



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS

In accordance with FCC 47 CFR Part 15B

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00243

Document 75935599 Report 12 Issue 1

September 2016



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North, Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS
In accordance with FCC 47 CFR Part 15B

Document 75935599 Report 12 Issue 1

September 2016

PREPARED FOR

Sharp Telecommunications of Europe Ltd
Inspired
Easthampstead Road
Bracknell
Berkshire
RG12 1NS

PREPARED BY

Natalie Bennett
Senior Administrator, Project Support

APPROVED BY

Stephen Milliken
Authorised Signatory

DATED

22 September 2016

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15B. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

G Lawler





Product Service

CONTENTS

Section		Page No
1	REPORT SUMMARY	3
1.1	Introduction	4
1.2	Brief Summary of Results.....	5
1.3	Product Technical Description.....	6
1.4	Product Information	6
1.5	Test Conditions	6
1.6	Deviations from the Standard	6
1.7	Modification Record	6
2	TEST DETAILS.....	7
2.1	AC Line Conducted Emissions	8
2.2	Radiated Emissions	11
3	TEST EQUIPMENT USED.....	15
3.1	Test Equipment Used.....	16
3.2	Measurement Uncertainty	17
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT	18
4.1	Accreditation, Disclaimers and Copyright.....	19



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM
(850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN,
SRD(NFC,FeliCa) and GPS
In accordance with FCC 47 CFR Part 15B



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show the verification of FCC Testing of the Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS to the requirements of FCC 47 CFR Part 15B.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Serial Number(s)	IMEI 004401115904944
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 15B (2015)
Disposal	Held Pending Disposal
Reference Number	Not Applicable
Date	Not Applicable
Order Number	10879
Date	18 July 2016
Start of Test	31 August 2016
Finish of Test	5 September 2016
Name of Engineer(s)	G Lawler
Related Document(s)	ANSI C63.4 (2014)



Product Service

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15B is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
AC Powered/USB with GPS Rx Operational				
2.1	15.107	AC Line Conducted Emissions	Pass	
2.2	15.109	Radiated Emissions	Pass	



Product Service

1.3 PRODUCT TECHNICAL DESCRIPTION

Refer to Model Description APYHRO00243 Rev 4.0 document.

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM
(850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN,
SRD(NFC,FeliCa) and GPS
In accordance with FCC 47 CFR Part 15B



Product Service

2.1 AC LINE CONDUCTED EMISSIONS

2.1.1 Specification Reference

FCC 47 CFR Part 15B, Clause 15.107

2.1.2 Equipment Under Test and Modification State

S/N: IMEI 004401115904944 - Modification State 0

2.1.3 Date of Test

5 September 2016

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The test was performed in accordance with ANSI C63.4, Clause 7.

Remarks

A mains supply cable of 1 m length was used to supply mains power to the EUT from the LISN.

All final measurements were assessed against the Class B emission limits in FCC 47 CFR Part 15, Clause 15.107.

2.1.6 Environmental Conditions

Ambient Temperature	20.0°C
Relative Humidity	73.0%




2.1.7 Test Results

AC Powered/USB with GPS Rx Operational, Live Line Results

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (μV/m)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.150	52.1	66.0	-13.9	33.2	56.0	-22.8
0.251	41.4	61.7	-20.3	24.4	51.7	-27.3
0.501	37.9	56.0	-18.1	26.5	46.0	-19.5
0.858	38.3	56.0	-17.7	27.5	46.0	-18.5
2.042	36.7	56.0	-19.3	25.1	46.0	-20.9
3.208	35.9	56.0	-20.1	23.3	46.0	-22.7
3.708	34.2	56.0	-21.8	22.4	46.0	-23.6

AC Powered/USB with GPS Rx Operational, Live Line Plot

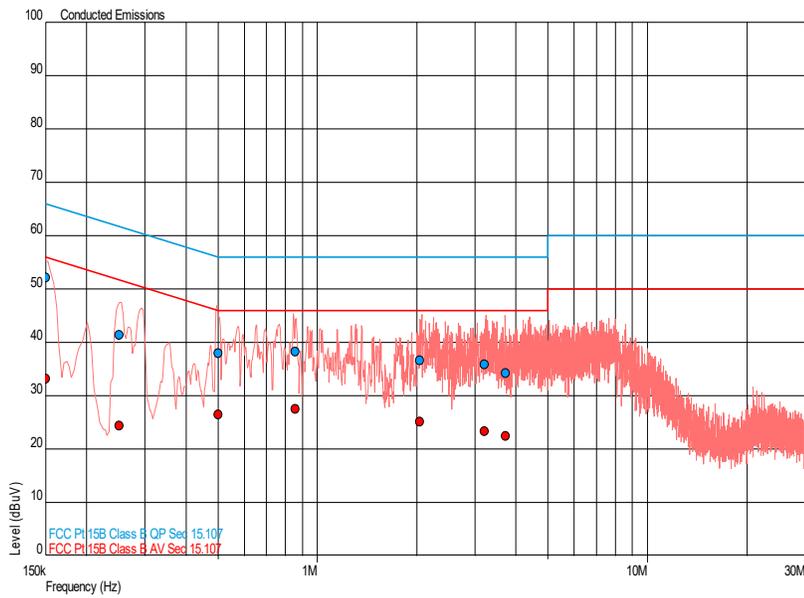




Product Service

AC Powered/USB with GPS Rx Operational, Neutral Line Results

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (μV/m)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.150	62.7	66.0	-3.3	42.2	56.0	-13.8
0.254	50.2	61.6	-11.4	29.8	51.6	-21.8
0.355	43.6	58.9	-15.3	24.5	48.9	-24.3
0.380	38.0	58.3	-20.3	18.6	48.3	-29.7
0.403	40.0	57.8	-17.8	22.3	47.8	-25.5
0.410	38.0	57.6	-19.6	21.9	47.6	-25.7

AC Powered/USB with GPS Rx Operational, Neutral Line Plot

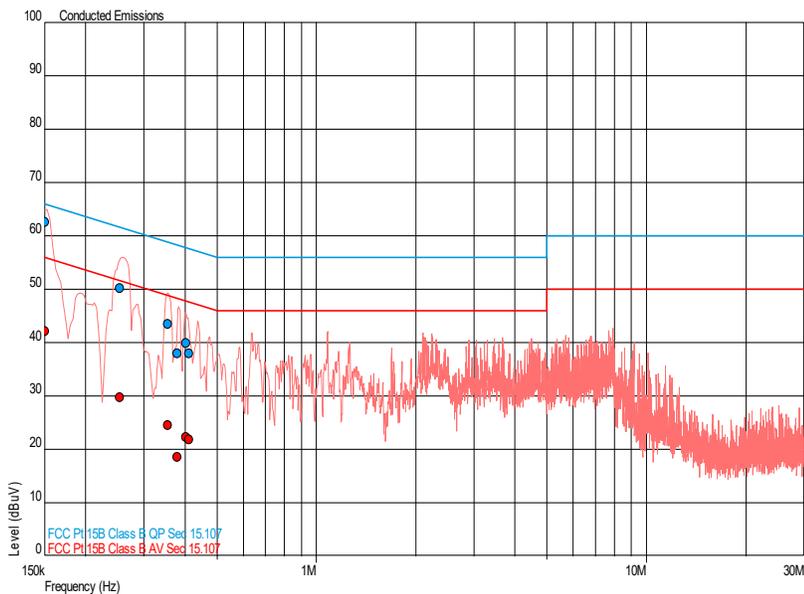

FCC 47 CFR Part 15, Limit Clause 15.107

Class B

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.



Product Service

2.2 RADIATED EMISSIONS

2.2.1 Specification Reference

FCC 47 CFR Part 15B, Clause 15.109

2.2.2 Equipment Under Test and Modification State

S/N: IMEI 004401115904944 - Modification State 0

2.2.3 Date of Test

31 August 2016 & 4 September 2016

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

The test was performed in accordance with ANSI C63.4, Clause 8.

Remarks

All final measurements were assessed against the Class B emission limits in FCC 47 CFR Part 15, Clause 15.109.

2.2.6 Environmental Conditions

Ambient Temperature	20.3 - 20.8°C
Relative Humidity	64.0 - 65.0%




Product Service

2.2.7 Test Results

AC Powered/USB with GPS Rx Operational, 30 MHz to 1 GHz Results

Frequency (MHz)	Quasi-Peak Level (dB μ V/m)	Quasi-Peak Level (μ V/m)	Quasi-Peak Margin (d μ V/m)	Quasi-Peak Margin (μ V/m)	Angle (°)	Height (m)	Polarisation
31.991	29.7	30.5	-10.3	-69.5	289	1.00	Vertical
33.294	30.5	33.5	-9.5	-66.5	206	1.00	Vertical
35.501	28.5	26.6	-11.5	-73.4	257	1.00	Vertical
36.320	27.9	24.8	-12.1	-75.2	112	1.00	Vertical
56.483	25.3	18.4	-14.7	-81.6	269	1.00	Vertical
960.000	34.0	50.1	-12.0	-149.9	268	1.00	Vertical

AC Powered/USB with GPS Rx Operational, 30 MHz to 1 GHz Plot

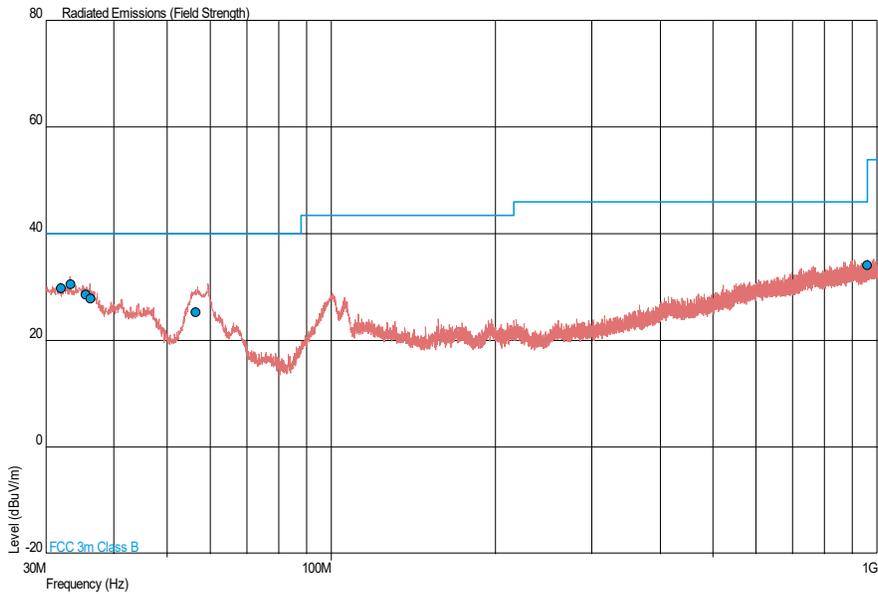




Product Service

AC Powered/USB with GPS Rx Operational, 1 GHz to 13 GHz Results

Frequency (MHz)	Average Level (dB μ V/m)	Peak Level (dB μ V/m)	Average Level (μ V/m)	Peak Level (μ V/m)	Angle (deg)	Height (m)	Polarisation
*							


*No emissions were detected within 10 dB of the limit.

AC Powered/USB with GPS Rx Operational, 1 GHz to 8 GHz Plot

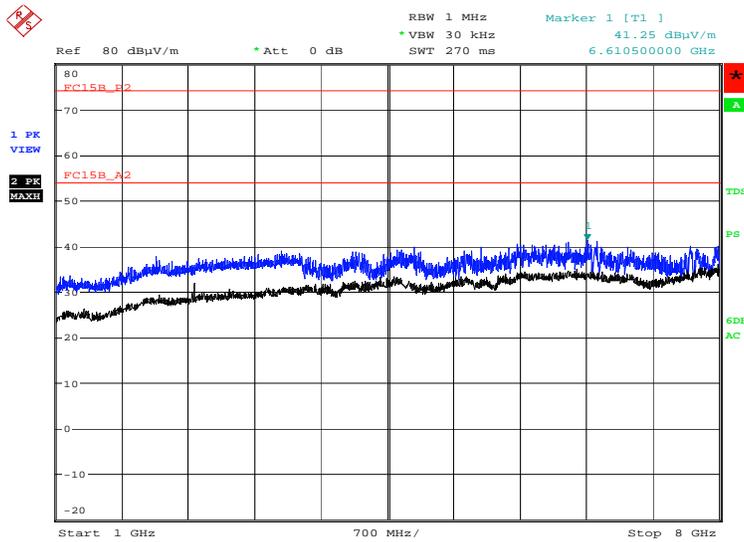

Date: 31.AUG.2016 22:48:49

AC Powered/USB with GPS Rx Operational, 8 GHz to 13 GHz Plot

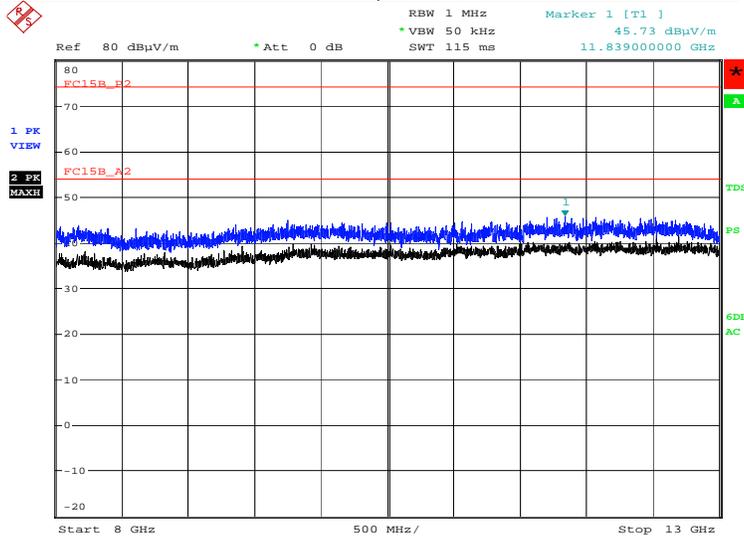

Date: 31.AUG.2016 22:42:33



Product Service

FCC 47 CFR Part 15, Limit Clause 15.109

Class B

Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500



Product Service

SECTION 3

TEST EQUIPMENT USED



Product Service

3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1- AC Line Conducted Emissions					
LISN	Rohde & Schwarz	ESH2-Z5	17	12	11-Feb-2017
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Transient Limiter	Hewlett Packard	11947A	2378	12	6-Jul-2017
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	2-Nov-2016
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
Digital thermo Hygrometer	Radio Spares	1260	4300	12	23-Aug-2017
2 metre SMA Cable	Florida Labs	SMS-235SP-78.8-SMS	4517	12	16-Feb-2017
Section 2.2 - Radiated Emissions					
Pre-Amplifier	Phase One	PS04-0086	1533	12	29-Jul-2017
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Multimeter	Iso-tech	IDM101	2417	12	29-Sep-2016
Antenna (Bilog)	Chase	CBL6143	2904	24	11-Jun-2017
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	2-Nov-2016
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
Digital thermo Hygrometer	Radio Spares	1260	4300	12	23-Aug-2017
1GHz to 8GHz Low Noise Amplifier	Wright Technologies	APS04-0085	4365	12	6-Oct-2016
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	-	TU
Cable (Rx, SMAm-SMAm 0.5m)	Scott Cables	SLSL18-SMSM-00.50M	4528	6	3-Feb-2017
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	29-Dec-2016

TU – Traceability Unscheduled



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
AC Line Conducted Emissions	± 3.2 dB
Radiated Emissions	30 MHz to 1 GHz: ± 5.1 dB 1 GHz to 40 GHz: ± 6.3 dB



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service

© 2016 TÜV SÜD Product Service