



FCC RF Test Report

APPLICANT : SHARP CORPORATION
EQUIPMENT : Smart Phone
TYPE NAME : Type-A
Type-B
FCC ID : APYHRO00249
STANDARD : FCC Part 15 Subpart C §15.225
CLASSIFICATION : (DXX) Low Power Communication Device Transmitter

The testing was completed on Apr. 30, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

SUMMARY OF THE TEST RESULT	4
1. GENERAL INFORMATION.....	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Applicable Standards.....	6
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Descriptions of Test Mode	7
2.2 Connection Diagram of Test System	7
2.3 Table for Supporting Units	8
2.4 EUT Operation Test Setup	8
3. TEST RESULTS.....	9
3.1 AC Power Line Conducted Emissions Measurement	9
3.2 20dB and 99% OBW Spectrum Bandwidth Measurement.....	11
3.3 Frequency Stability Measurement	12
3.4 Field Strength of Fundamental Emissions and Mask Measurement.....	13
3.5 Radiated Emissions Measurement	15
3.6 Antenna Requirements.....	18
4. LIST OF MEASURING EQUIPMENT	19
APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST	
APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS	
B1. Test Result of 20dB Spectrum Bandwidth	
B2. Test Result of Frequency Stability	
APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS	
C1. Test Result of Field Strength of Fundamental Emissions	
C2. Results of Radiated Emissions (9 kHz~30MHz)	
C3. Results of Radiated Emissions (30MHz~1GHz)	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR740121D	Rev. 01	Initial issue of report	Jun. 12, 2017



SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	FCC Rule	Description of Test	Result	Remark
3.1	15.207	AC Power Line Conducted Emissions	Complies	Under limit 3.50 dB at 0.534MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-
	-	99% OBW Spectrum Bandwidth	Complies	-
3.3	15.225(e)	Frequency Stability	Complies	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	Max level 61.990 dB μ V/m at 13.560 MHz
3.5	15.225(d) 15.209	Radiated Spurious Emissions	Complies	Under limit 3.99 dB at 67.800MHz
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	± 2.70 dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	± 5.20 dB	Confidence levels of 95%

1. GENERAL INFORMATION

1.1 Applicant

SHARP CORPORATION

Takumi-Cho, Sakai-Ku, Sakai-Shi, 2, Osaka 590-852, Japan

1.2 Manufacturer

SHARP CORPORATION

Takumi-Cho, Sakai-Ku, Sakai-Shi, 2, Osaka 590-852, Japan

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac, NFC, and GPS

Product Specification subjective to this standard	
Sample 1	EUT with Memory 1
Sample 2	EUT with Memory 2
Antenna Type	WWAN: ILA Antenna WLAN: ILA Antenna Bluetooth: ILA Antenna GPS/Glonass/Beidou/Galileo: ILA Antenna NFC: Loop Antenna

Remark:

1. All tests were performed with sample 1.
2. The deviations between type name: Type-A and type name: Type-B which can be referred Product Equality Declaration. The deviations were switched by Hardware.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978	
Test Site No.	Sporton Site No.	
	TH03-HY	CO05-HY
Test Engineer	William Liao	Arthur Hsieh
Temperature	22~24°C	22~24°C
Relative Humidity	53~55%	51~55%

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 / FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	
Test Engineer	J.C. Liang and Jacky Hung	
Temperature	21~24°C	
Relative Humidity	53~58%	

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.225
- ♦ ANSI C63.10-2013

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations for searching the worst cases.

The following table is a list of the test modes shown in this test report.


Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report.

Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.

Test Cases	
AC Conducted Emission	Mode 1: GSM850 Idle + NFC Tx + Bluetooth Idle + WLAN (2.4GHz) Idle + Earphone + USB Cable (Charging from Adapter)

2.2 Connection Diagram of Test System

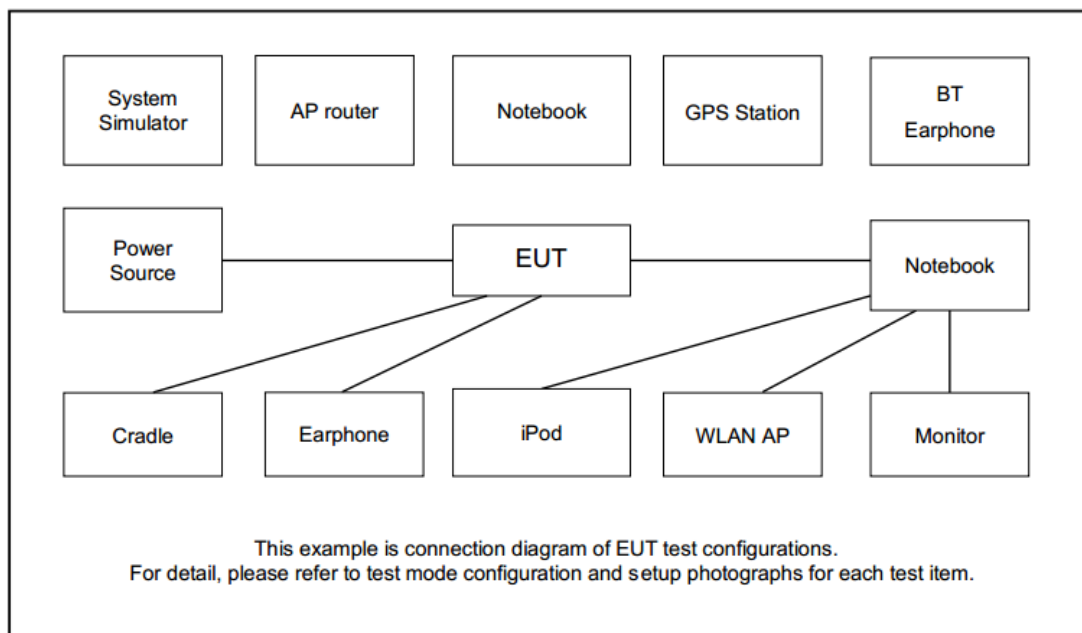

2.3 Table for Supporting Units

Support Unit	Manufacturer	Model	FCC ID
System Simulator	Anritsu	MT8820C	N/A
Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029
WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U
SD Card	SanDisk	MicroSD HC	FCC DoC
NFC Card	Metro Taipei	Easy Card	N/A

2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 2 cm gap to the EUT.

3. TEST RESULTS

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test setup

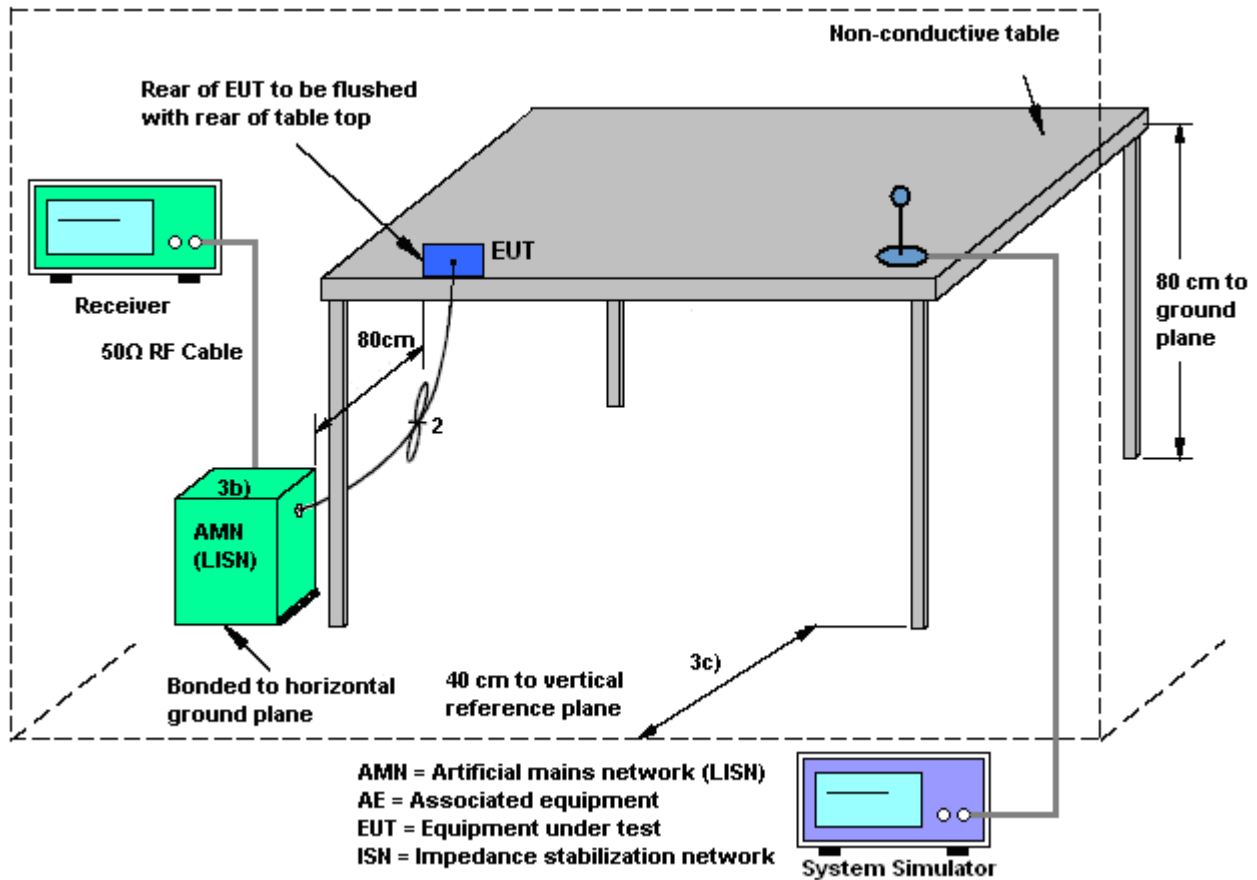

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

3.2.4 Test Setup

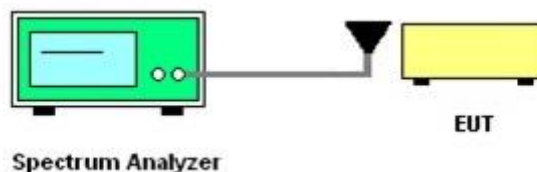

3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

3.3 Frequency Stability Measurement

3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. Extreme temperature rule is -20°C~50°C.

3.3.4 Test Setup

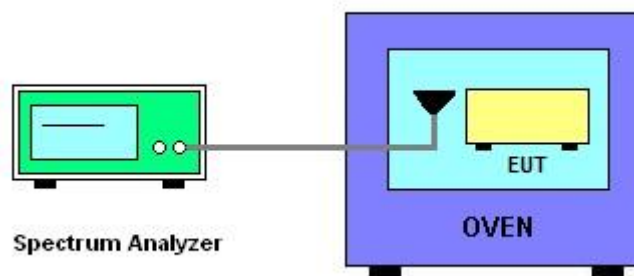

3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.

3.4 Field Strength of Fundamental Emissions and Mask Measurement

3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength ($\mu\text{V/m}$) at 30m	Field Strength (dB $\mu\text{V/m}$) at 30m	Field Strength (dB $\mu\text{V/m}$) at 10m	Field Strength (dB $\mu\text{V/m}$) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

3.4.2 Measuring Instruments

See list of measuring instruments of this test report.


3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.

Note: Emission level (dB $\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$).

3.4.4 Test Setup

For radiated emissions below 30MHz

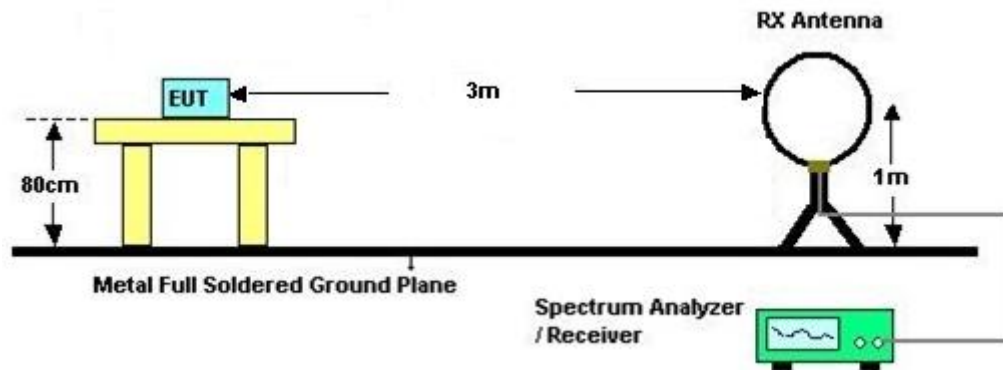

3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.

3.5 Radiated Emissions Measurement

3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (μ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

3.5.5 Test Setup

For radiated emissions below 30MHz

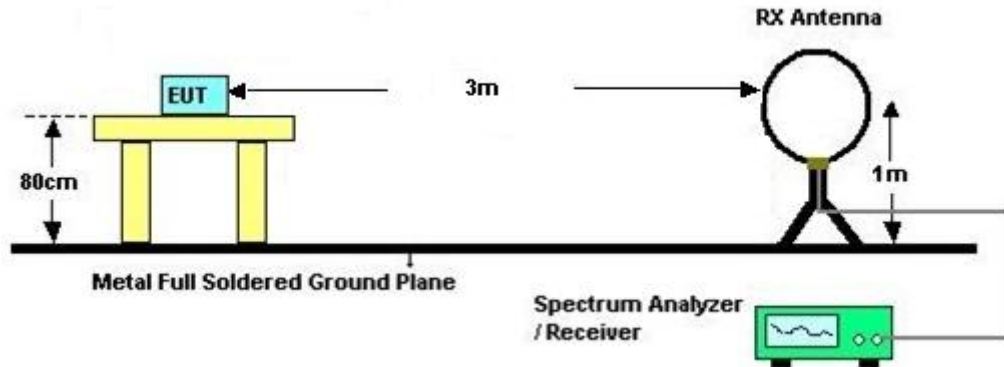

For radiated emissions above 30MHz

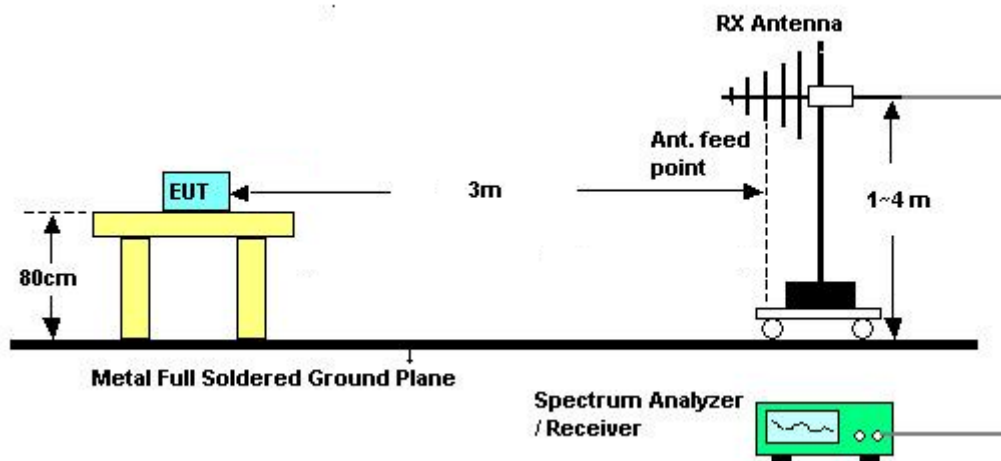

3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.



3.6 Antenna Requirements

3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4. LIST OF MEASURING EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	Dec. 01, 2016	Apr. 25, 2017	Nov. 30, 2017	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 27, 2016	Apr. 25, 2017	Jun. 26, 2017	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Nov. 16, 2016	Apr. 25, 2017	Nov. 15, 2017	Conducted (TH03-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 30, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Apr. 30, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Apr. 30, 2017	Nov. 28, 2017	Conduction (CO05-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Apr. 28, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N0 602	30MHz~1GHz	Oct. 15, 2016	Apr. 28, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Oct. 20, 2016	Apr. 28, 2017	Oct. 19, 2018	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 12, 2016	Apr. 28, 2017	Oct. 11, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Apr. 28, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Apr. 28, 2017	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY53290053	20Hz to 26.5GHz	Jan. 12, 2017	Apr. 28, 2017	Jan. 11, 2018	Radiation (03CH11-HY)




Appendix A. Test Results of Conducted Emission Test

EUT Information

Report NO : 740121
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

ENV216 Auto Test FCC Power Bar - L

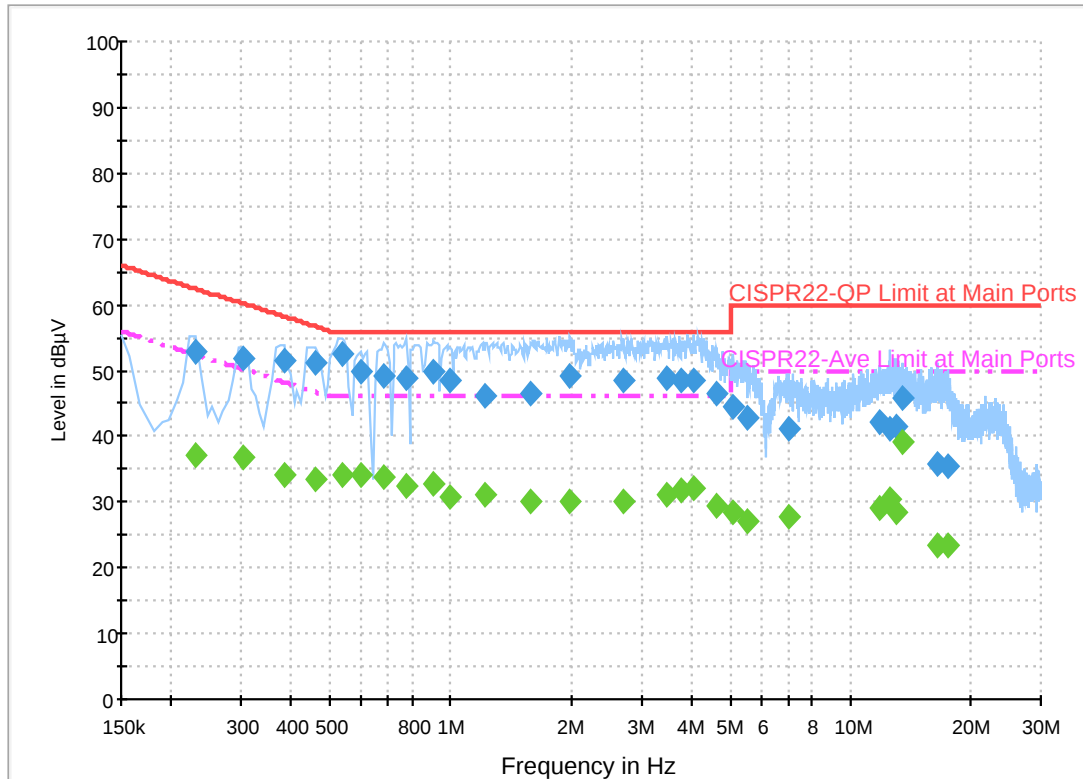

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.230000	52.8	Off	L1	19.6	9.6	62.4
0.302000	51.7	Off	L1	19.6	8.5	60.2
0.382000	51.3	Off	L1	19.6	6.9	58.2
0.462000	51.3	Off	L1	19.6	5.4	56.7
0.534000	52.5	Off	L1	19.6	3.5	56.0
0.598000	49.7	Off	L1	19.6	6.3	56.0
0.678000	49.0	Off	L1	19.6	7.0	56.0
0.774000	48.8	Off	L1	19.6	7.2	56.0
0.910000	49.8	Off	L1	19.6	6.2	56.0
0.998000	48.5	Off	L1	19.6	7.5	56.0
1.222000	46.0	Off	L1	19.6	10.0	56.0
1.590000	46.4	Off	L1	19.6	9.6	56.0
1.998000	49.3	Off	L1	19.6	6.7	56.0
2.710000	48.6	Off	L1	19.4	7.4	56.0
3.470000	48.8	Off	L1	19.7	7.2	56.0
3.774000	48.6	Off	L1	19.7	7.4	56.0
4.070000	48.6	Off	L1	19.7	7.4	56.0
4.654000	46.6	Off	L1	19.7	9.4	56.0
5.118000	44.3	Off	L1	19.8	15.7	60.0
5.542000	42.9	Off	L1	19.8	17.1	60.0
7.046000	41.0	Off	L1	19.9	19.0	60.0
11.918000	42.0	Off	L1	20.1	18.0	60.0
12.526000	41.0	Off	L1	20.2	19.0	60.0
13.062000	41.4	Off	L1	20.2	18.6	60.0
13.558000	45.8	Off	L1	20.2	14.2	60.0
16.542000	35.9	Off	L1	20.4	24.1	60.0
17.494000	35.5	Off	L1	20.5	24.5	60.0


Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.230000	37.3	Off	L1	19.6	15.1	52.4
0.302000	36.9	Off	L1	19.6	13.3	50.2
0.382000	34.1	Off	L1	19.6	14.1	48.2
0.462000	33.5	Off	L1	19.6	13.2	46.7
0.534000	34.2	Off	L1	19.6	11.8	46.0
0.598000	34.0	Off	L1	19.6	12.0	46.0
0.678000	33.9	Off	L1	19.6	12.1	46.0
0.774000	32.4	Off	L1	19.6	13.6	46.0
0.910000	32.9	Off	L1	19.6	13.1	46.0
0.998000	30.9	Off	L1	19.6	15.1	46.0
1.222000	31.0	Off	L1	19.6	15.0	46.0
1.590000	30.1	Off	L1	19.6	15.9	46.0
1.998000	30.1	Off	L1	19.6	15.9	46.0
2.710000	30.1	Off	L1	19.4	15.9	46.0
3.470000	31.1	Off	L1	19.7	14.9	46.0
3.774000	31.8	Off	L1	19.7	14.2	46.0
4.070000	32.1	Off	L1	19.7	13.9	46.0
4.654000	29.6	Off	L1	19.7	16.4	46.0
5.118000	28.3	Off	L1	19.8	21.7	50.0
5.542000	27.0	Off	L1	19.8	23.0	50.0
7.046000	27.9	Off	L1	19.9	22.1	50.0
11.918000	29.1	Off	L1	20.1	20.9	50.0
12.526000	30.4	Off	L1	20.2	19.6	50.0
13.062000	28.6	Off	L1	20.2	21.4	50.0
13.558000	39.1	Off	L1	20.2	10.9	50.0
16.542000	23.4	Off	L1	20.4	26.6	50.0
17.494000	23.5	Off	L1	20.5	26.5	50.0

EUT Information

Report NO : 740121
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

ENV216 Auto Test FCC Power Bar - N

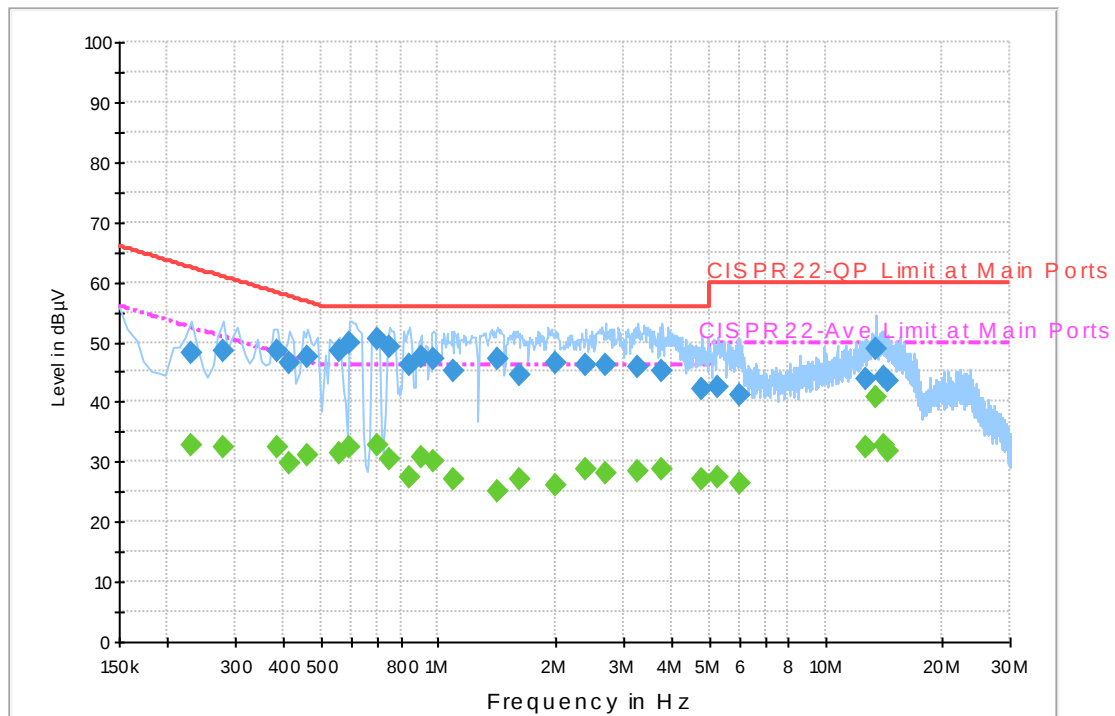

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.230000	48.2	Off	N	19.5	14.2	62.4
0.278000	48.5	Off	N	19.5	12.4	60.9
0.382000	48.3	Off	N	19.5	9.9	58.2
0.414000	46.5	Off	N	19.5	11.1	57.6
0.462000	47.5	Off	N	19.5	9.2	56.7
0.558000	48.5	Off	N	19.5	7.5	56.0
0.590000	50.0	Off	N	19.5	6.0	56.0
0.694000	50.4	Off	N	19.5	5.6	56.0
0.750000	49.1	Off	N	19.6	6.9	56.0
0.846000	46.1	Off	N	19.6	9.9	56.0
0.902000	47.6	Off	N	19.6	8.4	56.0
0.974000	47.3	Off	N	19.6	8.7	56.0
1.102000	45.0	Off	N	19.6	11.0	56.0
1.422000	47.1	Off	N	19.6	8.9	56.0
1.614000	44.5	Off	N	19.6	11.5	56.0
2.022000	46.5	Off	N	19.6	9.5	56.0
2.406000	46.2	Off	N	19.1	9.8	56.0
2.710000	46.3	Off	N	19.4	9.7	56.0
3.270000	45.9	Off	N	19.6	10.1	56.0
3.798000	45.3	Off	N	19.7	10.7	56.0
4.814000	42.1	Off	N	19.7	13.9	56.0
5.294000	42.4	Off	N	19.8	17.6	60.0
6.006000	41.0	Off	N	19.8	19.0	60.0
12.774000	43.7	Off	N	20.2	16.3	60.0
13.558000	48.8	Off	N	20.3	11.2	60.0
14.094000	44.3	Off	N	20.3	15.7	60.0
14.542000	43.6	Off	N	20.4	16.4	60.0



Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.230000	32.9	Off	N	19.5	19.5	52.4
0.278000	32.5	Off	N	19.5	18.4	50.9
0.382000	32.6	Off	N	19.5	15.6	48.2
0.414000	29.7	Off	N	19.5	17.9	47.6
0.462000	31.0	Off	N	19.5	15.7	46.7
0.558000	31.5	Off	N	19.5	14.5	46.0
0.590000	32.3	Off	N	19.5	13.7	46.0
0.694000	32.7	Off	N	19.5	13.3	46.0
0.750000	30.3	Off	N	19.6	15.7	46.0
0.846000	27.4	Off	N	19.6	18.6	46.0
0.902000	30.8	Off	N	19.6	15.2	46.0
0.974000	30.0	Off	N	19.6	16.0	46.0
1.102000	27.1	Off	N	19.6	18.9	46.0
1.422000	25.1	Off	N	19.6	20.9	46.0
1.614000	27.2	Off	N	19.6	18.8	46.0
2.022000	26.0	Off	N	19.6	20.0	46.0
2.406000	28.7	Off	N	19.1	17.3	46.0
2.710000	28.1	Off	N	19.4	17.9	46.0
3.270000	28.5	Off	N	19.6	17.5	46.0
3.798000	28.8	Off	N	19.7	17.2	46.0
4.814000	26.9	Off	N	19.7	19.1	46.0
5.294000	27.5	Off	N	19.8	22.5	50.0
6.006000	26.5	Off	N	19.8	23.5	50.0
12.774000	32.3	Off	N	20.2	17.7	50.0
13.558000	40.8	Off	N	20.3	9.2	50.0
14.094000	32.9	Off	N	20.3	17.1	50.0
14.542000	31.8	Off	N	20.4	18.2	50.0



Appendix B. Test Results of Conducted Test Items

B1. Test Result of 20dB Spectrum Bandwidth

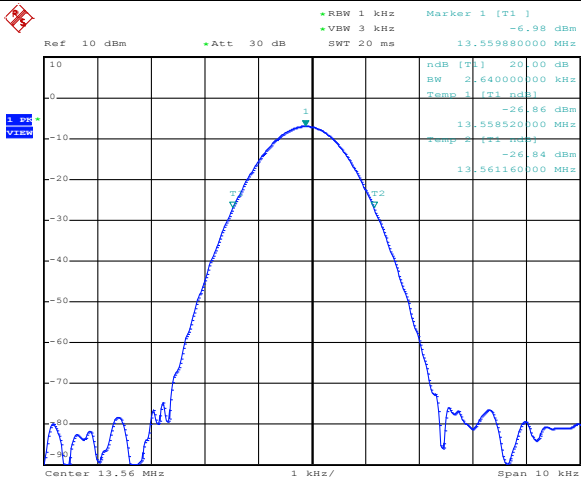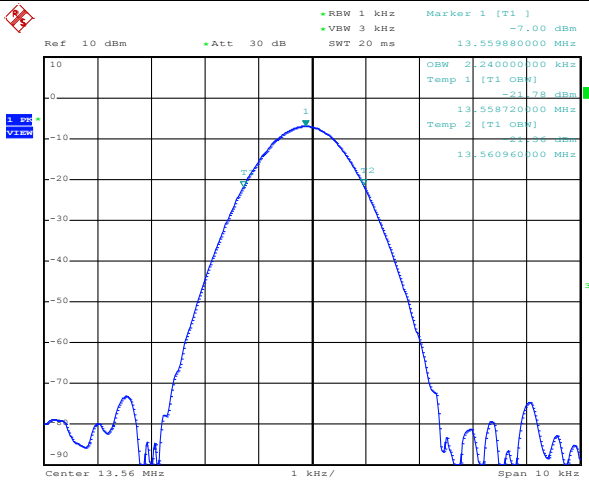Test mode	NFC Tx	Test Frequency (MHz)	13.56
 Ref 10 dBm Att 30 dB SWT 20 ms 13.559880000 MHz Marker 1 [T1] -6.98 dBm RBW 1 kHz VBW 3 kHz Temp 1 [T1] -26.86 dBm Temp 2 [T2] -26.84 dBm Center 13.56 MHz 1 kHz/ Span 10 kHz Date: 25.APR.2017 17:16:40		 Ref 10 dBm Att 30 dB SWT 20 ms 13.559880000 MHz Marker 1 [T1] -7.00 dBm RBW 1 kHz VBW 3 kHz Temp 1 [T1] -21.78 dBm Temp 2 [T2] -21.86 dBm Center 13.56 MHz 1 kHz/ Span 10 kHz Date: 25.APR.2017 17:18:26	
20dB Bandwidth (kHz)	2.640	99% OccupiedBW(kHz)	2.240
Frequency range (MHz)	$f_L > 13.553$	13.55852	Test Result
	$f_H < 13.567$	13.56116	Complies



B2. Test Result of Frequency Stability


Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
120	13.559840	-20	0	13.559970
102	13.559840		2	13.559980
138	13.559840		5	13.559990
			10	13.560020
		-10	0	13.560020
			2	13.560040
			5	13.560060
			10	13.560070
		0	0	13.560080
			2	13.560100
			5	13.560100
			10	13.560090
		10	0	13.560100
			2	13.560080
			5	13.560080
			10	13.560100
		20	0	13.559840
			2	13.559840
			5	13.559840
			10	13.559840
		30	0	13.559860
			2	13.559870
			5	13.559860
			10	13.559860
		40	0	13.559840
			2	13.559840
			5	13.559840
			10	13.559840




Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
		50	0	13.559840
			2	13.559840
			5	13.559840
			10	13.559840
Max.Deviation (MHz)	-0.000160	Max.Deviation (MHz)		-0.000160
Max.Deviation (ppm)	-11.7994	Max.Deviation (ppm)		-11.7994
Limit	FS < ±100 ppm	Limit		FS < ±100 ppm
Test Result	PASS	Test Result		PASS

Appendix C. Test Results of Radiated Test Items

C1. Test Result of Field Strength of Fundamental Emissions

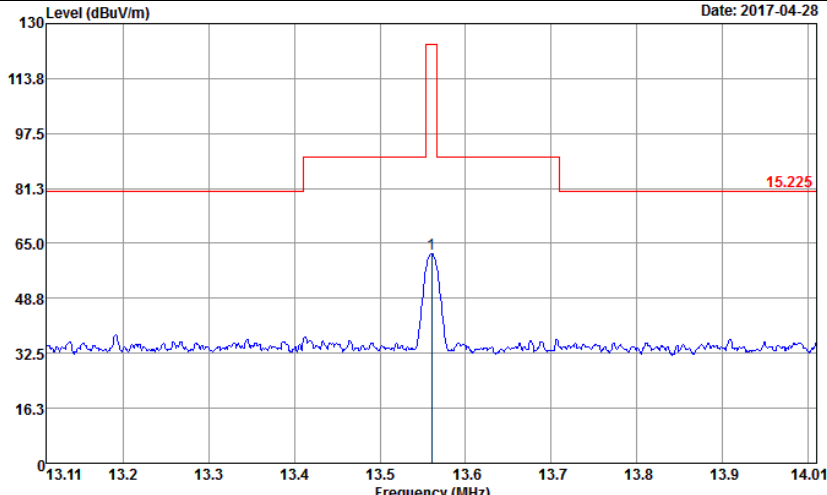Test Mode :		NFC Tx				Test Frequency (MHz)		13.56	
								Date: 2017-04-28	
									
Site : 03CH11-HY Condition : 15.225 3m LOOP_ANT(H) HORIZONTAL : RBW:9.000KHz VBW:9.000KHz SWT:Auto Project : 740121 Mode : 1									
Freq	Level	Over	Limit	ReadAntenna	Cable	A/Pos	T/Pos	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	13.56	61.99	-62.01	124.00	41.17	20.14	0.68	100	0 QP

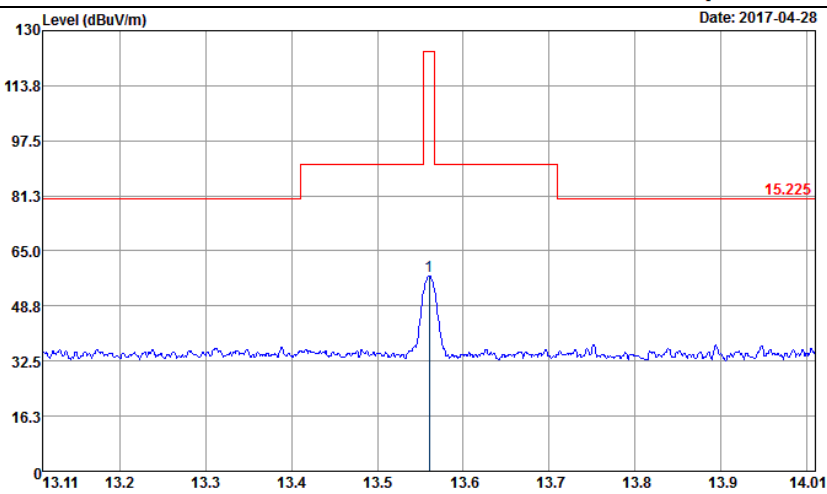								Date: 2017-04-28	
									
Site : 03CH11-HY Condition : 15.225 3m LOOP_ANT(V) VERTICAL : RBW:9.000KHz VBW:9.000KHz SWT:Auto Project : 740121 Mode : 1									
Freq	Level	Over	Limit	ReadAntenna	Cable	A/Pos	T/Pos	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	13.56	57.57	-66.43	124.00	36.75	20.14	0.68	100	87 QP

C2.Results of Radiated Spurious Emissions (9 kHz~30MHz)

Test Mode :	NFC Tx	Polarization :	Horizontal
--------------------	--------	-----------------------	------------

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.01925	42.32	-79.6	121.92	22.27	20.05	0	-	-	Average
0.06738	60.71	-50.32	111.03	40.64	20.06	0.01	-	-	Average
0.09574	38.59	-69.39	107.98	18.57	20.01	0.01	-	-	QP
0.13332	45.19	-59.92	105.11	25.18	20	0.01	-	-	Average
0.1976	51.58	-50.11	101.69	31.59	19.98	0.01	-	-	Average
1.549	47.35	-16.45	63.8	27.21	20.02	0.12	100	0	QP
10.32	36.53	-32.97	69.5	16.23	20.12	0.18	-	-	QP
13.56	61.24	-8.26	69.5	40.84	20.14	0.26	-	-	QP
21.517	36.7	-32.8	69.5	15.95	20.48	0.27	-	-	QP
26.17	36.63	-32.87	69.5	15.9	20.47	0.26	-	-	QP

Test Mode :	NFC Tx	Polarization :	Vertical
--------------------	--------	-----------------------	----------

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.01925	49.69	-72.23	121.92	29.64	20.05	0	-	-	Average
0.06756	55.74	-55.27	111.01	35.67	20.06	0.01	-	-	Average
0.09378	46.78	-61.38	108.16	26.76	20.01	0.01	-	-	QP
0.14064	47.56	-57.08	104.64	27.55	20	0.01	-	-	Average
0.1551	51.38	-52.41	103.79	31.38	19.99	0.01	-	-	Average
1.526	44.55	-19.38	63.93	24.41	20.02	0.12	100	0	QP
8.192	36.95	-32.55	69.5	16.68	20.11	0.16	-	-	QP
13.56	56.36	-13.14	69.5	35.96	20.14	0.26	-	-	QP
16.594	36.34	-33.16	69.5	15.86	20.2	0.28	-	-	QP
27	37.65	-31.85	69.5	17.02	20.38	0.25	-	-	QP

Note:

1. 13.56 MHz is fundamental signal which can be ignored.
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
4. Limit line = specific limits (dBμV) + distance extrapolation factor.

C3.Results of Radiated Spurious Emissions (30MHz~1GHz)

Test Mode :	NFC Tx	Polarization :	Horizontal
--------------------	--------	-----------------------	------------

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
40.8	32.62	-7.38	40	45.33	18.83	0.94	32.49	-	-	Peak
67.8	36.01	-3.99	40	55.3	12.12	1.06	32.49	100	0	Peak
122.07	25.96	-17.54	43.5	39.48	17.51	1.39	32.46	-	-	Peak
570.9	27.18	-18.82	46	30.55	25.96	3.02	32.44	-	-	Peak
765.5	30.55	-15.45	46	30.96	28.26	3.47	32.28	-	-	Peak
947.5	33.82	-12.18	46	30.37	30.69	3.82	31.23	-	-	Peak

Test Mode :	NFC Tx	Polarization :	Vertical
--------------------	--------	-----------------------	----------

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
40.8	32.86	-7.14	40	45.57	18.83	0.94	32.49	100	0	Peak
67.8	32.14	-7.86	40	51.43	12.12	1.06	32.49	-	-	Peak
78.06	24.34	-15.66	40	42.56	13.03	1.22	32.48	-	-	Peak
615	27.63	-18.37	46	30.91	25.96	3.13	32.46	-	-	Peak
736.8	30.88	-15.12	46	31.79	27.91	3.41	32.36	-	-	Peak
932.8	33.37	-12.63	46	30.66	30.09	3.81	31.36	-	-	Peak

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.