




FCC SAR TEST REPORT

FCC ID : APYHRO00278
Equipment : Smart phone
Brand Name : SHARP
Applicant : SHARP CORPORATION
1 Takumi-cho, Sakai-ku, Sakai City, Osaka, Japan 590-8522
Manufacturer : SHARP CORPORATION
2-13-1, HACHIHONMATSU-IIIDA, HIGASHI-HIROSHIMA-SHI,
HIROSHIMA PREFECTURE 739-0192, JAPAN
Standard : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Aug. 19, 2019 and testing was started from Aug. 26, 2019 and completed on Sep. 05, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information	5
3.2 General LTE SAR Test and Reporting Considerations	6
4. RF Exposure Limits.....	8
4.1 Uncontrolled Environment.....	8
4.2 Controlled Environment.....	8
5. Specific Absorption Rate (SAR).....	9
5.1 Introduction	9
5.2 SAR Definition.....	9
6. System Description and Setup	10
6.1 E-Field Probe	11
6.2 Data Acquisition Electronics (DAE)	11
6.3 Phantom.....	12
6.4 Device Holder.....	13
7. Measurement Procedures	14
7.1 Spatial Peak SAR Evaluation.....	14
7.2 Power Reference Measurement.....	15
7.3 Area Scan	15
7.4 Zoom Scan.....	16
7.5 Volume Scan Procedures.....	16
7.6 Power Drift Monitoring.....	16
8. Test Equipment List.....	17
9. System Verification	18
9.1 Tissue Simulating Liquids.....	18
9.2 Tissue Verification	19
9.3 System Performance Check Results.....	20
10. RF Exposure Positions	21
10.1 Ear and handset reference point.....	21
10.2 Definition of the cheek position	22
10.3 Definition of the tilt position	23
10.4 Body Worn Accessory	23
10.5 Product Specific Exposure	24
10.6 Wireless Router.....	24
11. Conducted RF Output Power (Unit: dBm).....	25
12. Antenna Location	51
13. SAR Test Results	52
13.1 Head SAR	54
13.2 Hotspot SAR	57
13.3 Body Worn Accessory SAR.....	60
13.4 Product Specific SAR.....	61
13.5 Repeated SAR Measurement	62
14. Simultaneous Transmission Analysis.....	63
14.1 Head Exposure Conditions	63
14.2 Hotspot Exposure Conditions.....	65
14.3 Body-Worn Accessory Exposure Conditions	67
14.4 Product Specific Exposure Conditions	68
15. Uncertainty Assessment	69
16. References	69
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



History of this test report

Report No.	Version	Description	Issued Date
FA960602-01	01	Initial issue of report	Oct. 11, 2019
FA960602-01	02	Update Applicant address	Oct. 17, 2019



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for SHARP CORPORATION, Smart phone, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 15mm)	Product Specific (Separation 0mm)	
		1g SAR (W/kg)			10g SAR (W/kg)	
Licensed	GSM850	1.09	0.16	0.14		1.37
	GSM1900	0.12	1.27	0.35	1.08	
	WCDMA II	0.17	1.28	0.55	1.62	
	WCDMA IV	0.12	1.23	0.72	3.32	
	WCDMA V	0.90	0.33	0.28		
	LTE Band 2	0.16	1.30	0.58	1.53	
	LTE Band 4	0.13	1.27	0.70	3.14	
	LTE Band 5	1.18	0.37	0.31		
	LTE Band 12 / 17	0.72	0.23	0.22		
DTS	2.4GHz WLAN	0.26	0.23	0.13		1.37
NII	5GHz WLAN	0.16		0.60	2.11	1.25
DSS	Bluetooth	0.06	0.03	0.02		1.30
Date of Testing:		2019/8/26 ~ 2019/9/24				

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang

Report Producer: Wan Liu

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 941225 D07 UMPC Mini Tablet v01r02

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Smart phone
Brand Name	SHARP
FCC ID	APYHRO00278
IMEI Code	004401117032645
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS RMC/AMR 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM, 64QAM WLAN: 802.11a/b/g/n/ac HT20 / HT40 / VHT20 / VHT40 / VHT80 Bluetooth BR/EDR/LE NFC:ASK
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: 1. This device has two antennas. The Primary Cellular Antenna (LAT) is location on the bottom edge of the device and the Secondary Cellular Antenna (UAT) is location on the top edge of the device. 2. This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications. 3. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA B2 / B4 and LTE B2 / B4.	

3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05							
FCC ID	APYHRO00278						
Equipment Name	Smart phone						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz						
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz						
uplink modulations used	QPSK / 16QAM / 64QAM						
LTE Voice / Data requirements	Voice and Data						
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3						
	Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})					
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18
	256 QAM	> 5	> 4	> 8	> 12	> 16	> 18
	≥ 1						≤ 5
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.						
Power reduction applied to satisfy SAR compliance	1. Yes, when operating in hotspot mode that LTE B2 / B4 power reduction applied to satisfy SAR compliance.						

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 17												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq. (MHz)				
L	23755		706.5			23780		709				
M	23790		710			23790		710				
H	23825		713.5			23800		711				

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

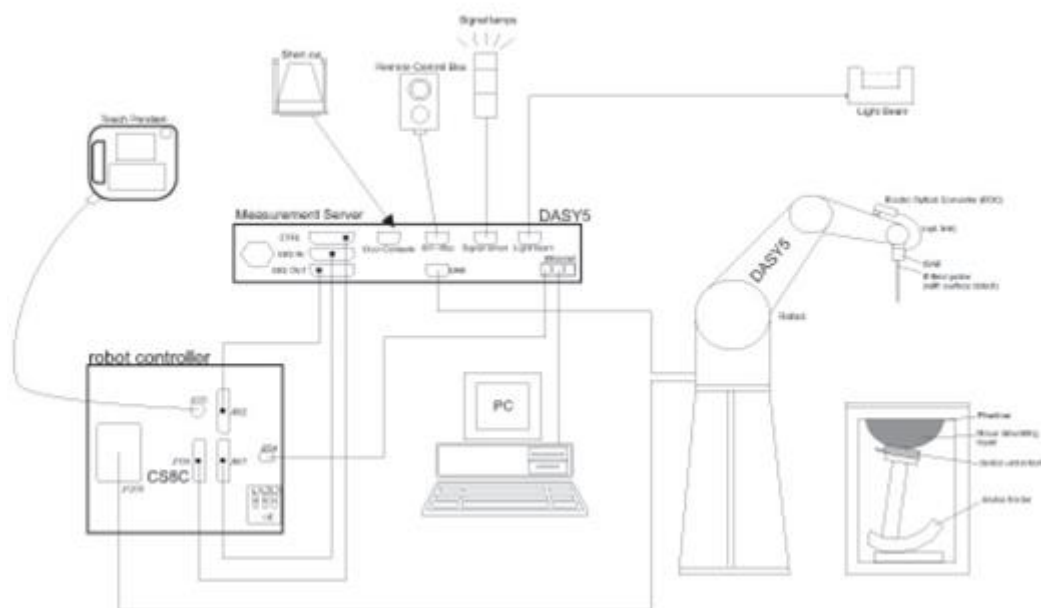

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 $\mu\text{W/g}$ – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 $\mu\text{W/g}$ – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 $\mu\text{W/g}$)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

6.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1107	Mar. 08, 2019	Mar. 07, 2020
SPEAG	835MHz System Validation Kit	D835V2	4d167	Mar. 08, 2019	Mar. 07, 2020
SPEAG	1750MHz System Validation Kit	D1750V2	1112	Mar. 07, 2019	Mar. 06, 2020
SPEAG	1900MHz System Validation Kit	D1900V2	5d185	Mar. 07, 2019	Mar. 06, 2020
SPEAG	2450MHz System Validation Kit	D2450V2	929	Mar. 06, 2019	Mar. 05, 2020
SPEAG	5GHz System Validation Kit	D5GHzV2	1128	Mar. 05, 2019	Mar. 04, 2020
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 19, 2018	Sep. 18, 2019
SPEAG	Data Acquisition Electronics	DAE4	316	Jan. 03, 2019	Jan. 02, 2020
SPEAG	Data Acquisition Electronics	DAE4	778	May. 21, 2019	May. 20, 2020
SPEAG	Data Acquisition Electronics	DAE3	360	Oct. 29, 2018	Oct. 28, 2019
SPEAG	Dosimetric E-Field Probe	ES3DV3	3124	Jan. 15, 2019	Jan. 14, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 24, 2018	Sep. 23, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Jan. 15, 2019	Jan. 14, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7346	Apr. 25, 2019	Apr. 24, 2020
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2018	Nov. 11, 2019
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2018	Nov. 11, 2019
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 21, 2019	Apr. 20, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50267236	Apr. 01, 2019	Mar. 31, 2020
R&S	BT Base Station	CBT32	100522	Mar. 18, 2019	Mar. 17, 2020
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	SMA100A	101091	Jul. 03, 2019	Jul. 02, 2020
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 19, 2018	Sep. 18, 2019
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 06, 2019	Sep. 05, 2020
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 16, 2019	Jul. 15, 2020
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Dec. 07, 2018	Dec. 06, 2019
Anritsu	Power Meter	ML2495A	1218006	Oct. 08, 2018	Oct. 07, 2019
Anritsu	Power Sensor	MA2411B	1207363	Oct. 08, 2018	Oct. 07, 2019
Anritsu	Power Meter	ML2495A	1419002	May. 29, 2019	May. 28, 2020
Anritsu	Power Sensor	MA2411B	1339124	May. 29, 2019	May. 28, 2020
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 28, 2018	Aug. 27, 2019
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 27, 2019	Jun. 26, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	070501814	Oct. 08, 2018	Oct. 07, 2019
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 10, 2019	May. 09, 2020
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

9. System Verification

9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

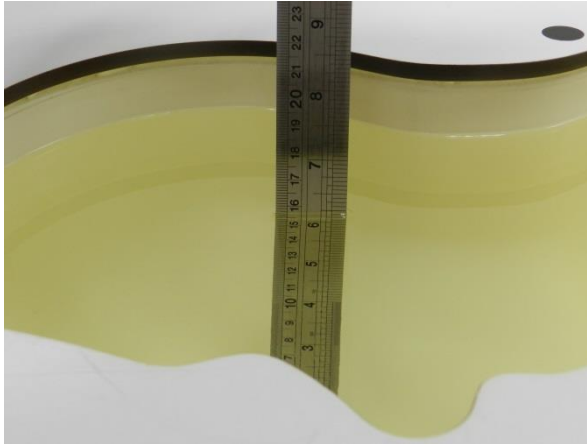


Fig 10.1 Photo of Liquid Height for Head SAR

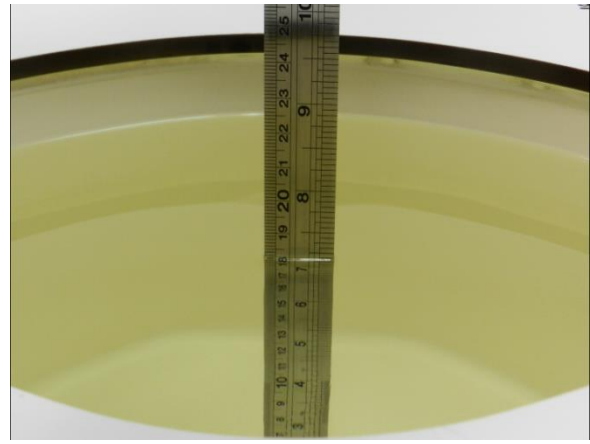


Fig 10.2 Photo of Liquid Height for Body SAR

9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.2	0.893	42.815	0.89	41.90	0.34	2.18	±5	2019/8/26
835	22.7	0.896	40.627	0.90	41.50	-0.44	-2.10	±5	2019/8/27
835	22.5	0.890	42.456	0.90	41.50	-1.11	2.30	±5	2019/8/28
835	22.6	0.895	42.129	0.90	41.50	-0.56	1.52	±5	2019/9/3
1750	22.9	1.369	40.600	1.37	40.10	-0.07	1.25	±5	2019/9/4
1750	22.8	1.361	40.114	1.37	40.10	-0.66	0.03	±5	2019/9/5
1900	22.5	1.428	40.517	1.40	40.00	2.00	1.29	±5	2019/8/29
1900	22.9	1.419	39.692	1.40	40.00	1.36	-0.77	±5	2019/9/4
1900	22.8	1.403	39.402	1.40	40.00	0.21	-1.50	±5	2019/9/5
2450	22.2	1.793	39.230	1.80	39.20	-0.39	0.08	±5	2019/9/5
5250	22.5	4.502	37.650	4.71	35.95	-4.42	4.73	±5	2019/9/23
5250	22.4	4.505	37.660	4.71	35.95	-4.35	4.76	±5	2019/9/24
5600	22.5	4.847	37.120	5.07	35.50	-4.40	4.56	±5	2019/9/23
5600	22.4	4.850	37.130	5.07	35.50	-4.34	4.59	±5	2019/9/24

9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/8/26	750	250	D750V3-1107	ES3DV3 - SN3270	DAE3 Sn577	2.06	8.32	8.24	-0.96
2019/8/27	835	250	D835V2-4d167	ES3DV3 - SN3270	DAE3 Sn577	2.28	9.50	9.12	-4.00
2019/8/28	835	250	D835V2-4d167	ES3DV3 - SN3270	DAE3 Sn577	2.41	9.50	9.64	1.47
2019/9/3	835	250	D835V2-4d167	EX3DV4 - SN3728	DAE4 Sn778	2.38	9.50	9.52	0.21
2019/9/4	1750	250	D1750V2-1112	EX3DV4 - SN3728	DAE4 Sn778	8.74	36.70	34.96	-4.74
2019/9/5	1750	250	D1750V2-1112	EX3DV4 - SN3728	DAE4 Sn778	8.68	36.70	34.72	-5.40
2019/8/29	1900	250	D1900V2-5d185	ES3DV3 - SN3270	DAE3 Sn577	9.81	39.40	39.24	-0.41
2019/9/4	1900	250	D1900V2-5d185	EX3DV4 - SN3728	DAE4 Sn778	9.62	39.40	38.48	-2.34
2019/9/5	1900	250	D1900V2-5d185	EX3DV4 - SN3728	DAE4 Sn778	9.49	39.40	37.96	-3.65
2019/9/5	2450	250	D2450V2-929	ES3DV3 - SN3124	DAE4 Sn316	12.05	52.10	48.2	-7.49
2019/9/23	5250	100	D5GHzV2-1128-5250	EX3DV4 - SN3728	DAE4 Sn778	7.41	76.20	74.1	-2.76
2019/9/24	5250	100	D5GHzV2-1128-5250	EX3DV4 - SN7346	DAE3 Sn360	7.71	76.20	77.1	1.18
2019/9/23	5600	100	D5GHzV2-1128-5600	EX3DV4 - SN3728	DAE4 Sn778	7.43	79.90	74.3	-7.01
2019/9/24	5600	100	D5GHzV2-1128-5600	EX3DV4 - SN7346	DAE3 Sn360	8.36	79.90	83.6	4.63

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019/9/4	1750	250	D1750V2-1112	EX3DV4 - SN3728	DAE4 Sn778	4.63	19.40	18.52	-4.54
2019/9/5	1750	250	D1750V2-1112	EX3DV4 - SN3728	DAE4 Sn778	4.60	19.40	18.4	-5.15
2019/9/4	1900	250	D1900V2-5d185	EX3DV4 - SN3728	DAE4 Sn778	4.88	20.50	19.52	-4.78
2019/9/5	1900	250	D1900V2-5d185	EX3DV4 - SN3728	DAE4 Sn778	4.85	20.50	19.4	-5.37
2019/9/24	5250	100	D5GHZV2-1128-5250	EX3DV4 - SN7346	DAE3 Sn360	2.13	21.90	21.3	-2.74
2019/9/24	5600	100	D5GHZV2-1128-5600	EX3DV4 - SN7346	DAE3 Sn360	2.31	23.00	23.1	0.43

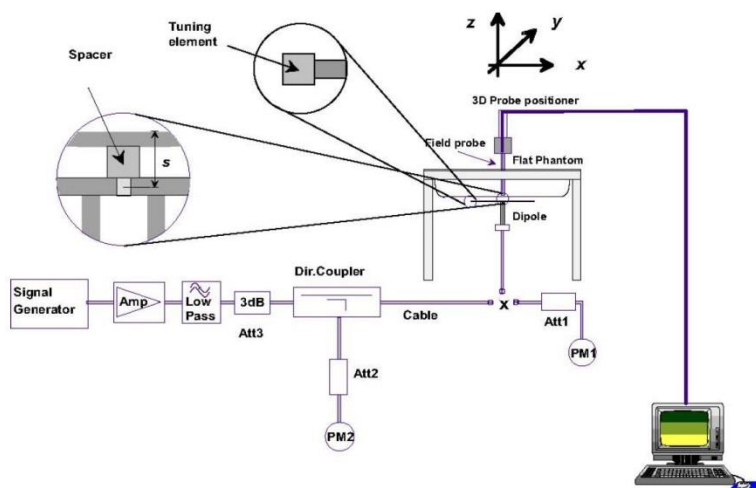


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

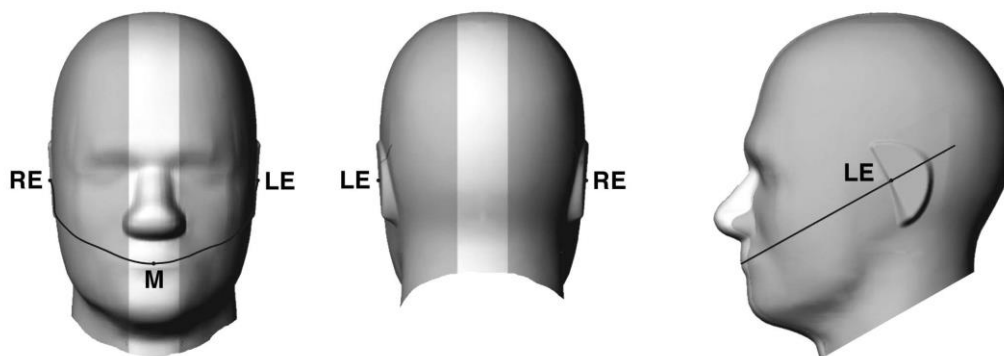


Fig 9.1.1 Front, back, and side views of SAM twin phantom

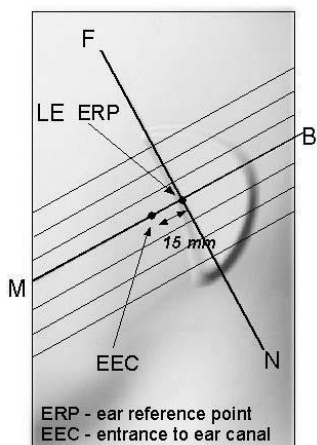


Fig 9.1.2 Close-up side view of phantom showing the ear region.

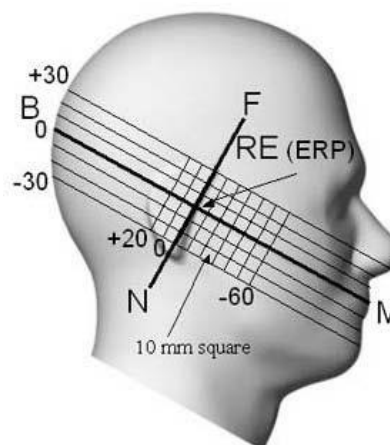


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

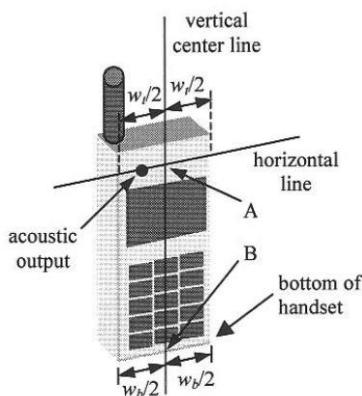


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

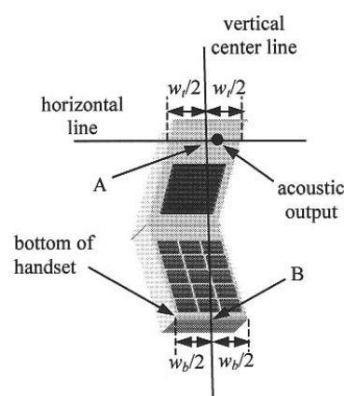


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

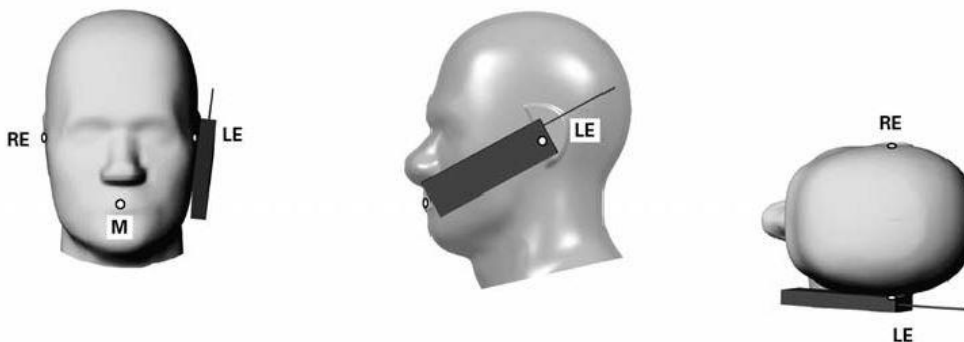


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

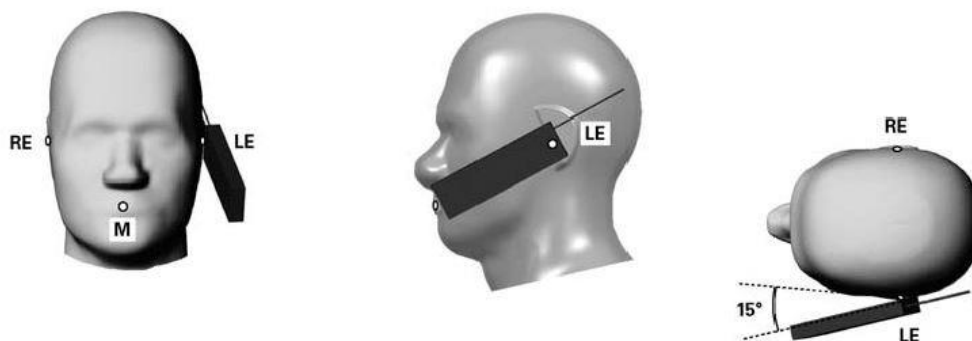


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

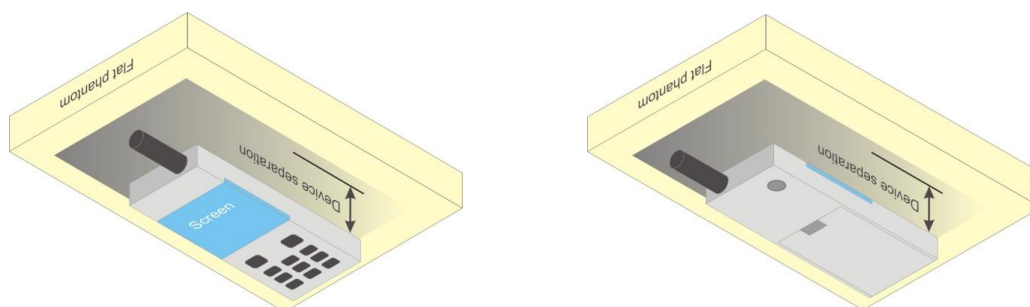


Fig 9.4 Body Worn Position



10.5 Product Specific Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

10.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

11. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (1Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode
4. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 3Tx slot due to its highest frame-average power.

<Default Power Mode>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	34.78	34.79	34.70	35.00	25.78	25.79	25.70	26.00
GPRS 1 Tx slot	34.80	34.81	34.72	35.00	25.80	25.81	25.72	26.00
GPRS 2 Tx slots	29.02	28.93	29.08	30.50	23.02	22.93	23.08	24.50
GPRS 3 Tx slots	27.39	27.15	27.31	29.00	23.13	22.89	23.05	24.74
GPRS 4 Tx slots	27.18	26.80	26.96	28.50	24.18	23.80	23.96	25.50

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	31.42	31.30	31.32	32.00	22.42	22.30	22.32	23.00
GPRS 1 Tx slot	31.45	31.34	31.35	32.00	22.45	22.34	22.35	23.00
GPRS 2 Tx slots	28.82	28.78	28.75	29.50	22.82	22.78	22.75	23.50
GPRS 3 Tx slots	27.71	27.67	27.58	28.00	23.45	23.41	23.32	23.74
GPRS 4 Tx slots	26.21	26.14	26.05	26.50	23.21	23.14	23.05	23.50

<Reduced Power Mode>

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.75	29.71	29.68	30.00	20.75	20.71	20.68	21.00
GPRS 1 Tx slot	29.84	29.80	29.77	30.00	20.84	20.80	20.77	21.00
GPRS 2 Tx slots	26.92	26.88	26.79	27.00	20.92	20.88	20.79	21.00
GPRS 3 Tx slots	25.50	25.41	25.42	25.50	21.24	21.15	21.16	21.24
GPRS 4 Tx slots	23.83	23.77	23.58	24.00	20.83	20.77	20.58	21.00

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

<Default Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.52	23.67	23.75	24.00	23.97	23.92	23.95	24.00	24.98	24.98	24.99	25.00
3GPP Rel 99	RMC 12.2Kbps	23.54	23.66	23.85	24.00	23.99	23.94	23.97	24.00	24.98	24.99	25.00	25.00
3GPP Rel 6	HSDPA Subtest-1	22.57	22.72	22.73	23.50	22.97	22.98	23.00	23.50	23.97	24.12	24.05	24.50
3GPP Rel 6	HSDPA Subtest-2	22.56	22.72	22.80	23.50	22.99	22.99	23.01	23.50	23.99	24.10	24.15	24.50
3GPP Rel 6	HSDPA Subtest-3	22.05	22.21	22.29	23.00	22.46	22.46	22.50	23.00	23.51	23.62	23.59	24.00
3GPP Rel 6	HSDPA Subtest-4	22.10	22.20	22.27	23.00	22.46	22.51	22.51	23.00	23.54	23.62	23.59	24.00
3GPP Rel 6	HSUPA Subtest-1	22.52	22.61	22.76	23.50	22.93	22.93	22.96	23.50	24.00	24.10	24.06	24.50
3GPP Rel 6	HSUPA Subtest-2	20.49	20.73	20.70	21.50	20.92	20.94	20.92	21.50	22.05	22.11	22.05	22.50
3GPP Rel 6	HSUPA Subtest-3	21.51	21.66	21.74	22.50	21.88	21.93	21.96	22.50	22.98	23.17	23.04	23.50
3GPP Rel 6	HSUPA Subtest-4	20.48	20.68	20.76	21.50	20.91	20.95	20.92	21.50	22.02	22.07	22.00	22.50
3GPP Rel 6	HSUPA Subtest-5	22.50	22.70	22.80	23.50	22.90	22.90	22.90	23.50	24.00	24.10	24.00	24.50


<Reduced Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	20.10	20.25	20.31	22.00	19.19	19.15	19.15	21.00
3GPP Rel 99	RMC 12.2Kbps	20.10	20.26	20.34	22.00	19.21	19.17	19.16	21.00
3GPP Rel 6	HSDPA Subtest-1	19.09	19.24	19.32	21.50	18.19	18.18	18.16	20.50
3GPP Rel 6	HSDPA Subtest-2	19.13	19.32	19.34	21.50	18.14	18.16	18.15	20.50
3GPP Rel 6	HSDPA Subtest-3	18.63	18.79	18.84	21.00	17.67	17.63	17.71	20.00
3GPP Rel 6	HSDPA Subtest-4	18.66	18.79	18.86	21.00	17.74	17.65	17.69	20.00
3GPP Rel 6	HSUPA Subtest-1	19.10	19.21	19.34	21.50	18.14	18.19	18.14	20.50
3GPP Rel 6	HSUPA Subtest-2	17.08	17.27	17.34	19.50	16.16	16.15	16.10	18.50
3GPP Rel 6	HSUPA Subtest-3	18.13	18.26	18.36	20.50	17.18	17.16	17.15	19.50
3GPP Rel 6	HSUPA Subtest-4	17.10	17.28	17.30	19.50	16.16	16.07	16.17	18.50
3GPP Rel 6	HSUPA Subtest-5	19.10	19.20	19.30	21.50	18.20	18.20	18.10	20.50


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

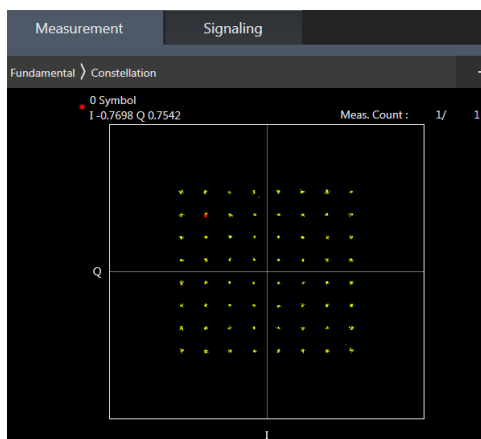

64QAM

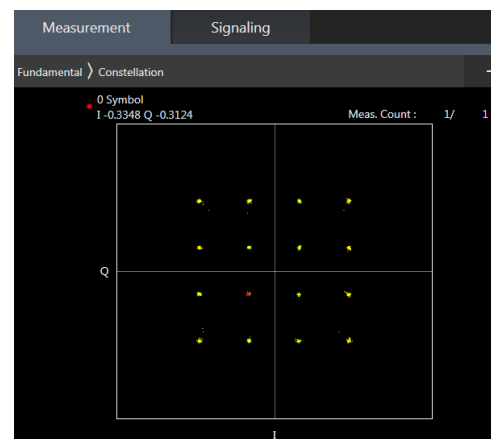

16QAM

<Default Power Mode>
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.46	23.70	23.58	24	0
20	QPSK	1	49	23.55	23.72	23.54		
20	QPSK	1	99	23.56	23.76	23.58		
20	QPSK	50	0	22.66	22.81	22.71	23	1
20	QPSK	50	24	22.66	22.81	22.65		
20	QPSK	50	50	22.60	22.82	22.65		
20	QPSK	100	0	22.62	22.81	22.71	23	1
20	16QAM	1	0	22.60	23.00	22.79		
20	16QAM	1	49	22.76	23.00	22.86		
20	16QAM	1	99	22.94	22.98	22.80	22	2
20	16QAM	50	0	21.67	21.91	21.75		
20	16QAM	50	24	21.73	21.96	21.71		
20	16QAM	50	50	21.68	21.89	21.72	22	2
20	16QAM	100	0	21.66	21.90	21.77		
20	64QAM	1	0	21.60	22.00	21.73		
20	64QAM	1	49	21.73	22.01	21.83	22	2
20	64QAM	1	99	21.91	21.94	21.76		
20	64QAM	50	0	20.71	20.92	20.76		
20	64QAM	50	24	20.73	20.94	20.72	21	3
20	64QAM	50	50	20.67	20.92	20.75		
20	64QAM	100	0	20.70	20.93	20.79		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.45	23.74	23.48	24	0
15	QPSK	1	37	23.43	23.70	23.53		
15	QPSK	1	74	23.54	23.72	23.55		
15	QPSK	36	0	22.54	22.79	22.60	23	1
15	QPSK	36	20	22.65	22.84	22.62		
15	QPSK	36	39	22.59	22.79	22.64		
15	QPSK	75	0	22.60	22.81	22.61	23	1
15	16QAM	1	0	22.58	23.00	22.75		
15	16QAM	1	37	22.62	22.99	22.87		
15	16QAM	1	74	22.86	22.94	22.79	22	2
15	16QAM	36	0	21.54	21.92	21.64		
15	16QAM	36	20	21.68	21.96	21.69		
15	16QAM	36	39	21.68	21.84	21.71	22	2
15	16QAM	75	0	21.67	21.87	21.69		
15	64QAM	1	0	21.56	22.00	21.73		
15	64QAM	1	37	21.61	21.97	21.82	22	2
15	64QAM	1	74	21.78	21.88	21.76		
15	64QAM	36	0	20.62	20.97	20.71		
15	64QAM	36	20	20.75	20.97	20.76	21	3
15	64QAM	36	39	20.72	20.94	20.73		
15	64QAM	75	0	20.68	20.91	20.70		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.59	23.75	23.55	24	0
10	QPSK	1	25	23.49	23.73	23.56		
10	QPSK	1	49	23.60	23.75	23.56		



FCC SAR TEST REPORT

Report No. : FA960602-01

10	QPSK	25	0	22.58	22.73	22.64	23	1
10	QPSK	25	12	22.60	22.84	22.63		
10	QPSK	25	25	22.65	22.81	22.63		
10	QPSK	50	0	22.64	22.82	22.62		
10	16QAM	1	0	22.66	22.94	22.89	23	1
10	16QAM	1	25	22.63	22.99	22.92		
10	16QAM	1	49	22.80	22.97	22.80		
10	16QAM	25	0	21.61	21.93	21.73	22	2
10	16QAM	25	12	21.58	21.91	21.71		
10	16QAM	25	25	21.66	21.90	21.71		
10	16QAM	50	0	21.67	21.89	21.68		
10	64QAM	1	0	21.64	21.98	21.81	22	2
10	64QAM	1	25	21.60	22.00	21.85		
10	64QAM	1	49	21.76	21.98	21.75		
10	64QAM	25	0	20.59	20.93	20.73	21	3
10	64QAM	25	12	20.60	20.94	20.76		
10	64QAM	25	25	20.66	20.89	20.70		
10	64QAM	50	0	20.70	20.94	20.73		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.50	23.70	23.55	24	0
5	QPSK	1	12	23.49	23.71	23.55		
5	QPSK	1	24	23.44	23.69	23.54		
5	QPSK	12	0	22.54	22.80	22.64	23	1
5	QPSK	12	7	22.55	22.82	22.66		
5	QPSK	12	13	22.52	22.78	22.63		
5	QPSK	25	0	22.54	22.77	22.63		
5	16QAM	1	0	22.55	22.94	22.88	23	1
5	16QAM	1	12	22.58	22.99	22.85		
5	16QAM	1	24	22.57	22.92	22.76		
5	16QAM	12	0	21.54	21.90	21.70	22	2
5	16QAM	12	7	21.54	21.92	21.72		
5	16QAM	12	13	21.51	21.87	21.65		
5	16QAM	25	0	21.54	21.87	21.71		
5	64QAM	1	0	21.55	21.97	21.80	22	2
5	64QAM	1	12	21.56	21.97	21.80		
5	64QAM	1	24	21.54	21.90	21.70		
5	64QAM	12	0	20.62	20.96	20.77	21	3
5	64QAM	12	7	20.63	20.97	20.77		
5	64QAM	12	13	20.59	20.93	20.74		
5	64QAM	25	0	20.57	20.88	20.71		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.49	23.69	23.55	24	0
3	QPSK	1	8	23.46	23.71	23.55		
3	QPSK	1	14	23.45	23.70	23.53		
3	QPSK	8	0	22.51	22.78	22.63	23	1
3	QPSK	8	4	22.54	22.79	22.65		
3	QPSK	8	7	22.50	22.78	22.63		
3	QPSK	15	0	22.54	22.78	22.63		
3	16QAM	1	0	22.54	22.99	22.84	23	1
3	16QAM	1	8	22.57	22.99	22.83		
3	16QAM	1	14	22.51	22.93	22.73		
3	16QAM	8	0	21.52	21.94	21.68	22	2
3	16QAM	8	4	21.58	21.96	21.71		
3	16QAM	8	7	21.51	21.89	21.67		



FCC SAR TEST REPORT

Report No. : FA960602-01

3	16QAM	15	0	21.58	21.87	21.70		
3	64QAM	1	0	21.50	21.95	21.77	22	2
3	64QAM	1	8	21.55	21.96	21.77		
3	64QAM	1	14	21.53	21.91	21.72		
3	64QAM	8	0	20.58	20.95	20.73	21	3
3	64QAM	8	4	20.62	20.97	20.73		
3	64QAM	8	7	20.56	20.94	20.69		
3	64QAM	15	0	20.58	20.91	20.71		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.46	23.69	23.51	24	0
1.4	QPSK	1	3	23.47	23.72	23.59		
1.4	QPSK	1	5	23.45	23.66	23.49		
1.4	QPSK	3	0	23.48	23.72	23.54		
1.4	QPSK	3	1	23.54	23.78	23.59		
1.4	QPSK	3	3	23.46	23.70	23.57		
1.4	QPSK	6	0	22.49	22.74	22.58	23	1
1.4	16QAM	1	0	22.51	22.97	22.74	23	1
1.4	16QAM	1	3	22.57	22.97	22.81		
1.4	16QAM	1	5	22.50	22.92	22.68		
1.4	16QAM	3	0	22.39	22.75	22.56		
1.4	16QAM	3	1	22.44	22.82	22.61		
1.4	16QAM	3	3	22.38	22.74	22.54		
1.4	16QAM	6	0	21.57	21.90	21.69	22	2
1.4	64QAM	1	0	21.51	21.92	21.69	22	2
1.4	64QAM	1	3	21.56	21.97	21.76		
1.4	64QAM	1	5	21.49	21.86	21.67		
1.4	64QAM	3	0	21.54	21.96	21.72		
1.4	64QAM	3	1	21.59	22.00	21.74		
1.4	64QAM	3	3	21.54	21.91	21.70		
1.4	64QAM	6	0	20.54	20.85	20.64	21	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	24	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.54	23.56	23.55		
20	QPSK	1	49	23.50	23.52	23.57	23	1
20	QPSK	1	99	23.55	23.59	23.59		
20	QPSK	50	0	22.58	22.63	22.58		
20	QPSK	50	24	22.70	22.65	22.64	23	1
20	QPSK	50	50	22.65	22.57	22.61		
20	QPSK	100	0	22.70	22.60	22.62		
20	16QAM	1	0	22.82	22.80	22.85	23	1
20	16QAM	1	49	22.76	22.83	22.99		
20	16QAM	1	99	22.79	22.93	22.91		
20	16QAM	50	0	21.70	21.72	21.67	22	2
20	16QAM	50	24	21.77	21.71	21.79		
20	16QAM	50	50	21.74	21.65	21.70		
20	16QAM	100	0	21.74	21.65	21.72	22	2
20	64QAM	1	0	21.79	21.81	21.85		
20	64QAM	1	49	21.75	21.80	21.94		
20	64QAM	1	99	21.79	21.89	21.88	21	3
20	64QAM	50	0	20.72	20.75	20.70		
20	64QAM	50	24	20.82	20.73	20.79		
20	64QAM	50	50	20.75	20.69	20.74	21	3
20	64QAM	100	0	20.79	20.70	20.77		
Channel				20025	20175	20325	24	0
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.58	23.57	23.57		
15	QPSK	1	37	23.52	23.49	23.55	23	1
15	QPSK	1	74	23.53	23.57	23.58		
15	QPSK	36	0	22.61	22.63	22.66		
15	QPSK	36	20	22.71	22.64	22.66	23	1
15	QPSK	36	39	22.65	22.56	22.63		
15	QPSK	75	0	22.66	22.59	22.63		
15	16QAM	1	0	22.81	22.79	23.00	23	1
15	16QAM	1	37	22.78	22.78	22.91		
15	16QAM	1	74	22.78	22.97	22.92		
15	16QAM	36	0	21.68	21.72	21.79	22	2
15	16QAM	36	20	21.80	21.74	21.80		
15	16QAM	36	39	21.74	21.66	21.71		
15	16QAM	75	0	21.77	21.67	21.73	22	2
15	64QAM	1	0	21.79	21.78	21.99		
15	64QAM	1	37	21.79	21.76	21.91		
15	64QAM	1	74	21.77	21.85	21.91	21	3
15	64QAM	36	0	20.73	20.77	20.82		
15	64QAM	36	20	20.85	20.78	20.83		
15	64QAM	36	39	20.77	20.72	20.76	21	3
15	64QAM	75	0	20.79	20.69	20.77		
Channel				20000	20175	20350	24	0
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.48	23.54	23.58		
10	QPSK	1	25	23.43	23.54	23.57	23	1
10	QPSK	1	49	23.38	23.49	23.58		
10	QPSK	25	0	22.51	22.61	22.61		
10	QPSK	25	12	22.53	22.63	22.61	23	1



FCC SAR TEST REPORT

Report No. : FA960602-01

10	QPSK	25	25	22.46	22.56	22.70		
10	QPSK	50	0	22.49	22.61	22.61		
10	16QAM	1	0	22.74	22.82	22.95		
10	16QAM	1	25	22.76	22.81	22.91	23	1
10	16QAM	1	49	22.64	22.81	22.89		
10	16QAM	25	0	21.63	21.69	21.76		
10	16QAM	25	12	21.61	21.72	21.76	22	2
10	16QAM	25	25	21.56	21.67	21.80		
10	16QAM	50	0	21.61	21.70	21.74		
10	64QAM	1	0	21.67	21.79	21.96	22	2
10	64QAM	1	25	21.76	21.76	21.99		
10	64QAM	1	49	21.64	21.76	21.89		
10	64QAM	25	0	20.61	20.72	20.79	21	3
10	64QAM	25	12	20.63	20.73	20.77		
10	64QAM	25	25	20.59	20.70	20.85		
10	64QAM	50	0	20.61	20.72	20.75		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.46	23.53	23.55	24	0
5	QPSK	1	12	23.42	23.53	23.57		
5	QPSK	1	24	23.40	23.48	23.57		
5	QPSK	12	0	22.53	22.59	22.71	23	1
5	QPSK	12	7	22.53	22.64	22.74		
5	QPSK	12	13	22.50	22.57	22.67		
5	QPSK	25	0	22.52	22.60	22.69	23	1
5	16QAM	1	0	22.68	22.79	23.00		
5	16QAM	1	12	22.75	22.78	22.92		
5	16QAM	1	24	22.69	22.74	22.84	22	2
5	16QAM	12	0	21.59	21.66	21.83		
5	16QAM	12	7	21.64	21.71	21.85		
5	16QAM	12	13	21.61	21.67	21.79	22	2
5	16QAM	25	0	21.59	21.69	21.81		
5	64QAM	1	0	21.63	21.78	21.94		
5	64QAM	1	12	21.71	21.75	21.92	22	2
5	64QAM	1	24	21.69	21.74	21.85		
5	64QAM	12	0	20.64	20.74	20.93		
5	64QAM	12	7	20.69	20.78	20.92	21	3
5	64QAM	12	13	20.67	20.73	20.85		
5	64QAM	25	0	20.58	20.69	20.80		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.43	23.53	23.63	24	0
3	QPSK	1	8	23.44	23.52	23.63		
3	QPSK	1	14	23.40	23.49	23.57		
3	QPSK	8	0	22.49	22.62	22.68	23	1
3	QPSK	8	4	22.50	22.60	22.71		
3	QPSK	8	7	22.47	22.55	22.64		
3	QPSK	15	0	22.51	22.60	22.69	23	1
3	16QAM	1	0	22.62	22.74	22.93		
3	16QAM	1	8	22.73	22.82	22.92		
3	16QAM	1	14	22.69	22.76	22.86	22	2
3	16QAM	8	0	21.57	21.71	21.82		
3	16QAM	8	4	21.64	21.72	21.86		
3	16QAM	8	7	21.62	21.69	21.81	22	2
3	16QAM	15	0	21.60	21.71	21.79		
3	64QAM	1	0	21.61	21.73	21.91	22	2



FCC SAR TEST REPORT

Report No. : FA960602-01

3	64QAM	1	8	21.68	21.77	21.92	21	3
3	64QAM	1	14	21.69	21.75	21.86		
3	64QAM	8	0	20.61	20.72	20.86		
3	64QAM	8	4	20.64	20.74	20.88		
3	64QAM	8	7	20.61	20.74	20.87		
3	64QAM	15	0	20.60	20.69	20.82		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.38	23.47	23.54	24	0
1.4	QPSK	1	3	23.46	23.55	23.63		
1.4	QPSK	1	5	23.38	23.44	23.53		
1.4	QPSK	3	0	23.43	23.52	23.61		
1.4	QPSK	3	1	23.49	23.59	23.66		
1.4	QPSK	3	3	23.43	23.54	23.61		
1.4	QPSK	6	0	22.48	22.54	22.64	23	1
1.4	16QAM	1	0	22.60	22.69	22.83	23	1
1.4	16QAM	1	3	22.70	22.80	22.92		
1.4	16QAM	1	5	22.64	22.71	22.82		
1.4	16QAM	3	0	22.44	22.56	22.68		
1.4	16QAM	3	1	22.49	22.60	22.70		
1.4	16QAM	3	3	22.45	22.54	22.62		
1.4	16QAM	6	0	21.59	21.69	21.81	22	2
1.4	64QAM	1	0	21.57	21.72	21.82	22	2
1.4	64QAM	1	3	21.64	21.76	21.91		
1.4	64QAM	1	5	21.58	21.71	21.81		
1.4	64QAM	3	0	21.63	21.74	21.85		
1.4	64QAM	3	1	21.65	21.79	21.89		
1.4	64QAM	3	3	21.61	21.74	21.83		
1.4	64QAM	6	0	20.54	20.64	20.73	21	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	24.11	24.10	24.11	25	0
10	QPSK	1	25	24.15	24.18	24.09		
10	QPSK	1	49	24.23	24.22	24.16		
10	QPSK	25	0	23.21	23.25	23.14	24	1
10	QPSK	25	12	23.22	23.24	23.13		
10	QPSK	25	25	23.31	23.25	23.16		
10	QPSK	50	0	23.18	23.24	23.16		
10	16QAM	1	0	23.47	23.45	23.46	24	1
10	16QAM	1	25	23.48	23.45	23.42		
10	16QAM	1	49	23.49	23.50	23.49		
10	16QAM	25	0	22.29	22.34	22.28	23	2
10	16QAM	25	12	22.30	22.33	22.28		
10	16QAM	25	25	22.39	22.32	22.20		
10	16QAM	50	0	22.28	22.36	22.27		
10	64QAM	1	0	22.36	22.35	22.43	23	2
10	64QAM	1	25	22.44	22.47	22.38		
10	64QAM	1	49	22.47	22.47	22.40		
10	64QAM	25	0	21.29	21.34	21.28	22	3
10	64QAM	25	12	21.33	21.36	21.28		
10	64QAM	25	25	21.39	21.34	21.21		
10	64QAM	50	0	21.29	21.36	21.28		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	24.08	24.18	24.07	25	0
5	QPSK	1	12	24.08	24.17	24.17		
5	QPSK	1	24	24.15	24.14	24.13		
5	QPSK	12	0	23.14	23.25	23.10	24	1
5	QPSK	12	7	23.25	23.26	23.25		
5	QPSK	12	13	23.21	23.19	23.22		
5	QPSK	25	0	23.21	23.21	23.10		
5	16QAM	1	0	23.43	23.50	23.42	24	1
5	16QAM	1	12	23.40	23.49	23.46		
5	16QAM	1	24	23.44	23.47	23.45		
5	16QAM	12	0	22.21	22.34	22.24	23	2
5	16QAM	12	7	22.33	22.35	22.34		
5	16QAM	12	13	22.28	22.35	22.31		
5	16QAM	25	0	22.32	22.32	22.18		
5	64QAM	1	0	22.37	22.46	22.34	23	2
5	64QAM	1	12	22.35	22.46	22.42		
5	64QAM	1	24	22.38	22.46	22.40		
5	64QAM	12	0	21.27	21.37	21.26	22	3
5	64QAM	12	7	21.37	21.39	21.38		
5	64QAM	12	13	21.32	21.36	21.34		
5	64QAM	25	0	21.33	21.33	21.19		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	24.10	24.19	24.16	25	0
3	QPSK	1	8	24.07	24.15	24.14		
3	QPSK	1	14	24.08	24.15	24.14		
3	QPSK	8	0	23.16	23.21	23.21	24	1
3	QPSK	8	4	23.17	23.24	23.22		



FCC SAR TEST REPORT

Report No. : FA960602-01

3	QPSK	8	7	23.15	23.22	23.19		
3	QPSK	15	0	23.15	23.21	23.21		
3	16QAM	1	0	23.43	23.49	23.48		
3	16QAM	1	8	23.45	23.50	23.48	24	1
3	16QAM	1	14	23.41	23.48	23.42		
3	16QAM	8	0	22.29	22.36	22.33		
3	16QAM	8	4	22.29	22.40	22.39	23	2
3	16QAM	8	7	22.28	22.36	22.34		
3	16QAM	15	0	22.25	22.35	22.32		
3	64QAM	1	0	22.38	22.47	22.43	23	2
3	64QAM	1	8	22.36	22.48	22.42		
3	64QAM	1	14	22.34	22.47	22.40		
3	64QAM	8	0	21.28	21.35	21.33	22	3
3	64QAM	8	4	21.28	21.42	21.38		
3	64QAM	8	7	21.28	21.34	21.37		
3	64QAM	15	0	21.25	21.33	21.34		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	24.02	24.11	24.05	25	0
1.4	QPSK	1	3	24.11	24.16	24.14		
1.4	QPSK	1	5	24.03	24.10	24.07		
1.4	QPSK	3	0	24.06	24.15	24.22		
1.4	QPSK	3	1	24.10	24.20	24.18		
1.4	QPSK	3	3	24.05	24.16	24.11		
1.4	QPSK	6	0	23.09	23.15	23.14	24	1
1.4	16QAM	1	0	23.35	23.42	23.44	24	1
1.4	16QAM	1	3	23.42	23.53	23.56		
1.4	16QAM	1	5	23.33	23.43	23.39		
1.4	16QAM	3	0	23.15	23.23	23.20		
1.4	16QAM	3	1	23.21	23.29	23.24		
1.4	16QAM	3	3	23.14	23.25	23.20		
1.4	16QAM	6	0	22.24	22.30	22.31	23	2
1.4	64QAM	1	0	22.34	22.38	22.34	23	2
1.4	64QAM	1	3	22.35	22.44	22.40		
1.4	64QAM	1	5	22.27	22.41	22.35		
1.4	64QAM	3	0	22.28	22.41	22.34		
1.4	64QAM	3	1	22.34	22.42	22.40		
1.4	64QAM	3	3	22.28	22.39	22.33		
1.4	64QAM	6	0	21.17	21.25	21.24	22	3



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	25	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	24.76	24.71	24.76		
10	QPSK	1	25	24.83	24.88	24.77	24	1
10	QPSK	1	49	24.83	24.78	24.67		
10	QPSK	25	0	23.93	23.86	23.80		
10	QPSK	25	12	23.94	23.88	23.84	24	1
10	QPSK	25	25	23.91	23.84	23.83		
10	QPSK	50	0	23.90	23.89	23.81		
10	16QAM	1	0	23.89	23.98	23.82	24	1
10	16QAM	1	25	23.88	23.88	23.92		
10	16QAM	1	49	23.87	23.95	23.99		
10	16QAM	25	0	23.00	22.92	22.89	23	2
10	16QAM	25	12	22.97	22.96	22.94		
10	16QAM	25	25	22.95	22.93	22.89		
10	16QAM	50	0	22.95	22.93	22.91	23	2
10	64QAM	1	0	22.84	22.91	22.95		
10	64QAM	1	25	22.99	23.00	23.00		
10	64QAM	1	49	22.87	22.82	22.89	22	3
10	64QAM	25	0	21.97	21.91	21.90		
10	64QAM	25	12	21.99	21.95	21.94		
10	64QAM	25	25	21.97	21.95	21.88	22	3
10	64QAM	50	0	21.97	21.95	21.89		
Channel				23035	23095	23155	25	0
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	24.76	24.76	24.65		
5	QPSK	1	12	24.79	24.79	24.55	24	1
5	QPSK	1	24	24.84	24.77	24.50		
5	QPSK	12	0	23.83	23.84	23.69		
5	QPSK	12	7	23.87	23.89	23.62	24	1
5	QPSK	12	13	23.91	23.86	23.59		
5	QPSK	25	0	23.91	23.82	23.68		
5	16QAM	1	0	23.83	23.88	23.98	24	1
5	16QAM	1	12	23.89	23.50	23.87		
5	16QAM	1	24	23.83	23.88	23.83		
5	16QAM	12	0	22.91	22.88	22.76	23	2
5	16QAM	12	7	22.94	22.94	22.68		
5	16QAM	12	13	22.99	22.92	22.65		
5	16QAM	25	0	23.00	22.93	22.77	23	2
5	64QAM	1	0	22.92	22.94	22.90		
5	64QAM	1	12	22.99	22.93	22.76		
5	64QAM	1	24	22.99	22.91	22.76	22	3
5	64QAM	12	0	21.94	21.93	21.78		
5	64QAM	12	7	21.94	21.97	21.71		
5	64QAM	12	13	21.98	21.97	21.67	22	3
5	64QAM	25	0	21.97	21.89	21.77		
Channel				23025	23095	23165	25	0
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	24.69	24.72	24.55		
3	QPSK	1	8	24.73	24.70	24.54	24	1
3	QPSK	1	14	24.79	24.69	24.40		
3	QPSK	8	0	23.74	23.76	23.59		
3	QPSK	8	4	23.78	23.80	23.52	24	1



FCC SAR TEST REPORT

Report No. : FA960602-01

3	QPSK	8	7	23.81	23.80	23.57		
3	QPSK	15	0	23.81	23.81	23.60		
3	16QAM	1	0	23.79	23.85	23.97		
3	16QAM	1	8	23.86	23.42	23.86	24	1
3	16QAM	1	14	23.74	23.88	23.83		
3	16QAM	8	0	22.86	22.88	22.76		
3	16QAM	8	4	22.87	22.94	22.64	23	2
3	16QAM	8	7	22.96	22.84	22.55		
3	16QAM	15	0	22.91	22.90	22.77		
3	64QAM	1	0	22.92	22.88	22.82	23	2
3	64QAM	1	8	22.99	22.88	22.66		
3	64QAM	1	14	22.99	22.82	22.76		
3	64QAM	8	0	21.91	21.90	21.76	22	3
3	64QAM	8	4	21.88	21.95	21.61		
3	64QAM	8	7	21.93	21.88	21.59		
3	64QAM	15	0	21.97	21.88	21.69		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	24.64	24.65	24.52	25	0
1.4	QPSK	1	3	24.69	24.62	24.53		
1.4	QPSK	1	5	24.73	24.71	24.47		
1.4	QPSK	3	0	24.71	24.74	24.42		
1.4	QPSK	3	1	24.75	24.62	24.61		
1.4	QPSK	3	3	24.69	24.61	24.40		
1.4	QPSK	6	0	23.88	23.55	23.76	24	1
1.4	16QAM	1	0	23.66	23.67	23.54	24	1
1.4	16QAM	1	3	23.71	23.64	23.55		
1.4	16QAM	1	5	23.75	23.73	23.49		
1.4	16QAM	3	0	23.73	23.76	23.44		
1.4	16QAM	3	1	23.77	23.64	23.63		
1.4	16QAM	3	3	23.71	23.63	23.42		
1.4	16QAM	6	0	22.56	22.86	22.79	23	2
1.4	64QAM	1	0	22.78	22.79	22.66	23	2
1.4	64QAM	1	3	22.83	22.76	22.67		
1.4	64QAM	1	5	22.87	22.85	22.61		
1.4	64QAM	3	0	22.85	22.88	22.56		
1.4	64QAM	3	1	22.89	22.76	22.75		
1.4	64QAM	3	3	22.83	22.75	22.54		
1.4	64QAM	6	0	21.76	21.88	21.69	22	3

<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	25	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	24.83	24.82	24.81		
10	QPSK	1	25	24.83	24.87	24.81	24	1
10	QPSK	1	49	24.67	24.65	24.65		
10	QPSK	25	0	23.84	23.85	23.86		
10	QPSK	25	12	23.86	23.87	23.83	24	1
10	QPSK	25	25	23.83	23.83	23.82		
10	QPSK	50	0	23.87	23.84	23.81		
10	16QAM	1	0	23.89	23.88	23.89	24	1
10	16QAM	1	25	23.82	23.99	23.92		
10	16QAM	1	49	24.00	23.97	23.96		
10	16QAM	25	0	22.92	22.94	22.93	23	2
10	16QAM	25	12	22.96	22.98	22.94		
10	16QAM	25	25	22.93	22.90	22.92		
10	16QAM	50	0	22.94	22.92	22.91	23	2
10	64QAM	1	0	22.93	22.82	22.81		
10	64QAM	1	25	22.83	22.71	22.85		
10	64QAM	1	49	22.89	22.90	22.88	22	3
10	64QAM	25	0	21.95	21.91	21.93		
10	64QAM	25	12	21.97	21.94	21.94		
10	64QAM	25	25	21.94	21.92	21.90	22	3
10	64QAM	50	0	21.93	21.91	21.93		
Channel				23755	23790	23825	25	0
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	24.85	24.81	24.78		
5	QPSK	1	12	24.84	24.83	24.62	24	1
5	QPSK	1	24	24.86	24.64	24.59		
5	QPSK	12	0	23.87	23.84	23.79		
5	QPSK	12	7	23.88	23.87	23.72	24	1
5	QPSK	12	13	23.90	23.86	23.71		
5	QPSK	25	0	23.87	23.85	23.80		
5	16QAM	1	0	23.90	23.93	23.92	24	1
5	16QAM	1	12	23.93	23.99	23.75		
5	16QAM	1	24	23.99	23.82	23.71		
5	16QAM	12	0	22.71	22.70	22.68	23	2
5	16QAM	12	7	22.77	22.74	22.58		
5	16QAM	12	13	22.77	22.75	22.54		
5	16QAM	25	0	22.75	22.73	22.66	23	2
5	64QAM	1	0	22.83	22.82	22.84		
5	64QAM	1	12	22.88	22.87	22.69		
5	64QAM	1	24	22.90	22.73	22.64	22	3
5	64QAM	12	0	21.75	21.73	21.72		
5	64QAM	12	7	21.78	21.76	21.61		
5	64QAM	12	13	21.76	21.74	21.59	22	3
5	64QAM	25	0	21.72	21.70	21.65		

<Reduced Power Mode>
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	20.08	20.26	20.13	22	0
20	QPSK	1	49	20.12	20.35	20.11		
20	QPSK	1	99	20.14	20.37	20.18		
20	QPSK	50	0	19.22	19.37	19.26	21	1
20	QPSK	50	24	19.26	19.41	19.26		
20	QPSK	50	50	19.20	19.37	19.20		
20	QPSK	100	0	19.19	19.40	19.29	21	1
20	16QAM	1	0	19.31	19.50	19.41		
20	16QAM	1	49	19.44	19.50	19.46		
20	16QAM	1	99	19.48	19.49	19.45	20	2
20	16QAM	50	0	18.30	18.42	18.33		
20	16QAM	50	24	18.31	18.43	18.30		
20	16QAM	50	50	18.32	18.42	18.33	20	2
20	16QAM	100	0	18.32	18.49	18.35		
20	64QAM	1	0	18.33	18.49	18.37		
20	64QAM	1	49	18.41	18.50	18.42	20	2
20	64QAM	1	99	18.47	18.48	18.46		
20	64QAM	50	0	17.31	17.47	17.33		
20	64QAM	50	24	17.31	17.49	17.29	19	3
20	64QAM	50	50	17.31	17.48	17.33		
20	64QAM	100	0	17.32	17.43	17.36		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	20.05	20.33	20.13	22	0
15	QPSK	1	37	20.01	20.29	20.13		
15	QPSK	1	74	20.11	20.30	20.16		
15	QPSK	36	0	19.12	19.41	19.15	21	1
15	QPSK	36	20	19.23	19.43	19.22		
15	QPSK	36	39	19.21	19.42	19.25		
15	QPSK	75	0	19.22	19.41	19.18	21	1
15	16QAM	1	0	19.29	19.50	19.46		
15	16QAM	1	37	19.27	19.49	19.45		
15	16QAM	1	74	19.48	19.48	19.45	20	2
15	16QAM	36	0	18.18	18.43	18.25		
15	16QAM	36	20	18.31	18.46	18.33		
15	16QAM	36	39	18.29	18.47	18.29	20	2
15	16QAM	75	0	18.33	18.43	18.30		
15	64QAM	1	0	18.25	18.50	18.40		
15	64QAM	1	37	18.25	18.49	18.45	20	2
15	64QAM	1	74	18.45	18.45	18.44		
15	64QAM	36	0	17.23	17.49	17.32		
15	64QAM	36	20	17.34	17.50	17.36	19	3
15	64QAM	36	39	17.30	17.46	17.37		
15	64QAM	75	0	17.32	17.50	17.28		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	20.17	20.35	20.16	22	0
10	QPSK	1	25	20.06	20.33	20.18		
10	QPSK	1	49	20.18	20.36	20.19		



FCC SAR TEST REPORT

Report No. : FA960602-01

10	QPSK	25	0	19.17	19.40	19.21	21	1
10	QPSK	25	12	19.17	19.40	19.26		
10	QPSK	25	25	19.21	19.38	19.20		
10	QPSK	50	0	19.25	19.38	19.23		
10	16QAM	1	0	19.41	19.50	19.46	21	1
10	16QAM	1	25	19.31	19.49	19.47		
10	16QAM	1	49	19.49	19.48	19.42		
10	16QAM	25	0	18.22	18.45	18.30	20	2
10	16QAM	25	12	18.23	18.45	18.31		
10	16QAM	25	25	18.30	18.50	18.31		
10	16QAM	50	0	18.32	18.43	18.31		
10	64QAM	1	0	18.35	18.50	18.45	20	2
10	64QAM	1	25	18.27	18.49	18.50		
10	64QAM	1	49	18.43	18.50	18.47		
10	64QAM	25	0	17.25	17.45	17.32	19	3
10	64QAM	25	12	17.24	17.46	17.36		
10	64QAM	25	25	17.30	17.43	17.32		
10	64QAM	50	0	17.35	17.43	17.29		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	20.05	20.33	20.16	22	0
5	QPSK	1	12	20.07	20.33	20.17		
5	QPSK	1	24	20.03	20.29	20.17		
5	QPSK	12	0	19.16	19.42	19.23	21	1
5	QPSK	12	7	19.15	19.43	19.26		
5	QPSK	12	13	19.14	19.37	19.23		
5	QPSK	25	0	19.14	19.37	19.19		
5	16QAM	1	0	19.30	19.50	19.45	21	1
5	16QAM	1	12	19.30	19.50	19.46		
5	16QAM	1	24	19.26	19.49	19.50		
5	16QAM	12	0	18.23	18.45	18.33	20	2
5	16QAM	12	7	18.22	18.46	18.34		
5	16QAM	12	13	18.20	18.45	18.32		
5	16QAM	25	0	18.20	18.50	18.30		
5	64QAM	1	0	18.29	18.50	18.46	20	2
5	64QAM	1	12	18.27	18.50	18.47		
5	64QAM	1	24	18.23	18.47	18.43		
5	64QAM	12	0	17.29	17.50	17.37	19	3
5	64QAM	12	7	17.15	17.49	17.42		
5	64QAM	12	13	17.12	17.46	17.35		
5	64QAM	25	0	17.21	17.49	17.32		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	20.05	20.32	20.17	22	0
3	QPSK	1	8	20.06	20.35	20.18		
3	QPSK	1	14	20.03	20.31	20.16		
3	QPSK	8	0	19.14	19.39	19.19	21	1
3	QPSK	8	4	19.19	19.42	19.24		
3	QPSK	8	7	19.12	19.39	19.21		
3	QPSK	15	0	19.14	19.37	19.23		
3	16QAM	1	0	19.27	19.50	19.50	21	1
3	16QAM	1	8	19.30	19.50	19.45		
3	16QAM	1	14	19.28	19.49	19.42		
3	16QAM	8	0	18.24	18.47	18.36	20	2
3	16QAM	8	4	18.27	18.50	18.36		
3	16QAM	8	7	18.24	18.46	18.32		



FCC SAR TEST REPORT

Report No. : FA960602-01

3	16QAM	15	0	18.23	18.42	18.31		
3	64QAM	1	0	18.26	18.50	18.45	20	2
3	64QAM	1	8	18.27	18.50	18.48		
3	64QAM	1	14	18.24	18.49	18.43		
3	64QAM	8	0	17.27	17.48	17.33	19	3
3	64QAM	8	4	17.29	17.50	17.37		
3	64QAM	8	7	17.28	17.48	17.34		
3	64QAM	15	0	17.25	17.45	17.29		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	20.02	20.27	20.10	22	0
1.4	QPSK	1	3	20.07	20.33	20.15		
1.4	QPSK	1	5	20.00	20.26	20.09		
1.4	QPSK	3	0	20.04	20.31	20.15		
1.4	QPSK	3	1	20.11	20.35	20.19		
1.4	QPSK	3	3	20.08	20.32	20.14		
1.4	QPSK	6	0	19.11	19.35	19.16	21	1
1.4	16QAM	1	0	19.22	19.49	19.48	21	1
1.4	16QAM	1	3	19.30	19.50	19.43		
1.4	16QAM	1	5	19.22	19.48	19.44		
1.4	16QAM	3	0	19.07	19.43	19.25		
1.4	16QAM	3	1	19.10	19.49	19.28		
1.4	16QAM	3	3	19.03	19.41	19.23		
1.4	16QAM	6	0	18.23	18.45	18.32	20	2
1.4	64QAM	1	0	18.20	18.50	18.40	20	2
1.4	64QAM	1	3	18.26	18.50	18.48		
1.4	64QAM	1	5	18.21	18.48	18.38		
1.4	64QAM	3	0	18.20	18.47	18.38		
1.4	64QAM	3	1	18.25	18.50	18.42		
1.4	64QAM	3	3	18.19	18.47	18.39		
1.4	64QAM	6	0	17.19	17.46	17.26	19	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.19	19.21	19.26		
20	QPSK	1	49	19.15	19.16	19.20	21	0
20	QPSK	1	99	19.14	19.17	19.19		
20	QPSK	50	0	18.16	18.20	18.14		
20	QPSK	50	24	18.26	18.22	18.23	20	1
20	QPSK	50	50	18.19	18.14	18.18		
20	QPSK	100	0	18.25	18.19	18.22		
20	16QAM	1	0	18.48	18.50	18.46	20	1
20	16QAM	1	49	18.45	18.45	18.50		
20	16QAM	1	99	18.47	18.49	18.50		
20	16QAM	50	0	17.31	17.32	17.27	19	2
20	16QAM	50	24	17.39	17.31	17.37		
20	16QAM	50	50	17.35	17.27	17.31		
20	16QAM	100	0	17.36	17.29	17.32	19	2
20	64QAM	1	0	17.45	17.46	17.50		
20	64QAM	1	49	17.46	17.44	17.45		
20	64QAM	1	99	17.43	17.43	17.46	18	3
20	64QAM	50	0	16.33	16.34	16.30		
20	64QAM	50	24	16.43	16.33	16.38		
20	64QAM	50	50	16.34	16.27	16.29	18	3
20	64QAM	100	0	16.38	16.32	16.34		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	19.20	19.21	19.23		
15	QPSK	1	37	19.17	19.14	19.20	21	0
15	QPSK	1	74	19.18	19.20	19.21		
15	QPSK	36	0	18.21	18.22	18.24	20	1
15	QPSK	36	20	18.31	18.24	18.23		
15	QPSK	36	39	18.25	18.15	18.18		
15	QPSK	75	0	18.28	18.21	18.22	20	1
15	16QAM	1	0	18.50	18.50	18.50		
15	16QAM	1	37	18.49	18.46	18.48		
15	16QAM	1	74	18.48	18.49	18.50	19	2
15	16QAM	36	0	17.33	17.33	17.38		
15	16QAM	36	20	17.44	17.32	17.38		
15	16QAM	36	39	17.38	17.28	17.32	19	2
15	16QAM	75	0	17.39	17.30	17.36		
15	64QAM	1	0	17.43	17.45	17.49		
15	64QAM	1	37	17.42	17.45	17.48	19	2
15	64QAM	1	74	17.50	17.43	17.46		
15	64QAM	36	0	16.35	16.37	16.41		
15	64QAM	36	20	16.49	16.39	16.42	18	3
15	64QAM	36	39	16.41	16.33	16.36		
15	64QAM	75	0	16.41	16.32	16.35		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.14	19.21	19.24		
10	QPSK	1	25	19.12	19.15	19.23	21	0
10	QPSK	1	49	19.07	19.11	19.23		
10	QPSK	25	0	18.14	18.20	18.22	20	1
10	QPSK	25	12	18.12	18.23	18.22		



FCC SAR TEST REPORT

Report No. : FA960602-01

10	QPSK	25	25	18.07	18.14	18.28		
10	QPSK	50	0	18.12	18.18	18.18		
10	16QAM	1	0	18.45	18.46	18.50		
10	16QAM	1	25	18.43	18.44	18.50	20	1
10	16QAM	1	49	18.47	18.42	18.49		
10	16QAM	25	0	17.21	17.33	17.34		
10	16QAM	25	12	17.24	17.30	17.35	19	2
10	16QAM	25	25	17.21	17.29	17.39		
10	16QAM	50	0	17.21	17.30	17.33		
10	64QAM	1	0	17.43	17.42	17.47	19	2
10	64QAM	1	25	17.44	17.47	17.50		
10	64QAM	1	49	17.39	17.43	17.46		
10	64QAM	25	0	16.26	16.35	16.37	18	3
10	64QAM	25	12	16.24	16.35	16.37		
10	64QAM	25	25	16.20	16.27	16.40		
10	64QAM	50	0	16.23	16.32	16.34		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	19.10	19.17	19.25	21	0
5	QPSK	1	12	19.12	19.15	19.24		
5	QPSK	1	24	19.08	19.12	19.20		
5	QPSK	12	0	18.14	18.21	18.29	20	1
5	QPSK	12	7	18.15	18.21	18.32		
5	QPSK	12	13	18.10	18.19	18.24		
5	QPSK	25	0	18.12	18.16	18.26	20	1
5	16QAM	1	0	18.48	18.45	18.50		
5	16QAM	1	12	18.43	18.47	18.50		
5	16QAM	1	24	18.49	18.43	18.49	19	2
5	16QAM	12	0	17.23	17.29	17.43		
5	16QAM	12	7	17.26	17.34	17.42		
5	16QAM	12	13	17.24	17.29	17.39	19	2
5	16QAM	25	0	17.20	17.30	17.36		
5	64QAM	1	0	17.41	17.50	17.47		
5	64QAM	1	12	17.42	17.49	17.48	19	2
5	64QAM	1	24	17.35	17.43	17.46		
5	64QAM	12	0	16.29	16.38	16.47		
5	64QAM	12	7	16.32	16.40	16.50	18	3
5	64QAM	12	13	16.27	16.36	16.46		
5	64QAM	25	0	16.24	16.28	16.39		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	19.07	19.16	19.24	21	0
3	QPSK	1	8	19.09	19.13	19.22		
3	QPSK	1	14	19.08	19.12	19.19		
3	QPSK	8	0	18.11	18.18	18.26	20	1
3	QPSK	8	4	18.14	18.21	18.28		
3	QPSK	8	7	18.11	18.17	18.27		
3	QPSK	15	0	18.09	18.17	18.26	20	1
3	16QAM	1	0	18.40	18.45	18.50		
3	16QAM	1	8	18.42	18.48	18.50		
3	16QAM	1	14	18.48	18.50	18.48	19	2
3	16QAM	8	0	17.24	17.34	17.46		
3	16QAM	8	4	17.28	17.39	17.46		
3	16QAM	8	7	17.28	17.34	17.45	19	2
3	16QAM	15	0	17.22	17.29	17.39		
3	64QAM	1	0	17.37	17.47	17.46	19	2



FCC SAR TEST REPORT

Report No. : FA960602-01

3	64QAM	1	8	17.44	17.47	17.48	18	3
3	64QAM	1	14	17.41	17.42	17.45		
3	64QAM	8	0	16.29	16.35	16.45		
3	64QAM	8	4	16.31	16.41	16.49		
3	64QAM	8	7	16.25	16.35	16.43		
3	64QAM	15	0	16.22	16.30	16.40		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	19.01	19.07	19.17	21	0
1.4	QPSK	1	3	19.08	19.14	19.25		
1.4	QPSK	1	5	19.01	19.05	19.14		
1.4	QPSK	3	0	19.06	19.13	19.22		
1.4	QPSK	3	1	19.11	19.16	19.22		
1.4	QPSK	3	3	19.06	19.14	19.21		
1.4	QPSK	6	0	18.05	18.11	18.20	20	1
1.4	16QAM	1	0	18.38	18.46	18.48	20	1
1.4	16QAM	1	3	18.47	18.46	18.50		
1.4	16QAM	1	5	18.42	18.46	18.47		
1.4	16QAM	3	0	18.17	18.26	18.39		
1.4	16QAM	3	1	18.21	18.30	18.39		
1.4	16QAM	3	3	18.17	18.23	18.35		
1.4	16QAM	6	0	17.20	17.29	17.38	19	2
1.4	64QAM	1	0	17.31	17.40	17.48	19	2
1.4	64QAM	1	3	17.40	17.47	17.48		
1.4	64QAM	1	5	17.30	17.42	17.49		
1.4	64QAM	3	0	17.33	17.36	17.48		
1.4	64QAM	3	1	17.35	17.44	17.45		
1.4	64QAM	3	3	17.31	17.39	17.46		
1.4	64QAM	6	0	16.17	16.22	16.33	18	3

<WLAN Conducted Power>
General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	17.40	17.50	99.16
		6	2437	17.40	17.50	
		11	2462	17.40	17.50	
	802.11g 6Mbps	1	2412	17.20	17.50	94.93
		6	2437	17.20	17.50	
		11	2462	17.30	17.50	
	802.11n-HT20 MCS0	1	2412	17.00	17.50	94.59
		6	2437	17.00	17.50	
		11	2462	17.00	17.50	



<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	16.00	16.50	95.37
		40	5200	15.70	16.50	
		44	5220	16.00	16.50	
		48	5240	16.20	16.50	
	802.11n-HT20 MCS0	36	5180	17.30	17.50	94.58
		40	5200	17.20	17.50	
		44	5220	17.30	17.50	
		48	5240	17.40	17.50	
	802.11n-HT40 MCS0	38	5190	15.90	16.00	90.87
		46	5230	15.50	16.00	
	802.11ac-VHT20 MCS0	36	5180	17.20	17.50	94.61
		40	5200	17.10	17.50	
		44	5220	17.20	17.50	
		48	5240	17.30	17.50	
	802.11ac-VHT40 MCS0	38	5190	15.80	16.00	90.05
		46	5230	15.20	16.00	
	802.11ac-VHT80 MCS0	42	5210	14.90	15.00	88.55

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	16.10	16.50	95.37
		56	5280	16.00	16.50	
		60	5300	16.00	16.50	
		64	5320	16.20	16.50	
	802.11n-HT20 MCS0	52	5260	17.40	17.50	94.58
		56	5280	17.40	17.50	
		60	5300	17.40	17.50	
		64	5320	17.10	17.50	
	802.11n-HT40 MCS0	54	5270	15.40	16.00	90.87
		62	5310	15.30	16.00	
	802.11ac-VHT20 MCS0	52	5260	17.30	17.50	94.61
		56	5280	17.30	17.50	
		60	5300	17.30	17.50	
		64	5320	17.00	17.50	
	802.11ac-VHT40 MCS0	54	5270	15.30	16.00	90.05
		62	5310	15.20	16.00	
	802.11ac-VHT80 MCS0	58	5290	14.50	15.00	88.55

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	16.00	16.50	95.37
		116	5580	16.00	16.50	
		124	5620	16.10	16.50	
		132	5660	16.10	16.50	
		144	5720	16.30	16.50	
	802.11n-HT20 MCS0	100	5500	17.10	17.50	94.58
		116	5580	17.30	17.50	
		124	5620	17.40	17.50	
		132	5660	17.40	17.50	
		144	5720	17.40	17.50	
	802.11n-HT40 MCS0	102	5510	15.20	16.00	90.87
		110	5550	15.20	16.00	
		126	5630	15.40	16.00	
		134	5670	15.90	16.00	
		142	5710	15.90	16.00	
	802.11ac-VHT20 MCS0	100	5500	17.00	17.50	94.61
		116	5580	17.20	17.50	
		124	5620	17.30	17.50	
		132	5660	17.30	17.50	
		144	5720	17.30	17.50	
	802.11ac-VHT40 MCS0	102	5510	15.10	16.00	90.05
		110	5550	15.10	16.00	
		126	5630	15.30	16.00	
		134	5670	15.80	16.00	
		142	5710	15.80	16.00	
	802.11ac-VHT80 MCS0	106	5530	14.90	15.00	88.55
		122	5610	14.20	15.00	
		138	5690	14.90	15.00	


<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	11.77	9.17	9.20
	CH 39	2441	12.02	9.39	9.43
	CH 78	2480	11.06	8.33	8.36
Tune-up Limit			13	10.5	10.5

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	4.50	4.50
	CH 19	2440	4.00	4.00
	CH 39	2480	5.50	5.50
Tune-up Limit			7.5	6.5


General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 77.22% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

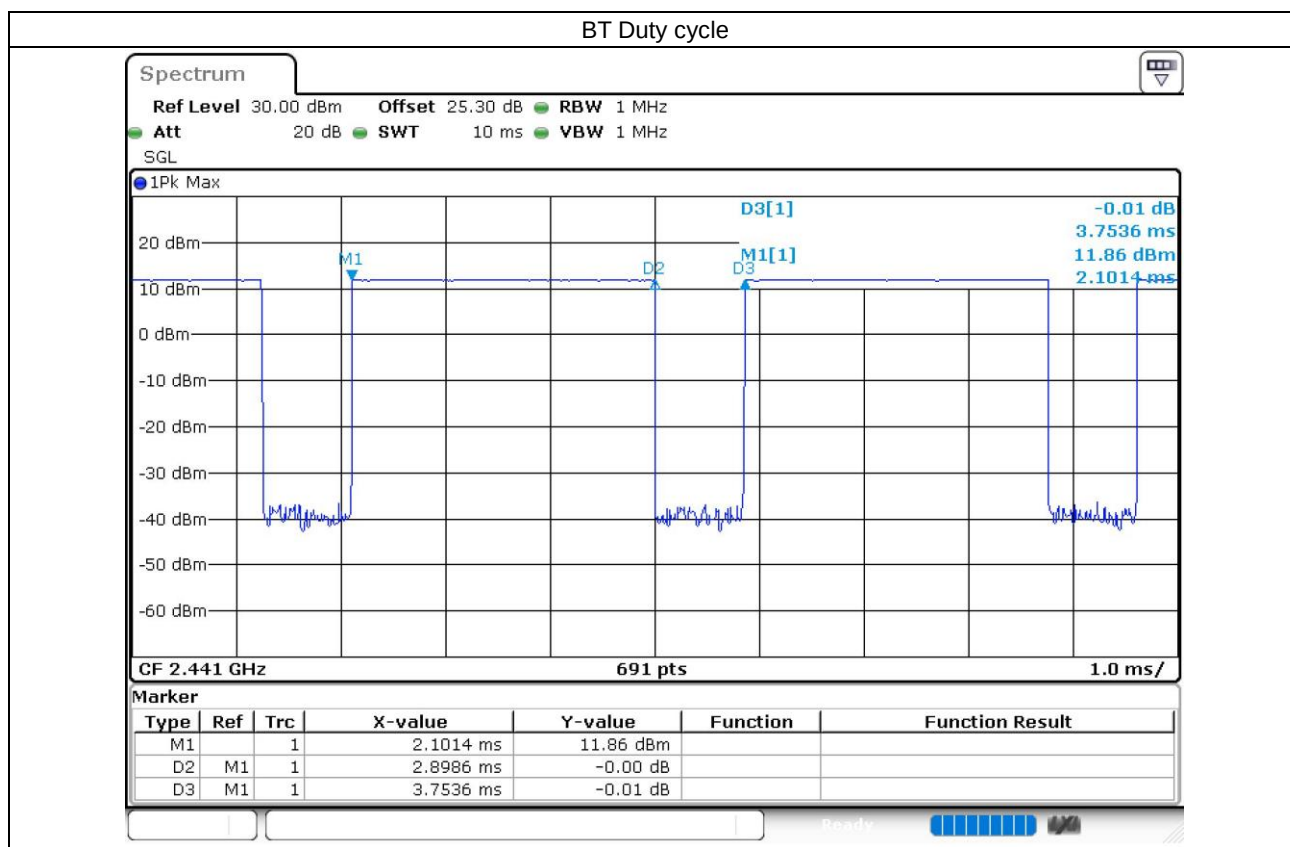

12. Antenna Location

<Mobile Phone>

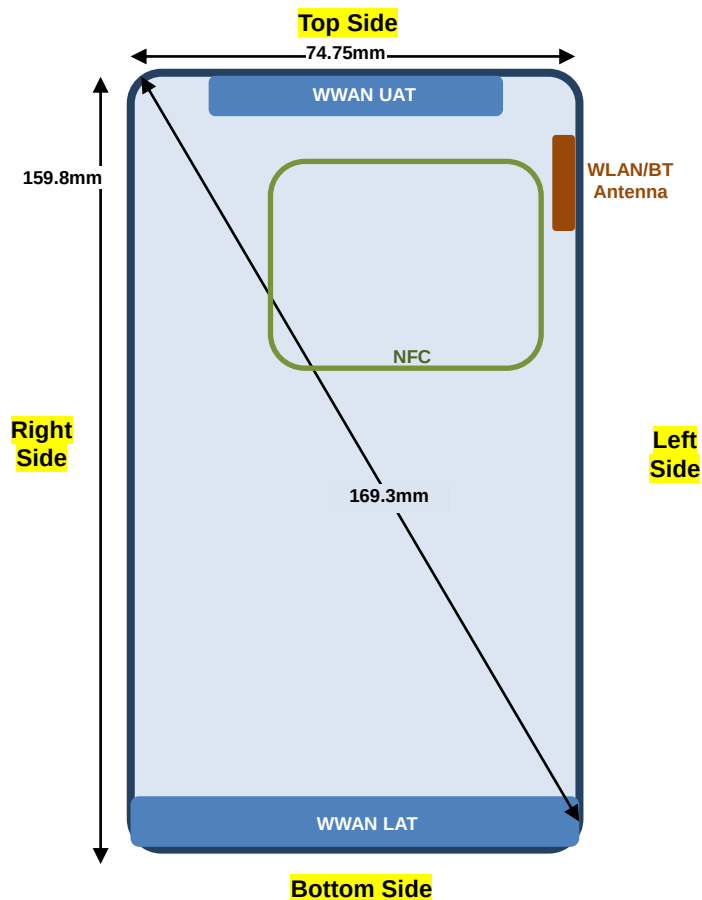

Back View

WWAN antennas support bands:

UAT: GSM850, WCDMA V, LTE B5/12

LAT: GSM850/1900, WCDMA II/IV/V, LTE B2/4/5/12/17

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN LAT	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN UAT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN LAT	Yes	Yes	No	Yes	Yes	Yes
WWAN UAT	Yes	Yes	Yes	No	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA B2 / B4 and LTE B2 / B4.
5. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
6. Per KDB 648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold, for this device WWAN transmitter scaled to maximum output power is higher than 1.2W/kg of GSM1900, WCDMA B2, and LTE B2/4, therefore product specific SAR is necessary.
7. For 5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16 cm.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (1Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode
3. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 3Tx slot due to its highest frame-average power.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12 / B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 17 SAR test was covered by Band 12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

13.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_UAT	GPRS (1 Tx slot)	Right Cheek	0mm	OFF	189	836.4	34.81	35.00	1.045	-0.02	0.850	0.888
	GSM850_UAT	GPRS (1 Tx slot)	Right Cheek	0mm	OFF	128	824.2	34.80	35.00	1.047	-0.04	0.799	0.837
01	GSM850_UAT	GPRS (1 Tx slot)	Right Cheek	0mm	OFF	251	848.8	34.72	35.00	1.067	-0.01	1.020	1.088
	GSM850_UAT	GPRS (1 Tx slot)	Right Tilted	0mm	OFF	189	836.4	34.81	35.00	1.045	0	0.621	0.649
	GSM850_UAT	GPRS (1 Tx slot)	Left Cheek	0mm	OFF	189	836.4	34.81	35.00	1.045	0	0.817	0.854
	GSM850_UAT	GPRS (1 Tx slot)	Left Cheek	0mm	OFF	128	824.2	34.80	35.00	1.047	-0.02	0.716	0.750
	GSM850_UAT	GPRS (1 Tx slot)	Left Cheek	0mm	OFF	251	848.8	34.72	35.00	1.067	-0.07	0.881	0.940
	GSM850_UAT	GPRS (1 Tx slot)	Left Tilted	0mm	OFF	189	836.4	34.81	35.00	1.045	-0.01	0.531	0.555
	GSM850_LAT	GPRS (1 Tx slot)	Right Cheek	0mm	OFF	189	836.4	34.81	35.00	1.045	-0.12	0.107	0.112
	GSM850_LAT	GPRS (1 Tx slot)	Right Tilted	0mm	OFF	189	836.4	34.81	35.00	1.045	-0.05	0.067	0.070
	GSM850_LAT	GPRS (1 Tx slot)	Left Cheek	0mm	OFF	189	836.4	34.81	35.00	1.045	-0.07	0.101	0.106
	GSM850_LAT	GPRS (1 Tx slot)	Left Tilted	0mm	OFF	189	836.4	34.81	35.00	1.045	0.01	0.068	0.071
	GSM1900_LAT	GPRS (3 Tx slots)	Right Cheek	0mm	OFF	512	1850.2	27.71	28.00	1.069	0.02	0.052	0.056
	GSM1900_LAT	GPRS (3 Tx slots)	Right Tilted	0mm	OFF	512	1850.2	27.71	28.00	1.069	0.1	0.025	0.027
02	GSM1900_LAT	GPRS (3 Tx slots)	Left Cheek	0mm	OFF	512	1850.2	27.71	28.00	1.069	-0.12	0.108	0.115
	GSM1900_LAT	GPRS (3 Tx slots)	Left Tilted	0mm	OFF	512	1850.2	27.71	28.00	1.069	-0.1	0.052	0.056

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_LAT	RMC 12.2Kbps	Right Cheek	0mm	OFF	9538	1907.6	23.85	24.00	1.035	-0.06	0.091	0.094
	WCDMA II_LAT	RMC 12.2Kbps	Right Tilted	0mm	OFF	9538	1907.6	23.85	24.00	1.035	0.06	0.042	0.043
03	WCDMA II_LAT	RMC 12.2Kbps	Left Cheek	0mm	OFF	9538	1907.6	23.85	24.00	1.035	-0.11	0.160	0.166
	WCDMA II_LAT	RMC 12.2Kbps	Left Tilted	0mm	OFF	9538	1907.6	23.85	24.00	1.035	-0.1	0.070	0.072
	WCDMA IV_LAT	RMC 12.2Kbps	Right Cheek	0mm	OFF	1312	1712.4	23.99	24.00	1.002	0.07	0.086	0.086
	WCDMA IV_LAT	RMC 12.2Kbps	Right Tilted	0mm	OFF	1312	1712.4	23.99	24.00	1.002	0.12	0.053	0.053
04	WCDMA IV_LAT	RMC 12.2Kbps	Left Cheek	0mm	OFF	1312	1712.4	23.99	24.00	1.002	0.02	0.116	0.116
	WCDMA IV_LAT	RMC 12.2Kbps	Left Tilted	0mm	OFF	1312	1712.4	23.99	24.00	1.002	0.12	0.061	0.061
05	WCDMA V_UAT	RMC 12.2Kbps	Right Cheek	0mm	OFF	4233	846.6	25.00	25.00	1.000	-0.05	0.904	0.904
	WCDMA V_UAT	RMC 12.2Kbps	Right Cheek	0mm	OFF	4132	826.4	24.98	25.00	1.005	-0.01	0.636	0.639
	WCDMA V_UAT	RMC 12.2Kbps	Right Cheek	0mm	OFF	4182	836.4	24.99	25.00	1.002	-0.01	0.760	0.762
	WCDMA V_UAT	RMC 12.2Kbps	Right Tilted	0mm	OFF	4233	846.6	25.00	25.00	1.000	0	0.648	0.648
	WCDMA V_UAT	RMC 12.2Kbps	Left Cheek	0mm	OFF	4233	846.6	25.00	25.00	1.000	-0.01	0.844	0.844
	WCDMA V_UAT	RMC 12.2Kbps	Left Cheek	0mm	OFF	4132	826.4	24.98	25.00	1.005	0.03	0.597	0.600
	WCDMA V_UAT	RMC 12.2Kbps	Left Cheek	0mm	OFF	4182	836.4	24.99	25.00	1.002	0.03	0.718	0.720
	WCDMA V_UAT	RMC 12.2Kbps	Left Tilted	0mm	OFF	4233	846.6	25.00	25.00	1.000	0.03	0.590	0.590
	WCDMA V_LAT	RMC 12.2Kbps	Right Cheek	0mm	OFF	4233	846.6	25.00	25.00	1.000	0	0.226	0.226
	WCDMA V_LAT	RMC 12.2Kbps	Right Tilted	0mm	OFF	4233	846.6	25.00	25.00	1.000	0.05	0.122	0.122
	WCDMA V_LAT	RMC 12.2Kbps	Left Cheek	0mm	OFF	4233	846.6	25.00	25.00	1.000	-0.01	0.213	0.213
	WCDMA V_LAT	RMC 12.2Kbps	Left Tilted	0mm	OFF	4233	846.6	25.00	25.00	1.000	0.01	0.148	0.148



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 2_LAT	20M	QPSK	1	99	Right Cheek	0mm	OFF	18900	1880	23.76	24.00	1.057	0.08	0.088	0.093
	LTE Band 2_LAT	20M	QPSK	50	50	Right Cheek	0mm	OFF	18900	1880	22.82	23.00	1.042	0.02	0.069	0.072
	LTE Band 2_LAT	20M	QPSK	1	99	Right Tilted	0mm	OFF	18900	1880	23.76	24.00	1.057	0.15	0.043	0.045
	LTE Band 2_LAT	20M	QPSK	50	50	Right Tilted	0mm	OFF	18900	1880	22.82	23.00	1.042	0.06	0.032	0.033
	LTE Band 2_LAT	20M	QPSK	1	99	Left Cheek	0mm	OFF	18900	1880	23.76	24.00	1.057	0.16	0.148	0.156
	LTE Band 2_LAT	20M	QPSK	50	50	Left Cheek	0mm	OFF	18900	1880	22.82	23.00	1.042	-0.03	0.115	0.120
	LTE Band 2_LAT	20M	QPSK	1	99	Left Tilted	0mm	OFF	18900	1880	23.76	24.00	1.057	0.12	0.065	0.069
	LTE Band 2_LAT	20M	QPSK	50	50	Left Tilted	0mm	OFF	18900	1880	22.82	23.00	1.042	0.14	0.050	0.052
07	LTE Band 4_LAT	20M	QPSK	1	99	Right Cheek	0mm	OFF	20175	1732.5	23.59	24.00	1.099	0.11	0.067	0.074
	LTE Band 4_LAT	20M	QPSK	50	24	Right Cheek	0mm	OFF	20175	1732.5	22.65	23.00	1.084	0.09	0.058	0.063
	LTE Band 4_LAT	20M	QPSK	1	99	Right Tilted	0mm	OFF	20175	1732.5	23.59	24.00	1.099	0.15	0.045	0.049
	LTE Band 4_LAT	20M	QPSK	50	24	Right Tilted	0mm	OFF	20175	1732.5	22.65	23.00	1.084	0.12	0.037	0.040
	LTE Band 4_LAT	20M	QPSK	1	99	Left Cheek	0mm	OFF	20175	1732.5	23.59	24.00	1.099	0.03	0.115	0.126
	LTE Band 4_LAT	20M	QPSK	50	24	Left Cheek	0mm	OFF	20175	1732.5	22.65	23.00	1.084	0.11	0.090	0.098
	LTE Band 4_LAT	20M	QPSK	1	99	Left Tilted	0mm	OFF	20175	1732.5	23.59	24.00	1.099	0.08	0.068	0.075
	LTE Band 4_LAT	20M	QPSK	50	24	Left Tilted	0mm	OFF	20175	1732.5	22.65	23.00	1.084	0.04	0.055	0.060
08	LTE Band 5_UAT	10M	QPSK	1	49	Right Cheek	0mm	OFF	20525	836.5	24.22	25.00	1.197	-0.01	0.821	0.983
	LTE Band 5_UAT	10M	QPSK	25	25	Right Cheek	0mm	OFF	20525	836.5	23.25	24.00	1.189	-0.14	0.657	0.781
	LTE Band 5_UAT	10M	QPSK	50	0	Right Cheek	0mm	OFF	20525	836.5	23.24	24.00	1.191	0.04	0.660	0.786
	LTE Band 5_UAT	10M	QPSK	1	49	Right Tilted	0mm	OFF	20525	836.5	24.22	25.00	1.197	0	0.573	0.686
	LTE Band 5_UAT	10M	QPSK	25	25	Right Tilted	0mm	OFF	20525	836.5	23.25	24.00	1.189	0.01	0.458	0.544
	LTE Band 5_UAT	10M	QPSK	1	49	Left Cheek	0mm	OFF	20525	836.5	24.22	25.00	1.197	-0.01	0.987	1.181
	LTE Band 5_UAT	10M	QPSK	25	25	Left Cheek	0mm	OFF	20525	836.5	23.25	24.00	1.189	0.03	0.795	0.945
	LTE Band 5_UAT	10M	QPSK	50	0	Left Cheek	0mm	OFF	20525	836.5	23.24	24.00	1.191	-0.02	0.800	0.953
	LTE Band 5_UAT	10M	QPSK	1	49	Left Tilted	0mm	OFF	20525	836.5	24.22	25.00	1.197	0.01	0.682	0.816
	LTE Band 5_UAT	10M	QPSK	25	25	Left Tilted	0mm	OFF	20525	836.5	23.25	24.00	1.189	-0.01	0.543	0.645
	LTE Band 5_LAT	10M	QPSK	1	49	Right Cheek	0mm	OFF	20525	836.5	24.22	25.00	1.197	0.04	0.215	0.257
	LTE Band 5_LAT	10M	QPSK	25	25	Right Cheek	0mm	OFF	20525	836.5	23.25	24.00	1.189	0.02	0.170	0.202
	LTE Band 5_LAT	10M	QPSK	1	49	Right Tilted	0mm	OFF	20525	836.5	24.22	25.00	1.197	-0.06	0.106	0.127
	LTE Band 5_LAT	10M	QPSK	25	25	Right Tilted	0mm	OFF	20525	836.5	23.25	24.00	1.189	0.06	0.093	0.111
	LTE Band 5_LAT	10M	QPSK	1	49	Left Cheek	0mm	OFF	20525	836.5	24.22	25.00	1.197	-0.01	0.205	0.245
	LTE Band 5_LAT	10M	QPSK	25	25	Left Cheek	0mm	OFF	20525	836.5	23.25	24.00	1.189	0	0.158	0.188
09	LTE Band 5_LAT	10M	QPSK	1	49	Left Tilted	0mm	OFF	20525	836.5	24.22	25.00	1.197	0.01	0.147	0.176
	LTE Band 5_LAT	10M	QPSK	25	25	Left Tilted	0mm	OFF	20525	836.5	23.25	24.00	1.189	0.05	0.114	0.135
	LTE Band 12_UAT	10M	QPSK	1	25	Right Cheek	0mm	OFF	23095	707.5	24.88	25.00	1.028	0.03	0.696	0.715
	LTE Band 12_UAT	10M	QPSK	25	12	Right Cheek	0mm	OFF	23095	707.5	23.88	24.00	1.028	0.05	0.607	0.624
	LTE Band 12_UAT	10M	QPSK	1	25	Right Tilted	0mm	OFF	23095	707.5	24.88	25.00	1.028	0.04	0.536	0.551
	LTE Band 12_UAT	10M	QPSK	25	12	Right Tilted	0mm	OFF	23095	707.5	23.88	24.00	1.028	0.01	0.437	0.449
	LTE Band 12_UAT	10M	QPSK	1	25	Left Cheek	0mm	OFF	23095	707.5	24.88	25.00	1.028	0.01	0.639	0.657
	LTE Band 12_UAT	10M	QPSK	25	12	Left Cheek	0mm	OFF	23095	707.5	23.88	24.00	1.028	0.01	0.521	0.536
	LTE Band 12_UAT	10M	QPSK	1	25	Left Tilted	0mm	OFF	23095	707.5	24.88	25.00	1.028	0.04	0.441	0.453
	LTE Band 12_UAT	10M	QPSK	25	12	Left Tilted	0mm	OFF	23095	707.5	23.88	24.00	1.028	0.04	0.358	0.368
	LTE Band 12_LAT	10M	QPSK	1	25	Right Cheek	0mm	OFF	23095	707.5	24.88	25.00	1.028	0.02	0.114	0.117
	LTE Band 12_LAT	10M	QPSK	25	12	Right Cheek	0mm	OFF	23095	707.5	23.88	24.00	1.028	0.03	0.090	0.093
	LTE Band 12_LAT	10M	QPSK	1	25	Right Tilted	0mm	OFF	23095	707.5	24.88	25.00	1.028	0.13	0.036	0.037
	LTE Band 12_LAT	10M	QPSK	25	12	Right Tilted	0mm	OFF	23095	707.5	23.88	24.00	1.028	0.12	0.029	0.030
	LTE Band 12_LAT	10M	QPSK	1	25	Left Cheek	0mm	OFF	23095	707.5	24.88	25.00	1.028	0.03	0.096	0.099
	LTE Band 12_LAT	10M	QPSK	25	12	Left Cheek	0mm	OFF	23095	707.5	23.88	24.00	1.028	0.01	0.077	0.079
	LTE Band 12_LAT	10M	QPSK	1	25	Left Tilted	0mm	OFF	23095	707.5	24.88	25.00	1.028	0.09	0.043	0.044
	LTE Band 12_LAT	10M	QPSK	25	12	Left Tilted	0mm	OFF	23095	707.5	23.88	24.00	1.028	0.07	0.034	0.035

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	1	2412	17.40	17.50	1.023	99.16	1.008	-0.09	0.211	0.218
10	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	1	2412	17.40	17.50	1.023	99.16	1.008	-0.07	0.247	0.255
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	1	2412	17.40	17.50	1.023	99.16	1.008	0.04	0.187	0.193
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	1	2412	17.40	17.50	1.023	99.16	1.008	-0.04	0.202	0.208
11	WLAN5GHz	802.11n-HT20 MCS0	Right Cheek	0mm	52	5260	17.40	17.50	1.023	94.58	1.057	-0.06	0.094	0.102
	WLAN5GHz	802.11n-HT20 MCS0	Right Tilted	0mm	52	5260	17.40	17.50	1.023	94.58	1.057	0.04	0.035	0.038
	WLAN5GHz	802.11n-HT20 MCS0	Left Cheek	0mm	52	5260	17.40	17.50	1.023	94.58	1.057	0.11	0.017	0.018
	WLAN5GHz	802.11n-HT20 MCS0	Left Tilted	0mm	52	5260	17.40	17.50	1.023	94.58	1.057	-0.01	0.022	0.024
12	WLAN5GHz	802.11n-HT20 MCS0	Right Cheek	0mm	124	5620	17.40	17.50	1.023	94.58	1.057	0.12	0.152	0.164
	WLAN5GHz	802.11n-HT20 MCS0	Right Tilted	0mm	124	5620	17.40	17.50	1.023	94.58	1.057	0.16	0.066	0.071
	WLAN5GHz	802.11n-HT20 MCS0	Left Cheek	0mm	124	5620	17.40	17.50	1.023	94.58	1.057	0.12	0.049	0.053
	WLAN5GHz	802.11n-HT20 MCS0	Left Tilted	0mm	124	5620	17.40	17.50	1.023	94.58	1.057	-0.15	0.035	0.038

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	39	2441	12.02	13.00	1.253	77.22	1.079	0.15	0.037	0.050
13	Bluetooth	1Mbps	Right Tilted	0mm	39	2441	12.02	13.00	1.253	77.22	1.079	0.11	0.046	0.062
	Bluetooth	1Mbps	Left Cheek	0mm	39	2441	12.02	13.00	1.253	77.22	1.079	0.06	0.033	0.045
	Bluetooth	1Mbps	Left Tilted	0mm	39	2441	12.02	13.00	1.253	77.22	1.079	-0.04	0.045	0.061

13.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_UAT	GPRS (1 Tx slot)	Front	10mm	OFF	189	836.4	34.81	35.00	1.045	-0.12	0.065	0.068
	GSM850_UAT	GPRS (1 Tx slot)	Back	10mm	OFF	189	836.4	34.81	35.00	1.045	-0.01	0.059	0.062
	GSM850_UAT	GPRS (1 Tx slot)	Left Side	10mm	OFF	189	836.4	34.81	35.00	1.045	-0.14	0.041	0.043
	GSM850_UAT	GPRS (1 Tx slot)	Right Side	10mm	OFF	189	836.4	34.81	35.00	1.045	-0.02	0.020	0.021
	GSM850_UAT	GPRS (1 Tx slot)	Top Side	10mm	OFF	189	836.4	34.81	35.00	1.045	-0.12	0.035	0.037
	GSM850_LAT	GPRS (1 Tx slot)	Front	10mm	OFF	189	836.4	34.81	35.00	1.045	0	0.146	0.153
14	GSM850_LAT	GPRS (1 Tx slot)	Back	10mm	OFF	189	836.4	34.81	35.00	1.045	-0.05	0.154	0.161
	GSM850_LAT	GPRS (1 Tx slot)	Left Side	10mm	OFF	189	836.4	34.81	35.00	1.045	-0.06	0.084	0.088
	GSM850_LAT	GPRS (1 Tx slot)	Right Side	10mm	OFF	189	836.4	34.81	35.00	1.045	0.02	0.143	0.149
	GSM850_LAT	GPRS (1 Tx slot)	Bottom Side	10mm	OFF	189	836.4	34.81	35.00	1.045	-0.16	0.082	0.086
	GSM1900_LAT	GPRS (3 Tx slots)	Front	10mm	ON	512	1850.2	25.50	25.50	1.000	-0.16	0.532	0.532
	GSM1900_LAT	GPRS (3 Tx slots)	Back	10mm	ON	512	1850.2	25.50	25.50	1.000	0.07	0.420	0.420
	GSM1900_LAT	GPRS (3 Tx slots)	Left Side	10mm	ON	512	1850.2	25.50	25.50	1.000	0.12	0.098	0.098
	GSM1900_LAT	GPRS (3 Tx slots)	Right Side	10mm	ON	512	1850.2	25.50	25.50	1.000	0.03	0.029	0.029
	GSM1900_LAT	GPRS (3 Tx slots)	Bottom Side	10mm	ON	512	1850.2	25.50	25.50	1.000	-0.14	0.914	0.914
	GSM1900_LAT	GPRS (3 Tx slots)	Bottom Side	10mm	ON	661	1880	25.41	25.50	1.021	-0.09	1.150	1.174
15	GSM1900_LAT	GPRS (3 Tx slots)	Bottom Side	10mm	ON	810	1909.8	25.42	25.50	1.019	-0.12	1.250	1.273

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_LAT	RMC 12.2Kbps	Front	10mm	ON	9538	1907.6	20.34	22.00	1.466	0.02	0.509	0.746
	WCDMA II_LAT	RMC 12.2Kbps	Back	10mm	ON	9538	1907.6	20.34	22.00	1.466	0.12	0.392	0.574
	WCDMA II_LAT	RMC 12.2Kbps	Left Side	10mm	ON	9538	1907.6	20.34	22.00	1.466	0.01	0.088	0.129
	WCDMA II_LAT	RMC 12.2Kbps	Right Side	10mm	ON	9538	1907.6	20.34	22.00	1.466	-0.17	0.027	0.040
	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	10mm	ON	9538	1907.6	20.34	22.00	1.466	-0.11	0.859	1.259
	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	10mm	ON	9262	1852.4	20.10	22.00	1.549	-0.08	0.822	1.273
16	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	10mm	ON	9400	1880	20.26	22.00	1.493	-0.11	0.854	1.275
	WCDMA IV_LAT	RMC 12.2Kbps	Front	10mm	ON	1312	1712.4	19.21	21.00	1.510	-0.06	0.483	0.729
	WCDMA IV_LAT	RMC 12.2Kbps	Back	10mm	ON	1312	1712.4	19.21	21.00	1.510	0.11	0.357	0.539
	WCDMA IV_LAT	RMC 12.2Kbps	Left Side	10mm	ON	1312	1712.4	19.21	21.00	1.510	-0.08	0.076	0.115
	WCDMA IV_LAT	RMC 12.2Kbps	Right Side	10mm	ON	1312	1712.4	19.21	21.00	1.510	-0.14	0.024	0.036
	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	10mm	ON	1312	1712.4	19.21	21.00	1.510	-0.09	0.802	1.211
17	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	10mm	ON	1413	1732.6	19.17	21.00	1.524	-0.09	0.808	1.231
	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	10mm	ON	1513	1752.6	19.16	21.00	1.528	-0.07	0.768	1.173
	WCDMA V_UAT	RMC 12.2Kbps	Front	10mm	OFF	4233	846.6	25.00	25.00	1.000	0.03	0.084	0.084
	WCDMA V_UAT	RMC 12.2Kbps	Back	10mm	OFF	4233	846.6	25.00	25.00	1.000	-0.12	0.077	0.077
	WCDMA V_UAT	RMC 12.2Kbps	Left Side	10mm	OFF	4233	846.6	25.00	25.00	1.000	-0.01	0.043	0.043
	WCDMA V_UAT	RMC 12.2Kbps	Right Side	10mm	OFF	4233	846.6	25.00	25.00	1.000	0.02	0.020	0.020
	WCDMA V_UAT	RMC 12.2Kbps	Top Side	10mm	OFF	4233	846.6	25.00	25.00	1.000	-0.11	0.045	0.045
	WCDMA V_LAT	RMC 12.2Kbps	Front	10mm	OFF	4233	846.6	25.00	25.00	1.000	-0.04	0.294	0.294
18	WCDMA V_LAT	RMC 12.2Kbps	Back	10mm	OFF	4233	846.6	25.00	25.00	1.000	-0.06	0.326	0.326
	WCDMA V_LAT	RMC 12.2Kbps	Left Side	10mm	OFF	4233	846.6	25.00	25.00	1.000	-0.13	0.200	0.200
	WCDMA V_LAT	RMC 12.2Kbps	Right Side	10mm	OFF	4233	846.6	25.00	25.00	1.000	0	0.315	0.315
	WCDMA V_LAT	RMC 12.2Kbps	Bottom Side	10mm	OFF	4233	846.6	25.00	25.00	1.000	-0.06	0.144	0.144



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_LAT	20M	QPSK	1	99	Front	10mm	ON	18900	1880	20.37	22.00	1.455	0	0.513	0.747
	LTE Band 2_LAT	20M	QPSK	50	24	Front	10mm	ON	18900	1880	19.41	21.00	1.442	-0.04	0.408	0.588
	LTE Band 2_LAT	20M	QPSK	1	99	Back	10mm	ON	18900	1880	20.37	22.00	1.455	0.06	0.376	0.547
	LTE Band 2_LAT	20M	QPSK	50	24	Back	10mm	ON	18900	1880	19.41	21.00	1.442	0.07	0.299	0.431
	LTE Band 2_LAT	20M	QPSK	1	99	Left Side	10mm	ON	18900	1880	20.37	22.00	1.455	0.02	0.089	0.130
	LTE Band 2_LAT	20M	QPSK	50	24	Left Side	10mm	ON	18900	1880	19.41	21.00	1.442	0.03	0.068	0.098
	LTE Band 2_LAT	20M	QPSK	1	99	Right Side	10mm	ON	18900	1880	20.37	22.00	1.455	0.17	0.027	0.039
	LTE Band 2_LAT	20M	QPSK	50	24	Right Side	10mm	ON	18900	1880	19.41	21.00	1.442	-0.13	0.021	0.030
	LTE Band 2_LAT	20M	QPSK	1	99	Bottom Side	10mm	ON	18900	1880	20.37	22.00	1.455	-0.07	0.867	1.262
19	LTE Band 2_LAT	20M	QPSK	1	99	Bottom Side	10mm	ON	18700	1860	20.14	22.00	1.535	-0.06	0.847	1.300
	LTE Band 2_LAT	20M	QPSK	1	99	Bottom Side	10mm	ON	19100	1900	20.18	22.00	1.521	-0.07	0.814	1.238
	LTE Band 2_LAT	20M	QPSK	50	24	Bottom Side	10mm	ON	18900	1880	19.41	21.00	1.442	-0.08	0.698	1.007
	LTE Band 2_LAT	20M	QPSK	50	24	Bottom Side	10mm	ON	18700	1860	19.26	21.00	1.493	-0.1	0.682	1.018
	LTE Band 2_LAT	20M	QPSK	50	24	Bottom Side	10mm	ON	19100	1900	19.26	21.00	1.493	-0.08	0.660	0.985
	LTE Band 2_LAT	20M	QPSK	100	0	Bottom Side	10mm	ON	18900	1880	19.40	21.00	1.445	-0.13	0.692	1.000
	LTE Band 4_LAT	20M	QPSK	1	0	Front	10mm	ON	20175	1732.5	19.21	21.00	1.510	-0.03	0.498	0.752
	LTE Band 4_LAT	20M	QPSK	50	24	Front	10mm	ON	20175	1732.5	18.22	20.00	1.507	-0.12	0.389	0.586
	LTE Band 4_LAT	20M	QPSK	1	0	Back	10mm	ON	20175	1732.5	19.21	21.00	1.510	0.09	0.376	0.568
	LTE Band 4_LAT	20M	QPSK	50	24	Back	10mm	ON	20175	1732.5	18.22	20.00	1.507	0.08	0.292	0.440
	LTE Band 4_LAT	20M	QPSK	1	0	Left Side	10mm	ON	20175	1732.5	19.21	21.00	1.510	0.03	0.078	0.118
	LTE Band 4_LAT	20M	QPSK	50	24	Left Side	10mm	ON	20175	1732.5	18.22	20.00	1.507	0	0.059	0.089
	LTE Band 4_LAT	20M	QPSK	1	0	Right Side	10mm	ON	20175	1732.5	19.21	21.00	1.510	0.07	0.024	0.036
	LTE Band 4_LAT	20M	QPSK	50	24	Right Side	10mm	ON	20175	1732.5	18.22	20.00	1.507	-0.11	0.019	0.029
20	LTE Band 4_LAT	20M	QPSK	1	0	Bottom Side	10mm	ON	20175	1732.5	19.21	21.00	1.510	-0.09	0.838	1.265
	LTE Band 4_LAT	20M	QPSK	50	24	Bottom Side	10mm	ON	20175	1732.5	18.22	20.00	1.507	-0.08	0.659	0.993
	LTE Band 4_LAT	20M	QPSK	100	0	Bottom Side	10mm	ON	20175	1732.5	18.19	20.00	1.517	-0.09	0.653	0.991
	LTE Band 5_UAT	10M	QPSK	1	49	Front	10mm	OFF	20525	836.5	24.22	25.00	1.197	-0.01	0.232	0.278
	LTE Band 5_UAT	10M	QPSK	25	25	Front	10mm	OFF	20525	836.5	23.25	24.00	1.189	-0.01	0.176	0.209
	LTE Band 5_UAT	10M	QPSK	1	49	Back	10mm	OFF	20525	836.5	24.22	25.00	1.197	-0.12	0.216	0.258
	LTE Band 5_UAT	10M	QPSK	25	25	Back	10mm	OFF	20525	836.5	23.25	24.00	1.189	-0.17	0.171	0.203
	LTE Band 5_UAT	10M	QPSK	1	49	Left Side	10mm	OFF	20525	836.5	24.22	25.00	1.197	0.01	0.114	0.136
	LTE Band 5_UAT	10M	QPSK	25	25	Left Side	10mm	OFF	20525	836.5	23.25	24.00	1.189	0.01	0.089	0.106
	LTE Band 5_UAT	10M	QPSK	1	49	Right Side	10mm	OFF	20525	836.5	24.22	25.00	1.197	-0.05	0.042	0.050
	LTE Band 5_UAT	10M	QPSK	25	25	Right Side	10mm	OFF	20525	836.5	23.25	24.00	1.189	-0.03	0.034	0.040
	LTE Band 5_UAT	10M	QPSK	1	49	Top Side	10mm	OFF	20525	836.5	24.22	25.00	1.197	-0.03	0.139	0.166
	LTE Band 5_UAT	10M	QPSK	25	25	Top Side	10mm	OFF	20525	836.5	23.25	24.00	1.189	-0.05	0.107	0.127
	LTE Band 5_LAT	10M	QPSK	1	49	Front	10mm	OFF	20525	836.5	24.22	25.00	1.197	0.06	0.261	0.312
	LTE Band 5_LAT	10M	QPSK	25	25	Front	10mm	OFF	20525	836.5	23.25	24.00	1.189	0.05	0.204	0.242
	LTE Band 5_LAT	10M	QPSK	1	49	Back	10mm	OFF	20525	836.5	24.22	25.00	1.197	-0.07	0.259	0.310
	LTE Band 5_LAT	10M	QPSK	25	25	Back	10mm	OFF	20525	836.5	23.25	24.00	1.189	-0.07	0.203	0.241
	LTE Band 5_LAT	10M	QPSK	1	49	Left Side	10mm	OFF	20525	836.5	24.22	25.00	1.197	-0.03	0.190	0.227
	LTE Band 5_LAT	10M	QPSK	25	25	Left Side	10mm	OFF	20525	836.5	23.25	24.00	1.189	-0.04	0.152	0.181
21	LTE Band 5_LAT	10M	QPSK	1	49	Right Side	10mm	OFF	20525	836.5	24.22	25.00	1.197	-0.04	0.311	0.372
	LTE Band 5_LAT	10M	QPSK	25	25	Right Side	10mm	OFF	20525	836.5	23.25	24.00	1.189	-0.05	0.244	0.290
	LTE Band 5_LAT	10M	QPSK	1	49	Bottom Side	10mm	OFF	20525	836.5	24.22	25.00	1.197	-0.08	0.125	0.150
	LTE Band 5_LAT	10M	QPSK	25	25	Bottom Side	10mm	OFF	20525	836.5	23.25	24.00	1.189	-0.13	0.097	0.115

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_UAT	10M	QPSK	1	25	Front	10mm	OFF	23095	707.5	24.88	25.00	1.028	0.01	0.070	0.072
	LTE Band 12_UAT	10M	QPSK	25	12	Front	10mm	OFF	23095	707.5	23.88	24.00	1.028	-0.03	0.056	0.058
	LTE Band 12_UAT	10M	QPSK	1	25	Back	10mm	OFF	23095	707.5	24.88	25.00	1.028	-0.1	0.068	0.070
	LTE Band 12_UAT	10M	QPSK	25	12	Back	10mm	OFF	23095	707.5	23.88	24.00	1.028	-0.06	0.053	0.054
	LTE Band 12_UAT	10M	QPSK	1	25	Left Side	10mm	OFF	23095	707.5	24.88	25.00	1.028	0	0.054	0.056
	LTE Band 12_UAT	10M	QPSK	25	12	Left Side	10mm	OFF	23095	707.5	23.88	24.00	1.028	-0.04	0.044	0.045
	LTE Band 12_UAT	10M	QPSK	1	25	Right Side	10mm	OFF	23095	707.5	24.88	25.00	1.028	0.03	0.028	0.029
	LTE Band 12_UAT	10M	QPSK	25	12	Right Side	10mm	OFF	23095	707.5	23.88	24.00	1.028	-0.04	0.022	0.023
	LTE Band 12_UAT	10M	QPSK	1	25	Top Side	10mm	OFF	23095	707.5	24.88	25.00	1.028	0.05	0.042	0.043
	LTE Band 12_UAT	10M	QPSK	25	12	Top Side	10mm	OFF	23095	707.5	23.88	24.00	1.028	0.05	0.033	0.034
	LTE Band 12_LAT	10M	QPSK	1	25	Front	10mm	OFF	23095	707.5	24.88	25.00	1.028	0.01	0.211	0.217
	LTE Band 12_LAT	10M	QPSK	25	12	Front	10mm	OFF	23095	707.5	23.88	24.00	1.028	-0.03	0.141	0.145
22	LTE Band 12_LAT	10M	QPSK	1	25	Back	10mm	OFF	23095	707.5	24.88	25.00	1.028	0.01	0.222	0.228
	LTE Band 12_LAT	10M	QPSK	25	12	Back	10mm	OFF	23095	707.5	23.88	24.00	1.028	0.02	0.180	0.185
	LTE Band 12_LAT	10M	QPSK	1	25	Left Side	10mm	OFF	23095	707.5	24.88	25.00	1.028	-0.09	0.149	0.153
	LTE Band 12_LAT	10M	QPSK	25	12	Left Side	10mm	OFF	23095	707.5	23.88	24.00	1.028	-0.04	0.120	0.123
	LTE Band 12_LAT	10M	QPSK	1	25	Right Side	10mm	OFF	23095	707.5	24.88	25.00	1.028	0.01	0.195	0.200
	LTE Band 12_LAT	10M	QPSK	25	12	Right Side	10mm	OFF	23095	707.5	23.88	24.00	1.028	-0.04	0.158	0.162
	LTE Band 12_LAT	10M	QPSK	1	25	Bottom Side	10mm	OFF	23095	707.5	24.88	25.00	1.028	0.05	0.088	0.090
	LTE Band 12_LAT	10M	QPSK	25	12	Bottom Side	10mm	OFF	23095	707.5	23.88	24.00	1.028	0.04	0.071	0.073

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	1	2412	17.40	17.50	1.023	99.16	1.008	-0.11	0.111	0.114
23	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	17.40	17.50	1.023	99.16	1.008	-0.06	0.218	0.225
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	1	2412	17.40	17.50	1.023	99.16	1.008	-0.18	0.154	0.159
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	1	2412	17.40	17.50	1.023	99.16	1.008	-0.06	0.124	0.128

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	39	2441	12.02	13.00	1.253	77.22	1.079	0.09	0.013	0.018
24	Bluetooth	1Mbps	Back	10mm	39	2441	12.02	13.00	1.253	77.22	1.079	0.11	0.024	0.032
	Bluetooth	1Mbps	Left Side	10mm	39	2441	12.02	13.00	1.253	77.22	1.079	0.11	0.021	0.028
	Bluetooth	1Mbps	Top Side	10mm	39	2441	12.02	13.00	1.253	77.22	1.079	0.16	0.019	0.026

13.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_UAT	GPRS (1 Tx slot)	Front	15mm	OFF	189	836.4	34.81	35.00	1.045	0	0.031	0.032
	GSM850_UAT	GPRS (1 Tx slot)	Back	15mm	OFF	189	836.4	34.81	35.00	1.045	0.02	0.032	0.033
	GSM850_LAT	GPRS (1 Tx slot)	Front	15mm	OFF	189	836.4	34.81	35.00	1.045	-0.04	0.134	0.140
25	GSM850_LAT	GPRS (1 Tx slot)	Back	15mm	OFF	189	836.4	34.81	35.00	1.045	0.01	0.136	0.142
26	GSM1900_LAT	GPRS (3 Tx slots)	Front	15mm	OFF	512	1850.2	27.71	28.00	1.069	-0.16	0.330	0.353
	GSM1900_LAT	GPRS (3 Tx slots)	Back	15mm	OFF	512	1850.2	27.71	28.00	1.069	0	0.318	0.340

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
27	WCDMA II_LAT	RMC 12.2Kbps	Front	15mm	OFF	9538	1907.6	23.85	24.00	1.035	-0.1	0.532	0.551
	WCDMA II_LAT	RMC 12.2Kbps	Back	15mm	OFF	9538	1907.6	23.85	24.00	1.035	0.11	0.459	0.475
28	WCDMA IV_LAT	RMC 12.2Kbps	Front	15mm	OFF	1312	1712.4	23.99	24.00	1.002	-0.08	0.714	0.716
	WCDMA IV_LAT	RMC 12.2Kbps	Back	15mm	OFF	1312	1712.4	23.99	24.00	1.002	0.07	0.594	0.595
	WCDMA V_UAT	RMC 12.2Kbps	Front	15mm	OFF	4233	846.6	25.00	25.00	1.000	-0.04	0.035	0.035
	WCDMA V_UAT	RMC 12.2Kbps	Back	15mm	OFF	4233	846.6	25.00	25.00	1.000	0.06	0.036	0.036
	WCDMA V_LAT	RMC 12.2Kbps	Front	15mm	OFF	4233	846.6	25.00	25.00	1.000	0.01	0.252	0.252
29	WCDMA V_LAT	RMC 12.2Kbps	Back	15mm	OFF	4233	846.6	25.00	25.00	1.000	-0.02	0.275	0.275

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
30	LTE Band 2_LAT	20M	QPSK	1	99	Front	15mm	OFF	18900	1880	23.76	24.00	1.057	-0.04	0.544	0.575
	LTE Band 2_LAT	20M	QPSK	50	50	Front	15mm	OFF	18900	1880	22.82	23.00	1.042	-0.08	0.440	0.459
	LTE Band 2_LAT	20M	QPSK	1	99	Back	15mm	OFF	18900	1880	23.76	24.00	1.057	0.04	0.470	0.497
	LTE Band 2_LAT	20M	QPSK	50	50	Back	15mm	OFF	18900	1880	22.82	23.00	1.042	0.1	0.376	0.392
31	LTE Band 4_LAT	20M	QPSK	1	99	Front	15mm	OFF	20175	1732.5	23.59	24.00	1.099	0.02	0.632	0.695
	LTE Band 4_LAT	20M	QPSK	50	24	Front	15mm	OFF	20175	1732.5	22.65	23.00	1.084	-0.07	0.534	0.579
	LTE Band 4_LAT	20M	QPSK	1	99	Back	15mm	OFF	20175	1732.5	23.59	24.00	1.099	0.06	0.512	0.563
	LTE Band 4_LAT	20M	QPSK	50	24	Back	15mm	OFF	20175	1732.5	22.65	23.00	1.084	0.02	0.426	0.462
	LTE Band 5_UAT	10M	QPSK	1	49	Front	15mm	OFF	20525	836.5	24.22	25.00	1.197	0.01	0.078	0.093
	LTE Band 5_UAT	10M	QPSK	25	25	Front	15mm	OFF	20525	836.5	23.25	24.00	1.189	0.01	0.078	0.093
	LTE Band 5_UAT	10M	QPSK	1	49	Back	15mm	OFF	20525	836.5	24.22	25.00	1.197	-0.07	0.099	0.118
	LTE Band 5_UAT	10M	QPSK	25	25	Back	15mm	OFF	20525	836.5	23.25	24.00	1.189	-0.11	0.077	0.092
	LTE Band 5_LAT	10M	QPSK	1	49	Front	15mm	OFF	20525	836.5	24.22	25.00	1.197	-0.14	0.232	0.278
	LTE Band 5_LAT	10M	QPSK	25	25	Front	15mm	OFF	20525	836.5	23.25	24.00	1.189	-0.14	0.232	0.276
32	LTE Band 5_LAT	10M	QPSK	1	49	Back	15mm	OFF	20525	836.5	24.22	25.00	1.197	0	0.256	0.306
	LTE Band 5_LAT	10M	QPSK	25	25	Back	15mm	OFF	20525	836.5	23.25	24.00	1.189	-0.03	0.204	0.242
	LTE Band 12_UAT	10M	QPSK	1	25	Front	15mm	OFF	23095	707.5	24.88	25.00	1.028	0.08	0.041	0.042
	LTE Band 12_UAT	10M	QPSK	25	12	Front	15mm	OFF	23095	707.5	23.88	24.00	1.028	0.09	0.033	0.034
	LTE Band 12_UAT	10M	QPSK	1	25	Back	15mm	OFF	23095	707.5	24.88	25.00	1.028	0	0.044	0.045
	LTE Band 12_UAT	10M	QPSK	25	12	Back	15mm	OFF	23095	707.5	23.88	24.00	1.028	-0.01	0.036	0.037
	LTE Band 12_LAT	10M	QPSK	1	25	Front	15mm	OFF	23095	707.5	24.88	25.00	1.028	-0.13	0.167	0.172
	LTE Band 12_LAT	10M	QPSK	25	12	Front	15mm	OFF	23095	707.5	23.88	24.00	1.028	-0.02	0.136	0.140
33	LTE Band 12_LAT	10M	QPSK	1	25	Back	15mm	OFF	23095	707.5	24.88	25.00	1.028	0.01	0.209	0.215
	LTE Band 12_LAT	10M	QPSK	25	12	Back	15mm	OFF	23095	707.5	23.88	24.00	1.028	-0.01	0.168	0.173

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	1	2412	17.40	17.50	1.023	99.16	1.008	-0.11	0.071	0.073
34	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	1	2412	17.40	17.50	1.023	99.16	1.008	-0.11	0.124	0.128
	WLAN5GHz	802.11n-HT20 MCS0	Front	15mm	52	5260	17.40	17.50	1.023	94.58	1.057	-0.16	0.040	0.043
35	WLAN5GHz	802.11n-HT20 MCS0	Back	15mm	52	5260	17.40	17.50	1.023	94.58	1.057	-0.09	0.427	0.462
	WLAN5GHz	802.11n-HT20 MCS0	Front	15mm	124	5620	17.40	17.50	1.023	94.58	1.057	0.17	0.053	0.057
36	WLAN5GHz	802.11n-HT20 MCS0	Back	15mm	124	5620	17.40	17.50	1.023	94.58	1.057	-0.09	0.555	0.600

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	15mm	39	2441	12.02	13.00	1.253	77.22	1.079	0.18	0.009	0.012
37	Bluetooth	1Mbps	Back	15mm	39	2441	12.02	13.00	1.253	77.22	1.079	0.09	0.013	0.018

13.4 Product Specific SAR
<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
38	GSM1900_LAT	GPRS (3 Tx slots)	Bottom Side	0mm	810	1909.8	27.58	28	1.102	-0.16	0.981	1.081

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
39	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	0mm	9400	1880	23.66	24	1.081	-0.05	1.500	1.622
	WCDMA IV_LAT	RMC 12.2Kbps	Front	0mm	1312	1712.4	23.99	24.00	1.002	0.06	3.260	3.268
40	WCDMA IV_LAT	RMC 12.2Kbps	Front	0mm	1413	1732.6	23.94	24.00	1.014	0.03	3.270	3.315
	WCDMA IV_LAT	RMC 12.2Kbps	Front	0mm	1513	1752.6	23.97	24.00	1.007	0.07	3.170	3.192
	WCDMA IV_LAT	RMC 12.2Kbps	Bottom Side	0mm	1413	1732.6	23.94	24.00	1.014	-0.1	1.770	1.795

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
41	LTE Band 2_LAT	20M	QPSK	1	99	Bottom Side	0mm	18700	1860	23.56	24.00	1.107	-0.06	1.380	1.527
42	LTE Band 4_LAT	20M	QPSK	1	99	Front	0mm	20175	1732.5	23.59	24.00	1.099	0.03	2.860	3.143
	LTE Band 4_LAT	20M	QPSK	1	99	Bottom Side	0mm	20175	1732.5	23.59	24.00	1.099	-0.07	1.550	1.703

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11n-HT20 MCS0	Front	0mm	52	5260	17.40	17.50	1.023	94.58	1.057	0.13	0.083	0.090
43	WLAN5GHz	802.11n-HT20 MCS0	Back	0mm	52	5260	17.40	17.50	1.023	94.58	1.057	-0.14	1.950	2.109
	WLAN5GHz	802.11n-HT20 MCS0	Back	0mm	60	5300	17.40	17.50	1.023	94.58	1.057	-0.18	1.830	1.979
	WLAN5GHz	802.11n-HT20 MCS0	Left Side	0mm	52	5260	17.40	17.50	1.023	94.58	1.057	0.16	0.740	0.800
	WLAN5GHz	802.11n-HT20 MCS0	Right Side	0mm	52	5260	17.40	17.50	1.023	94.58	1.057	0	0.001	0.001
	WLAN5GHz	802.11n-HT20 MCS0	Top Side	0mm	52	5260	17.40	17.50	1.023	94.58	1.057	-0.03	0.038	0.041
	WLAN5GHz	802.11n-HT20 MCS0	Front	0mm	124	5620	17.40	17.50	1.023	94.58	1.057	0.13	0.101	0.109
44	WLAN5GHz	802.11n-HT20 MCS0	Back	0mm	124	5620	17.40	17.50	1.023	94.58	1.057	-0.14	1.680	1.817
	WLAN5GHz	802.11n-HT20 MCS0	Left Side	0mm	124	5620	17.40	17.50	1.023	94.58	1.057	0.16	0.889	0.962
	WLAN5GHz	802.11n-HT20 MCS0	Right Side	0mm	124	5620	17.40	17.50	1.023	94.58	1.057	0	0.001	0.001
	WLAN5GHz	802.11n-HT20 MCS0	Top Side	0mm	124	5620	17.40	17.50	1.023	94.58	1.057	-0.03	0.046	0.050

13.5 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850_UAT	GPRS (1 Tx slot)	Right Cheek	0mm	OFF	251	848.8	34.72	35.00	1.067	-0.01	1.020	-	1.088
2nd	GSM850_UAT	GPRS (1 Tx slot)	Right Cheek	0mm	OFF	251	848.8	34.72	35.00	1.067	-0.05	0.936	1.09	0.998
1st	GSM1900_LAT	GPRS (3 Tx slots)	Bottom Side	10mm	ON	810	1909.8	25.42	25.50	1.019	-0.12	1.250	-	1.273
2nd	GSM1900_LAT	GPRS (3 Tx slots)	Bottom Side	10mm	ON	810	1909.8	25.42	25.50	1.019	-0.11	1.198	1.04	1.220
1st	LTE Band 4_LAT	20M_QPSK_1_0	Bottom Side	10mm	ON	20175	1732.5	19.21	21.00	1.510	-0.09	0.838	-	1.265
2nd	LTE Band 4_LAT	20M_QPSK_1_0	Bottom Side	10mm	ON	20175	1732.5	19.21	21.00	1.510	-0.11	0.830	1.01	1.253

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA IV_LAT	RMC 12.2Kbps	Front	0mm	OFF	1413	1732.6	23.94	24.00	1.014	0.03	3.270	-	3.315
2nd	WCDMA IV_LAT	RMC 12.2Kbps	Front	0mm	OFF	1413	1732.6	23.94	24.00	1.014	0.03	2.958	1.11	2.999

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
3.	WWAN + WLAN5GHz	Yes	Yes	Yes	Yes

General Note:

1. This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications.
2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. All licensed modes share the same antenna part and cannot transmit simultaneously.
4. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
5. The Scaled SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

14.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850_UAT	Right Cheek	1.088	0.218	0.164	0.050	1.306	1.252	1.138
		Right Tilted	0.649	0.255	0.071	0.062	0.904	0.720	0.711
		Left Cheek	0.940	0.193	0.053	0.045	1.133	0.993	0.985
		Left Tilted	0.555	0.208	0.038	0.061	0.763	0.593	0.616
WCDMA	WCDMA V_UAT	Right Cheek	0.904	0.218	0.164	0.050	1.122	1.068	0.954
		Right Tilted	0.648	0.255	0.071	0.062	0.903	0.719	0.710
		Left Cheek	0.844	0.193	0.053	0.045	1.037	0.897	0.889
		Left Tilted	0.590	0.208	0.038	0.061	0.798	0.628	0.651
LTE	LTE Band 5_UAT	Right Cheek	0.983	0.218	0.164	0.050	1.201	1.147	1.033
		Right Tilted	0.686	0.255	0.071	0.062	0.941	0.757	0.748
		Left Cheek	1.181	0.193	0.053	0.045	1.374	1.234	1.226
		Left Tilted	0.816	0.208	0.038	0.061	1.024	0.854	0.877
	LTE Band 12_UAT	Right Cheek	0.715	0.218	0.164	0.050	0.933	0.879	0.765
		Right Tilted	0.551	0.255	0.071	0.062	0.806	0.622	0.613
		Left Cheek	0.657	0.193	0.053	0.045	0.850	0.710	0.702
		Left Tilted	0.453	0.208	0.038	0.061	0.661	0.491	0.514

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850_LAT	Right Cheek	0.112	0.218	0.164	0.050	0.330	0.276	0.162
		Right Tilted	0.070	0.255	0.071	0.062	0.325	0.141	0.132
		Left Cheek	0.106	0.193	0.053	0.045	0.299	0.159	0.151
		Left Tilted	0.071	0.208	0.038	0.061	0.279	0.109	0.132
	GSM1900_LAT	Right Cheek	0.056	0.218	0.164	0.050	0.274	0.220	0.106
		Right Tilted	0.027	0.255	0.071	0.062	0.282	0.098	0.089
		Left Cheek	0.115	0.193	0.053	0.045	0.308	0.168	0.160
		Left Tilted	0.056	0.208	0.038	0.061	0.264	0.094	0.117
WCDMA	WCDMA II_LAT	Right Cheek	0.094	0.218	0.164	0.050	0.312	0.258	0.144
		Right Tilted	0.043	0.255	0.071	0.062	0.298	0.114	0.105
		Left Cheek	0.166	0.193	0.053	0.045	0.359	0.219	0.211
		Left Tilted	0.072	0.208	0.038	0.061	0.280	0.110	0.133
	WCDMA IV_LAT	Right Cheek	0.086	0.218	0.164	0.050	0.304	0.250	0.136
		Right Tilted	0.053	0.255	0.071	0.062	0.308	0.124	0.115
		Left Cheek	0.116	0.193	0.053	0.045	0.309	0.169	0.161
		Left Tilted	0.061	0.208	0.038	0.061	0.269	0.099	0.122
	WCDMA V_LAT	Right Cheek	0.226	0.218	0.164	0.050	0.444	0.390	0.276
		Right Tilted	0.122	0.255	0.071	0.062	0.377	0.193	0.184
		Left Cheek	0.213	0.193	0.053	0.045	0.406	0.266	0.258
		Left Tilted	0.148	0.208	0.038	0.061	0.356	0.186	0.209
LTE	LTE Band 2_LAT	Right Cheek	0.093	0.218	0.164	0.050	0.311	0.257	0.143
		Right Tilted	0.045	0.255	0.071	0.062	0.300	0.116	0.107
		Left Cheek	0.156	0.193	0.053	0.045	0.349	0.209	0.201
		Left Tilted	0.069	0.208	0.038	0.061	0.277	0.107	0.130
	LTE Band 4_LAT	Right Cheek	0.074	0.218	0.164	0.050	0.292	0.238	0.124
		Right Tilted	0.049	0.255	0.071	0.062	0.304	0.120	0.111
		Left Cheek	0.126	0.193	0.053	0.045	0.319	0.179	0.171
		Left Tilted	0.075	0.208	0.038	0.061	0.283	0.113	0.136
	LTE Band 5_LAT	Right Cheek	0.257	0.218	0.164	0.050	0.475	0.421	0.307
		Right Tilted	0.127	0.255	0.071	0.062	0.382	0.198	0.189
		Left Cheek	0.245	0.193	0.053	0.045	0.438	0.298	0.290
		Left Tilted	0.176	0.208	0.038	0.061	0.384	0.214	0.237
	LTE Band 12_LAT	Right Cheek	0.117	0.218	0.164	0.050	0.335	0.281	0.167
		Right Tilted	0.037	0.255	0.071	0.062	0.292	0.108	0.099
		Left Cheek	0.099	0.193	0.053	0.045	0.292	0.152	0.144
		Left Tilted	0.044	0.208	0.038	0.061	0.252	0.082	0.105

14.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	4	1+2 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850_UAT	Front	0.068	0.114	0.018	0.182	0.086
		Back	0.062	0.225	0.032	0.287	0.094
		Left side	0.043	0.159	0.028	0.202	0.071
		Right side	0.021			0.021	0.021
		Top side	0.037	0.128	0.026	0.165	0.063
WCDMA	WCDMA V_UAT	Front	0.084	0.114	0.018	0.198	0.102
		Back	0.077	0.225	0.032	0.302	0.109
		Left side	0.043	0.159	0.028	0.202	0.071
		Right side	0.020			0.020	0.020
		Top side	0.045	0.128	0.026	0.173	0.071
LTE	LTE Band 5_UAT	Front	0.278	0.114	0.018	0.392	0.296
		Back	0.258	0.225	0.032	0.483	0.290
		Left side	0.136	0.159	0.028	0.295	0.164
		Right side	0.050			0.050	0.050
		Top side	0.166	0.128	0.026	0.294	0.192
	LTE Band 12_UAT	Front	0.072	0.114	0.018	0.186	0.090
		Back	0.070	0.225	0.032	0.295	0.102
		Left side	0.056	0.159	0.028	0.215	0.084
		Right side	0.029			0.029	0.029
		Top side	0.043	0.128	0.026	0.171	0.069

WWAN Band		Exposure Position	1	2	4	1+2 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
GSM	GSM850_LAT	Front	0.153	0.114	0.018	0.267	0.171
		Back	0.161	0.225	0.032	0.386	0.193
		Left side	0.088	0.159	0.028	0.247	0.116
		Right side	0.149			0.149	0.149
		Top side		0.128	0.026	0.128	0.026
		Bottom side	0.086			0.086	0.086
	GSM1900_LAT	Front	0.532	0.114	0.018	0.646	0.550
		Back	0.420	0.225	0.032	0.645	0.452
		Left side	0.098	0.159	0.028	0.257	0.126
		Right side	0.029			0.029	0.029
		Top side		0.128	0.026	0.128	0.026
		Bottom side	1.273			1.273	1.273
WCDMA	WCDMA II_LAT	Front	0.746	0.114	0.018	0.860	0.764
		Back	0.574	0.225	0.032	0.799	0.606
		Left side	0.129	0.159	0.028	0.288	0.157
		Right side	0.040			0.040	0.040
		Top side		0.128	0.026	0.128	0.026
		Bottom side	1.275			1.275	1.275
	WCDMA IV_LAT	Front	0.729	0.114	0.018	0.843	0.747
		Back	0.539	0.225	0.032	0.764	0.571
		Left side	0.115	0.159	0.028	0.274	0.143
		Right side	0.036			0.036	0.036
		Top side		0.128	0.026	0.128	0.026
		Bottom side	1.231			1.231	1.231
	WCDMA V_LAT	Front	0.294	0.114	0.018	0.408	0.312
		Back	0.326	0.225	0.032	0.551	0.358
		Left side	0.200	0.159	0.028	0.359	0.228
		Right side	0.315			0.315	0.315
		Top side		0.128	0.026	0.128	0.026
		Bottom side	0.144			0.144	0.144
LTE	LTE Band 2_LAT	Front	0.747	0.114	0.018	0.861	0.765
		Back	0.547	0.225	0.032	0.772	0.579
		Left side	0.130	0.159	0.028	0.289	0.158
		Right side	0.039			0.039	0.039
		Top side		0.128	0.026	0.128	0.026
		Bottom side	1.300			1.300	1.300
	LTE Band 4_LAT	Front	0.752	0.114	0.018	0.866	0.770
		Back	0.568	0.225	0.032	0.793	0.600
		Left side	0.118	0.159	0.028	0.277	0.146
		Right side	0.036			0.036	0.036
		Top side		0.128	0.026	0.128	0.026
		Bottom side	1.265			1.265	1.265
	LTE Band 5_LAT	Front	0.312	0.114	0.018	0.426	0.330
		Back	0.310	0.225	0.032	0.535	0.342
		Left side	0.227	0.159	0.028	0.386	0.255
		Right side	0.372			0.372	0.372
		Top side		0.128	0.026	0.128	0.026
		Bottom side	0.150			0.150	0.150
	LTE Band 12_LAT	Front	0.217	0.114	0.018	0.331	0.235
		Back	0.228	0.225	0.032	0.453	0.260
		Left side	0.153	0.159	0.028	0.312	0.181
		Right side	0.200			0.200	0.200
		Top side		0.128	0.026	0.128	0.026
		Bottom side	0.090			0.090	0.090

14.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850_UAT	Front	0.032	0.073	0.057	0.012	0.105	0.089	0.044
		Back	0.033	0.128	0.600	0.018	0.161	0.633	0.051
WCDMA	WCDMA V_UAT	Front	0.035	0.073	0.057	0.012	0.108	0.092	0.047
		Back	0.036	0.128	0.600	0.018	0.164	0.636	0.054
LTE	LTE Band 5_UAT	Front	0.093	0.073	0.057	0.012	0.166	0.150	0.105
		Back	0.118	0.128	0.600	0.018	0.246	0.718	0.136
	LTE Band 12_UAT	Front	0.042	0.073	0.057	0.012	0.115	0.099	0.054
		Back	0.045	0.128	0.600	0.018	0.173	0.645	0.063

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850_LAT	Front	0.140	0.073	0.057	0.012	0.213	0.197	0.152
		Back	0.142	0.128	0.600	0.018	0.270	0.742	0.160
	GSM1900_LAT	Front	0.353	0.073	0.057	0.012	0.426	0.410	0.365
		Back	0.340	0.128	0.600	0.018	0.468	0.940	0.358
WCDMA	WCDMA II_LAT	Front	0.551	0.073	0.057	0.012	0.624	0.608	0.563
		Back	0.475	0.128	0.600	0.018	0.603	1.075	0.493
	WCDMA IV_LAT	Front	0.716	0.073	0.057	0.012	0.789	0.773	0.728
		Back	0.595	0.128	0.600	0.018	0.723	1.195	0.613
	WCDMA V_LAT	Front	0.252	0.073	0.057	0.012	0.325	0.309	0.264
		Back	0.275	0.128	0.600	0.018	0.403	0.875	0.293
LTE	LTE Band 2_LAT	Front	0.575	0.073	0.057	0.012	0.648	0.632	0.587
		Back	0.497	0.128	0.600	0.018	0.625	1.097	0.515
	LTE Band 4_LAT	Front	0.695	0.073	0.057	0.012	0.768	0.752	0.707
		Back	0.563	0.128	0.600	0.018	0.691	1.163	0.581
	LTE Band 5_LAT	Front	0.278	0.073	0.057	0.012	0.351	0.335	0.290
		Back	0.306	0.128	0.600	0.018	0.434	0.906	0.324
	LTE Band 12_LAT	Front	0.172	0.073	0.057	0.012	0.245	0.229	0.184
		Back	0.215	0.128	0.600	0.018	0.343	0.815	0.233

14.4 Product Specific Exposure Conditions

WWAN Band		Exposure Position	1	3	1+3 Summed 10g SAR (W/kg)
			WWAN	5GHz WLAN	
			10g SAR (W/kg)	10g SAR (W/kg)	
GSM	GSM1900_LAT	Front		0.109	0.109
		Back		2.109	2.109
		Left side		0.962	0.962
		Right side			0.000
		Top side		0.050	0.050
		Bottom side	1.081		1.081
WCDMA	WCDMA II_LAT	Front		0.109	0.109
		Back		2.109	2.109
		Left side		0.962	0.962
		Right side			0.000
		Top side		0.050	0.050
		Bottom side	1.622		1.622
	WCDMA IV_LAT	Front	3.315	0.109	3.424
		Back		2.109	2.109
		Left side		0.962	0.962
		Right side			0.000
		Top side		0.050	0.050
		Bottom side	1.795		1.795
LTE	LTE Band 2_LAT	Front		0.109	0.109
		Back		2.109	2.109
		Left side		0.962	0.962
		Right side			0.000
		Top side		0.050	0.050
		Bottom side	1.527		1.527
	LTE Band 4_LAT	Front	3.143	0.109	3.252
		Back		2.109	2.109
		Left side		0.962	0.962
		Right side			0.000
		Top side		0.050	0.050
		Bottom side	1.703		1.703

Test Engineer : Willie Huang Lewis Chang Charles Shen Jack Yang and Ginger Chiang

15. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 941225 D07 v01r02, " SAR Evaluation Procedures for UMPC Mini-Tablet Devices", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.