

Page: 1 of 126

SAR TEST REPORT





The following samples were submitted and identified on behalf of the client as:

Smart phone **Equipment Under Test**

Sharp Corporation, Mobile Communication B.U. **Company Name** 2-13-1, Hachihonmatsu-lida, Higashi-hiroshima-shi, **Company Address**

Hiroshima, 739-0192, Japan

Standards IEEE/ANSI C95.1-1992, IEEE 1528-2013

FCC ID APYHRO00292 **Date of Receipt** Nov. 24, 2020

Date of Test(s) Dec. 16, 2020 ~ Dec. 21, 2020

Date of Issue Jan. 27, 2021

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Ruby Ou	Engineer / Bond Tsai	Asst. Manager / John Yeh
Ruby Ou	BondIsai	John Teh
		Date: Jan. 27, 2021

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 2 of 126

	Highest SAR Summary				
Equipment class	Frequency Band	Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	Highest Simultaneous Transmission 1g SAR(W/Kg)
			1g \$	SAR(W/Kg)	
Licensed	WCDMA Band V	0.28	-	-	
Licensed	LTE Band 38	-	0.29	-	
Licensed	GPRS 1900	-	-	0.63	0.81
DTS	2.4GHz WLAN	0.50	0.07	0.08	0.61
NII	5GHz WLAN	0.40	0.11	0.08	
DSS	Bluetooth	0.21	0.04	-	
Date	of Testing	2020/12/16 ~ 2020/12/21			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 3 of 126

Revision History

Report Number	Revision	Description	Issue Date
E5/2020/B0021	Rev.00	Initial creation of document	Jan. 27, 2021

Note:

1. Measurement results in the original test report E5/2020/B0013 are full leveraged in this test report E5/2020/B0021.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华红用摄影测过之样只有含,同时叶梯只展展现的元子。大数华土模太从司隶而连订,不可如以推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 4 of 126

Contents

0.	Guidance applied	5
1.	General Information	6
	1.1 Testing Laboratory	6
	1.2 Details of Applicant	6
	1.3 Description of EUT	7
	1.4 Test Environment	35
	1.5 Operation Description	35
	1.6 Positioning Procedure	39
	1.7 Evaluation Procedures	41
	1.8 Probe Calibration Procedures	43
	1.9 The SAR Measurement System	46
	1.10 System Components	48
	1.11 SAR System Verification	50
	1.12 Tissue Simulant Fluid for the Frequency Band	52
	1.13 Test Standards and Limits	55
2.	Summary of Results	57
	2.1 Decision rules	57
	2.2 Summary of Results	57
	2.3 Reporting statements of conformity	66
3.	Simultaneous Transmission Analysis	67
	3.1 Estimated SAR calculation	
	3.2 SPLSR evaluation and analysis	68
4.	Instruments List	81
5.	Measurements	83
6.	SAR System Performance Verification	113
7.	Uncertainty Budget	124
Αį	opendixes	
	E52020B0021 SAR_Appendix A Photographs	
	E52020B0021 SAR_Appendix B DAE & Probe Cal. Certificate	
	E52020B0021 SAR Appendix C Phantom Description & Dipole Cal. Certificate	126

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the low. prosecuted to the fullest extent of the law.



Page: 5 of 126

0. Guidance applied

The SAR testing method and procedure for this device is in accordance with the following standards:

IEEE/ANSI C95.1-1992

IEEE 1528-2013

KDB865664D01v01r04

KDB865664D02v01r02

KDB941225D01v03r01

KDB941225D05v02r05

KDB941225D06v02r01

KDB447498D01v06

KDB248227D01v02r02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 6 of 126

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Central RF Lab				
No. 2, Keji 1st Rd., Gu	No. 2, Keji 1st Rd., Guishan Township, Taoyuan County, 33383, Taiwan			
FCC Designation Number				
Tel +886-2-2299-3279				
Fax +886-2-2298-0488				
Internet	Internet http://www.tw.sgs.com/			

1.2 Details of Applicant

Company Name	Sharp Corporation, Mobile Communication B.U.
Company Address	2-13-1, Hachihonmatsu-lida, Higashi-hiroshima-shi,
	Hiroshima, 739-0192, Japan

1.2.1 Details of Manufacturer

Company Name	Sharp Corporation
Company Address	1 Takumi-cho, Sakai-ku, Sakai City,Osaka 590-8522,Japan

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 7 of 126

1.3 Description of EUT

EUT Name	Smart phone					
FCC ID	APYHRO00292					
	⊠GSM ⊠GPRS ⊠WC	DMA ⊠HSDPA				
Mode of Operation	⊠HSUPA ⊠LTE FDD ⊠LTE TDD ⊠Bluetooth					
	⊠WLAN802.11 a/b/g/n/ac(20M/40	M/80M)				
	GSM (DTM multi class B)	1/8.3				
	GPRS (support multi class 12 max)	1/2 (1Dn4UP) 1/2.76 (1Dn3UP) 1/4.1 (1Dn2UP) 1/8.3 (1Dn1UP)				
Duty Cycle	LTE FDD	1				
Duty Gyold	LTE TDD	0.633				
	WCDMA	1				
	WLAN802.11a/b/g/n/ac (20M/40M/80M)	Refer to page 31-34				
	Bluetooth	76.8%				
	GSM850	824 — 849				
	GSM1900	1850 — 1910				
	WCDMA Band V	824 — 849				
	LTE FDD Band 5	824 — 849				
	LTE FDD Band 12	699 — 716				
TX Frequency Range (MHz)	LTE FDD Band 17	704 — 716				
((VII 12)	LTE TDD Band 38	2570 — 2620				
	LTE TDD Band 41	2496 — 2690				
	WiFi 2.4GHz	2400 — 2462				
	WiFi 5GHz	5150 - 5825				
	Bluetooth	2402 — 2480				
	GSM850	128 — 251				
Channel Number	GSM1900	512 — 810				
(ARFCN)	WCDMA Band V	4132 – 4233				
	LTE FDD Band 5	20407 — 20643				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 8 of 126

	LTE FDD Band 12	23017	_	23173
	LTE FDD Band 17	23755	_	23825
	LTE TDD Band 38	37775	_	38225
Channel Number (ARFCN)	LTE TDD Band 41	39675	_	41565
(viiti ort)	WiFi 2.4GHz	1	_	11
	WiFi 5GHz	36	_	165
	Bluetooth	0	_	78

WWAN

	Max. SAR (1-g) (Unit: W/Kg)					
Mode	Band	Measured	Reported	Position / Channel		
	GSM 850	0.16	0.21	□Left ⊠Right ⊠Cheek □Tilt 251 Channel		
	GSM 1900	0.07	0.08	☐Left ☐Right ☐Cheek ☐Tilt 810 Channel		
	WCDMA Band V	0.24	0.28	☐Left ☐Right ☐Cheek ☐Tilt 64233 ☐Channel		
Head	LTE FDD Band 5	0.22	0.26	☐Left ☐Right ☐Cheek ☐Tilt20600 _Channel		
.,,,,,	LTE FDD Band 12	0.14	0.16	☐Left ☐Right ☐Cheek ☐Tilt ☐ 23060 Channel		
	LTE FDD Band 17	0.15	0.17	☐Left ⊠Right ☐Cheek ☐TiltChannel		
	LTE TDD Band 38	0.09	0.10	☐Left ☐Right ☐Cheek ☐Tilt ☐ Channel		
	LTE TDD Band 41	0.11	0.19	☐Left ☐Right ☐Cheek ☐Tilt 61490 Channel		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 9 of 126

WLAN

WLAN					
Max. SAR (1-g) (Unit: W/Kg)					
Mode	Band	Measured	Reported	Position / Channel	
	WLAN802.11 b	0.48	0.50	□Left ⊠Right ⊠Cheek □Tilt 10 Channel	
	WLAN802.11ac(80M)5.2G	0.36	0.40	☐Left ⊠Right ☐Cheek ⊠Tilt <u>42</u> Channel	
Haad	WLAN802.11ac(80M)5.3G	0.29	0.34	☐Left ☐Right ☐Cheek ☐Tilt <u>58</u> Channel	
Head	WLAN802.11ac(80M)5.6G	0.31	0.34	☐Left ☐Right ☐Cheek ☐Tilt138 _Channel	
	WLAN802.11ac(80M)5.8G	0.31	0.37	☐Left ☐Right ☐Cheek ☐Tilt155 _Channel	
	Bluetooth	0.10	0.22	□Left ⊠Right ⊠Cheek □Tilt 39 Channel	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 10 of 126

WWAN

Max. SAR (1-g) (Unit: W/Kg)					
Mode	Band	Measured	Reported	Position / Channel	
	GSM 850	0.12	0.16	⊠Front □Back 190 Channel	
	GSM 1900	0.21	0.25	⊠Front □Back 810Channel	
	WCDMA Band V	0.21	0.24	⊠Front □Back 4233 Channel	
Body-worn	LTE FDD Band 5	0.16	0.18	⊠Front □Back 20525 Channel	
	LTE FDD Band 12	0.17	0.17	⊠Front □Back 23095 Channel	
	LTE FDD Band 17	0.17	0.19	⊠Front □Back <u>23790</u> Channel	
	LTE TDD Band 38	0.25	0.29	⊠Front □Back <u>37850</u> Channel	
	LTE TDD Band 41	0.21	0.25	⊠Front □Back 40185 Channel	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论时,此都华结里做影响就之缘是台香,同时此楼是做是2000子。木都华丰硕木公司事而纯可,不可驾份海顺。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 11 of 126

WLAN

Max. SAR (1-g) (Unit: W/Kg)											
Mode	Band	Measured	Reported	Position / Channel							
	WLAN802.11 b	0.07	0.07	☐Front ⊠Back 10 Channel							
	WLAN802.11ac(80M)5.2G	0.10	0.11	⊠Front □Back <u>42</u> Channel							
Dody worn	WLAN802.11ac(80M)5.3G	0.03	0.04	⊠Front □Back 58 _Channel							
Body-worn	WLAN802.11ac(80M)5.6G	0.03	0.03	⊠Front □Back 138 Channel							
	WLAN802.11ac(80M)5.8G	0.05	0.06	⊠Front □Back 155 Channel							
	Bluetooth	0.02	0.04	☐Front ☐Back 39 _Channel							

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非足有论阻,此器华结里属影响对文梯是各青,同時此樣是属星短00千。未器华主领太公司皇而连行,太可驾必複制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 12 of 126

WWAN

	Max. SAR	(1-g) (Unit:	W/Kg)	
Mode	Band	Measured	Reported	Position / Channel
	GPRS 850 (1Dn4UP)	0.37	0.50	☐Front ☐Back ☐Top ☐Right ☐Left ☐Bottom
	GPRS 1900 (1Dn4UP)	0.44	0.63	☐Front☐Back☐Top☐Right☐Bottom_810Channel
	WCDMA Band V	0.46	0.53	☐Front ☐Back ☐Top ☐Right ☐Left ☐Bottom
Hotspot	LTE FDD Band 5	0.34	0.39	☐Front ☐Back ☐Top ☐Right ☐Left ☐Bottom 20525 Channel
mode	LTE FDD Band 12	0.20	0.23	☐Front ☐Back ☐Top ☐Right ☐Left ☐Bottom23060 Channel
	LTE FDD Band 17	0.24	0.28	☐Front ☐Back ☐Top ☐Right ☐Left ☐Bottom
	LTE TDD Band 38	0.38	0.46	☐Front ☐Back ☐Top ☐Right ☐Left ☐Bottom 38150 Channel
	LTE TDD Band 41	0.35	0.59	☐Front ☐Back ☐Top ☐Right ☐Left ☐Bottom41490 _Channel

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 13 of 126

WLAN

Max. SAR (1-g) (Unit: W/Kg)										
Mode	Band	Measured	Reported	Position / Channel						
Hotspot	WLAN802.11 b	0.08	0.08	☐Front ☐Back ☐Top ☐Right ☐Left ☐Bottom10Channel						
mode	WLAN802.11ac(80M)5.8G	0.07	0.08	☐Front ☐Back ☐Top ☐Right ☐Left ☐Bottom155 Channel						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 14 of 126

GSM 850 - conducted power table:

	oonaaotet	oonaaotea power table:									
EUT mode	Frequency (MHz)	СН	Max. Rated Avg. Power + Max.Tolerance	Burst average power	Source-based time average power						
	(1711 12)			Avg.	Avg.						
			(dBm)	(dBm)	(dBm)						
CCM 050	824.2	128	33.5	32.91	23.88						
GSM 850 (GMSK)	836.6	190	33.5	32.34	23.31						
(Giviort)	848.8	251	33.5	32.41	23.38						
	The d	vision factor	compared to the numb	er of TX time slot							
	Divi	1 TX time slot									
	DIVI	sion factor		-9.03							

GPRS 850 - conducted power table:

			Burst avera	age power			
	ted Avg. Pow olerance (dBr		33.5	31	29.3	28.5	
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP	
EUT mode	e Frequency CH		nodel ' 'I CHII " I		Avg. (dBm)	Avg. (dBm)	Avg. (dBm)
GPRS	824.2	128	32.89	29.72	27.77	27.23	
850	836.6	190	32.31	29.52	27.64	27.27	
830	848.8 251		32.37	29.62	27.66	27.31	
		Sc	ource-based tim	e average powe	er		
GPRS	824.2	128	23.86	23.70	23.51	24.22	
850	836.6	190	23.28	23.50	23.38	24.26	
830	848.8	251	23.34	23.60	23.40	24.30	
	The div	ision fa	ctor compared	to the number c	of TX time slot		
Div	vision factor		1 TX time slot	2 TX time slot	3 TX time slot	4 TX time slot	
	VISION TACION		-9.03	-6.02	-4.26	-3.01	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 15 of 126

GSM 1900 - conducted power table:

	Join 1000 Conductor portor table.										
EUT mode	Frequency (MHz)	СН	Max. Rated Avg. Power + Max.Tolerance	Burst average power	Source-based time average power						
	(1711 12)			Avg.	Avg.						
			(dBm)	(dBm)	(dBm)						
CSM1000	1850.2	512	30.5	29.95	20.92						
GSM1900 (GMSK)	1800	661	30.5	29.85	20.82						
(Gillert)	1909.8	810	30.5	29.83	20.80						
	The d	ivision factor	compared to the numb	er of TX time slot							
	Divi	1 TX time slot									
	DIVI	sion factor		-9.03							

GPRS 1900 - conducted power table:

			Burst avera	age power		
	ted Avg. Power of the state of		30.5	28	26.5	25.5
			1Dn1UP 1Dn2UP 1Dn3UP		1Dn3UP	1Dn4UP
EUT mode	Frequency (MHz)	СН	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)
GPRS	1850.2	512	29.91	27.02	24.84	24.14
1900	1880	661	29.82	26.71	24.55	23.98
1900	1909.8 810		29.79	26.59	24.64	23.97
		Sc	ource-based tim	e average powe	er	
GPRS	1850.2	512	20.88	21.00	20.58	21.13
1900	1880	661	20.79	20.69	20.29	20.97
1900	1909.8	810	20.76	20.57	20.38	20.96
	The div	ision fa	ctor compared	to the number c	of TX time slot	
Div	vision factor		1 TX time slot	2 TX time slot	3 TX time slot	4 TX time slot
	vision ractor		-9.03	-6.02	-4.26	-3.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 16 of 126

WCDMA Band V - HSDPA / HSUPA Conducted power table (Unit: dBm):

TODIIA Band V - 11001 A 7 11001 A Conducted power table (offic. dbin).									
	Band		WCDMA V						
	TX Channel	4132	4183	4233					
	Frequency (MHz)	826.4	836.6	846.6					
Max. Rated Av	g. Power+Max. Tolerance (dBm)		25.00						
3GPP Rel 99	RMC 12.2Kbps	24.37	24.36	24.39					
	HSDPA Subtest-1	23.40	23.38	23.41					
3GPP Rel 5	HSDPA Subtest-2	22.90	22.89	22.91					
SGPP Rei S	HSDPA Subtest-3	22.89	22.87	22.89					
	HSDPA Subtest-4	22.86	22.85	22.88					
	HSUPA Subtest-1	23.41	23.43	23.42					
	HSUPA Subtest-2	21.43	21.41	21.39					
3GPP Rel 6	HSUPA Subtest-3	22.43	22.41	22.42					
	HSUPA Subtest-4	21.41	21.41	21.44					
	HSUPA Subtest-5	23.42	23.51	23.41					

Subtests for WCDMA Release 5 HSDPA

SUB-TEST	β _c	β_d	β _d (SF)	β_c/β_d	β _{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15	15/15	64	12/15	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Subtests for WCDMA Release 6 HSUPA

SUB-TEST	βς	β _d	β _d (SF)	β _o /β _d	β _{HS} (Note1)	β _{ec}	β _{ed} (Note 5) (Note 6)	β _{ed} (SF)	β _{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β _{ed} 1: 47/15 β _{ed} 2: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是结果都是这样的人,因为他们是这个人可能的。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 Idiwan Etd.



Page: 17 of 126

LTE FDD Band 5 / Band 12 / Band 17 / LTE TDD Band 38 conducted power table:

			LT	E Band 5			
BW(Mhz)	Modulation	RB Size	RB Offset	Cond	ucted power (dBm)	.
	Frequenc	cy (MHz)		829	836.5	844	Target Power + Max. Tolerance (dBm
	Char	nnel		20450	20525	20600	Tolerance (ubiii
		1	0	23.10	23.40	23.25	24.00
		1	25	23.17	23.24	23.28	24.00
	1	1	49	23.37	23.21	23.19	24.00
	QPSK	25	0	22.19	22.19	22.17	23.00
		25	12	22.25	22.26	22.16	23.00
		25	25	22.25	22.32	22.24	23.00
	1	50	0	22.25	22.24	22.14	23.00
		1	0	22.35	22.28	22.13	23.00
	1	1	25	22.24	22.26	22.80	23.00
	16-QAM	1	49	22.55	22.31	22.69	23.00
10		25	0	21.22	21.19	21.15	22.00
10		25	12	21.33	21.26	21.25	22.00
		25	25	21.32	21.29	21.27	22.00
		50	0	21.23	21.26	21.21	22.00
64-QAM		1	0	21.23	21.23	21.12	22.00
		1	25	21.26	21.20	21.16	22.00
		1	49	21.17	21.07	21.03	22.00
	64 OAM	25	0	20.15	20.14	20.00	21.00
	04-QAIVI	25	12	20.19	20.14	20.11	21.00
		25	25	20.19	19.96	20.11	21.00
	H	50	0	20.07	19.99	20.04	21.00
	Frequenc		0	826.5	836.5	846.5	Target
	Char			20425	20525	20625	Power + Max. Tolerance (dBm
			1 _	23.27	23.11	23.23	24.00
		1	0	23.21			
	-	<u>1</u> 1	0 12			23.14	24.00
		1 1 1	12 24	23.07	23.13	23.14 23.20	24.00 24.00
	QPSK	1	12 24		23.13 23.21	23.14 23.20 22.22	24.00
	QPSK	1 1	12	23.07 23.21 22.27	23.13 23.21 22.24	23.20 22.22	24.00 23.00
	QPSK	1 1 12	12 24 0	23.07 23.21	23.13 23.21	23.20	24.00 23.00 23.00
	QPSK	1 1 12 12 12	12 24 0 6 13	23.07 23.21 22.27 22.20 22.18	23.13 23.21 22.24 22.25 22.34	23.20 22.22 22.23 22.16	24.00 23.00 23.00 23.00
	QPSK	1 1 12 12 12 12 25	12 24 0 6 13	23.07 23.21 22.27 22.20 22.18 22.29	23.13 23.21 22.24 22.25 22.34 22.28	23.20 22.22 22.23 22.16 22.15	24.00 23.00 23.00
	QPSK	1 1 12 12 12 12 25 1	12 24 0 6 13 0	23.07 23.21 22.27 22.20 22.18 22.29 22.72	23.13 23.21 22.24 22.25 22.34 22.28 22.78	23.20 22.22 22.23 22.16 22.15 22.71	24.00 23.00 23.00 23.00 23.00 23.00 23.00
	QPSK	1 1 12 12 12 12 25 1	12 24 0 6 13 0 0	23.07 23.21 22.27 22.20 22.18 22.29 22.72 22.27	23.13 23.21 22.24 22.25 22.34 22.28 22.78 22.60	23.20 22.22 22.23 22.16 22.15 22.71 22.27	24.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00
5		1 1 12 12 12 12 25 1 1	12 24 0 6 13 0 0 12 24	23.07 23.21 22.27 22.20 22.18 22.29 22.72 22.27 22.10	23.13 23.21 22.24 22.25 22.34 22.28 22.78 22.60 22.20	23.20 22.22 22.23 22.16 22.15 22.71 22.27 22.46	24.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00
5	QPSK	1 1 12 12 12 25 1 1 1 1	12 24 0 6 13 0 0 12 24	23.07 23.21 22.27 22.20 22.18 22.29 22.72 22.27 22.10 21.32	23.13 23.21 22.24 22.25 22.34 22.28 22.78 22.60 22.20 21.26	23.20 22.22 22.23 22.16 22.15 22.71 22.27 22.46 21.12	24.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00
5		1 1 12 12 12 25 1 1 1 1 12	12 24 0 6 13 0 0 12 24 0 6	23.07 23.21 22.27 22.20 22.18 22.29 22.72 22.27 22.10 21.32 21.16	23.13 23.21 22.24 22.25 22.34 22.28 22.78 22.60 22.20 21.26 21.31	23.20 22.22 22.23 22.16 22.15 22.71 22.27 22.46 21.12 21.32	24.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 22.00 22.00
5		1 1 12 12 12 25 1 1 1 1 22 12	12 24 0 6 13 0 0 12 24 0 6	23.07 23.21 22.27 22.20 22.18 22.29 22.72 22.27 22.10 21.32 21.16 21.26	23.13 23.21 22.24 22.25 22.34 22.28 22.78 22.60 22.20 21.26 21.31 21.23	23.20 22.22 22.23 22.16 22.15 22.71 22.27 22.46 21.12 21.32 21.25	24.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 22.00 22.00 22.00
5		1 1 12 12 12 25 1 1 1 1 12 12 12 12	12 24 0 6 13 0 0 12 24 0 6 13 0	23.07 23.21 22.27 22.20 22.18 22.29 22.72 22.27 22.10 21.32 21.16 21.26 21.37	23.13 23.21 22.24 22.25 22.34 22.28 22.78 22.60 22.20 21.26 21.31 21.23 21.18	23.20 22.22 22.23 22.16 22.15 22.71 22.27 22.46 21.12 21.32 21.25 21.23	24.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 22.00 22.00 22.00 22.00
5		1 1 12 12 12 25 1 1 1 1 12 12 12 12 25	12 24 0 6 13 0 0 12 24 0 6 13 0	23.07 23.21 22.27 22.20 22.18 22.29 22.72 22.27 22.10 21.32 21.16 21.26 21.37 21.18	23.13 23.21 22.24 22.25 22.34 22.28 22.78 22.60 22.20 21.26 21.31 21.23 21.18 21.16	23.20 22.22 22.23 22.16 22.15 22.71 22.27 22.46 21.12 21.32 21.25 21.23 21.05	24.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 22.00 22.00 22.00 22.00 22.00
5		1 1 12 12 12 25 1 1 1 1 12 12 12 12 25	12 24 0 6 13 0 0 12 24 0 6 13 0 0	23.07 23.21 22.27 22.20 22.18 22.29 22.72 22.72 22.10 21.32 21.16 21.26 21.37 21.18 21.15	23.13 23.21 22.24 22.25 22.34 22.28 22.78 22.60 22.20 21.26 21.31 21.23 21.18 21.16 21.18	23.20 22.22 22.23 22.16 22.15 22.71 22.27 22.46 21.12 21.32 21.25 21.23 21.05 21.05	24.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 22.00 22.00 22.00 22.00 22.00 22.00
5	16-QAM	1 1 12 12 12 25 1 1 1 1 12 12 12 12 25 1 1 1 1	12 24 0 6 13 0 0 12 24 0 6 13 0 0	23.07 23.21 22.27 22.20 22.18 22.29 22.72 22.27 22.10 21.32 21.16 21.26 21.37 21.18 21.15 21.16	23.13 23.21 22.24 22.25 22.34 22.28 22.78 22.60 22.20 21.26 21.31 21.23 21.18 21.16 21.18 21.04	23.20 22.22 22.23 22.16 22.15 22.71 22.27 22.46 21.12 21.32 21.25 21.23 21.05 20.92	24.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 22.00 22.00 22.00 22.00 22.00 22.00 22.00 22.00
5		1 1 12 12 12 25 1 1 1 1 12 12 12 25 1 1 1 1	12 24 0 6 13 0 0 12 24 0 6 13 0 0 12 24 0 6	23.07 23.21 22.27 22.20 22.18 22.29 22.72 22.27 22.10 21.32 21.16 21.26 21.37 21.18 21.15 21.16 20.11	23.13 23.21 22.24 22.25 22.34 22.28 22.78 22.60 22.20 21.26 21.31 21.23 21.18 21.16 21.18 21.16 21.18 21.04 20.06	23.20 22.22 22.23 22.16 22.15 22.71 22.27 22.46 21.12 21.32 21.25 21.05 21.05 20.92 20.00	24.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 22.00 22.00 22.00 22.00 22.00 22.00 22.00 22.00 22.00 22.00 22.00
5	16-QAM	1 1 12 12 12 25 1 1 1 1 12 12 12 12 25 1 1 1 1	12 24 0 6 13 0 0 12 24 0 6 13 0 0	23.07 23.21 22.27 22.20 22.18 22.29 22.72 22.27 22.10 21.32 21.16 21.26 21.37 21.18 21.15 21.16	23.13 23.21 22.24 22.25 22.34 22.28 22.78 22.60 22.20 21.26 21.31 21.23 21.18 21.16 21.18 21.04	23.20 22.22 22.23 22.16 22.15 22.71 22.27 22.46 21.12 21.32 21.25 21.23 21.05 20.92	24.00 23.00 23.00 23.00 23.00 23.00 23.00 23.00 22.00 22.00 22.00 22.00 22.00 22.00 22.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 18 of 126

			Lī	ΓE Band 5			
BW(Mhz)	Modulation	RB Size	RB Offset	Cond	ucted power ((dBm)	
	Frequenc	cy (MHz)		825.5	836.5	847.5	Target Power + Max.
	Cha	nnel		20415	20525	20635	Tolerance (dBm)
			0	23.20	23.17	23.29	24.00
		1	7	23.01	23.17	23.24	24.00
		1	14	23.07	23.21	23.19	24.00
	QPSK	8	0	22.24	22.25	22.27	23.00
		8	4	22.28	22.31	22.21	23.00
		8	7	22.25	22.29	22.15	23.00
		15	0	22.27	22.18	22.23	23.00
		1	0	22.19	22.73	22.22	23.00
		1	7	22.34	22.67	22.70	23.00
		1	14	22.46	22.54	22.43	23.00
3	16-QAM	8	0	21.31	21.29	21.36	22.00
Ü	10 0, 10	8	4	21.22	21.28	21.17	22.00
		8	7	21.27	21.24	21.35	22.00
		15	0	21.12	21.19	21.29	22.00
		1	0	21.12	21.13	21.09	22.00
		1	7	21.15	21.13	21.11	22.00
		1	14		21.00	21.02	22.00
	64 0 0 1 1			21.15			
	64-QAM	<u>8</u> 8	0 4	20.12	19.99 20.13	19.92 20.03	21.00 21.00
		8					
		_	7	19.93	19.92	19.96	21.00
		15	0	19.91	19.94	19.91	21.00
	Frequenc	cy (MHz)		824.7	836.5	848.3	Target Power + Max.
	Cha	nnel		20407	20525	20643	Tolerance (dBm)
		1	0	23.12	23.06	23.02	24.00
		1	2	23.15	23.25	23.11	24.00
		1	5	23.10	23.09	22.99	24.00
	QPSK	3	0	22.92	22.93	22.98	24.00
		3	2	22.95	22.96	22.97	24.00
		3	3	22.98	22.94	22.95	24.00
		6	0	22.13	22.19	22.11	23.00
		1	0	22.72	22.31	22.41	23.00
		1	2	22.45	22.39	22.71	23.00
		1	5	22.29	22.15	22.25	23.00
1.4	16-QAM	3	0	21.95	21.94	21.92	23.00
		3	2	21.89	21.91	21.92	23.00
		3	3	21.95	21.92	21.93	23.00
		6	0	21.21	21.13	21.21	22.00
		1	0	21.15	21.11	20.92	22.00
		1	2	21.06	21.08	20.96	22.00
		1	5	21.04	20.97	20.91	22.00
	64-QAM	3	0	20.46	20.55	20.48	22.00
	0. 37.00	3	2	20.39	20.49	20.41	22.00
		3	3	20.10	20.14	20.22	22.00
		6	0	19.94	19.90	19.85	21.00
		U		10.04	19.90	19.00	21.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 19 of 126

BW(Mhz) Modulation RB Size RB Offset Conducted power (dBm) Target Power + Max. Tolerance (dBm)				LT	E Band 12			
Tequency (MHz)	BW(Mhz)	Modulation	RB Size	RB Offset	Cond	ucted power (dBm)	Tannat
Channel 23060 23095 23130		Frequenc	cy (MHz)		704	707.5	711	Power + Max.
1		Cha	nnel		23060	23095	23130	Tolerance (abin)
1			1	0	23.20	23.19	23.53	24.00
QPSK			1	25	23.16	23.34	23.34	24.00
10			1	49	23.44	23.89	23.17	24.00
10		QPSK	25	0	22.29	22.29	22.23	23.00
10			25	12	22.40	22.32	22.29	23.00
10			25	25	22.24	22.4	22.44	23.00
10 16-QAM			50	0	22.32	22.41	22.15	23.00
10			1	0	22.45	22.52	22.34	23.00
10			1	25	22.61	22.53	22.46	23.00
25			1	49	23.00	22.63	22.65	23.00
25 25 21.43 21.51 21.50 22.00	10	16-QAM	25	0	21.38	21.35	21.20	22.00
SO			25	12	21.44	21.37	21.51	22.00
1			25	25	21.43	21.51	21.50	22.00
1			50	0	21.55	21.38	21.25	22.00
1			1	0	21.36	21.33	21.19	22.00
64-QAM			1	25	21.40	21.31	21.35	22.00
25			1	49	21.39	21.30	21.22	22.00
Prequency (MHz) Prequency		64-QAM	25	0	20.30	20.29	20.16	21.00
Frequency (MHz) Frequency (MHz) Tol.5 Target Power + Max. Tolerance (dBm) Tolerance (dBm) 1 12 23.22 23.26 23.17 24.00 1 24 23.36 23.34 23.24 24.00 12 6 22.43 22.29 22.25 23.00 12 13 22.35 22.36 22.31 23.00 12 13 22.35 22.36 22.31 23.00 12 12 13 22.35 22.36 22.31 23.00 12 12 13 22.35 22.36 22.31 23.00 25 0 22.36 22.46 22.29 23.00 1 1 12 22.73 22.49 22.28 23.00 1 1 12 22.73 22.49 22.84 23.00 1 1 12 22.73 22.49 22.84 23.00 1 1 24 22.54 22.63 22.46 23.00 1 1 24 22.54 22.63 22.46 23.00 1 1 24 22.54 22.63 22.46 23.00 1 1 24 22.54 22.63 22.46 23.00 1 1 24 22.54 22.63 22.46 23.00 1 1 2 0 21.33 21.44 21.47 22.00 1 2 13 21.32 21.34 21.28 22.00 1 2 13 21.32 21.34 21.28 22.00 1 1 2 21.39 21.23 21.30 21.20 1 1 2 21.39 21.23 21.30 22.00 1 1 24 21.37 21.19 21.08 22.00 64-QAM 12 0 20.27 20.22 20.09 21.00 12 6 20.27 20.21 20.17 21.00 12 6 20.27 20.21 20.17 21.00			25	12	20.37	20.27	20.28	21.00
Frequency (MHz) Channel 23035 23095 23155 Target Power + Max. Tolerance (dBm) 1 0 23.21 23.21 23.34 24.00 1 12 23.32 23.26 23.17 24.00 1 24 23.36 23.34 22.24 24.00 12 0 22.42 22.34 22.13 23.00 12 13 22.35 22.36 22.31 23.00 12 13 22.35 22.36 22.31 23.00 25 0 22.36 22.46 22.29 23.00 25 0 22.36 22.46 22.29 23.00 1 1 12 22.73 22.49 22.84 23.00 1 1 24 22.54 22.63 22.46 23.00 1 1 24 22.54 22.63 22.46 23.00 1 1 24 22.54 22.63 22.46 23.00 1 1 24 22.54 22.63 22.46 23.00 1 1 24 22.54 22.63 22.46 23.00 1 2 13 21.33 21.34 21.28 22.00 1 1 0 21.31 21.32 21.34 21.28 22.00 1 0 21.31 21.21 21.07 22.00 1 1 2 21.39 21.23 21.32 22.00 1 1 24 21.27 21.36 21.29 22.00 1 1 24 21.27 21.39 21.23 22.00 1 1 24 21.27 21.19 21.08 22.00 64-QAM 12 0 20.27 20.22 20.09 21.00 12 6 20.27 20.21 20.17 21.00 12 6 20.27 20.21 20.17 21.00			25	25	20.31	20.24	20.18	21.00
Channel 23035 23095 23155 Power + Max. Tolerance (dBm) QPSK 1 0 23.21 23.34 24.00 1 12 23.22 23.26 23.17 24.00 1 24 23.36 23.34 23.24 24.00 12 6 22.42 22.34 22.13 23.00 12 13 22.35 22.36 22.31 23.00 25 0 22.36 22.46 22.29 23.00 1 1 0 22.16 22.71 22.28 23.00 1 12 22.73 22.49 22.84 23.00 1 12 22.73 22.49 22.84 23.00 1 12 0 21.33 21.44 21.47 22.00 12 6 21.48 21.44 21.47 22.00 12 13 21.32<			50	0	20.28	20.20	20.19	21.00
Channel 23035 23095 23155 Tolerance (dBm) QPSK 1 0 23.21 23.21 23.34 24.00 1 12 23.22 23.26 23.17 24.00 1 24 23.36 23.34 23.24 24.00 12 0 22.42 22.34 22.13 23.00 12 6 22.43 22.29 22.25 23.00 12 13 22.35 22.36 22.31 23.00 25 0 22.36 22.46 22.29 23.00 1 12 22.73 22.49 22.84 23.00 1 12 22.73 22.49 22.84 23.00 1 12 22.73 22.49 22.84 23.00 1 12 0 21.33 21.44 21.47 22.00 12 6 21.48 21.44 21.47 22.00 12		Frequenc	cy (MHz)	(MHz)		707.5	713.5	
QPSK 1 12 23.22 23.26 23.17 24.00 1 24 23.36 23.34 23.24 24.00 12 0 22.42 22.34 22.13 23.00 12 6 22.43 22.29 22.25 23.00 12 13 22.35 22.36 22.31 23.00 25 0 22.36 22.46 22.29 23.00 1 1 0 22.16 22.71 22.28 23.00 1 12 22.73 22.49 22.84 23.00 1 12 22.54 22.63 22.46 23.00 1 12 0 21.33 21.44 21.47 22.00 12 6 21.48 21.44 21.72 22.00 12 13 21.32 21.34 21.28 22.00 25 0 21.27 21.36 21.29 22.00 1		Cha	nnel		23035	23095	23155	
PSK 12			1	0	23.21	23.21	23.34	24.00
QPSK 12 0 22.42 22.34 22.13 23.00 12 6 22.43 22.29 22.25 23.00 12 13 22.35 22.36 22.31 23.00 25 0 22.36 22.46 22.29 23.00 1 1 0 22.16 22.71 22.28 23.00 1 12 22.73 22.49 22.84 23.00 1 24 22.54 22.63 22.46 23.00 1 12 0 21.33 21.44 21.47 22.00 12 6 21.48 21.44 21.72 22.00 12 13 21.32 21.34 21.28 22.00 25 0 21.27 21.36 21.29 22.00 1 0 21.31 21.21 21.07 22.00 1 12 21.39 21.23 21.32 22.00 1			1	12	23.22	23.26	23.17	24.00
12 6 22.43 22.29 22.25 23.00 12 13 22.35 22.36 22.31 23.00 25 0 22.36 22.46 22.29 23.00 1 0 22.16 22.71 22.28 23.00 1 12 22.73 22.49 22.84 23.00 1 12 2 22.73 22.49 22.84 23.00 1 24 22.54 22.63 22.46 23.00 1 2 0 21.33 21.44 21.47 22.00 12 6 21.48 21.44 21.72 22.00 12 13 21.32 21.34 21.28 22.00 25 0 21.27 21.36 21.29 22.00 1 0 21.31 21.21 21.07 22.00 1 1 12 21.39 21.32 21.32 22.00 1 1 24 21.27 21.19 21.08 22.00 1 2 6 20.27 20.22 20.09 21.00 12 6 20.27 20.21 20.17 21.00 12 13 20.27 20.09 20.14 21.00			1	24	23.36	23.34	23.24	24.00
12 13 22.35 22.36 22.31 23.00 25 0 22.36 22.46 22.29 23.00 1 0 22.16 22.71 22.28 23.00 1 12 22.73 22.49 22.84 23.00 1 24 22.54 22.63 22.46 23.00 12 0 21.33 21.44 21.47 22.00 12 6 21.48 21.44 21.72 22.00 12 13 21.32 21.34 21.28 22.00 25 0 21.27 21.36 21.29 22.00 1 0 21.31 21.21 21.07 22.00 1 1 12 21.39 21.23 21.32 22.00 1 1 24 21.27 21.19 21.08 22.00 1 2 6 20.27 20.22 20.09 21.00 1 2 6 20.27 20.21 20.17 21.00 1 2 6 20.27 20.20 20.14 21.00		QPSK	12	0	22.42	22.34	22.13	23.00
5 0 22.36 22.46 22.29 23.00 1			12	6	22.43	22.29	22.25	23.00
1 0 22.16 22.71 22.28 23.00 1 12 22.73 22.49 22.84 23.00 1 24 22.54 22.63 22.46 23.00 1 2 0 21.33 21.44 21.47 22.00 1 2 6 21.48 21.44 21.72 22.00 1 2 13 21.32 21.34 21.28 22.00 2 5 0 21.27 21.36 21.29 22.00 1 1 0 21.31 21.21 21.07 22.00 1 1 12 21.39 21.23 21.32 22.00 1 1 24 21.27 21.19 21.08 22.00 1 24 21.27 21.19 21.08 22.00 1 2 6 20.27 20.22 20.09 21.00 1 2 6 20.27 20.21 20.17 21.00 1 2 13 20.27 20.09 20.14 21.00			12	13	22.35	22.36	22.31	23.00
1 12 22.73 22.49 22.84 23.00 1 24 22.54 22.63 22.46 23.00 1 2 0 21.33 21.44 21.47 22.00 1 2 6 21.48 21.44 21.72 22.00 1 2 13 21.32 21.34 21.28 22.00 2 5 0 21.27 21.36 21.29 22.00 1 1 0 21.31 21.21 21.07 22.00 1 1 12 21.39 21.23 21.32 22.00 1 1 24 21.27 21.19 21.08 22.00 1 24 21.27 21.19 21.08 22.00 1 2 6 20.27 20.22 20.09 21.00 1 2 6 20.27 20.21 20.17 21.00 1 2 13 20.27 20.09 20.14 21.00			25	0	22.36	22.46	22.29	23.00
1 24 22.54 22.63 22.46 23.00 12 0 21.33 21.44 21.47 22.00 12 6 21.48 21.44 21.72 22.00 12 13 21.32 21.34 21.28 22.00 25 0 21.27 21.36 21.29 22.00 1 0 21.31 21.21 21.07 22.00 1 1 12 21.39 21.23 21.32 22.00 1 1 24 21.27 21.19 21.08 22.00 1 24 21.27 21.19 21.08 22.00 1 2 6 20.27 20.22 20.09 21.00 1 2 13 20.27 20.21 20.17 21.00 1 2 13 20.27 20.09 20.14 21.00			1	0	22.16	22.71	22.28	23.00
5 16-QAM 12 0 21.33 21.44 21.47 22.00 12 6 21.48 21.44 21.72 22.00 12 13 21.32 21.34 21.28 22.00 25 0 21.27 21.36 21.29 22.00 11 0 21.31 21.21 21.07 22.00 11 12 21.39 21.23 21.32 22.00 11 12 21.39 21.23 21.32 22.00 11 24 21.27 21.19 21.08 22.00 12 64-QAM 12 0 20.27 20.22 20.09 21.00 12 13 20.27 20.21 20.17 21.00 12 13 20.27 20.09 20.14 21.00			1	12	22.73	22.49	22.84	23.00
12 6 21.48 21.44 21.72 22.00 12 13 21.32 21.34 21.28 22.00 25 0 21.27 21.36 21.29 22.00 1 0 21.31 21.21 21.07 22.00 1 1 12 21.39 21.23 21.32 22.00 1 1 24 21.27 21.19 21.08 22.00 1 2 0 20.27 20.22 20.09 21.00 1 2 6 20.27 20.21 20.17 21.00 1 2 13 20.27 20.09 20.14 21.00			1	24	22.54	22.63	22.46	23.00
12 13 21.32 21.34 21.28 22.00 25 0 21.27 21.36 21.29 22.00 1 0 21.31 21.21 21.07 22.00 1 12 21.39 21.23 21.32 22.00 1 24 21.27 21.19 21.08 22.00 1 24 21.27 21.19 21.08 22.00 1 2 0 20.27 20.22 20.09 21.00 12 6 20.27 20.21 20.17 21.00 12 13 20.27 20.09 20.14 21.00	5	16-QAM	12	0	21.33	21.44	21.47	22.00
25 0 21.27 21.36 21.29 22.00 1 0 21.31 21.21 21.07 22.00 1 12 21.39 21.23 21.32 22.00 1 24 21.27 21.19 21.08 22.00 12 0 20.27 20.22 20.09 21.00 12 6 20.27 20.21 20.17 21.00 12 13 20.27 20.09 20.14 21.00			12	6	21.48	21.44	21.72	22.00
1 0 21.31 21.21 21.07 22.00 1 12 21.39 21.23 21.32 22.00 1 24 21.27 21.19 21.08 22.00 64-QAM 12 0 20.27 20.22 20.09 21.00 12 6 20.27 20.21 20.17 21.00 12 13 20.27 20.09 20.14 21.00			12	13	21.32	21.34	21.28	22.00
64-QAM 1 12 21.39 21.23 21.32 22.00 1 24 21.27 21.19 21.08 22.00 12 0 20.27 20.22 20.09 21.00 12 6 20.27 20.21 20.17 21.00 12 13 20.27 20.09 20.14 21.00			25	0	21.27	21.36	21.29	22.00
64-QAM 1 24 21.27 21.19 21.08 22.00 12 0 20.27 20.22 20.09 21.00 12 6 20.27 20.21 20.17 21.00 12 13 20.27 20.09 20.14 21.00			1	0	21.31	21.21	21.07	22.00
64-QAM 12 0 20.27 20.22 20.09 21.00 12 6 20.27 20.21 20.17 21.00 12 13 20.27 20.09 20.14 21.00			1	12	21.39	21.23	21.32	22.00
12 6 20.27 20.21 20.17 21.00 12 13 20.27 20.09 20.14 21.00			1	24	21.27	21.19	21.08	22.00
12 13 20.27 20.09 20.14 21.00		64-QAM	12	0	20.27	20.22	20.09	21.00
			12	6	20.27	20.21	20.17	21.00
25 0 20.22 20.09 20.07 21.00			12	13	20.27	20.09	20.14	21.00
		<u> </u>	25	0	20.22	20.09	20.07	21.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 20 of 126

			LT	E Band 12			
BW(Mhz)	Modulation	RB Size	RB Offset	Cond	ucted power ((dBm)	_
	Frequenc	cy (MHz)		700.5	707.5	714.5	Target Power + Max. Tolerance (dBm)
	Cha	nnel		23025	23095	23165	Tolerance (ubin)
		1	0	23.23	23.38	23.16	24.00
		1	7	23.31	23.37	23.23	24.00
		1	14	23.21	23.25	23.18	24.00
	QPSK	8	0	22.33	22.33	22.17	23.00
		8	4	22.30	22.36	22.29	23.00
		8	7	22.27	22.36	22.26	23.00
		15	0	22.32	22.29	22.26	23.00
		1	0	22.62	22.48	22.53	23.00
		1	7	22.64	22.68	22.30	23.00
		1	14	22.30	22.38	22.75	23.00
3	16-QAM	8	0	21.42	21.45	21.27	22.00
		8	4	21.46	21.31	21.40	22.00
		8	7	21.30	21.44	21.37	22.00
		15	0	21.24	21.42	21.29	22.00
		1	0	21.25	21.33	21.09	22.00
		1	7	21.26	21.22	21.27	22.00
		1	14	21.28	21.19	21.10	22.00
	64-QAM	8	0	20.23	20.22	20.10	21.00
	0. 2	8	4	20.30	20.18	20.16	21.00
		8	7	20.17	20.12	20.15	21.00
		15	0	20.16	20.19	20.10	21.00
	Frequenc			699.7	707.5	715.3	Target
	Cha	nnel		23017	23095	23173	Power + Max. Tolerance (dBm)
		1	0	23.18	23.11	23.13	24.00
		1	2	23.25	23.32	23.20	24.00
		1	5	23.22	23.28	23.12	24.00
	QPSK	3	0	22.90	22.89	22.91	24.00
		3	2	22.96	22.94	22.92	24.00
		3	3	22.95	22.89	22.95	24.00
		6	0	22.34	22.26	22.24	23.00
		1	0	22.77	22.28	22.33	23.00
		1	2	22.50	22.86	22.79	23.00
		1	5	22.68	22.32	22.15	23.00
1.4	16-QAM	3	0	21.99	21.89	21.95	23.00
		3	2	21.97	21.93	21.94	23.00
		3	3	21.95	21.97	21.88	23.00
		6	0	21.34	21.33	21.38	22.00
		1	0	21.26	21.32	21.07	22.00
		1	2	21.36	21.29	21.25	22.00
		1	5	21.26	21.21	21.22	22.00
	64-QAM	3	0	20.55	20.49	20.45	22.00
	O-T SZ/NIVI	3	2	20.33	20.49	20.43	22.00
		3	3	20.41	20.32	20.44	22.00
		6	0	20.34	20.37	20.40	21.00
		U	U	20.14	20.10	20.00	21.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 21 of 126

BWI(Mtz) Modulation RB Size RB Offset Conducted power (dBm) Target Power + Max. Tolerance (dBm)				LT	E Band 17			
Tequency (MHz)	BW(Mhz)	Modulation	RB Size	RB Offset	Cond	ucted power (dBm)	Tannat
Channel 23780 23790 23800		Frequenc	cy (MHz)		709	710	711	Power + Max.
1		Cha	nnel		23780	23790	23800	Tolerance (ubin)
1			1	0	23.21	23.24	23.34	24.00
QPSK			1	25	23.32	23.29	23.21	24.00
10			1	49	23.27	23.49	23.12	24.00
10		QPSK	25	0	22.17	22.18	22.12	23.00
10			25	12	22.38	22.26	22.29	23.00
10			25	25	22.42	22.46	22.36	23.00
10			50	0	22.32	22.27	22.20	23.00
10			1	0	22.26	22.26	22.19	23.00
10			1	25	22.20	22.16	22.39	23.00
25			1	49	22.51	22.48	22.52	23.00
25 25 21.41 21.40 21.47 22.00	10	16-QAM	25	0	21.22	21.12	21.21	22.00
SO			25	12	21.43	21.37	21.37	22.00
1			25	25	21.41	21.40	21.47	22.00
1			50	0	21.34	21.38	21.16	22.00
1			1	0	21.33	21.26	21.36	22.00
64-QAM			1	25	21.38	21.26	21.33	22.00
25			1	49	21.24	21.28	21.07	22.00
Prequency (MHz) Prequency		64-QAM	25	0	20.25	20.15	20.25	21.00
Frequency (MHz) Frequency (MHz) Tolerance (dBm) 1			25	12	20.23	20.24	20.25	21.00
Frequency (MHz) Channel 23755 23790 23825 Target Power + Max. Tolerance (dBm) 1 0 23.08 23.17 23.34 24.00 1 12 23.07 23.27 23.16 24.00 1 24 23.31 23.21 23.31 24.00 12 0 22.21 22.25 22.20 23.00 12 13 22.36 22.38 22.38 23.00 25 0 22.38 22.28 22.27 23.00 1 12 24 22.39 22.58 22.98 23.00 1 1 24 22.39 22.58 22.98 23.00 1 1 24 22.39 22.58 22.98 23.00 1 1 24 22.39 22.58 22.98 23.00 1 1 24 22.39 22.58 22.98 23.00 1 1 24 22.39 22.58 22.98 23.00 1 1 24 22.39 22.58 22.98 23.00 1 1 24 22.39 22.58 22.98 23.00 1 1 24 22.39 22.58 22.98 23.00 1 1 2 6 21.36 21.31 21.41 22.00 1 2 13 21.42 21.29 21.36 22.00 25 0 21.44 21.29 21.36 22.00 25 0 21.44 21.29 21.37 22.00 1 0 21.28 21.24 21.27 22.00 1 1 24 21.11 21.23 20.96 22.00 1 24 21.11 21.23 20.96 22.00 1 24 21.11 21.23 20.96 22.00 1 24 21.11 21.23 20.96 22.00 1 24 21.11 20.23 20.16 21.00 12 6 20.11 20.23 20.16 21.00			25	25	20.23	20.18	20.13	21.00
Channel 23755 23790 23825 Power + Max. Tolerance (dBm) 1			50	0	20.19	20.16	20.10	21.00
Channel 23755 23790 23825 Tolerance (dBm) QPSK 1 0 23.08 23.17 23.34 24.00 1 12 23.07 23.27 23.16 24.00 1 24 23.31 23.21 23.31 24.00 12 0 22.21 22.25 22.20 23.00 12 13 22.36 22.38 22.38 23.00 25 0 22.38 22.28 22.27 23.00 1 12 22.76 22.66 22.37 23.00 1 12 22.76 22.66 22.37 23.00 1 12 22.76 22.66 22.37 23.00 1 12 22.76 22.66 22.37 23.00 1 12 0 21.24 21.36 21.34 22.00 12 6 21.36 21.31 21.41 22.00 12		Frequenc	cy (MHz)		706.5	710	713.5	
APSK 1 1 12 23.07 23.27 23.16 24.00 1 24 23.31 23.21 23.31 24.00 22.21 22.25 22.20 23.00 1 2 6 22.37 22.34 22.30 23.00 25 0 22.38 22.38 22.38 23.00 25 0 22.38 22.38 22.38 23.00 25 0 22.38 22.28 22.27 23.00 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		Cha	nnel		23755	23790	23825	
PSK			1	0	23.08	23.17	23.34	24.00
QPSK 12 0 22.21 22.25 22.20 23.00 12 6 22.37 22.34 22.30 23.00 12 13 22.36 22.38 22.38 23.00 25 0 22.38 22.28 22.27 23.00 1 0 22.44 22.34 22.66 23.00 1 12 22.76 22.66 22.37 23.00 1 24 22.39 22.58 22.98 23.00 1 12 0 21.24 21.36 21.34 22.00 12 6 21.36 21.31 21.41 22.00 12 13 21.42 21.29 21.36 22.00 25 0 21.44 21.29 21.37 22.00 1 12 21.28 21.24 21.27 22.00 1 12 21.27 21.14 21.25 22.00 1 12			1	12	23.07	23.27	23.16	24.00
12 6 22.37 22.34 22.30 23.00 12 13 22.36 22.38 22.38 23.00 25 0 22.38 22.28 22.27 23.00 1 0 22.44 22.34 22.66 23.00 1 12 22.76 22.66 22.37 23.00 1 24 22.39 22.58 22.98 23.00 1 24 22.39 22.58 22.98 23.00 1 2 0 21.24 21.36 21.34 22.00 12 6 21.36 21.31 21.41 22.00 12 13 21.42 21.29 21.36 22.00 25 0 21.44 21.29 21.37 22.00 1 0 21.28 21.24 21.27 22.00 1 1 24 21.11 21.23 20.96 22.00 1 24 21.11 21.23 20.96 22.00 1 24 21.11 21.23 20.96 22.00 1 26 20.11 20.23 20.16 21.00 1 2 6 20.11 20.23 20.16 21.00 1 2 13 20.18 20.09 19.98 21.00			1	24	23.31	23.21	23.31	24.00
12 13 22.36 22.38 22.38 23.00 25 0 22.38 22.28 22.27 23.00 1 0 22.44 22.34 22.66 23.00 1 12 22.76 22.66 22.37 23.00 1 24 22.39 22.58 22.98 23.00 12 0 21.24 21.36 21.34 22.00 12 6 21.36 21.31 21.41 22.00 12 13 21.42 21.29 21.36 22.00 25 0 21.44 21.29 21.37 22.00 25 0 21.44 21.29 21.37 22.00 1 1 2 21.28 21.24 21.27 22.00 1 1 12 21.27 21.14 21.25 22.00 1 1 24 21.11 21.23 20.96 22.00 1 2 6 20.11 20.23 20.16 21.00 12 6 20.11 20.23 20.16 21.00 12 13 20.18 20.09 19.98 21.00		QPSK	12	0	22.21	22.25	22.20	23.00
5 16-QAM 12 0 22.38 22.28 22.27 23.00 1 1 24 22.39 22.58 22.98 23.00 12 13 21.41 22.00 21.44 21.36 21.37 22.00 25 0 21.44 21.29 21.37 22.00 11 22 21.28 21.29 21.37 22.00 11 22 21.28 21.29 21.37 22.00 11 22 21.28 21.24 21.25 22.00 11 22 21.27 21.14 21.25 22.00 11 24 21.11 21.23 20.96 22.00 12 21.24 21.11 21.23 20.96 22.00 12 21.26 20.11 20.23 20.16 21.00 12 13 20.18 20.09 19.98 21.00			12	6	22.37	22.34	22.30	23.00
1 0 22.44 22.34 22.66 23.00 1 12 22.76 22.66 22.37 23.00 1 24 22.39 22.58 22.98 23.00 1 2 0 21.24 21.36 21.34 22.00 1 2 6 21.36 21.31 21.41 22.00 1 2 13 21.42 21.29 21.36 22.00 2 5 0 21.44 21.29 21.37 22.00 2 5 0 21.44 21.29 21.37 22.00 1 1 0 21.28 21.24 21.27 22.00 1 1 12 21.27 21.14 21.25 22.00 1 24 21.11 21.23 20.96 22.00 1 24 21.11 21.23 20.96 22.00 1 2 6 20.11 20.23 20.16 21.00 1 2 13 20.18 20.09 19.98 21.00			12	13	22.36	22.38	22.38	23.00
1 12 22.76 22.66 22.37 23.00 1 24 22.39 22.58 22.98 23.00 1 2 0 21.24 21.36 21.34 22.00 1 2 6 21.36 21.31 21.41 22.00 1 2 13 21.42 21.29 21.36 22.00 2 5 0 21.44 21.29 21.37 22.00 2 1 0 21.28 21.24 21.27 22.00 1 12 21.27 21.14 21.25 22.00 1 1 24 21.11 21.23 20.96 22.00 1 24 21.11 21.23 20.96 22.00 1 2 6 20.11 20.23 20.16 21.00 1 2 13 20.18 20.09 19.98 21.00			25	0	22.38	22.28	22.27	23.00
1 24 22.39 22.58 22.98 23.00 12 0 21.24 21.36 21.34 22.00 12 6 21.36 21.31 21.41 22.00 12 13 21.42 21.29 21.36 22.00 25 0 21.44 21.29 21.37 22.00 1 0 21.28 21.24 21.27 22.00 1 12 21.27 21.14 21.25 22.00 1 12 24 21.11 21.23 20.96 22.00 64-QAM 12 0 20.10 20.06 20.12 21.00 12 13 20.18 20.09 19.98 21.00			1	0	22.44	22.34	22.66	23.00
5 16-QAM 12 0 21.24 21.36 21.34 22.00 12 6 21.36 21.34 22.00 21.24 21.36 21.31 21.41 22.00 22.00 25 0 21.44 21.29 21.37 22.00 25 0 21.44 21.29 21.37 22.00 25 0 21.44 21.29 21.37 22.00 21.37 22.00 21.38 21.24 21.27 22.00 21.37 22.00 21.28 21.24 21.27 22.00 21.28 21.27 21.14 21.25 22.00 21.27 21.14 21.25 22.00 21.27 21.14 21.25 22.00 21.27 21.14 21.25 22.00 21.27 21			1	12	22.76	22.66	22.37	23.00
12 6 21.36 21.31 21.41 22.00 12 13 21.42 21.29 21.36 22.00 25 0 21.44 21.29 21.37 22.00 1 0 21.28 21.24 21.27 22.00 1 12 21.27 21.14 21.25 22.00 1 24 21.11 21.23 20.96 22.00 1 24 20.10 20.06 20.12 21.00 12 6 20.11 20.23 20.16 21.00 12 13 20.18 20.09 19.98 21.00			1	24	22.39	22.58	22.98	23.00
12 13 21.42 21.29 21.36 22.00 25 0 21.44 21.29 21.37 22.00 1 0 21.28 21.24 21.27 22.00 1 12 21.27 21.14 21.25 22.00 1 24 21.11 21.23 20.96 22.00 12 6 20.11 20.23 20.16 21.00 12 13 20.18 20.09 19.98 21.00	5	16-QAM	12	0	21.24	21.36	21.34	22.00
12 13 21.42 21.29 21.36 22.00 25 0 21.44 21.29 21.37 22.00 1 0 21.28 21.24 21.27 22.00 1 12 21.27 21.14 21.25 22.00 1 24 21.11 21.23 20.96 22.00 12 0 20.10 20.06 20.12 21.00 12 6 20.11 20.23 20.16 21.00 12 13 20.18 20.09 19.98 21.00			12	6	21.36	21.31	21.41	22.00
25 0 21.44 21.29 21.37 22.00 1 0 21.28 21.24 21.27 22.00 1 12 21.27 21.14 21.25 22.00 1 24 21.11 21.23 20.96 22.00 12 0 20.10 20.06 20.12 21.00 12 6 20.11 20.23 20.16 21.00 12 13 20.18 20.09 19.98 21.00			12	13			21.36	
64-QAM 1 0 21.28 21.24 21.27 22.00 1 12 21.27 21.14 21.25 22.00 1 24 21.11 21.23 20.96 22.00 12 0 20.10 20.06 20.12 21.00 12 6 20.11 20.23 20.16 21.00 12 13 20.18 20.09 19.98 21.00			25	0	21.44	21.29	21.37	22.00
64-QAM 1 12 21.27 21.14 21.25 22.00 1 24 21.11 21.23 20.96 22.00 12 0 20.10 20.06 20.12 21.00 12 6 20.11 20.23 20.16 21.00 12 13 20.18 20.09 19.98 21.00			1	0	21.28			
64-QAM 1 24 21.11 21.23 20.96 22.00 12 0 20.10 20.06 20.12 21.00 12 6 20.11 20.23 20.16 21.00 12 13 20.18 20.09 19.98 21.00					21.27	21.14		
64-QAM 12 0 20.10 20.06 20.12 21.00 12 6 20.11 20.23 20.16 21.00 12 13 20.18 20.09 19.98 21.00			1	24				
12 6 20.11 20.23 20.16 21.00 12 13 20.18 20.09 19.98 21.00		64-QAM	12					
12 13 20.18 20.09 19.98 21.00			12	6				
			12	13				21.00
					20.12	20.14	20.07	21.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 22 of 126

			LT	E Band 38			
BW(Mhz)	Modulation	RB Size	RB Offset	Cond	ucted power ((dBm)	T .
	Frequenc	cy (MHz)		2580	2595	2610	Target Power + Max. Tolerance (dBm)
	Cha	nnel		37850	38000	38150	roicianoc (abiii)
		1	0	23.27	23.28	23.14	24.00
		1	50	23.26	23.25	23.04	24.00
		1	99	23.34	23.19	23.20	24.00
	QPSK	50	0	22.32	22.26	22.16	23.00
		50	25	22.27	22.23	22.16	23.00
		50	50	22.26	22.25	22.10	23.00
		100	0	22.25	22.23	22.17	23.00
		1	0	22.08	22.56	22.45	23.00
		1	50	22.51	22.54	22.21	23.00
		1	99	22.63	22.14	22.43	23.00
20	16-QAM	50	0	21.16	21.11	21.13	22.00
		50	25	21.21	21.19	21.13	22.00
		50	50	21.19	21.11	21.07	22.00
		100	0	21.26	21.24	21.18	22.00
		1	0	21.13	21.16	21.12	22.00
		1	50	21.14	21.10	21.01	22.00
		1	99	21.07	21.13	21.09	22.00
	64-QAM	50	0	20.10	20.13	20.09	21.00
		50	25	20.11	20.07	19.98	21.00
		50	50	20.04	20.10	20.06	21.00
		100	0	20.05	20.07	20.03	21.00
	Frequenc	cy (MHz)	y (MHz)		2595	2612.5	Target
	Cha	nnel		37825	38000	38175	Power + Max. Tolerance (dBm)
		1	0	23.00	23.15	23.04	24.00
		1	36	23.19	23.06	23.00	24.00
		1	74	23.05	22.96	22.98	24.00
	QPSK	36	0	22.33	22.26	22.08	23.00
		36	18	22.21	22.17	22.08	23.00
		36	37	22.31	22.23	22.06	23.00
		75	0	22.27	22.23	22.16	23.00
		1	0	22.30	22.30	22.19	23.00
		1	36	22.32	22.24	22.00	23.00
		1	74	22.30	22.20	22.13	23.00
15	16-QAM	36	0	21.24	21.25	21.28	22.00
		36	18	21.30	21.27	21.20	22.00
		36	37	21.22	21.14	21.16	22.00
		75	0	21.27	21.25	21.26	22.00
		1	0	20.99	21.16	21.02	22.00
		1	36	21.13	20.96	20.97	22.00
		1	74	20.99	21.07	21.00	22.00
	64-QAM	36	0	20.04	20.01	20.08	21.00
		36	18	19.96	19.96	19.85	21.00
		36	37	19.99	20.09	19.99	21.00
		75	0	19.90	19.95	20.03	21.00
		-					1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 23 of 126

			LT	E Band 38			
BW(Mhz)	Modulation	RB Size	RB Offset	Cond	ucted power ((dBm)	.
	Frequenc	cy (MHz)		2575	2595	2615	Target Power + Max. Tolerance (dBm)
	Cha	nnel		37800	38000	38200	rolerance (abin)
		1	0	22.93	22.87	22.85	24.00
		1	25	22.91	22.87	22.71	24.00
		1	49	22.97	22.80	22.83	24.00
	QPSK	25	0	22.19	22.06	21.89	23.00
		25	12	22.07	22.09	21.93	23.00
		25	25	22.12	22.03	21.96	23.00
		50	0	22.09	22.13	21.97	23.00
		1	0	22.09	22.07	21.88	23.00
		1	25	22.05	22.01	21.89	23.00
		1	49	22.02	21.98	21.90	23.00
10	16-QAM	25	0	21.12	21.01	20.95	22.00
		25	12	21.08	21.04	20.87	22.00
		25	25	21.05	21.06	20.92	22.00
		50	0	21.18	21.11	20.97	22.00
		1	0	21.01	21.10	21.07	22.00
		1	25	21.02	20.97	20.90	22.00
		1	49	21.06	21.11	21.06	22.00
	64-QAM	25	0	19.98	20.03	20.08	21.00
		25	12	20.07	20.00	19.88	21.00
		25	25	20.02	20.08	20.01	21.00
		50	0	19.96	20.00	19.92	21.00
	Frequenc	cy (MHz)		2572.5	2595	2617.5	Target
	Cha	nnel		37775	38000	38225	Power + Max. Tolerance (dBm)
		1	0	22.57	22.68	22.69	24.00
		1	12	22.54	22.60	22.64	24.00
		1	24	22.61	22.52	22.64	24.00
	QPSK	12	0	21.84	21.77	21.71	23.00
		12	6	21.79	21.80	21.85	23.00
		12	13	21.78	21.80	21.75	23.00
		25	0	21.82	21.83	21.67	23.00
		1	0	21.86	21.73	21.83	23.00
		1	12	21.81	21.73	21.67	23.00
		1	24	21.78	21.83	21.67	23.00
5	16-QAM	12	0	20.83	20.71	20.75	22.00
		12	6	20.86	20.84	20.76	22.00
		12	13	20.77	20.85	20.91	22.00
		25	0	20.90	20.88	20.80	22.00
		1	0	21.08	21.04	21.01	22.00
		1	12	21.00	21.06	20.89	22.00
		1	24	20.99	21.09	21.03	22.00
	64-QAM	12	0	19.97	19.99	20.09	21.00
		12	6	20.00	20.00	19.89	21.00
		12	13	19.90	20.05	20.03	21.00
		25	0	19.90	20.05	19.88	21.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 24 of 126

LTE TDD Band 41 conducted power table:

	י טטי	Juliu	7100	mau	otou	powe	· tabi	٠.				
						LTE Band 41						
BW(Mhz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dBm)		Target Power + Max. Tolerance (dBm)			
	Frequen	cy (MHz)		2506	2549.5	2593	2636.5	2680	2496 ~ 2544.9	2545 ~ 2594.9	2595 ~ 2644.9	2645 ~ 2690
	Cha	nnel		39750	40185	40620	41055	41490	39650 ~ 40139	40140 ~ 40639	40640 ~ 41139	41140 ~ 41590
		1	0	22.18	23.80	23.79	23.25	22.22	23.00	24.50	24.00	23.00
		1	50	22.20	23.73	23.67	23.15	22.12	23.00	24.50	24.00	23.00
		1	99	22.22	23.74	23.78	23.27	22.23	23.00	24.50	24.00	23.00
	QPSK	50	0	21.46	23.04	23.03	22.36	21.35	22.00	23.50	23.00	22.00
		50	25	21.43	22.96	22.98	22.34	21.31	22.00	23.50	23.00	22.00
		50	50	21.44	22.94	22.96	22.39	21.39	22.00	23.50	23.00	22.00
		100	0	21.39	22.98	23.00	22.47	21.31	22.00	23.50	23.00	22.00
		1	0	21.40	22.97	23.05	22.49	21.42	22.00	23.50	23.00	22.00
		1	50	21.34	22.92	22.96	22.35	21.33	22.00	23.50	23.00	22.00
		1	99	21.37	22.93	22.91	22.38	21.35	22.00	23.50	23.00	22.00
20	16-QAM	50	0	20.51	22.06	21.99	21.50	20.41	21.00	22.50	22.00	21.00
		50	25	20.40	21.98	22.03	21.38	20.26	21.00	22.50	22.00	21.00
		50	50	20.42	21.96	22.02	21.44	20.43	21.00	22.50	22.00	21.00
		100	0	20.47	22.02	22.04	21.50	20.35	21.00	22.50	22.00	21.00
		1	0	20.43	22.02	21.96	21.42	20.38	21.00	22.50	22.00	21.00
		1	50	20.30	21.94	21.97	21.35	20.19	21.00	22.50	22.00	21.00
		1	99	20.37	21.87	21.95	21.34	20.39	21.00	22.50	22.00	21.00
	64-QAM	50	0	19.39	20.91	20.93	20.37	19.37	20.00	21.50	21.00	20.00
		50	25	19.26	20.86	20.95	20.27	19.17	20.00	21.50	21.00	20.00
		50	50	19.30	20.76	20.87	20.33	19.29	20.00	21.50	21.00	20.00
		100	0	19.32	20.77	20.85	20.34	19.26	20.00	21.50	21.00	20.00
BW(Mhz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dRm)				wer + Max.	
D11 (11112)	- Woodington	112 0.20	112 011001			- actor porter	(45)				ce (dBm)	
	Frequen	cy (MHz)		2503.5	2548.3	2593	2637.8	2682.5	2496 ~ 2544.9	2545 ~ 2594.9	2595 ~ 2644.9	2645 ~ 2690
	Cha	nnel		39725	40173	40620	41068	41515	39650 ~ 40139	40140 ~ 40639	40640 ~ 41139	41140 ~ 41590
		1	0	21.98	23.47	23.60	23.02	21.94	23.00	24.50	24.00	23.00
		1	36	21.95	23.47	23.45	22.91	21.95	23.00	24.50	24.00	23.00
		1	74	21.96	23.61	23.67	23.09	22.09	23.00	24.50	24.00	23.00
	QPSK	36	0	21.24	22.77	22.69	22.12	21.11	22.00	23.50	23.00	22.00
		36	18	21.17	22.66	22.64	22.18	21.11	22.00	23.50	23.00	22.00
		36	37	21.14	22.74	22.66	22.08	21.08	22.00	23.50	23.00	22.00
		75	0	21.22	22.69	22.67	22.14	21.13	22.00	23.50	23.00	22.00
		1	0	21.17	22.71	22.67	22.17	21.12	22.00	23.50	23.00	22.00
		1	36	21.18	22.65	22.56	22.11	21.05	22.00	23.50	23.00	22.00
		1	74	21.12	22.71	22.72	22.12	21.11	22.00	23.50	23.00	22.00
								01.00			21.22	
15	16-QAM	36	0	20.18	21.75	21.70	21.11	20.10	21.00	22.50	22.00	21.00
15	16-QAM	36 36		20.18 20.11	21.75 21.64	21.70 21.74	21.11	20.10 20.10	21.00	22.50	22.00 22.00	21.00
15	16-QAM		0									
15	16-QAM	36	0 18	20.11	21.64	21.74	21.09	20.10	21.00	22.50	22.00	21.00
15	16-QAM	36 36	0 18 37	20.11 20.18	21.64 21.72	21.74 21.66	21.09 21.08	20.10 20.07	21.00 21.00	22.50 22.50	22.00 22.00	21.00 21.00
15	16-QAM	36 36 75	0 18 37 0	20.11 20.18 20.20	21.64 21.72 21.82	21.74 21.66 21.81	21.09 21.08 21.17	20.10 20.07 20.17	21.00 21.00 21.00	22.50 22.50 22.50	22.00 22.00 22.00	21.00 21.00 21.00
15	16-QAM	36 36 75 1	0 18 37 0	20.11 20.18 20.20 20.44	21.64 21.72 21.82 22.06	21.74 21.66 21.81 21.98	21.09 21.08 21.17 21.41	20.10 20.07 20.17 20.31	21.00 21.00 21.00 21.00	22.50 22.50 22.50 22.50	22.00 22.00 22.00 22.00	21.00 21.00 21.00 21.00
15	16-QAM	36 36 75 1	0 18 37 0 0 36	20.11 20.18 20.20 20.44 20.32	21.64 21.72 21.82 22.06 21.99	21.74 21.66 21.81 21.98 21.94	21.09 21.08 21.17 21.41 21.40	20.10 20.07 20.17 20.31 20.15	21.00 21.00 21.00 21.00 21.00	22.50 22.50 22.50 22.50 22.50	22.00 22.00 22.00 22.00 22.00	21.00 21.00 21.00 21.00 21.00
15		36 36 75 1 1	0 18 37 0 0 0 36 74	20.11 20.18 20.20 20.44 20.32 20.31	21.64 21.72 21.82 22.06 21.99 21.92	21.74 21.66 21.81 21.98 21.94 22.03	21.09 21.08 21.17 21.41 21.40 21.42	20.10 20.07 20.17 20.31 20.15 20.42	21.00 21.00 21.00 21.00 21.00 21.00	22.50 22.50 22.50 22.50 22.50 22.50 22.50	22.00 22.00 22.00 22.00 22.00 22.00 22.00	21.00 21.00 21.00 21.00 21.00 21.00
15		36 36 75 1 1 1 36	0 18 37 0 0 36 74	20.11 20.18 20.20 20.44 20.32 20.31 19.42	21.64 21.72 21.82 22.06 21.99 21.92 20.89	21.74 21.66 21.81 21.98 21.94 22.03 21.00	21.09 21.08 21.17 21.41 21.40 21.42 20.42	20.10 20.07 20.17 20.31 20.15 20.42 19.36	21.00 21.00 21.00 21.00 21.00 21.00 21.00 20.00	22.50 22.50 22.50 22.50 22.50 22.50 22.50 21.50	22.00 22.00 22.00 22.00 22.00 22.00 21.00	21.00 21.00 21.00 21.00 21.00 21.00 20.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 25 of 126

						LTE Band 41						
BW(Mhz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dBm)		Target Power + Max. Tolerance (dBm)			
	Frequen	cy (MHz)		2501	2547	2593	2639	2685	2496 ~ 2544.9	2545 ~ 2594.9	2595 ~ 2644.9	2645 ~ 269
	Cha	nnel		39700	40160	40620	41080	41540	39650 ~ 40139	40140 ~ 40639	40640 ~ 41139	41140 ~ 41590
		1	0	22.13	23.71	23.55	23.11	21.96	23.00	24.50	24.00	23.00
		1	25	22.00	23.62	23.53	23.14	22.02	23.00	24.50	24.00	23.00
		1	49	22.10	23.65	23.41	23.01	22.08	23.00	24.50	24.00	23.00
	QPSK	25	0	21.27	22.72	22.66	22.13	21.18	22.00	23.50	23.00	22.00
		25	12	21.17	22.78	22.86	22.12	21.17	22.00	23.50	23.00	22.00
		25	25	21.30	22.69	22.82	22.22	21.24	22.00	23.50	23.00	22.00
		50	0	21.22	22.74	22.72	22.27	21.11	22.00	23.50	23.00	22.00
		1	0	21.27	22.70	22.73	22.29	21.24	22.00	23.50	23.00	22.00
		1	25	21.25	22.83	22.73	22.19	21.33	22.00	23.50	23.00	22.00
		1	49	21.23	22.66	22.69	22.19	21.08	22.00	23.50	23.00	22.00
10	16-QAM	25	0	20.28	21.67	21.71	21.00	20.03	21.00	22.50	22.00	21.00
		25	12	20.37	21.83	21.82	21.09	20.21	21.00	22.50	22.00	21.00
		25	25	20.20	21.72	21.77	21.30	20.19	21.00	22.50	22.00	21.00
		50	0	20.33	21.80	21.79	21.32	20.05	21.00	22.50	22.00	21.00
		1	0	20.49	22.07	21.90	21.35	20.32	21.00	22.50	22.00	21.00
		1	25	20.32	21.97	21.97	21.35	20.24	21.00	22.50	22.00	21.00
		1	49	20.34	21.92	21.92	21.41	20.33	21.00	22.50	22.00	21.00
	64-QAM	25	0	19.36	20.98	20.88	20.43	19.37	20.00	21.50	21.00	20.00
		25	12	19.31	20.83	21.02	20.25	19.20	20.00	21.50	21.00	20.00
		25	25	19.33	20.74	20.95	20.33	19.36	20.00	21.50	21.00	20.00
		50	0	19.25	20.84	20.89	20.41	19.21	20.00	21.50	21.00	20.00
BW(Mhz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dBm)				wer + Max. ce (dBm)	
	Frequen	cy (MHz)		2498.5	2547.8	2593	2640.3	2687.5	2496 ~ 2544.9	2545 ~ 2594.9	2595 ~ 2644.9	2645 ~ 26
									39650~	40140 ~	40640~	41140~
	Cha	nnel		39675	40148	40620	41093	41565	40139	40639	41139	41140~
	1	1	0	22.12	23.69	23.61	23.03	22.16	23.00	24.50	24.00	23.00
		1	12	22.15	23.59	23.58	22.93	21.99	23.00	24.50	24.00	23.00
		1	24	22.11	23.55	23.58	23.09	22.03	23.00	24.50	24.00	23.00
	QPSK	12	0	21.21	22.74	22.75	22.17	21.12	22.00	23.50	23.00	22.00
	Q. O.t	12	6	21.21	22.72	22.72	22.12	21.16	22.00	23.50	23.00	22.00
		12	13	21.11	22.67	22.65	22.12	21.14	22.00	23.50	23.00	22.00
		25	0	21.19	22.62	22.72	22.11	21.17	22.00	23.50	23.00	22.00
		1	0	21.55	23.01	23.02	21.99	21.42	22.00	23.50	23.00	22.00
		1	12	21.39	22.89	22.88	22.06	21.38	22.00	23.50	23.00	22.00
		1	24	21.51	23.06	23.10	22.44	21.47	22.00	23.50	23.00	22.00
5	16-QAM	12	0	20.15	21.72	21.65	21.08	20.12	21.00	22.50	22.00	21.00
		12	6	20.17	21.72	21.72	21.13	20.17	21.00	22.50	22.00	21.00
		12	13	20.15	21.57	21.63	21.04	20.03	21.00	22.50	22.00	21.00
		25	0	20.23	21.68	21.69	21.18	20.13	21.00	22.50	22.00	21.00
		1	0	20.37	22.02	22.01	21.44	20.34	21.00	22.50	22.00	21.00
		1	12	20.34	21.89	21.91	21.37	20.21	21.00	22.50	22.00	21.00
		1	24	20.33	21.82	21.91	21.41	20.45	21.00	22.50	22.00	21.00
	64-QAM	12	0	19.34	20.84	20.88	20.37	19.41	20.00	21.50	21.00	20.00
		12	6	19.31	20.84	20.91	20.33	19.15	20.00	21.50	21.00	20.00
[]	12	13	19.32	20.71	20.80	20.40	19.30	20.00	21.50	21.00	20.00	
		25	0									

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 26 of 126

WLAN802.11 a/b/g/n/ac(20M/40M/80M) conducted power table:

	Main Antenna										
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)					
		1	2412		12.00	11.55					
		2	2417		15.00	14.82					
	802.11b	6	2437	1Mbps	15.00	14.80					
		10	2457		15.00	14.88					
		11	2462		12.00	11.75					
		1	2412		12.00	11.79					
		2	2417		15.00	14.75					
2450 MHz	802.11g	6	2437	6Mbps	15.00	14.54					
		10	2457		15.00	14.79					
		11	2462		12.00	11.84					
		1	2412		12.00	11.80					
		2	2417		15.00	14.72					
	802.11n20-HT0	6	2437	MCS0	15.00	14.54					
		10	2457		15.00	14.84					
		11	2462		12.00	11.90					

	Main Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
		36	5180		11.00	10.61				
	802.11a	44	5220	6Mbps	12.00	11.80				
		48	5240		12.00	11.71				
		36	5180		11.00	10.64				
	802.11n20-HT0	44	5220	MCS0	12.00	11.85				
		48	5240		12.00	11.80				
5.15-5.25 GHz		36	5180		11.00	10.60				
0.13-3.23 GHZ	802.11ac20-VHT0	44	5220	MCS0	12.00	11.76				
		48	5240		12.00	11.71				
	802.11n40-HT0	38	5190	MCS0	11.00	10.73				
	002.111140-1110	46	5230	WCSO	12.00	11.71				
	802.11ac40-VHT0	38	5190	MCS0	11.00	10.57				
	1002.11a040-VIII0	46	5230	IVICOU	12.00	11.66				
	802.11ac80-VHT0	42	5210	MCS0	12.00	11.85				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 27 of 126

		Ma	in Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		12.00	11.73
	802.11a	60	5300	6Mbps	12.00	11.55
		64	5320		11.00	10.58
		52	5260		12.00	11.76
	802.11n20-HT0	60	5300	MCS0	12.00	11.52
		64	5320		11.00	10.68
5.25-5.35 GHz		52	5260		12.00	11.68
0.23-3.33 GHZ	802.11ac20-VHT0	60	5300	MCS0	12.00	11.51
		64	5320		11.00	10.52
	802.11n40-HT0	54	5270	MCS0	12.00	11.66
	002.111140-1110	62	5310	IVICOU	11.00	10.77
	802.11ac40-VHT0	54	5270	MCS0	12.00	11.64
	1002.11ab40-V110	62	5310	IVICOU	11.00	10.80
	802.11ac80-VHT0	58	5290	MCS0	12.00	11.64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 28 of 126

Main Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
		100	5500		11.00	10.60			
	802.11a	116	5580	6Mbps	12.00	11.82			
	002.11a	140	5700	olvinhe	11.00	10.68			
		144	5720		12.00	11.71			
		100	5500		11.00	10.61			
	802.11n20-HT0	116	5580	MCS0	12.00	11.85			
	802.11N20-H10	140	5700	MCSU	11.00	10.64			
		144	5720		12.00	11.73			
	802.11ac20-VHT0	100	5500		11.00	10.64			
		116	5580	MCS0	12.00	11.74			
	002.118020-71110	140	5700	IVICOU	11.00	10.57			
5600 MHz		144	5720		12.00	11.70			
		102	5510		11.00	10.78			
	802.11n40-HT0	110	5550	MCS0	12.00	11.57			
	002.111140-1110	134	5670	WCSO	11.00	10.53			
		142	5710		12.00	11.79			
		102	5510		11.00	10.75			
	802.11ac40-VHT0	110	5550	MCS0	12.00	11.52			
	1002.11ac40-VIII0	134	5670	IVICOU	11.00	10.56			
		142	5710		12.00	11.69			
		106	5530		12.00	11.83			
	802.11ac80-VHT0	122	5610	MCS0	12.00	11.55			
		138	5690		12.00	11.91			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 29 of 126

		Mai	n Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		11.00	10.70
	802.11a	157	5785	6Mbps	12.00	11.75
		165	5825		11.00	10.78
		149	5745		11.00	10.62
	802.11n20-HT0	157	5785	MCS0	12.00	11.68
		165	5825		11.00	10.64
5800 MHz		149	5745		11.00	10.56
3600 MHZ	802.11ac20-VHT0	157	5785	MCS0	12.00	11.66
		165	5825		11.00	10.61
	802.11n40-HT0	151	5755	MCS0	11.00	10.50
	002.111140-1110	159	5795	IVICOU	11.00	10.53
	802 112c/0 \/UT0	151	5755	MCS0	11.00	10.48
	802.11ac40-VHT0	159	5795	IVICOU	11.00	10.57
	802.11ac80-VHT0	155	5775	MCS0	12.00	11.56

Bluetooth maximum power table:

Biaotootii	maximam	power tab					
Mode	Channel	Frequency	Average	Max. Rated Avg. Power + Max.			
	Chamilei	(MHz)	1Mbps	2Mbps	3Mbps	Tolerance (dBm)	
	CH 00	2402	9.35	7.12	7.04	12.6	
BR/EDR	CH 39	2441	10.61	7.78	7.73		
	CH 78	2480	2480 9.16 7.09		7.01		
Mode	Channel	Frequency	Average	Max. Rated Avg. Power + Max.			
iviode		(MHz)		Tolerance (dBm)			
	CH 00	2402					
LE	CH 19	2442		12.6			
	CH 39	2480					
	CH 00	2402					
LE_2M	CH 19	2442		5.78			
	CH 39	2480					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 30 of 126

BT_duty(2.88/3.75=0.768)
Center Freq 2.441000000 GHz

Trig: Free Run PNO: Fast #Atten: 30 dB IFGain:Low

Avg Type: Log-Pwr

TRACE 1 2 3 4 5 6
TYPE WWWWWWW
DET P N N N N N



MKR	MODE	TRC	SCL		X		Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	^
1	Δ2	1	t	(Δ)	2.880 ms	(Δ)	-0.02 dB				
2	F	1	t		2.310 ms	3	10.70 dBm				
3	Δ4	1	t	(Δ)	3.750 ms	(Δ)	0.00 dB				
4	F	1	t		2.310 ms	3	10.70 dBm				
5											
6											
7											
8											
9											
10											
11											~
<										>	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 31 of 126

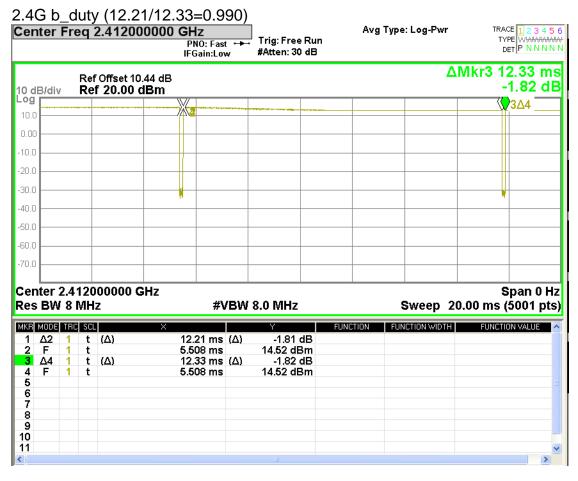


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 32 of 126

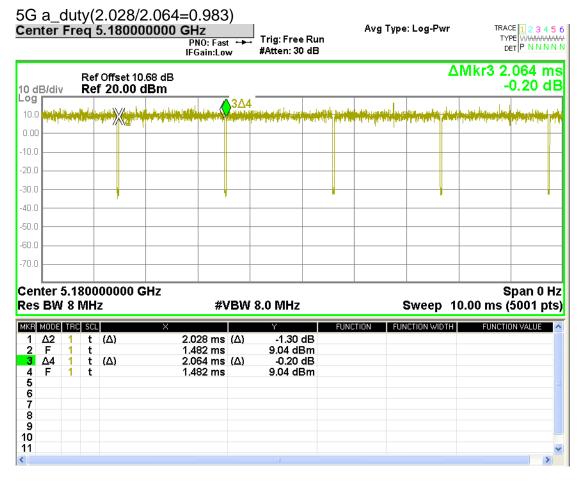


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华红用摄影测过之样只有含,同时叶梯只展展现的元子。大数华土模太从司隶而连订,不可如以推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Talwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 33 of 126

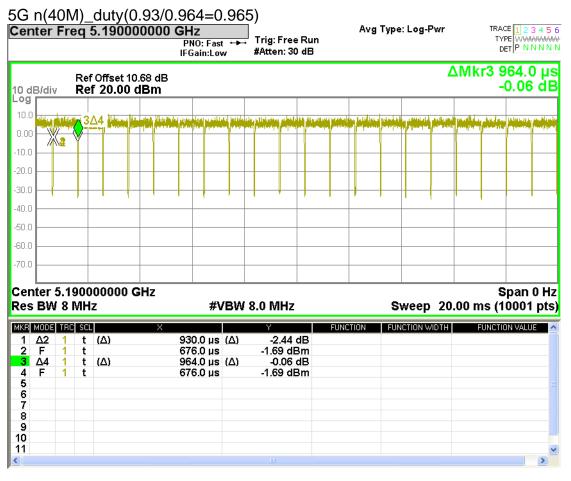

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Page: 34 of 126

 $\begin{array}{c} \text{5G ac(80M)_duty}(0.456/0.492=0.927) \\ \hline \textbf{Center Freq 5.210000000 GHz} \\ \hline & PN0: Fast \longrightarrow \\ \text{IFGain:Low} \end{array} \\ \begin{array}{c} \text{Trig: Free Run} \\ \text{\#Atten: 30 dB} \end{array}$

Avg Type: Log-Pwr

TRACE 1 2 3 4 5 6 TYPE WWWWWWWW DET P N N N N N

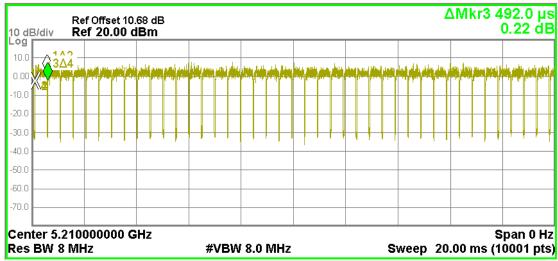

MKR	MODE	TRC	SCL		X		Υ	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	^
1	Δ2	1	t	(Δ)	456.0 µs	(A)	4.19 dB				
2	F	1	t		120.0 µs		-2.26 dBm				
3	Δ4	1	t	(Δ)	492.0 µs	(Δ)	0.22 dB				
4	F	1	t		120.0 µs		-2.26 dBm				
5											
6											
7											
8											
9											
10											
11											~
<											>

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時此樣是僅早留的子。木報生去經太公司惠面許可,不可製公詢則。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

S Taiwan Ltd. _I No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 35 of 126

1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

- 1. The EUT is controlled by using a Radio Communication Tester (MT8820C), and the communication between the EUT and the tester is established by air link.
- 2. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.
- 3. During the SAR testing, the DASY 5 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- 4. SAR test reduction for GPRS mode is determined by the source-based time-averaged output power. The data mode with highest specified time-averaged output power should be tested for SAR compliance.
- 5. The 3G SAR test reduction procedure is applied to HSDPA with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSDPA) is $\leq \frac{1}{4}$ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSDPA).

Sub-test	βε	βα	βd (SF)	βο/βα	β _{HS} ⁽¹⁾⁽²⁾	CM ⁽³⁾ (dB)	MPR ⁽³⁾ (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	12/15 ⁽⁴⁾	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK,} Δ_{NACK} and Δ_{COI} = 30/15 with β_{HS} = 30/15 * β_C.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15$ * β_{c} , and $\Delta_{CGI} = 30/15$ * β_{c} and $\beta_{$ 24/15 with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for β_d/β_d = 12/15, β_{HS}/β_c = 24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 11/15 and β_d = 15/15.

6. The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSPA) is $\leq \frac{1}{4}$ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSPA).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 36 of 126

Sub-test	βο	βd	β _d (SF)	β _c /β _d	β _{HS} (1)	βες	β _{ed} (4)(5)	β _{ed} (SF)	β _{ed} (Codes)	CM (2) (dB)	MPR (2)(6) (dB)	AG (5) Index	E-TFCI
1	11/15 (3)	15/15 ⁽³⁾	64	11/15 (3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	βed1: 47/15 βed2: 47/15		2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

7. LTE modes test according to KDB 941225D05v02r05.

- a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.
- Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise. SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.
- When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel. b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation
- The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
- c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation
- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are \leq 0.8 W/kg.
- Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also
- d. Per Section 5.2.4, Higher order modulations
- For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is >

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

Note 1: For sub-test 1 to 4, Δαρκ, Δαρκ, αναρα and Δροι = 30/15 with β_{HS} = 30/15 * β_E. For sub-test 5, Δαρκ, Δαρκ, Δαρκ and Δροι = 5/15 with β_{HS} = 5/15 * β_E.

Note 2: CM = 1 for β₂/β_d = 12/15, β_{HS}β_e = 24/15. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM. difference.

Note 3: For subtest 1 the 🕫 a ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_e = 10/15$ and $\beta_d = 15/15$.

lote 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g

Note 5: βed can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values



Page: 37 of 126

½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

- e. Per Section 5.3, other channel bandwidth standalone SAR test requirements
- For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.
- TDD LTE was tested at highest duty factor using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

WLAN

802.11b DSSS SAR Test Requirements:

- 8. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 9. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

10. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Initial Test Configuration:

11. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 38 of 126

highest maximum output power specified for production units in each standalone and aggregated frequency band.

- 12. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 13. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.
- 14. According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is \leq 0.8 W/kg, when the transmission band is \leq 100MHz.
- 15. According to **KDB865664D01v01r04**, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此觀些廷里僅對理試之樣是負責,同時此樣是僅保留的子。太觀些去經太公司事而許可,不可類於複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


台灣檢驗科技股份有限公司




Page: 39 of 126

1.6 Positioning Procedure

Head SAR measurement statement

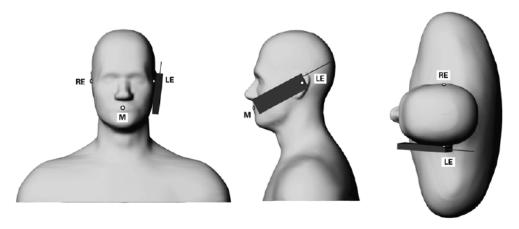

Phone position 1, "cheek" or "touch" position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

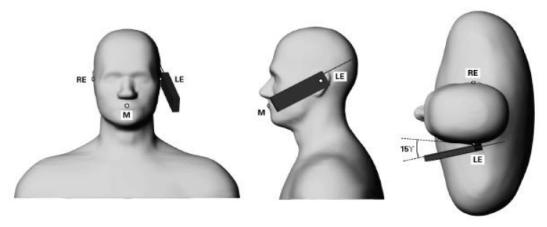

Phone position 2, "tilted position." The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

Cheek/Touch Position:

The handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.

Ear/Tilt Position:

With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华红用摄影测验之样只有含,同既此样只属风风风干。大规华工概太八司隶而连可,太可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwali Eta.



Page: 40 of 126

Body SAR measurement statement

1. Body-worn exposure: 10mm

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

2. Hotspot exposure: 10mm

A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge when the form factor of a handset is larger than 9 cm x 5 cm.

- Phablet SAR test consideration
 - When the device is a phablet (overall diagonal dimension > 16.0 cm), the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for product specific 10-g SAR. Since the device is not a phablet, product specific 10-g SAR is not required.
- 4. Based on KDB941225D06v02r01, the hotspot mode and body-worn accessory SAR test configurations may overlap for handsets. When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations. For WCDMA / LTE / WLAN, since the maximum power is the same between body-worn and hotspot mode, and the test distance of hotspot mode is the same with that of body-worn mode, hotspot mode SAR is used to support body-worn SAR. For GSM850/1900, since the wireless mode transmission configurations is different between body-worn and hotspot mode, body-worn SAR is performed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.sqs.com.tw



Page: 41 of 126

1.7 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- 3. The generation of a high-resolution mesh within the measured volume.
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid.
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans.

The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations up and the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 42 of 126

the moved around until the highest averaged SAR is found.

If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. _I No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 43 of 126

1.8 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.8.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($_{\delta T} /_{\delta t}$) in the liquid.

$$SAR = C \frac{\delta T}{\delta t}$$
,

Whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

1. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations up and the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 www.sqs.com.tw



Page: 44 of 126

small.

2. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.

- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- 4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about ±10% (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is ±5% (RSS) when the same liquid is used for the calibration and for actual measurements and ±7-9% (RSS) when not, which is in good agreement with the estimates given in [2].

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 45 of 126

1.8.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- 1. The setup must enable accurate determination of the incident power.
- 2. The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- Due to the small wavelength in liquids with high permittivity, even small setups
 might be above the resonant cutoff frequencies. The field distribution in the
 setup must be carefully checked for conformity with the theoretical field
 distribution.

References

- (1) N. Kuster, Q. Balzano, and J.C. Lin, Eds., *Mobile Communications Safety*, Chapman & Hall, London, 1997.
- (2) K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", *IEEE Transactions on Microwave Theory and Techniques*, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- (3) K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", *IEEE Transactions on Instrumentation and Measurements*, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华红用摄影测验之样只有含,同既此样只属风风风干。大规华工概太八司隶而连可,太可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 46 of 126

1.9 The SAR Measurement System

A block diagram of the SAR measurement system is given in Fig. a. This SAR measurement system uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). Model EX3DV4 field probes are used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|2)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

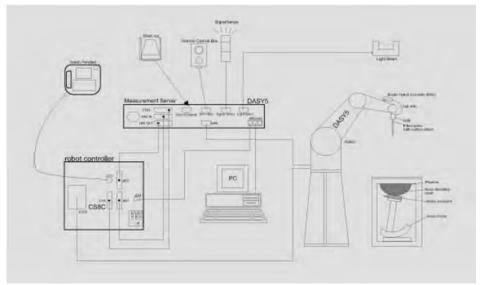


Fig. a A block diagram of the SAR measurement system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 47 of 126

The DASY 5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows7
- 8. DASY 5 software.
- 9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- 10. The SAM twin phantom enabling testing left-hand and right-hand usage.
- 11. The device holder for handheld mobile phones.
- 12. Tissue simulating liquid mixed according to the given recipes.
- 13. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此觀些廷里僅對理試之樣是負責,同時此樣是僅保留的子。太觀些去經太公司事而許可,不可類於複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 48 of 126

1.10 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL750/835/1900/2450/2600/5200/5300/ 5600/5800 MHz Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz, Linearity: ± 0.6 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic	$10 \mu W/g \text{ to > } 100 \text{ mW/g}$
Range	Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Tip diameter: 2.5 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 49 of 126

Phantom

Model	Twin SAM
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Height: 850 mm; Length: 1000 mm; Width: 500 mm

DEVICE HOLDER

Construction	In combination with the Twin SAM Phantom	
	V4.0/V4.0C or Twin SAM, the Mounting	
	Device (made from POM) enables the	
	rotation of the mounted transmitter in	
	spherical coordinates, whereby the rotation	
	point is the ear opening. The devices can	
	be easily and accurately positioned	
	according to IEC, IEEE, CENELEC, FCC or	
	other specifications. The device holder can	
	be locked at different phantom locations	
	(left head, right head, flat phantom).	



Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 50 of 126

1.11 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% (according to KDB865664D01) from the target SAR values. These tests were done at 750/835/1900/2450/2600/5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. During the tests, the liquid depth above the ear reference points was above 15 cm (≤3G) or 10 cm (>3G) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

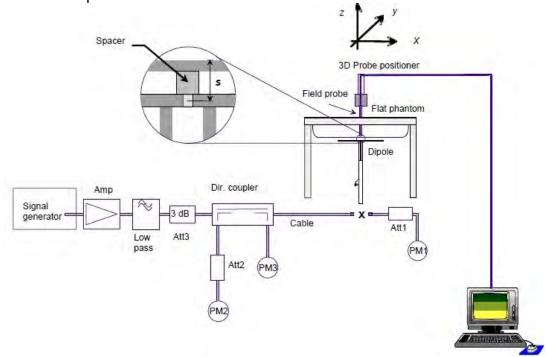


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 51 of 126

Validation Kit	S/N	Frequency (MHz)				1W Target SAR-1g (mW/g)	pin=250mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D750V3	1015	750	Head	8.48	2.14	8.56	0.94%	Dec, 16, 2020		
D835V2	4d063	835	Head	9.52	2.39	9.56	0.42%	Dec, 17, 2020		
D1900V2	5d173	1900	Head	39.4	9.76	39.04	-0.91%	Dec, 18, 2020		
D2450V2	727	2450	Head	52.6	13.20	52.80	0.38%	Dec, 19, 2020		
				57.3	14.60	58.40	1.92%	Dec, 19, 2020		
D2600V2	1005	2600	Head	57.3	14.70	58.80	2.62%	Dec, 20, 2020		
				57.3	14.90	59.60	4.01%	Dec, 21, 2020		
Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	pin=100mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date		
	1023	5200	Head	80.1	8.14	81.40	1.62%	Dec, 20, 2020		
D5GHzV2	1023	5300	Head	82.8	8.39	83.90	1.33%	Dec, 20, 2020		
D3G112V2	1023	5600	Head	83.1	8.23	82.30	-0.96%	Dec, 21, 2020		
	1023	5800	Head	81.4	8.07	80.70	-0.86%	Dec, 21, 2020		

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless untermine states are results shown in this east report completely considered and so completely considered and considered an documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 52 of 126

1.12 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the flat section of the phantom was at least 15 cm (≤3G) or 10 cm (>3G) during all tests. (Appendix Fig.

2)

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, Er	Measured Conductivity, σ (S/m)	% dev ɛr	% dev σ
		704	42.181	0.890	42.607	0.894	1.01%	0.47%
		707.5	42.162	0.890	42.597	0.895	1.03%	0.55%
	Dec, 16. 2020	709	42.155	0.890	42.568	0.897	0.98%	0.77%
	Dec, 16. 2020	710	42.149	0.890	42.559	0.898	0.97%	0.87%
		711	42.144	0.890	42.557	0.899	0.98%	0.97%
		750	41.942	0.893	42.365	0.900	1.01%	0.74%
		824.2	41.556	0.899	41.922	0.903	0.88%	0.43%
		826.4	41.545	0.899	41.902	0.905	0.86%	0.63%
		829	41.531	0.900	41.892	0.906	0.87%	0.72%
		835	41.500	0.900	41.874	0.907	0.90%	0.78%
	Dec, 17. 2020	836.5	41.500	0.902	41.844	0.908	0.83%	0.71%
		836.6	41.500	0.902	41.844	0.909	0.83%	0.81%
		844	41.500	0.910	41.843	0.917	0.83%	0.80%
		846.6	41.500	0.912	41.840	0.920	0.82%	0.82%
		848.8	41.500	0.915	41.834	0.922	0.80%	0.78%
Head		1850.2	40.000	1.400	39.890	1.383	-0.27%	-1.21%
пеац	Dec 10 2020	1880	40.000	1.400	39.886	1.385	-0.28%	-1.07%
	Dec, 18. 2020	1900	40.000	1.400	39.881	1.387	-0.30%	-0.93%
		1909.8	40.000	1.400	39.877	1.388	-0.31%	-0.86%
		2441	39.216	1.792	38.824	1.770	-1.00%	-1.23%
	Dec, 19. 2020	2450	39.200	1.800	38.804	1.778	-1.01%	-1.22%
		2457	39.191	1.808	38.799	1.787	-1.00%	-1.14%
		2580	39.035	1.942	39.253	1.940	0.56%	-0.09%
	Dec 10 2020	2595	39.015	1.958	39.243	1.956	0.58%	-0.11%
	Dec, 19. 2020	2600	39.009	1.964	39.239	1.962	0.59%	-0.08%
		2610	38.996	1.975	39.219	1.972	0.57%	-0.13%
		2506	39.129	1.861	39.344	1.859	0.55%	-0.11%
		2549.5	39.073	1.909	39.304	1.908	0.59%	-0.03%
	Dec 20 2020	2593	39.018	1.956	39.268	1.955	0.64%	-0.05%
	Dec, 20. 2020	2600	39.009	1.964	39.255	1.963	0.63%	-0.03%
		2636.5	38.963	2.003	39.193	2.001	0.59%	-0.12%
		2680	38.907	2.051	39.137	2.049	0.59%	-0.09%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有的证明,所谓生结里痛對测计之緣具有書,同時所撰具備程度的手,不可無的複數。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 53 of 126

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, Er	Target Conductivity, σ (S/m)	Measured Dielectric Constant, Er	Measured Conductivity, σ (S/m)	% dev ɛr	% dev σ
		2506	39.129	1.861	39.367	1.858	0.61%	-0.17%
		2549.5	39.073	1.909	39.296	1.907	0.57%	-0.08%
	Doc 21 2020	2593	39.018	1.956	39.237	1.953	0.56%	-0.15%
	Dec, 21. 2020	2600	39.009	1.964	39.224	1.961	0.55%	-0.13%
		2636.5	38.963	2.003	39.212	2.002	0.64%	-0.07%
		2680	38.907	2.051	39.121	2.049	0.55%	-0.09%
Hood		5200	35.986	4.655	35.631	4.597	-0.99%	-1.25%
Head	Doc 20 2020	5210	35.974	4.665	35.629	4.610	-0.96%	-1.18%
	Dec, 20. 2020	5290	35.883	4.747	35.538	4.689	-0.96%	-1.23%
		5300	35.871	4.758	35.498	4.701	-1.04%	-1.19%
		5600	35.529	5.065	35.173	5.006	-1.00%	-1.16%
	Dec, 21. 2020	5690	35.426	5.157	35.086	5.094	-0.96%	-1.23%
		5775	35.329	5.244	34.986	5.182	-0.97%	-1.19%
		5800	35.300	5.270	34.947	5.208	-1.00%	-1.18%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生红用攝影測建立幾只有書,同時此幾旦萬風宛の干。大報生土極大公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 54 of 126

The composition of the tissue simulating liquid:

The composition of the needs chinalating liquid.											
Frequency (MHz)			Total								
	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount			
750	Head	_	532.98 g	18.3 g	2.4 g	3.2 g	766 g	1.3L(Kg)			
850	Head	_	532.98 g	18.3 g	2.4 g	3.2 g	766 g	1.3L(Kg)			
1900	Head	444.52 g	552.42 g	3.06 g	-	ı	_	1.0L(Kg)			
2450	Head	550ml	450ml	_	_	_	_	1.0L(Kg)			
2600	Head	550ml	450ml	_	_	_	_	1.0L(Kg)			

Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for tissue simulating liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 55 of 126

1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter.

Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

1. Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over a 10 grams of tissue (defined as a tissue volume in the shape of a cube).

Occupational/Controlled limits apply when persons are exposed as consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

2. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 56 of 126

Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube).

General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure.

Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .6)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/kg	8.00 W/kg
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 4. RF exposure limits

Notes:

- Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 57 of 126

2. Summary of Results

2.1 Decision rules

Reported measurement data comply with IEEE 1528-2013: Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.2 Summary of Results

GSM 850

Mode	Position	Distance	СН	CH Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S	Plot	
		(mm)		(MHz)	Tolerance (dBm)	(dBm)		,		page
					, ,	, ,		Measured	Reported	
	Re Cheek	-	128	824.2	33.50	32.91	114.55%	0.17	0.19	83
	Re Cheek	-	190	836.6	33.50	32.34	130.62%	0.15	0.20	-
Head	Re Cheek	-	251	848.8	33.50	32.41	128.53%	0.16	0.21	-
(GSM)	Re Tilt	-	128	824.2	33.50	32.91	114.55%	0.09	0.10	-
	Le Cheek	-	128	824.2	33.50	32.91	114.55%	0.15	0.17	-
Body-worn	Le Tilt	-	128	824.2	33.50	32.91	114.55%	0.07	0.08	-
	Front side	10	128	824.2	33.50	32.91	114.55%	0.13	0.15	84
Body-worn	Front side	10	190	836.6	33.50	32.34	130.62%	0.12	0.16	-
(GSM)	Front side	10	251	848.8	33.50	32.41	128.53%	0.12	0.15	-
	Back side	10	128	824.2	33.50	32.91	114.55%	0.11	0.13	-
	Front side	10	251	848.8	28.50	27.31	131.52%	0.09	0.12	-
	Back side	10	251	848.8	28.50	27.31	131.52%	0.08	0.11	-
	Top side	10	251	848.8	28.50	27.31	131.52%	0.00	0.00	-
Hotspot (GPRS)	Bottom side	10	251	848.8	28.50	27.31	131.52%	0.11	0.14	-
<1Dn4Up>	Right side	10	128	824.2	28.50	27.23	133.97%	0.37	0.50	85
	Right side	10	190	836.6	28.50	27.27	132.74%	0.26	0.35	-
	Right side	10	251	848.8	28.50	27.31	131.52%	0.18	0.24	-
	Left side	10	251	848.8	28.50	27.31	131.52%	0.08	0.11	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分換具有害,同時他幾乎區程內的子。木都些主權大公司事而雖可,不可如以複制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 58 of 126

GSM 1900

Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		Plot page
					,	(* /		Measured	Reported	
	Re Cheek	-	512	1850.2	30.50	29.95	113.50%	0.06	0.07	-
	Re Cheek	-	661	1880	30.50	29.85	116.14%	0.06	0.07	-
Head	Re Cheek	-	810	1909.8	30.50	29.83	116.68%	0.07	0.08	86
(GSM)	Re Tilt	-	512	1850.2	30.50	29.95	113.50%	0.02	0.02	-
	Le Cheek	-	512	1850.2	30.50	29.95	113.50%	0.03	0.03	-
Body-worn (GSM)	Le Tilt	-	512	1850.2	30.50	29.95	113.50%	0.03	0.03	-
	Front side	10	512	1850.2	30.50	29.95	113.50%	0.21	0.24	-
Body-worn	Front side	10	661	1880	30.50	29.85	116.14%	0.21	0.24	-
(GSM)	Front side	10	810	1909.8	30.50	29.83	116.68%	0.21	0.25	87
	Back side	10	512	1850.2	30.50	29.95	113.50%	0.20	0.23	-
	Front side	10	512	1850.2	25.50	24.14	136.77%	0.19	0.26	-
	Back side	10	512	1850.2	25.50	24.14	136.77%	0.12	0.16	-
	Top side	10	512	1850.2	25.50	24.14	136.77%	0.02	0.03	-
Hotspot (GPRS)	Bottom side	10	512	1850.2	25.50	24.14	136.77%	0.41	0.56	-
<1Dn4Up>	Bottom side	10	661	1880	25.50	23.98	141.91%	0.40	0.57	-
	Bottom side	10	810	1909.8	25.50	23.97	142.23%	0.44	0.63	88
	Right side	10	512	1850.2	25.50	24.14	136.77%	0.03	0.04	-
	Left side	10	512	1850.2	25.50	24.14	136.77%	0.07	0.10	-

WCDMA Band V

Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		Plot page
					roioidiloo (d2iii)	(42)		Measured	(W/kg) ad Reported 0.24 0.24 0.28 0.10 0.23 0.13 0.24 0.21 0.24 0.21 0.24 0.21 0.20 0.21 0.21 0.23	
	RE Cheek	-	4132	826.4	25.00	24.37	115.61%	0.21	0.24	-
	RE Cheek	-	4183	836.6	25.00	24.36	115.88%	0.21	0.24	-
R99	RE Cheek	-	4233	846.6	25.00	24.39	115.08%	0.24	0.28	89
(Head)	RE Tilt	-	4233	846.6	25.00	24.39	115.08%	0.09	0.10	-
	LE Cheek	-	4233	846.6	25.00	24.39	115.08%	0.20	0.23	-
	LE Tilt	-	4233	846.6	25.00	24.39	115.08%	0.11	0.13	-
Pady Warn	Front side	10	4233	846.6	25.00	24.39	115.08%	0.21	0.24	-
Body-Worn	Back side	10	4233	846.6	25.00	24.39	115.08%	0.18	0.21	-
	Front side	10	4233	846.6	25.00	24.39	115.08%	0.21	0.24	-
	Back side	10	4233	846.6	25.00	24.39	115.08%	0.18	0.21	-
	Top side	10	4233	846.6	25.00	24.39	115.08%	0.01	0.01	-
Hotopot	Bottom side	10	4233	846.6	25.00	24.39	115.08%	0.20	0.23	-
Hotspot	Right side	10	4132	826.4	25.00	24.37	115.61%	0.46	0.53	90
	Right side	10	4183	836.6	25.00	24.36	115.88%	0.42	0.49	-
	Right side	10	4233	846.6	25.00	24.39	115.08%	0.35	0.40	-
	Left side	10	4233	846.6	25.00	24.39	115.08%	0.18	0.21	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 59 of 126

LTE FDD Band 5

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S. (W/I		Plot page
									Tolerance (abin)	(dDill)		Measured	Reported	
					RE Cheek	-	20525	836.5	24.00	23.40	114.82%	0.18	0.21	-
				0	RE Tilt	-	20525	836.5	24.00	23.40	114.82%	0.06	0.07	-
			1 RB	0	LE Cheek	-	20525	836.5	24.00	23.40	114.82%	0.17	0.20	-
			IKD		LE Tilt	-	20525	836.5	24.00	23.40	114.82%	0.06	0.07	-
				25	RE Cheek		20600	844	24.00	23.28	118.03%	0.22	0.26	91
				49	RE Cheek	-	20450	829	24.00	23.37	115.61%	0.18	0.21	-
Head	10MHz	QPSK			RE Cheek	-	20525	836.5	23.00	22.32	116.95%	0.14	0.16	-
ricau	TOWNIZ	Qi Sik	25 RB	12	RE Tilt	-	20525	836.5	23.00	22.32	116.95%	0.05	0.06	-
			23 KB	12	LE Cheek	-	20525	836.5	23.00	22.32	116.95%	0.12	0.14	-
					LE Tilt	-	20525	836.5	23.00	22.32	116.95%	0.04	0.05	-
					RE Cheek	-	20450	829	23.00	22.25	118.85%	0.14	0.17	-
			50) RB	RE Tilt	-	20450	829	23.00	22.25	118.85%	0.04	0.05	-
			30	ND	LE Cheek	-	20450	829	23.00	22.25	118.85%	0.11	0.13	-
					LE Tilt	-	20450	829	23.00	22.25	118.85%	0.04	0.05	-
Body-worn	10MHz	QPSK	1RB	0	Front side	10	20525	836.5	24.00	23.40	114.82%	0.16	0.18	-
bouy-woili	TOWINZ	QFSK	IND	0	Back side	10	20525	836.5	24.00	23.40	114.82%	0.15	0.17	-
					Front side	10	20525	836.5	24.00	23.40	114.82%	0.16	0.18	-
					Back side	10	20525	836.5	24.00	23.40	114.82%	0.15	0.17	-
				0	Top side	10	20525	836.5	24.00	23.40	114.82%	0.01	0.01	-
			1 RB	0	Bottom side	10	20525	836.5	24.00	23.40	114.82%	0.19	0.22	-
			IKD		Right side	10	20525	836.5	24.00	23.40	114.82%	0.34	0.39	92
					Left side	10	20525	836.5	24.00	23.40	114.82%	0.16	0.18	-
				25	Right side	10	20600	844	24.00	23.28	118.03%	0.25	0.30	-
				49	Right side	10	20450	829	24.00	23.37	115.61%	0.30	0.35	-
					Front side	10	20525	836.5	23.00	22.32	116.95%	0.11	0.13	-
Hatanat	10MHz	QPSK			Back side	10	20525	836.5	23.00	22.32	116.95%	0.11	0.13	-
Hotspot	TUIVINZ	QPSK	25 RB	25	Top side	10	20525	836.5	23.00	22.32	116.95%	0.01	0.01	-
			25 KB	25	Bottom side	10	20525	836.5	23.00	22.32	116.95%	0.15	0.18	-
					Right side	10	20525	836.5	23.00	22.32	116.95%	0.23	0.27	-
					Left side	10	20525	836.5	23.00	22.32	116.95%	0.10	0.12	-
					Front side	10	20450	829	23.00	22.25	118.85%	0.10	0.12	-
					Back side	10	20450	829	23.00	22.25	118.85%	0.10	0.12	-
				N DD	Top side	10	20450	829	23.00	22.25	118.85%	0.01	0.01	-
			50) RB	Bottom side	10	20450	829	23.00	22.25	118.85%	0.16	0.19	-
					Right side	10	20450	829	23.00	22.25	118.85%	0.26	0.31	-
					Left side	10	20450	829	23.00	22.25	118.85%	0.11	0.13	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 60 of 126

LTE FDD Band 12

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/		Plot page
										(==)		Measured	Reported	
				0	RE Cheek	-	23130	711	24.00	23.53	111.43%	0.13	0.14	-
					RE Cheek	-	23060	704	24.00	23.44	113.76%	0.14	0.16	-
			1 RB		RE Cheek	-	23095	707.5	24.00	23.89	102.57%	0.15	0.15	93
			IKD	49	RE Tilt	-	23095	707.5	24.00	23.89	102.57%	0.05	0.05	-
					LE Cheek	-	23095	707.5	24.00	23.89	102.57%	0.13	0.13	-
					LE Tilt	-	23095	707.5	24.00	23.89	102.57%	0.08	0.08	-
Head	10MHz	QPSK			RE Cheek	-	23130	711	23.00	22.44	113.76%	0.13	0.15	-
ricaa	TOWNIE	Qi Oit	25 RB	25	RE Tilt	-	23130	711	23.00	22.44	113.76%	0.04	0.05	-
			23 ND	25	LE Cheek	-	23130	711	23.00	22.44	113.76%	0.11	0.13	-
					LE Tilt	-	23130	711	23.00	22.44	113.76%	0.05	0.06	-
					RE Cheek	-	23095	707.5	23.00	22.41	114.55%	0.12	0.14	-
			50) RB	RE Tilt	-	23095	707.5	23.00	22.41	114.55%	0.03	0.03	-
			30	/ IND	LE Cheek	-	23095	707.5	23.00	22.41	114.55%	0.10	0.11	-
					LE Tilt	-	23095	707.5	23.00	22.41	114.55%	0.04	0.05	-
Body-worn	10MHz	QPSK	1RB	49	Front side	10	23095	707.5	24.00	23.89	102.57%	0.17	0.17	-
ouy-woiii	TOWINZ	QFSK	IND	49	Back side	10	23095	707.5	24.00	23.89	102.57%	0.15	0.15	
				0	Right side	10	23130	711	24.00	23.53	111.43%	0.20	0.22	9
					Front side	10	23095	707.5	24.00	23.89	102.57%	0.17	0.17	-
					Back side	10	23095	707.5	24.00	23.89	102.57%	0.15	0.15	-
			1 RB		Top side	10	23095	707.5	24.00	23.89	102.57%	0.01	0.01	-
			IKD	49	Bottom side	10	23095	707.5	24.00	23.89	102.57%	0.07	0.07	-
					Right side	10	23060	704	24.00	23.44	113.76%	0.20	0.23	-
					Right side	10	23095	707.5	24.00	23.89	102.57%	0.19	0.19	-
					Left side	10	23095	707.5	24.00	23.89	102.57%	0.14	0.14	-
					Front side	10	23130	711	23.00	22.44	113.76%	0.13	0.15	-
Hatan at	401415	QPSK			Back side	10	23130	711	23.00	22.44	113.76%	0.12	0.14	-
Hotspot	10MHz	QPSK	25 RB	25	Top side	10	23130	711	23.00	22.44	113.76%	0.00	0.00	-
			25 KB	25	Bottom side	10	23130	711	23.00	22.44	113.76%	0.06	0.07	-
					Right side	10	23130	711	23.00	22.44	113.76%	0.16	0.18	-
					Left side	10	23130	711	23.00	22.44	113.76%	0.11	0.13	-
				•	Front side	10	23095	707.5	23.00	22.41	114.55%	0.13	0.15	-
					Back side	10	23095	707.5	23.00	22.41	114.55%	0.12	0.14	Ι.
					Top side	10	23095	707.5	23.00	22.41	114.55%	0.00	0.00	
			50) RB	Bottom side	10	23095	707.5	23.00	22.41	114.55%	0.05	0.06	-
					Right side	10	23095	707.5	23.00	22.41	114.55%	0.16	0.18	١.
					Left side	10	23095	707.5	23.00	22.41	114.55%	0.11	0.13	Ι.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 61 of 126

LTE FDD Band 17

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S. (W/I		Plot page
									roloidilee (dBiil)	(GDIII)		Measured	Reported	
				0	RE Cheek	-	23800	711	24.00	23.34	116.41%	0.14	0.16	-
				25	RE Cheek	-	23780	709	24.00	23.32	116.95%	0.14	0.16	-
			1 RB		RE Cheek	-	23790	710	24.00	23.49	112.46%	0.15	0.17	95
			IND	49	RE Tilt	-	23790	710	24.00	23.49	112.46%	0.09	0.10	-
				49	LE Cheek	-	23790	710	24.00	23.49	112.46%	0.13	0.15	-
					LE Tilt	-	23790	710	24.00	23.49	112.46%	0.08	0.09	-
Head	10MHz	QPSK			RE Cheek	-	23790	710	23.00	22.46	113.24%	0.12	0.14	-
ricau	TOWNIZ	Qi Sit	25 RB	25	RE Tilt	-	23790	710	23.00	22.46	113.24%	0.06	0.07	-
			23 KB	25	LE Cheek	-	23790	710	23.00	22.46	113.24%	0.11	0.12	-
					LE Tilt	-	23790	710	23.00	22.46	113.24%	0.05	0.06	-
					RE Cheek	-	23780	709	23.00	22.32	116.95%	0.12	0.14	-
			50) RB	RE Tilt	-	23780	709	23.00	22.32	116.95%	0.05	0.06	-
			30	IND	LE Cheek	-	23780	709	23.00	22.32	116.95%	0.10	0.12	
					LE Tilt	-	23780	709	23.00	22.32	116.95%	0.05	0.06	
Body-worn	10MHz	QPSK	1RB	49	Front side	10	23790	710	24.00	23.49	112.46%	0.17	0.19	
ouy-woni	TOWNIZ	QI SIX	III	43	Back side	10	23790	710	24.00	23.49	112.46%	0.15	0.17	
				0	Right side	10	23800	711	24.00	23.34	116.41%	0.23	0.27	
				25	Right side	10	23780	709	24.00	23.32	116.95%	0.24	0.28	9
					Front side	10	23790	710	24.00	23.49	112.46%	0.17	0.19	-
			1 RB		Back side	10	23790	710	24.00	23.49	112.46%	0.15	0.17	
			1 KB	40	Top side	10	23790	710	24.00	23.49	112.46%	0.01	0.01	-
				49	Bottom side	10	23790	710	24.00	23.49	112.46%	0.06	0.07	-
					Right side	10	23790	710	24.00	23.49	112.46%	0.19	0.21	
					Left side	10	23790	710	24.00	23.49	112.46%	0.14	0.16	-
					Front side	10	23790	710	23.00	22.46	113.24%	0.13	0.15	-
		0001			Back side	10	23790	710	23.00	22.46	113.24%	0.12	0.14	-
Hotspot	10MHz	QPSK	05 DD	05	Top side	10	23790	710	23.00	22.46	113.24%	0.00	0.00	-
			25 RB	25	Bottom side	10	23790	710	23.00	22.46	113.24%	0.05	0.06	-
					Right side	10	23790	710	23.00	22.46	113.24%	0.20	0.23	
					Left side	10	23790	710	23.00	22.46	113.24%	0.11	0.12	-
					Front side	10	23780	709	23.00	22.32	116.95%	0.13	0.15	-
					Back side	10	23780	709	23.00	22.32	116.95%	0.12	0.14	١.
				, DD	Top side	10	23780	709	23.00	22.32	116.95%	0.00	0.00	١.
			50) RB	Bottom side	10	23780	709	23.00	22.32	116.95%	0.05	0.06	-
					Right side	10	23780	709	23.00	22.32	116.95%	0.19	0.22	-
					Left side	10	23780	709	23.00	22.32	116.95%	0.11	0.13	Ι.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 62 of 126

LTE TDD Band 38

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S. (W/		Plot page
									rolorance (abiii)	(GDIII)		Measured	Reported	
				0	RE Cheek	-	38000	2595	24.00	23.28	118.03%	0.08	0.09	-
					RE Cheek	-	37850	2580	24.00	23.34	116.41%	0.09	0.10	97
			1 RB		RE Cheek	-	38150	2610	24.00	23.20	120.23%	0.08	0.10	-
			IKD	99	RE Tilt	-	37850	2580	24.00	23.34	116.41%	0.04	0.05	-
					LE Cheek	-	37850	2580	24.00	23.34	116.41%	0.04	0.05	-
					LE Tilt	-	37850	2580	24.00	23.34	116.41%	0.02	0.02	-
Head	20MHz	QPSK			RE Cheek	-	37850	2580	23.00	22.32	116.95%	0.06	0.07	-
пеаи	ZUIVINZ	QFSK	50 RB	0	RE Tilt	-	37850	2580	23.00	22.32	116.95%	0.02	0.02	-
			30 KB	0	LE Cheek	-	37850	2580	23.00	22.32	116.95%	0.04	0.05	-
					LE Tilt	-	37850	2580	23.00	22.32	116.95%	0.01	0.01	-
					RE Cheek	-	37850	2580	23.00	22.25	118.85%	0.06	0.07	-
			10	0 RB	RE Tilt	-	37850	2580	23.00	22.25	118.85%	0.02	0.02	-
			10	UND	LE Cheek	-	37850	2580	23.00	22.25	118.85%	0.04	0.05	-
					LE Tilt	-	37850	2580	23.00	22.25	118.85%	0.01	0.01	-
Body-worn	10MHz	QPSK	1RB	99	Front side	10	37850	2580	24.00	23.34	116.41%	0.25	0.29	-
Bouy-woili	TOWINZ	QFSK	IND	99	Back side	10	37850	2580	24.00	23.34	116.41%	0.17	0.20	-
				0	Bottom side	10	38000	2595	24.00	23.28	118.03%	0.29	0.34	-
					Front side	10	37850	2580	24.00	23.34	116.41%	0.25	0.29	-
					Back side	10	37850	2580	24.00	23.34	116.41%	0.17	0.20	-
			1 RB		Top side	10	37850	2580	24.00	23.34	116.41%	0.01	0.01	-
			1 KB	99	Bottom side	10	37850	2580	24.00	23.34	116.41%	0.39	0.45	98
					Bottom side	10	38150	2610	24.00	23.20	120.23%	0.38	0.46	-
					Right side	10	37850	2580	24.00	23.34	116.41%	0.19	0.22	-
					Left side	10	37850	2580	24.00	23.34	116.41%	0.02	0.02	-
					Front side	10	37850	2580	23.00	22.32	116.95%	0.16	0.19	-
Hatanas	00141	ODOK			Back side	10	37850	2580	23.00	22.32	116.95%	0.11	0.13	-
Hotspot	20MHz	QPSK	50 DD		Top side	10	37850	2580	23.00	22.32	116.95%	0.00	0.00	-
			50 RB	0	Bottom side	10	37850	2580	23.00	22.32	116.95%	0.23	0.27	-
					Right side	10	37850	2580	23.00	22.32	116.95%	0.13	0.15	-
					Left side	10	37850	2580	23.00	22.32	116.95%	0.01	0.01	-
					Front side	10	37850	2580	23.00	22.25	118.85%	0.17	0.20	-
					Back side	10	37850	2580	23.00	22.25	118.85%	0.10	0.12	-
				0 DD	Top side	10	37850	2580	23.00	22.25	118.85%	0.00	0.00	-
			10	0 RB	Bottom side	10	37850	2580	23.00	22.25	118.85%	0.24	0.29	-
					Right side	10	37850	2580	23.00	22.25	118.85%	0.13	0.15	-
					Left side	10	37850	2580	23.00	22.25	118.85%	0.01	0.01	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 63 of 126

LTE TDD Band 41

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/		Plot page
									,	(==,		Measured	Reported	
					RE Cheek	-	40185	2549.5	24.50	23.80	117.49%	0.05	0.06	-
					RE Cheek	-	40620	2593	24.50	23.79	117.76%	0.09	0.11	-
				0	RE Tilt	-	40185	2549.5	24.50	23.80	117.49%	0.04	0.05	-
			1 RB		LE Cheek	-	40185	2549.5	24.50	23.80	117.49%	0.04	0.05	-
			IND		LE Tilt		40185	2549.5	24.50	23.80	117.49%	0.03	0.04	-
					RE Cheek		39750	2506	24.50	22.22	169.04%	0.03	0.05	-
				99	RE Cheek	-	41055	2636.5	24.50	23.27	132.74%	0.12	0.16	99
Head	20MHz	QPSK			RE Cheek	-	41490	2680	24.50	22.23	168.66%	0.11	0.19	-
ricad	20111112	Qi Oit			RE Cheek	-	40185	2549.5	23.50	23.04	111.17%	0.05	0.06	-
			50 RB	0	RE Tilt	-	40185	2549.5	23.50	23.04	111.17%	0.02	0.02	-
			30 KB		LE Cheek	-	40185	2549.5	23.50	23.04	111.17%	0.03	0.03	-
					LE Tilt	-	40185	2549.5	23.50	23.04	111.17%	0.02	0.02	-
					RE Cheek	-	40620	2593	23.50	23.00	112.20%	0.09	0.10	-
			10	0 RB	RE Tilt	-	40620	2593	23.50	23.00	112.20%	0.04	0.04	-
				0110	LE Cheek	-	40620	2593	23.50	23.00	112.20%	0.04	0.04	-
					LE Tilt	-	40620	2593	23.50	23.00	112.20%	0.03	0.03	-
Body-worn	10MHz	QPSK	1RB	0	Front side	10	40185	2549.5	24.50	23.80	117.49%	0.21	0.25	-
Boay Hom	10111112	Q. 0.1		Ů	Back side	10	40185	2549.5	24.50	23.80	117.49%	0.13	0.15	-
					Front side	10	40185	2549.5	24.50	23.80	117.49%	0.21	0.25	-
					Back side	10	40185	2549.5	24.50	23.80	117.49%	0.13	0.15	-
					Top side	10	40185	2549.5	24.50	23.80	117.49%	0.01	0.01	-
				0	Bottom side	10	40185	2549.5	24.50	23.80	117.49%	0.32	0.38	-
			1 RB		Bottom side	10	40620	2593	24.50	23.79	117.76%	0.34	0.40	-
					Right side	10	40185	2549.5	24.50	23.80	117.49%	0.15	0.18	-
					Left side	10	40185	2549.5	24.50	23.80	117.49%	0.01	0.01	-
				99	Bottom side	10	41055	2636.5	24.50	23.27	132.74%	0.43	0.57	100
					Bottom side	10	41490	2680	24.50	22.23	168.66%	0.35	0.59	-
					Front side	10	40185	2549.5	23.50	23.04	111.17%	0.14	0.16	-
Hotspot	20MHz	QPSK			Back side	10	40185	2549.5	23.50	23.04	111.17%	0.10	0.11	-
		4. 4.1			Top side	10	40185	2549.5	23.50	23.04	111.17%	0.01	0.01	-
			50 RB	0	Bottom side	10	40185	2549.5	23.50	23.04	111.17%	0.22	0.24	-
					Bottom side	10	40620	2593	23.50	23.03	111.43%	0.33	0.37	-
					Right side	10	40185	2549.5	23.50	23.04	111.17%	0.11	0.12	-
					Left side	10	40185	2549.5	23.50	23.04	111.17%	0.00	0.00	-
					Front side	10	40620	2593	23.50	23.00	112.20%	0.14	0.16	-
					Back side	10	40620	2593	23.50	23.00	112.20%	0.09	0.10	-
			10	0 RB	Top side	10	40620	2593	23.50	23.00	112.20%	0.00	0.00	-
					Bottom side	10	40620	2593	23.50	23.00	112.20%	0.35	0.39	-
					Right side	10	40620	2593	23.50	23.00	112.20%	0.10	0.11	-
					Left side	10	40620	2593	23.50	23.00	112.20%	0.00	0.00	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 64 of 126

WI AN 802.11b

11 LAI												
Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged S (W/	U	Plot page
						Tolerance (ubiti)	(ubiii)	, and the second	J	Measured	Reported	
		RE Cheek	-	10	2457	15	14.88	1.010	102.75%	0.48	0.50	101
	Head	RE Tilt	-	10	2457	15	14.88	1.010	102.75%	0.43	0.45	-
	neau	LE Cheek	-	10	2457	15	14.88	1.010	102.75%	0.18	0.19	-
		LE Tilt	-	10	2457	15	14.88	1.010	102.75%	0.23	0.24	-
	Body-	Front side	10	10	2457	15	14.88	1.010	102.75%	0.05	0.05	-
Main	worn	Back side	10	10	2457	15	14.88	1.010	102.75%	0.07	0.07	-
IVIAIII		Front side	10	10	2457	15	14.88	1.010	102.75%	0.05	0.05	-
		Back side	10	10	2457	15	14.88	1.010	102.75%	0.07	0.07	-
	Hotspot	Top side	10	10	2457	15	14.88	1.010	102.75%	0.06	0.06	-
	поізроі	Bottom side	10	10	2457	15	14.88	1.010	102.75%	0.00	0.00	-
		Right side	10	10	2457	15	14.88	1.010	102.75%	0.00	0.00	-
		Left side	10	10	2457	15	14.88	1.010	102.75%	0.08	0.08	102

Bluetooth (GFSK)

	(U . U . 1 ,										
Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged S (W/	U	Plot page
						Tolerance (dbm)	(ubiii)	Ŭ	J	Measured	Reported	
		RE Cheek	-	39	2441	12.6	10.61	1.302	158.12%	0.10	0.21	103
	Head	RE Tilt	-	39	2441	12.6	10.61	1.302	158.12%	0.08	0.16	-
Main	ricau	LE Cheek	-	39	2441	12.6	10.61	1.302	158.12%	0.04	0.08	-
IVIAIII		LE Tilt	-	39	2441	12.6	10.61	1.302	158.12%	0.05	0.10	-
	Body-	Front side	10	39	2441	12.6	10.61	1.302	158.12%	0.01	0.02	-
	worn	Back side	10	39	2441	12.6	10.61	1.302	158.12%	0.02	0.04	104

WLAN 802.11ac(80M) 5.2G

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged S (W/	AR over 1g kg)	Plot page
						Tolerance (dBm)	(dBm)	· ·		Measured	Reported	
		RE Cheek	-	42	5210	12	11.85	1.079	103.63%	0.23	0.26	-
	Head	RE Tilt	-	42	5210	12	11.85	1.079	103.63%	0.36	0.40	105
Main	пеаи	LE Cheek	-	42	5210	12	11.85	1.079	103.63%	0.13	0.15	-
IVIAIII		LE Tilt	-	42	5210	12	11.85	1.079	103.63%	0.18	0.20	-
	Body-	Front side	10	42	5210	12	11.85	1.079	103.63%	0.10	0.11	106
	worn	Back side	10	42	5210	12	11.85	1.079	103.63%	0.05	0.06	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 65 of 126

WLAN 802.11ac(80M) 5.3G

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged S (W/		Plot page
						Tolerance (dBm)	(dBm)	Ŭ	J	Measured	Reported	
		RE Cheek	-	58	5290	12	11.64	1.079	108.76%	0.19	0.22	-
	Head	RE Tilt	-	58	5290	12	11.64	1.079	108.76%	0.29	0.34	107
Main	пеаи	LE Cheek	-	58	5290	12	11.64	1.079	108.76%	0.11	0.13	-
IVIAIII		LE Tilt	-	58	5290	12	11.64	1.079	108.76%	0.16	0.19	-
	Body-	Front side	10	58	5290	12	11.64	1.079	108.76%	0.03	0.04	108
	worn	Back side	10	58	5290	12	11.64	1.079	108.76%	0.02	0.02	-

WLAN 802.11ac(80M) 5.6G

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged S (W/	-	Plot page
						Tolerance (dBm)	(dBm)	· ·	J	Measured	Reported	
		RE Cheek	-	138	5690	12	11.91	1.079	102.21%	0.26	0.29	-
	Head	RE Tilt	-	138	5690	12	11.91	1.079	102.21%	0.31	0.34	109
Main	neau	LE Cheek	-	138	5690	12	11.91	1.079	102.21%	0.25	0.28	-
Iviairi		LE Tilt	-	138	5690	12	11.91	1.079	102.21%	0.28	0.31	-
	Body-	Front side	10	138	5690	12	11.91	1.079	102.21%	0.03	0.03	110
	worn	Back side	10	138	5690	12	11.91	1.079	102.21%	0.01	0.01	-

WLAN 802.11ac(80M) 5.8G

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged S (W/	U	Plot page
						Tolerance (dbm)	(UDIII)	J	J	Measured	Reported	
		RE Cheek	-	155	5775	12	11.56	1.079	110.79%	0.27	0.32	-
	Head	RE Tilt	-	155	5775	12	11.56	1.079	110.79%	0.31	0.37	111
	neau	LE Cheek	-	155	5775	12	11.56	1.079	110.79%	0.28	0.33	-
		LE Tilt	-	155	5775	12	11.56	1.079	110.79%	0.30	0.36	-
	Body-	Front side	10	155	5775	12	11.56	1.079	110.79%	0.05	0.06	-
Main	worn	Back side	10	155	5775	12	11.56	1.079	110.79%	0.02	0.02	-
IVIAIII		Front side	10	155	5775	12	11.56	1.079	110.79%	0.05	0.06	-
		Back side	10	155	5775	12	11.56	1.079	110.79%	0.02	0.02	-
	Hotspot	Top side	10	155	5775	12	11.56	1.079	110.79%	0.07	0.08	112
	потерот	Bottom side	10	155	5775	12	11.56	1.079	110.79%	0.00	0.00	-
		Right side	10	155	5775	12	11.56	1.079	110.79%	0.00	0.00	-
		Left side	10	155	5775	12	11.56	1.079	110.79%	0.06	0.07	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想生红用做影响起力操具负责,同时此模具做是例如于。木型生土硕木公司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOS Idiwan Eta.



Page: 66 of 126

Note:

Scaling = $\frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P2(mW)}{P1(mW)} = 10^{\left(\frac{P2-P1}{10}\right)(dBm)}$

Reported SAR = measured SAR * (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

2.3 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 67 of 126

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Head	Body-Worn	Hotspot
GSM + WLAN 2.4/5.8GHz	Yes	Yes	No
GPRS + WLAN 2.4/5.8GHz	No	No	Yes
UMTS + WLAN 2.4/5.8GHz	Yes	Yes	Yes
LTE + WLAN 2.4/5.8GHz	Yes	Yes	Yes
GSM + WLAN 5.2/5.3/5.6GHz	Yes	Yes	No
UMTS + WLAN 5.2/5.3/5.6GHz	Yes	Yes	No
LTE + WLAN 5.2/5.3/5.6GHz	Yes	Yes	No
GSM + BT	Yes	Yes	No
UMTS + BT	Yes	Yes	No
LTE + BT	Yes	Yes	No
GSM + WLAN 5GHz + BT	Yes	Yes	No
UMTS + WLAN 5GHz + BT	Yes	Yes	No
LTE + WLAN 5GHz + BT	Yes	Yes	No

Note:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報告結果僅聚的計畫,同時什樣品僅保留的天。木報告未經木公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw

The device does not support DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.

^{2.} Based on KDB447498D01 note 36, when SAR test exclusion is allowed by other published RF exposure KDB procedures, such as the 2.5 cm hotspot mode SAR test exclusion for an edge or surface, then estimated SAR is not required to determine simultaneous SAR test exclusion.

^{3:} Based on KDB 648474 D04v01r03 note 6, simultaneous transmission SAR for 10-g extremity SAR requires consideration only when standalone 10-g SAR is required.



Page: 68 of 126

3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{\text{f(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.sqs.com.tw



Page: 69 of 126

Simultaneous Transmission Combination

Simultaneous Transmission Combination reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation							
Frequency band	Position		WWAN	WLAN	<1.6W/kg		
20.10			0.21	0.50	0.71		
GSM 850		Right cheek		0.30	0.71		
	Head	Right tilt Left cheek	0.10 0.17	0.45	0.36		
		Left tilt	0.17	0.19	0.30		
		Front side	0.08	0.24	0.32		
	Hotspot	Back side	0.12	0.05			
GPRS 850 (1Dn4UP)			-		0.18		
		Top side	0.00	0.06	0.06		
(1511401)		Bottom side	0.14	0.00	0.14		
		Right side	0.50	0.00	0.50		
		Left side	0.11	0.08	0.19		
	Head	Right cheek	0.08	0.50	0.58		
GSM 1900		Right tilt	0.02	0.45	0.47		
		Left cheek	0.03	0.19	0.22		
		Left tilt	0.03	0.24	0.27		
		Front side	0.26	0.05	0.31		
		Back side	0.16	0.07	0.23		
GPRS 1900	Hotspot	Top side	0.03	0.06	0.09		
(1Dn4UP)		Bottom side	0.63	0.00	0.63		
		Right side	0.04	0.00	0.04		
		Left side	0.10	0.08	0.18		
	Head	Right cheek	0.28	0.50	0.78		
		Right tilt	0.10	0.45	0.55		
		Left cheek	0.23	0.19	0.42		
		Left tilt	0.13	0.24	0.37		
WCDMA Band V	Hotspot	Front side	0.24	0.05	0.29		
Band v		Back side	0.21	0.07	0.28		
		Top side	0.01	0.06	0.07		
		Bottom side	0.23	0.00	0.23		
		Right side	0.53	0.00	0.53		
		Left side	0.21	0.08	0.29		
LTE FDD Band 5	Head	Right cheek	0.26	0.50	0.76		
		Right tilt	0.07	0.45	0.52		
		Left cheek	0.20	0.19	0.39		
		Left tilt	0.07	0.24	0.31		
	Hotspot	Front side	0.18	0.05	0.23		
		Back side	0.17	0.07	0.24		
		Top side	0.01	0.06	0.07		
		Bottom side	0.22	0.00	0.22		
		Right side	0.39	0.00	0.39		
		Left side	0.18	0.08	0.26		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 70 of 126

reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation						
Frequency	Position		reported \$	ΣSAR		
band			WWAN	WLAN	<1.6W/kg	
	Head	Right cheek	0.16	0.50	0.66	
		Right tilt	0.05	0.45	0.50	
		Left cheek	0.13	0.19	0.32	
		Left tilt	0.08	0.24	0.32	
LTE FDD	Hotspot	Front side	0.17	0.05	0.22	
Band 12		Back side	0.15	0.07	0.22	
		Top side	0.01	0.06	0.07	
		Bottom side	0.07	0.00	0.07	
		Right side	0.23	0.00	0.23	
		Left side	0.14	0.08	0.22	
	Head	Right cheek	0.17	0.50	0.67	
		Right tilt	0.10	0.45	0.55	
		Left cheek	0.15	0.19	0.34	
		Left tilt	0.09	0.24	0.33	
LTE FDD	Hotspot	Front side	0.19	0.05	0.24	
Band 17		Back side	0.17	0.07	0.24	
		Top side	0.01	0.06	0.07	
		Bottom side	0.07	0.00	0.07	
		Right side	0.28	0.00	0.28	
		Left side	0.16	0.08	0.24	
	Head	Right cheek	0.10	0.50	0.60	
		Right tilt	0.05	0.45	0.50	
LTE TDD Band 38		Left cheek	0.05	0.19	0.24	
		Left tilt	0.02	0.24	0.26	
	Hotspot	Front side	0.29	0.05	0.34	
		Back side	0.20	0.07	0.27	
		Top side	0.01	0.06	0.07	
		Bottom side	0.46	0.00	0.46	
		Right side	0.22	0.00	0.22	
		Left side	0.02	0.08	0.10	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw



Page: 71 of 126

reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation							
Frequency	Position		reported SAR / W/kg		ΣSAR		
band			WWAN	WLAN	<1.6W/kg		
LTE TDD Band 41	Head	Right cheek	0.19	0.50	0.69		
		Right tilt	0.05	0.45	0.50		
		Left cheek	0.05	0.19	0.24		
		Left tilt	0.04	0.24	0.28		
	Hotspot	Front side	0.25	0.05	0.30		
		Back side	0.15	0.07	0.22		
		Top side	0.01	0.06	0.07		
		Bottom side	0.59	0.00	0.59		
		Right side	0.18	0.00	0.18		
		Left side	0.01	0.08	0.09		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生红用攝影測建立幾只有書,同時此幾旦萬風宛の干。大報生土極大公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 72 of 126

reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation					
Frequency	Position		reported SAR / W/kg		ΣSAR
band			WWAN	WLAN	<1.6W/kg
GSM 850	body- worn	Front side	0.16	0.05	0.21
		Back side	0.13	0.07	0.20
GSM 1900	body- worn	Front side	0.25	0.05	0.30
GSW 1900		Back side	0.23	0.07	0.30
WCDMA Band V	body- worn	Front side	0.24	0.05	0.29
WCDIVIA Barid V		Back side	0.21	0.07	0.28
LTE FDD Band 5	body- worn	Front side	0.18	0.05	0.23
LIE FDD Baild 3		Back side	0.17	0.07	0.24
LTE FDD Band 12	body- worn	Front side	0.17	0.05	0.22
		Back side	0.15	0.07	0.22
LTE FDD Band 17	body- worn	Front side	0.19	0.05	0.24
		Back side	0.17	0.07	0.24
LTE TDD Band 38	body- worn	Front side	0.29	0.05	0.34
		Back side	0.20	0.07	0.27
LTE TDD Band 41	body- worn	Front side	0.25	0.05	0.30
LIE IDD Ballu 41		Back side	0.15	0.07	0.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 73 of 126

repo	reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation							
Frequency	_		reported SAR / W/kg		ΣSAR			
band	Position		WWAN	WLAN	<1.6W/kg			
		Right cheek	0.21	0.32	0.53			
0014.050	11	Right tilt	0.10	0.40	0.50			
GSM 850	Head	Left cheek	0.17	0.33	0.50			
		Left tilt	0.08	0.36	0.44			
		Front side	0.12	0.06	0.18			
		Back side	0.11	0.02	0.13			
GPRS 850	Hotopot	Top side	0.00	0.08	0.08			
(1Dn4UP)	Hotspot	Bottom side	0.14	0.00	0.14			
		Right side	0.50	0.00	0.50			
		Left side	0.11	0.07	0.18			
		Right cheek	0.08	0.32	0.40			
GSM 1900	Llaad	Right tilt	0.02	0.40	0.42			
GSW 1900	Head	Left cheek	0.03	0.33	0.36			
		Left tilt	0.03	0.36	0.39			
	Hotspot	Front side	0.26	0.06	0.32			
		Back side	0.16	0.02	0.18			
GPRS 1900		Top side	0.03	0.08	0.11			
(1Dn4UP)		Bottom side	0.63	0.00	0.63			
		Right side	0.04	0.00	0.04			
		Left side	0.10	0.07	0.17			
	Head	Right cheek	0.28	0.32	0.60			
		Right tilt	0.10	0.40	0.50			
		Left cheek	0.23	0.33	0.56			
		Left tilt	0.13	0.36	0.49			
WCDMA		Front side	0.24	0.06	0.30			
Band V		Back side	0.21	0.02	0.23			
	Lietenet	Top side	0.01	0.08	0.09			
	Hotspot	Bottom side	0.23	0.00	0.23			
		Right side	0.53	0.00	0.53			
		Left side	0.21	0.07	0.28			
		Right cheek	0.26	0.32	0.58			
	Llaad	Right tilt	0.07	0.40	0.47			
	Head	Left cheek	0.20	0.33	0.53			
		Left tilt	0.07	0.36	0.43			
LTE FDD		Front side	0.18	0.06	0.24			
Band 5		Back side	0.17	0.02	0.19			
	Llet	Top side	0.01	0.08	0.09			
	Hotspot	Bottom side	0.22	0.00	0.22			
		Right side	0.39	0.00	0.39			
		Left side	0.18	0.07	0.25			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 74 of 126

reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation							
Frequency	I Position I		reported	SAR / W/kg	ΣSAR		
band			WWAN	WLAN	<1.6W/kg		
		Right cheek	0.16	0.32	0.48		
	Head	Right tilt	0.05	0.40	0.45		
	пеац	Left cheek	0.13	0.33	0.46		
		Left tilt	0.08	0.36	0.44		
LTE FDD		Front side	0.17	0.06	0.23		
Band 12		Back side	0.15	0.02	0.17		
	Lletenet	Top side	0.01	0.08	0.09		
	Hotspot	Bottom side	0.07	0.00	0.07		
		Right side	0.23	0.00	0.23		
		Left side	0.14	0.07	0.21		
	Head	Right cheek	0.17	0.32	0.49		
		Right tilt	0.10	0.40	0.50		
		Left cheek	0.15	0.33	0.48		
		Left tilt	0.09	0.36	0.45		
LTE FDD	Hotspot	Front side	0.19	0.06	0.25		
Band 17		Back side	0.17	0.02	0.19		
		Top side	0.01	0.08	0.09		
		Bottom side	0.07	0.00	0.07		
		Right side	0.28	0.00	0.28		
		Left side	0.16	0.07	0.23		
		Right cheek	0.10	0.32	0.42		
	Head	Right tilt	0.05	0.40	0.45		
	пеац	Left cheek	0.05	0.33	0.38		
		Left tilt	0.02	0.36	0.38		
LTE TDD		Front side	0.29	0.06	0.35		
Band 38		Back side	0.20	0.02	0.22		
	Hotopet	Top side	0.01	0.08	0.09		
	Hotspot	Bottom side	0.46	0.00	0.46		
		Right side	0.22	0.00	0.22		
		Left side	0.02	0.07	0.09		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 75 of 126

reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation								
Frequency	Position		reported S	SAR / W/kg	ΣSAR			
band	P	osition	WWAN	WLAN	<1.6W/kg			
		Right cheek	0.19	0.32	0.51			
	Head	Right tilt	0.05	0.40	0.45			
		Left cheek	0.05	0.33	0.38			
		Left tilt	0.04	0.36	0.40			
LTE TDD Band 41		Front side	0.25	0.06	0.31			
Band 41		Back side	0.15	0.02	0.17			
	Hotspot	Top side	0.01	0.08	0.09			
	поіѕроі	Bottom side	0.59	0.00	0.59			
		Right side	0.18	0.00	0.18			
		Left side	0.01	0.07	0.08			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 76 of 126

reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation							
Frequency	,	!#!	reported S	ΣSAR			
band	Р	Position		WLAN	<1.6W/kg		
GSM 850	body-	Front side	0.16	0.11	0.27		
G3W 630	worn	Back side	0.13	0.06	0.19		
GSM 1900	body-	Front side	0.25	0.11	0.36		
GSW 1900	worn	Back side	0.23	0.06	0.29		
WCDMA Band V	body- worn	Front side	0.24	0.11	0.35		
WODINA Baria V		Back side	0.21	0.06	0.27		
LTE FDD Band 5	body- worn	Front side	0.18	0.11	0.29		
ETET DD Band 3		Back side	0.17	0.06	0.23		
LTE FDD Band 12	body-	Front side	0.17	0.11	0.28		
ETET DD Band 12	worn	Back side	0.15	0.06	0.21		
LTE FDD Band 17	body-	Front side	0.19	0.11	0.30		
ETET DD Band 17	worn	Back side	0.17	0.06	0.23		
LTE TDD Band 38	body-	Front side	0.29	0.11	0.40		
LIL IDD Ballu 30	worn	Back side	0.20	0.06	0.26		
LTE TDD Band 41	body-	Front side	0.25	0.11	0.36		
ETE TOO Band 41	worn	Back side	0.15	0.06	0.21		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 77 of 126

rep	reported SAR WWAN and Bluetooth, ΣSAR evaluation							
Frequency	Position		reported	SAR / W/kg	ΣSAR			
band	Р	osition	WWAN	ВТ	<1.6W/kg			
		Right cheek	0.21	0.21	0.42			
GSM 850	Head	Right tilt	0.10	0.16	0.26			
G3W 650	пеац	Left cheek	0.17	0.08	0.25			
		Left tilt	0.08	0.10	0.18			
GPRS 850	body-	Front side	0.16	0.02	0.18			
(1Dn4UP)	worn	Back side	0.13	0.04	0.17			
		Right cheek	0.08	0.21	0.29			
GSM 1900	Head	Right tilt	0.02	0.16	0.18			
G3W 1900	пеац	Left cheek	0.03	0.08	0.11			
		Left tilt	0.03	0.10	0.13			
GPRS 1900	body-	Front side	0.25	0.02	0.27			
(1Dn4UP)	worn	Back side	0.23	0.04	0.27			
	Head	Right cheek	0.28	0.21	0.49			
		Right tilt	0.10	0.16	0.26			
WCDMA Band V		Left cheek	0.23	0.08	0.31			
Danu v		Left tilt	0.13	0.10	0.23			
	body-	Front side	0.24	0.02	0.26			
	worn	Back side	0.21	0.04	0.25			
	Head body- worn	Right cheek	0.26	0.21	0.47			
		Right tilt	0.07	0.16	0.23			
LTE FDD		Left cheek	0.20	0.08	0.28			
Band 5		Left tilt	0.07	0.10	0.17			
		Front side	0.18	0.02	0.20			
		Back side	0.17	0.04	0.21			
		Right cheek	0.16	0.21	0.37			
	Head	Right tilt	0.05	0.16	0.21			
LTE FDD	Heau	Left cheek	0.13	0.08	0.21			
Band 12		Left tilt	0.08	0.10	0.18			
	body-	Front side	0.17	0.02	0.19			
	worn	Back side	0.15	0.04	0.19			
		Right cheek	0.17	0.21	0.38			
	Head	Right tilt	0.10	0.16	0.26			
LTE FDD	пеаи	Left cheek	0.15	0.08	0.23			
Band 17		Left tilt	0.09	0.10	0.19			
	body-	Front side	0.19	0.02	0.21			
	worn	Back side	0.17	0.04	0.21			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw



Page: 78 of 126

reported SAR WWAN and Bluetooth, ΣSAR evaluation							
Frequency	Position		reported	SAR / W/kg	ΣSAR		
band	r	Position		ВТ	<1.6W/kg		
		Right cheek	0.10	0.21	0.31		
	Head	Right tilt	0.05	0.16	0.21		
LTE TDD		Left cheek	0.05	0.08	0.13		
Band 38		Left tilt	0.02	0.10	0.12		
	body- worn	Front side	0.29	0.02	0.31		
		Back side	0.20	0.04	0.24		
		Right cheek	0.19	0.21	0.40		
	Head	Right tilt	0.05	0.16	0.21		
LTE TDD	Head	Left cheek	0.05	0.08	0.13		
Band 41		Left tilt	0.04	0.10	0.14		
	body-	Front side	0.25	0.02	0.27		
	worn	· ·		0.04	0.19		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時此樣是僅是紹介之一。木報生主概未公司惠面許可,不可製品複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 79 of 126

repo	rted SAR	WWAN and W	LAN 5GHz a	nd Bluetooth,	ΣSAR evalua	tion
Frequency	_) :4:	re	ΣSAR		
band	Position		WWAN	WLAN	ВТ	<1.6W/kg
		Right cheek	0.21	0.32	0.21	0.74
GSM 850	Head	Right tilt	0.10	0.40	0.16	0.66
G3W 630	Heau	Left cheek	0.17	0.33	0.08	0.58
		Left tilt	0.08	0.36	0.10	0.54
GPRS 850	body-	Front side	0.16	0.11	0.02	0.29
(1Dn4UP)	worn	Back side	0.13	0.06	0.04	0.23
		Right cheek	0.08	0.32	0.21	0.61
GSM 1900	Head	Right tilt	0.02	0.40	0.16	0.58
GSW 1900	пеац	Left cheek	0.03	0.33	0.08	0.44
		Left tilt	0.03	0.36	0.10	0.49
GPRS 1900	body-	Front side	0.25	0.11	0.02	0.38
(1Dn4UP)	worn	Back side	0.23	0.06	0.04	0.33
		Right cheek	0.28	0.32	0.21	0.81
	Head	Right tilt	0.10	0.40	0.16	0.66
WCDMA		Left cheek	0.23	0.33	0.08	0.64
Band V		Left tilt	0.13	0.36	0.10	0.59
	body- worn	Front side	0.24	0.11	0.02	0.37
		Back side	0.21	0.06	0.04	0.31
	llaad	Right cheek	0.26	0.32	0.21	0.79
		Right tilt	0.07	0.40	0.16	0.63
LTE FDD	Head	Left cheek	0.20	0.33	0.08	0.61
Band 5		Left tilt	0.07	0.36	0.10	0.53
	body-	Front side	0.18	0.11	0.02	0.31
	worn	Back side	0.17	0.06	0.04	0.27
		Right cheek	0.16	0.32	0.21	0.69
	Llood	Right tilt	0.05	0.40	0.16	0.61
LTE FDD	Head	Left cheek	0.13	0.33	0.08	0.54
Band 12		Left tilt	0.08	0.36	0.10	0.54
	body-	Front side	0.17	0.11	0.02	0.30
	worn	Back side	0.15	0.06	0.04	0.25
		Right cheek	0.17	0.32	0.21	0.70
	116	Right tilt	0.10	0.40	0.16	0.66
LTE FDD	Head	Left cheek	0.15	0.33	0.08	0.56
Band 17		Left tilt	0.09	0.36	0.10	0.55
	body-	Front side	0.19	0.11	0.02	0.32
	worn	Back side	0.17	0.06	0.04	0.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有的时,所都些结果做到调转之缘是负责,同时讲赞品值保留的手,就都是未领大公司事而能可,不可驾停推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 80 of 126

reported SAR WWAN and WLAN 5GHz and Bluetooth, ΣSAR evaluation							
Frequency	Position		re	ported SAR / W	//kg	ΣSAR	
band	P	OSITION	WWAN	WLAN	ВТ	<1.6W/kg	
		Right cheek	0.10	0.32	0.21	0.63	
	Head	Right tilt	0.05	0.40	0.16	0.61	
LTE TDD	Head	Left cheek	0.05	0.33	0.08	0.46	
Band 38		Left tilt	0.02	0.36	0.10	0.48	
	body- worn	Front side	0.29	0.11	0.02	0.42	
		Back side	0.20	0.06	0.04	0.30	
		Right cheek	0.19	0.32	0.21	0.72	
	Head	Right tilt	0.05	0.40	0.16	0.61	
LTE TDD	rieau	Left cheek	0.05	0.33	0.08	0.46	
Band 41		Left tilt	0.04	0.36	0.10	0.50	
	body-	Front side	0.25	0.11	0.02	0.38	
	worn	Back side	0.15	0.06	0.04	0.25	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 81 of 126

4. Instruments List

instruments List								
Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration			
SPEAG	Dosimetric E-Field	EX3DV4	7466	Feb.04,2020	Feb.03,2021			
OI E/KO	Probe	2702 7 1	3665	Aug.20,2020	Aug.19,2021			
		D750V3	1015	Aug.13,2020	Aug.12,2021			
		D835V2	4d063	Aug.13,2020	Aug.12,2021			
CDE A C	System Validation	D1900V2	5d173	Apr.22,2020	Apr.21,2021			
SPEAG	Dipole	D2450V2	727	Apr.22,2020	Apr.21,2021			
		D2600V2	1005	Jan.29,2020	Jan.28,2021			
		D5GHzV2	1023	Jan.28,2020	Jan.27,2021			
SPEAG	Data acquisition Electronics	DAE4	558	Nov.24,2020	Nov.23,2021			
SPEAG			1336	Aug.13,2020	Aug.12,2021			
SPEAG	Software	DASY 52 V52.10.4 DASY 52 V52.10.3	N/A	Calibration not required	Calibration not required			
SPEAG	Phantom	SAM	N/A	Calibration not required	Calibration not required			
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Jan.28,2020	Jan.27,2021			
Agilent	Dual-directional	772D	MY46151242	Aug.17,2020	Aug.16,2021			
Agilent	coupler	778D	MY48220468	Aug.17,2020	Aug.16,2021			
Agilent	Signal Generator	N5181A	MY50141235	May.04,2020	May.03,2021			
Agilent	Power Meter	E4417A	MY51410006	Mar.09,2020	Mar.08,2021			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有的时,所都些结果做到调转之缘是负责,同时讲赞品值保留的手,就都是未领大公司事而能可,不可驾停推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 Idiwan Etd.



Page: 82 of 126

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Agilopt	Power Sensor	E9301H	MY51470001	Mar.09,2020	Mar.08,2021
Agilent	Power Sensor		MY51470002	Mar.09,2020	Mar.08,2021
TECPEL	Digital thermometer	DTM-303A	TP130074	Apr.10,2020	Apr.09,2021
Anritsu	Radio Communication Test	MT8820C	6201061014	Apr.28,2020	Apr.27,2021

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the low. prosecuted to the fullest extent of the law.



Page: 83 of 126

5. Measurements

Date: 2020/12/17

Report No. : E5/2020/B0013

GSM 850_Head_Re Cheek_CH 128

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: f = 824.2 MHz; $\sigma = 0.903 \text{ S/m}$; $\varepsilon_r = 41.922$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Ambient temperature: 22.4°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.199 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.595 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 68.5%

Maximum value of SAR (measured) = 0.196 W/kg

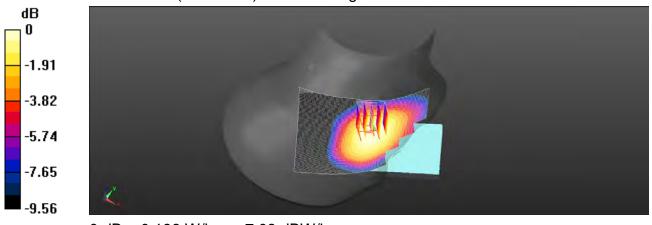

0 dB = 0.196 W/kg = -7.08 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時此樣是僅早留的子。木報生去經太公司惠面許可,不可製公複制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwan Eta.



Page: 84 of 126

Date: 2020/12/17

Report No.: E5/2020/B0013

GSM 850_Body-worn_Front side_CH 128_10mm

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: f = 824.2 MHz; $\sigma = 0.903 \text{ S/m}$; $\varepsilon_r = 41.922$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.147 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.93 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.146 W/kg

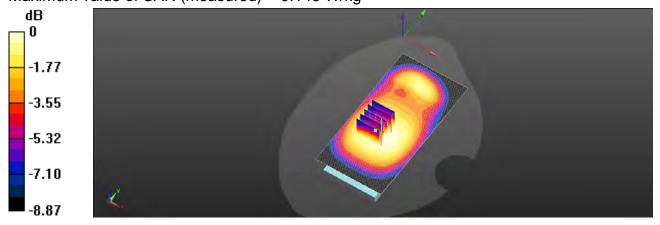

0 dB = 0.146 W/kg = -8.35 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 85 of 126

Date: 2020/12/17

Report No.: E5/2020/B0013

GPRS 850_Hotspot_Right side_CH 128_10mm

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:2

Medium parameters used: f = 824.2 MHz; $\sigma = 0.903 \text{ S/m}$; $\varepsilon_r = 41.922$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (41x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.457 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.63 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 67.7%

Maximum value of SAR (measured) = 0.465 W/kg

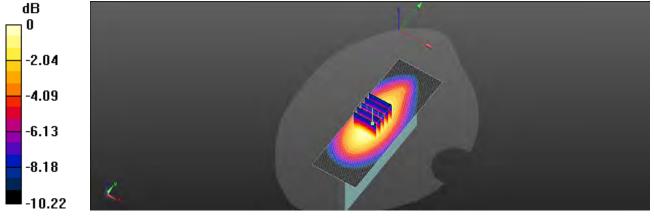

0 dB = 0.465 W/kg = -3.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

f (886-2) 2298-0488

t (886-2) 2299-3279



Page: 86 of 126

Date: 2020/12/18

Report No. : E5/2020/B0013 GSM 1900 Head Re Cheek CH 810

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: f = 1909.8 MHz; $\sigma = 1.388 \text{ S/m}$; $\epsilon_r = 39.877$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(7.95, 7.95, 7.95); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0746 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.761 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 69.1%

Maximum value of SAR (measured) = 0.0901 W/kg

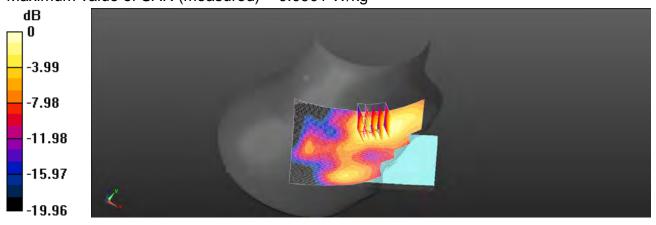

0 dB = 0.0901 W/kg = -10.45 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 Idiwali Etd.



Page: 87 of 126

Date: 2020/12/18

Report No.: E5/2020/B0013

GSM 1900_Body-worn_Front side_CH 810_10mm

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: f = 1909.8 MHz; σ = 1.388 S/m; ϵ_r = 39.877; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(7.95, 7.95, 7.95); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.252 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.96 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.249 W/kg

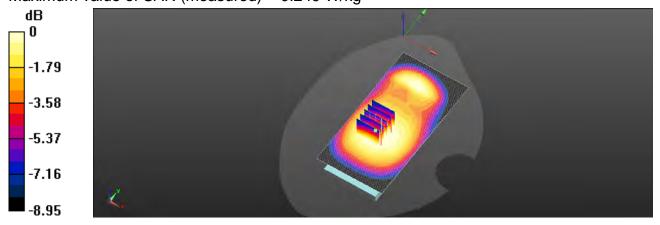

0 dB = 0.249 W/kg = -6.04 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 Idiwan Etc.



Page: 88 of 126

Date: 2020/12/18

Report No.: E5/2020/B0013

GPRS 1900_Hotspot_Bottom side_CH 810_10mm

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium parameters used: f = 1909.8 MHz; $\sigma = 1.388 \text{ S/m}$; $\epsilon_r = 39.877$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(7.95, 7.95, 7.95); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (41x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.643 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.46 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.825 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.230 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 0.647 W/kg

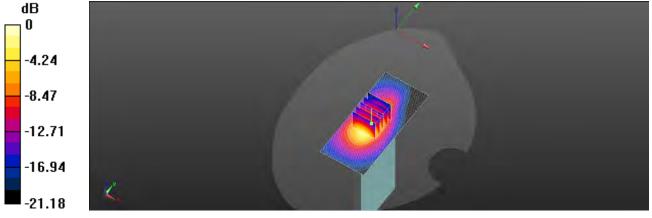

0 dB = 0.647 W/kg = -1.89 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 89 of 126

Date: 2020/12/17

Report No.: E5/2020/B0013

WCDMA Band V_Head_Re Cheek_CH 4233

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: f = 847 MHz; $\sigma = 0.92$ S/m; $\varepsilon_r = 41.84$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient temperature: 22.4°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.275 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.597 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.185 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm,

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 0.270 W/kg

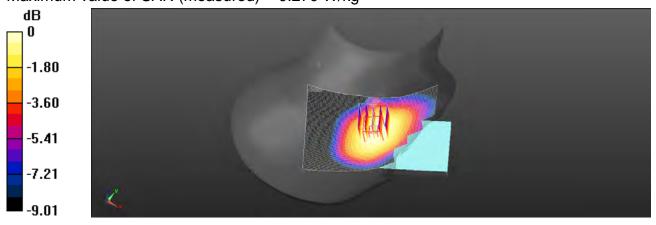

0 dB = 0.270 W/kg = -5.68 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 90 of 126

Date: 2020/12/17

Report No.: E5/2020/B0013

WCDMA Band V_Hotspot_Right side_CH 4132_10mm

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: f = 847 MHz; $\sigma = 0.905$ S/m; $\varepsilon_r = 41.902$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (41x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.571 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.05 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.309 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 67.2%

Maximum value of SAR (measured) = 0.581 W/kg

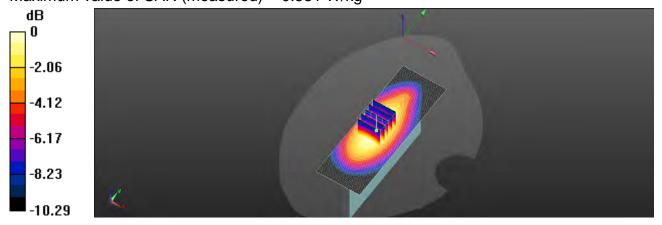

0 dB = 0.581 W/kg = -2.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 91 of 126

Date: 2020/12/17

Report No.: E5/2020/B0013

LTE Band 5 (10MHz) Head Re Cheek CH 20600 QPSK 1-25

Communication System: LTE; Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: f = 844 MHz; $\sigma = 0.917$ S/m; $\varepsilon_r = 41.843$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient temperature: 22.4°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.198 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.699 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 0.196 W/kg

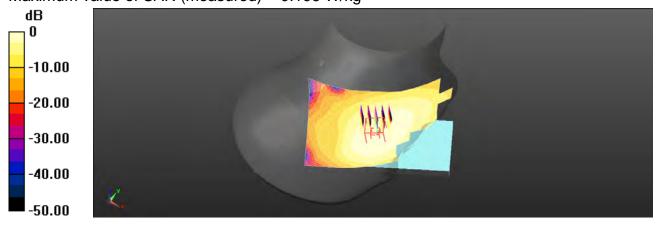

0 dB = 0.196 W/kg = -7.08 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 92 of 126

Date: 2020/12/17

Report No.: E5/2020/B0013

LTE Band 5 (10MHz)_Hotspot_Right side_CH 20525_QPSK_1-0_10mm

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 836.5 MHz; $\sigma = 0.908 \text{ S/m}$; $\varepsilon_r = 41.844$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.416 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.07 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 68.6%

Maximum value of SAR (measured) = 0.422 W/kg

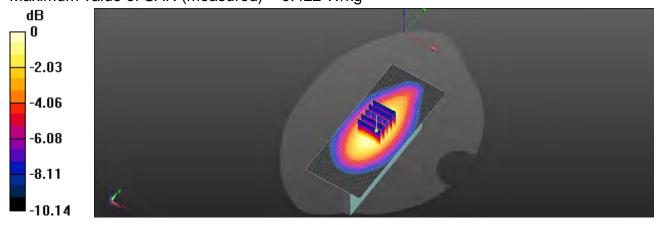

0 dB = 0.422 W/kg = -3.74 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 93 of 126

Date: 2020/12/16

Report No.: E5/2020/B0013

LTE Band 12 (10MHz)_Head_Re Cheek_CH 23095_QPSK_1-49

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 707.5 MHz; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 42.597$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Ambient temperature: 22.1°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.78, 9.78, 9.78); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

• DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.167 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.282 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 0.166 W/kg

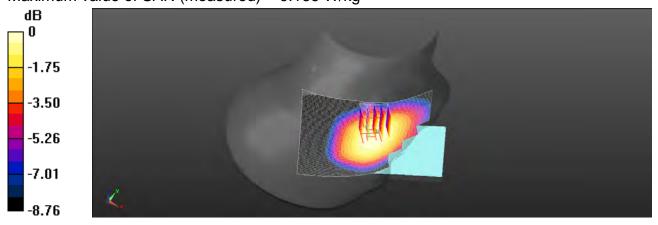

0 dB = 0.166 W/kg = -7.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

odcuments, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

台灣檢驗科技股份有限公司

prosecuted to the fullest extent of the law



Page: 94 of 126

Date: 2020/12/16

Report No.: E5/2020/B0013

LTE Band 12 (10MHz)_Hotspot_Right side_CH 23130_QPSK_1-0_10mm

Communication System: LTE; Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: f = 711 MHz; $\sigma = 0.899$ S/m; $\varepsilon_r = 42.557$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.78, 9.78, 9.78); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.245 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.13 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.137 W/kg

Smallest distance from peaks to all points 3 dB below= 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 69.1%

Maximum value of SAR (measured) = 0.246 W/kg

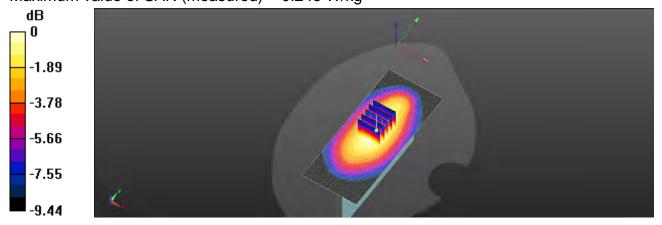

0 dB = 0.246 W/kg = -6.09 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 95 of 126

Date: 2020/12/16

Report No.: E5/2020/B0013

LTE Band 17 (10MHz)_Head_Re Cheek_CH 23790_QPSK_1-49

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: f = 710 MHz; $\sigma = 0.898 \text{ S/m}$; $\varepsilon_r = 42.559$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Ambient temperature: 22.1°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.78, 9.78, 9.78); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.172 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.563 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.121 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 0.171 W/kg

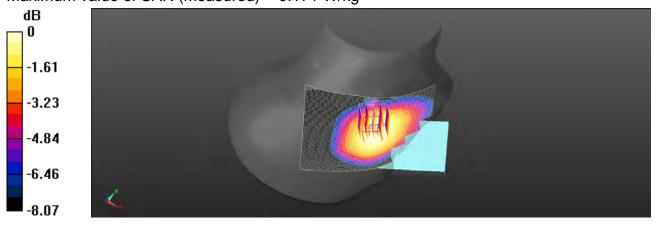

0 dB = 0.171 W/kg = -7.68 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 96 of 126

Date: 2020/12/16

Report No.: E5/2020/B0013

LTE Band 17 (10MHz) Hotspot_Right side_CH 23780_QPSK_1-25_10mm

Communication System: LTE; Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: f = 709 MHz; $\sigma = 0.897$ S/m; $\varepsilon_r = 42.568$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.78, 9.78, 9.78); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.289 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.65 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 0.293 W/kg

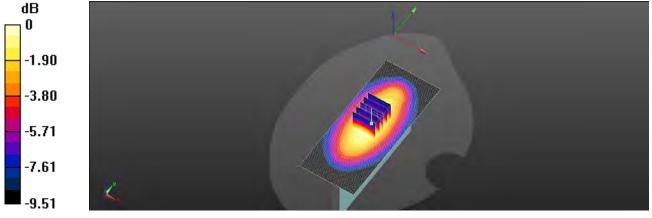

0 dB = 0.293 W/kg = -5.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 97 of 126

Date: 2020/12/19

Report No.: E5/2020/B0013

LTE Band 38 (20MHz)_Head_Re Cheek_CH 37850_QPSK_1-99

Communication System: LTE; Frequency: 2580 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2580 MHz; $\sigma = 1.94 \text{ S/m}$; $\epsilon_r = 39.253$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(7.21, 7.21, 7.21); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (91x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.150 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.098 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.046 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 0.122 W/kg

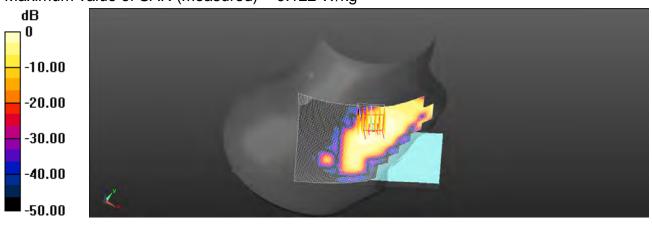

0 dB = 0.122 W/kg = -9.13 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 98 of 126

Date: 2020/12/19

Report No.: E5/2020/B0013

LTE Band 38 (20MHz)_Hotspot_Bottom side_CH 37850_QPSK_1-99_10mm

Communication System: LTE; Frequency: 2580 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2580 MHz; $\sigma = 1.94 \text{ S/m}$; $\epsilon_r = 39.253$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(7.21, 7.21, 7.21); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.676 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.187 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.144 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 0.649 W/kg

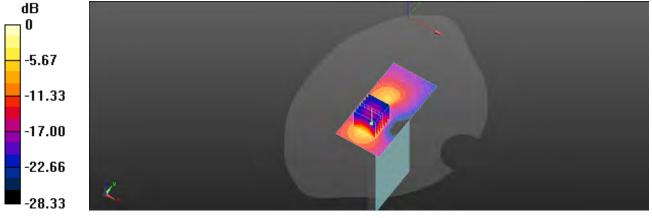

0 dB = 0.649 W/kg = -1.88 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此觀些廷里僅對理試之樣是負責,同時此樣是僅保留的子。太觀些去經太公司事而許可,不可類於複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Talwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 99 of 126

Date: 2020/12/20

Report No.: E5/2020/B0013

LTE Band 41 (20MHz)_Head_Re Cheek_CH 41055_QPSK_1-99

Communication System: LTE; Frequency: 2636.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2636.5 MHz; σ = 2.001 S/m; ϵ_r = 39.193; ρ = 1000 kg/m³

Phantom section: Right Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(7.21, 7.21, 7.21); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (91x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.183 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.537 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 0.174 W/kg

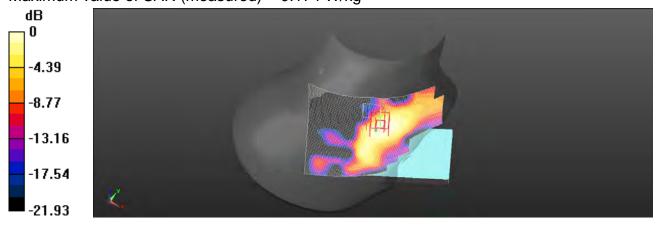

0 dB = 0.174 W/kg = -7.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此觀些廷里僅對理試之樣是負責,同時此樣是僅保留的子。太觀些去經太公司事而許可,不可類於複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E5/2020/B0021 Page: 100 of 126

Date: 2020/12/20

Report No.: E5/2020/B0013

LTE Band 41 (20MHz)_Hotspot_Bottom side_CH 41055_QPSK_1-99_10mm

Communication System: LTE; Frequency: 2636.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2636.5 MHz; $\sigma = 2.001 \text{ S/m}$; $\epsilon_r = 39.193$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(7.21, 7.21, 7.21); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.736 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.835 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.163 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.717 W/kg

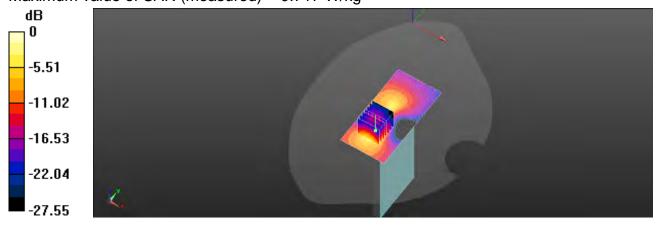

0 dB = 0.717 W/kg = -1.44 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 101 of 126

Date: 2020/12/19

Report No.: E5/2020/B0013

WLAN 802.11b_Head_Re Cheek_CH 10

Communication System: WLAN; Frequency: 2457 MHz; Duty Cycle: 1:0.990

Medium parameters used: f = 2457 MHz; $\sigma = 1.787$ S/m; $\varepsilon_r = 38.799$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient temperature: 22.3°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(7.85, 7.85, 7.85); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (91x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.991 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.597 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.738 W/kg

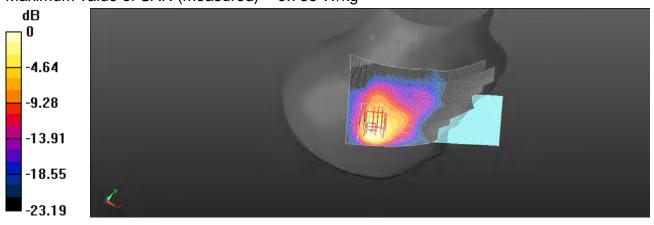

0 dB = 0.738 W/kg = -1.32 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時此樣是僅早留的子。木報生去經太公司惠面許可,不可製公詢則。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

at the above the second



Report No.: E5/2020/B0021 Page: 102 of 126

Date: 2020/12/19

Report No.: E5/2020/B0013

WLAN 802.11b_Hotspot_Left side_CH 10_10mm

Communication System: WLAN; Frequency: 2457 MHz; Duty Cycle: 1:0.990

Medium parameters used: f = 2457 MHz; $\sigma = 1.787$ S/m; $\varepsilon_r = 38.799$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(7.85, 7.85, 7.85); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (71x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.146 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.043 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 0.139 W/kg

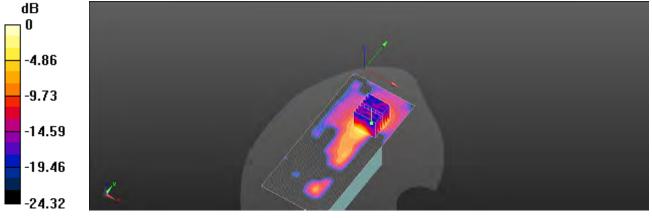

0 dB = 0.139 W/kg = -8.57 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 103 of 126

Date: 2020/12/19

Report No.: E5/2020/B0013 Bluetooth(GFSK)_Head_Re Cheek_CH 39

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:0.768 Medium parameters used: f = 2441 MHz; $\sigma = 1.77$ S/m; $\varepsilon_r = 38.824$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient temperature: 22.3°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(7.85, 7.85, 7.85); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (91x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.176 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.361 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.043 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.156 W/kg

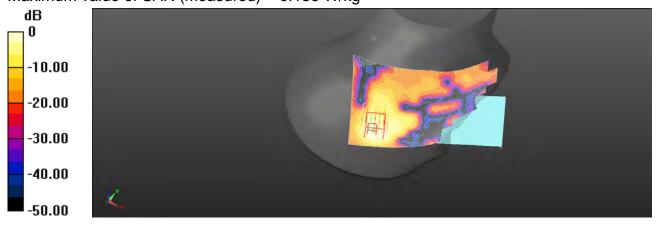

0 dB = 0.156 W/kg = -8.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 104 of 126

Date: 2020/12/19

Report No.: E5/2020/B0013

Bluetooth(GFSK)_Body-worn_Back side_CH 39_10mm

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:0.768 Medium parameters used: f = 2441 MHz; $\sigma = 1.77$ S/m; $\varepsilon_r = 38.824$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 SN7466; ConvF(7.85, 7.85, 7.85); Calibrated: 2020/2/4
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2020/8/13
- Phantom: SAM
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0398 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9560 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00747 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 0.0281 W/kg

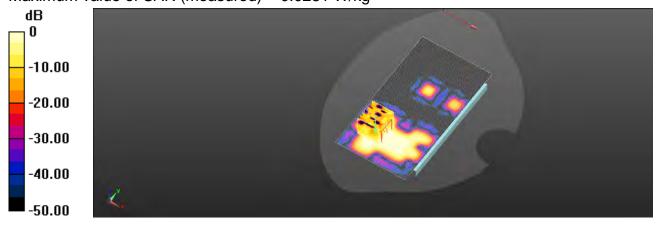

0 dB = 0.0281 W/kg = -15.51 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

台灣檢驗科技股份有限公司



Page: 105 of 126

Date: 2020/12/20

Report No.: E5/2020/B0013

WLAN 802.11ac(80M) 5.2G_Head_Re Tilt_CH 42

Communication System: WLAN; Frequency: 5210 MHz; Duty Cycle: 1:0.927

Medium parameters used: f = 5210 MHz; $\sigma = 4.61 \text{ S/m}$; $\epsilon_r = 35.629$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Ambient temperature: 22.4°C; Liquid temperature: 21.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(5.6, 5.6, 5.6); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (111x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.701 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.461 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.744 W/kg

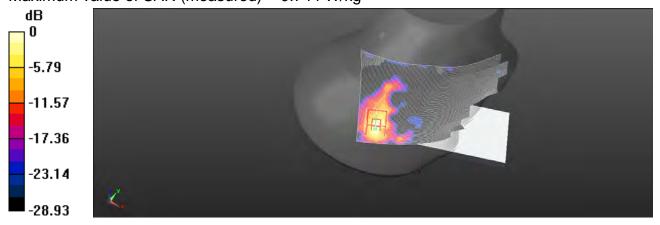

0 dB = 0.744 W/kg = -1.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 106 of 126

Date: 2020/12/20

Report No.: E5/2020/B0013

WLAN 802.11ac(80M) 5.2G_Body-worn_Front side_CH 42_10mm

Communication System: WLAN; Frequency: 5210 MHz; Duty Cycle: 1:0.927

Medium parameters used: f = 5210 MHz; σ = 4.61 S/m; ϵ_r = 35.629; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 SN7466; ConvF(5.6, 5.6, 5.6); Calibrated: 2020/2/4
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2020/8/13
- Phantom: SAM
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (101x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.259 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9680 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 0.237 W/kg

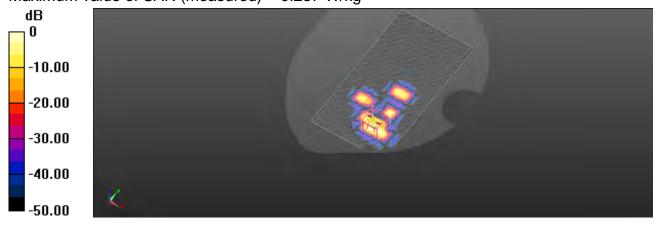

0 dB = 0.237 W/kg = -6.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 Idiwali Eta.



Report No.: E5/2020/B0021 Page: 107 of 126

Date: 2020/12/20

Report No.: E5/2020/B0013

WLAN 802.11ac(80M) 5.3G_Head_Re Tilt_CH 58

Communication System: WLAN; Frequency: 5290 MHz; Duty Cycle: 1:0.927

Medium parameters used: f = 5290 MHz; $\sigma = 4.689 \text{ S/m}$; $\epsilon_r = 35.538$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(5.45, 5.45, 5.45); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (111x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.547 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.122 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 0.613 W/kg

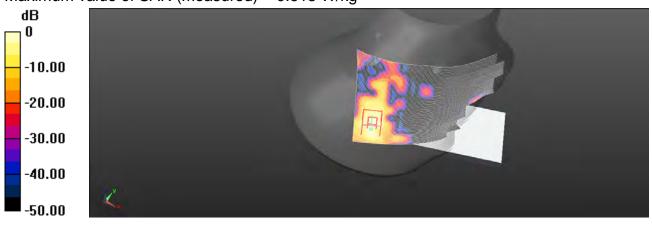

0 dB = 0.613 W/kg = -2.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw



Page: 108 of 126

Date: 2020/12/20

Report No.: E5/2020/B0013

WLAN 802.11ac(80M) 5.3G_Body-worn_Front side_CH 58_10mm

Communication System: WLAN; Frequency: 5290 MHz; Duty Cycle: 1:0.927

Medium parameters used: f = 5290 MHz; $\sigma = 4.689 \text{ S/m}$; $\epsilon_r = 35.538$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(5.45, 5.45, 5.45); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (101x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0632 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.159 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.00652 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 0.0509 W/kg

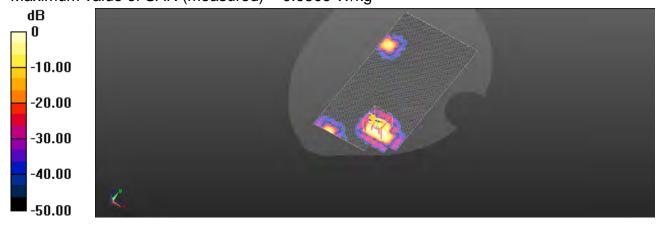

0 dB = 0.0509 W/kg = -12.93 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

t (886-2) 2299-3279



Page: 109 of 126

Date: 2020/12/21

Report No.: E5/2020/B0013

WLAN 802.11ac(80M) 5.6G_Head_Re Tilt_CH 138

Communication System: WLAN; Frequency: 5690 MHz; Duty Cycle: 1:0.927

Medium parameters used: f = 5690 MHz; $\sigma = 5.094 \text{ S/m}$; $\varepsilon_r = 35.086$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (111x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.681 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.122 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 0.698 W/kg

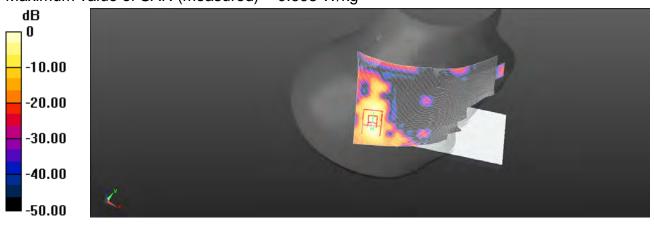

0 dB = 0.698 W/kg = -1.56 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時此樣是僅早留的子。木報生去經太公司惠面許可,不可製公詢則。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 110 of 126

Date: 2020/12/21

Report No.: E5/2020/B0013

WLAN 802.11ac(80M) 5.6G_Body-worn_Front side_CH 138_10mm

Communication System: WLAN; Frequency: 5690 MHz; Duty Cycle: 1:0.927

Medium parameters used: f = 5690 MHz; $\sigma = 5.094 \text{ S/m}$; $\varepsilon_r = 35.086$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 SN7466; ConvF(4.98, 4.98, 4.98); Calibrated: 2020/2/4
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1336; Calibrated: 2020/8/13
- Phantom: SAM
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (101x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0720 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.029 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.0077 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.8%

Maximum value of SAR (measured) = 0.0682 W/kg

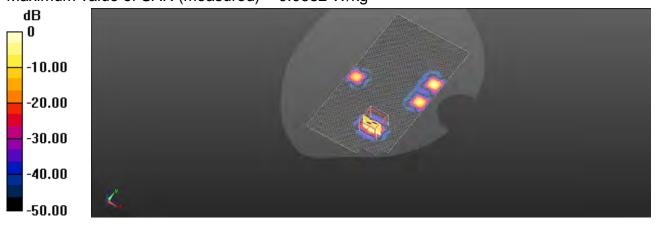

0 dB = 0.0682 W/kg = -11.66 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 111 of 126

Date: 2020/12/21

Report No.: E5/2020/B0013

WLAN 802.11ac(80M) 5.8G_Head_Re Tilt_CH 155

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:0.927

Medium parameters used: f = 5775 MHz; σ = 5.182 S/m; ϵ_r = 34.986; ρ = 1000 kg/m³

Phantom section: Right Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(5.04, 5.04, 5.04); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (111x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.732 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.271 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 0.723 W/kg

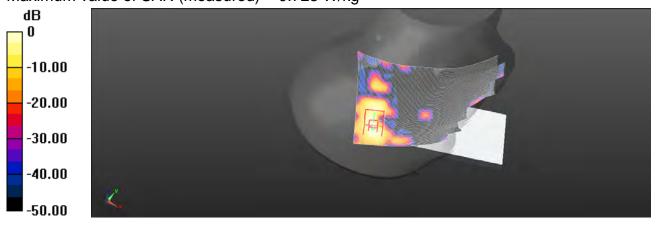

0 dB = 0.723 W/kg = -1.41 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時此樣是僅早留的子。木報生去經太公司惠面許可,不可製公詢則。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 Idiwali Etd.



Page: 112 of 126

Date: 2020/12/21

Report No.: E5/2020/B0013

WLAN 802.11ac(80M) 5.8G_Hotspot_Top side_CH 155_10mm

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:0.927

Medium parameters used: f = 5775 MHz; $\sigma = 5.182$ S/m; $\varepsilon_r = 34.986$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(5.04, 5.04, 5.04); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (81x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.161 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.193 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.023 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.6%

Maximum value of SAR (measured) = 0.152 W/kg

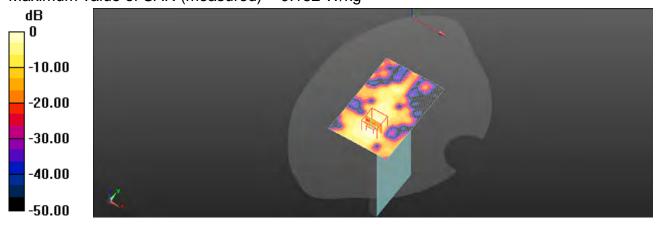

0 dB = 0.152 W/kg = -8.18 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 113 of 126

6. SAR System Performance Verification

Date: 2020/12/16

Report No.: E5/2020/B0013 **Dipole 750 MHz SN:1015**

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: f = 750 MHz; $\sigma = 0.9 \text{ S/m}$; $\epsilon_f = 42.365$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.78, 9.78, 9.78); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.62 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.63 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.41 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 68.2%

Maximum value of SAR (measured) = 2.70 W/kg

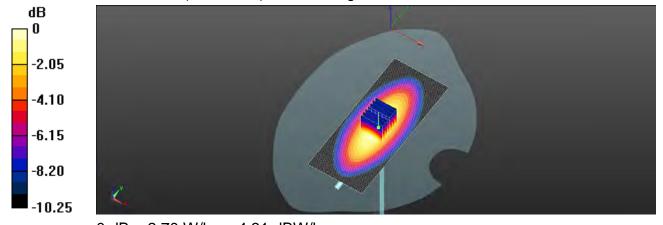

0 dB = 2.70 W/kg = 4.31 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw



Report No.: E5/2020/B0021 Page: 114 of 126

Date: 2020/12/17

Report No.: E5/2020/B0013 Dipole 835 MHz_SN:4d063

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f = 835 MHz; $\sigma = 0.907 \text{ S/m}$; $\epsilon_r = 41.874$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (41x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.89 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 62.48 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.55 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 66.8%

Maximum value of SAR (measured) = 2.91 W/kg

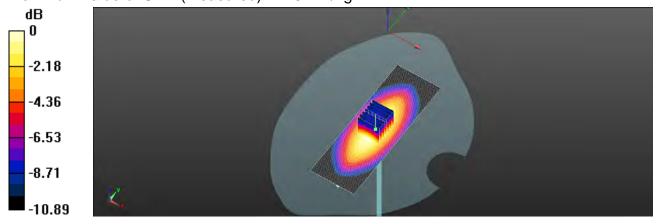

0 dB = 2.91 W/kg = 4.63 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 115 of 126

Date: 2020/12/18

Report No.: E5/2020/B0013 Dipole 1900 MHz SN:5d173

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:10

Medium parameters used: f = 1900 MHz; σ = 1.387 S/m; ϵ_r = 39.881; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(7.95, 7.95, 7.95); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 13.2 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.8 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.76 W/kg; SAR(10 g) = 5.11 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 13.0 W/kg

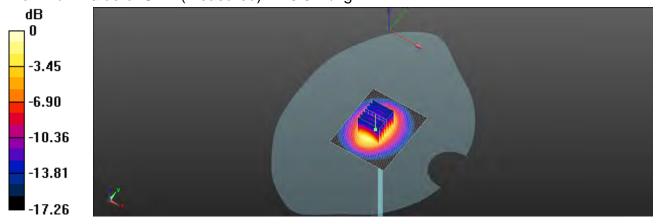

0 dB = 13.0 W/kg = 11.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,此報生结里僅對測計之樣具負責,同時此樣具僅保留的主。木報生主概木公司書面幹可,不可無的複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Talwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 116 of 126

Date: 2020/12/19

Report No.: E5/2020/B0013 Dipole 2450 MHz_SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.778 \text{ S/m}$; $\epsilon_r = 38.804$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(7.85, 7.85, 7.85); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (51x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 18.7 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 119.0 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 22.7 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.28 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 69.9%

Maximum value of SAR (measured) = 17.1 W/kg

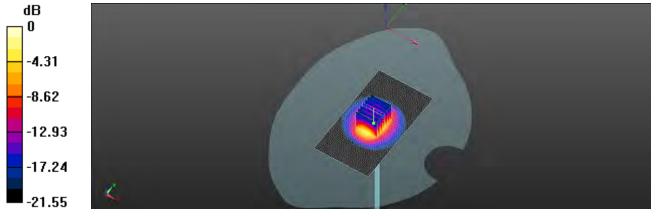

0 dB = 17.1 W/kg = 13.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

台灣檢驗科技股份有限公司



Page: 117 of 126

Date: 2020/12/19

Report No.: E5/2020/B0013 **Dipole 2600 MHz_SN:1005**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2600 MHz; $\sigma = 1.962 \text{ S/m}$; $\epsilon_r = 39.239$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(7.21, 7.21, 7.21); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 23.5 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 111.5 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 32.9 W/kg

SAR(1 g) = 14.6 W/kg; SAR(10 g) = 6.47 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 23.1 W/kg

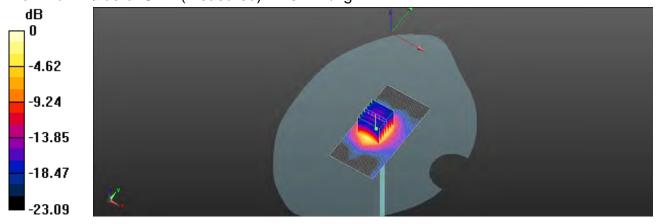

0 dB = 23.1 W/kg = 13.65 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 118 of 126

Date: 2020/12/20

Report No.: E5/2020/B0013 **Dipole 2600 MHz_SN:1005**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2600 MHz; $\sigma = 1.963 \text{ S/m}$; $\varepsilon_r = 39.255$; $\rho = 650 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(7.21, 7.21, 7.21); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 23.5 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.74 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 14.7 W/kg; SAR(10 g) = 6.49 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 22.5 W/kg

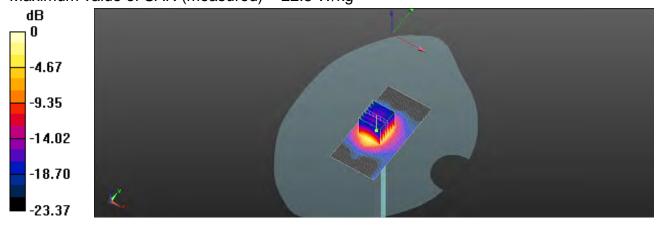

0 dB = 22.5 W/kg = 13.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sqs.com.tw



Report No.: E5/2020/B0021 Page: 119 of 126

Date: 2020/12/21

Report No.: E5/2020/B0013 Dipole 2600 MHz_SN:1005

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2600 MHz; $\sigma = 1.961 \text{ S/m}$; $\varepsilon_r = 39.224$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3665; ConvF(7.21, 7.21, 7.21); Calibrated: 2020/8/20

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn558; Calibrated: 2020/11/24

Phantom: SAM

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 24.1 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.0 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 33.3 W/kg

SAR(1 g) = 14.9 W/kg; SAR(10 g) = 6.56 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 23.5 W/kg

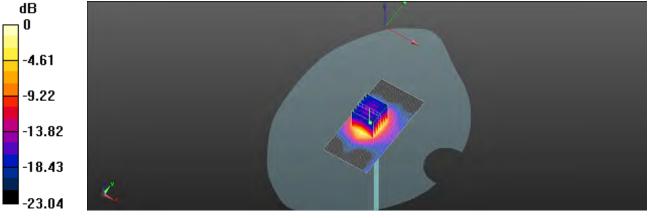

0 dB = 23.5 W/kg = 13.71 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件報生结里做新聞过入樣具負責,同時件樣具做保留的干。大報生主概未公司書面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 120 of 126

Date: 2020/12/20

Report No.: E5/2020/B0013 **Dipole 5200 MHz_SN:1023**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5200 MHz; $\sigma = 4.597 \text{ S/m}$; $\epsilon_r = 35.631$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(5.6, 5.6, 5.6); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 12.1 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 72.44 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 23.5 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 12.1 W/kg

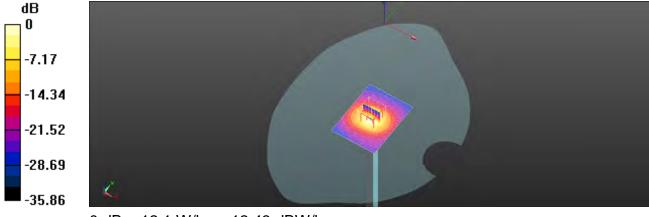

0 dB = 12.1 W/kg = 12.43 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E5/2020/B0021 Page: 121 of 126

Date: 2020/12/20

Report No.: E5/2020/B0013 **Dipole 5300 MHz_SN:1023**

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5300 MHz; $\sigma = 4.701 \text{ S/m}$; $\epsilon_r = 35.498$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(5.45, 5.45, 5.45); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 12.6 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 69.16 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 24.3 W/kg

SAR(1 g) = 8.39 W/kg; SAR(10 g) = 2.37 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 12.4 W/kg

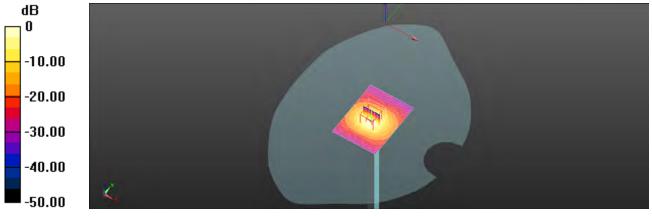

0 dB = 12.4 W/kg = 13.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

台灣檢驗科技股份有限公司



Report No.: E5/2020/B0021 Page: 122 of 126

Date: 2020/12/21

Report No.: E5/2020/B0013 Dipole 5600 MHz_SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 5.006 \text{ S/m}$; $\epsilon_r = 35.173$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(4.98, 4.98, 4.98); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (71x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.4 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.02 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 8.23 W/kg; SAR(10 g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 15.5 W/kg

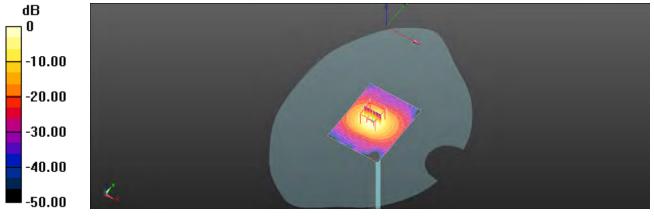

0 dB = 15.5 W/kg = 12.78 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有铅明,此数华红用摄影测过之样只有景,同时此样只属是例如子。太极生工概太公司电描弦可,因可如公指制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E5/2020/B0021 Page: 123 of 126

Date: 2020/12/21

Report No.: E5/2020/B0013 **Dipole 5800 MHz_SN:1023**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5800 MHz; $\sigma = 5.208 \text{ S/m}$; $\epsilon_r = 34.947$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7466; ConvF(5.04, 5.04, 5.04); Calibrated: 2020/2/4

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2020/8/13

Phantom: SAM

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (71x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 13.1 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.56 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 22.6 W/kg

SAR(1 g) = 8.07 W/kg; SAR(10 g) = 2.32 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 12.4 W/kg

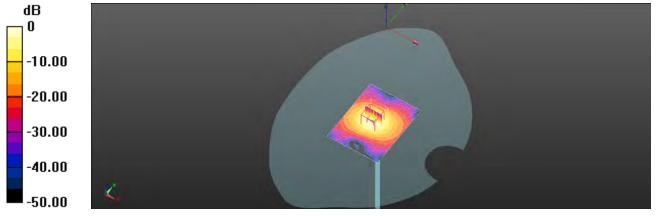

0 dB = 12.4 W/kg = 12.24 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

t (886-2) 2299-3279



Page: 124 of 126

7. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	oc
Isotropy , Axial	3.50%	R	√ 3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√ 3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√ 3	1.732	1	1	2.71%	2.71%	- oc
Detection Limits	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	oc
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	oc
Response time	0.80%	R	√ 3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√ 3	1.732	1	1	1.50%	1.50%	×
Measurement drift (class A evaluation)	1.75%	R	√ 3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition - noise	3.00%	R	√ 3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√ 3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√ 3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom shell	2.90%	R	√ 3	1.732	1	1	1.67%	1.67%	×
Post-processing	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√ 3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√ 3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√ 3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	1.04%	N	1	1	0.64	0.43	0.67%	0.45%	М
Liquid Conductivity (mea.)	1.25%	N	1	1	0.6	0.49	0.75%	0.61%	М
Combined standard uncertainty		RSS					11.76%	11.73%	
Expant uncertainty (95% confidence interval), K=2							23.52%	23.46%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.sqs.com.tw



Page: 125 of 126

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	1.03%	N	1	1	0.64	0.43	0.66%	0.44%	М
Liquid Conductivity (mea.)	1.23%	N	1	1	0.6	0.49	0.74%	0.60%	М
Combined standard uncertainty		RSS					11.46%	11.43%	
Expant uncertainty (95% confidence interval), K=2							22.92%	22.87%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw



Page: 126 of 126

Appendixes

Refer to separated files for the following appendixes.

E52020B0021 SAR_Appendix A Photographs

E52020B0021 SAR_Appendix B DAE & Probe Cal. Certificate

E52020B0021 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.