





Mode	14																																																																																																																																			
	Harmonic																																																																																																																																			
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz																																																																																																																																			
ANT	4																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak	 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>53.15</td> <td>74.00</td> <td>-20.85</td> <td>36.35</td> <td>38.90</td> <td>18.62</td> <td>41.52</td> <td>0.80</td> <td>164</td> <td>99</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>42.44</td> <td>54.00</td> <td>-11.56</td> <td>25.64</td> <td>38.90</td> <td>18.62</td> <td>41.52</td> <td>0.80</td> <td>164</td> <td>99</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>53.43</td> <td>74.00</td> <td>-20.57</td> <td>35.34</td> <td>39.00</td> <td>22.97</td> <td>44.30</td> <td>0.42</td> <td>264</td> <td>318</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>43.74</td> <td>54.00</td> <td>-10.26</td> <td>25.65</td> <td>39.00</td> <td>22.97</td> <td>44.30</td> <td>0.42</td> <td>264</td> <td>318</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	10600.00	53.15	74.00	-20.85	36.35	38.90	18.62	41.52	0.80	164	99	PEAK	2	10600.00	42.44	54.00	-11.56	25.64	38.90	18.62	41.52	0.80	164	99	Average	3	15900.00	53.43	74.00	-20.57	35.34	39.00	22.97	44.30	0.42	264	318	PEAK	4	15900.00	43.74	54.00	-10.26	25.65	39.00	22.97	44.30	0.42	264	318	Average	 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>52.41</td> <td>74.00</td> <td>-21.59</td> <td>35.61</td> <td>38.90</td> <td>18.62</td> <td>41.52</td> <td>0.80</td> <td>136</td> <td>96</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>42.13</td> <td>54.00</td> <td>-11.87</td> <td>25.33</td> <td>38.90</td> <td>18.62</td> <td>41.52</td> <td>0.80</td> <td>136</td> <td>96</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>53.37</td> <td>74.00</td> <td>-20.63</td> <td>35.28</td> <td>39.00</td> <td>22.97</td> <td>44.30</td> <td>0.42</td> <td>315</td> <td>151</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>43.75</td> <td>54.00</td> <td>-10.25</td> <td>25.66</td> <td>39.00</td> <td>22.97</td> <td>44.30</td> <td>0.42</td> <td>315</td> <td>151</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	10600.00	52.41	74.00	-21.59	35.61	38.90	18.62	41.52	0.80	136	96	PEAK	2	10600.00	42.13	54.00	-11.87	25.33	38.90	18.62	41.52	0.80	136	96	Average	3	15900.00	53.37	74.00	-20.63	35.28	39.00	22.97	44.30	0.42	315	151	PEAK	4	15900.00	43.75	54.00	-10.25	25.66	39.00	22.97	44.30	0.42	315	151	Average
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																								
1	10600.00	53.15	74.00	-20.85	36.35	38.90	18.62	41.52	0.80	164	99	PEAK																																																																																																																								
2	10600.00	42.44	54.00	-11.56	25.64	38.90	18.62	41.52	0.80	164	99	Average																																																																																																																								
3	15900.00	53.43	74.00	-20.57	35.34	39.00	22.97	44.30	0.42	264	318	PEAK																																																																																																																								
4	15900.00	43.74	54.00	-10.26	25.65	39.00	22.97	44.30	0.42	264	318	Average																																																																																																																								
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																								
1	10600.00	52.41	74.00	-21.59	35.61	38.90	18.62	41.52	0.80	136	96	PEAK																																																																																																																								
2	10600.00	42.13	54.00	-11.87	25.33	38.90	18.62	41.52	0.80	136	96	Average																																																																																																																								
3	15900.00	53.37	74.00	-20.63	35.28	39.00	22.97	44.30	0.42	315	151	PEAK																																																																																																																								
4	15900.00	43.75	54.00	-10.25	25.66	39.00	22.97	44.30	0.42	315	151	Average																																																																																																																								
Avg																																																																																																																																				

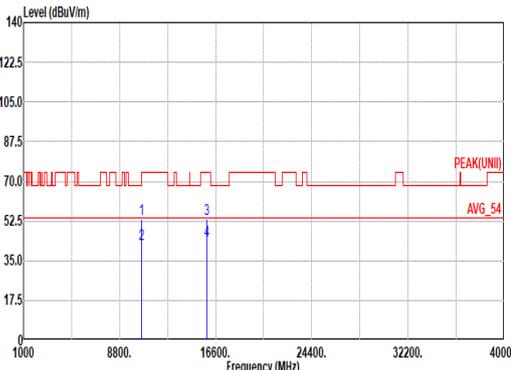

	<b>15</b>																																																																			
<b>Mode</b>	<b>Band Edge</b>																																																																			
	<b>U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz</b>																																																																			
<b>ANT</b>	<b>4</b>																																																																			
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																		
<b>Peak</b>	<p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.66</td> <td>67.29</td> <td>74.00</td> <td>-6.71</td> <td>58.96</td> <td>33.10</td> <td>13.07</td> <td>37.84</td> <td>0.00</td> <td>100</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5357.66	67.29	74.00	-6.71	58.96	33.10	13.07	37.84	0.00	100	66	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNI) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>107.99</td> <td>-----</td> <td>-----</td> <td>99.87</td> <td>32.92</td> <td>13.02</td> <td>37.82</td> <td>0.00</td> <td>100</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5320.00	107.99	-----	-----	99.87	32.92	13.02	37.82	0.00	100	66	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5357.66	67.29	74.00	-6.71	58.96	33.10	13.07	37.84	0.00	100	66	PEAK																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5320.00	107.99	-----	-----	99.87	32.92	13.02	37.82	0.00	100	66	PEAK																																																								
<b>Avg</b>	<p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.94</td> <td>50.74</td> <td>54.00</td> <td>-3.26</td> <td>42.42</td> <td>33.10</td> <td>13.06</td> <td>37.84</td> <td>0.00</td> <td>100</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5358.94	50.74	54.00	-3.26	42.42	33.10	13.06	37.84	0.00	100	66	AVERAGE	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.05</td> <td>-----</td> <td>-----</td> <td>92.93</td> <td>32.92</td> <td>13.02</td> <td>37.82</td> <td>0.00</td> <td>100</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	5320.00	101.05	-----	-----	92.93	32.92	13.02	37.82	0.00	100	66	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5358.94	50.74	54.00	-3.26	42.42	33.10	13.06	37.84	0.00	100	66	AVERAGE																																																								
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																									
1	5320.00	101.05	-----	-----	92.93	32.92	13.02	37.82	0.00	100	66	AVERAGE																																																								




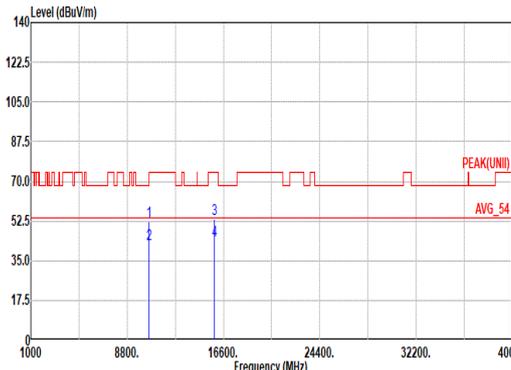


Mode	15																																																																										
	Band Edge																																																																										
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																										
ANT	4																																																																										
Pol.	Vertical	Fundamental																																																																									
Peak	<p>Level (dBuV/m)</p> <p>140</p> <p>122.5</p> <p>105.0</p> <p>87.5</p> <p>70.0</p> <p>52.5</p> <p>35.0</p> <p>17.5</p> <p>0</p> <p>5320 5348. 5376. 5404. 5432. 5460</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.00</td> <td>63.03</td> <td>74.00</td> <td>-10.97</td> <td>54.71</td> <td>33.10</td> <td>13.06</td> <td>37.84</td> <td>0.00</td> <td>300</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5351.00	63.03	74.00	-10.97	54.71	33.10	13.06	37.84	0.00	300	340	PEAK	<p>Level (dBuV/m)</p> <p>140</p> <p>122.5</p> <p>105.0</p> <p>87.5</p> <p>70.0</p> <p>52.5</p> <p>35.0</p> <p>17.5</p> <p>0</p> <p>1000 2200. 3400. 4600. 5800. 7000</p> <p>Frequency (MHz)</p> <p>PEAK(UNI)</p> <p>Site : 03CH20-HY Condition: PEAK(UNI) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>105.14</td> <td>-----</td> <td>97.02</td> <td>32.92</td> <td>13.02</td> <td>37.82</td> <td>0.00</td> <td>300</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	105.14	-----	97.02	32.92	13.02	37.82	0.00	300	340	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	5351.00	63.03	74.00	-10.97	54.71	33.10	13.06	37.84	0.00	300	340	PEAK																																																															
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	5320.00	105.14	-----	97.02	32.92	13.02	37.82	0.00	300	340	PEAK																																																																
Avg	<p>Level (dBuV/m)</p> <p>140</p> <p>122.5</p> <p>105.0</p> <p>87.5</p> <p>70.0</p> <p>52.5</p> <p>35.0</p> <p>17.5</p> <p>0</p> <p>5320 5348. 5376. 5404. 5432. 5460</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>48.22</td> <td>54.00</td> <td>-5.78</td> <td>39.90</td> <td>33.10</td> <td>13.06</td> <td>37.84</td> <td>0.00</td> <td>300</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.10	48.22	54.00	-5.78	39.90	33.10	13.06	37.84	0.00	300	340	AVERAGE	<p>Level (dBuV/m)</p> <p>140</p> <p>122.5</p> <p>105.0</p> <p>87.5</p> <p>70.0</p> <p>52.5</p> <p>35.0</p> <p>17.5</p> <p>0</p> <p>1000 2200. 3400. 4600. 5800. 7000</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.67</td> <td>-----</td> <td>90.55</td> <td>32.92</td> <td>13.02</td> <td>37.82</td> <td>0.00</td> <td>300</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	98.67	-----	90.55	32.92	13.02	37.82	0.00	300	340	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	5350.10	48.22	54.00	-5.78	39.90	33.10	13.06	37.84	0.00	300	340	AVERAGE																																																															
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	5320.00	98.67	-----	90.55	32.92	13.02	37.82	0.00	300	340	AVERAGE																																																																





Mode	15																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																																																																																	
ANT	4																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>52.61</td> <td>74.00</td> <td>-21.39</td> <td>35.67</td> <td>39.06</td> <td>18.65</td> <td>41.57</td> <td>0.80</td> <td>346</td> <td>34</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>42.30</td> <td>54.00</td> <td>-11.70</td> <td>25.36</td> <td>39.06</td> <td>18.65</td> <td>41.57</td> <td>0.80</td> <td>346</td> <td>34</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>52.13</td> <td>74.00</td> <td>-21.87</td> <td>34.15</td> <td>38.80</td> <td>23.02</td> <td>44.25</td> <td>0.41</td> <td>311</td> <td>14</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15960.00</td> <td>43.55</td> <td>54.00</td> <td>-10.45</td> <td>25.57</td> <td>38.80</td> <td>23.02</td> <td>44.25</td> <td>0.41</td> <td>311</td> <td>14</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	52.61	74.00	-21.39	35.67	39.06	18.65	41.57	0.80	346	34	PEAK	2	10640.00	42.30	54.00	-11.70	25.36	39.06	18.65	41.57	0.80	346	34	Average	3	15960.00	52.13	74.00	-21.87	34.15	38.80	23.02	44.25	0.41	311	14	PEAK	4	15960.00	43.55	54.00	-10.45	25.57	38.80	23.02	44.25	0.41	311	14	Average	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>52.14</td> <td>74.00</td> <td>-21.86</td> <td>35.20</td> <td>39.06</td> <td>18.65</td> <td>41.57</td> <td>0.80</td> <td>349</td> <td>248</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>42.30</td> <td>54.00</td> <td>-11.70</td> <td>25.36</td> <td>39.06</td> <td>18.65</td> <td>41.57</td> <td>0.80</td> <td>349</td> <td>248</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>52.39</td> <td>74.00</td> <td>-21.61</td> <td>34.41</td> <td>38.80</td> <td>23.02</td> <td>44.25</td> <td>0.41</td> <td>348</td> <td>56</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15960.00</td> <td>43.59</td> <td>54.00</td> <td>-10.41</td> <td>25.61</td> <td>38.80</td> <td>23.02</td> <td>44.25</td> <td>0.41</td> <td>348</td> <td>56</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	52.14	74.00	-21.86	35.20	39.06	18.65	41.57	0.80	349	248	PEAK	2	10640.00	42.30	54.00	-11.70	25.36	39.06	18.65	41.57	0.80	349	248	Average	3	15960.00	52.39	74.00	-21.61	34.41	38.80	23.02	44.25	0.41	348	56	PEAK	4	15960.00	43.59	54.00	-10.41	25.61	38.80	23.02	44.25	0.41	348	56	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	10640.00	52.61	74.00	-21.39	35.67	39.06	18.65	41.57	0.80	346	34	PEAK																																																																																																																																																						
2	10640.00	42.30	54.00	-11.70	25.36	39.06	18.65	41.57	0.80	346	34	Average																																																																																																																																																						
3	15960.00	52.13	74.00	-21.87	34.15	38.80	23.02	44.25	0.41	311	14	PEAK																																																																																																																																																						
4	15960.00	43.55	54.00	-10.45	25.57	38.80	23.02	44.25	0.41	311	14	Average																																																																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	10640.00	52.14	74.00	-21.86	35.20	39.06	18.65	41.57	0.80	349	248	PEAK																																																																																																																																																						
2	10640.00	42.30	54.00	-11.70	25.36	39.06	18.65	41.57	0.80	349	248	Average																																																																																																																																																						
3	15960.00	52.39	74.00	-21.61	34.41	38.80	23.02	44.25	0.41	348	56	PEAK																																																																																																																																																						
4	15960.00	43.59	54.00	-10.41	25.61	38.80	23.02	44.25	0.41	348	56	Average																																																																																																																																																						

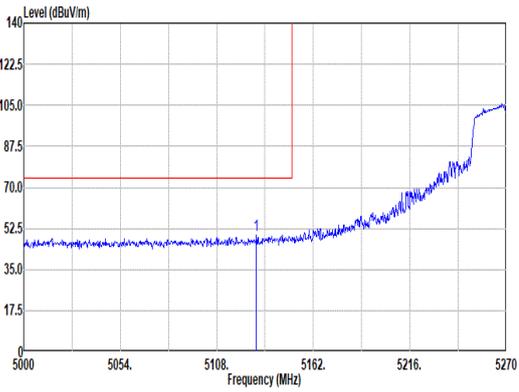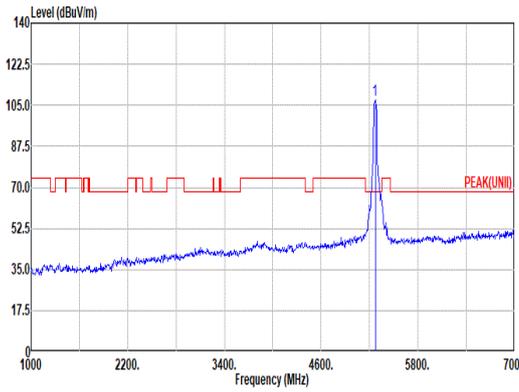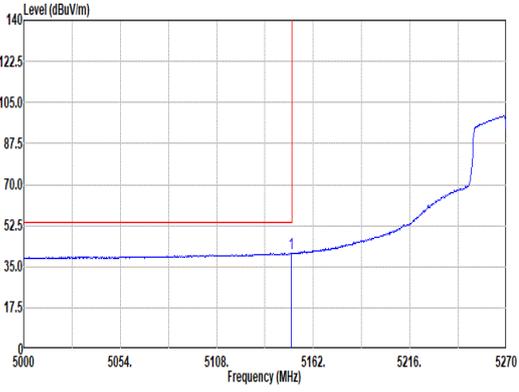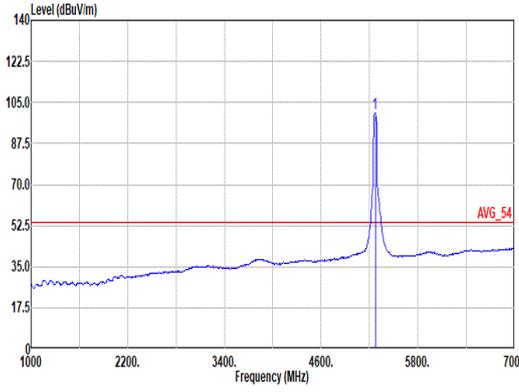

Mode	16																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																									
ANT	4																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5130.14</td> <td>49.89</td> <td>74.00</td> <td>-24.11</td> <td>41.58</td> <td>33.26</td> <td>12.78</td> <td>37.73</td> <td>0.00</td> <td>100</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5130.14	49.89	74.00	-24.11	41.58	33.26	12.78	37.73	0.00	100	66	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>107.42</td> <td>-----</td> <td>-----</td> <td>99.40</td> <td>32.86</td> <td>12.96</td> <td>37.80</td> <td>0.00</td> <td>100</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5270.00	107.42	-----	-----	99.40	32.86	12.96	37.80	0.00	100	66	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5130.14	49.89	74.00	-24.11	41.58	33.26	12.78	37.73	0.00	100	66	PEAK																																																															
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5270.00	107.42	-----	-----	99.40	32.86	12.96	37.80	0.00	100	66	PEAK																																																															
Avg	 <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5149.58</td> <td>40.83</td> <td>54.00</td> <td>-13.17</td> <td>32.47</td> <td>33.30</td> <td>12.80</td> <td>37.74</td> <td>0.00</td> <td>100</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5149.58	40.83	54.00	-13.17	32.47	33.30	12.80	37.74	0.00	100	66	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>100.48</td> <td>-----</td> <td>-----</td> <td>92.46</td> <td>32.86</td> <td>12.96</td> <td>37.80</td> <td>0.00</td> <td>100</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5270.00	100.48	-----	-----	92.46	32.86	12.96	37.80	0.00	100	66	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5149.58	40.83	54.00	-13.17	32.47	33.30	12.80	37.74	0.00	100	66	AVERAGE																																																															
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5270.00	100.48	-----	-----	92.46	32.86	12.96	37.80	0.00	100	66	AVERAGE																																																															

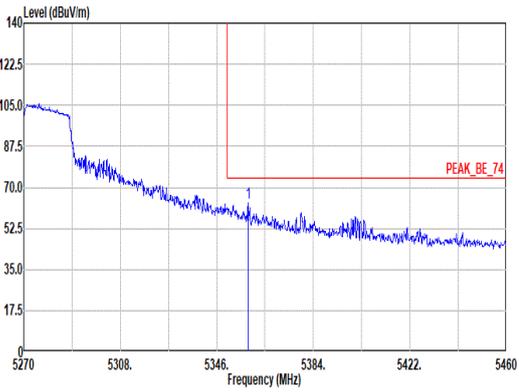
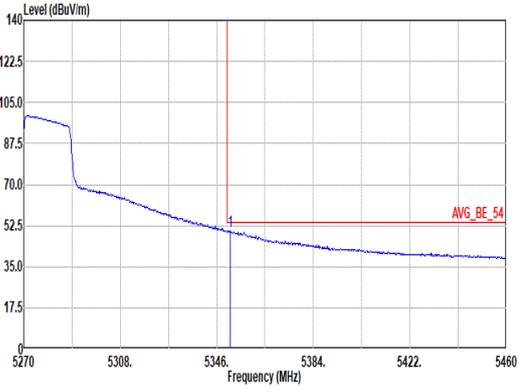


	<b>16</b>																																								
<b>Mode</b>	<b>Band Edge - R</b>																																								
	<b>U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz</b>																																								
<b>ANT</b>	<b>4</b>																																								
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																							
<b>Peak</b>	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>5358.35</th> <th>63.48</th> <th>74.00</th> <th>-10.52</th> <th>55.15</th> <th>33.10</th> <th>13.07</th> <th>37.84</th> <th>0.00</th> <th>100</th> <th>66</th> <th>PEAK</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.35</td> <td>63.48</td> <td>74.00</td> <td>-10.52</td> <td>55.15</td> <td>33.10</td> <td>13.07</td> <td>37.84</td> <td>0.00</td> <td>100</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	1	5358.35	63.48	74.00	-10.52	55.15	33.10	13.07	37.84	0.00	100	66	PEAK	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark		1	5358.35	63.48	74.00	-10.52	55.15	33.10	13.07	37.84	0.00	100	66	PEAK	<b>Blank</b>
1	5358.35	63.48	74.00	-10.52	55.15	33.10	13.07	37.84	0.00	100	66	PEAK																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																														
1	5358.35	63.48	74.00	-10.52	55.15	33.10	13.07	37.84	0.00	100	66	PEAK																													
<b>Avg</b>	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>5351.32</th> <th>50.32</th> <th>54.00</th> <th>-3.68</th> <th>42.00</th> <th>33.10</th> <th>13.06</th> <th>37.84</th> <th>0.00</th> <th>100</th> <th>66</th> <th>AVERAGE</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.32</td> <td>50.32</td> <td>54.00</td> <td>-3.68</td> <td>42.00</td> <td>33.10</td> <td>13.06</td> <td>37.84</td> <td>0.00</td> <td>100</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	1	5351.32	50.32	54.00	-3.68	42.00	33.10	13.06	37.84	0.00	100	66	AVERAGE	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark		1	5351.32	50.32	54.00	-3.68	42.00	33.10	13.06	37.84	0.00	100	66	AVERAGE	<b>Blank</b>
1	5351.32	50.32	54.00	-3.68	42.00	33.10	13.06	37.84	0.00	100	66	AVERAGE																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																														
1	5351.32	50.32	54.00	-3.68	42.00	33.10	13.06	37.84	0.00	100	66	AVERAGE																													



Mode	16																																																																																	
	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																	
ANT	4																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.16</td> <td>48.66</td> <td>74.00</td> <td>-25.34</td> <td>40.34</td> <td>33.27</td> <td>12.79</td> <td>37.74</td> <td>0.00</td> <td>300</td> <td>343</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5137.16	48.66	74.00	-25.34	40.34	33.27	12.79	37.74	0.00	300	343	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>104.44</td> <td>-----</td> <td>-----</td> <td>96.43</td> <td>32.84</td> <td>12.97</td> <td>37.80</td> <td>0.00</td> <td>300</td> <td>343</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5270.00	104.44	-----	-----	96.43	32.84	12.97	37.80	0.00	300	343	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5137.16	48.66	74.00	-25.34	40.34	33.27	12.79	37.74	0.00	300	343	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5270.00	104.44	-----	-----	96.43	32.84	12.97	37.80	0.00	300	343	PEAK																																																																						
Avg	<p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.37</td> <td>39.68</td> <td>54.00</td> <td>-14.32</td> <td>31.33</td> <td>33.29</td> <td>12.80</td> <td>37.74</td> <td>0.00</td> <td>300</td> <td>343</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5143.37	39.68	54.00	-14.32	31.33	33.29	12.80	37.74	0.00	300	343	AVERAGE	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>97.39</td> <td>-----</td> <td>-----</td> <td>89.37</td> <td>32.86</td> <td>12.96</td> <td>37.80</td> <td>0.00</td> <td>300</td> <td>343</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5270.00	97.39	-----	-----	89.37	32.86	12.96	37.80	0.00	300	343	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5143.37	39.68	54.00	-14.32	31.33	33.29	12.80	37.74	0.00	300	343	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5270.00	97.39	-----	-----	89.37	32.86	12.96	37.80	0.00	300	343	AVERAGE																																																																						



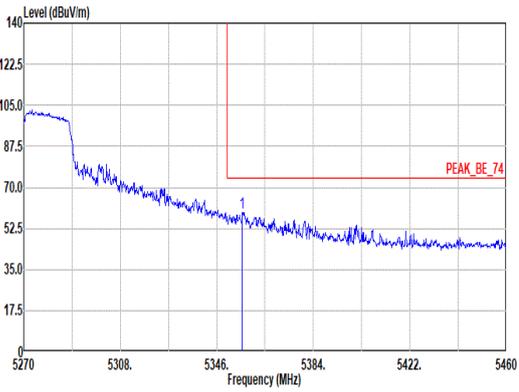
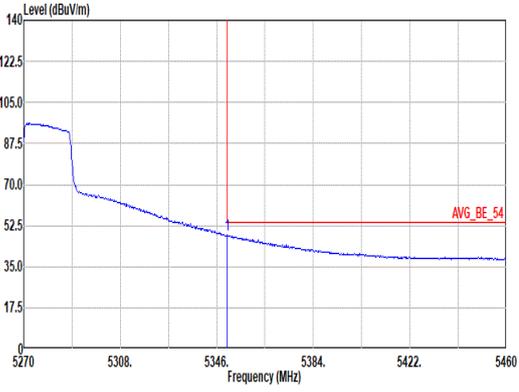


	<b>16</b>																																									
Mode	<b>Band Edge - R</b>																																									
	<b>U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz</b>																																									
ANT	<b>4</b>																																									
Pol.	<b>Vertical</b>	<b>Fundamental</b>																																								
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5356.07</td> <td>59.31</td> <td>74.00</td> <td>-14.69</td> <td>50.98</td> <td>33.10</td> <td>13.07</td> <td>37.84</td> <td>0.00</td> <td>300</td> <td>343</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5356.07	59.31	74.00	-14.69	50.98	33.10	13.07	37.84	0.00	300	343	PEAK	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5356.07	59.31	74.00	-14.69	50.98	33.10	13.07	37.84	0.00	300	343	PEAK																															
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.18</td> <td>48.37</td> <td>54.00</td> <td>-5.63</td> <td>40.05</td> <td>33.10</td> <td>13.06</td> <td>37.84</td> <td>0.00</td> <td>300</td> <td>343</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.18	48.37	54.00	-5.63	40.05	33.10	13.06	37.84	0.00	300	343	AVERAGE	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5350.18	48.37	54.00	-5.63	40.05	33.10	13.06	37.84	0.00	300	343	AVERAGE																															





Mode	16																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																																																																							
ANT	4																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>51.55</td> <td>68.20</td> <td>-16.65</td> <td>35.04</td> <td>38.60</td> <td>18.56</td> <td>41.46</td> <td>0.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>52.69</td> <td>74.00</td> <td>-21.31</td> <td>34.89</td> <td>38.86</td> <td>22.89</td> <td>44.38</td> <td>0.43</td> <td>100</td> <td>239</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15810.00</td> <td>42.96</td> <td>54.00</td> <td>-11.04</td> <td>25.16</td> <td>38.86</td> <td>22.89</td> <td>44.38</td> <td>0.43</td> <td>100</td> <td>239</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10540.00	51.55	68.20	-16.65	35.04	38.60	18.56	41.46	0.81	--	--	PEAK	2	15810.00	52.69	74.00	-21.31	34.89	38.86	22.89	44.38	0.43	100	239	PEAK	3	15810.00	42.96	54.00	-11.04	25.16	38.86	22.89	44.38	0.43	100	239	Average	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>51.45</td> <td>68.20</td> <td>-16.75</td> <td>34.94</td> <td>38.60</td> <td>18.56</td> <td>41.46</td> <td>0.81</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>52.58</td> <td>74.00</td> <td>-21.42</td> <td>34.78</td> <td>38.86</td> <td>22.89</td> <td>44.38</td> <td>0.43</td> <td>200</td> <td>269</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15810.00</td> <td>42.89</td> <td>54.00</td> <td>-11.11</td> <td>25.09</td> <td>38.86</td> <td>22.89</td> <td>44.38</td> <td>0.43</td> <td>200</td> <td>269</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10540.00	51.45	68.20	-16.75	34.94	38.60	18.56	41.46	0.81	--	--	PEAK	2	15810.00	52.58	74.00	-21.42	34.78	38.86	22.89	44.38	0.43	200	269	PEAK	3	15810.00	42.89	54.00	-11.11	25.09	38.86	22.89	44.38	0.43	200	269	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	10540.00	51.55	68.20	-16.65	35.04	38.60	18.56	41.46	0.81	--	--	PEAK																																																																																																																												
2	15810.00	52.69	74.00	-21.31	34.89	38.86	22.89	44.38	0.43	100	239	PEAK																																																																																																																												
3	15810.00	42.96	54.00	-11.04	25.16	38.86	22.89	44.38	0.43	100	239	Average																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	10540.00	51.45	68.20	-16.75	34.94	38.60	18.56	41.46	0.81	--	--	PEAK																																																																																																																												
2	15810.00	52.58	74.00	-21.42	34.78	38.86	22.89	44.38	0.43	200	269	PEAK																																																																																																																												
3	15810.00	42.89	54.00	-11.11	25.09	38.86	22.89	44.38	0.43	200	269	Average																																																																																																																												

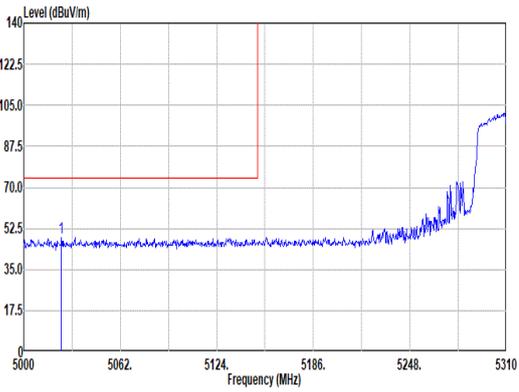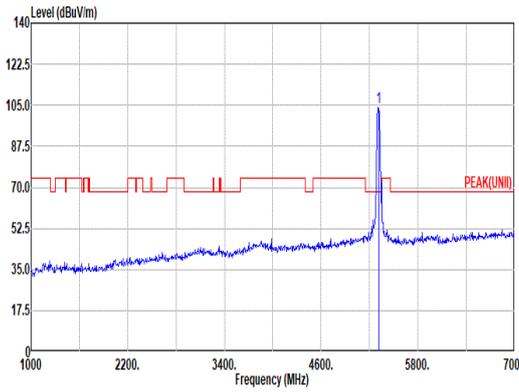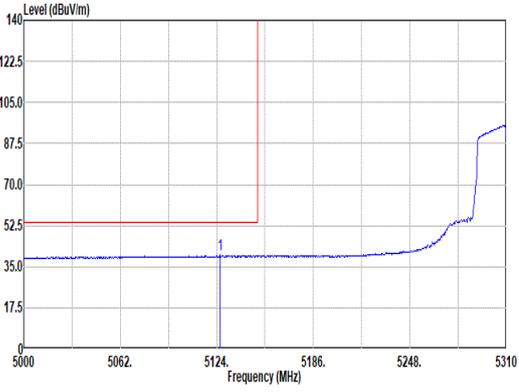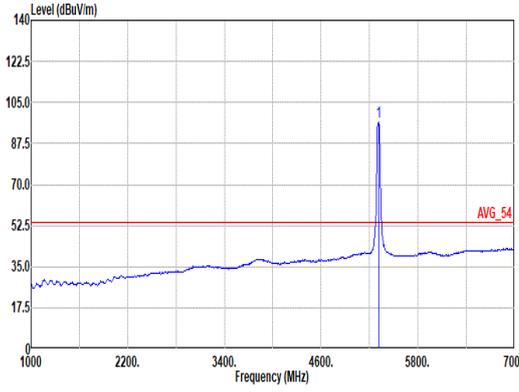

	17																																																																											
Mode	Band Edge - L																																																																											
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																											
ANT	4																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5024.18</td> <td>48.80</td> <td>74.00</td> <td>-25.20</td> <td>40.49</td> <td>33.35</td> <td>12.64</td> <td>37.68</td> <td>0.00</td> <td>101</td> <td>67</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5024.18	48.80	74.00	-25.20	40.49	33.35	12.64	37.68	0.00	101	67	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>103.93</td> <td>-----</td> <td>-----</td> <td>95.89</td> <td>32.85</td> <td>13.01</td> <td>37.82</td> <td>0.00</td> <td>101</td> <td>67</td> <td>PEAK(UNII)</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5310.00	103.93	-----	-----	95.89	32.85	13.01	37.82	0.00	101	67	PEAK(UNII)
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5024.18	48.80	74.00	-25.20	40.49	33.35	12.64	37.68	0.00	101	67	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5310.00	103.93	-----	-----	95.89	32.85	13.01	37.82	0.00	101	67	PEAK(UNII)																																																																
Avg	 <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5126.17</td> <td>39.89</td> <td>54.00</td> <td>-14.11</td> <td>31.60</td> <td>33.25</td> <td>12.77</td> <td>37.73</td> <td>0.00</td> <td>101</td> <td>67</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5126.17	39.89	54.00	-14.11	31.60	33.25	12.77	37.73	0.00	101	67	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>96.61</td> <td>-----</td> <td>-----</td> <td>88.54</td> <td>32.88</td> <td>13.01</td> <td>37.82</td> <td>0.00</td> <td>101</td> <td>67</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5310.00	96.61	-----	-----	88.54	32.88	13.01	37.82	0.00	101	67	AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5126.17	39.89	54.00	-14.11	31.60	33.25	12.77	37.73	0.00	101	67	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5310.00	96.61	-----	-----	88.54	32.88	13.01	37.82	0.00	101	67	AVERAGE																																																																

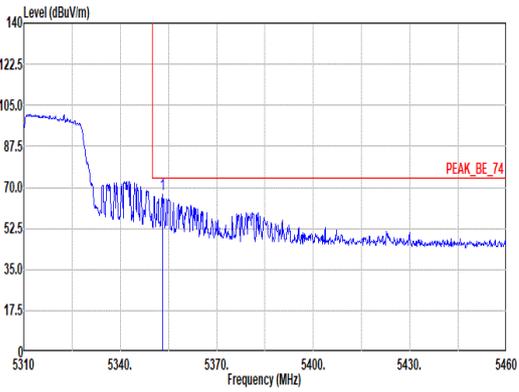
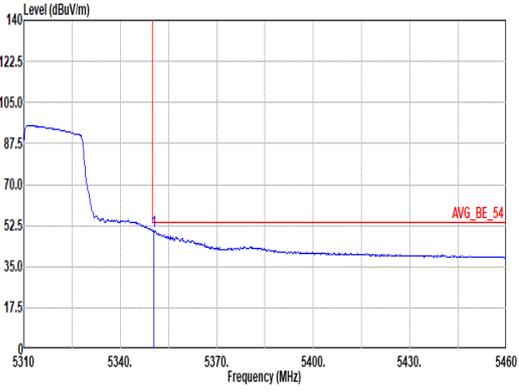


	<b>17</b>																																							
<b>Mode</b>	<b>Band Edge - R</b>																																							
	<b>U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz</b>																																							
<b>ANT</b>	<b>4</b>																																							
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																						
<b>Peak</b>	 <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5353.20</td> <td>67.24</td> <td>74.00</td> <td>-6.76</td> <td>58.92</td> <td>33.10</td> <td>13.06</td> <td>37.84</td> <td>0.00</td> <td>101</td> <td>67 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5353.20	67.24	74.00	-6.76	58.92	33.10	13.06	37.84	0.00	101	67 PEAK	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																
1 5353.20	67.24	74.00	-6.76	58.92	33.10	13.06	37.84	0.00	101	67 PEAK																														
<b>Avg</b>	 <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.50</td> <td>50.19</td> <td>54.00</td> <td>-3.81</td> <td>41.87</td> <td>33.10</td> <td>13.06</td> <td>37.84</td> <td>0.00</td> <td>101</td> <td>67 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5350.50	50.19	54.00	-3.81	41.87	33.10	13.06	37.84	0.00	101	67 AVERAGE	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																
1 5350.50	50.19	54.00	-3.81	41.87	33.10	13.06	37.84	0.00	101	67 AVERAGE																														



	17																																																																																	
Mode	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																	
ANT	4																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5090.52</td> <td>48.25</td> <td>74.00</td> <td>-25.75</td> <td>40.01</td> <td>33.22</td> <td>12.73</td> <td>37.71</td> <td>0.00</td> <td>400</td> <td>5</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5090.52	48.25	74.00	-25.75	40.01	33.22	12.73	37.71	0.00	400	5	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>99.97</td> <td>-----</td> <td>-----</td> <td>91.93</td> <td>32.85</td> <td>13.01</td> <td>37.82</td> <td>0.00</td> <td>400</td> <td>5</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5310.00	99.97	-----	-----	91.93	32.85	13.01	37.82	0.00	400	5	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5090.52	48.25	74.00	-25.75	40.01	33.22	12.73	37.71	0.00	400	5	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5310.00	99.97	-----	-----	91.93	32.85	13.01	37.82	0.00	400	5	PEAK																																																																						
Avg	<p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5088.66</td> <td>39.41</td> <td>54.00</td> <td>-14.59</td> <td>31.17</td> <td>33.22</td> <td>12.73</td> <td>37.71</td> <td>0.00</td> <td>400</td> <td>5</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5088.66	39.41	54.00	-14.59	31.17	33.22	12.73	37.71	0.00	400	5	AVERAGE	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>92.57</td> <td>-----</td> <td>-----</td> <td>84.53</td> <td>32.85</td> <td>13.01</td> <td>37.82</td> <td>0.00</td> <td>400</td> <td>5</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5310.00	92.57	-----	-----	84.53	32.85	13.01	37.82	0.00	400	5	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5088.66	39.41	54.00	-14.59	31.17	33.22	12.73	37.71	0.00	400	5	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5310.00	92.57	-----	-----	84.53	32.85	13.01	37.82	0.00	400	5	AVERAGE																																																																						



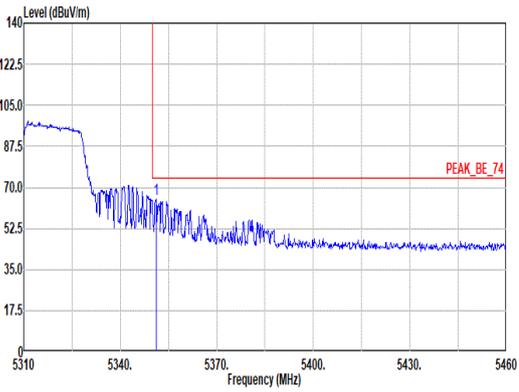
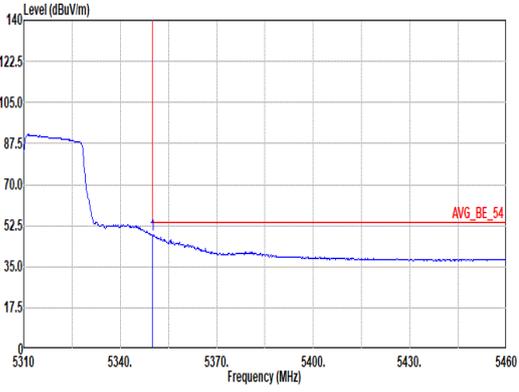


	<b>17</b>																																							
<b>Mode</b>	<b>Band Edge - R</b>																																							
	<b>U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz</b>																																							
<b>ANT</b>	<b>4</b>																																							
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																						
<b>Peak</b>	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5351.10</td> <td>64.79</td> <td>74.00</td> <td>-9.21</td> <td>56.47</td> <td>33.10</td> <td>13.06</td> <td>37.84</td> <td>0.00</td> <td>400</td> <td>5 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5351.10	64.79	74.00	-9.21	56.47	33.10	13.06	37.84	0.00	400	5 PEAK	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																
1 5351.10	64.79	74.00	-9.21	56.47	33.10	13.06	37.84	0.00	400	5 PEAK																														
<b>Avg</b>	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.05</td> <td>48.37</td> <td>54.00</td> <td>-5.63</td> <td>40.05</td> <td>33.10</td> <td>13.06</td> <td>37.84</td> <td>0.00</td> <td>400</td> <td>5 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5350.05	48.37	54.00	-5.63	40.05	33.10	13.06	37.84	0.00	400	5 AVERAGE	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																
1 5350.05	48.37	54.00	-5.63	40.05	33.10	13.06	37.84	0.00	400	5 AVERAGE																														





Mode	17																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																																																																																													
ANT	4																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>52.31</td> <td>74.00</td> <td>-21.69</td> <td>35.44</td> <td>38.98</td> <td>18.63</td> <td>41.54</td> <td>0.80</td> <td>200</td> <td>54</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10620.00</td> <td>42.27</td> <td>54.00</td> <td>-11.73</td> <td>25.40</td> <td>38.98</td> <td>18.63</td> <td>41.54</td> <td>0.80</td> <td>200</td> <td>54</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15930.00</td> <td>52.34</td> <td>74.00</td> <td>-21.66</td> <td>34.34</td> <td>38.88</td> <td>22.99</td> <td>44.28</td> <td>0.41</td> <td>400</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15930.00</td> <td>43.24</td> <td>54.00</td> <td>-10.76</td> <td>25.24</td> <td>38.88</td> <td>22.99</td> <td>44.28</td> <td>0.41</td> <td>400</td> <td>293</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10620.00	52.31	74.00	-21.69	35.44	38.98	18.63	41.54	0.80	200	54	PEAK	2	10620.00	42.27	54.00	-11.73	25.40	38.98	18.63	41.54	0.80	200	54	Average	3	15930.00	52.34	74.00	-21.66	34.34	38.88	22.99	44.28	0.41	400	293	PEAK	4	15930.00	43.24	54.00	-10.76	25.24	38.88	22.99	44.28	0.41	400	293	Average	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>52.20</td> <td>74.00</td> <td>-21.80</td> <td>35.33</td> <td>38.98</td> <td>18.63</td> <td>41.54</td> <td>0.80</td> <td>400</td> <td>328</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10620.00</td> <td>42.20</td> <td>54.00</td> <td>-11.80</td> <td>25.33</td> <td>38.98</td> <td>18.63</td> <td>41.54</td> <td>0.80</td> <td>400</td> <td>328</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15930.00</td> <td>52.38</td> <td>74.00</td> <td>-21.62</td> <td>34.38</td> <td>38.88</td> <td>22.99</td> <td>44.28</td> <td>0.41</td> <td>400</td> <td>170</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15930.00</td> <td>43.30</td> <td>54.00</td> <td>-10.70</td> <td>25.30</td> <td>38.88</td> <td>22.99</td> <td>44.28</td> <td>0.41</td> <td>400</td> <td>170</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10620.00	52.20	74.00	-21.80	35.33	38.98	18.63	41.54	0.80	400	328	PEAK	2	10620.00	42.20	54.00	-11.80	25.33	38.98	18.63	41.54	0.80	400	328	Average	3	15930.00	52.38	74.00	-21.62	34.38	38.88	22.99	44.28	0.41	400	170	PEAK	4	15930.00	43.30	54.00	-10.70	25.30	38.88	22.99	44.28	0.41	400	170	Average
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	10620.00	52.31	74.00	-21.69	35.44	38.98	18.63	41.54	0.80	200	54	PEAK																																																																																																																																																		
2	10620.00	42.27	54.00	-11.73	25.40	38.98	18.63	41.54	0.80	200	54	Average																																																																																																																																																		
3	15930.00	52.34	74.00	-21.66	34.34	38.88	22.99	44.28	0.41	400	293	PEAK																																																																																																																																																		
4	15930.00	43.24	54.00	-10.76	25.24	38.88	22.99	44.28	0.41	400	293	Average																																																																																																																																																		
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																		
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	10620.00	52.20	74.00	-21.80	35.33	38.98	18.63	41.54	0.80	400	328	PEAK																																																																																																																																																		
2	10620.00	42.20	54.00	-11.80	25.33	38.98	18.63	41.54	0.80	400	328	Average																																																																																																																																																		
3	15930.00	52.38	74.00	-21.62	34.38	38.88	22.99	44.28	0.41	400	170	PEAK																																																																																																																																																		
4	15930.00	43.30	54.00	-10.70	25.30	38.88	22.99	44.28	0.41	400	170	Average																																																																																																																																																		

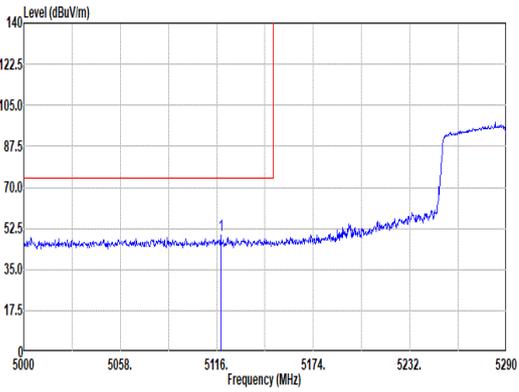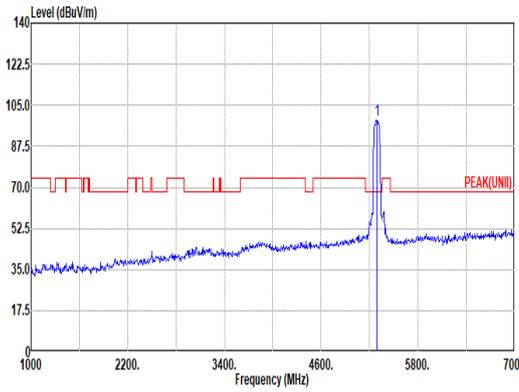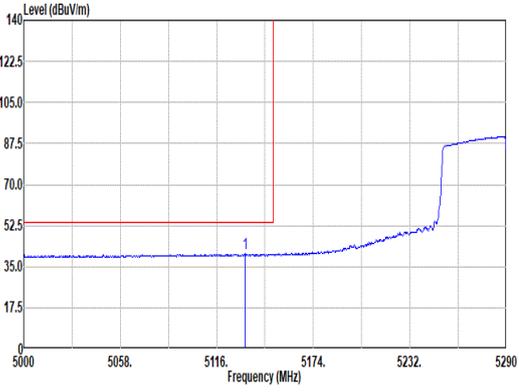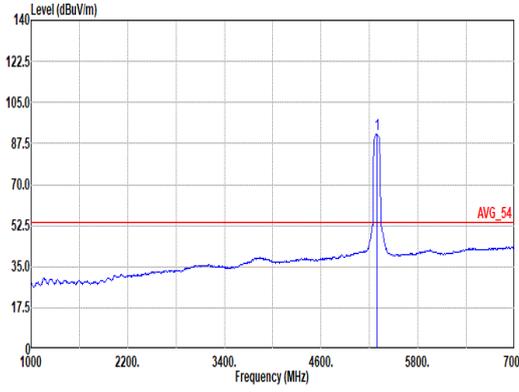

Mode	18																																																																											
	Band Edge - L																																																																											
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																											
ANT	4																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5118.32</td> <td>49.56</td> <td>74.00</td> <td>-24.44</td> <td>41.29</td> <td>33.24</td> <td>12.76</td> <td>37.73</td> <td>0.00</td> <td>100</td> <td>67</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5118.32	49.56	74.00	-24.44	41.29	33.24	12.76	37.73	0.00	100	67	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>98.77</td> <td>-----</td> <td>-----</td> <td>90.77</td> <td>32.83</td> <td>12.98</td> <td>37.81</td> <td>0.00</td> <td>100</td> <td>67</td> <td>PEAK(UNII)</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5290.00	98.77	-----	-----	90.77	32.83	12.98	37.81	0.00	100	67	PEAK(UNII)
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5118.32	49.56	74.00	-24.44	41.29	33.24	12.76	37.73	0.00	100	67	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5290.00	98.77	-----	-----	90.77	32.83	12.98	37.81	0.00	100	67	PEAK(UNII)																																																																
Avg	 <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5133.11</td> <td>40.42</td> <td>54.00</td> <td>-13.58</td> <td>32.10</td> <td>33.27</td> <td>12.78</td> <td>37.73</td> <td>0.00</td> <td>100</td> <td>67</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5133.11	40.42	54.00	-13.58	32.10	33.27	12.78	37.73	0.00	100	67	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>91.60</td> <td>-----</td> <td>-----</td> <td>83.61</td> <td>32.82</td> <td>12.98</td> <td>37.81</td> <td>0.00</td> <td>100</td> <td>67</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5290.00	91.60	-----	-----	83.61	32.82	12.98	37.81	0.00	100	67	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5133.11	40.42	54.00	-13.58	32.10	33.27	12.78	37.73	0.00	100	67	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5290.00	91.60	-----	-----	83.61	32.82	12.98	37.81	0.00	100	67	AVERAGE																																																																

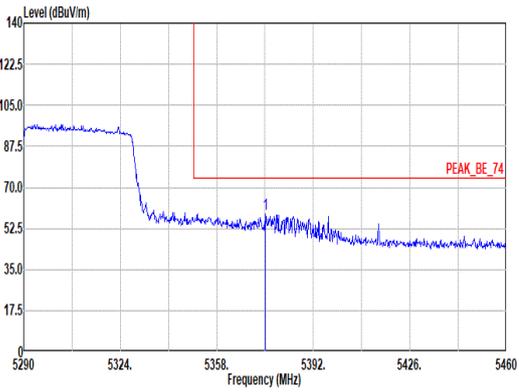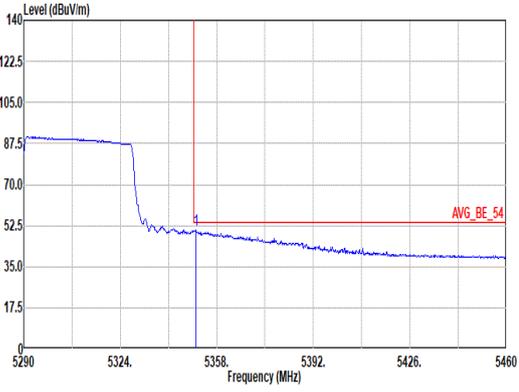

	<b>18</b>																																							
<b>Mode</b>	<b>Band Edge - R</b>																																							
	<b>U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz</b>																																							
<b>ANT</b>	<b>4</b>																																							
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																						
<b>Peak</b>	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5375.17</td> <td>58.47</td> <td>74.00</td> <td>-15.53</td> <td>50.13</td> <td>33.10</td> <td>13.09</td> <td>37.85</td> <td>0.00</td> <td>100</td> <td>67 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5375.17	58.47	74.00	-15.53	50.13	33.10	13.09	37.85	0.00	100	67 PEAK	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																
1 5375.17	58.47	74.00	-15.53	50.13	33.10	13.09	37.85	0.00	100	67 PEAK																														
<b>Avg</b>	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.69</td> <td>50.72</td> <td>54.00</td> <td>-3.28</td> <td>42.40</td> <td>33.10</td> <td>13.06</td> <td>37.84</td> <td>0.00</td> <td>100</td> <td>67 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5350.69	50.72	54.00	-3.28	42.40	33.10	13.06	37.84	0.00	100	67 AVERAGE	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																
1 5350.69	50.72	54.00	-3.28	42.40	33.10	13.06	37.84	0.00	100	67 AVERAGE																														



Mode	18																																																																															
	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																															
ANT	4																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>5883.81</th> <th>49.14</th> <th>74.00</th> <th>-24.86</th> <th>40.90</th> <th>33.23</th> <th>12.72</th> <th>37.71</th> <th>0.00</th> <th>304</th> <th>343</th> <th>PEAK</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5883.81</td> <td>49.14</td> <td>74.00</td> <td>-24.86</td> <td>40.90</td> <td>33.23</td> <td>12.72</td> <td>37.71</td> <td>0.00</td> <td>304</td> <td>343</td> <td>PEAK</td> </tr> </tbody> </table>	1	5883.81	49.14	74.00	-24.86	40.90	33.23	12.72	37.71	0.00	304	343	PEAK	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark		1	5883.81	49.14	74.00	-24.86	40.90	33.23	12.72	37.71	0.00	304	343	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>5290.00</th> <th>97.91</th> <th>-----</th> <th>-----</th> <th>89.92</th> <th>32.81</th> <th>12.99</th> <th>37.81</th> <th>0.00</th> <th>304</th> <th>343</th> <th>PEAK(UNII)</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>97.91</td> <td>-----</td> <td>-----</td> <td>89.92</td> <td>32.81</td> <td>12.99</td> <td>37.81</td> <td>0.00</td> <td>304</td> <td>343</td> <td>PEAK(UNII)</td> </tr> </tbody> </table>	1	5290.00	97.91	-----	-----	89.92	32.81	12.99	37.81	0.00	304	343	PEAK(UNII)	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark		1	5290.00	97.91	-----	-----	89.92	32.81	12.99	37.81	0.00	304	343	PEAK(UNII)
	1	5883.81	49.14	74.00	-24.86	40.90	33.23	12.72	37.71	0.00	304	343	PEAK																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																					
1	5883.81	49.14	74.00	-24.86	40.90	33.23	12.72	37.71	0.00	304	343	PEAK																																																																				
1	5290.00	97.91	-----	-----	89.92	32.81	12.99	37.81	0.00	304	343	PEAK(UNII)																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																					
1	5290.00	97.91	-----	-----	89.92	32.81	12.99	37.81	0.00	304	343	PEAK(UNII)																																																																				
Avg	<p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>5133.98</th> <th>39.99</th> <th>54.00</th> <th>-14.01</th> <th>31.67</th> <th>33.27</th> <th>12.78</th> <th>37.73</th> <th>0.00</th> <th>304</th> <th>343</th> <th>AVERAGE</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5133.98</td> <td>39.99</td> <td>54.00</td> <td>-14.01</td> <td>31.67</td> <td>33.27</td> <td>12.78</td> <td>37.73</td> <td>0.00</td> <td>304</td> <td>343</td> <td>AVERAGE</td> </tr> </tbody> </table>	1	5133.98	39.99	54.00	-14.01	31.67	33.27	12.78	37.73	0.00	304	343	AVERAGE	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark		1	5133.98	39.99	54.00	-14.01	31.67	33.27	12.78	37.73	0.00	304	343	AVERAGE	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>5290.00</th> <th>90.61</th> <th>-----</th> <th>-----</th> <th>82.61</th> <th>32.83</th> <th>12.98</th> <th>37.81</th> <th>0.00</th> <th>304</th> <th>343</th> <th>AVERAGE</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="2">Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>90.61</td> <td>-----</td> <td>-----</td> <td>82.61</td> <td>32.83</td> <td>12.98</td> <td>37.81</td> <td>0.00</td> <td>304</td> <td>343</td> <td>AVERAGE</td> </tr> </tbody> </table>	1	5290.00	90.61	-----	-----	82.61	32.83	12.98	37.81	0.00	304	343	AVERAGE	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark		1	5290.00	90.61	-----	-----	82.61	32.83	12.98	37.81	0.00	304	343	AVERAGE
1	5133.98	39.99	54.00	-14.01	31.67	33.27	12.78	37.73	0.00	304	343	AVERAGE																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																					
1	5133.98	39.99	54.00	-14.01	31.67	33.27	12.78	37.73	0.00	304	343	AVERAGE																																																																				
1	5290.00	90.61	-----	-----	82.61	32.83	12.98	37.81	0.00	304	343	AVERAGE																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																					
1	5290.00	90.61	-----	-----	82.61	32.83	12.98	37.81	0.00	304	343	AVERAGE																																																																				



Mode	18																																														
	Band Edge - R																																														
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																														
ANT	4																																														
Pol.	Vertical	Fundamental																																													
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5385.03</td> <td>58.21</td> <td>74.00</td> <td>-15.79</td> <td>49.86</td> <td>33.10</td> <td>13.10</td> <td>37.85</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>304 343 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5385.03	58.21	74.00	-15.79	49.86	33.10	13.10	37.85	0.00									304 343 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5385.03	58.21	74.00	-15.79	49.86	33.10	13.10	37.85	0.00																																							
								304 343 PEAK																																							
Avg	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5358.18</td> <td>47.78</td> <td>54.00</td> <td>-6.22</td> <td>39.46</td> <td>33.10</td> <td>13.06</td> <td>37.84</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>304 343 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5358.18	47.78	54.00	-6.22	39.46	33.10	13.06	37.84	0.00									304 343 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5358.18	47.78	54.00	-6.22	39.46	33.10	13.06	37.84	0.00																																							
								304 343 AVERAGE																																							







Mode	18																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																																																																																							
ANT	4																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>52.25</td> <td>68.20</td> <td>-15.95</td> <td>35.57</td> <td>38.78</td> <td>18.60</td> <td>41.50</td> <td>0.80</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>52.43</td> <td>74.00</td> <td>-21.57</td> <td>34.58</td> <td>38.82</td> <td>22.94</td> <td>44.33</td> <td>0.42</td> <td>300</td> <td>321</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15870.00</td> <td>43.65</td> <td>54.00</td> <td>-10.35</td> <td>25.00</td> <td>38.82</td> <td>22.94</td> <td>44.33</td> <td>0.42</td> <td>300</td> <td>321</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10580.00	52.25	68.20	-15.95	35.57	38.78	18.60	41.50	0.80	--	--	PEAK	2	15870.00	52.43	74.00	-21.57	34.58	38.82	22.94	44.33	0.42	300	321	PEAK	3	15870.00	43.65	54.00	-10.35	25.00	38.82	22.94	44.33	0.42	300	321	Average	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>51.72</td> <td>68.20</td> <td>-16.48</td> <td>35.04</td> <td>38.78</td> <td>18.60</td> <td>41.50</td> <td>0.80</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>52.66</td> <td>74.00</td> <td>-21.34</td> <td>34.81</td> <td>38.82</td> <td>22.94</td> <td>44.33</td> <td>0.42</td> <td>400</td> <td>4</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15870.00</td> <td>43.76</td> <td>54.00</td> <td>-10.24</td> <td>25.91</td> <td>38.82</td> <td>22.94</td> <td>44.33</td> <td>0.42</td> <td>400</td> <td>4</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10580.00	51.72	68.20	-16.48	35.04	38.78	18.60	41.50	0.80	--	--	PEAK	2	15870.00	52.66	74.00	-21.34	34.81	38.82	22.94	44.33	0.42	400	4	PEAK	3	15870.00	43.76	54.00	-10.24	25.91	38.82	22.94	44.33	0.42	400	4	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	10580.00	52.25	68.20	-15.95	35.57	38.78	18.60	41.50	0.80	--	--	PEAK																																																																																																																												
2	15870.00	52.43	74.00	-21.57	34.58	38.82	22.94	44.33	0.42	300	321	PEAK																																																																																																																												
3	15870.00	43.65	54.00	-10.35	25.00	38.82	22.94	44.33	0.42	300	321	Average																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	10580.00	51.72	68.20	-16.48	35.04	38.78	18.60	41.50	0.80	--	--	PEAK																																																																																																																												
2	15870.00	52.66	74.00	-21.34	34.81	38.82	22.94	44.33	0.42	400	4	PEAK																																																																																																																												
3	15870.00	43.76	54.00	-10.24	25.91	38.82	22.94	44.33	0.42	400	4	Average																																																																																																																												



	<b>19</b>																																																																																												
<b>Mode</b>	<b>Band Edge</b>																																																																																												
	<b>U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																												
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>	<p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.15</td> <td>58.36</td> <td>74.00</td> <td>-15.64</td> <td>50.09</td> <td>32.98</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>73</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.50</td> <td>64.17</td> <td>68.20</td> <td>-4.03</td> <td>55.90</td> <td>32.96</td> <td>13.20</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5450.15	58.36	74.00	-15.64	50.09	32.98	13.18	37.89	0.00	100	73	PEAK	2	5468.50	64.17	68.20	-4.03	55.90	32.96	13.20	37.89	0.00	100	73	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>107.65</td> <td>-----</td> <td>-----</td> <td>99.42</td> <td>32.90</td> <td>13.24</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	107.65	-----	-----	99.42	32.90	13.24	37.91	0.00	100	73	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5450.15	58.36	74.00	-15.64	50.09	32.98	13.18	37.89	0.00	100	73	PEAK																																																																																	
2	5468.50	64.17	68.20	-4.03	55.90	32.96	13.20	37.89	0.00	100	73	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5500.00	107.65	-----	-----	99.42	32.90	13.24	37.91	0.00	100	73	PEAK																																																																																	
<b>Avg</b>	<p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>46.68</td> <td>54.00</td> <td>-7.32</td> <td>38.40</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.95	46.68	54.00	-7.32	38.40	32.98	13.19	37.89	0.00	100	73	AVERAGE	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>102.05</td> <td>-----</td> <td>-----</td> <td>93.83</td> <td>32.90</td> <td>13.23</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	102.05	-----	-----	93.83	32.90	13.23	37.91	0.00	100	73	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5459.95	46.68	54.00	-7.32	38.40	32.98	13.19	37.89	0.00	100	73	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5500.00	102.05	-----	-----	93.83	32.90	13.23	37.91	0.00	100	73	AVERAGE																																																																																	

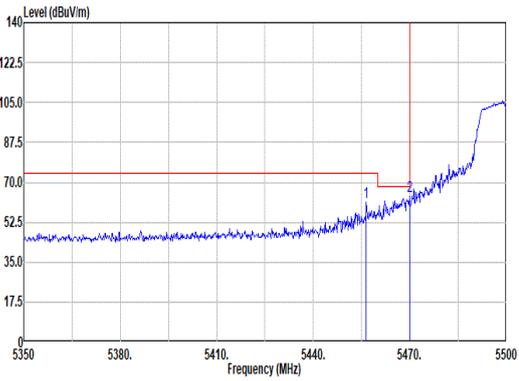
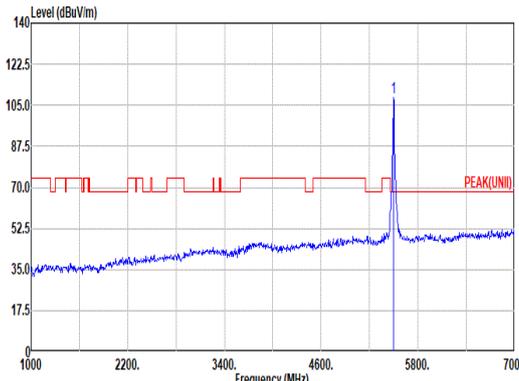
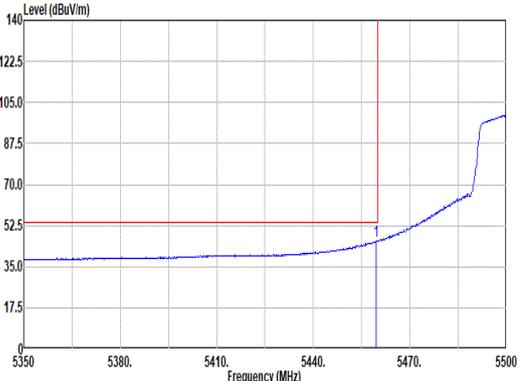
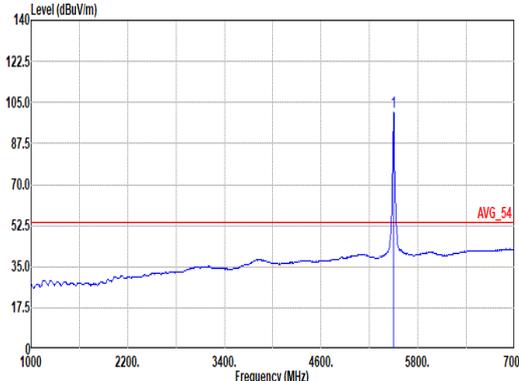


Mode	19																																																																																												
	Band Edge																																																																																												
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																												
ANT	4																																																																																												
Pol.	Vertical	Fundamental																																																																																											
Peak	 <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.50</td> <td>61.04</td> <td>74.00</td> <td>-12.96</td> <td>52.76</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.85</td> <td>64.09</td> <td>68.20</td> <td>-4.11</td> <td>55.83</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5456.50	61.04	74.00	-12.96	52.76	32.99	13.18	37.89	0.00	100	340	PEAK	2	5469.85	64.09	68.20	-4.11	55.83	32.96	13.20	37.90	0.00	100	340	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>100.14</td> <td>-----</td> <td>-----</td> <td>99.92</td> <td>32.90</td> <td>13.23</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK(UNII)</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	100.14	-----	-----	99.92	32.90	13.23	37.91	0.00	100	340	PEAK(UNII)
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5456.50	61.04	74.00	-12.96	52.76	32.99	13.18	37.89	0.00	100	340	PEAK																																																																																	
2	5469.85	64.09	68.20	-4.11	55.83	32.96	13.20	37.90	0.00	100	340	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5500.00	100.14	-----	-----	99.92	32.90	13.23	37.91	0.00	100	340	PEAK(UNII)																																																																																	
Avg	 <p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.65</td> <td>46.20</td> <td>54.00</td> <td>-7.80</td> <td>37.92</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.65	46.20	54.00	-7.80	37.92	32.98	13.19	37.89	0.00	100	340	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>100.70</td> <td>-----</td> <td>-----</td> <td>92.48</td> <td>32.90</td> <td>13.23</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	100.70	-----	-----	92.48	32.90	13.23	37.91	0.00	100	340	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5459.65	46.20	54.00	-7.80	37.92	32.98	13.19	37.89	0.00	100	340	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5500.00	100.70	-----	-----	92.48	32.90	13.23	37.91	0.00	100	340	AVERAGE																																																																																	



Mode	19																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																																																							
ANT	4																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>51.47</td> <td>74.00</td> <td>-22.53</td> <td>34.87</td> <td>38.80</td> <td>18.98</td> <td>41.94</td> <td>0.76</td> <td>331</td> <td>34</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>42.60</td> <td>54.00</td> <td>-11.40</td> <td>26.00</td> <td>38.80</td> <td>18.98</td> <td>41.94</td> <td>0.76</td> <td>331</td> <td>34</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>53.81</td> <td>68.20</td> <td>-14.39</td> <td>34.70</td> <td>39.20</td> <td>23.43</td> <td>44.00</td> <td>0.48</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	51.47	74.00	-22.53	34.87	38.80	18.98	41.94	0.76	331	34	PEAK	2	11000.00	42.60	54.00	-11.40	26.00	38.80	18.98	41.94	0.76	331	34	Average	3	16500.00	53.81	68.20	-14.39	34.70	39.20	23.43	44.00	0.48	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>51.47</td> <td>74.00</td> <td>-22.53</td> <td>34.87</td> <td>38.80</td> <td>18.98</td> <td>41.94</td> <td>0.76</td> <td>395</td> <td>145</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>42.37</td> <td>54.00</td> <td>-11.63</td> <td>25.77</td> <td>38.80</td> <td>18.98</td> <td>41.94</td> <td>0.76</td> <td>395</td> <td>145</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>54.38</td> <td>68.20</td> <td>-13.82</td> <td>35.27</td> <td>39.20</td> <td>23.43</td> <td>44.00</td> <td>0.48</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	51.47	74.00	-22.53	34.87	38.80	18.98	41.94	0.76	395	145	PEAK	2	11000.00	42.37	54.00	-11.63	25.77	38.80	18.98	41.94	0.76	395	145	Average	3	16500.00	54.38	68.20	-13.82	35.27	39.20	23.43	44.00	0.48	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11000.00	51.47	74.00	-22.53	34.87	38.80	18.98	41.94	0.76	331	34	PEAK																																																																																																																												
2	11000.00	42.60	54.00	-11.40	26.00	38.80	18.98	41.94	0.76	331	34	Average																																																																																																																												
3	16500.00	53.81	68.20	-14.39	34.70	39.20	23.43	44.00	0.48	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11000.00	51.47	74.00	-22.53	34.87	38.80	18.98	41.94	0.76	395	145	PEAK																																																																																																																												
2	11000.00	42.37	54.00	-11.63	25.77	38.80	18.98	41.94	0.76	395	145	Average																																																																																																																												
3	16500.00	54.38	68.20	-13.82	35.27	39.20	23.43	44.00	0.48	--	--	PEAK																																																																																																																												

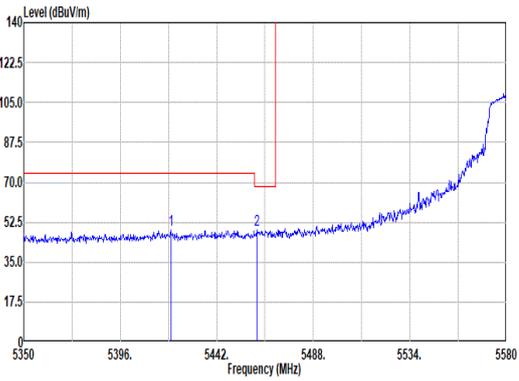
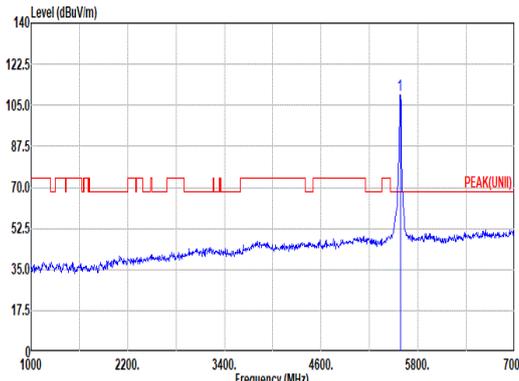
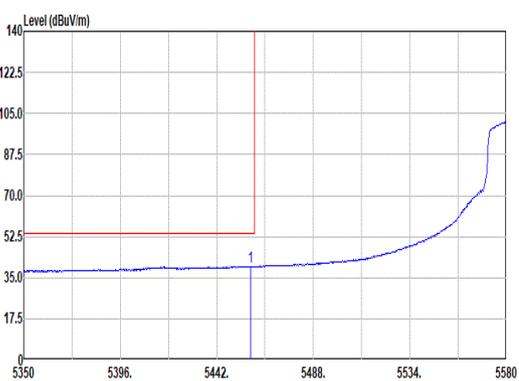
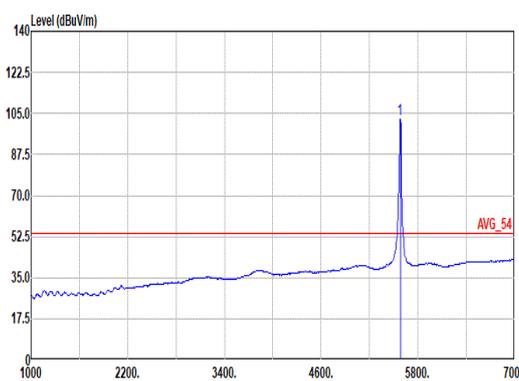


		<b>20</b>																																																																																											
<b>Mode</b>	<b>Band Edge - L</b>																																																																																												
	<b>U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																												
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>	 <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5420.15</td> <td>48.99</td> <td>74.00</td> <td>-25.01</td> <td>40.66</td> <td>33.06</td> <td>13.14</td> <td>37.87</td> <td>0.00</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.09</td> <td>48.93</td> <td>68.20</td> <td>-19.27</td> <td>40.65</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5420.15	48.99	74.00	-25.01	40.66	33.06	13.14	37.87	0.00	100	76	PEAK	2	5461.09	48.93	68.20	-19.27	40.65	32.98	13.19	37.89	0.00	100	76	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>109.53</td> <td>-----</td> <td>-----</td> <td>101.15</td> <td>32.97</td> <td>13.32</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>76</td> <td>PEAK(UNII)</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	109.53	-----	-----	101.15	32.97	13.32	37.91	0.00	100	76	PEAK(UNII)
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5420.15	48.99	74.00	-25.01	40.66	33.06	13.14	37.87	0.00	100	76	PEAK																																																																																	
2	5461.09	48.93	68.20	-19.27	40.65	32.98	13.19	37.89	0.00	100	76	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5580.00	109.53	-----	-----	101.15	32.97	13.32	37.91	0.00	100	76	PEAK(UNII)																																																																																	
<b>Avg</b>	 <p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.10</td> <td>39.87</td> <td>54.00</td> <td>-14.13</td> <td>31.60</td> <td>32.98</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5458.10	39.87	54.00	-14.13	31.60	32.98	13.18	37.89	0.00	100	76	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>102.71</td> <td>-----</td> <td>-----</td> <td>94.34</td> <td>32.96</td> <td>13.32</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	102.71	-----	-----	94.34	32.96	13.32	37.91	0.00	100	76	AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5458.10	39.87	54.00	-14.13	31.60	32.98	13.18	37.89	0.00	100	76	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5580.00	102.71	-----	-----	94.34	32.96	13.32	37.91	0.00	100	76	AVERAGE																																																																																	



Mode	20																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																					
ANT	4																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Site : 03CH20-HY          Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5738.55</td> <td>48.33</td> <td>68.20</td> <td>-19.87</td> <td>39.04</td> <td>33.68</td> <td>13.53</td> <td>37.92</td> <td>0.00 100 76 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5738.55	48.33	68.20	-19.87	39.04	33.68	13.53	37.92	0.00 100 76 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																														
1 5738.55	48.33	68.20	-19.87	39.04	33.68	13.53	37.92	0.00 100 76 PEAK																														

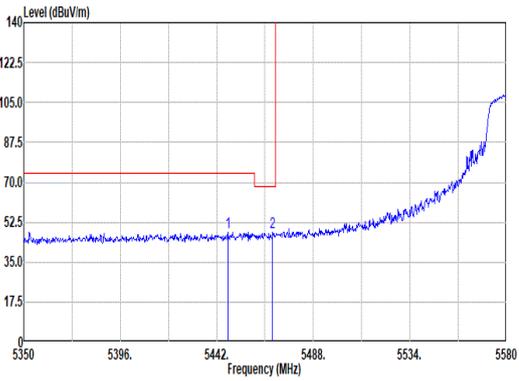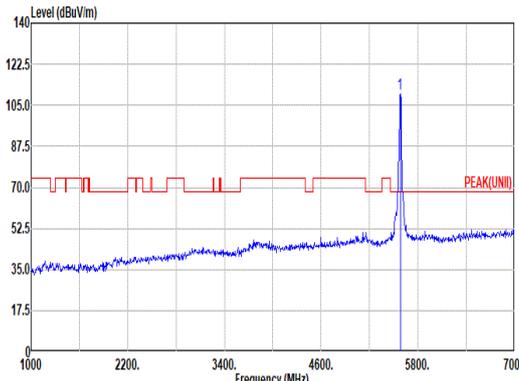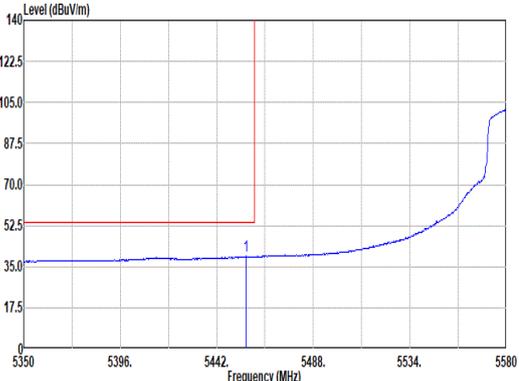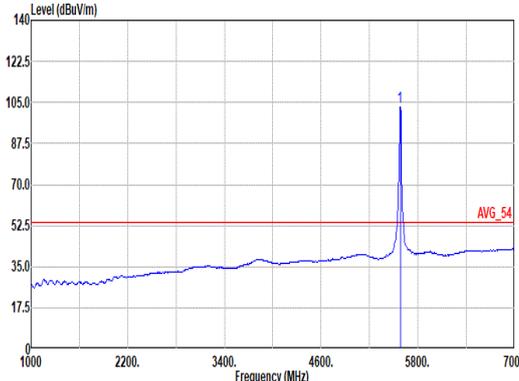

		<b>20</b>																																																																																											
<b>Mode</b>	<b>Band Edge - L</b>																																																																																												
	<b>U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																												
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>	 <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.29</td> <td>48.10</td> <td>74.00</td> <td>-25.90</td> <td>39.00</td> <td>33.01</td> <td>13.17</td> <td>37.88</td> <td>0.00</td> <td>100</td> <td></td> <td>343 PEAK</td> </tr> <tr> <td>2</td> <td>5468.68</td> <td>48.00</td> <td>68.20</td> <td>-20.20</td> <td>39.73</td> <td>32.96</td> <td>13.20</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td></td> <td>343 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5447.29	48.10	74.00	-25.90	39.00	33.01	13.17	37.88	0.00	100		343 PEAK	2	5468.68	48.00	68.20	-20.20	39.73	32.96	13.20	37.89	0.00	100		343 PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>109.87</td> <td>-----</td> <td>-----</td> <td>101.49</td> <td>32.97</td> <td>13.32</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td></td> <td>343 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	109.87	-----	-----	101.49	32.97	13.32	37.91	0.00	100		343 PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5447.29	48.10	74.00	-25.90	39.00	33.01	13.17	37.88	0.00	100		343 PEAK																																																																																	
2	5468.68	48.00	68.20	-20.20	39.73	32.96	13.20	37.89	0.00	100		343 PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5580.00	109.87	-----	-----	101.49	32.97	13.32	37.91	0.00	100		343 PEAK																																																																																	
<b>Avg</b>	 <p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.03</td> <td>39.36</td> <td>54.00</td> <td>-14.64</td> <td>31.08</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td></td> <td>343 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5456.03	39.36	54.00	-14.64	31.08	32.99	13.18	37.89	0.00	100		343 AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>103.25</td> <td>-----</td> <td>-----</td> <td>94.88</td> <td>32.96</td> <td>13.32</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td></td> <td>343 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	103.25	-----	-----	94.88	32.96	13.32	37.91	0.00	100		343 AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5456.03	39.36	54.00	-14.64	31.08	32.99	13.18	37.89	0.00	100		343 AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5580.00	103.25	-----	-----	94.88	32.96	13.32	37.91	0.00	100		343 AVERAGE																																																																																	






Mode	20																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																									
ANT	4																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH20-HY          Condition: PEAK_BE(U-NII) B3 3m HF_91200_02360_241101 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5755.01</td> <td>49.88</td> <td>68.20</td> <td>-18.32</td> <td>40.51</td> <td>33.74</td> <td>13.55</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>343</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5755.01	49.88	68.20	-18.32	40.51	33.74	13.55	37.92	0.00	100	343	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5755.01	49.88	68.20	-18.32	40.51	33.74	13.55	37.92	0.00	100	343	PEAK																															



Mode	20																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>51.86</td> <td>74.00</td> <td>-22.14</td> <td>35.12</td> <td>38.98</td> <td>19.12</td> <td>42.11</td> <td>0.75</td> <td>388</td> <td>145</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>42.39</td> <td>54.00</td> <td>-11.61</td> <td>25.65</td> <td>38.98</td> <td>19.12</td> <td>42.11</td> <td>0.75</td> <td>388</td> <td>145</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>54.35</td> <td>68.20</td> <td>-13.85</td> <td>35.10</td> <td>39.32</td> <td>23.61</td> <td>44.20</td> <td>0.52</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11160.00	51.86	74.00	-22.14	35.12	38.98	19.12	42.11	0.75	388	145	PEAK	2	11160.00	42.39	54.00	-11.61	25.65	38.98	19.12	42.11	0.75	388	145	Average	3	16740.00	54.35	68.20	-13.85	35.10	39.32	23.61	44.20	0.52	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>52.75</td> <td>74.00</td> <td>-21.25</td> <td>36.01</td> <td>38.98</td> <td>19.12</td> <td>42.11</td> <td>0.75</td> <td>385</td> <td>46</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>42.49</td> <td>54.00</td> <td>-11.51</td> <td>25.75</td> <td>38.98</td> <td>19.12</td> <td>42.11</td> <td>0.75</td> <td>385</td> <td>46</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>53.84</td> <td>68.20</td> <td>-14.36</td> <td>34.59</td> <td>39.32</td> <td>23.61</td> <td>44.20</td> <td>0.52</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11160.00	52.75	74.00	-21.25	36.01	38.98	19.12	42.11	0.75	385	46	PEAK	2	11160.00	42.49	54.00	-11.51	25.75	38.98	19.12	42.11	0.75	385	46	Average	3	16740.00	53.84	68.20	-14.36	34.59	39.32	23.61	44.20	0.52	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11160.00	51.86	74.00	-22.14	35.12	38.98	19.12	42.11	0.75	388	145	PEAK																																																																																																																										
2	11160.00	42.39	54.00	-11.61	25.65	38.98	19.12	42.11	0.75	388	145	Average																																																																																																																										
3	16740.00	54.35	68.20	-13.85	35.10	39.32	23.61	44.20	0.52	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11160.00	52.75	74.00	-21.25	36.01	38.98	19.12	42.11	0.75	385	46	PEAK																																																																																																																										
2	11160.00	42.49	54.00	-11.51	25.75	38.98	19.12	42.11	0.75	385	46	Average																																																																																																																										
3	16740.00	53.84	68.20	-14.36	34.59	39.32	23.61	44.20	0.52	--	--	PEAK																																																																																																																										

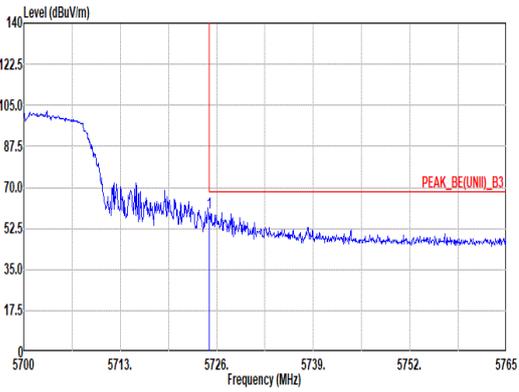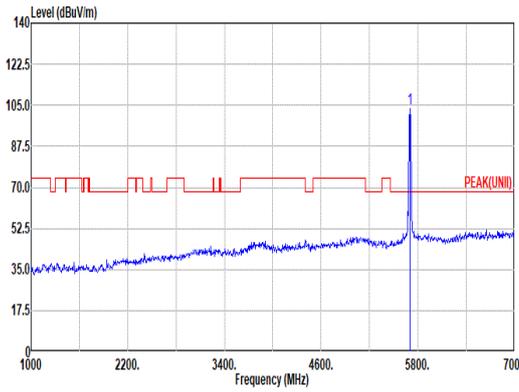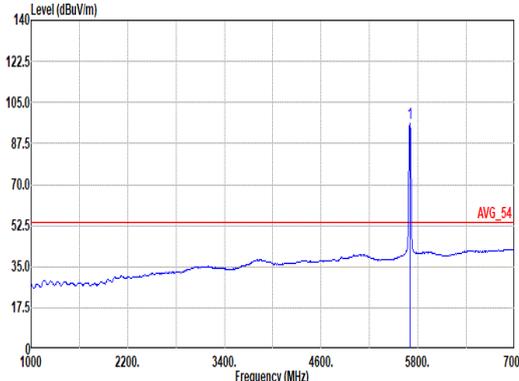

	<b>21</b>																																																																															
<b>Mode</b>	<b>Band Edge</b>																																																																															
	<b>U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz</b>																																																																															
<b>ANT</b>	<b>4</b>																																																																															
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																														
<b>Peak</b>	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE(UNII)_B3</p> <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5725.03</td> <td>59.40</td> <td>68.20</td> <td>-8.80</td> <td>50.16</td> <td>33.65</td> <td>13.51</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5725.03	59.40	68.20	-8.80	50.16	33.65	13.51	37.92	0.00	100	296	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK(UNII)</p> <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>103.33</td> <td>-----</td> <td>-----</td> <td>94.16</td> <td>33.61</td> <td>13.48</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5700.00	103.33	-----	-----	94.16	33.61	13.48	37.92	0.00	100	296	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 5725.03	59.40	68.20	-8.80	50.16	33.65	13.51	37.92	0.00	100	296	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 5700.00	103.33	-----	-----	94.16	33.61	13.48	37.92	0.00	100	296	PEAK																																																																					
<b>Avg</b>	<b>Blank</b>	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>96.36</td> <td>-----</td> <td>-----</td> <td>87.23</td> <td>33.58</td> <td>13.47</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5700.00	96.36	-----	-----	87.23	33.58	13.47	37.92	0.00	100	296	AVERAGE																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 5700.00	96.36	-----	-----	87.23	33.58	13.47	37.92	0.00	100	296	AVERAGE																																																																					



Mode	21																																																																																			
	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																			
ANT	4																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE(UNII)_B3</p> <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.55</td> <td>63.79</td> <td>68.20</td> <td>-4.41</td> <td>54.55</td> <td>33.65</td> <td>13.51</td> <td>37.92</td> <td>0.00</td> <td>300</td> <td>37</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.55	63.79	68.20	-4.41	54.55	33.65	13.51	37.92	0.00	300	37	PEAK	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK(UNII)</p> <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>104.92</td> <td>-----</td> <td>-----</td> <td>95.79</td> <td>33.58</td> <td>13.47</td> <td>37.92</td> <td>0.00</td> <td>300</td> <td>37</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	104.92	-----	-----	95.79	33.58	13.47	37.92	0.00	300	37	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5725.55	63.79	68.20	-4.41	54.55	33.65	13.51	37.92	0.00	300	37	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	104.92	-----	-----	95.79	33.58	13.47	37.92	0.00	300	37	PEAK																																																																								
Avg	Blank	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>98.86</td> <td>-----</td> <td>-----</td> <td>89.69</td> <td>33.61</td> <td>13.48</td> <td>37.92</td> <td>0.00</td> <td>300</td> <td>37</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	98.86	-----	-----	89.69	33.61	13.48	37.92	0.00	300	37	AVERAGE																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	98.86	-----	-----	89.69	33.61	13.48	37.92	0.00	300	37	AVERAGE																																																																								



Mode	21																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>52.93</td> <td>74.00</td> <td>-21.07</td> <td>36.14</td> <td>39.10</td> <td>19.33</td> <td>42.37</td> <td>0.73</td> <td>348</td> <td>68</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>42.60</td> <td>54.00</td> <td>-11.40</td> <td>25.01</td> <td>39.10</td> <td>19.33</td> <td>42.37</td> <td>0.73</td> <td>348</td> <td>68</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17100.00</td> <td>53.97</td> <td>68.20</td> <td>-14.23</td> <td>34.00</td> <td>39.20</td> <td>23.88</td> <td>44.49</td> <td>0.58</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11400.00	52.93	74.00	-21.07	36.14	39.10	19.33	42.37	0.73	348	68	PEAK	2	11400.00	42.60	54.00	-11.40	25.01	39.10	19.33	42.37	0.73	348	68	Average	3	17100.00	53.97	68.20	-14.23	34.00	39.20	23.88	44.49	0.58	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>51.91</td> <td>74.00</td> <td>-22.09</td> <td>35.12</td> <td>39.10</td> <td>19.33</td> <td>42.37</td> <td>0.73</td> <td>312</td> <td>15</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>42.64</td> <td>54.00</td> <td>-11.36</td> <td>25.85</td> <td>39.10</td> <td>19.33</td> <td>42.37</td> <td>0.73</td> <td>312</td> <td>15</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17100.00</td> <td>54.30</td> <td>68.20</td> <td>-13.90</td> <td>35.13</td> <td>39.20</td> <td>23.88</td> <td>44.49</td> <td>0.58</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11400.00	51.91	74.00	-22.09	35.12	39.10	19.33	42.37	0.73	312	15	PEAK	2	11400.00	42.64	54.00	-11.36	25.85	39.10	19.33	42.37	0.73	312	15	Average	3	17100.00	54.30	68.20	-13.90	35.13	39.20	23.88	44.49	0.58	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11400.00	52.93	74.00	-21.07	36.14	39.10	19.33	42.37	0.73	348	68	PEAK																																																																																																																										
2	11400.00	42.60	54.00	-11.40	25.01	39.10	19.33	42.37	0.73	348	68	Average																																																																																																																										
3	17100.00	53.97	68.20	-14.23	34.00	39.20	23.88	44.49	0.58	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11400.00	51.91	74.00	-22.09	35.12	39.10	19.33	42.37	0.73	312	15	PEAK																																																																																																																										
2	11400.00	42.64	54.00	-11.36	25.85	39.10	19.33	42.37	0.73	312	15	Average																																																																																																																										
3	17100.00	54.30	68.20	-13.90	35.13	39.20	23.88	44.49	0.58	--	--	PEAK																																																																																																																										



	22																																																																																																
Mode	Band Edge																																																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																
ANT	4																																																																																																
Pol.	Horizontal	Fundamental																																																																																															
Peak	<p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.50</td> <td>57.90</td> <td>74.00</td> <td>-16.10</td> <td>49.61</td> <td>33.00</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>68</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5465.35</td> <td>62.67</td> <td>68.20</td> <td>-5.53</td> <td>54.40</td> <td>32.97</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5450.50	57.90	74.00	-16.10	49.61	33.00	13.18	37.89	0.00	100	68	PEAK	2	5465.35	62.67	68.20	-5.53	54.40	32.97	13.19	37.89	0.00	100	68	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>107.56</td> <td>-----</td> <td>-----</td> <td>99.34</td> <td>32.90</td> <td>13.23</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	107.56	-----	-----	99.34	32.90	13.23	37.91	0.00	100	68	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5450.50	57.90	74.00	-16.10	49.61	33.00	13.18	37.89	0.00	100	68	PEAK																																																																																					
2	5465.35	62.67	68.20	-5.53	54.40	32.97	13.19	37.89	0.00	100	68	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	107.56	-----	-----	99.34	32.90	13.23	37.91	0.00	100	68	PEAK																																																																																					
Avg	<p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.20</td> <td>43.65</td> <td>54.00</td> <td>-10.35</td> <td>35.37</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.20	43.65	54.00	-10.35	35.37	32.98	13.19	37.89	0.00	100	68	AVERAGE	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>100.22</td> <td>-----</td> <td>-----</td> <td>92.00</td> <td>32.90</td> <td>13.23</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	100.22	-----	-----	92.00	32.90	13.23	37.91	0.00	100	68	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5459.20	43.65	54.00	-10.35	35.37	32.98	13.19	37.89	0.00	100	68	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	100.22	-----	-----	92.00	32.90	13.23	37.91	0.00	100	68	AVERAGE																																																																																					







	22																																																																
Mode	Band Edge																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																
ANT	4																																																																
Pol.	Vertical	Fundamental																																																															
Peak	<p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5453.65 56.72 74.00 -17.28</td> <td>48.44</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> <tr> <td>2 5469.25 62.57 68.20 -5.63</td> <td>54.31</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		1 5453.65 56.72 74.00 -17.28	48.44	32.99	13.18	37.89	0.00	100	338	PEAK	2 5469.25 62.57 68.20 -5.63	54.31	32.96	13.20	37.90	0.00	100	338	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 105.34</td> <td>97.12</td> <td>32.90</td> <td>13.23</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		1 5500.00 105.34	97.12	32.90	13.23	37.91	0.00	100	338	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																										
1 5453.65 56.72 74.00 -17.28	48.44	32.99	13.18	37.89	0.00	100	338	PEAK																																																									
2 5469.25 62.57 68.20 -5.63	54.31	32.96	13.20	37.90	0.00	100	338	PEAK																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																										
1 5500.00 105.34	97.12	32.90	13.23	37.91	0.00	100	338	PEAK																																																									
Avg	<p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5458.45 42.74 54.00 -11.26</td> <td>34.47</td> <td>32.98</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>338</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		1 5458.45 42.74 54.00 -11.26	34.47	32.98	13.18	37.89	0.00	100	338	AVERAGE	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 98.34</td> <td>90.12</td> <td>32.90</td> <td>13.23</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>338</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg		1 5500.00 98.34	90.12	32.90	13.23	37.91	0.00	100	338	AVERAGE									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																										
1 5458.45 42.74 54.00 -11.26	34.47	32.98	13.18	37.89	0.00	100	338	AVERAGE																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	cm	deg																																																										
1 5500.00 98.34	90.12	32.90	13.23	37.91	0.00	100	338	AVERAGE																																																									



Mode	22																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>51.04</td> <td>74.00</td> <td>-22.96</td> <td>34.44</td> <td>38.80</td> <td>18.98</td> <td>41.94</td> <td>0.76</td> <td>400</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>42.33</td> <td>54.00</td> <td>-11.67</td> <td>25.73</td> <td>38.80</td> <td>18.98</td> <td>41.94</td> <td>0.76</td> <td>400</td> <td>26</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>54.02</td> <td>68.20</td> <td>-14.18</td> <td>34.91</td> <td>39.20</td> <td>23.43</td> <td>44.00</td> <td>0.48</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11000.00	51.04	74.00	-22.96	34.44	38.80	18.98	41.94	0.76	400	26	PEAK	2	11000.00	42.33	54.00	-11.67	25.73	38.80	18.98	41.94	0.76	400	26	Average	3	16500.00	54.02	68.20	-14.18	34.91	39.20	23.43	44.00	0.48	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>51.53</td> <td>74.00</td> <td>-22.47</td> <td>34.93</td> <td>38.80</td> <td>18.98</td> <td>41.94</td> <td>0.76</td> <td>400</td> <td>123</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>42.26</td> <td>54.00</td> <td>-11.74</td> <td>25.66</td> <td>38.80</td> <td>18.98</td> <td>41.94</td> <td>0.76</td> <td>400</td> <td>123</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>53.84</td> <td>68.20</td> <td>-14.36</td> <td>34.73</td> <td>39.20</td> <td>23.43</td> <td>44.00</td> <td>0.48</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11000.00	51.53	74.00	-22.47	34.93	38.80	18.98	41.94	0.76	400	123	PEAK	2	11000.00	42.26	54.00	-11.74	25.66	38.80	18.98	41.94	0.76	400	123	Average	3	16500.00	53.84	68.20	-14.36	34.73	39.20	23.43	44.00	0.48	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11000.00	51.04	74.00	-22.96	34.44	38.80	18.98	41.94	0.76	400	26	PEAK																																																																																																																										
2	11000.00	42.33	54.00	-11.67	25.73	38.80	18.98	41.94	0.76	400	26	Average																																																																																																																										
3	16500.00	54.02	68.20	-14.18	34.91	39.20	23.43	44.00	0.48	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11000.00	51.53	74.00	-22.47	34.93	38.80	18.98	41.94	0.76	400	123	PEAK																																																																																																																										
2	11000.00	42.26	54.00	-11.74	25.66	38.80	18.98	41.94	0.76	400	123	Average																																																																																																																										
3	16500.00	53.84	68.20	-14.36	34.73	39.20	23.43	44.00	0.48	--	--	PEAK																																																																																																																										

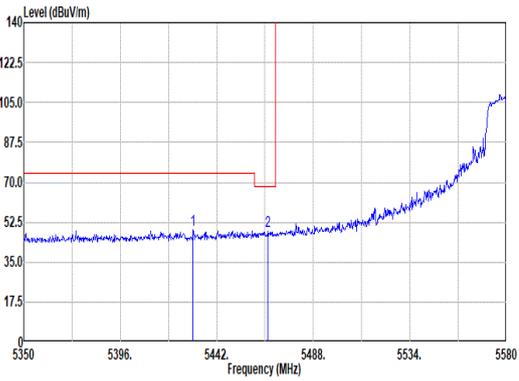
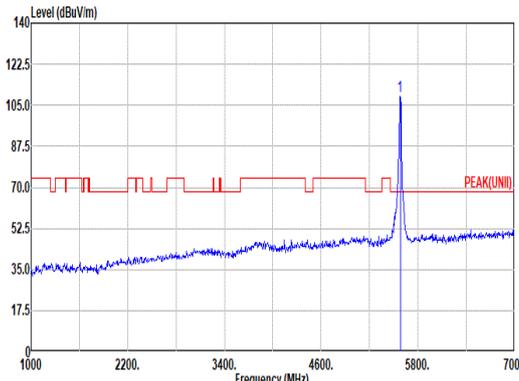
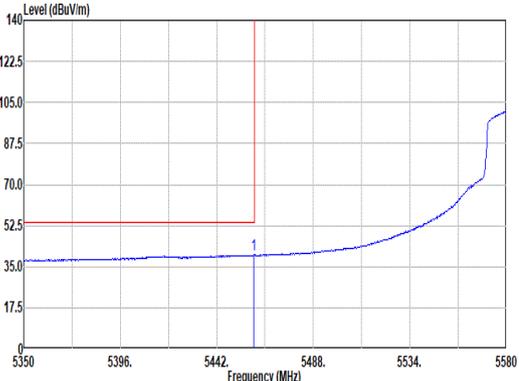
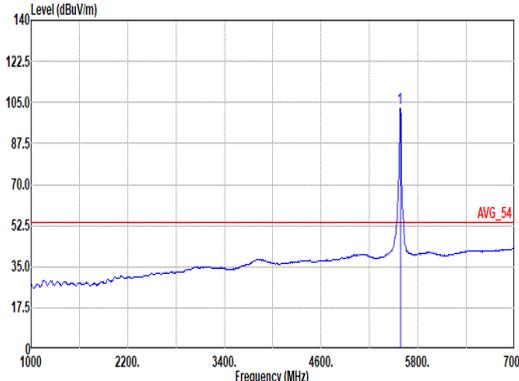


		<b>23</b>																																																																																												
<b>Mode</b>	<b>Band Edge - L</b>																																																																																													
	<b>U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz</b>																																																																																													
<b>ANT</b>	<b>4</b>																																																																																													
<b>Pol.</b>	<b>Horizontal</b>		<b>Fundamental</b>																																																																																											
<b>Peak</b>	 <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5430.73</td> <td>49.08</td> <td>74.00</td> <td>-24.92</td> <td>40.77</td> <td>33.04</td> <td>13.15</td> <td>37.88</td> <td>0.00</td> <td>101</td> <td>76</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.38</td> <td>48.68</td> <td>68.20</td> <td>-19.52</td> <td>40.41</td> <td>32.97</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>101</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5430.73	49.08	74.00	-24.92	40.77	33.04	13.15	37.88	0.00	101	76	PEAK	2	5466.38	48.68	68.20	-19.52	40.41	32.97	13.19	37.89	0.00	101	76	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>108.71</td> <td>-----</td> <td>-----</td> <td>100.34</td> <td>32.96</td> <td>13.32</td> <td>37.91</td> <td>0.00</td> <td>101</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	108.71	-----	-----	100.34	32.96	13.32	37.91	0.00	101	76	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5430.73	49.08	74.00	-24.92	40.77	33.04	13.15	37.88	0.00	101	76	PEAK																																																																																		
2	5466.38	48.68	68.20	-19.52	40.41	32.97	13.19	37.89	0.00	101	76	PEAK																																																																																		
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5580.00	108.71	-----	-----	100.34	32.96	13.32	37.91	0.00	101	76	PEAK																																																																																		
<b>Avg</b>	 <p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.71</td> <td>39.96</td> <td>54.00</td> <td>-14.04</td> <td>31.68</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>101</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.71	39.96	54.00	-14.04	31.68	32.98	13.19	37.89	0.00	101	76	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>102.31</td> <td>-----</td> <td>-----</td> <td>93.93</td> <td>32.97</td> <td>13.32</td> <td>37.91</td> <td>0.00</td> <td>101</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	102.31	-----	-----	93.93	32.97	13.32	37.91	0.00	101	76	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5459.71	39.96	54.00	-14.04	31.68	32.98	13.19	37.89	0.00	101	76	AVERAGE																																																																																		
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5580.00	102.31	-----	-----	93.93	32.97	13.32	37.91	0.00	101	76	AVERAGE																																																																																		



Mode	23																																											
	Band Edge - R																																											
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																											
ANT	4																																											
Pol.	Horizontal	Fundamental																																										
Peak	<p>Site : 03CH20-HY          Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5747.98</td> <td>47.96</td> <td>68.20</td> <td>-20.24</td> <td>38.64</td> <td>33.70</td> <td>13.54</td> <td>37.92</td> <td>0.00</td> <td>101</td> <td>76 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5747.98	47.96	68.20	-20.24	38.64	33.70	13.54	37.92	0.00	101	76 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 5747.98	47.96	68.20	-20.24	38.64	33.70	13.54	37.92	0.00	101	76 PEAK																																		

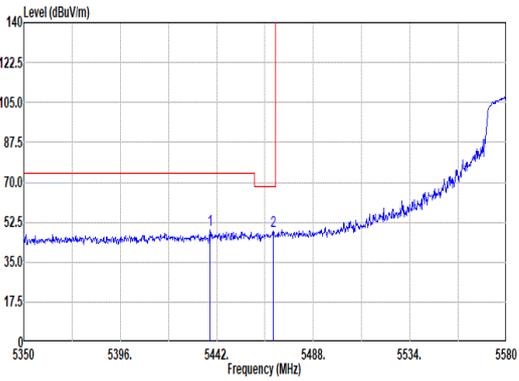
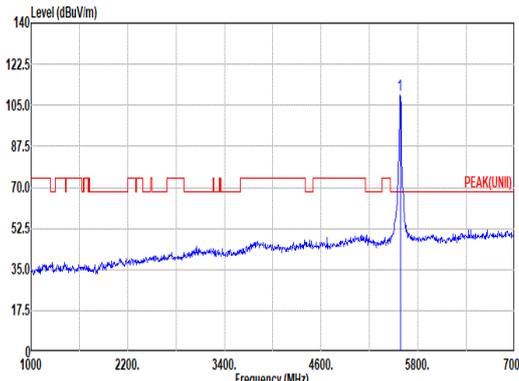
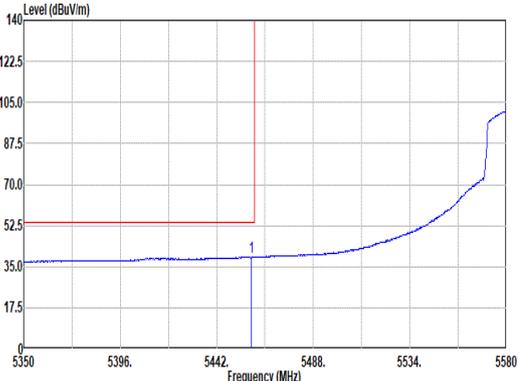
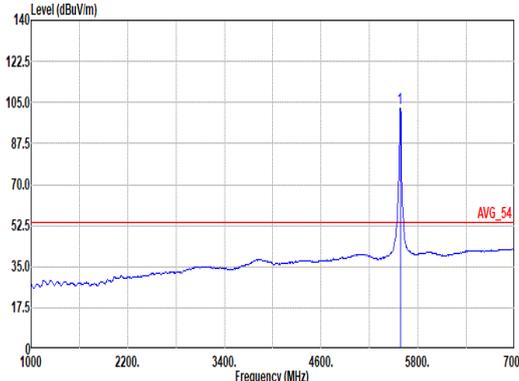


		<b>23</b>																																																																																											
<b>Mode</b>	<b>Band Edge - L</b>																																																																																												
	<b>U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																												
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>	 <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5438.78</td> <td>49.03</td> <td>74.00</td> <td>-24.97</td> <td>40.73</td> <td>33.02</td> <td>13.16</td> <td>37.88</td> <td>0.00</td> <td>100</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.91</td> <td>48.57</td> <td>68.20</td> <td>-19.63</td> <td>40.31</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>100</td> <td>342</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5438.78	49.03	74.00	-24.97	40.73	33.02	13.16	37.88	0.00	100	342	PEAK	2	5468.91	48.57	68.20	-19.63	40.31	32.96	13.20	37.90	0.00	100	342	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>109.40</td> <td>-----</td> <td>-----</td> <td>101.03</td> <td>32.96</td> <td>13.32</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>342</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	109.40	-----	-----	101.03	32.96	13.32	37.91	0.00	100	342	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5438.78	49.03	74.00	-24.97	40.73	33.02	13.16	37.88	0.00	100	342	PEAK																																																																																	
2	5468.91	48.57	68.20	-19.63	40.31	32.96	13.20	37.90	0.00	100	342	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5580.00	109.40	-----	-----	101.03	32.96	13.32	37.91	0.00	100	342	PEAK																																																																																	
<b>Avg</b>	 <p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.56</td> <td>39.28</td> <td>54.00</td> <td>-14.72</td> <td>31.01</td> <td>32.98</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>342</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5458.56	39.28	54.00	-14.72	31.01	32.98	13.18	37.89	0.00	100	342	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>102.69</td> <td>-----</td> <td>-----</td> <td>94.31</td> <td>32.97</td> <td>13.32</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>342</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5580.00	102.69	-----	-----	94.31	32.97	13.32	37.91	0.00	100	342	AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5458.56	39.28	54.00	-14.72	31.01	32.98	13.18	37.89	0.00	100	342	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5580.00	102.69	-----	-----	94.31	32.97	13.32	37.91	0.00	100	342	AVERAGE																																																																																	






Mode	23																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																									
ANT	4																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH20-HY          Condition: PEAK_BE(LNII)_B3 3m HF_91200_02360_241101 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5741.51</td> <td>49.23</td> <td>68.20</td> <td>-18.97</td> <td>39.94</td> <td>33.68</td> <td>13.53</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>342</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5741.51	49.23	68.20	-18.97	39.94	33.68	13.53	37.92	0.00	100	342	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5741.51	49.23	68.20	-18.97	39.94	33.68	13.53	37.92	0.00	100	342	PEAK																															

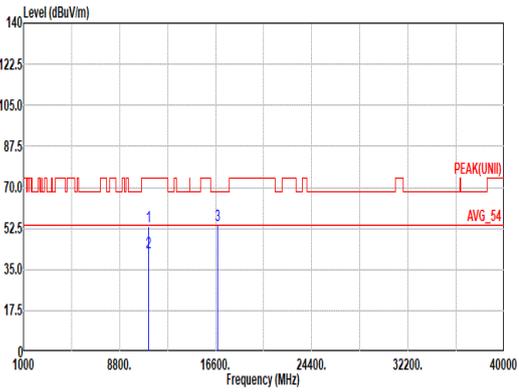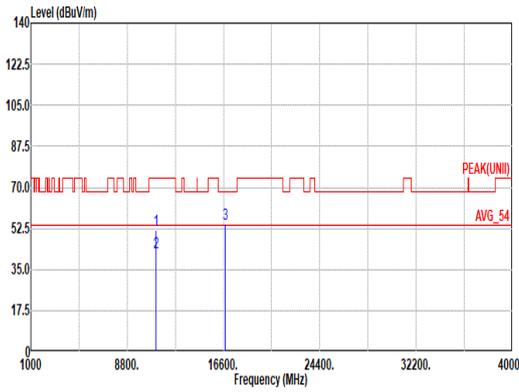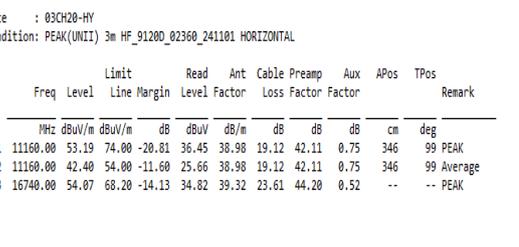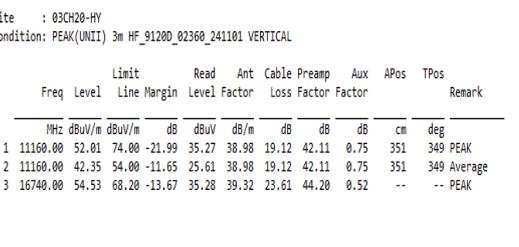

Mode	23																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak	 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>53.19</td> <td>74.00</td> <td>-20.81</td> <td>36.45</td> <td>38.98</td> <td>19.12</td> <td>42.11</td> <td>0.75</td> <td>346</td> <td>99</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>42.40</td> <td>54.00</td> <td>-11.60</td> <td>25.66</td> <td>38.98</td> <td>19.12</td> <td>42.11</td> <td>0.75</td> <td>346</td> <td>99</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>54.07</td> <td>68.20</td> <td>-14.13</td> <td>34.02</td> <td>39.32</td> <td>23.61</td> <td>44.20</td> <td>0.52</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11160.00	53.19	74.00	-20.81	36.45	38.98	19.12	42.11	0.75	346	99	PEAK	2	11160.00	42.40	54.00	-11.60	25.66	38.98	19.12	42.11	0.75	346	99	Average	3	16740.00	54.07	68.20	-14.13	34.02	39.32	23.61	44.20	0.52	--	--	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>52.01</td> <td>74.00</td> <td>-21.99</td> <td>35.27</td> <td>38.98</td> <td>19.12</td> <td>42.11</td> <td>0.75</td> <td>351</td> <td>349</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>42.35</td> <td>54.00</td> <td>-11.65</td> <td>25.61</td> <td>38.98</td> <td>19.12</td> <td>42.11</td> <td>0.75</td> <td>351</td> <td>349</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>54.53</td> <td>68.20</td> <td>-13.67</td> <td>35.28</td> <td>39.32</td> <td>23.61</td> <td>44.20</td> <td>0.52</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11160.00	52.01	74.00	-21.99	35.27	38.98	19.12	42.11	0.75	351	349	PEAK	2	11160.00	42.35	54.00	-11.65	25.61	38.98	19.12	42.11	0.75	351	349	Average	3	16740.00	54.53	68.20	-13.67	35.28	39.32	23.61	44.20	0.52	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11160.00	53.19	74.00	-20.81	36.45	38.98	19.12	42.11	0.75	346	99	PEAK																																																																																																																										
2	11160.00	42.40	54.00	-11.60	25.66	38.98	19.12	42.11	0.75	346	99	Average																																																																																																																										
3	16740.00	54.07	68.20	-14.13	34.02	39.32	23.61	44.20	0.52	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11160.00	52.01	74.00	-21.99	35.27	38.98	19.12	42.11	0.75	351	349	PEAK																																																																																																																										
2	11160.00	42.35	54.00	-11.65	25.61	38.98	19.12	42.11	0.75	351	349	Average																																																																																																																										
3	16740.00	54.53	68.20	-13.67	35.28	39.32	23.61	44.20	0.52	--	--	PEAK																																																																																																																										
Avg																																																																																																																																						

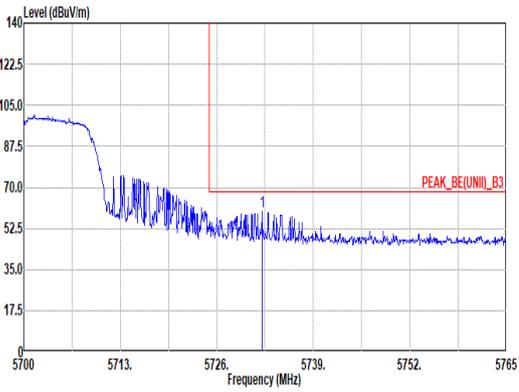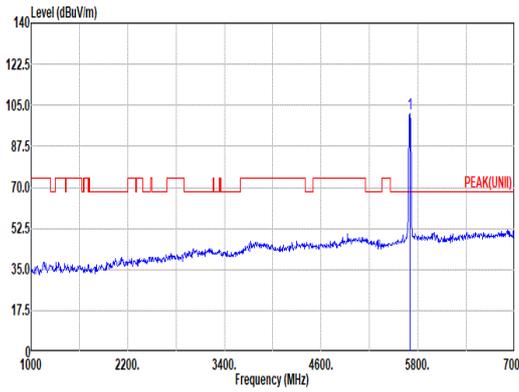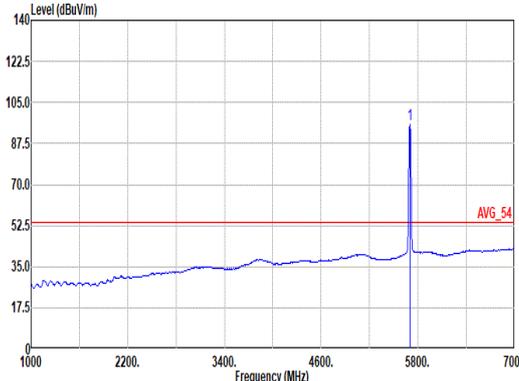

Mode	24																																																																															
	Band Edge																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																															
ANT	4																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5732.11</td> <td>59.44</td> <td>68.20</td> <td>-8.76</td> <td>50.18</td> <td>33.66</td> <td>13.52</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>321</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5732.11	59.44	68.20	-8.76	50.18	33.66	13.52	37.92	0.00	100	321	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>101.66</td> <td>-----</td> <td>-----</td> <td>92.53</td> <td>33.58</td> <td>13.47</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>321</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5700.00	101.66	-----	-----	92.53	33.58	13.47	37.92	0.00	100	321	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 5732.11	59.44	68.20	-8.76	50.18	33.66	13.52	37.92	0.00	100	321	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 5700.00	101.66	-----	-----	92.53	33.58	13.47	37.92	0.00	100	321	PEAK																																																																					
Avg	Blank	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>95.38</td> <td>-----</td> <td>-----</td> <td>86.25</td> <td>33.58</td> <td>13.47</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>321</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5700.00	95.38	-----	-----	86.25	33.58	13.47	37.92	0.00	100	321	AVERAGE																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 5700.00	95.38	-----	-----	86.25	33.58	13.47	37.92	0.00	100	321	AVERAGE																																																																					



Mode	24																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																	
ANT	4																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.13</td> <td>63.34</td> <td>68.20</td> <td>-4.86</td> <td>54.10</td> <td>33.65</td> <td>13.51</td> <td>37.92</td> <td>0.00</td> <td>310</td> <td>358</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5726.13	63.34	68.20	-4.86	54.10	33.65	13.51	37.92	0.00	310	358	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>103.86</td> <td>-----</td> <td>-----</td> <td>94.73</td> <td>33.58</td> <td>13.47</td> <td>37.92</td> <td>0.00</td> <td>310</td> <td>358</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	103.86	-----	-----	94.73	33.58	13.47	37.92	0.00	310	358	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5726.13	63.34	68.20	-4.86	54.10	33.65	13.51	37.92	0.00	310	358	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5700.00	103.86	-----	-----	94.73	33.58	13.47	37.92	0.00	310	358	PEAK																																																																						
Avg	Blank	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>98.14</td> <td>-----</td> <td>-----</td> <td>89.01</td> <td>33.58</td> <td>13.47</td> <td>37.92</td> <td>0.00</td> <td>310</td> <td>358</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	98.14	-----	-----	89.01	33.58	13.47	37.92	0.00	310	358	AVERAGE																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5700.00	98.14	-----	-----	89.01	33.58	13.47	37.92	0.00	310	358	AVERAGE																																																																						



Mode	24																																																																																																													
	Harmonic																																																																																																													
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																													
ANT	4																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>51.96</td> <td>74.00</td> <td>-22.04</td> <td>35.17</td> <td>39.10</td> <td>19.33</td> <td>42.37</td> <td>0.73</td> <td>300</td> <td>95</td> <td>PEAK</td> </tr> <tr> <td>2 11400.00</td> <td>42.64</td> <td>54.00</td> <td>-11.36</td> <td>25.85</td> <td>39.10</td> <td>19.33</td> <td>42.37</td> <td>0.73</td> <td>300</td> <td>95</td> <td>Average</td> </tr> <tr> <td>3 17100.00</td> <td>54.49</td> <td>68.20</td> <td>-13.71</td> <td>35.32</td> <td>39.20</td> <td>23.88</td> <td>44.49</td> <td>0.58</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	1 11400.00	51.96	74.00	-22.04	35.17	39.10	19.33	42.37	0.73	300	95	PEAK	2 11400.00	42.64	54.00	-11.36	25.85	39.10	19.33	42.37	0.73	300	95	Average	3 17100.00	54.49	68.20	-13.71	35.32	39.20	23.88	44.49	0.58	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>52.62</td> <td>74.00</td> <td>-21.38</td> <td>35.83</td> <td>39.10</td> <td>19.33</td> <td>42.37</td> <td>0.73</td> <td>200</td> <td>141</td> <td>PEAK</td> </tr> <tr> <td>2 11400.00</td> <td>42.67</td> <td>54.00</td> <td>-11.33</td> <td>25.88</td> <td>39.10</td> <td>19.33</td> <td>42.37</td> <td>0.73</td> <td>200</td> <td>141</td> <td>Average</td> </tr> <tr> <td>3 17100.00</td> <td>53.79</td> <td>68.20</td> <td>-14.41</td> <td>34.62</td> <td>39.20</td> <td>23.88</td> <td>44.49</td> <td>0.58</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	1 11400.00	52.62	74.00	-21.38	35.83	39.10	19.33	42.37	0.73	200	141	PEAK	2 11400.00	42.67	54.00	-11.33	25.88	39.10	19.33	42.37	0.73	200	141	Average	3 17100.00	53.79	68.20	-14.41	34.62	39.20	23.88	44.49	0.58	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
1 11400.00	51.96	74.00	-22.04	35.17	39.10	19.33	42.37	0.73	300	95	PEAK																																																																																																			
2 11400.00	42.64	54.00	-11.36	25.85	39.10	19.33	42.37	0.73	300	95	Average																																																																																																			
3 17100.00	54.49	68.20	-13.71	35.32	39.20	23.88	44.49	0.58	--	--	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
1 11400.00	52.62	74.00	-21.38	35.83	39.10	19.33	42.37	0.73	200	141	PEAK																																																																																																			
2 11400.00	42.67	54.00	-11.33	25.88	39.10	19.33	42.37	0.73	200	141	Average																																																																																																			
3 17100.00	53.79	68.20	-14.41	34.62	39.20	23.88	44.49	0.58	--	--	PEAK																																																																																																			



		<b>25</b>																																																																																											
<b>Mode</b>	<b>Band Edge - L</b>																																																																																												
	<b>U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																												
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>	<p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.76</td> <td>58.83</td> <td>74.00</td> <td>-15.17</td> <td>50.54</td> <td>33.00</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>110</td> <td>73</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.20</td> <td>64.10</td> <td>68.20</td> <td>-4.10</td> <td>55.84</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>110</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5451.76	58.83	74.00	-15.17	50.54	33.00	13.18	37.89	0.00	110	73	PEAK	2	5469.20	64.10	68.20	-4.10	55.84	32.96	13.20	37.90	0.00	110	73	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>102.68</td> <td>-----</td> <td>-----</td> <td>94.45</td> <td>32.90</td> <td>13.24</td> <td>37.91</td> <td>0.00</td> <td>110</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5510.00	102.68	-----	-----	94.45	32.90	13.24	37.91	0.00	110	73	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5451.76	58.83	74.00	-15.17	50.54	33.00	13.18	37.89	0.00	110	73	PEAK																																																																																	
2	5469.20	64.10	68.20	-4.10	55.84	32.96	13.20	37.90	0.00	110	73	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5510.00	102.68	-----	-----	94.45	32.90	13.24	37.91	0.00	110	73	PEAK																																																																																	
<b>Avg</b>	<p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.60</td> <td>43.57</td> <td>54.00</td> <td>-10.43</td> <td>35.29</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>110</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.60	43.57	54.00	-10.43	35.29	32.98	13.19	37.89	0.00	110	73	AVERAGE	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>95.69</td> <td>-----</td> <td>-----</td> <td>87.46</td> <td>32.90</td> <td>13.24</td> <td>37.91</td> <td>0.00</td> <td>110</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5510.00	95.69	-----	-----	87.46	32.90	13.24	37.91	0.00	110	73	AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5459.60	43.57	54.00	-10.43	35.29	32.98	13.19	37.89	0.00	110	73	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5510.00	95.69	-----	-----	87.46	32.90	13.24	37.91	0.00	110	73	AVERAGE																																																																																	



Mode	25																																			
	Band Edge - R																																			
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																			
ANT	4																																			
Pol.	Horizontal	Fundamental																																		
Peak	<p>Site : 03CH20-HY          Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5736.95</td> <td>47.71</td> <td>68.20</td> <td>-20.49</td> <td>38.44</td> <td>33.67</td> <td>13.52</td> <td>37.92</td> <td>0.00</td> <td>110</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	1	5736.95	47.71	68.20	-20.49	38.44	33.67	13.52	37.92	0.00	110	73	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																									
1	5736.95	47.71	68.20	-20.49	38.44	33.67	13.52	37.92	0.00	110	73	PEAK																								



<b>25</b>																																																																																												
<b>Mode</b>	<b>Band Edge - L</b>																																																																																											
<b>U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																											
<b>Pol.</b>	<b>Vertical</b>																																																																																											
<b>Peak</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.16</td> <td>56.52</td> <td>74.00</td> <td>-17.48</td> <td>48.24</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>104</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.72</td> <td>62.44</td> <td>68.20</td> <td>-5.76</td> <td>54.17</td> <td>32.96</td> <td>13.20</td> <td>37.89</td> <td>0.00</td> <td>104</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>101.70</td> <td>-----</td> <td>-----</td> <td>93.47</td> <td>32.90</td> <td>13.24</td> <td>37.91</td> <td>0.00</td> <td>104</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5454.16	56.52	74.00	-17.48	48.24	32.99	13.18	37.89	0.00	104	360	PEAK	2	5468.72	62.44	68.20	-5.76	54.17	32.96	13.20	37.89	0.00	104	360	PEAK	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5510.00	101.70	-----	-----	93.47	32.90	13.24	37.91	0.00	104	360	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5454.16	56.52	74.00	-17.48	48.24	32.99	13.18	37.89	0.00	104	360	PEAK																																																																																
2	5468.72	62.44	68.20	-5.76	54.17	32.96	13.20	37.89	0.00	104	360	PEAK																																																																																
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5510.00	101.70	-----	-----	93.47	32.90	13.24	37.91	0.00	104	360	PEAK																																																																																
<b>Avg</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>42.44</td> <td>54.00</td> <td>-11.56</td> <td>34.16</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>104</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>94.81</td> <td>-----</td> <td>-----</td> <td>86.58</td> <td>32.90</td> <td>13.24</td> <td>37.91</td> <td>0.00</td> <td>104</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.76	42.44	54.00	-11.56	34.16	32.98	13.19	37.89	0.00	104	360	AVERAGE	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5510.00	94.81	-----	-----	86.58	32.90	13.24	37.91	0.00	104	360	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5459.76	42.44	54.00	-11.56	34.16	32.98	13.19	37.89	0.00	104	360	AVERAGE																																																																																
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5510.00	94.81	-----	-----	86.58	32.90	13.24	37.91	0.00	104	360	AVERAGE																																																																																







Mode	25																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																					
ANT	4																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Site : 03CH20-HY            Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5734.40</td> <td>48.51</td> <td>68.20</td> <td>-19.69</td> <td>39.24</td> <td>33.67</td> <td>13.52</td> <td>37.92</td> <td>0.00 104 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5734.40	48.51	68.20	-19.69	39.24	33.67	13.52	37.92	0.00 104 360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																														
1 5734.40	48.51	68.20	-19.69	39.24	33.67	13.52	37.92	0.00 104 360 PEAK																														



Mode	25																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>51.17</td> <td>74.00</td> <td>-22.83</td> <td>34.57</td> <td>38.80</td> <td>19.00</td> <td>41.96</td> <td>0.76</td> <td>200</td> <td>176</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11020.00</td> <td>41.72</td> <td>54.00</td> <td>-12.28</td> <td>25.12</td> <td>38.80</td> <td>19.00</td> <td>41.96</td> <td>0.76</td> <td>200</td> <td>176</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16530.00</td> <td>53.07</td> <td>68.20</td> <td>-15.13</td> <td>34.01</td> <td>39.14</td> <td>23.45</td> <td>44.02</td> <td>0.49</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11020.00	51.17	74.00	-22.83	34.57	38.80	19.00	41.96	0.76	200	176	PEAK	2	11020.00	41.72	54.00	-12.28	25.12	38.80	19.00	41.96	0.76	200	176	Average	3	16530.00	53.07	68.20	-15.13	34.01	39.14	23.45	44.02	0.49	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>51.32</td> <td>74.00</td> <td>-22.68</td> <td>34.72</td> <td>38.80</td> <td>19.00</td> <td>41.96</td> <td>0.76</td> <td>100</td> <td>131</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11020.00</td> <td>41.89</td> <td>54.00</td> <td>-12.11</td> <td>25.29</td> <td>38.80</td> <td>19.00</td> <td>41.96</td> <td>0.76</td> <td>100</td> <td>131</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16530.00</td> <td>53.30</td> <td>68.20</td> <td>-14.90</td> <td>34.24</td> <td>39.14</td> <td>23.45</td> <td>44.02</td> <td>0.49</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11020.00	51.32	74.00	-22.68	34.72	38.80	19.00	41.96	0.76	100	131	PEAK	2	11020.00	41.89	54.00	-12.11	25.29	38.80	19.00	41.96	0.76	100	131	Average	3	16530.00	53.30	68.20	-14.90	34.24	39.14	23.45	44.02	0.49	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11020.00	51.17	74.00	-22.83	34.57	38.80	19.00	41.96	0.76	200	176	PEAK																																																																																																																										
2	11020.00	41.72	54.00	-12.28	25.12	38.80	19.00	41.96	0.76	200	176	Average																																																																																																																										
3	16530.00	53.07	68.20	-15.13	34.01	39.14	23.45	44.02	0.49	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11020.00	51.32	74.00	-22.68	34.72	38.80	19.00	41.96	0.76	100	131	PEAK																																																																																																																										
2	11020.00	41.89	54.00	-12.11	25.29	38.80	19.00	41.96	0.76	100	131	Average																																																																																																																										
3	16530.00	53.30	68.20	-14.90	34.24	39.14	23.45	44.02	0.49	--	--	PEAK																																																																																																																										

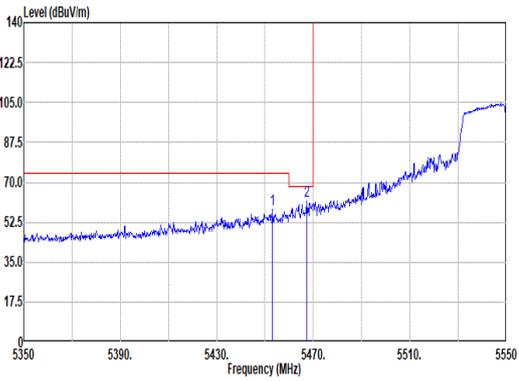
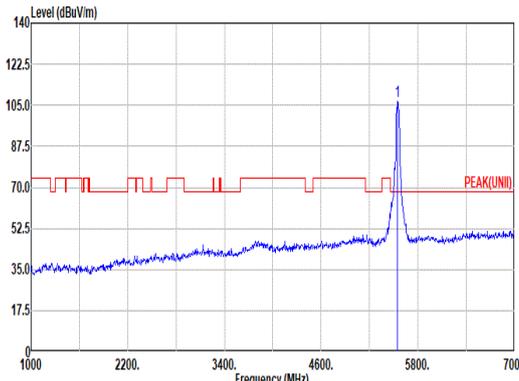
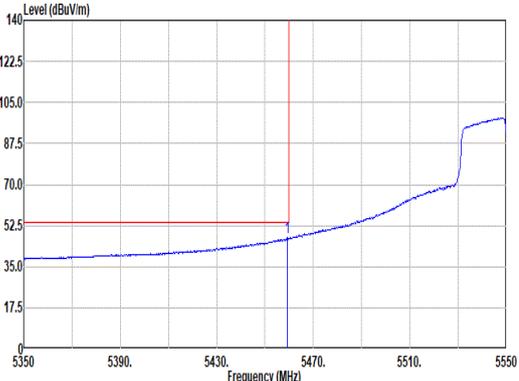
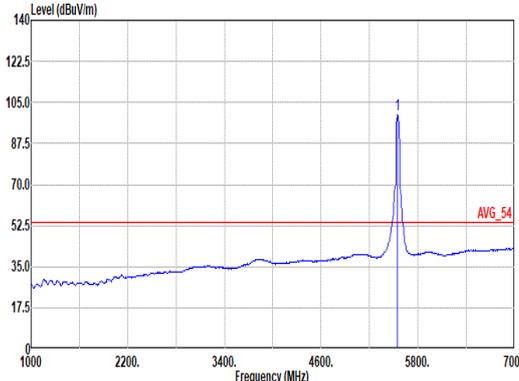


		26																																																																																											
Mode	Band Edge - L																																																																																												
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																																																																												
ANT	4																																																																																												
Pol.	Horizontal	Fundamental																																																																																											
Peak	 <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.00</td> <td>57.99</td> <td>74.00</td> <td>-16.01</td> <td>49.71</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.20</td> <td>61.99</td> <td>68.20</td> <td>-6.21</td> <td>53.72</td> <td>32.97</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5453.00	57.99	74.00	-16.01	49.71	32.99	13.18	37.89	0.00	100	63	PEAK	2	5467.20	61.99	68.20	-6.21	53.72	32.97	13.19	37.89	0.00	100	63	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>106.70</td> <td>-----</td> <td>-----</td> <td>98.43</td> <td>32.90</td> <td>13.28</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5550.00	106.70	-----	-----	98.43	32.90	13.28	37.91	0.00	100	63	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5453.00	57.99	74.00	-16.01	49.71	32.99	13.18	37.89	0.00	100	63	PEAK																																																																																	
2	5467.20	61.99	68.20	-6.21	53.72	32.97	13.19	37.89	0.00	100	63	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5550.00	106.70	-----	-----	98.43	32.90	13.28	37.91	0.00	100	63	PEAK																																																																																	
Avg	 <p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.20</td> <td>47.29</td> <td>54.00</td> <td>-6.71</td> <td>39.01</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.20	47.29	54.00	-6.71	39.01	32.98	13.19	37.89	0.00	100	63	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>99.62</td> <td>-----</td> <td>-----</td> <td>91.35</td> <td>32.90</td> <td>13.28</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5550.00	99.62	-----	-----	91.35	32.90	13.28	37.91	0.00	100	63	AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5459.20	47.29	54.00	-6.71	39.01	32.98	13.19	37.89	0.00	100	63	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5550.00	99.62	-----	-----	91.35	32.90	13.28	37.91	0.00	100	63	AVERAGE																																																																																	



Mode	26																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																								
ANT	4																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH20-HY            Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5758.12</td> <td>47.29</td> <td>68.20</td> <td>-20.91</td> <td>37.90</td> <td>33.76</td> <td>13.55</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>63 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5758.12	47.29	68.20	-20.91	37.90	33.76	13.55	37.92	0.00	100	63 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5758.12	47.29	68.20	-20.91	37.90	33.76	13.55	37.92	0.00	100	63 PEAK																															

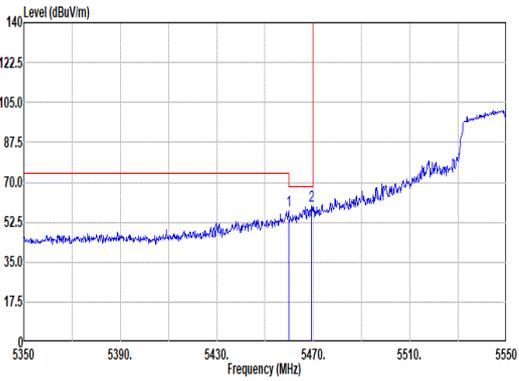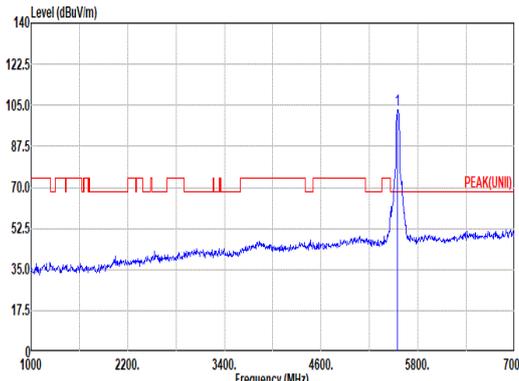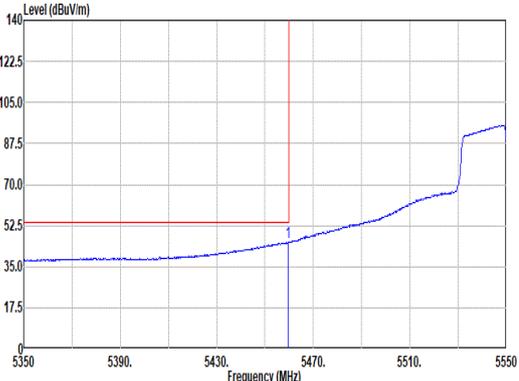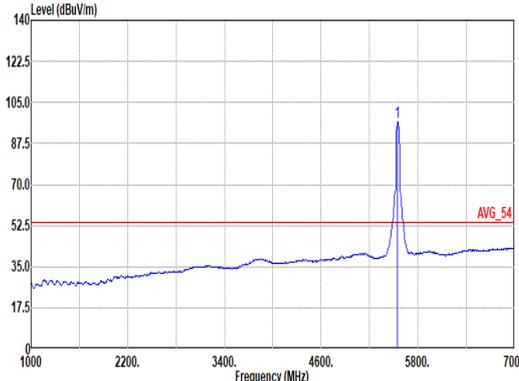

		<b>26</b>																																																																																											
<b>Mode</b>	<b>Band Edge - L</b>																																																																																												
	<b>U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																												
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>	 <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.00</td> <td>57.70</td> <td>74.00</td> <td>-16.30</td> <td>49.42</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>400</td> <td>354</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.20</td> <td>59.67</td> <td>68.20</td> <td>-8.53</td> <td>51.41</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>400</td> <td>354</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.00	57.70	74.00	-16.30	49.42	32.98	13.19	37.89	0.00	400	354	PEAK	2	5469.20	59.67	68.20	-8.53	51.41	32.96	13.20	37.90	0.00	400	354	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>103.22</td> <td>-----</td> <td>-----</td> <td>94.95</td> <td>32.90</td> <td>13.28</td> <td>37.91</td> <td>0.00</td> <td>400</td> <td>354</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5550.00	103.22	-----	-----	94.95	32.90	13.28	37.91	0.00	400	354	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5459.00	57.70	74.00	-16.30	49.42	32.98	13.19	37.89	0.00	400	354	PEAK																																																																																	
2	5469.20	59.67	68.20	-8.53	51.41	32.96	13.20	37.90	0.00	400	354	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5550.00	103.22	-----	-----	94.95	32.90	13.28	37.91	0.00	400	354	PEAK																																																																																	
<b>Avg</b>	 <p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.60</td> <td>45.40</td> <td>54.00</td> <td>-8.60</td> <td>37.12</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>400</td> <td>354</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.60	45.40	54.00	-8.60	37.12	32.98	13.19	37.89	0.00	400	354	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>96.66</td> <td>-----</td> <td>-----</td> <td>88.37</td> <td>32.91</td> <td>13.29</td> <td>37.91</td> <td>0.00</td> <td>400</td> <td>354</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5550.00	96.66	-----	-----	88.37	32.91	13.29	37.91	0.00	400	354	AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5459.60	45.40	54.00	-8.60	37.12	32.98	13.19	37.89	0.00	400	354	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5550.00	96.66	-----	-----	88.37	32.91	13.29	37.91	0.00	400	354	AVERAGE																																																																																	



Mode	26																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																								
ANT	4																																								
Pol.	Vertical	Fundamental																																							
Peak	<p>Site : 03CH20-HY            Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5734.04</td> <td>49.57</td> <td>68.20</td> <td>-18.63</td> <td>40.30</td> <td>33.67</td> <td>13.52</td> <td>37.92</td> <td>0.00</td> <td>400</td> <td>354 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5734.04	49.57	68.20	-18.63	40.30	33.67	13.52	37.92	0.00	400	354 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5734.04	49.57	68.20	-18.63	40.30	33.67	13.52	37.92	0.00	400	354 PEAK																															



Mode	26																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>51.24</td> <td>74.00</td> <td>-22.76</td> <td>34.56</td> <td>38.90</td> <td>19.07</td> <td>42.05</td> <td>0.76</td> <td>400</td> <td>147</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11100.00</td> <td>41.87</td> <td>54.00</td> <td>-12.13</td> <td>25.19</td> <td>38.90</td> <td>19.07</td> <td>42.05</td> <td>0.76</td> <td>400</td> <td>147</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16650.00</td> <td>53.84</td> <td>68.20</td> <td>-14.36</td> <td>34.51</td> <td>39.40</td> <td>23.54</td> <td>44.12</td> <td>0.51</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11100.00	51.24	74.00	-22.76	34.56	38.90	19.07	42.05	0.76	400	147	PEAK	2	11100.00	41.87	54.00	-12.13	25.19	38.90	19.07	42.05	0.76	400	147	Average	3	16650.00	53.84	68.20	-14.36	34.51	39.40	23.54	44.12	0.51	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>51.71</td> <td>74.00</td> <td>-22.29</td> <td>35.03</td> <td>38.90</td> <td>19.07</td> <td>42.05</td> <td>0.76</td> <td>200</td> <td>118</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11100.00</td> <td>42.00</td> <td>54.00</td> <td>-11.92</td> <td>25.40</td> <td>38.90</td> <td>19.07</td> <td>42.05</td> <td>0.76</td> <td>200</td> <td>118</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16650.00</td> <td>53.39</td> <td>68.20</td> <td>-14.81</td> <td>34.06</td> <td>39.40</td> <td>23.54</td> <td>44.12</td> <td>0.51</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11100.00	51.71	74.00	-22.29	35.03	38.90	19.07	42.05	0.76	200	118	PEAK	2	11100.00	42.00	54.00	-11.92	25.40	38.90	19.07	42.05	0.76	200	118	Average	3	16650.00	53.39	68.20	-14.81	34.06	39.40	23.54	44.12	0.51	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11100.00	51.24	74.00	-22.76	34.56	38.90	19.07	42.05	0.76	400	147	PEAK																																																																																																																										
2	11100.00	41.87	54.00	-12.13	25.19	38.90	19.07	42.05	0.76	400	147	Average																																																																																																																										
3	16650.00	53.84	68.20	-14.36	34.51	39.40	23.54	44.12	0.51	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11100.00	51.71	74.00	-22.29	35.03	38.90	19.07	42.05	0.76	200	118	PEAK																																																																																																																										
2	11100.00	42.00	54.00	-11.92	25.40	38.90	19.07	42.05	0.76	200	118	Average																																																																																																																										
3	16650.00	53.39	68.20	-14.81	34.06	39.40	23.54	44.12	0.51	--	--	PEAK																																																																																																																										



<b>27</b>																																																																																												
<b>Mode</b>	<b>Band Edge - L</b>																																																																																											
<b>U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																											
<b>Pol.</b>	<b>Horizontal</b>																																																																																											
<b>Peak</b>	<b>Fundamental</b>																																																																																											
<p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5419.44</td> <td>47.49</td> <td>74.00</td> <td>-26.51</td> <td>39.16</td> <td>33.06</td> <td>13.14</td> <td>37.87</td> <td>0.00</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.00</td> <td>47.19</td> <td>68.20</td> <td>-21.01</td> <td>38.91</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5419.44	47.49	74.00	-26.51	39.16	33.06	13.14	37.87	0.00	100	76	PEAK	2	5468.00	47.19	68.20	-21.01	38.91	32.98	13.19	37.89	0.00	100	76	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>103.16</td> <td>-----</td> <td>-----</td> <td>94.25</td> <td>33.39</td> <td>13.44</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	103.16	-----	-----	94.25	33.39	13.44	37.92	0.00	100	76	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5419.44	47.49	74.00	-26.51	39.16	33.06	13.14	37.87	0.00	100	76	PEAK																																																																																
2	5468.00	47.19	68.20	-21.01	38.91	32.98	13.19	37.89	0.00	100	76	PEAK																																																																																
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5670.00	103.16	-----	-----	94.25	33.39	13.44	37.92	0.00	100	76	PEAK																																																																																
<b>Avg</b>	<b>Avg</b>																																																																																											
<p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.00</td> <td>38.58</td> <td>54.00</td> <td>-15.42</td> <td>30.31</td> <td>32.98</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5458.00	38.58	54.00	-15.42	30.31	32.98	13.18	37.89	0.00	100	76	AVERAGE	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>96.64</td> <td>-----</td> <td>-----</td> <td>87.73</td> <td>33.39</td> <td>13.44</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	96.64	-----	-----	87.73	33.39	13.44	37.92	0.00	100	76	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5458.00	38.58	54.00	-15.42	30.31	32.98	13.18	37.89	0.00	100	76	AVERAGE																																																																																
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5670.00	96.64	-----	-----	87.73	33.39	13.44	37.92	0.00	100	76	AVERAGE																																																																																



Mode	27																																																																
	Band Edge - R																																																																
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																
ANT	4																																																																
Pol.	Horizontal	Fundamental																																																															
Peak	<p>Site : 03CH20-HY          Condition: PEAK_BE(LNII)_B3 3m HF_91200_02360_241101 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5725.10</td> <td>60.91</td> <td>68.20</td> <td>-7.29</td> <td>51.67</td> <td>33.65</td> <td>13.51</td> <td>37.92</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>76</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5725.10	60.91	68.20	-7.29	51.67	33.65	13.51	37.92	0.00									100									76									PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																									
1 5725.10	60.91	68.20	-7.29	51.67	33.65	13.51	37.92	0.00																																																									
								100																																																									
								76																																																									
								PEAK																																																									



	<b>27</b>																																																																																												
<b>Mode</b>	<b>Band Edge - L</b>																																																																																												
	<b>U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																												
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>	<p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.92</td> <td>48.27</td> <td>74.00</td> <td>-25.73</td> <td>39.98</td> <td>33.00</td> <td>13.17</td> <td>37.88</td> <td>0.00</td> <td>108</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.80</td> <td>46.34</td> <td>68.20</td> <td>-21.86</td> <td>38.07</td> <td>32.97</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>108</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5447.92	48.27	74.00	-25.73	39.98	33.00	13.17	37.88	0.00	108	360	PEAK	2	5466.80	46.34	68.20	-21.86	38.07	32.97	13.19	37.89	0.00	108	360	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>104.64</td> <td>-----</td> <td>-----</td> <td>95.73</td> <td>33.39</td> <td>13.44</td> <td>37.92</td> <td>0.00</td> <td>108</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	104.64	-----	-----	95.73	33.39	13.44	37.92	0.00	108	360	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5447.92	48.27	74.00	-25.73	39.98	33.00	13.17	37.88	0.00	108	360	PEAK																																																																																	
2	5466.80	46.34	68.20	-21.86	38.07	32.97	13.19	37.89	0.00	108	360	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5670.00	104.64	-----	-----	95.73	33.39	13.44	37.92	0.00	108	360	PEAK																																																																																	
<b>Avg</b>	<p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5436.00</td> <td>38.17</td> <td>54.00</td> <td>-15.83</td> <td>29.86</td> <td>33.03</td> <td>13.16</td> <td>37.88</td> <td>0.00</td> <td>108</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5436.00	38.17	54.00	-15.83	29.86	33.03	13.16	37.88	0.00	108	360	AVERAGE	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>98.72</td> <td>-----</td> <td>-----</td> <td>89.81</td> <td>33.39</td> <td>13.44</td> <td>37.92</td> <td>0.00</td> <td>108</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	98.72	-----	-----	89.81	33.39	13.44	37.92	0.00	108	360	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5436.00	38.17	54.00	-15.83	29.86	33.03	13.16	37.88	0.00	108	360	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5670.00	98.72	-----	-----	89.81	33.39	13.44	37.92	0.00	108	360	AVERAGE																																																																																	







Mode	27																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																								
ANT	4																																								
Pol.	Vertical	Fundamental																																							
Peak	<p>Site : 03CH20-HY          Condition: PEAK_BE(LNII)_B3 3m HF_91200_02360_241101 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.39</td> <td>64.70</td> <td>68.20</td> <td>-3.50</td> <td>55.46</td> <td>33.65</td> <td>13.51</td> <td>37.92</td> <td>0.00</td> <td>108</td> <td>360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5725.39	64.70	68.20	-3.50	55.46	33.65	13.51	37.92	0.00	108	360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5725.39	64.70	68.20	-3.50	55.46	33.65	13.51	37.92	0.00	108	360 PEAK																															



Mode	27																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>50.88</td> <td>74.00</td> <td>-23.12</td> <td>34.10</td> <td>39.08</td> <td>19.28</td> <td>42.31</td> <td>0.73</td> <td>300</td> <td>243</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11340.00</td> <td>42.09</td> <td>54.00</td> <td>-11.91</td> <td>25.31</td> <td>39.08</td> <td>19.28</td> <td>42.31</td> <td>0.73</td> <td>300</td> <td>243</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17010.00</td> <td>54.39</td> <td>68.20</td> <td>-13.81</td> <td>35.10</td> <td>39.32</td> <td>23.82</td> <td>44.42</td> <td>0.57</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11340.00	50.88	74.00	-23.12	34.10	39.08	19.28	42.31	0.73	300	243	PEAK	2	11340.00	42.09	54.00	-11.91	25.31	39.08	19.28	42.31	0.73	300	243	Average	3	17010.00	54.39	68.20	-13.81	35.10	39.32	23.82	44.42	0.57	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>51.01</td> <td>74.00</td> <td>-22.99</td> <td>34.23</td> <td>39.08</td> <td>19.28</td> <td>42.31</td> <td>0.73</td> <td>200</td> <td>338</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11340.00</td> <td>42.19</td> <td>54.00</td> <td>-11.81</td> <td>25.41</td> <td>39.08</td> <td>19.28</td> <td>42.31</td> <td>0.73</td> <td>200</td> <td>338</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17010.00</td> <td>54.10</td> <td>68.20</td> <td>-14.10</td> <td>34.81</td> <td>39.32</td> <td>23.82</td> <td>44.42</td> <td>0.57</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11340.00	51.01	74.00	-22.99	34.23	39.08	19.28	42.31	0.73	200	338	PEAK	2	11340.00	42.19	54.00	-11.81	25.41	39.08	19.28	42.31	0.73	200	338	Average	3	17010.00	54.10	68.20	-14.10	34.81	39.32	23.82	44.42	0.57	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11340.00	50.88	74.00	-23.12	34.10	39.08	19.28	42.31	0.73	300	243	PEAK																																																																																																																										
2	11340.00	42.09	54.00	-11.91	25.31	39.08	19.28	42.31	0.73	300	243	Average																																																																																																																										
3	17010.00	54.39	68.20	-13.81	35.10	39.32	23.82	44.42	0.57	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11340.00	51.01	74.00	-22.99	34.23	39.08	19.28	42.31	0.73	200	338	PEAK																																																																																																																										
2	11340.00	42.19	54.00	-11.81	25.41	39.08	19.28	42.31	0.73	200	338	Average																																																																																																																										
3	17010.00	54.10	68.20	-14.10	34.81	39.32	23.82	44.42	0.57	--	--	PEAK																																																																																																																										

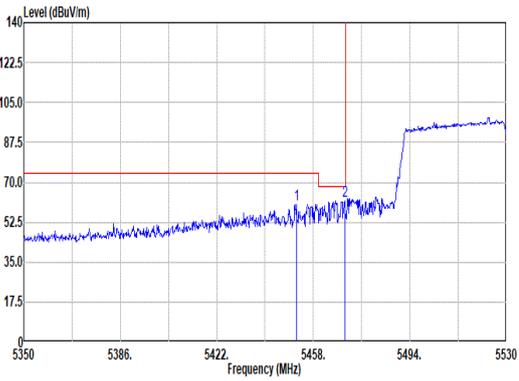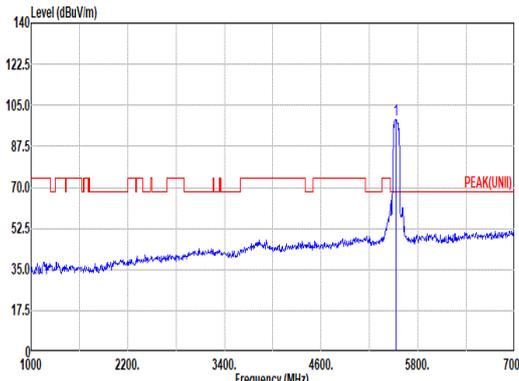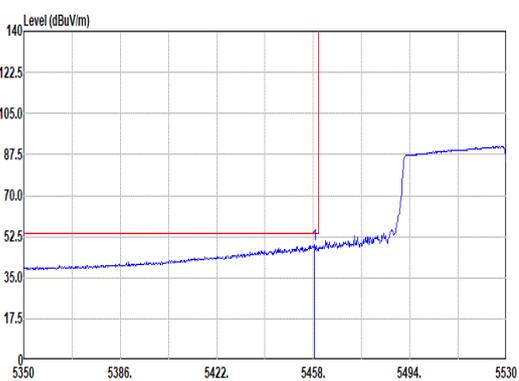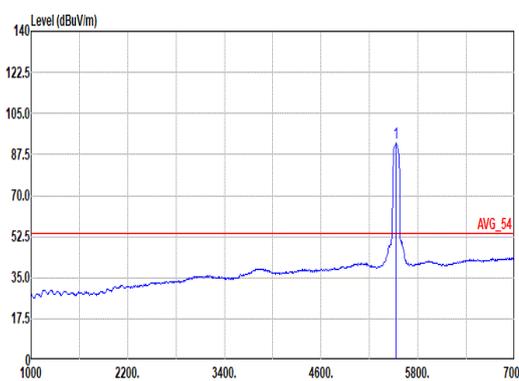

	28																																																																																												
<b>Mode</b>	Band Edge - L																																																																																												
<b>ANT</b>	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz																																																																																												
<b>Pol.</b>	Horizontal	Fundamental																																																																																											
<b>Peak</b>	 <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1" style="width:100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.70</td> <td>60.27</td> <td>74.00</td> <td>-13.73</td> <td>51.98</td> <td>33.00</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>103</td> <td>65</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.70</td> <td>62.06</td> <td>68.20</td> <td>-6.14</td> <td>53.80</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>103</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5451.70	60.27	74.00	-13.73	51.98	33.00	13.18	37.89	0.00	103	65	PEAK	2	5469.70	62.06	68.20	-6.14	53.80	32.96	13.20	37.90	0.00	103	65	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1" style="width:100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>99.02</td> <td>-----</td> <td>-----</td> <td>90.76</td> <td>32.90</td> <td>13.27</td> <td>37.91</td> <td>0.00</td> <td>103</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5530.00	99.02	-----	-----	90.76	32.90	13.27	37.91	0.00	103	65	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5451.70	60.27	74.00	-13.73	51.98	33.00	13.18	37.89	0.00	103	65	PEAK																																																																																	
2	5469.70	62.06	68.20	-6.14	53.80	32.96	13.20	37.90	0.00	103	65	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5530.00	99.02	-----	-----	90.76	32.90	13.27	37.91	0.00	103	65	PEAK																																																																																	
<b>Avg</b>	 <p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3.300kHz SMT:Auto</p> <table border="1" style="width:100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.54</td> <td>48.89</td> <td>54.00</td> <td>-5.11</td> <td>40.62</td> <td>32.98</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>103</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5458.54	48.89	54.00	-5.11	40.62	32.98	13.18	37.89	0.00	103	65	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3.300kHz SMT:Auto</p> <table border="1" style="width:100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>92.21</td> <td>-----</td> <td>-----</td> <td>83.96</td> <td>32.90</td> <td>13.26</td> <td>37.91</td> <td>0.00</td> <td>103</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5530.00	92.21	-----	-----	83.96	32.90	13.26	37.91	0.00	103	65	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5458.54	48.89	54.00	-5.11	40.62	32.98	13.18	37.89	0.00	103	65	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5530.00	92.21	-----	-----	83.96	32.90	13.26	37.91	0.00	103	65	AVERAGE																																																																																	



Mode	28																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																								
ANT	4																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH20-HY            Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.40</td> <td>47.34</td> <td>68.20</td> <td>-20.86</td> <td>38.08</td> <td>33.66</td> <td>13.52</td> <td>37.92</td> <td>0.00</td> <td>103</td> <td>65 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5731.40	47.34	68.20	-20.86	38.08	33.66	13.52	37.92	0.00	103	65 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5731.40	47.34	68.20	-20.86	38.08	33.66	13.52	37.92	0.00	103	65 PEAK																															



<b>28</b>																																																																																																				
<b>Mode</b>	<b>Band Edge - L</b>																																																																																																			
<b>U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz</b>																																																																																																				
<b>ANT</b>	<b>4</b>																																																																																																			
<b>Pol.</b>	<b>Vertical</b>																																																																																																			
<b>Peak</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.50</td> <td>58.77</td> <td>74.00</td> <td>-15.23</td> <td>50.49</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>379</td> <td>354</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.52</td> <td>61.04</td> <td>68.20</td> <td>-7.16</td> <td>52.78</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>379</td> <td>354</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>97.28</td> <td>-----</td> <td>-----</td> <td>89.02</td> <td>32.90</td> <td>13.27</td> <td>37.91</td> <td>0.00</td> <td>379</td> <td>354</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5453.50	58.77	74.00	-15.23	50.49	32.99	13.18	37.89	0.00	379	354	PEAK	2	5469.52	61.04	68.20	-7.16	52.78	32.96	13.20	37.90	0.00	379	354	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	97.28	-----	-----	89.02	32.90	13.27	37.91	0.00	379	354	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5453.50	58.77	74.00	-15.23	50.49	32.99	13.18	37.89	0.00	379	354	PEAK																																																																																								
2	5469.52	61.04	68.20	-7.16	52.78	32.96	13.20	37.90	0.00	379	354	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5530.00	97.28	-----	-----	89.02	32.90	13.27	37.91	0.00	379	354	PEAK																																																																																								
<b>Avg</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.66</td> <td>48.63</td> <td>54.00</td> <td>-5.37</td> <td>40.35</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>379</td> <td>354</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>89.59</td> <td>-----</td> <td>-----</td> <td>81.33</td> <td>32.90</td> <td>13.27</td> <td>37.91</td> <td>0.00</td> <td>379</td> <td>354</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.66	48.63	54.00	-5.37	40.35	32.99	13.18	37.89	0.00	379	354	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	89.59	-----	-----	81.33	32.90	13.27	37.91	0.00	379	354	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5455.66	48.63	54.00	-5.37	40.35	32.99	13.18	37.89	0.00	379	354	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5530.00	89.59	-----	-----	81.33	32.90	13.27	37.91	0.00	379	354	AVERAGE																																																																																								



Mode	28																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																								
ANT	4																																								
Pol.	Vertical	Fundamental																																							
Peak	<p>Site : 03CH20-HY            Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5733.28</td> <td>47.73</td> <td>68.20</td> <td>-20.47</td> <td>38.46</td> <td>33.67</td> <td>13.52</td> <td>37.92</td> <td>0.00</td> <td>379</td> <td>354 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5733.28	47.73	68.20	-20.47	38.46	33.67	13.52	37.92	0.00	379	354 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5733.28	47.73	68.20	-20.47	38.46	33.67	13.52	37.92	0.00	379	354 PEAK																															



Mode	28																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>51.97</td> <td>74.00</td> <td>-22.03</td> <td>35.36</td> <td>38.82</td> <td>19.03</td> <td>42.00</td> <td>0.76</td> <td>200</td> <td>111</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11060.00</td> <td>42.44</td> <td>54.00</td> <td>-11.56</td> <td>25.03</td> <td>38.82</td> <td>19.03</td> <td>42.00</td> <td>0.76</td> <td>200</td> <td>111</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16590.00</td> <td>53.86</td> <td>68.20</td> <td>-14.34</td> <td>34.03</td> <td>39.10</td> <td>23.50</td> <td>44.07</td> <td>0.50</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11060.00	51.97	74.00	-22.03	35.36	38.82	19.03	42.00	0.76	200	111	PEAK	2	11060.00	42.44	54.00	-11.56	25.03	38.82	19.03	42.00	0.76	200	111	Average	3	16590.00	53.86	68.20	-14.34	34.03	39.10	23.50	44.07	0.50	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>51.59</td> <td>74.00</td> <td>-22.41</td> <td>34.98</td> <td>38.82</td> <td>19.03</td> <td>42.00</td> <td>0.76</td> <td>300</td> <td>141</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11060.00</td> <td>42.38</td> <td>54.00</td> <td>-11.62</td> <td>25.77</td> <td>38.82</td> <td>19.03</td> <td>42.00</td> <td>0.76</td> <td>300</td> <td>141</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16590.00</td> <td>53.37</td> <td>68.20</td> <td>-14.83</td> <td>34.34</td> <td>39.10</td> <td>23.50</td> <td>44.07</td> <td>0.50</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11060.00	51.59	74.00	-22.41	34.98	38.82	19.03	42.00	0.76	300	141	PEAK	2	11060.00	42.38	54.00	-11.62	25.77	38.82	19.03	42.00	0.76	300	141	Average	3	16590.00	53.37	68.20	-14.83	34.34	39.10	23.50	44.07	0.50	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11060.00	51.97	74.00	-22.03	35.36	38.82	19.03	42.00	0.76	200	111	PEAK																																																																																																																										
2	11060.00	42.44	54.00	-11.56	25.03	38.82	19.03	42.00	0.76	200	111	Average																																																																																																																										
3	16590.00	53.86	68.20	-14.34	34.03	39.10	23.50	44.07	0.50	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11060.00	51.59	74.00	-22.41	34.98	38.82	19.03	42.00	0.76	300	141	PEAK																																																																																																																										
2	11060.00	42.38	54.00	-11.62	25.77	38.82	19.03	42.00	0.76	300	141	Average																																																																																																																										
3	16590.00	53.37	68.20	-14.83	34.34	39.10	23.50	44.07	0.50	--	--	PEAK																																																																																																																										



<b>29</b>																																																																																												
<b>Mode</b>	<b>Band Edge - L</b>																																																																																											
<b>U-NII-2C_5.47-5.725_802.11ac_VHT80_CH122_5610MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																											
<b>Pol.</b>	<b>Horizontal</b>																																																																																											
<b>Peak</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.60</td> <td>57.50</td> <td>74.00</td> <td>-16.50</td> <td>49.22</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>65</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.56</td> <td>59.24</td> <td>68.20</td> <td>-8.96</td> <td>50.97</td> <td>32.96</td> <td>13.20</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>100.66</td> <td>-----</td> <td>-----</td> <td>92.19</td> <td>33.03</td> <td>13.35</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5456.60	57.50	74.00	-16.50	49.22	32.99	13.18	37.89	0.00	100	65	PEAK	2	5468.56	59.24	68.20	-8.96	50.97	32.96	13.20	37.89	0.00	100	65	PEAK	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5610.00	100.66	-----	-----	92.19	33.03	13.35	37.91	0.00	100	65	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5456.60	57.50	74.00	-16.50	49.22	32.99	13.18	37.89	0.00	100	65	PEAK																																																																																
2	5468.56	59.24	68.20	-8.96	50.97	32.96	13.20	37.89	0.00	100	65	PEAK																																																																																
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5610.00	100.66	-----	-----	92.19	33.03	13.35	37.91	0.00	100	65	PEAK																																																																																
<b>Avg</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.86</td> <td>47.65</td> <td>54.00</td> <td>-6.35</td> <td>39.37</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>93.85</td> <td>-----</td> <td>-----</td> <td>85.38</td> <td>33.03</td> <td>13.35</td> <td>37.91</td> <td>0.00</td> <td>100</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5456.86	47.65	54.00	-6.35	39.37	32.99	13.18	37.89	0.00	100	65	AVERAGE	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5610.00	93.85	-----	-----	85.38	33.03	13.35	37.91	0.00	100	65	AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5456.86	47.65	54.00	-6.35	39.37	32.99	13.18	37.89	0.00	100	65	AVERAGE																																																																																
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5610.00	93.85	-----	-----	85.38	33.03	13.35	37.91	0.00	100	65	AVERAGE																																																																																



Mode	29																																						
	Band Edge - R																																						
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																						
ANT	4																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p>Site : 03CH20-HY          Condition: PEAK_BE(LNII)_B3 3m HF_91200_02360_241101 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5729.82</td> <td>57.64</td> <td>68.20</td> <td>-10.56</td> <td>48.38</td> <td>33.66</td> <td>13.52</td> <td>37.92</td> <td>0.00 100 65</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5729.82	57.64	68.20	-10.56	48.38	33.66	13.52	37.92	0.00 100 65	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																															
1 5729.82	57.64	68.20	-10.56	48.38	33.66	13.52	37.92	0.00 100 65	PEAK																														



	<b>29</b>																																																																																												
<b>Mode</b>	<b>Band Edge - L</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																												
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>	<p>Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.90</td> <td>54.56</td> <td>74.00</td> <td>-19.44</td> <td>46.29</td> <td>32.98</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>295</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.82</td> <td>55.52</td> <td>68.20</td> <td>-12.68</td> <td>47.26</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>295</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5457.90	54.56	74.00	-19.44	46.29	32.98	13.18	37.89	0.00	295	0	PEAK	2	5468.82	55.52	68.20	-12.68	47.26	32.96	13.20	37.90	0.00	295	0	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>102.19</td> <td>-----</td> <td>-----</td> <td>93.68</td> <td>33.06</td> <td>13.36</td> <td>37.91</td> <td>0.00</td> <td>295</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5610.00	102.19	-----	-----	93.68	33.06	13.36	37.91	0.00	295	0	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5457.90	54.56	74.00	-19.44	46.29	32.98	13.18	37.89	0.00	295	0	PEAK																																																																																	
2	5468.82	55.52	68.20	-12.68	47.26	32.96	13.20	37.90	0.00	295	0	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5610.00	102.19	-----	-----	93.68	33.06	13.36	37.91	0.00	295	0	PEAK																																																																																	
<b>Avg</b>	<p>Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.62</td> <td>45.72</td> <td>54.00</td> <td>-8.28</td> <td>37.43</td> <td>33.00</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>295</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5458.62	45.72	54.00	-8.28	37.43	33.00	13.18	37.89	0.00	295	0	AVERAGE	<p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>95.46</td> <td>-----</td> <td>-----</td> <td>86.99</td> <td>33.83</td> <td>13.35</td> <td>37.91</td> <td>0.00</td> <td>295</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5610.00	95.46	-----	-----	86.99	33.83	13.35	37.91	0.00	295	0	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5458.62	45.72	54.00	-8.28	37.43	33.00	13.18	37.89	0.00	295	0	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5610.00	95.46	-----	-----	86.99	33.83	13.35	37.91	0.00	295	0	AVERAGE																																																																																	



Mode	29																																			
	Band Edge - R																																			
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																			
ANT	4																																			
Pol.	Vertical	Fundamental																																		
Peak	<p>Site : 03CH20-HY          Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5731.83</td> <td>63.76</td> <td>68.20</td> <td>-4.44</td> <td>54.50</td> <td>33.66</td> <td>13.52</td> <td>37.92</td> <td>0.00</td> <td>295</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	1	5731.83	63.76	68.20	-4.44	54.50	33.66	13.52	37.92	0.00	295	0	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																									
1	5731.83	63.76	68.20	-4.44	54.50	33.66	13.52	37.92	0.00	295	0	PEAK																								



Mode	29																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH122_5610MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.00</td> <td>51.17</td> <td>74.00</td> <td>-22.83</td> <td>34.54</td> <td>38.90</td> <td>19.17</td> <td>42.18</td> <td>0.74</td> <td>400</td> <td>219</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11220.00</td> <td>42.41</td> <td>54.00</td> <td>-11.59</td> <td>25.78</td> <td>38.90</td> <td>19.17</td> <td>42.18</td> <td>0.74</td> <td>400</td> <td>219</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16830.00</td> <td>53.70</td> <td>68.20</td> <td>-14.50</td> <td>34.39</td> <td>39.36</td> <td>23.68</td> <td>44.27</td> <td>0.54</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11220.00	51.17	74.00	-22.83	34.54	38.90	19.17	42.18	0.74	400	219	PEAK	2	11220.00	42.41	54.00	-11.59	25.78	38.90	19.17	42.18	0.74	400	219	Average	3	16830.00	53.70	68.20	-14.50	34.39	39.36	23.68	44.27	0.54	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.00</td> <td>51.38</td> <td>74.00</td> <td>-22.62</td> <td>34.75</td> <td>38.90</td> <td>19.17</td> <td>42.18</td> <td>0.74</td> <td>300</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11220.00</td> <td>42.58</td> <td>54.00</td> <td>-11.42</td> <td>25.95</td> <td>38.90</td> <td>19.17</td> <td>42.18</td> <td>0.74</td> <td>300</td> <td>110</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16830.00</td> <td>53.82</td> <td>68.20</td> <td>-14.38</td> <td>34.51</td> <td>39.36</td> <td>23.68</td> <td>44.27</td> <td>0.54</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11220.00	51.38	74.00	-22.62	34.75	38.90	19.17	42.18	0.74	300	110	PEAK	2	11220.00	42.58	54.00	-11.42	25.95	38.90	19.17	42.18	0.74	300	110	Average	3	16830.00	53.82	68.20	-14.38	34.51	39.36	23.68	44.27	0.54	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11220.00	51.17	74.00	-22.83	34.54	38.90	19.17	42.18	0.74	400	219	PEAK																																																																																																																										
2	11220.00	42.41	54.00	-11.59	25.78	38.90	19.17	42.18	0.74	400	219	Average																																																																																																																										
3	16830.00	53.70	68.20	-14.50	34.39	39.36	23.68	44.27	0.54	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11220.00	51.38	74.00	-22.62	34.75	38.90	19.17	42.18	0.74	300	110	PEAK																																																																																																																										
2	11220.00	42.58	54.00	-11.42	25.95	38.90	19.17	42.18	0.74	300	110	Average																																																																																																																										
3	16830.00	53.82	68.20	-14.38	34.51	39.36	23.68	44.27	0.54	--	--	PEAK																																																																																																																										



<b>30</b>																																																							
<b>Mode</b>	<b>Band Edge - L</b>																																																						
<b>U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz</b>																																																							
<b>ANT</b>	<b>4</b>																																																						
<b>Pol.</b>	<b>Horizontal</b>																																																						
<b>Peak</b>	<p>Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5397.97</td> <td>46.59</td> <td>74.00</td> <td>-27.41</td> <td>38.23</td> <td>33.10</td> <td>13.12</td> <td>37.86</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5464.27</td> <td>45.98</td> <td>68.20</td> <td>-22.22</td> <td>37.71</td> <td>32.97</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5397.97	46.59	74.00	-27.41	38.23	33.10	13.12	37.86	0.00	100	301	PEAK	2	5464.27	45.98	68.20	-22.22	37.71	32.97	13.19	37.89	0.00	100	301	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5397.97	46.59	74.00	-27.41	38.23	33.10	13.12	37.86	0.00	100	301	PEAK																																											
2	5464.27	45.98	68.20	-22.22	37.71	32.97	13.19	37.89	0.00	100	301	PEAK																																											
<p>Site : 03CH20-HY Condition: PEAK(U-NII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5720.00</td> <td>106.84</td> <td>-----</td> <td>-----</td> <td>97.63</td> <td>33.63</td> <td>13.50</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5720.00	106.84	-----	-----	97.63	33.63	13.50	37.92	0.00	100	301	PEAK														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5720.00	106.84	-----	-----	97.63	33.63	13.50	37.92	0.00	100	301	PEAK																																											
<b>Avg</b>	<p>Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.81</td> <td>37.15</td> <td>54.00</td> <td>-16.85</td> <td>28.88</td> <td>32.98</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.81	37.15	54.00	-16.85	28.88	32.98	13.18	37.89	0.00	100	301	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5458.81	37.15	54.00	-16.85	28.88	32.98	13.18	37.89	0.00	100	301	AVERAGE																																											
<p>Site : 03CH20-HY Condition: AVG 54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5720.00</td> <td>99.99</td> <td>-----</td> <td>-----</td> <td>90.78</td> <td>33.63</td> <td>13.50</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5720.00	99.99	-----	-----	90.78	33.63	13.50	37.92	0.00	100	301	AVERAGE														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5720.00	99.99	-----	-----	90.78	33.63	13.50	37.92	0.00	100	301	AVERAGE																																											



Mode	30																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																								
ANT	4																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH20-HY          Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5892.50</td> <td>49.64</td> <td>68.20</td> <td>-18.56</td> <td>39.54</td> <td>34.30</td> <td>13.73</td> <td>37.93</td> <td>0.00</td> <td>100</td> <td>301 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5892.50	49.64	68.20	-18.56	39.54	34.30	13.73	37.93	0.00	100	301 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5892.50	49.64	68.20	-18.56	39.54	34.30	13.73	37.93	0.00	100	301 PEAK																															



<b>30</b>																																																																		
<b>Mode</b>	<b>Band Edge - L</b>																																																																	
<b>U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz</b>																																																																		
<b>ANT</b>	<b>4</b>																																																																	
<b>Pol.</b>	<b>Vertical</b>																																																																	
<b>Peak</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5362.87</td> <td>46.75</td> <td>74.00</td> <td>-27.25</td> <td>38.42</td> <td>33.10</td> <td>13.07</td> <td>37.84</td> <td>0.00</td> <td>366</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.17</td> <td>46.07</td> <td>68.20</td> <td>-22.13</td> <td>37.81</td> <td>32.96</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>366</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5720.00</td> <td>108.69</td> <td>-----</td> <td>-----</td> <td>99.48</td> <td>33.63</td> <td>13.50</td> <td>37.92</td> <td>0.00</td> <td>366</td> <td>0</td> <td>PEAK(UNII)</td> </tr> </tbody> </table> </div> </div>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5362.87	46.75	74.00	-27.25	38.42	33.10	13.07	37.84	0.00	366	0	PEAK	2	5468.17	46.07	68.20	-22.13	37.81	32.96	13.19	37.89	0.00	366	0	PEAK	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5720.00	108.69	-----	-----	99.48	33.63	13.50	37.92	0.00	366	0	PEAK(UNII)
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5362.87	46.75	74.00	-27.25	38.42	33.10	13.07	37.84	0.00	366	0	PEAK																																																						
2	5468.17	46.07	68.20	-22.13	37.81	32.96	13.19	37.89	0.00	366	0	PEAK																																																						
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5720.00	108.69	-----	-----	99.48	33.63	13.50	37.92	0.00	366	0	PEAK(UNII)																																																						
<b>Avg</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.64</td> <td>37.39</td> <td>54.00</td> <td>-16.61</td> <td>29.12</td> <td>32.98</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>366</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5720.00</td> <td>102.34</td> <td>-----</td> <td>-----</td> <td>93.12</td> <td>33.64</td> <td>13.50</td> <td>37.92</td> <td>0.00</td> <td>366</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Avg	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5457.64	37.39	54.00	-16.61	29.12	32.98	13.18	37.89	0.00	366	0	AVERAGE	Avg	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5720.00	102.34	-----	-----	93.12	33.64	13.50	37.92	0.00	366	0	AVERAGE													
Avg	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5457.64	37.39	54.00	-16.61	29.12	32.98	13.18	37.89	0.00	366	0	AVERAGE																																																						
Avg	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5720.00	102.34	-----	-----	93.12	33.64	13.50	37.92	0.00	366	0	AVERAGE																																																						







Mode	30																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																													
ANT	4																																													
Pol.	Vertical	Fundamental																																												
Peak	<p>Site : 03CH20-HY          Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5864.50</td> <td>49.97</td> <td>68.20</td> <td>-18.23</td> <td>39.89</td> <td>34.30</td> <td>13.70</td> <td>37.92</td> <td>0.00</td> <td>366</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5864.50	49.97	68.20	-18.23	39.89	34.30	13.70	37.92	0.00	366	0	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1 5864.50	49.97	68.20	-18.23	39.89	34.30	13.70	37.92	0.00	366	0	PEAK																																			



Mode	30																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>51.82</td> <td>74.00</td> <td>-22.18</td> <td>34.98</td> <td>39.18</td> <td>19.36</td> <td>42.42</td> <td>0.72</td> <td>114</td> <td>54</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>42.42</td> <td>54.00</td> <td>-11.58</td> <td>25.58</td> <td>39.18</td> <td>19.36</td> <td>42.42</td> <td>0.72</td> <td>114</td> <td>54</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17160.00</td> <td>53.77</td> <td>68.20</td> <td>-14.43</td> <td>34.45</td> <td>39.34</td> <td>23.93</td> <td>44.54</td> <td>0.59</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11440.00	51.82	74.00	-22.18	34.98	39.18	19.36	42.42	0.72	114	54	PEAK	2	11440.00	42.42	54.00	-11.58	25.58	39.18	19.36	42.42	0.72	114	54	Average	3	17160.00	53.77	68.20	-14.43	34.45	39.34	23.93	44.54	0.59	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>51.79</td> <td>74.00</td> <td>-22.21</td> <td>34.95</td> <td>39.18</td> <td>19.36</td> <td>42.42</td> <td>0.72</td> <td>154</td> <td>89</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>42.41</td> <td>54.00</td> <td>-11.59</td> <td>25.57</td> <td>39.18</td> <td>19.36</td> <td>42.42</td> <td>0.72</td> <td>154</td> <td>89</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17160.00</td> <td>54.23</td> <td>68.20</td> <td>-13.97</td> <td>34.91</td> <td>39.34</td> <td>23.93</td> <td>44.54</td> <td>0.59</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11440.00	51.79	74.00	-22.21	34.95	39.18	19.36	42.42	0.72	154	89	PEAK	2	11440.00	42.41	54.00	-11.59	25.57	39.18	19.36	42.42	0.72	154	89	Average	3	17160.00	54.23	68.20	-13.97	34.91	39.34	23.93	44.54	0.59	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11440.00	51.82	74.00	-22.18	34.98	39.18	19.36	42.42	0.72	114	54	PEAK																																																																																																																										
2	11440.00	42.42	54.00	-11.58	25.58	39.18	19.36	42.42	0.72	114	54	Average																																																																																																																										
3	17160.00	53.77	68.20	-14.43	34.45	39.34	23.93	44.54	0.59	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11440.00	51.79	74.00	-22.21	34.95	39.18	19.36	42.42	0.72	154	89	PEAK																																																																																																																										
2	11440.00	42.41	54.00	-11.59	25.57	39.18	19.36	42.42	0.72	154	89	Average																																																																																																																										
3	17160.00	54.23	68.20	-13.97	34.91	39.34	23.93	44.54	0.59	--	--	PEAK																																																																																																																										

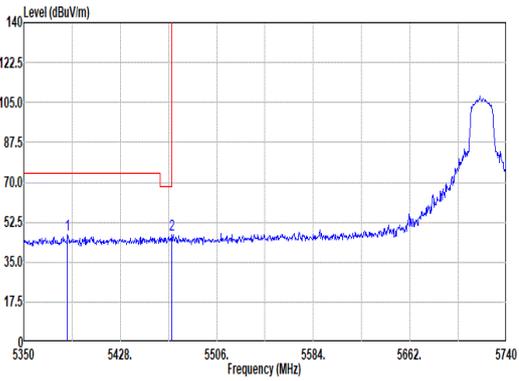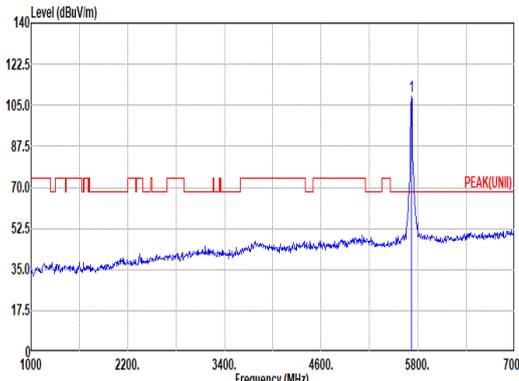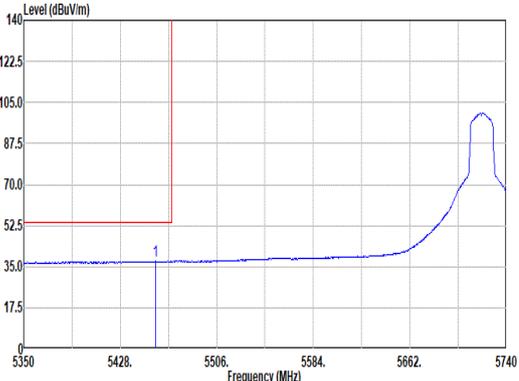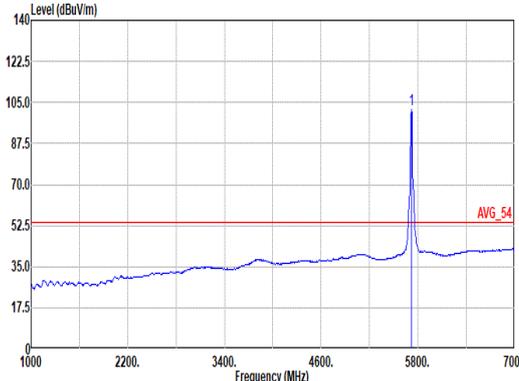

<b>31</b>																																																					
<b>Mode</b>	<b>Band Edge - L</b>																																																				
<b>U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz</b>																																																					
<b>ANT</b>	<b>4</b>																																																				
<b>Pol.</b>	<b>Horizontal</b>																																																				
<b>Peak</b>	 <p>Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5385.49</td> <td>46.94</td> <td>74.00</td> <td>-27.06</td> <td>38.60</td> <td>33.10</td> <td>13.10</td> <td>37.86</td> <td>0.00</td> <td>292</td> <td>22</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.73</td> <td>46.93</td> <td>68.20</td> <td>-21.27</td> <td>38.67</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>292</td> <td>22</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5385.49	46.94	74.00	-27.06	38.60	33.10	13.10	37.86	0.00	292	22	PEAK	2	5469.73	46.93	68.20	-21.27	38.67	32.96	13.20	37.90	0.00	292	22	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5385.49	46.94	74.00	-27.06	38.60	33.10	13.10	37.86	0.00	292	22	PEAK																																									
2	5469.73	46.93	68.20	-21.27	38.67	32.96	13.20	37.90	0.00	292	22	PEAK																																									
 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5720.00</td> <td>108.78</td> <td>-----</td> <td>-----</td> <td>99.56</td> <td>33.64</td> <td>13.50</td> <td>37.92</td> <td>0.00</td> <td>292</td> <td>22</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5720.00	108.78	-----	-----	99.56	33.64	13.50	37.92	0.00	292	22	PEAK														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5720.00	108.78	-----	-----	99.56	33.64	13.50	37.92	0.00	292	22	PEAK																																									
<b>Avg</b>	 <p>Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.47</td> <td>37.35</td> <td>54.00</td> <td>-16.65</td> <td>29.07</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>292</td> <td>22</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5456.47	37.35	54.00	-16.65	29.07	32.99	13.18	37.89	0.00	292	22	AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5456.47	37.35	54.00	-16.65	29.07	32.99	13.18	37.89	0.00	292	22	AVERAGE																																									
 <p>Site : 03CH20-HY Condition: AVG 54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5720.00</td> <td>102.03</td> <td>-----</td> <td>-----</td> <td>92.81</td> <td>33.64</td> <td>13.50</td> <td>37.92</td> <td>0.00</td> <td>292</td> <td>22</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5720.00	102.03	-----	-----	92.81	33.64	13.50	37.92	0.00	292	22	AVERAGE														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5720.00	102.03	-----	-----	92.81	33.64	13.50	37.92	0.00	292	22	AVERAGE																																									



Mode	31																																																																
	Band Edge - R																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz																																																																
ANT	4																																																																
Pol.	Horizontal	Fundamental																																																															
Peak	<p>Site : 03CH20-HY          Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5882.75</td> <td>49.75</td> <td>68.20</td> <td>-18.45</td> <td>39.66</td> <td>34.30</td> <td>13.72</td> <td>37.93</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>292</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>22</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5882.75	49.75	68.20	-18.45	39.66	34.30	13.72	37.93	0.00									292									22									PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																									
1 5882.75	49.75	68.20	-18.45	39.66	34.30	13.72	37.93	0.00																																																									
								292																																																									
								22																																																									
								PEAK																																																									



<b>31</b>																																																																		
<b>Mode</b>	<b>Band Edge - L</b>																																																																	
<b>U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz</b>																																																																		
<b>ANT</b>	<b>4</b>																																																																	
<b>Pol.</b>	<b>Vertical</b>																																																																	
<b>Peak</b>	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5386.27</td> <td>46.50</td> <td>74.00</td> <td>-27.50</td> <td>38.16</td> <td>33.10</td> <td>13.10</td> <td>37.86</td> <td>0.00</td> <td>109</td> <td>8</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.95</td> <td>46.96</td> <td>68.20</td> <td>-21.24</td> <td>38.70</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>109</td> <td>8</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: PEAK(U-NII) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5720.00</td> <td>110.45</td> <td>-----</td> <td>-----</td> <td>101.23</td> <td>33.64</td> <td>13.50</td> <td>37.92</td> <td>0.00</td> <td>109</td> <td>8</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5386.27	46.50	74.00	-27.50	38.16	33.10	13.10	37.86	0.00	109	8	PEAK	2	5468.95	46.96	68.20	-21.24	38.70	32.96	13.20	37.90	0.00	109	8	PEAK	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5720.00	110.45	-----	-----	101.23	33.64	13.50	37.92	0.00	109	8	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5386.27	46.50	74.00	-27.50	38.16	33.10	13.10	37.86	0.00	109	8	PEAK																																																						
2	5468.95	46.96	68.20	-21.24	38.70	32.96	13.20	37.90	0.00	109	8	PEAK																																																						
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5720.00	110.45	-----	-----	101.23	33.64	13.50	37.92	0.00	109	8	PEAK																																																						
<b>Avg</b>	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.03</td> <td>37.34</td> <td>54.00</td> <td>-16.66</td> <td>29.07</td> <td>32.98</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>109</td> <td>8</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5720.00</td> <td>104.19</td> <td>-----</td> <td>-----</td> <td>94.97</td> <td>33.64</td> <td>13.50</td> <td>37.92</td> <td>0.00</td> <td>109</td> <td>8</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5458.03	37.34	54.00	-16.66	29.07	32.98	13.18	37.89	0.00	109	8	AVERAGE	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5720.00	104.19	-----	-----	94.97	33.64	13.50	37.92	0.00	109	8	AVERAGE													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5458.03	37.34	54.00	-16.66	29.07	32.98	13.18	37.89	0.00	109	8	AVERAGE																																																						
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5720.00	104.19	-----	-----	94.97	33.64	13.50	37.92	0.00	109	8	AVERAGE																																																						







Mode	31																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz																																							
ANT	4																																							
Pol.	Vertical	Fundamental																																						
Peak	<p>Site : 03CH20-HY          Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5888.00</td> <td>50.01</td> <td>68.20 -18.19</td> <td>39.91</td> <td>34.30</td> <td>13.73</td> <td>37.93</td> <td>0.00</td> <td>109</td> <td>8 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5888.00	50.01	68.20 -18.19	39.91	34.30	13.73	37.93	0.00	109	8 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5888.00	50.01	68.20 -18.19	39.91	34.30	13.73	37.93	0.00	109	8 PEAK																															



Mode	31																																																																																																																															
	Harmonic																																																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz																																																																																																																															
ANT	4																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																														
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>51.98</td> <td>74.00</td> <td>-22.02</td> <td>35.14</td> <td>39.18</td> <td>19.36</td> <td>42.42</td> <td>0.72</td> <td>100</td> <td>86</td> <td>PEAK</td> </tr> <tr> <td>2 11440.00</td> <td>42.48</td> <td>54.00</td> <td>-11.52</td> <td>25.64</td> <td>39.18</td> <td>19.36</td> <td>42.42</td> <td>0.72</td> <td>100</td> <td>86</td> <td>Average</td> </tr> <tr> <td>3 17160.00</td> <td>54.29</td> <td>68.20</td> <td>-13.91</td> <td>34.97</td> <td>39.34</td> <td>23.93</td> <td>44.54</td> <td>0.59</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11440.00	51.98	74.00	-22.02	35.14	39.18	19.36	42.42	0.72	100	86	PEAK	2 11440.00	42.48	54.00	-11.52	25.64	39.18	19.36	42.42	0.72	100	86	Average	3 17160.00	54.29	68.20	-13.91	34.97	39.34	23.93	44.54	0.59	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>51.75</td> <td>74.00</td> <td>-22.25</td> <td>34.91</td> <td>39.18</td> <td>19.36</td> <td>42.42</td> <td>0.72</td> <td>400</td> <td>152</td> <td>PEAK</td> </tr> <tr> <td>2 11440.00</td> <td>42.58</td> <td>54.00</td> <td>-11.42</td> <td>25.74</td> <td>39.18</td> <td>19.36</td> <td>42.42</td> <td>0.72</td> <td>400</td> <td>152</td> <td>Average</td> </tr> <tr> <td>3 17160.00</td> <td>54.13</td> <td>68.20</td> <td>-14.07</td> <td>34.81</td> <td>39.34</td> <td>23.93</td> <td>44.54</td> <td>0.59</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11440.00	51.75	74.00	-22.25	34.91	39.18	19.36	42.42	0.72	400	152	PEAK	2 11440.00	42.58	54.00	-11.42	25.74	39.18	19.36	42.42	0.72	400	152	Average	3 17160.00	54.13	68.20	-14.07	34.81	39.34	23.93	44.54	0.59	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 11440.00	51.98	74.00	-22.02	35.14	39.18	19.36	42.42	0.72	100	86	PEAK																																																																																																																					
2 11440.00	42.48	54.00	-11.52	25.64	39.18	19.36	42.42	0.72	100	86	Average																																																																																																																					
3 17160.00	54.29	68.20	-13.91	34.97	39.34	23.93	44.54	0.59	--	--	PEAK																																																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 11440.00	51.75	74.00	-22.25	34.91	39.18	19.36	42.42	0.72	400	152	PEAK																																																																																																																					
2 11440.00	42.58	54.00	-11.42	25.74	39.18	19.36	42.42	0.72	400	152	Average																																																																																																																					
3 17160.00	54.13	68.20	-14.07	34.81	39.34	23.93	44.54	0.59	--	--	PEAK																																																																																																																					

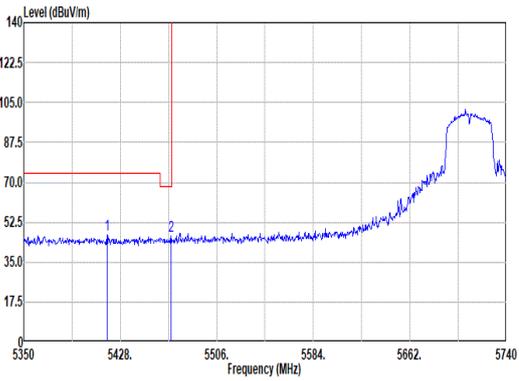
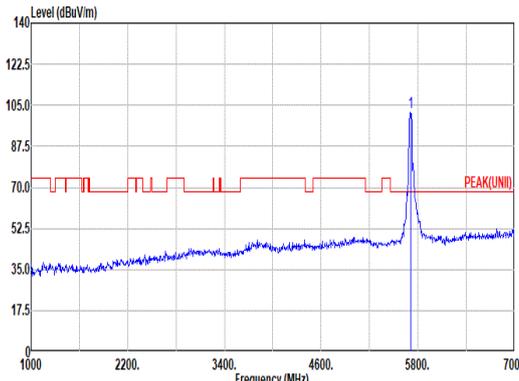
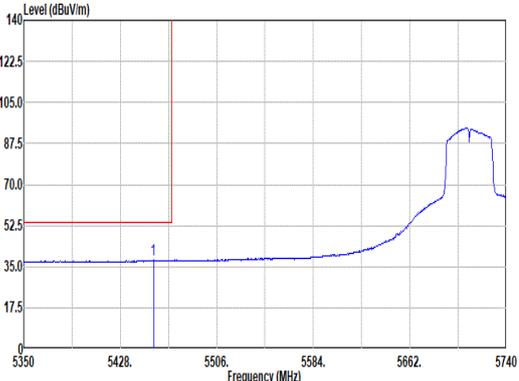
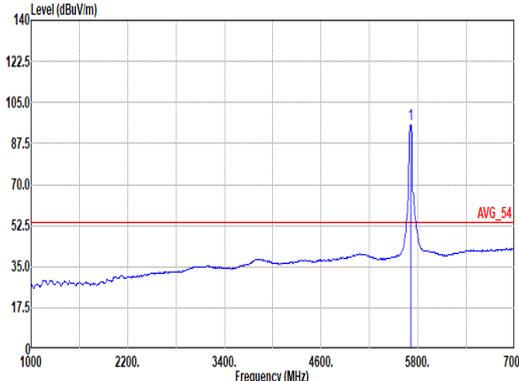


		<b>32</b>																																																																																											
<b>Mode</b>	<b>Band Edge - L</b>																																																																																												
	<b>U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																												
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>	 <p>Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5417.47</td> <td>47.00</td> <td>74.00</td> <td>-27.00</td> <td>38.66</td> <td>33.07</td> <td>13.14</td> <td>37.87</td> <td>0.00</td> <td>100</td> <td></td> <td>347 PEAK</td> </tr> <tr> <td>2</td> <td>5469.34</td> <td>46.25</td> <td>68.20</td> <td>-21.95</td> <td>37.99</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>100</td> <td></td> <td>347 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5417.47	47.00	74.00	-27.00	38.66	33.07	13.14	37.87	0.00	100		347 PEAK	2	5469.34	46.25	68.20	-21.95	37.99	32.96	13.20	37.90	0.00	100		347 PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5710.00</td> <td>101.93</td> <td>-----</td> <td>-----</td> <td>92.76</td> <td>33.61</td> <td>13.48</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td></td> <td>347 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5710.00	101.93	-----	-----	92.76	33.61	13.48	37.92	0.00	100		347 PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5417.47	47.00	74.00	-27.00	38.66	33.07	13.14	37.87	0.00	100		347 PEAK																																																																																	
2	5469.34	46.25	68.20	-21.95	37.99	32.96	13.20	37.90	0.00	100		347 PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5710.00	101.93	-----	-----	92.76	33.61	13.48	37.92	0.00	100		347 PEAK																																																																																	
<b>Avg</b>	 <p>Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.91</td> <td>37.93</td> <td>54.00</td> <td>-16.07</td> <td>29.65</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td></td> <td>347 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5454.91	37.93	54.00	-16.07	29.65	32.99	13.18	37.89	0.00	100		347 AVERAGE	 <p>Site : 03CH20-HY Condition: AVG 54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5710.00</td> <td>95.69</td> <td>-----</td> <td>-----</td> <td>86.50</td> <td>33.62</td> <td>13.49</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td></td> <td>347 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5710.00	95.69	-----	-----	86.50	33.62	13.49	37.92	0.00	100		347 AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5454.91	37.93	54.00	-16.07	29.65	32.99	13.18	37.89	0.00	100		347 AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5710.00	95.69	-----	-----	86.50	33.62	13.49	37.92	0.00	100		347 AVERAGE																																																																																	



Mode	32																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz																																								
ANT	4																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH20-HY          Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5863.00</td> <td>51.76</td> <td>68.20</td> <td>-16.44</td> <td>41.68</td> <td>34.30</td> <td>13.70</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td>347 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5863.00	51.76	68.20	-16.44	41.68	34.30	13.70	37.92	0.00	100	347 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5863.00	51.76	68.20	-16.44	41.68	34.30	13.70	37.92	0.00	100	347 PEAK																															

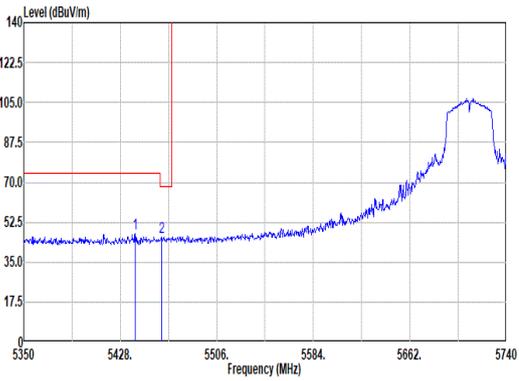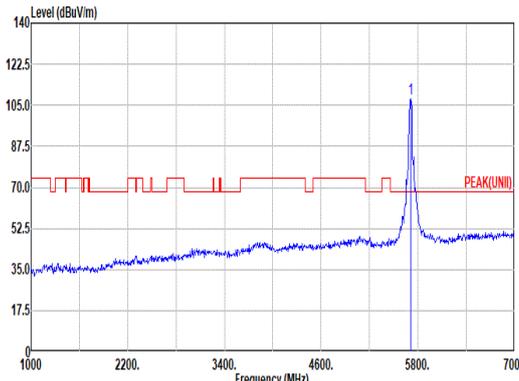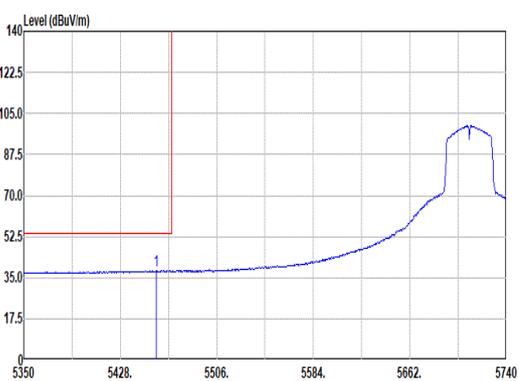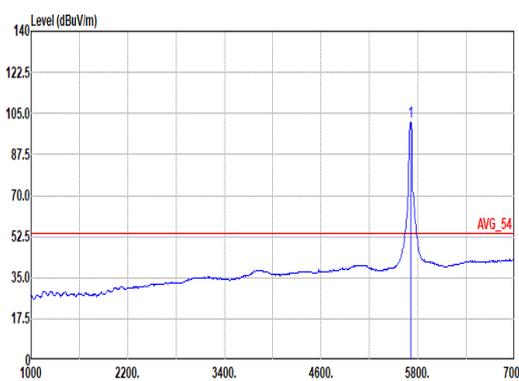

		<b>32</b>																																																																																											
<b>Mode</b>	<b>Band Edge - L</b>																																																																																												
	<b>U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																												
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>	 <p>Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5440.09</td> <td>47.38</td> <td>74.00</td> <td>-26.62</td> <td>39.08</td> <td>33.02</td> <td>13.16</td> <td>37.88</td> <td>0.00</td> <td>294</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.54</td> <td>45.88</td> <td>68.20</td> <td>-22.32</td> <td>37.60</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>294</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5440.09	47.38	74.00	-26.62	39.08	33.02	13.16	37.88	0.00	294	360	PEAK	2	5461.54	45.88	68.20	-22.32	37.60	32.98	13.19	37.89	0.00	294	360	PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5710.00</td> <td>107.80</td> <td>-----</td> <td>-----</td> <td>98.61</td> <td>33.62</td> <td>13.49</td> <td>37.92</td> <td>0.00</td> <td>294</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5710.00	107.80	-----	-----	98.61	33.62	13.49	37.92	0.00	294	360	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5440.09	47.38	74.00	-26.62	39.08	33.02	13.16	37.88	0.00	294	360	PEAK																																																																																	
2	5461.54	45.88	68.20	-22.32	37.60	32.98	13.19	37.89	0.00	294	360	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5710.00	107.80	-----	-----	98.61	33.62	13.49	37.92	0.00	294	360	PEAK																																																																																	
<b>Avg</b>	 <p>Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.86</td> <td>37.94</td> <td>54.00</td> <td>-16.06</td> <td>29.66</td> <td>32.99</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>294</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5456.86	37.94	54.00	-16.06	29.66	32.99	13.18	37.89	0.00	294	360	AVERAGE	 <p>Site : 03CH20-HY Condition: AVG 54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5710.00</td> <td>101.37</td> <td>-----</td> <td>-----</td> <td>92.18</td> <td>33.62</td> <td>13.49</td> <td>37.92</td> <td>0.00</td> <td>294</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5710.00	101.37	-----	-----	92.18	33.62	13.49	37.92	0.00	294	360	AVERAGE													
	Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5456.86	37.94	54.00	-16.06	29.66	32.99	13.18	37.89	0.00	294	360	AVERAGE																																																																																	
Avg	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5710.00	101.37	-----	-----	92.18	33.62	13.49	37.92	0.00	294	360	AVERAGE																																																																																	







Mode	32																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz																																					
ANT	4																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Site : 03CH20-HY          Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5860.25</td> <td>51.45</td> <td>68.20</td> <td>-16.75</td> <td>41.38</td> <td>34.30</td> <td>13.69</td> <td>37.92</td> <td>0.00 294 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5860.25	51.45	68.20	-16.75	41.38	34.30	13.69	37.92	0.00 294 360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																														
1 5860.25	51.45	68.20	-16.75	41.38	34.30	13.69	37.92	0.00 294 360 PEAK																														



Mode	32																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.00</td> <td>52.30</td> <td>74.00</td> <td>-21.70</td> <td>35.47</td> <td>39.14</td> <td>19.35</td> <td>42.39</td> <td>0.73</td> <td>100</td> <td>196</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11420.00</td> <td>42.64</td> <td>54.00</td> <td>-11.36</td> <td>25.81</td> <td>39.14</td> <td>19.35</td> <td>42.39</td> <td>0.73</td> <td>100</td> <td>196</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17130.00</td> <td>55.43</td> <td>68.20</td> <td>-12.77</td> <td>36.20</td> <td>39.26</td> <td>23.90</td> <td>44.52</td> <td>0.59</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11420.00	52.30	74.00	-21.70	35.47	39.14	19.35	42.39	0.73	100	196	PEAK	2	11420.00	42.64	54.00	-11.36	25.81	39.14	19.35	42.39	0.73	100	196	Average	3	17130.00	55.43	68.20	-12.77	36.20	39.26	23.90	44.52	0.59	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.00</td> <td>52.31</td> <td>74.00</td> <td>-21.69</td> <td>35.48</td> <td>39.14</td> <td>19.35</td> <td>42.39</td> <td>0.73</td> <td>300</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11420.00</td> <td>42.66</td> <td>54.00</td> <td>-11.34</td> <td>25.83</td> <td>39.14</td> <td>19.35</td> <td>42.39</td> <td>0.73</td> <td>300</td> <td>164</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17130.00</td> <td>54.44</td> <td>68.20</td> <td>-13.76</td> <td>35.21</td> <td>39.26</td> <td>23.90</td> <td>44.52</td> <td>0.59</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11420.00	52.31	74.00	-21.69	35.48	39.14	19.35	42.39	0.73	300	164	PEAK	2	11420.00	42.66	54.00	-11.34	25.83	39.14	19.35	42.39	0.73	300	164	Average	3	17130.00	54.44	68.20	-13.76	35.21	39.26	23.90	44.52	0.59	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11420.00	52.30	74.00	-21.70	35.47	39.14	19.35	42.39	0.73	100	196	PEAK																																																																																																																										
2	11420.00	42.64	54.00	-11.36	25.81	39.14	19.35	42.39	0.73	100	196	Average																																																																																																																										
3	17130.00	55.43	68.20	-12.77	36.20	39.26	23.90	44.52	0.59	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11420.00	52.31	74.00	-21.69	35.48	39.14	19.35	42.39	0.73	300	164	PEAK																																																																																																																										
2	11420.00	42.66	54.00	-11.34	25.83	39.14	19.35	42.39	0.73	300	164	Average																																																																																																																										
3	17130.00	54.44	68.20	-13.76	35.21	39.26	23.90	44.52	0.59	--	--	PEAK																																																																																																																										

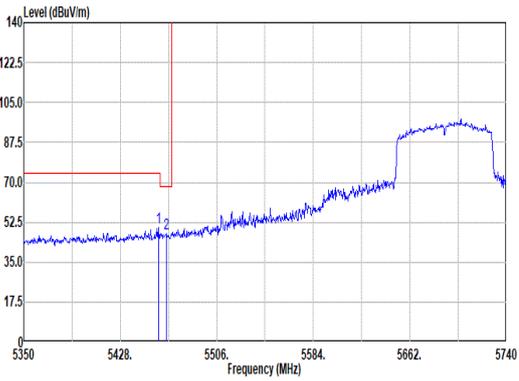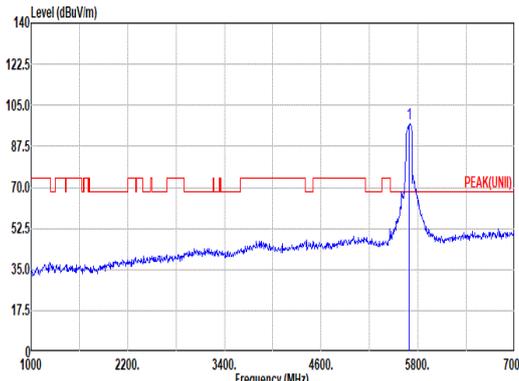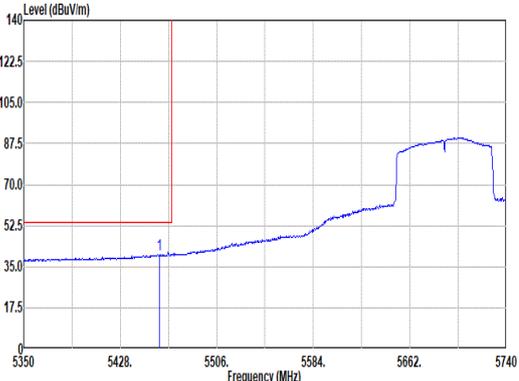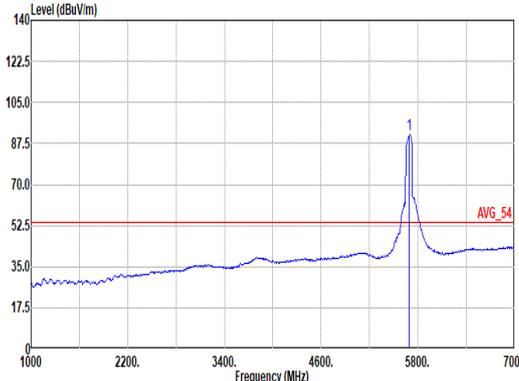

		<b>33</b>																																																																																											
<b>Mode</b>	<b>Band Edge - L</b>																																																																																												
	<b>U-NII-2C_5.47-5.725_802.11ac_VHT80_CH138_5690MHz</b>																																																																																												
<b>ANT</b>	<b>4</b>																																																																																												
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>	 <p>Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.81</td> <td>50.15</td> <td>74.00</td> <td>-23.85</td> <td>41.88</td> <td>32.98</td> <td>13.18</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td></td> <td>347 PEAK</td> </tr> <tr> <td>2</td> <td>5465.44</td> <td>47.43</td> <td>68.20</td> <td>-20.77</td> <td>39.16</td> <td>32.97</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td></td> <td>347 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5450.81	50.15	74.00	-23.85	41.88	32.98	13.18	37.89	0.00	100		347 PEAK	2	5465.44	47.43	68.20	-20.77	39.16	32.97	13.19	37.89	0.00	100		347 PEAK	 <p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5690.00</td> <td>97.07</td> <td>-----</td> <td>-----</td> <td>87.90</td> <td>33.61</td> <td>13.48</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td></td> <td>347 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5690.00	97.07	-----	-----	87.90	33.61	13.48	37.92	0.00	100		347 PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5450.81	50.15	74.00	-23.85	41.88	32.98	13.18	37.89	0.00	100		347 PEAK																																																																																	
2	5465.44	47.43	68.20	-20.77	39.16	32.97	13.19	37.89	0.00	100		347 PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5690.00	97.07	-----	-----	87.90	33.61	13.48	37.92	0.00	100		347 PEAK																																																																																	
<b>Avg</b>	 <p>Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.59</td> <td>40.16</td> <td>54.00</td> <td>-13.84</td> <td>31.88</td> <td>32.98</td> <td>13.19</td> <td>37.89</td> <td>0.00</td> <td>100</td> <td></td> <td>347 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.59	40.16	54.00	-13.84	31.88	32.98	13.19	37.89	0.00	100		347 AVERAGE	 <p>Site : 03CH20-HY Condition: AVG 54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5690.00</td> <td>91.37</td> <td>-----</td> <td>-----</td> <td>82.20</td> <td>33.61</td> <td>13.48</td> <td>37.92</td> <td>0.00</td> <td>100</td> <td></td> <td>347 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5690.00	91.37	-----	-----	82.20	33.61	13.48	37.92	0.00	100		347 AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5459.59	40.16	54.00	-13.84	31.88	32.98	13.19	37.89	0.00	100		347 AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5690.00	91.37	-----	-----	82.20	33.61	13.48	37.92	0.00	100		347 AVERAGE																																																																																	



Mode	33																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz																																					
ANT	4																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Site : 03CH20-HY          Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5851.90</td> <td>58.05</td> <td>68.20</td> <td>-10.15</td> <td>47.99</td> <td>34.30</td> <td>13.68</td> <td>37.92</td> <td>0.00 100 347 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5851.90	58.05	68.20	-10.15	47.99	34.30	13.68	37.92	0.00 100 347 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																														
1 5851.90	58.05	68.20	-10.15	47.99	34.30	13.68	37.92	0.00 100 347 PEAK																														



<b>33</b>																																																																		
<b>Mode</b>	<b>Band Edge - L</b>																																																																	
<b>U-NII-2C_5.47-5.725_802.11ac_VHT80_CH138_5690MHz</b>																																																																		
<b>ANT</b>	<b>4</b>																																																																	
<b>Pol.</b>	<b>Vertical</b>																																																																	
<b>Peak</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.84</td> <td>51.23</td> <td>74.00</td> <td>-22.77</td> <td>42.95</td> <td>33.00</td> <td>13.17</td> <td>37.89</td> <td>0.00</td> <td>299</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.73</td> <td>48.22</td> <td>68.20</td> <td>-19.98</td> <td>39.96</td> <td>32.96</td> <td>13.20</td> <td>37.90</td> <td>0.00</td> <td>299</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: PEAK(U-NII) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5690.00</td> <td>104.59</td> <td>-----</td> <td>-----</td> <td>95.46</td> <td>33.58</td> <td>13.47</td> <td>37.92</td> <td>0.00</td> <td>299</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5449.84	51.23	74.00	-22.77	42.95	33.00	13.17	37.89	0.00	299	360	PEAK	2	5469.73	48.22	68.20	-19.98	39.96	32.96	13.20	37.90	0.00	299	360	PEAK	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5690.00	104.59	-----	-----	95.46	33.58	13.47	37.92	0.00	299	360	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																						
1	5449.84	51.23	74.00	-22.77	42.95	33.00	13.17	37.89	0.00	299	360	PEAK																																																						
2	5469.73	48.22	68.20	-19.98	39.96	32.96	13.20	37.90	0.00	299	360	PEAK																																																						
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																						
1	5690.00	104.59	-----	-----	95.46	33.58	13.47	37.92	0.00	299	360	PEAK																																																						
<b>Avg</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.86</td> <td>39.91</td> <td>54.00</td> <td>-14.09</td> <td>31.63</td> <td>33.00</td> <td>13.17</td> <td>37.89</td> <td>0.00</td> <td>299</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH20-HY Condition: AVG 54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5690.00</td> <td>98.22</td> <td>-----</td> <td>-----</td> <td>89.14</td> <td>33.54</td> <td>13.46</td> <td>37.92</td> <td>0.00</td> <td>299</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5449.86	39.91	54.00	-14.09	31.63	33.00	13.17	37.89	0.00	299	360	AVERAGE	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5690.00	98.22	-----	-----	89.14	33.54	13.46	37.92	0.00	299	360	AVERAGE													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																						
1	5449.86	39.91	54.00	-14.09	31.63	33.00	13.17	37.89	0.00	299	360	AVERAGE																																																						
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																						
1	5690.00	98.22	-----	-----	89.14	33.54	13.46	37.92	0.00	299	360	AVERAGE																																																						



Mode	33																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz																																							
ANT	4																																							
Pol.	Vertical	Fundamental																																						
Peak	<p>Site : 03CH20-HY          Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5859.40</td> <td>59.49</td> <td>68.20</td> <td>-8.71</td> <td>49.42</td> <td>34.30</td> <td>13.69</td> <td>37.92</td> <td>0.00</td> <td>299 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5859.40	59.49	68.20	-8.71	49.42	34.30	13.69	37.92	0.00	299 360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5859.40	59.49	68.20	-8.71	49.42	34.30	13.69	37.92	0.00	299 360 PEAK																															



Mode	33																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH138_5690MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.00</td> <td>51.54</td> <td>74.00</td> <td>-22.46</td> <td>34.75</td> <td>39.10</td> <td>19.31</td> <td>42.35</td> <td>0.73</td> <td>200</td> <td>255</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11380.00</td> <td>42.89</td> <td>54.00</td> <td>-11.11</td> <td>26.10</td> <td>39.10</td> <td>19.31</td> <td>42.35</td> <td>0.73</td> <td>200</td> <td>255</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17070.00</td> <td>53.49</td> <td>68.20</td> <td>-14.71</td> <td>34.20</td> <td>39.32</td> <td>23.86</td> <td>44.47</td> <td>0.58</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11380.00	51.54	74.00	-22.46	34.75	39.10	19.31	42.35	0.73	200	255	PEAK	2	11380.00	42.89	54.00	-11.11	26.10	39.10	19.31	42.35	0.73	200	255	Average	3	17070.00	53.49	68.20	-14.71	34.20	39.32	23.86	44.47	0.58	--	--	PEAK	<p>Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.00</td> <td>51.37</td> <td>74.00</td> <td>-22.63</td> <td>34.58</td> <td>39.10</td> <td>19.31</td> <td>42.35</td> <td>0.73</td> <td>300</td> <td>303</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11380.00</td> <td>42.69</td> <td>54.00</td> <td>-11.31</td> <td>25.90</td> <td>39.10</td> <td>19.31</td> <td>42.35</td> <td>0.73</td> <td>300</td> <td>303</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17070.00</td> <td>54.29</td> <td>68.20</td> <td>-13.91</td> <td>35.00</td> <td>39.32</td> <td>23.86</td> <td>44.47</td> <td>0.58</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11380.00	51.37	74.00	-22.63	34.58	39.10	19.31	42.35	0.73	300	303	PEAK	2	11380.00	42.69	54.00	-11.31	25.90	39.10	19.31	42.35	0.73	300	303	Average	3	17070.00	54.29	68.20	-13.91	35.00	39.32	23.86	44.47	0.58	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11380.00	51.54	74.00	-22.46	34.75	39.10	19.31	42.35	0.73	200	255	PEAK																																																																																																																										
2	11380.00	42.89	54.00	-11.11	26.10	39.10	19.31	42.35	0.73	200	255	Average																																																																																																																										
3	17070.00	53.49	68.20	-14.71	34.20	39.32	23.86	44.47	0.58	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11380.00	51.37	74.00	-22.63	34.58	39.10	19.31	42.35	0.73	300	303	PEAK																																																																																																																										
2	11380.00	42.69	54.00	-11.31	25.90	39.10	19.31	42.35	0.73	300	303	Average																																																																																																																										
3	17070.00	54.29	68.20	-13.91	35.00	39.32	23.86	44.47	0.58	--	--	PEAK																																																																																																																										



Mode	35																																																																																																																																																																																																	
	LF																																																																																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																																																																																																																	
ANT	4																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
QP/ Peak	<p>Site : 03CH20-HY Condition: QP 3m Bilog_55606 &amp; 08_241127 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Limit Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>32.91</td> <td>23.77</td> <td>40.00</td> <td>-16.23</td> <td>35.07</td> <td>23.21</td> <td>1.01</td> <td>35.75</td> <td>0.23</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>105.66</td> <td>33.78</td> <td>43.50</td> <td>-9.72</td> <td>50.53</td> <td>16.80</td> <td>1.83</td> <td>35.67</td> <td>0.21</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>3</td> <td>229.82</td> <td>30.99</td> <td>46.00</td> <td>-15.01</td> <td>47.34</td> <td>16.21</td> <td>2.69</td> <td>35.44</td> <td>0.19</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>4</td> <td>494.63</td> <td>27.16</td> <td>46.00</td> <td>-18.84</td> <td>34.02</td> <td>23.87</td> <td>3.92</td> <td>34.78</td> <td>0.13</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>5</td> <td>736.16</td> <td>33.95</td> <td>46.00</td> <td>-12.05</td> <td>35.05</td> <td>27.90</td> <td>4.80</td> <td>33.95</td> <td>0.15</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>6</td> <td>949.56</td> <td>34.97</td> <td>46.00</td> <td>-11.03</td> <td>31.86</td> <td>30.74</td> <td>5.43</td> <td>33.16</td> <td>0.10</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	32.91	23.77	40.00	-16.23	35.07	23.21	1.01	35.75	0.23	--	-- Peak	2	105.66	33.78	43.50	-9.72	50.53	16.80	1.83	35.67	0.21	--	-- Peak	3	229.82	30.99	46.00	-15.01	47.34	16.21	2.69	35.44	0.19	--	-- Peak	4	494.63	27.16	46.00	-18.84	34.02	23.87	3.92	34.78	0.13	--	-- Peak	5	736.16	33.95	46.00	-12.05	35.05	27.90	4.80	33.95	0.15	--	-- Peak	6	949.56	34.97	46.00	-11.03	31.86	30.74	5.43	33.16	0.10	--	-- Peak	<p>Site : 03CH20-HY Condition: QP 3m Bilog_55606 &amp; 08_241127 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Limit Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>84.32</td> <td>29.96</td> <td>40.00</td> <td>-10.04</td> <td>49.08</td> <td>13.93</td> <td>1.64</td> <td>35.70</td> <td>0.21</td> <td>100</td> <td>254 QP</td> </tr> <tr> <td>2</td> <td>105.66</td> <td>36.17</td> <td>43.50</td> <td>-7.33</td> <td>52.92</td> <td>16.88</td> <td>1.83</td> <td>35.67</td> <td>0.21</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>3</td> <td>230.79</td> <td>27.66</td> <td>46.00</td> <td>-18.34</td> <td>43.89</td> <td>16.32</td> <td>2.70</td> <td>35.44</td> <td>0.19</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>4</td> <td>497.54</td> <td>28.97</td> <td>46.00</td> <td>-17.03</td> <td>35.77</td> <td>23.92</td> <td>3.93</td> <td>34.78</td> <td>0.13</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>5</td> <td>749.74</td> <td>33.03</td> <td>46.00</td> <td>-12.97</td> <td>33.80</td> <td>28.13</td> <td>4.85</td> <td>33.89</td> <td>0.14</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>6</td> <td>951.50</td> <td>35.44</td> <td>46.00</td> <td>-10.56</td> <td>32.15</td> <td>30.91</td> <td>5.43</td> <td>33.15</td> <td>0.10</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	84.32	29.96	40.00	-10.04	49.08	13.93	1.64	35.70	0.21	100	254 QP	2	105.66	36.17	43.50	-7.33	52.92	16.88	1.83	35.67	0.21	--	-- Peak	3	230.79	27.66	46.00	-18.34	43.89	16.32	2.70	35.44	0.19	--	-- Peak	4	497.54	28.97	46.00	-17.03	35.77	23.92	3.93	34.78	0.13	--	-- Peak	5	749.74	33.03	46.00	-12.97	33.80	28.13	4.85	33.89	0.14	--	-- Peak	6	951.50	35.44	46.00	-10.56	32.15	30.91	5.43	33.15	0.10	--	-- Peak
	Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																							
1	32.91	23.77	40.00	-16.23	35.07	23.21	1.01	35.75	0.23	--	-- Peak																																																																																																																																																																																							
2	105.66	33.78	43.50	-9.72	50.53	16.80	1.83	35.67	0.21	--	-- Peak																																																																																																																																																																																							
3	229.82	30.99	46.00	-15.01	47.34	16.21	2.69	35.44	0.19	--	-- Peak																																																																																																																																																																																							
4	494.63	27.16	46.00	-18.84	34.02	23.87	3.92	34.78	0.13	--	-- Peak																																																																																																																																																																																							
5	736.16	33.95	46.00	-12.05	35.05	27.90	4.80	33.95	0.15	--	-- Peak																																																																																																																																																																																							
6	949.56	34.97	46.00	-11.03	31.86	30.74	5.43	33.16	0.10	--	-- Peak																																																																																																																																																																																							
	Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																							
1	84.32	29.96	40.00	-10.04	49.08	13.93	1.64	35.70	0.21	100	254 QP																																																																																																																																																																																							
2	105.66	36.17	43.50	-7.33	52.92	16.88	1.83	35.67	0.21	--	-- Peak																																																																																																																																																																																							
3	230.79	27.66	46.00	-18.34	43.89	16.32	2.70	35.44	0.19	--	-- Peak																																																																																																																																																																																							
4	497.54	28.97	46.00	-17.03	35.77	23.92	3.93	34.78	0.13	--	-- Peak																																																																																																																																																																																							
5	749.74	33.03	46.00	-12.97	33.80	28.13	4.85	33.89	0.14	--	-- Peak																																																																																																																																																																																							
6	951.50	35.44	46.00	-10.56	32.15	30.91	5.43	33.15	0.10	--	-- Peak																																																																																																																																																																																							



## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11a	97.48	1392	0.72	750Hz
5GHz 802.11n HT20	97.00	1295	0.77	820Hz
5GHz 802.11n HT40	94.74	648	1.54	1.6KHz
5GHz 802.11ac VHT80	90.25	324	3.09	3.3KHz

