


FCC SAR TEST REPORT

FCC ID : APYHRO00335
Equipment : Smart phone
Brand Name : SHARP
Model Name : APYHRO00335
Applicant : SHARP CORPORATION
1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan
Manufacturer : SHARP CORPORATION
1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Mar. 04, 2025 and testing was started from Mar. 05, 2025 and completed on Apr. 02, 2025. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Statement of Compliance 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information 5
3.1 General Information 5
3.2 General LTE SAR Test and Reporting Considerations 6
4. RF Exposure Limits..... 8
4.1 Uncontrolled Environment..... 8
4.2 Controlled Environment..... 8
5. Specific Absorption Rate (SAR)..... 9
5.1 Introduction 9
5.2 SAR Definition..... 9
6. System Description and Setup10
6.1 Test Site Location.....10
6.2 E-Field Probe11
6.3 Data Acquisition Electronics (DAE)11
6.4 Phantom.....12
6.5 Device Holder.....13
7. Measurement Procedures14
7.1 Spatial Peak SAR Evaluation14
7.2 Power Reference Measurement.....15
7.3 Area Scan15
7.4 Zoom Scan.....16
7.5 Volume Scan Procedures.....16
7.6 Power Drift Monitoring.....16
8. Test Equipment List17
9. System Verification18
9.1 Tissue Verification18
9.2 System Performance Check Results.....19
10. RF Exposure Positions20
10.1 Ear and handset reference point20
10.2 Definition of the cheek position21
10.3 Definition of the tilt position22
10.4 Body Worn Accessory23
10.5 Product Specific Exposure23
10.6 Wireless Router.....24
11. GSM/UMTS/LTE Output Power (Unit: dBm)25
12. UL Carrier aggregation43
13. WiFi/Bluetooth Output Power (Unit: dBm).....44
14. Antenna Location49
15. SAR Test Results50
15.1 Head SAR52
15.2 Hotspot SAR55
15.3 Body Worn Accessory SAR.....58
15.4 Product Specific SAR.....60
15.5 Repeated SAR Measurement61
16. Simultaneous Transmission Analysis62
16.1 Head Exposure Conditions62
16.2 Hotspot Exposure Conditions.....62
16.3 Body-Worn Accessory Exposure Conditions62
16.4 Product Specific Exposure Conditions63
17. Uncertainty Assessment64
18. References.....64
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for SHARP CORPORATION, Smart phone, APYHRO00335, are as follows.

Table with columns: Equipment Class, Frequency Band, Highest SAR Summary (Head, Body-worn, Hotspot, Product Specific), Highest Simultaneous Transmission 1g SAR (W/kg), Highest Simultaneous Transmission 10g SAR (W/kg). Rows include GSM850, GSM1900, WCDMA V, LTE Bands 2, 5, 7, 12/17, 38, DTS, NII, DSS, DXX, and NFC.

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang
Report Producer: Daisy Peng

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013
FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
FCC KDB 865664 D02 SAR Reporting v01r02
FCC KDB 447498 D01 General RF Exposure Guidance v06
FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
FCC KDB 941225 D01 3G SAR Procedures v03r01
FCC KDB 941225 D05 SAR for LTE Devices v02r05
FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
FCC KDB 941225 D06 Hotspot Mode SAR v02r01



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Smart phone
Brand Name	SHARP
Model Name	APYHRO00335
FCC ID	APYHRO00335
IMEI Code	004401232020723 / 004401232020863 / 004401232020897
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 38: 2570 MHz ~ 2620 MHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	GSM/GPRS RMC/AMR 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM, 64QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC: ASK
HW Version	DVT
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	
<ol style="list-style-type: none"> This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications. This device has two samples, RF exposure evaluation selects sample 1 as the main test, sample 2 will spot check worst case found in sample 1. 	



3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID	APYHRO00335																																																																									
Equipment Name	Smart phone																																																																									
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 38: 2570 MHz ~ 2620 MHz																																																																									
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz																																																																									
uplink modulations used	QPSK / 16QAM / 64QAM																																																																									
LTE Voice / Data requirements	Data only																																																																									
LTE MPR permanently built-in by design	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>												Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																									
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																									
LTE Carrier Aggregation Combinations	Intra-Band possible combinations and the detail power measurement please referred to section 12.																																																																									
LTE Carrier Aggregation Additional Information	This device supports maximum of 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																									
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																																																										
LTE Band 2																																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																														
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860																																																														
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880																																																														
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900																																																														
LTE Band 5																																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz																																																																			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																														
L	20407	824.7	20415	825.5	20425	826.5	20450	829																																																																		
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5																																																																		
H	20643	848.3	20635	847.5	20625	846.5	20600	844																																																																		
LTE Band 7																																																																										
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																																																			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																														
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510																																																																		
M	21100	2535	21100	2535	21100	2535	21100	2535																																																																		
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560																																																																		
LTE Band 12																																																																										



	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711
LTE Band 17								
	Bandwidth 5 MHz				Bandwidth 10 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709	
M	23790		710		23790		710	
H	23825		713.5		23800		711	
LTE Band 38								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

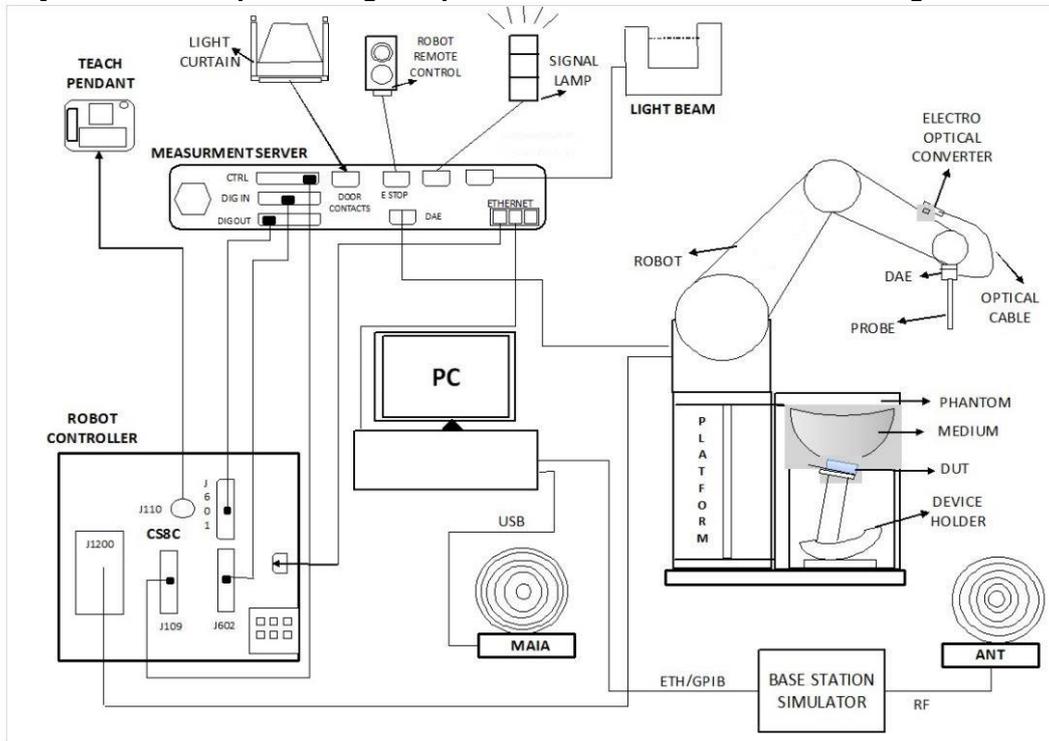

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Laboratory	EMC & Wireless Communications Laboratory		Wensan Laboratory				
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan				
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY	SAR18-HY	SAR21-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY	SAR19-HY	SAR22-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY	SAR20-HY	

6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Jun. 22, 2022	Jun. 19, 2025
SPEAG	835MHz System Validation Kit ⁽²⁾	D835V2	4d167	Nov. 24, 2022	Nov. 21, 2025
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d093	Mar. 25, 2022	Mar. 22, 2025
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	929	Nov. 21, 2022	Nov. 18, 2025
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 15, 2024	Aug. 14, 2025
SPEAG	5GHz System Validation Kit	D5GHZV2	1006	Oct. 15, 2024	Oct. 14, 2025
SPEAG	5GHz System Validation Kit	D5GHZV2	1128	Sep. 17, 2024	Sep. 16, 2025
SPEAG	13MHz System Validation Kit ⁽²⁾	CLA13	1022	Sep. 01, 2022	Aug. 29, 2025
SPEAG	Data Acquisition Electronics	DAE4	1694	Nov. 19, 2024	Nov. 18, 2025
SPEAG	Data Acquisition Electronics	DAE4	1794	Feb. 12, 2025	Feb. 11, 2026
SPEAG	Data Acquisition Electronics	DAE4ip	1800	Jun. 18, 2024	Jun. 17, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Nov. 19, 2024	Nov. 18, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	7625	Dec. 13, 2024	Dec. 12, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	7785	Nov. 28, 2024	Nov. 27, 2025
Testo	Hygro meter	608-H1	45196600	Oct. 28, 2024	Oct. 27, 2025
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Nov. 12, 2024	Nov. 11, 2025
R&S	BT Base Station	CBT	101136	Oct. 20, 2024	Oct. 19, 2025
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 24, 2024	Sep. 23, 2025
Keysight	ENA Network Analyzer	E5071C	MY46104758	Oct. 20, 2024	Oct. 19, 2025
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 17, 2024	Sep. 16, 2025
SPEAG	Dielectric Probe Kit	DAK-12	1156	Jul. 15, 2024	Jul. 14, 2025
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 07, 2024	Aug. 06, 2025
Anritsu	Power Meter	ML2495A	1419002	Aug. 13, 2024	Aug. 12, 2025
Anritsu	Power Sensor	MA2411B	1911176	Aug. 13, 2024	Aug. 12, 2025
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 09, 2024	Jul. 08, 2025
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 23, 2024	Oct. 22, 2025
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
13	22.4	0.757	53.459	0.75	55.00	0.93	-2.80	±5	2025/4/2
750	22.5	0.892	40.000	0.89	41.90	0.22	-4.53	±5	2025/3/5
835	22.5	0.926	40.100	0.90	41.50	2.89	-3.37	±5	2025/3/5
1900	22.7	1.370	40.600	1.40	40.00	-2.14	1.50	±5	2025/3/6
2450	22.8	1.810	38.900	1.80	39.20	0.56	-0.77	±5	2025/3/8
2450	22.1	1.860	38.800	1.80	39.20	3.33	-1.02	±5	2025/4/1
2600	22.3	1.970	38.400	1.96	39.00	0.51	-1.54	±5	2025/3/7
5250	22.6	4.610	36.200	4.71	35.95	-2.12	0.70	±5	2025/3/9
5250	22.5	4.580	35.900	4.71	35.95	-2.76	-0.14	±5	2025/3/10
5250	22.2	4.610	34.600	4.71	35.95	-2.12	-3.76	±5	2025/4/2
5600	22.6	4.980	35.600	5.07	35.50	-1.78	0.28	±5	2025/3/9
5600	22.5	4.940	35.400	5.07	35.50	-2.56	-0.28	±5	2025/3/10
5600	22.2	5.000	34.000	5.07	35.50	-1.38	-4.23	±5	2025/4/2
5800	22.6	5.190	35.400	5.27	35.30	-1.52	0.28	±5	2025/3/9
5800	22.5	5.160	35.200	5.27	35.30	-2.09	-0.28	±5	2025/3/10
5800	22.2	5.240	34.100	5.27	35.30	-0.57	-3.40	±5	2025/4/2

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)	Test Site
2025/4/2	13	1000	CLA13-1022	EX3DV4 - SN3931	DAE4 Sn1794	0.569	0.560	0.569	1.61	0.352	0.349	0.352	0.57	SAR-08
2025/3/5	750	50	D750V3-1107	EX3DV4 - SN7625	DAE4ip Sn1800	0.425	8.540	8.5	-0.47					SAR-18
2025/3/5	835	50	D835V2-4d167	EX3DV4 - SN7625	DAE4ip Sn1800	0.515	9.800	10.3	5.10					SAR-18
2025/3/6	1900	50	D1900V2-5d093	EX3DV4 - SN7625	DAE4ip Sn1800	1.920	39.900	38.4	-3.76					SAR-18
2025/3/8	2450	50	D2450V2-929	EX3DV4 - SN7625	DAE4ip Sn1800	2.630	52.400	52.6	0.38					SAR-18
2025/4/1	2450	50	D2450V2-929	EX3DV4 - SN7785	DAE4 Sn1694	2.610	52.400	52.2	-0.38					SAR-20
2025/3/7	2600	50	D2600V2-1008	EX3DV4 - SN7625	DAE4ip Sn1800	2.750	55.700	55	-1.26					SAR-18
2025/3/9	5250	50	D5GHzV2-1006-5250	EX3DV4 - SN7625	DAE4ip Sn1800	3.930	80.600	78.6	-2.48	1.110	22.800	22.2	-2.63	SAR-18
2025/3/10	5250	50	D5GHzV2-1006-5250	EX3DV4 - SN7625	DAE4ip Sn1800	3.900	80.600	78	-3.23	1.100	22.800	22	-3.51	SAR-18
2025/4/2	5250	50	D5GHzV2-1128-5250	EX3DV4 - SN7785	DAE4 Sn1694	3.570	77.500	71.4	-7.87	1.040	22.200	20.8	-6.31	SAR-20
2025/3/9	5600	50	D5GHzV2-1006-5600	EX3DV4 - SN7625	DAE4ip Sn1800	4.000	83.400	80	-4.08	1.110	23.700	22.2	-6.33	SAR-18
2025/3/10	5600	50	D5GHzV2-1006-5600	EX3DV4 - SN7625	DAE4ip Sn1800	3.950	83.400	79	-5.28	1.100	23.700	22	-7.17	SAR-18
2025/4/2	5600	50	D5GHzV2-1128-5600	EX3DV4 - SN7785	DAE4 Sn1694	3.750	81.700	75	-8.20	1.070	23.500	21.4	-8.94	SAR-20
2025/3/9	5800	50	D5GHzV2-1006-5800	EX3DV4 - SN7625	DAE4ip Sn1800	3.760	80.600	75.2	-6.70	1.040	22.700	20.8	-8.37	SAR-18
2025/3/10	5800	50	D5GHzV2-1006-5800	EX3DV4 - SN7625	DAE4ip Sn1800	3.740	80.600	74.8	-7.20	1.040	22.700	20.8	-8.37	SAR-18
2025/4/2	5800	50	D5GHzV2-1128-5800	EX3DV4 - SN7785	DAE4 Sn1694	3.900	78.600	78	-0.76	1.120	22.500	22.4	-0.44	SAR-20

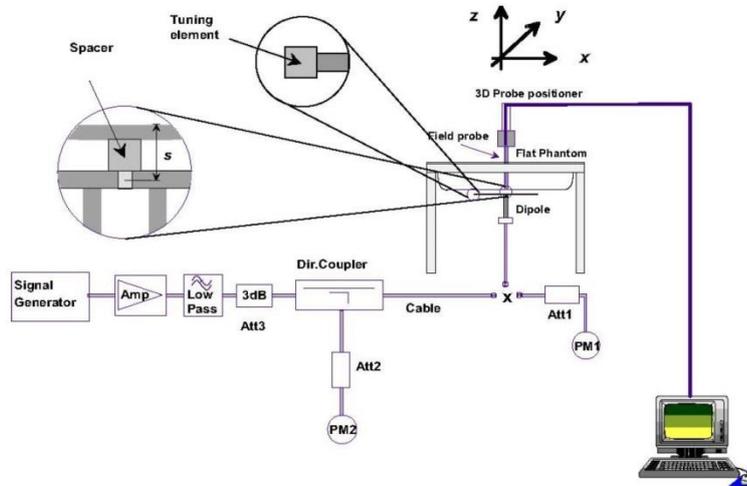


Fig 8.3.1 System Performance Check Setup

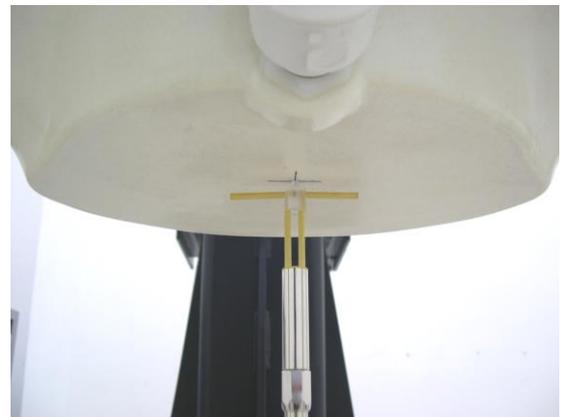


Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

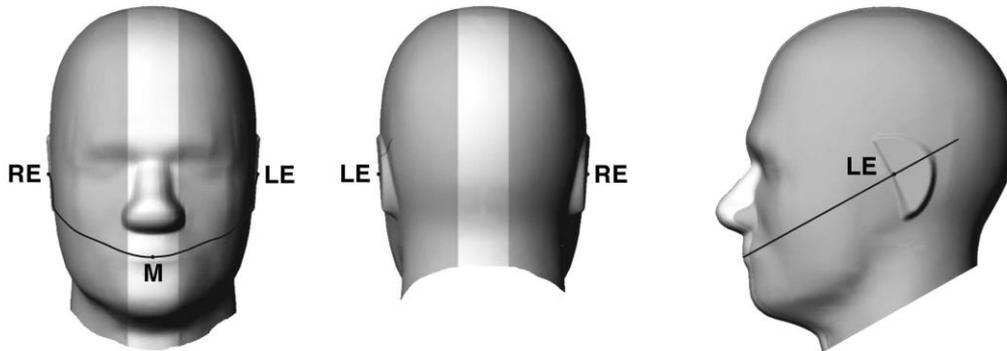


Fig 9.1.1 Front, back, and side views of SAM twin phantom

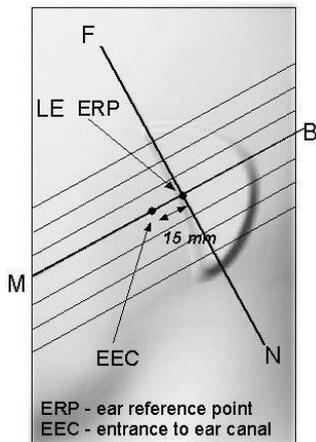


Fig 9.1.2 Close-up side view of phantom showing the ear region.

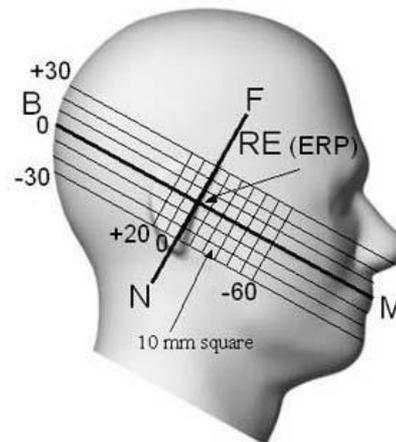


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

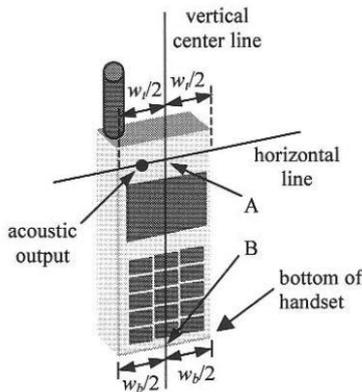


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

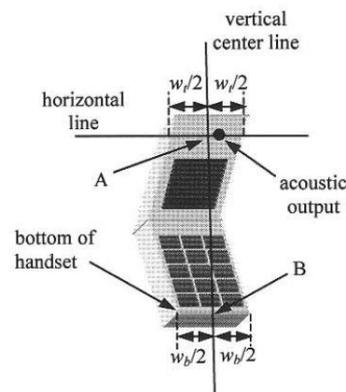


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

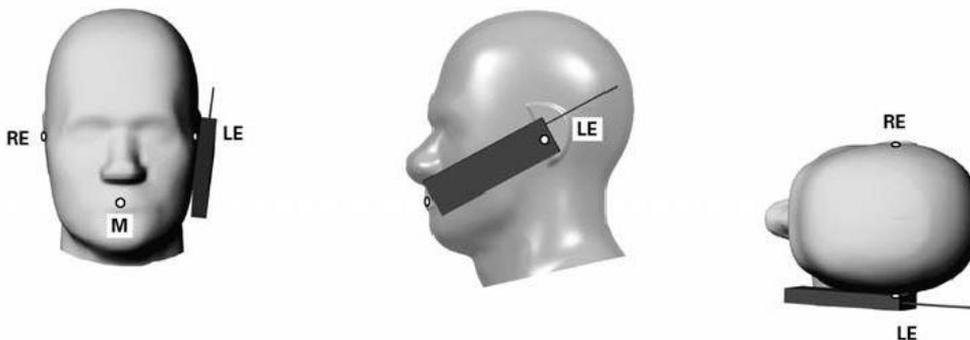


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

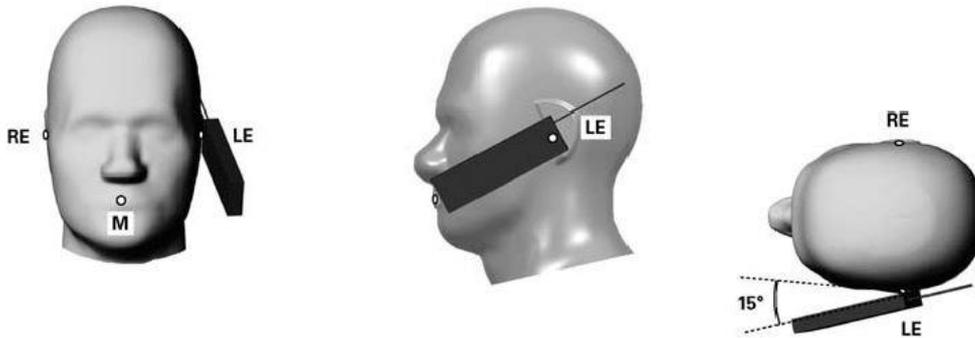


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

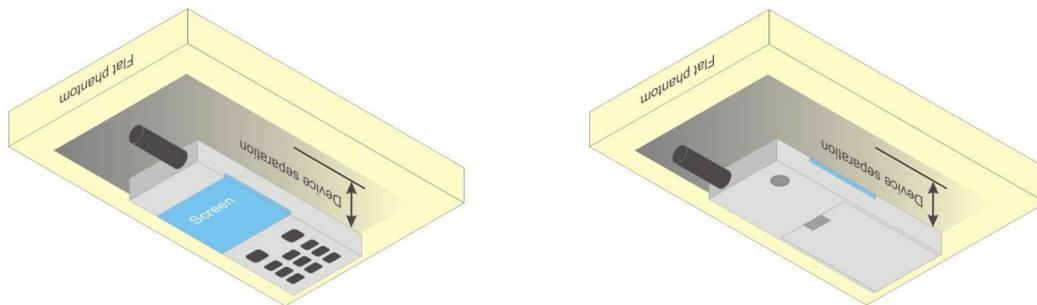


Fig 9.4 Body Worn Position

10.5 Product Specific Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.



10.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



11. GSM/UMTS/LTE Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (1Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850_Ant 0	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.01	32.17	32.19	34.00	23.01	23.17	23.19	25.00
GPRS 1 Tx slot	32.01	32.21	32.24	34.00	23.01	23.21	23.24	25.00
GPRS 2 Tx slots	28.87	29.06	29.07	30.50	22.87	23.06	23.07	24.50
GPRS 3 Tx slots	27.46	27.66	27.67	29.00	23.20	23.40	23.41	24.74
GPRS 4 Tx slots	26.01	26.19	26.22	27.50	23.01	23.19	23.22	24.50

GSM1900_Ant 1	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	512	661		810	512	661	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.01	29.02	29.08	31.00	20.01	20.02	20.08	22.00
GPRS 1 Tx slot	29.01	29.04	29.12	31.00	20.01	20.04	20.12	22.00
GPRS 2 Tx slots	26.04	26.22	26.33	28.00	20.04	20.22	20.33	22.00
GPRS 3 Tx slots	24.56	24.72	24.87	26.50	20.30	20.46	20.61	22.24
GPRS 4 Tx slots	23.06	23.21	23.33	25.00	20.06	20.21	20.33	22.00

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

Band		WCDMA V_Ant 0			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	21.96	21.87	21.85	23.50
3GPP Rel 99	RMC 12.2Kbps	22.02	21.95	21.88	23.50
3GPP Rel 6	HSDPA Subtest-1	21.03	20.96	20.96	22.50
3GPP Rel 6	HSDPA Subtest-2	21.02	20.97	20.98	22.50
3GPP Rel 6	HSDPA Subtest-3	20.56	20.50	20.57	22.00
3GPP Rel 6	HSDPA Subtest-4	20.52	20.47	20.54	22.00
3GPP Rel 6	HSUPA Subtest-1	19.53	19.04	19.00	22.50
3GPP Rel 6	HSUPA Subtest-2	19.02	18.97	18.94	20.50
3GPP Rel 6	HSUPA Subtest-3	20.04	19.96	19.91	21.50
3GPP Rel 6	HSUPA Subtest-4	18.59	18.54	18.52	20.50
3GPP Rel 6	HSUPA Subtest-5	20.00	19.90	19.90	22.50

**<LTE Conducted Power>****General Note:**

1. A Base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5/B12/B17/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<LTE Band 2_Ant 1>							
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	22.25	22.53	22.64	24.5
20	QPSK	1	49	22.27	22.55	22.71	
20	QPSK	1	99	22.50	22.70	23.00	
20	QPSK	50	0	21.37	21.54	21.73	23.5
20	QPSK	50	24	21.39	21.58	21.77	
20	QPSK	50	50	21.51	21.63	21.89	
20	QPSK	100	0	21.36	21.57	21.76	23.5
20	16QAM	1	0	21.65	21.83	22.00	
20	16QAM	1	49	21.64	21.89	22.08	
20	16QAM	1	99	21.71	21.90	22.19	22.5
20	16QAM	50	0	20.37	20.54	20.72	
20	16QAM	50	24	20.37	20.58	20.76	
20	16QAM	50	50	20.39	20.61	20.81	22.5
20	16QAM	100	0	20.35	20.56	20.73	
20	64QAM	1	0	20.51	20.69	20.87	
20	64QAM	1	49	20.49	20.72	20.87	22.5
20	64QAM	1	99	20.57	20.73	21.06	
20	64QAM	50	0	19.34	19.52	19.71	
20	64QAM	50	24	19.35	19.57	19.75	21.5
20	64QAM	50	50	19.38	19.59	19.80	
20	64QAM	100	0	19.34	19.54	19.73	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	22.28	22.56	22.77	24.5
15	QPSK	1	37	22.37	22.64	22.79	
15	QPSK	1	74	22.38	22.63	22.99	
15	QPSK	36	0	21.35	21.61	21.78	23.5
15	QPSK	36	20	21.35	21.61	21.82	
15	QPSK	36	39	21.38	21.62	21.87	
15	QPSK	75	0	21.39	21.61	21.85	23.5
15	16QAM	1	0	21.65	21.89	22.09	
15	16QAM	1	37	21.66	21.97	22.20	
15	16QAM	1	74	21.73	21.97	22.23	22.5
15	16QAM	36	0	20.36	20.59	20.79	
15	16QAM	36	20	20.37	20.58	20.81	
15	16QAM	36	39	20.38	20.60	20.86	22.5
15	16QAM	75	0	20.39	20.64	20.85	
15	64QAM	1	0	20.53	20.72	20.89	
15	64QAM	1	37	20.53	20.78	20.93	22.5
15	64QAM	1	74	20.58	20.80	21.13	
15	64QAM	36	0	19.36	19.60	19.79	
15	64QAM	36	20	19.37	19.62	19.85	21.5
15	64QAM	36	39	19.39	19.63	19.89	
15	64QAM	75	0	19.36	19.62	19.82	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	22.23	22.54	22.79	24.5
10	QPSK	1	25	22.28	22.63	22.88	
10	QPSK	1	49	22.30	22.60	22.94	
10	QPSK	25	0	21.40	21.64	21.91	23.5



FCC SAR TEST REPORT

Report No. : FA4D0637

10	QPSK	25	12	21.42	21.66	21.92	
10	QPSK	25	25	21.40	21.68	21.93	
10	QPSK	50	0	21.43	21.66	21.92	
10	16QAM	1	0	21.68	21.85	22.16	23.5
10	16QAM	1	25	21.68	21.96	22.18	
10	16QAM	1	49	21.65	21.97	22.25	
10	16QAM	25	0	20.37	20.62	20.88	22.5
10	16QAM	25	12	20.40	20.64	20.89	
10	16QAM	25	25	20.38	20.66	20.90	
10	16QAM	50	0	20.40	20.64	20.89	22.5
10	64QAM	1	0	20.52	20.78	21.04	
10	64QAM	1	25	20.57	20.82	21.04	
10	64QAM	1	49	20.52	20.83	21.11	21.5
10	64QAM	25	0	19.35	19.62	19.88	
10	64QAM	25	12	19.38	19.64	19.90	
10	64QAM	25	25	19.36	19.66	19.90	21.5
10	64QAM	50	0	19.38	19.64	19.88	
Channel				18625	18900	19175	
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	22.18	22.53	22.84	24.5
5	QPSK	1	12	22.22	22.61	22.90	
5	QPSK	1	24	22.22	22.57	22.92	
5	QPSK	12	0	21.35	21.64	21.95	23.5
5	QPSK	12	7	21.36	21.68	21.93	
5	QPSK	12	13	21.35	21.67	21.95	
5	QPSK	25	0	21.38	21.68	21.96	23.5
5	16QAM	1	0	21.62	21.88	22.20	
5	16QAM	1	12	21.66	21.92	22.21	
5	16QAM	1	24	21.68	21.94	22.26	22.5
5	16QAM	12	0	20.36	20.64	20.95	
5	16QAM	12	7	20.37	20.67	20.93	
5	16QAM	12	13	20.35	20.67	20.95	22.5
5	16QAM	25	0	20.35	20.65	20.91	
5	64QAM	1	0	20.48	20.76	21.03	
5	64QAM	1	12	20.50	20.82	21.05	22.5
5	64QAM	1	24	20.52	20.79	21.07	
5	64QAM	12	0	19.37	19.66	19.96	
5	64QAM	12	7	19.39	19.71	19.94	21.5
5	64QAM	12	13	19.39	19.69	19.96	
5	64QAM	25	0	19.35	19.65	19.90	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	22.11	22.57	22.81	24.5
3	QPSK	1	8	22.10	22.56	22.77	
3	QPSK	1	14	22.13	22.51	22.82	
3	QPSK	8	0	21.32	21.60	21.90	23.5
3	QPSK	8	4	21.33	21.60	21.91	
3	QPSK	8	7	21.34	21.63	21.90	
3	QPSK	15	0	21.30	21.61	21.92	23.5
3	16QAM	1	0	21.61	21.84	22.15	
3	16QAM	1	8	21.63	21.86	22.18	
3	16QAM	1	14	21.61	21.86	22.20	22.5
3	16QAM	8	0	20.37	20.65	20.93	
3	16QAM	8	4	20.38	20.67	20.95	
3	16QAM	8	7	20.39	20.69	20.96	22.5
3	16QAM	15	0	20.31	20.60	20.91	



3	64QAM	1	0	20.44	20.71	21.02	22.5
3	64QAM	1	8	20.48	20.76	21.08	
3	64QAM	1	14	20.47	20.78	21.09	
3	64QAM	8	0	19.36	19.65	19.93	21.5
3	64QAM	8	4	19.38	19.63	19.94	
3	64QAM	8	7	19.37	19.67	19.95	
3	64QAM	15	0	19.27	19.59	19.88	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	22.16	22.56	22.86	24.5
1.4	QPSK	1	3	22.17	22.53	22.88	
1.4	QPSK	1	5	22.18	22.55	22.85	
1.4	QPSK	3	0	22.17	22.53	22.89	
1.4	QPSK	3	1	22.15	22.50	22.87	
1.4	QPSK	3	3	22.17	22.53	22.90	
1.4	QPSK	6	0	21.29	21.61	21.89	23.5
1.4	16QAM	1	0	21.61	21.89	22.20	23.5
1.4	16QAM	1	3	21.61	21.91	22.21	
1.4	16QAM	1	5	21.64	21.91	22.21	
1.4	16QAM	3	0	21.29	21.58	21.87	
1.4	16QAM	3	1	21.29	21.59	21.88	
1.4	16QAM	3	3	21.28	21.59	21.88	
1.4	16QAM	6	0	20.36	20.68	20.97	22.5
1.4	64QAM	1	0	20.48	20.82	21.08	22.5
1.4	64QAM	1	3	20.48	20.79	21.07	
1.4	64QAM	1	5	20.48	20.79	21.07	
1.4	64QAM	3	0	20.41	20.71	21.02	
1.4	64QAM	3	1	20.40	20.70	20.99	
1.4	64QAM	3	3	20.40	20.69	21.00	
1.4	64QAM	6	0	19.26	19.58	19.88	21.5

<LTE Band 5_Ant 0>								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	
Channel				20450	20525	20600		24.5
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.63	23.00	22.82	24.5	
10	QPSK	1	25	22.76	22.87	22.92		
10	QPSK	1	49	22.83	22.87	22.97		
10	QPSK	25	0	21.78	21.90	21.99	23.5	
10	QPSK	25	12	21.80	21.93	22.07		
10	QPSK	25	25	21.85	22.00	22.05		
10	QPSK	50	0	21.80	21.94	22.03	23.5	
10	16QAM	1	0	21.94	22.05	22.29		
10	16QAM	1	25	22.02	22.32	22.35		
10	16QAM	1	49	22.13	22.30	22.32	22.5	
10	16QAM	25	0	20.76	20.87	20.99		
10	16QAM	25	12	20.79	20.91	21.05		
10	16QAM	25	25	20.82	20.98	21.01	22.5	
10	16QAM	50	0	20.80	20.95	21.00		
10	64QAM	1	0	20.85	20.96	21.12		
10	64QAM	1	25	20.91	21.14	21.18	22.5	
10	64QAM	1	49	21.00	21.15	21.17		
10	64QAM	25	0	19.75	19.88	19.98		21.5
10	64QAM	25	12	19.75	19.92	20.03		
10	64QAM	25	25	19.82	19.98	20.00		



FCC SAR TEST REPORT

Report No. : FA4D0637

10	64QAM	50	0	19.78	19.94	20.00	
Channel				20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	22.60	22.99	22.76	24.5
5	QPSK	1	12	22.74	22.77	22.89	
5	QPSK	1	24	22.73	22.84	22.95	
5	QPSK	12	0	21.69	21.87	21.95	23.5
5	QPSK	12	7	21.78	21.88	22.07	
5	QPSK	12	13	21.81	21.91	21.98	
5	QPSK	25	0	21.73	21.94	21.96	
5	16QAM	1	0	21.87	22.01	22.25	23.5
5	16QAM	1	12	21.93	22.32	22.33	
5	16QAM	1	24	22.13	22.21	22.27	
5	16QAM	12	0	20.76	20.82	20.91	22.5
5	16QAM	12	7	20.79	20.83	21.03	
5	16QAM	12	13	20.76	20.92	20.98	
5	16QAM	25	0	20.76	20.90	20.95	
5	64QAM	1	0	20.82	20.92	21.09	22.5
5	64QAM	1	12	20.82	21.14	21.09	
5	64QAM	1	24	20.99	21.06	21.07	
5	64QAM	12	0	19.67	19.85	19.89	21.5
5	64QAM	12	7	19.66	19.82	19.96	
5	64QAM	12	13	19.73	19.95	19.95	
5	64QAM	25	0	19.76	19.93	19.98	
Channel				20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	22.62	22.91	22.81	24.5
3	QPSK	1	8	22.75	22.81	22.88	
3	QPSK	1	14	22.78	22.80	22.91	
3	QPSK	8	0	21.70	21.83	21.91	23.5
3	QPSK	8	4	21.72	21.83	22.05	
3	QPSK	8	7	21.82	21.92	21.96	
3	QPSK	15	0	21.72	21.94	22.01	
3	16QAM	1	0	21.93	22.01	22.29	23.5
3	16QAM	1	8	21.95	22.25	22.25	
3	16QAM	1	14	22.11	22.27	22.28	
3	16QAM	8	0	20.70	20.81	20.98	22.5
3	16QAM	8	4	20.69	20.89	20.96	
3	16QAM	8	7	20.82	20.98	20.96	
3	16QAM	15	0	20.74	20.90	20.99	
3	64QAM	1	0	20.85	20.89	21.04	22.5
3	64QAM	1	8	20.84	21.09	21.10	
3	64QAM	1	14	20.94	21.12	21.10	
3	64QAM	8	0	19.72	19.82	19.93	21.5
3	64QAM	8	4	19.69	19.85	19.99	
3	64QAM	8	7	19.77	19.95	19.95	
3	64QAM	15	0	19.76	19.84	19.93	
Channel				20407	20525	20643	Tune-up limit (dBm)
Frequency (MHz)				824.7	836.5	848.3	
1.4	QPSK	1	0	22.63	22.91	22.77	24.5
1.4	QPSK	1	3	22.75	22.78	22.82	
1.4	QPSK	1	5	22.76	22.85	22.89	
1.4	QPSK	3	0	22.59	22.91	22.73	
1.4	QPSK	3	1	22.70	22.76	22.75	
1.4	QPSK	3	3	22.71	22.75	22.87	
1.4	QPSK	6	0	21.77	21.87	21.96	23.5



1.4	16QAM	1	0	21.86	22.05	22.20	23.5
1.4	16QAM	1	3	21.99	22.25	22.27	
1.4	16QAM	1	5	21.75	21.83	21.86	
1.4	16QAM	3	0	21.80	22.03	22.17	
1.4	16QAM	3	1	21.98	22.23	22.25	
1.4	16QAM	3	3	21.68	21.85	21.93	
1.4	16QAM	6	0	20.73	20.93	20.97	22.5
1.4	64QAM	1	0	20.78	20.88	21.12	22.5
1.4	64QAM	1	3	20.89	21.07	21.14	
1.4	64QAM	1	5	21.00	21.10	21.17	
1.4	64QAM	3	0	20.66	20.88	20.91	
1.4	64QAM	3	1	20.77	20.81	21.10	
1.4	64QAM	3	3	20.84	20.98	21.05	
1.4	64QAM	6	0	19.79	19.95	19.99	21.5

<LTE Band 7_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	Tune-up limit (dBm)
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	22.94	22.99	22.94	24.5
20	QPSK	1	49	22.89	22.89	22.82	
20	QPSK	1	99	22.98	22.88	22.90	
20	QPSK	50	0	21.83	21.90	21.85	23.5
20	QPSK	50	24	21.87	21.90	21.85	
20	QPSK	50	50	21.99	22.00	21.93	
20	QPSK	100	0	21.89	21.96	21.88	23.5
20	16QAM	1	0	21.91	22.06	22.02	
20	16QAM	1	49	22.22	22.27	22.19	
20	16QAM	1	99	22.20	22.21	22.15	22.5
20	16QAM	50	0	20.82	20.90	20.84	
20	16QAM	50	24	20.83	20.90	20.85	
20	16QAM	50	50	20.96	20.96	20.91	22.5
20	16QAM	100	0	20.87	20.93	20.85	
20	64QAM	1	0	21.79	20.95	20.85	
20	64QAM	1	49	21.05	21.11	20.98	22.5
20	64QAM	1	99	21.08	20.98	21.04	
20	64QAM	50	0	19.81	19.88	19.82	
20	64QAM	50	24	19.83	19.87	19.83	21.5
20	64QAM	50	50	19.96	19.97	19.90	
20	64QAM	100	0	19.86	19.91	19.84	
Channel				20825	21100	21375	Tune-up limit (dBm)
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	22.77	22.88	22.80	24.5
15	QPSK	1	37	22.88	22.93	22.88	
15	QPSK	1	74	22.96	22.94	22.96	
15	QPSK	36	0	21.78	21.85	21.81	23.5
15	QPSK	36	20	21.85	21.88	21.83	
15	QPSK	36	39	21.95	21.93	21.87	
15	QPSK	75	0	21.88	21.91	21.87	23.5
15	16QAM	1	0	21.96	22.14	22.07	
15	16QAM	1	37	22.16	22.30	22.21	
15	16QAM	1	74	22.26	22.29	22.17	22.5
15	16QAM	36	0	20.79	20.86	20.80	
15	16QAM	36	20	20.83	20.86	20.82	
15	16QAM	36	39	20.92	20.92	20.88	



FCC SAR TEST REPORT

Report No. : FA4D0637

15	16QAM	75	0	20.89	20.94	20.87	
15	64QAM	1	0	20.88	21.02	20.93	22.5
15	64QAM	1	37	21.03	21.15	21.04	
15	64QAM	1	74	21.14	21.12	21.07	
15	64QAM	36	0	19.79	19.88	19.80	21.5
15	64QAM	36	20	19.82	19.88	19.83	
15	64QAM	36	39	19.94	19.94	19.87	
15	64QAM	75	0	19.87	19.91	19.84	
Channel				20800	21100	21400	Tune-up limit (dBm)
Frequency (MHz)				2505	2535	2565	
10	QPSK	1	0	22.80	22.84	22.77	24.5
10	QPSK	1	25	22.76	22.84	22.79	
10	QPSK	1	49	22.93	22.92	22.88	
10	QPSK	25	0	21.79	21.85	21.78	23.5
10	QPSK	25	12	21.76	21.85	21.80	
10	QPSK	25	25	21.84	21.89	21.83	
10	QPSK	50	0	21.84	21.90	21.80	
10	16QAM	1	0	21.96	22.20	22.11	23.5
10	16QAM	1	25	22.02	22.22	22.05	
10	16QAM	1	49	22.27	22.32	22.14	
10	16QAM	25	0	20.77	20.83	20.76	22.5
10	16QAM	25	12	20.75	20.80	20.76	
10	16QAM	25	25	20.82	20.88	20.82	
10	16QAM	50	0	20.82	20.87	20.80	
10	64QAM	1	0	20.89	21.02	20.93	22.5
10	64QAM	1	25	20.88	21.05	20.92	
10	64QAM	1	49	21.11	21.13	21.01	
10	64QAM	25	0	19.76	19.83	19.77	21.5
10	64QAM	25	12	19.73	19.82	19.74	
10	64QAM	25	25	19.81	19.88	19.79	
10	64QAM	50	0	19.80	19.86	19.77	
Channel				20775	21100	21425	Tune-up limit (dBm)
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	22.80	22.84	22.80	24.5
5	QPSK	1	12	22.82	22.90	22.83	
5	QPSK	1	24	22.82	22.87	22.83	
5	QPSK	12	0	21.82	21.89	21.84	23.5
5	QPSK	12	7	21.81	21.89	21.84	
5	QPSK	12	13	21.81	21.90	21.86	
5	QPSK	25	0	21.84	21.92	21.86	
5	16QAM	1	0	21.98	22.18	22.05	23.5
5	16QAM	1	12	22.04	22.26	22.06	
5	16QAM	1	24	22.08	22.20	22.06	
5	16QAM	12	0	20.83	20.90	20.83	22.5
5	16QAM	12	7	20.81	20.88	20.84	
5	16QAM	12	13	20.81	20.90	20.82	
5	16QAM	25	0	20.83	20.89	20.83	
5	64QAM	1	0	20.91	21.06	20.92	22.5
5	64QAM	1	12	20.99	21.08	20.96	
5	64QAM	1	24	20.96	21.13	20.95	
5	64QAM	12	0	19.85	19.93	19.83	21.5
5	64QAM	12	7	19.84	19.87	19.84	
5	64QAM	12	13	19.83	19.89	19.84	
5	64QAM	25	0	19.78	19.88	19.80	



<LTE Band 12_Ant 0>							
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23095	23130	
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	22.50	22.68	22.58	24.5
10	QPSK	1	25	22.52	22.67	22.61	
10	QPSK	1	49	22.54	22.61	22.58	
10	QPSK	25	0	21.56	21.54	21.59	23.5
10	QPSK	25	12	21.55	21.63	21.62	
10	QPSK	25	25	21.56	21.57	21.64	
10	QPSK	50	0	21.55	21.57	21.63	
10	16QAM	1	0	21.80	21.86	21.79	23.5
10	16QAM	1	25	21.83	21.94	21.91	
10	16QAM	1	49	21.78	21.96	21.91	
10	16QAM	25	0	20.55	20.54	20.58	22.5
10	16QAM	25	12	20.53	20.62	20.60	
10	16QAM	25	25	20.55	20.54	20.62	
10	16QAM	50	0	20.55	20.56	20.61	
10	64QAM	1	0	20.66	20.69	20.65	22.5
10	64QAM	1	25	20.70	20.82	20.81	
10	64QAM	1	49	20.62	20.81	20.73	
10	64QAM	25	0	19.54	19.55	19.58	21.5
10	64QAM	25	12	19.54	19.61	19.59	
10	64QAM	25	25	19.56	19.55	19.63	
10	64QAM	50	0	19.54	19.57	19.61	
Channel				23035	23095	23155	Tune-up limit (dBm)
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	22.53	22.58	22.59	24.5
5	QPSK	1	12	22.61	22.61	22.58	
5	QPSK	1	24	22.60	22.52	22.53	
5	QPSK	12	0	21.66	21.56	21.52	23.5
5	QPSK	12	7	21.59	21.57	21.55	
5	QPSK	12	13	21.66	21.53	21.55	
5	QPSK	25	0	21.64	21.54	21.62	23.5
5	16QAM	1	0	21.90	21.84	21.74	
5	16QAM	1	12	21.92	21.91	21.91	
5	16QAM	1	24	21.88	21.90	21.83	
5	16QAM	12	0	20.64	20.53	20.53	22.5
5	16QAM	12	7	20.56	20.56	20.57	
5	16QAM	12	13	20.58	20.51	20.61	
5	16QAM	25	0	20.58	20.55	20.51	
5	64QAM	1	0	20.68	20.65	20.55	22.5
5	64QAM	1	12	20.76	20.79	20.71	
5	64QAM	1	24	20.71	20.77	20.68	
5	64QAM	12	0	19.61	19.55	19.50	21.5
5	64QAM	12	7	19.55	19.55	19.56	
5	64QAM	12	13	19.66	19.57	19.54	
5	64QAM	25	0	19.64	19.57	19.52	
Channel				23025	23095	23165	Tune-up limit (dBm)
Frequency (MHz)				700.5	707.5	714.5	
3	QPSK	1	0	22.60	22.66	22.59	24.5
3	QPSK	1	8	22.62	22.64	22.59	
3	QPSK	1	14	22.57	22.56	22.54	
3	QPSK	8	0	21.59	21.54	21.53	23.5



3	QPSK	8	4	21.55	21.56	21.55	
3	QPSK	8	7	21.60	21.58	21.63	
3	QPSK	15	0	21.65	21.55	21.55	
3	16QAM	1	0	21.83	21.77	21.72	23.5
3	16QAM	1	8	21.86	21.88	21.83	
3	16QAM	1	14	21.84	21.87	21.83	
3	16QAM	8	0	20.57	20.50	20.53	22.5
3	16QAM	8	4	20.62	20.57	20.52	
3	16QAM	8	7	20.58	20.53	20.54	
3	16QAM	15	0	20.56	20.54	20.54	
3	64QAM	1	0	20.71	20.59	20.55	22.5
3	64QAM	1	8	20.80	20.73	20.74	
3	64QAM	1	14	20.69	20.77	20.69	
3	64QAM	8	0	19.63	19.51	19.56	21.5
3	64QAM	8	4	19.56	19.58	19.52	
3	64QAM	8	7	19.65	19.55	19.57	
3	64QAM	15	0	19.55	19.50	19.55	
Channel				23017	23095	23173	
Frequency (MHz)				699.7	707.5	715.3	
1.4	QPSK	1	0	22.60	22.58	22.53	24.5
1.4	QPSK	1	3	22.59	22.66	22.55	
1.4	QPSK	1	5	22.56	22.53	22.56	
1.4	QPSK	3	0	22.59	22.53	22.59	
1.4	QPSK	3	1	22.56	22.59	22.56	
1.4	QPSK	3	3	22.56	22.58	22.55	
1.4	QPSK	6	0	21.59	21.55	21.62	23.5
1.4	16QAM	1	0	21.80	21.83	21.78	23.5
1.4	16QAM	1	3	21.88	21.92	21.87	
1.4	16QAM	1	5	21.57	21.59	21.61	
1.4	16QAM	3	0	21.71	21.81	21.69	
1.4	16QAM	3	1	21.81	21.84	21.79	
1.4	16QAM	3	3	21.55	21.50	21.56	
1.4	16QAM	6	0	20.56	20.52	20.59	22.5
1.4	64QAM	1	0	20.68	20.62	20.65	22.5
1.4	64QAM	1	3	20.80	20.74	20.78	
1.4	64QAM	1	5	20.68	20.72	20.66	
1.4	64QAM	3	0	20.56	20.54	20.53	
1.4	64QAM	3	1	20.67	20.57	20.58	
1.4	64QAM	3	3	20.80	20.70	20.69	
1.4	64QAM	6	0	19.79	19.60	19.67	



<LTE Band 17_Ant 0>							
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23780	23790	23800	
Frequency (MHz)				709	710	711	
10	QPSK	1	0	22.54	22.63	22.56	24.5
10	QPSK	1	25	22.53	22.62	22.51	
10	QPSK	1	49	22.58	22.60	22.53	
10	QPSK	25	0	21.59	21.59	21.51	23.5
10	QPSK	25	12	21.61	21.59	21.53	
10	QPSK	25	25	21.58	21.58	21.55	
10	QPSK	50	0	21.57	21.60	21.52	
10	16QAM	1	0	21.89	21.81	21.80	23.5
10	16QAM	1	25	21.83	21.91	21.83	
10	16QAM	1	49	21.92	21.95	21.84	
10	16QAM	25	0	20.57	20.58	20.56	22.5
10	16QAM	25	12	20.59	20.56	20.51	
10	16QAM	25	25	20.56	20.55	20.52	
10	16QAM	50	0	20.57	20.60	20.53	
10	64QAM	1	0	20.71	20.67	20.65	22.5
10	64QAM	1	25	20.67	20.80	20.69	
10	64QAM	1	49	20.80	20.78	20.66	
10	64QAM	25	0	19.57	19.57	19.59	21.5
10	64QAM	25	12	19.59	19.57	19.49	
10	64QAM	25	25	19.55	19.56	19.52	
10	64QAM	50	0	19.55	19.60	19.51	
Channel				23755	23790	23825	Tune-up limit (dBm)
Frequency (MHz)				706.5	710	713.5	
5	QPSK	1	0	22.50	22.59	22.53	24.5
5	QPSK	1	12	22.59	22.56	22.57	
5	QPSK	1	24	22.58	22.58	22.55	
5	QPSK	12	0	21.54	21.59	21.52	23.5
5	QPSK	12	7	21.57	21.52	21.52	
5	QPSK	12	13	21.58	21.59	21.58	
5	QPSK	25	0	21.51	21.56	21.55	
5	16QAM	1	0	21.85	21.76	21.70	23.5
5	16QAM	1	12	21.79	21.89	21.81	
5	16QAM	1	24	21.87	21.88	21.76	
5	16QAM	12	0	20.56	20.53	20.55	22.5
5	16QAM	12	7	20.53	20.56	20.51	
5	16QAM	12	13	20.53	20.57	20.59	
5	16QAM	25	0	20.57	20.52	20.58	
5	64QAM	1	0	20.62	20.59	20.56	22.5
5	64QAM	1	12	20.64	20.74	20.67	
5	64QAM	1	24	20.70	20.72	20.59	
5	64QAM	12	0	19.56	19.53	19.56	21.5
5	64QAM	12	7	19.57	19.50	19.55	
5	64QAM	12	13	19.51	19.56	19.50	
5	64QAM	25	0	19.51	19.52	19.57	

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Base station simulator was used for LTE output power measurements and SAR testing.

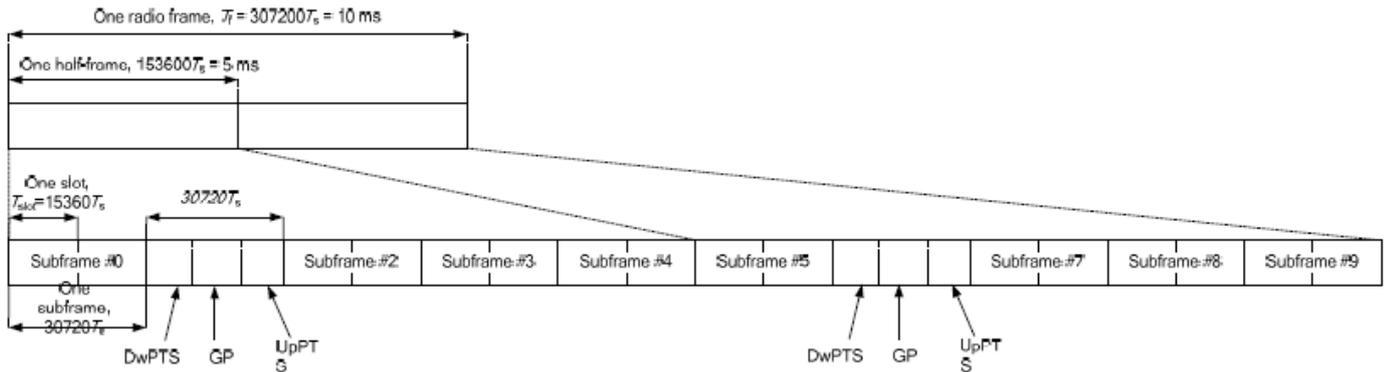


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts
1	19760 · Ts			20480 · Ts		
2	21952 · Ts			23040 · Ts		
3	24144 · Ts			25600 · Ts		
4	26336 · Ts			7680 · Ts	4384 · Ts	5120 · Ts
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts		
6	19760 · Ts			23040 · Ts		
7	21952 · Ts			12800 · Ts		
8	24144 · Ts			-	-	-
9	13168 · Ts			-	-	-

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<LTE Band 38_Ant 1>							
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				37850	38000	38150	
Frequency (MHz)				2580	2595	2610	
20	QPSK	1	0	22.90	22.84	22.89	24.5
20	QPSK	1	49	22.83	22.81	22.83	
20	QPSK	1	99	22.80	22.82	22.87	
20	QPSK	50	0	21.80	21.81	21.78	23.5
20	QPSK	50	24	21.81	21.86	21.84	
20	QPSK	50	50	21.82	21.83	21.89	
20	QPSK	100	0	21.82	21.83	21.84	23.5
20	16QAM	1	0	21.85	21.85	21.88	
20	16QAM	1	49	21.88	21.93	21.84	
20	16QAM	1	99	21.87	21.88	21.93	22.5
20	16QAM	50	0	20.83	20.80	20.80	
20	16QAM	50	24	20.81	20.82	20.84	
20	16QAM	50	50	20.81	20.86	20.88	22.5
20	16QAM	100	0	20.81	20.84	20.83	
20	64QAM	1	0	20.70	20.68	20.72	
20	64QAM	1	49	20.76	20.78	20.75	22.5
20	64QAM	1	99	20.73	20.75	20.80	
20	64QAM	50	0	19.78	19.78	19.76	
20	64QAM	50	24	19.81	19.80	19.82	21.5
20	64QAM	50	50	19.79	19.83	19.84	
20	64QAM	100	0	19.78	19.82	19.80	
Channel				37825	38000	38175	Tune-up limit (dBm)
Frequency (MHz)				2577.5	2595	2612.5	
15	QPSK	1	0	22.67	22.61	22.62	24.5
15	QPSK	1	37	22.73	22.69	22.71	
15	QPSK	1	74	22.66	22.64	22.75	
15	QPSK	36	0	21.67	21.63	21.63	23.5
15	QPSK	36	20	21.66	21.76	21.64	
15	QPSK	36	39	21.63	21.69	21.79	
15	QPSK	75	0	21.65	21.67	21.70	23.5
15	16QAM	1	0	21.70	21.71	21.77	
15	16QAM	1	37	21.69	21.83	21.68	
15	16QAM	1	74	21.74	21.68	21.73	22.5
15	16QAM	36	0	20.63	20.61	20.65	
15	16QAM	36	20	20.64	20.62	20.73	
15	16QAM	36	39	20.65	20.67	20.76	22.5
15	16QAM	75	0	20.68	20.69	20.73	
15	64QAM	1	0	20.52	20.53	20.56	
15	64QAM	1	37	20.65	20.61	20.56	22.5
15	64QAM	1	74	20.58	20.61	20.66	
15	64QAM	36	0	19.65	19.65	19.66	
15	64QAM	36	20	19.70	19.66	19.66	21.5
15	64QAM	36	39	19.61	19.72	19.70	
15	64QAM	75	0	19.67	19.72	19.67	
Channel				37800	38000	38200	Tune-up limit (dBm)
Frequency (MHz)				2575	2595	2615	
10	QPSK	1	0	22.64	22.56	22.60	24.5
10	QPSK	1	25	22.71	22.67	22.71	
10	QPSK	1	49	22.64	22.70	22.77	
10	QPSK	25	0	21.62	21.63	21.63	23.5



10	QPSK	25	12	21.65	21.72	21.70	
10	QPSK	25	25	21.71	21.65	21.72	
10	QPSK	50	0	21.72	21.67	21.74	
10	16QAM	1	0	21.71	21.66	21.70	23.5
10	16QAM	1	25	21.70	21.80	21.73	
10	16QAM	1	49	21.75	21.76	21.80	
10	16QAM	25	0	20.66	20.68	20.70	22.5
10	16QAM	25	12	20.63	20.62	20.74	
10	16QAM	25	25	20.63	20.67	20.78	
10	16QAM	50	0	20.70	20.70	20.65	22.5
10	64QAM	1	0	20.55	20.55	20.62	
10	64QAM	1	25	20.66	20.58	20.61	
10	64QAM	1	49	20.61	20.64	20.60	21.5
10	64QAM	25	0	19.67	19.58	19.57	
10	64QAM	25	12	19.65	19.65	19.67	
10	64QAM	25	25	19.60	19.64	19.70	21.5
10	64QAM	50	0	19.67	19.65	19.61	
Channel				37775	38000	38225	
Frequency (MHz)				2572.5	2595	2617.5	
5	QPSK	1	0	22.61	22.57	22.63	24.5
5	QPSK	1	12	22.65	22.63	22.68	
5	QPSK	1	24	22.70	22.65	22.72	
5	QPSK	12	0	21.63	21.64	21.67	23.5
5	QPSK	12	7	21.65	21.69	21.69	
5	QPSK	12	13	21.68	21.64	21.78	
5	QPSK	25	0	21.64	21.65	21.72	23.5
5	16QAM	1	0	21.67	21.68	21.71	
5	16QAM	1	12	21.74	21.79	21.70	
5	16QAM	1	24	21.71	21.77	21.74	22.5
5	16QAM	12	0	20.72	20.68	20.67	
5	16QAM	12	7	20.68	20.69	20.69	
5	16QAM	12	13	20.70	20.73	20.69	22.5
5	16QAM	25	0	20.63	20.68	20.67	
5	64QAM	1	0	20.52	20.57	20.62	
5	64QAM	1	12	20.60	20.64	20.61	22.5
5	64QAM	1	24	20.57	20.58	20.66	
5	64QAM	12	0	19.58	19.65	19.66	
5	64QAM	12	7	19.66	19.64	19.65	21.5
5	64QAM	12	13	19.66	19.67	19.72	
5	64QAM	25	0	19.67	19.64	19.60	



12. UL Carrier aggregation

<LTE UL carrier aggregation>

General Note:

1. The device supports intra-band uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
2. The device supports uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
3. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
4. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
5. Additional SAR measurement for LTE UL CA whit other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

2CC Uplink Carrier Aggregation	
Number	Combination
1	38C

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	0	0	0	1	0	22.54	24.50
37901	38099	QPSK	1	0	0	0	1	0	22.52	24.50
38150	37952	QPSK	1	0	1	99	2	0	22.55	24.50



13. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<2.4GHz WLAN>						
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 1		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	17.10	17.50	100.00
		6	2437	14.10	14.50	
		11	2462	14.30	14.50	
	802.11g 6Mbps	1	2412	16.60	17.00	97.47
		6	2437	17.70	18.00	
		11	2462	14.50	14.50	
	802.11n-HT20 MCS0	1	2412	15.80	16.00	97.37
		6	2437	17.60	18.00	
		11	2462	13.90	14.00	
	802.11n-HT40 MCS0	3	2422	12.80	13.00	94.83
		6	2437	13.80	14.00	
		9	2452	13.60	14.00	
	802.11ac-VHT20 MCS0	1	2412	15.70	16.00	97.27
		6	2437	17.50	18.00	
		11	2462	13.80	14.00	
802.11ac-VHT40 MCS0	3	2422	12.70	13.00	94.86	
	6	2437	13.70	14.00		
	9	2452	13.50	14.00		
<5.2GHz WLAN>						
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 1		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	17.20	18.00	97.54
		40	5200	18.90	19.00	
		44	5220	18.90	19.00	
		48	5240	18.90	19.00	
	802.11n-HT20 MCS0	36	5180	17.60	18.00	97.25
		40	5200	18.70	19.00	
		44	5220	18.90	19.00	
		48	5240	18.90	19.00	
	802.11n-HT40 MCS0	38	5190	16.00	16.50	94.83
		46	5230	18.60	19.00	
	802.11ac-VHT20 MCS0	36	5180	17.50	18.00	97.25
		40	5200	18.60	19.00	
		44	5220	18.80	19.00	
		48	5240	18.80	19.00	
	802.11ac-VHT40 MCS0	38	5190	15.90	16.50	94.85
		46	5230	18.50	19.00	
	802.11ac-VHT80 MCS0	42	5210	13.30	13.50	90.33



<5.3GHz WLAN>						
				Ant 1		
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	18.90	19.00	97.54
		56	5280	18.90	19.00	
		60	5300	18.90	19.00	
		64	5320	16.20	16.50	
	802.11n-HT20 MCS0	52	5260	18.80	19.00	97.25
		56	5280	18.80	19.00	
		60	5300	18.90	19.00	
	802.11n-HT40 MCS0	54	5270	17.90	18.00	94.83
		62	5310	14.00	14.00	
	802.11ac-VHT20 MCS0	52	5260	18.70	19.00	97.25
		56	5280	18.70	19.00	
		60	5300	18.80	19.00	
	802.11ac-VHT40 MCS0	64	5320	16.20	16.50	94.85
		54	5270	17.80	18.00	
	802.11ac-VHT80 MCS0	62	5310	13.90	14.00	94.85
	802.11ac-VHT80 MCS0	58	5290	12.80	13.00	90.33
<5.5GHz WLAN>						
				Ant 1		
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	17.40	17.50	97.54
		116	5580	18.80	19.00	
		124	5620	18.60	19.00	
		132	5660	18.60	19.00	
		144	5720	18.90	19.00	
	802.11n-HT20 MCS0	100	5500	16.30	16.50	97.25
		116	5580	18.70	19.00	
		124	5620	18.80	19.00	
		132	5660	18.70	19.00	
	802.11n-HT40 MCS0	144	5720	18.70	19.00	94.83
		102	5510	14.10	15.00	
		110	5550	18.70	19.00	
		126	5630	18.60	19.00	
	802.11ac-VHT20 MCS0	134	5670	16.50	16.50	97.25
		142	5710	18.60	19.00	
		100	5500	16.20	16.50	
		116	5580	18.60	19.00	
	802.11ac-VHT40 MCS0	124	5620	18.70	19.00	94.85
		132	5660	18.60	19.00	
		144	5720	18.60	19.00	
		102	5510	14.00	15.00	
	802.11ac-VHT80 MCS0	110	5550	18.60	19.00	90.33
		126	5630	18.50	19.00	
		134	5670	16.40	16.50	
142		5710	18.50	19.00		
802.11ac-VHT80 MCS0	106	5530	14.30	14.50	90.33	
	122	5610	17.20	17.50		
802.11ac-VHT80 MCS0	138	5690	18.60	19.00	90.33	




<5.8GHz WLAN>						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 1		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	18.70	19.00	97.54
		157	5785	18.80	19.00	
		165	5825	18.70	19.00	
	802.11n-HT20 MCS0	149	5745	18.70	19.00	97.25
		157	5785	18.70	19.00	
		165	5825	18.70	19.00	
	802.11n-HT40 MCS0	151	5755	18.60	19.00	94.83
		159	5795	18.60	19.00	
	802.11ac-VHT20 MCS0	149	5745	18.60	19.00	97.50
		157	5785	18.60	19.00	
		165	5825	18.60	19.00	
	802.11ac-VHT40 MCS0	151	5755	18.50	19.00	94.85
		159	5795	18.50	19.00	
	802.11ac-VHT80 MCS0	155	5775	17.00	17.50	90.33

<2.4GHz Bluetooth>


				Ant 1		
Bluetooth	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	BR / EDR 1Mbps	0	2402	14.06	14.50	76.88
		39	2441	13.70		
		78	2480	14.18		
	BR / EDR 2Mbps	0	2402	11.73	12.00	76.88
		39	2441	11.48		
		78	2480	11.84		
	BR / EDR 3Mbps	0	2402	11.87	12.00	76.85
		39	2441	11.59		
		78	2480	12.00		
LE 1Mbps	0	2402	4.30	5.00	60.94	
	19	2440	4.90			
	39	2480	4.70			
LE 2Mbps	0	2402	4.40	5.00	31.34	
	19	2440	5.00			
	39	2480	4.80			

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 76.88% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

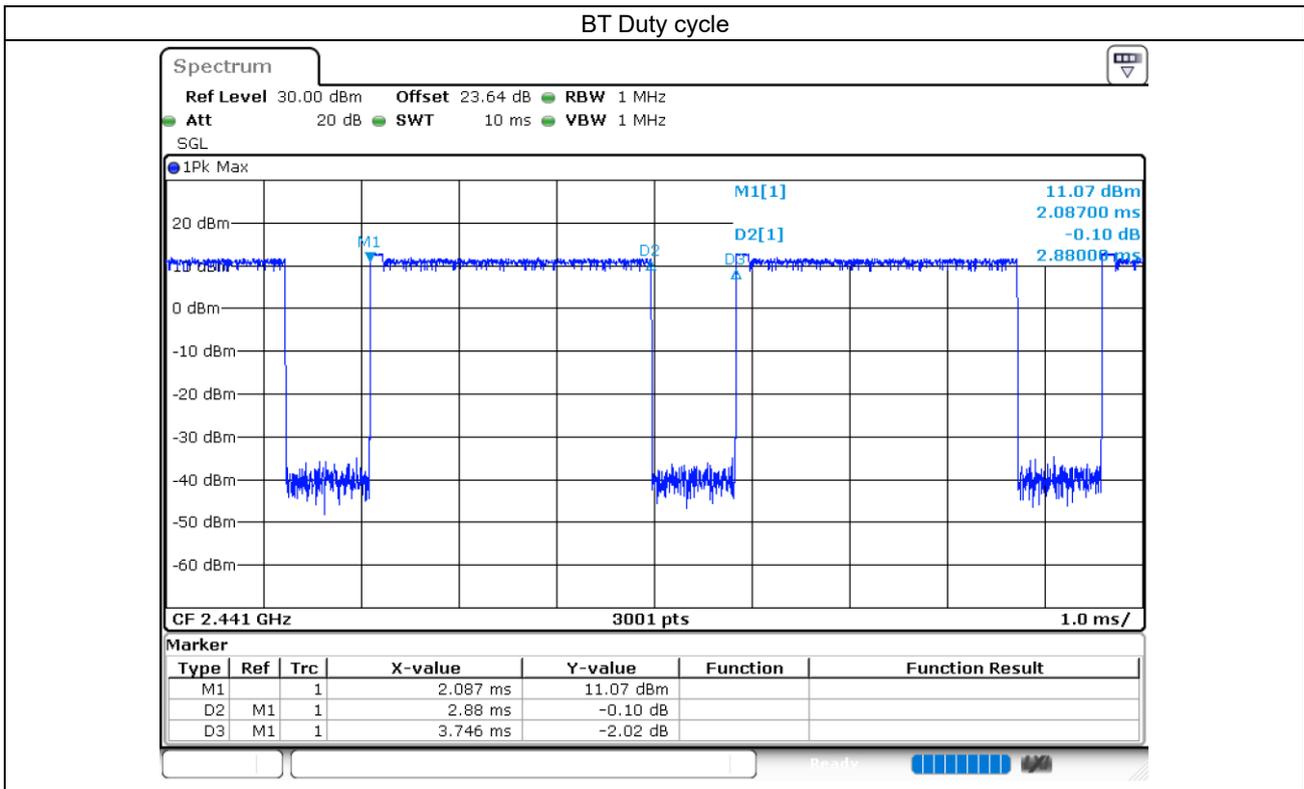

14. Antenna Location

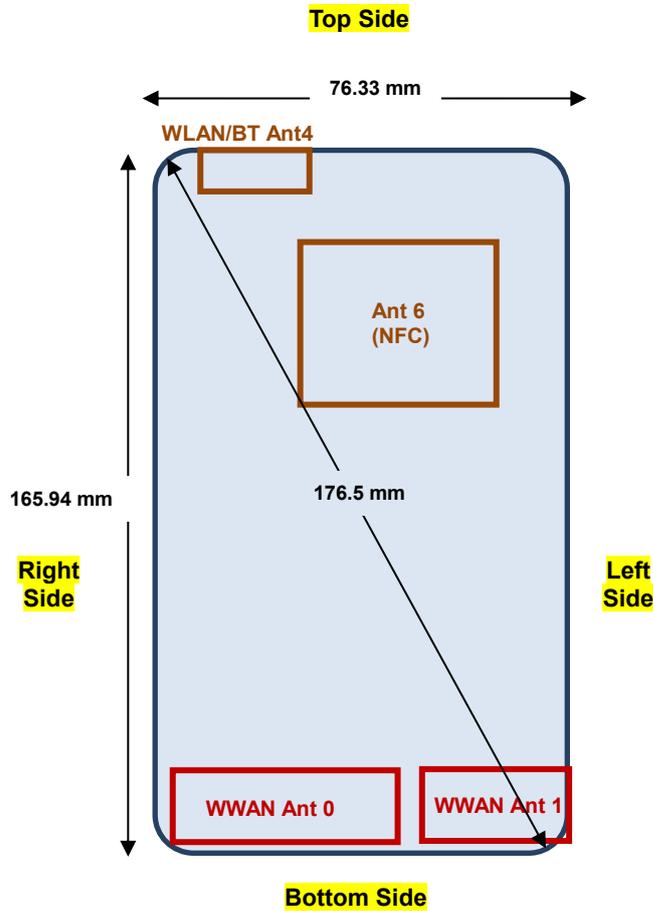

Back View

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 0	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN Antenna 1	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN Antenna 4	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 0	Yes	Yes	No	Yes	Yes	Yes
WWAN Antenna 1	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN Antenna 4	Yes	Yes	Yes	No	Yes	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. For 5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16 cm.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (1Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5/B12/B17/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 17 SAR test was covered by Band 12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN5.2GHz band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

NFC Note:

1. NFC mainly operate in hand-held extremity exposure conditions, therefore Standalone 10-g extremity SAR testing for NFC will be performed with active mode at 0mm separation distance.
2. NFC SAR is measured for all surface edges of the device with a transmitting antenna located within 25 mm.
3. NFC 13.56MHz antenna port is not available on the device to support conducted power measurement, therefore the measured results are referred to as reported SAR.
4. NFC SAR test tissue-simulating liquid parameter: refer to IEC/IEEE 62209-1528 2020.

**15.1 Head SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850_Ant 0	GPRS (1 Tx slot)	Right Cheek	0mm	251	848.8	Sample 1	32.24	34.00	1.500	-0.02	0.128	0.192
	GSM850_Ant 0	GPRS (1 Tx slot)	Right Tilted	0mm	251	848.8	Sample 1	32.24	34.00	1.500	0.01	0.074	0.111
	GSM850_Ant 0	GPRS (1 Tx slot)	Left Cheek	0mm	251	848.8	Sample 1	32.24	34.00	1.500	0.03	0.116	0.174
	GSM850_Ant 0	GPRS (1 Tx slot)	Left Tilted	0mm	251	848.8	Sample 1	32.24	34.00	1.500	-0.08	0.064	0.096
	GSM850_Ant 0	GPRS (1 Tx slot)	Right Cheek	0mm	251	848.8	Sample 2	32.24	34.00	1.500	0.12	0.120	0.180
	GSM1900_Ant 1	GPRS (3 Tx slots)	Right Cheek	0mm	810	1909.8	Sample 1	24.87	26.50	1.455	0.1	0.001	0.001
	GSM1900_Ant 1	GPRS (3 Tx slots)	Right Tilted	0mm	810	1909.8	Sample 1	24.87	26.50	1.455	0.12	0.001	0.001
02	GSM1900_Ant 1	GPRS (3 Tx slots)	Left Cheek	0mm	810	1909.8	Sample 1	24.87	26.50	1.455	0	0.073	0.106
	GSM1900_Ant 1	GPRS (3 Tx slots)	Left Tilted	0mm	810	1909.8	Sample 1	24.87	26.50	1.455	-0.17	0.050	0.073
	GSM1900_Ant 1	GPRS (3 Tx slots)	Left Cheek	0mm	810	1909.8	Sample 2	24.87	26.50	1.455	0.18	0.066	0.096

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V_Ant 0	RMC 12.2Kbps	Right Cheek	0mm	4132	826.4	Sample 1	22.02	23.50	1.406	0.08	0.124	0.174
	WCDMA V_Ant 0	RMC 12.2Kbps	Right Tilted	0mm	4132	826.4	Sample 1	22.02	23.50	1.406	0.01	0.086	0.121
03	WCDMA V_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	Sample 1	22.02	23.50	1.406	0.02	0.139	0.195
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Tilted	0mm	4132	826.4	Sample 1	22.02	23.50	1.406	0.03	0.084	0.118
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	Sample 2	22.02	23.50	1.406	-0.1	0.133	0.187



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 1	20M	QPSK	1	99	Right Cheek	0mm	19100	1900	Sample 1	23.00	24.50	1.413			0.18	0.069	0.097
	LTE Band 2_Ant 1	20M	QPSK	50	50	Right Cheek	0mm	19100	1900	Sample 1	21.89	23.50	1.449			0.14	0.047	0.068
	LTE Band 2_Ant 1	20M	QPSK	1	99	Right Tilted	0mm	19100	1900	Sample 1	23.00	24.50	1.413			-0.17	0.062	0.088
	LTE Band 2_Ant 1	20M	QPSK	50	50	Right Tilted	0mm	19100	1900	Sample 1	21.89	23.50	1.449			0.17	0.056	0.081
04	LTE Band 2_Ant 1	20M	QPSK	1	99	Left Cheek	0mm	19100	1900	Sample 1	23.00	24.50	1.413			0.13	0.101	0.143
	LTE Band 2_Ant 1	20M	QPSK	50	50	Left Cheek	0mm	19100	1900	Sample 1	21.89	23.50	1.449			0.01	0.074	0.107
	LTE Band 2_Ant 1	20M	QPSK	1	99	Left Tilted	0mm	19100	1900	Sample 1	23.00	24.50	1.413			0.1	0.065	0.092
	LTE Band 2_Ant 1	20M	QPSK	50	50	Left Tilted	0mm	19100	1900	Sample 1	21.89	23.50	1.449			-0.17	0.047	0.068
	LTE Band 2_Ant 1	20M	QPSK	1	99	Left Cheek	0mm	19100	1900	Sample 2	23.00	24.50	1.413			0.18	0.072	0.102
05	LTE Band 5_Ant 0	10M	QPSK	1	0	Right Cheek	0mm	20525	836.5	Sample 1	23.00	24.50	1.413			0.19	0.173	0.244
	LTE Band 5_Ant 0	10M	QPSK	25	25	Right Cheek	0mm	20525	836.5	Sample 1	22.00	23.50	1.413			-0.08	0.151	0.213
	LTE Band 5_Ant 0	10M	QPSK	1	0	Right Tilted	0mm	20525	836.5	Sample 1	23.00	24.50	1.413			0.05	0.113	0.160
	LTE Band 5_Ant 0	10M	QPSK	25	25	Right Tilted	0mm	20525	836.5	Sample 1	22.00	23.50	1.413			0.06	0.097	0.137
	LTE Band 5_Ant 0	10M	QPSK	1	0	Left Cheek	0mm	20525	836.5	Sample 1	23.00	24.50	1.413			-0.09	0.171	0.242
	LTE Band 5_Ant 0	10M	QPSK	25	25	Left Cheek	0mm	20525	836.5	Sample 1	22.00	23.50	1.413			-0.08	0.142	0.201
	LTE Band 5_Ant 0	10M	QPSK	1	0	Left Tilted	0mm	20525	836.5	Sample 1	23.00	24.50	1.413			0.13	0.099	0.140
	LTE Band 5_Ant 0	10M	QPSK	25	25	Left Tilted	0mm	20525	836.5	Sample 1	22.00	23.50	1.413			0.12	0.081	0.114
	LTE Band 5_Ant 0	10M	QPSK	1	0	Right Cheek	0mm	20525	836.5	Sample 2	23.00	24.50	1.413			0.01	0.163	0.230
	LTE Band 7_Ant 1	20M	QPSK	1	0	Right Cheek	0mm	21100	2535	Sample 1	22.99	24.50	1.416			0.18	0.138	0.195
	LTE Band 7_Ant 1	20M	QPSK	50	50	Right Cheek	0mm	21100	2535	Sample 1	22.00	23.50	1.413			0.16	0.112	0.158
	LTE Band 7_Ant 1	20M	QPSK	1	0	Right Tilted	0mm	21100	2535	Sample 1	22.99	24.50	1.416			-0.1	0.124	0.176
	LTE Band 7_Ant 1	20M	QPSK	50	50	Right Tilted	0mm	21100	2535	Sample 1	22.00	23.50	1.413			0.07	0.106	0.150
06	LTE Band 7_Ant 1	20M	QPSK	1	0	Left Cheek	0mm	21100	2535	Sample 1	22.99	24.50	1.416			0.12	0.270	0.382
	LTE Band 7_Ant 1	20M	QPSK	1	0	Left Cheek	0mm	20850	2510	Sample 1	22.94	24.50	1.432			-0.1	0.266	0.381
	LTE Band 7_Ant 1	20M	QPSK	1	0	Left Cheek	0mm	21350	2560	Sample 1	22.94	24.50	1.432			0.01	0.255	0.365
	LTE Band 7_Ant 1	20M	QPSK	50	50	Left Cheek	0mm	21100	2535	Sample 1	22.00	23.50	1.413			-0.15	0.213	0.301
	LTE Band 7_Ant 1	20M	QPSK	1	0	Left Tilted	0mm	21100	2535	Sample 1	22.99	24.50	1.416			0.19	0.093	0.132
	LTE Band 7_Ant 1	20M	QPSK	50	50	Left Tilted	0mm	21100	2535	Sample 1	22.00	23.50	1.413			0.07	0.069	0.097
	LTE Band 7_Ant 1	20M	QPSK	1	0	Left Cheek	0mm	21100	2535	Sample 2	22.99	24.50	1.416			0.19	0.254	0.360
07	LTE Band 12_Ant 0	10M	QPSK	1	0	Right Cheek	0mm	23095	707.5	Sample 1	22.68	24.50	1.521			0.14	0.087	0.132
	LTE Band 12_Ant 0	10M	QPSK	25	12	Right Cheek	0mm	23095	707.5	Sample 1	21.63	23.50	1.538			0.08	0.077	0.118
	LTE Band 12_Ant 0	10M	QPSK	1	0	Right Tilted	0mm	23095	707.5	Sample 1	22.68	24.50	1.521			-0.17	0.058	0.088
	LTE Band 12_Ant 0	10M	QPSK	25	12	Right Tilted	0mm	23095	707.5	Sample 1	21.63	23.50	1.538			-0.03	0.040	0.062
	LTE Band 12_Ant 0	10M	QPSK	1	0	Left Cheek	0mm	23095	707.5	Sample 1	22.68	24.50	1.521			0.14	0.073	0.111
	LTE Band 12_Ant 0	10M	QPSK	25	12	Left Cheek	0mm	23095	707.5	Sample 1	21.63	23.50	1.538			0.11	0.068	0.105
	LTE Band 12_Ant 0	10M	QPSK	1	0	Left Tilted	0mm	23095	707.5	Sample 1	22.68	24.50	1.521			-0.05	0.001	0.002
	LTE Band 12_Ant 0	10M	QPSK	25	12	Left Tilted	0mm	23095	707.5	Sample 1	21.63	23.50	1.538			0.18	0.001	0.002
	LTE Band 12_Ant 0	10M	QPSK	1	0	Right Cheek	0mm	23095	707.5	Sample 2	22.68	24.50	1.521			-0.18	0.085	0.129
	LTE Band 38_Ant 1	20M	QPSK	1	0	Right Cheek	0mm	38000	2595	Sample 1	22.84	24.50	1.466	62.9	1.006	-0.15	0.086	0.127
	LTE Band 38_Ant 1	20M	QPSK	50	24	Right Cheek	0mm	38000	2595	Sample 1	21.86	23.50	1.459	62.9	1.006	-0.15	0.068	0.100
	LTE Band 38_Ant 1	20M	QPSK	1	0	Right Tilted	0mm	38000	2595	Sample 1	22.84	24.50	1.466	62.9	1.006	0.11	0.081	0.119
	LTE Band 38_Ant 1	20M	QPSK	50	24	Right Tilted	0mm	38000	2595	Sample 1	21.86	23.50	1.459	62.9	1.006	-0.08	0.055	0.081
08	LTE Band 38_Ant 1	20M	QPSK	1	0	Left Cheek	0mm	38000	2595	Sample 1	22.84	24.50	1.466	62.9	1.006	-0.14	0.158	0.233
	LTE Band 38_Ant 1	20M	QPSK	50	24	Left Cheek	0mm	38000	2595	Sample 1	21.86	23.50	1.459	62.9	1.006	-0.08	0.126	0.185
	LTE Band 38_Ant 1	20M	QPSK	1	0	Left Tilted	0mm	38000	2595	Sample 1	22.84	24.50	1.466	62.9	1.006	-0.04	0.048	0.071
	LTE Band 38_Ant 1	20M	QPSK	50	24	Left Tilted	0mm	38000	2595	Sample 1	21.86	23.50	1.459	62.9	1.006	-0.08	0.040	0.059
	LTE Band 38_Ant 1	20M	QPSK	1	0	Left Cheek	0mm	38000	2595	Sample 2	22.84	24.50	1.466	62.9	1.006	-0.15	0.145	0.214
	ULCA 38C_Ant 1	20M	QPSK	1	0	Left Cheek	0mm	38150+37952	2610	Sample 1	22.55	24.50	1.567	62.9	1.006	0.14	0.137	0.216

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4	1	2412	Sample 1	17.10	17.50	1.096	100	1.000	0.08	0.299	0.328
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4	1	2412	Sample 1	17.10	17.50	1.096	100	1.000	0.01	0.199	0.218
09	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 4	1	2412	Sample 1	17.10	17.50	1.096	100	1.000	-0.15	0.530	0.581
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 4	1	2412	Sample 1	17.10	17.50	1.096	100	1.000	-0.08	0.376	0.412
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 4	1	2412	Sample 2	17.10	17.50	1.096	100	1.000	-0.08	0.506	0.555
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	-0.18	0.685	0.718
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	0.1	0.736	0.772
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	0.12	0.983	1.031
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 4	56	5280	Sample 1	18.90	19.00	1.023	97.54	1.025	-0.17	0.861	0.903
10	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	0.14	1.000	1.049
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 4	56	5280	Sample 1	18.90	19.00	1.023	97.54	1.025	-0.05	0.803	0.842
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 4	60	5300	Sample 2	18.90	19.00	1.023	97.54	1.025	0.14	0.988	1.036
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 4	56	5280	Sample 2	18.90	19.00	1.023	97.54	1.025	0.01	0.812	0.852
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	0.17	0.354	0.430
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	-0.05	0.570	0.692
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	0.01	0.650	0.789
11	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	0.17	0.900	1.092
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4	110	5550	Sample 1	18.70	19.00	1.072	94.83	1.055	-0.17	0.795	0.899
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	138	5690	Sample 2	18.60	19.00	1.096	90.33	1.107	0.04	0.891	1.081
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4	110	5550	Sample 2	18.70	19.00	1.072	94.83	1.055	-0.17	0.855	0.967
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	-0.15	0.545	0.630
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	0.19	0.635	0.735
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	0.07	0.648	0.750
12	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	-0.16	0.824	0.953
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4	159	5795	Sample 1	18.60	19.00	1.096	94.83	1.055	-0.18	0.765	0.885
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4	151	5755	Sample 2	18.60	19.00	1.096	94.83	1.055	0.03	0.804	0.930
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4	159	5795	Sample 2	18.60	19.00	1.096	94.83	1.055	-0.08	0.727	0.841

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 4	78	2480	Sample 1	14.18	14.50	1.077	76.88	1.084	-0.08	0.001	0.001
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 4	78	2480	Sample 1	14.18	14.50	1.077	76.88	1.084	-0.08	0.038	0.044
13	Bluetooth	1Mbps	Left Cheek	0mm	Ant 4	78	2480	Sample 1	14.18	14.50	1.077	76.88	1.084	-0.12	0.063	0.074
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 4	78	2480	Sample 1	14.18	14.50	1.077	76.88	1.084	0.1	0.043	0.050
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 4	78	2480	Sample 2	14.18	14.50	1.077	76.88	1.084	-0.12	0.054	0.063



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
14	GSM850_Ant 0	GPRS (1 Tx slot)	Front	10mm	251	848.8	Sample 1	32.24	34.00	1.500	0.17	0.106	0.159
	GSM850_Ant 0	GPRS (1 Tx slot)	Back	10mm	251	848.8	Sample 1	32.24	34.00	1.500	0	0.219	0.328
	GSM850_Ant 0	GPRS (1 Tx slot)	Left Side	10mm	251	848.8	Sample 1	32.24	34.00	1.500	-0.04	0.059	0.088
	GSM850_Ant 0	GPRS (1 Tx slot)	Right Side	10mm	251	848.8	Sample 1	32.24	34.00	1.500	-0.08	0.092	0.138
	GSM850_Ant 0	GPRS (1 Tx slot)	Bottom Side	10mm	251	848.8	Sample 1	32.24	34.00	1.500	-0.13	0.147	0.220
	GSM850_Ant 0	GPRS (1 Tx slot)	Back	10mm	251	848.8	Sample 2	32.24	34.00	1.500	-0.15	0.209	0.313
15	GSM1900_Ant 1	GPRS (3 Tx slots)	Front	10mm	810	1909.8	Sample 1	24.87	26.50	1.455	-0.03	0.182	0.265
	GSM1900_Ant 1	GPRS (3 Tx slots)	Back	10mm	810	1909.8	Sample 1	24.87	26.50	1.455	0	0.284	0.413
	GSM1900_Ant 1	GPRS (3 Tx slots)	Left Side	10mm	810	1909.8	Sample 1	24.87	26.50	1.455	-0.07	0.107	0.156
	GSM1900_Ant 1	GPRS (3 Tx slots)	Right Side	10mm	810	1909.8	Sample 1	24.87	26.50	1.455	0.05	0.053	0.077
	GSM1900_Ant 1	GPRS (3 Tx slots)	Bottom Side	10mm	810	1909.8	Sample 1	24.87	26.50	1.455	-0.11	0.236	0.343
	GSM1900_Ant 1	GPRS (3 Tx slots)	Back	10mm	810	1909.8	Sample 2	24.87	26.50	1.455	-0.08	0.269	0.392

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
16	WCDMA V_Ant 0	RMC 12.2Kbps	Front	10mm	4132	826.4	Sample 1	22.02	23.50	1.406	-0.08	0.104	0.146
	WCDMA V_Ant 0	RMC 12.2Kbps	Back	10mm	4132	826.4	Sample 1	22.02	23.50	1.406	0	0.234	0.329
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Side	10mm	4132	826.4	Sample 1	22.02	23.50	1.406	-0.08	0.057	0.080
	WCDMA V_Ant 0	RMC 12.2Kbps	Right Side	10mm	4132	826.4	Sample 1	22.02	23.50	1.406	0.1	0.108	0.152
	WCDMA V_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	4132	826.4	Sample 1	22.02	23.50	1.406	-0.18	0.138	0.194
	WCDMA V_Ant 0	RMC 12.2Kbps	Back	10mm	4132	826.4	Sample 2	22.02	23.50	1.406	-0.08	0.211	0.297



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 1	20M	QPSK	1	99	Front	10mm	19100	1900	Sample 1	23.00	24.50	1.413			0.15	0.301	0.425
	LTE Band 2_Ant 1	20M	QPSK	50	50	Front	10mm	19100	1900	Sample 1	21.89	23.50	1.449			-0.09	0.252	0.365
17	LTE Band 2_Ant 1	20M	QPSK	1	99	Back	10mm	19100	1900	Sample 1	23.00	24.50	1.413			-0.04	0.450	0.636
	LTE Band 2_Ant 1	20M	QPSK	50	50	Back	10mm	19100	1900	Sample 1	21.89	23.50	1.449			-0.05	0.382	0.553
	LTE Band 2_Ant 1	20M	QPSK	1	99	Left Side	10mm	19100	1900	Sample 1	23.00	24.50	1.413			-0.08	0.170	0.240
	LTE Band 2_Ant 1	20M	QPSK	50	50	Left Side	10mm	19100	1900	Sample 1	21.89	23.50	1.449			0.16	0.143	0.207
	LTE Band 2_Ant 1	20M	QPSK	1	99	Right Side	10mm	19100	1900	Sample 1	23.00	24.50	1.413			0.05	0.080	0.113
	LTE Band 2_Ant 1	20M	QPSK	50	50	Right Side	10mm	19100	1900	Sample 1	21.89	23.50	1.449			0.05	0.064	0.093
	LTE Band 2_Ant 1	20M	QPSK	1	99	Bottom Side	10mm	19100	1900	Sample 1	23.00	24.50	1.413			-0.03	0.445	0.629
	LTE Band 2_Ant 1	20M	QPSK	50	50	Bottom Side	10mm	19100	1900	Sample 1	21.89	23.50	1.449			-0.15	0.350	0.507
	LTE Band 2_Ant 1	20M	QPSK	1	99	Back	10mm	19100	1900	Sample 2	23.00	24.50	1.413			-0.08	0.445	0.629
	LTE Band 5_Ant 0	10M	QPSK	1	0	Front	10mm	20525	836.5	Sample 1	23.00	24.50	1.413			0.1	0.149	0.210
	LTE Band 5_Ant 0	10M	QPSK	25	25	Front	10mm	20525	836.5	Sample 1	22.00	23.50	1.413			0.12	0.124	0.175
18	LTE Band 5_Ant 0	10M	QPSK	1	0	Back	10mm	20525	836.5	Sample 1	23.00	24.50	1.413			0.02	0.283	0.400
	LTE Band 5_Ant 0	10M	QPSK	25	25	Back	10mm	20525	836.5	Sample 1	22.00	23.50	1.413			0.08	0.230	0.325
	LTE Band 5_Ant 0	10M	QPSK	1	0	Left Side	10mm	20525	836.5	Sample 1	23.00	24.50	1.413			-0.17	0.076	0.107
	LTE Band 5_Ant 0	10M	QPSK	25	25	Left Side	10mm	20525	836.5	Sample 1	22.00	23.50	1.413			-0.03	0.067	0.095
	LTE Band 5_Ant 0	10M	QPSK	1	0	Right Side	10mm	20525	836.5	Sample 1	23.00	24.50	1.413			0.14	0.154	0.218
	LTE Band 5_Ant 0	10M	QPSK	25	25	Right Side	10mm	20525	836.5	Sample 1	22.00	23.50	1.413			0.11	0.132	0.186
	LTE Band 5_Ant 0	10M	QPSK	1	0	Bottom Side	10mm	20525	836.5	Sample 1	23.00	24.50	1.413			-0.05	0.218	0.308
	LTE Band 5_Ant 0	10M	QPSK	25	25	Bottom Side	10mm	20525	836.5	Sample 1	22.00	23.50	1.413			0.18	0.172	0.243
	LTE Band 5_Ant 0	10M	QPSK	1	0	Back	10mm	20525	836.5	Sample 2	23.00	24.50	1.413			0.18	0.274	0.265
	LTE Band 7_Ant 1	20M	QPSK	1	0	Front	10mm	21100	2535	Sample 1	22.99	24.50	1.416			0.16	0.399	0.565
	LTE Band 7_Ant 1	20M	QPSK	50	50	Front	10mm	21100	2535	Sample 1	22.00	23.50	1.413			0.13	0.306	0.432
19	LTE Band 7_Ant 1	20M	QPSK	1	0	Back	10mm	21100	2535	Sample 1	22.99	24.50	1.416			0	0.555	0.786
	LTE Band 7_Ant 1	20M	QPSK	50	50	Back	10mm	21100	2535	Sample 1	22.00	23.50	1.413			-0.03	0.424	0.599
	LTE Band 7_Ant 1	20M	QPSK	1	0	Left Side	10mm	21100	2535	Sample 1	22.99	24.50	1.416			0	0.289	0.409
	LTE Band 7_Ant 1	20M	QPSK	50	50	Left Side	10mm	21100	2535	Sample 1	22.00	23.50	1.413			0.01	0.225	0.318
	LTE Band 7_Ant 1	20M	QPSK	1	0	Right Side	10mm	21100	2535	Sample 1	22.99	24.50	1.416			-0.01	0.089	0.126
	LTE Band 7_Ant 1	20M	QPSK	50	50	Right Side	10mm	21100	2535	Sample 1	22.00	23.50	1.413			-0.06	0.066	0.093
	LTE Band 7_Ant 1	20M	QPSK	1	0	Bottom Side	10mm	21100	2535	Sample 1	22.99	24.50	1.416			-0.04	0.347	0.491
	LTE Band 7_Ant 1	20M	QPSK	50	50	Bottom Side	10mm	21100	2535	Sample 1	22.00	23.50	1.413			-0.09	0.269	0.380
	LTE Band 7_Ant 1	20M	QPSK	1	0	Back	10mm	21100	2535	Sample 2	22.99	24.50	1.416			-0.08	0.546	0.773
	LTE Band 12_Ant 0	10M	QPSK	1	0	Front	10mm	23095	707.5	Sample 1	22.68	24.50	1.521			0.08	0.105	0.160
	LTE Band 12_Ant 0	10M	QPSK	25	12	Front	10mm	23095	707.5	Sample 1	21.63	23.50	1.538			0.01	0.089	0.137
20	LTE Band 12_Ant 0	10M	QPSK	1	0	Back	10mm	23095	707.5	Sample 1	22.68	24.50	1.521			0	0.207	0.315
	LTE Band 12_Ant 0	10M	QPSK	25	12	Back	10mm	23095	707.5	Sample 1	21.63	23.50	1.538			0.03	0.175	0.269
	LTE Band 12_Ant 0	10M	QPSK	1	0	Left Side	10mm	23095	707.5	Sample 1	22.68	24.50	1.521			-0.08	0.094	0.143
	LTE Band 12_Ant 0	10M	QPSK	25	12	Left Side	10mm	23095	707.5	Sample 1	21.63	23.50	1.538			-0.08	0.080	0.123
	LTE Band 12_Ant 0	10M	QPSK	1	0	Right Side	10mm	23095	707.5	Sample 1	22.68	24.50	1.521			0.1	0.151	0.230
	LTE Band 12_Ant 0	10M	QPSK	25	12	Right Side	10mm	23095	707.5	Sample 1	21.63	23.50	1.538			-0.18	0.129	0.198
	LTE Band 12_Ant 0	10M	QPSK	1	0	Bottom Side	10mm	23095	707.5	Sample 1	22.68	24.50	1.521			0.1	0.080	0.122
	LTE Band 12_Ant 0	10M	QPSK	25	12	Bottom Side	10mm	23095	707.5	Sample 1	21.63	23.50	1.538			0.12	0.071	0.109
	LTE Band 12_Ant 0	10M	QPSK	1	0	Back	10mm	23095	707.5	Sample 2	22.68	24.50	1.521			-0.13	0.179	0.272
	LTE Band 38_Ant 1	20M	QPSK	1	0	Front	10mm	38000	2595	Sample 1	22.84	24.50	1.466	62.9	1.006	0.18	0.251	0.370
	LTE Band 38_Ant 1	20M	QPSK	50	24	Front	10mm	38000	2595	Sample 1	21.86	23.50	1.459	62.9	1.006	-0.17	0.186	0.273
21	LTE Band 38_Ant 1	20M	QPSK	1	0	Back	10mm	38000	2595	Sample 1	22.84	24.50	1.466	62.9	1.006	0.09	0.295	0.435
	LTE Band 38_Ant 1	20M	QPSK	50	24	Back	10mm	38000	2595	Sample 1	21.86	23.50	1.459	62.9	1.006	-0.05	0.244	0.358
	LTE Band 38_Ant 1	20M	QPSK	1	0	Left Side	10mm	38000	2595	Sample 1	22.84	24.50	1.466	62.9	1.006	0	0.163	0.240
	LTE Band 38_Ant 1	20M	QPSK	50	24	Left Side	10mm	38000	2595	Sample 1	21.86	23.50	1.459	62.9	1.006	-0.13	0.128	0.188
	LTE Band 38_Ant 1	20M	QPSK	1	0	Right Side	10mm	38000	2595	Sample 1	22.84	24.50	1.466	62.9	1.006	-0.01	0.054	0.080



	LTE Band 38_Ant 1	20M	QPSK	50	24	Right Side	10mm	38000	2595	Sample 1	21.86	23.50	1.459	62.9	1.006	-0.09	0.042	0.062
	LTE Band 38_Ant 1	20M	QPSK	1	0	Bottom Side	10mm	38000	2595	Sample 1	22.84	24.50	1.466	62.9	1.006	0.05	0.222	0.327
	LTE Band 38_Ant 1	20M	QPSK	50	24	Bottom Side	10mm	38000	2595	Sample 1	21.86	23.50	1.459	62.9	1.006	0.02	0.180	0.264
	LTE Band 38_Ant 1	20M	QPSK	1	0	Back	10mm	38000	2595	Sample 2	22.84	24.50	1.466	62.9	1.006	-0.03	0.285	0.420
	ULCA 38C_Ant 1	20M	QPSK	1	0	Back	10mm	38150+37952	2610	Sample 1	22.55	24.50	1.567	62.9	1.006	0.08	0.271	0.427

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4	1	2412	Sample 1	17.10	17.50	1.096	100	1.000	0.08	0.088	0.096
22	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4	1	2412	Sample 1	17.10	17.50	1.096	100	1.000	-0.15	0.150	0.164
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 4	1	2412	Sample 1	17.10	17.50	1.096	100	1.000	0.01	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 4	1	2412	Sample 1	17.10	17.50	1.096	100	1.000	0.03	0.074	0.081
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 4	1	2412	Sample 1	17.10	17.50	1.096	100	1.000	-0.08	0.048	0.053
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4	1	2412	Sample 2	17.10	17.50	1.096	100	1.000	-0.08	0.149	0.163

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 4	78	2480	Sample 1	14.18	14.50	1.077	76.88	1.084	-0.01	0.001	0.001
23	Bluetooth	1Mbps	Back	10mm	Ant 4	78	2480	Sample 1	14.18	14.50	1.077	76.88	1.084	-0.16	0.025	0.029
	Bluetooth	1Mbps	Left Side	10mm	Ant 4	78	2480	Sample 1	14.18	14.50	1.077	76.88	1.084	-0.08	0.001	0.001
	Bluetooth	1Mbps	Right Side	10mm	Ant 4	78	2480	Sample 1	14.18	14.50	1.077	76.88	1.084	0.05	0.001	0.001
	Bluetooth	1Mbps	Top Side	10mm	Ant 4	78	2480	Sample 1	14.18	14.50	1.077	76.88	1.084	0.06	0.001	0.001
	Bluetooth	1Mbps	Back	10mm	Ant 4	78	2480	Sample 2	14.18	14.50	1.077	76.88	1.084	-0.09	0.020	0.023



15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 0	GPRS (1 Tx slot)	Front	15mm	251	848.8	Sample 1	32.24	34.00	1.500	-0.13	0.092	0.138
24	GSM850_Ant 0	GPRS (1 Tx slot)	Back	15mm	251	848.8	Sample 1	32.24	34.00	1.500	0	0.140	0.210
	GSM850_Ant 0	GPRS (1 Tx slot)	Back	15mm	251	848.8	Sample 2	32.24	34.00	1.500	0.14	0.133	0.199
	GSM1900_Ant 1	GPRS (3 Tx slots)	Front	15mm	810	1909.8	Sample 1	24.87	26.50	1.455	-0.15	0.120	0.175
25	GSM1900_Ant 1	GPRS (3 Tx slots)	Back	15mm	810	1909.8	Sample 1	24.87	26.50	1.455	-0.04	0.152	0.221
	GSM1900_Ant 1	GPRS (3 Tx slots)	Back	15mm	810	1909.8	Sample 2	24.87	26.50	1.455	0.17	0.142	0.207

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V_Ant 0	RMC 12.2Kbps	Front	15mm	4132	826.4	Sample 1	22.02	23.50	1.406	0.13	0.103	0.145
26	WCDMA V_Ant 0	RMC 12.2Kbps	Back	15mm	4132	826.4	Sample 1	22.02	23.50	1.406	0	0.173	0.243
	WCDMA V_Ant 0	RMC 12.2Kbps	Back	15mm	4132	826.4	Sample 2	22.02	23.50	1.406	0.01	0.168	0.236

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 1	20M	QPSK	1	99	Front	15mm	19100	1900	Sample 1	23.00	24.50	1.413			-0.06	0.139	0.196
	LTE Band 2_Ant 1	20M	QPSK	50	50	Front	15mm	19100	1900	Sample 1	21.89	23.50	1.449			-0.14	0.108	0.156
27	LTE Band 2_Ant 1	20M	QPSK	1	99	Back	15mm	19100	1900	Sample 1	23.00	24.50	1.413			0.06	0.239	0.338
	LTE Band 2_Ant 1	20M	QPSK	50	50	Back	15mm	19100	1900	Sample 1	21.89	23.50	1.449			0.01	0.162	0.235
	LTE Band 2_Ant 1	20M	QPSK	1	99	Back	15mm	19100	1900	Sample 2	23.00	24.50	1.413			-0.17	0.221	0.312
	LTE Band 5_Ant 0	10M	QPSK	1	0	Front	15mm	20525	836.5	Sample 1	23.00	24.50	1.413			-0.16	0.135	0.191
	LTE Band 5_Ant 0	10M	QPSK	25	25	Front	15mm	20525	836.5	Sample 1	22.00	23.50	1.413			-0.12	0.109	0.154
28	LTE Band 5_Ant 0	10M	QPSK	1	0	Back	15mm	20525	836.5	Sample 1	23.00	24.50	1.413			-0.02	0.197	0.278
	LTE Band 5_Ant 0	10M	QPSK	25	25	Back	15mm	20525	836.5	Sample 1	22.00	23.50	1.413			-0.02	0.162	0.229
	LTE Band 5_Ant 0	10M	QPSK	1	0	Back	15mm	20525	836.5	Sample 2	23.00	24.50	1.413			-0.01	0.185	0.261
	LTE Band 7_Ant 1	20M	QPSK	1	0	Front	15mm	21100	2535	Sample 1	22.99	24.50	1.416			-0.13	0.165	0.234
	LTE Band 7_Ant 1	20M	QPSK	50	50	Front	15mm	21100	2535	Sample 1	22.00	23.50	1.413			0.08	0.137	0.194
29	LTE Band 7_Ant 1	20M	QPSK	1	0	Back	15mm	21100	2535	Sample 1	22.99	24.50	1.416			-0.16	0.242	0.343
	LTE Band 7_Ant 1	20M	QPSK	50	50	Back	15mm	21100	2535	Sample 1	22.00	23.50	1.413			0.01	0.157	0.222
	LTE Band 7_Ant 1	20M	QPSK	1	0	Back	15mm	21100	2535	Sample 2	22.99	24.50	1.416			0.05	0.229	0.324
	LTE Band 12_Ant 0	10M	QPSK	1	0	Front	15mm	23095	707.5	Sample 1	22.68	24.50	1.521			-0.01	0.123	0.187
	LTE Band 12_Ant 0	10M	QPSK	25	12	Front	15mm	23095	707.5	Sample 1	21.63	23.50	1.538			0	0.106	0.163
30	LTE Band 12_Ant 0	10M	QPSK	1	0	Back	15mm	23095	707.5	Sample 1	22.68	24.50	1.521			-0.01	0.192	0.292
	LTE Band 12_Ant 0	10M	QPSK	25	12	Back	15mm	23095	707.5	Sample 1	21.63	23.50	1.538			-0.06	0.164	0.252
	LTE Band 12_Ant 0	10M	QPSK	1	0	Back	15mm	23095	707.5	Sample 2	22.68	24.50	1.521			-0.09	0.170	0.258
	LTE Band 38_Ant 1	20M	QPSK	1	0	Front	15mm	38000	2595	Sample 1	22.84	24.50	1.466	62.9	1.006	0.03	0.122	0.180
	LTE Band 38_Ant 1	20M	QPSK	50	24	Front	15mm	38000	2595	Sample 1	21.86	23.50	1.459	62.9	1.006	-0.13	0.093	0.136
31	LTE Band 38_Ant 1	20M	QPSK	1	0	Back	15mm	38000	2595	Sample 1	22.84	24.50	1.466	62.9	1.006	-0.1	0.135	0.199
	LTE Band 38_Ant 1	20M	QPSK	50	24	Back	15mm	38000	2595	Sample 1	21.86	23.50	1.459	62.9	1.006	-0.15	0.099	0.145
	LTE Band 38_Ant 1	20M	QPSK	1	0	Back	15mm	38000	2595	Sample 2	22.84	24.50	1.466	62.9	1.006	0.13	0.124	0.183
	ULCA 38C_Ant 1	20M	QPSK	1	0	Back	15mm	38150+37952	2610	Sample 1	22.55	24.50	1.567	62.9	1.006	-0.09	0.124	0.195



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 4	1	2412	Sample 1	17.10	17.50	1.096	100	1.000	0.1	0.045	0.049
32	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 4	1	2412	Sample 1	17.10	17.50	1.096	100	1.000	-0.04	0.078	0.086
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 4	1	2412	Sample 2	17.10	17.50	1.096	100	1.000	-0.18	0.077	0.084
	WLAN5GHz	802.11a 6Mbps	Front	15mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	0.12	0.146	0.153
33	WLAN5GHz	802.11a 6Mbps	Back	15mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	-0.15	0.830	0.871
	WLAN5GHz	802.11a 6Mbps	Back	15mm	Ant 4	56	5280	Sample 1	18.90	19.00	1.023	97.54	1.025	-0.17	0.729	0.765
	WLAN5GHz	802.11a 6Mbps	Back	15mm	Ant 4	60	5300	Sample 2	18.90	19.00	1.023	97.54	1.025	0.14	0.761	0.798
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	0.11	0.140	0.170
34	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	0.18	0.648	0.787
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 4	138	5690	Sample 2	18.60	19.00	1.096	90.33	1.107	-0.17	0.637	0.773
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	0.17	0.120	0.139
35	WLAN5GHz	802.11n-HT40 MCS0	Back	15mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	0.15	0.657	0.760
	WLAN5GHz	802.11n-HT40 MCS0	Back	15mm	Ant 4	151	5755	Sample 2	18.60	19.00	1.096	94.83	1.055	0.01	0.650	0.752

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	15mm	Ant 4	78	2480	Sample 1	14.18	14.50	1.077	76.88	1.084	-0.17	0.001	0.001
36	Bluetooth	1Mbps	Back	15mm	Ant 4	78	2480	Sample 1	14.18	14.50	1.077	76.88	1.084	0.14	0.011	0.013
	Bluetooth	1Mbps	Back	15mm	Ant 4	78	2480	Sample 2	14.18	14.50	1.077	76.88	1.084	0.05	0.001	0.001



15.4 Product Specific SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	0.16	0.485	0.509
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	-0.1	2.180	2.287
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 4	56	5280	Sample 1	18.90	19.00	1.023	97.54	1.025	0.07	2.400	2.517
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	0.18	0.115	0.121
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	-0.1	0.130	0.136
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	0.01	1.720	1.804
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 4	60	5300	Sample 2	18.90	19.00	1.023	97.54	1.025	-0.12	2.190	2.297
37	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 4	56	5280	Sample 2	18.90	19.00	1.023	97.54	1.025	0.1	2.410	2.528
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	0.05	0.488	0.592
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	0.06	1.790	2.173
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	110	5550	Sample 1	18.70	19.00	1.072	94.83	1.055	0.18	1.720	1.944
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	-0.09	0.050	0.061
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	-0.08	0.094	0.114
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	0.13	1.310	1.590
38	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4	138	5690	Sample 2	18.60	19.00	1.096	90.33	1.107	0.11	2.320	2.816
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	110	5550	Sample 2	18.70	19.00	1.072	94.83	1.055	0.18	2.120	2.397
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	0.1	0.523	0.605
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	-0.17	2.200	2.545
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	159	5795	Sample 1	18.60	19.00	1.096	94.83	1.055	0.03	2.260	2.614
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	0.04	0.082	0.095
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	-0.01	0.154	0.178
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	-0.08	1.400	1.619
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	151	5755	Sample 2	18.60	19.00	1.096	94.83	1.055	-0.07	2.110	2.441
39	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	159	5795	Sample 2	18.60	19.00	1.096	94.83	1.055	0.15	2.430	2.811

<NFC SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Freq. (MHz)	Sample	Power Drift (dB)	Measured 10g SAR (W/kg)
	NFC	ASK	Front	0mm	13.56	Sample 1	0	<0.001
	NFC	ASK	Back	0mm	13.56	Sample 1	0	<0.001
	NFC	ASK	Left Side	0mm	13.56	Sample 1	0	<0.001
	NFC	ASK	Right Side	0mm	13.56	Sample 1	0	<0.001
40	NFC	ASK	Top Side	0mm	13.56	Sample 1	0	<0.001
	NFC	ASK	Top Side	0mm	13.56	Sample 2	0	<0.001



15.5 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	0.14	1.000	-	1.049
2nd	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	0.11	0.980	1.02	1.028
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	0.17	0.900	-	1.092
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	138	5690	Sample 1	18.60	19.00	1.096	90.33	1.107	0.14	0.894	1.01	1.085
1st	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	-0.16	0.824	-	0.953
2nd	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4	151	5755	Sample 1	18.60	19.00	1.096	94.83	1.055	0.16	0.798	1.03	0.923
1st	WLAN5GHz	802.11a 6Mbps	Back	15mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	-0.15	0.830	-	0.871
2nd	WLAN5GHz	802.11a 6Mbps	Back	15mm	Ant 4	60	5300	Sample 1	18.90	19.00	1.023	97.54	1.025	0.08	0.824	1.01	0.864

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 4	56	5280	Sample 2	18.90	19.00	1.023	97.54	1.025	0.1	2.410	-	2.528
2nd	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 4	56	5280	Sample 2	18.90	19.00	1.023	97.54	1.025	0.05	2.370	1.02	2.486
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4	138	5690	Sample 2	18.60	19.00	1.096	90.33	1.107	0.11	2.320	-	2.816
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4	138	5690	Sample 2	18.60	19.00	1.096	90.33	1.107	0.02	2.210	1.05	2.683
1st	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	159	5795	Sample 2	18.60	19.00	1.096	94.83	1.055	0.15	2.430	-	2.811
2nd	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	159	5795	Sample 2	18.60	19.00	1.096	94.83	1.055	0.05	2.370	1.03	2.742

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Hotspot	Body-worn	Product Specific
1.	WWAN + 2.4GHz WLAN Ant 4	Yes	Yes	Yes	
2.	WWAN + 5GHz WLAN Ant 4 + Bluetooth Ant 4	Yes	Yes	Yes	
3.	WLAN5GHz Ant 4 + NFC				Yes

General Note:

- This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications.
- The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

16.1 Head Exposure Conditions

Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
	Maximum WWAN	WLAN2.4GHz Ant 4	WLAN5GHz Ant 4	Bluetooth Ant 4		
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
Right Cheek	0.244	0.328	0.718	0.001	0.572	0.963
Right Tilted	0.176	0.218	0.772	0.044	0.394	0.992
Left Cheek	0.382	0.581	1.031	0.074	0.963	1.487
Left Tilted	0.140	0.412	1.092	0.050	0.552	1.282

16.2 Hotspot Exposure Conditions

Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
	Maximum WWAN	WLAN2.4GHz Ant 4	WLAN5GHz Ant 4	Bluetooth Ant 4		
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
Front	0.565	0.096		0.001	0.661	0.566
Back	0.786	0.164		0.029	0.950	0.815
Left side	0.409	0.001		0.001	0.410	0.410
Right side	0.230	0.081		0.001	0.311	0.231
Top side		0.053		0.001	0.053	0.001
Bottom side	0.629				0.629	0.629

16.3 Body-Worn Accessory Exposure Conditions

Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
	Maximum WWAN	WLAN2.4GHz Ant 4	WLAN5GHz Ant 4	Bluetooth Ant 4		
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
Front	0.234	0.049	0.170	0.001	0.283	0.405
Back	0.343	0.086	0.871	0.013	0.429	1.227

16.4 Product Specific Exposure Conditions

Exposure Position	1	2	1+2 Summed 10g SAR (W/kg)
	WLAN5GHz Ant 4	NFC	
	10g SAR (W/kg)	10g SAR (W/kg)	
Front	0.605	0.001	0.606
Back	2.816	0.001	2.817
Left side	0.121	0.001	0.122
Right side	0.178	0.001	0.179
Top side	1.804	0.001	1.805
Bottom side			0.000

Test Engineer : John Fan, Kevin Guo, Jordar Jhuang and Andy Chiang



17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [8] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [9] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.