


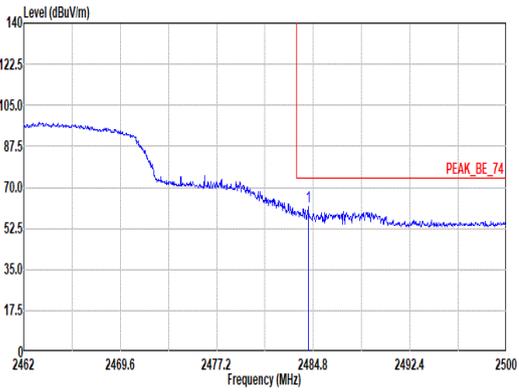





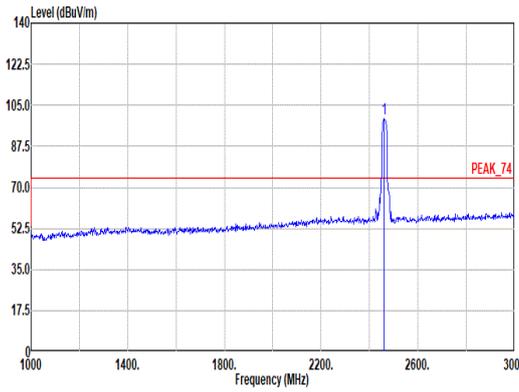


Mode	20																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																	
ANT	4																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) showing a peak at 2484.8 MHz labeled PEAK_BE_74.</p> <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.38</td> <td>61.75</td> <td>74.00</td> <td>-12.25</td> <td>46.77</td> <td>27.50</td> <td>7.86</td> <td>30.30</td> <td>9.92</td> <td>300</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2484.38	61.75	74.00	-12.25	46.77	27.50	7.86	30.30	9.92	300	80	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) showing a peak at 2462.00 MHz labeled PEAK_74.</p> <p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.18</td> <td>-----</td> <td>-----</td> <td>84.35</td> <td>27.40</td> <td>7.82</td> <td>30.31</td> <td>9.92</td> <td>300</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2462.00	99.18	-----	-----	84.35	27.40	7.82	30.31	9.92	300	80	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2484.38	61.75	74.00	-12.25	46.77	27.50	7.86	30.30	9.92	300	80	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2462.00	99.18	-----	-----	84.35	27.40	7.82	30.31	9.92	300	80	PEAK																																																																						
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) showing an average level at 2483.58 MHz labeled AVG_BE_54.</p> <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.58</td> <td>47.16</td> <td>54.00</td> <td>-6.84</td> <td>32.18</td> <td>27.50</td> <td>7.86</td> <td>30.30</td> <td>9.92</td> <td>300</td> <td>80</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2483.58	47.16	54.00	-6.84	32.18	27.50	7.86	30.30	9.92	300	80	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) showing an average level at 2462.00 MHz labeled AVG_54.</p> <p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>91.62</td> <td>-----</td> <td>-----</td> <td>76.79</td> <td>27.40</td> <td>7.82</td> <td>30.31</td> <td>9.92</td> <td>300</td> <td>80</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2462.00	91.62	-----	-----	76.79	27.40	7.82	30.31	9.92	300	80	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2483.58	47.16	54.00	-6.84	32.18	27.50	7.86	30.30	9.92	300	80	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2462.00	91.62	-----	-----	76.79	27.40	7.82	30.31	9.92	300	80	AVERAGE																																																																						


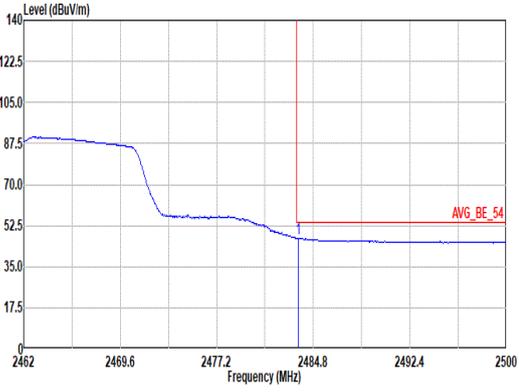


Mode	20																																																																																																																																					
	Harmonic																																																																																																																																					
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																					
ANT	4																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>48.33</td> <td>74.00</td> <td>-25.67</td> <td>71.71</td> <td>31.35</td> <td>11.05</td> <td>66.30</td> <td>0.52</td> <td>100</td> <td>118</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>37.39</td> <td>54.00</td> <td>-16.61</td> <td>60.77</td> <td>31.35</td> <td>11.05</td> <td>66.30</td> <td>0.52</td> <td>100</td> <td>118</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>44.52</td> <td>74.00</td> <td>-29.48</td> <td>60.02</td> <td>36.43</td> <td>13.34</td> <td>65.76</td> <td>0.49</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4924.00	48.33	74.00	-25.67	71.71	31.35	11.05	66.30	0.52	100	118	PEAK	2	4924.00	37.39	54.00	-16.61	60.77	31.35	11.05	66.30	0.52	100	118	AVERAGE	3	7386.00	44.52	74.00	-29.48	60.02	36.43	13.34	65.76	0.49	--	--	PEAK	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>45.63</td> <td>74.00</td> <td>-28.37</td> <td>69.01</td> <td>31.35</td> <td>11.05</td> <td>66.30</td> <td>0.52</td> <td>100</td> <td>322</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>34.25</td> <td>54.00</td> <td>-19.75</td> <td>57.63</td> <td>31.35</td> <td>11.05</td> <td>66.30</td> <td>0.52</td> <td>100</td> <td>322</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>43.91</td> <td>74.00</td> <td>-30.09</td> <td>59.41</td> <td>36.43</td> <td>13.34</td> <td>65.76</td> <td>0.49</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4924.00	45.63	74.00	-28.37	69.01	31.35	11.05	66.30	0.52	100	322	PEAK	2	4924.00	34.25	54.00	-19.75	57.63	31.35	11.05	66.30	0.52	100	322	AVERAGE	3	7386.00	43.91	74.00	-30.09	59.41	36.43	13.34	65.76	0.49	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	4924.00	48.33	74.00	-25.67	71.71	31.35	11.05	66.30	0.52	100	118	PEAK																																																																																																																										
2	4924.00	37.39	54.00	-16.61	60.77	31.35	11.05	66.30	0.52	100	118	AVERAGE																																																																																																																										
3	7386.00	44.52	74.00	-29.48	60.02	36.43	13.34	65.76	0.49	--	--	PEAK																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	4924.00	45.63	74.00	-28.37	69.01	31.35	11.05	66.30	0.52	100	322	PEAK																																																																																																																										
2	4924.00	34.25	54.00	-19.75	57.63	31.35	11.05	66.30	0.52	100	322	AVERAGE																																																																																																																										
3	7386.00	43.91	74.00	-30.09	59.41	36.43	13.34	65.76	0.49	--	--	PEAK																																																																																																																										




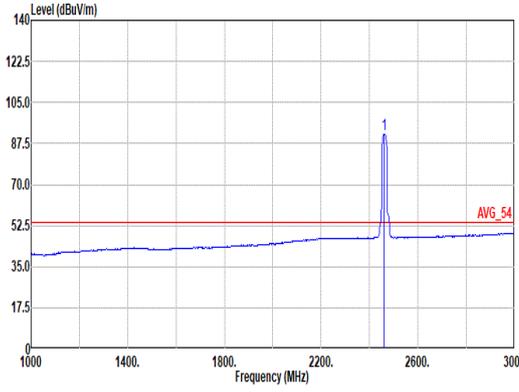


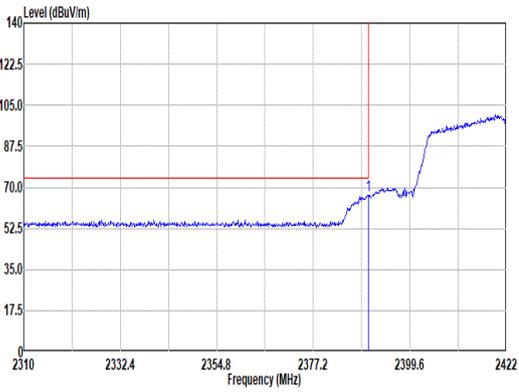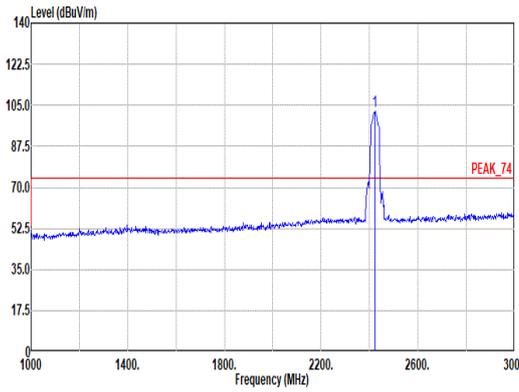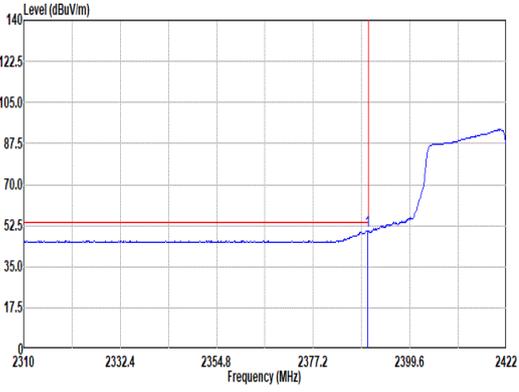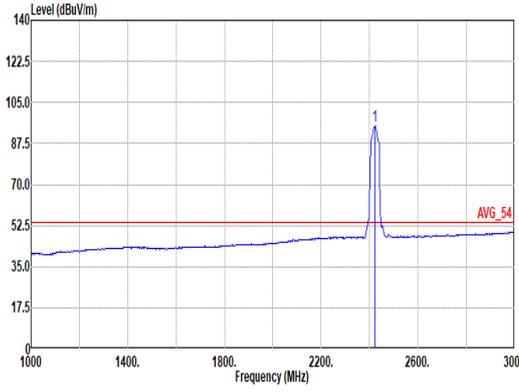		21																																																																										
Mode	Band Edge - L																																																																											
	2400-2483.5_802.11n_HT40_CH03_2422MHz																																																																											
ANT	4																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.97</td> <td>66.51</td> <td>74.00</td> <td>-7.49</td> <td>51.51</td> <td>27.70</td> <td>7.71</td> <td>30.33</td> <td>9.92</td> <td>146</td> <td>109</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.97	66.51	74.00	-7.49	51.51	27.70	7.71	30.33	9.92	146	109	PEAK	 <p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>102.38</td> <td>-----</td> <td>-----</td> <td>87.41</td> <td>27.60</td> <td>7.77</td> <td>30.32</td> <td>9.92</td> <td>146</td> <td>109</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	102.38	-----	-----	87.41	27.60	7.77	30.32	9.92	146	109	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.97	66.51	74.00	-7.49	51.51	27.70	7.71	30.33	9.92	146	109	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2422.00	102.38	-----	-----	87.41	27.60	7.77	30.32	9.92	146	109	PEAK																																																																
Avg	 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.74</td> <td>50.36</td> <td>54.00</td> <td>-3.64</td> <td>35.36</td> <td>27.70</td> <td>7.71</td> <td>30.33</td> <td>9.92</td> <td>146</td> <td>109</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.74	50.36	54.00	-3.64	35.36	27.70	7.71	30.33	9.92	146	109	AVERAGE	 <p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>95.02</td> <td>-----</td> <td>-----</td> <td>80.05</td> <td>27.60</td> <td>7.77</td> <td>30.32</td> <td>9.92</td> <td>146</td> <td>109</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	95.02	-----	-----	80.05	27.60	7.77	30.32	9.92	146	109	AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.74	50.36	54.00	-3.64	35.36	27.70	7.71	30.33	9.92	146	109	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2422.00	95.02	-----	-----	80.05	27.60	7.77	30.32	9.92	146	109	AVERAGE																																																																

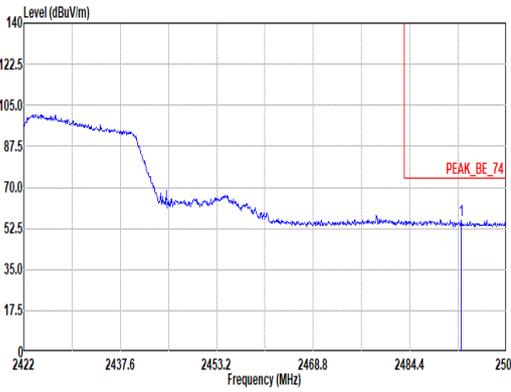
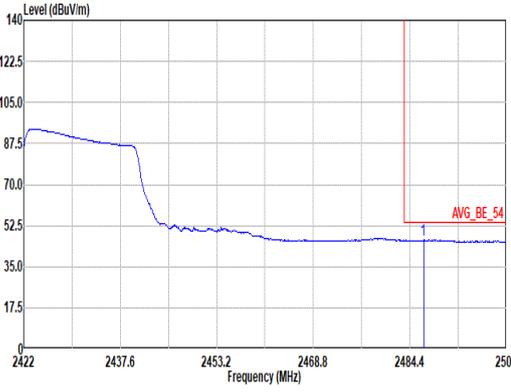


	21																											
Mode	Band Edge - R																											
ANT	4																											
Pol.	Horizontal	Fundamental																										
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>2492.75</th> <th>56.14</th> <th>74.00</th> <th>-17.86</th> <th>41.14</th> <th>27.50</th> <th>7.87</th> <th>30.29</th> <th>9.92</th> <th>146</th> <th>109</th> <th>PEAK</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> </table>	1	2492.75	56.14	74.00	-17.86	41.14	27.50	7.87	30.29	9.92	146	109	PEAK	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	Blank
1	2492.75	56.14	74.00	-17.86	41.14	27.50	7.87	30.29	9.92	146	109	PEAK																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																
Avg	 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>2486.58</th> <th>46.44</th> <th>54.00</th> <th>-7.56</th> <th>31.46</th> <th>27.50</th> <th>7.86</th> <th>30.30</th> <th>9.92</th> <th>146</th> <th>109</th> <th>AVERAGE</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> </table>	1	2486.58	46.44	54.00	-7.56	31.46	27.50	7.86	30.30	9.92	146	109	AVERAGE	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	Blank
1	2486.58	46.44	54.00	-7.56	31.46	27.50	7.86	30.30	9.92	146	109	AVERAGE																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																

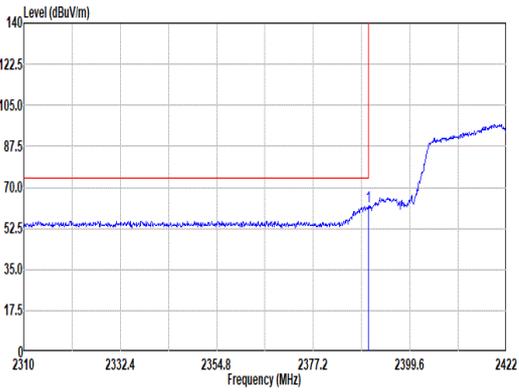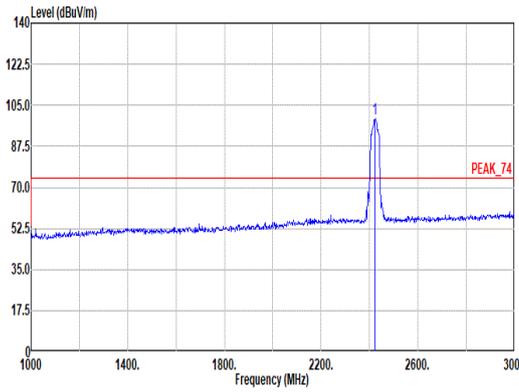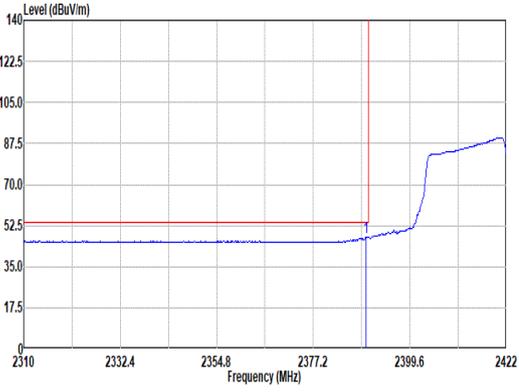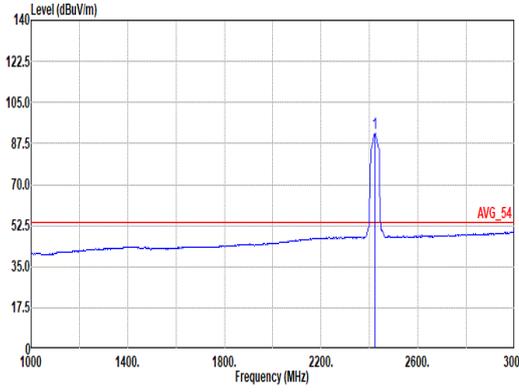

	21																																																																											
Mode	Band Edge - L																																																																											
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																											
ANT	4																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.97</td> <td>61.98</td> <td>74.00</td> <td>-12.02</td> <td>46.98</td> <td>27.70</td> <td>7.71</td> <td>30.33</td> <td>9.92</td> <td>381</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.97	61.98	74.00	-12.02	46.98	27.70	7.71	30.33	9.92	381	82	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>99.42</td> <td>-----</td> <td>-----</td> <td>84.45</td> <td>27.60</td> <td>7.77</td> <td>30.32</td> <td>9.92</td> <td>381</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	99.42	-----	-----	84.45	27.60	7.77	30.32	9.92	381	82	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.97	61.98	74.00	-12.02	46.98	27.70	7.71	30.33	9.92	381	82	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2422.00	99.42	-----	-----	84.45	27.60	7.77	30.32	9.92	381	82	PEAK																																																																
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.52</td> <td>47.75</td> <td>54.00</td> <td>-6.25</td> <td>32.75</td> <td>27.70</td> <td>7.71</td> <td>30.33</td> <td>9.92</td> <td>381</td> <td>82</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.52	47.75	54.00	-6.25	32.75	27.70	7.71	30.33	9.92	381	82	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>91.80</td> <td>-----</td> <td>-----</td> <td>76.83</td> <td>27.60</td> <td>7.77</td> <td>30.32</td> <td>9.92</td> <td>381</td> <td>82</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	91.80	-----	-----	76.83	27.60	7.77	30.32	9.92	381	82	AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.52	47.75	54.00	-6.25	32.75	27.70	7.71	30.33	9.92	381	82	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2422.00	91.80	-----	-----	76.83	27.60	7.77	30.32	9.92	381	82	AVERAGE																																																																



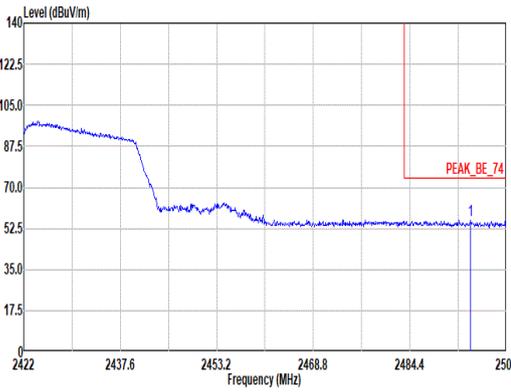
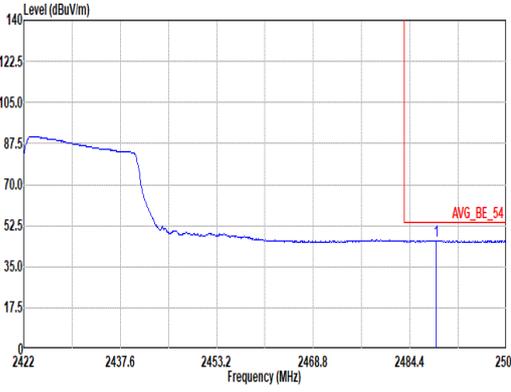


	21																																					
Mode	Band Edge - R																																					
ANT	4																																					
Pol.	Vertical	Fundamental																																				
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2494.23</td> <td>56.01</td> <td>74.00</td> <td>-17.99</td> <td>41.00</td> <td>27.50</td> <td>7.88</td> <td>30.29</td> <td>9.92</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2494.23	56.01	74.00	-17.99	41.00	27.50	7.88	30.29	9.92	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2494.23	56.01	74.00	-17.99	41.00	27.50	7.88	30.29	9.92																														
Avg	 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2488.69</td> <td>46.12</td> <td>54.00</td> <td>-7.88</td> <td>31.12</td> <td>27.50</td> <td>7.87</td> <td>30.29</td> <td>9.92</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2488.69	46.12	54.00	-7.88	31.12	27.50	7.87	30.29	9.92	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2488.69	46.12	54.00	-7.88	31.12	27.50	7.87	30.29	9.92																														



Mode	21																																																																																																																																																																																									
	Harmonic																																																																																																																																																																																									
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																																																																																																									
ANT	4																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																								
Peak Avg	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>4844.00</th> <th>39.73</th> <th>74.00</th> <th>-34.27</th> <th>63.27</th> <th>31.30</th> <th>11.04</th> <th>66.37</th> <th>0.49</th> <th>--</th> <th>--</th> <th>PEAK</th> </tr> <tr> <th>2</th> <th>7266.00</th> <th>45.10</th> <th>74.00</th> <th>-28.90</th> <th>60.67</th> <th>36.53</th> <th>13.26</th> <th>65.75</th> <th>0.39</th> <th>--</th> <th>--</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td colspan="13"> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>-34.27</td> <td>63.27</td> <td>31.30</td> <td>11.04</td> <td>66.37</td> <td>0.49</td> <td>--</td> <td>--</td> </tr> <tr> <td>-28.90</td> <td>60.67</td> <td>36.53</td> <td>13.26</td> <td>65.75</td> <td>0.39</td> <td>--</td> <td>--</td> </tr> </tbody> </table> </td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	4844.00	39.73	74.00	-34.27	63.27	31.30	11.04	66.37	0.49	--	--	PEAK	2	7266.00	45.10	74.00	-28.90	60.67	36.53	13.26	65.75	0.39	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>-34.27</td> <td>63.27</td> <td>31.30</td> <td>11.04</td> <td>66.37</td> <td>0.49</td> <td>--</td> <td>--</td> </tr> <tr> <td>-28.90</td> <td>60.67</td> <td>36.53</td> <td>13.26</td> <td>65.75</td> <td>0.39</td> <td>--</td> <td>--</td> </tr> </tbody> </table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Line Margin	Level	Factor	Loss	Factor	Factor			dB	dBuV	dB/m	dB	dB	dB	cm	deg	-34.27	63.27	31.30	11.04	66.37	0.49	--	--	-28.90	60.67	36.53	13.26	65.75	0.39	--	--	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>4844.00</th> <th>39.02</th> <th>74.00</th> <th>-34.98</th> <th>62.56</th> <th>31.30</th> <th>11.04</th> <th>66.37</th> <th>0.49</th> <th>--</th> <th>--</th> <th>PEAK</th> </tr> <tr> <th>2</th> <th>7266.00</th> <th>45.06</th> <th>74.00</th> <th>-28.94</th> <th>60.63</th> <th>36.53</th> <th>13.26</th> <th>65.75</th> <th>0.39</th> <th>--</th> <th>--</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td colspan="13"> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>-34.98</td> <td>62.56</td> <td>31.30</td> <td>11.04</td> <td>66.37</td> <td>0.49</td> <td>--</td> <td>--</td> </tr> <tr> <td>-28.94</td> <td>60.63</td> <td>36.53</td> <td>13.26</td> <td>65.75</td> <td>0.39</td> <td>--</td> <td>--</td> </tr> </tbody> </table> </td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	4844.00	39.02	74.00	-34.98	62.56	31.30	11.04	66.37	0.49	--	--	PEAK	2	7266.00	45.06	74.00	-28.94	60.63	36.53	13.26	65.75	0.39	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>-34.98</td> <td>62.56</td> <td>31.30</td> <td>11.04</td> <td>66.37</td> <td>0.49</td> <td>--</td> <td>--</td> </tr> <tr> <td>-28.94</td> <td>60.63</td> <td>36.53</td> <td>13.26</td> <td>65.75</td> <td>0.39</td> <td>--</td> <td>--</td> </tr> </tbody> </table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Line Margin	Level	Factor	Loss	Factor	Factor			dB	dBuV	dB/m	dB	dB	dB	cm	deg	-34.98	62.56	31.30	11.04	66.37	0.49	--	--	-28.94	60.63	36.53	13.26	65.75	0.39	--	--
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																													
1	4844.00	39.73	74.00	-34.27	63.27	31.30	11.04	66.37	0.49	--	--	PEAK																																																																																																																																																																														
2	7266.00	45.10	74.00	-28.90	60.67	36.53	13.26	65.75	0.39	--	--	PEAK																																																																																																																																																																														
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>-34.27</td> <td>63.27</td> <td>31.30</td> <td>11.04</td> <td>66.37</td> <td>0.49</td> <td>--</td> <td>--</td> </tr> <tr> <td>-28.90</td> <td>60.67</td> <td>36.53</td> <td>13.26</td> <td>65.75</td> <td>0.39</td> <td>--</td> <td>--</td> </tr> </tbody> </table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Line Margin	Level	Factor	Loss	Factor	Factor			dB	dBuV	dB/m	dB	dB	dB	cm	deg	-34.27	63.27	31.30	11.04	66.37	0.49	--	--	-28.90	60.67	36.53	13.26	65.75	0.39	--	--																																																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																			
Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																			
-34.27	63.27	31.30	11.04	66.37	0.49	--	--																																																																																																																																																																																			
-28.90	60.67	36.53	13.26	65.75	0.39	--	--																																																																																																																																																																																			
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																														
1	4844.00	39.02	74.00	-34.98	62.56	31.30	11.04	66.37	0.49	--	--	PEAK																																																																																																																																																																														
2	7266.00	45.06	74.00	-28.94	60.63	36.53	13.26	65.75	0.39	--	--	PEAK																																																																																																																																																																														
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>-34.98</td> <td>62.56</td> <td>31.30</td> <td>11.04</td> <td>66.37</td> <td>0.49</td> <td>--</td> <td>--</td> </tr> <tr> <td>-28.94</td> <td>60.63</td> <td>36.53</td> <td>13.26</td> <td>65.75</td> <td>0.39</td> <td>--</td> <td>--</td> </tr> </tbody> </table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Line Margin	Level	Factor	Loss	Factor	Factor			dB	dBuV	dB/m	dB	dB	dB	cm	deg	-34.98	62.56	31.30	11.04	66.37	0.49	--	--	-28.94	60.63	36.53	13.26	65.75	0.39	--	--																																																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																			
Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																			
-34.98	62.56	31.30	11.04	66.37	0.49	--	--																																																																																																																																																																																			
-28.94	60.63	36.53	13.26	65.75	0.39	--	--																																																																																																																																																																																			

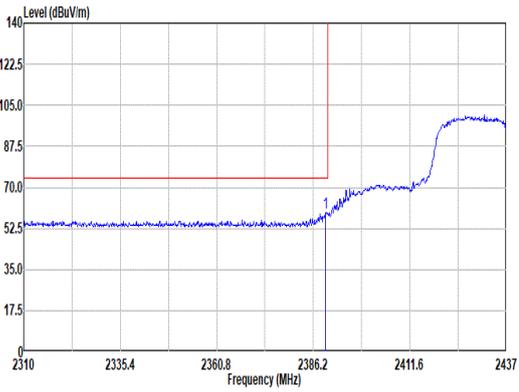
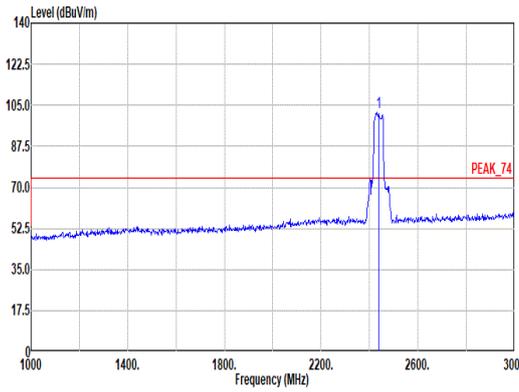
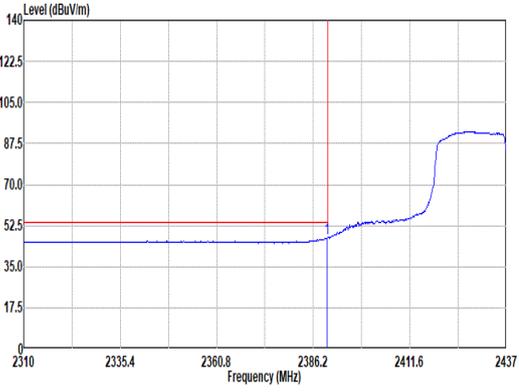
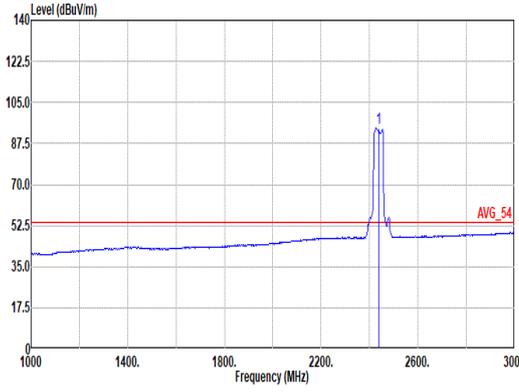


	22																																																																											
Mode	Band Edge - L																																																																											
	2400-2483.5_802.11n_HT40_CH06_2437MHz																																																																											
ANT	4																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.50</td> <td>59.38</td> <td>74.00</td> <td>-14.62</td> <td>44.38</td> <td>27.70</td> <td>7.71</td> <td>30.33</td> <td>9.92</td> <td>113</td> <td>112</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.50	59.38	74.00	-14.62	44.38	27.70	7.71	30.33	9.92	113	112	PEAK	 <p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>101.82</td> <td>-----</td> <td>-----</td> <td>86.84</td> <td>27.60</td> <td>7.78</td> <td>30.32</td> <td>9.92</td> <td>113</td> <td>112</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	101.82	-----	-----	86.84	27.60	7.78	30.32	9.92	113	112	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.50	59.38	74.00	-14.62	44.38	27.70	7.71	30.33	9.92	113	112	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2437.00	101.82	-----	-----	86.84	27.60	7.78	30.32	9.92	113	112	PEAK																																																																
Avg	 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.76</td> <td>47.28</td> <td>54.00</td> <td>-6.72</td> <td>32.28</td> <td>27.70</td> <td>7.71</td> <td>30.33</td> <td>9.92</td> <td>113</td> <td>112</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.76	47.28	54.00	-6.72	32.28	27.70	7.71	30.33	9.92	113	112	AVERAGE	 <p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>93.90</td> <td>-----</td> <td>-----</td> <td>78.93</td> <td>27.60</td> <td>7.77</td> <td>30.32</td> <td>9.92</td> <td>113</td> <td>112</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	93.90	-----	-----	78.93	27.60	7.77	30.32	9.92	113	112	AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.76	47.28	54.00	-6.72	32.28	27.70	7.71	30.33	9.92	113	112	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2437.00	93.90	-----	-----	78.93	27.60	7.77	30.32	9.92	113	112	AVERAGE																																																																





Mode	22																																						
	Band Edge - R																																						
	2400-2483.5_802.11n HT40_CH06_2437MHz																																						
ANT	4																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.62</td> <td>65.43</td> <td>74.00</td> <td>-8.57</td> <td>50.45</td> <td>27.50</td> <td>7.86</td> <td>30.30</td> <td>9.92</td> <td>113 112 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.62	65.43	74.00	-8.57	50.45	27.50	7.86	30.30	9.92	113 112 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																															
1 2483.62	65.43	74.00	-8.57	50.45	27.50	7.86	30.30	9.92	113 112 PEAK																														
Avg	<p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.56</td> <td>49.47</td> <td>54.00</td> <td>-4.53</td> <td>34.49</td> <td>27.50</td> <td>7.86</td> <td>30.30</td> <td>9.92</td> <td>113 112 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.56	49.47	54.00	-4.53	34.49	27.50	7.86	30.30	9.92	113 112 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																															
1 2483.56	49.47	54.00	-4.53	34.49	27.50	7.86	30.30	9.92	113 112 AVERAGE																														

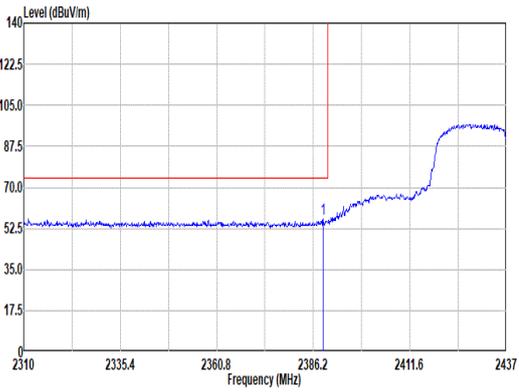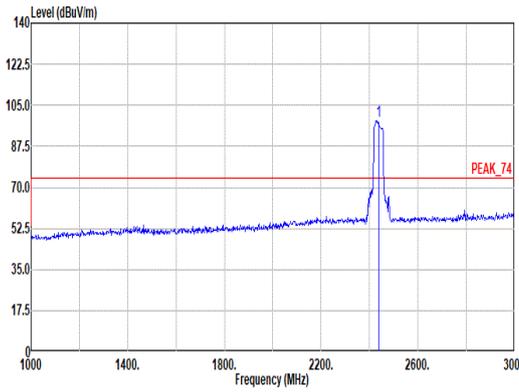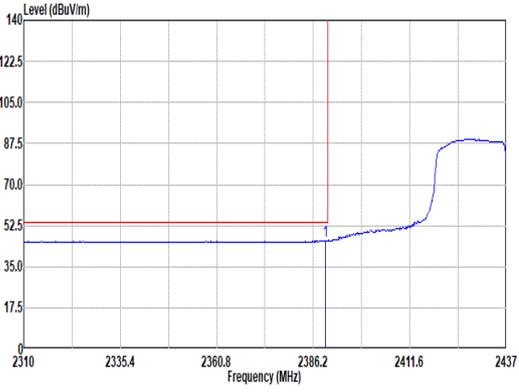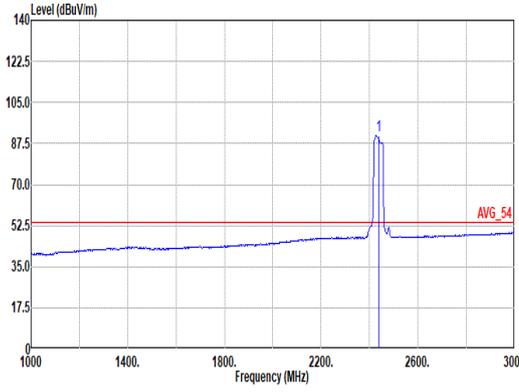

Mode	22																																																																											
	Band Edge - L																																																																											
	2400-2483.5_802.11n_HT40_CH06_2437MHz																																																																											
ANT	4																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.74</td> <td>56.53</td> <td>74.00</td> <td>-17.47</td> <td>41.54</td> <td>27.69</td> <td>7.71</td> <td>30.33</td> <td>9.92</td> <td>385</td> <td>69</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2388.74	56.53	74.00	-17.47	41.54	27.69	7.71	30.33	9.92	385	69	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>98.41</td> <td>-----</td> <td>-----</td> <td>83.43</td> <td>27.60</td> <td>7.78</td> <td>30.32</td> <td>9.92</td> <td>385</td> <td>69</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	98.41	-----	-----	83.43	27.60	7.78	30.32	9.92	385	69	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2388.74	56.53	74.00	-17.47	41.54	27.69	7.71	30.33	9.92	385	69	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2437.00	98.41	-----	-----	83.43	27.60	7.78	30.32	9.92	385	69	PEAK																																																																
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.38</td> <td>46.11</td> <td>54.00</td> <td>-7.89</td> <td>31.12</td> <td>27.69</td> <td>7.71</td> <td>30.33</td> <td>9.92</td> <td>385</td> <td>69</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.38	46.11	54.00	-7.89	31.12	27.69	7.71	30.33	9.92	385	69	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>90.98</td> <td>-----</td> <td>-----</td> <td>76.01</td> <td>27.60</td> <td>7.77</td> <td>30.32</td> <td>9.92</td> <td>385</td> <td>69</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	90.98	-----	-----	76.01	27.60	7.77	30.32	9.92	385	69	AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.38	46.11	54.00	-7.89	31.12	27.69	7.71	30.33	9.92	385	69	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2437.00	90.98	-----	-----	76.01	27.60	7.77	30.32	9.92	385	69	AVERAGE																																																																

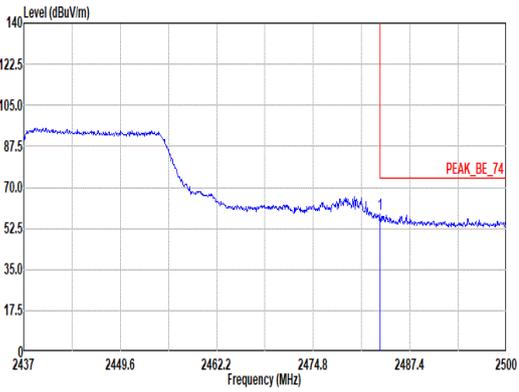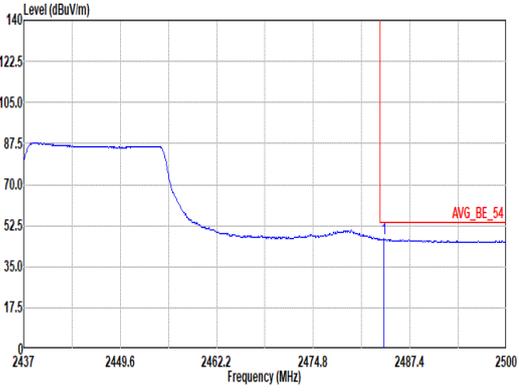

	22																																					
Mode	Band Edge - R																																					
ANT	4																																					
	Vertical	Fundamental																																				
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.56</td> <td>58.79</td> <td>74.00</td> <td>-15.21</td> <td>43.81</td> <td>27.50</td> <td>7.86</td> <td>30.30</td> <td>9.92</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.56	58.79	74.00	-15.21	43.81	27.50	7.86	30.30	9.92	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2483.56	58.79	74.00	-15.21	43.81	27.50	7.86	30.30	9.92																														
Avg	 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.06</td> <td>47.81</td> <td>54.00</td> <td>-6.99</td> <td>32.03</td> <td>27.50</td> <td>7.86</td> <td>30.30</td> <td>9.92</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.06	47.81	54.00	-6.99	32.03	27.50	7.86	30.30	9.92	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2484.06	47.81	54.00	-6.99	32.03	27.50	7.86	30.30	9.92																														





Mode	22																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_802.11n_HT40_CH06_2437MHz																																																																																																																																													
ANT	4																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>42.50</td> <td>74.00</td> <td>-31.50</td> <td>65.99</td> <td>31.30</td> <td>11.05</td> <td>66.34</td> <td>0.50</td> <td>100</td> <td>95</td> <td></td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>32.46</td> <td>54.00</td> <td>-21.54</td> <td>55.95</td> <td>31.30</td> <td>11.05</td> <td>66.34</td> <td>0.50</td> <td>100</td> <td>95</td> <td></td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>44.42</td> <td>74.00</td> <td>-29.58</td> <td>59.87</td> <td>36.58</td> <td>13.29</td> <td>65.75</td> <td>0.43</td> <td>--</td> <td>--</td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	4874.00	42.50	74.00	-31.50	65.99	31.30	11.05	66.34	0.50	100	95		PEAK	2	4874.00	32.46	54.00	-21.54	55.95	31.30	11.05	66.34	0.50	100	95		AVERAGE	3	7311.00	44.42	74.00	-29.58	59.87	36.58	13.29	65.75	0.43	--	--		PEAK	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.22</td> <td>74.00</td> <td>-32.78</td> <td>64.71</td> <td>31.30</td> <td>11.05</td> <td>66.34</td> <td>0.50</td> <td>103</td> <td>338</td> <td></td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>31.87</td> <td>54.00</td> <td>-22.13</td> <td>55.36</td> <td>31.30</td> <td>11.05</td> <td>66.34</td> <td>0.50</td> <td>103</td> <td>338</td> <td></td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>44.70</td> <td>74.00</td> <td>-29.30</td> <td>60.15</td> <td>36.58</td> <td>13.29</td> <td>65.75</td> <td>0.43</td> <td>--</td> <td>--</td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	4874.00	41.22	74.00	-32.78	64.71	31.30	11.05	66.34	0.50	103	338		PEAK	2	4874.00	31.87	54.00	-22.13	55.36	31.30	11.05	66.34	0.50	103	338		AVERAGE	3	7311.00	44.70	74.00	-29.30	60.15	36.58	13.29	65.75	0.43	--	--		PEAK
	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																		
1	4874.00	42.50	74.00	-31.50	65.99	31.30	11.05	66.34	0.50	100	95		PEAK																																																																																																																																	
2	4874.00	32.46	54.00	-21.54	55.95	31.30	11.05	66.34	0.50	100	95		AVERAGE																																																																																																																																	
3	7311.00	44.42	74.00	-29.58	59.87	36.58	13.29	65.75	0.43	--	--		PEAK																																																																																																																																	
Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																		
1	4874.00	41.22	74.00	-32.78	64.71	31.30	11.05	66.34	0.50	103	338		PEAK																																																																																																																																	
2	4874.00	31.87	54.00	-22.13	55.36	31.30	11.05	66.34	0.50	103	338		AVERAGE																																																																																																																																	
3	7311.00	44.70	74.00	-29.30	60.15	36.58	13.29	65.75	0.43	--	--		PEAK																																																																																																																																	







Mode	23																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>57.02</td> <td>74.00</td> <td>-16.98</td> <td>42.02</td> <td>27.70</td> <td>7.71</td> <td>30.33</td> <td>9.92</td> <td>100</td> <td>108</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.95	57.02	74.00	-16.98	42.02	27.70	7.71	30.33	9.92	100	108	PEAK	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>102.62</td> <td>-----</td> <td>-----</td> <td>87.79</td> <td>27.40</td> <td>7.82</td> <td>30.31</td> <td>9.92</td> <td>100</td> <td>108</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2452.00	102.62	-----	-----	87.79	27.40	7.82	30.31	9.92	100	108	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2389.95	57.02	74.00	-16.98	42.02	27.70	7.71	30.33	9.92	100	108	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2452.00	102.62	-----	-----	87.79	27.40	7.82	30.31	9.92	100	108	PEAK																																																																						
Avg	<p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.24</td> <td>46.05</td> <td>54.00</td> <td>-7.95</td> <td>31.07</td> <td>27.68</td> <td>7.71</td> <td>30.33</td> <td>9.92</td> <td>100</td> <td>108</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2388.24	46.05	54.00	-7.95	31.07	27.68	7.71	30.33	9.92	100	108	AVERAGE	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>94.98</td> <td>-----</td> <td>-----</td> <td>80.15</td> <td>27.40</td> <td>7.82</td> <td>30.31</td> <td>9.92</td> <td>100</td> <td>108</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2452.00	94.98	-----	-----	80.15	27.40	7.82	30.31	9.92	100	108	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2388.24	46.05	54.00	-7.95	31.07	27.68	7.71	30.33	9.92	100	108	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2452.00	94.98	-----	-----	80.15	27.40	7.82	30.31	9.92	100	108	AVERAGE																																																																						

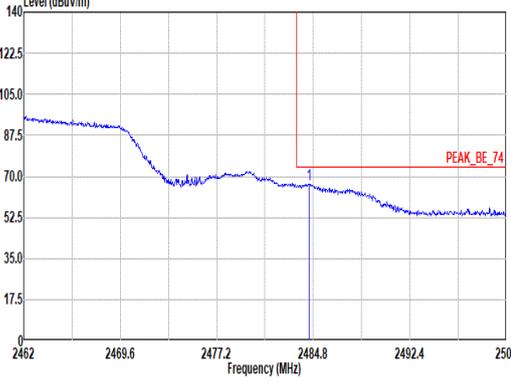
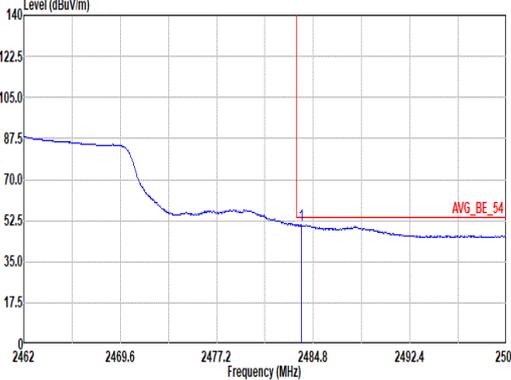


	23																																								
Mode	Band Edge - R																																								
ANT	2400-2483.5_802.11n HT40_CH09_2452MHz																																								
ANT	4																																								
Pol.	Horizontal	Fundamental																																							
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.50</td> <td>66.76</td> <td>74.00</td> <td>-7.24</td> <td>51.78</td> <td>27.50</td> <td>7.86</td> <td>30.30</td> <td>9.92</td> <td>100</td> <td>108</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.50	66.76	74.00	-7.24	51.78	27.50	7.86	30.30	9.92	100	108	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																	
1 2484.50	66.76	74.00	-7.24	51.78	27.50	7.86	30.30	9.92	100	108	PEAK																														
Avg	 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2483.85</td> <td>50.57</td> <td>54.00</td> <td>-3.43</td> <td>35.59</td> <td>27.50</td> <td>7.86</td> <td>30.30</td> <td>9.92</td> <td>100</td> <td>108</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.85	50.57	54.00	-3.43	35.59	27.50	7.86	30.30	9.92	100	108	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																	
1 2483.85	50.57	54.00	-3.43	35.59	27.50	7.86	30.30	9.92	100	108	AVERAGE																														

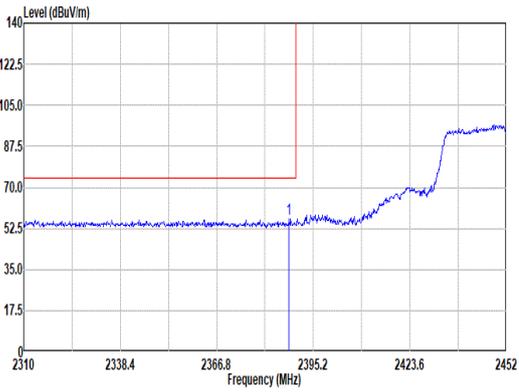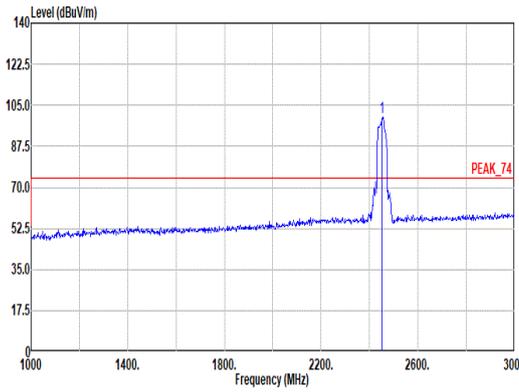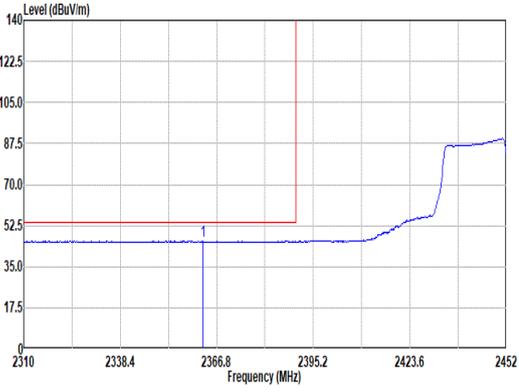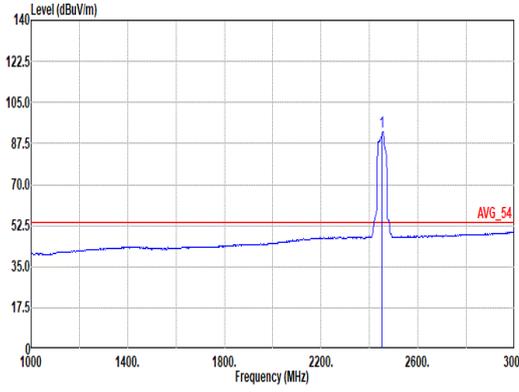

		23																																																																										
Mode	Band Edge - L																																																																											
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																											
ANT	4																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	 <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.10</td> <td>56.42</td> <td>74.00</td> <td>-17.58</td> <td>41.44</td> <td>27.68</td> <td>7.71</td> <td>30.33</td> <td>9.92</td> <td>330</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2388.10	56.42	74.00	-17.58	41.44	27.68	7.71	30.33	9.92	330	80	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>99.93</td> <td>-----</td> <td>-----</td> <td>85.11</td> <td>27.40</td> <td>7.81</td> <td>30.31</td> <td>9.92</td> <td>330</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2452.00	99.93	-----	-----	85.11	27.40	7.81	30.31	9.92	330	80	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2388.10	56.42	74.00	-17.58	41.44	27.68	7.71	30.33	9.92	330	80	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2452.00	99.93	-----	-----	85.11	27.40	7.81	30.31	9.92	330	80	PEAK																																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2362.82</td> <td>45.98</td> <td>54.00</td> <td>-8.02</td> <td>30.89</td> <td>27.84</td> <td>7.67</td> <td>30.34</td> <td>9.92</td> <td>330</td> <td>80</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2362.82	45.98	54.00	-8.02	30.89	27.84	7.67	30.34	9.92	330	80	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>92.29</td> <td>-----</td> <td>-----</td> <td>77.47</td> <td>27.40</td> <td>7.81</td> <td>30.31</td> <td>9.92</td> <td>330</td> <td>80</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2452.00	92.29	-----	-----	77.47	27.40	7.81	30.31	9.92	330	80	AVERAGE
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2362.82	45.98	54.00	-8.02	30.89	27.84	7.67	30.34	9.92	330	80	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2452.00	92.29	-----	-----	77.47	27.40	7.81	30.31	9.92	330	80	AVERAGE																																																																

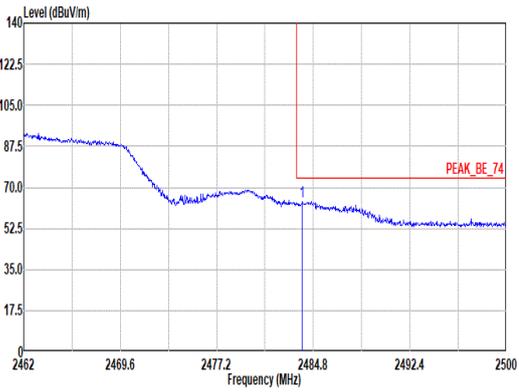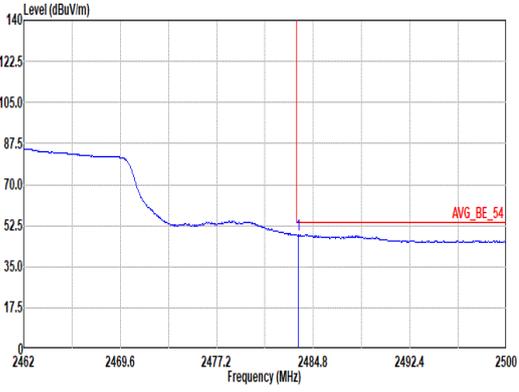

	23																											
Mode	Band Edge - R																											
ANT	4																											
Pol.	Vertical	Fundamental																										
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>2483.93</th> <th>63.93</th> <th>74.00</th> <th>-10.07</th> <th>48.95</th> <th>27.50</th> <th>7.86</th> <th>30.30</th> <th>9.92</th> <th>330</th> <th>80</th> <th>PEAK</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> </table>	1	2483.93	63.93	74.00	-10.07	48.95	27.50	7.86	30.30	9.92	330	80	PEAK	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	Blank
1	2483.93	63.93	74.00	-10.07	48.95	27.50	7.86	30.30	9.92	330	80	PEAK																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																
Avg	 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>2483.58</th> <th>48.48</th> <th>54.00</th> <th>-5.52</th> <th>33.50</th> <th>27.50</th> <th>7.86</th> <th>30.30</th> <th>9.92</th> <th>330</th> <th>80</th> <th>AVERAGE</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> </table>	1	2483.58	48.48	54.00	-5.52	33.50	27.50	7.86	30.30	9.92	330	80	AVERAGE	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	Blank
1	2483.58	48.48	54.00	-5.52	33.50	27.50	7.86	30.30	9.92	330	80	AVERAGE																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																



Mode	23																																																																																																																						
	Harmonic																																																																																																																						
	2400-2483.5_802.11n_HT40_CH09_2452MHz																																																																																																																						
ANT	4																																																																																																																						
Pol.	Horizontal	Vertical																																																																																																																					
Peak Avg	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.00</td> <td>42.75</td> <td>74.00</td> <td>-31.25</td> <td>66.20</td> <td>31.31</td> <td>11.05</td> <td>66.32</td> <td>0.51</td> <td>100</td> <td>118</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4904.00</td> <td>33.51</td> <td>54.00</td> <td>-20.49</td> <td>56.96</td> <td>31.31</td> <td>11.05</td> <td>66.32</td> <td>0.51</td> <td>100</td> <td>118</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7356.00</td> <td>44.25</td> <td>74.00</td> <td>-29.75</td> <td>59.74</td> <td>36.49</td> <td>13.32</td> <td>65.76</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4904.00	42.75	74.00	-31.25	66.20	31.31	11.05	66.32	0.51	100	118	PEAK	2	4904.00	33.51	54.00	-20.49	56.96	31.31	11.05	66.32	0.51	100	118	AVERAGE	3	7356.00	44.25	74.00	-29.75	59.74	36.49	13.32	65.76	0.46	--	--	PEAK	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.00</td> <td>40.33</td> <td>74.00</td> <td>-33.67</td> <td>63.78</td> <td>31.31</td> <td>11.05</td> <td>66.32</td> <td>0.51</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7356.00</td> <td>44.04</td> <td>74.00</td> <td>-29.96</td> <td>59.53</td> <td>36.49</td> <td>13.32</td> <td>65.76</td> <td>0.46</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4904.00	40.33	74.00	-33.67	63.78	31.31	11.05	66.32	0.51	--	--	PEAK	2	7356.00	44.04	74.00	-29.96	59.53	36.49	13.32	65.76	0.46	--	--	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	4904.00	42.75	74.00	-31.25	66.20	31.31	11.05	66.32	0.51	100	118	PEAK																																																																																																											
2	4904.00	33.51	54.00	-20.49	56.96	31.31	11.05	66.32	0.51	100	118	AVERAGE																																																																																																											
3	7356.00	44.25	74.00	-29.75	59.74	36.49	13.32	65.76	0.46	--	--	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	4904.00	40.33	74.00	-33.67	63.78	31.31	11.05	66.32	0.51	--	--	PEAK																																																																																																											
2	7356.00	44.04	74.00	-29.96	59.53	36.49	13.32	65.76	0.46	--	--	PEAK																																																																																																											





Mode	24																																																																																																																																																																																																	
	LF																																																																																																																																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																																	
ANT	4																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
QP/ Peak	<p>Site : 03CH16-HY Condition: QP 3m CBL6111D800802N1D01N-06_47020 & 06_241005 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Limit Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>69.77</td> <td>30.36</td> <td>40.00</td> <td>-9.64</td> <td>48.03</td> <td>12.54</td> <td>1.31</td> <td>32.37</td> <td>0.05</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>183.26</td> <td>35.79</td> <td>43.50</td> <td>-7.71</td> <td>50.66</td> <td>15.20</td> <td>2.11</td> <td>32.26</td> <td>0.08</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>3</td> <td>225.94</td> <td>36.11</td> <td>46.00</td> <td>-9.89</td> <td>50.27</td> <td>15.95</td> <td>2.33</td> <td>32.51</td> <td>0.07</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>4</td> <td>273.47</td> <td>27.61</td> <td>46.00</td> <td>-18.39</td> <td>38.43</td> <td>18.85</td> <td>2.56</td> <td>32.30</td> <td>0.07</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>5</td> <td>736.16</td> <td>33.47</td> <td>46.00</td> <td>-12.53</td> <td>33.05</td> <td>28.16</td> <td>4.22</td> <td>32.10</td> <td>0.14</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>6</td> <td>937.92</td> <td>32.89</td> <td>46.00</td> <td>-13.11</td> <td>29.13</td> <td>30.62</td> <td>4.78</td> <td>31.88</td> <td>0.24</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cm	deg		1	69.77	30.36	40.00	-9.64	48.03	12.54	1.31	32.37	0.05	--	-- Peak	2	183.26	35.79	43.50	-7.71	50.66	15.20	2.11	32.26	0.08	--	-- Peak	3	225.94	36.11	46.00	-9.89	50.27	15.95	2.33	32.51	0.07	--	-- Peak	4	273.47	27.61	46.00	-18.39	38.43	18.85	2.56	32.30	0.07	--	-- Peak	5	736.16	33.47	46.00	-12.53	33.05	28.16	4.22	32.10	0.14	--	-- Peak	6	937.92	32.89	46.00	-13.11	29.13	30.62	4.78	31.88	0.24	--	-- Peak	<p>Site : 03CH16-HY Condition: QP 3m CBL6111D800802N1D01N-06_47020 & 06_241005 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Limit Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>43.58</td> <td>31.04</td> <td>40.00</td> <td>-8.16</td> <td>45.64</td> <td>17.63</td> <td>1.02</td> <td>32.50</td> <td>0.05</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>185.20</td> <td>34.06</td> <td>43.50</td> <td>-9.44</td> <td>49.02</td> <td>15.14</td> <td>2.12</td> <td>32.30</td> <td>0.08</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>3</td> <td>225.94</td> <td>30.91</td> <td>46.00</td> <td>-15.09</td> <td>45.07</td> <td>15.95</td> <td>2.33</td> <td>32.51</td> <td>0.07</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>4</td> <td>512.09</td> <td>26.50</td> <td>46.00</td> <td>-19.50</td> <td>31.89</td> <td>23.88</td> <td>3.51</td> <td>32.93</td> <td>0.15</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>5</td> <td>751.68</td> <td>31.35</td> <td>46.00</td> <td>-14.65</td> <td>30.65</td> <td>28.37</td> <td>4.26</td> <td>32.07</td> <td>0.14</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>6</td> <td>941.00</td> <td>34.36</td> <td>46.00</td> <td>-11.64</td> <td>30.35</td> <td>30.82</td> <td>4.79</td> <td>31.84</td> <td>0.24</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cm	deg		1	43.58	31.04	40.00	-8.16	45.64	17.63	1.02	32.50	0.05	--	-- Peak	2	185.20	34.06	43.50	-9.44	49.02	15.14	2.12	32.30	0.08	--	-- Peak	3	225.94	30.91	46.00	-15.09	45.07	15.95	2.33	32.51	0.07	--	-- Peak	4	512.09	26.50	46.00	-19.50	31.89	23.88	3.51	32.93	0.15	--	-- Peak	5	751.68	31.35	46.00	-14.65	30.65	28.37	4.26	32.07	0.14	--	-- Peak	6	941.00	34.36	46.00	-11.64	30.35	30.82	4.79	31.84	0.24	--	-- Peak
	Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																								
1	69.77	30.36	40.00	-9.64	48.03	12.54	1.31	32.37	0.05	--	-- Peak																																																																																																																																																																																							
2	183.26	35.79	43.50	-7.71	50.66	15.20	2.11	32.26	0.08	--	-- Peak																																																																																																																																																																																							
3	225.94	36.11	46.00	-9.89	50.27	15.95	2.33	32.51	0.07	--	-- Peak																																																																																																																																																																																							
4	273.47	27.61	46.00	-18.39	38.43	18.85	2.56	32.30	0.07	--	-- Peak																																																																																																																																																																																							
5	736.16	33.47	46.00	-12.53	33.05	28.16	4.22	32.10	0.14	--	-- Peak																																																																																																																																																																																							
6	937.92	32.89	46.00	-13.11	29.13	30.62	4.78	31.88	0.24	--	-- Peak																																																																																																																																																																																							
	Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																								
1	43.58	31.04	40.00	-8.16	45.64	17.63	1.02	32.50	0.05	--	-- Peak																																																																																																																																																																																							
2	185.20	34.06	43.50	-9.44	49.02	15.14	2.12	32.30	0.08	--	-- Peak																																																																																																																																																																																							
3	225.94	30.91	46.00	-15.09	45.07	15.95	2.33	32.51	0.07	--	-- Peak																																																																																																																																																																																							
4	512.09	26.50	46.00	-19.50	31.89	23.88	3.51	32.93	0.15	--	-- Peak																																																																																																																																																																																							
5	751.68	31.35	46.00	-14.65	30.65	28.37	4.26	32.07	0.14	--	-- Peak																																																																																																																																																																																							
6	941.00	34.36	46.00	-11.64	30.35	30.82	4.79	31.84	0.24	--	-- Peak																																																																																																																																																																																							



Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
4	802.11b	99.70	-	-	10Hz
4	802.11g	97.54	1390	0.72	750Hz
4	2.4GHz 802.11n HT20	97.38	1300	0.77	820Hz
4	2.4GHz 802.11n HT40	95.01	648	1.54	1.6kHz

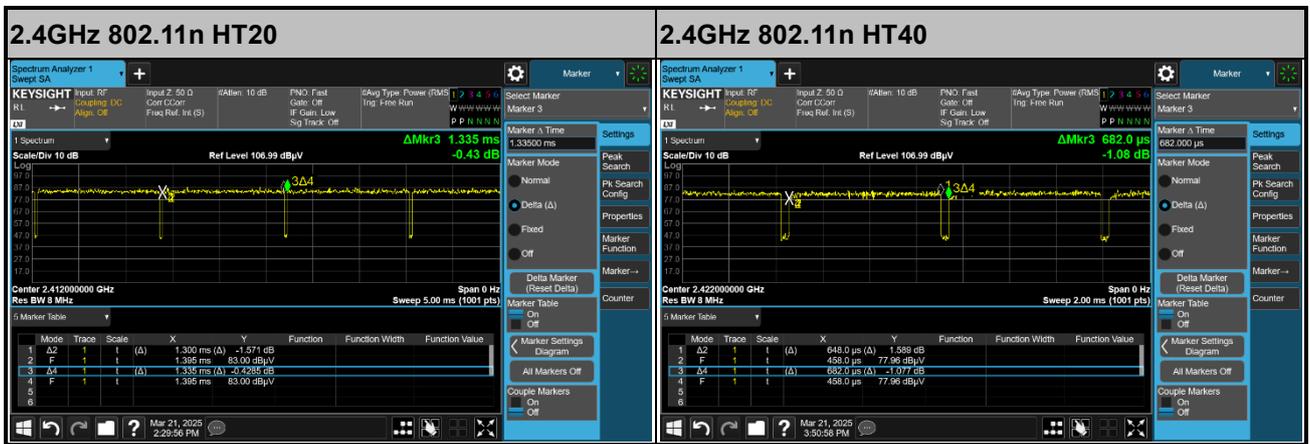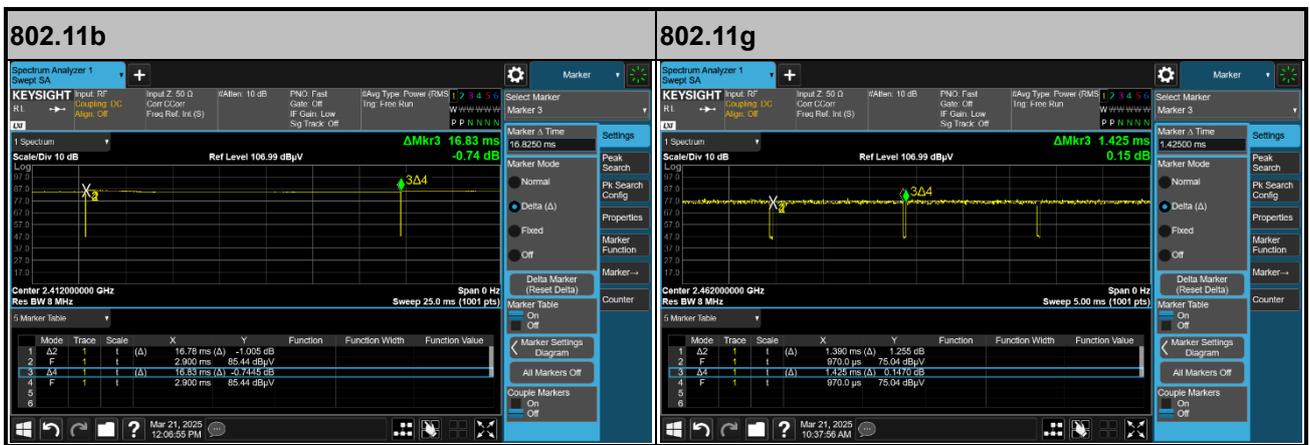

—THE END—