

2. Test Setup

Add test setup picture (device inside a chamber)


Mention the test methodology to obtain the shared gain measurements: (active/passive)

The chamber temperature is controlled by 20 °C ~21 °C.


The chamber humidity is controlled by 45%~50%.

Test chamber address: No.4, Ming Sheng St., Tu Cheng Dist., Xinbei City 236,
Taiwan(R.O.C)

The chamber name: FIH Antenna Chamber-02

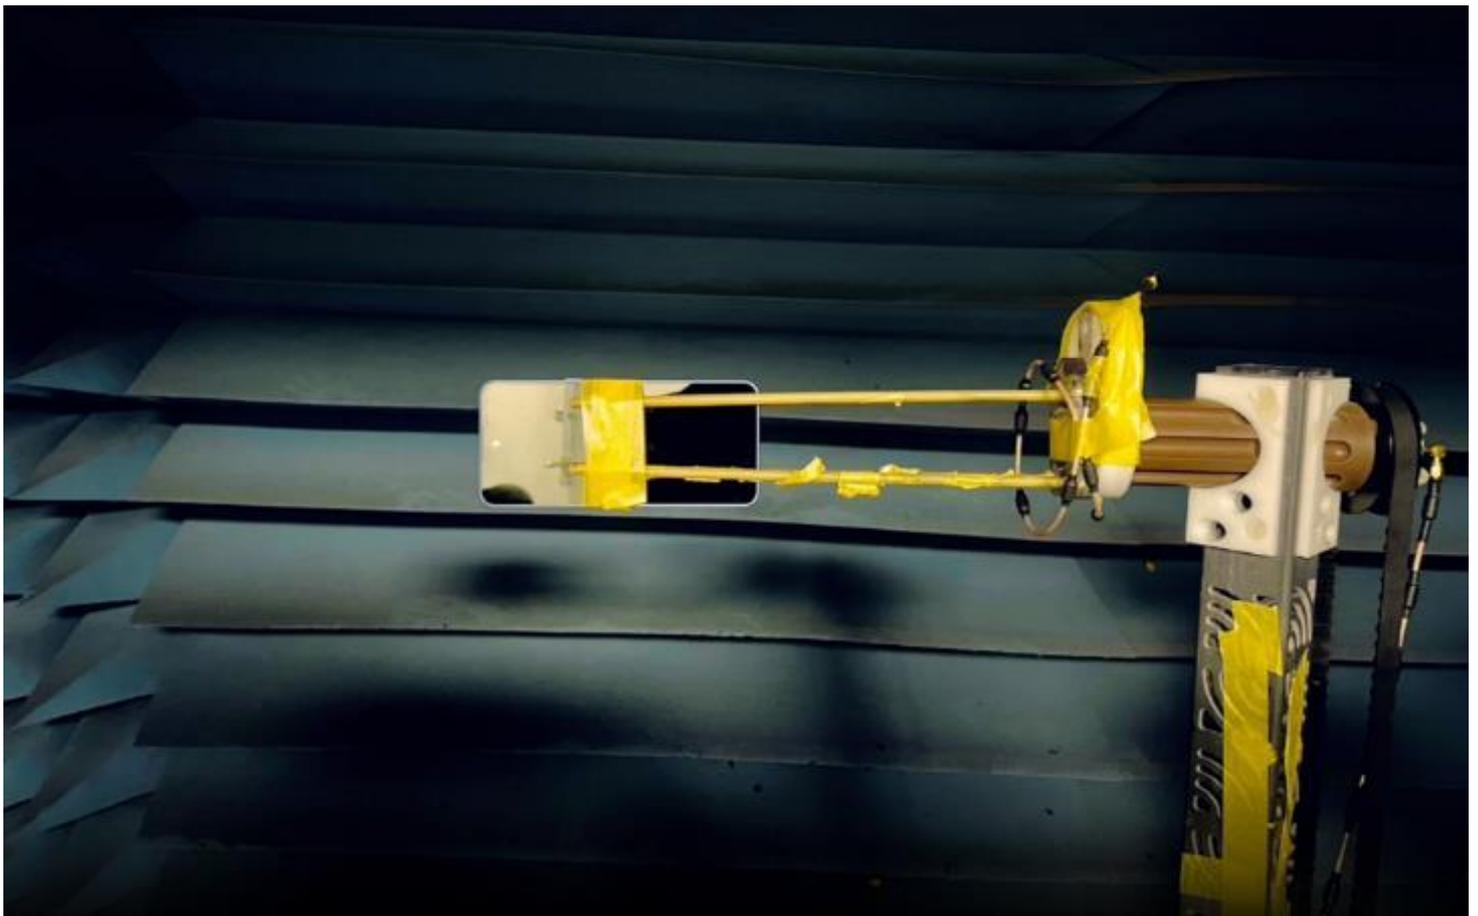

3. Antenna Placement

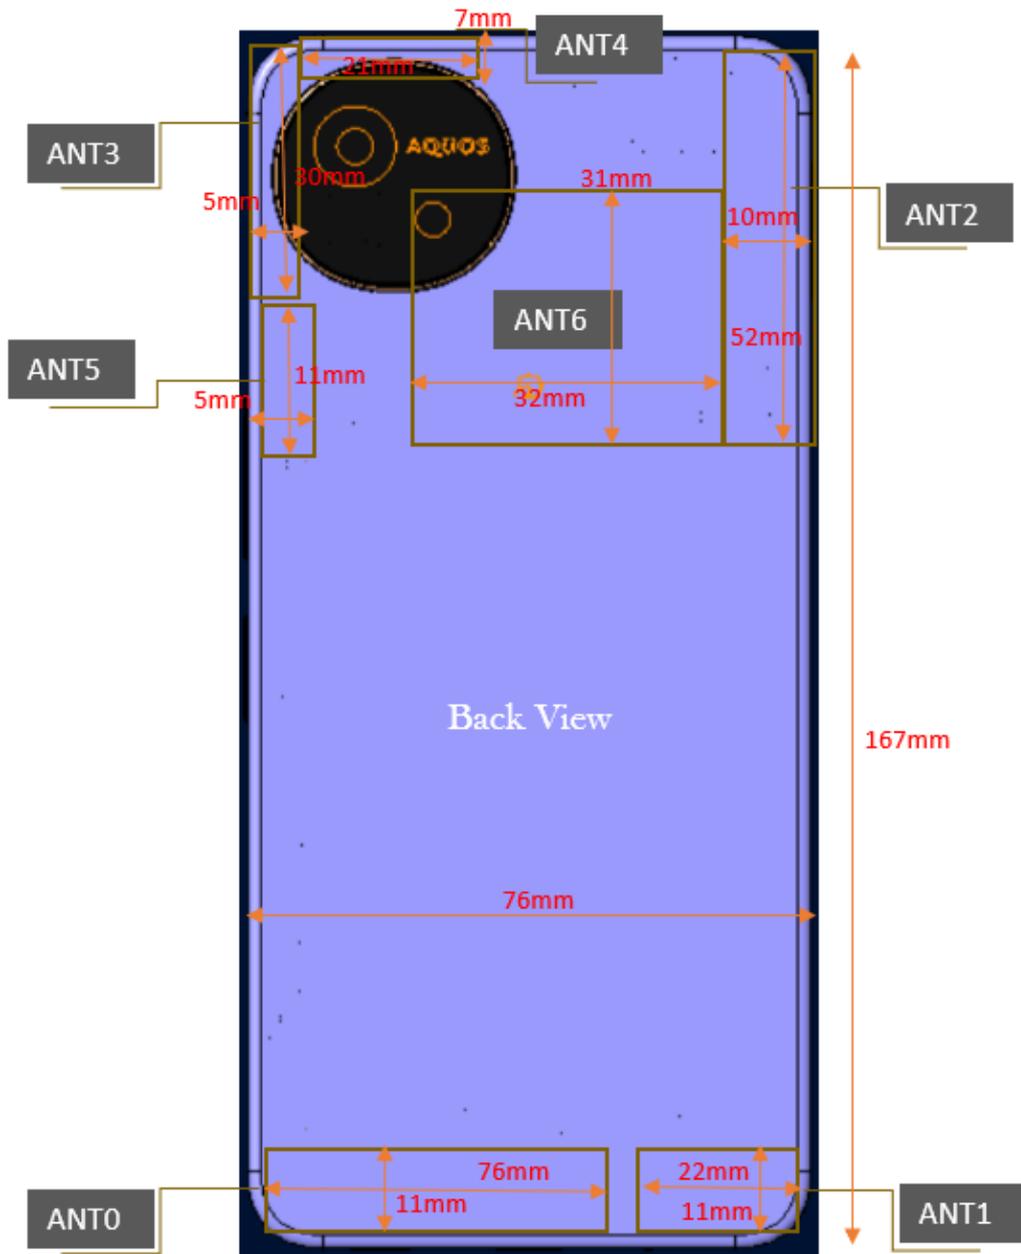

No.	Type	RAT Support
ANT0	Monopole	2/3/4G: LB TRx
ANT1	PIFA	2/3G: MB TRx, 4G: MB/HB TRx,
ANT2	PIFA	3G: LB/MB DRx 4G: LB/MB/HB DRx
ANT3	Loop	GPS L1
ANT4	Loop	WLAN 2.4G/5G chain0, BT
ANT6	Loop	NFC

2G: 850/1900
 3G: B5
 4G: B2/B5/B7/B12/B17/B38