



Test Report No.: PSU-NQN2504150110RF06



Certificate #6613.01

# FCC TEST REPORT (Part 15, Subpart C)

Applicant:	SHARP CORPORATION
Address:	1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan


Manufacturer or Supplier:	SHARP CORPORATION
Address:	1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan
Product:	Smart Phone
Brand Name:	SHARP
FCC ID:	APYHRO00336
Date of tests:	Mar. 19, 2025 ~ Apr.28, 2025

The tests have been carried out according to the requirements of the following standard:

**FCC Part 15, Subpart C, Section 15.247**

**ANSI C63.10-2020**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Apr.28, 2025	 Date: Apr.28, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	5
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>6</b>
<b>1.1 MEASUREMENT UNCERTAINTY.....</b>	<b>7</b>
<b>2 GENERAL INFORMATION .....</b>	<b>8</b>
<b>2.1 GENERAL DESCRIPTION OF EUT .....</b>	<b>8</b>
<b>2.2 DESCRIPTION OF TEST MODES .....</b>	<b>10</b>
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST .....	11
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	11
<b>2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....</b>	<b>13</b>
<b>2.4 DESCRIPTION OF SUPPORT UNITS.....</b>	<b>13</b>
<b>3 TEST TYPES AND RESULTS.....</b>	<b>14</b>
<b>3.1 CONDUCTED EMISSION MEASUREMENT.....</b>	<b>14</b>
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	14
3.1.2 TEST INSTRUMENTS.....	14
3.1.3 TEST PROCEDURES .....	14
3.1.4 DEVIATION FROM TEST STANDARD .....	15
3.1.5 TEST SETUP .....	15
3.1.6 EUT OPERATING CONDITIONS .....	15
3.1.7 TEST RESULTS .....	16
<b>3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....</b>	<b>18</b>
3.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	18
3.2.2 TEST INSTRUMENTS.....	19
3.2.3 TEST PROCEDURES .....	20
3.2.4 DEVIATION FROM TEST STANDARD .....	20
3.2.5 TEST SETUP .....	21
3.2.6 EUT OPERATING CONDITIONS .....	22
3.2.7 TEST RESULTS .....	23
<b>3.3 NUMBER OF HOPPING FREQUENCY USED .....</b>	<b>51</b>
3.3.1 LIMIT OF HOPPING FREQUENCY USED .....	51
3.3.2 TEST SETUP .....	51
3.3.3 TEST INSTRUMENTS.....	51
3.3.4 TEST PROCEDURES .....	52
3.3.5 DEVIATION FROM TEST STANDARD .....	52
3.3.6 TEST RESULTS .....	52
<b>3.4 DWELL TIME ON EACH CHANNEL.....</b>	<b>53</b>



**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2504150110RF06**

3.4.1	LIMIT OF DWELL TIME USED .....	53
3.4.2	TEST SETUP .....	53
3.4.3	TEST INSTRUMENTS .....	53
3.4.4	TEST PROCEDURES .....	53
3.4.5	DEVIATION FROM TEST STANDARD .....	53
3.4.6	TEST RESULTS .....	53
<b>3.5</b>	<b>CHANNEL BANDWIDTH .....</b>	<b>54</b>
3.5.1	LIMITS OF CHANNEL BANDWIDTH .....	54
3.5.2	TEST SETUP .....	54
3.5.3	TEST INSTRUMENTS .....	54
3.5.4	TEST PROCEDURE .....	54
3.5.5	DEVIATION FROM TEST STANDARD .....	54
3.5.6	EUT OPERATING CONDITION .....	55
3.5.7	TEST RESULTS .....	55
<b>3.6</b>	<b>HOPPING CHANNEL SEPARATION .....</b>	<b>56</b>
3.6.1	LIMIT OF HOPPING CHANNEL SEPARATION .....	56
3.6.2	TEST SETUP .....	56
3.6.3	TEST INSTRUMENTS .....	56
3.6.4	TEST PROCEDURES .....	56
3.6.5	DEVIATION FROM TEST STANDARD .....	56
3.6.6	TEST RESULTS .....	56
<b>3.7</b>	<b>MAXIMUM OUTPUT POWER .....</b>	<b>57</b>
3.7.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT .....	57
3.7.2	TEST SETUP .....	57
3.7.3	TEST INSTRUMENTS .....	57
3.7.4	TEST PROCEDURES .....	57
3.7.5	DEVIATION FROM TEST STANDARD .....	57
3.7.6	EUT OPERATING CONDITION .....	57
3.7.7	TEST RESULTS .....	57
3.7.7.1	MAXIMUM PEAK OUTPUT POWER .....	57
3.7.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE) .....	58
<b>3.8</b>	<b>OUT OF BAND MEASUREMENT .....</b>	<b>59</b>
3.8.1	LIMITS OF OUT OF BAND MEASUREMENT .....	59
3.8.2	TEST INSTRUMENTS .....	59
3.8.3	TEST PROCEDURE .....	59
3.8.4	DEVIATION FROM TEST STANDARD .....	59



**BUREAU**  
**VERITAS**

**Test Report No.: PSU-NQN2504150110RF06**

3.8.5	EUT OPERATING CONDITION .....	59
3.8.6	TEST RESULTS .....	59
<b>4</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b>	<b>60</b>
<b>5</b>	<b>MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB60</b>	
<b>6</b>	<b>APPENDIX .....</b>	<b>61</b>



Test Report No.: PSU-NQN2504150110RF06

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2504150110RF06	Original release	Apr.28, 2025



BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C		
STANDARD	TEST TYPE AND LIMIT	RESULT
15.207	AC Power Conducted Emission	Compliance
15.247(a)(1) (iii)	Number of Hopping Frequency Used	Compliance
15.247(a)(1) (iii)	Dwell Time on Each Channel	Compliance
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Compliance
15.247(b)	Maximum Peak Output Power	Compliance
15.247(d)& 15.209	Transmitter Radiated Emissions	Compliance
15.247(d)	Out of band Measurement	Compliance
15.203	Antenna Requirement	Compliance

### NOTE:

1. If the Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### \*Test Lab Information Reference

#### Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

#### Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province

**Accredited Test Lab Cert 6613.01**


The FCC Site Registration No. is 434559; The Designation No. is CN1325.

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

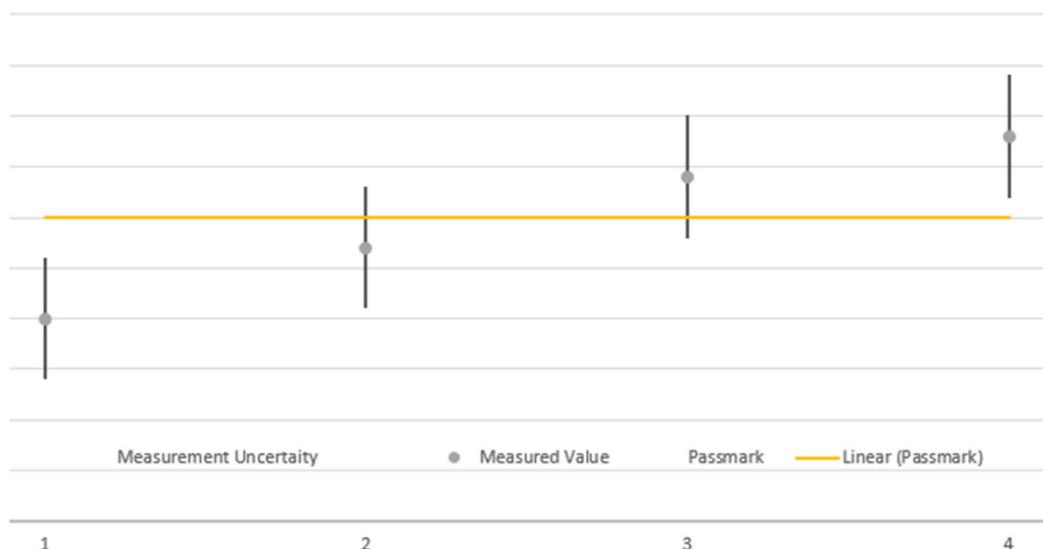

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT*</b>	Smart Phone
<b>BRAND NAME*</b>	SHARP
<b>NOMINAL VOLTAGE*</b>	4.0Vdc(adapter or host equipment) 3.89Vdc (Li-ion, battery)
<b>MODULATION TECHNOLOGY*</b>	FHSS
<b>MODULATION TYPE*</b>	GFSK, 8DPSK, $\pi/4$ DQPSK
<b>OPERATING FREQUENCY</b>	2402MHz~2480MHz
<b>NUMBER OF CHANNEL</b>	79
<b>MAX. OUTPUT POWER</b>	54.82 mW (Max. Measured)
<b>ANTENNA TYPE*</b>	ANT4: PIFA Antenna with -3.2dBi gain ANT8: PIFA Antenna with 0.4dBi gain
<b>HW VERSION*</b>	DVT
<b>SW VERSION*</b>	A2270
<b>I/O PORTS*</b>	Refer to user's manual
<b>EXTREME TEMPERATURE*</b>	5~35°C
<b>EXTREME VOLTAGE*</b>	3.7V~4V



**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2504150110RF06**

**NOTE:**

1. \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.

**5. List of Accessory:**

<b>Battery Information</b>	<b>Battery Type</b>	Li-Lon
	<b>Manufacturer</b>	Ningde Amperex Technology Limited
	<b>Model Number</b>	UBATIA319AFN2
	<b>Capacity</b>	4880 mAh
	<b>Nominal Voltage</b>	3.89V



## 2.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)						
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



## 2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 4 photograph of the test configuration for reference.

## 2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission.

Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission

**RE≥1G**: Radiated Emission above 1GHz  
**APCM**: Antenna Port Conducted Measurement

### RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	78	FHSS	GFSK	DH5

### RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5



BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	78	FHSS	GFSK	DH5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- The following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH1/DH3/DH5
0 to 78	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH1/2DH3/2DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH1/3DH3/3DH5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	23deg. C, 70%RH	DC 4V By DC Supply	Hanwen Xu
RE≥1G	23deg. C, 70%RH	DC 4V By DC Supply	Hanwen Xu
PLC	25deg. C, 52%RH	DC 4V By DC Supply	Hanwen Xu
APCM	25deg. C, 60%RH	DC 3.7V By DC Supply	Hanwen Xu



Test Report No.: PSU-NQN2504150110RF06

### 2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### FCC Part 15, Subpart C. Section 15.247 ANSI C63.10-2020

- NOTE:**
1. All test items have been performed and recorded as per the above standards.
  2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

### 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	Thinkpad E14	SL10W47313	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m



### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

##### 3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	102749	Mar.28,24	Mar.27,26
ELEKTRA test software	Rohde&Schwarz	ELEKTRA	NA	N/A	N/A
LISN network	Rohde&Schwarz	ENV216	102640	Mar.28,24	Mar.27,26
CABLE	Rohde&Schwarz	W61.01	N/A	Apr.27,25	Apr.26,26
CABLE	Rohde&Schwarz	W601	N/A	Apr.27,25	Apr.26,26

- NOTE:**
1. The test was performed in CE shielded room.
  2. The calibration interval of the above test instruments is 12/24months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

##### 3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.



BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06


c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation.

### 3.1.5 TEST SETUP

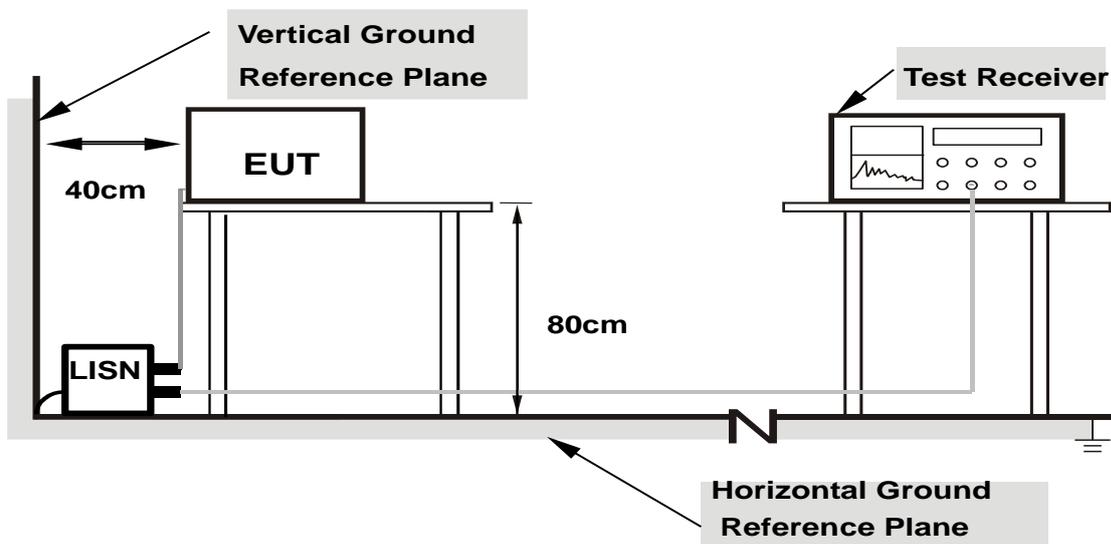

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



### 3.1.7 TEST RESULTS

#### AC Power line Conducted Emission


A “reference path loss” Corr.(dB) is established and the  $L_{cable+ATT+VDF}$  is the attenuation of “reference path loss”, and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{result} = P_{mea} + Corr.(dB)$$

Sample calculation:  $(39.6dB\mu V) = (10dB\mu V) + (29.6dB)$ , the corresponding frequency is 0.15MHz.

Full Spectrum

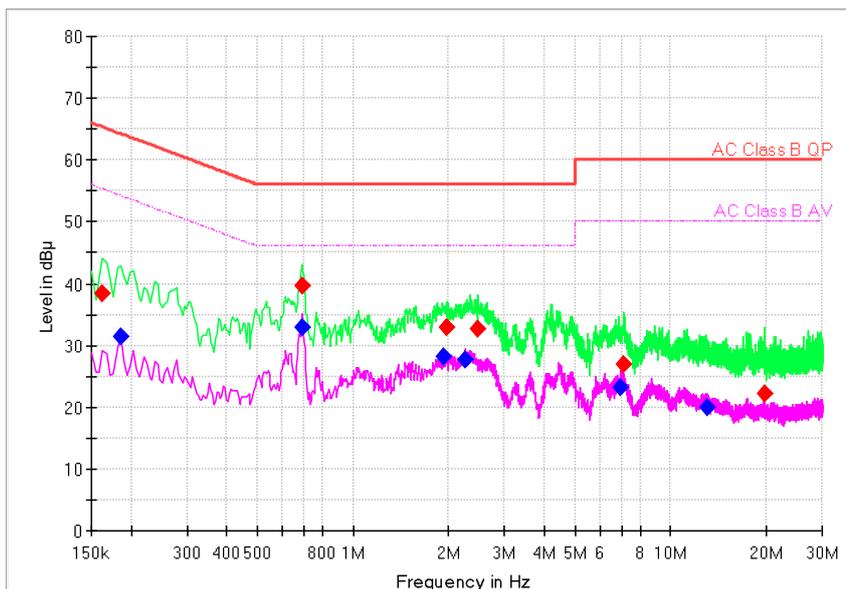

L+N Line



BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	PmeaQuasiPeak (dBμV)	PmeaAverage (dBμV)
0.163169	38.43	---	65.3	26.88	L1	29.6	8.83	---
0.185118	---	31.28	54.25	22.97	L1	29.6	---	1.68
0.689934	---	32.97	46	13.03	L1	29.6	---	3.37
0.689934	39.7	---	56	16.3	L1	29.6	10.1	---
1.932221	---	28.06	46	17.94	L1	29.6	---	-1.54
1.962949	32.87	---	56	23.13	L1	29.6	3.27	---
2.257059	---	27.69	46	18.31	L1	29.6	---	-1.91
2.472154	32.76	---	56	23.24	L1	29.6	3.16	---
6.971603	---	23.26	50	26.74	L1	29.7	---	-6.44
7.147191	26.99	---	60	33.01	L1	29.7	-2.71	---
13.12158	---	19.98	50	30.02	L1	29.9	---	-9.92
19.86855	22.06	---	60	37.94	L1	30.3	-8.24	---



BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

### 3.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

#### 3.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



**3.2.2 TEST INSTRUMENTS**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,23	Aug.29,25
Pre-Amplifier	R&S	SCU08F1	101028	Jan.22,24	Jan.21,26
Signal Generator	R&S	SMB100A	182185	Mar.29,24	Mar.28,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESW44	101973	Mar.28,24	Mar.27,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Dec.26,23	Dec.25,25
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,23	Aug.21,25
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Jul.15,24	Jul.14,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,23	Aug.21,25
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,25	Feb.22,27
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.19,24	Jun.18,26
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,23	Aug.30,25
Hygrothermograph	DELI	20210528	SZ014	Sep.06,23	Sep.05,25
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.27,24	Apr.26,25
CABLE	R&S	W12.14	N/A	Apr.27,24	Apr.26,25

- NOTE:**
1. The calibration interval of the above test instruments is 12/ 24/ 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Chamber.
  3. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



### 3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit.
5. All modes of operation were investigated and the worst-case emissions are reported.

### 3.2.4 DEVIATION FROM TEST STANDARD

No deviation.




BUREAU  
VERITAS


Test Report No.: PSU-NQN2504150110RF06

### 3.2.5 TEST SETUP


#### <Frequency Range 9KHz~30MHz >

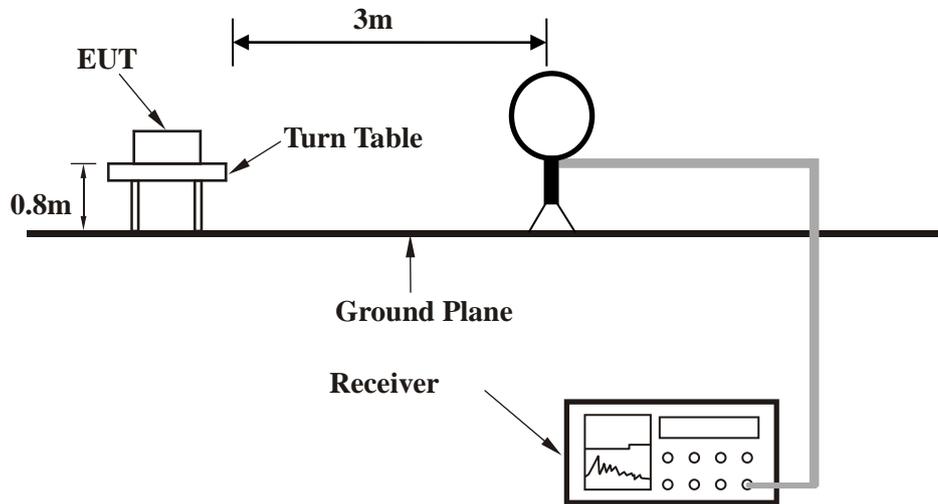

#### < Frequency Range 30MHz~1GHz >

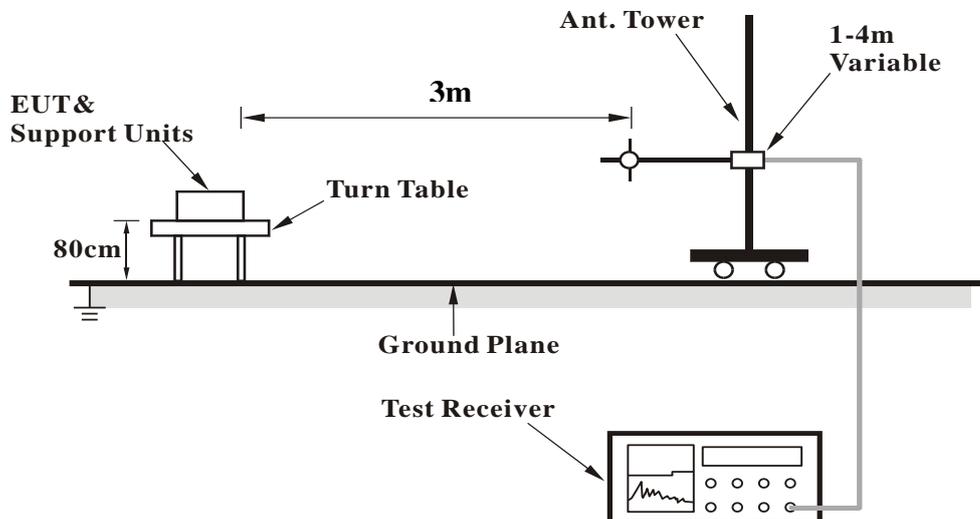

<Frequency Range above 1GHz>

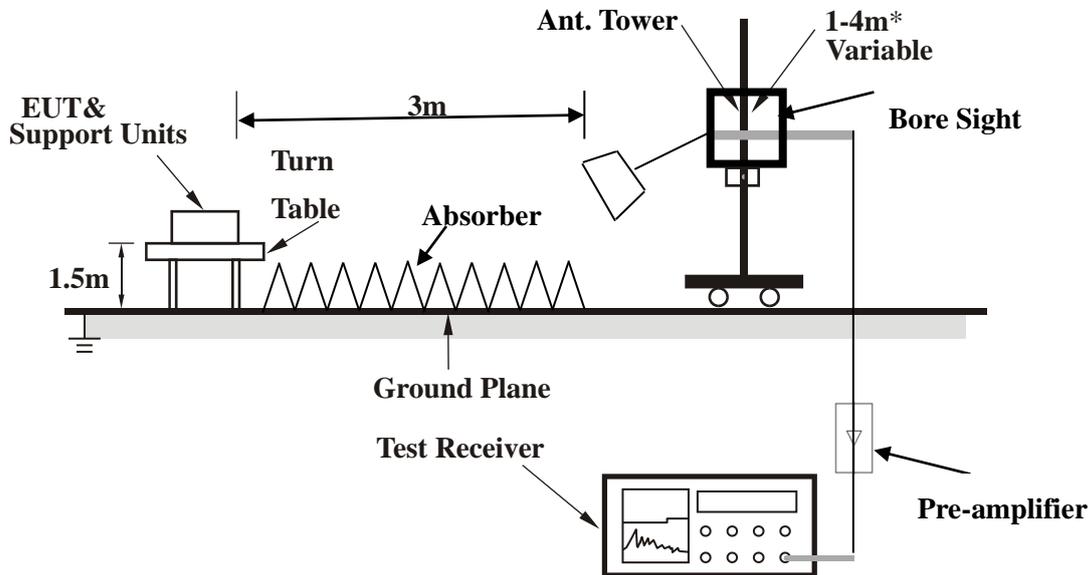

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.




BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

### 3.2.7 TEST RESULTS

#### Radiated Emission Band Edge for BT

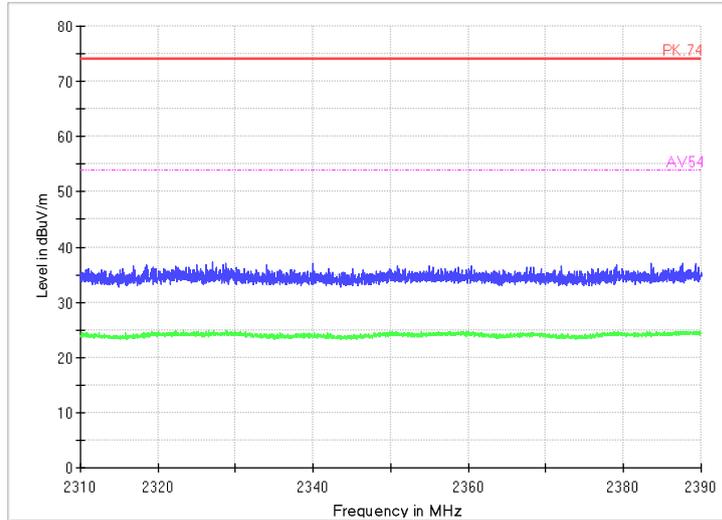


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

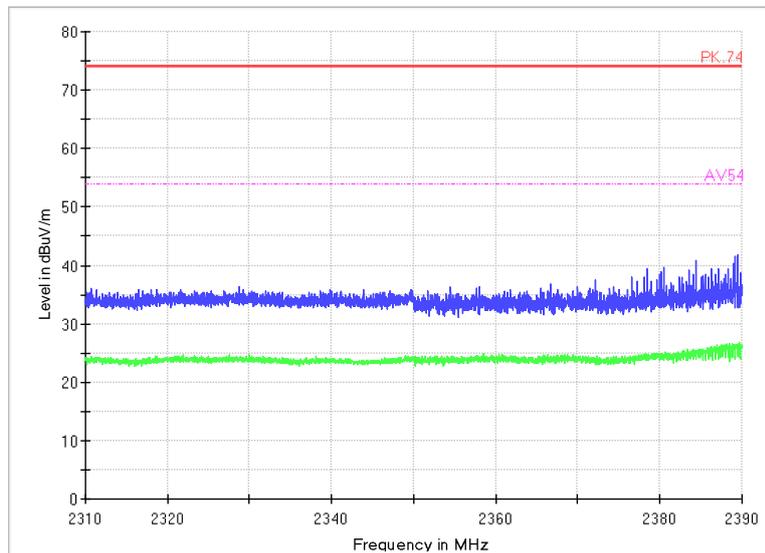

Carrier frequency (MHz): 2402


Channel No.:0

Test Mode: GFSK

Polarity: Horizontal



Test Report No.: PSU-NQN2504150110RF06

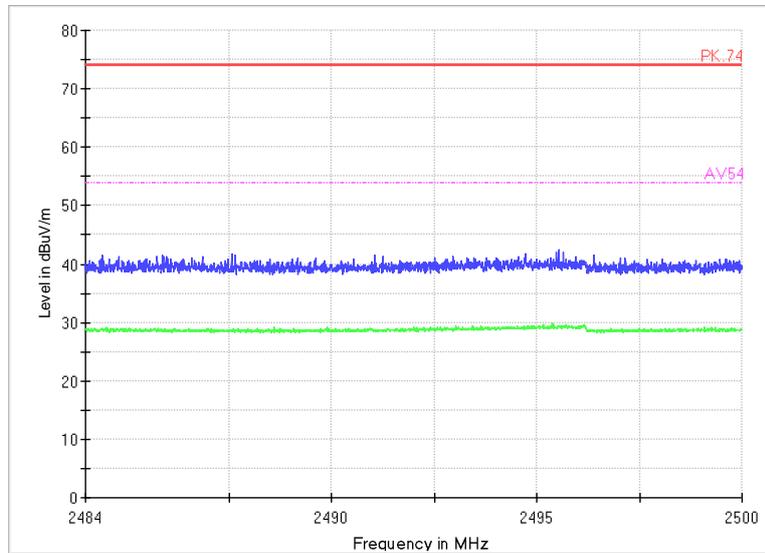


Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

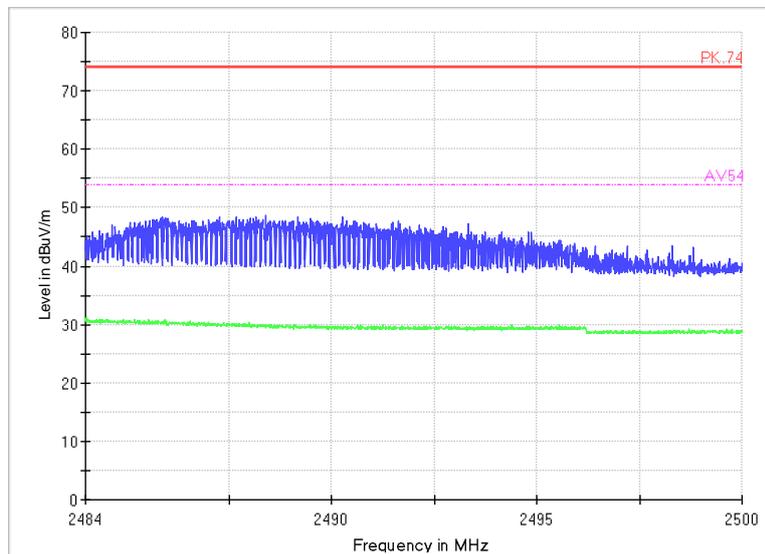

Carrier frequency (MHz): 2480


Channel No.:78

Test Mode: GFSK

Polarity: Horizontal



Test Report No.: PSU-NQN2504150110RF06

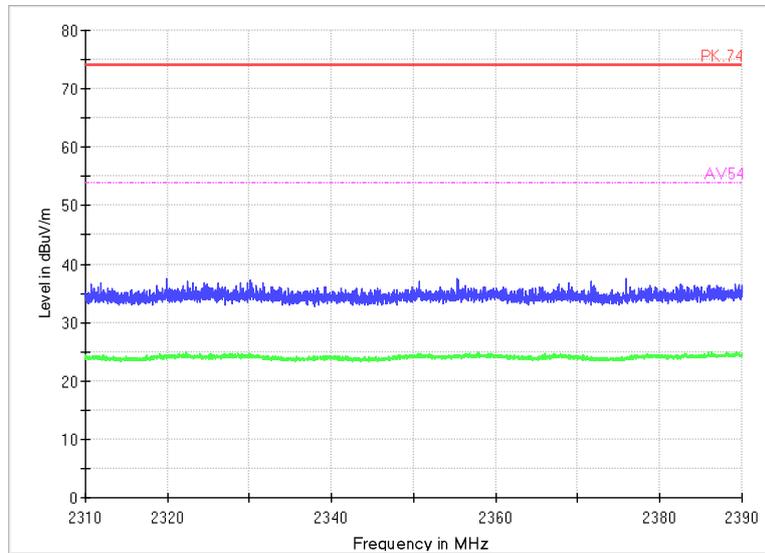


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode:  $\pi/4$ DQPSK

Polarity: Vertical

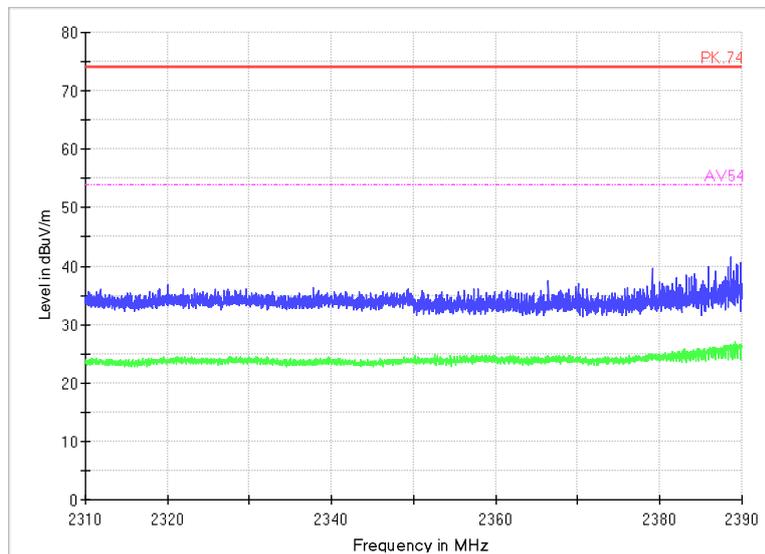

Carrier frequency (MHz): 2402


Channel No.:0

Test Mode:  $\pi/4$ DQPSK

Polarity: Horizontal



Test Report No.: PSU-NQN2504150110RF06

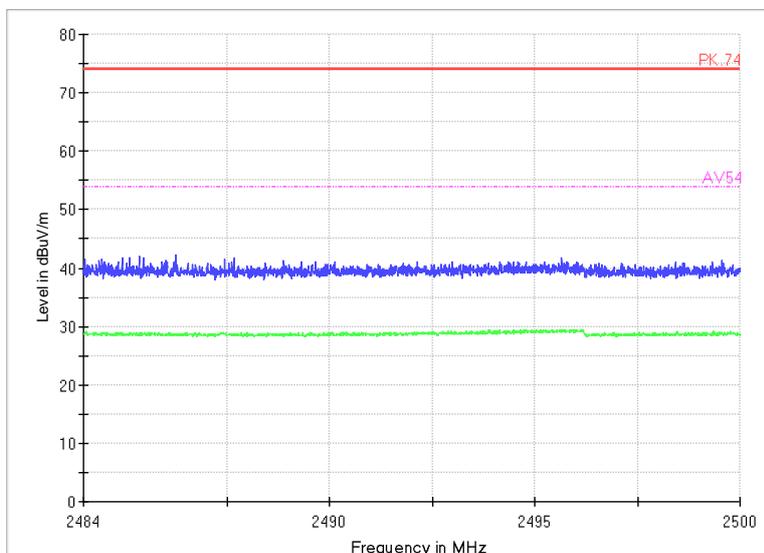


Carrier frequency (MHz): 2480

Channel No.:78

Test Mode:  $\pi/4$ DQPSK

Polarity: Vertical

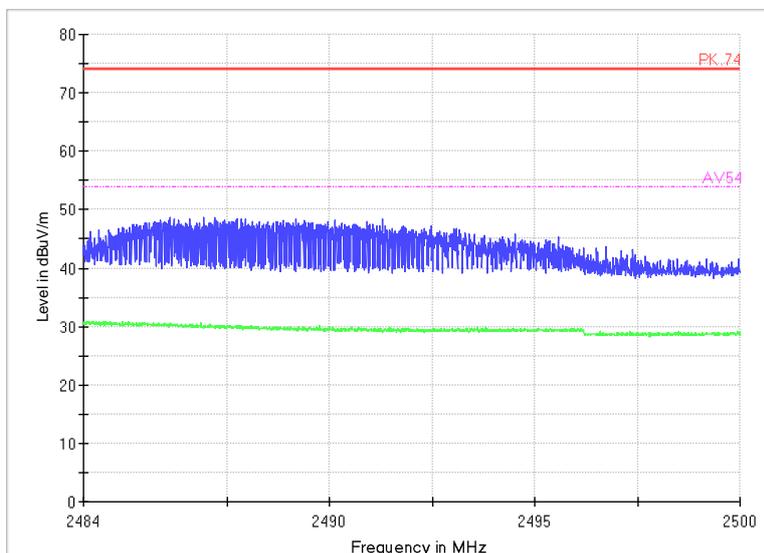

Carrier frequency (MHz): 2480


Channel No.:78

Test Mode:  $\pi/4$ DQPSK

Polarity: Horizontal



Test Report No.: PSU-NQN2504150110RF06

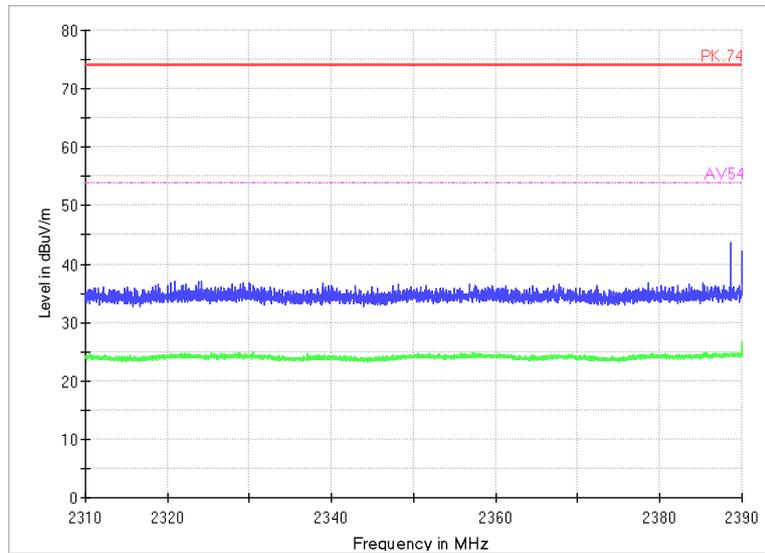


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Vertical

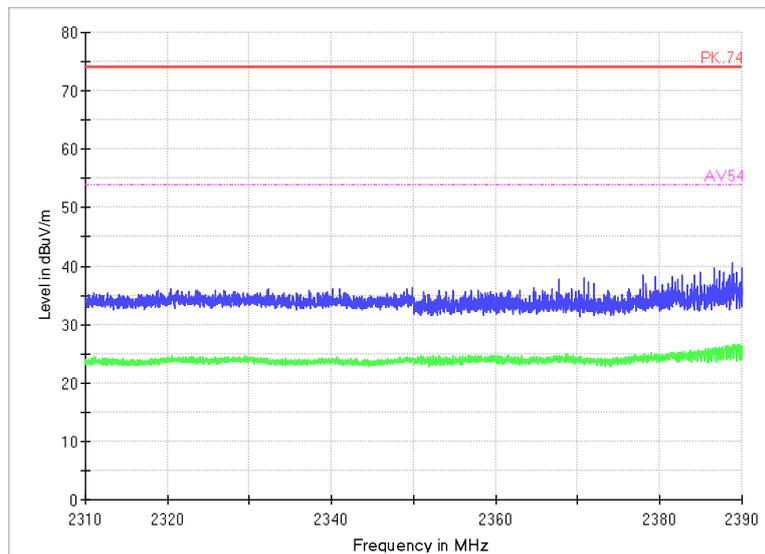

Carrier frequency (MHz): 2402


Channel No.:0

Test Mode: 8DPSK

Polarity: Horizontal



Test Report No.: PSU-NQN2504150110RF06

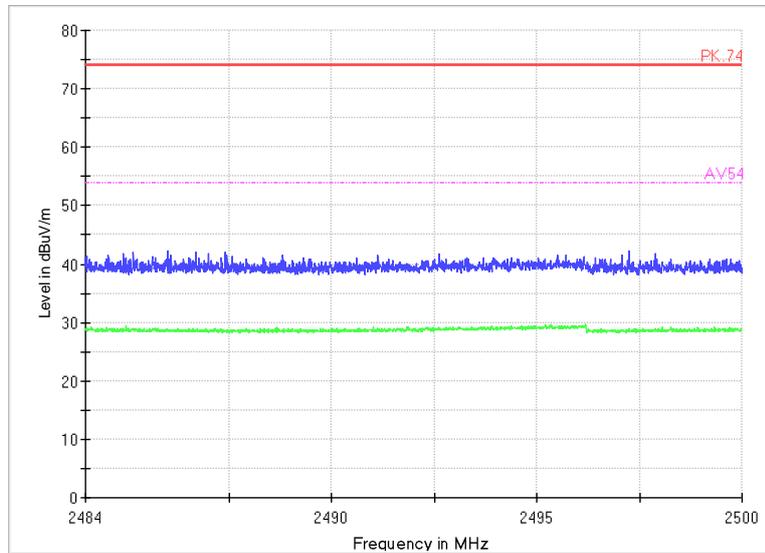


Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Vertical

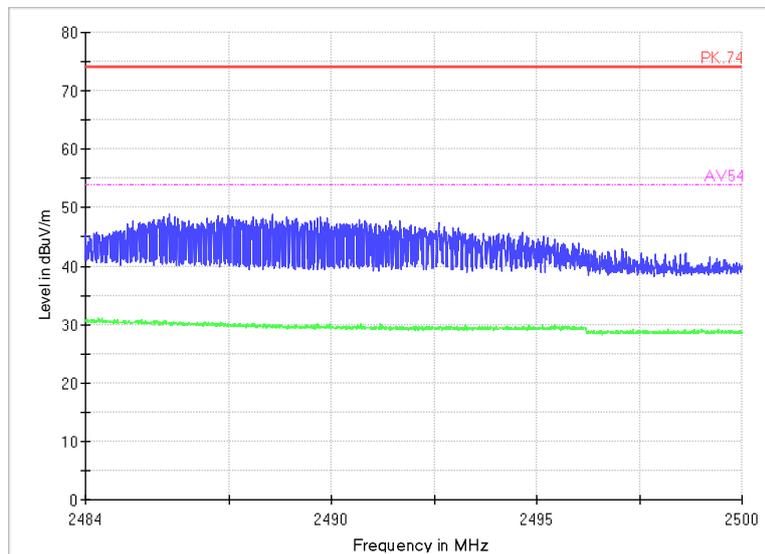

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Horizontal



BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

### Radiated Emission for BT

After comparison, the worst case attitude is EUT lay down.

Determining Spurious Emissions Levels

A “reference path loss” is established and the  $A_{Rpl}$  is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation:  $(11.57 \text{ dB}\mu\text{V/m}) = (26.97 \text{ dB}\mu\text{V}) + (-15.4 \text{ dB/m})$ , the corresponding frequency is 52.2615MHz.

For GFSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
49.788	11.57	-15.4	26.97	Vertical	40	28.43
77.6755	30.47	-22	52.47	Vertical	40	9.53
117.0575	32.3	-18.6	50.9	Vertical	43.5	11.2
209.838	20.25	-17.2	37.45	Vertical	43.5	23.25
520.335	13.69	-8.8	22.49	Vertical	46	32.31
941.7515	17.63	-1.9	19.53	Vertical	46	28.37

For  $\pi/4$ DQPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
43.8225	13.04	-16	29.04	Vertical	40	26.96
77.724	32.78	-22	54.78	Vertical	40	7.22
116.9605	32.92	-18.6	51.52	Vertical	43.5	10.58
208.1405	21.12	-17.2	38.32	Vertical	43.5	22.38
512.672	14.51	-9	23.51	Vertical	46	31.49
916.3375	19.19	-1.9	21.09	Vertical	46	26.81

For 8DPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
42.804	13.7	-16.3	30	Vertical	40	26.3



BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

77.2875	31.41	-21.9	53.31	Vertical	40	8.59
117.3	32.94	-18.7	51.64	Vertical	43.5	10.56
209.159	21.8	-17.2	39	Vertical	43.5	21.7
547.301	14.65	-8.4	23.05	Vertical	46	31.35
938.793	19.09	-1.8	20.89	Vertical	46	26.91

For GFSK

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
49.8365	15.86	-15.4	31.26	Vertical	40	24.14
77.724	32.7	-22	54.7	Vertical	40	7.3
117.009	32.97	-18.6	51.57	Vertical	43.5	10.53
209.0135	21.51	-17.2	38.71	Vertical	43.5	21.99
503.36	14.19	-9.2	23.39	Vertical	46	31.81
933.458	19.09	-1.7	20.79	Vertical	46	26.91

For  $\pi/4$ DQPSK

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
49.788	14.63	-15.4	30.03	Vertical	40	25.37
77.724	32.67	-22	54.67	Vertical	40	7.33
117.203	32.9	-18.6	51.5	Vertical	43.5	10.6
209.45	21.57	-17.2	38.77	Vertical	43.5	21.93
520.1895	14.78	-8.8	23.58	Vertical	46	31.22
927.3955	19.16	-1.7	20.86	Vertical	46	26.84

For 8DPSK

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
49.788	15.43	-15.4	30.83	Vertical	40	24.57
77.627	31.54	-22	53.54	Vertical	40	8.46
117.203	32.95	-18.6	51.55	Vertical	43.5	10.55
205.6185	21.29	-17.2	38.49	Vertical	43.5	22.21
518.007	14.89	-8.8	23.69	Vertical	46	31.11
927.638	19.23	-1.7	20.93	Vertical	46	26.77



BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

For GFSK

Channel No.:78

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
36.402	12.6	-18.1	30.7	Vertical	40	27.4
77.627	31.6	-22	53.6	Vertical	40	8.4
117.009	32.97	-18.6	51.57	Vertical	43.5	10.53
209.353	21.8	-17.2	39	Vertical	43.5	21.7
549.726	14.74	-8.3	23.04	Vertical	46	31.26
883.6	18.84	-2.3	21.14	Vertical	46	27.16

For  $\pi/4$ DQPSK

Channel No.:78

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
35.82	13.28	-18.3	31.58	Vertical	40	26.72
77.5785	31.52	-22	53.52	Vertical	40	8.48
117.494	32.96	-18.7	51.66	Vertical	43.5	10.54
209.0135	21.47	-17.2	38.67	Vertical	43.5	22.03
518.7345	14.89	-8.8	23.69	Vertical	46	31.11
935.883	19.07	-1.8	20.87	Vertical	46	26.93

For 8DPSK


Channel No.:78

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
42.804	13.56	-16.3	29.86	Vertical	40	26.44
77.627	31.76	-22	53.76	Vertical	40	8.24
117.1545	32.99	-18.6	51.59	Vertical	43.5	10.51
209.2075	21.86	-17.2	39.06	Vertical	43.5	21.64
543.518	14.34	-8.5	22.84	Vertical	46	31.66
872.8815	18.67	-2.4	21.07	Vertical	46	27.33



Test Report No.: PSU-NQN2504150110RF06

Full Spectrum

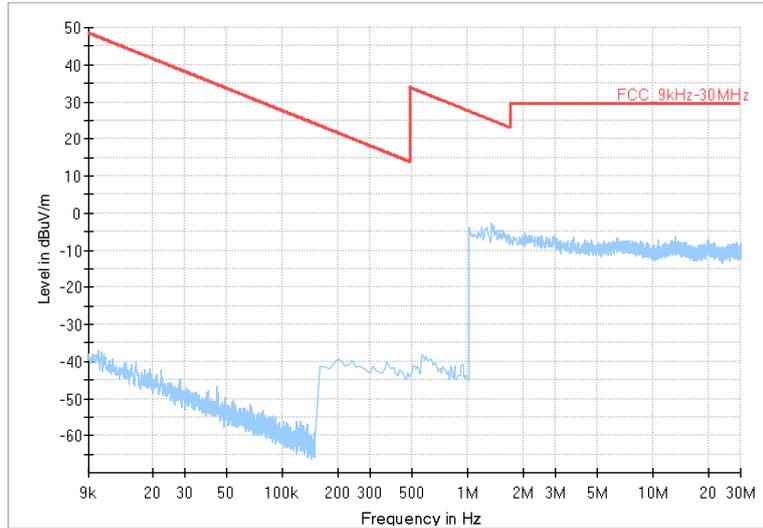

Frequency Range: 9kHz -30MHz

Detector: QP mode

Note: The relevant tests have been performed in order to verify in which mode would have the worst features, the result show above is the worst case.




BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

Carrier frequency (MHz): 2402

Channel No.:0

Full Spectrum

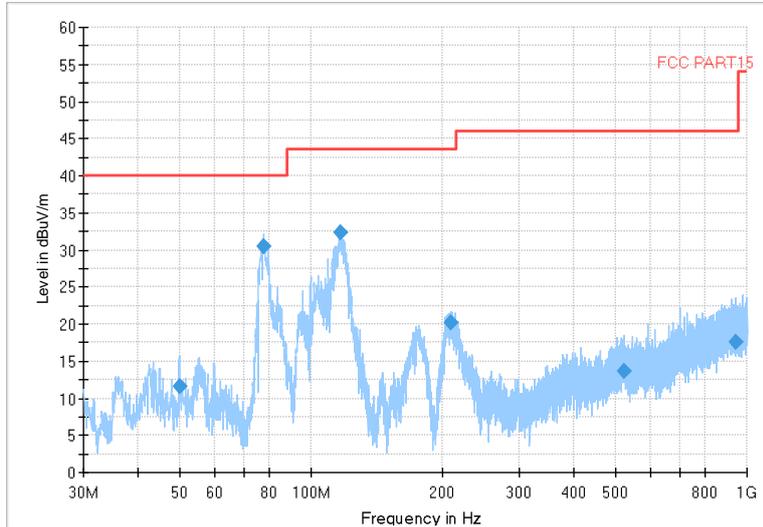


Frequency Range:30MHz-1GHz

Detector: QP mode

Modulation type: GFSK

Full Spectrum

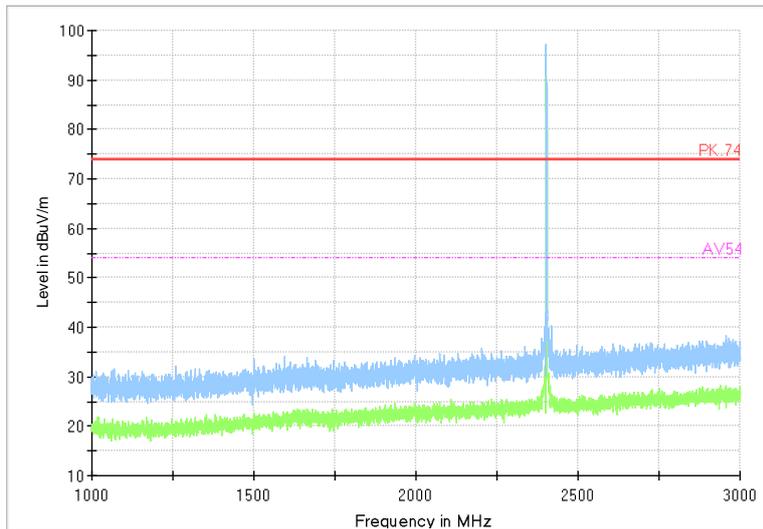

Frequency Range: 1GHz-3GHz


Detector: Av mode and PK mode

Modulation type: GFSK



Test Report No.: PSU-NQN2504150110RF06

Full Spectrum

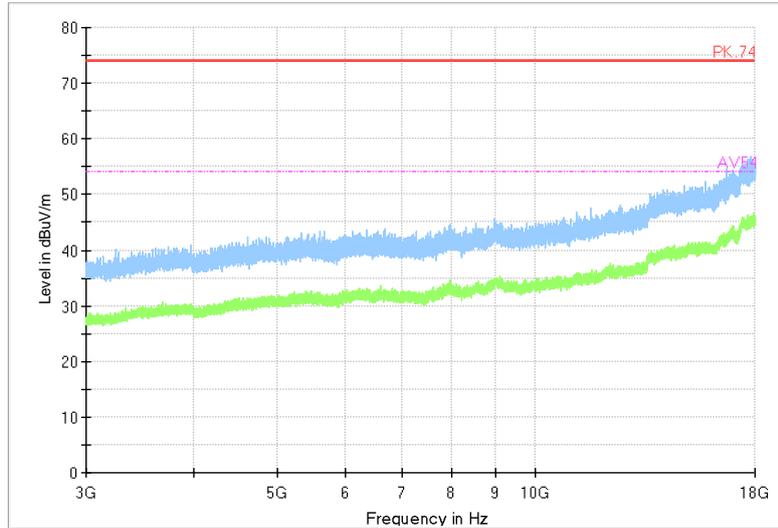


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK

Full Spectrum

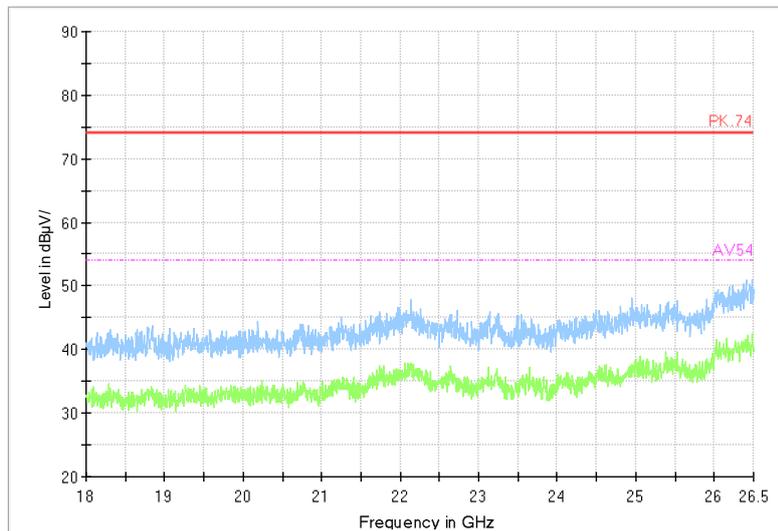

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: GFSK




BUREAU VERITAS

Test Report No.: PSU-NQN2504150110RF06

Carrier frequency (MHz): 2402

Channel No.:0

Full Spectrum

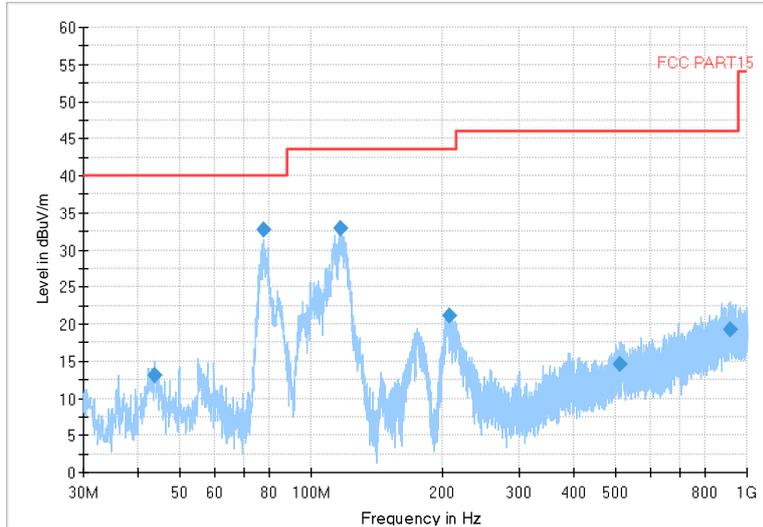


Frequency Range:30MHz-1GHz

Detector: QP mode

Modulation type:  $\pi/4$ DQPSK

Full Spectrum

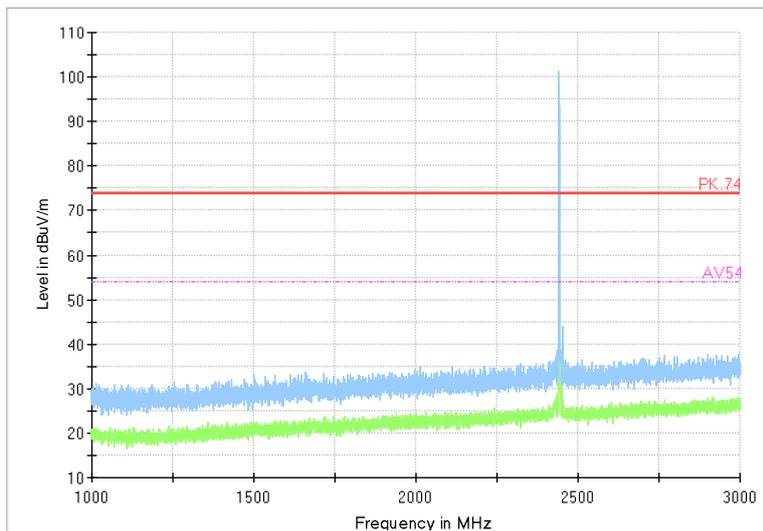

Frequency Range: 1GHz-3GHz


Detector: Av mode and PK mode

Modulation type:  $\pi/4$ DQPSK



Test Report No.: PSU-NQN2504150110RF06

Full Spectrum

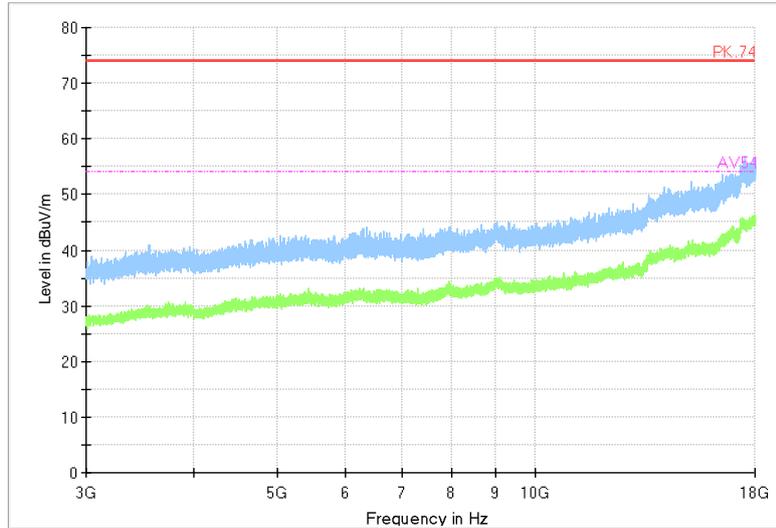


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type:  $\pi/4$ DQPSK

Full Spectrum

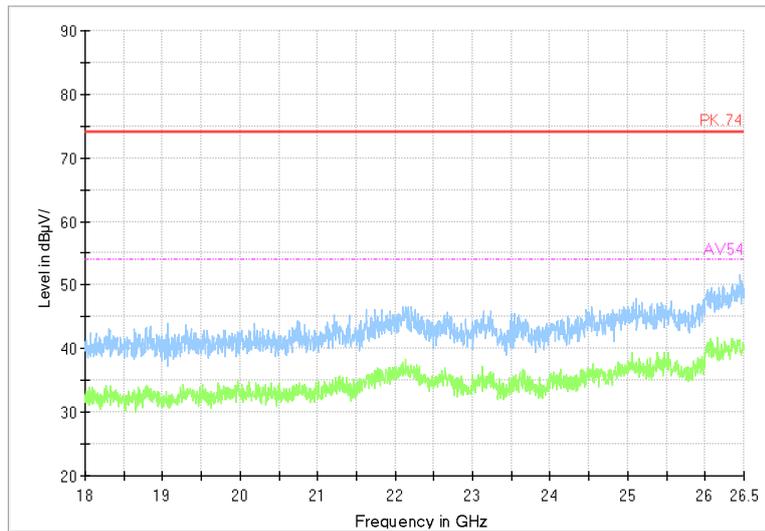

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type:  $\pi/4$ DQPSK




BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

Carrier frequency (MHz): 2402

Channel No.:0

Full Spectrum

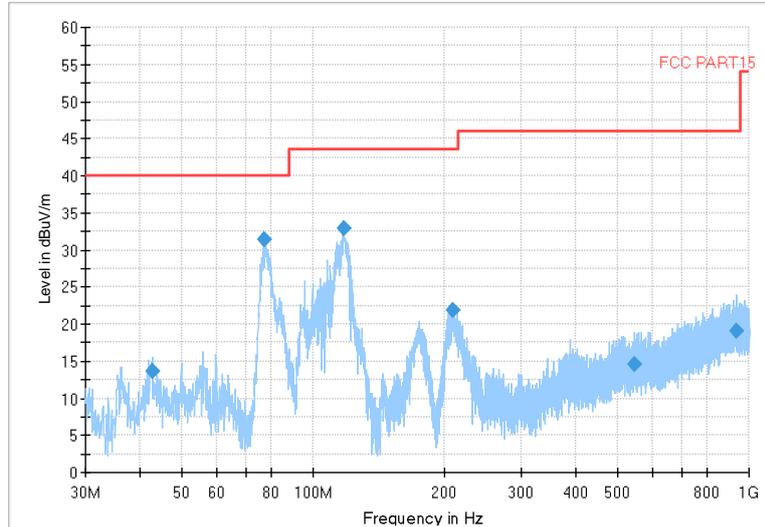


Frequency Range:30MHz-1GHz

Detector: QP mode

Modulation type: 8DPSK

Full Spectrum

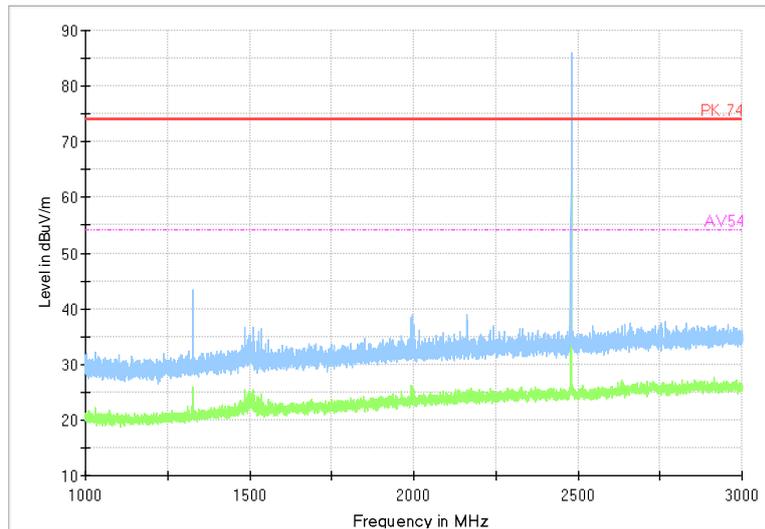

Frequency Range: 1GHz-3GHz


Detector: Av mode and PK mode

Modulation type: 8DPSK



Test Report No.: PSU-NQN2504150110RF06

Full Spectrum

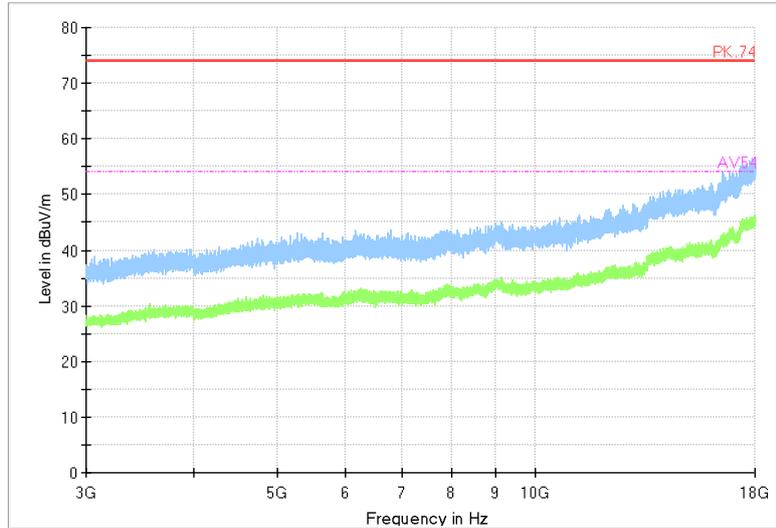


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: 8DPSK

Full Spectrum

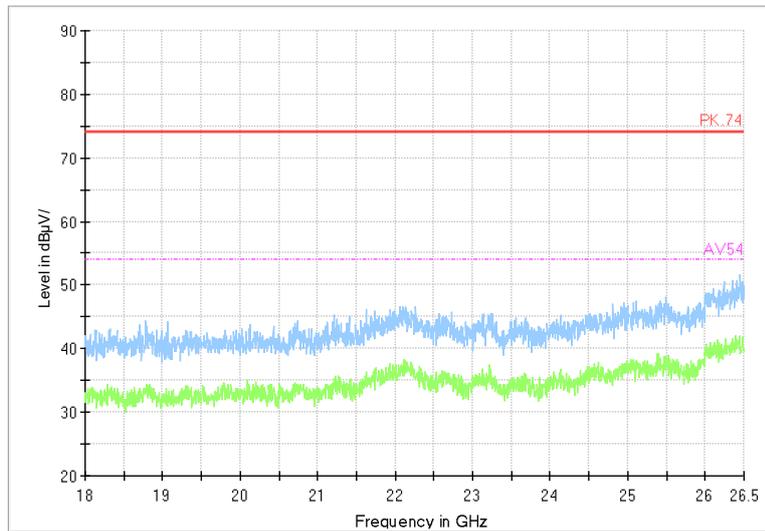

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: 8DPSK




BUREAU VERITAS

Test Report No.: PSU-NQN2504150110RF06

Carrier frequency (MHz): 2440

Channel No.:39

Full Spectrum

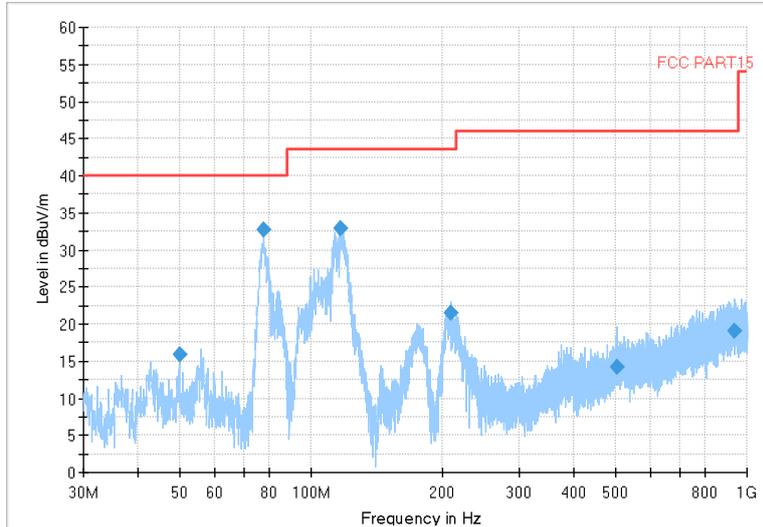


Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: GFSK

Full Spectrum

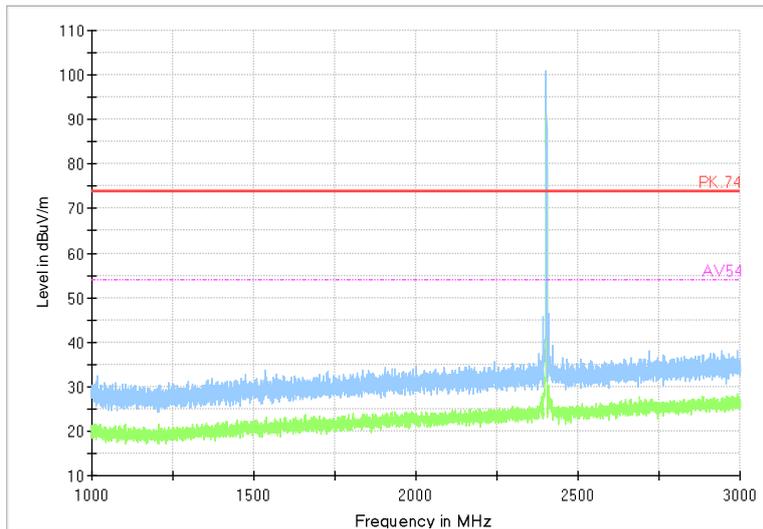

Frequency Range: 1GHz-3GHz


Detector: Av mode and PK mode

Modulation type: GFSK



Test Report No.: PSU-NQN2504150110RF06

Full Spectrum

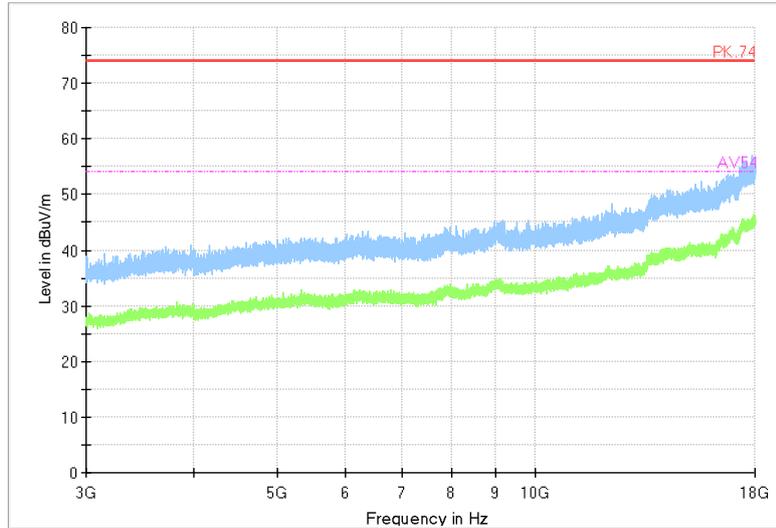


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK

Full Spectrum

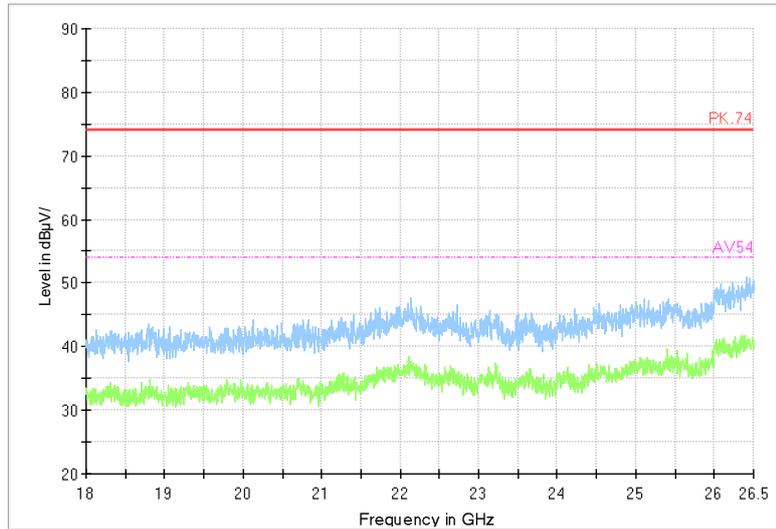

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode


Modulation type: GFSK



Test Report No.: PSU-NQN2504150110RF06

Carrier frequency (MHz): 2440


Channel No.:39

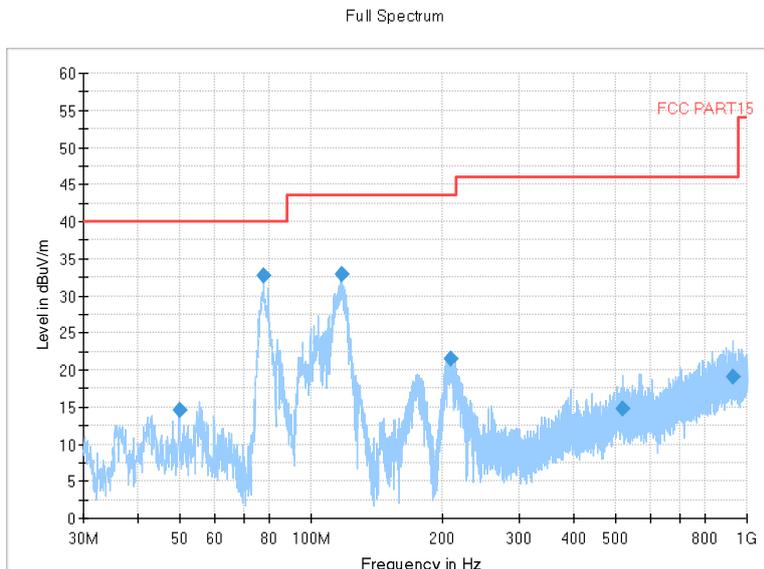

Frequency Range: 30MHz-1GHz

Detector:QP mode

Modulation type:  $\pi/4$ DQPSK

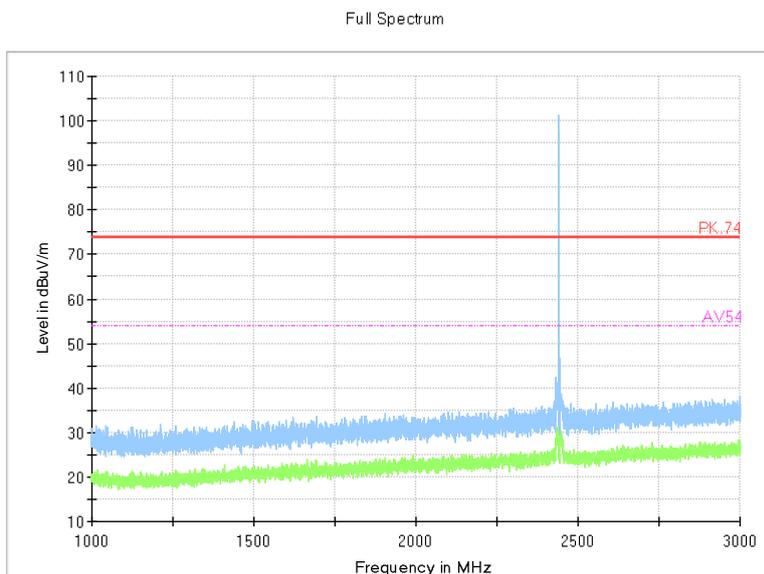

Frequency Range: 1GHz-3GHz


Detector: Av mode and PK mode

Modulation type:  $\pi/4$ DQPSK



Test Report No.: PSU-NQN2504150110RF06

Full Spectrum

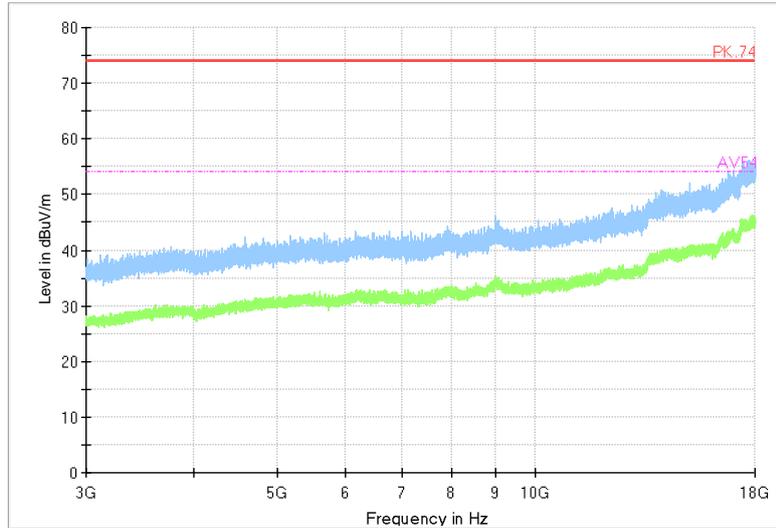


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type:  $\pi/4$ DQPSK

Full Spectrum

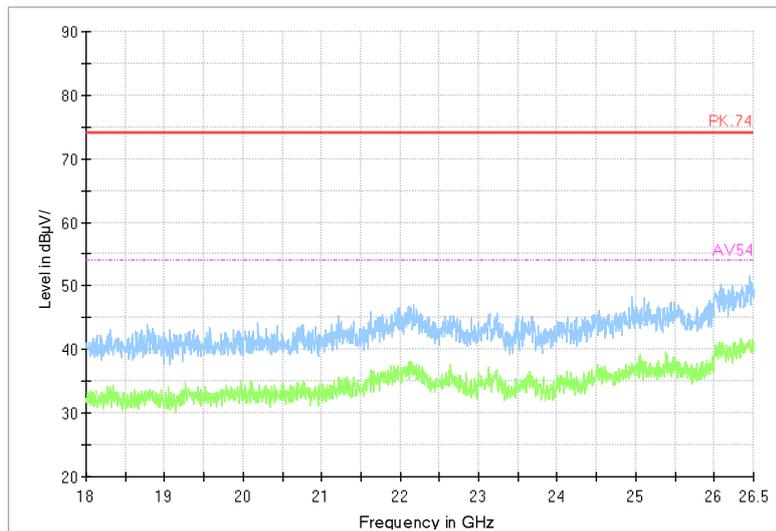

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode


Modulation type:  $\pi/4$ DQPSK



Test Report No.: PSU-NQN2504150110RF06

Carrier frequency (MHz): 2440


Channel No.:39

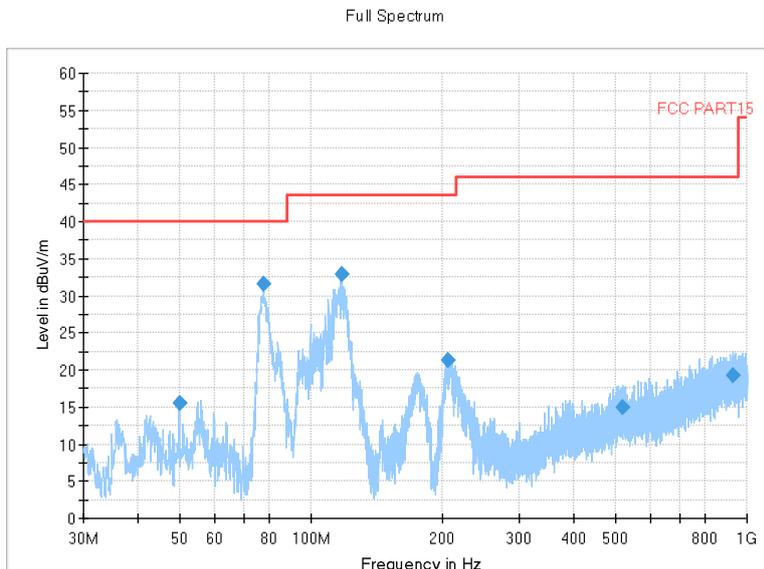

Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: 8DPSK

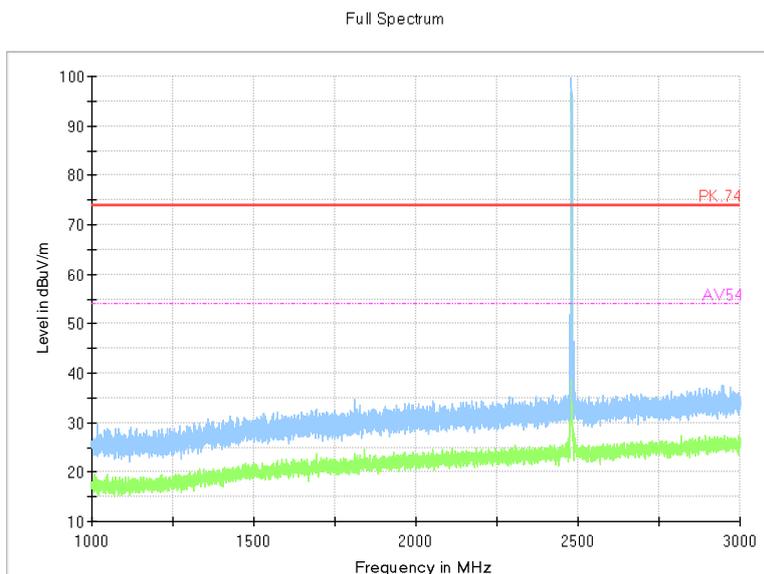

Frequency Range: 1GHz-3GHz


Detector: Av mode and PK mode

Modulation type: 8DPSK



Test Report No.: PSU-NQN2504150110RF06

Full Spectrum

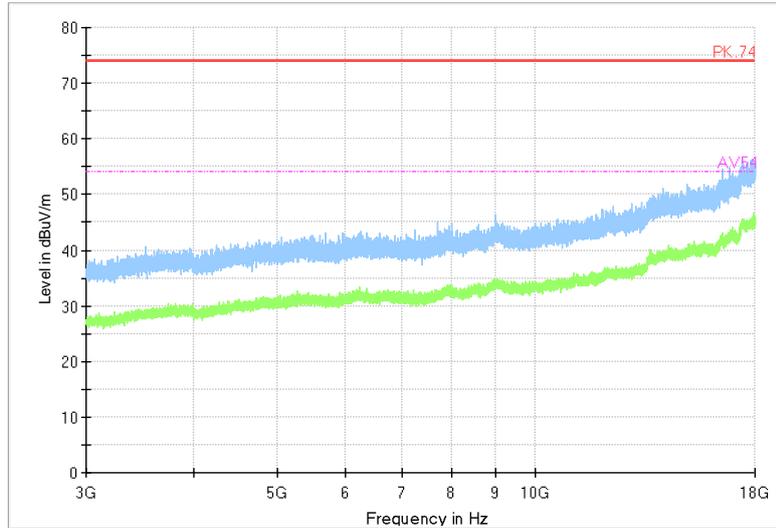


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: 8DPSK

Full Spectrum

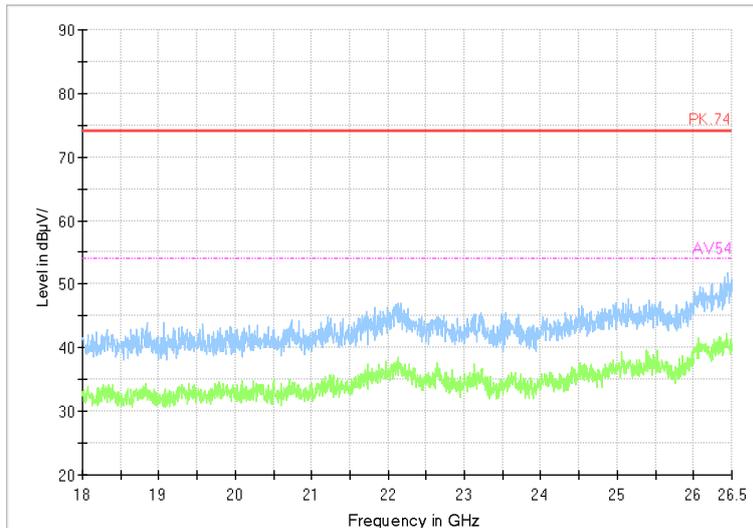

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: 8DPSK




BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

Carrier frequency (MHz): 2480

Channel No.:78

Full Spectrum

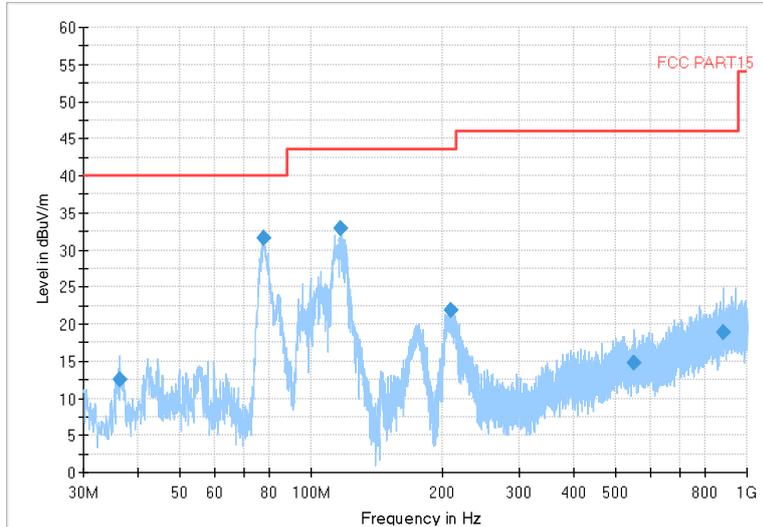


Frequency Range:30MHz-1GHz

Detector: QP mode

Modulation type: GFSK

Full Spectrum

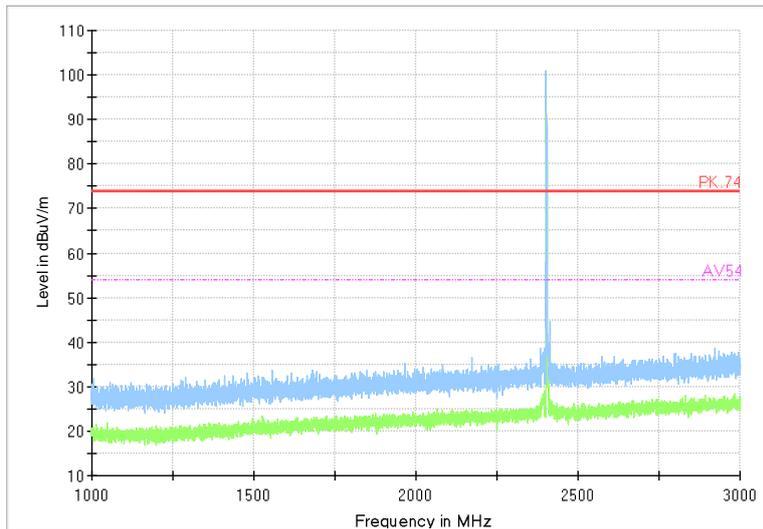

Frequency Range: 1GHz-3GHz


Detector: Av mode and PK mode

Modulation type: GFSK



Test Report No.: PSU-NQN2504150110RF06

Full Spectrum

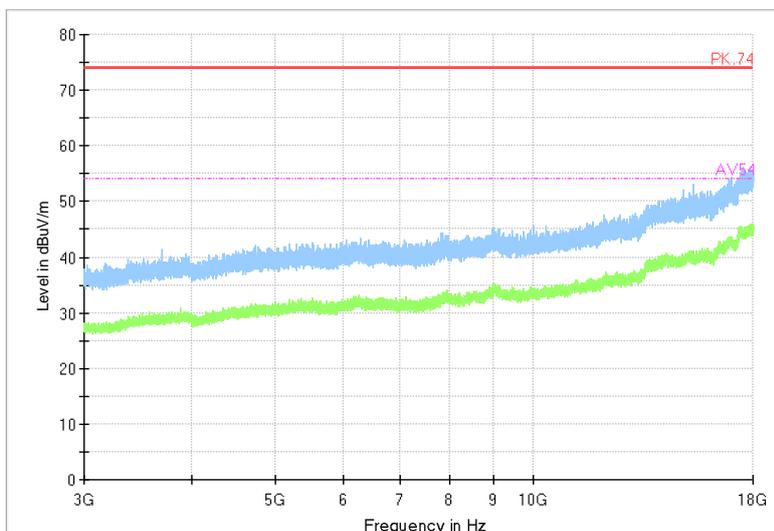


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: GFSK

Full Spectrum

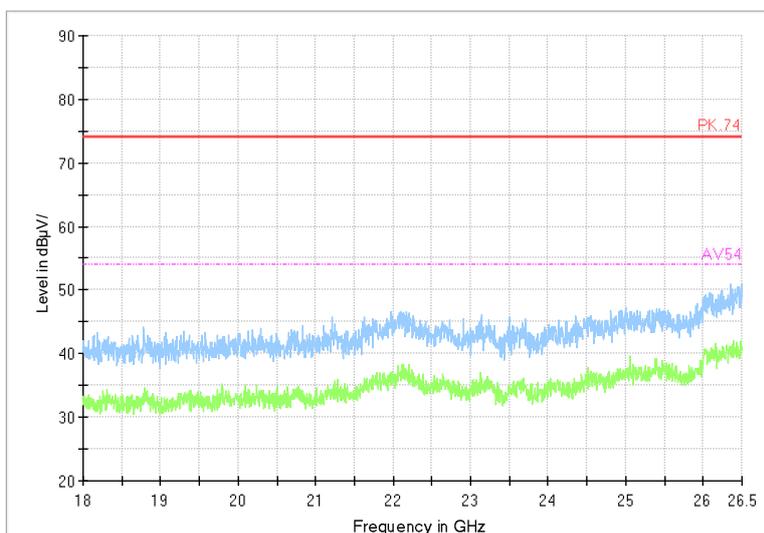

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: GFSK




BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

Carrier frequency (MHz): 2480

Channel No.:78

Full Spectrum

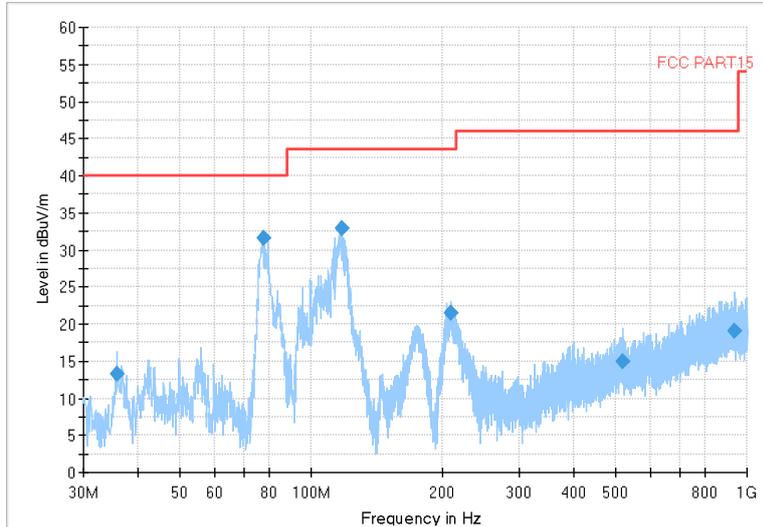


Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type:  $\pi/4$ DQPSK

Full Spectrum

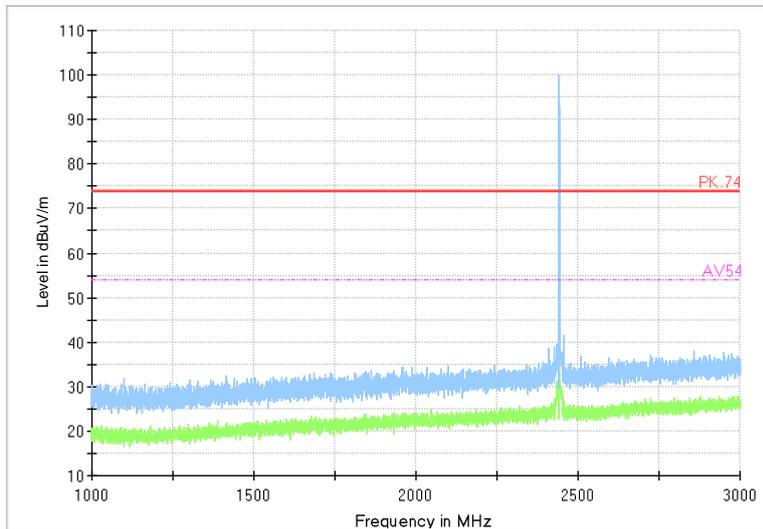

Frequency Range: 1GHz-3GHz


Detector: Av mode and PK mode

Modulation type:  $\pi/4$ DQPSK



Test Report No.: PSU-NQN2504150110RF06

Full Spectrum

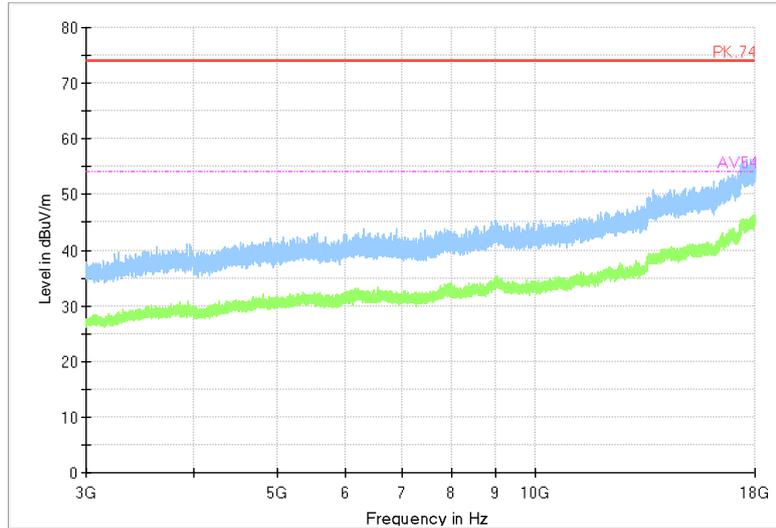


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type:  $\pi/4$ DQPSK

Full Spectrum

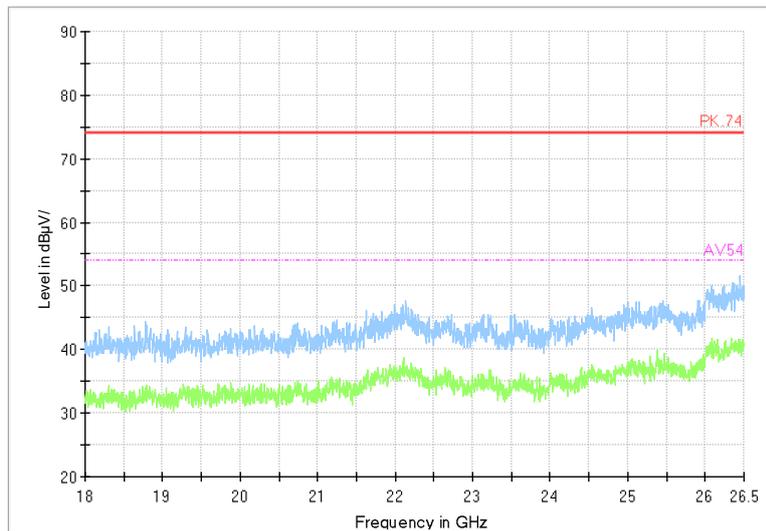

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type:  $\pi/4$ DQPSK




BUREAU VERITAS

Test Report No.: PSU-NQN2504150110RF06

Carrier frequency (MHz): 2480

Channel No.:78

Full Spectrum

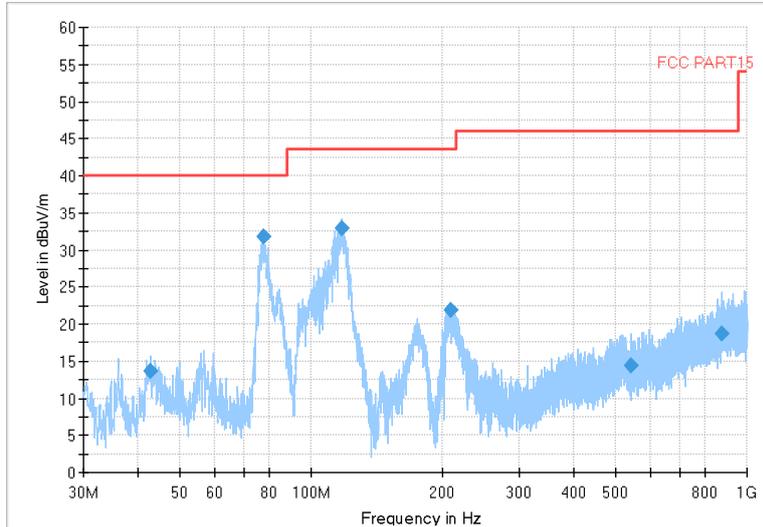


Frequency Range: 30MHz-1GHz

Detector: QP mode

Modulation type: 8DPSK

Full Spectrum

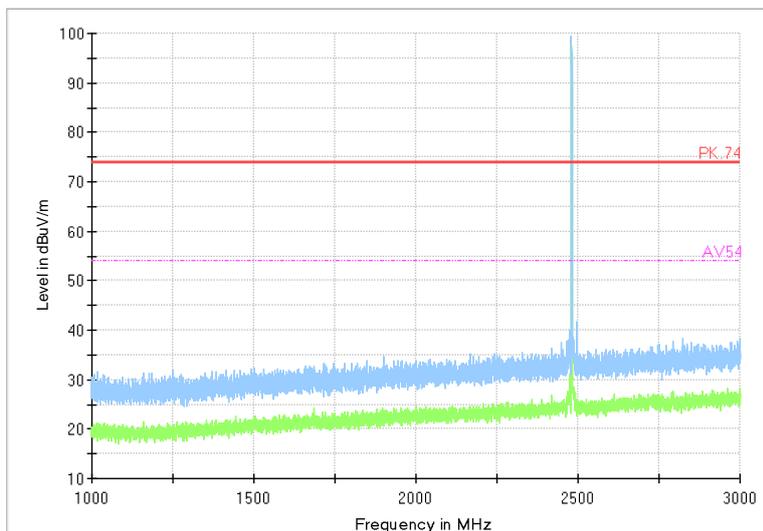

Frequency Range: 1GHz-3GHz


Detector: Av mode and PK mode

Modulation type: 8DPSK



Test Report No.: PSU-NQN2504150110RF06

Full Spectrum

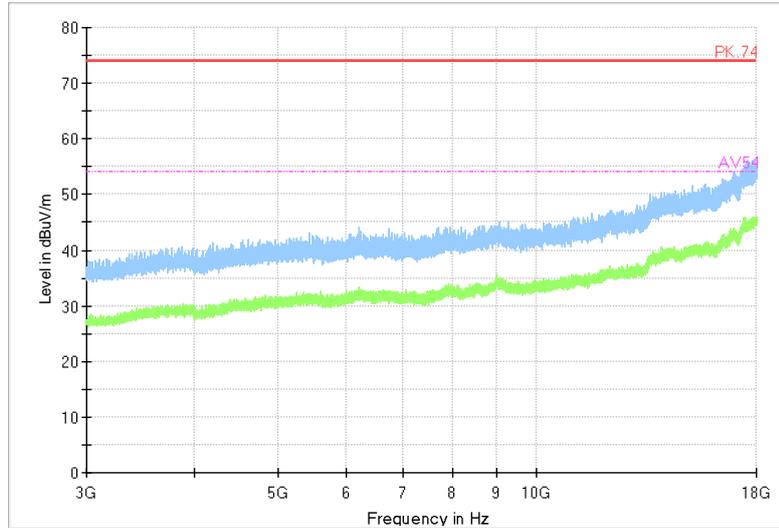


Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: 8DPSK

Full Spectrum

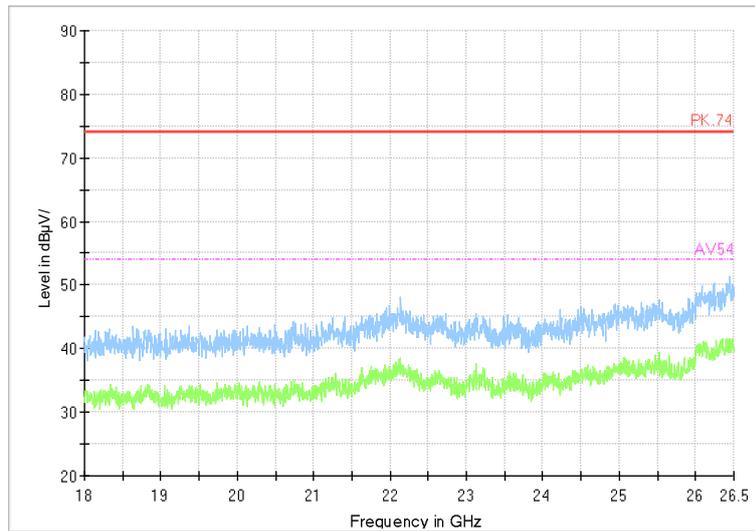

Frequency Range: 18GHz-26GHz

Detector: Av mode and PK mode

Modulation type: 8DPSK




### 3.3 NUMBER OF HOPPING FREQUENCY USED

#### 3.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

#### 3.3.2 TEST SETUP

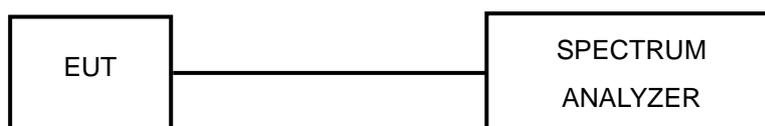

#### 3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	R&S	ESW 44	101973	Mar.28,24	Mar.27,26
Open Switch and Control Unit	R&S	OSP-B157W8	100836	N/A	N/A
Vector Signal Generator	R&S	SMBV100B	102176	Mar.29,24	Mar.28,26
Signal Generator	R&S	SMB100A03	182185	Mar.29,24	Mar.28,26
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.19,24	Jun.18,26
Hygrothermograph	DELI	20210528	SZ015	Sep.06,23	Sep.05,25
PC	LENOVO	E14	HRSW0024	N/A	N/A
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.27,25	Apr.26,26
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.27,25	Apr.26,26
Test Software	EMC32	EMC32	N/A	N/A	N/A
Temperature Chamber	votsch	VT4002	58566078100050	May.30,26	May.29,28
Power Meter	R&S	NRX	102380	Mar.28,26	Mar.27,28
Power Meter probe	R&S	NRP6A	102942	Mar.28,26	Mar.27,28

**NOTE:**

1. The calibration interval of the above test instruments is 12/ 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



Test Report No.: PSU-NQN2504150110RF06

### 3.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

### 3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

Please Refer to Appendix Of this test report.




### 3.4 DWELL TIME ON EACH CHANNEL

#### 3.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 3.4.2 TEST SETUP

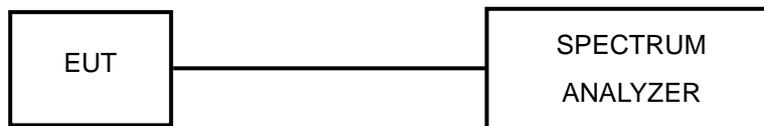

#### 3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

#### 3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.4.6 TEST RESULTS


Please Refer to Appendix Of this test repor

### 3.5 CHANNEL BANDWIDTH

#### 3.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

#### 3.5.2 TEST SETUP

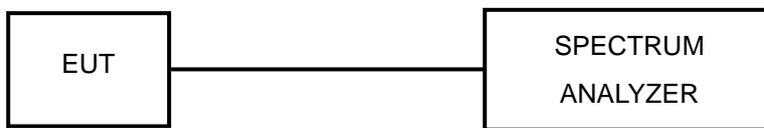

#### 3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.5.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

#### 3.5.5 DEVIATION FROM TEST STANDARD

No deviation.



Test Report No.: PSU-NQN2504150110RF06

### 3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 3.5.7 TEST RESULTS


Please Refer to Appendix Of this test report.

### 3.6 HOPPING CHANNEL SEPARATION

#### 3.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

#### 3.6.2 TEST SETUP

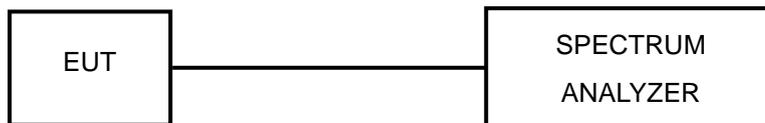

#### 3.6.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

#### 3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.6.6 TEST RESULTS


Please Refer to Appendix Of this test report.

### 3.7 MAXIMUM OUTPUT POWER

#### 3.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

#### 3.7.2 TEST SETUP

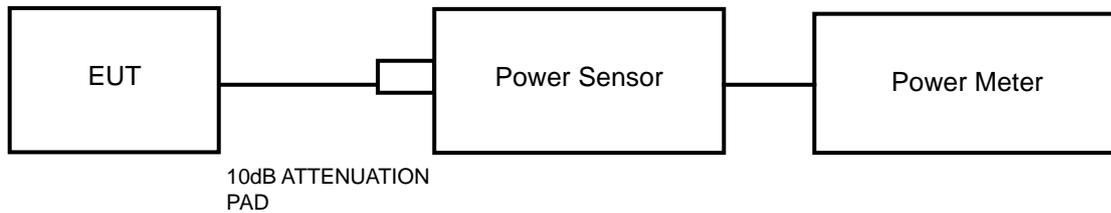

#### 3.7.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.7.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

#### 3.7.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 3.7.7 TEST RESULTS

##### 3.7.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix Of this test report.



**Test Report No.: PSU-NQN2504150110RF06**

### 3.7.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix Of this test report.



### 3.8 OUT OF BAND MEASUREMENT

#### 3.8.1 LIMITS OF OUT OF BAND MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100KHz RBW).

#### 3.8.2 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

#### 3.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

#### 3.8.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.8.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 3.8.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix Of this test report.



**BUREAU  
VERITAS**

Test Report No.: PSU-NQN2504150110RF06

## **4 PHOTOGRAPHS OF THE TEST CONFIGURATION**

Please refer to the attached file (Test Setup Photo).

## **5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.



## 6 APPENDIX

### BT ANT4

#### 1 Duty Cycle and Antenna Gain

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK(DH5)	2402	Fig.1	77.80%	1.09	-3.20

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
$\pi/4$ DQPSK(2D H5)	2402	Fig.2	77.80%	1.09	-3.20

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
8DPSK(3DH5)	2402	Fig.3	77.40%	1.11	-3.20

Note: Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$



Test Mode: GFSK(DH5)

Test Mode:  $\pi/4$ DQPSK(2DH5)

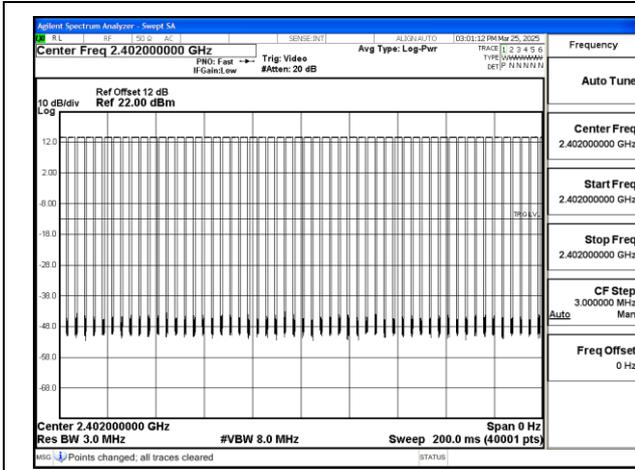


Fig.1

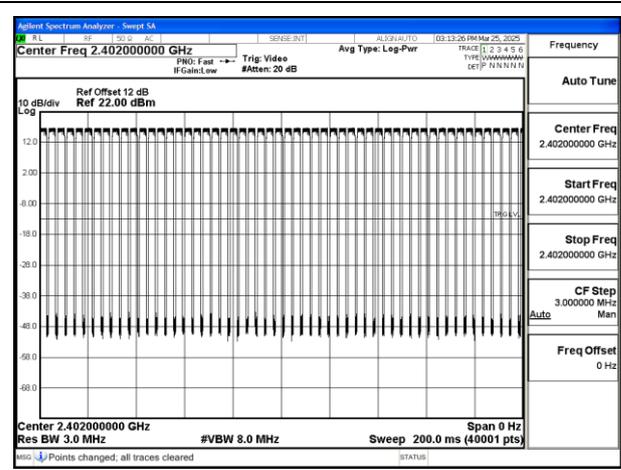


Fig.2

Test Mode: 8DPSK(3DH5)

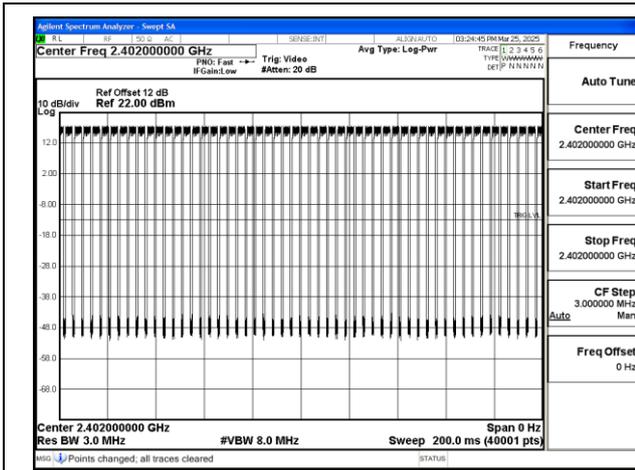


Fig.3



BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

## 2 EIRP

### Conducted Power

Modulation type	Conducted Peak Power(dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	13.84	13.38	13.46
$\pi/4$ DQPSK(2DH5)	16.53	16.11	13.52
8DPSK(3DH5)	17.39	16.86	16.90

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	12.76	13.20	12.62
$\pi/4$ DQPSK(2DH5)	13.32	13.33	13.90
8DPSK(3DH5)	13.76	13.12	13.29

### EIRP

Modulation type	Peak EIRP (dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	10.64	10.18	10.26
$\pi/4$ DQPSK(2DH5)	13.33	12.91	10.32
8DPSK(3DH5)	14.19	13.66	13.70

Modulation type	Average EIRP (dBm)		
	2402MHz	2441MHz	2480MHz
GFSK(DH5)	9.56	10.00	9.42
$\pi/4$ DQPSK(2DH5)	10.12	10.13	10.70
8DPSK(3DH5)	10.56	9.92	10.09

EIRP (dBm)=Conducted Power(dBm)+Antenna Gain(dBi)



BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

### 3 Occupied Bandwidth

#### 20dB Bandwidth

Test Mode	Carrier frequency (MHz)	20dB Bandwidth(KHz)
GFSK(DH5)	2402	938.3
GFSK(DH5)	2441	928.9
GFSK(DH5)	2480	931.6

Test Mode	Carrier frequency (MHz)	20dB Bandwidth(KHz)
$\pi/4$ DQPSK(2DH5)	2402	1331.4
$\pi/4$ DQPSK(2DH5)	2441	1346.9
$\pi/4$ DQPSK(2DH5)	2480	1343.8


Test Mode	Carrier frequency (MHz)	20dB Bandwidth(KHz)
8DPSK(3DH5)	2402	1352.3
8DPSK(3DH5)	2441	1342.5
8DPSK(3DH5)	2480	1345.6




BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06


Test Mode: GFSK(DH5)

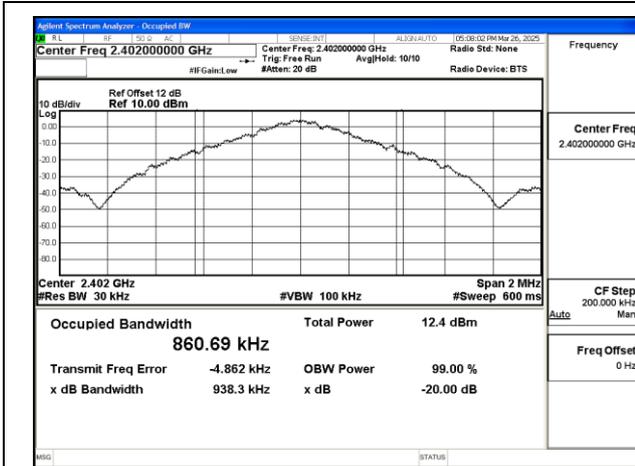

Test Mode:GFSK(DH5) 2402MHz

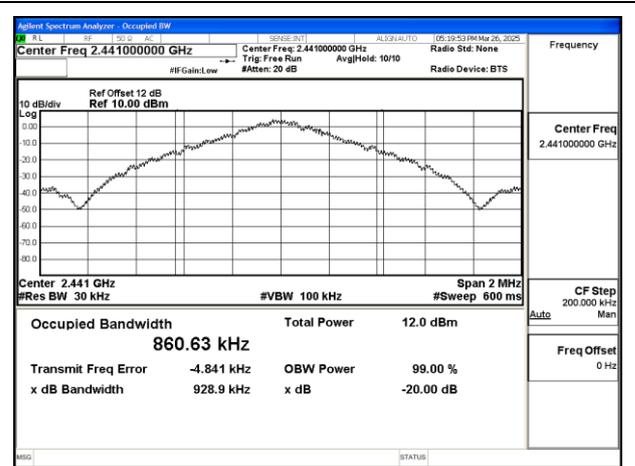

Test Mode:GFSK(DH5) 2441MHz

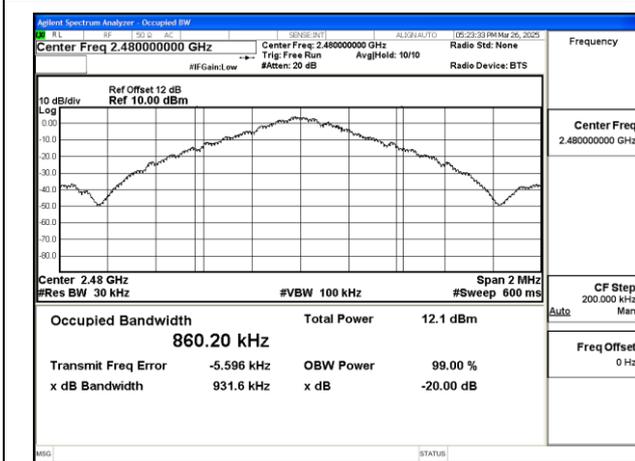


Test Mode:GFSK(DH5) 2480MHz



BUREAU VERITAS

### Test Report No.: PSU-NQN2504150110RF06

Test Mode:  $\pi/4$ DQPSK(2DH5)

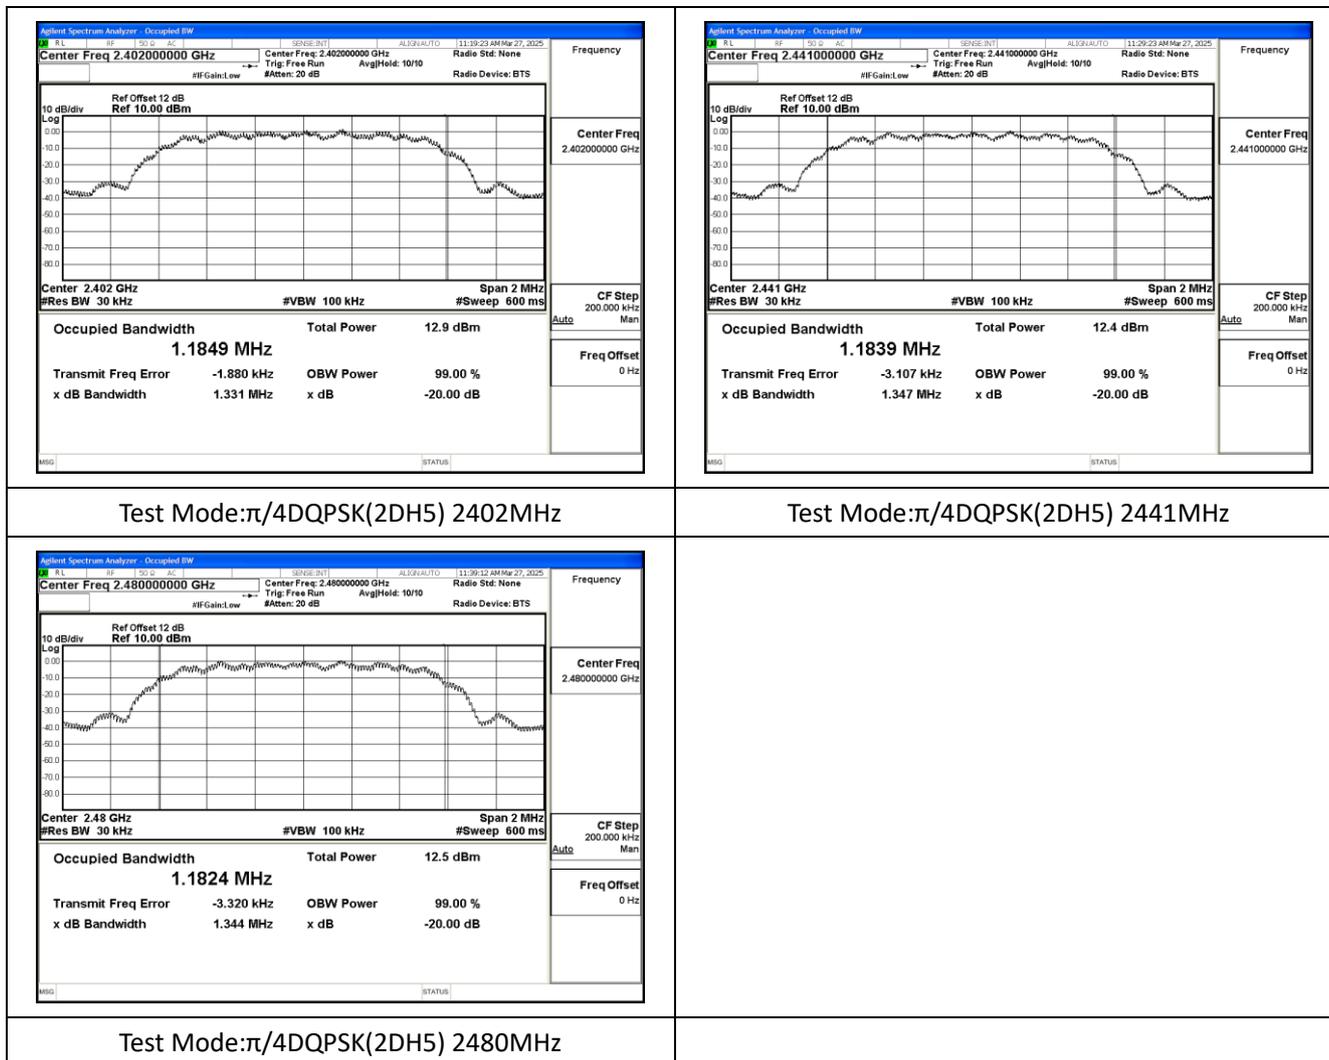

Test Mode: $\pi/4$ DQPSK(2DH5) 2402MHz

Test Mode: $\pi/4$ DQPSK(2DH5) 2441MHz


Test Mode: $\pi/4$ DQPSK(2DH5) 2480MHz




BUREAU VERITAS

### Test Report No.: PSU-NQN2504150110RF06


Test Mode: 8DPSK(3DH5)

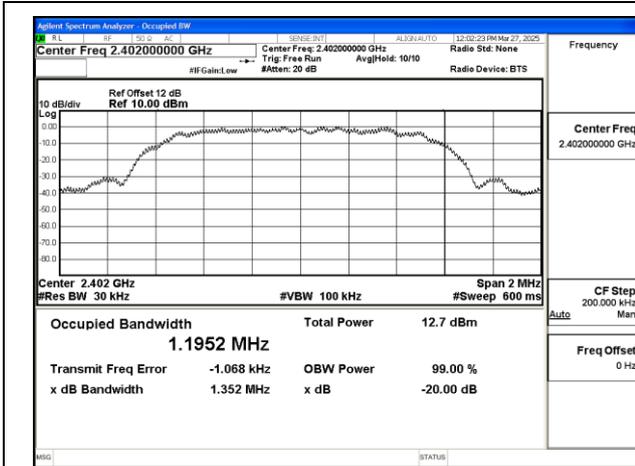

Test Mode:8DPSK(3DH5) 2402MHz

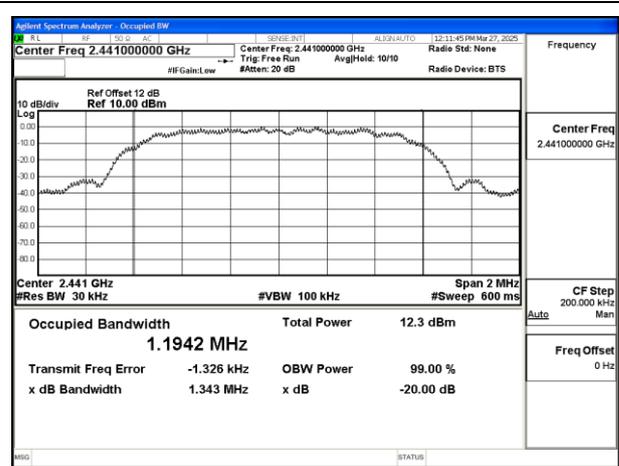

Test Mode:8DPSK(3DH5) 2441MHz

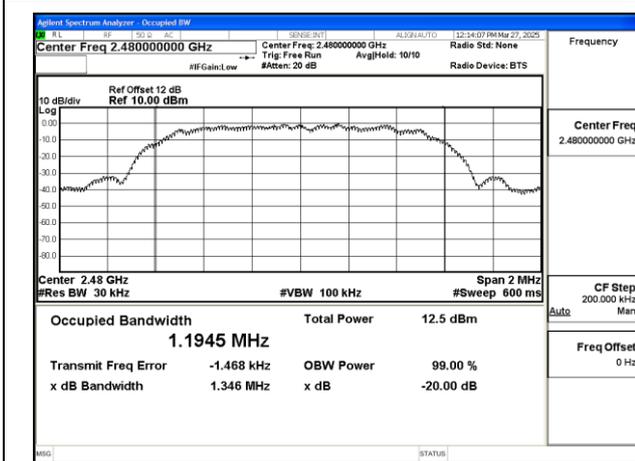

Test Mode:8DPSK(3DH5) 2480MHz



BUREAU  
VERITAS

Test Report No.: PSU-NQN2504150110RF06

### 99% Bandwidth

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK(DH5)	2402	860.5
GFSK(DH5)	2441	860.1
GFSK(DH5)	2480	859.8

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
$\pi/4$ DQPSK(2DH5)	2402	1184.1
$\pi/4$ DQPSK(2DH5)	2441	1184.3
$\pi/4$ DQPSK(2DH5)	2480	1184.1


Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
8DPSK(3DH5)	2402	1194.2
8DPSK(3DH5)	2441	1194.9
8DPSK(3DH5)	2480	1193.5




**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2504150110RF06**


Test Mode: GFSK(DH5)

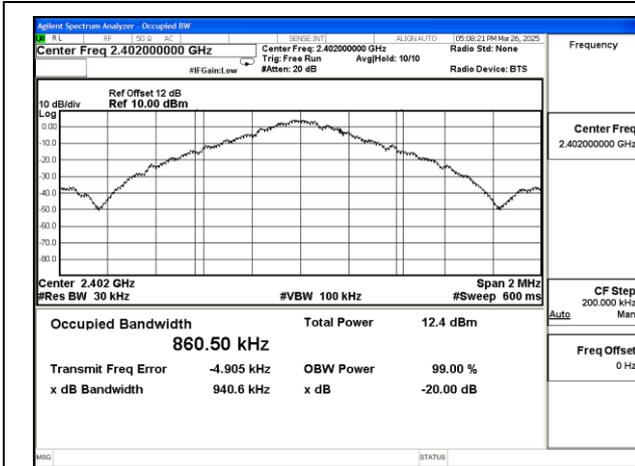

Test Mode:GFSK(DH5) 2402MHz

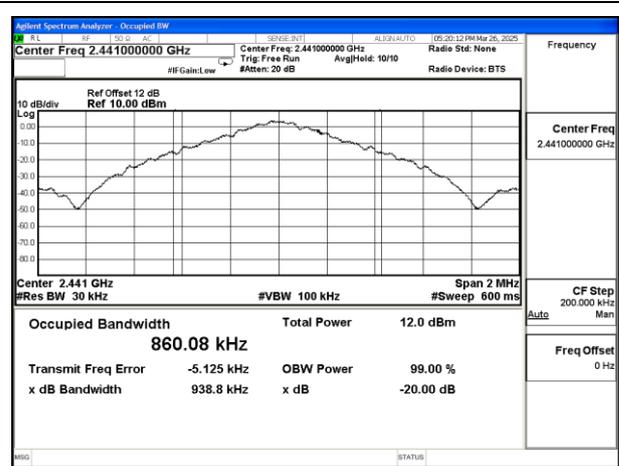

Test Mode:GFSK(DH5) 2441MHz

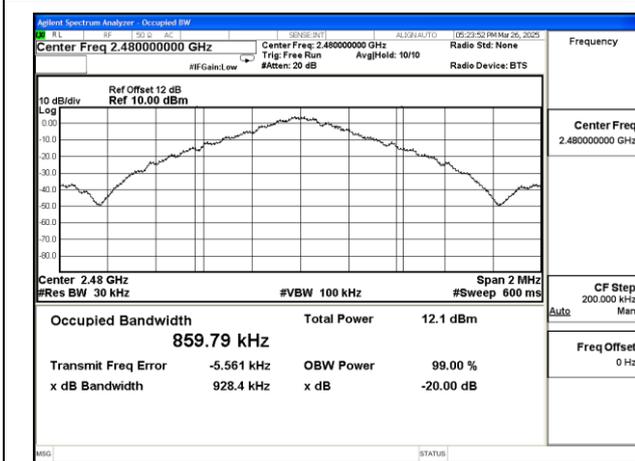


Test Mode:GFSK(DH5) 2480MHz




BUREAU VERITAS

### Test Report No.: PSU-NQN2504150110RF06


Test Mode:  $\pi/4$ DQPSK(2DH5)

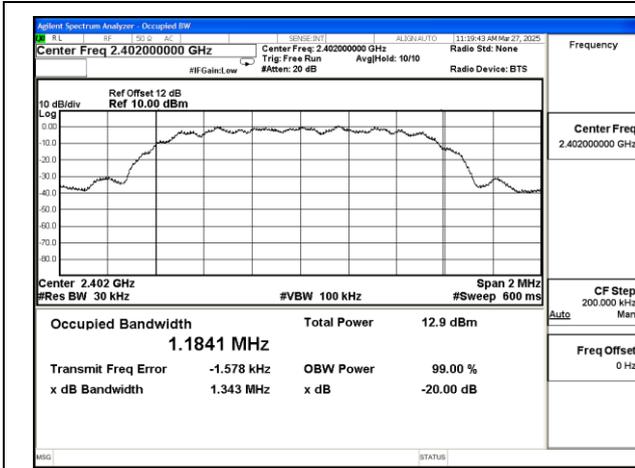

Test Mode: $\pi/4$ DQPSK(2DH5) 2402MHz

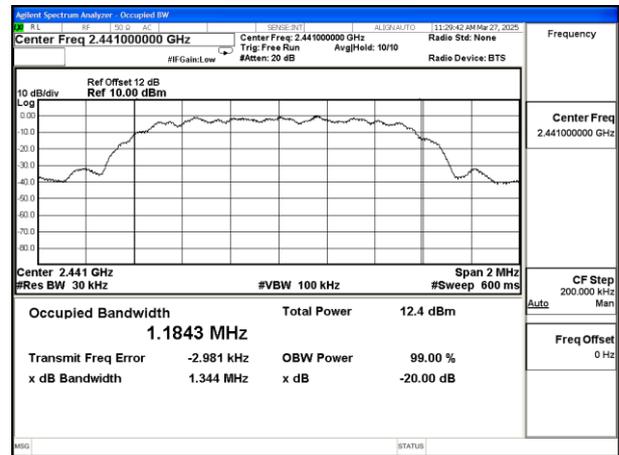

Test Mode: $\pi/4$ DQPSK(2DH5) 2441MHz

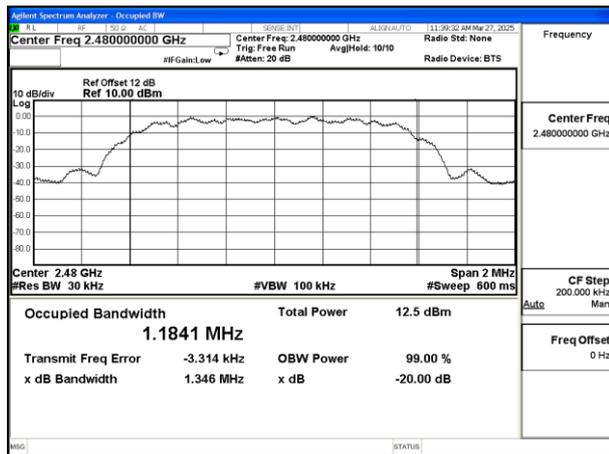


Test Mode: $\pi/4$ DQPSK(2DH5) 2480MHz




BUREAU VERITAS

# Test Report No.: PSU-NQN2504150110RF06


Test Mode: 8DPSK(3DH5)

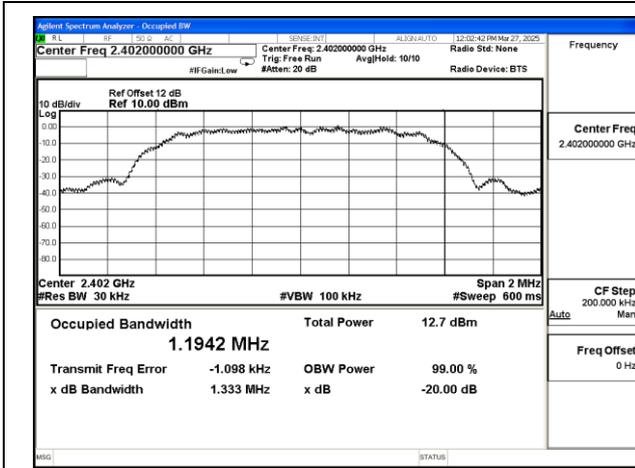

Test Mode:8DPSK(3DH5) 2402MHz

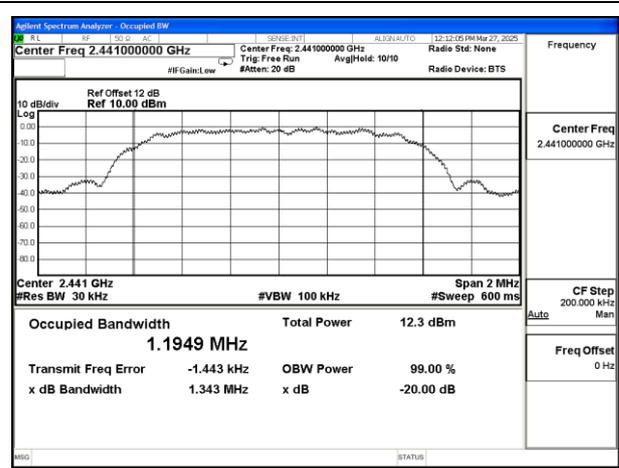

Test Mode:8DPSK(3DH5) 2441MHz

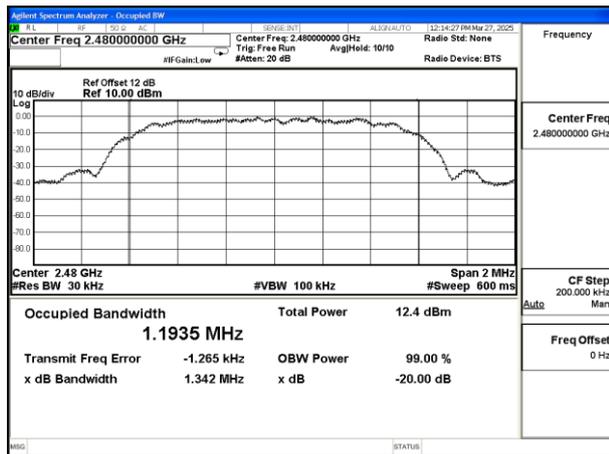

Test Mode:8DPSK(3DH5) 2480MHz



#### 4 Hopping Frequency Separation

##### Channel separation

Test Mode	Op-mode	Channel separation (MHz)
GFSK(DH5)	Hopping mode	1

##### Number of Hopping Frequencies

Test Mode	Op-mode	Result
GFSK(DH5)	Hopping mode	79



Test Report No.: PSU-NQN2504150110RF06

Channel separation

Test Mode	Op-mode	Channel separation (MHz)
$\pi/4$ DQPSK(2DH5)	Hopping mode	1

Number of Hopping Frequencies

Test Mode	Op-mode	Result
$\pi/4$ DQPSK(2DH5)	Hopping mode	79



Test Report No.: PSU-NQN2504150110RF06

Channel separation

Test Mode	Op-mode	Channel separation (MHz)
8DPSK(3DH5)	Hopping mode	1

Number of Hopping Frequencies

Test Mode	Op-mode	Result
8DPSK(3DH5)	Hopping mode	79



5 Dwell Time

Test Mode	Packet type	Time slot length(μS)	Dwell time	Dwell time(ms)
GFSK(DH1)	DH1	384	Time slot length *31.6*16000/2/79	122.9
GFSK(DH3)	DH3	1630	Time slot length *31.6*16000/4/79	260.8
GFSK(DH5)	DH5	2850	Time slot length *31.6*16000/6/79	304.0

Test Mode	Packet type	Time slot length(μS)	Dwell time	Dwell time(ms)
π/4DQPSK(2DH1)	2DH1	388	Time slot length *31.6*16000/2/79	124.2
π/4DQPSK(2DH3)	2DH3	1610	Time slot length *31.6*16000/4/79	257.6
π/4DQPSK(2DH5)	2DH5	2870	Time slot length *31.6*16000/6/79	306.1


Test Mode	Packet type	Time slot length(μS)	Dwell time	Dwell time(ms)
8DPSK(3DH1)	3DH1	370	Time slot length *31.6*16000/2/79	118.4
8DPSK(3DH3)	3DH3	1620	Time slot length *31.6*16000/4/79	259.2
8DPSK(3DH5)	3DH5	2870	Time slot length *31.6*16000/6/79	306.1




BUREAU VERITAS

# Test Report No.: PSU-NQN2504150110RF06


Test Mode: GFSK(DH5)

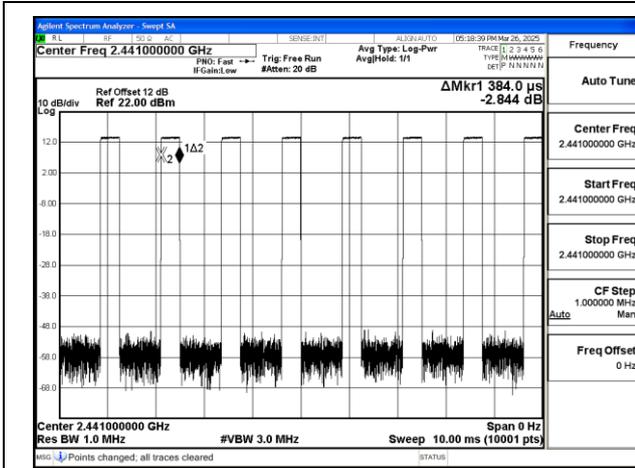

Test Mode:GFSK(DH1) 2441MHz

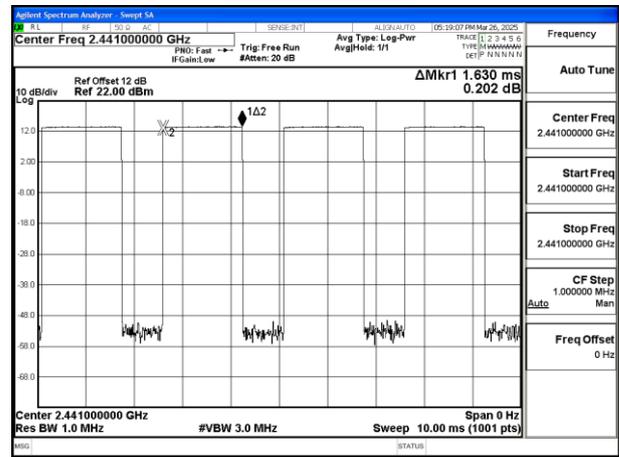

Test Mode:GFSK(DH3) 2441MHz

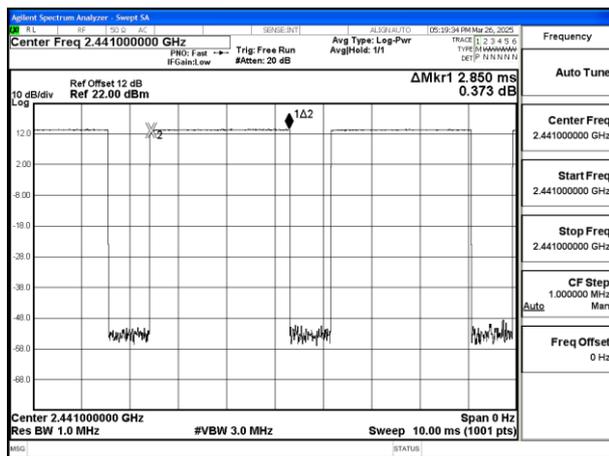


Test Mode:GFSK(DH5) 2441MHz




BUREAU VERITAS

# Test Report No.: PSU-NQN2504150110RF06


Test Mode:  $\pi/4$ DQPSK(2DH5)

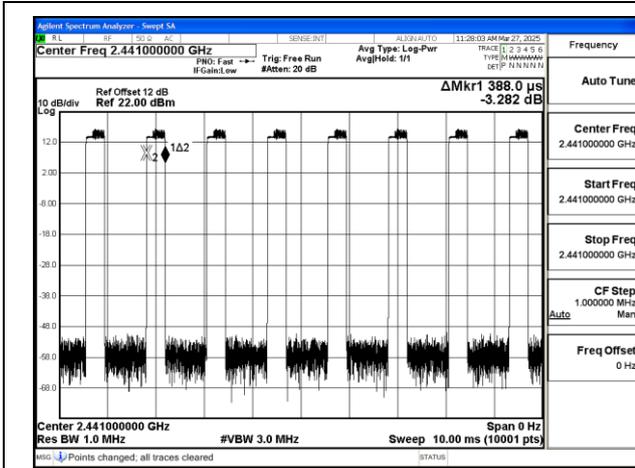

Test Mode: $\pi/4$ DQPSK(2DH1) 2441MHz

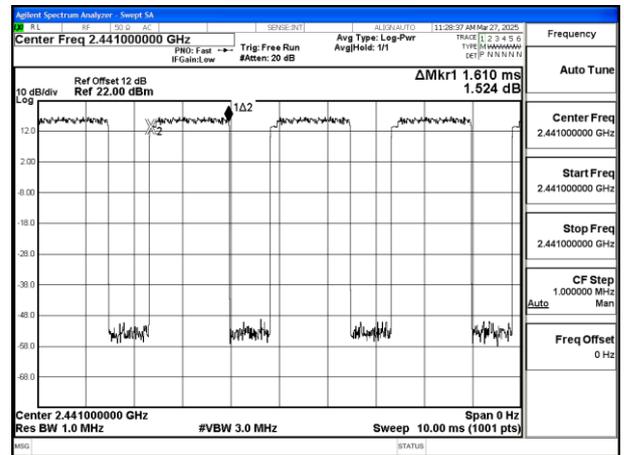

Test Mode: $\pi/4$ DQPSK(2DH3) 2441MHz

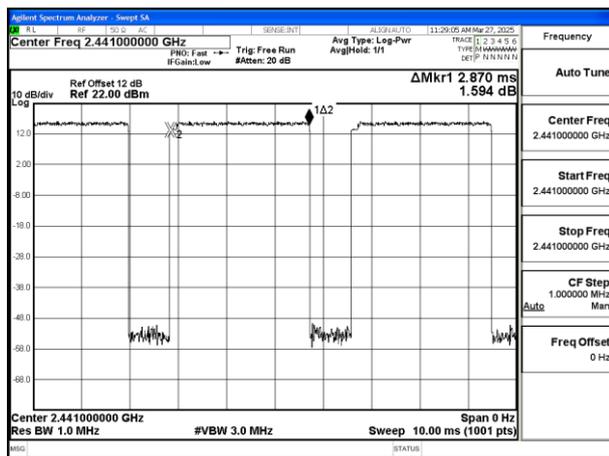


Test Mode: $\pi/4$ DQPSK(2DH5) 2441MHz




BUREAU VERITAS

# Test Report No.: PSU-NQN2504150110RF06


## Test Mode: 8DPSK(3DH5)

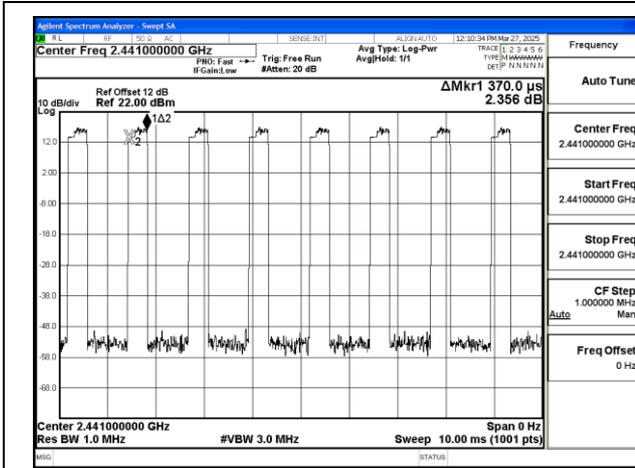

Test Mode:8DPSK(3DH1) 2441MHz

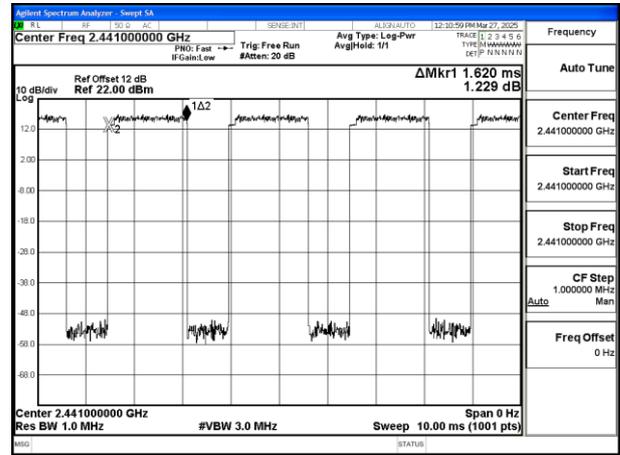

Test Mode:8DPSK(3DH3) 2441MHz

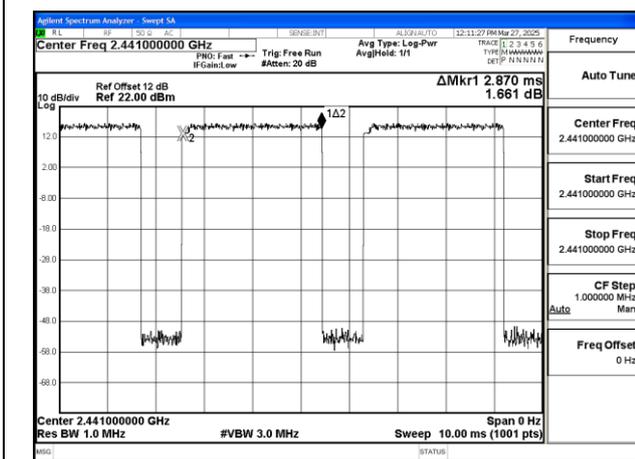

Test Mode:8DPSK(3DH5) 2441MHz




BUREAU VERITAS

# Test Report No.: PSU-NQN2504150110RF06

## 6 Conducted Out of band emission measurement

Test Mode: GFSK

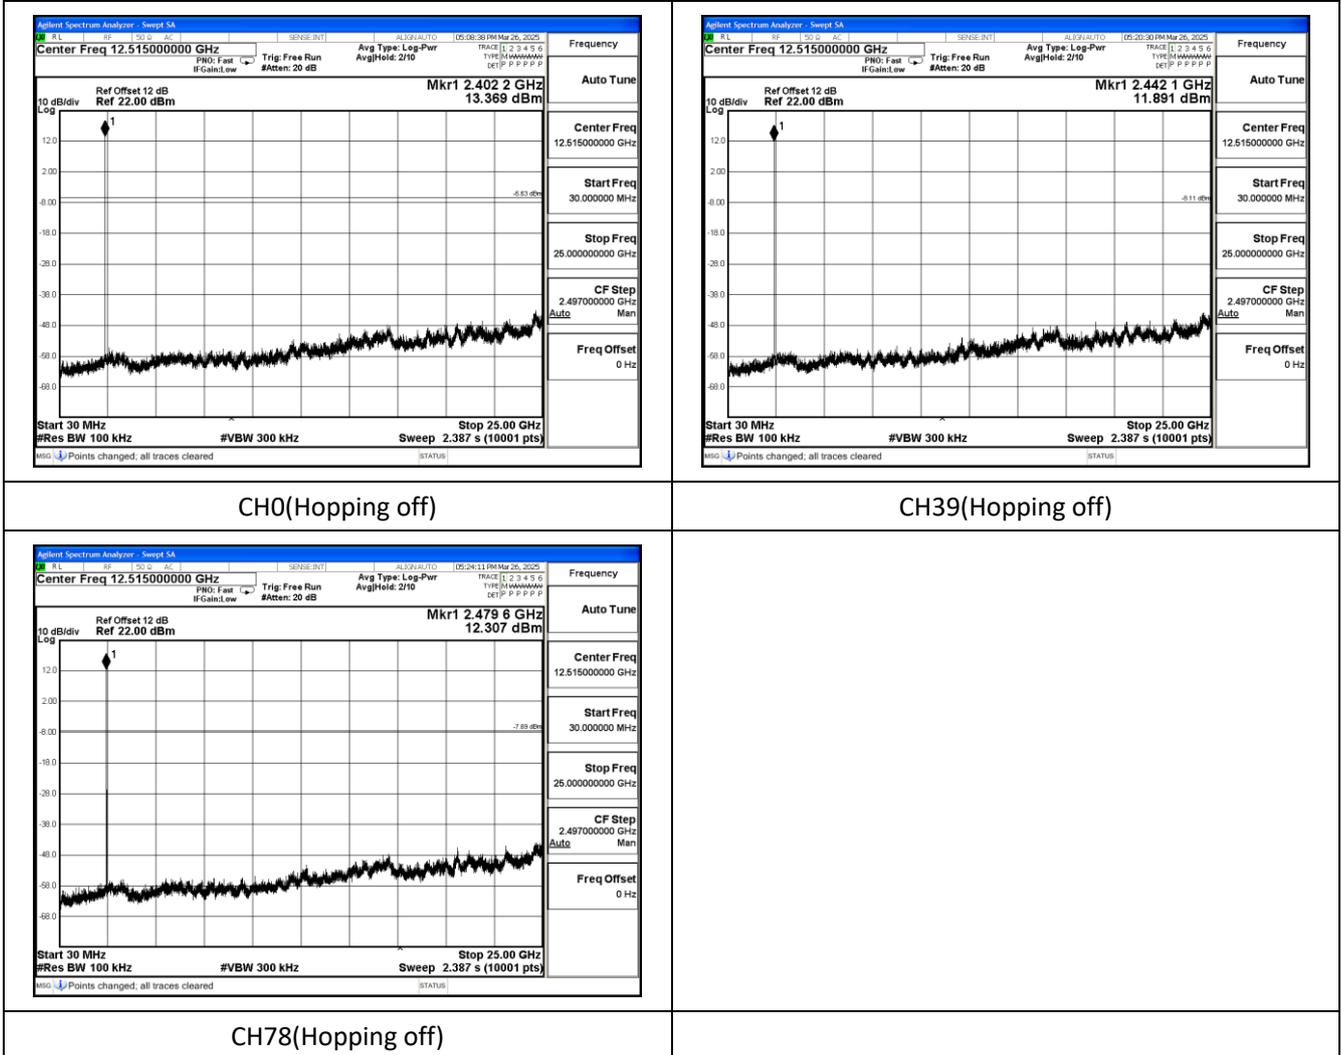





BUREAU VERITAS

# Test Report No.: PSU-NQN2504150110RF06


Test Mode:  $\pi/4$ DQPSK

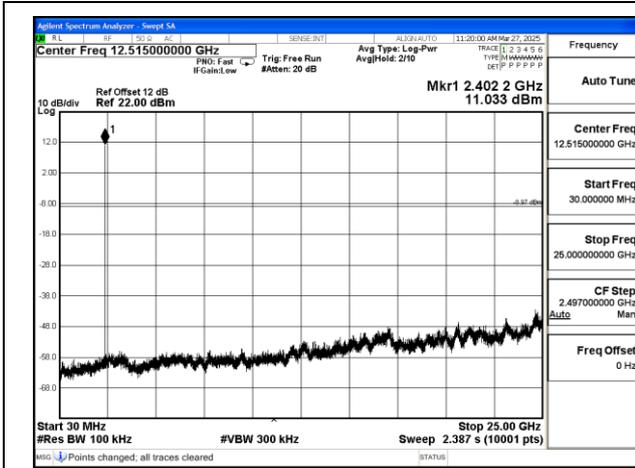

CH0(Hopping off)

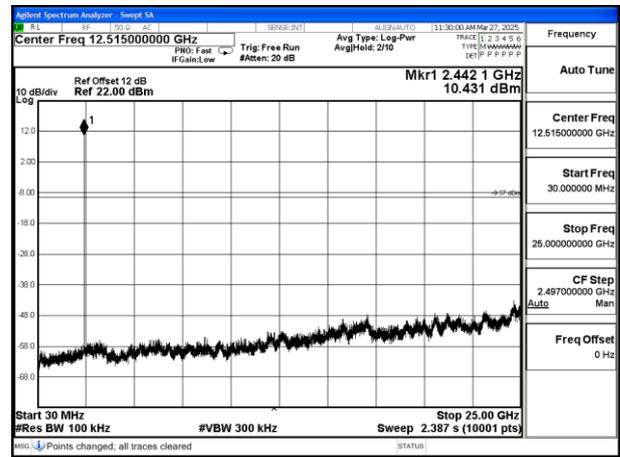

CH39(Hopping off)

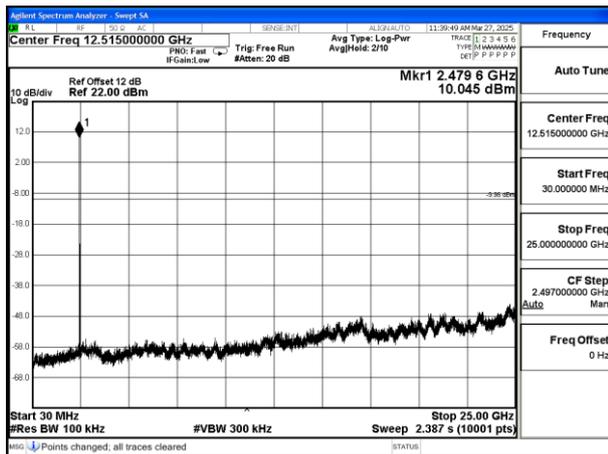


CH78(Hopping off)



BUREAU VERITAS


# Test Report No.: PSU-NQN2504150110RF06

Test Mode: 8DPSK

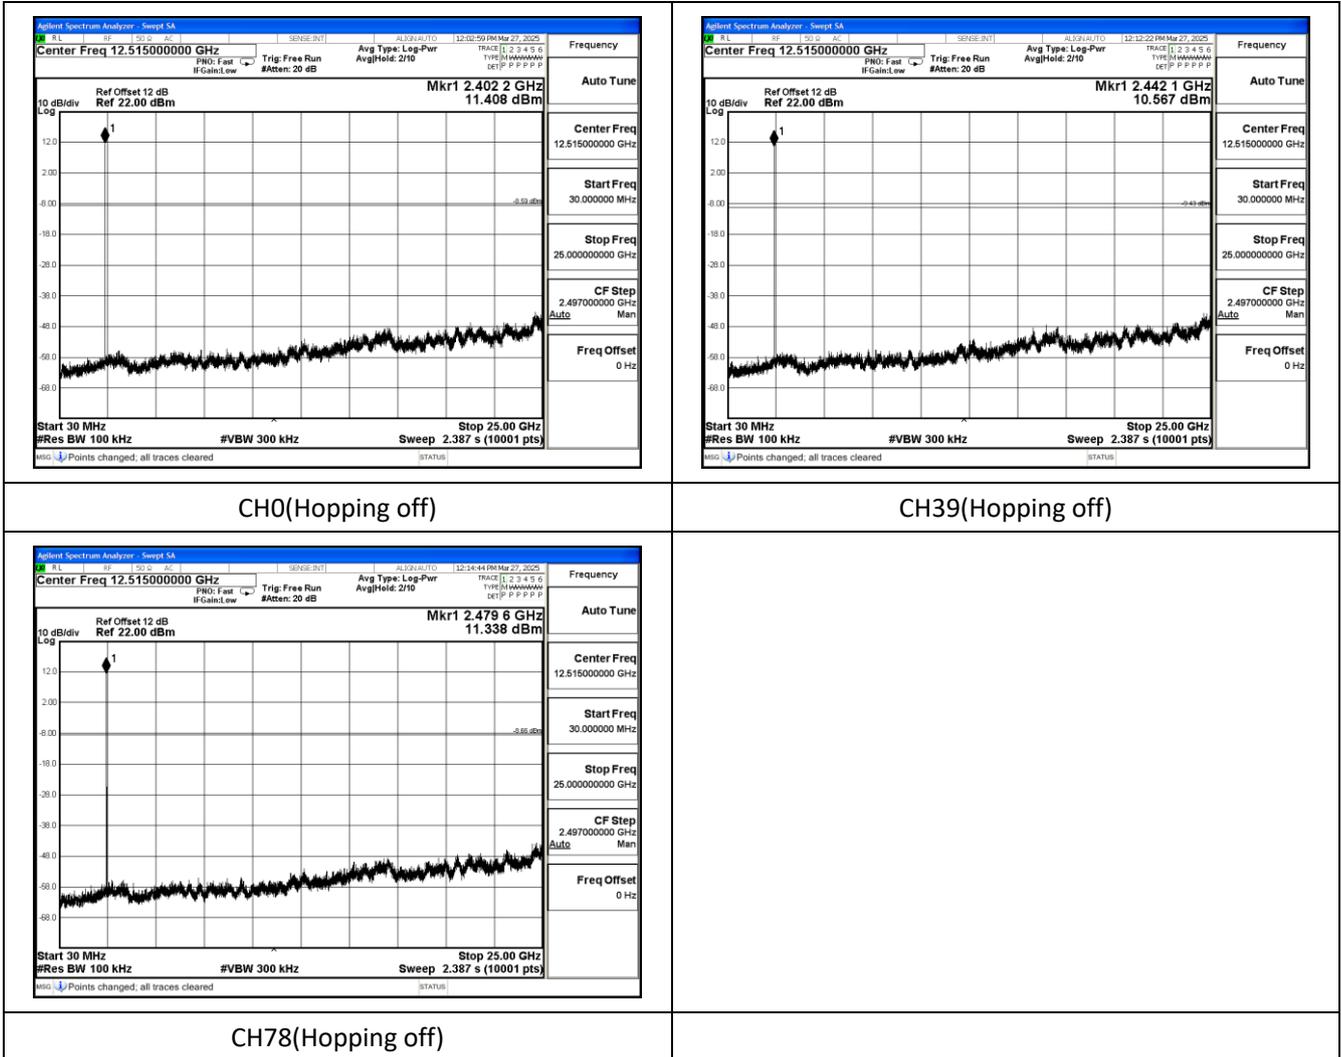

## 7 Band Edge measurement

Test Mode: GFSK

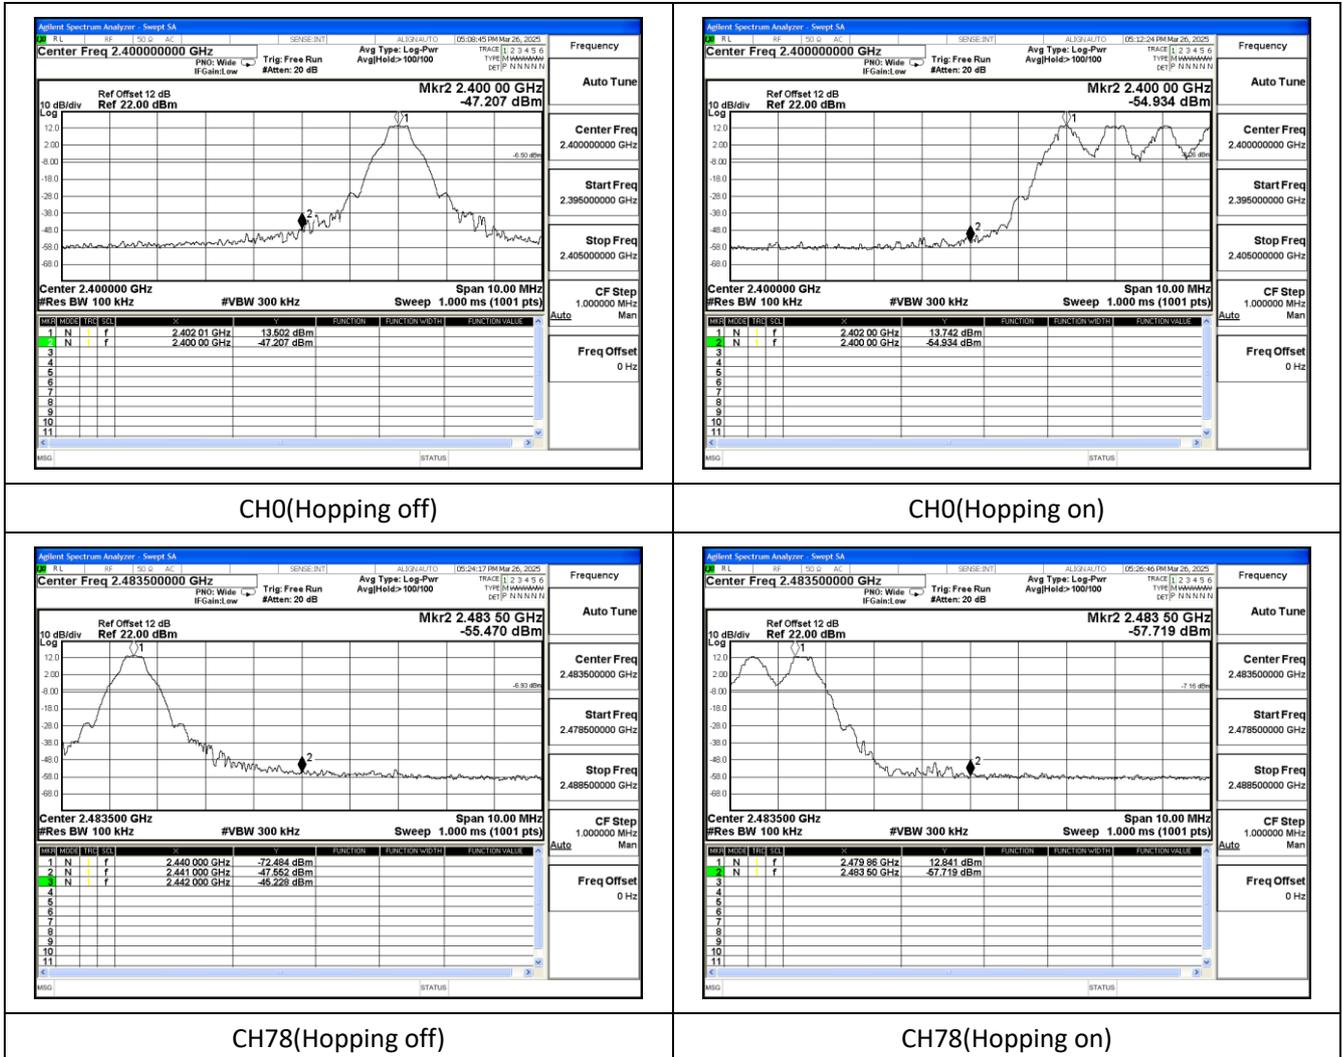




BUREAU VERITAS

Test Report No.: PSU-NQN2504150110RF06


Test Mode:  $\pi/4$ DQPSK

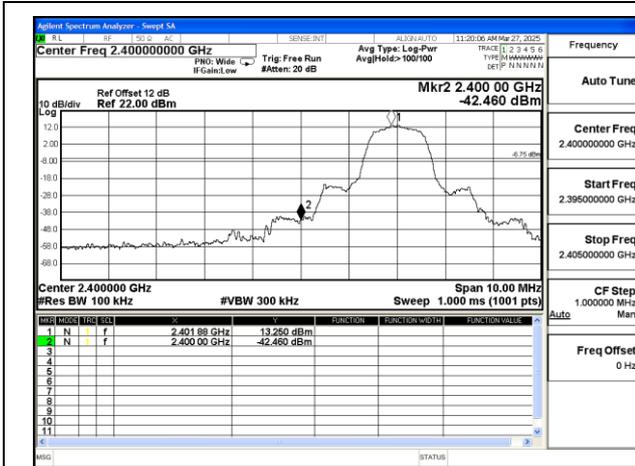


CH0(Hopping off)



CH0(Hopping on)

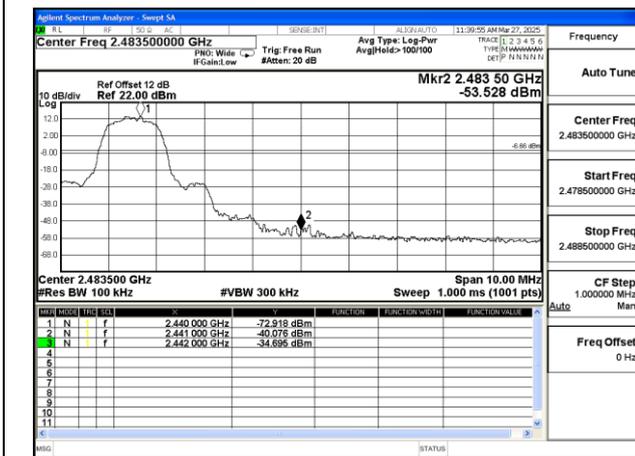

CH78(Hopping off)

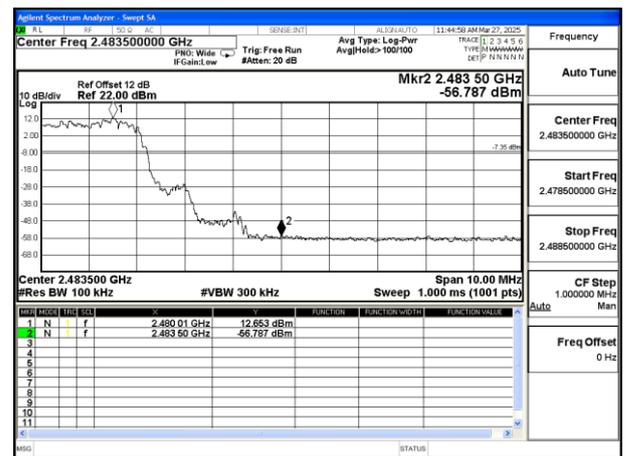

CH78(Hopping on)