






LTE Band 41, Channel Bandwidth: 10 MHz

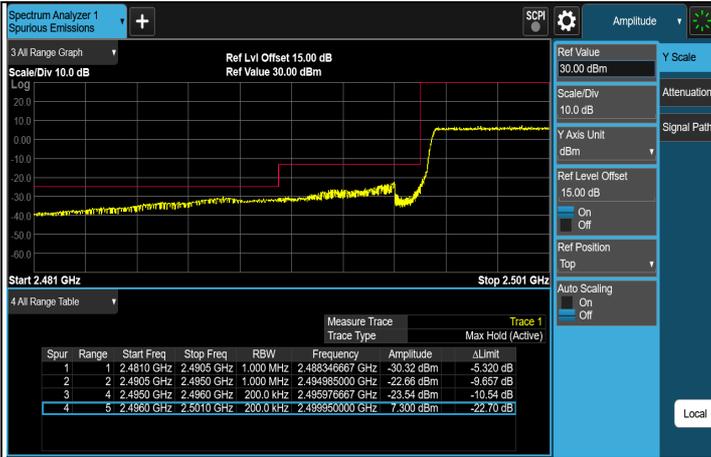

FULL CH 39700 (2501 MHz)

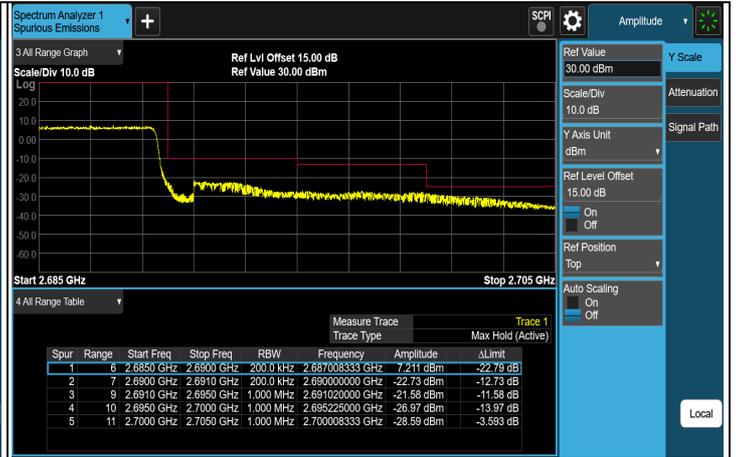


FULL CH 0 (2685 MHz)

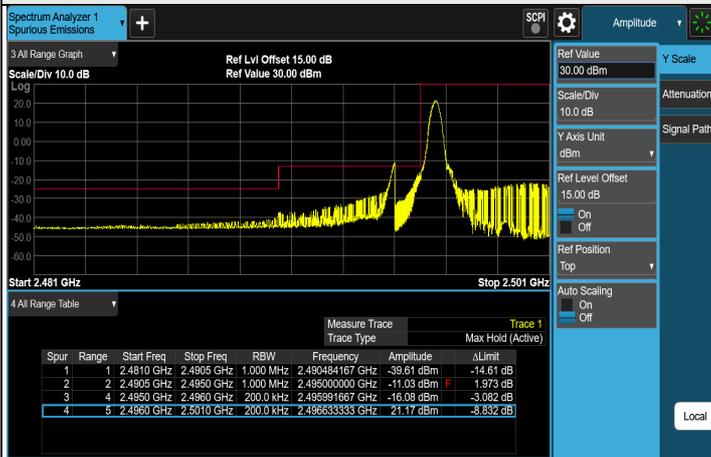

1RB CH 39700 (2501 MHz)




1RB CH 0 (2685 MHz)

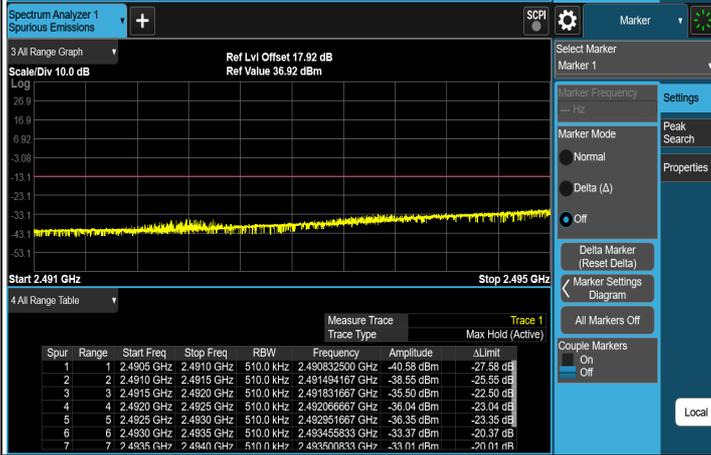





LTE Band 41, Channel Bandwidth: 15 MHz

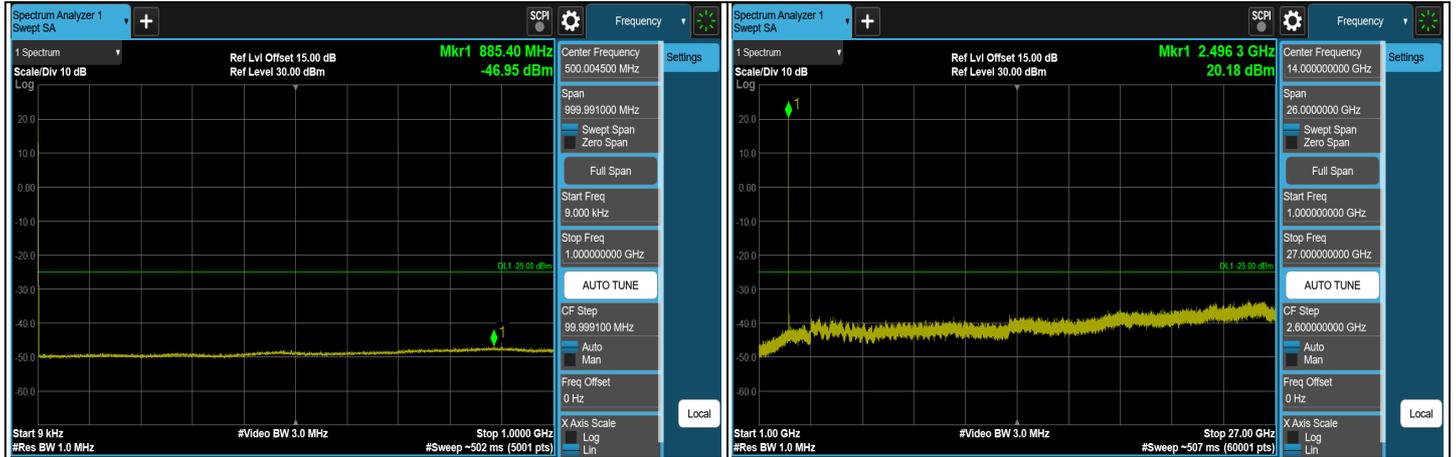

CH 39725 (2503.5 MHz)

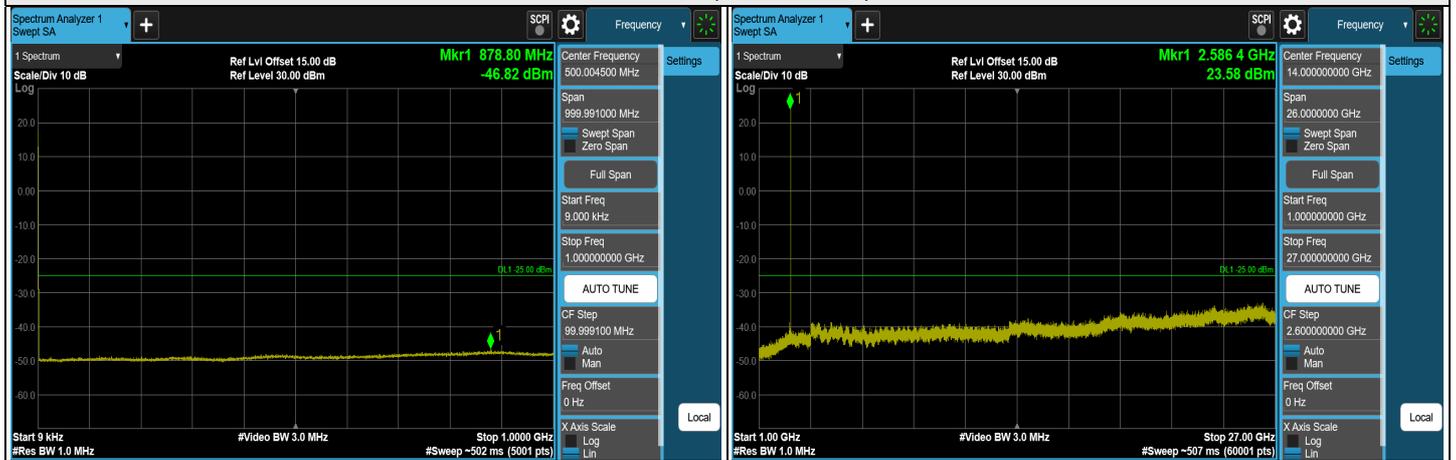

CH 40620 (2593 MHz)

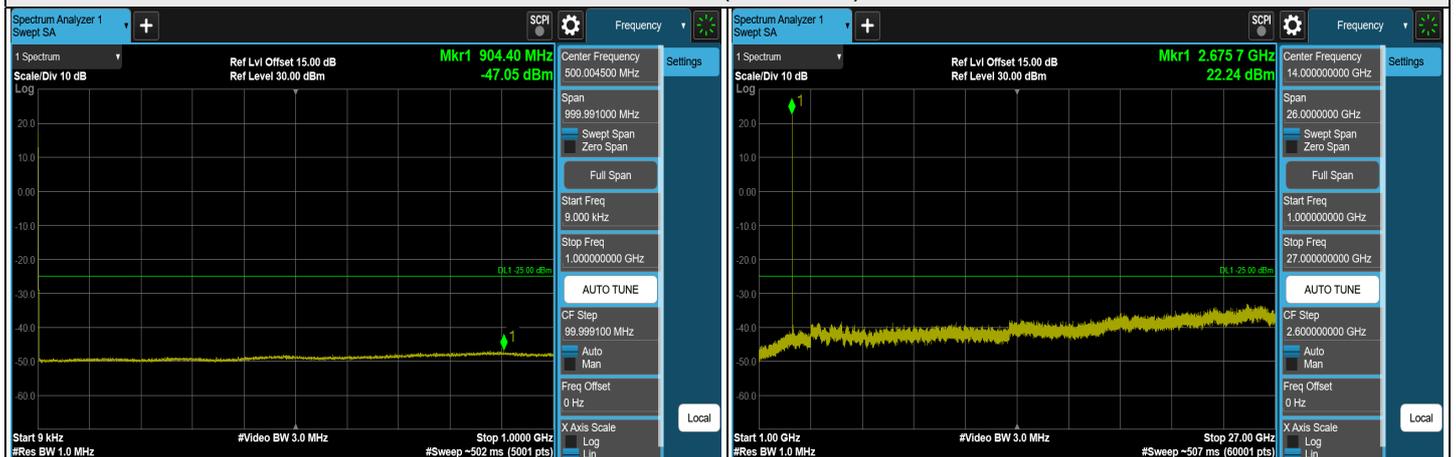


CH 41515 (2682.5 MHz)

Note: The signal at 9 kHz is IF signal from spectrum analyzer.




LTE Band 41, Channel Bandwidth: 15 MHz

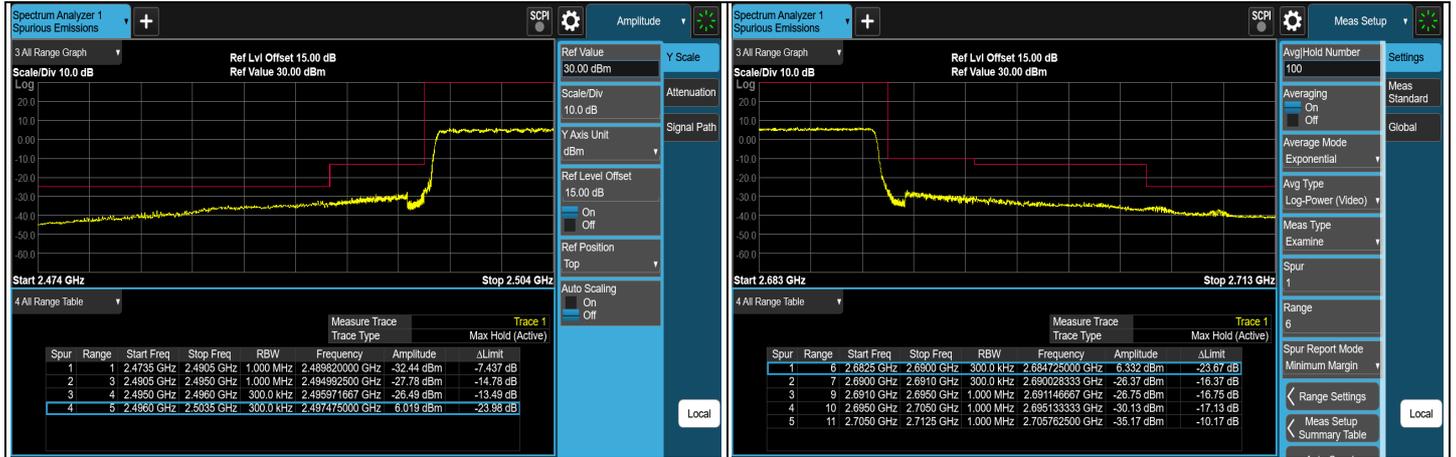

FULL CH 39725 (2503.5 MHz)

FULL CH 41515 (2682.5 MHz)

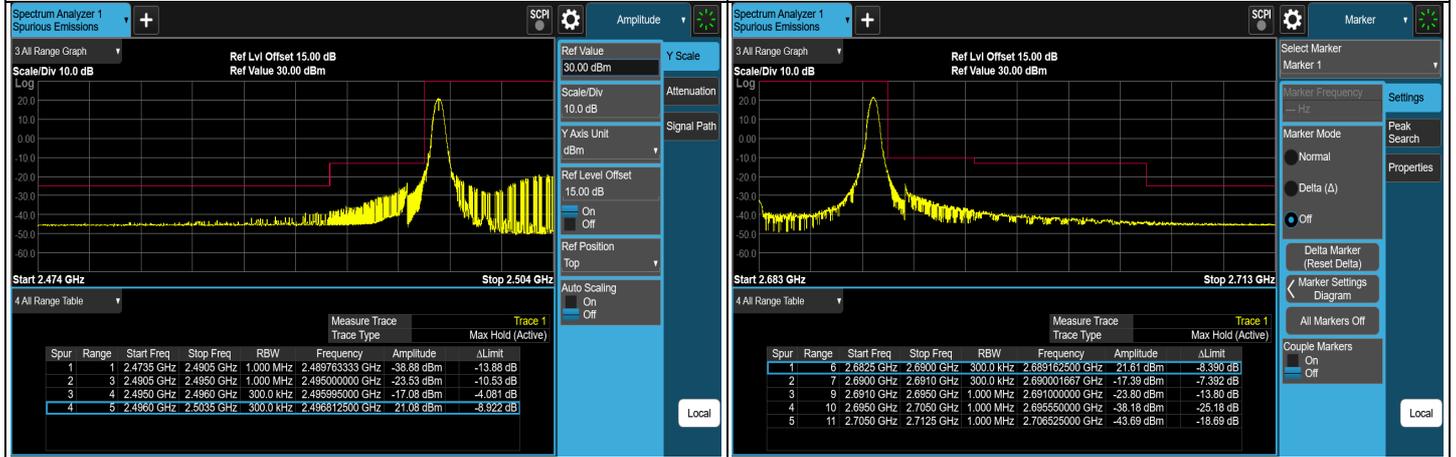


1RB CH 39725 (2503.5 MHz)


1RB CH 41515 (2682.5 MHz)




LTE Band 41, Channel Bandwidth: 20 MHz

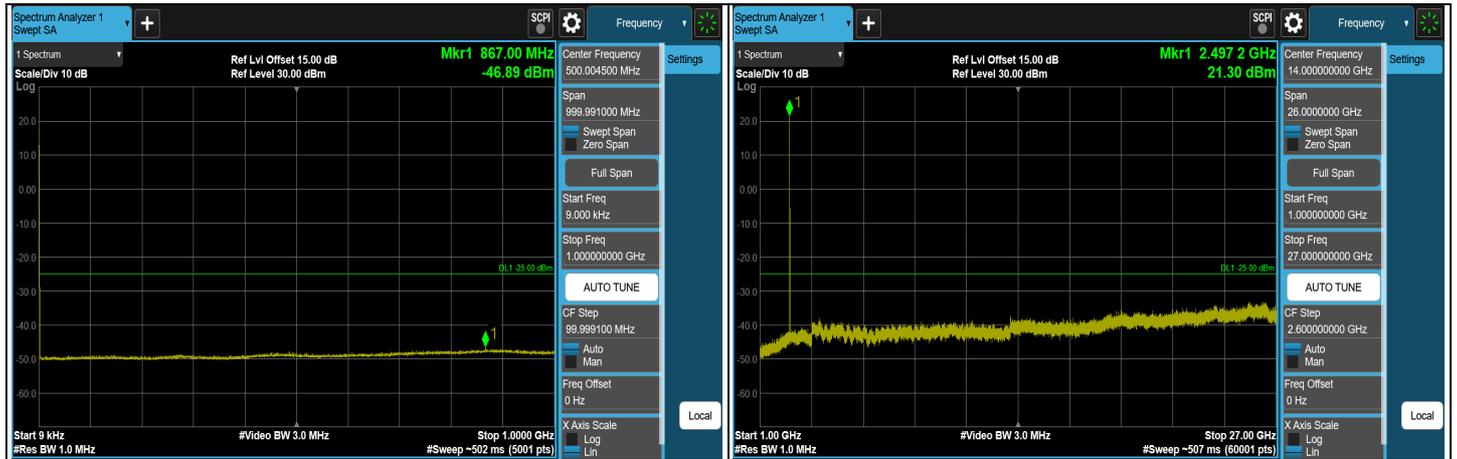

CH 39750 (2506 MHz)

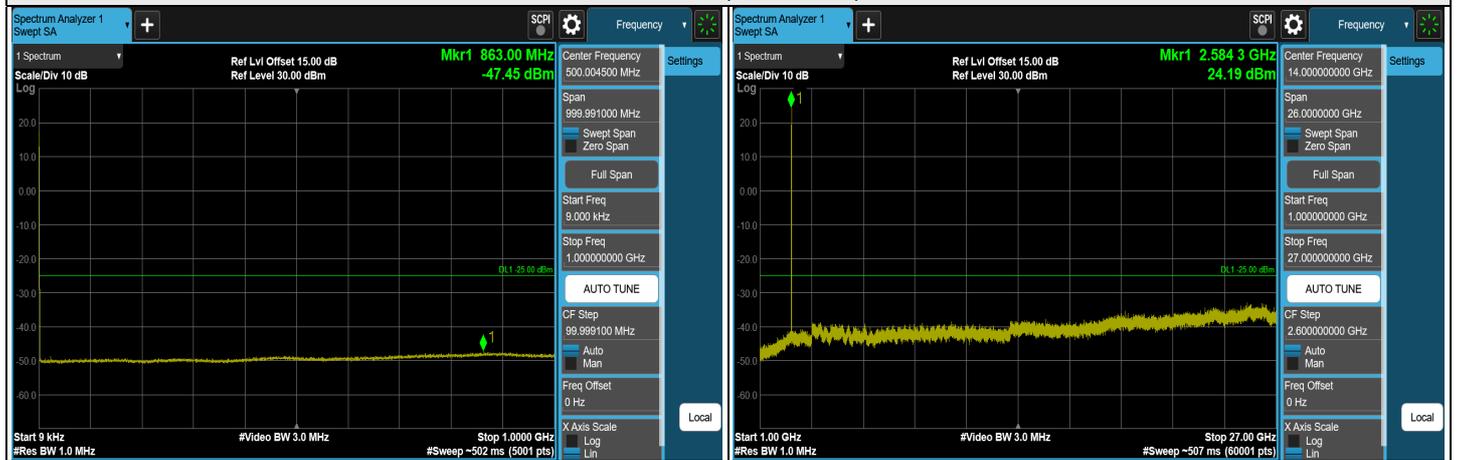


CH 40620 (2593 MHz)

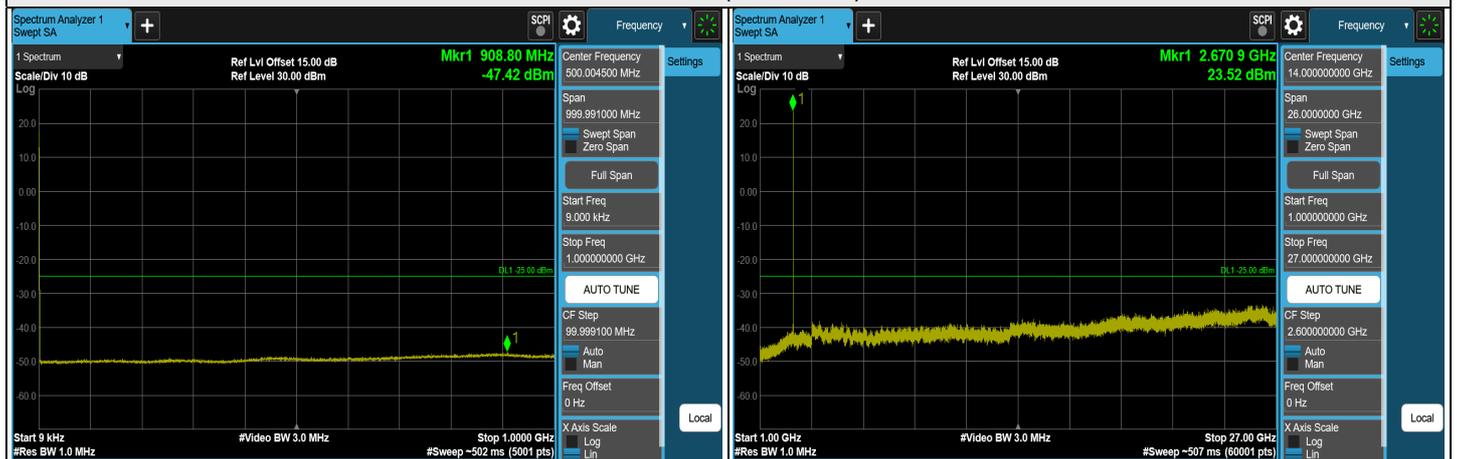

CH 41490 (2680 MHz)


Note: The signal at 9 kHz is IF signal from spectrum analyzer.

LTE Band 41, Channel Bandwidth: 20 MHz

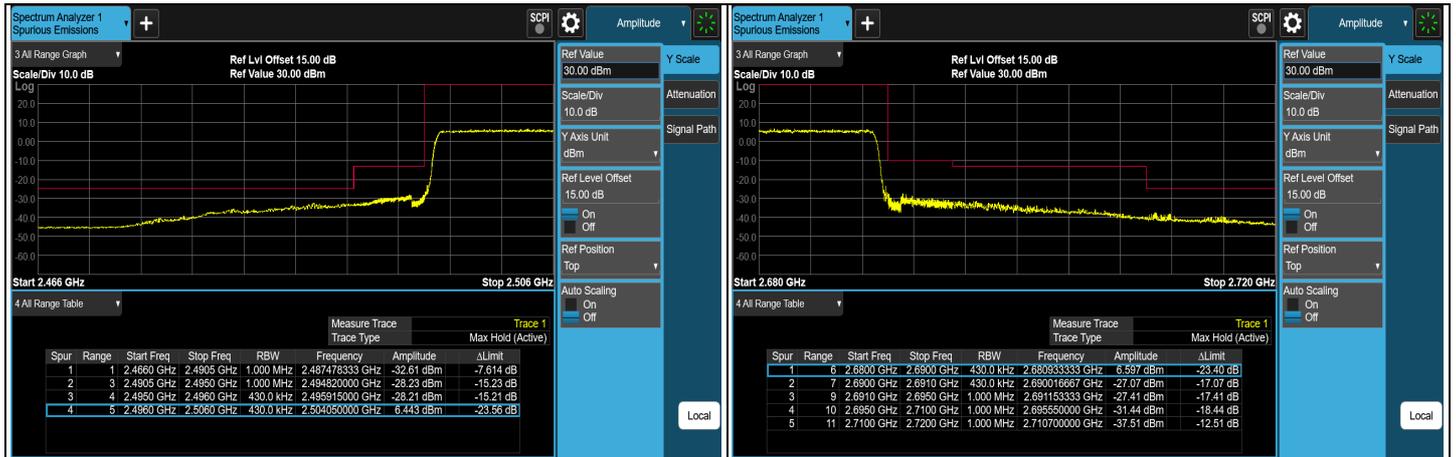

FULL CH 39750 (2506 MHz)

FULL CH 41490 (2680 MHz)

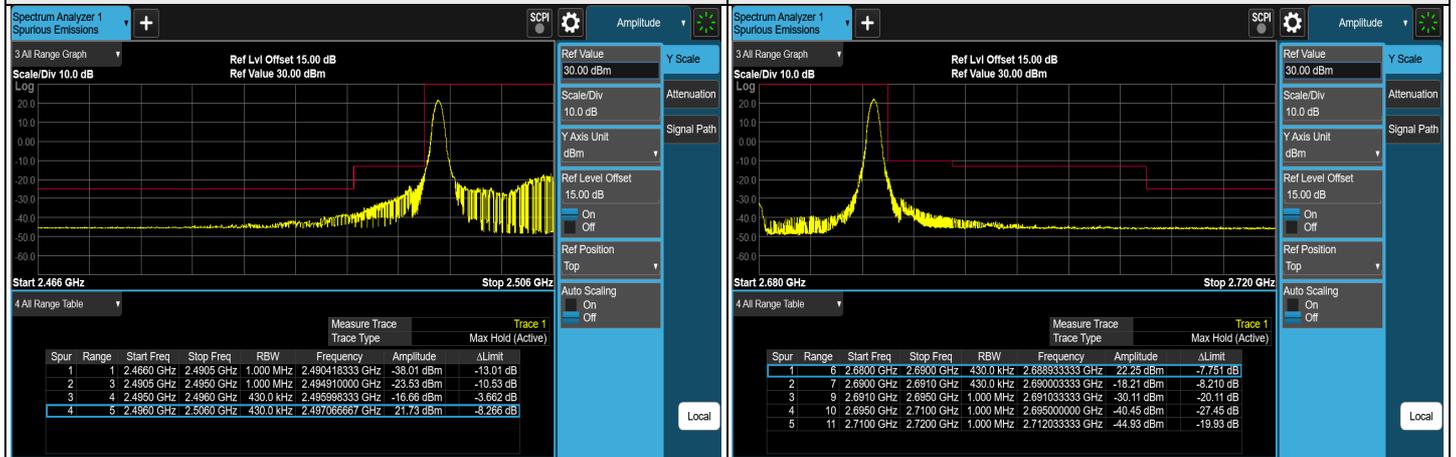

1RB CH 39750 (2506 MHz)

1RB CH 41490 (2680 MHz)

7.6 Radiated Spurious Emissions below 1GHz


7.6.1 GSM 850

RF Mode	GSM 850	Channel	CH 251 : 848.8 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	173.56	-52.5	-13.0	-39.5	1.25 H	109	56.3	-108.8
2	335.55	-60.5	-13.0	-47.5	1.00 H	351	45.9	-106.4
3	535.37	-57.7	-13.0	-44.7	1.00 H	356	44.3	-102.0
4	684.75	-55.1	-13.0	-42.1	1.50 H	126	43.7	-98.8
5	881.66	-52.3	-13.0	-39.3	1.25 H	212	43.9	-96.2
6	944.71	-49.9	-13.0	-36.9	1.25 H	179	45.1	-95.0

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

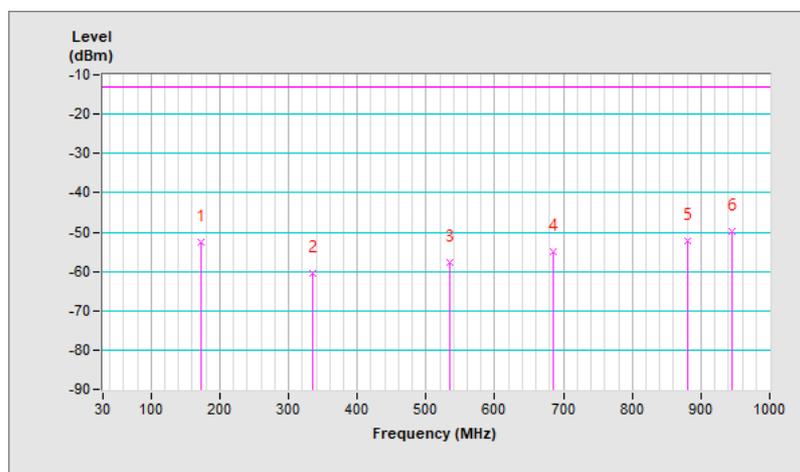


RF Mode	GSM 850	Channel	CH 251 : 848.8 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-54.4	-13.0	-41.4	1.25 V	346	54.9	-109.3
2	175.50	-57.2	-13.0	-44.2	1.00 V	51	51.8	-109.0
3	448.07	-57.9	-13.0	-44.9	1.50 V	199	45.4	-103.3
4	518.88	-56.5	-13.0	-43.5	1.00 V	272	45.8	-102.3
5	600.36	-54.9	-13.0	-41.9	1.00 V	305	45.2	-100.1
6	945.68	-50.3	-13.0	-37.3	1.50 V	349	44.7	-95.0

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

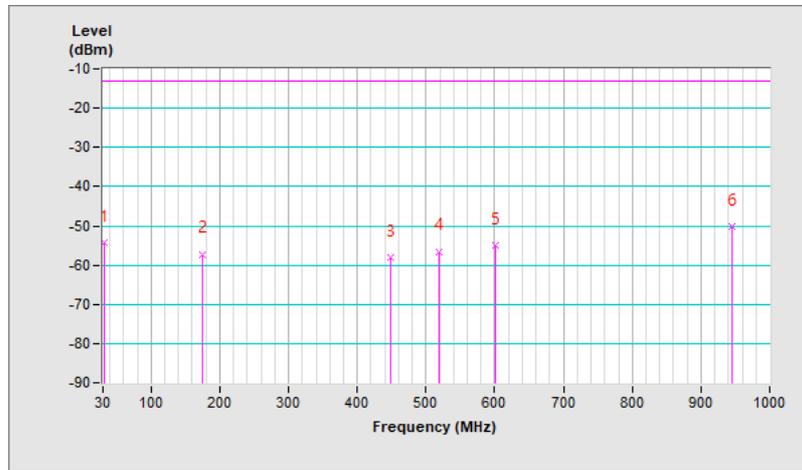


7.6.2 GSM 1900

RF Mode	GSM 1900	Channel	CH 810 : 1909.8 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	175.50	-52.3	-13.0	-39.3	1.00 H	97	56.7	-109.0
2	363.68	-59.8	-13.0	-46.8	1.00 H	189	46.1	-105.9
3	451.95	-56.9	-13.0	-43.9	1.25 H	212	46.4	-103.3
4	649.83	-54.9	-13.0	-41.9	2.00 H	231	44.6	-99.5
5	871.96	-51.7	-13.0	-38.7	1.50 H	52	44.7	-96.4
6	948.59	-45.4	-13.0	-32.4	1.00 H	332	49.6	-95.0

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

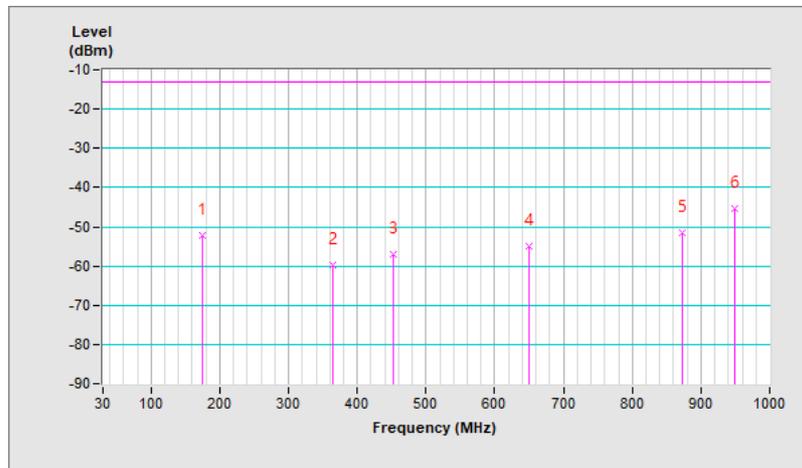


RF Mode	GSM 1900	Channel	CH 810 : 1909.8 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-53.8	-13.0	-40.8	1.00 V	332	55.5	-109.3
2	85.29	-60.9	-13.0	-47.9	1.50 V	1	53.0	-113.9
3	174.53	-57.6	-13.0	-44.6	1.00 V	6	51.3	-108.9
4	488.81	-56.9	-13.0	-43.9	2.00 V	109	46.0	-102.9
5	640.13	-54.1	-13.0	-41.1	1.00 V	65	45.4	-99.5
6	948.59	-47.8	-13.0	-34.8	1.25 V	352	47.2	-95.0

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

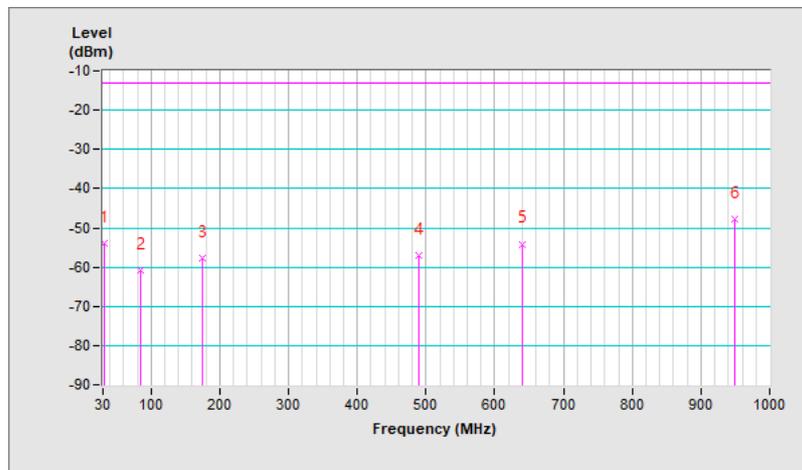


7.6.3 WCDMA Band II

RF Mode	WCDMA Band II	Channel	CH 9538 : 1907.6 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	172.59	-52.5	-13.0	-39.5	1.00 H	124	56.2	-108.7
2	331.67	-59.8	-13.0	-46.8	1.50 H	269	46.6	-106.4
3	534.40	-57.3	-13.0	-44.3	1.00 H	100	44.7	-102.0
4	644.01	-54.8	-13.0	-41.8	1.25 H	25	44.7	-99.5
5	867.11	-51.7	-13.0	-38.7	1.00 H	97	44.7	-96.4
6	948.59	-46.9	-13.0	-33.9	2.00 H	350	48.1	-95.0

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

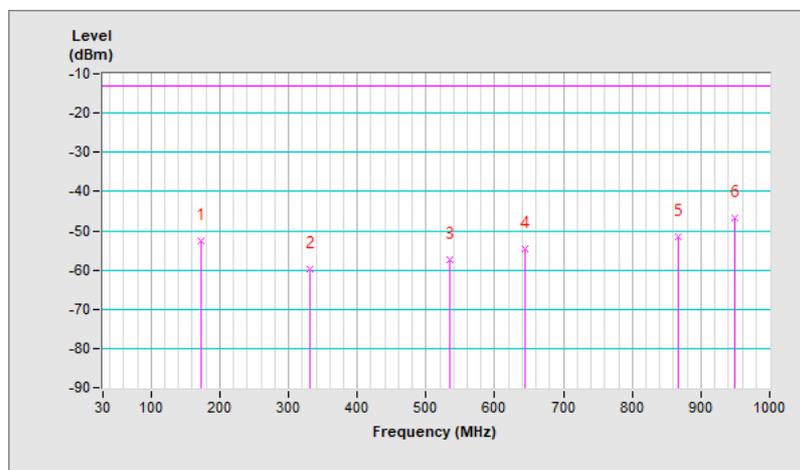


RF Mode	WCDMA Band II	Channel	CH 9538 : 1907.6 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.31	-56.4	-13.0	-43.4	1.25 V	18	51.8	-108.2
2	176.47	-56.2	-13.0	-43.2	1.25 V	68	53.0	-109.2
3	531.49	-56.5	-13.0	-43.5	1.00 V	16	45.5	-102.0
4	647.89	-54.6	-13.0	-41.6	1.00 V	325	44.9	-99.5
5	798.24	-51.1	-13.0	-38.1	2.00 V	313	46.0	-97.1
6	948.59	-48.5	-13.0	-35.5	1.50 V	150	46.5	-95.0

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

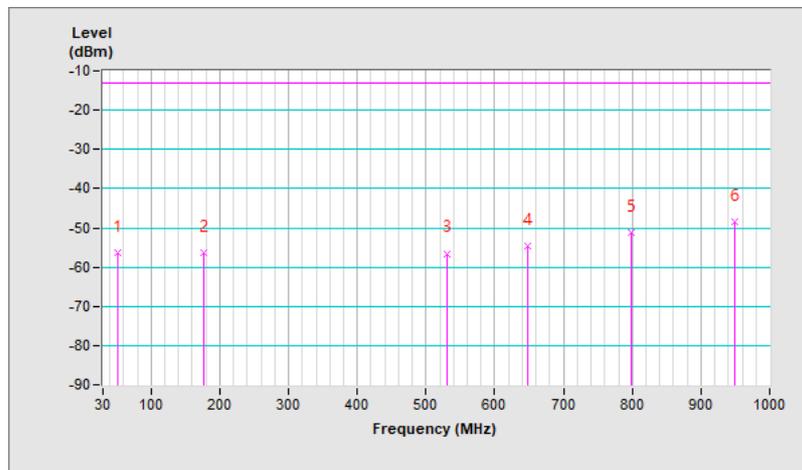


7.6.4 WCDMA Band V

RF Mode	WCDMA Band V	Channel	CH 4233 : 846.6 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	178.41	-54.2	-13.0	-41.2	1.50 H	119	55.2	-109.4
2	305.48	-61.1	-13.0	-48.1	1.00 H	251	46.1	-107.2
3	464.56	-57.9	-13.0	-44.9	1.25 H	305	45.1	-103.0
4	607.15	-55.5	-13.0	-42.5	1.00 H	108	44.5	-100.0
5	699.30	-54.1	-13.0	-41.1	1.00 H	223	44.6	-98.7
6	944.71	-48.6	-13.0	-35.6	1.50 H	322	46.4	-95.0

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

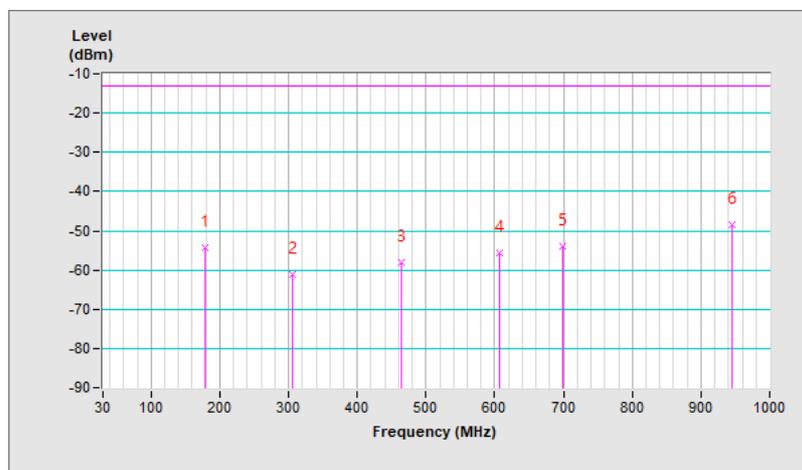


RF Mode	WCDMA Band V	Channel	CH 4233 : 846.6 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-54.5	-13.0	-41.5	1.25 V	5	54.8	-109.3
2	124.09	-58.8	-13.0	-45.8	1.00 V	197	51.0	-109.8
3	177.44	-58.2	-13.0	-45.2	1.50 V	68	51.1	-109.3
4	415.09	-57.6	-13.0	-44.6	1.00 V	273	47.1	-104.7
5	698.33	-54.5	-13.0	-41.5	1.25 V	156	44.2	-98.7
6	949.56	-48.0	-13.0	-35.0	1.00 V	350	47.0	-95.0

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

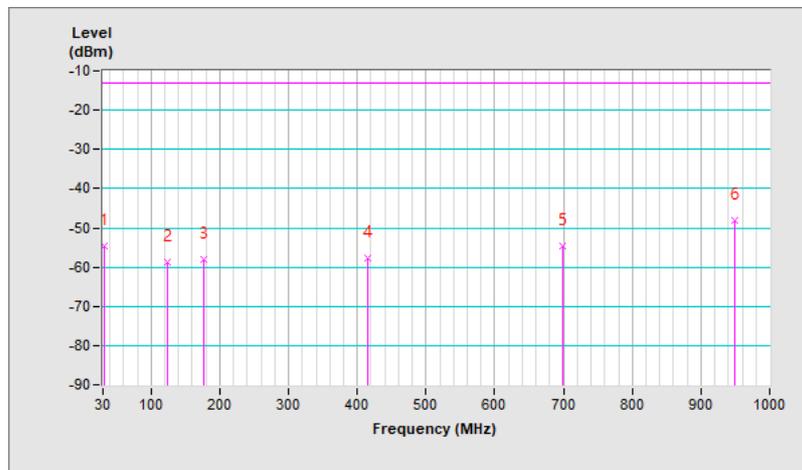


7.6.5 LTE Band 2

RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 19175 : 1907.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	167.74	-53.7	-13.0	-40.7	1.50 H	140	54.6	-108.3
2	329.73	-59.6	-13.0	-46.6	1.25 H	248	46.8	-106.4
3	470.38	-57.9	-13.0	-44.9	1.00 H	43	45.1	-103.0
4	603.27	-55.6	-13.0	-42.6	1.00 H	80	44.4	-100.0
5	704.15	-52.7	-13.0	-39.7	2.00 H	76	45.9	-98.6
6	945.68	-48.5	-13.0	-35.5	1.50 H	212	46.5	-95.0

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

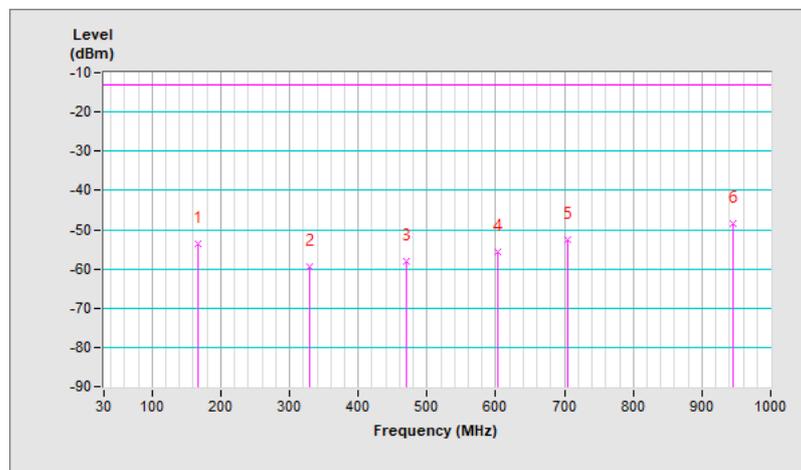


RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 19175 : 1907.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	177.44	-54.3	-13.0	-41.3	1.50 V	134	55.0	-109.3
2	314.21	-59.4	-13.0	-46.4	1.25 V	229	47.4	-106.8
3	591.63	-55.8	-13.0	-42.8	1.00 V	343	44.5	-100.3
4	681.84	-54.1	-13.0	-41.1	1.00 V	9	44.9	-99.0
5	798.24	-50.4	-13.0	-37.4	1.50 V	75	46.7	-97.1
6	942.77	-47.1	-13.0	-34.1	1.25 V	320	48.0	-95.1

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

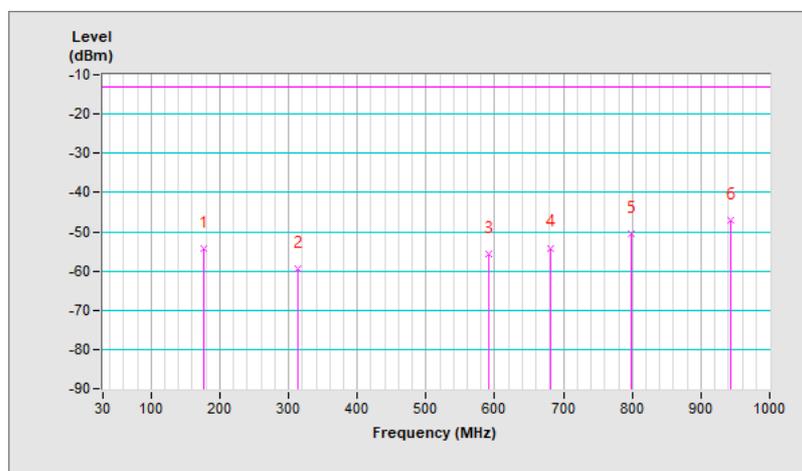


7.6.6 LTE Band 5

RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	177.44	-53.9	-13.0	-40.9	1.00 H	131	55.4	-109.3
2	314.21	-61.0	-13.0	-48.0	1.25 H	341	45.8	-106.8
3	445.16	-58.4	-13.0	-45.4	1.00 H	16	45.0	-103.4
4	584.84	-55.7	-13.0	-42.7	1.00 H	308	44.8	-100.5
5	695.42	-53.4	-13.0	-40.4	1.50 H	189	45.4	-98.8
6	918.52	-50.7	-13.0	-37.7	2.00 H	280	44.8	-95.5

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

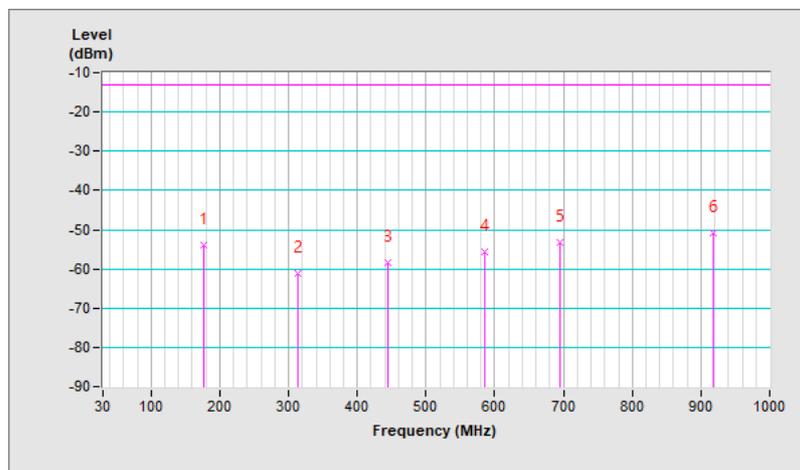


RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-56.4	-13.0	-43.4	1.25 V	339	52.8	-109.2
2	176.47	-58.2	-13.0	-45.2	1.50 V	1	51.0	-109.2
3	467.47	-58.6	-13.0	-45.6	1.25 V	197	44.4	-103.0
4	589.69	-56.3	-13.0	-43.3	1.00 V	232	44.1	-100.4
5	713.85	-54.7	-13.0	-41.7	1.25 V	272	44.0	-98.7
6	940.83	-47.8	-13.0	-34.8	1.50 V	349	47.3	-95.1

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

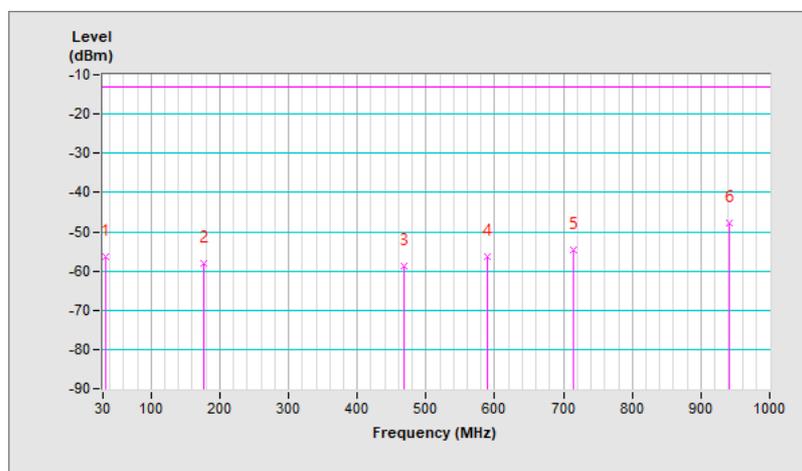


7.6.7 LTE Band 7

RF Mode	LTE Band 7 Channel Bandwidth: 5MHz	Channel	CH 21425 : 2567.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-57.5	-25.0	-32.5	1.50 H	323	51.7	-109.2
2	128.94	-59.6	-25.0	-34.6	1.00 H	95	49.8	-109.4
3	175.50	-58.1	-25.0	-33.1	1.25 H	67	50.9	-109.0
4	568.35	-57.0	-25.0	-32.0	1.00 H	145	44.1	-101.1
5	687.66	-55.5	-25.0	-30.5	1.00 H	13	43.3	-98.8
6	946.65	-48.1	-25.0	-23.1	1.50 H	142	46.9	-95.0

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

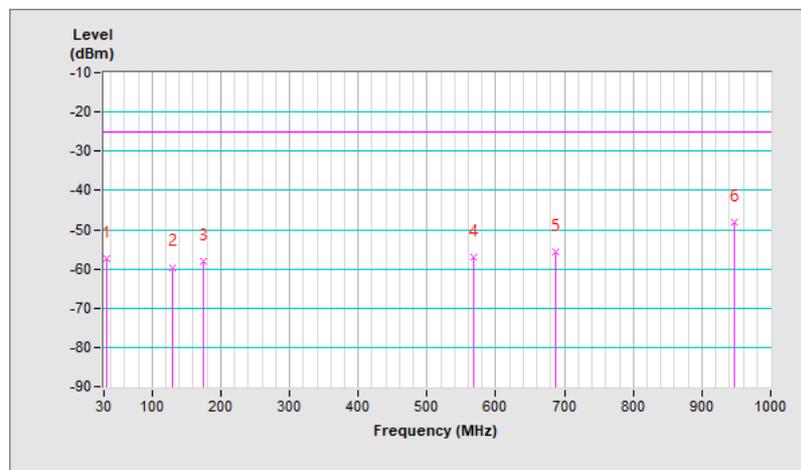


RF Mode	LTE Band 7 Channel Bandwidth: 5MHz	Channel	CH 21425 : 2567.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-59.0	-25.0	-34.0	1.50 V	3	49.3	-108.3
2	172.59	-58.8	-25.0	-33.8	1.25 V	12	49.9	-108.7
3	449.04	-58.8	-25.0	-33.8	1.00 V	210	44.5	-103.3
4	560.59	-56.9	-25.0	-31.9	1.00 V	171	44.6	-101.5
5	691.54	-55.2	-25.0	-30.2	2.00 V	279	43.6	-98.8
6	949.56	-49.0	-25.0	-24.0	1.50 V	61	46.0	-95.0

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

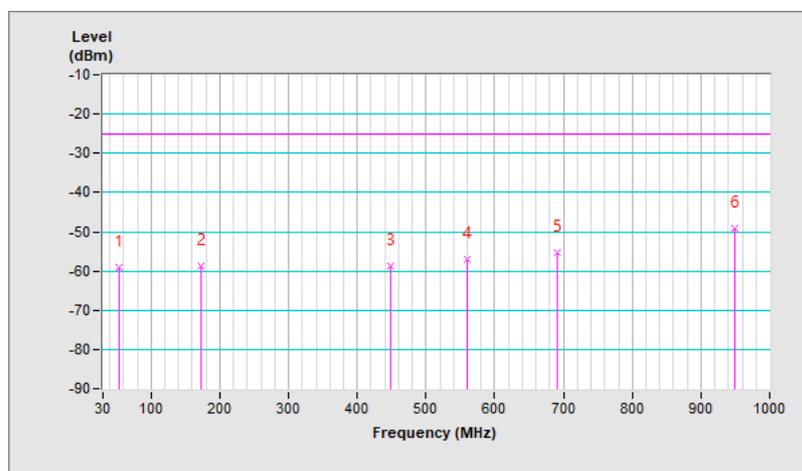

7.6.8 LTE Band 12


RF Mode	LTE Band 12 Channel Bandwidth: 1.4MHz	Channel	CH 23173 : 715.3 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-57.2	-13.0	-44.2	1.50 H	6	51.1	-108.3
2	179.38	-60.3	-13.0	-47.3	1.25 H	14	49.3	-109.6
3	386.96	-60.4	-13.0	-47.4	1.00 H	293	44.9	-105.3
4	542.16	-57.6	-13.0	-44.6	1.00 H	168	44.3	-101.9
5	638.19	-55.5	-13.0	-42.5	1.25 H	96	44.0	-99.5
6	950.53	-50.6	-13.0	-37.6	1.50 H	180	44.4	-95.0

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

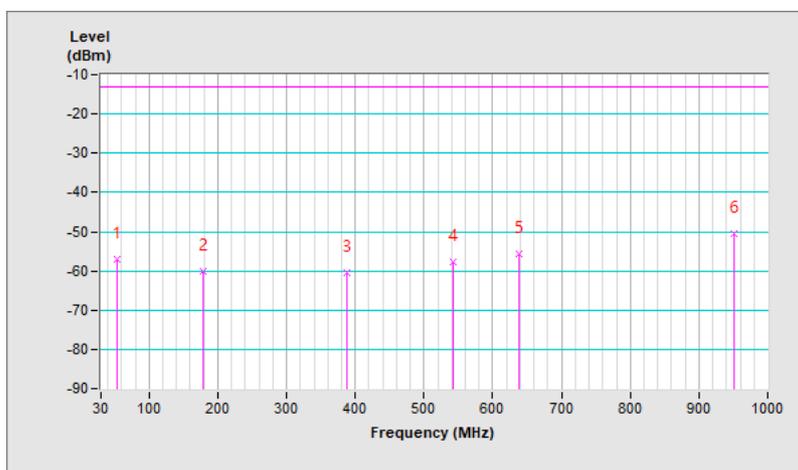


RF Mode	LTE Band 12 Channel Bandwidth: 1.4MHz	Channel	CH 23173 : 715.3 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-58.2	-13.0	-45.2	1.00 V	273	51.0	-109.2
2	171.62	-58.8	-13.0	-45.8	1.00 V	344	49.8	-108.6
3	444.19	-60.0	-13.0	-47.0	1.50 V	60	43.4	-103.4
4	605.21	-56.3	-13.0	-43.3	1.25 V	236	43.7	-100.0
5	723.55	-54.8	-13.0	-41.8	2.00 V	230	43.7	-98.5
6	948.59	-49.2	-13.0	-36.2	1.25 V	146	45.8	-95.0

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

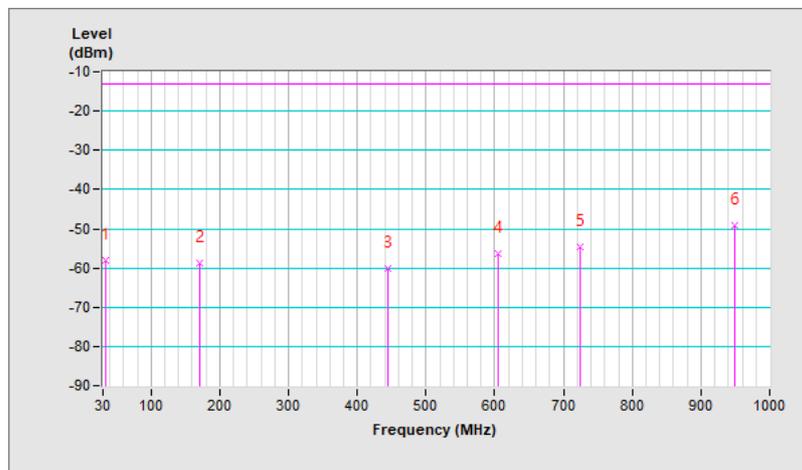


7.6.9 LTE Band 17

RF Mode	LTE Band 17 Channel Bandwidth: 5MHz	Channel	CH 23825 : 713.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	177.44	-54.2	-13.0	-41.2	1.25 H	111	55.1	-109.3
2	328.76	-60.6	-13.0	-47.6	1.00 H	223	45.8	-106.4
3	541.19	-55.7	-13.0	-42.7	1.50 H	71	46.2	-101.9
4	598.42	-55.9	-13.0	-42.9	1.25 H	314	44.2	-100.1
5	688.63	-54.9	-13.0	-41.9	1.00 H	14	43.9	-98.8
6	949.56	-46.6	-13.0	-33.6	1.25 H	0	48.4	-95.0

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

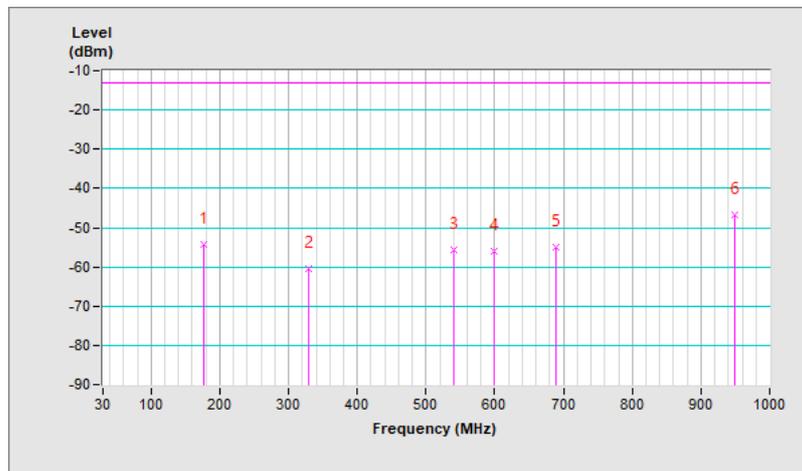


RF Mode	LTE Band 17 Channel Bandwidth: 5MHz	Channel	CH 23825 : 713.5 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.31	-57.9	-13.0	-44.9	1.25 V	356	50.3	-108.2
2	175.50	-61.2	-13.0	-48.2	1.00 V	40	47.8	-109.0
3	470.38	-58.7	-13.0	-45.7	1.50 V	184	44.3	-103.0
4	637.22	-55.2	-13.0	-42.2	1.25 V	178	44.4	-99.6
5	802.12	-52.8	-13.0	-39.8	1.00 V	145	44.3	-97.1
6	944.71	-49.8	-13.0	-36.8	1.50 V	346	45.2	-95.0

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

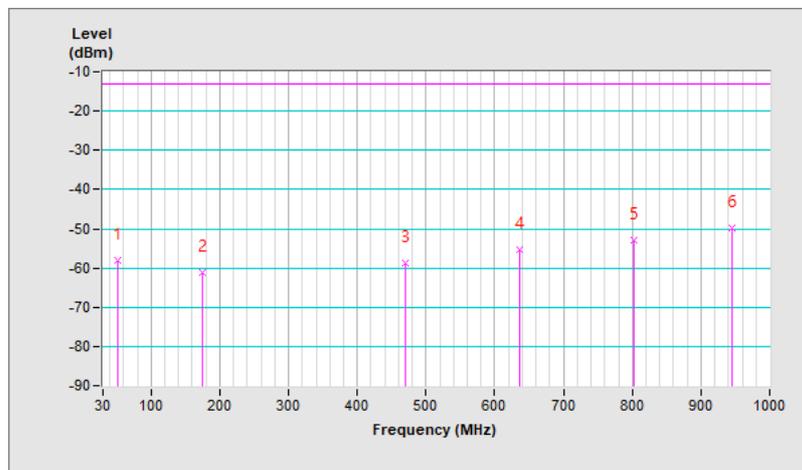


7.6.10 LTE Band 38

RF Mode	LTE Band 38 Channel Bandwidth: 20MHz	Channel	CH 38000 : 2595 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	172.59	-54.4	-25.0	-29.4	1.50 H	101	54.3	-108.7
2	302.57	-60.8	-25.0	-35.8	1.00 H	226	46.5	-107.3
3	528.58	-57.9	-25.0	-32.9	1.25 H	353	44.2	-102.1
4	582.90	-56.5	-25.0	-31.5	1.00 H	123	44.1	-100.6
5	801.15	-52.4	-25.0	-27.4	1.25 H	311	44.7	-97.1
6	944.71	-47.8	-25.0	-22.8	1.50 H	195	47.2	-95.0

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

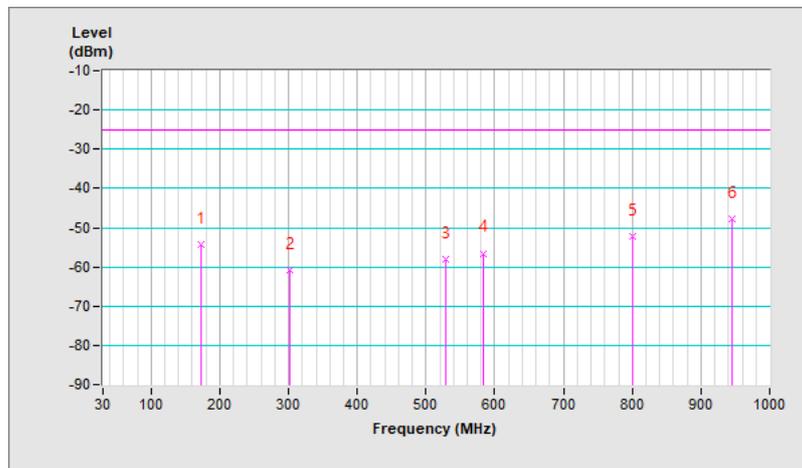


RF Mode	LTE Band 38 Channel Bandwidth: 20MHz	Channel	CH 38000 : 2595 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-55.4	-25.0	-30.4	1.50 V	353	53.9	-109.3
2	175.50	-57.4	-25.0	-32.4	1.00 V	67	51.6	-109.0
3	443.22	-58.6	-25.0	-33.6	1.25 V	196	44.8	-103.4
4	590.66	-55.5	-25.0	-30.5	1.25 V	61	44.9	-100.4
5	801.15	-51.7	-25.0	-26.7	1.00 V	139	45.4	-97.1
6	949.56	-48.0	-25.0	-23.0	1.50 V	344	47.0	-95.0

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

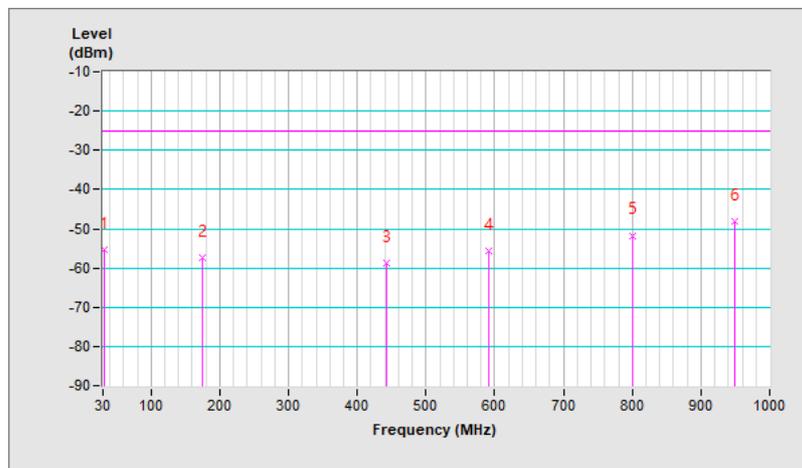


7.6.11 LTE Band 41

RF Mode	LTE Band 41 Channel Bandwidth: 20MHz	Channel	CH 40620 : 2593 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	176.47	-52.2	-25.0	-27.2	1.25 H	104	57.0	-109.2
2	309.36	-60.0	-25.0	-35.0	1.00 H	101	46.9	-106.9
3	432.55	-58.5	-25.0	-33.5	1.50 H	294	45.4	-103.9
4	599.39	-55.9	-25.0	-30.9	1.00 H	335	44.2	-100.1
5	736.16	-54.5	-25.0	-29.5	1.25 H	296	43.7	-98.2
6	946.65	-46.8	-25.0	-21.8	1.50 H	198	48.2	-95.0

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

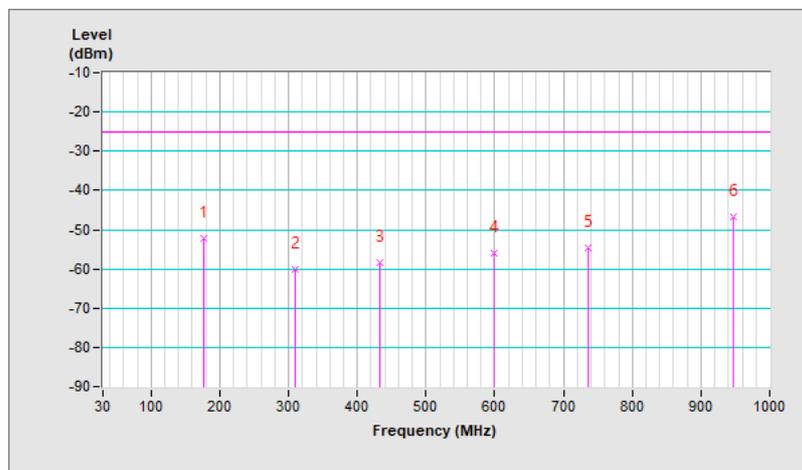


RF Mode	LTE Band 41 Channel Bandwidth: 20MHz	Channel	CH 40620 : 2593 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.67	-56.0	-25.0	-31.0	1.25 V	30	52.5	-108.5
2	179.38	-57.8	-25.0	-32.8	1.50 V	8	51.8	-109.6
3	404.42	-59.0	-25.0	-34.0	1.00 V	20	45.9	-104.9
4	610.06	-56.6	-25.0	-31.6	2.00 V	124	43.5	-100.1
5	853.53	-53.3	-25.0	-28.3	1.25 V	202	43.4	-96.7
6	944.71	-49.0	-25.0	-24.0	1.00 V	344	46.0	-95.0

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

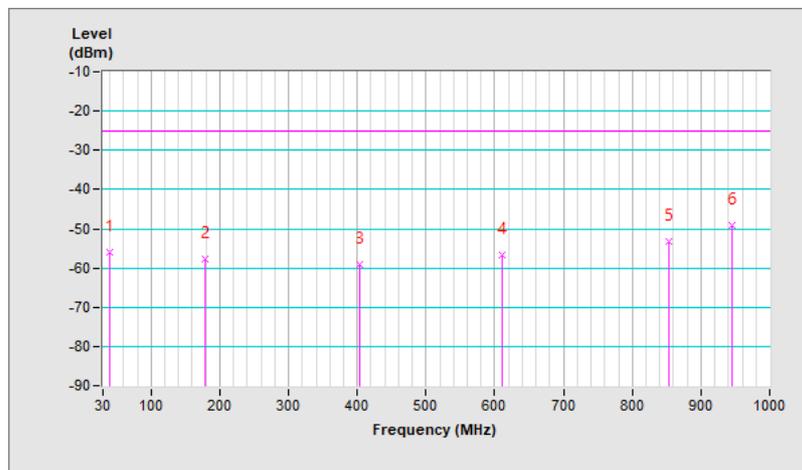

7.7 Radiated Spurious Emissions above 1GHz

7.7.1 GSM 850

RF Mode	GSM 850	Channel	CH 128 : 824.2 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-41.50	-13.00	-28.50	1.93 H	196	59.81	-101.31
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-40.60	-13.00	-27.60	1.78 V	326	60.71	-101.31

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	GSM 850	Channel	CH 189 : 836.4 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-41.05	-13.00	-28.05	1.94 H	198	60.13	-101.18

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-40.29	-13.00	-27.29	1.79 V	324	60.89	-101.18

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



RF Mode	GSM 850	Channel	CH 251 : 848.8 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-40.98	-13.00	-27.98	1.86 H	202	60.07	-101.05

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-40.29	-13.00	-27.29	1.74 V	323	60.76	-101.05

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

7.7.2 GSM 1900

RF Mode	GSM 1900	Channel	CH 512 : 1850.2 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3700.40	-46.60	-13.00	-33.60	1.52 H	318	48.11	-94.71
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3700.40	-47.32	-13.00	-34.32	2.79 V	224	47.39	-94.71

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	GSM 1900	Channel	CH 661 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-46.08	-13.00	-33.08	1.51 H	314	48.13	-94.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-46.53	-13.00	-33.53	2.85 V	228	47.68	-94.21

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	GSM 1900	Channel	CH 810 : 1909.8 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3819.60	-45.92	-13.00	-32.92	1.46 H	313	47.96	-93.88

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3819.60	-46.46	-13.00	-33.46	2.77 V	221	47.42	-93.88

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.3 WCDMA Band II

RF Mode	WCDMA Band II	Channel	CH 9262 : 1852.4 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3704.80	-47.13	-13.00	-34.13	1.72 H	310	47.54	-94.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3704.80	-47.85	-13.00	-34.85	2.61 V	215	46.82	-94.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	WCDMA Band II	Channel	CH 9400 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-46.37	-13.00	-33.37	1.71 H	314	47.84	-94.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-47.08	-13.00	-34.08	2.59 V	217	47.13	-94.21

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	WCDMA Band II	Channel	CH 9538 : 1907.6 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.20	-46.08	-13.00	-33.08	1.75 H	306	47.83	-93.91

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.20	-46.81	-13.00	-33.81	2.68 V	212	47.10	-93.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.4 WCDMA Band V

RF Mode	WCDMA Band V	Channel	CH 4132 : 826.4 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1652.80	-52.41	-13.00	-39.41	1.86 H	209	48.88	-101.29
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1652.80	-50.61	-13.00	-37.61	1.62 V	317	50.68	-101.29

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



RF Mode	WCDMA Band V	Channel	CH 4182 : 836.4 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-52.03	-13.00	-39.03	1.85 H	204	49.15	-101.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-50.31	-13.00	-37.31	1.69 V	315	50.87	-101.18

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



RF Mode	WCDMA Band V	Channel	CH 4233 : 846.6 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.20	-52.08	-13.00	-39.08	1.91 H	209	48.99	-101.07

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.20	-50.25	-13.00	-37.25	1.66 V	314	50.82	-101.07

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

7.7.5 LTE Band 2

RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 18607 : 1850.7 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-49.68	-13.00	-36.68	1.57 H	324	45.02	-94.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-50.39	-13.00	-37.39	2.60 V	227	44.31	-94.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-49.18	-13.00	-36.18	1.55 H	320	45.03	-94.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-49.88	-13.00	-36.88	2.59 V	228	44.33	-94.21

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 1.4MHz	Channel	CH 19193 : 1909.3 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-48.79	-13.00	-35.79	1.54 H	322	45.09	-93.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-49.62	-13.00	-36.62	2.52 V	222	44.26	-93.88

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 18625 : 1852.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-49.49	-13.00	-36.49	1.61 H	325	45.18	-94.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-50.40	-13.00	-37.40	2.61 V	226	44.27	-94.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-49.02	-13.00	-36.02	1.59 H	323	45.19	-94.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-49.94	-13.00	-36.94	2.58 V	223	44.27	-94.21

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 5MHz	Channel	CH 19175 : 1907.5 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-48.70	-13.00	-35.70	1.51 H	327	45.21	-93.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-49.55	-13.00	-36.55	2.54 V	221	44.36	-93.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 18700 : 1860 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-49.42	-13.00	-36.42	1.56 H	322	45.11	-94.53
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-50.11	-13.00	-37.11	2.57 V	222	44.42	-94.53

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 18900 : 1880 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-48.98	-13.00	-35.98	1.58 H	325	45.23	-94.21
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-49.78	-13.00	-36.78	2.58 V	226	44.43	-94.21

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 2 Channel Bandwidth: 20MHz	Channel	CH 19100 : 1900 MHz
Frequency Range	1 GHz ~ 20 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-48.98	-13.00	-35.98	1.53 H	323	45.05	-94.03
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-49.72	-13.00	-36.72	2.60 V	229	44.31	-94.03

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.7.6 LTE Band 5

RF Mode	LTE Band 5 Channel Bandwidth: 1.4MHz	Channel	CH 20407 : 824.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-47.73	-13.00	-34.73	1.57 H	220	53.58	-101.31
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-46.79	-13.00	-33.79	1.53 V	302	54.52	-101.31

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 5 Channel Bandwidth: 1.4MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-47.55	-13.00	-34.55	1.54 H	221	53.63	-101.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-46.60	-13.00	-33.60	1.51 V	304	54.58	-101.18

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 1.4MHz	Channel	CH 20643 : 848.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-47.41	-13.00	-34.41	1.59 H	223	53.64	-101.05
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-46.66	-13.00	-33.66	1.52 V	299	54.39	-101.05

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 5MHz	Channel	CH 20425 : 826.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-47.44	-13.00	-34.44	1.54 H	217	53.85	-101.29
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-46.91	-13.00	-33.91	1.49 V	301	54.38	-101.29

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 5MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-47.32	-13.00	-34.32	1.56 H	216	53.86	-101.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-46.66	-13.00	-33.66	1.52 V	298	54.52	-101.18

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 5MHz	Channel	CH 20625 : 846.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-47.44	-13.00	-34.44	1.55 H	219	53.63	-101.07
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-46.61	-13.00	-33.61	1.46 V	300	54.46	-101.07

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20450 : 829 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-47.66	-13.00	-34.66	1.63 H	222	53.61	-101.27
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-46.70	-13.00	-33.70	1.47 V	297	54.57	-101.27

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20525 : 836.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-47.31	-13.00	-34.31	1.58 H	218	53.87	-101.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-46.56	-13.00	-33.56	1.50 V	295	54.62	-101.18

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 5 Channel Bandwidth: 10MHz	Channel	CH 20600 : 844 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-47.25	-13.00	-34.25	1.63 H	215	53.85	-101.10
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-46.74	-13.00	-33.74	1.54 V	298	54.36	-101.10

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

7.7.7 LTE Band 7

RF Mode	LTE Band 7 Channel Bandwidth: 5MHz	Channel	CH 20775 : 2502.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5005.00	-45.46	-25.00	-20.46	1.43 H	314	46.22	-91.68
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5005.00	-46.41	-25.00	-21.41	2.80 V	206	45.27	-91.68

Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



RF Mode	LTE Band 7 Channel Bandwidth: 5MHz	Channel	CH 21100 : 2535 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-45.23	-25.00	-20.23	1.46 H	312	46.32	-91.55
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-46.18	-25.00	-21.18	2.78 V	207	45.37	-91.55

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 7 Channel Bandwidth: 5MHz	Channel	CH 21425 : 2567.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5135.00	-45.04	-25.00	-20.04	1.48 H	312	46.18	-91.22
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5135.00	-45.84	-25.00	-20.84	2.82 V	202	45.38	-91.22

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 7 Channel Bandwidth: 20MHz	Channel	CH 20850 : 2510 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5020.00	-45.62	-25.00	-20.62	1.39 H	313	46.05	-91.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5020.00	-46.35	-25.00	-21.35	2.81 V	203	45.32	-91.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 7 Channel Bandwidth: 20MHz	Channel	CH 21100 : 2535 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-45.20	-25.00	-20.20	1.44 H	313	46.35	-91.55
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-46.01	-25.00	-21.01	2.76 V	204	45.54	-91.55

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 7 Channel Bandwidth: 20MHz	Channel	CH 21350 : 2560 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.00	-45.27	-25.00	-20.27	1.42 H	313	46.01	-91.28
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.00	-45.86	-25.00	-20.86	2.80 V	206	45.42	-91.28

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

7.7.8 LTE Band 12

RF Mode	LTE Band 12 Channel Bandwidth: 1.4MHz	Channel	CH 23017 : 699.7 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-49.33	-13.00	-36.33	1.94 H	34	52.16	-101.49
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-48.16	-13.00	-35.16	1.46 V	139	53.33	-101.49

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 1.4MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-49.34	-13.00	-36.34	1.98 H	40	52.08	-101.42
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-48.01	-13.00	-35.01	1.50 V	135	53.41	-101.42

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 1.4MHz	Channel	CH 23173 : 715.3 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-49.43	-13.00	-36.43	1.97 H	38	51.93	-101.36
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-47.91	-13.00	-34.91	1.56 V	136	53.45	-101.36

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

RF Mode	LTE Band 12 Channel Bandwidth: 5MHz	Channel	CH 23035 : 701.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-49.28	-13.00	-36.28	2.04 H	35	52.19	-101.47
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-48.13	-13.00	-35.13	1.56 V	135	53.34	-101.47

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 5MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-49.29	-13.00	-36.29	1.94 H	37	52.13	-101.42
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-48.05	-13.00	-35.05	1.48 V	137	53.37	-101.42

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 5MHz	Channel	CH 23155 : 713.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-49.27	-13.00	-36.27	2.00 H	39	52.09	-101.36
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-48.07	-13.00	-35.07	1.47 V	133	53.29	-101.36

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 12 Channel Bandwidth: 10MHz	Channel	CH 23060 : 704 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-49.30	-13.00	-36.30	2.02 H	33	52.14	-101.44
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-48.09	-13.00	-35.09	1.49 V	135	53.35	-101.44

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 10MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-49.21	-13.00	-36.21	2.03 H	37	52.21	-101.42
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-47.96	-13.00	-34.96	1.51 V	142	53.46	-101.42

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



RF Mode	LTE Band 12 Channel Bandwidth: 10MHz	Channel	CH 23130 : 711 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-49.23	-13.00	-36.23	1.98 H	35	52.16	-101.39
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-48.08	-13.00	-35.08	1.52 V	146	53.31	-101.39

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

7.7.9 LTE Band 17

RF Mode	LTE Band 17 Channel Bandwidth: 5MHz	Channel	CH 23755 : 706.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1413.00	-49.07	-13.00	-36.07	2.04 H	39	52.36	-101.43
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1413.00	-47.91	-13.00	-34.91	1.91 V	141	53.52	-101.43

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

RF Mode	LTE Band 17 Channel Bandwidth: 5MHz	Channel	CH 23790 : 710 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-48.97	-13.00	-35.97	2.09 H	43	52.43	-101.40
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-47.89	-13.00	-34.89	1.90 V	141	53.51	-101.40

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



RF Mode	LTE Band 17 Channel Bandwidth: 5MHz	Channel	CH 23825 : 713.5 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-48.91	-13.00	-35.91	2.04 H	45	52.45	-101.36
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-47.83	-13.00	-34.83	1.91 V	136	53.53	-101.36

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



RF Mode	LTE Band 17 Channel Bandwidth: 10MHz	Channel	CH 23780 : 709 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1418.00	-48.95	-13.00	-35.95	2.10 H	39	52.46	-101.41
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1418.00	-47.95	-13.00	-34.95	1.85 V	140	53.46	-101.41

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



RF Mode	LTE Band 17 Channel Bandwidth: 10MHz	Channel	CH 23790 : 710 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-48.93	-13.00	-35.93	2.08 H	40	52.47	-101.40
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-47.84	-13.00	-34.84	1.86 V	136	53.56	-101.40

Remarks:

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



RF Mode	LTE Band 17 Channel Bandwidth: 10MHz	Channel	CH 23800 : 711 MHz
Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-49.15	-13.00	-36.15	2.03 H	40	52.24	-101.39
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-47.88	-13.00	-34.88	1.88 V	139	53.51	-101.39

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

7.7.10 LTE Band 38

RF Mode	LTE Band 38 Channel Bandwidth: 5MHz	Channel	CH 37775 : 2572.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5145.00	-45.23	-25.00	-20.23	1.74 H	337	45.93	-91.16
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5145.00	-46.04	-25.00	-21.04	2.39 V	199	45.12	-91.16

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 38 Channel Bandwidth: 5MHz	Channel	CH 38000 : 2595 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-45.20	-25.00	-20.20	1.72 H	332	45.98	-91.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-45.93	-25.00	-20.93	2.40 V	195	45.25	-91.18

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 38 Channel Bandwidth: 5MHz	Channel	CH 38225 : 2617.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5235.00	-45.41	-25.00	-20.41	1.67 H	340	45.92	-91.33
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5235.00	-46.18	-25.00	-21.18	2.37 V	193	45.15	-91.33

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 38 Channel Bandwidth: 20MHz	Channel	CH 37850 : 2580 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5160.00	-45.05	-25.00	-20.05	1.66 H	339	46.11	-91.16
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5160.00	-45.99	-25.00	-20.99	2.37 V	198	45.17	-91.16

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 38 Channel Bandwidth: 20MHz	Channel	CH 38000 : 2595 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-45.05	-25.00	-20.05	1.65 H	334	46.13	-91.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-45.80	-25.00	-20.80	2.39 V	194	45.38	-91.18

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 38 Channel Bandwidth: 20MHz	Channel	CH 38150 : 2610 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5220.00	-45.23	-25.00	-20.23	1.64 H	342	46.04	-91.27
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5220.00	-46.17	-25.00	-21.17	2.32 V	197	45.10	-91.27

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.7.11 LTE Band 41

RF Mode	LTE Band 41 Channel Bandwidth: 5MHz	Channel	CH 39675 : 2498.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4997.00	-45.78	-25.00	-20.78	1.66 H	338	45.89	-91.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4997.00	-46.60	-25.00	-21.60	2.41 V	195	45.07	-91.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 41 Channel Bandwidth: 5MHz	Channel	CH 40620 : 2593 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-45.22	-25.00	-20.22	1.74 H	338	45.95	-91.17
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-46.01	-25.00	-21.01	2.41 V	201	45.16	-91.17

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 41 Channel Bandwidth: 5MHz	Channel	CH 41565 : 2687.5 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5375.00	-45.24	-25.00	-20.24	1.67 H	342	46.12	-91.36
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5375.00	-46.05	-25.00	-21.05	2.40 V	199	45.31	-91.36

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 41 Channel Bandwidth: 20MHz	Channel	CH 39750 : 2506 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5012.00	-45.70	-25.00	-20.70	1.69 H	342	45.96	-91.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5012.00	-46.33	-25.00	-21.33	2.39 V	196	45.33	-91.66

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 41 Channel Bandwidth: 20MHz	Channel	CH 40620 : 2593 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-45.04	-25.00	-20.04	1.70 H	338	46.13	-91.17
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5186.00	-45.79	-25.00	-20.79	2.37 V	198	45.38	-91.17

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



RF Mode	LTE Band 41 Channel Bandwidth: 20MHz	Channel	CH 41490 : 2680 MHz
Frequency Range	1 GHz ~ 27 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5360.00	-45.48	-25.00	-20.48	1.72 H	337	45.94	-91.42
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5360.00	-46.07	-25.00	-21.07	2.33 V	201	45.35	-91.42

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

7.8 Frequency Stability

Environmental Conditions:	25°C, 60% RH	Tested By:	Noah Chang
---------------------------	--------------	------------	------------

7.8.1 GSM 850

Frequency Stability Versus Voltage (GSM)				
Voltage (Vdc)	CH 128 (824.2 MHz)		CH 251 (848.8 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	824.199997	-0.0036	848.799999	-0.0012
3.89	824.199995	-0.0061	848.800002	0.0024
4.3	824.199996	-0.0049	848.800002	0.0024

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 128 (824.2 MHz)		CH 251 (848.8 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	824.200004	0.0049	848.800002	0.0024
-20	824.199999	-0.0012	848.799995	-0.0059
-10	824.200004	0.0049	848.799999	-0.0012
0	824.200002	0.0024	848.800004	0.0047
10	824.199995	-0.0061	848.799998	-0.0024
20	824.199995	-0.0061	848.800003	0.0035
30	824.200001	0.0012	848.799999	-0.0012
40	824.200001	0.0012	848.799999	-0.0012
50	824.200001	0.0012	848.799997	-0.0035
55	824.199997	-0.0036	848.799999	-0.0012

Frequency Stability Versus Voltage (GPRS)				
Voltage (Vdc)	CH 128 (824.2 MHz)		CH 251 (848.8 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	824.199995	-0.0061	848.800002	0.0024
3.89	824.199995	-0.0061	848.800003	0.0035
4.3	824.200003	0.0036	848.800001	0.0012

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 128 (824.2 MHz)		CH 251 (848.8 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	824.200005	0.0061	848.800004	0.0047
-20	824.200001	0.0012	848.800002	0.0024
-10	824.200002	0.0024	848.800004	0.0047
0	824.200001	0.0012	848.800001	0.0012
10	824.200003	0.0036	848.800004	0.0047
20	824.199997	-0.0036	848.800003	0.0035
30	824.199996	-0.0049	848.800005	0.0059
40	824.199996	-0.0049	848.800003	0.0035
50	824.199995	-0.0061	848.800001	0.0012
55	824.199997	-0.0036	848.799998	-0.0024

7.8.2 GSM 1900

Frequency Stability Versus Voltage (GSM)				
Voltage (Vdc)	CH 512 (1850.2 MHz)		CH 810 (1909.8 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	1850.200003	0.0016	1909.799999	-0.0005
3.89	1850.200005	0.0027	1909.799996	-0.0021
4.3	1850.200001	0.0005	1909.799995	-0.0026

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 512 (1850.2 MHz)		CH 810 (1909.8 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.199995	-0.0027	1909.799999	-0.0005
-20	1850.199997	-0.0016	1909.799996	-0.0021
-10	1850.199997	-0.0016	1909.800003	0.0016
0	1850.200001	0.0005	1909.799997	-0.0016
10	1850.199996	-0.0022	1909.799996	-0.0021
20	1850.199998	-0.0011	1909.800005	0.0026
30	1850.199995	-0.0027	1909.800003	0.0016
40	1850.199995	-0.0027	1909.799998	-0.0010
50	1850.200002	0.0011	1909.800001	0.0005
55	1850.200001	0.0005	1909.799997	-0.0016

Frequency Stability Versus Voltage (GPRS)				
Voltage (Vdc)	CH 512 (1850.2 MHz)		CH 810 (1909.8 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	1850.199997	-0.0016	1909.800001	0.0005
3.89	1850.199996	-0.0022	1909.800001	0.0005
4.3	1850.200005	0.0027	1909.800002	0.0010

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 512 (1850.2 MHz)		CH 810 (1909.8 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1850.200004	0.0022	1909.799998	-0.0010
-20	1850.200004	0.0022	1909.800005	0.0026
-10	1850.199995	-0.0027	1909.799999	-0.0005
0	1850.199996	-0.0022	1909.799996	-0.0021
10	1850.200003	0.0016	1909.799997	-0.0016
20	1850.199997	-0.0016	1909.799995	-0.0026
30	1850.199999	-0.0005	1909.800002	0.0010
40	1850.200001	0.0005	1909.799996	-0.0021
50	1850.199997	-0.0016	1909.800002	0.0010
55	1850.199998	-0.0011	1909.799996	-0.0021

7.8.3 WCDMA Band II

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 9262 (1852.4 MHz)		CH 9538 (1907.6 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	1852.400002	0.0011	1907.599997	-0.0016
3.89	1852.400002	0.0011	1907.599996	-0.0021
4.3	1852.400001	0.0005	1907.599995	-0.0026

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 9262 (1852.4 MHz)		CH 9538 (1907.6 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1852.399997	-0.0016	1907.599998	-0.0010
-20	1852.399999	-0.0005	1907.599995	-0.0026
-10	1852.399996	-0.0022	1907.599995	-0.0026
0	1852.399999	-0.0005	1907.599995	-0.0026
10	1852.399998	-0.0011	1907.600001	0.0005
20	1852.399995	-0.0027	1907.600004	0.0021
30	1852.400002	0.0011	1907.599996	-0.0021
40	1852.400002	0.0011	1907.599995	-0.0026
50	1852.399995	-0.0027	1907.600005	0.0026
55	1852.400005	0.0027	1907.600001	0.0005

7.8.4 WCDMA Band V

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 4132 (826.4 MHz)		CH 4223 (846.6 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	826.399998	-0.0024	846.600005	0.0059
3.89	826.399997	-0.0036	846.599998	-0.0024
4.3	826.399995	-0.0061	846.600001	0.0012

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 4132 (826.4 MHz)		CH 4223 (846.6 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	826.399996	-0.0048	846.599996	-0.0047
-20	826.399998	-0.0024	846.599997	-0.0035
-10	826.399997	-0.0036	846.599996	-0.0047
0	826.399998	-0.0024	846.600001	0.0012
10	826.400001	0.0012	846.599997	-0.0035
20	826.400003	0.0036	846.599996	-0.0047
30	826.400004	0.0048	846.599995	-0.0059
40	826.400001	0.0012	846.599997	-0.0035
50	826.399995	-0.0061	846.599999	-0.0012
55	826.399997	-0.0036	846.599996	-0.0047

7.8.5 LTE Band 2

LTE Band 2, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 18700 (1860 MHz)		CH 19100 (1900 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	1860.000005	0.0027	1900.000007	0.0037
3.89	1859.999999	-0.0005	1900	0
4.3	1859.999998	-0.0011	1899.999995	-0.0026

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 18700 (1860 MHz)		CH 19100 (1900 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1860	0	1900.000002	0.0011
-20	1859.999997	-0.0016	1899.999995	-0.0026
-10	1859.999992	-0.0043	1899.999995	-0.0026
0	1859.999997	-0.0016	1900	0
10	1859.999991	-0.0048	1899.999992	-0.0042
20	1859.999996	-0.0022	1899.999991	-0.0047
30	1859.999992	-0.0043	1899.999993	-0.0037
40	1859.999997	-0.0016	1899.999995	-0.0026
50	1859.999994	-0.0032	1899.999994	-0.0032
55	1860	0	1900.000004	0.0021

7.8.6 LTE Band 5

LTE Band 5, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20450 (829 MHz)		CH 20600 (844 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	828.999997	-0.0036	844	0
3.89	829.000009	0.0109	844.00001	0.0118
4.3	828.999993	-0.0084	843.999992	-0.0095

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20450 (829 MHz)		CH 20600 (844 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	829.000007	0.0084	844.000007	0.0083
-20	828.999995	-0.006	843.999991	-0.0107
-10	829.000004	0.0048	843.999999	-0.0012
0	828.999997	-0.0036	844	0
10	828.999993	-0.0084	843.999993	-0.0083
20	829.000002	0.0024	844.000003	0.0036
30	829.000002	0.0024	844.000004	0.0047
40	828.999998	-0.0024	843.999995	-0.0059
50	828.999998	-0.0024	844.000003	0.0036
55	828.999994	-0.0072	843.999991	-0.0107

7.8.7 LTE Band 7

LTE Band 7, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 20850 (2510 MHz)		CH 21350 (2560 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2510	0	2560.000001	0.0004
3.89	2510.000003	0.0012	2560.000003	0.0012
4.3	2510.000009	0.0036	2560.000007	0.0027

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 20850 (2510 MHz)		CH 21350 (2560 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2509.999992	-0.0032	2559.999995	-0.002
-20	2509.999999	-0.0004	2559.999999	-0.0004
-10	2510.000008	0.0032	2560.000007	0.0027
0	2510.000001	0.0004	2560.000004	0.0016
10	2510.00001	0.004	2560.000009	0.0035
20	2510.000003	0.0012	2560.000002	0.0008
30	2509.999993	-0.0028	2559.999995	-0.002
40	2509.999992	-0.0032	2559.99999	-0.0039
50	2509.999995	-0.002	2559.999996	-0.0016
55	2509.999997	-0.0012	2559.999996	-0.0016

7.8.8 LTE Band 12

LTE Band 12, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 23060 (704 MHz)		CH 23130 (711 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	704.000008	0.0114	711.000007	0.0098
3.89	704.000003	0.0043	711.000003	0.0042
4.3	704.000007	0.0099	711.000001	0.0141

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23060 (704 MHz)		CH 23130 (711 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	703.999995	-0.0071	710.999997	-0.0042
-20	703.999993	-0.0099	710.999998	-0.0028
-10	704.000008	0.0114	711.000004	0.0056
0	703.999999	-0.0014	711.000001	0.0014
10	703.999993	-0.0099	710.999997	-0.0042
20	703.999992	-0.0114	710.999993	-0.0098
30	703.999999	-0.0014	710.999994	-0.0084
40	703.999991	-0.0128	710.999993	-0.0098
50	703.999991	-0.0128	710.999991	-0.0127
55	704.000009	0.0128	711.000006	0.0084

7.8.9 LTE Band 17

LTE Band 17, Channel Bandwidth: 10 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 23780 (709 MHz)		CH 23800 (711 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	708.999999	-0.0014	711	0
3.89	709.000004	0.0056	711.000002	0.0028
4.3	709.000001	0.0014	711.000001	0.0014

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 23780 (709 MHz)		CH 23800 (711 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	709.000007	0.0099	711.000003	0.0042
-20	709.000006	0.0085	711.000004	0.0056
-10	709.000001	0.0014	711	0
0	708.999992	-0.0113	710.999995	-0.007
10	709.000006	0.0085	711.000003	0.0042
20	709.000005	0.0071	711.000009	0.0127
30	708.999992	-0.0113	710.999994	-0.0084
40	709.000001	0.0141	711.000001	0.0141
50	708.999999	-0.0014	711.000004	0.0056
55	708.999993	-0.0099	710.999992	-0.0113

7.8.10 LTE Band 38

LTE Band 38, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 37850 (2580 MHz)		CH 38150 (2610 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2580.000002	0.0008	2610.000007	0.0027
3.89	2580.000002	0.0008	2609.999998	-0.0008
4.3	2579.999998	-0.0008	2610.000002	0.0008

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 37850 (2580 MHz)		CH 38150 (2610 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2579.999998	-0.0008	2609.999999	-0.0004
-20	2580	0	2610.000004	0.0015
-10	2580.000001	0.0004	2610.000006	0.0023
0	2580.000003	0.0012	2610.000007	0.0027
10	2580.000001	0.0039	2610.000009	0.0034
20	2579.999999	-0.0004	2610.000001	0.0004
30	2580.000008	0.0031	2610.000005	0.0019
40	2580.000001	0.0004	2610	0
50	2579.999999	-0.0039	2609.999991	-0.0034
55	2580.000006	0.0023	2610.000003	0.0011

7.8.11 LTE Band 41

LTE Band 41, Channel Bandwidth: 20 MHz

Frequency Stability Versus Voltage				
Voltage (Vdc)	CH 39750 (2506 MHz)		CH 41490 (2680 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.7	2505.999996	-0.0016	2679.999992	-0.003
3.89	2506.000005	0.002	2680.000006	0.0022
4.3	2506.000003	0.0012	2680.000004	0.0015

Note: The applicant defined the normal working voltage is from 3.7 to 4.3 Vdc.

Frequency Stability Versus Temperature				
Temperature (°C)	CH 39750 (2506 MHz)		CH 41490 (2680 MHz)	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2506.000004	0.0016	2680.000003	0.0011
-20	2506.000001	0.0004	2680.000003	0.0011
-10	2505.99999	-0.004	2679.99999	-0.0037
0	2506	0	2680.000003	0.0011
10	2506.000003	0.0012	2680.000005	0.0019
20	2506	0	2679.999995	-0.0019
30	2506.000001	0.0004	2679.999997	-0.0011
40	2505.999992	-0.0032	2679.999995	-0.0019
50	2506.000001	0.0004	2680.000005	0.0019
55	2506.000005	0.002	2680.000006	0.0022

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)



9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---