



## SAR TEST REPORT


**Test Report No. : 26CE0276-HO-C-1**

**Applicant** : Sharp Corporation  
**Type of Equipment** : Wireless PDA  
**Model No.** : PV200E  
**FCC ID** : APYNAR0061  
**Test standard** : FCC47CFR 2.1093  
FCC OET Bulletin 65, Supplement C  
**Test Result** : Complied  
**Max. SAR Measured**  
**PCS 1900** : Head 0.351W/kg (1880.0MHz)  
Body 0.552W/kg (1909.8MHz)  
**Bluetooth** : Body 0.000786 W/kg (2441MHz)  
**Colocation evaluation** :  
**GSM850 + Bluetooth** : 0.352 W/kg  
**PCS1900 + Bluetooth** : 0.553 W/kg

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above standard. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

**Date of test** : July 24 to August 2, 2006

**Tested by** :    
Miyo Ikuta Hisayoshi Sato  
EMC Services EMC Services

**Approved by** :   
Hironobu Shimoji  
Group Leader of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

\*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://ulapex.jp/emc/nvlap.htm>

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

<b>SECTION 1 :</b>	<b>Client information .....</b>	<b>3</b>
<b>SECTION 2 :</b>	<b>Equipment under test (E.U.T.).....</b>	<b>3</b>
2.1	Identification of E.U.T. ....	3
2.2	Product Description.....	4
<b>SECTION 3 :</b>	<b>Test standard information .....</b>	<b>5</b>
3.1	Requirements for compliance testing defined by the FCC.....	5
3.2	Exposure limit .....	6
<b>SECTION 4 :</b>	<b>Test result .....</b>	<b>7</b>
4.1	Result of Max. SAR value.....	7
4.2	Colocation of SAR value.....	7
4.3	Test Location.....	7
<b>SECTION 5 :</b>	<b>Operation of E.U.T. during testing .....</b>	<b>8</b>
5.1	Confirmation before SAR testing.....	8
5.2	Confirmation after SAR testing.....	8
5.3	Operating modes .....	8
5.4	Description of the head test setup.....	9
5.5	Method of measurement (Head SAR) .....	10
5.6	Description of the Body-worn test setup and Method .....	10
5.7	Antenna position .....	10
<b>SECTION 6 :</b>	<b>Test surrounding .....</b>	<b>11</b>
6.1	Measurement uncertainty .....	11
<b>SECTION 7 :</b>	<b>Confirmation before testing.....</b>	<b>12</b>
7.1	Output Power Measurement results.....	12
<b>SECTION 8 :</b>	<b>Measurement results .....</b>	<b>13</b>
8.3	Head 1900MHz SAR .....	13
8.4	Body-worn 1900MHz SAR .....	14
8.5	Body-worn 2450MHz SAR .....	15
<b>APPENDIX 1 :</b>	<b>Photographs of test setup .....</b>	<b>16</b>
<b>APPENDIX 2 :</b>	<b>SAR Measurement data .....</b>	<b>24</b>
1.	Evaluation procedure .....	25
2.	Measurement data (GSM 1900).....	26
3.	Measurement data (Bluetooth).....	42
<b>APPENDIX 3 :</b>	<b>Test instruments.....</b>	<b>45</b>
1.	Equipment used .....	46
2.	Dosimetry assessment setup .....	47
3.	Configuration and peripherals .....	48
4.	System components .....	49
5.	Test system specifications .....	51
6.	1800MHz Simulated Tissues Composition.....	52
7.	1800MHz Validation Measurement.....	52
8.	1800MHz System validation data.....	53
9.	1800MHz Validation Measurement data .....	54
10.	Simulated tissues composition of 2450MHz.....	56
11.	Validation measurement .....	56
12.	System validation data.....	57
13.	2450MHz Validation Measurement data .....	58
14.	Validation uncertainty .....	59
15.	System Validation Dipole (D1800V2,S/N: 2d040).....	60
16.	System Validation Dipole (D2450V2,S/N: 713) .....	69
17.	Dosimetric E-Field Probe Calibration (EX3DV3,S/N: 3507).....	78
18.	References .....	88

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## SECTION 1 : Client information

Company Name	SHARP CORPORATION
Brand name	SHARP
Address	492 Minosho-cho Yamatokoriyama-city Nara 639-1186,Japan
Telephone Number	+81-743-55-4022
Facsimile Number	+81-743-55-2553
Contact Person	Takahiro Inoue

## SECTION 2 : Equipment under test (E.U.T.)

### 2.1 Identification of E.U.T.

Type of Equipment	Wireless PDA	
Model No.	PV200E	
Serial No.	5	
Country of Manufacture	Japan	
Battery	Model Name :	PV-BL11 (Rechargeable Lithium-ion battery)
	Rating :	DC3.7V/1500mAh
	Manufacture	SHARP
Option Battery	N/A	
Accessories	Carring case and Earphone	
Condition of EUT	Engineering prototype (Not for sale: This sample is equivalent to mass-produced items.)	
Modification of EUT	No modification by this test lab	
Receipt Date of Sample	February 23, 2006	
Category Identified	Portable device	

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## 2.2 Product Description

### Radio Specification

	<b>PCS1900</b>	<b>Bluetooth</b>
Equipment Type	Transceiver	Transceiver
Tx frequency	1850.2MHz - 1909.8MHz	2402MHz - 2480MHz
Type of Modulation	GMSK/8PSK	FHSS
Bandwidth	338kHz	1MHz
Channel Spacing	200kHz	1MHz
Channel Number	299	79
Antenna fixed method	Integral	Integral
Antenna Type	PIFA (Type 68d)	Chip Antenna (AF216M245001T)
Antenna Connector Type	Spring Contact	Spring Contact
Antenna Gain	-2.6dBi max	-6.6dBi max
Antenna location	Refer to Appendix 1	Refer to Appendix 1
Max. Transmit Power tested (Conducted power)	29.7dBm(922.6mW)*1	0.02dBm (1mW)
Power Supply	DC3.7 – 4.2V	DC3.0V

\*1 : The result is the conducted power at the antenna terminal in the SAR testing.  
The data is shown in Section 7.1

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 3 : Test standard information**

### **3.1 Requirements for compliance testing defined by the FCC**

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

**1** Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).

**2** IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

---

### 3.2 Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

**Occupational/Controlled Environments:** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**General Population/Uncontrolled Environments:** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

<p><b>NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg</b></p>
---

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 4 : Test result**

### **4.1 Result of Max. SAR value**

#### **4.1.1 PCS1900**

Max. SAR Measured : Head 0.351W/kg  
Body 0.552W/kg

#### **4.1.2 Bluetooth**

Max. SAR Measured : Body 0.000786W/kg

### **4.2 Colocation of SAR value**

As the colocation evaluation, the maximum SAR value of EUT was calculated by adding maximum SAR values of GSM and Bluetooth as Shown below:

Max. SAR value = Max. SAR value(PCS1900) + Max. SAR value (Bluetooth)

#### **Head**

Max.SAR Measured (PCS1900 + Bluetooth) **0.352W/kg**  
=0.351(from PCS1900 head test) + 0.000786 (Bluetooth)  
=0.351786

#### **Body**

Max.SAR Measured (PCS1900 + Bluetooth) **0.553W/kg**  
=0.552(from PCS1900 body test) + 0.000786 (Bluetooth)  
=0.552786

### **4.3 Test Location**

UL Apex Co., Ltd. Head Office EMC Lab.  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8116  
Facsimile : +81 596 24 8124

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

## **SECTION 5 : Operation of E.U.T. during testing**

### **5.1 Confirmation before SAR testing**

#### **Correlation of EMC power and SAR power**

It was checked that the antenna port power was correlated with 0~+5%(FCC requirement) at EMC test (April 17,2006)(Report No. 26CE0276-HO-A)

- EMC and SAR tests were performed with the same test sample under the same condition.
- EMC and SAR tests were performed at the same laboratory.
- The test mode setting was simple, and there was no possibility that the power (value) was changed by the wrong setting.

The result is shown in Section 7.1.

### **5.2 Confirmation after SAR testing**

It was checked that the powerdrift was within  $\pm 5\%$  in the evaluation procedure of SAR testing.  
The result is shown in APPENDIX 2.

### **5.3 Operating modes**

A communication link was set up with the Universal Radio Communication Tester from R&S.  
The EUT was command to operate at maximum transmit power (Power class 0).  
The frequency band and the modulation used in this test are shown as a following.

#### 1. PCS1900 (Power class 0)

Frequency band : 1850.2MHz – 1909.8MHz  
Channel : 512ch(1850.2MHz)  
              661ch(1880.0MHz)  
              810ch(1909.8MHz)  
Modulation : GSM,GPRS,EGPRS  
Crest factor : 8.3(GSM),4.2(GPRS,EGPRS)

#### 2. Bluetooth

Frequency band : 2402MHz – 2480MHz  
Channel : 1ch(2402MHz)  
              39ch(2441MHz)  
              79ch(2480MHz)  
Modulation : FHSS  
Crest factor : 1

\*The detail of base-station simulator

Item : Universal Radio Cimmunication Tester  
Model Number : CMU200  
Serial Number : 106223  
Manufacture : Rohde & Schwarz

---

***UL Apex Co., Ltd.***

***Head Office EMC Lab.***

*4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN*

*Telephone: +81 596 24 8116*

*Facsimile: +81 596 24 8124*

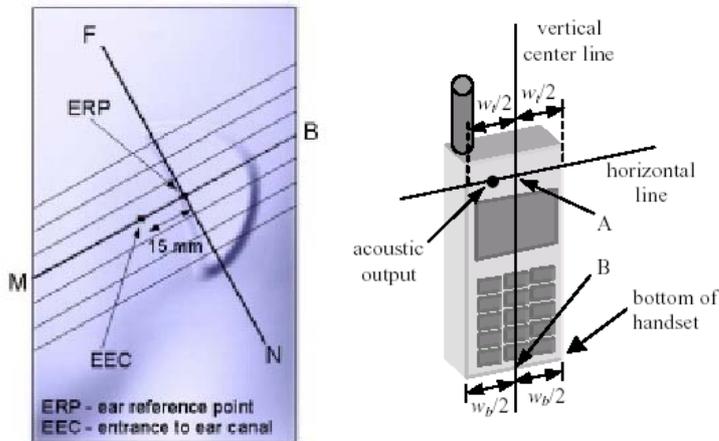
## 5.4 Description of the head test setup

According to the OET 65 and IEEE1528, this EUT was tested on the “Cheek/Touch” and “Ear/Tilt” positions at the left head and right head section of the SAM phantom.

### 5.4.1 Initial ear position

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom.

The device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”.

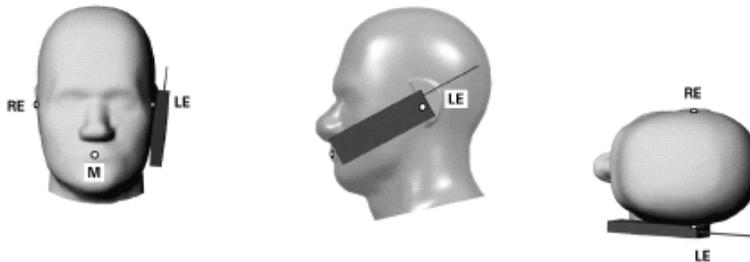


### 5.4.2 Cheek position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line.

This test position is established:

- i) When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- ii) (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.



**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

### **5.4.3 Tilt position**

If the earpiece of the handset is not in full contact with the phantom's ear spacer and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer. Otherwise the handset should be moved away from the cheek perpendicular to the line passes through both "ear reference points" for approximate 2-3 cm. While it is in this position, the handset is tilted away from the mouth with respect to the "test device reference point" by 15°. After the tilt, it is then moved back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously.



### **5.5 Method of measurement (Head SAR)**

Step1. The searching for the worst position

Step2. The changing to the Low and High channels

The test was performed at the worst conditions of Step1.

### **5.6 Description of the Body-worn test setup and Method**

This EUT was tested on the "Back" position at the flat section of SAM phantom.

The tested channel was performed in each Low, Mid and High channels.

The tested modulation was performed in each GSM, GPRS and EGPRS.

The tests were performed in the EUT with the carrying case and ear phone. (Refer to the Appendix1)

### **5.7 Antenna position**

The antenna of this EUT was built-in antenna.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## SECTION 6 : Test surrounding

### 6.1 Measurement uncertainty

The uncertainty budget has been determined for the DASY4 measurement system according to the SPEAG documents[6][7] and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or veff
<b>Measurement System</b>						
Probe calibration	$\pm 6.8$	Normal	1	1	$\pm 6.8$	$\infty$
Axial isotropy of the probe	$\pm 4.7$	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	$\pm 1.9$	$\infty$
Spherical isotropy of the probe	$\pm 9.6$	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	$\pm 3.9$	$\infty$
Boundary effects	$\pm 2.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.2$	$\infty$
Probe linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.7$	$\infty$
Detection limit	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Readout electronics	$\pm 0.3$	Normal	1	1	$\pm 0.3$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.5$	$\infty$
RF ambient Noise	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
RF ambient Reflections	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Probe Positioner	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Probe positioning	$\pm 9.9$	Rectangular	$\sqrt{3}$	1	$\pm 5.7$	$\infty$
Max.SAR Eval.	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
<b>Test Sample Related</b>						
Device positioning	$\pm 2.9$	Normal	1	1	$\pm 2.9$	32
Device holder uncertainty	$\pm 3.6$	Normal	1	1	$\pm 3.6$	4
Power drift	$\pm 5.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.9$	$\infty$
<b>Phantom and Setup</b>						
Phantom uncertainty	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
Liquid conductivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid conductivity (meas.)	$\pm 5.0$	Rectangular	1	0.64	$\pm 3.2$	$\infty$
Liquid permittivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
Liquid permittivity (meas.)	$\pm 5.0$	Rectangular	1	0.6	$\pm 3.0$	$\infty$
<b>Combined Standard Uncertainty</b>						
					<b><math>\pm 13.453</math></b>	
<b>Expanded Uncertainty (k=2)</b>						
					<b><math>\pm 26.9</math></b>	

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## SECTION 7 : Confirmation before testing

### 7.1 Output Power Measurement results

Model : PV200E  
Modulation : GSM, GPRS, EGPRS, Bluetooth  
Serial No. : 5  
Ambient temperature (deg.c.) : 24.5  
Relative Humidity (%) : 56  
Date : July 24,2006  
Measured By : Miyo Ikuta

PCS1900 GSM mode						
Ch	Frequency [MHz]	P/M Reading [dBm]	Atten. [dB]	Cable Loss [dB]	Result [dBm]	Convert [mW]
Low	1850.2	9.08	20.00	0.49	29.6	905.7
Mid	1880.0	9.06	20.00	0.49	29.6	901.6
High	1909.8	9.06	20.00	0.49	29.6	901.6

PCS1900 GPRS mode						
Ch	Frequency [MHz]	P/M Reading [dBm]	Atten. [dB]	Cable Loss [dB]	Result [dBm]	Convert [mW]
Low	1850.2	8.85	20.00	0.50	29.4	861.0
Mid	1880.0	8.78	20.00	0.50	29.3	847.2
High	1909.8	8.70	20.00	0.50	29.2	831.8

PCS1900 EGPRS mode						
Ch	Frequency [MHz]	P/M Reading [dBm]	Atten. [dB]	Cable Loss [dB]	Result [dBm]	Convert [mW]
Low	1850.2	9.09	20.00	0.50	29.6	909.9
Mid	1880.0	9.10	20.00	0.50	29.6	912.0
High	1909.8	9.15	20.00	0.50	29.7	922.6

Bluetooth						
Ch	Freq. [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result	
					[dBm]	[mW]
Low	2402.0	-1.71	0.95	0.00	-0.76	0.84
Mid	2441.0	-1.09	0.95	0.00	-0.14	0.97
High	2480.0	-1.87	0.95	0.00	-0.92	0.81
Inquiry	2441.0	-0.93	0.95	0.00	0.02	1.00

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## SECTION 8 : Measurement results

### 8.3 Head 1900MHz SAR

Liquid Depth (cm) : **15.0** Model : **PV200E**  
Parameters :  $\epsilon_r=38.0, \sigma=1.44$  Serial No. : **5**  
Ambient temperature (deg.c.) : **24.5** Modulation : **GSM**  
Relative Humidity (%) : **56** Crest factor : **8.3**  
Date : **July 24, 2006** Measured By : **Miyo Ikuta**

HEAD SAR MEASUREMENT RESULTS								
Frequency		Modulation	Phantom Section	EUT Set-up Conditions		Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Before	After	Maximum of multi-peak
<b>Step1. Position search</b>								
Mid	1880.0	GSM	Left head	Fixed	Cheek	22.9	22.9	<b>0.278</b>
Mid	1880.0	GSM	Left head	Fixed	Tilt	22.9	22.9	<b>0.336</b>
Mid	1880.0	GSM	Right head	Fixed	Cheek	22.9	22.9	<b>0.246</b>
Mid	1880.0	GSM	Right head	Fixed	Tilt	22.9	22.9	<b>0.262</b>
<b>Step2. Frequency Change</b>								
Low	1850.2	GSM	Left head	Fixed	Tilt	22.9	22.9	<b>0.351</b>
High	1909.2	GSM	Left head	Fixed	Tilt	22.9	22.9	<b>0.233</b>
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						Head SAR: 1.6 W/kg (averaged over 1 gram)		

\*See Appendix 3 for measurement data plots.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**8.4 Body-worn 1900MHz SAR**

Liquid Depth (cm) : **15.0** Model : **PV200E**  
Parameters :  $\epsilon_r = 50.7, \sigma = 1.57$  Serial No. : **5**  
Ambient temperature (deg.c.) : **24.5** Modulation : **GSM**  
Relative Humidity (%) : **53** Crest factor : **8.3**  
Date : **July 26, 2006** Measured By : **Miyo Ikuta**

BODY-WORN SAR MEASUREMENT RESULTS PCS1900									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Low	1850.2	GSM	Flat	Fixed	Back	0	23.5	23.5	<b>0.294</b>
Mid	1880.0	GSM	Flat	Fixed	Back	0	23.5	23.5	<b>0.306</b>
High	1909.8	GSM	Flat	Fixed	Back	0	23.5	23.5	<b>0.245</b>
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Body SAR: 1.6 W/kg (averaged over 1 gram)		

Liquid Depth (cm) : **15.0** Model : **PV200E**  
Parameters :  $\epsilon_r = 50.7, \sigma = 1.57$  Serial No. : **5**  
Ambient temperature (deg.c.) : **24.5** Modulation : **GPRS,EGPRS**  
Relative Humidity (%) : **53** Crest factor : **4.2**  
Date : **July 26, 2006** Measured By : **Miyo Ikuta**

BODY-WORN SAR MEASUREMENT RESULTS PCS1900									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Low	1850.2	GPRS	Flat	Fixed	Back	0	23.5	23.5	<b>0.552</b>
Mid	1880.0	GPRS	Flat	Fixed	Back	0	23.5	23.5	<b>0.464</b>
High	1909.8	GPRS	Flat	Fixed	Back	0	23.5	23.5	<b>0.424</b>
Low	1850.2	EGPRS	Flat	Fixed	Back	0	23.5	23.5	<b>0.543</b>
Mid	1880.0	EGPRS	Flat	Fixed	Back	0	23.5	23.7	<b>0.516</b>
High	1909.8	EGPRS	Flat	Fixed	Back	0	23.7	23.8	<b>0.473</b>
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Body SAR: 1.6 W/kg (averaged over 1 gram)		

\* See Appendix 3 for measurement data plots.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**8.5 Body-worn 2450MHz SAR**

Liquid Depth (cm) : **15.0** Model : **PV200E**  
Parameters :  $\epsilon_r = 50.3, \sigma = 1.97$  Serial No. : **5**  
Ambient temperature (deg.c.) : **25.0** Modulation : **FHSS**  
Relative Humidity (%) : **51** Crest factor : **1**  
Date : **August 2,2006** Measured By : **Hisayosi Sato**

BODY-WORN SAR MEASUREMENT RESULTS									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum of multi-peak
Low	2402	BT	Flat	Fixed	Back	0	24.0	24.0	<b>0.0000963</b>
Mid	2441	BT	Flat	Fixed	Back	0	24.0	24.0	<b>0.000786</b>
High	2480	BT	Flat	Fixed	Back	0	24.0	24.0	<b>0.000102</b>

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124