




RADIO TEST REPORT

Test Report No.: 28FE0217-HO-C


Applicant : SHARP CORPORATION
Type of Equipment : GSM Mobile Phone
Model No. : PV210
Test regulation : FCC Part 24: 2005
FCC ID : APYNAR0064
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.

Date of test: March 1 to 16, 2008

Tested by: 
Yutaka Yoshida
EMC Services


Shinya Watanabe
EMC Services


Satofumi Matsuyama
EMC Services

Approved by : 
Tetsuo Maeno
Site Manager of EMC Services

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(09.01.08)

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Peak Output Power(Conducted/Radiated).....	10
SECTION 6: Bandwidth and Band-Edge (Conducted).....	11
SECTION 7: Spurious Emission (Conducted)	11
SECTION 8: Spurious Radiation and Band-Edge (Radiated).....	12
SECTION 9: Frequency Stability	13
APPENDIX 1: Photographs of test setup.....	14
Spurious Radiation	14
Worst Case Position (Horizontal: Z-axis /:Vertical: Y-axis)	15
APPENDIX 2: Data of EMI test	16
Peak Output Power (Conducted)	16
Peak Output Power (Radiated)	17
Emission Bandwidth.....	18
99%Occupied Bandwidth	21
Band Edge(Conducted)	24
Band Edge (Radiated)	26
Spurious Emission (Conducted)	27
Spurious Radiation	34
Frequency Stability(Temperature/Voltage Variation).....	43
APPENDIX 3: Test instruments	45

SECTION 1: Customer information

Company Name : SHARP CORPORATION
Address : 492 Minosho-cho, Yamatokoriyama-city, NARA, 639-1186 JAPAN
Telephone Number : +81-743-55-4022
Facsimile Number : +81-743-55-2553
Contact Person : Juri Sugiyama

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : GSM Mobile Phone
Model No. : PV210
Serial No. : 168
Rating : AC120V/60Hz (AC Adapter)
Country of Mass-production : Japan
Receipt Date of Sample : February 22, 2008
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.

2.2 Product Description

Model No: PV210 (referred to as the EUT in this report) is the GSM Mobile Phone.

Equipment Type : Transceiver
Other Clock Frequency : 32.768kHz, 12MHz, 26MHz, 32MHz

[GSM Part]

Frequency Operation : 1850.2 – 1909.8MHz (PCS1900)
Type of Modulation : GMSK / 8PSK
Bandwidth : 334kHz
Channel Spacing : 200kHz
Antenna Type : PIFA
Antenna Connector Type : Pin Contact
Antenna Gain : -3.0dBi
Power Supply : DC3.7 - 4.2V
Temperature of Operation : -10 deg. C. to + 55 deg. C.

[Bluetooth Part]

Frequency Operation : 2402-2480MHz
Type of Modulation : FHSS
Bandwidth & Channel spacing : 1MHz & 1MHz
Channel Number : 79
Antenna Type : PIFA
Antenna Connector Type : Pin Contact
Antenna Gain : -2.71dBi
Power Supply : DC1.8V
Temperature of Operation : -10 deg. C. to + 55 deg. C.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 24 2005, final revised on October 20, 2005
Title : FCC 47CFR Part 24
Personal Communications Services

3.2 Procedures and results

Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
Peak Output Power	FCC Part2 Section 2.1046	Section 24.232(b)	Conducted/ Radiated	N/A	[Conducted] 3.2dB 1909.8MHz [Radiated] 2.2dB 1850.20MHz Horizontal	Complied
Emission Bandwidth, 99% Occupied Bandwidth	FCC Part2 Section 2.1049	Section 24.238(b)	Conducted	N/A	-	Complied
Band-Edge	FCC Part2 Section 2.1049	Section 24.238(b)	Conducted/ Radiated	N/A	[Conducted] 4.9dB 1910.020MHz [Radiated] 9.5dB 1850.00MHz Horizontal	Complied
Spurious Emission	FCC Part2 Section 2.1051	Section 24.238(a)	Conducted	N/A	-	Complied
Spurious Radiation	FCC Part2 Section 2.1053	Section 24.238(a)	Radiated	N/A	11.0dB 16920.00MHz Vertical	Complied
Frequency Stability (Temperature Variation)	FCC Part2 Section 2.1055(a) (1) and (b)	Section 24.235	Conducted	N/A	-	Complied
Frequency Stability (Voltage Variation)	FCC Part2 Section 2.1055(d)(1) and (2)	Section 24.235	Conducted	N/A	-	Complied

Note: UL Japan, Inc.'s EMI Work Procedures No. QPM05

*These tests were also referred to TIA-603-B " Land Mobile FM or PM Communications Equipment Measurement and Performance Standards."

*These tests were performed without any deviations from test procedure except for additions or exclusions.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.3 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room	Conducted emission	Radiated emission (10m*)			Radiated emission (3m*)			Radiated emission (3m*)	
		150kHz-30MHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	1GHz-18GHz
No.1 semi-anechoic Chamber (±)	3.7dB	3.1dB	4.7dB	4.4dB	3.2dB	3.7dB	4.4dB	5.9dB	6.1dB
No.2 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.3dB	3.9dB	5.9dB	6.1dB
No.3 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.2dB	4.4dB	5.9dB	6.1dB
No.4 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.2dB	4.4dB	5.9dB	6.1dB

*10m/3m = Measurement distance

Frequency Stability

The measurement uncertainty for this test is 1×10^{-5} .

Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

3.4 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	IC4247	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	IC4247-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	IC4247-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	IC4247-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.5 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The mode is used :

Test	Operating mode	Tested frequency	Channel
Peak output Power (Conducted/Radiated), Emission Bandwidth, 99% Occupied bandwidth, Spurious Emission (Conducted)	Transmitting (Tx) (GSM, GMSK)	1850.2MHz	512
		1880.0MHz	661
		1909.8MHz	810
	Transmitting (Tx) (EGPRS, 8PSK)	1850.2MHz	512
		1880.0MHz	661
		1909.8MHz	810
Band Edge (Conducted/Radiated)	Transmitting (Tx) (GSM, GMSK)	1850.2MHz	512
		1909.8MHz	810
		1850.2MHz	512
	Transmitting (Tx) (EGPRS, 8PSK)	1850.2MHz	512
		1880.0MHz	661
		1909.8MHz	810
Spurious Radiation	Transmitting (Tx) (GSM, GMSK)	1850.2MHz	512
		1880.0MHz	661
		1909.8MHz	810
	Transmitting (Tx) (EGPRS, 8PSK)	1850.2MHz	512
		1880.0MHz	661
		1909.8MHz	810
	Transmitting (Tx) (EGPRS, 8PSK) + Bluetooth (BT) Communication	1850.2MHz	512
		1880.0MHz	661
		1909.8MHz	810
Frequency Stability (Temperature/Voltage Variation)	Transmitting (Tx) (GSM, GMSK)	1880.0MHz	661
	Transmitting (Tx) (EGPRS, 8PSK)	1880.0MHz	661

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116


Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

Radiated

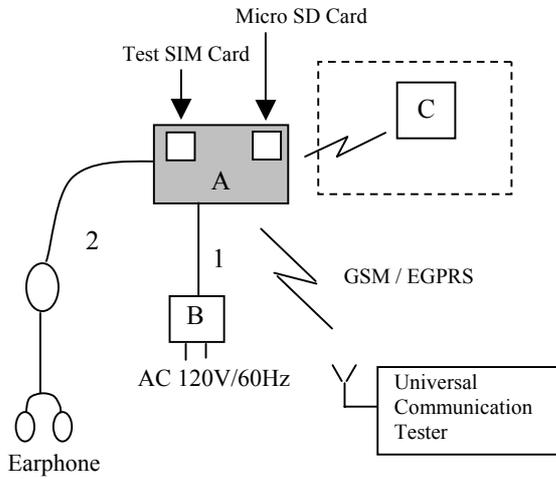

Conducted

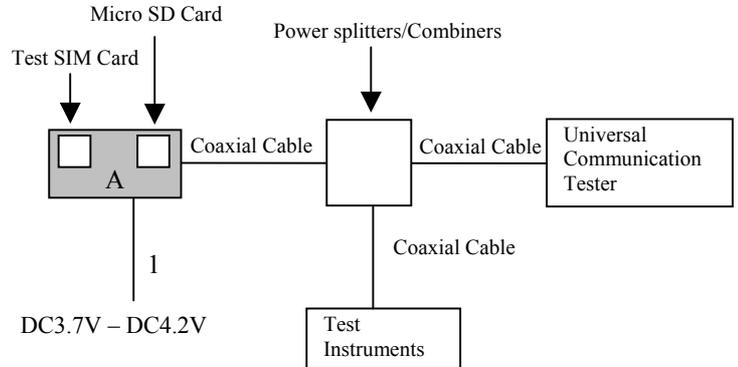

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

* [Dashed Box]: Transmitting (Tx) (EGPRS, 8PSK) + Bluetooth (BT) Communication mode only

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	GSM Mobile Phone	PV210	168	SHARP	EUT
B	AC Adapter	PV-AC41	RADPA1046YCPZ	SHARP	-
C	Bluetooth Headset	FS258	-	Jabra	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	1.5	Shielded	Shielded	-
2	Earphone Cable	1.5	Unshielded	Unshielded	-

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Peak Output Power(Conducted/Radiated)

[Conducted]

Test Procedure

The peak output power (conducted) was measured with a power meter and an attenuator at the antenna port.

Test data : **APPENDIX 2**
Test result : **Pass**

[Radiated]

Test Procedure

- 1) EUT was placed on a platform of nominal size, 1.0 by 0.5m, raised 80cm above the conducting ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The Radiated Electric Field Strength intensity has been measured in No.4 semi anechoic chamber with a ground plane and at a distance of 3m (for the Peak Output Power for the Radiated). The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
- 2) Exchanged the EUT to the Substitution Antenna, the measurement was set for the same height 1m as the EUT. The frequency above 1GHz of the Substitution antenna was used with Horn antenna calibrated with the Half wave dipole antenna, which is harmonized with the measured frequency in 1). The Substitution Antenna was connected with the Signal Generator, and the polarized electromagnetic radiation of the Substitution Antenna was matched with the one of the measuring Antenna, which was set with the Signal Generator to the measured frequency in 1). Then, we set with the Output power (CW) of the Signal Generator where the measuring electromagnetic field is equal to the measured value in 1). The measuring antenna height varied between 1 and 4m to obtain the maximum receiving level. Its Output power of Signal Generator was recorded.
- 3) Equivalent isotropic radiated power was calculated by subtracting the cable loss and the attenuator loss connected between the Signal Generator and the Substitution Antenna from the Output power of the Signal Generator recorded in 2).

Test data : **APPENDIX 2**
Test result : **Pass**

SECTION 6: Bandwidth and Band-Edge (Conducted)

Test Procedure

The Emission Bandwidth, 99% Occupied Bandwidth and Band-Edge was measured with a spectrum analyzer and attenuator connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

SECTION 7: Spurious Emission (Conducted)

Test Procedure

The Spurious Emission was measured with a spectrum analyzer and attenuator connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

SECTION 8: Spurious Radiation and Band-Edge (Radiated)

Test Procedure

- 1) EUT was placed on a platform of nominal size, 1.0m by 0.5m, raised 80cm above the conducting ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The Radiated Electric Field Strength intensity has been measured in No.4 semi anechoic chamber with a ground plane and at a distance of 3m.
The measuring antenna height was varied between 1 to 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
- 2) Exchanged the EUT to the Substitution Antenna, the antenna was set for the same height as EUT on the table.
The frequency below 1GHz of the Substitution antenna was used as the Half wave dipole antenna and Shorted dipole antenna calibrated with the Half wave dipole antenna, which is harmonized with the measured frequency in 1). The frequency above 1GHz of the Substitution antenna was used with Horn antenna calibrated with the Half wave dipole antenna.
The Substitution antenna was connected with the Signal Generator, and the polarized electromagnetic radiation of the Substitution antenna was matched with the one of the measuring antenna, which was set with the Signal Generator to the measured frequency in 1). Then, we set with the Output power (CW) of the Signal Generator where the measuring electromagnetic field is equal to the measured value in 1).
The measuring antenna height varied between 1 and 4m to obtain the maximum receiving level.
Its Output power of Signal Generator was recorded.
- 3) Equivalent isotropic radiated power was calculated by subtracting the cable loss and the attenuator loss connected between the Signal Generator and the Substitution Antenna from the Output power of the Signal Generator recorded in 2).

- The carrier level and noise levels were confirmed at each position of X, Y and Z axis of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data : **APPENDIX 2**
Test result : **Pass**

SECTION 9: Frequency Stability

Test Procedure

The Frequency Stability was measured with a frequency counter and attenuator connected to the antenna port. The Frequency Drift was measured with the 10 deg. C. steps from -30 deg. C. to 50 deg. C., and it is presented as the ppm unit. The Frequency Drift was measured with the normal temperature (20 deg. C.) and Voltage tolerance (DC3.7V to DC4.2V), and it is presented as the ppm unit.

Temperature : -30deg.C to +50deg.C (10 deg. C. step)
Voltage : Vnom:DC3.9V, Vmin:DC3.7V, Vmax:DC4.2V : Operating voltage range of EUT *

*The voltage supply beyond DC 4.2V exceeds the operating voltage range of EUT.
In case of the voltage supply below 3.7V, the EUT stops operation by low battery detection function.
Therefore, Frequency Stability test was performed under the above condition.

Test data : **APPENDIX 2**
Test result : **Pass**