



RADIO TEST REPORT

Test Report No. : 29CE0264-HO-01-A

Applicant : SHARP CORPORATION
Type of Equipment : W-CDMA / GSM Mobile Phone
Model No. : PV300
FCC ID : APYNAR0065
Test regulation : FCC Part 15 Subpart C 2008
Section 15.207, Section 15.247
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test: December 6 to 15, 2008

Tested by :

K. Adachi

Kenichi Adachi
EMC Services

T. Nakagawa

Tomohisa Nakagawa
EMC Services

Nori-hisa Hashimoto
Nori-hisa Hashimoto
EMC Services

T. Hatakeyama

Takahiro Hatakeyama
EMC Services

Takayuki Shimada

Takayuki Shimada
EMC Services

Approved by :

Y. Yoshida

Yutaka Yoshida
EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://uljapan.co.jp/emc/nvlap.htm>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b (09.01.08)

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	5
SECTION 4: Operation of E.U.T. during testing	9
SECTION 5: Conducted Emission	11
SECTION 6: Spurious Emission	12
SECTION 7: Bandwidth	13
SECTION 8: Maximum Peak Output Power	14
SECTION 9: Carrier Frequency Separation	14
SECTION 10: Number of Hopping Frequency	15
SECTION 11: Dwell time	15
APPENDIX 1: Photographs of test setup	16
Conducted Emission	16
Spurious Emission (Radiated).....	17
Worst Case Position (Horizontal: Z-axis/ Vertical:Z-axis)	18
APPENDIX 2: Data of EMI test	19
Conducted Emission	19
Carrier Frequency Separation.....	29
20dB Bandwidth.....	32
Number of Hopping Frequency	35
Dwell time	38
Maximum Peak Output Power	43
Radiated Spurious Emission (below 1GHz).....	44
Radiated Spurious Emission (above 1GHz).....	51
Conducted Spurious Emission	58
99% Occupied Bandwidth.....	67
APPENDIX 3:Test instruments	69

SECTION 1: Customer information

Company Name : SHARP CORPORATION
Brand name : SHARP
Address : 492 Minosho-cho, Yamatokoriyama-city, NARA-ken, 639-1186 JAPAN
Telephone Number : +81-743-55-4022
Facsimile Number : +81-743-55-2553
Contact Person : Juri Sugiyama

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : W-CDMA / GSM Mobile Phone
Model No. : PV300
Serial No. : P3-016: used for Antenna Terminal Conducted tests
P3-156: used for Conducted Emission, Radiated Spurious Emission tests
Rating : Battery DC 3.7 - DC4.2V
(AC Adapter: Input 100 - 240V, 50/60Hz, Output DC 5V)
Receipt Date of Sample : December 5, 2008
Country of Mass-production : Japan
Condition of EUT : Engineering prototype
Modification of EUT : No Modification by the test lab

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

2.2 Product Description

This page has been submitted for a separate exhibit.

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C: 2008, final revised on May 19, 2008

Title : FCC 47CFR Part15 Radio Frequency Devices Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

FCC 15.31 (e)

This EUT (Bluetooth part) provides stable voltage(DC2.6V) constantly to RF part regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results			
1	Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC: Section 15.207	-	N/A	[QP] 13.8dB, 3.17890MHz, N [AV] 14.2dB, 0.48534MHz, N	Complied			
		IC: RSS-Gen 7.2.2	IC: RSS-Gen 7.2.2							
2	Carrier Frequency Separation	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(a)(1)	Conducted	N/A	See data.	Complied			
		IC: -	IC: RSS-210 A8.1 (b)							
3	20dB Bandwidth	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(a)(1)	Conducted	N/A		See data.	Complied		
		IC: -	IC: RSS-210 A8.1 (a)							
4	Number of Hopping Frequency	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(a)(1)(iii)	Conducted	N/A			See data.	Complied	
		IC: -	IC: RSS-210 A8.1 (d)							
5	Dwell time	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(a)(1)(iii)	Conducted	N/A				See data.	Complied
		IC: -	IC: RSS-210 A8.1 (d)							
6	Maximum Peak Output Power	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(b)(1)	Conducted	N/A	See data.				Complied
		IC: RSS-Gen 4.8	IC: RSS-210 A8.4 (2)							
7	Band Edge Compliance	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(d)	Conducted	N/A		See data.			Complied
		IC: -	IC: RSS-210 A8.5							
8	Spurious Emission	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(d)	Conducted/ Radiated	N/A			See data.		Complied
		IC: RSS-Gen 4.9 RSS-Gen 4.10	IC: RSS-210 A8.5 RSS-Gen 7.2.1 and 7.2.3							

Note: UL Japan, Inc.'s EMI Work Procedures No.QPM05 and QPM15.

*These tests were performed without any deviations from test procedure except for additions or exclusions.

* In case any questions arise about test procedure, ANSI C63.4: 2003 is also referred.

3.3 Addition to standards

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99% Occupied Band Width	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	Conducted	N/A	N/A	N/A

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room	Conducted emission	Radiated emission (10m*)				Radiated emission (3m*)			Radiated emission (3m*)	
	150kHz-30MHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	1GHz-18GHz	18GHz-40GHz	
No.1 semi-anechoic chamber (±)	3.7dB	3.1dB	4.4dB	4.2dB	3.2dB	3.8dB	3.9dB	5.9dB	6.1dB	
No.2 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.4dB	4.0dB	5.9dB	6.1dB	
No.3 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.6dB	4.0dB	5.9dB	6.1dB	
No.4 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	3.9dB	3.9dB	5.9dB	6.1dB	

*10m/3m = Measurement distance

Conducted emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty for this test is 3.0dB.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

The mode used for test:

Test	Mode	Tested frequency
Conducted Emission Spurious Emission (Radiated)	Bluetooth Transmitting (Tx), Hopping Off, Payload: PRBS9, DH5(BDR) / 3DH5(EDR)	2402MHz(Low) 2441MHz(Mid) 2480MHz(High)
	Bluetooth Receiving (Rx)	2441MHz(Mid)
Carrier Frequency Separation	Bluetooth Transmitting (Tx), Hopping On, Payload: PRBS9, DH5(BDR) / 3DH5(EDR) / Inquiry	2402MHz(Low) 2441MHz(Mid) 2480MHz(High)
20dB Bandwidth	Bluetooth Transmitting (Tx), Hopping Off, Payload: PRBS9, DH5(BDR) / 3DH5(EDR) / Inquiry	2402MHz(Low) 2441MHz(Mid) 2480MHz(High)
Number of Hopping Frequency	Bluetooth Transmitting (Tx), Hopping On, Payload: PRBS9, DH5(BDR) / 3DH5(EDR) / Inquiry	-
Dwell time	Bluetooth Transmitting (Tx), Hopping On, Payload: PRBS9, - DH1(BDR) - DH3(BDR) - DH5(BDR) - 3DH1(EDR) - 3DH3(EDR) - 3DH5(EDR) / Inquiry	-
Maximum Peak Output Power	Bluetooth Transmitting (Tx), Hopping On, Payload: PRBS9, - DH5(BDR) - 3DH5(EDR) / Inquiry	2402MHz(Low) 2441MHz(Mid) 2480MHz(High)
Spurious Emission (Conducted)	Bluetooth Transmitting (Tx), Hopping Off, Payload: PRBS9, DH5(BDR) / 3DH5(EDR)	2402MHz(Low) 2441MHz(Mid) 2480MHz(High)
Band Edge Compliance (Conducted)	Bluetooth Transmitting (Tx), Payload: PRBS9, DH5(BDR) / 3DH5(EDR), -Hopping On -Hopping Off	2402MHz(Low) 2480MHz(High)
99% Occupied Bandwidth	Bluetooth Transmitting (Tx), Payload: PRBS9, DH5(BDR) / 3DH5(EDR), / Inquiry -Hopping On-Hopping Off	2402MHz(Low) 2441MHz(Mid) 2480MHz(High)

*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)

Remarks: Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

However, the limit level 125mW of AFH mode was used due to the overlap of the bandwidth.

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

< Conducted Emission, Radiated Spurious Emission tests > <Antenna terminal conducted tests>

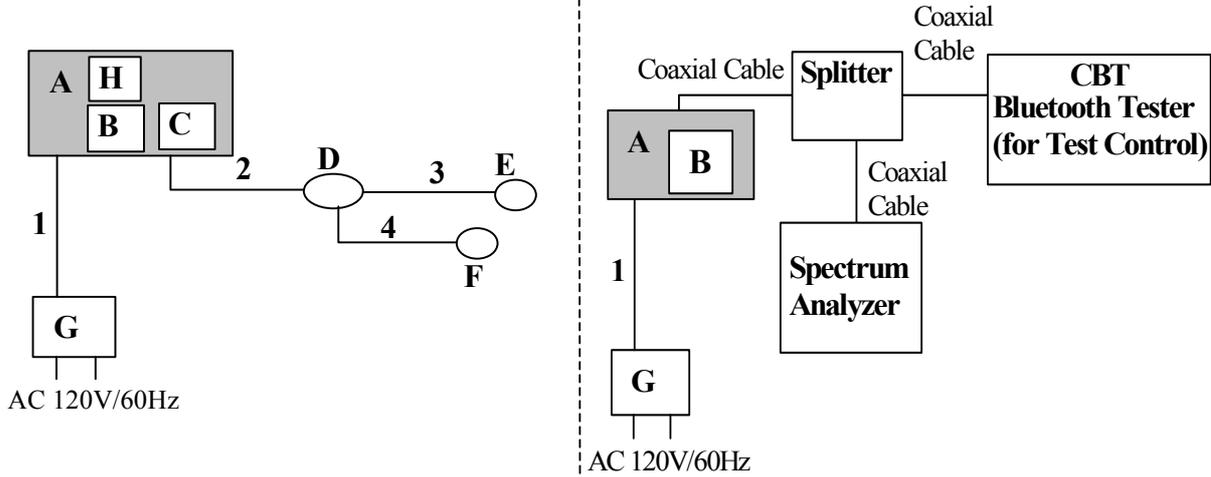

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	W-CDMA / GSM Mobile Phone	PV300	P3-016 *1) P3-156 *2)	SHARP	EUT
B	Battery	PV-BL51	-	SHARP	-
C	Micro SD card (1GB)	-	-	SanDisk	-
D	Microphone & Switch	-	-	SHARP	-
E	Earphone(R)				
F	Earphone(L)				
G	AC Adapter	PV-AC41	RADPA1046YCPZ	SHARP	-
H	TEST USIM Card	-	-	Anritsu	-

*1) Used for Antenna Terminal Conducted tests

*2) Used for Conducted Emission, Radiated Spurious Emission tests

List of cables used

No.	Name	Length (m)	Shield	
			Cable	Connector
1	DC cable	1.5	Shielded	Shielded
2	Microphone & Earphone cable	1.0	Unshielded	Unshielded
3	Earphone cable	0.5	Unshielded	Unshielded
4	Earphone cable	0.2	Unshielded	Unshielded

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cable and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Detector	: quasi-peak and average detector (IF BW 9 kHz)
Measurement range	: 0.15-30MHz
Test data	: APPENDIX 2
Test result	: Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Spurious Emission

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- RBW: 100kHz
- VBW: 300kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2

Test result : Pass

[Radiated]

Test Procedure

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 80cm above the conducting ground plane. The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) and 1m(Upper 10GHz).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The radiated emission measurements were made with the following detector function of the test receiver and the Spectrum analyzer.

The result also satisfied with the general limits specified in section FCC 15.209(a) / RSS-210 2.7 (IC).

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
Detector	QP: BW 120kHz	PK: RBW:1MHz/VBW: 1MHz
IF Bandwidth		AV *1): RBW:1MHz/VBW:10Hz *2)

*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

*2) The test was performed by VBW 10Hz for Average measurement according to DA00-705, since the duty cycle on the transmitting mode for Spurious Emission test was 100%.

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data : APPENDIX 2

Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 7: Bandwidth

20 dB Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- Span: 3MHz
- RBW: 30kHz
- VBW: 91kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

99% Occupied Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- Span: Enough width to display 20dB Bandwidth
- RBW: as close to 1% of the Span as is possible without being below 1%
- VBW: Three times of RBW
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

SECTION 8: Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with a power meter (tested bandwidth: 50MHz) connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

SECTION 9: Carrier Frequency Separation

Test Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port. The following spectrum analyzer setting was used:

- Span: 3MHz (Inquiry: 5MHz)
- RBW: 100kHz
- VBW: 300kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

SECTION 10: Number of Hopping Frequency

Test Procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- Span: 30MHz
- RBW: 300kHz
- VBW: 1MHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

SECTION 11: Dwell time

Test Procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- Span: Zero Span
- RBW: 1MHz
- VBW: 1MHz
- Sweep: as necessary to capture the entire dwell time per hopping channel
- Detector: function peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

APPENDIX 1: Photographs of test setup

Conducted Emission

This page has been submitted for a separate exhibit.

Spurious Emission (Radiated)

This page has been submitted for a separate exhibit.

Worst Case Position (Horizontal: Z-axis/ Vertical:Z-axis)

This page has been submitted for a separate exhibit.