



# HCT CO., LTD.

Product Compliance Division

TEL : +82 31 639 8518 FAX : +82 31 639 8525

## CERTIFICATE OF COMPLIANCE

### FCC PART 15.247 Certification

**Applicant Name:**  
SHARP CORPORATION

**Address:**  
22-22 Nagaike-cho, Abeno-ku, Osaka 545-8522  
Japan

**Date of Issue:**

February 12, 2010

**Test Site/Location:**

HCT.CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,  
Kyungki-do, Korea

**Test Report No.:** HCTR1001FR15

**HCT FRN:** 0005866421

**IC Recognition No.:** 5944A-1

**FCC ID**

**: APYNAR0067**

**APPLICANT**

**: SHARP CORPORATION**

**FCC Rule Part(s):** Part 15.247  
**Application Type:** Certification  
**EUT Type:** Slide Dual-band CDMA Phone with Bluetooth/ WLAN  
**Model(s):** PB10ZU  
**Tx Frequency:** 2412-2462 MHz(DSSS/OFDM)  
**Rx Frequency:** 2412-2462 MHz(DSSS/OFDM)  
**Max. RF Output Power:** Wi-Fi 802.11b(23.10 dBm) / Wi-Fi 802.11g (18.08 dBm)

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT.CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 862

Report prepared by

: Hyo Sun Kwak

Test engineer of RF Team

Approved by

: Sang Jun Lee

Manager of RF Team

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 1 of 58



# Table of Contents

1. GENERAL INFORMATION.....	3
2. EUT DESCRIPTION.....	3
3. TEST METHODOLOGY.....	4
3.1 EUT CONFIGURATION.....	4
3.2 EUT EXERCISE.....	4
3.3 GENERAL TEST PROCEDURES.....	4
3.4 DESCRIPTION OF TEST MODES.....	4
4. INSTRUMENT CALIBRATION.....	5
5. FACILITIES AND ACCREDITATIONS.....	5
5.1 FACILITIES.....	5
5.2 EQUIPMENT.....	5
6. ANTENNA REQUIREMENTS.....	6
7. TEST RESULT.....	7
7.1 6dB Bandwidth Measurement (802.11b/g).....	7
7.2 Output Power Measurement (802.11b/g).....	1 1
7.3 Power Spectral Density (802.11b/g).....	3 1
7.4 Out of Band Emissions at the Band Edge/ Conducted Spurious Emissions.....	3 5
7.5 Radiated Measurement.....	4 4
7.5.1 Radiated Spurious Emissions.....	4 4
7.5.2 Radiated Restricted Band Edge Measurements.....	5 2
7.6 POWERLINE CONDUCTED EMISSIONS.....	5 3
8. LIST OF TEST EQUIPMENT.....	5 8



## 1. GENERAL INFORMATION

**Applicant Name:** SHARP CORPORATION  
**Address:** 22-22 Nagaike-cho, Abeno-ku, Osaka 545-8522 Japan  
**FCC ID:** APYNAR0067  
**EUT:** Slide Dual-band CDMA Phone with Bluetooth/ WLAN  
**Model:** PB10ZU  
**Date of Test:** January 25, 2010 ~ February 12, 2010  
**Contact person:** Name: Tadashi Kagawa  
Phone #: +81-743-55-4091  
Fax #: +81-743-55-2553

## 2. EUT DESCRIPTION

<b>Product</b>	Slide Dual-band CDMA Phone with Bluetooth/ WLAN
<b>Model Name</b>	PB10ZU
<b>Power Supply</b>	DC 3.7 V
<b>Battery type</b>	Standard
<b>Frequency Range</b>	TX: 2412 ~ 2462 MHz RX: 2412 ~ 2462 MHz
<b>Max. RF Output Power</b>	Wi-Fi 802.11b(23.10 dBm) / Wi-Fi 802.11g (18.08 dBm)
<b>Modulation Type</b>	DSSS/CCK(802.11b), OFDM(802.11g)
<b>Antenna Specification</b>	Manufacturer: TAIYO YUDEN Antenna type: CHIP ANTENNA Peak Gain : 1.9 dBi



### 3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003)

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

#### 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 4 of 58



## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009 (Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 5 of 58



## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 6 of 58



## 7. TEST RESULT


### 7.1 6dB Bandwidth Measurement (802.11b/g)

#### Test Requirements and limit, §15.247(d)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

#### ■ TEST CONFIGURATION

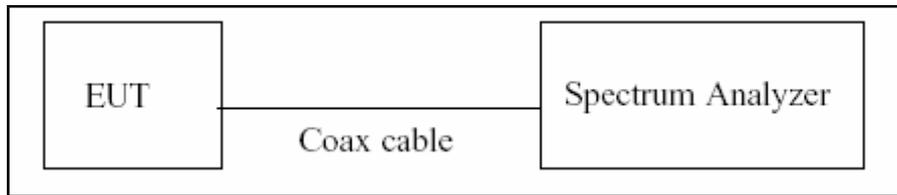

#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: 100 kHz

VBW: 100 kHz

SPAN: 40 MHz

#### ■ TEST RESULTS

##### Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	9.92	0.500	Pass
2437	6	9.92	0.500	Pass
2462	11	9.84	0.500	Pass


##### Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	16.40	0.500	Pass
2437	6	16.16	0.500	Pass
2462	11	16.40	0.500	Pass




RESULT PLOTS

6dB Bandwidth plot (802.11b-CH 1)

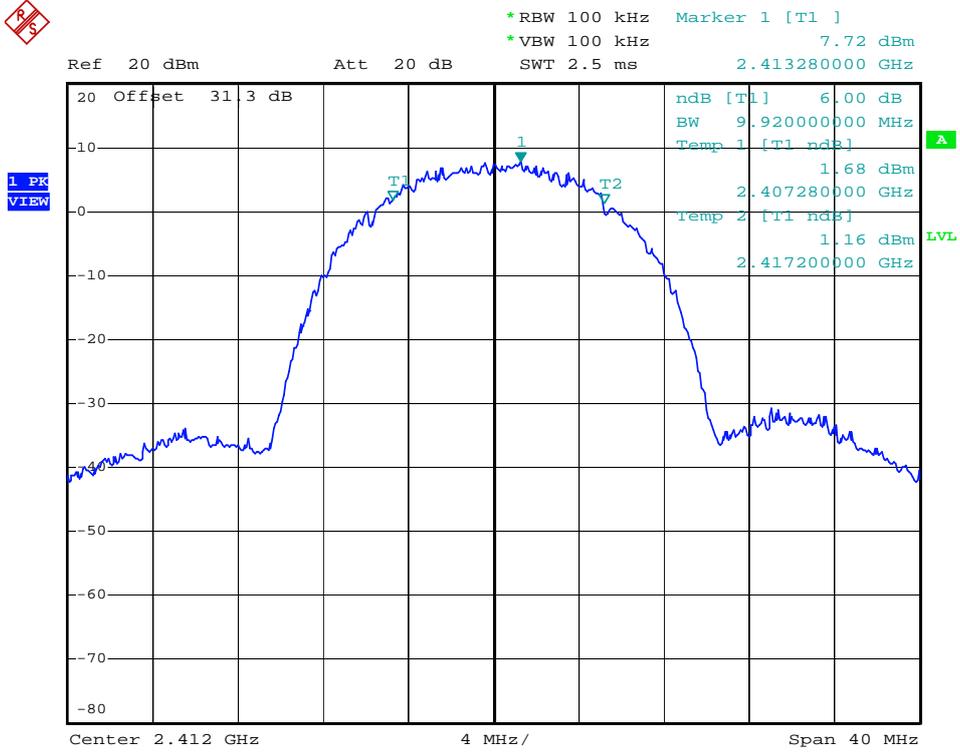

Date: 25.JAN.2010 08:04:57

6dB Bandwidth plot (802.11b-CH 6)

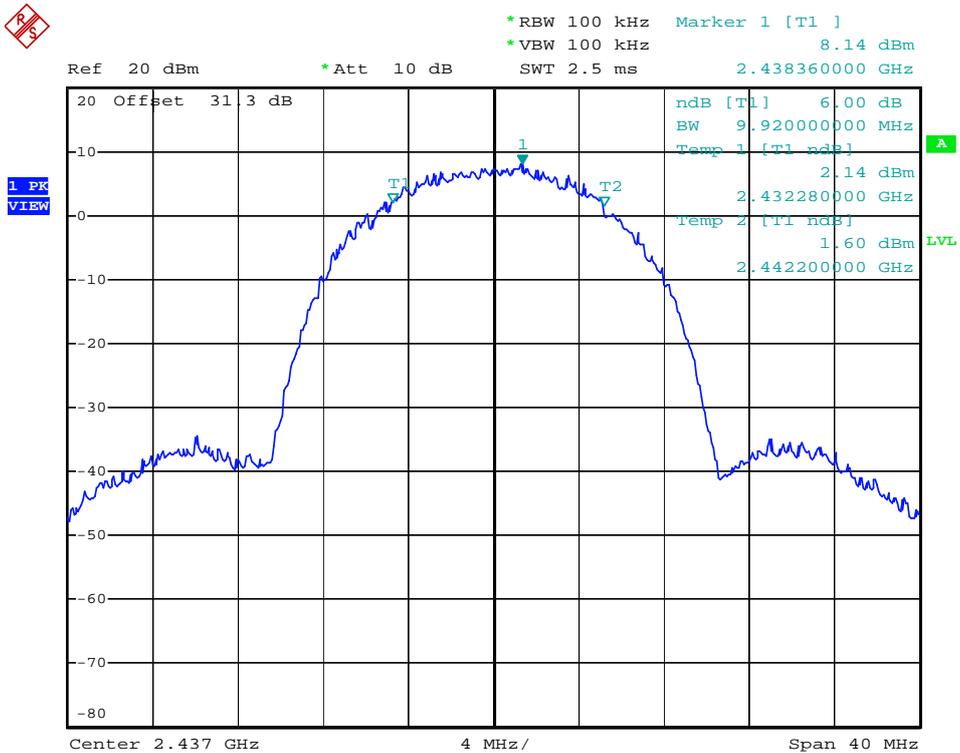


Date: 25.JAN.2010 08:48:57

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 8 of 58




### 6dB Bandwidth plot (802.11b-CH 11)

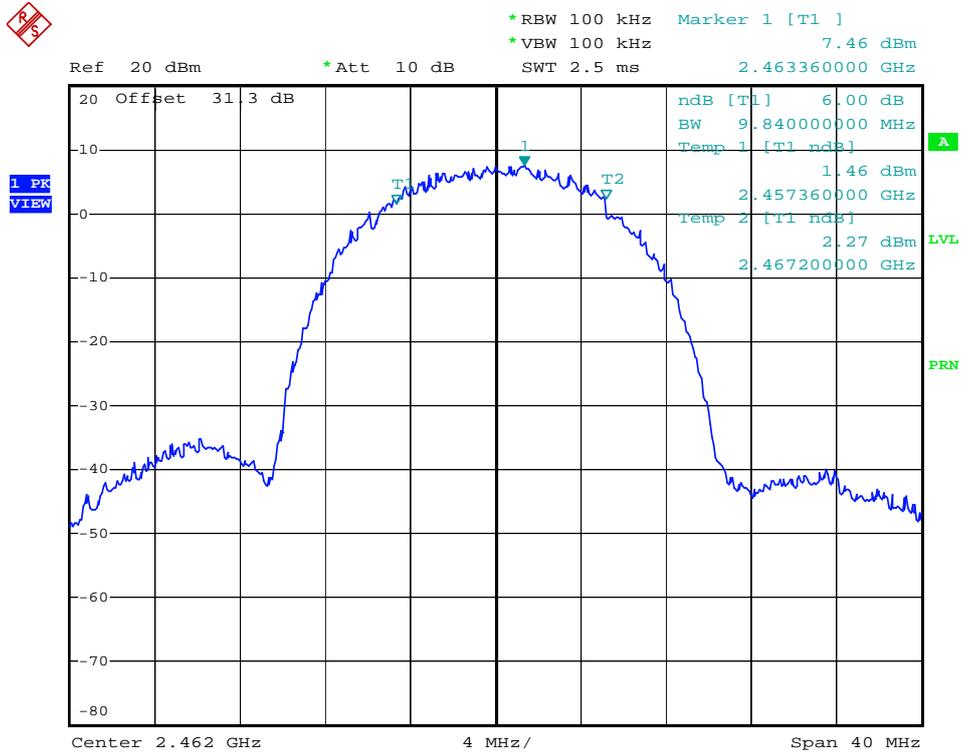

Date: 25.JAN.2010 09:03:31

### 6dB Bandwidth plot (802.11g-CH 1)

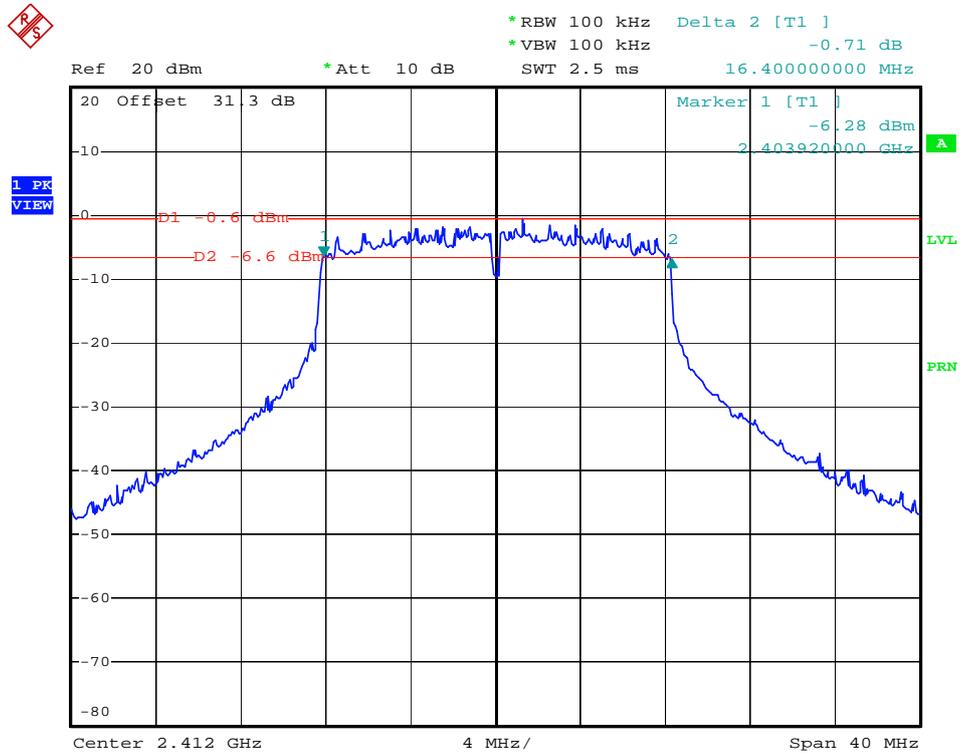


Date: 10.FEB.2010 15:15:23

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 9 of 58




### 6dB Bandwidth plot (802.11g-CH 6)

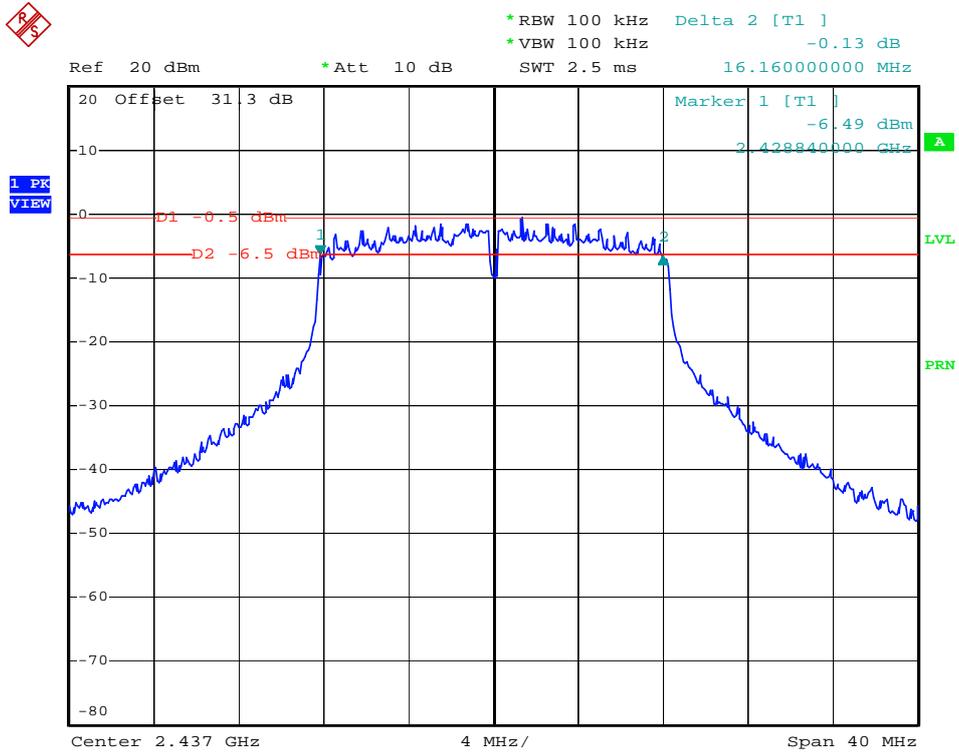

Date: 10.FEB.2010 15:18:49

### 6dB Bandwidth plot (802.11g-CH 11)

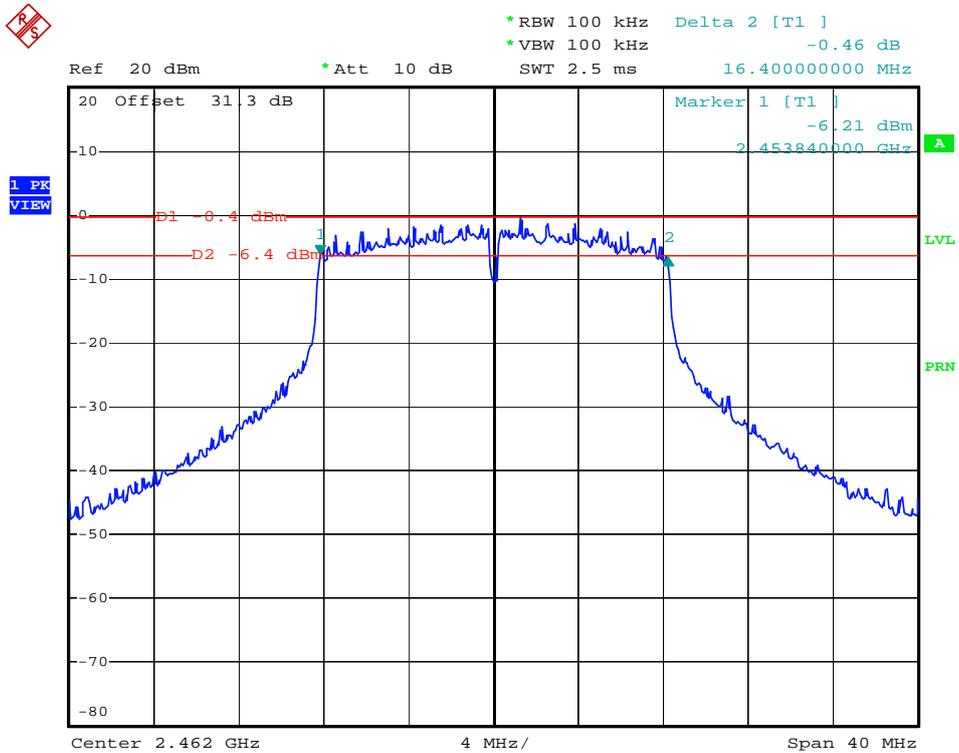

Date: 10.FEB.2010 15:22:31

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 1 0 of 58




## 7.2 Output Power Measurement (802.11b/g)

### Test Requirements and limit, §15.247(d)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

**The maximum permissible conducted output power is 1 Watt.**

#### ■ TEST CONFIGURATION

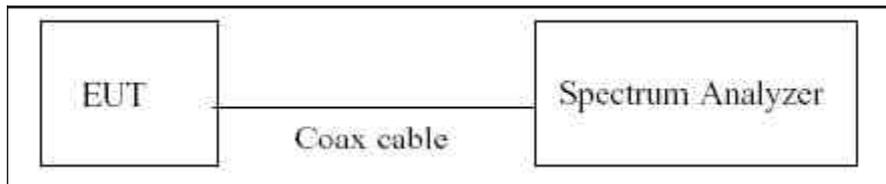

#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: 1 MHz

VBW: 1 MHz

SPAN: 40 MHz

Detector Mode = Peak

#### ■ TEST RESULTS

##### Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	19.28	30
		2 Mbps	19.97	30
		5.5 Mbps	21.43	30
		11 Mbps	22.88	30
2437	6	1 Mbps	19.67	30
		2 Mbps	20.12	30
		5.5 Mbps	21.93	30
		11 Mbps	23.10	30
2462	11	1 Mbps	19.57	30
		2 Mbps	19.87	30
		5.5 Mbps	21.68	30
		11 Mbps	22.73	30




Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	17.12	30
		9 Mbps	15.82	30
		12 Mbps	16.72	30
		18 Mbps	17.12	30
		24 Mbps	17.38	30
		36 Mbps	17.67	30
		48 Mbps	17.06	30
		54 Mbps	17.86	30
2437	6	6 Mbps	17.30	30
		9 Mbps	16.12	30
		12 Mbps	17.50	30
		18 Mbps	17.42	30
		24 Mbps	17.69	30
		36 Mbps	17.65	30
		48 Mbps	17.57	30
		54 Mbps	18.08	30
2462	11	6 Mbps	17.48	30
		9 Mbps	15.89	30
		12 Mbps	16.94	30
		18 Mbps	17.71	30
		24 Mbps	17.27	30
		36 Mbps	17.36	30
		48 Mbps	17.02	30
		54 Mbps	17.83	30




RESULT PLOTS

Conducted Output Power (802.11b-CH 1) 1Mbps

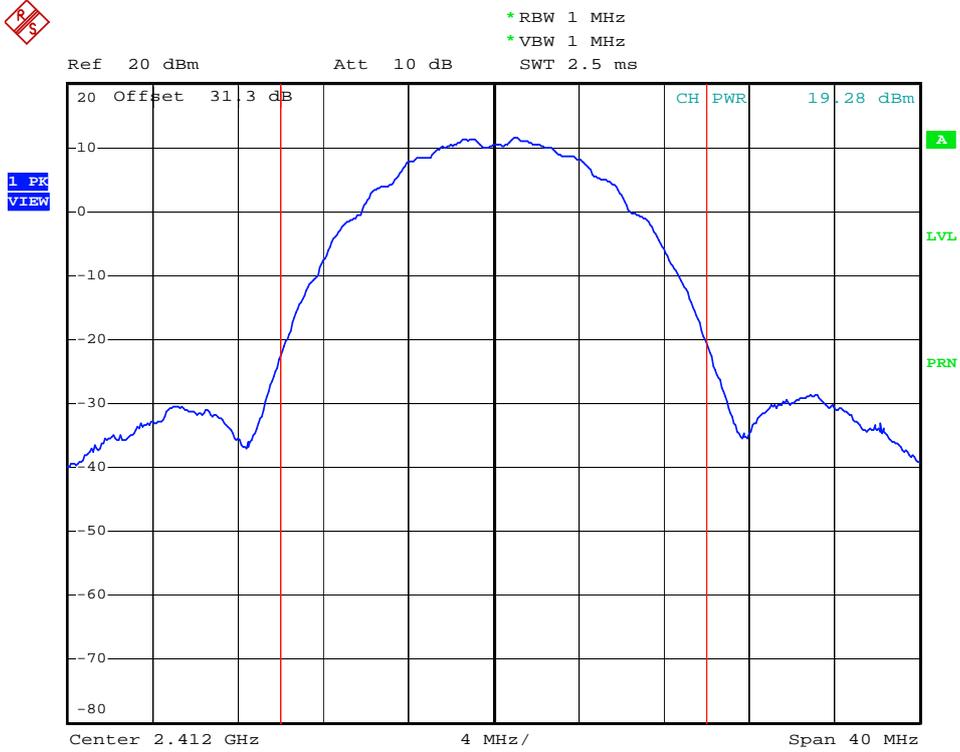

Date: 24.JAN.2010 15:16:19

Conducted Output Power (802.11b-CH 1) 2Mbps

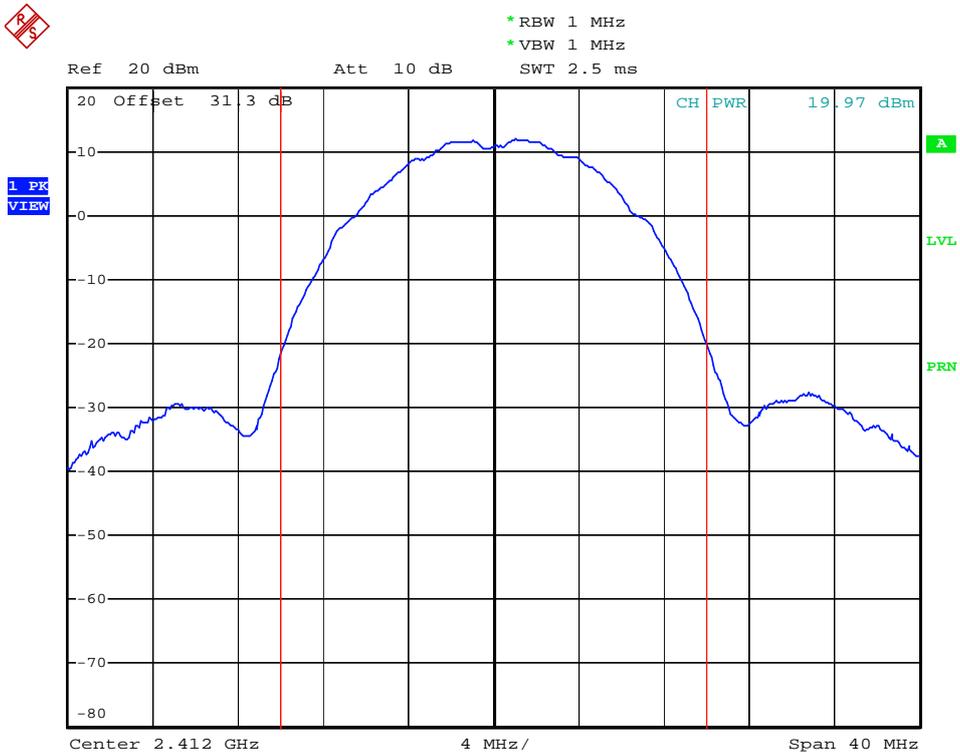


Date: 24.JAN.2010 15:20:54

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 13 of 58




### Conducted Output Power (802.11b-CH 1) 5.5Mbps

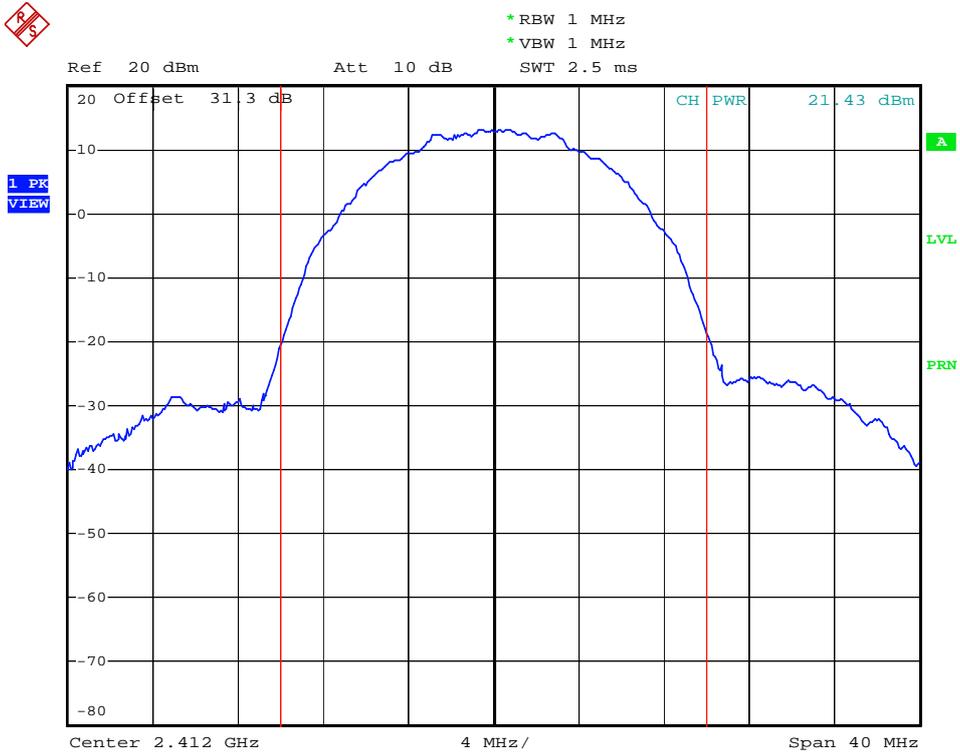

Date: 24.JAN.2010 15:25:15

### Conducted Output Power (802.11b-CH 1) 11Mbps

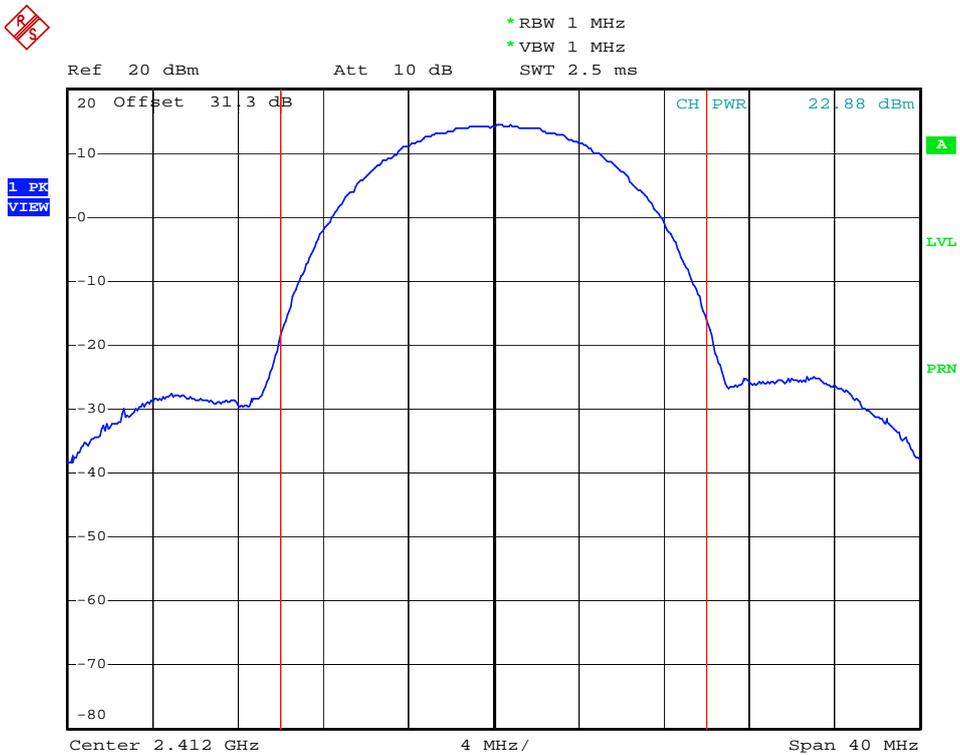


Date: 24.JAN.2010 15:35:18

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 14 of 58




### Conducted Output Power (802.11b-CH 6) 1Mbps

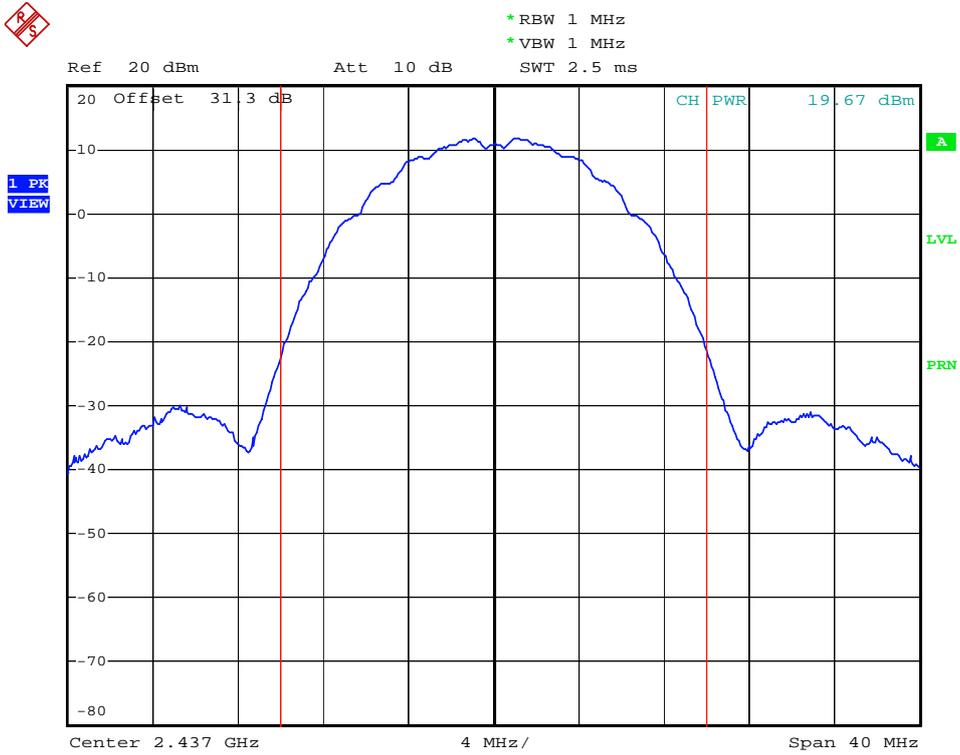

Date: 24.JAN.2010 15:45:57

### Conducted Output Power (802.11b-CH 6) 2Mbps

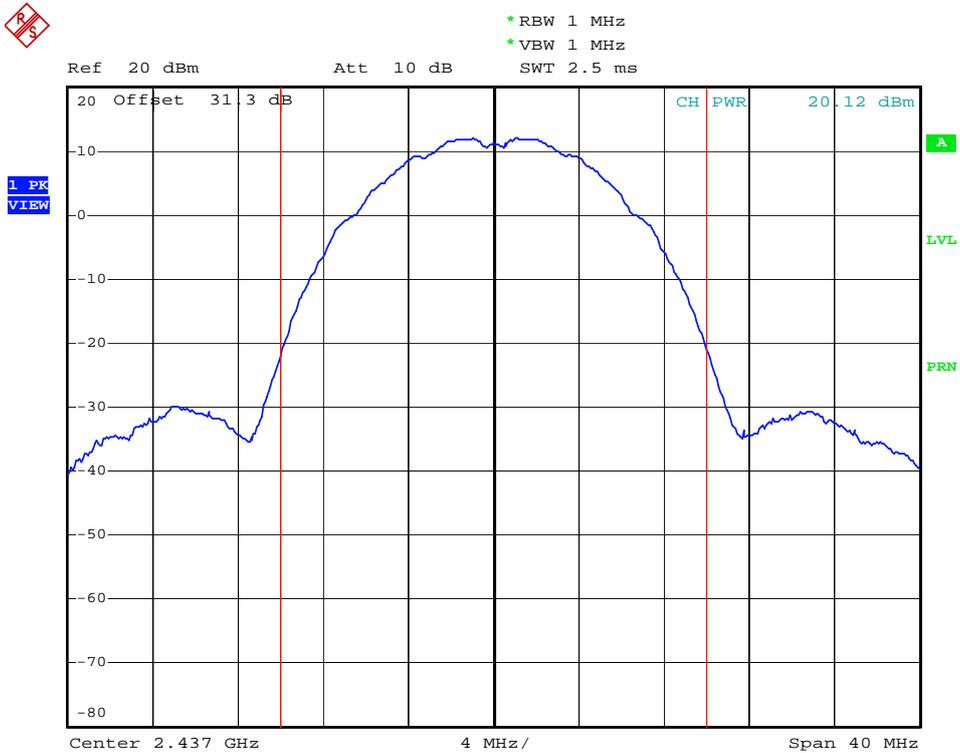


Date: 24.JAN.2010 15:46:40

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 15 of 58




### Conducted Output Power (802.11b-CH 6) 5.5Mbps

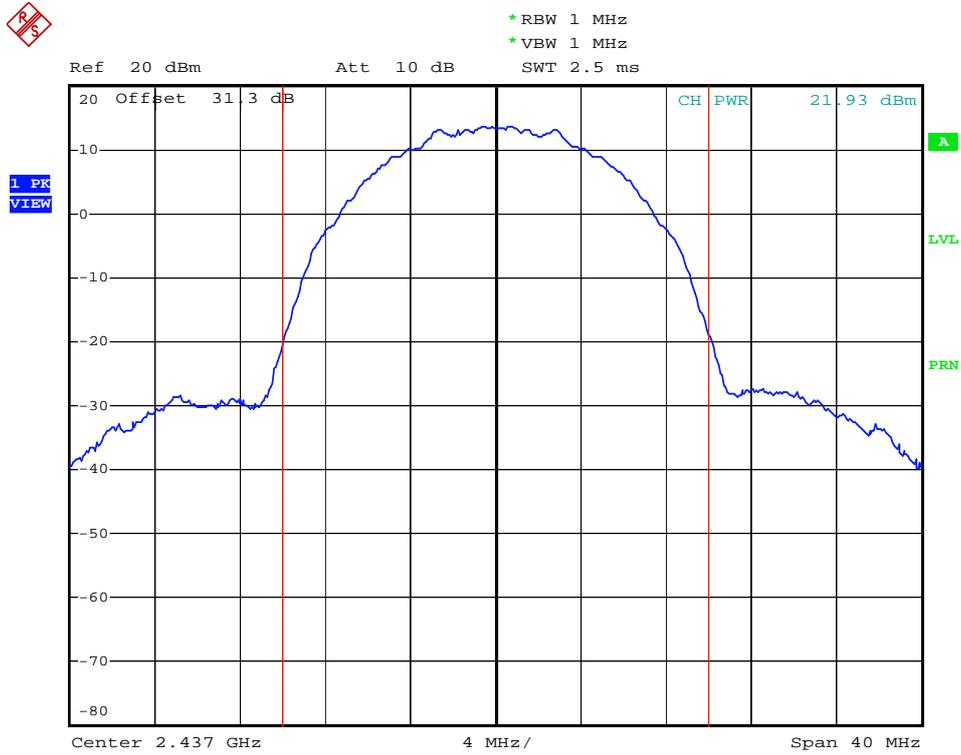

Date: 24.JAN.2010 15:47:20

### Conducted Output Power (802.11b-CH 6) 11Mbps

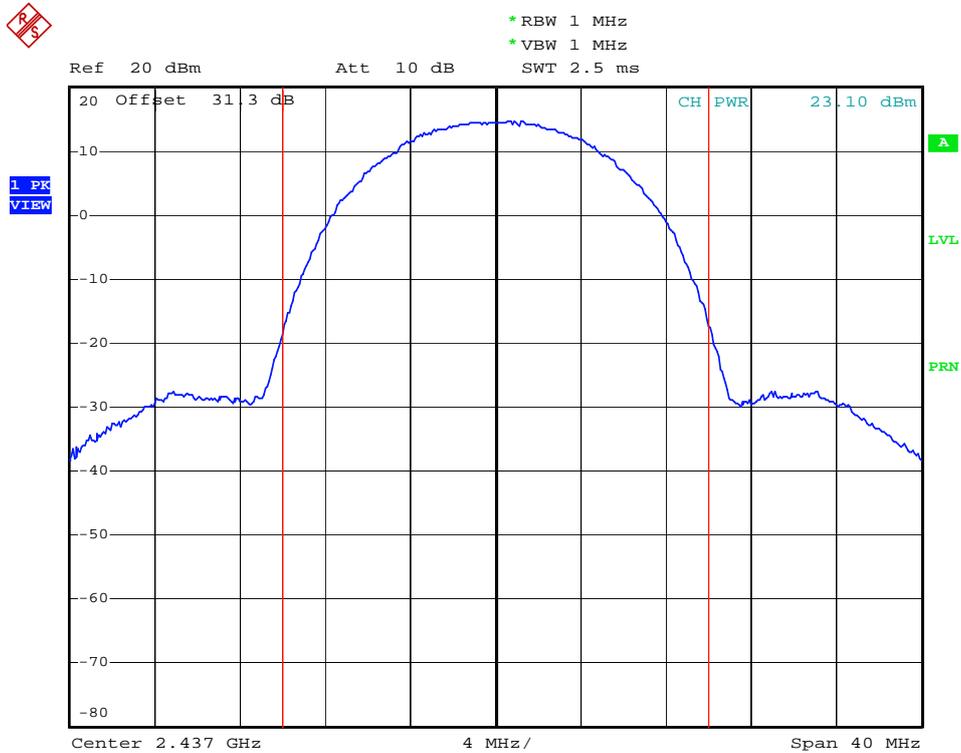


Date: 24.JAN.2010 15:48:31

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 16 of 58




### Conducted Output Power (802.11b-CH 11) 1Mbps

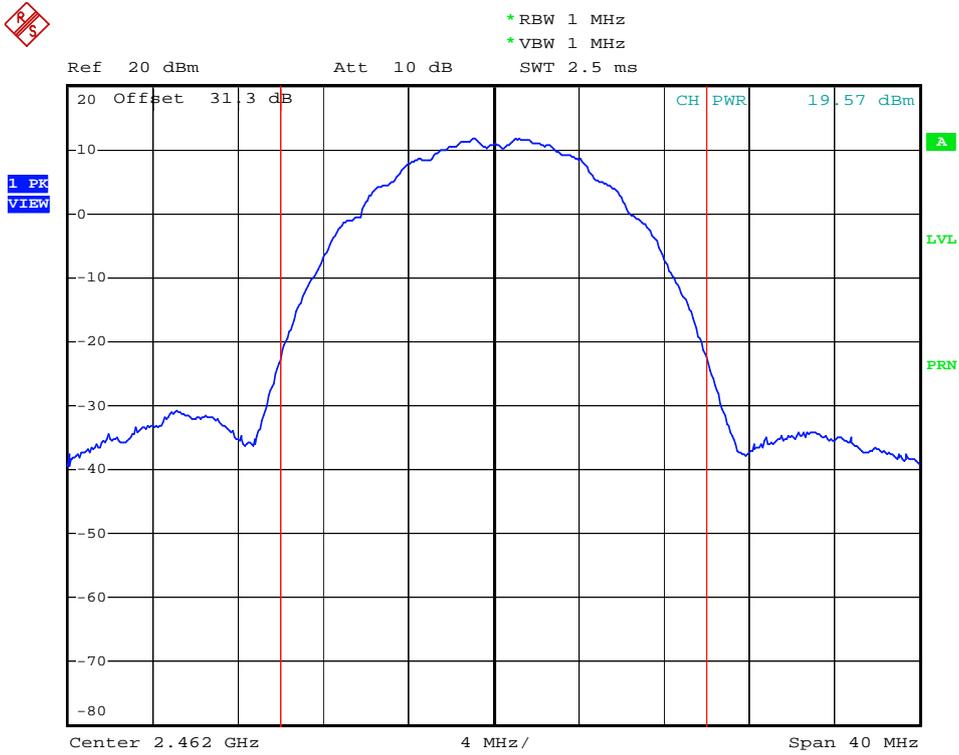

Date: 25.JAN.2010 07:47:53

### Conducted Output Power (802.11b-CH 11) 2Mbps

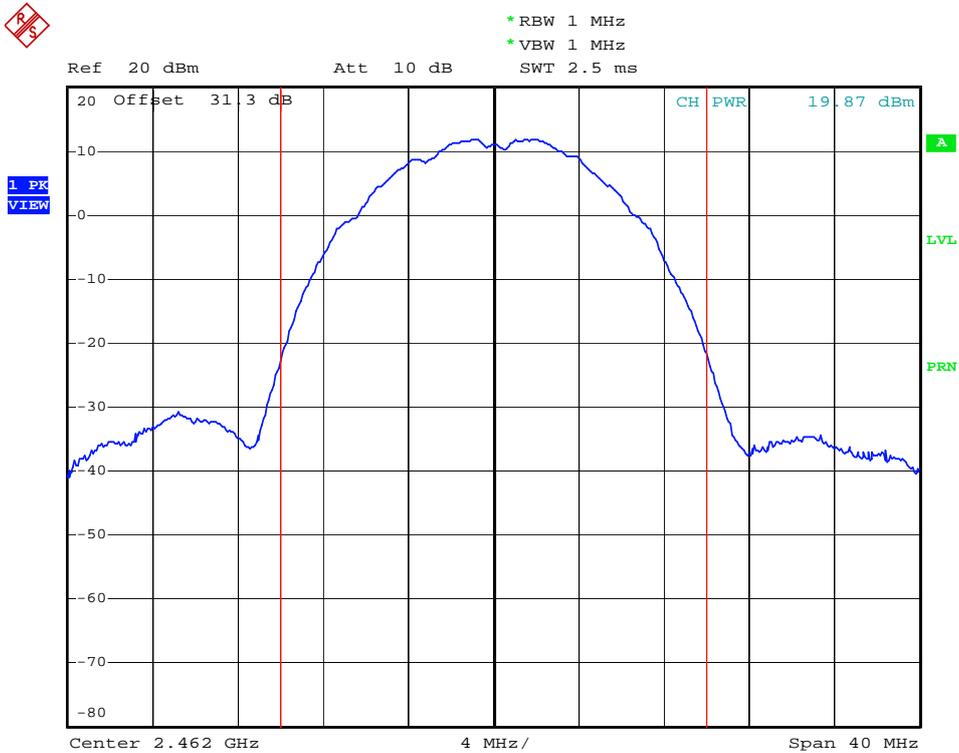


Date: 25.JAN.2010 07:48:40

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 17 of 58




### Conducted Output Power (802.11b-CH 11) 5.5Mbps

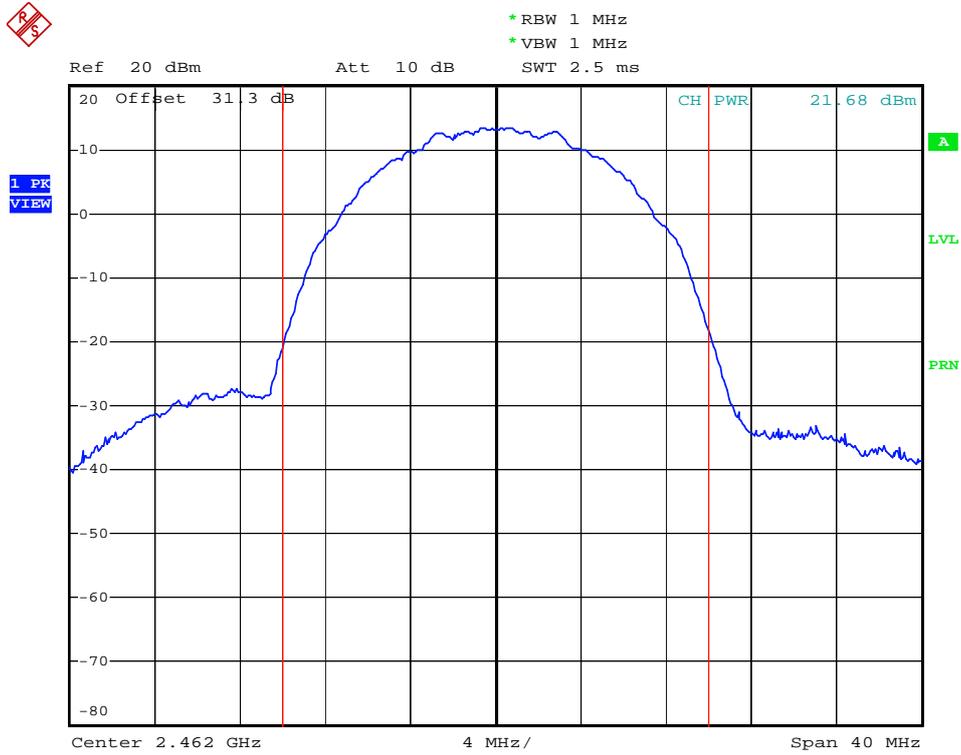

Date: 25.JAN.2010 07:49:39

### Conducted Output Power (802.11b-CH 11) 11Mbps

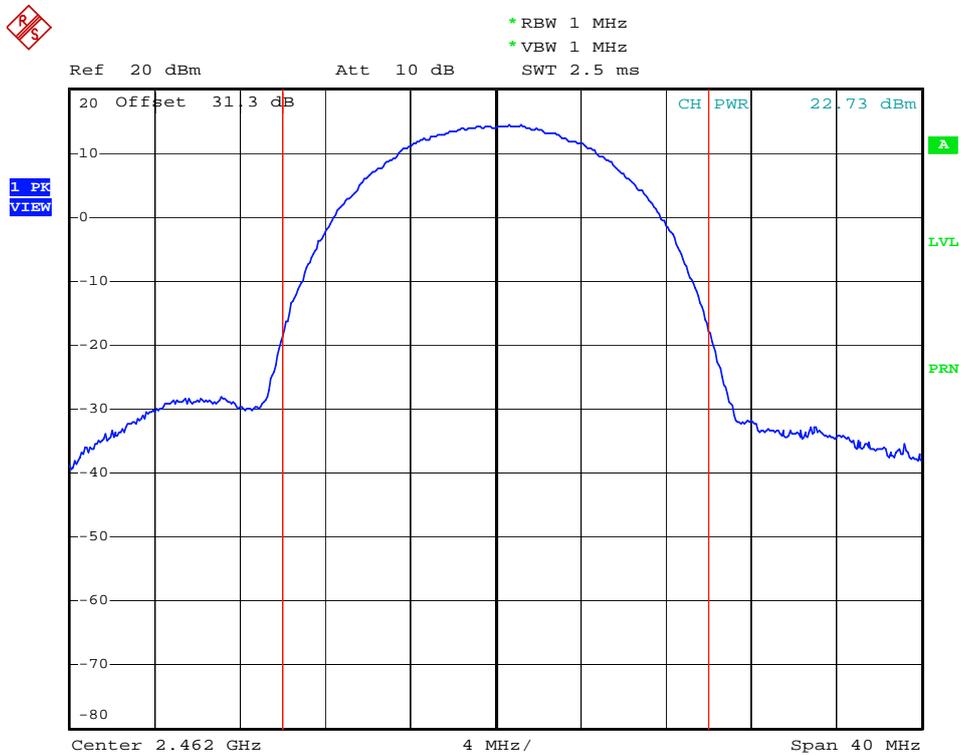


Date: 25.JAN.2010 07:51:01

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 18 of 58




### Conducted Output Power (802.11g-CH 1) 6Mbps

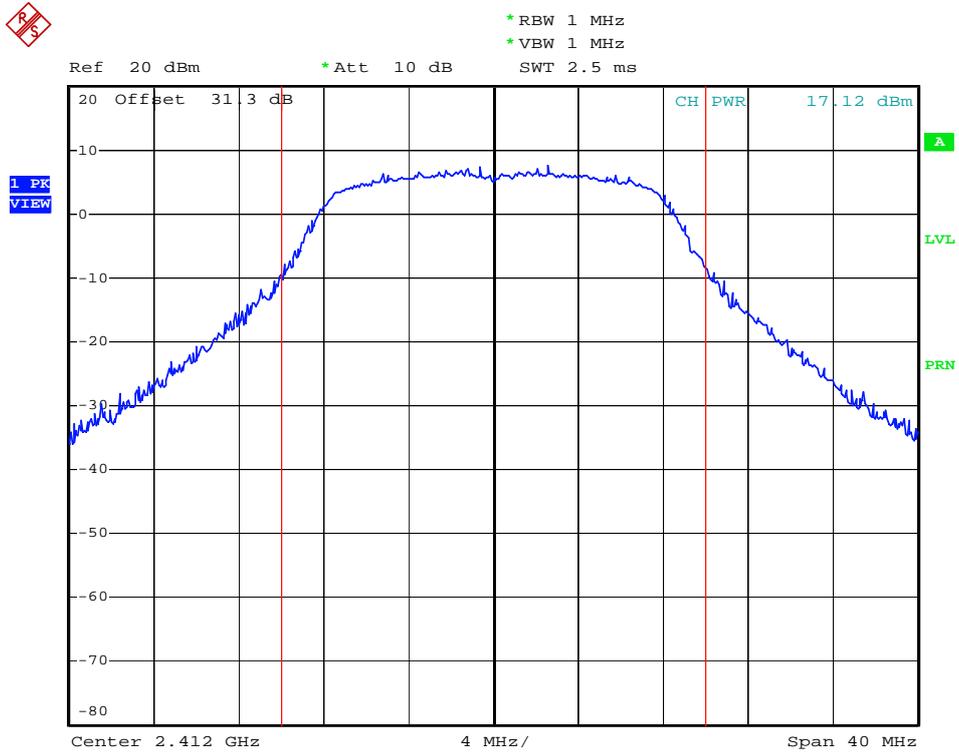

Date: 10.FEB.2010 13:38:16

### Conducted Output Power (802.11g-CH 1) 9Mbps

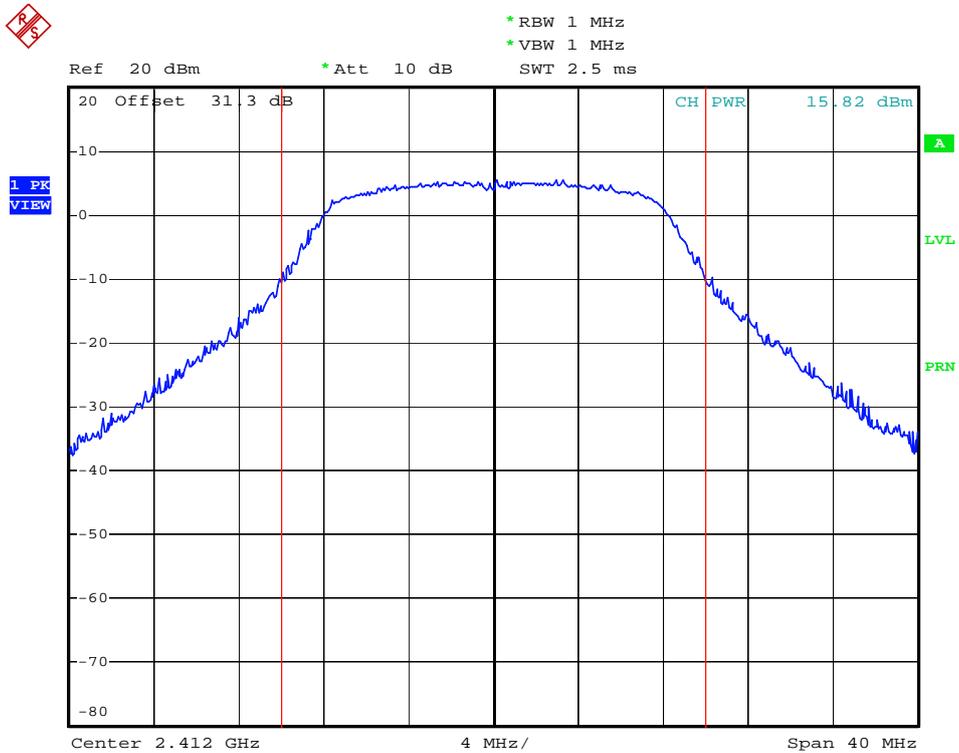


Date: 10.FEB.2010 14:08:49

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 19 of 58




### Conducted Output Power (802.11g-CH 1) 12Mbps

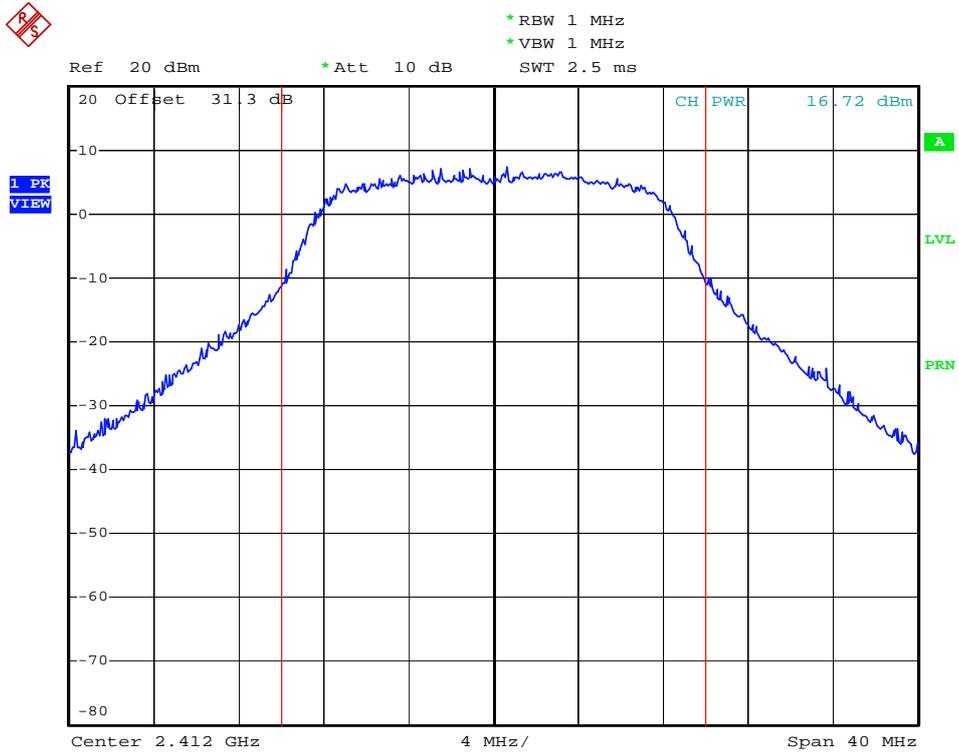

Date: 10.FEB.2010 14:09:43

### Conducted Output Power (802.11g-CH 1) 18Mbps

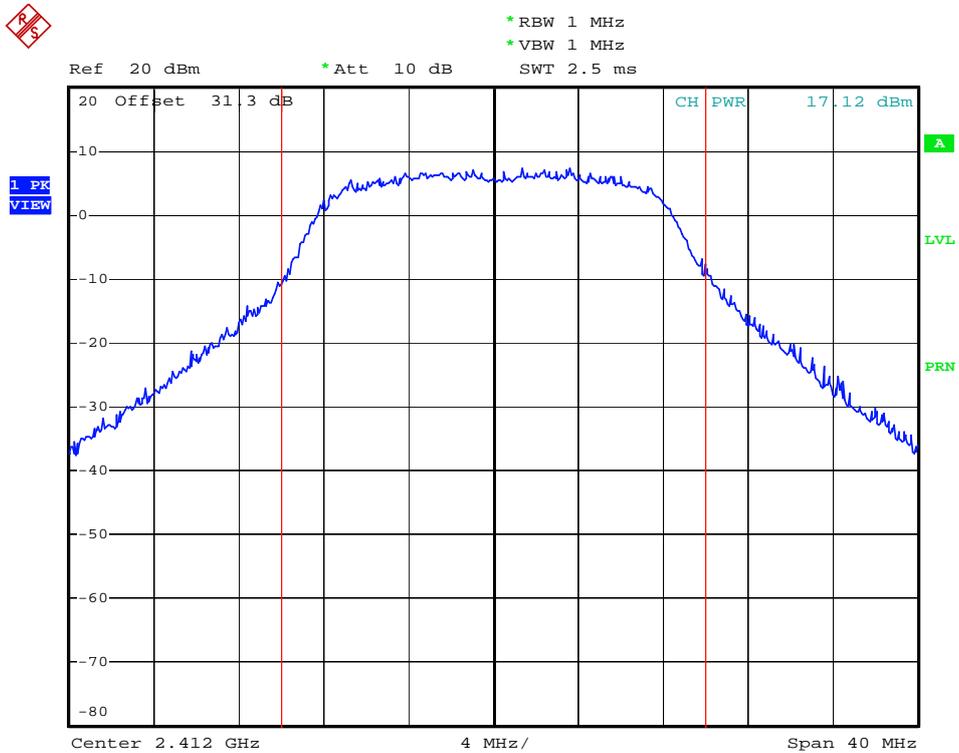


Date: 10.FEB.2010 14:10:51

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 20 of 58




### Conducted Output Power (802.11g-CH 1) 24Mbps

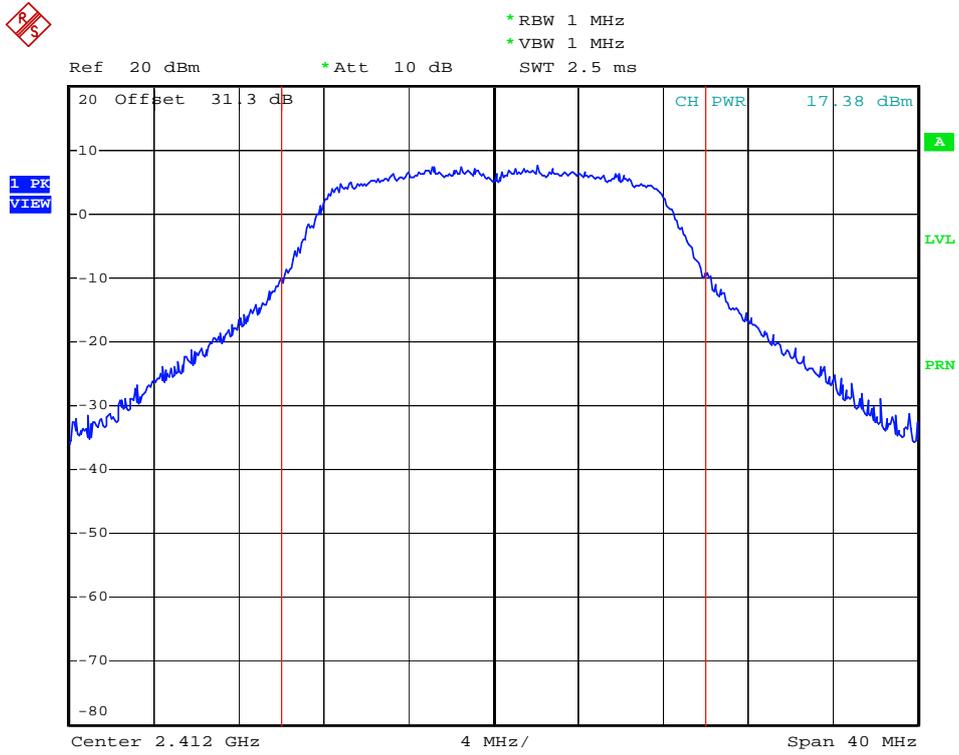

Date: 10.FEB.2010 14:11:40

### Conducted Output Power (802.11g-CH 1) 36Mbps

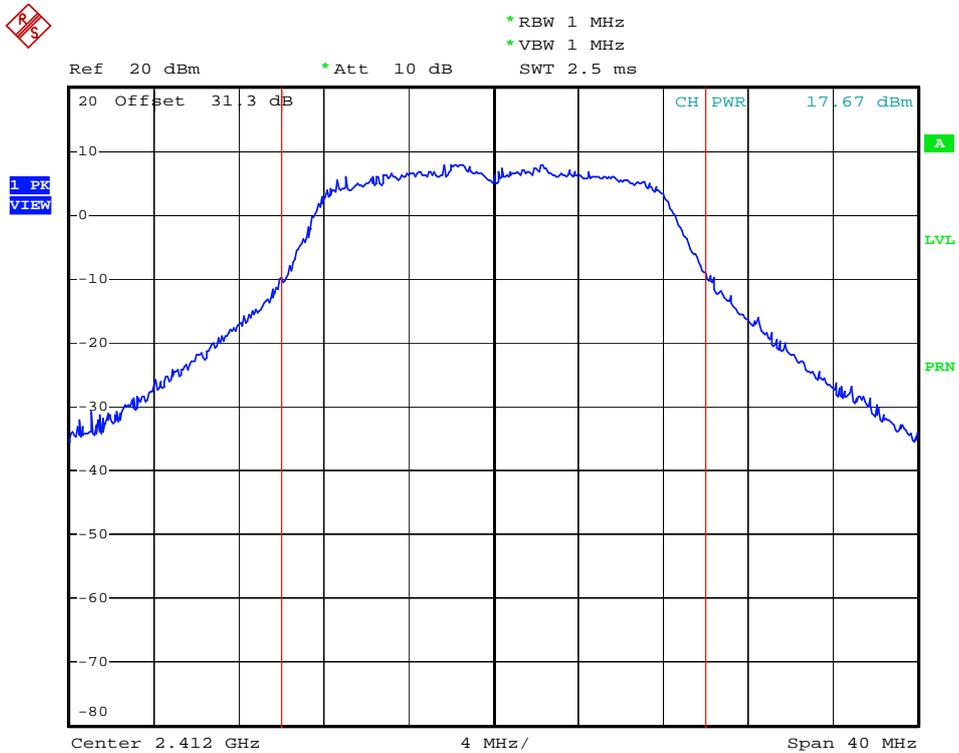


Date: 10.FEB.2010 14:12:29

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 21 of 58




### Conducted Output Power (802.11g-CH 1) 48Mbps

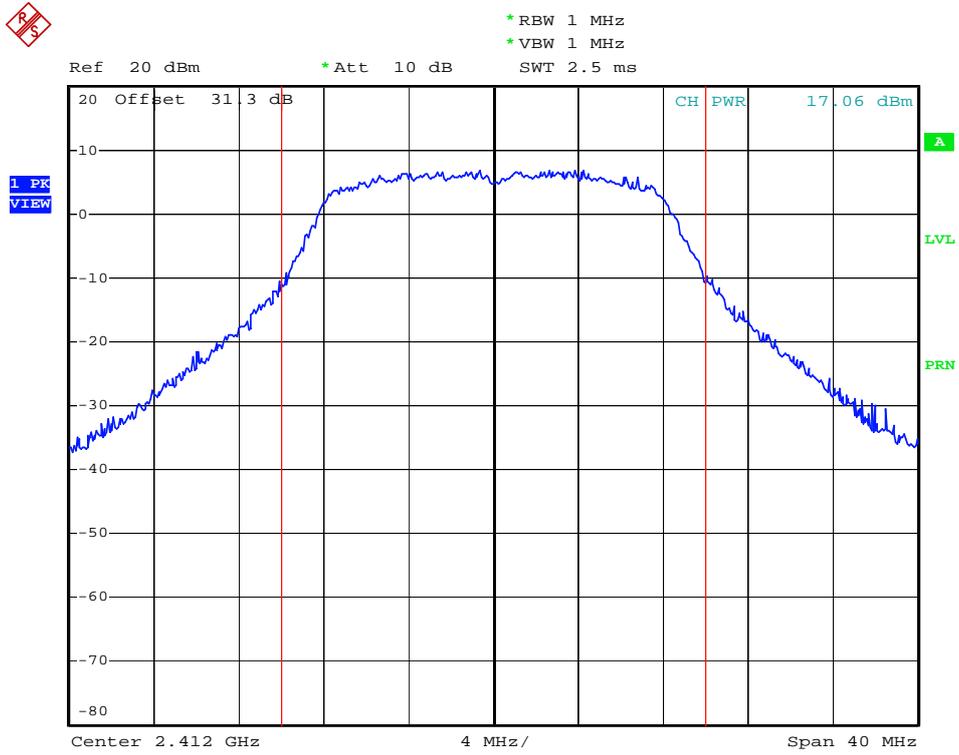

Date: 10.FEB.2010 14:13:24

### Conducted Output Power (802.11g-CH 1) 54Mbps

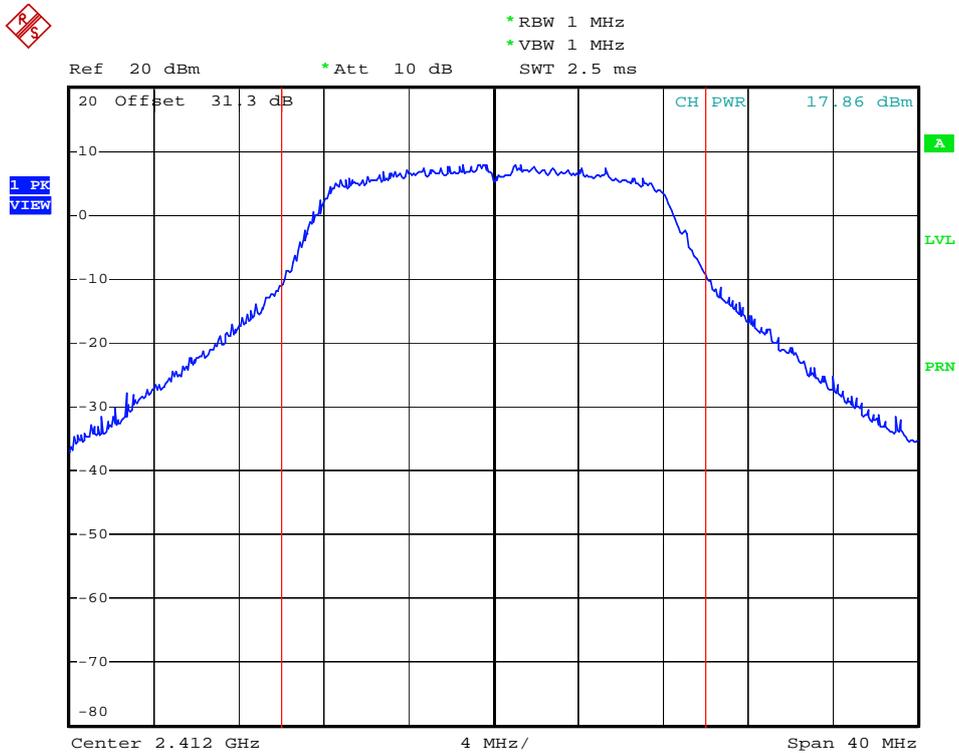


Date: 10.FEB.2010 14:14:16

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 2 2 of 58




### Conducted Output Power (802.11g-CH 6) 6Mbps

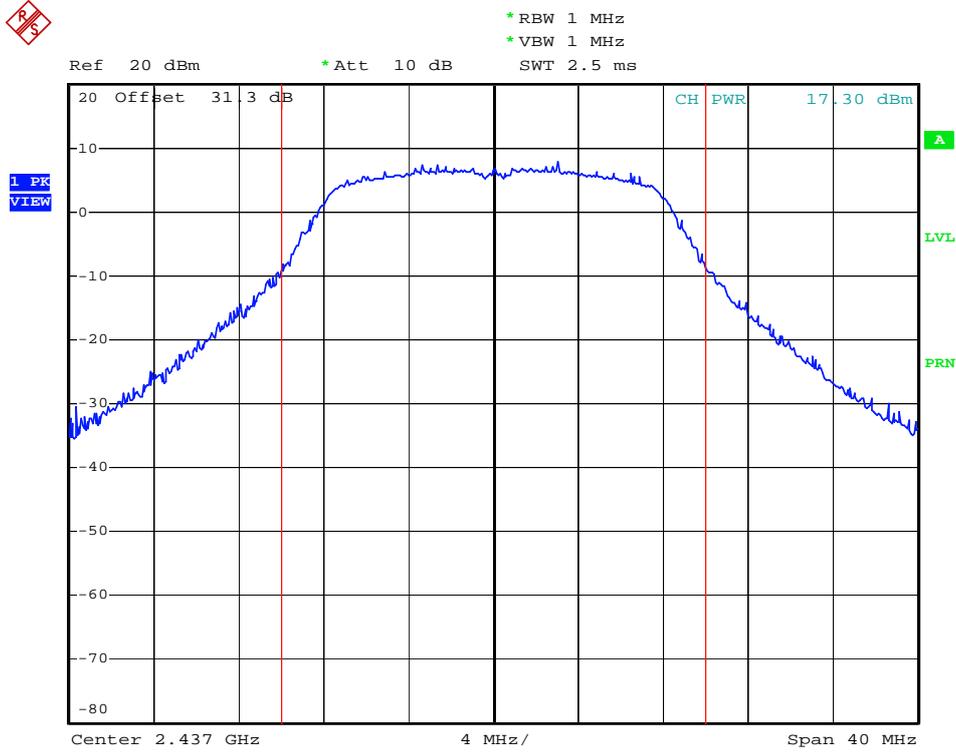

Date: 10.FEB.2010 14:15:58

### Conducted Output Power (802.11g-CH 6) 9Mbps

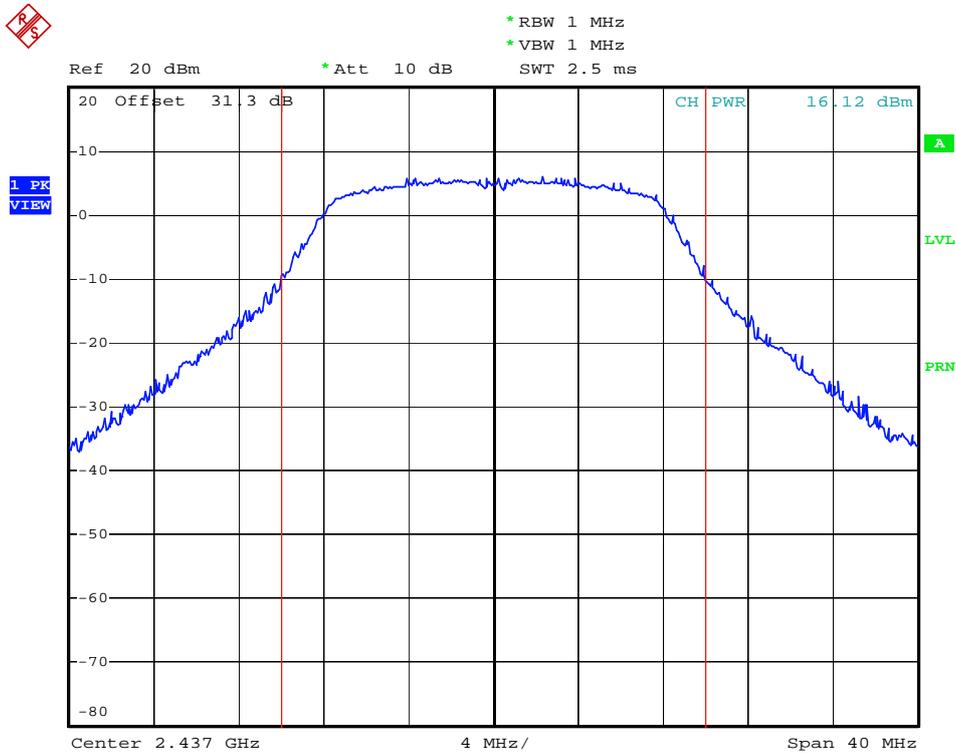


Date: 10.FEB.2010 14:17:07

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 23 of 58




### Conducted Output Power (802.11g-CH 6) 12Mbps

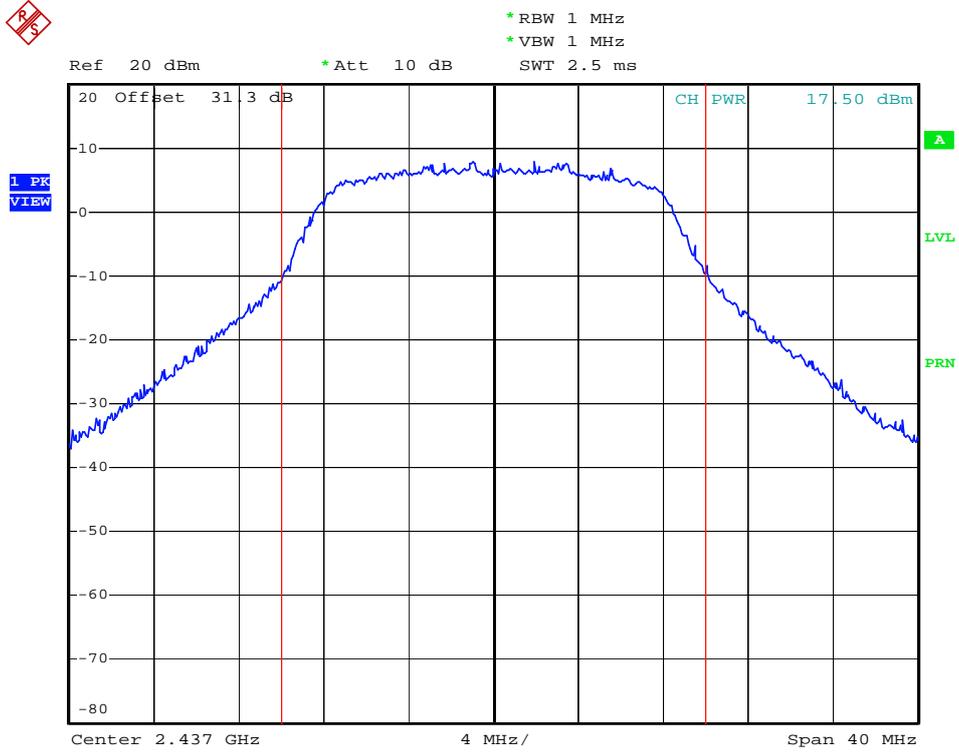

Date: 10.FEB.2010 14:18:09

### Conducted Output Power (802.11g-CH 6) 18Mbps

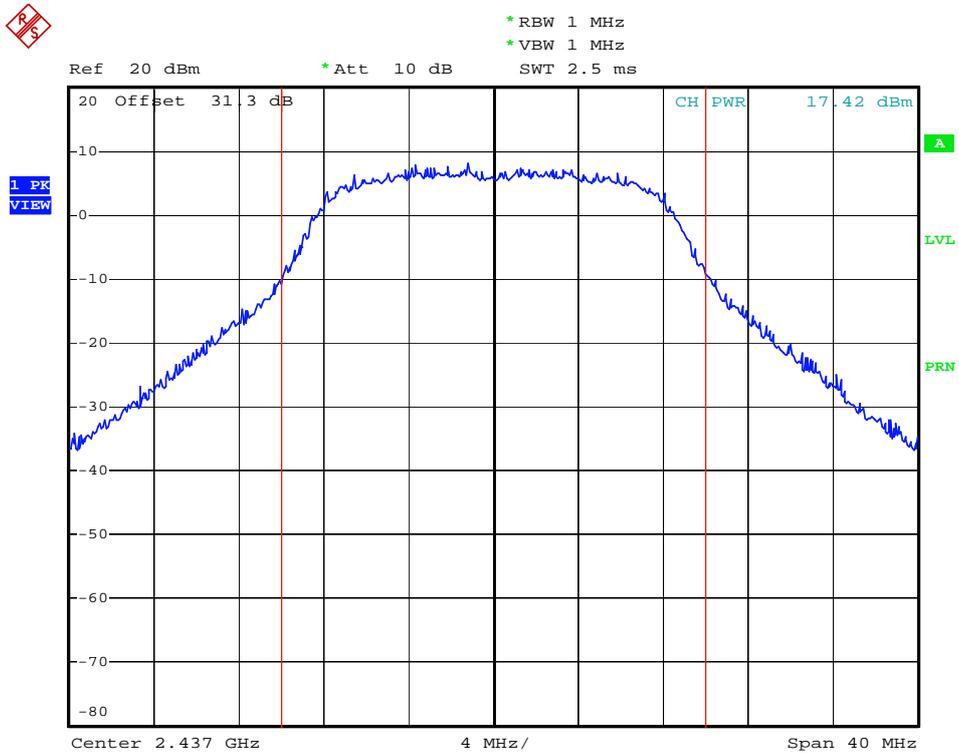


Date: 10.FEB.2010 14:19:29

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 24 of 58




### Conducted Output Power (802.11g-CH 6) 24Mbps

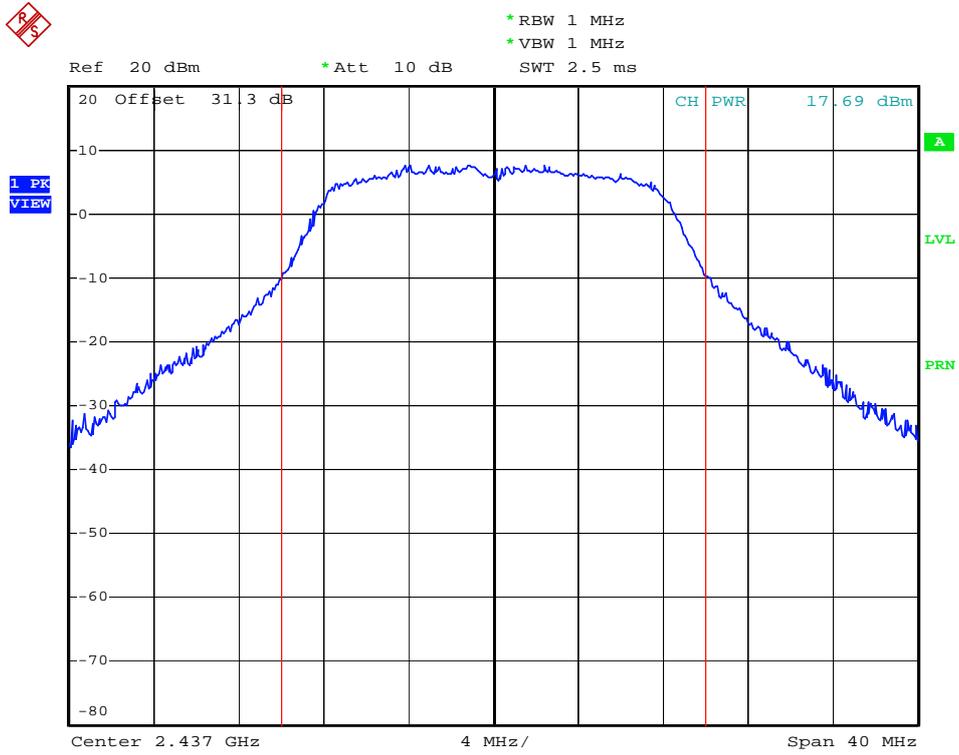

Date: 10.FEB.2010 14:20:32

### Conducted Output Power (802.11g-CH 6) 36Mbps

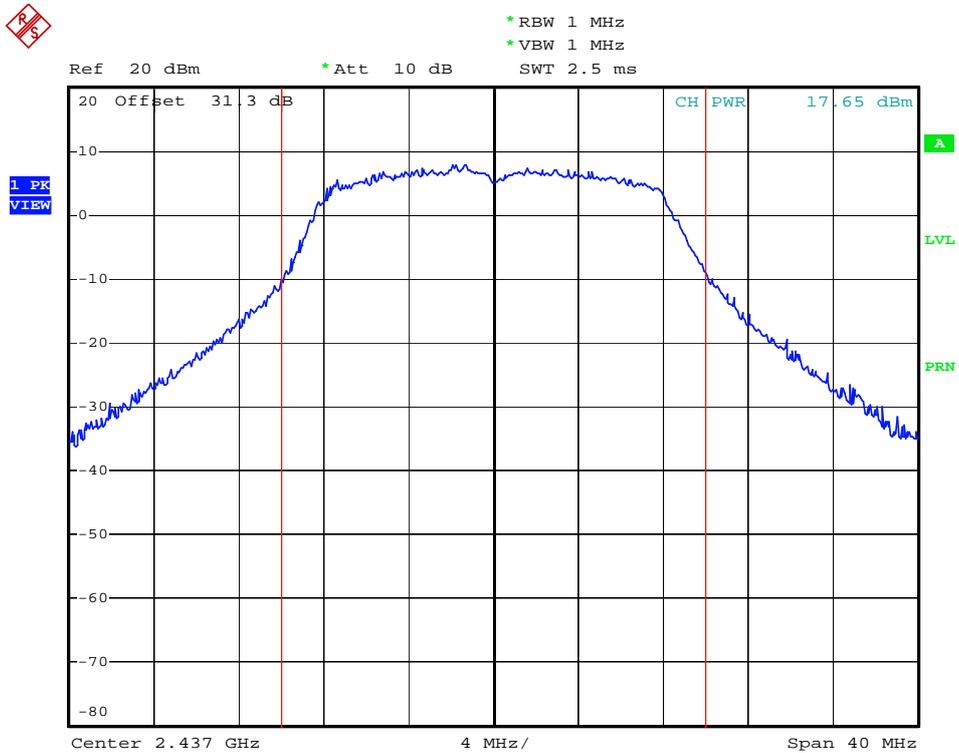


Date: 10.FEB.2010 14:21:27

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 25 of 58




### Conducted Output Power (802.11g-CH 6) 48Mbps

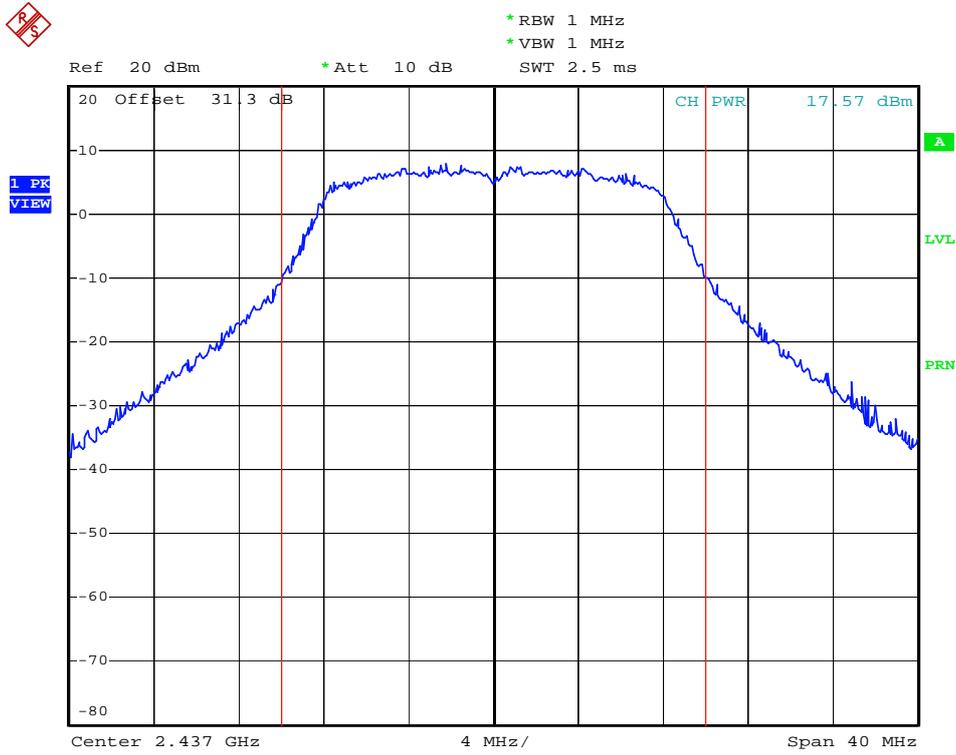

Date: 10.FEB.2010 14:27:43

### Conducted Output Power (802.11g-CH 6) 54Mbps

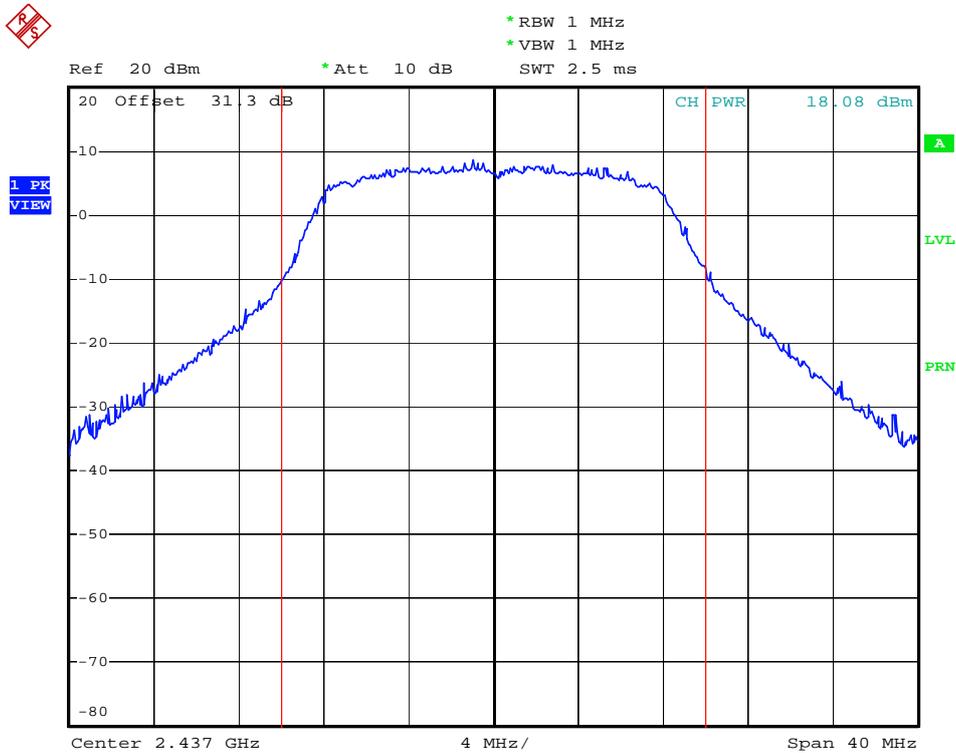


Date: 10.FEB.2010 14:29:05

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 26 of 58




### Conducted Output Power (802.11g-CH 11) 6Mbps

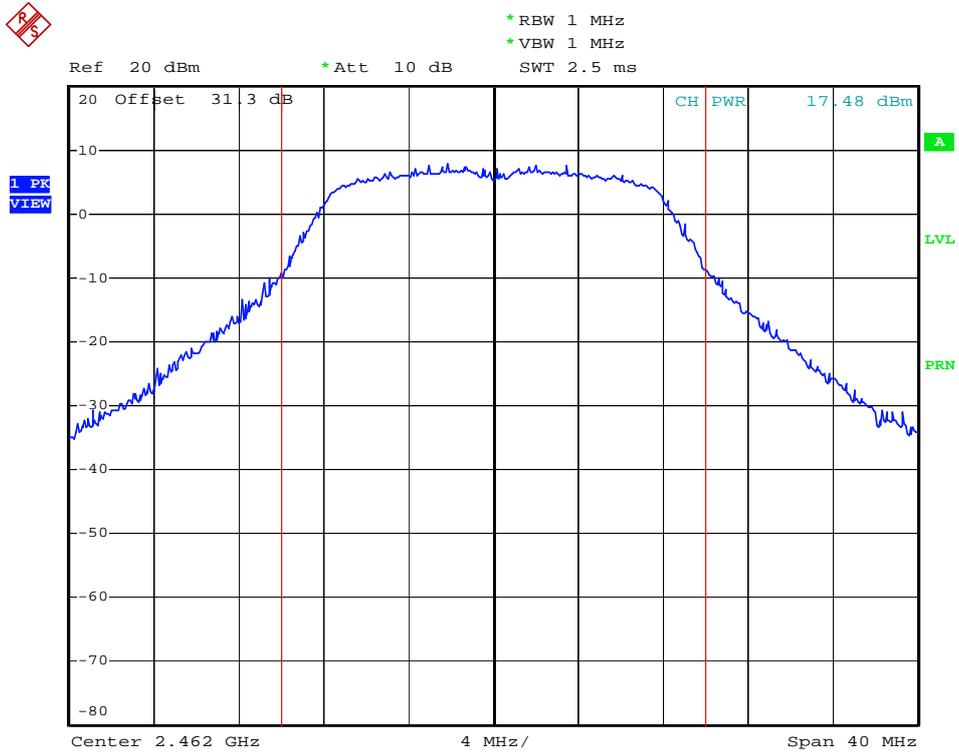

Date: 10.FEB.2010 14:39:05

### Conducted Output Power (802.11g-CH 11) 9Mbps

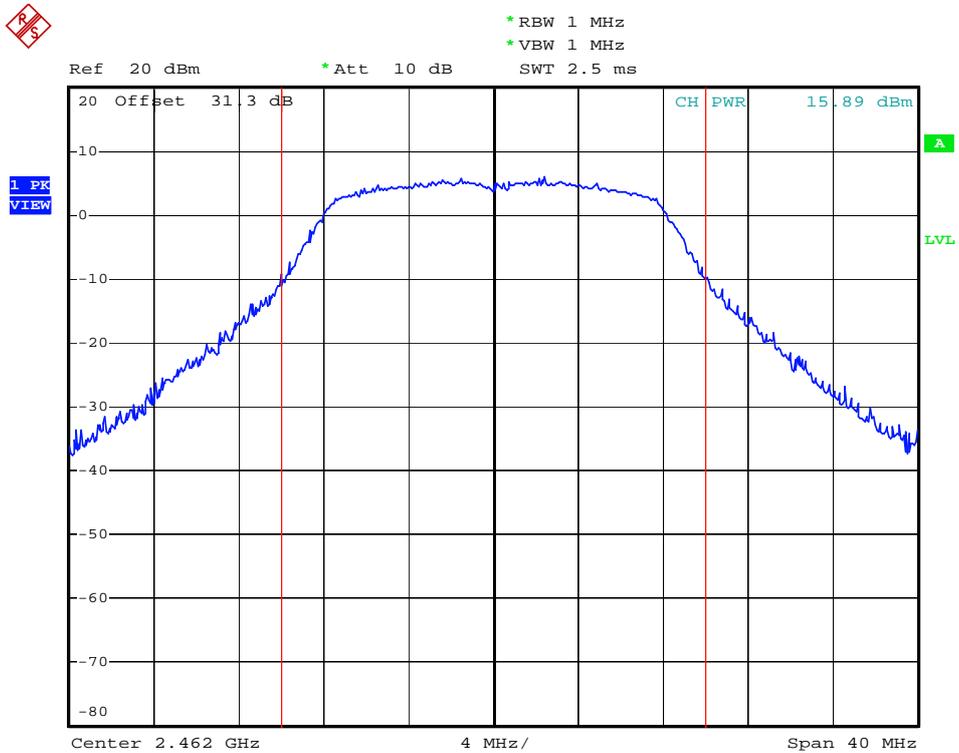


Date: 10.FEB.2010 14:40:04

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 27 of 58




### Conducted Output Power (802.11g-CH 11) 12Mbps

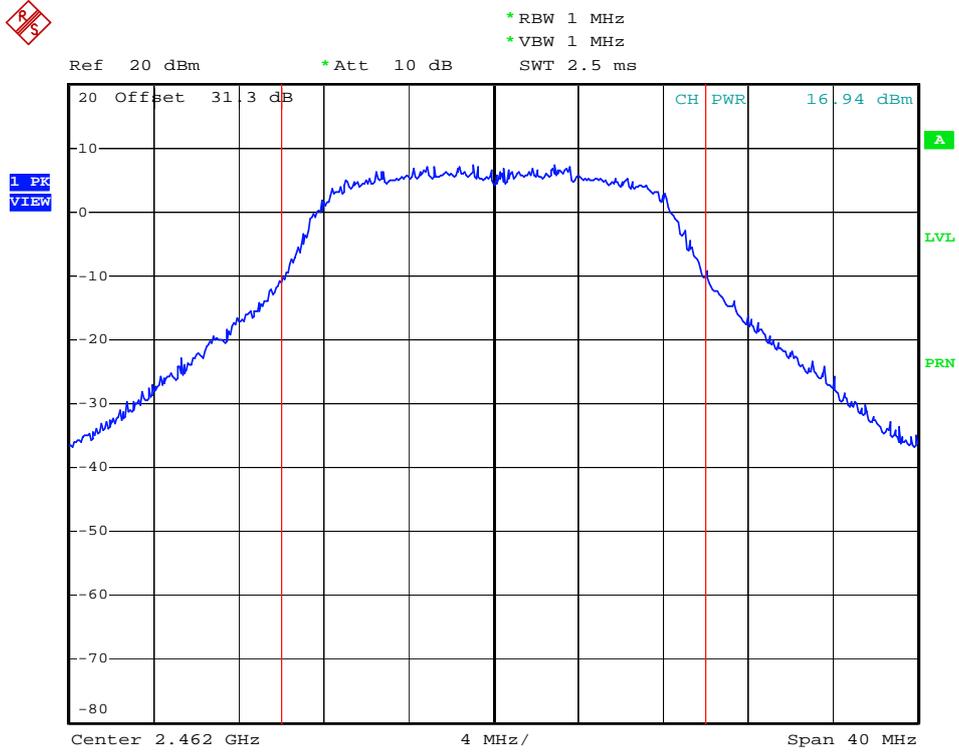

Date: 10.FEB.2010 15:06:15

### Conducted Output Power (802.11g-CH 11) 18Mbps

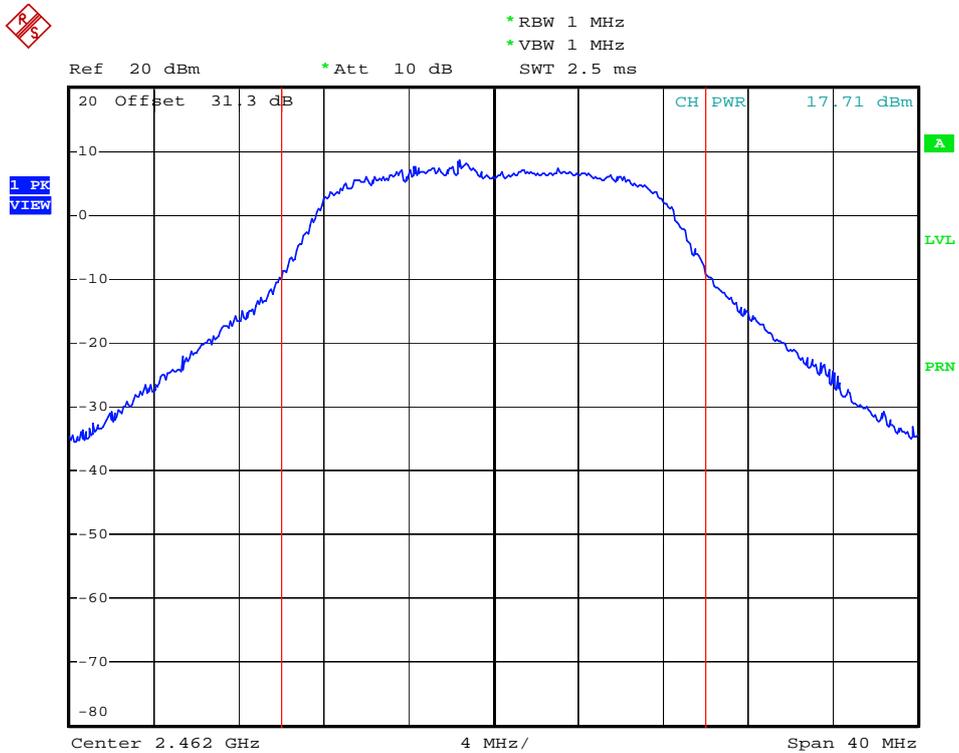


Date: 10.FEB.2010 15:08:19

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 28 of 58




### Conducted Output Power (802.11g-CH 11) 24Mbps

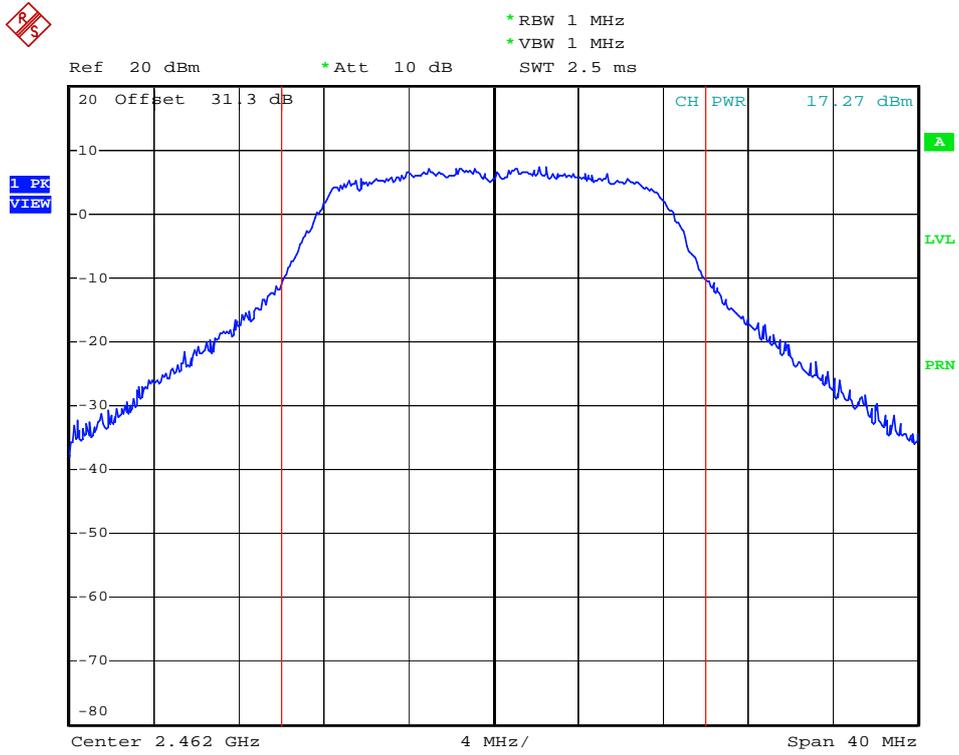

Date: 10.FEB.2010 15:09:10

### Conducted Output Power (802.11g-CH 11) 36Mbps

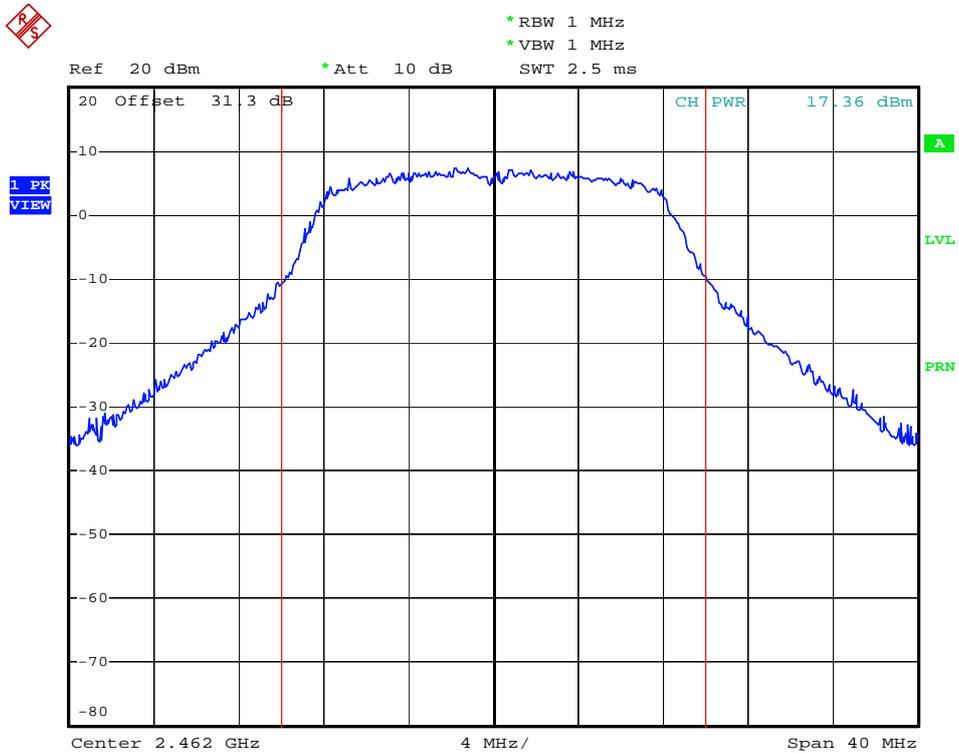


Date: 10.FEB.2010 15:09:46

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 29 of 58




### Conducted Output Power (802.11g-CH 11) 48Mbps

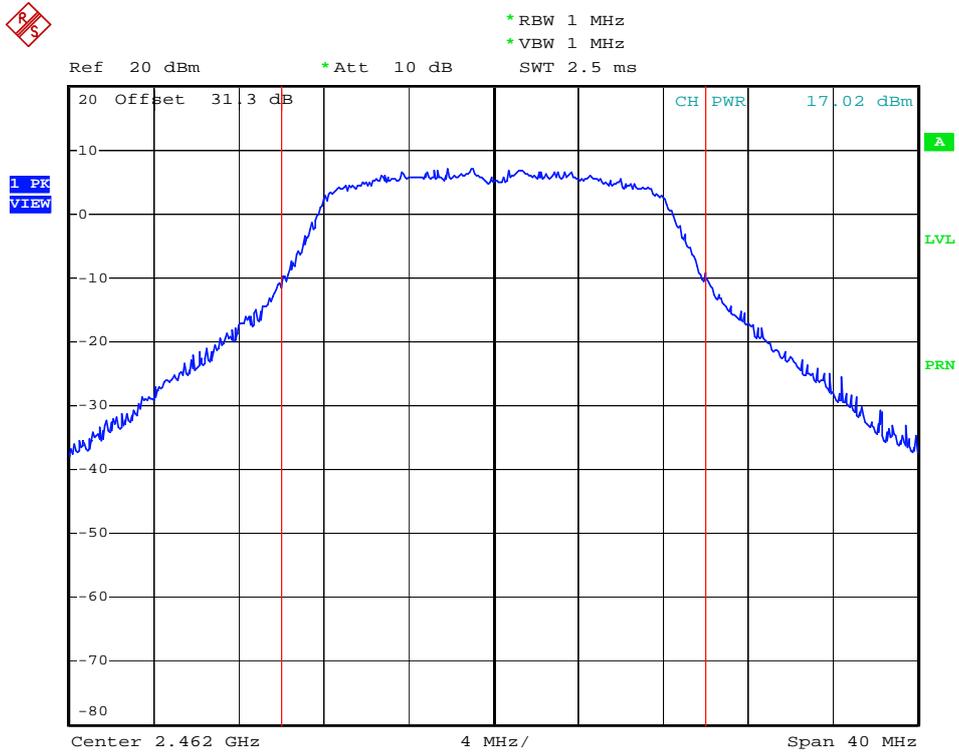

Date: 10.FEB.2010 15:10:28

### Conducted Output Power (802.11g-CH 11) 54Mbps

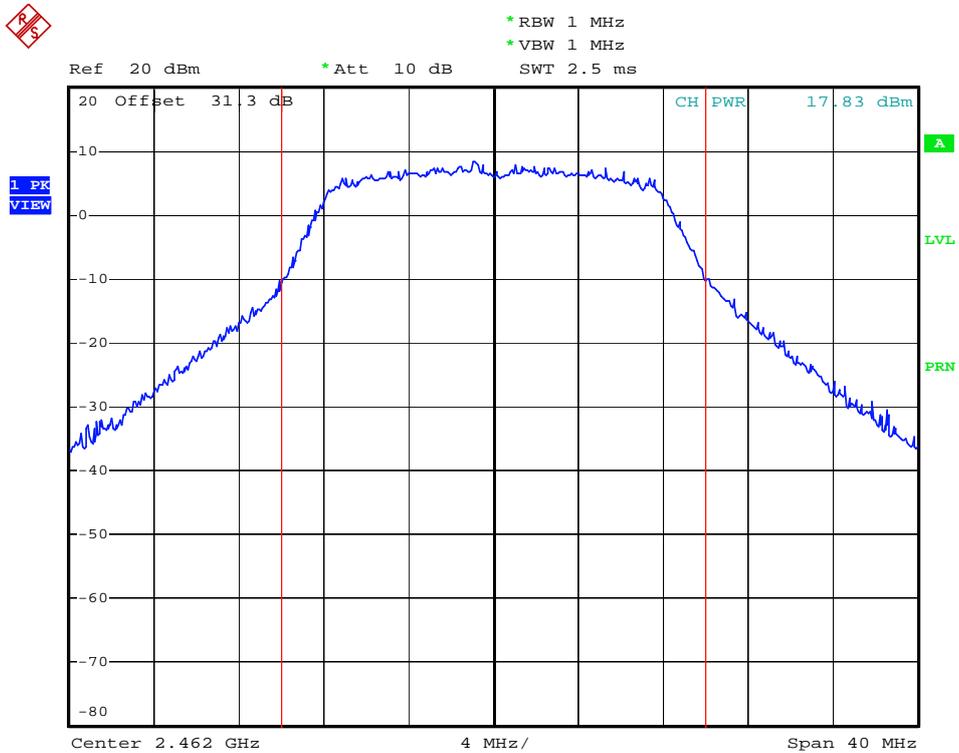

Date: 10.FEB.2010 15:11:18

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 3 0 of 58




### 7.3 Power Spectral Density (802.11b/g)

#### Test Requirements and limit, §15.247(d)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

**Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.**

#### ■ TEST CONFIGURATION

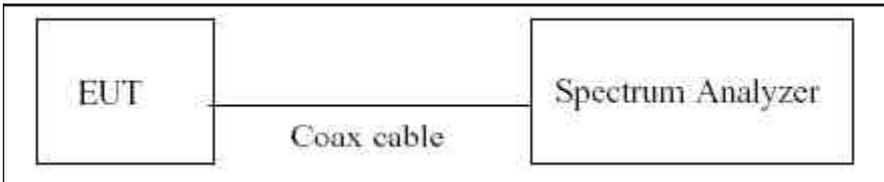

#### ■ TEST PROCEDURE

The spectrum analyzer is set to :

1. Span = 300 kHz
2. RBW = 3 kHz (7dB/div)
3. VBW = 3 kHz
4. Sweep = 100 sec
5. Detector Mode = Peak

#### ■ TEST RESULTS


Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result	
			Power Density (dBm)	Pass/Fail
2412	1	802.11b	-7.66	Pass
2437	6		-7.50	Pass
2462	11		-7.89	Pass
2412	1	802.11g	-23.64	Pass
2437	6		-23.53	Pass
2462	11		-23.52	Pass




RESULT PLOTS

Power Spectral Density (802.11b-CH 1)

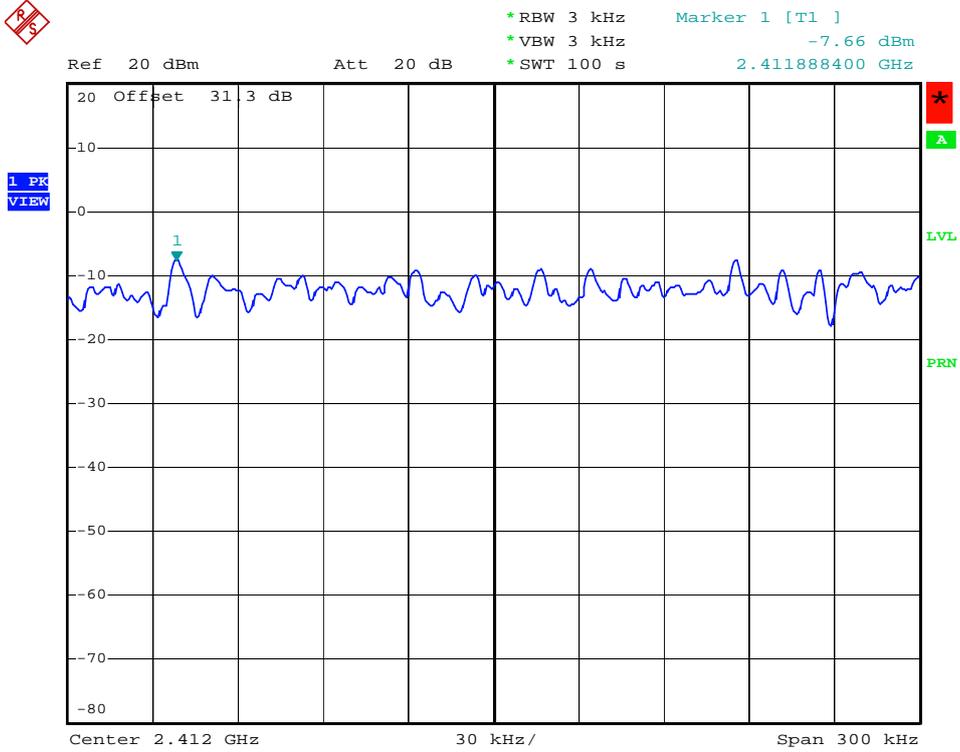

Date: 25.JAN.2010 08:13:14

Power Spectral Density (802.11b-CH 6)

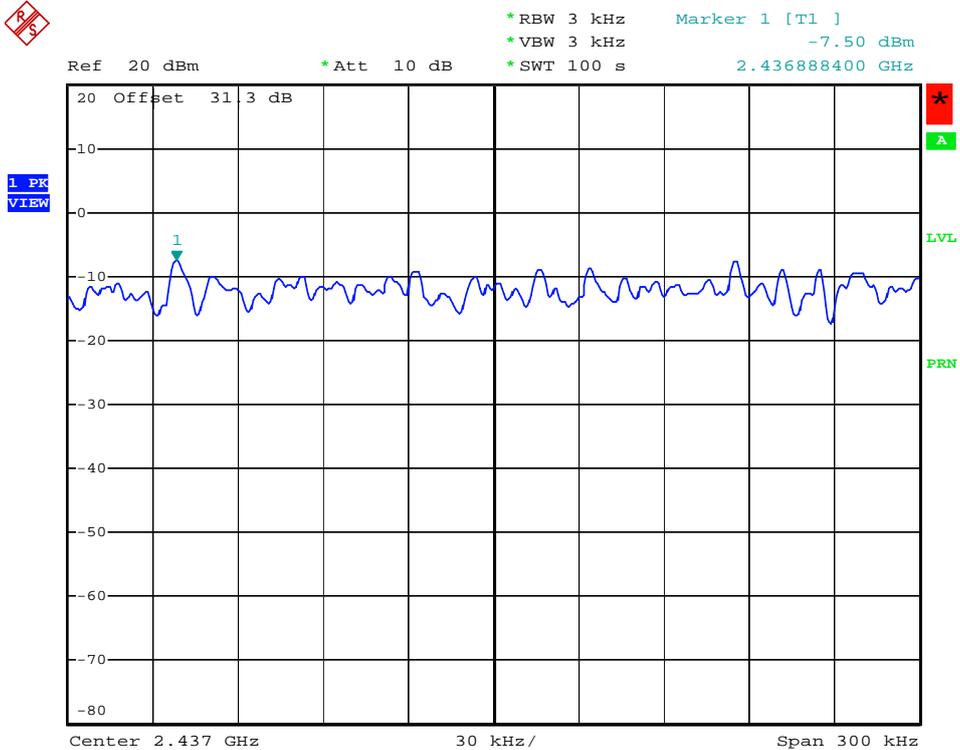


Date: 25.JAN.2010 08:47:01

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 32 of 58




### Power Spectral Density (802.11b-CH 11)

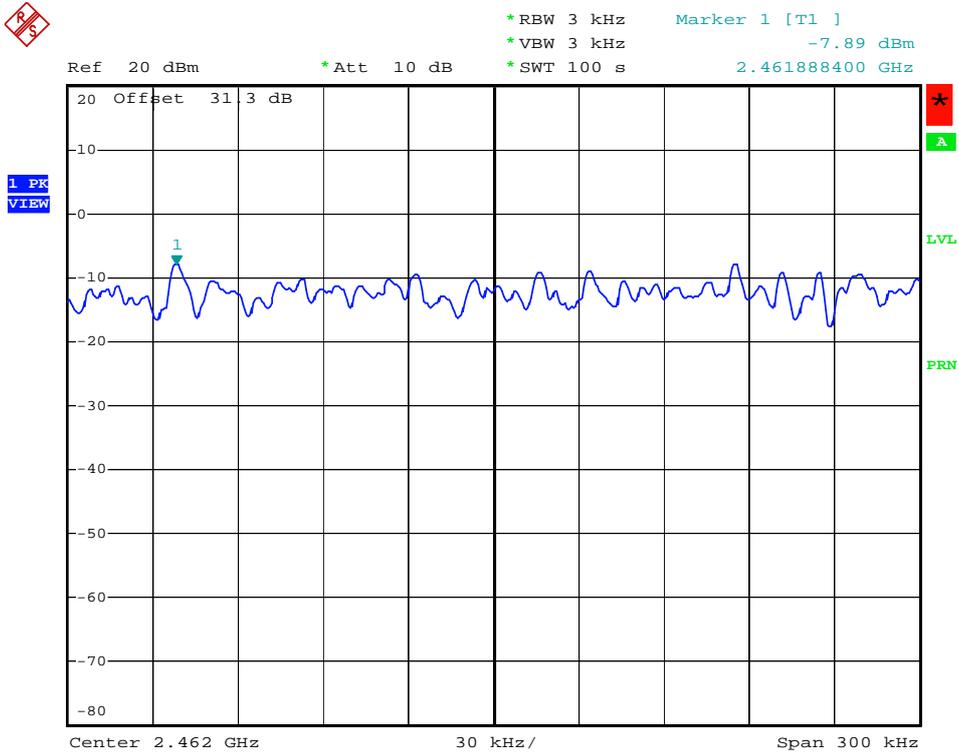

Date: 25.JAN.2010 09:10:30

### Power Spectral Density (802.11g-CH 1)

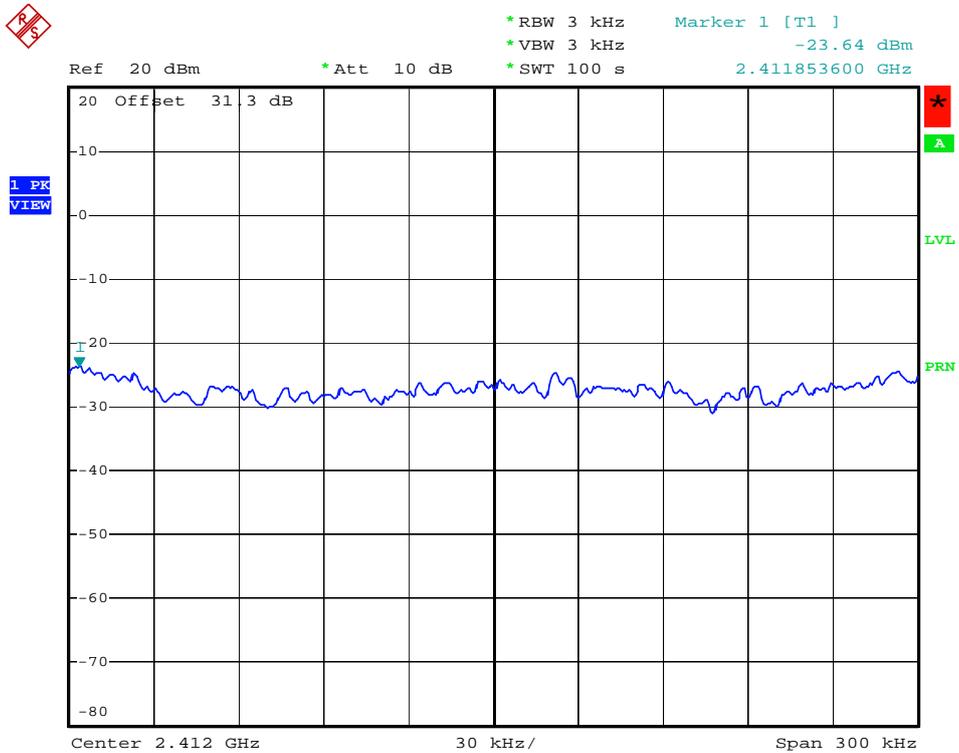


Date: 10.FEB.2010 15:34:19

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 33 of 58




### Power Spectral Density (802.11g-CH 6)

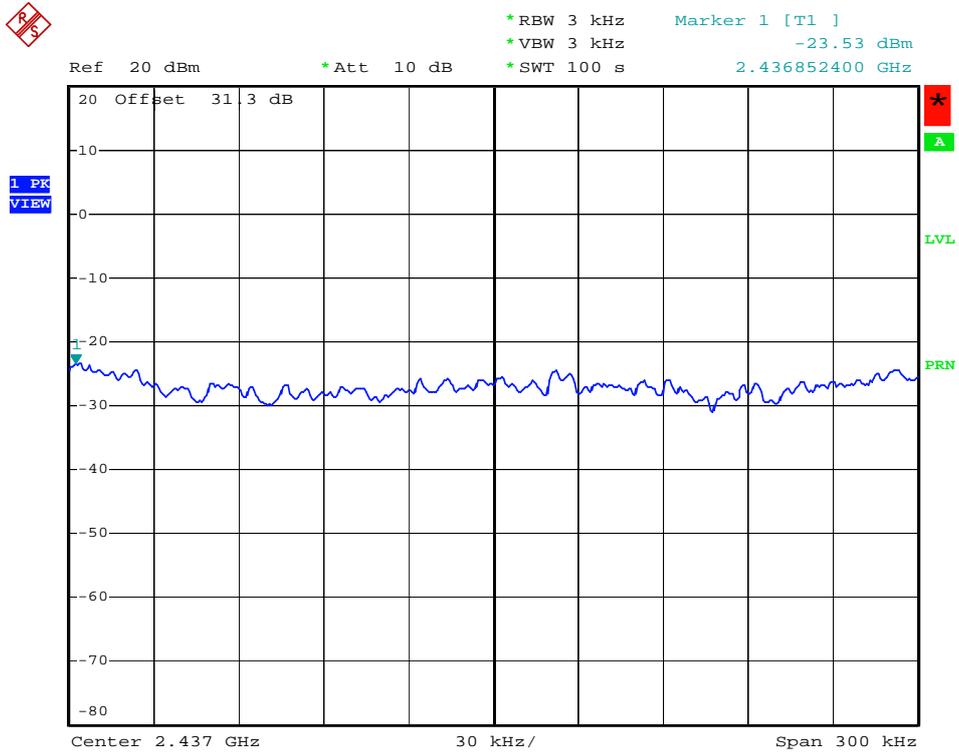

Date: 10.FEB.2010 15:31:47

### Power Spectral Density (802.11g-CH11)

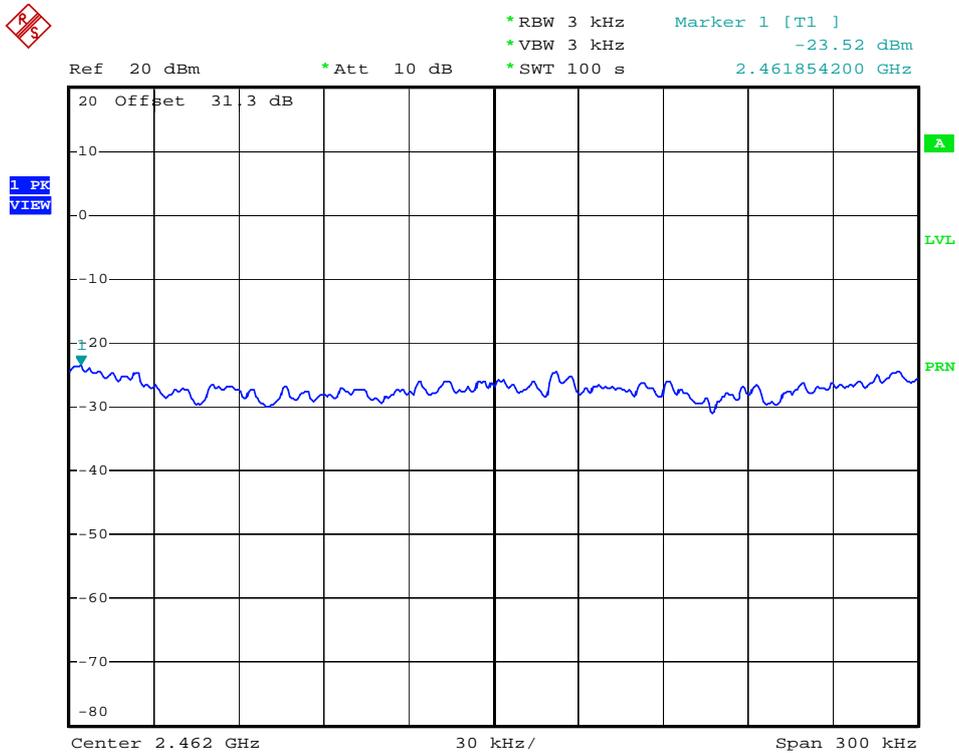


Date: 10.FEB.2010 15:28:45

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 3 4 of 58

## 7.4 Out of Band Emissions at the Band Edge/ Conducted Spurious Emissions Test Requirements and limit, §15.247(d)

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### ■ TEST CONFIGURATION

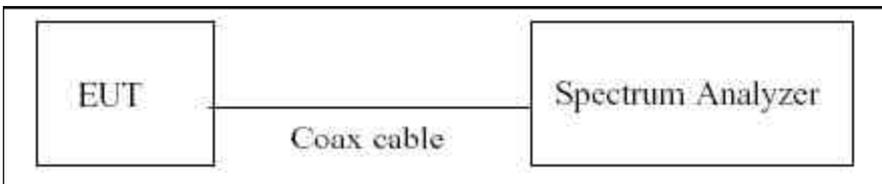

### ■ TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Detector Mode is set to a peak detector Mode.

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.


RESULT PLOTS

## BandEdge (802.11b-CH1)

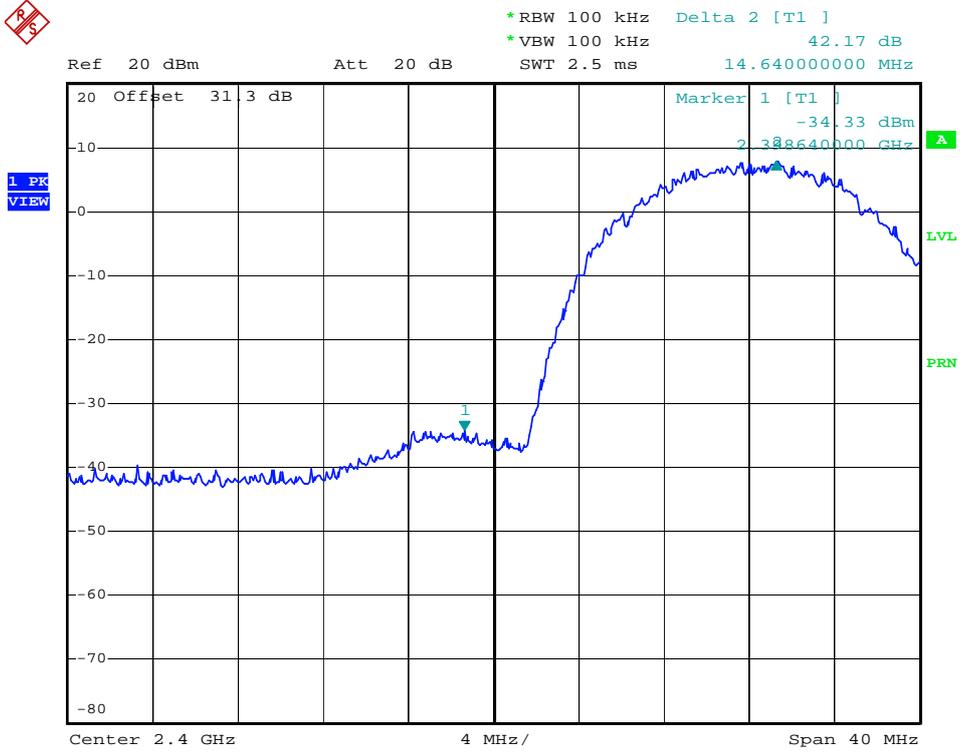

Date: 25.JAN.2010 08:15:50

## BandEdge (802.11b-CH11)

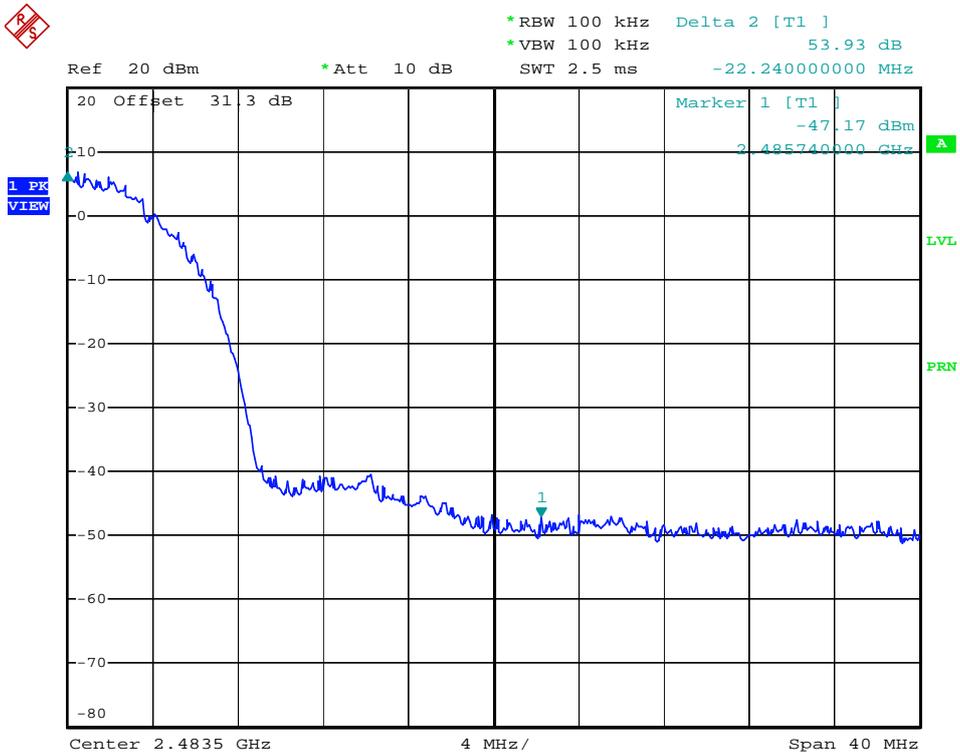


Date: 25.JAN.2010 09:11:45

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 36 of 58




### BandEdge (802.11g-CH1)

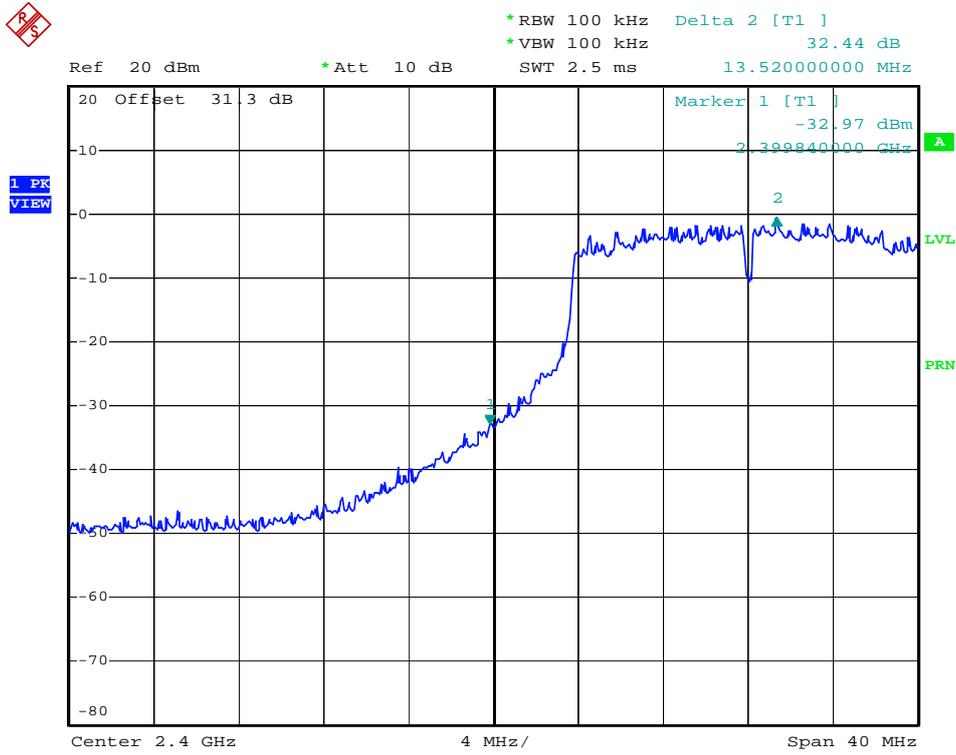

Date: 10.FEB.2010 15:37:21

### BandEdge (802.11g-CH11)

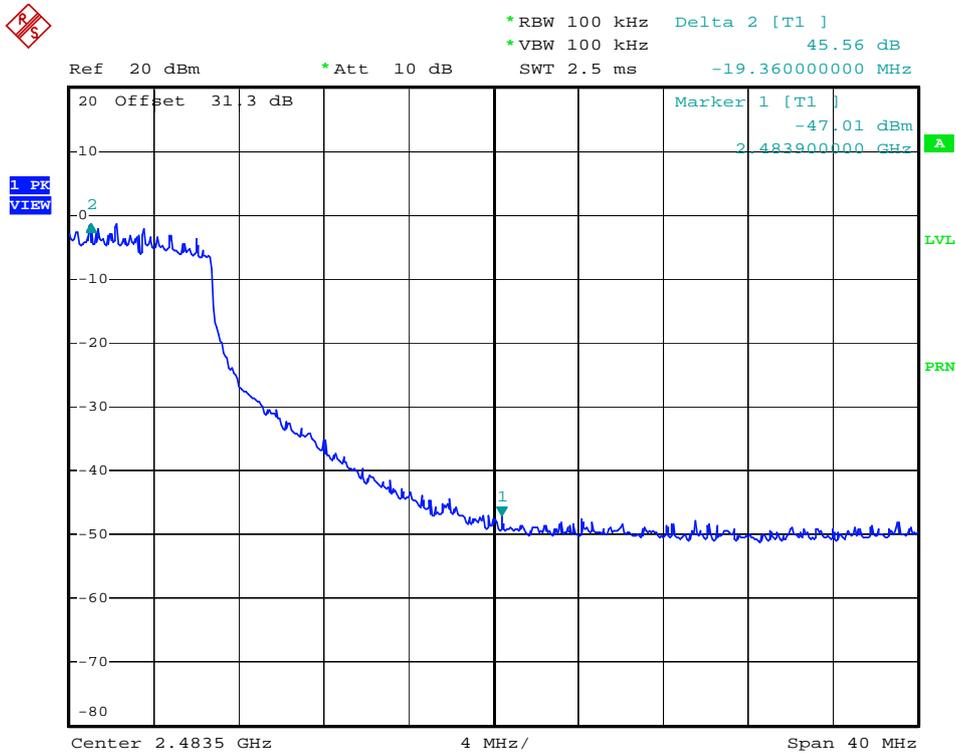


Date: 10.FEB.2010 15:53:01

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 37 of 58




- 30 MHz ~ 1 GHz

### Conducted Spurious Emission (802.11b-CH1)

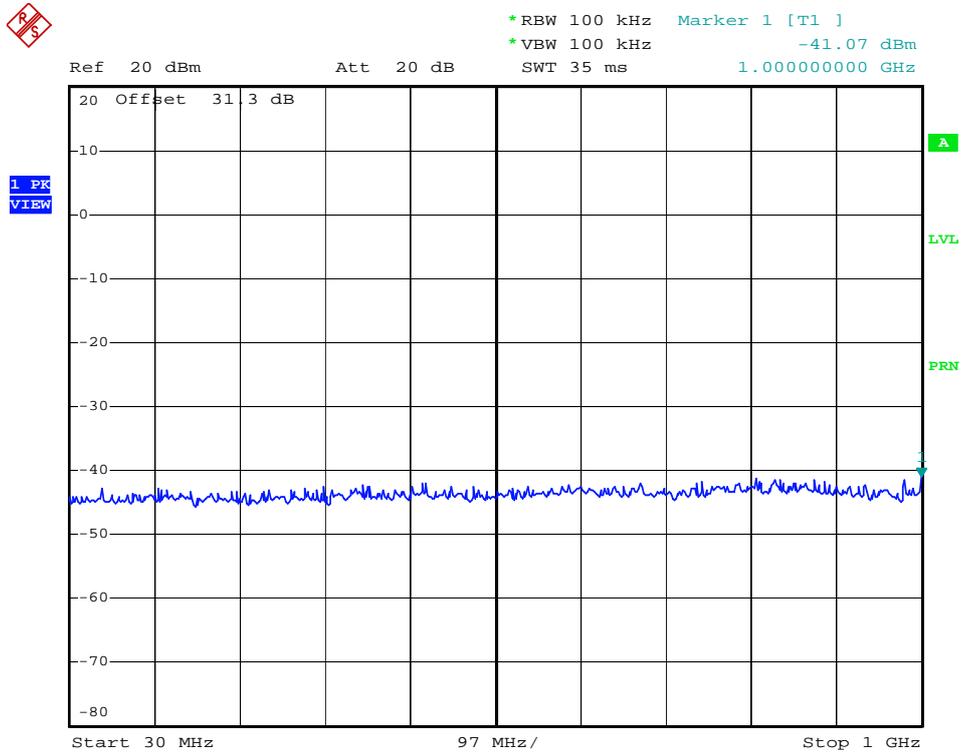

Date: 25.JAN.2010 08:20:22

### Conducted Spurious Emission (802.11b-CH6)

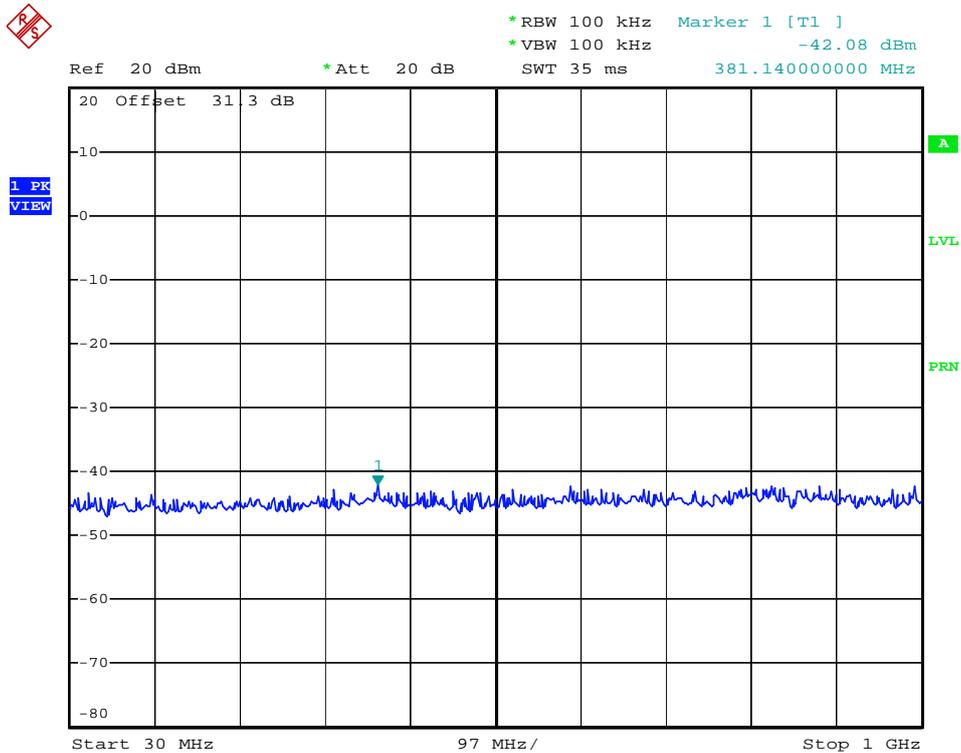


Date: 25.JAN.2010 08:37:30

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 38 of 58




### Conducted Spurious Emission (802.11b-CH11)

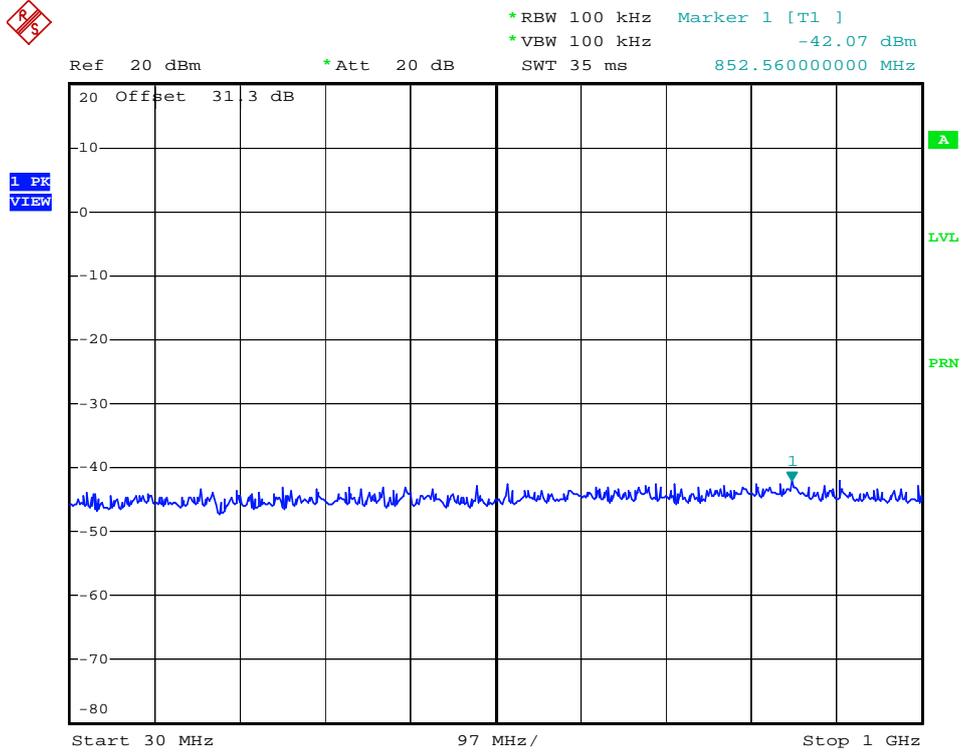

Date: 25.JAN.2010 09:13:32

### Conducted Spurious Emission (802.11g-CH1)

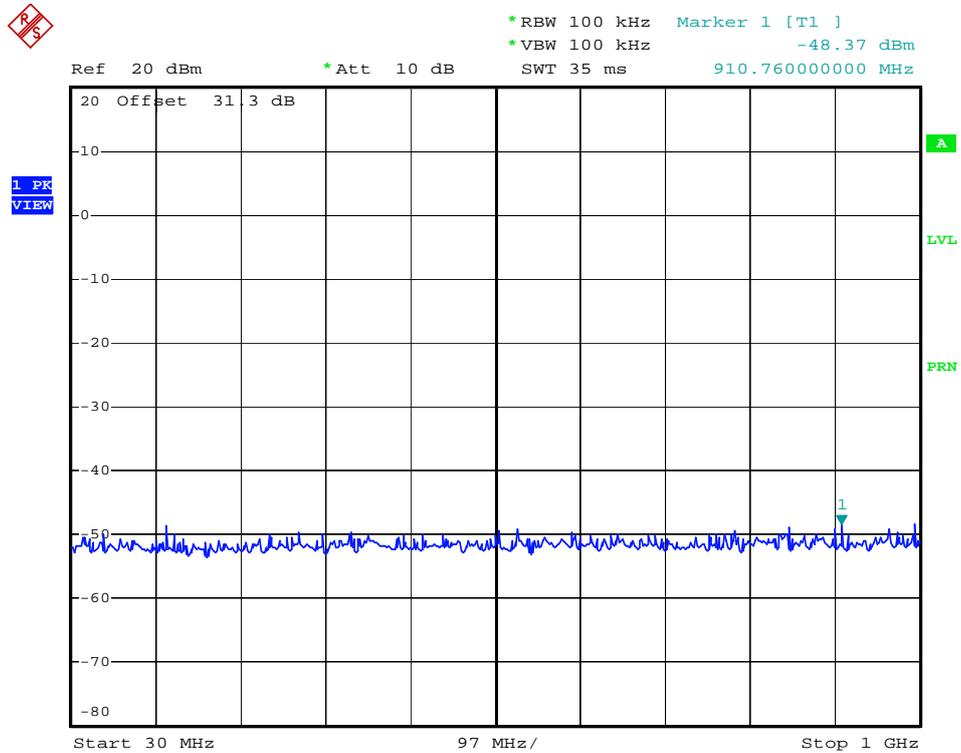


Date: 10.FEB.2010 15:54:23

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 39 of 58




### Conducted Spurious Emission (802.11g-CH6)

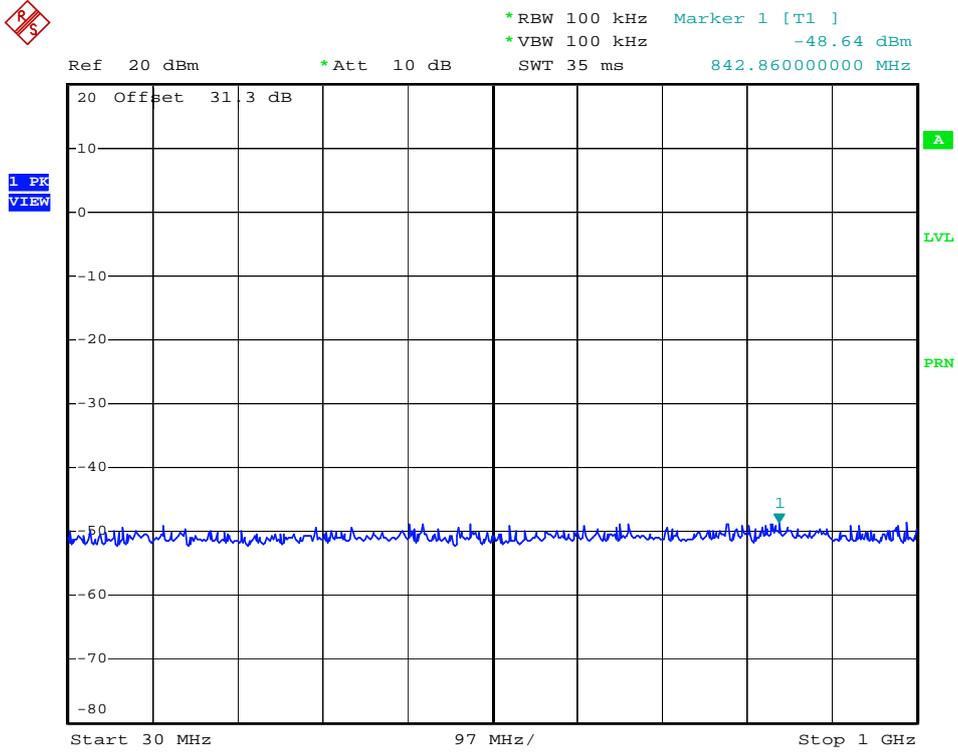

Date: 10.FEB.2010 15:55:45

### Conducted Spurious Emission (802.11g-CH11)

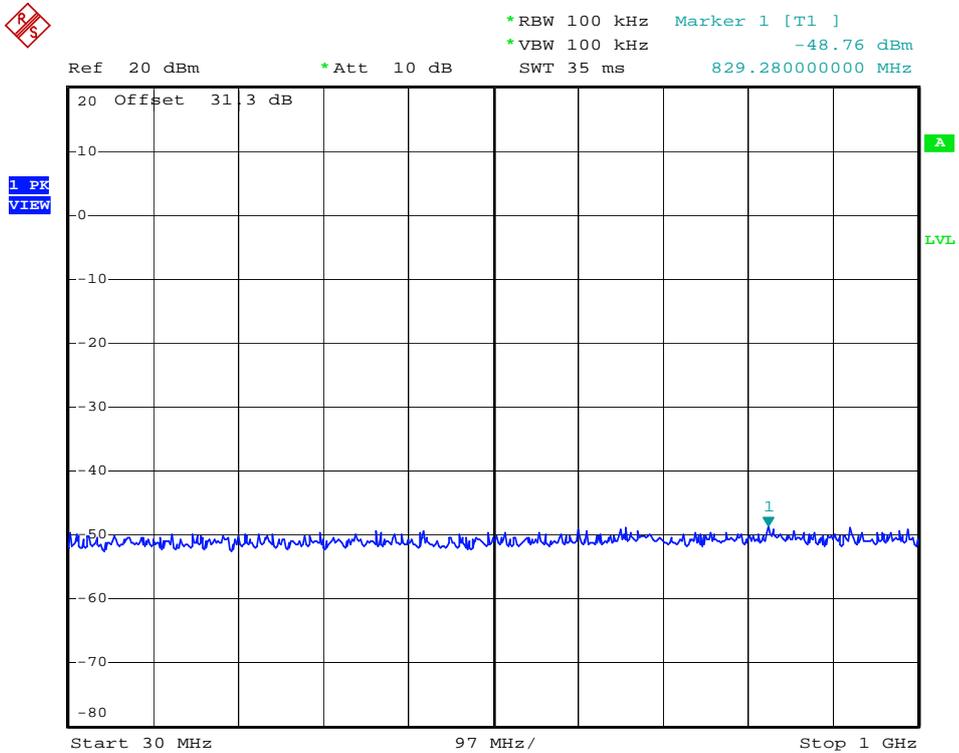


Date: 10.FEB.2010 15:57:00

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 40 of 58




- 1 GHz ~ 26 GHz

### Conducted Spurious Emission (802.11b-CH1)

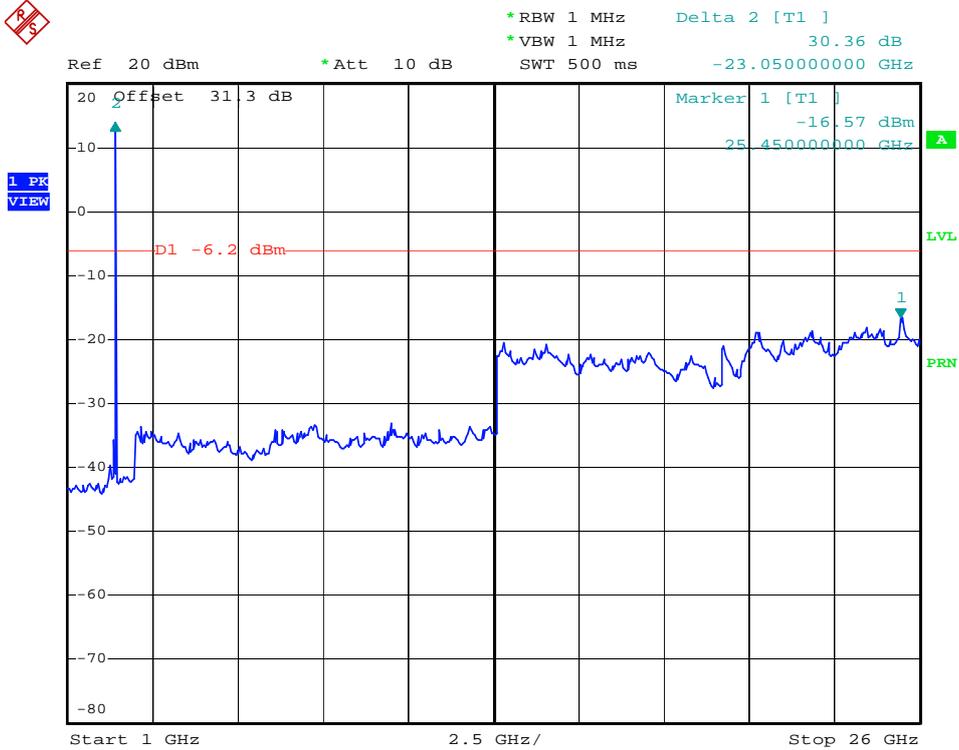

Date: 25.JAN.2010 08:23:50

### Conducted Spurious Emission (802.11b-CH6)

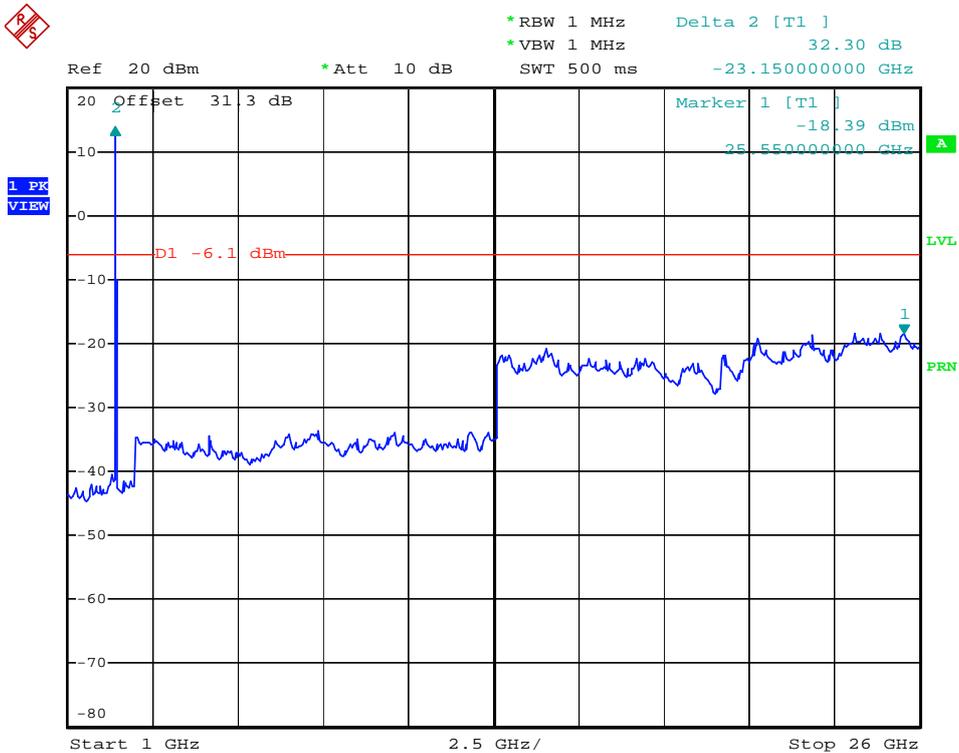


Date: 25.JAN.2010 08:35:59

HCT PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 41 of 58




### Conducted Spurious Emission (802.11b-CH11)

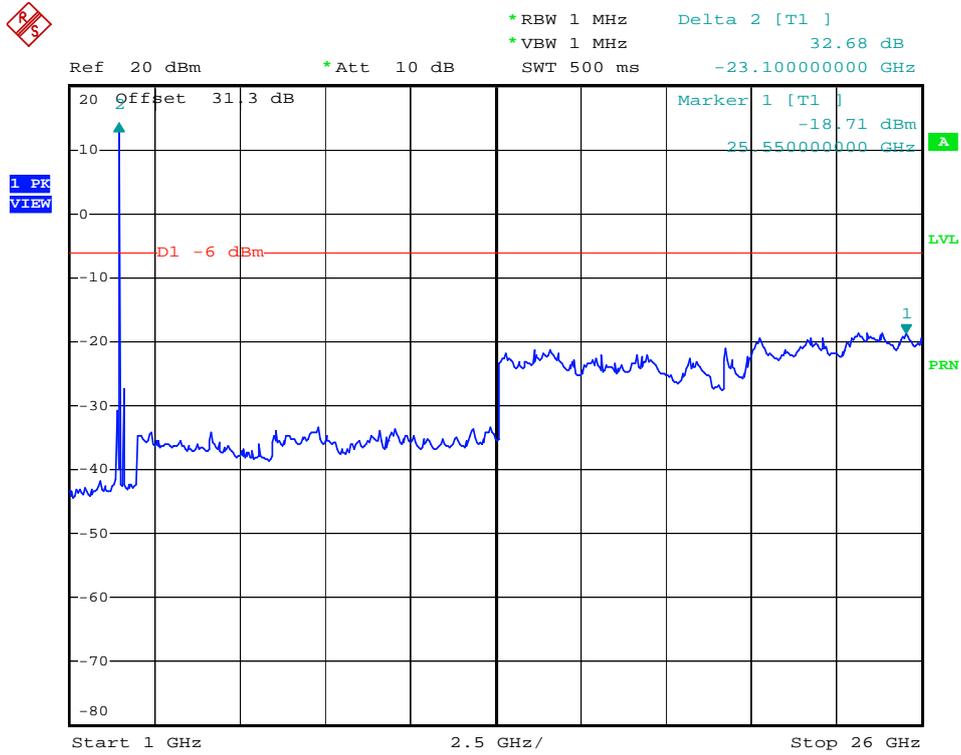

Date: 25.JAN.2010 09:14:37

### Conducted Spurious Emission (802.11g-CH1)

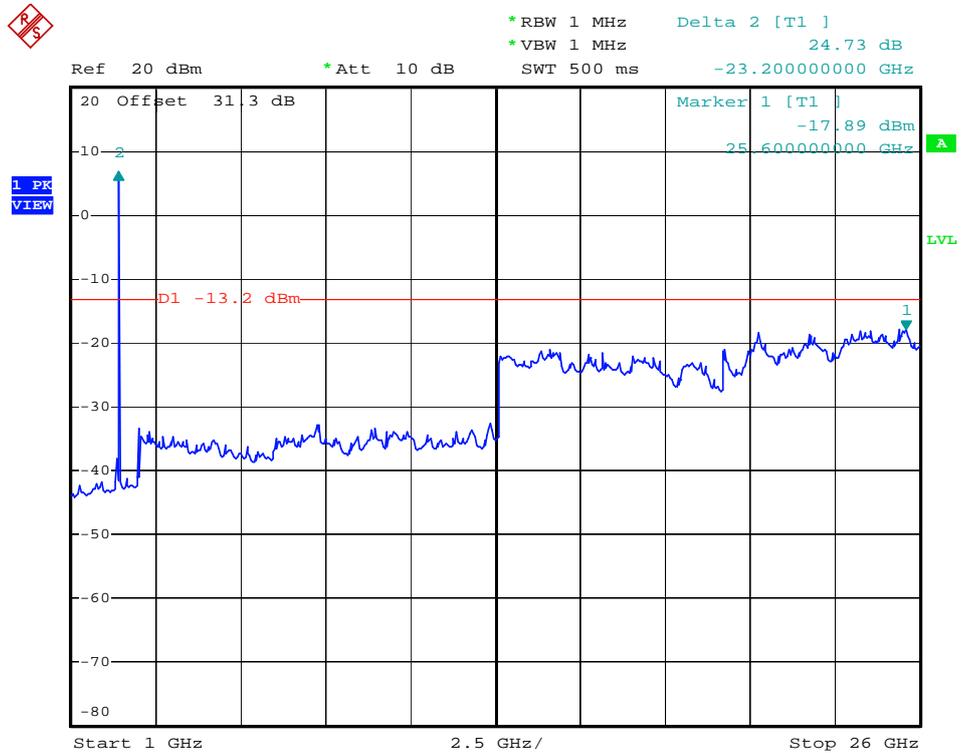


Date: 10.FEB.2010 16:04:11

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 4 2 of 58




### Conducted Spurious Emission (802.11g-CH6)

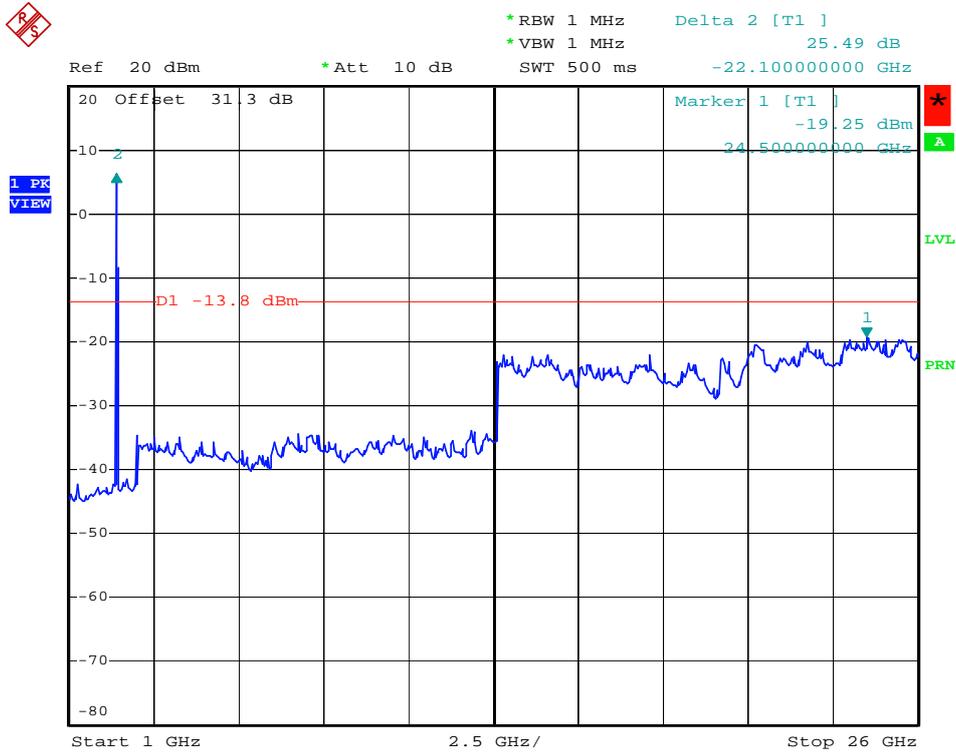

Date: 10.FEB.2010 16:08:27

### Conducted Spurious Emission (802.11g-CH11)

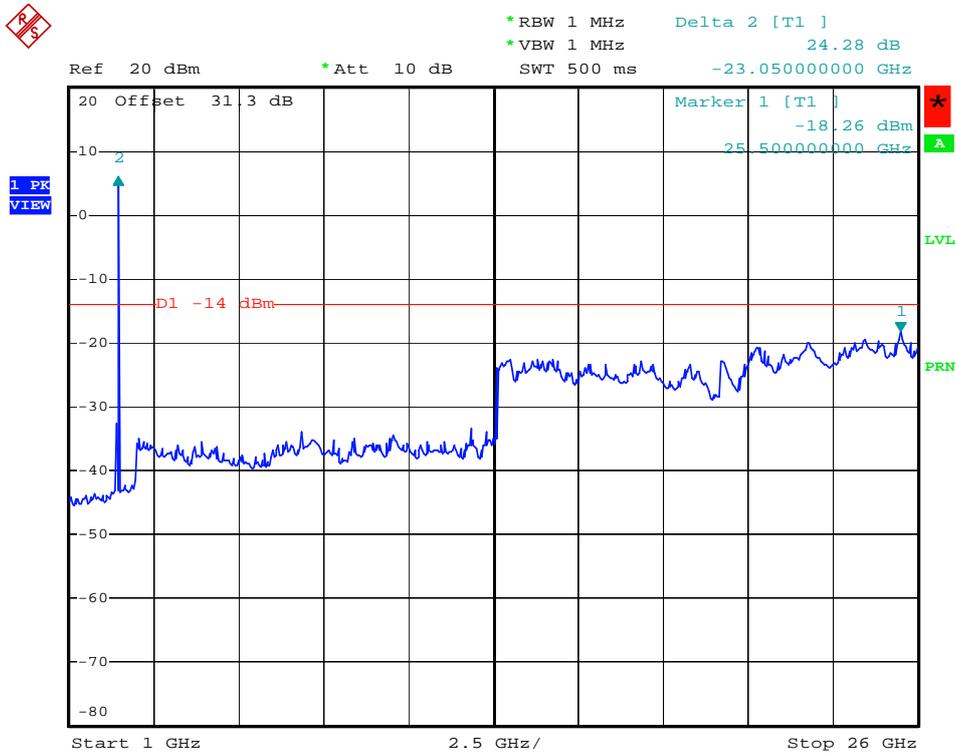

Date: 10.FEB.2010 16:11:08

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 43 of 58



## 7.5 Radiated Measurement.

### 7.5.1 Radiated Spurious Emissions.


#### Test Requirements and limit, §15.247(d)

1. 20dBc in any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

## Test Configuration


### Below 30 MHz

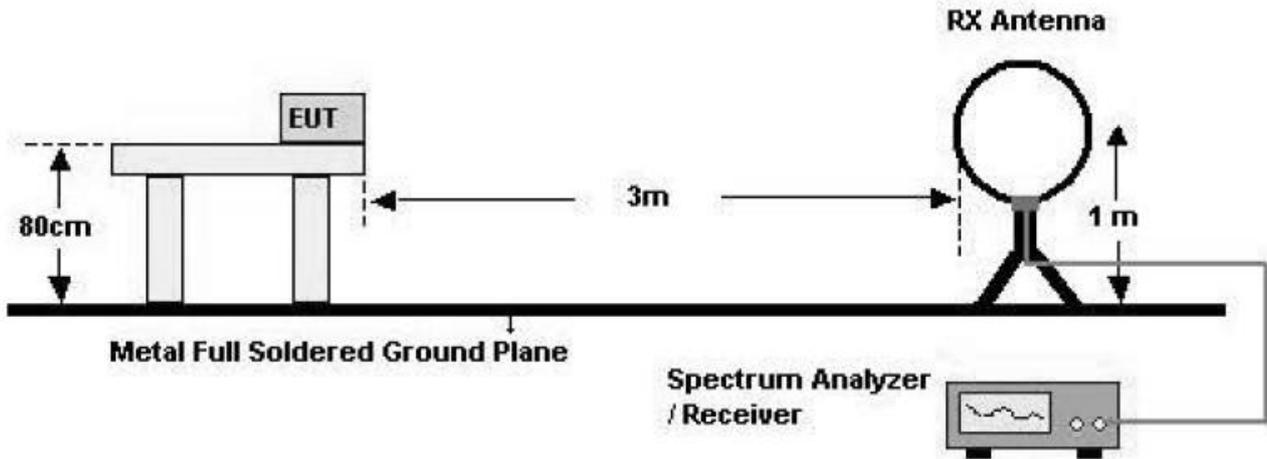

### 30 MHz - 1 GHz

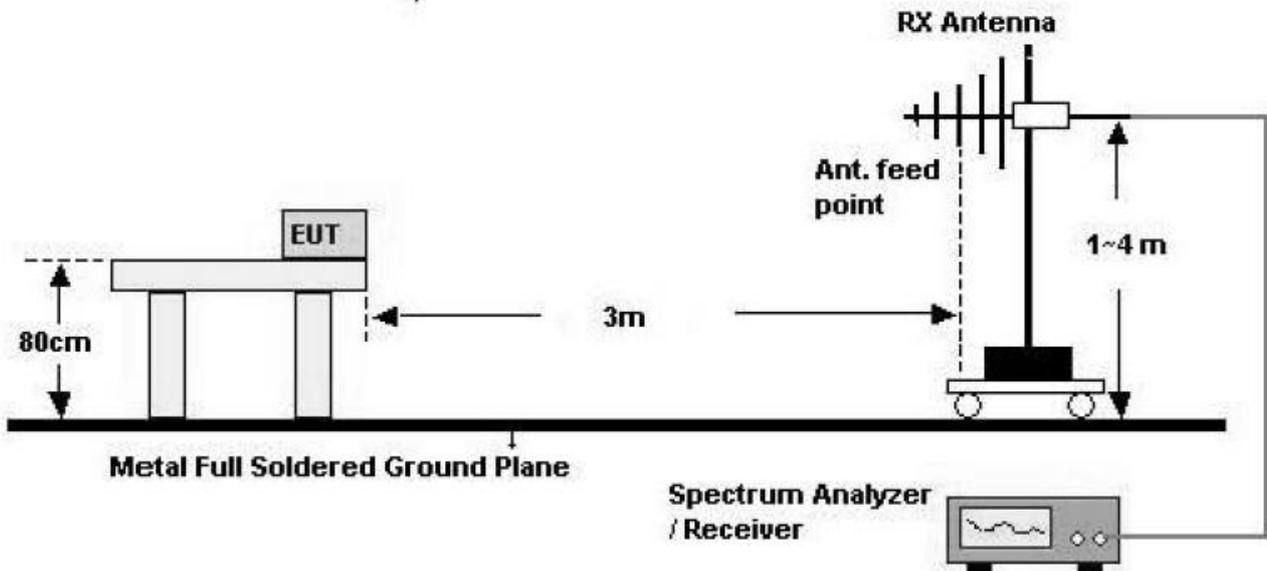

## Above 1 GHz

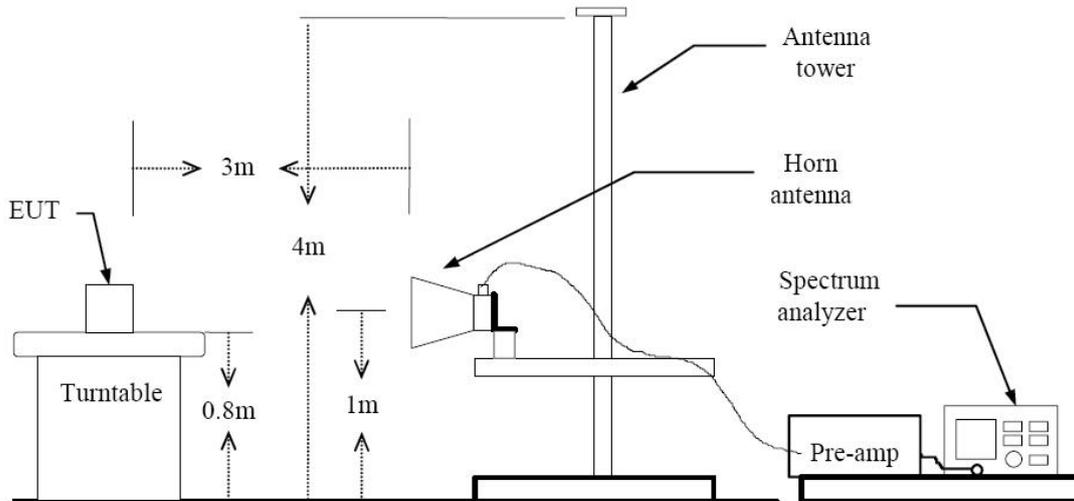

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



## TEST RESULTS

### 9 kHz – 30MHz

**Operation Mode:** Normal Link

The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

#### Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

HCT PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1001FR15	Date of Issue: February 12, 2010	EUT Type: Slide Dual-band CDMA Phone with Bluetooth/ WLAN	FCC ID: APYNAR0067	Page 4 7 of 58



## TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
862.26	8.4	22.9	3.3	V	34.56	46.0	11.4
924.34	7.8	23.5	3.6	H	34.91	46.0	11.1

### Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.



**Above 1 GHz**

Operation Mode:	802.11 b
Transfer Rate:	11 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4824	52.15	-4.75	V	47.40	74	26.60	PK
4824	39.33	-4.75	V	34.58	54	19.42	AV
7236	52.79	1.31	V	54.10	74	19.90	PK
7236	40.00	1.31	V	41.31	54	12.69	AV
4824	51.23	-4.75	H	46.48	74	27.52	PK
4824	39.33	-4.75	H	34.58	54	19.42	AV
7236	51.78	1.31	H	53.09	74	20.91	PK
7236	40.00	1.31	H	41.31	54	12.69	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.



Operation Mode: 802.11 b  
 Transfer Rate: 11 Mbps  
 Operating Frequency: 2437  
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4874	52.07	-4.62	V	47.45	74	26.55	PK
4874	40.34	-4.62	V	35.72	54	18.28	AV
7311	52.54	1.58	V	54.12	74	19.88	PK
7311	40.34	1.58	V	41.92	54	12.08	AV
4874	47.52	-4.62	H	42.90	74	31.10	PK
4874	36.39	-4.62	H	31.77	54	22.23	AV
7311	51.82	1.58	H	53.40	74	20.60	PK
7311	40.30	1.58	H	41.88	54	12.12	AV

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.



Operation Mode: 802.11 b  
 Transfer Rate: 11 Mbps  
 Operating Frequency: 2462  
 Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4924	51.55	-4.50	V	47.05	74	26.95	PK
4924	39.66	-4.50	V	35.16	54	18.84	AV
7386	53.07	1.85	V	54.92	74	19.08	PK
7386	40.92	1.85	V	42.77	54	11.23	AV
4924	51.01	-4.50	H	46.51	74	27.49	PK
4924	39.58	-4.50	H	35.08	54	18.92	AV
7386	53.82	1.85	H	55.67	74	18.33	PK
7386	40.92	1.85	H	42.77	54	11.23	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MH.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.



## 7.5.2 Radiated Restricted Band Edge Measurements

### Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode:	802.11 g
Transfer Rate:	9 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2340.19	48.79	-10.37	H	38.42	74	35.58	PK
2340.19	36.85	-10.37	H	26.48	54	27.52	AV
2345.20	48.06	-10.35	V	37.71	74	36.29	PK
2345.20	37.03	-10.35	V	26.68	54	27.32	AV
2491.06	47.89	-9.73	H	38.16	74	35.84	PK
2491.06	36.97	-9.73	H	27.24	54	26.76	AV
2487.35	47.58	-9.75	V	37.83	74	36.17	PK
2487.35	36.98	-9.75	V	27.23	54	26.77	AV

### Notes:

1. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.



## 7.6 POWERLINE CONDUCTED EMISSIONS

### Test Requirements and limit, §15.247(d)

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.



■ RESULT PLOTS


HCT

EMC

EUT: PB10ZU  
 Manufacturer: SHARP CORPORATION  
 Operating Condition: WLAN MODE  
 Test Site: SHIELD ROOM  
 Operator: HS KWAK  
 Test Specification: CISPR22 CLASS B  
 Comment: N

SCAN TABLE: "CISPR22 CLASS B"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

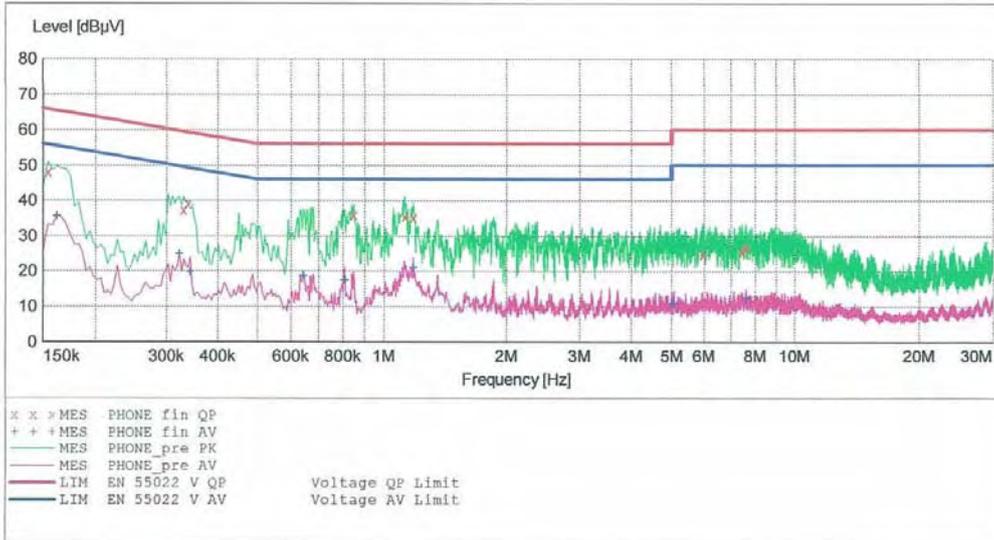

MEASUREMENT RESULT: "PHONE\_fin QP"

1/27/2010 11:29AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.154001	48.00	10.1	66	17.7	---	---
0.330001	37.30	10.1	60	22.1	---	---
0.338001	39.10	10.1	59	20.2	---	---
0.848000	35.90	10.1	56	20.1	---	---
1.128000	35.50	10.1	56	20.5	---	---
1.184000	35.30	10.1	56	20.7	---	---
5.960000	24.90	10.4	60	35.1	---	---
7.436000	25.70	10.5	60	34.3	---	---
7.612000	26.60	10.5	60	33.4	---	---



**MEASUREMENT RESULT: "PHONE\_fin AV"**

1/27/2010 11:29AM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.162001	35.60	10.1	55	19.8	---	---
0.322001	24.80	10.1	50	24.9	---	---
0.342001	19.80	10.1	49	29.3	---	---
0.644000	18.60	10.1	46	27.4	---	---
0.808000	17.50	10.1	46	28.5	---	---
1.184000	21.00	10.1	46	25.0	---	---
5.000000	10.80	10.3	46	35.2	---	---
5.072000	11.00	10.3	50	39.0	---	---
7.624000	12.20	10.5	50	37.8	---	---

<b>HCT PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1001FR15	<b>Date of Issue:</b> February 12, 2010	<b>EUT Type:</b> Slide Dual-band CDMA Phone with Bluetooth/ WLAN	<b>FCC ID:</b> APYNAR0067	Page 55 of 58




HCT

EMC

EUT: PB10ZU  
 Manufacturer: SHARP CORPORATION  
 Operating Condition: WLAN MODE  
 Test Site: SHIELD ROOM  
 Operator: HS KWAK  
 Test Specification: CISPR22 CLASS B  
 Comment: H

**SCAN TABLE: "CISPR22 CLASS B"**

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

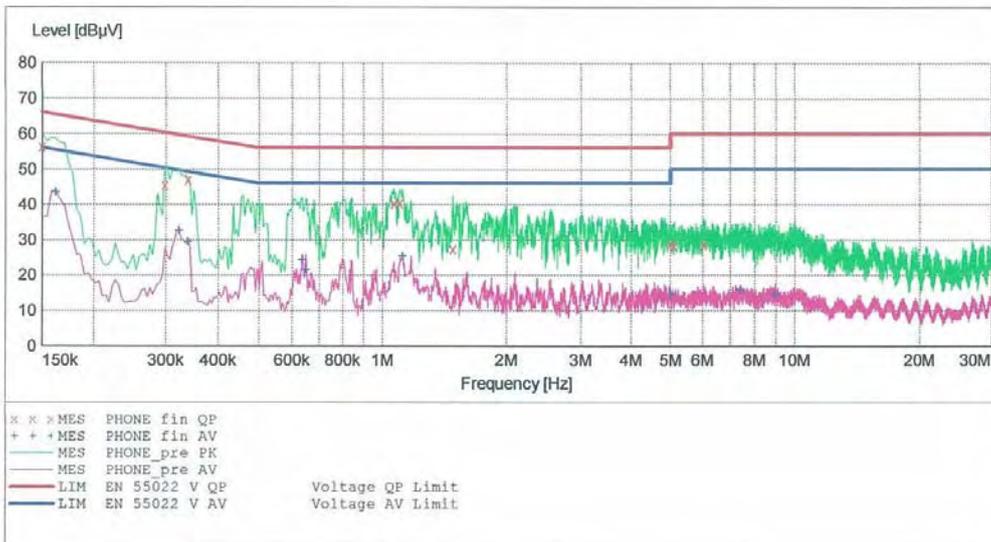

**MEASUREMENT RESULT: "PHONE\_fin\_QP"**

1/27/2010 11:21AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150001	56.30	10.1	66	9.7	---	---
0.298001	45.50	10.1	60	14.8	---	---
0.338001	46.90	10.1	59	12.4	---	---
1.068000	40.30	10.1	56	15.7	---	---
1.104000	40.50	10.1	56	15.5	---	---
1.488000	27.50	10.1	56	28.5	---	---
5.000000	28.80	10.3	56	27.2	---	---
5.112000	28.40	10.3	60	31.6	---	---
6.052000	28.70	10.4	60	31.3	---	---



**MEASUREMENT RESULT: "PHONE\_fin AV"**

1/27/2010 11:21AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.162001	43.40	10.1	55	11.9	---	---
0.322001	32.50	10.1	50	17.2	---	---
0.338001	29.40	10.1	49	19.8	---	---
0.636000	24.30	10.1	46	21.7	---	---
0.648000	21.50	10.1	46	24.5	---	---
1.124000	25.30	10.1	46	20.7	---	---
5.000000	14.40	10.3	46	31.6	---	---
7.412000	15.80	10.5	50	34.2	---	---
8.984000	14.40	10.6	50	35.6	---	---

<b>HCT PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1001FR15	<b>Date of Issue:</b> February 12, 2010	<b>EUT Type:</b> Slide Dual-band CDMA Phone with Bluetooth/ WLAN	<b>FCC ID:</b> APYNAR0067	Page 57 of 58



## 8. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Cal Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	04/10/2010	861741/013
Rohde & Schwarz	ESH3-Z6/ LISN	Annual	06/13/2010	100329
Schwarzbeck	VULB 9160/ TRILOG Antenna	Biennial	12/18/2010	9160-3150
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	10/30/2010	375.8810.352
MITEQ	AMF-60-0010 1800-35-20P/AMP	Annual	05/20/2010	1200937
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	03/26/2010	147
Rohde & Schwarz	FSP30 / Spectrum Analyzer	Annual	07/31/2010	839117/011
Agilent	E4440A / Spectrum Analyzer	Annual	12/23/2010	US45303008
Agilent	E4416A /Power Meter	Annual	01/14/2011	GB41291412
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	06/29/2010	1
Hewlett Packard	11636B/Power Divider	Annual	12/24/2010	11377
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	01/08/2011	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	12/01/2010	010002156287001199
TESCOM	TC-3000A / BLUETOOTH TESTER	Annual	01/11/2011	3000A490112
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	06/22/2010	100422