



JAPAN QUALITY ASSURANCE ORGANIZATION  
21-25, KINUTA 1-CHOME, SETAGAYA-KU, TOKYO 157 JAPAN  
PHONE (03) 3416-0111, TELEX 242-2531 JQA J FAX (03) 3416-9691

FCC ID : APYTCG037

## REPORT OF MEASUREMENTS

Date : October 8, 1998  
Issue in : Tokyo, Japan

JOA APPLICATION NO. : 80-80493

1. Applicant : SHARP CORPORATION  
174 Hayasaka-cho, Yaita-shi,  
Tochigi, 329-2193, Japan
2. Manufacturer : SHARP CORPORATION  
174 Hayasaka-cho, Yaita-shi,  
Tochigi, 329-2193, Japan
3. Description of Equipment : Transmitter
  - a) FCC ID : APYTCG037
  - b) Trade Name : SHARP
  - c) Model No. : VC-H998U
  - d) Operating Frequency : 390 MHz
  - e) Power Supply : 120 VAC 60 Hz
4. Applicable Rule : FCC Rules & Regulations Part 15  
Subpart C (June 23, 1989)
5. Place of Measurement : JQA EMC Engineering Dept.
6. Date of Measurement : October 6, 1998 (Completed)
7. Total Pages of This Report : 15 (including this page)
8. I certify that I am authorized to sign for the report and that all the statement in this report and in the exhibits hereto are true and correct to the best my knowledge and belief.

  
Shigeru Osawa, Assistant Manager  
Testing Div.  
EMC Engineering Dept.

1. Transmitter Fundamental and Spurious Emission: [ §15.231(b) ]

Measurement Method Employed:

Measurements were made under the conditions specified ANSI C63.4. The transmitter under test was operated continuously in its normal operating mode for the purpose of the measurements. In order to secure the continuous operation of the device under test, rewiring in the circuit was down by the manufacturer so as to affect its intended operation. The receiving antenna polarized horizontally was varied from 1 to 4 meters and the wooden turntable was rotated 360 degrees to obtain the highest reading on the field strength meter or on the display of the spectrum analyzer. And also, each emission was to be maximized by changing the orientation of the transmitter under test. These measurements were repeated with the receiving antenna polarized vertically. In this measurements, in order to determining the average value during a 100 ms interval of the maximum radiated power generated from the transmitter under test, the encoded waveform in the time domain was used, details of which was illustrated in the attached sheet.

Measurement Results:

Operating Frequency : 390 MHz  
 Distance of Measurement : 3.0 meters

Frequency (MHz)	Antenna	Amp.	Meter Reading		Factor* (dB)	Field Strength	
	Factor (dB)	Gain (dB)	Horiz. (dB/uV)	Vert. (dB/uV)		Horiz. (uV/m)	Vert. (uV/m)
Fundamental							
390	25.3	-	54.8	49.8	-4.0	6382.6	3589.2
Harmonic Frequency							
780	34.0	-	25.7	24.6	-4.0	609.5	537.0
1170	25.8	-	20.5	23.2	-4.0	130.4	177.9
1560	29.4	-	15.3	15.5	-4.0	108.1	110.6
1950	31.5	-	29.8	22.3	-4.0	734.2	309.6
2340	33.5	46.8	55.7	< 52.0	-4.0	83.5	< 54.5
2730	34.7	46.7	< 52.0	< 52.0	-4.0	< 62.8	< 62.8
3120	36.3	46.7	< 52.0	< 52.0	-4.0	< 75.7	< 75.7
3510	37.7	46.7	< 52.0	< 52.0	-4.0	< 89.5	< 89.5
3900	39.1	46.7	< 52.0	< 52.0	-4.0	< 104.5	< 104.5

Note: 1. The spectrum was checked from 30 MHz to tenth harmonics.  
All emissions not listed were found to be more than 20 dB below the limits.

2. The symbol of "<" means "or less".

3. The cable loss was included in the antenna factor.

4. Sample calculation :

at 390 MHz

$$10(Af+Mr+F)/20 = 10(25.3+54.8-4.0)/20 = 6382.6 \text{ uV/m}$$

Where,

Af = Antenna Factor including the cable loss.

Mr = Meter Reading

F = Peak to Average factor

5. "\*" : The factor due to the pulsed waveform as shown in the attached sheets.

6. Measuring Instrument Setting:

Field Strength Meter:(<1000 MHz)

Detector function : Peak

IF Bandwidth : 120 kHz

Spectrum Analyzer:(>1000 MHz)


Resolution Bandwidth : 1 MHz

The encoded waveform in the time domain

FCC ID : APYTCG037

Model : VC-H998U

Mode of EUT : Transmit

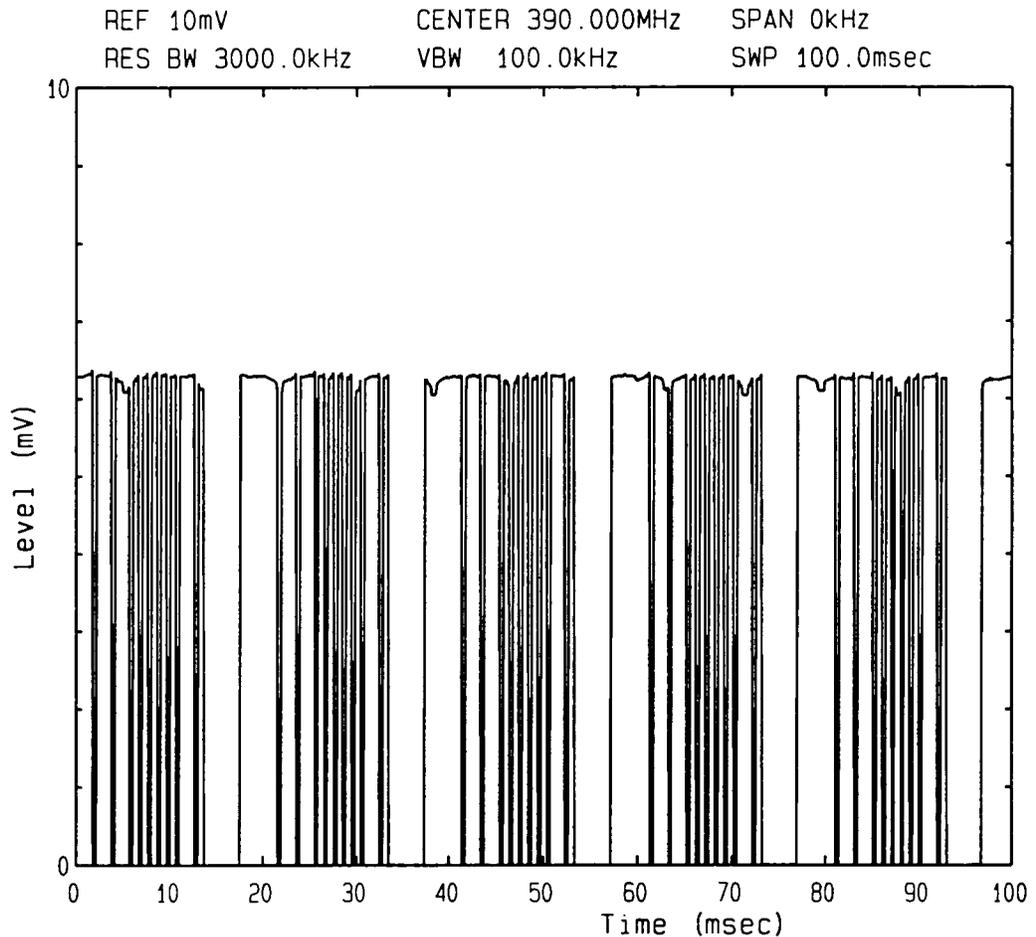

The above waveform indicates the case when field strength averaged over 100 milliseconds was maximum value. In order to obtain the peak to average factor, calculation of the period of total on-time was computed by personal computer. Results was obtained by following.

$$\begin{aligned} \text{Duty cycle} &= (\text{Maimum total on-time} / 100 \text{ msec}) \times 100 \\ &= (63.2 \text{ msec} / 100 \text{ msec}) \times 100 = 63.2 \% \end{aligned}$$

Therefore


$$\text{Factor is } 20\log(0.6320) = -4.0 \text{ dB}$$

## Radiated Fundamental & Spurious Emissions


FCC ID : APYTCG037

Operating Frequency : 390 MHz


FUNDAMENTAL LIMITS [Sec.15.231(b)] : 9167uV/m

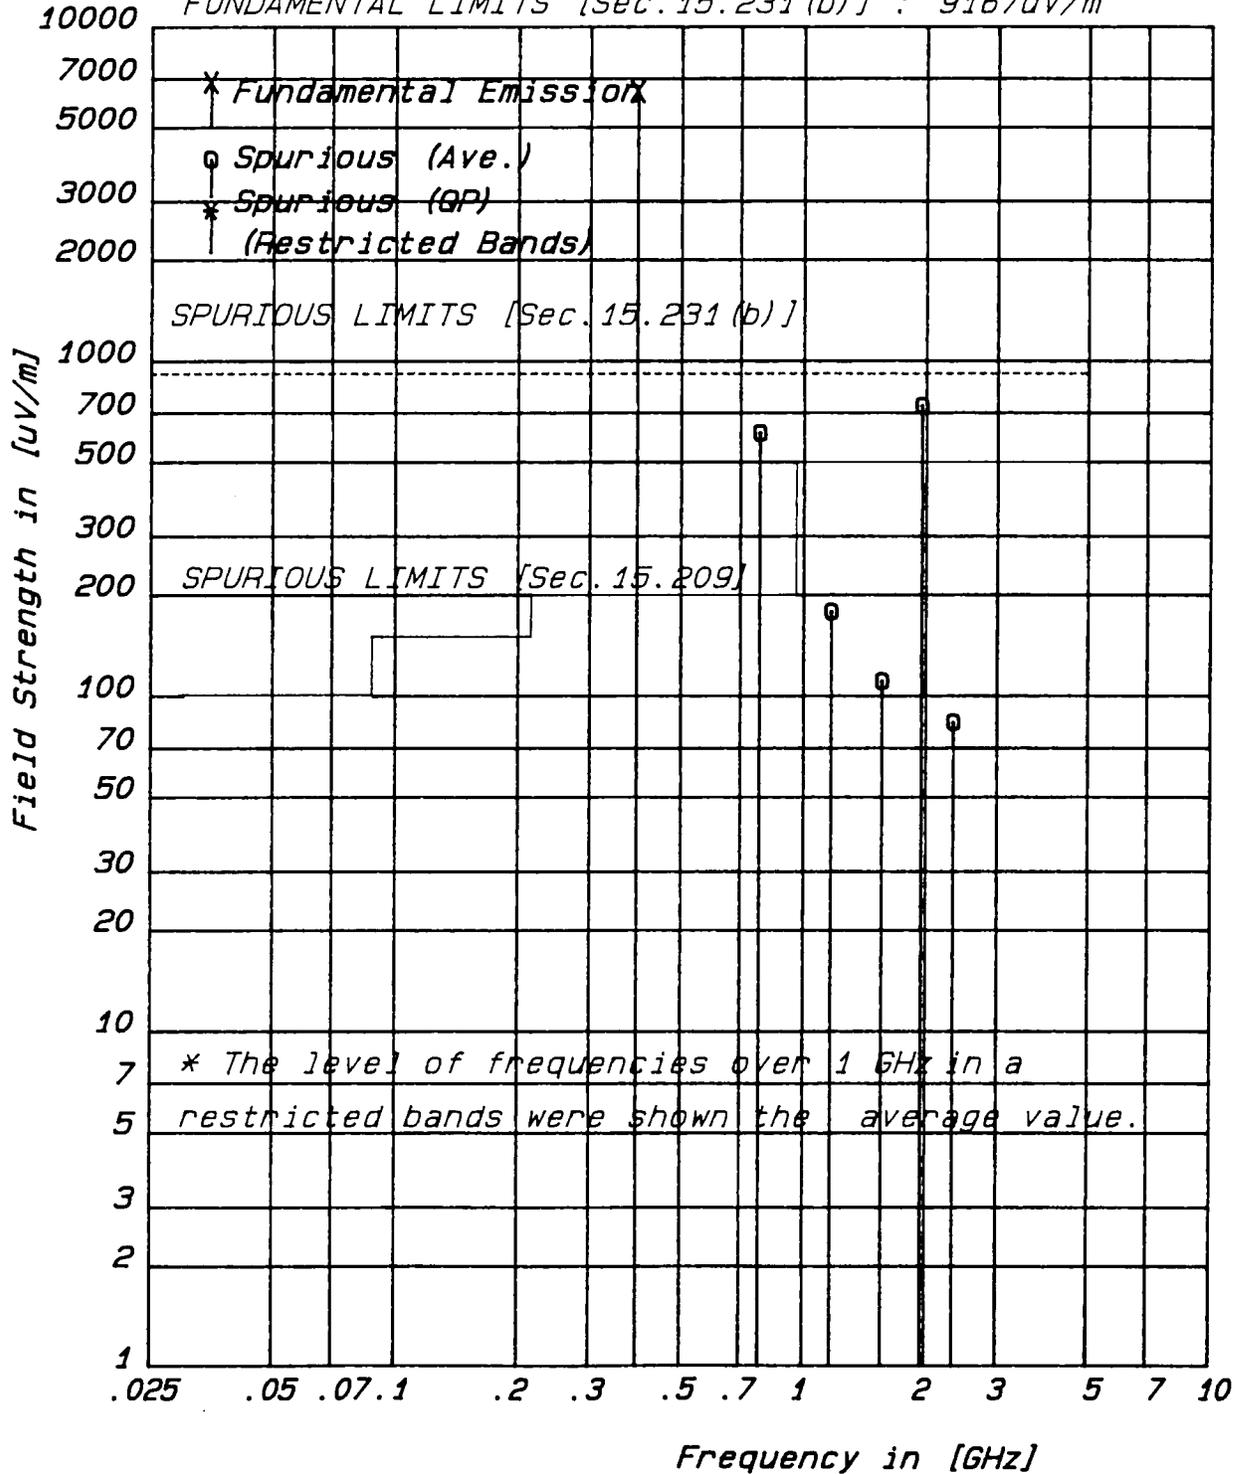


## MESUREMENT SET-UP FOR UP TO 1 GHz

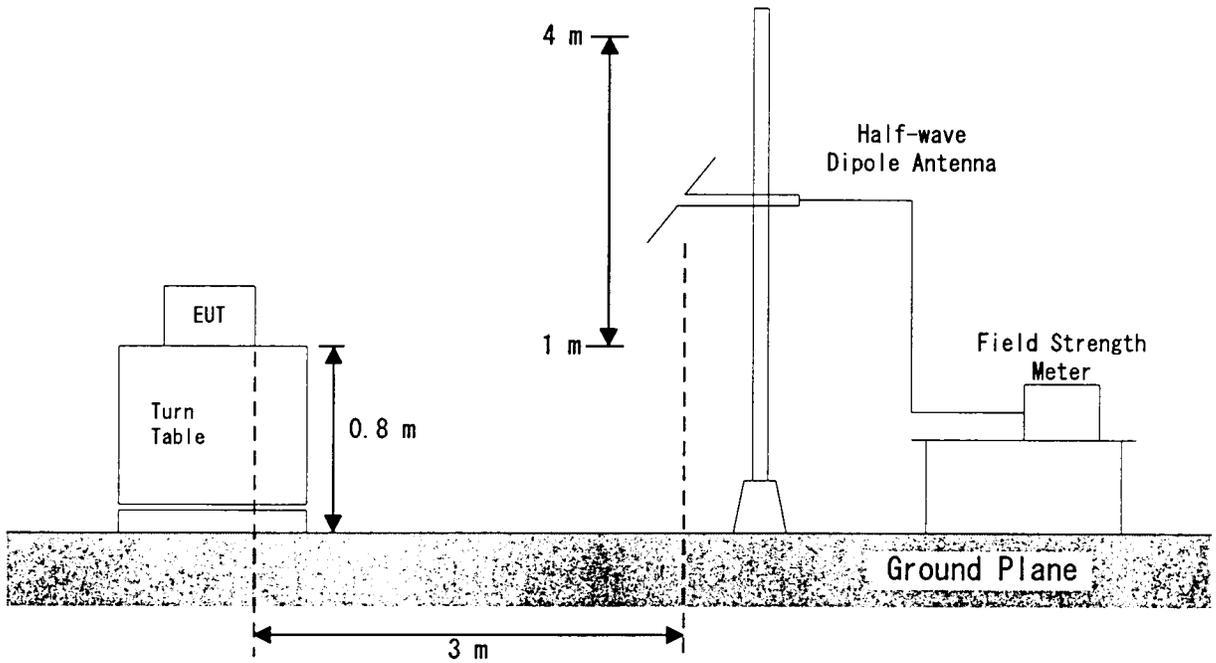

## MESUREMENT SET-UP FOR ABOVE 1 GHz

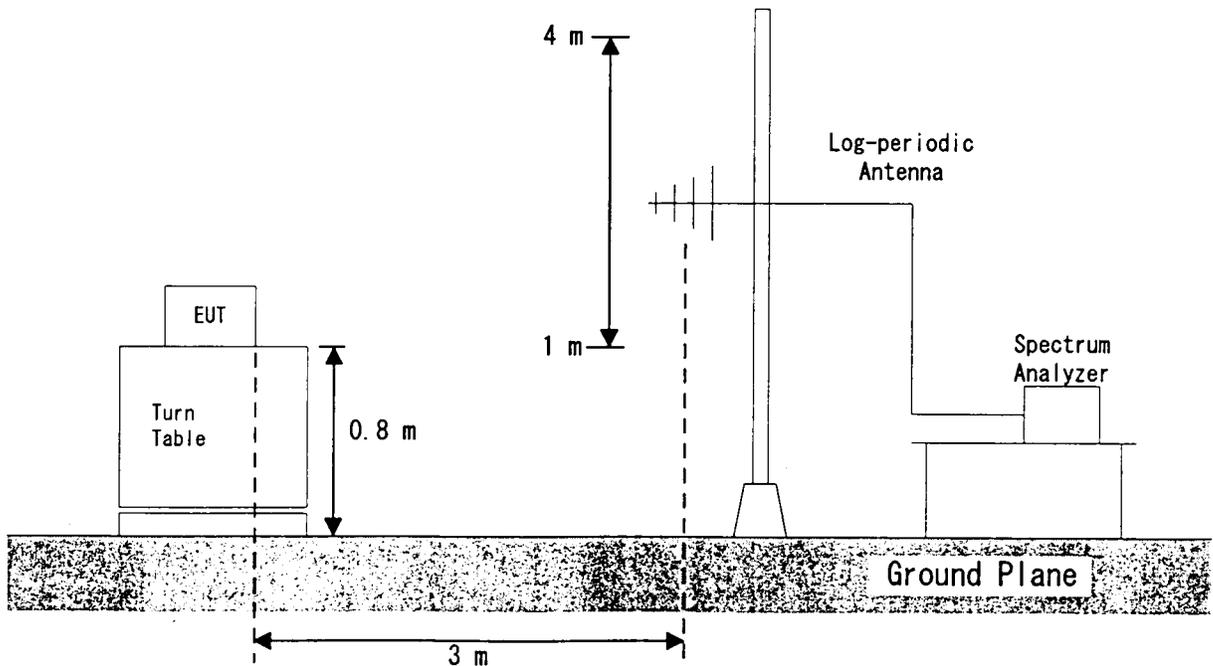

Configuration of EUT

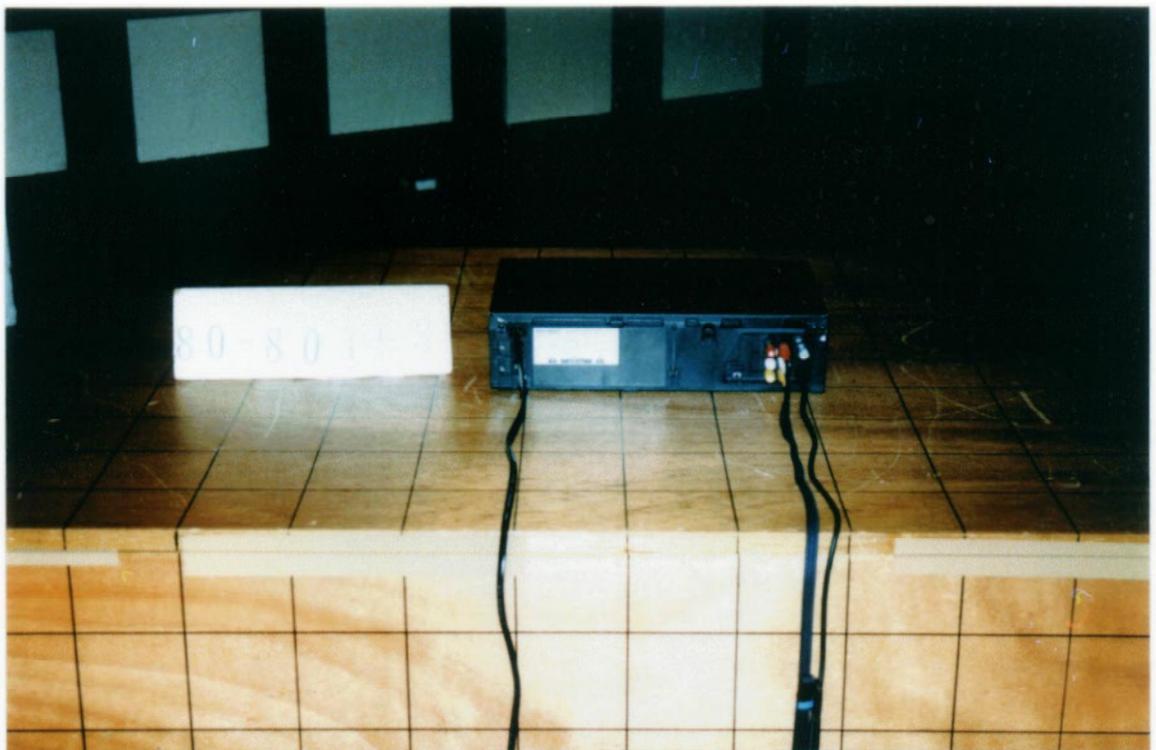

2. Emission Limitation: [§15.231(c)]

Measurement Method Employed: By using a spectrum analyzer with a vertical antenna for picking up the signal, the measurements of the fundamental frequency were made under the following transmitting modes of the EUT.

Measurements Results :

Specified Limits: 0.25 % of the Fundamental Frequency

$$390 \text{ MHz} \times 0.0025 = 975 \text{ kHz}$$


Refer to the attached graphs.

## Emission Limitation


FCC ID : APYTCG037

Model : VC-H998U

Mode of EUT : Transmit

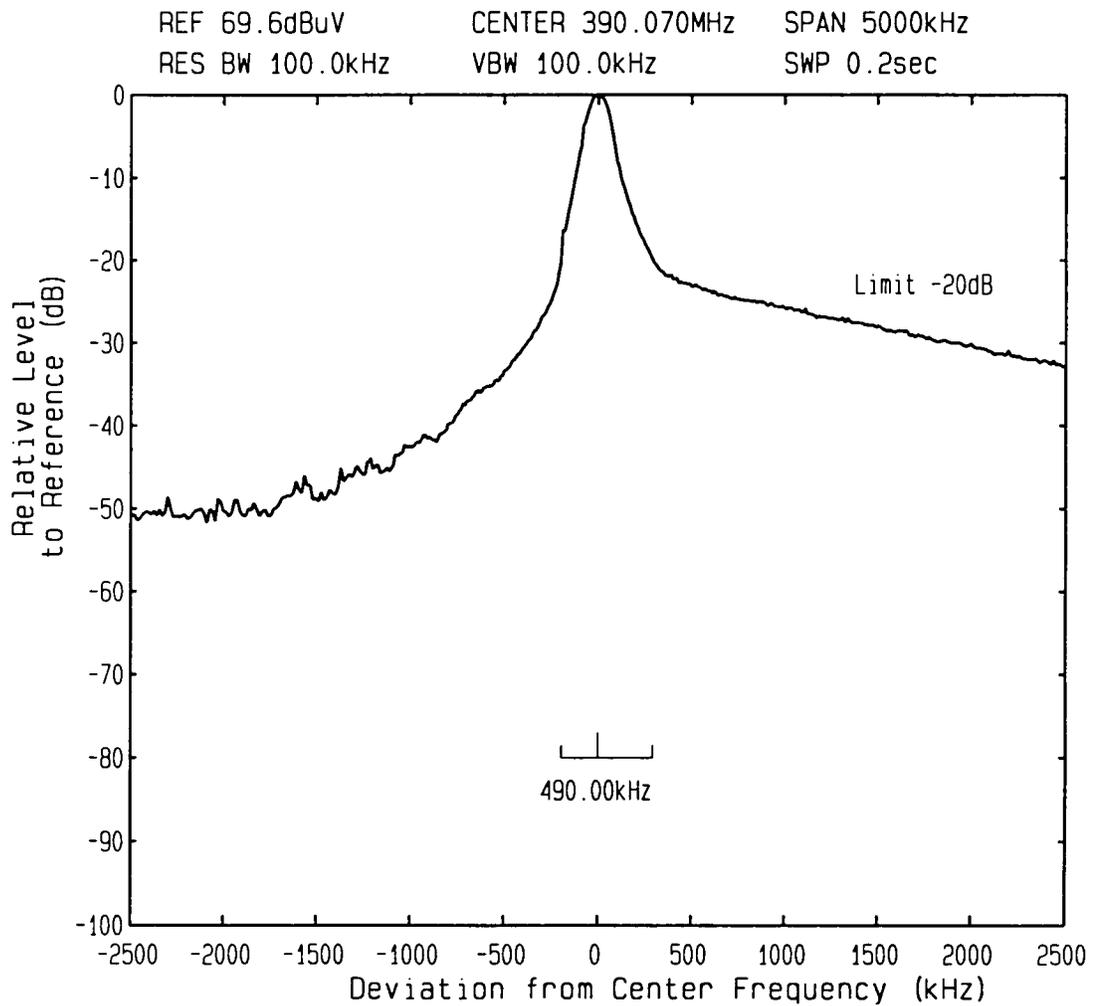

## MESUREMENT SET-UP FOR BAND WIDTH

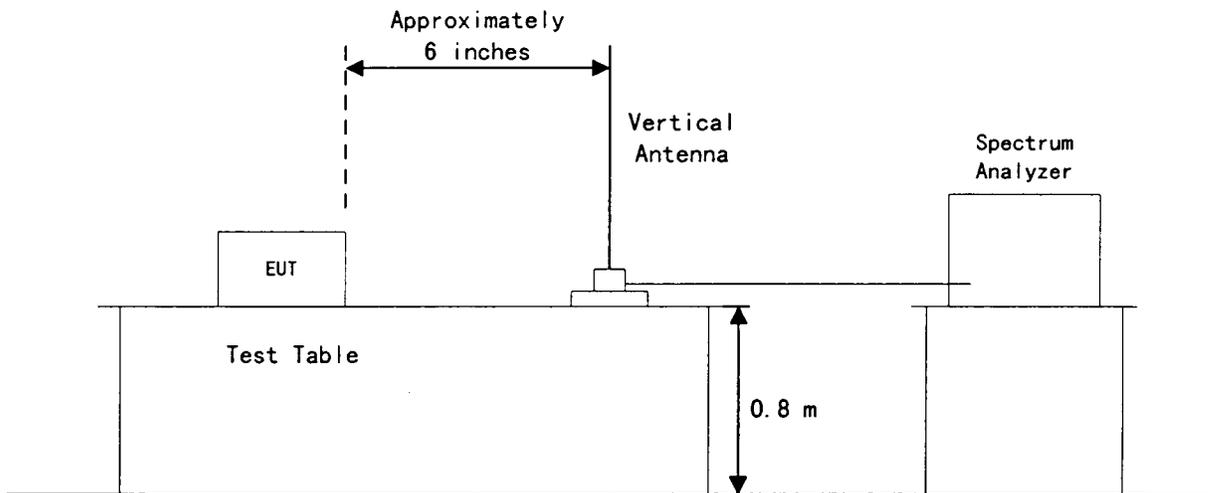

## 3. Power Line Conducted Interference Voltage : [§15.207]


Frequency (MHz)	LISN Factor (dB)	Meter Reading(dB)		Results (dB/uV)	
		One end & grounded	Other end & Grounded	One end & grounded	Other end & Grounded
0.45	0.2	35.4	35.4	35.6	35.6
0.50	0.2	33.4	33.5	33.6	33.7
0.60	0.2	29.9	30.0	30.1	30.2
0.70	0.2	27.3	27.6	27.5	27.8
1.00	0.2	22.8	23.1	23.0	23.3
1.70	0.2	21.3	19.4	21.5	19.6
3.17	0.2	24.3	21.7	24.5	21.9
5.13	0.2	10.3	8.4	10.5	8.6
6.35	0.2	9.5	4.1	9.7	4.3
8.56	0.2	8.9	4.4	9.1	4.6
9.04	0.2	10.2	3.0	10.4	3.2
10.27	0.2	9.1	2.5	9.3	2.7
12.23	0.2	8.1	5.2	8.3	5.4
15.67	0.3	8.8	5.4	9.1	5.7
18.56	0.4	13.3	10.2	13.7	10.6
19.84	0.4	12.6	9.2	13.0	9.6
22.29	0.4	9.4	7.5	9.8	7.9
24.50	0.5	10.8	9.5	11.3	10.0
24.99	0.5	12.9	10.9	13.4	11.4
26.96	0.5	16.2	15.1	16.7	15.6
28.64	0.6	19.4	18.7	20.0	19.3
29.93	0.6	16.6	15.8	17.2	16.4

## CONDUCTED RADIO NOISE MEASUREMENTS


MODEL NO.: VC-H998U

FCC ID : APYTCG037

Function of EUT : TX

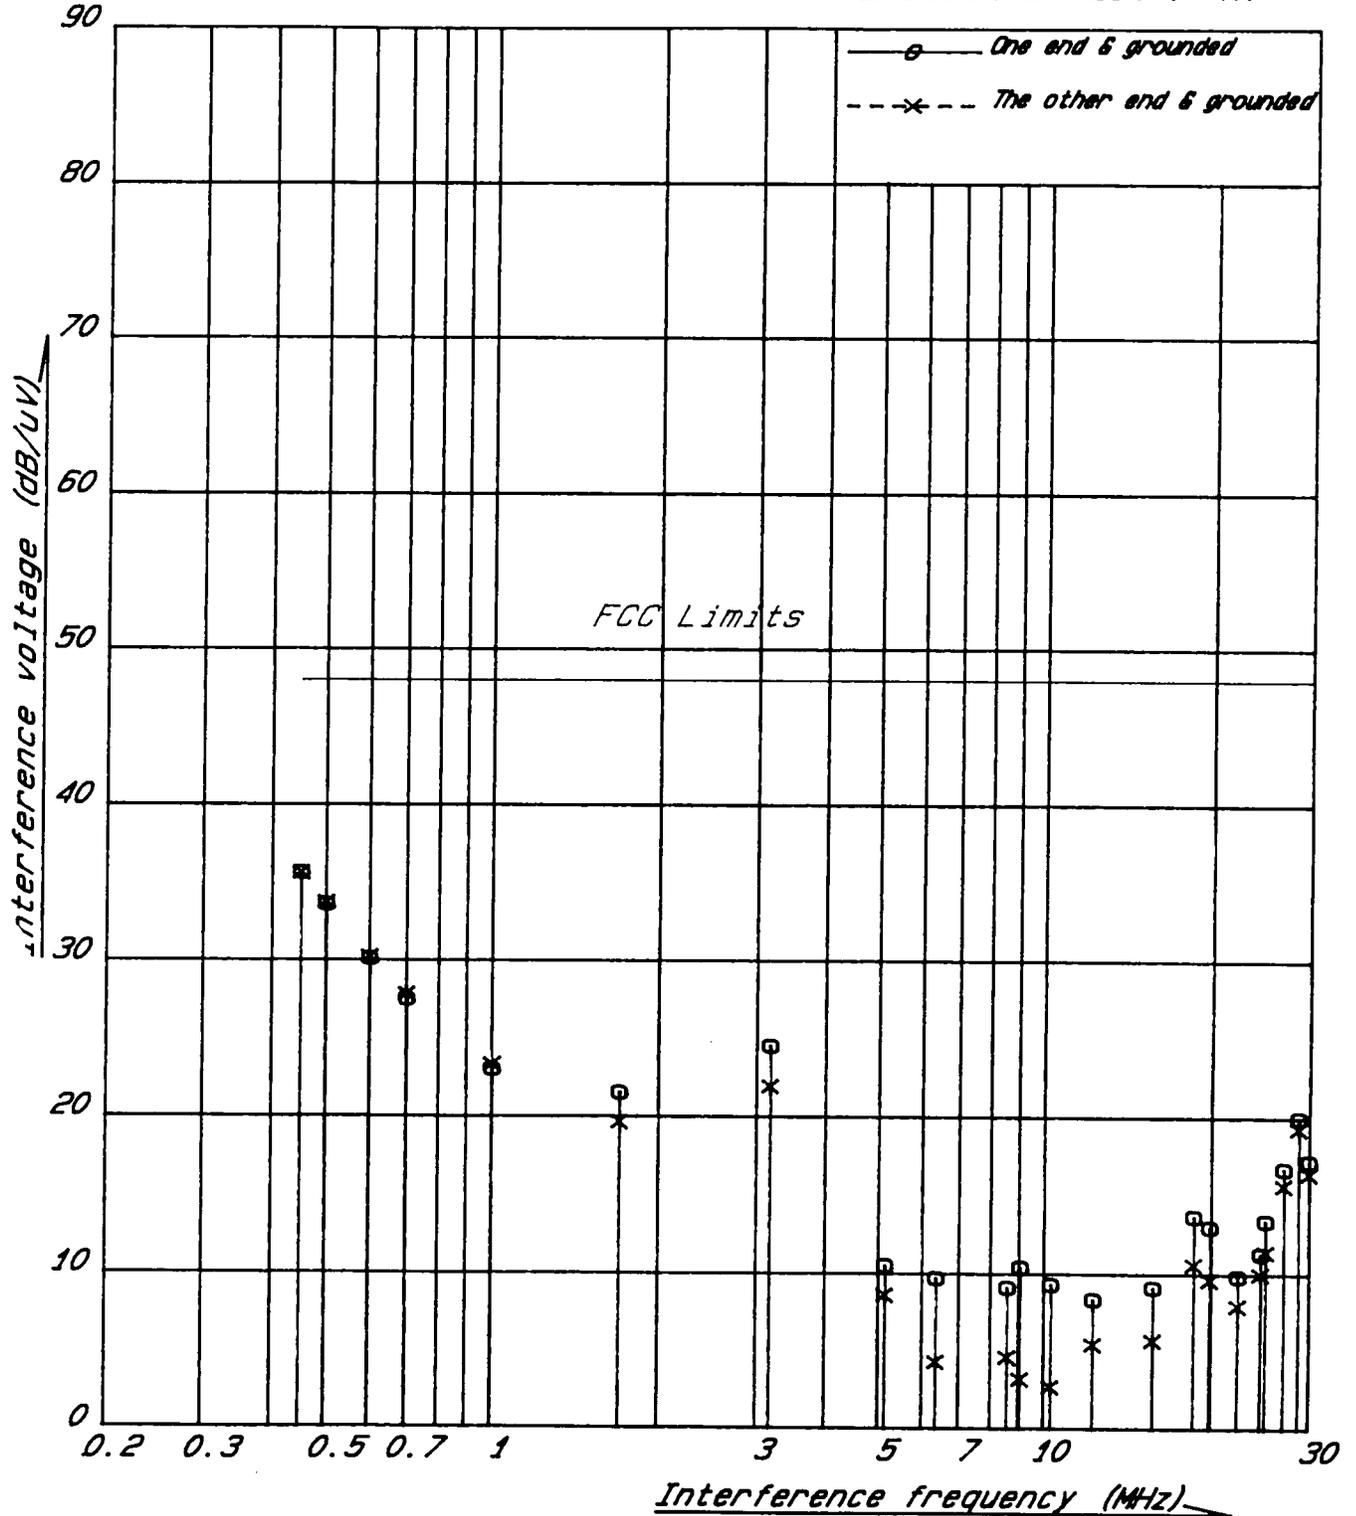

## MEASUREMENT SET-UP FOR LINE CONDUCTED RF VOLTAGE

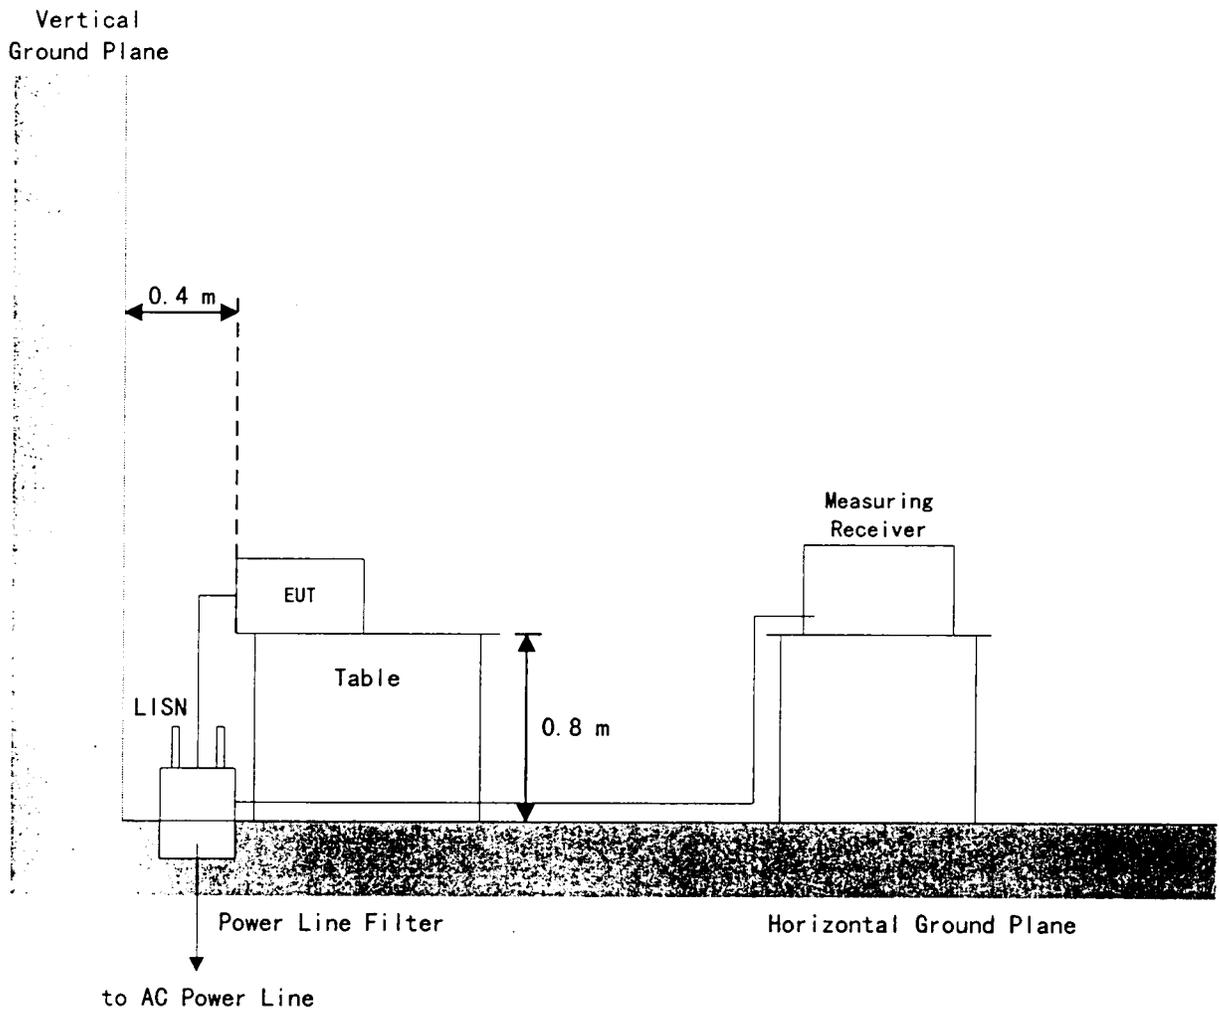

Configuration of EUT



## LIST OF MEASUREMENT EQUIPMENT

<u>Equipment (Model No.)</u>	<u>Manufacturer</u>	<u>Date of Cal.</u>
1. Field Strength Meter		
ESVP	Rohde & Schwarz	May 1998
ESH3	Rohde & Schwarz	May 1998
2. Spectrum Analyzer		
8566B	Hewlett Packard Inc.	April 1998
3. Tuned Dipole Antenna		
KBA-511	Kyoritsu Electrical Works	November 1997
KBA-611	Kyoritsu Electrical Works	November 1997
4. Vertical Antenna		
91972-2	Stoddard Aircraft Radio Co., Ltd.	-
5. Log-periodic Antenna		
HL 025	Rohde & Schwarz	November 1997
6. LISN		
KNW-407	Kyoritsu	April 1998