

*FCC PART 15, SUBPART B
CLASS B TEST REPORT
TEST METHOD: ANSI C63.4-1992
LIMITS: CISPR 22 CLASS B*

for
PS/2 MULTIFUNCTION KEYBOARD
Model: RT3500
FCC ID: AQ6-356880COB

Prepared for

PEOPLE PC
100 PINE STREET, SUITE 1100
SAN FRANCISCO, CA 94111

COMPATIBLE ELECTRONICS INC.
2337 TROUTDALE DRIVE
AGOURA, CALIFORNIA 91301
(818) 597-0600

DATE: JUNE 26, 2000

	REPORT BODY	APPENDICES				TOTAL
		<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	
PAGES	16	2	2	8	9	37

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	4
1. PURPOSE	5
2. ADMINISTRATIVE DATA	6
2.1 Location of Testing	6
2.2 Traceability Statement	6
2.3 Cognizant Personnel	6
2.4 Date Test Sample was Received	6
2.5 Disposition of the Test Sample	6
2.6 Abbreviations and Acronyms	6
3. APPLICABLE DOCUMENTS	7
4. Description of Test Configuration	8
4.1 Description of Test Configuration - EMI	8
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 EMI Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
7. Test Procedures	13
7.1 RF Emissions	13
7.1.1 Conducted Emissions Test	13
7.1.2 Radiated Emissions Test	14
7.1.3 RF Emissions Test Results	15
8. CONCLUSIONS	16



LIST OF APPENDICES

APPENDIX	TITLE
A	Modifications to the EUT
B	Additional Models Covered Under This Report
C	Diagrams, Charts and Photos <ul style="list-style-type: none"> • Test Setup Diagrams • Antenna and Effective Gain Factors • Radiated and Conducted Emissions Photos
D	Data Sheets

LIST OF TABLES

TABLE	TITLE
1	Conducted Emissions Test Results
2	Radiated Emissions Test Results

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Plot Map And Layout of Test Site



GENERAL REPORT SUMMARY

This electromagnetic emission report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product endorsement by NVLAP or any other agency of the U.S. Government.

Device Tested: PS/2 Multifunction Keyboard
 Model: RT3500
 S/N: None

Product Description: This is a PS/2 Multifunction Keyboard used for data input on a computer.

Modifications: The EUT was not modified during the testing.

Manufacturer: NMB Technologies, Inc.
 9730 Independence Avenue
 Chatsworth, CA 91311

Test Date: June 13, 2000

Test Specifications: EMI requirements
 FCC Title 47, Part 15 Subpart B, CLASS B per CISPR 22 Limits
 Test Procedure: ANSI C63.4: 1992.

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz.	Complies with the Class B limits of CISPR 22 as called out in FCC Title 47, Part 15 Subpart B.
2	Radiated RF Emissions, 30 MHz - 1000 MHz.	Complies with the Class B limits of CISPR 22 as called out in FCC Title 47, Part 15 Subpart B.



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the PS/2 Multifunction Keyboard Model: RT3500. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4: 1992. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by C.I.S.P.R. Publication 22 for Information Technology Equipment from 150 kHz to 1 GHz. Under paragraph G of Section 15.109 of the Code of Federal Regulations Title 47, part 15 of the FCC rules, the FCC accepts the international standards set forth in C.I.S.P.R. Publication 22.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 2337 Troutdale Drive, Agoura, California 91301.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

NMB Technologies, Inc.

Jamin Pandana	Electrical Engineer
John Guo	Manager, Electronic Engineering

Compatible Electronics Inc.

Ruby A. Hall	Test Engineer
André D. Khan	Test Technician
Jeff S. Klinger	Lab Manager

2.4 Date Test Sample was Received

The test sample was received on Jun. 13, 2000.

2.5 Disposition of the Test Sample

The test sample remains at Compatible Electronics, Inc.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network



3.**APPLICABLE DOCUMENTS**

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
CISPR 22 1993	Limits and methods of measurement of radio interference characteristics of information technology equipment.
CISPR 16 1993	Specification for radio disturbance and immunity measuring apparatus and methods.
FCC Title 47, Subpart B.	FCC Rules - Radio frequency devices (including digital devices).
ANSI C63.4 1992	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - EMI

The EUT was configured in a tabletop configuration. The EUT was connected to a Computer via the Keyboard port. A Monitor, Modem, Printer and Mouse were also connected to the Computer via the Video, Serial, Parallel and Mouse ports respectively. The EUT was tested sending data (capital Hs) via keystroke.

The EUT was operating in the above configuration sending Hs via keystroke. The cables were moved to maximize the emissions. The final conducted as well as radiated data was taken in this mode of operation. All initial investigations were performed with the spectrum analyzer in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix C.



4.1.1

Cable Construction and Termination

Cable 1

This is a 1.5 meter foil shielded round cable connecting the EUT to the Computer. It has a 4 pin Mini DIN metallic connector at the Computer end, and is hardwired at the EUT end. The shield of the cable was grounded to the chassis via the connector.

Cable 2

This is a 1.5 meter braid and foil shielded round cable connecting the Monitor to the Computer. It has a D-15 pin metallic connector at the Computer end, and is hardwired at the Monitor end. The shield of the cable was grounded to the chassis via the connector. The cable was bundled to a length of 1 meter.

Cable 3


This is a 1.5 meter braid and foil shielded round cable connecting the Printer to the Computer. It has a 36 pin metallic Centronics connector at the Printer end, and a D-25 pin metallic connector at the Computer end. The shield of the cable was grounded to the chassis via the connectors. The cable was bundled to a length of 1 meter.

Cable 4

This is a 1.5 meter braid and foil shielded round cable connecting the Modem to the Computer. It has a D-25 pin metallic connector at the Modem end, and a D-9 pin metallic connector at the Computer end. The shield of the cable was grounded to the chassis via the connectors.

Cable 5

This is a 2 meter foil shielded round cable connecting the Mouse to the Computer. It has a 6 pin Mini DIN metallic connector at the Computer end, and is hardwired at the Mouse end. The shield of the cable was grounded to the chassis via the connector.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

EQUIPMENT TYPE	MANUFACTURER	MODEL	SERIAL NUMBER
PS/2 MULTIFUNCTION KEYBOARD (EUT)	NMB TECHNOLOGIES, INC.	RT3500	None FCC ID: AQ6-356880COB
COMPUTER	HEWLETT PACKARD	PAVILION 6644F	KR01436228
MONITOR	VIEWSONIC	1449	3742968085
MODEM	HAYES	231AA	A05031083453
PRINTER	HEWLETT PACKARD	C2162A	SG49R130MP
MOUSE	HEWLETT PACKARD	M-S34	LZC01204099



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Spectrum Analyzer	Hewlett Packard	8566A	27029A04566	Jun. 19, 1999	Jun. 19, 2000
Quasi-Peak Adapter	Hewlett Packard	85650A	2648A15161	Jun. 19, 1999	Jun. 19, 2000
Preamplifier	Com Power	PA-102	01249	Apr. 10, 2000	Apr. 10, 2001
RF Attenuator	Hewlett Packard	HP8491A	63334	Apr. 11, 2000	Apr. 11, 2001
LISN (EUT)	Com Power	LI-215	02030	Sep. 27, 1999	Sep. 27, 2000
LISN (Accessory)	Com Power	LI-200	01777	N/A	N/A
LISN (Accessory)	Com Power	LI-200	01779	N/A	N/A
Biconical Antenna	Com Power	AB-100	01535	Apr. 11, 2000	Apr. 11, 2001
Log Periodic Antenna	Com Power	AL-100	A101	Apr. 11, 2000	Apr. 11, 2001
Antenna Mast	Com Power	AM-400	N/A	N/A	N/A
Turntable	Com Power	TT-106A	N/A	N/A	N/A
Computer	Hewlett Packard	Pavilion 4530	US91912022	N/A	N/A
Printer	Epson	P950A	A5PY290451	N/A	N/A



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and 7.1.2 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was grounded only through the Computer's chassis.



7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 RF Emissions

7.1.1 Conducted Emissions Test

The Spectrum Analyzer was used as a measuring meter along with the quasi-peak adapter. The data was collected with the Spectrum Analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak was used only where indicated in the data sheets. A 10 dB attenuation pad was used for the protection of the Spectrum Analyzer input stage, and the Spectrum Analyzer offset was adjusted accordingly to read the actual data measured. The LISN output was read by the Spectrum Analyzer. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for the conducted emissions test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4: 1992. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The initial test data was taken in manual mode while scanning the frequency ranges of 0.15 MHz to 1.6 MHz, 1.6 MHz to 5 MHz and 5 MHz to 30 MHz. The conducted emissions from the EUT were maximized for operating mode as well as cable and peripheral placement. Once a predominant frequency (within 12 dB of the limit) was found, it was more closely examined with the spectrum analyzer span adjusted to 1 MHz.

The final data was collected under program control by the computer in several overlapping sweeps by running the Spectrum Analyzer at a minimum scan rate of 10 seconds per octave. The six highest emissions are listed in Table 1.



7.1.2

Radiated Emissions Test

The spectrum analyzer was used as a measuring meter along with a quasi-peak adapter. A Preamplifier was used to increase the sensitivity of the instrument. The Spectrum Analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. This final reading is then recorded automatically by the Computer's automated data recording program, which takes into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The quasi-peak was used only for those readings, which are marked accordingly on the data sheets. The effective measurement bandwidth used for the radiated emissions test was 120 kHz.

Broadband biconical and log periodic antennas were used as transducers during the measurement. The biconical antenna was used from 30 MHz to 300 MHz, and the log periodic antenna was used from 300 MHz to 1 GHz. The frequency spans were wide (30 MHz to 88 MHz, 88 MHz to 216 MHz, 216 to 300 MHz and 300 MHz to 1 GHz) during preliminary investigations. The final data was taken with a frequency span of 1 MHz. Furthermore, the frequency span was reduced during the preliminary investigations as deemed necessary.

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 1992. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength).

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 10 meter test distance to obtain final test data. The six highest emissions are listed in Table 2.



7.1.3 RF Emissions Test Results

Table 1.0 CONDUCTED EMISSION RESULTS (110V)
PS/2 MULTIFUNCTION KEYBOARD Model: RT3500

Frequency MHz	Emission Level* dBuV	Average Specification Limit dBuV	Delta dB
0.228	48.39	52.52	-4.13
9.258	44.92	50.00	-5.08
9.718	44.94	50.00	-5.06
9.822	46.17	50.00	-3.83
9.927	45.96	50.00	-4.04
10.031	45.36	50.00	-4.64

Table 2.0 RADIATED EMISSION RESULTS
PS/2 MULTIFUNCTION KEYBOARD Model: RT3500

Frequency MHz	Meter* Reading dBuV/m	Cable loss** dB/m	Antenna Factor ** dB/m	Amplifier Gain ** dB	Dist. Factor dB	Corrected Reading dBuV/m	Spec. Limit dBuV/m	Delta dB
32.49	43.80	1.60	14.40	36.52	0	23.28	30	-6.72
64.62	48.70	1.95	9.54	36.70	0	23.48	30	-6.52
68.26	50.13#	1.98	9.23	36.70	0	24.65	30	-5.35
69.88	52.00	2.00	9.10	36.70	0	26.40	30	-3.60
110.58	48.30	2.38	10.28	36.42	0	24.55	30	-5.45
200.05	40.70	3.20	15.70	36.10	0	23.50	30	-6.50

Notes:

- * The complete emissions data is given in Appendix D of this report.
- ** The factors for the antenna and preamplifier effective gain, which includes the amplifier gain and cable loss, are attached in [Appendix C](#) of this report.
- # Quasi-Peak Reading
- A Average Reading



8. CONCLUSIONS

The PS/2 Multifunction Keyboard Model: RT3500 meets all of the **Class B** specification limits defined by C.I.S.P.R. Publication 22 for Information Technology Equipment from 150 kHz to 1 GHz. Under paragraph G of section 15.109 of the Code of Federal Regulations Title 47, Part 15, of the FCC Rules, the FCC accepts the international standards set forth in C.I.S.P.R. Publication 22.



APPENDIX A

MODIFICATIONS TO THE EUT



MODIFICATIONS TO THE EUT

There were no modifications made to the EUT during the test.



APPENDIX B

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***



ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

PS/2 MULTIFUNCTION KEYBOARD

Model: RT3500

FCC ID: AQ6-356880COB

There were no additional models covered under this report.



APPENDIX C

DIAGRAMS, CHARTS AND PHOTOS







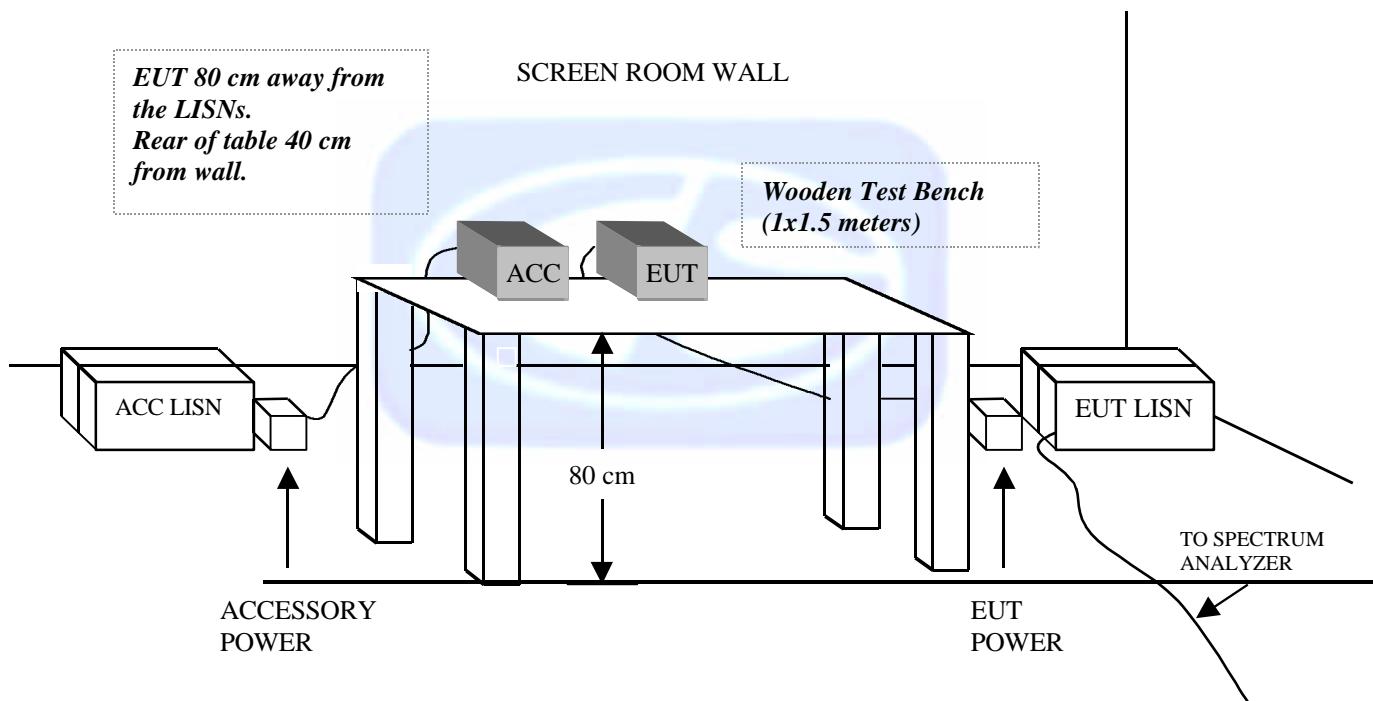
FIGURE 1: CONDUCTED EMISSIONS TEST SETUP

FIGURE 2: PLOT MAP AND LAYOUT OF RADIATED SITE

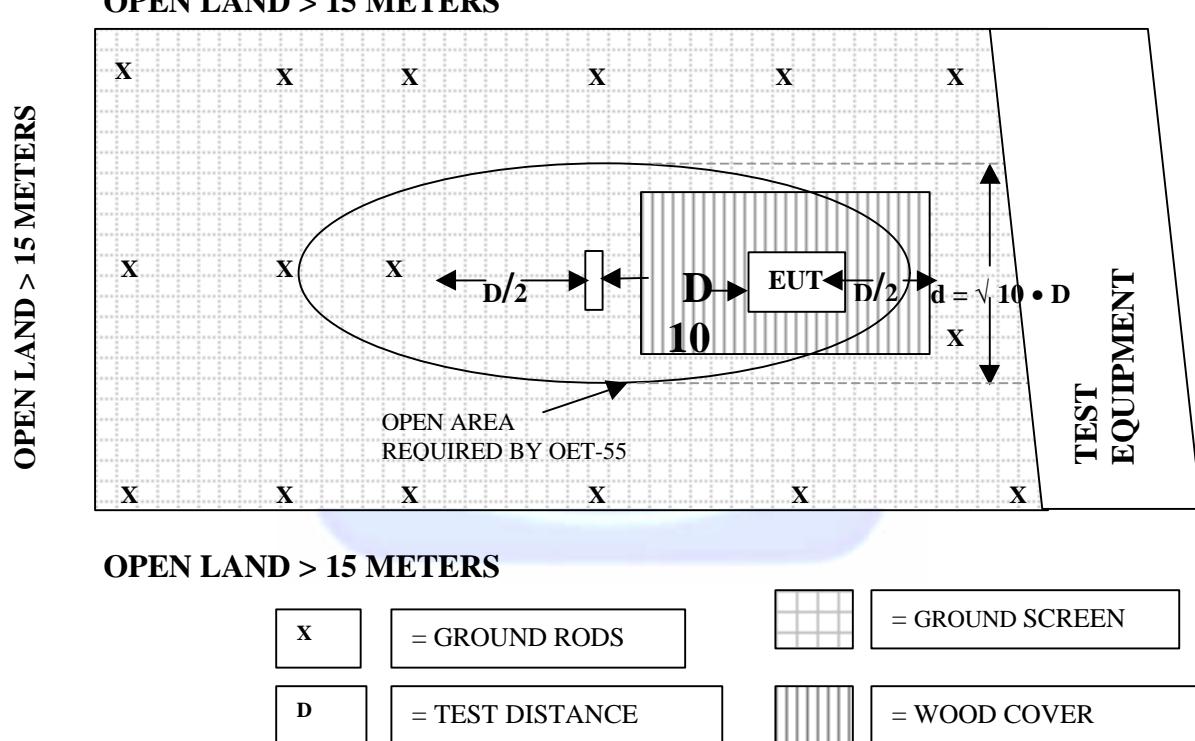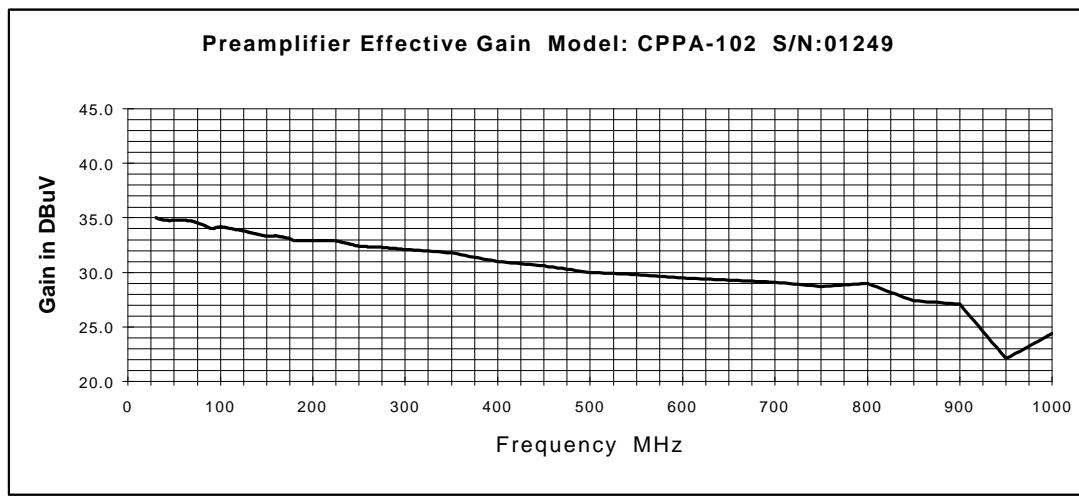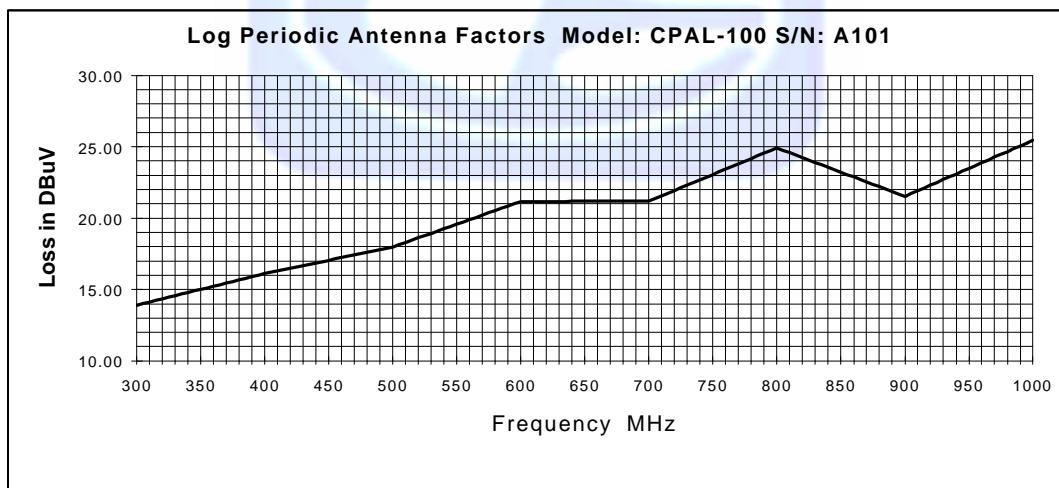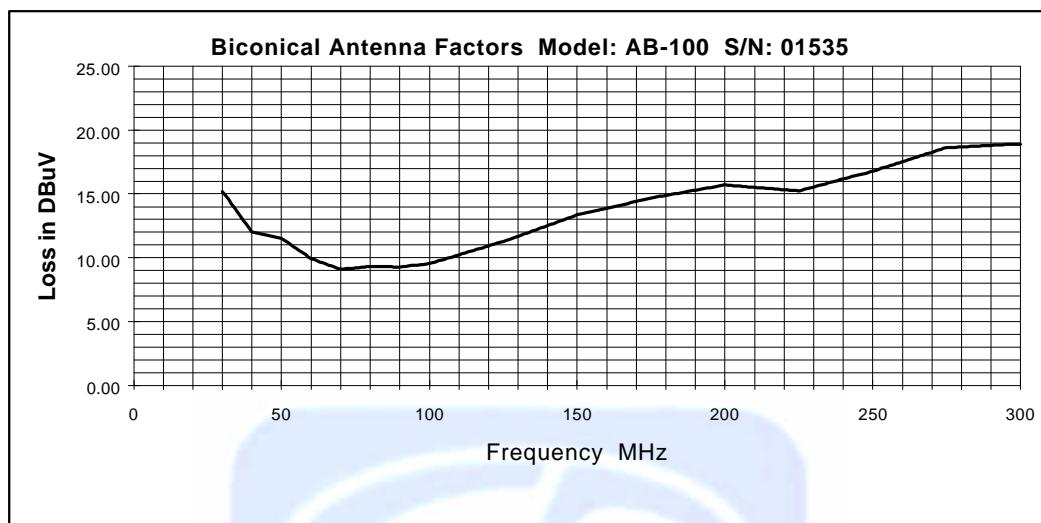

**FRONT VIEW**

NMB TECHNOLOGIES, INC.
PS/2 MULTIFUNCTION KEYBOARD
Model: RT3500

FCC CLASS B USING CISPR LIMITS - RADIATED EMISSIONS - 6-13-00

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



**REAR VIEW**

NMB TECHNOLOGIES, INC.
PS/2 MULTIFUNCTION KEYBOARD
Model: RT3500

FCC CLASS B USING CISPR LIMITS - RADIATED EMISSIONS - 6-13-00

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



**FRONT VIEW**

NMB TECHNOLOGIES, INC.
PS/2 MULTIFUNCTION KEYBOARD
Model: RT3500

FCC CLASS B USING CISPR LIMITS - CONDUCTED EMISSIONS - 6-13-00

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



**REAR VIEW**


NMB TECHNOLOGIES, INC.
PS/2 MULTIFUNCTION KEYBOARD
Model: RT3500

FCC CLASS B USING CISPR LIMITS - CONDUCTED EMISSIONS - 6-13-00

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



APPENDIX D
DATA SHEETS

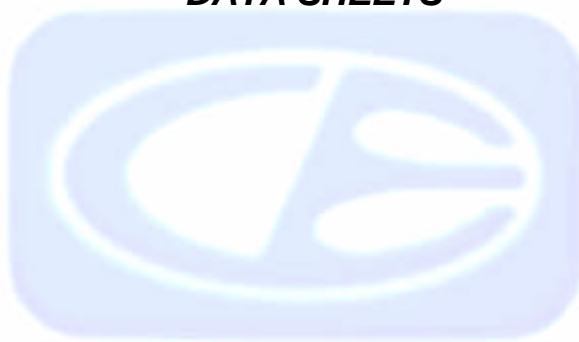



Test location: Compatible Electronics

Customer : NMB TECHNOLOGIES CORP.

Manufacturer : SAME

EUT name : KEYBOARD

Specification: FCC B Test distance: 10.0 mtrs

Distance correction factor($20 \log(\text{test/spec})$)

Test Mode : CISPR 22B LIMITS

QUALIFICATION SCAN

TEST ENG. A.KHAN

TEMP:90 HUMID:60%

Date : 6/13/2000

Time : 10.03

Model: RT3500

Lab: F

: 0.00

Pol	Freq	Rdng	Cable loss	Ant factor	Amp gain	Cor'd rdg = R	limit = L	Delta R-L
	MHz	dBuV	dB	dB	dB	dBuV	dBuV/m	dB
1V	31.94	41.50	1.58	14.58	36.52	21.13	30.00	-8.87
2V	32.49	43.80	1.60	14.40	36.52	23.28	30.00	-6.72
3V	44.54	41.20	1.89	11.80	36.65	18.25	30.00	-11.75
4V	50.55	41.20	1.90	11.44	36.70	17.84	30.00	-12.16
5V	62.66	47.70	1.93	9.70	36.70	22.63	30.00	-7.37
6V	64.62	48.70	1.95	9.54	36.70	23.48	30.00	-6.52
7V	68.27	53.20	1.98	9.23	36.70	27.72	30.00	-2.28
8V	68.26	50.13	1.98	9.23	36.70	24.65Qp	30.00	-5.35
9V	69.88	52.00	2.00	9.10	36.70	26.40	30.00	-3.60
10V	74.40	44.60	2.04	9.19	36.61	19.22	30.00	-10.78
11V	79.86	44.20	2.10	9.32	36.50	19.11	30.00	-10.89
12V	82.36	46.00	2.15	9.31	36.45	21.01	30.00	-8.99
13V	84.85	47.90	2.20	9.30	36.40	22.99	30.00	-7.01
14V	110.08	43.20	2.38	10.24	36.42	19.40	30.00	-10.60
15V	115.78	44.50	2.43	10.64	36.37	21.19	30.00	-8.81
16V	121.03	41.10	2.47	11.00	36.33	18.24	30.00	-11.76
17V	127.84	41.20	2.55	11.52	36.29	18.97	30.00	-11.03
18V	132.03	40.30	2.61	11.86	36.27	18.50	30.00	-11.50
19V	144.54	39.30	2.81	12.90	36.22	18.79	30.00	-11.21
20V	150.39	42.70	2.90	13.37	36.20	22.77	30.00	-7.23
21V	156.27	40.70	2.84	13.68	36.17	21.04	30.00	-8.96
22V	200.05	40.70	3.20	15.70	36.10	23.50	30.00	-6.50
23V	240.15	37.30	3.38	16.17	35.98	20.88	37.00	-16.12
24H	64.48	40.10	1.94	9.55	36.70	14.89	30.00	-15.11
25H	68.83	40.20	1.99	9.19	36.70	14.68	30.00	-15.32
26H	110.58	48.30	2.38	10.28	36.42	24.55	30.00	-5.45
27H	113.47	41.10	2.41	10.48	36.39	17.59	30.00	-12.41
28H	118.49	40.40	2.45	10.83	36.35	17.32	30.00	-12.68
29H	124.56	39.80	2.50	11.25	36.30	17.24	30.00	-12.76
30H	133.08	38.90	2.63	11.95	36.27	17.21	30.00	-12.79

Test location: Compatible Electronics

Customer : NMB TECHNOLOGIES CORP.

Date : 6/13/2000

Manufacturer : SAME

Time : 10.03

EUT name : KEYBOARD

Model: RT3500

Specification: FCC B Test distance: 10.0 mtrs

Lab: F

Distance correction factor(20*log(test/spec))

: 0.00

Test Mode : CISPR 22B LIMITS

QUALIFICATION SCAN

TEST ENG. A.KHAN

TEMP:90 HUMID:60%

Pol	Freq	Rdng	Cable	Ant	Amp	Cor'd	limit	Delta	
		MHz	dBuV	loss dB	factor dB	gain dB	rdg = R dBuV	= L dBuV/m	R-L dB
31H	155.23	38.30	2.85	13.63	36.18	18.59	30.00	-11.41	
32H	166.42	40.30	2.89	14.22	36.13	21.27	30.00	-8.73	
33H	183.60	38.50	3.20	15.02	36.10	20.62	30.00	-9.38	
34H	220.40	39.60	3.20	15.32	36.10	22.02	30.00	-7.98	
35H	248.88	39.70	3.49	16.71	35.91	23.99	37.00	-13.01	



**COMPATIBLE
ELECTRONICS**

NMB TECHNOLOGIES CORP.
KEYBOARD RT3500
LINE 110V

6/13/2000 10:33:26

TEST ENGINEER : Andre Khan
A.KHAN

7 highest peaks above -50.00 dB of AVERAGE limit line

Peak criteria : 3.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.150	54.86	56.00	-1.14 - SEE AVERAGE READING
2	9.927	45.96	50.00	-4.04
3	0.228	48.39	52.52	-4.13
4	10.031	45.36	50.00	-4.64
5	9.718	44.94	50.00	-5.06
6	9.258	44.92	50.00	-5.08
7	9.822	44.85	50.00	-5.15



**COMPATIBLE
ELECTRONICS**

NMB TECHNOLOGIES CORP.
KEYBOARD RT3500
LINE 110V

TEST ENGINEER : Andre Khan
A.KHAN

4 highest peaks above -50.00 dB of AVERAGE limit line

Peak criteria : 0.10 dB, Curve : Average


Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.153	48.15	55.82	-7.66
2	0.150	47.39	56.00	-8.61
3	0.192	44.80	53.97	-9.16
4	0.187	44.96	54.15	-9.19



COMPATIBLE
ELECTRONICS

6/13/2000 10:33:26

EMISSION LEVEL [dB_{UV}] PEAK
Graph for Peak & Average

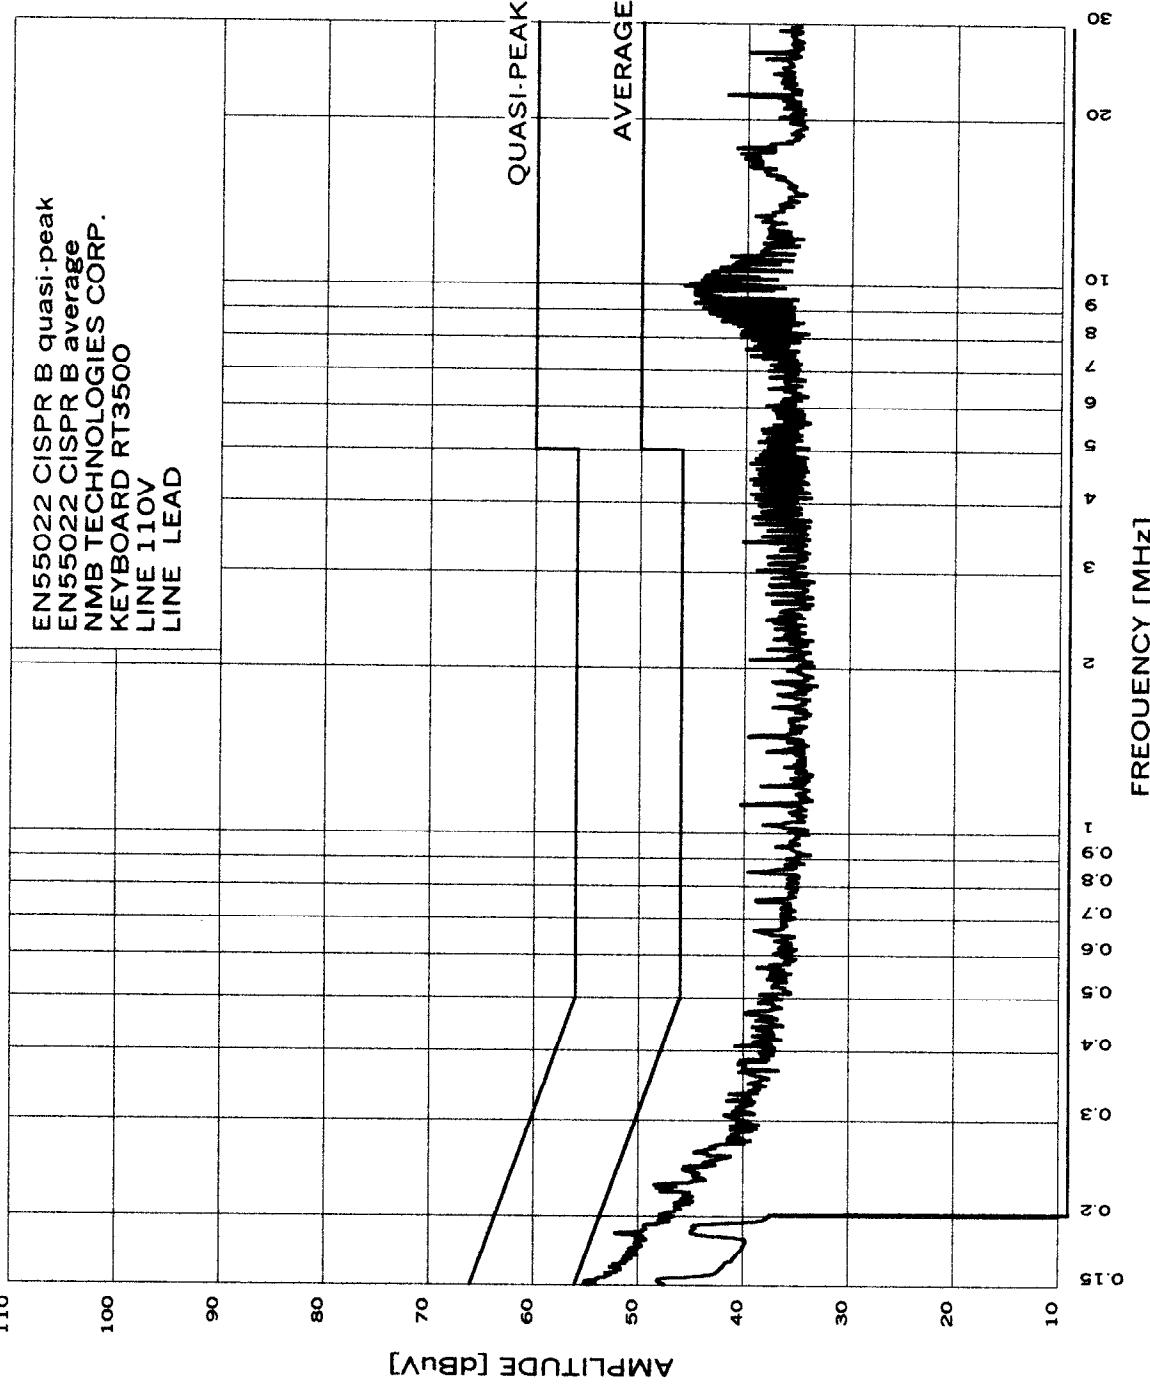



**COMPATIBLE
ELECTRONICS**

NMB TECHNOLOGIES CORP.
KEYBOARD RT3500
NEUTR. 110V

6/13/2000 10:43:59

TEST ENGINEER : Andrei Khan
A.KHAN

7 highest peaks above -50.00 dB of AVERAGE limit line

Peak criteria : 3.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.191	50.44	54.01	-3.57 - SEE AVERAGE READING
2	9.822	46.17	50.00	-3.83
3	9.927	45.58	50.00	-4.42
4	10.240	44.70	50.00	-5.30
5	9.456	44.45	50.00	-5.55
6	9.352	43.94	50.00	-6.06
7	0.150	40.92	56.00	-15.08



**COMPATIBLE
ELECTRONICS**

NMB TECHNOLOGIES CORP.
KEYBOARD RT3500
NEUTR. 110V

6/13/2000 10:43:59

TEST ENGINEER : Andre Khan
A.KHAN

4 highest peaks above -50.00 dB of AVERAGE limit line

Peak criteria : 0.10 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.192	39.75	53.97	-14.22
2	0.189	39.88	54.10	-14.22
3	0.153	34.77	55.82	-21.05
4	0.150	34.47	56.00	-21.53



COMPATIBLE
ELECTRONICS

6/13/2000 10:43:59

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

