



Engineering Solutions & Electromagnetic Compatibility Services

FCC & IC Class 2 Permissive Change Report

**Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA 24501**

Model: UNITY XG-100M MultiBand Mobile Radio

FCC ID: AQZ-XG-100M00

IC: 122D-XG100M00

April 24, 2013

Standards Referenced for this Report	
Part 2: 2012	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 90: 2012	Private Land Mobile Radio Services
TIA-102.CCAA August 2011	Two-Slot Time Division Multiple Access Transceiver Measurement Methods
TIA-102.CCAB October 2011	Two - Slot Time Division Multiple Access Transceiver Performance Recommendations
SRSP-500	Technical Requirements for Land Mobile and Fixed Radio Services Operating in the Bands 138-143.9875 MHz and 148.0125-174 MHz
RSS-119, Issue 11; June 2011	Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.41-960 MHz

Frequency Range (MHz)	Rated Transmit Power (W) (Conducted)	Frequency Tolerance (ppm)	Mode	Emission Designator (Transmit Mode)
136 – 174 (FCC/Federal) 138 – 174 (IC)	52.5	0.5	H-CPM TDMA	8K10DXW
380 – 520 (FCC/Federal) 406.1 – 430, 450 – 470 (IC)	52.5	0.5	H-CPM TDMA	8K10DXW
769 – 775, 799 – 805 (FCC) 768 – 776, 798 – 806 (IC)	26.3	0.5	H-CPM TDMA	8K10DXW
806 - 824	37.2	0.5	H-CPM TDMA	8K10DXW
851 - 869	37.2	0.5	H-CPM TDMA	8K10DXW

Report Prepared By: Daniel Baltzell

Document Number: 2012365

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	Test Result Summary	6
2	General Information	6
2.1	Test Facility	6
2.2	Related Submittal(s)/Grant(s)	6
2.3	Grant Notes	6
2.4	Tested System Details	7
3	FCC Rules and Regulations §90.1215(a) and §2.1046(a), IC RSS-119 5.4: Peak Output Power	9
3.1	Test Procedure.....	9
3.2	Test Data.....	9
4	FCC Rules and Regulations §2.1051: Spurious Emissions at Antenna Terminals; §90.210: Emissions Masks; RSS-119 §4.2: Transmitter Unwanted Emissions	11
4.1	Test Procedure.....	11
4.2	Test Data.....	11
5	FCC Rules and Regulations §2.1049(c)(1); §90.210; RSS-119 §5.8: Occupied Bandwidth	48
5.1	Test Procedure.....	48
5.2	Test Data.....	49
6	FCC Rules and Regulations Part §90.543(a): Emission Limitations: ACP Requirements; IC RSS-119 §4.3 Adjacent Channel Power (ACP) Measurement for Equipment in the Bands 764-776 MHz and 794-806 MHz.....	80
6.1	Test Procedure.....	80
6.2	Test Data.....	82
7	Conclusion	92

Table of Figures

Figure 2-1: Configuration of Tested System.....	8
---	---

Table of Tables

Table 2-1: Equipment Under Test (EUT).....	7
Table 2-2: Auxiliary Equipment	7
Table 3-1: RF Power Output: Modulated Carrier Output Power	9
Table 3-2: Test Equipment Used for Testing RF Power Output – Conducted	10
Table 4-1: Test Equipment Used for Testing Spurious Emissions.....	47
Table 5-1: Test Equipment Used for Testing Occupied Bandwidth	79
Table 6-1: ACP - 764.0125 MHz; H-CPM TDMA Mode (>400 kHz - RX Band).....	82
Table 6-2: ACP – 769.0125 MHz; H-CPM TDMA Mode (>400 kHz - RX Band).....	83
Table 6-3: ACP – 771.0000 MHz; H-CPM TDMA Mode (>400 kHz - RX Band).....	84
Table 6-4: ACP - 774.9875 MHz; H-CPM TDMA Mode (>400 kHz - RX Band).....	85
Table 6-5: ACP - 775.9875 MHz; H-CPM TDMA Mode (>400 kHz - RX Band).....	86
Table 6-6: ACP – 794.0125 MHz; H-CPM TDMA Mode (>400 kHz - RX Band).....	87
Table 6-7: ACP - 799.0125 MHz; H-CPM TDMA Mode (>400 kHz - RX Band).....	88
Table 6-8: ACP – 801.0000 MHz; H-CPM TDMA Mode (>400 kHz - RX Band).....	89
Table 6-9: ACP – 804.9875 MHz; H-CPM TDMA Mode (>400 kHz - RX Band).....	90
Table 6-10: ACP – 805.9875 MHz; H-CPM TDMA Mode (>400 kHz - RX Band).....	91
Table 6-11: Test Equipment Used for Testing ACP Requirements.....	92

Table of Plots

Plot 4-1: Conducted Spurious Emissions – H-CPM TDMA; 136.0125 MHz	12
Plot 4-2: Conducted Spurious Emissions – H-CPM TDMA; 138.0125 MHz	13
Plot 4-3: Conducted Spurious Emissions – H-CPM TDMA; 141.0000 MHz	14
Plot 4-4: Conducted Spurious Emissions – H-CPM TDMA; 143.9875 MHz	15
Plot 4-5: Conducted Spurious Emissions – H-CPM TDMA; 148.0125 MHz	16
Plot 4-6: Conducted Spurious Emissions – H-CPM TDMA; 150.0125 MHz	17
Plot 4-7: Conducted Spurious Emissions – H-CPM TDMA; 154.0125 MHz	18
Plot 4-8: Conducted Spurious Emissions – H-CPM TDMA; 162.0000 MHz	19
Plot 4-9: Conducted Spurious Emissions – H-CPM TDMA; 173.1875 MHz	20
Plot 4-10: Conducted Spurious Emissions – H-CPM TDMA; 173.9875 MHz	21
Plot 4-11: Conducted Spurious Emissions – H-CPM TDMA; 406.1125 MHz	22
Plot 4-12: Conducted Spurious Emissions – H-CPM TDMA; 418.0000 MHz	23
Plot 4-13: Conducted Spurious Emissions – H-CPM TDMA; 429.9875 MHz	24
Plot 4-14: Conducted Spurious Emissions – H-CPM TDMA; 450.0125 MHz	25
Plot 4-15: Conducted Spurious Emissions – H-CPM TDMA; 453.9875 MHz	26
Plot 4-16: Conducted Spurious Emissions – H-CPM TDMA; 456.0125 MHz	27
Plot 4-17: Conducted Spurious Emissions – H-CPM TDMA; 469.9875 MHz	28
Plot 4-18: Conducted Spurious Emissions – H-CPM TDMA; 511.9875 MHz	29
Plot 4-19: Conducted Spurious Emissions – H-CPM TDMA; 519.9875 MHz	30
Plot 4-20: Conducted Spurious Emissions – H-CPM TDMA; 764.0125 MHz	31
Plot 4-21: Conducted Spurious Emissions – H-CPM TDMA; 769.0125 MHz	32
Plot 4-22: Conducted Spurious Emissions – H-CPM TDMA; 771.0000 MHz	33
Plot 4-23: Conducted Spurious Emissions – H-CPM TDMA; 774.9875 MHz	34
Plot 4-24: Conducted Spurious Emissions – H-CPM TDMA; 775.9875 MHz	35

Plot 4-25:	Conducted Spurious Emissions – H-CPM TDMA; 794.0125 MHz	36
Plot 4-26:	Conducted Spurious Emissions – H-CPM TDMA; 799.0125 MHz	37
Plot 4-27:	Conducted Spurious Emissions – H-CPM TDMA; 801.0000 MHz	38
Plot 4-28:	Conducted Spurious Emissions – H-CPM TDMA; 804.9875 MHz	39
Plot 4-29:	Conducted Spurious Emissions – H-CPM TDMA; 805.9875 MHz	40
Plot 4-30:	Conducted Spurious Emissions – H-CPM TDMA; 806.0125 MHz	41
Plot 4-31:	Conducted Spurious Emissions – H-CPM TDMA; 815.0000 MHz	42
Plot 4-32:	Conducted Spurious Emissions – H-CPM TDMA; 823.9875 MHz	43
Plot 4-33:	Conducted Spurious Emissions – H-CPM TDMA; 851.0125 MHz	44
Plot 4-34:	Conducted Spurious Emissions – H-CPM TDMA; 860.0000 MHz	45
Plot 4-35:	Conducted Spurious Emissions – H-CPM TDMA; 868.9875 MHz	46
Plot 5-1:	Occupied Bandwidth – H-CPM TDMA; 136.0125 MHz; Mask D	49
Plot 5-2:	Occupied Bandwidth – H-CPM TDMA; 138.0125 MHz; Mask D	50
Plot 5-3:	Occupied Bandwidth – H-CPM TDMA; 141.0000 MHz; Mask D	51
Plot 5-4:	Occupied Bandwidth – H-CPM TDMA; 143.9875 MHz; Mask D	52
Plot 5-5:	Occupied Bandwidth – H-CPM TDMA; 148.0125 MHz; Mask D	53
Plot 5-6:	Occupied Bandwidth – H-CPM TDMA; 150.0125 MHz; Mask D	54
Plot 5-7:	Occupied Bandwidth – H-CPM TDMA; 154.0125 MHz; Mask D	55
Plot 5-8:	Occupied Bandwidth – H-CPM TDMA; 162.0000 MHz; Mask D	56
Plot 5-9:	Occupied Bandwidth – H-CPM TDMA; 173.1875 MHz; Mask D	57
Plot 5-10:	Occupied Bandwidth – H-CPM TDMA; 173.9875 MHz; Mask D	58
Plot 5-11:	Occupied Bandwidth – H-CPM TDMA; 406.1125 MHz; Mask D	59
Plot 5-12:	Occupied Bandwidth – H-CPM TDMA; 418.0000 MHz; Mask D	60
Plot 5-13:	Occupied Bandwidth – H-CPM TDMA; 429.9875 MHz; Mask D	61
Plot 5-14:	Occupied Bandwidth – H-CPM TDMA; 450.0125 MHz; Mask D	62
Plot 5-15:	Occupied Bandwidth – H-CPM TDMA; 453.9875 MHz; Mask D	63
Plot 5-16:	Occupied Bandwidth – H-CPM TDMA; 456.0125 MHz; Mask D	64
Plot 5-17:	Occupied Bandwidth – H-CPM TDMA; 469.9875 MHz; Mask D	65
Plot 5-18:	Occupied Bandwidth – H-CPM TDMA; 511.9875 MHz; Mask D	66
Plot 5-19:	Occupied Bandwidth – H-CPM TDMA; 519.9875 MHz; Mask D	67
Plot 5-20:	Occupied Bandwidth – H-CPM TDMA; 806.0125 MHz; Mask D	68
Plot 5-21:	Occupied Bandwidth – H-CPM TDMA; 815.0000 MHz; Mask D	69
Plot 5-22:	Occupied Bandwidth – H-CPM TDMA; 823.9875 MHz; Mask D	70
Plot 5-23:	Occupied Bandwidth – H-CPM TDMA; 851.0125 MHz; Mask D	71
Plot 5-24:	Occupied Bandwidth – H-CPM TDMA; 860.0000 MHz; Mask D	72
Plot 5-25:	Occupied Bandwidth – H-CPM TDMA; 868.9875 MHz; Mask D	73
Plot 5-26:	Occupied Bandwidth – H-CPM TDMA; 806.0125 MHz; Mask H	74
Plot 5-27:	Occupied Bandwidth – H-CPM TDMA; 815.0000 MHz; Mask G	75
Plot 5-28:	Occupied Bandwidth – H-CPM TDMA; 823.9875 MHz; Mask G	76
Plot 5-29:	Occupied Bandwidth – H-CPM TDMA; 851.0125 MHz; Mask H	77
Plot 5-30:	Occupied Bandwidth – H-CPM TDMA; 860.0000 MHz; Mask G	78
Plot 5-31:	Occupied Bandwidth – H-CPM TDMA; 868.9875 MHz; Mask G	79
Plot 6-1:	ACP - 764.0125 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)	82
Plot 6-2:	ACP - 769.0125 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)	83
Plot 6-3:	ACP - 771.0000 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)	84
Plot 6-4:	ACP - 774.9875 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)	85
Plot 6-5:	ACP - 775.9875 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)	86
Plot 6-6:	ACP - 794.0125 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)	87
Plot 6-7:	ACP - 799.0125 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)	88
Plot 6-8:	ACP - 801.0000 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)	89
Plot 6-9:	ACP - 804.9875 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)	90
Plot 6-10:	ACP - 805.9875 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)	91

Table of Appendixes

Appendix A: Description of Change.....	93
Appendix B: Agency Authorization Letter.....	94
Appendix C: IC Letters.....	95

1 Test Result Summary

Test	FCC Reference	IC Reference	Result
RF Power Output	2.1046(a), 90.541(b), 90.542(a)(6)	RSS-119 5.4	Complies
Spurious Emissions at Antenna Terminals	2.1046(a), 90.541(b), 90.542(a)(6)	RSS-119 5.4	Complies
Occupied Bandwidth/Emission Masks	2.1049(c)(1), 90.543(d)	RSS-119 5.5, 5.8	Complies

2 General Information

The following Class 2 Permissive Change Report is prepared on behalf of Harris Corporation in accordance with the Federal Communications Commission and Industry Canada rules and regulations. The Equipment Under Test (EUT) was UNITY XG-100M Radio Family; FCC ID: AQZ-XG-100M00, IC: 122D-XG100M00.

The purpose of this Class 2 Permissive Change is to add emission designator 8K10DXW (H-CPM TDMA).

All measurements contained in this application were conducted in accordance with the applicable sections of FCC Rules and Regulations CFR 47 Parts 2 and 90. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to, and approved by, the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.2 Related Submittal(s)/Grant(s)

The original FCC certification was granted May 24, 2011 (2011028). Class I permissive changes were dated September 26, 2011 (2011153), and February 2, 2012 (2012042). Class II permissive changes were granted October 24, 2011(2011157), December 15, 2011 (2011168), and November 13, 2012 (2012258). The original IC certification was granted May 23, 2011.

2.3 Grant Notes

Power is 52.5 W for VHF and UHF, 26.3 W for 700 Band, and 37.2 W for 800 Band.

2.4 Tested System Details

The test sample was received on April 3, 2013. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

The device was programmed for multiple test patterns using the H-CPM TDMA mode. All test patterns were investigated and found to be nearly identical from an emissions perspective.


Table 2-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
XG-100M Unity Mobile Radio	Harris Corporation	XG-100M	A40201008243	AQZ-XG-100M00	20881

Table 2-2: Auxiliary Equipment

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Audio Input/PTT Switch	Harris Corporation	N/A	N/A	N/A	17930
13.8 VDC Power Supply	Alinco	DM-330MW	N/A	DoC	901120

Figure 2-1: Configuration of Tested System

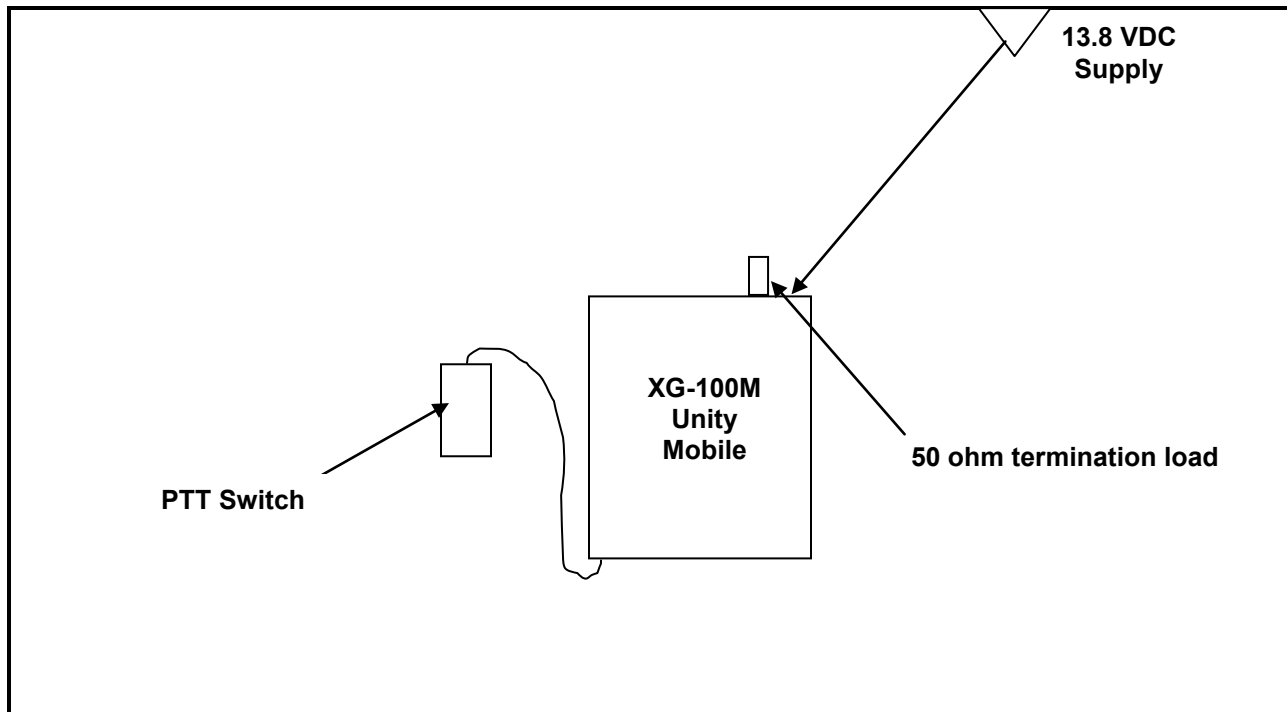

3 FCC Rules and Regulations §90.1215(a) and §2.1046(a), IC RSS-119 5.4: Peak Output Power

3.1 Test Procedure

TIA-102.CCAA August 2011, section 2.2.1, TIA-102.CCAB October 2011, section 3.2. The EUT was connected via an appropriate 50 ohm attenuator to a signal analyzer. An offset was used to account for any attenuation.

3.2 Test Data

Table 3-1: RF Power Output: Modulated Carrier Output Power

Frequency (MHz)	Power (dBm)	Power (W)
136.0125 (Federal)	47.2	52.5
138.0125 (IC)	47.2	52.5
141.0000 (IC)	47.2	52.5
143.9875 (IC)	47.1	51.3
148.0125 (IC)	47.1	51.3
150.0125 (FCC)	47.1	51.3
154.0125 (FCC)	47.1	51.3
162.0000 (FCC/IC)	47.1	51.3
173.1875 (FCC)	47.1	51.3
173.9875 (FCC/IC)	47.1	51.3
406.1125 (FCC/IC)	46.9	48.9
418.0000 (FCC/IC)	46.9	48.8
429.9875 (IC)	46.9	48.8
450.0125 (IC)	47.1	50.8
453.9875 (FCC/IC)	47.0	50.6
456.0125 (FCC)	47.1	51.1
469.9875 (FCC/IC)	47.0	50.0
511.9875 (FCC)	46.7	47.1
519.9875 (Federal)	46.6	45.5
764.0125 (IC)	44.2	26.3
769.0125 (FCC)	44.2	26.3
771.0000 (FCC/IC)	44.1	25.9
774.9875 (FCC)	44.3	26.6
775.9875 (IC)	44.3	26.7
794.0125 (IC)	44.3	26.7
799.0125 (FCC)	44.3	27.0
801.0000 (FCC/IC)	44.3	27.1
804.9875 (FCC)	44.3	27.2
805.9875 (IC)	45.6	36.1
806.0125 (FCC/IC)	45.6	36.1
815.0000 (FCC/IC)	45.6	36.3
823.9875 (FCC/IC)	45.6	36.6
851.0125 (FCC/IC)	45.6	36.0
860.0000 (FCC/IC)	45.5	35.6
868.9875 (FCC/IC)	45.5	35.1

* conducted antenna port power

Manufacturer's Rated Power: 52.5 W for VHF and UHF, 26.3 W for 700 Band, and 37.2 W for 800 Band

Table 3-2: Test Equipment Used for Testing RF Power Output – Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
901537	Aeroflex	48-40-34	40 dB Attenuator	CB6628	10/14/13

Test Personnel:

Daniel Baltzell
EMC Test Engineer



Signature

April 23, 2013
Date of Test

4 FCC Rules and Regulations §2.1051: Spurious Emissions at Antenna Terminals; §90.210: Emissions Masks; RSS-119 §4.2: Transmitter Unwanted Emissions

4.1 Test Procedure

TIA-102.CCAA August 2011, section 2.2.7, TIA-102.CCAB October 2011, section 3.2.7

The transmitter is terminated with a 50 Ω load and interfaced with a signal analyzer.

4.2 Test Data

Frequency range of measurement per Part 2.1057: 9 kHz to 10 x Fc

Limits: (43+10LOG P(W)) for wideband and 50 + 10 LOG P(W)) for narrowband


The following channels (in MHz) were investigated:

VHF (MHz)	UHF (MHz)	700 MHz	800 MHz
136.0125 (Federal)	406.1125 (FCC/IC)	764.0125 (IC)	806.0125 (FCC/IC)
138.0125 (IC)	418.0000 (FCC/IC)	769.0125 (FCC)	815.0000 (FCC/IC)
141.0000 (IC)	429.9875 (IC)	771.0000 (FCC/IC)	823.9875 (FCC/IC)
143.9875 (IC)	450.0125 (IC)	774.9875 (FCC)	851.0125 (FCC/IC)
148.0125 (IC)	453.9875 (FCC/IC),	775.9875 (IC)	860.0000 (FCC/IC),
150.0125 (FCC)	456.0125 (FCC)	794.0125 (IC),	868.9875 (FCC/IC)
154.0125 (FCC)	469.9875 (FCC/IC)	799.0125 (FCC)	
162.0000 (FCC/IC)	511.9875 (FCC)	801.0000 (FCC/IC)	
173.1875 (FCC)	519.9875 (Federal)	804.9875 (FCC)	
173.9875 (FCC/IC)		805.9875 (IC)	


Both high and low power settings were checked; high power was found to be worst case and is presented. All modes were investigated; analog mode is presented as representative data.

All frequencies were found to be greater than 20 dB below the limit except those shown in the following plots (per FCC 2.1051, data greater than 20 dB below the limit is not being reported).


Plot 4-1: Conducted Spurious Emissions – H-CPM TDMA; 136.0125 MHz

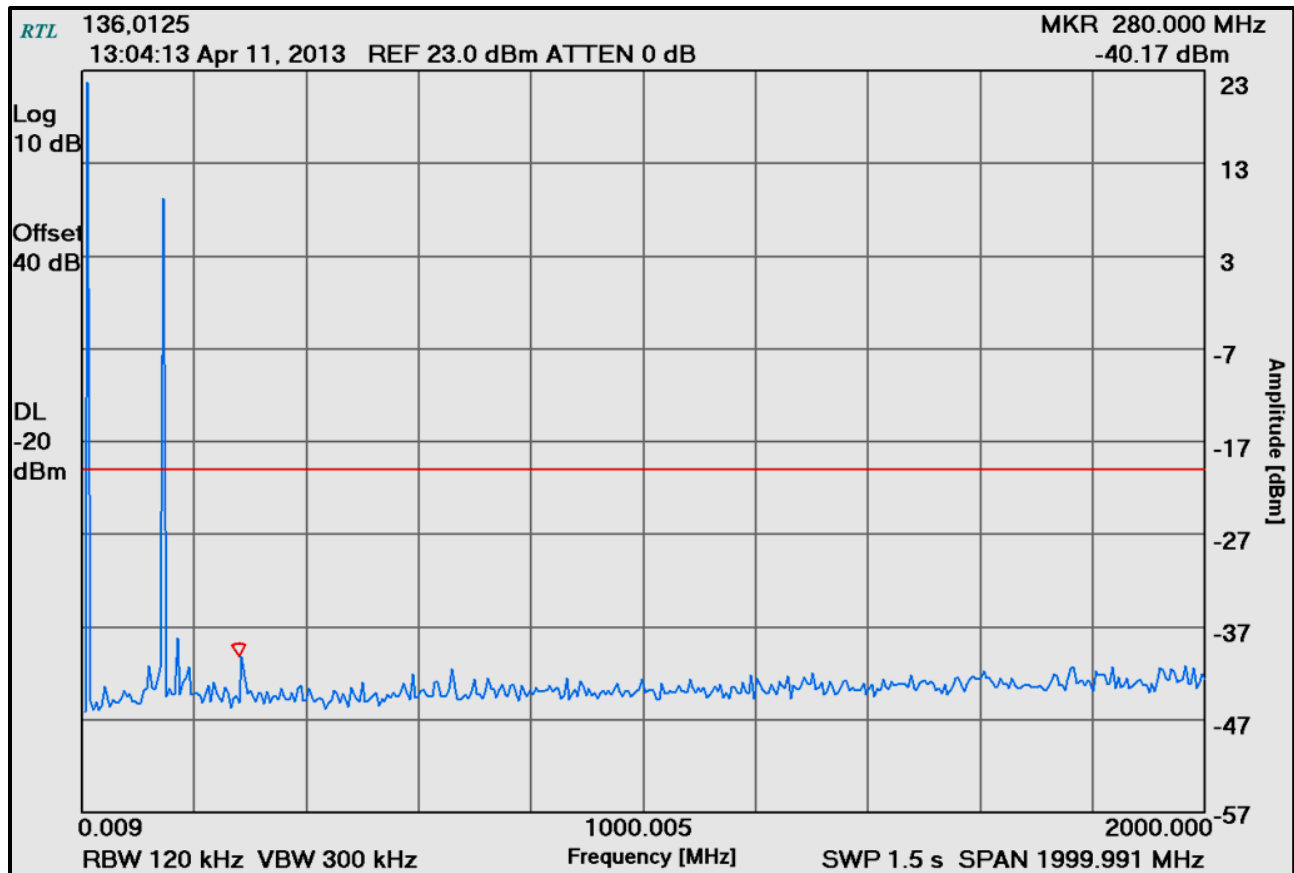


Plot 4-2: Conducted Spurious Emissions – H-CPM TDMA; 138.0125 MHz

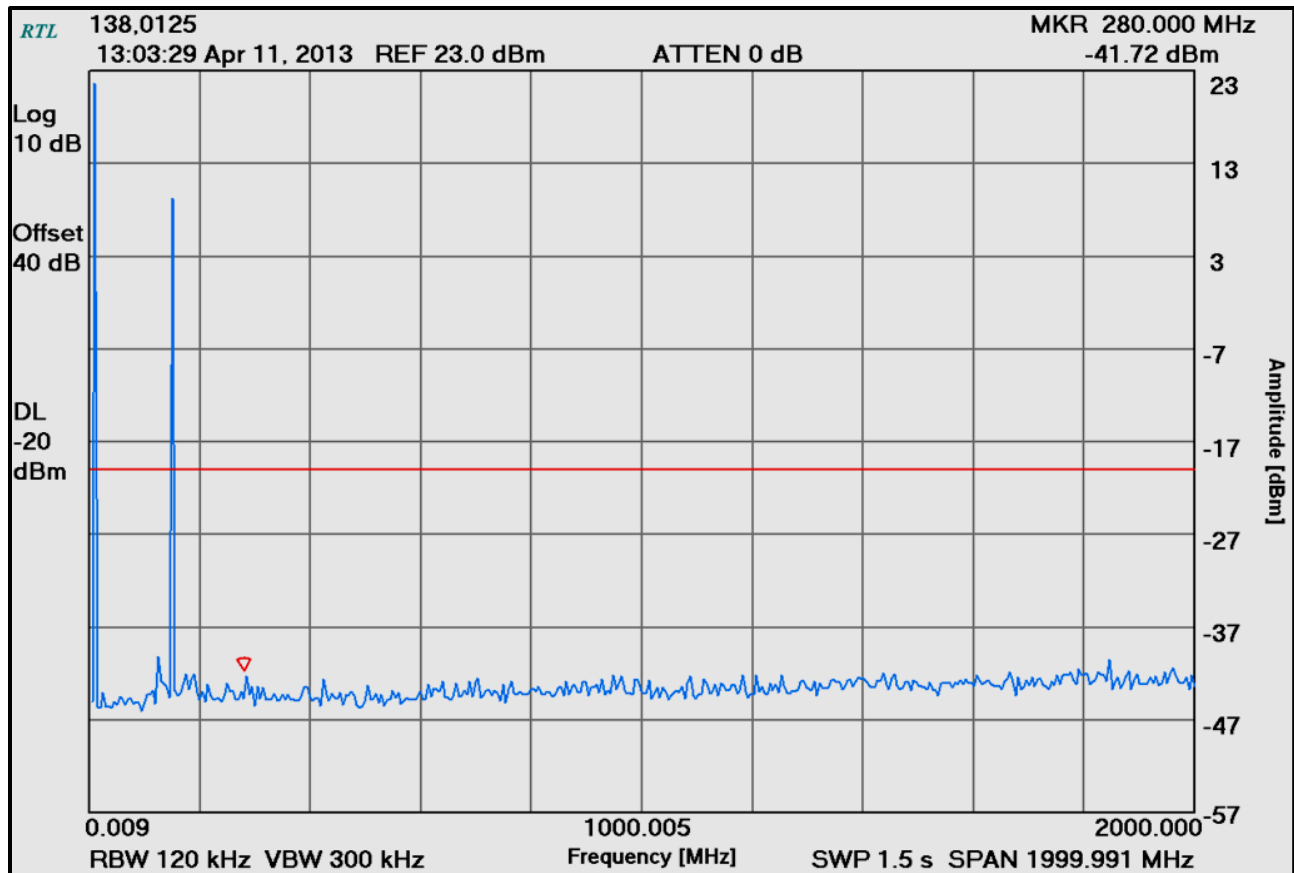


Plot 4-3: Conducted Spurious Emissions – H-CPM TDMA; 141.0000 MHz

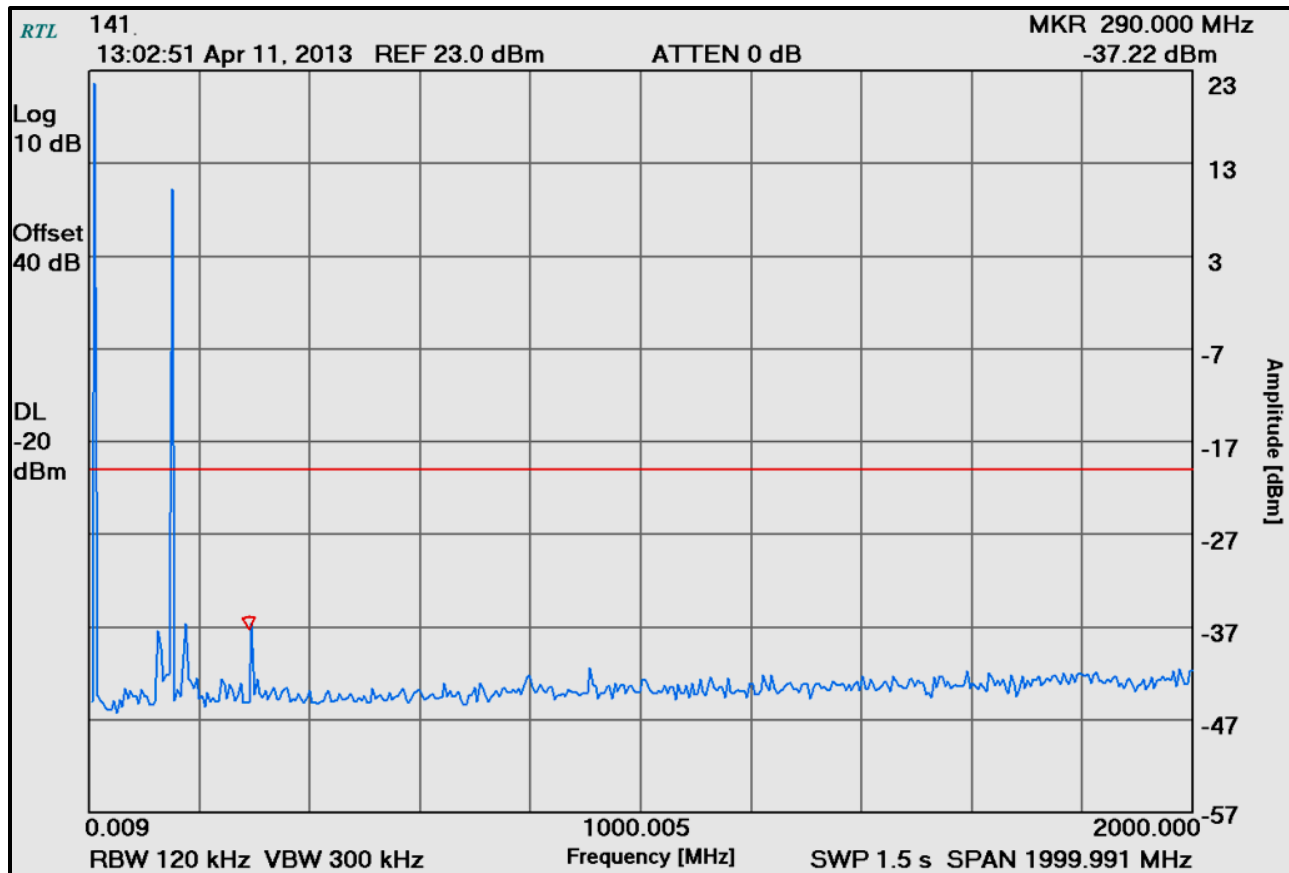


Plot 4-4: Conducted Spurious Emissions – H-CPM TDMA; 143.9875 MHz

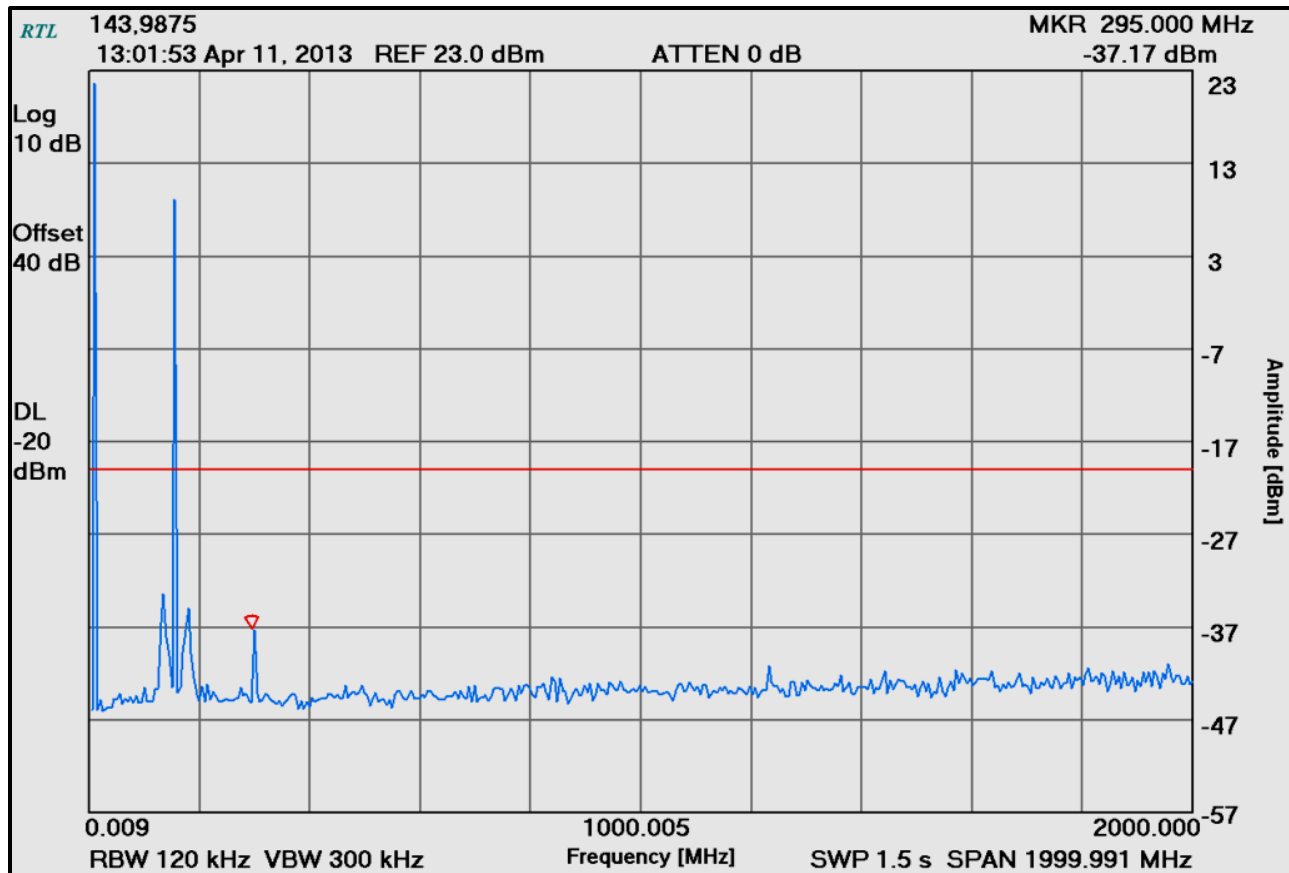


Plot 4-5: Conducted Spurious Emissions – H-CPM TDMA; 148.0125 MHz

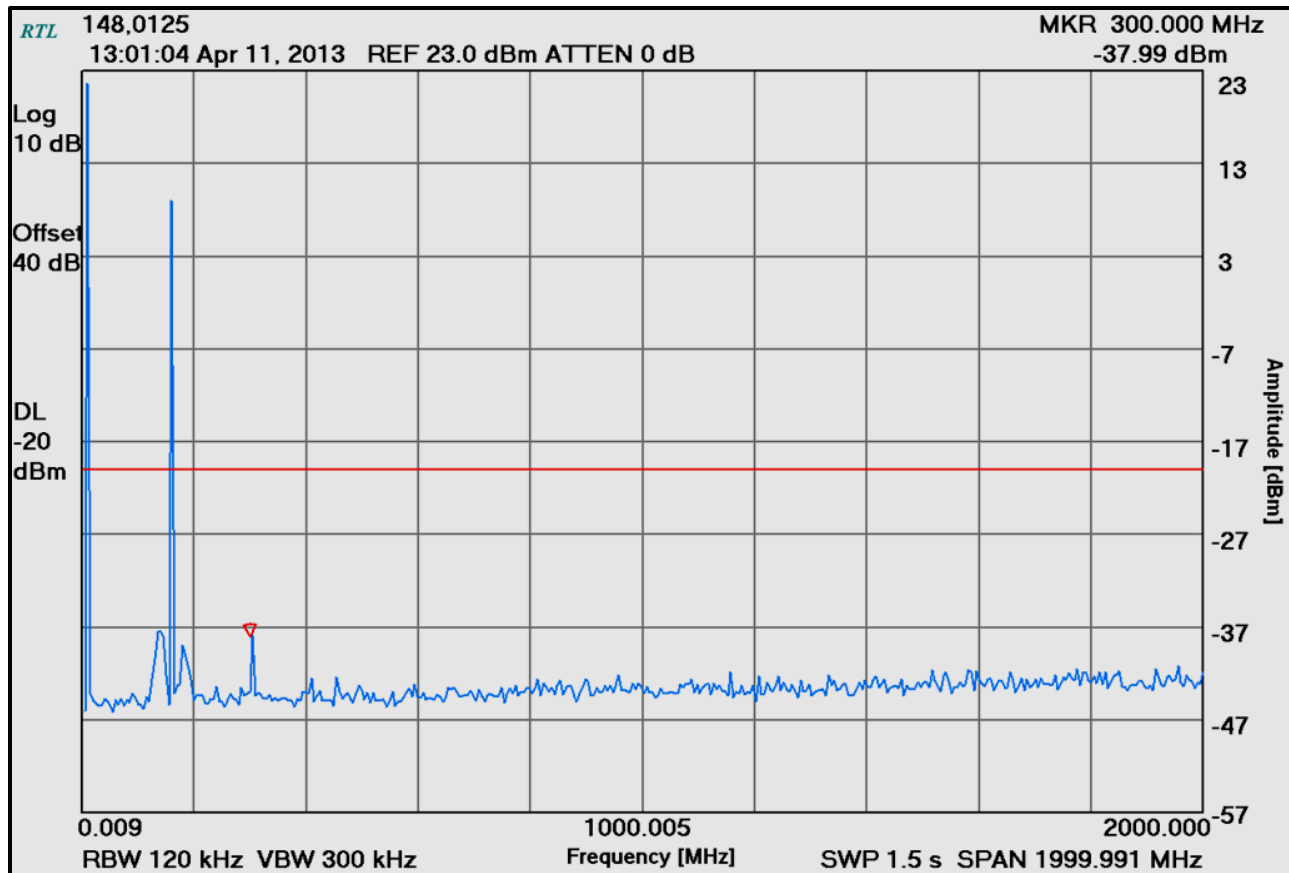


Plot 4-6: Conducted Spurious Emissions – H-CPM TDMA; 150.0125 MHz

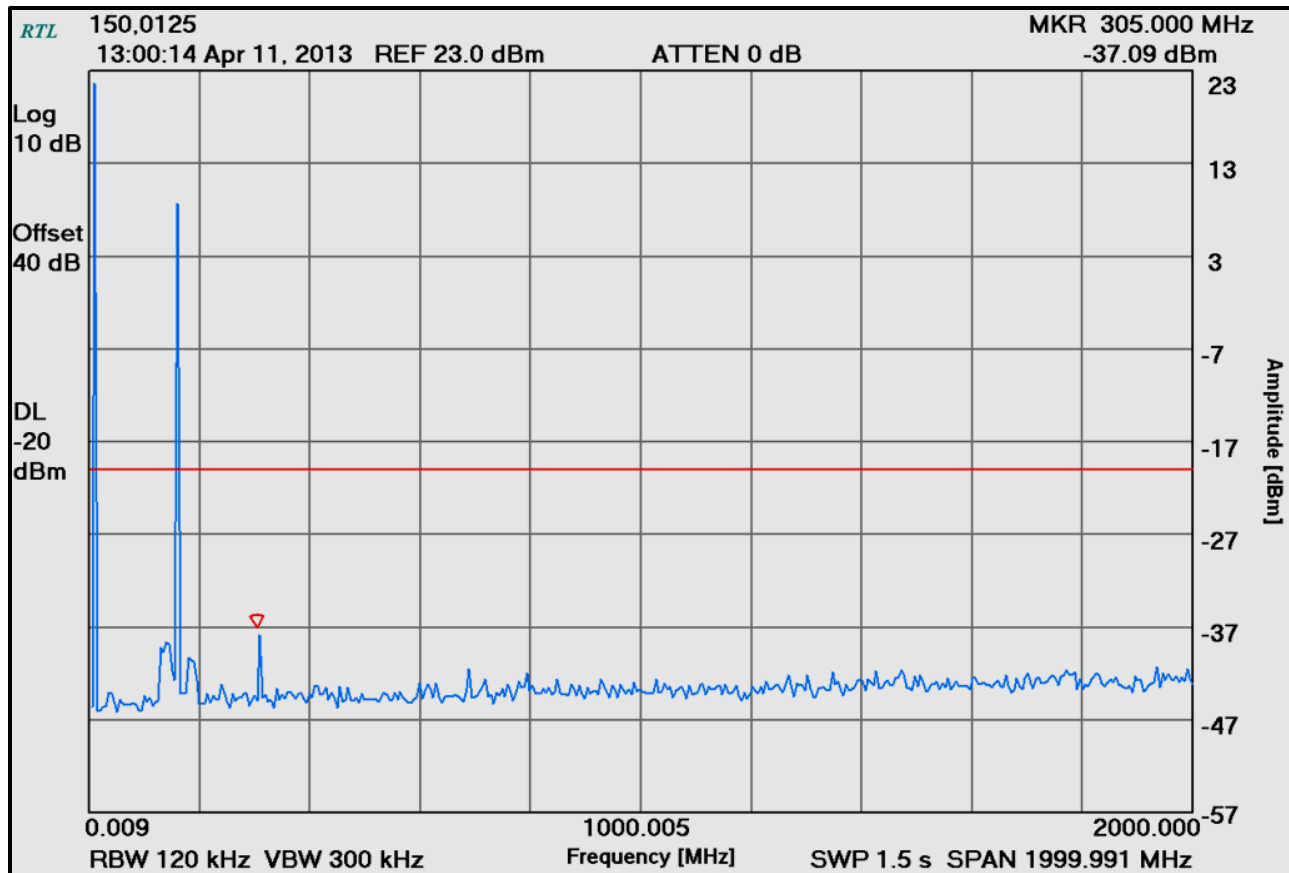


Plot 4-7: Conducted Spurious Emissions – H-CPM TDMA; 154.0125 MHz

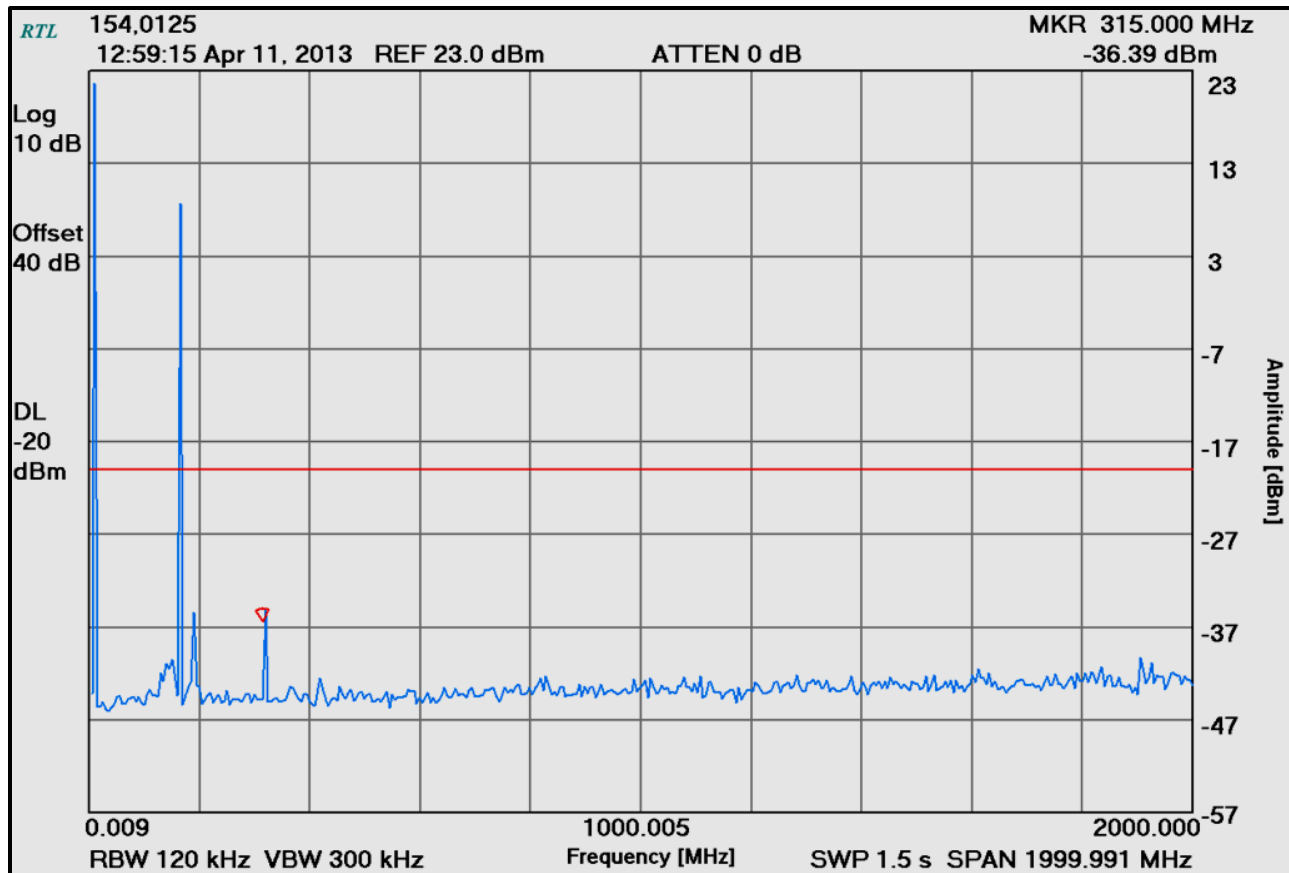


Plot 4-8: Conducted Spurious Emissions – H-CPM TDMA; 162.0000 MHz

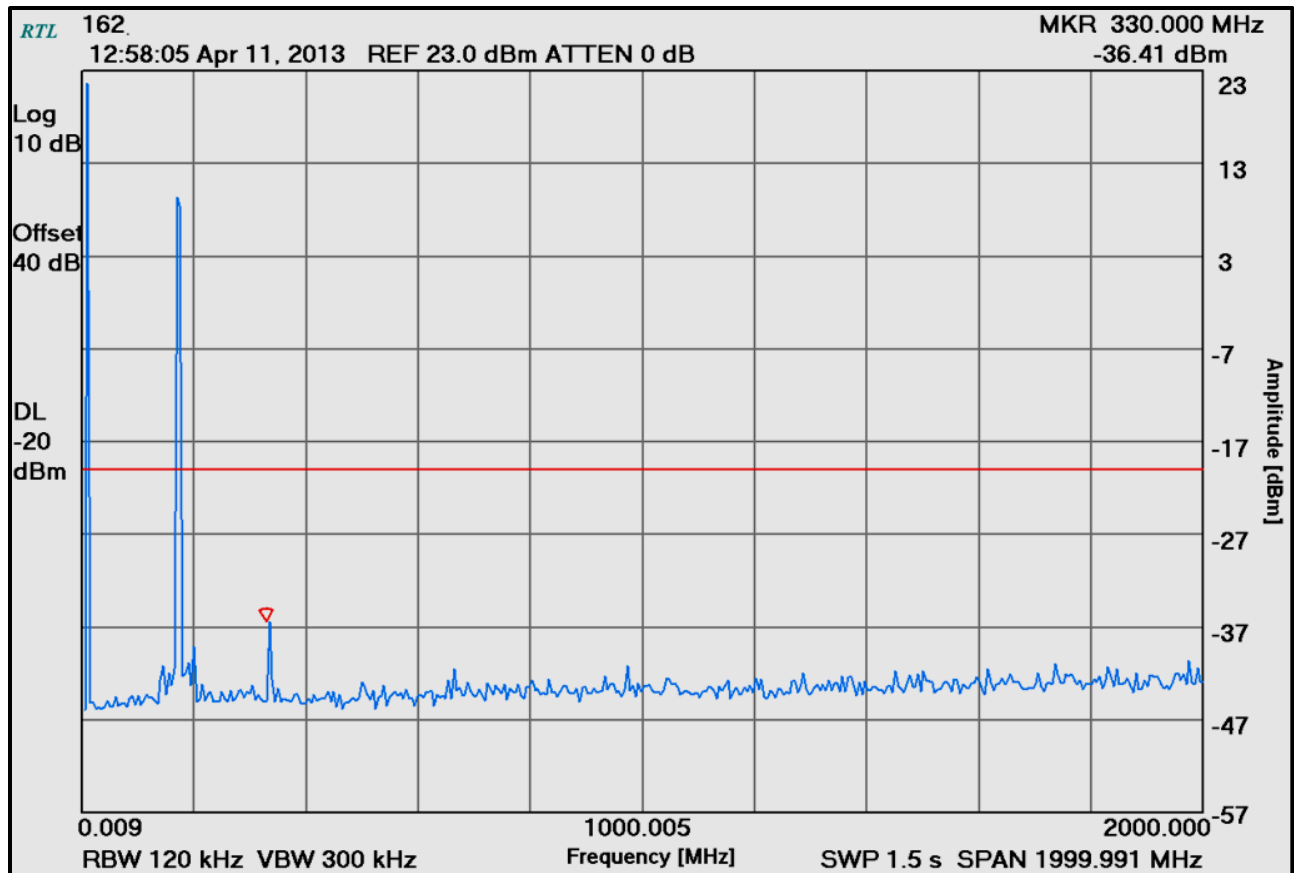


Plot 4-9: Conducted Spurious Emissions – H-CPM TDMA; 173.1875 MHz

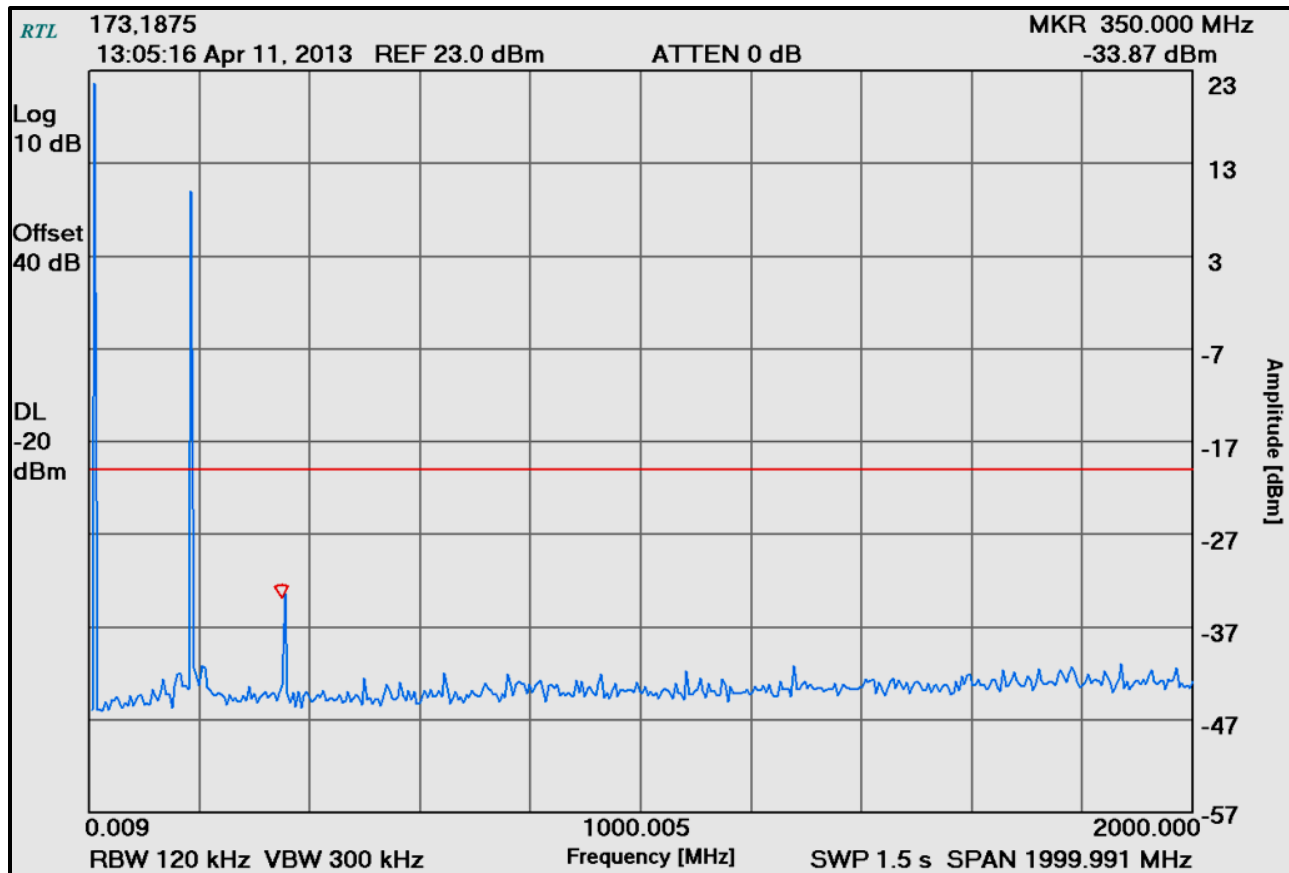


Plot 4-10: Conducted Spurious Emissions – H-CPM TDMA; 173.9875 MHz

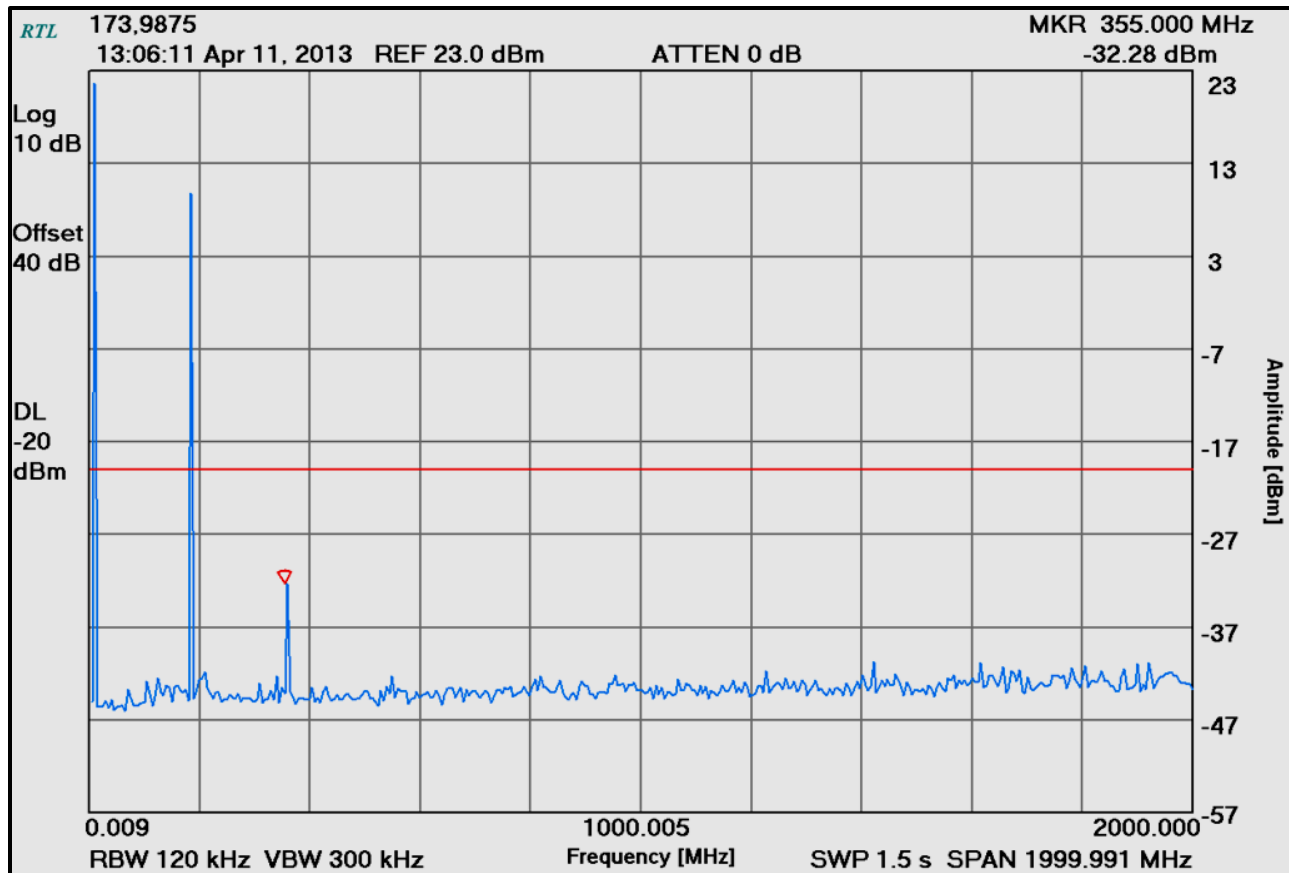


Plot 4-11: Conducted Spurious Emissions – H-CPM TDMA; 406.1125 MHz

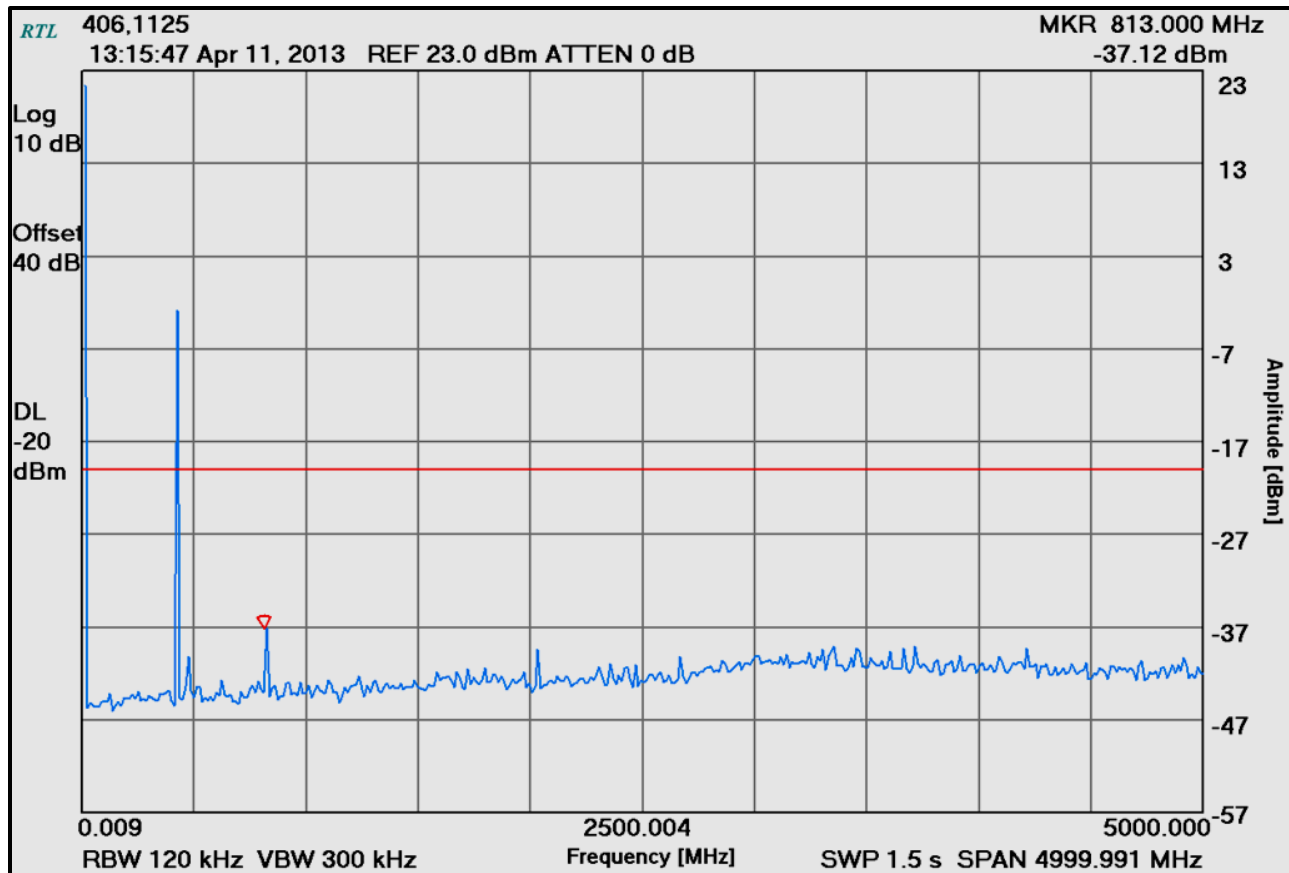


Plot 4-12: Conducted Spurious Emissions – H-CPM TDMA; 418.0000 MHz

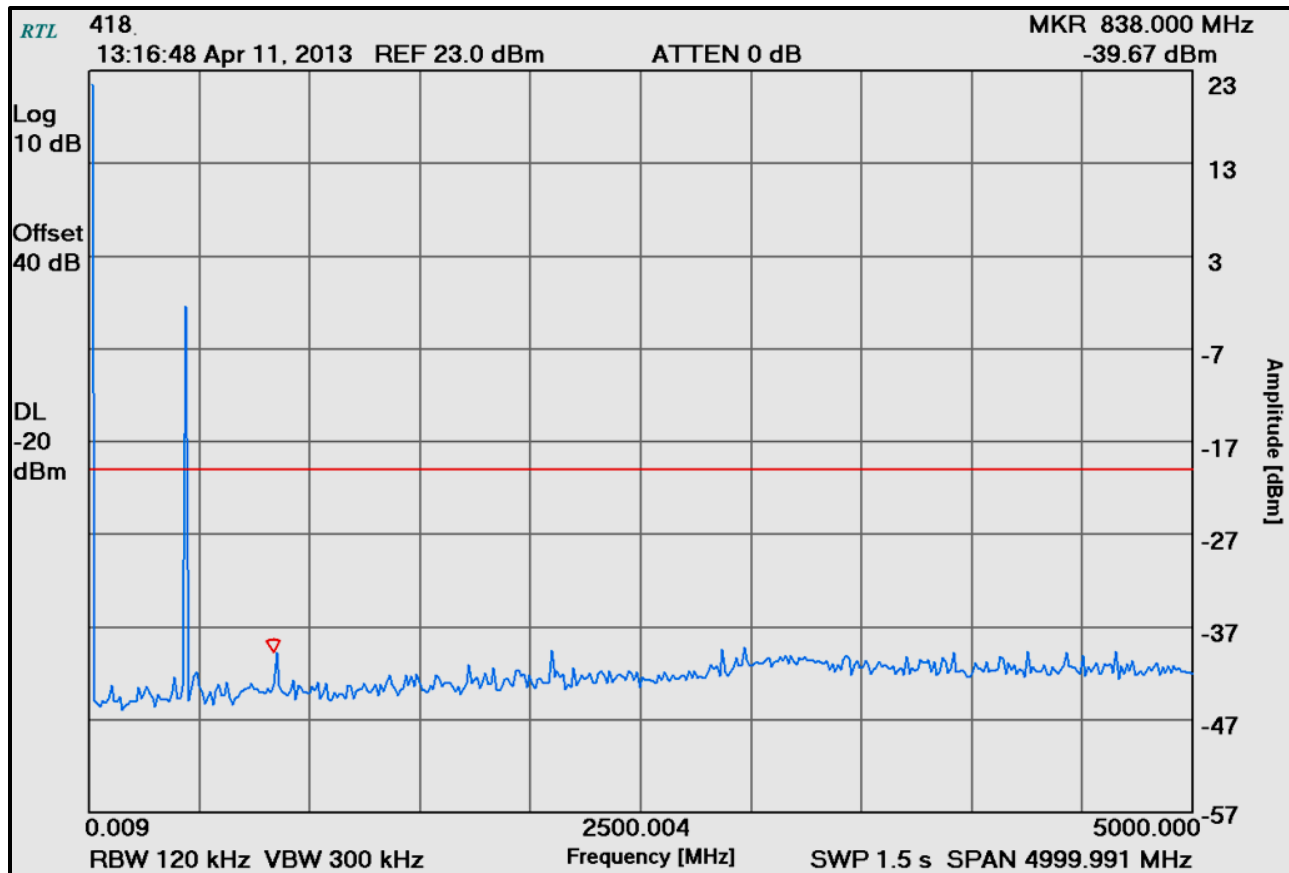


Plot 4-13: Conducted Spurious Emissions – H-CPM TDMA; 429.9875 MHz

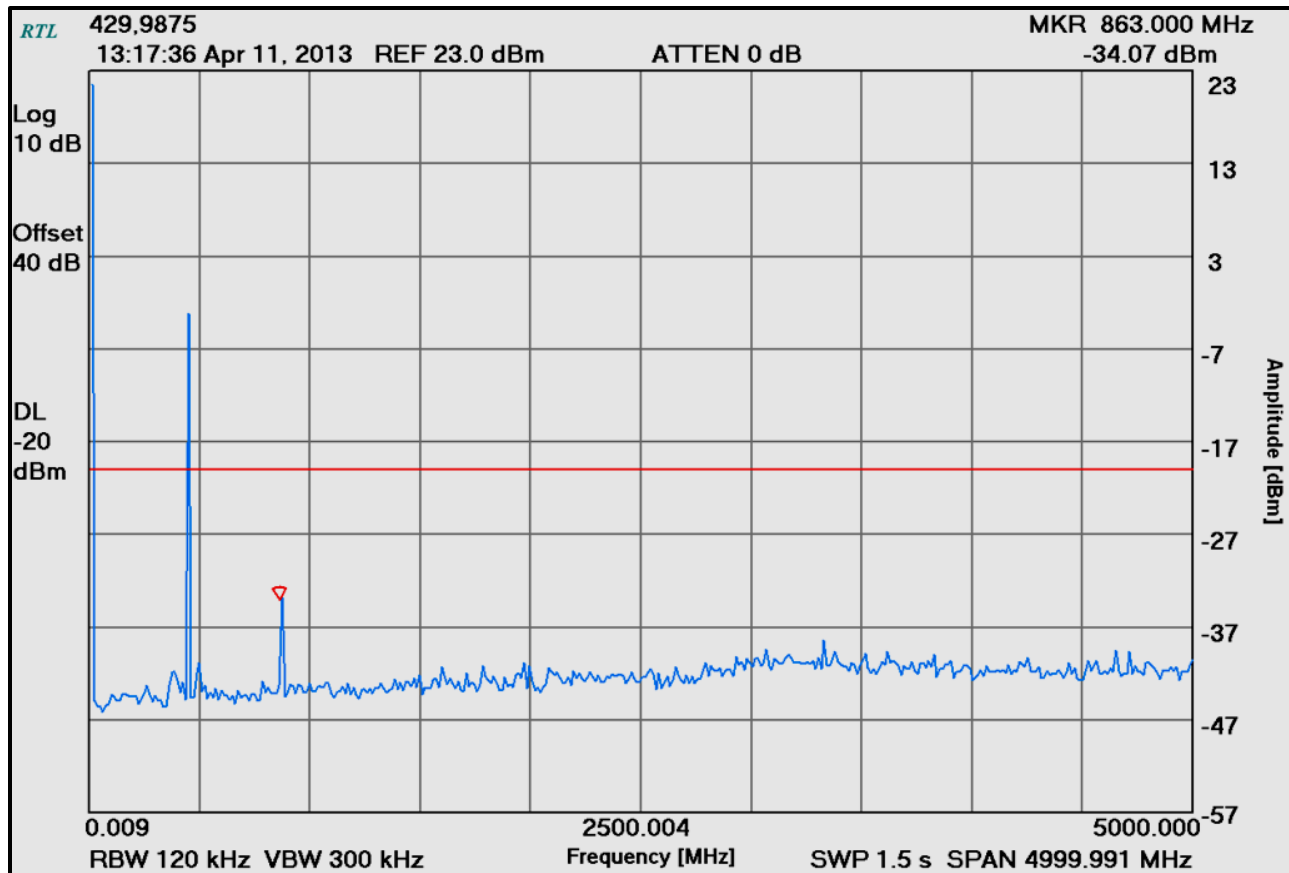


Plot 4-14: Conducted Spurious Emissions – H-CPM TDMA; 450.0125 MHz

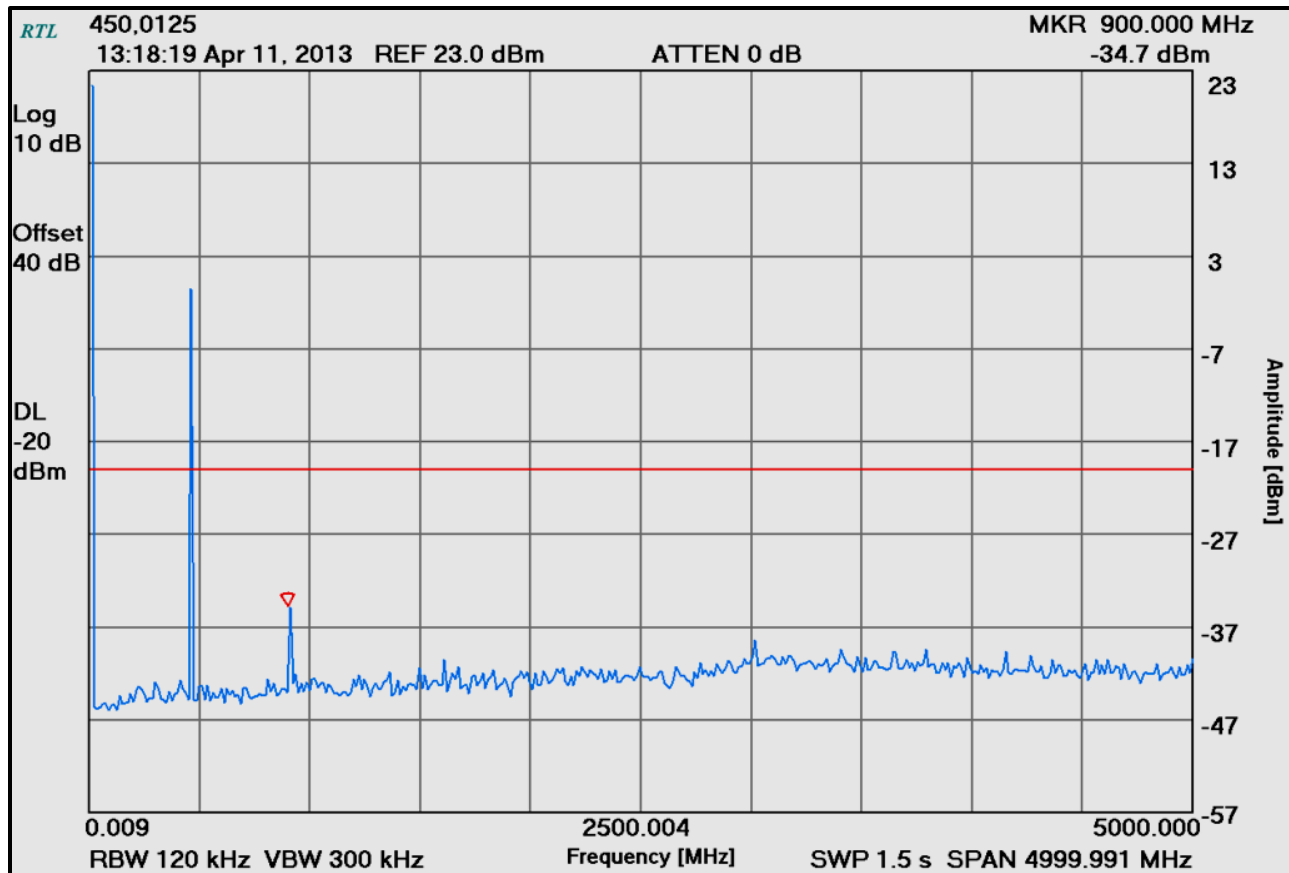


Plot 4-15: Conducted Spurious Emissions – H-CPM TDMA; 453.9875 MHz

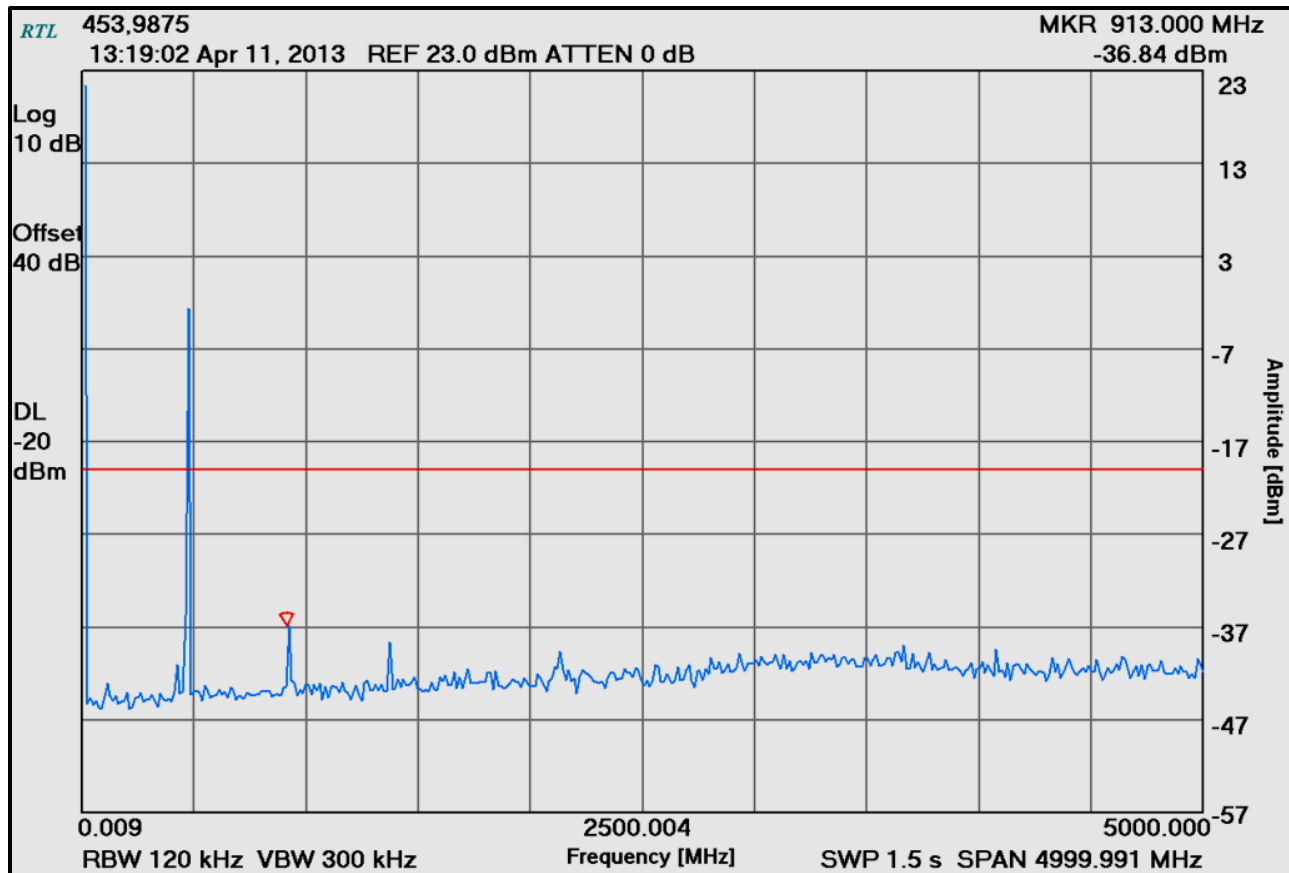


Plot 4-16: Conducted Spurious Emissions – H-CPM TDMA; 456.0125 MHz

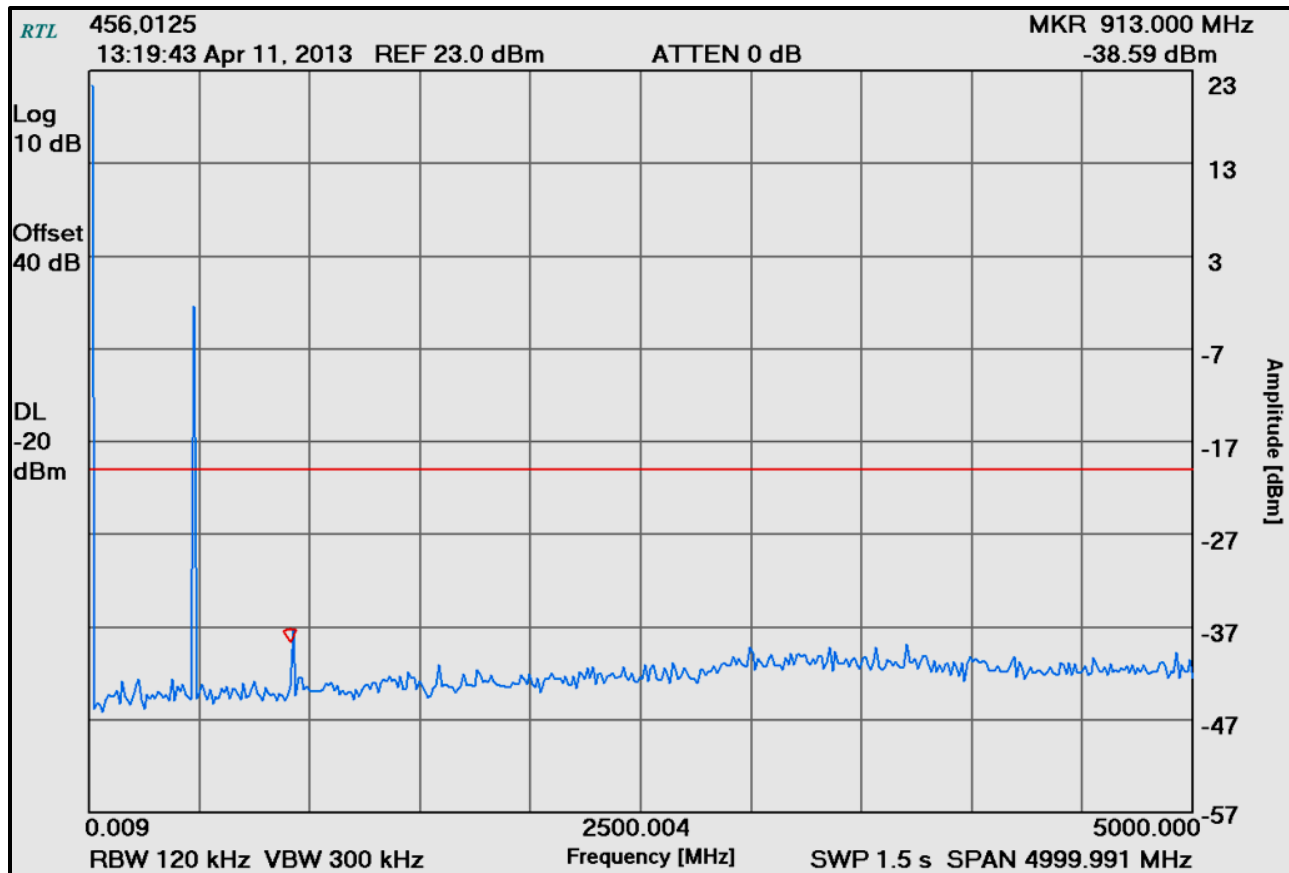


Plot 4-17: Conducted Spurious Emissions – H-CPM TDMA; 469.9875 MHz

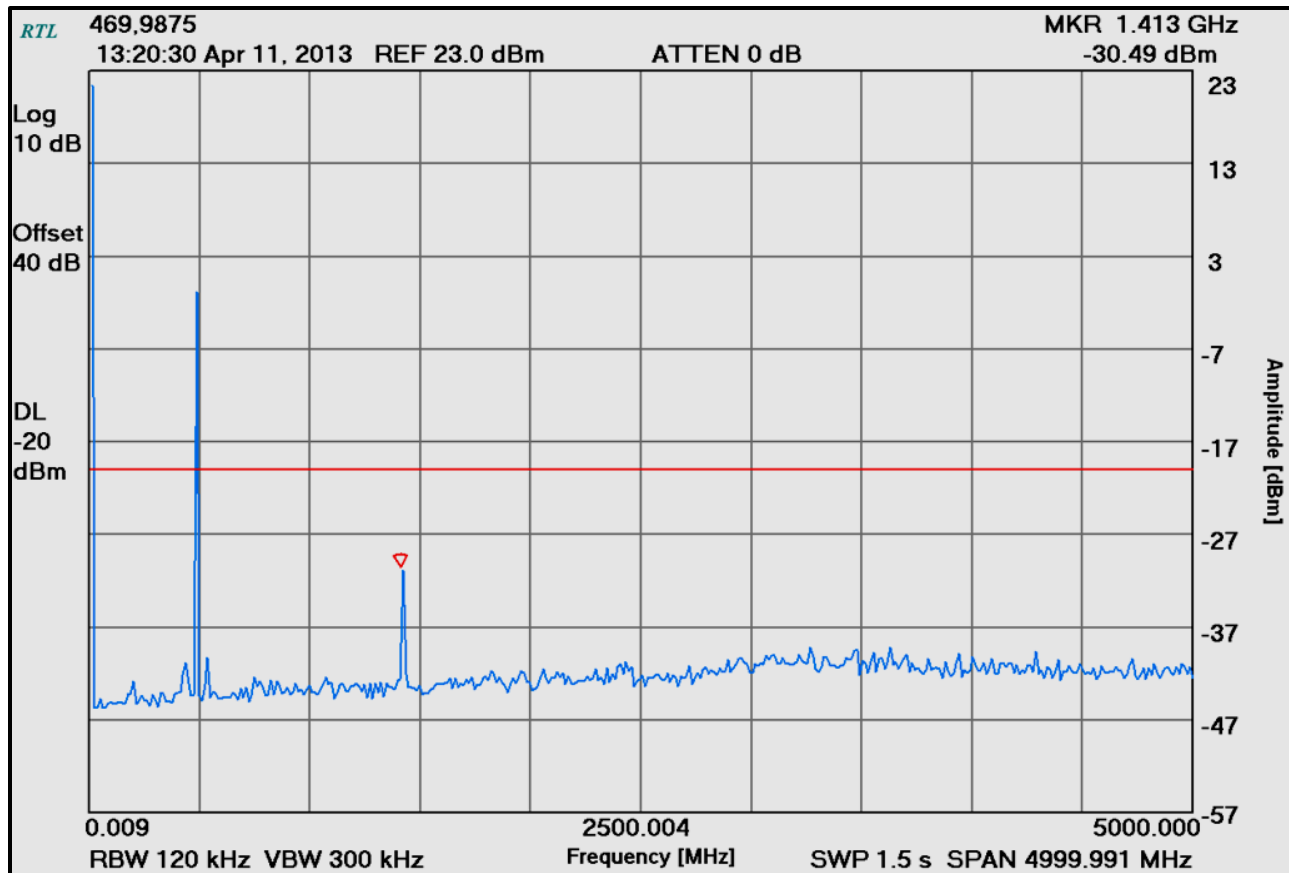


Plot 4-18: Conducted Spurious Emissions – H-CPM TDMA; 511.9875 MHz

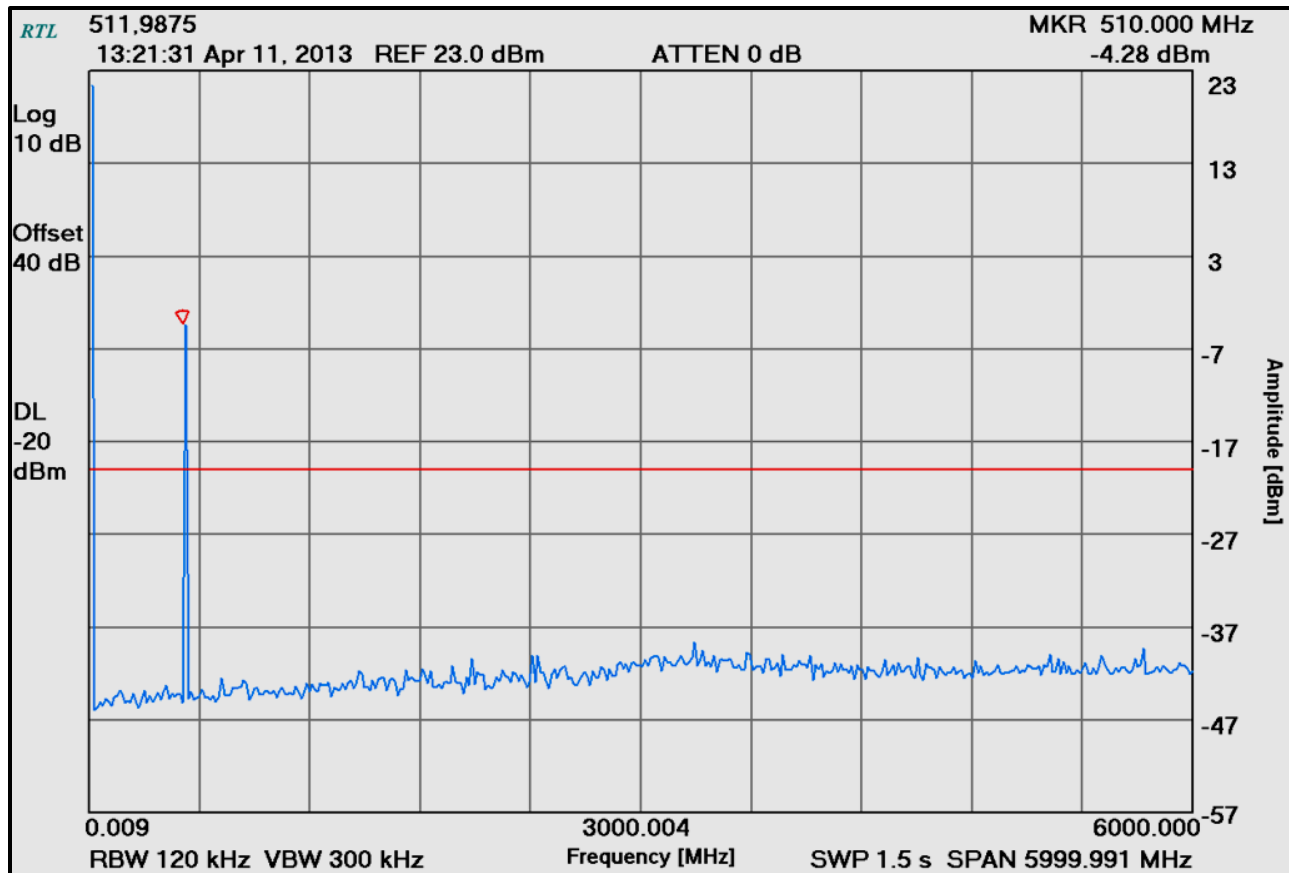


Plot 4-19: Conducted Spurious Emissions – H-CPM TDMA; 519.9875 MHz

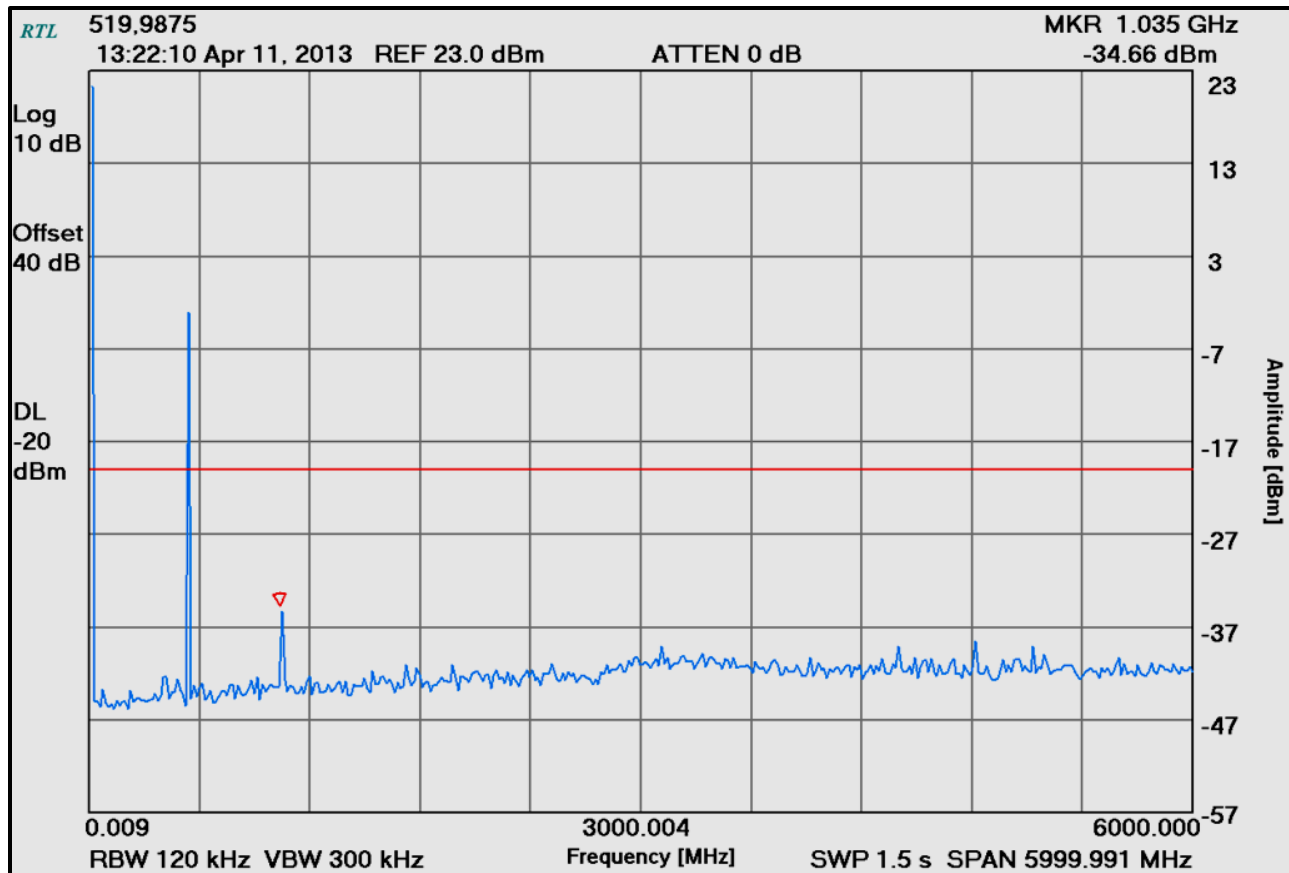


Plot 4-20: Conducted Spurious Emissions – H-CPM TDMA; 764.0125 MHz

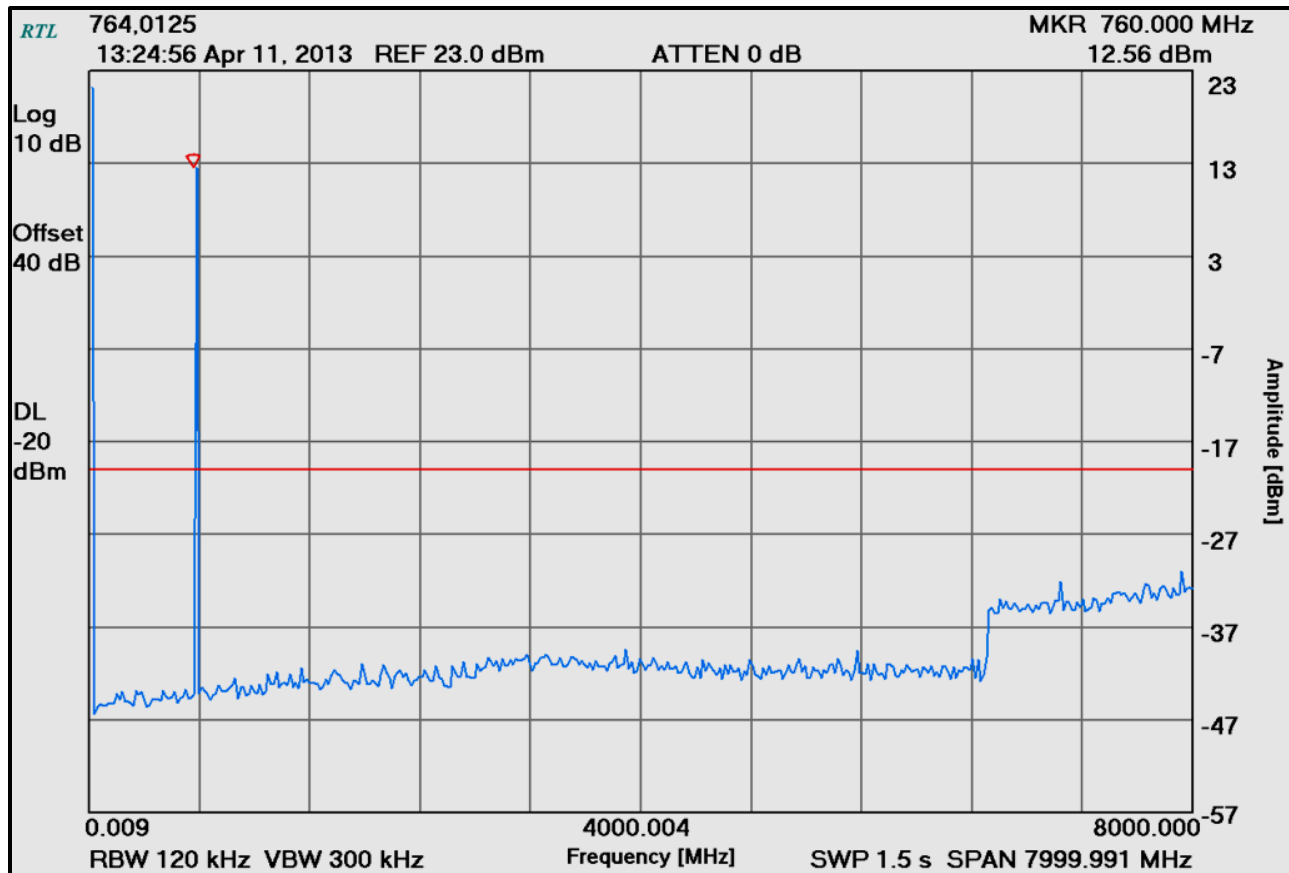


Plot 4-21: Conducted Spurious Emissions – H-CPM TDMA; 769.0125 MHz

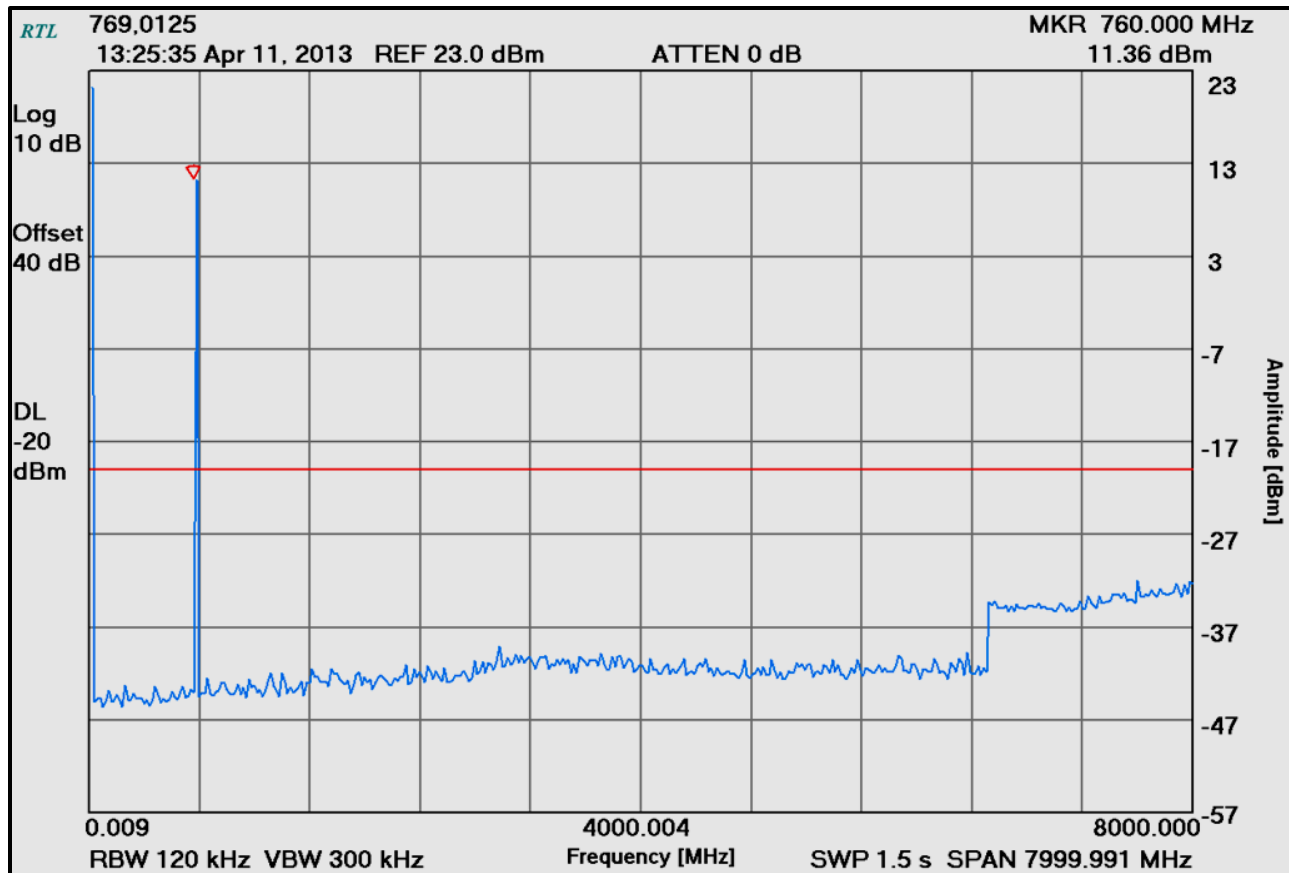


Plot 4-22: Conducted Spurious Emissions – H-CPM TDMA; 771.0000 MHz

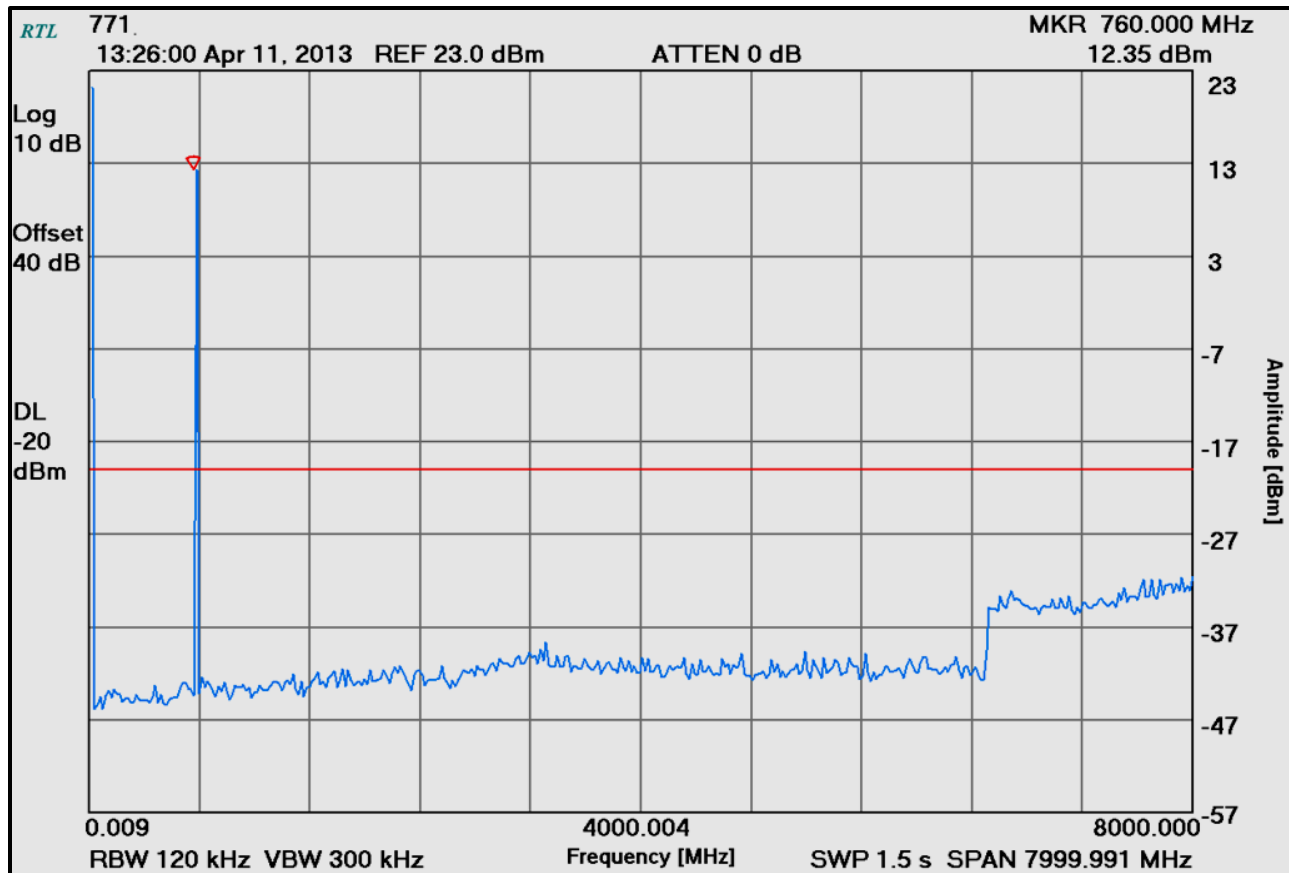


Plot 4-23: Conducted Spurious Emissions – H-CPM TDMA; 774.9875 MHz

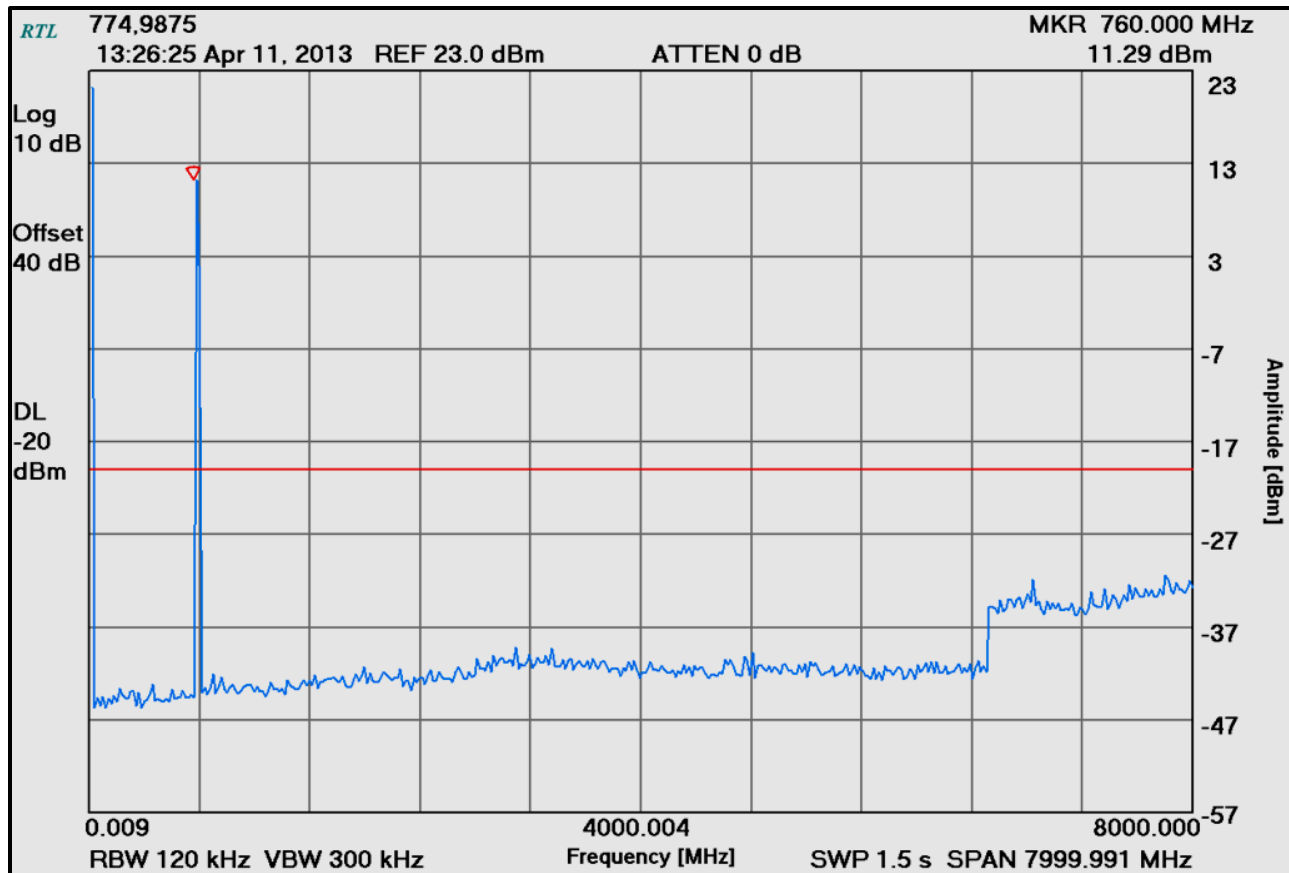


Plot 4-24: Conducted Spurious Emissions – H-CPM TDMA; 775.9875 MHz

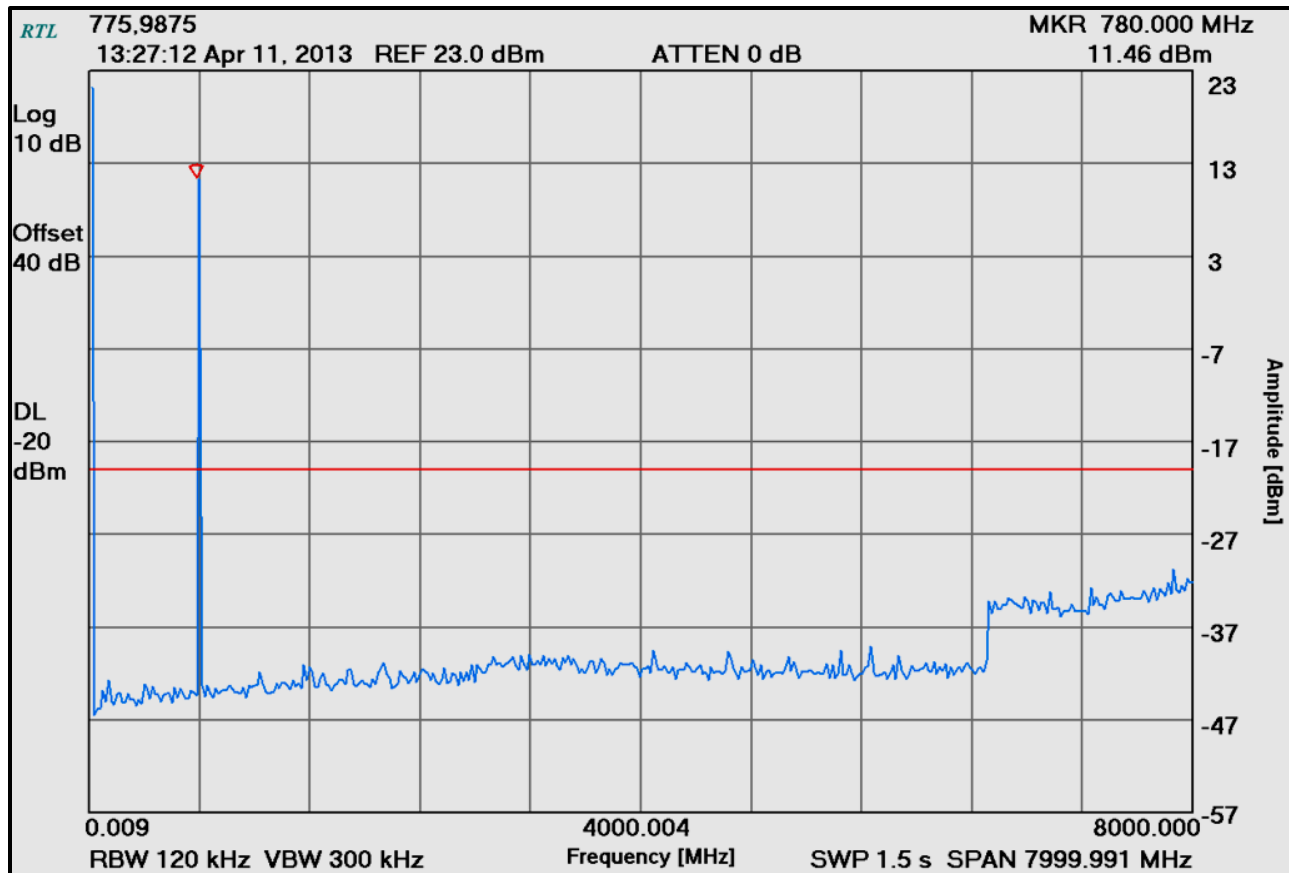


Plot 4-25: Conducted Spurious Emissions – H-CPM TDMA; 794.0125 MHz

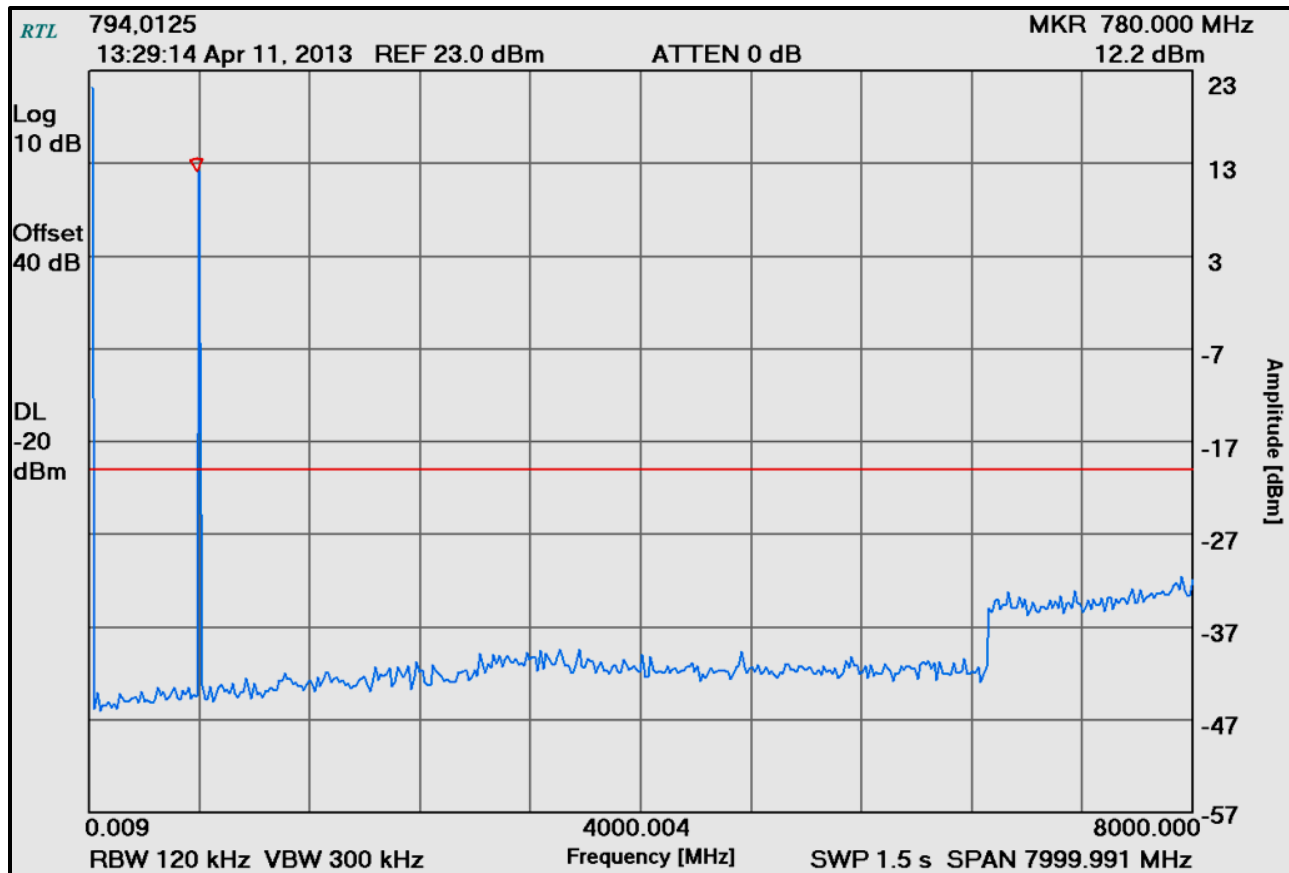


Plot 4-26: Conducted Spurious Emissions – H-CPM TDMA; 799.0125 MHz

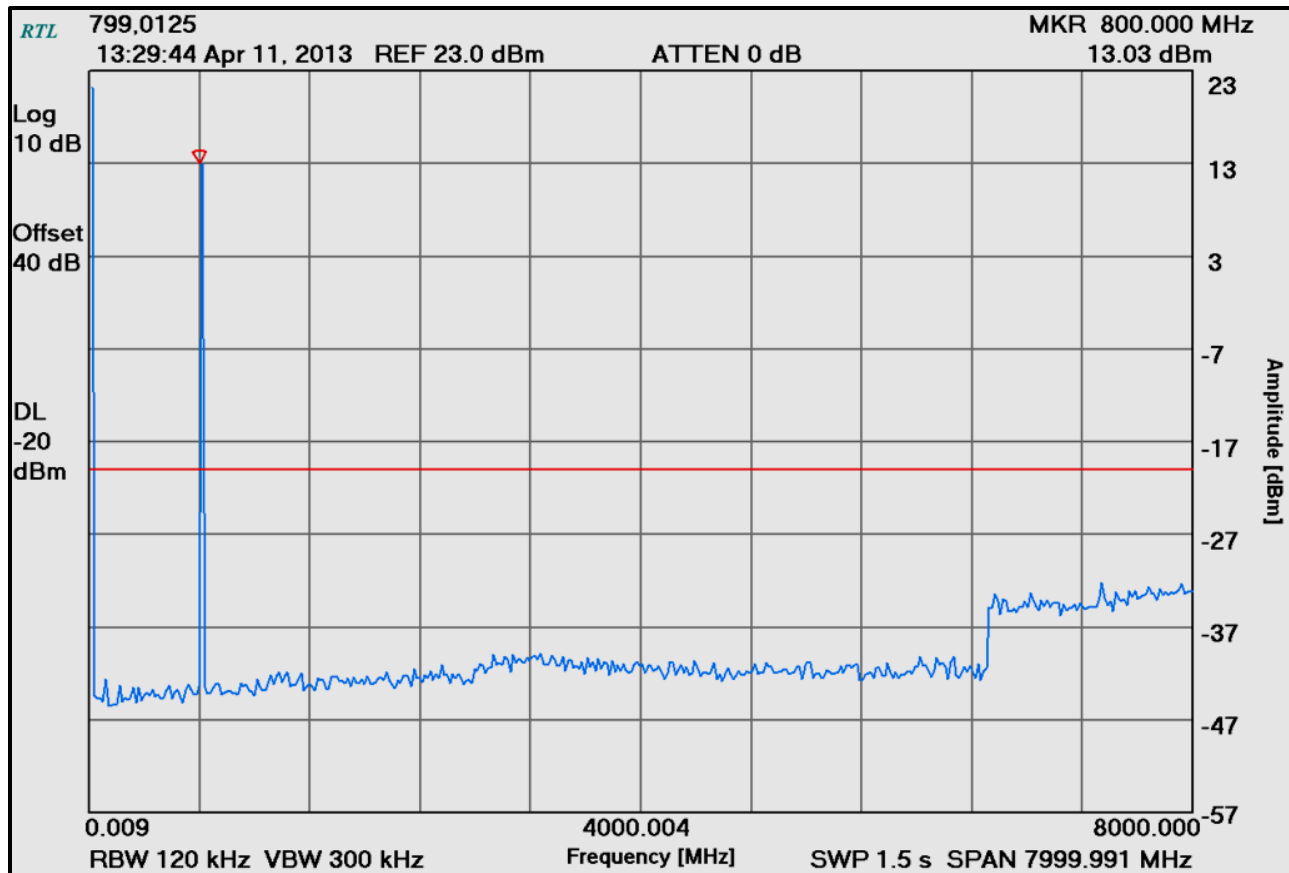


Plot 4-27: Conducted Spurious Emissions – H-CPM TDMA; 801.0000 MHz

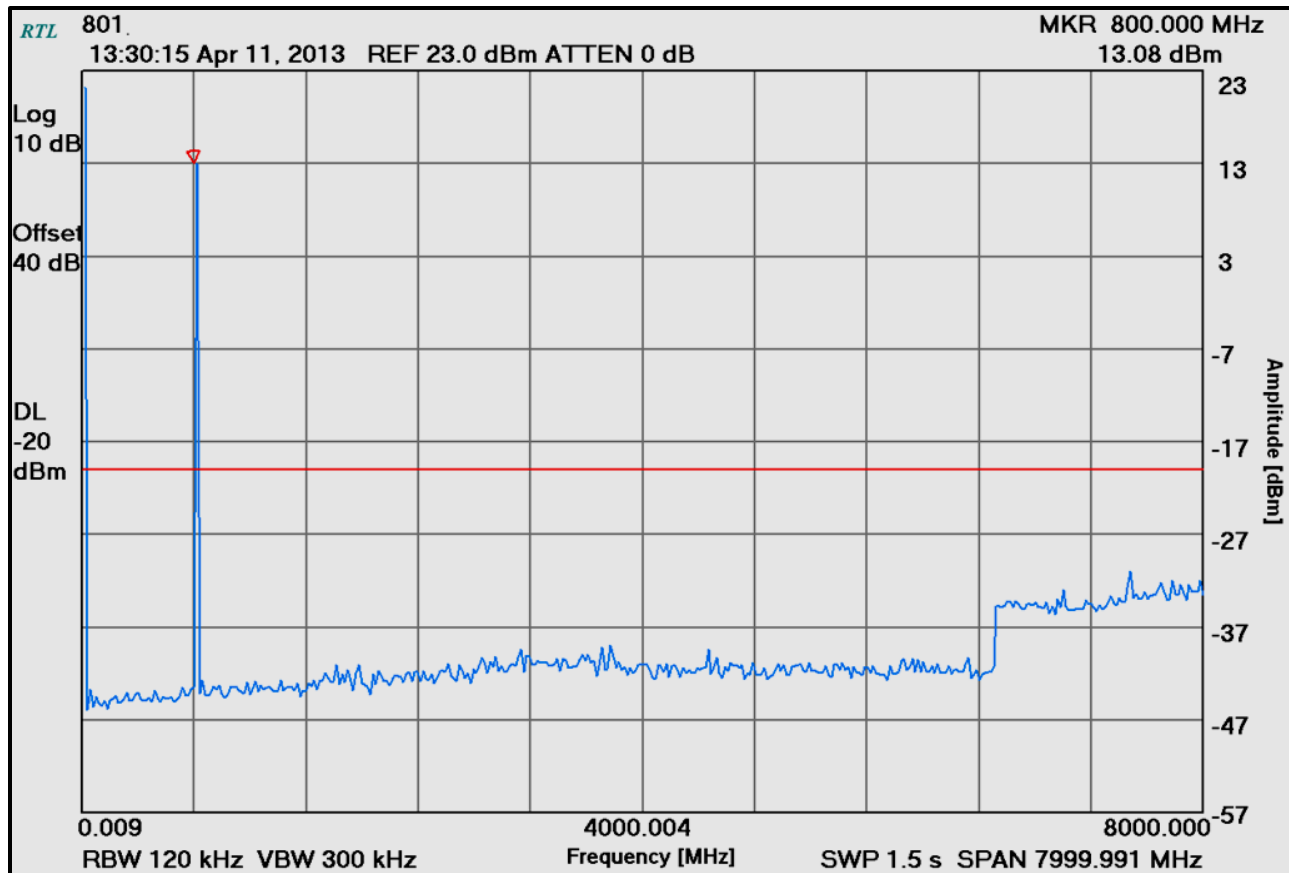


Plot 4-28: Conducted Spurious Emissions – H-CPM TDMA; 804.9875 MHz

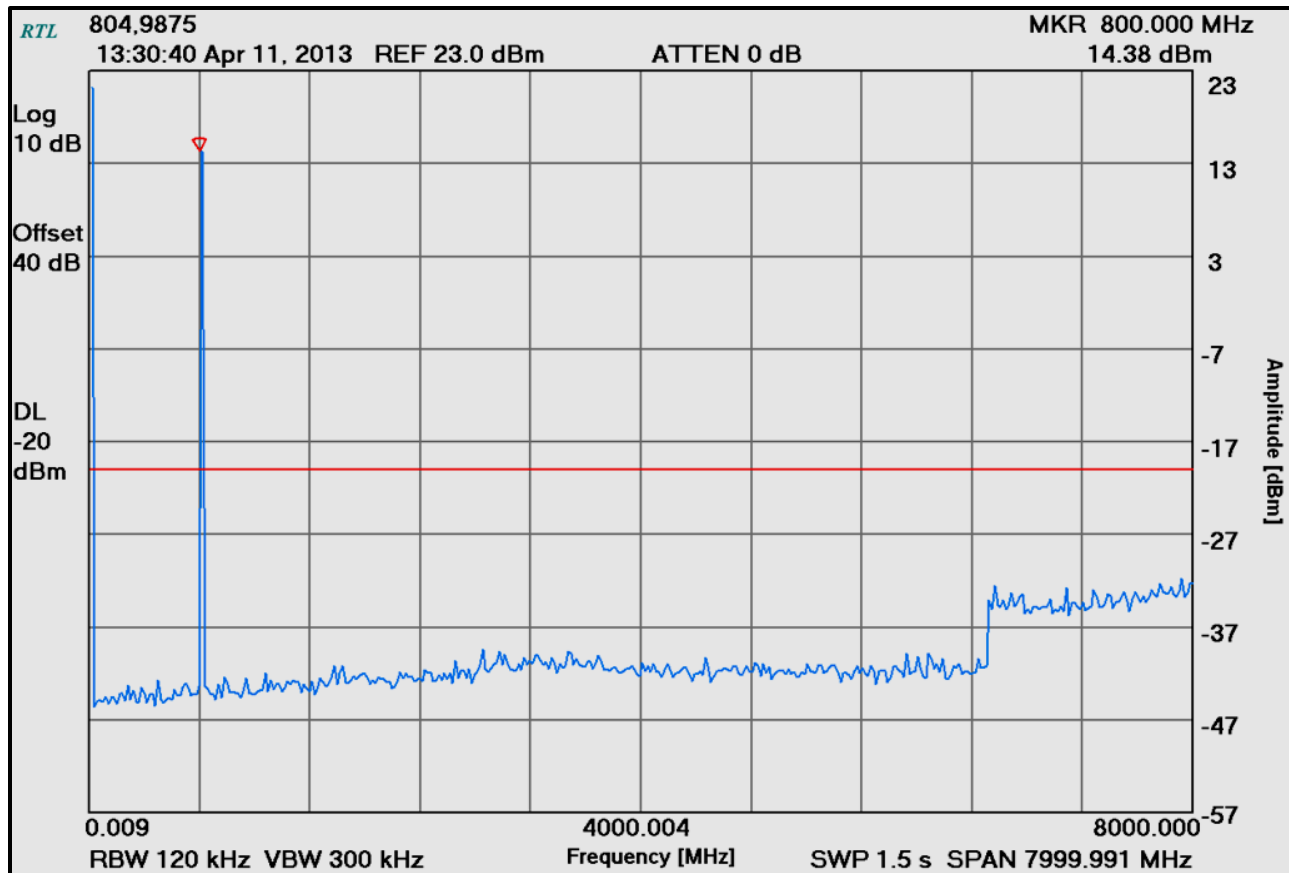


Plot 4-29: Conducted Spurious Emissions – H-CPM TDMA; 805.9875 MHz

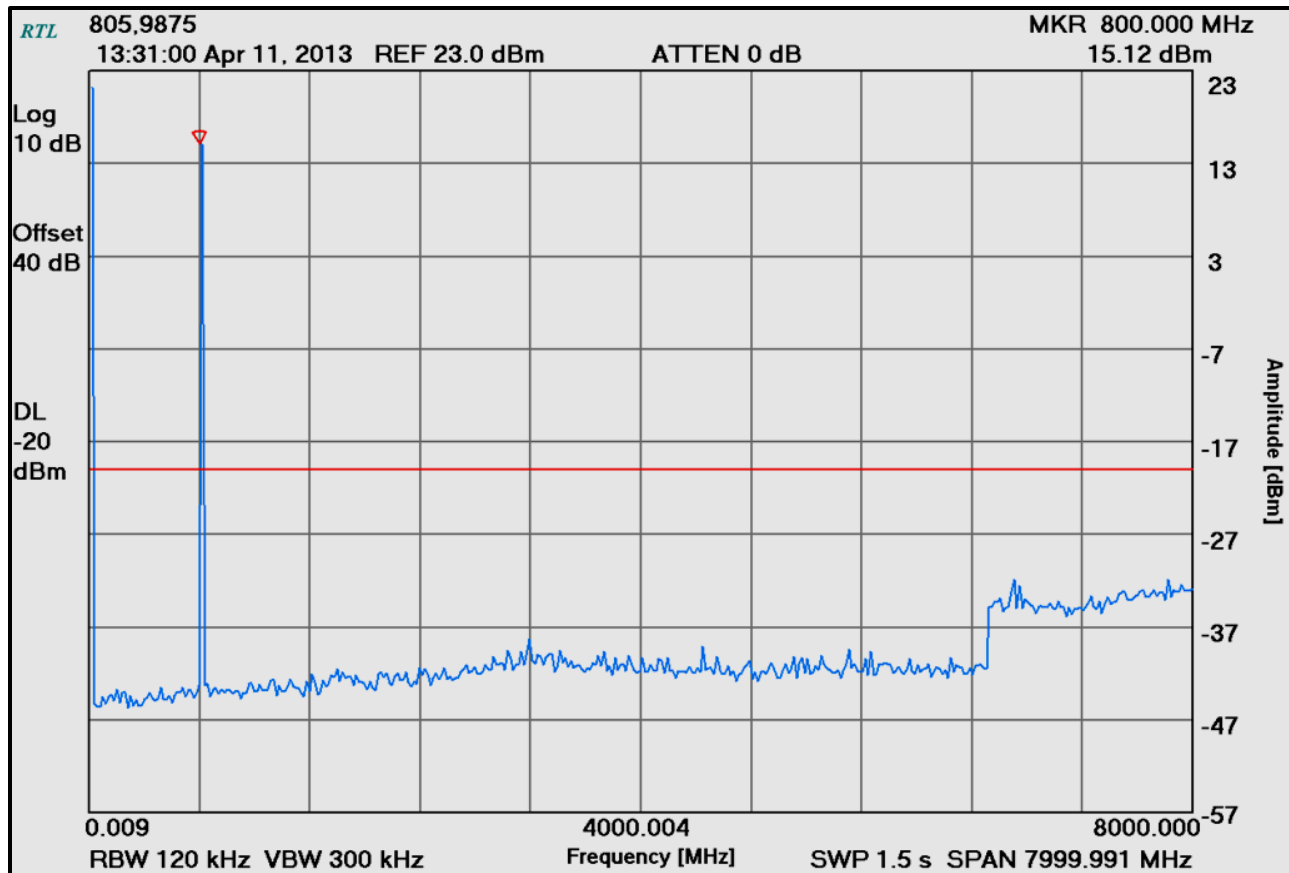


Plot 4-30: Conducted Spurious Emissions – H-CPM TDMA; 806.0125 MHz

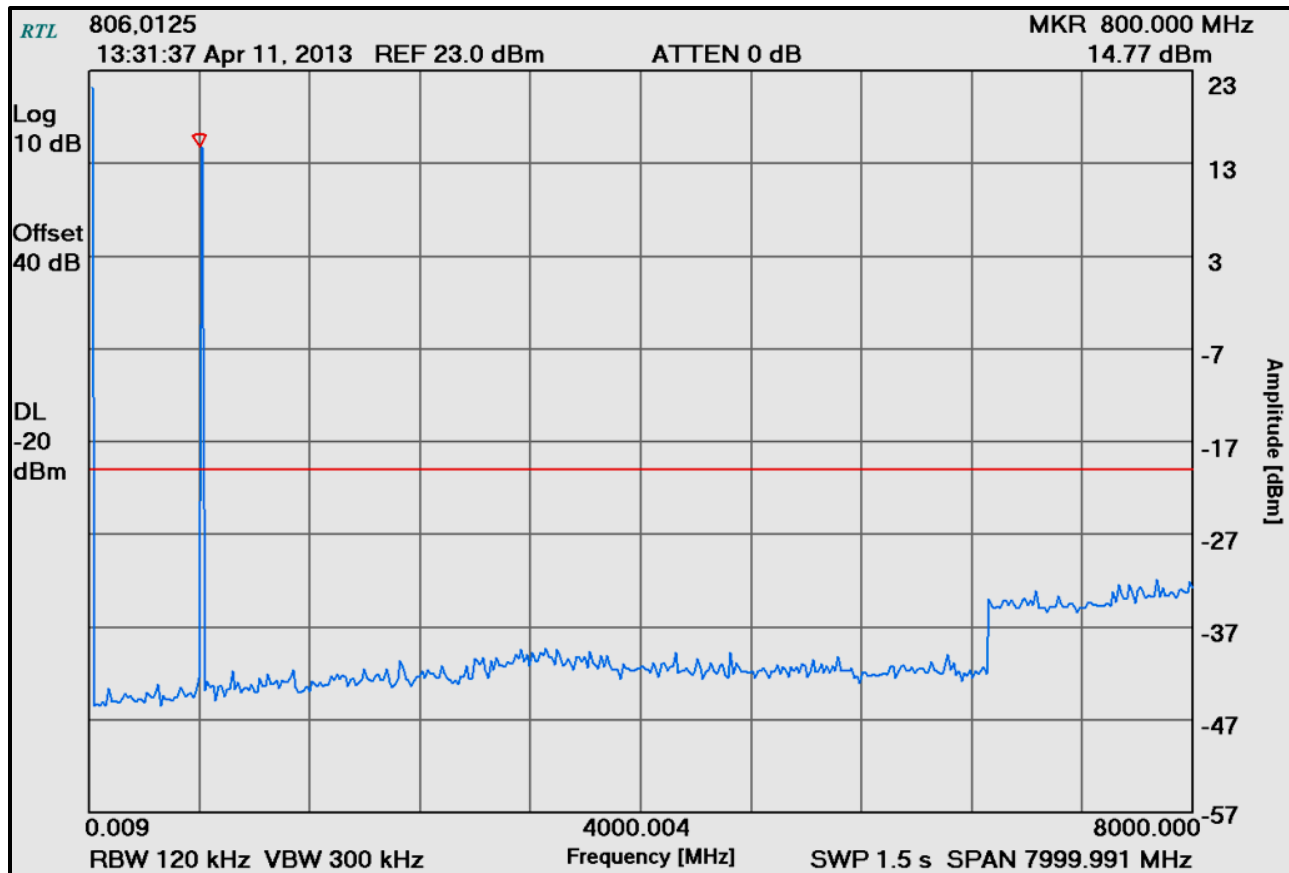


Plot 4-31: Conducted Spurious Emissions – H-CPM TDMA; 815.0000 MHz

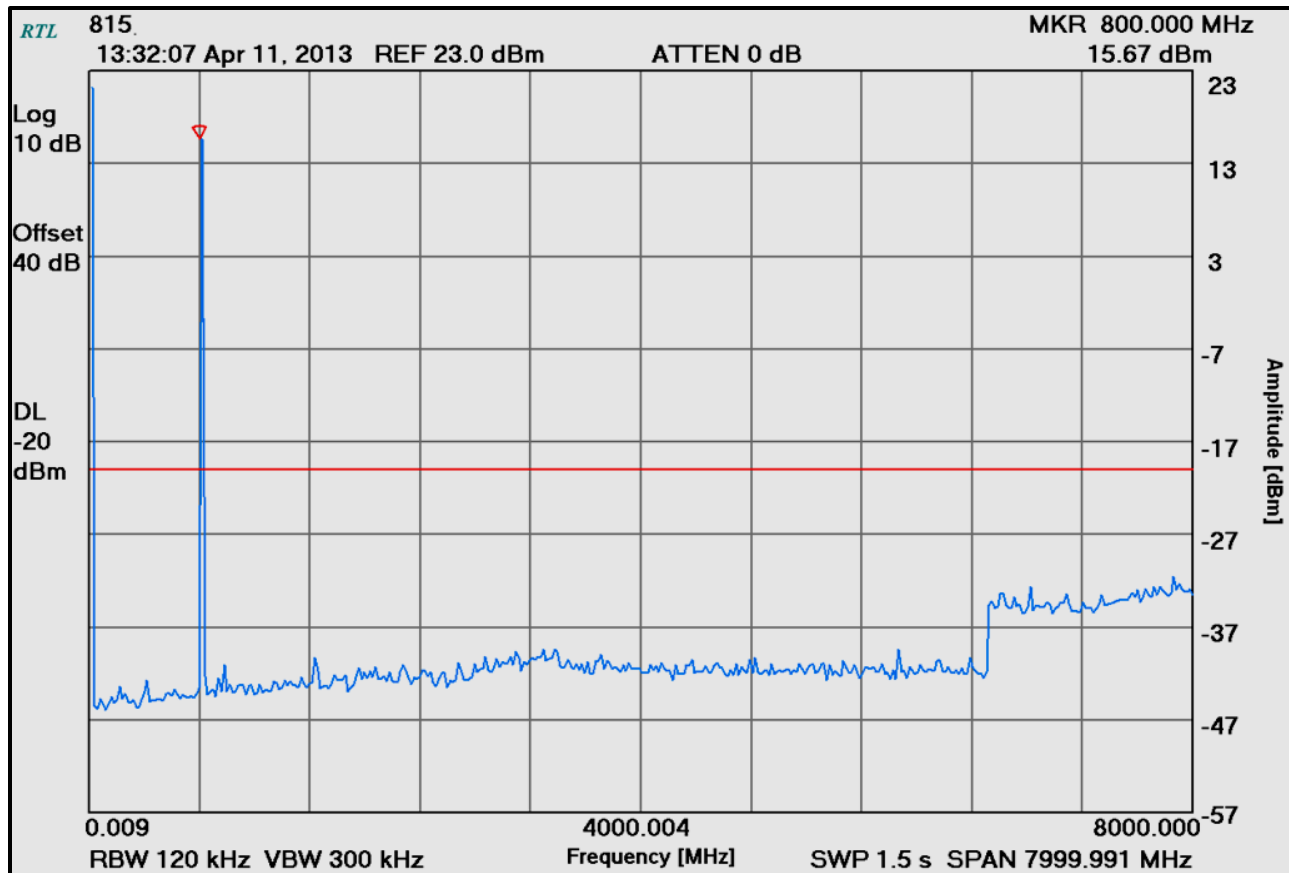


Plot 4-32: Conducted Spurious Emissions – H-CPM TDMA; 823.9875 MHz

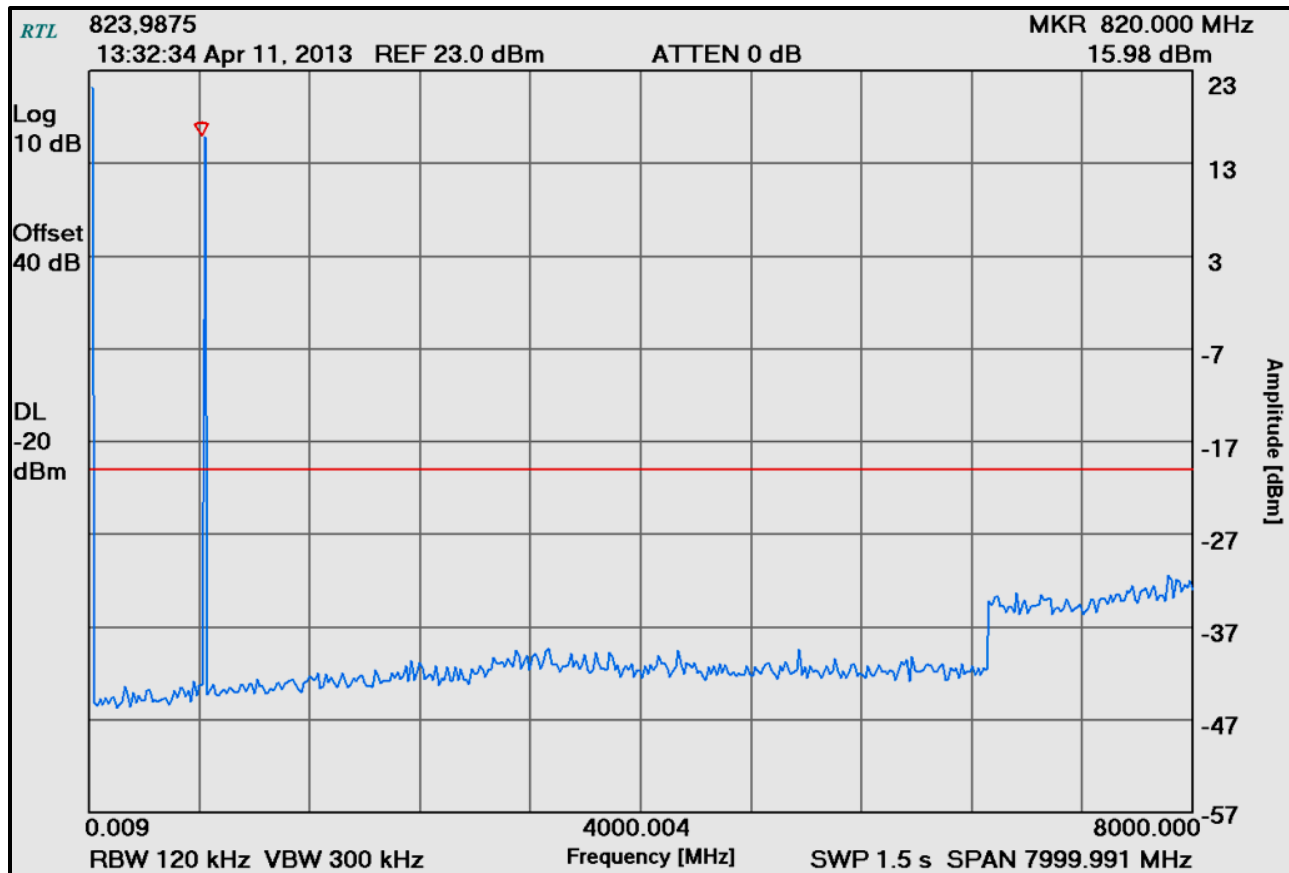

Plot 4-33: Conducted Spurious Emissions – H-CPM TDMA; 851.0125 MHz

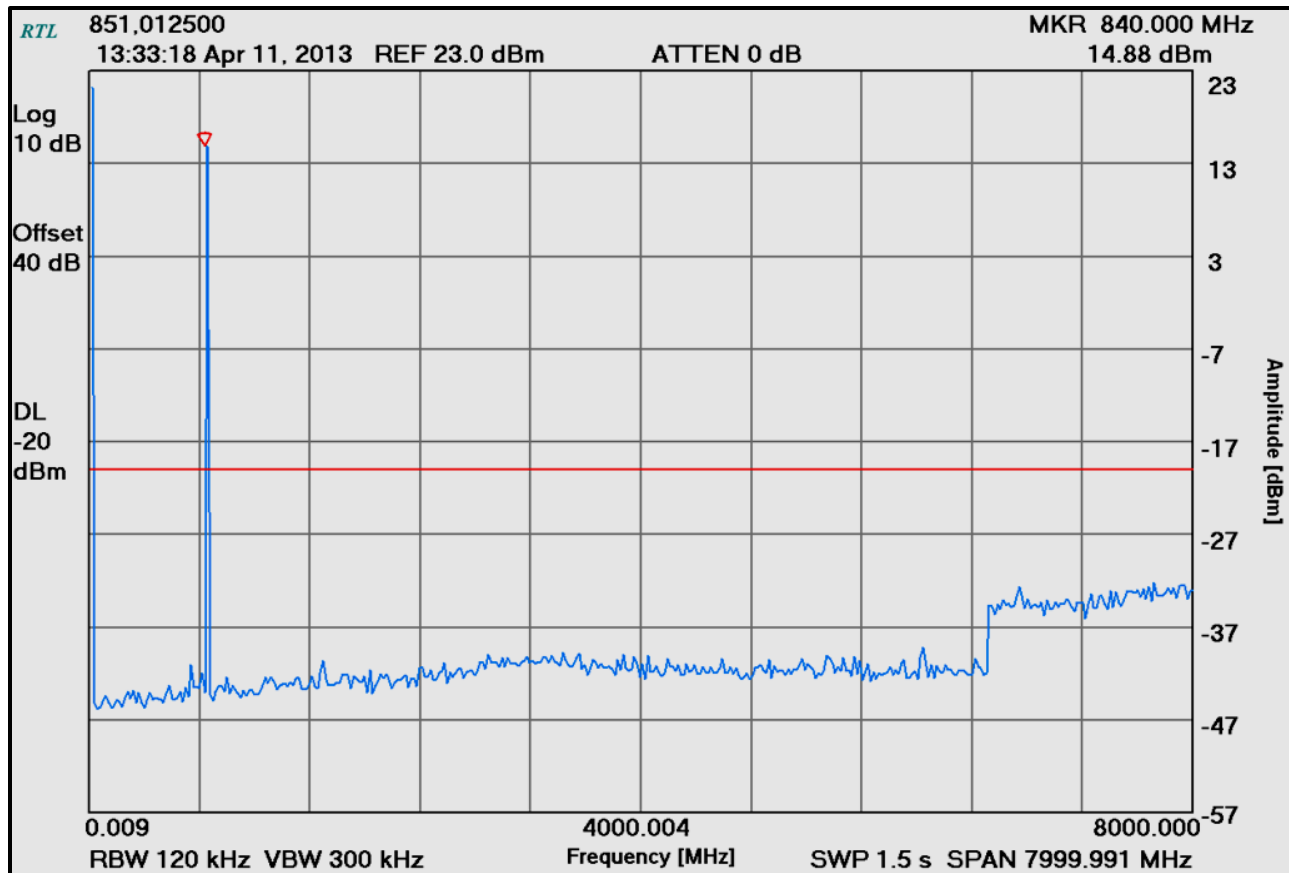

Plot 4-34: Conducted Spurious Emissions – H-CPM TDMA; 860.0000 MHz

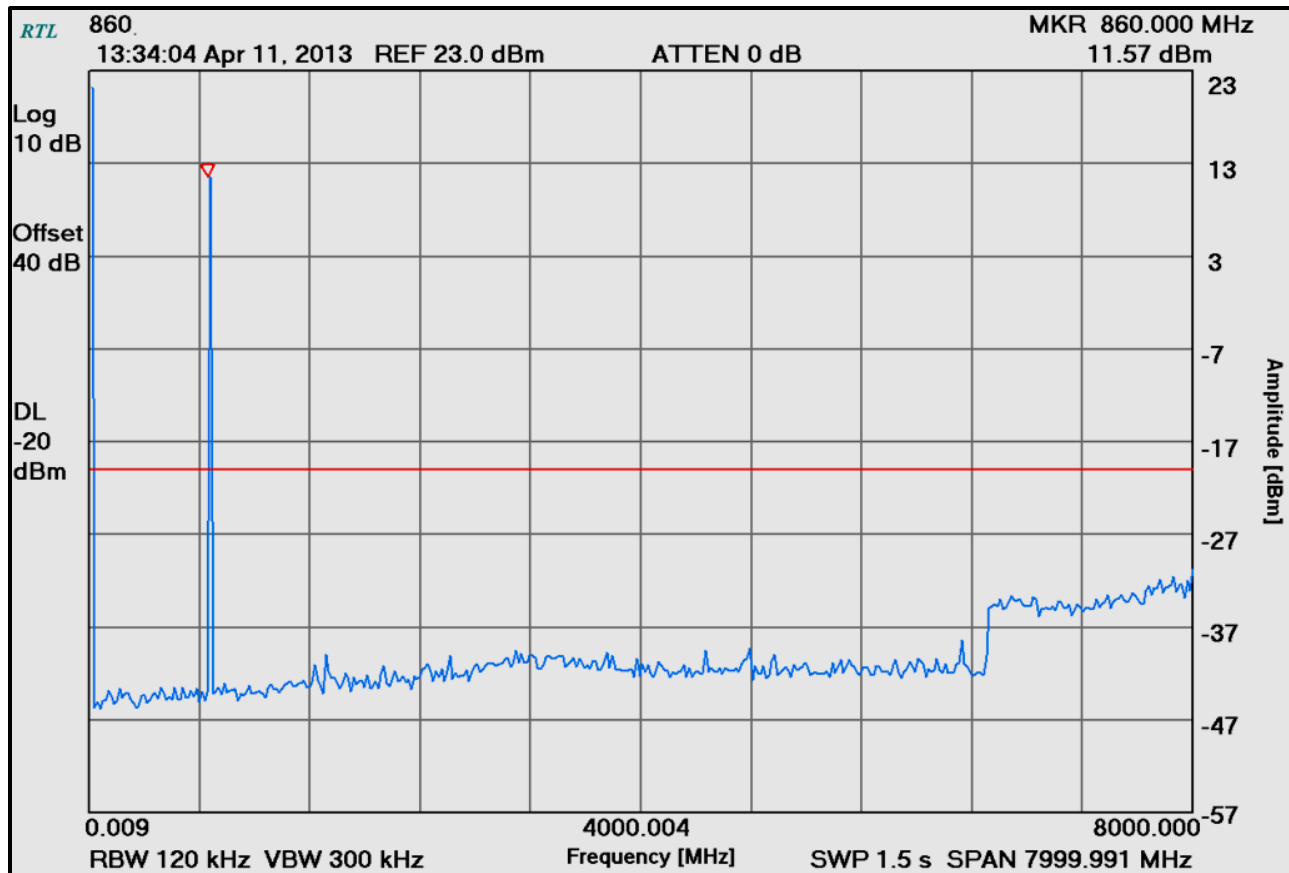

Plot 4-35: Conducted Spurious Emissions – H-CPM TDMA; 868.9875 MHz

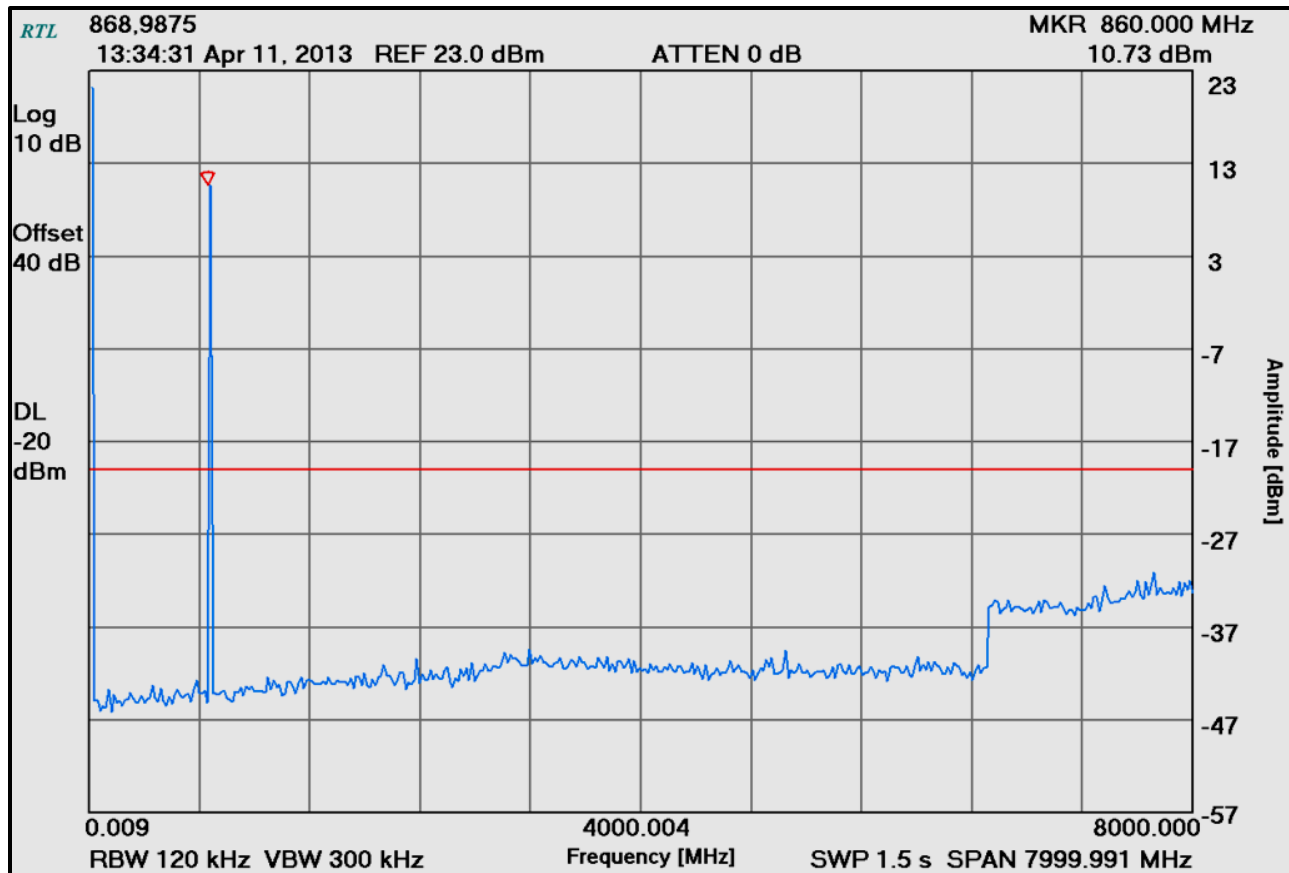


Table 4-1: Test Equipment Used for Testing Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13
901339	Weinschel Corp.	47-40-34	Attenuator (DC-18GHz, 40 dB, 25W)	BM4864	8/17/13
901358	Aeroflex/Weinschel	47-3-34	Attenuator, 3 dB0 1 - 18 GHz	BS0146	2/29/14
901131	Par Electronics	118-174 (25W)	VHF Notch Filter	N/A	2/29/14
901132	Par Electronics	806-902 (25W)	UHF Notch Filter	N/A	2/29/14
901133	Par Electronics	400-512 (25W)	UHF Notch Filter	N/A	2/29/14

Test Personnel:

Daniel Baltzell
 EMC Test Engineer

Signature

April 11, 2013
 Date of Test

5 FCC Rules and Regulations §2.1049(c)(1); §90.210; RSS-119 §5.8: Occupied Bandwidth

5.1 Test Procedure

TIA-102.CCAA August 2011, section 2.2.5, TIA-102.CCAB October 2011, section 3.2.5

Notes: FCC 90.210 specifies masks G and H for the 800 MHz band operation of this equipment, RSS-119 and TIA-102.CCAB October 2011 section 3.2.5.1 specify mask D; all data is presented on the following pages


FCC §90.210

Applicable Emission Masks		
Frequency Band (MHz)	Mask for Equipment with Audio Low Pass Filter	Mask for Equipment without Audio Low Pass Filter
Below 25 ¹	A or B	A or C
25–50.....	B	C
72–76.....	B	C
150–174 ²	B, D, or E	C, D, or E
150 Paging-only	B	C
220–222	F	F
421–512 ²	B, D, or E	C, D, or E
450 Paging-only	B	G
806–809/851–854	B	H
809–824/854–869 ³	B	G
896–901/935–940	I	J
902–928	K	K
929–930	B	G
4940–4990 MHz	L or M	L or M
5850–5925 ⁴		
All other bands	B	C


¹ Equipment using single sideband J3E emission must meet the requirements of Emission Mask A.
 Equipment using other emissions must meet the requirements of Emission Mask B or C, as applicable.
² Equipment designed to operate with a 25 kHz channel bandwidth must meet the requirements of Emission Mask B or C, as applicable. Equipment designed to operate with a 12.5 kHz channel bandwidth must meet the requirements of Emission Mask D, and equipment designed to operate with a 6.25 kHz channel bandwidth must meet the requirements of Emission Mask E.
³ Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of §90.691.
⁴ DSRCS Roadside Unit equipment in the 5850–5925 MHz band is governed under subpart M of this part.

5.2 Test Data


Plot 5-1: Occupied Bandwidth – H-CPM TDMA; 136.0125 MHz; Mask D

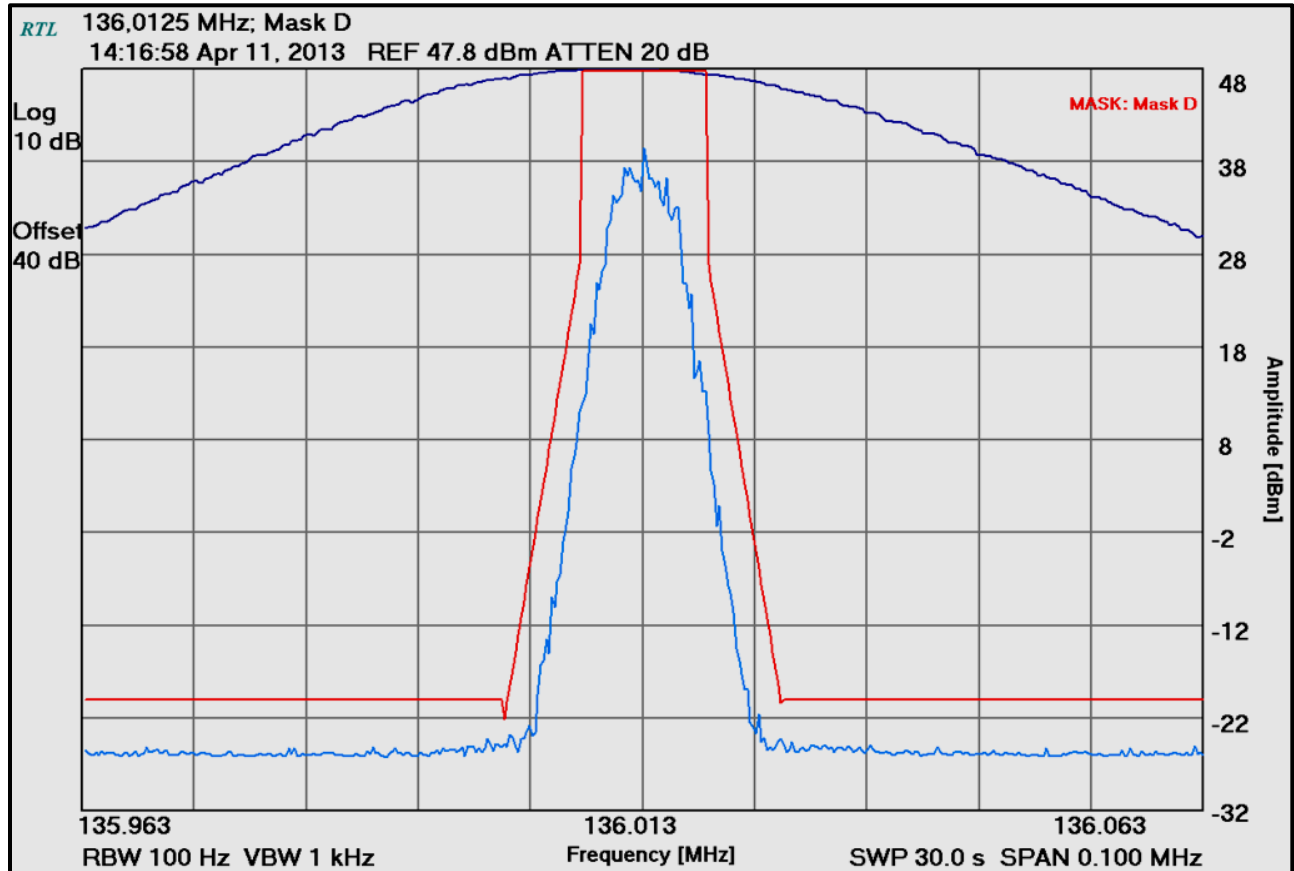


Plot 5-2: Occupied Bandwidth – H-CPM TDMA; 138.0125 MHz; Mask D

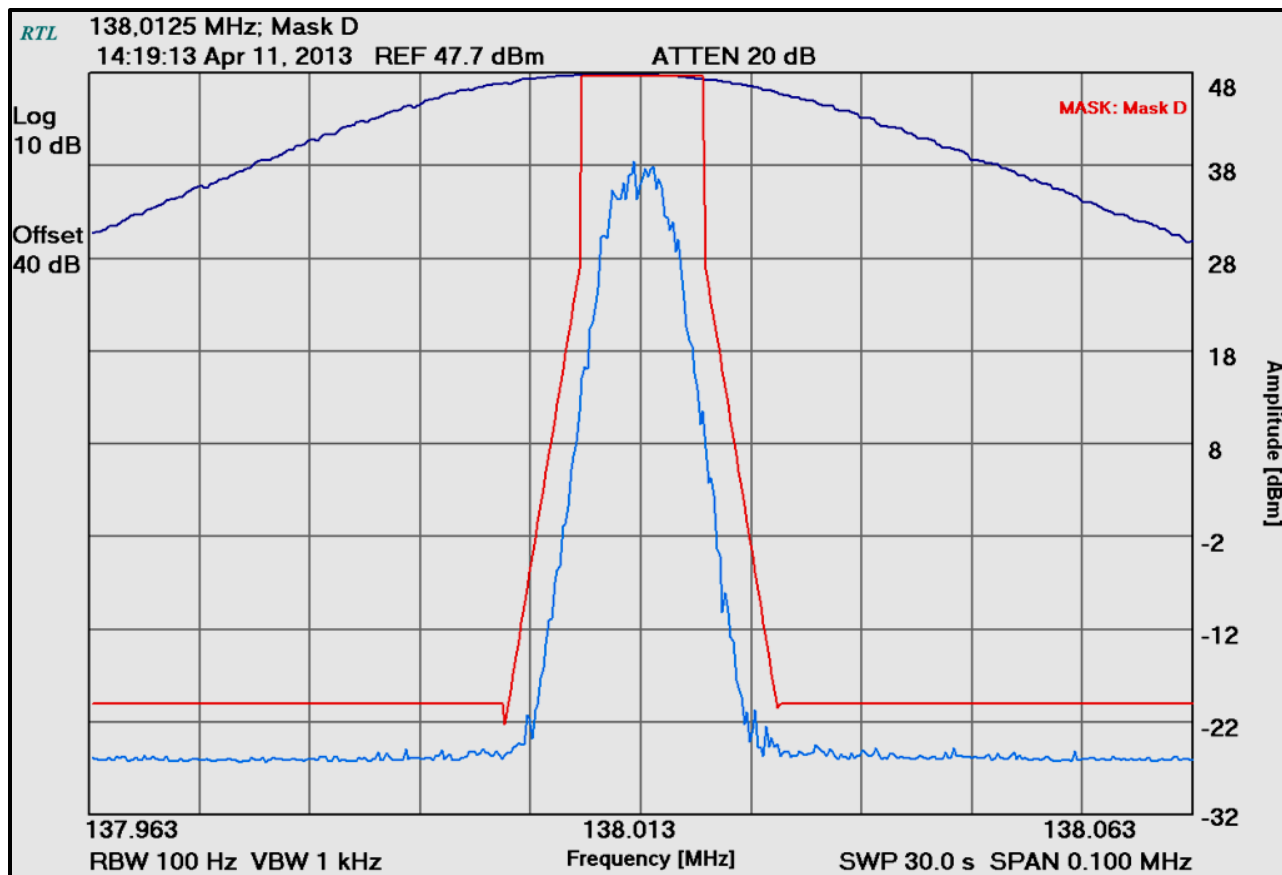


Plot 5-3: Occupied Bandwidth – H-CPM TDMA; 141.0000 MHz; Mask D

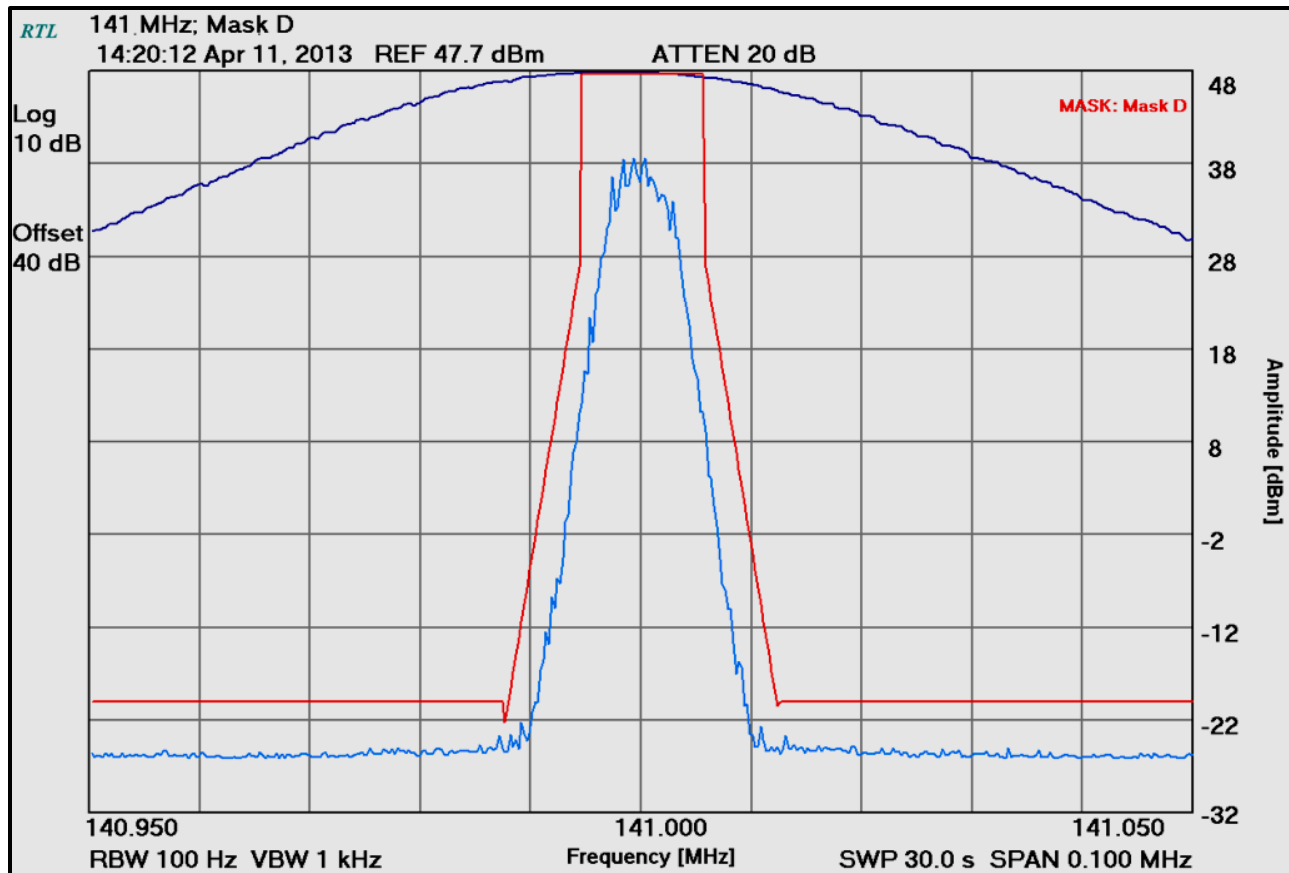


Plot 5-4: Occupied Bandwidth – H-CPM TDMA; 143.9875 MHz; Mask D

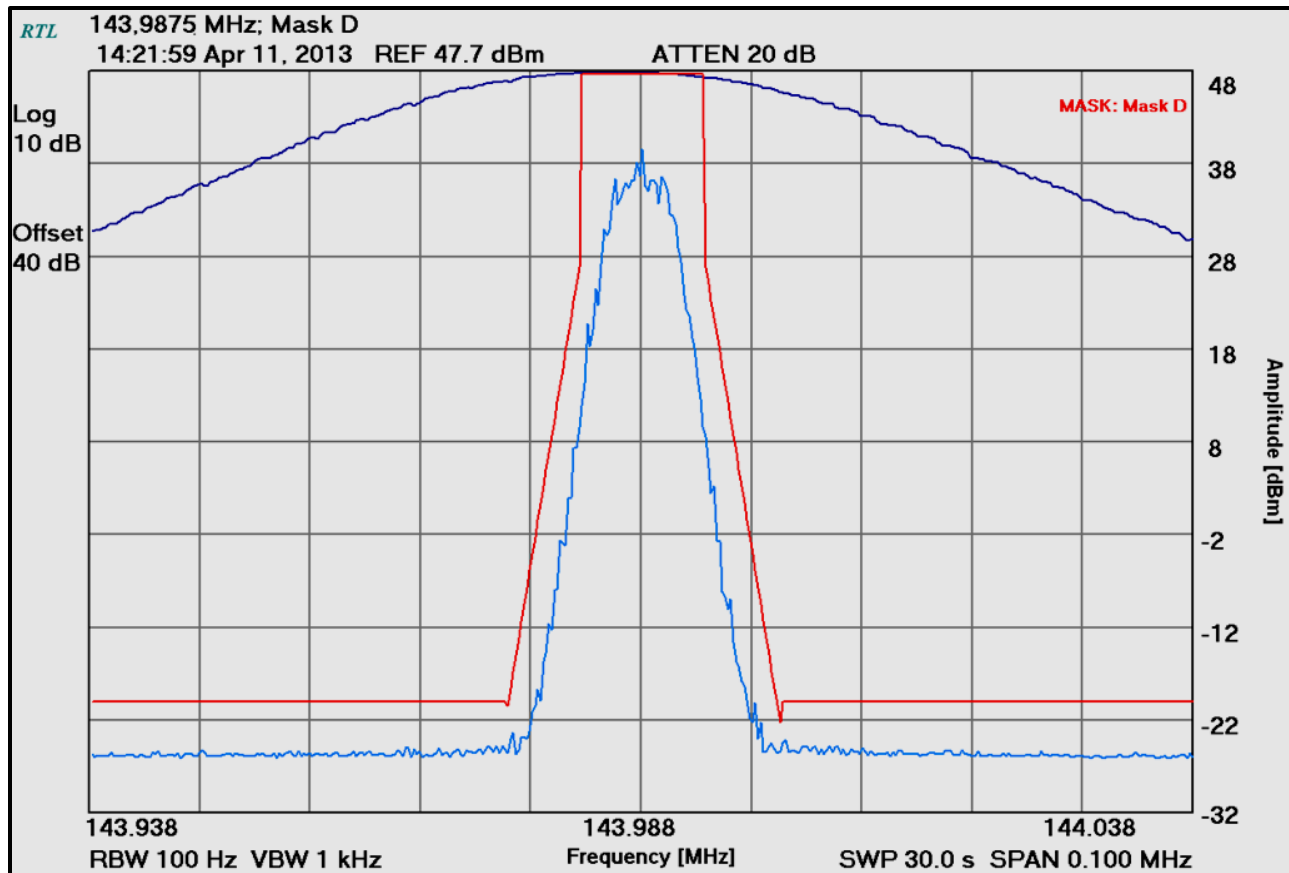


Plot 5-5: Occupied Bandwidth – H-CPM TDMA; 148.0125 MHz; Mask D

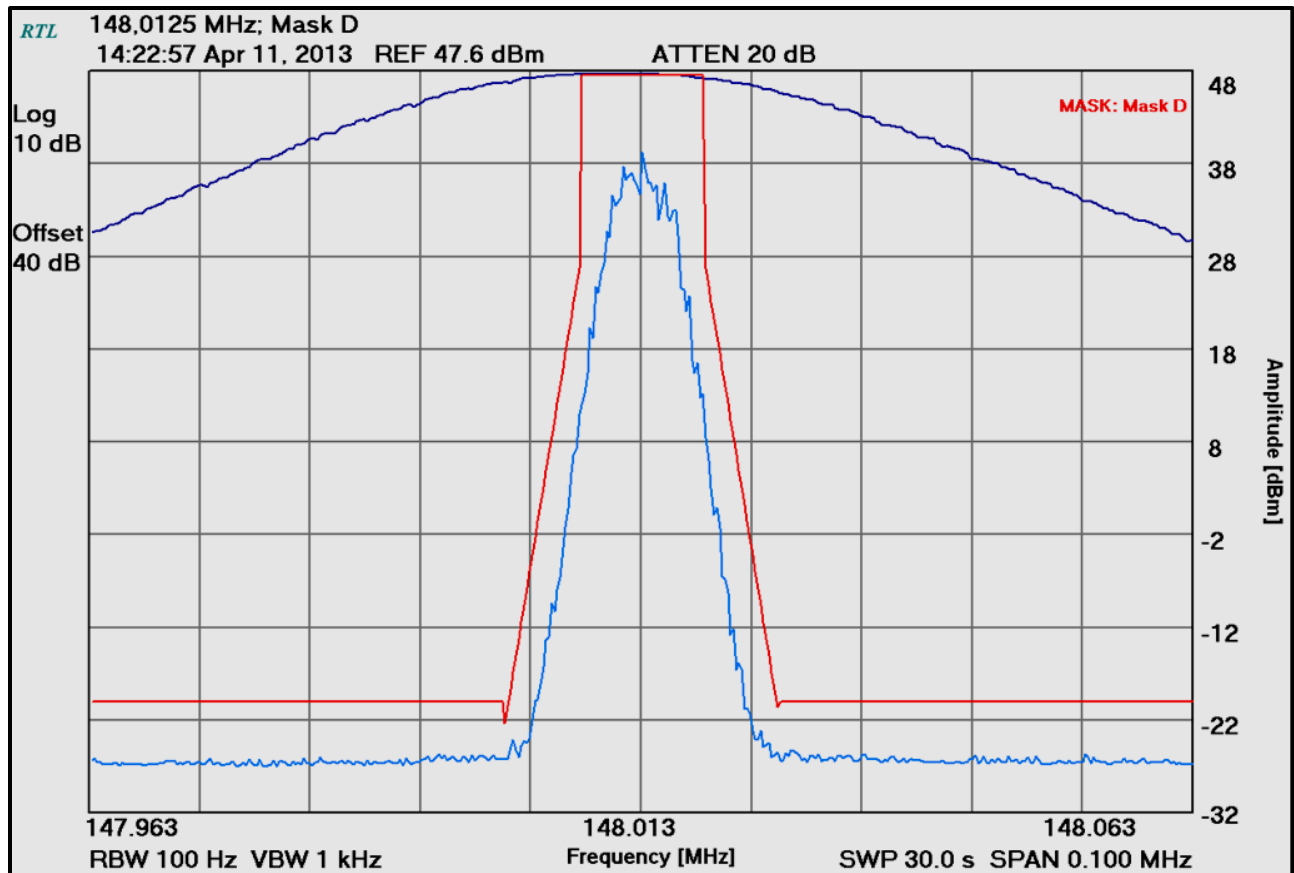


Plot 5-6: Occupied Bandwidth – H-CPM TDMA; 150.0125 MHz; Mask D

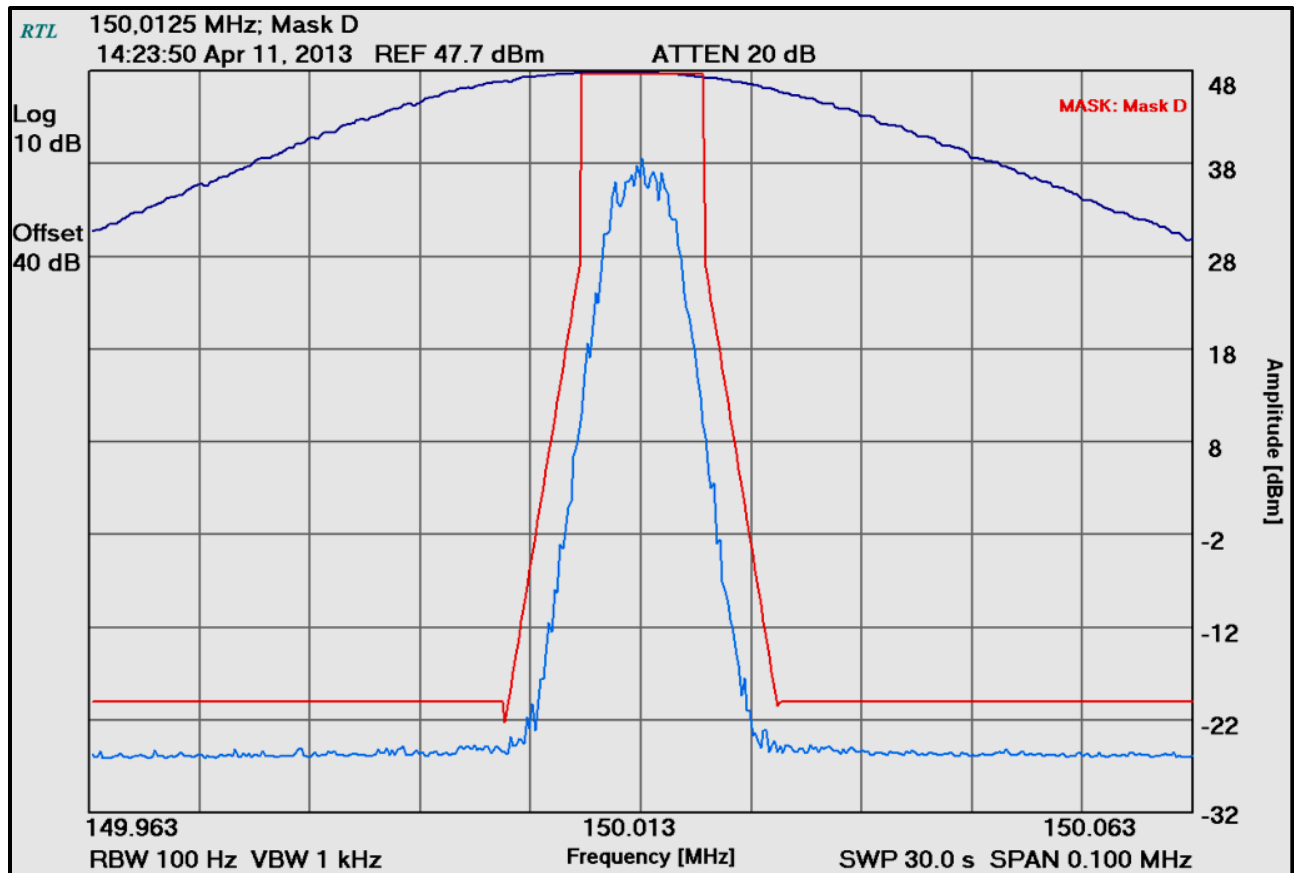


Plot 5-7: Occupied Bandwidth – H-CPM TDMA; 154.0125 MHz; Mask D

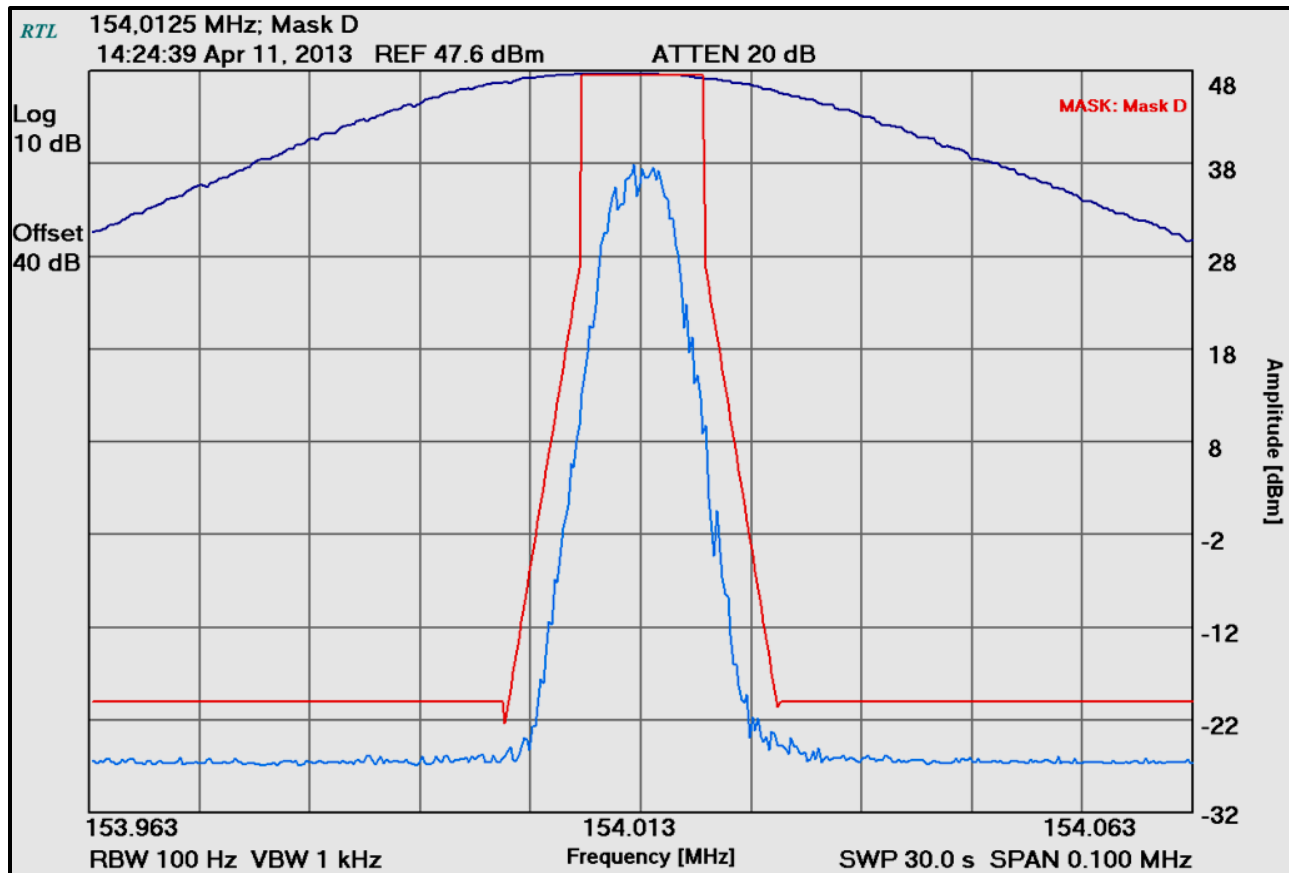


Plot 5-8: Occupied Bandwidth – H-CPM TDMA; 162.0000 MHz; Mask D

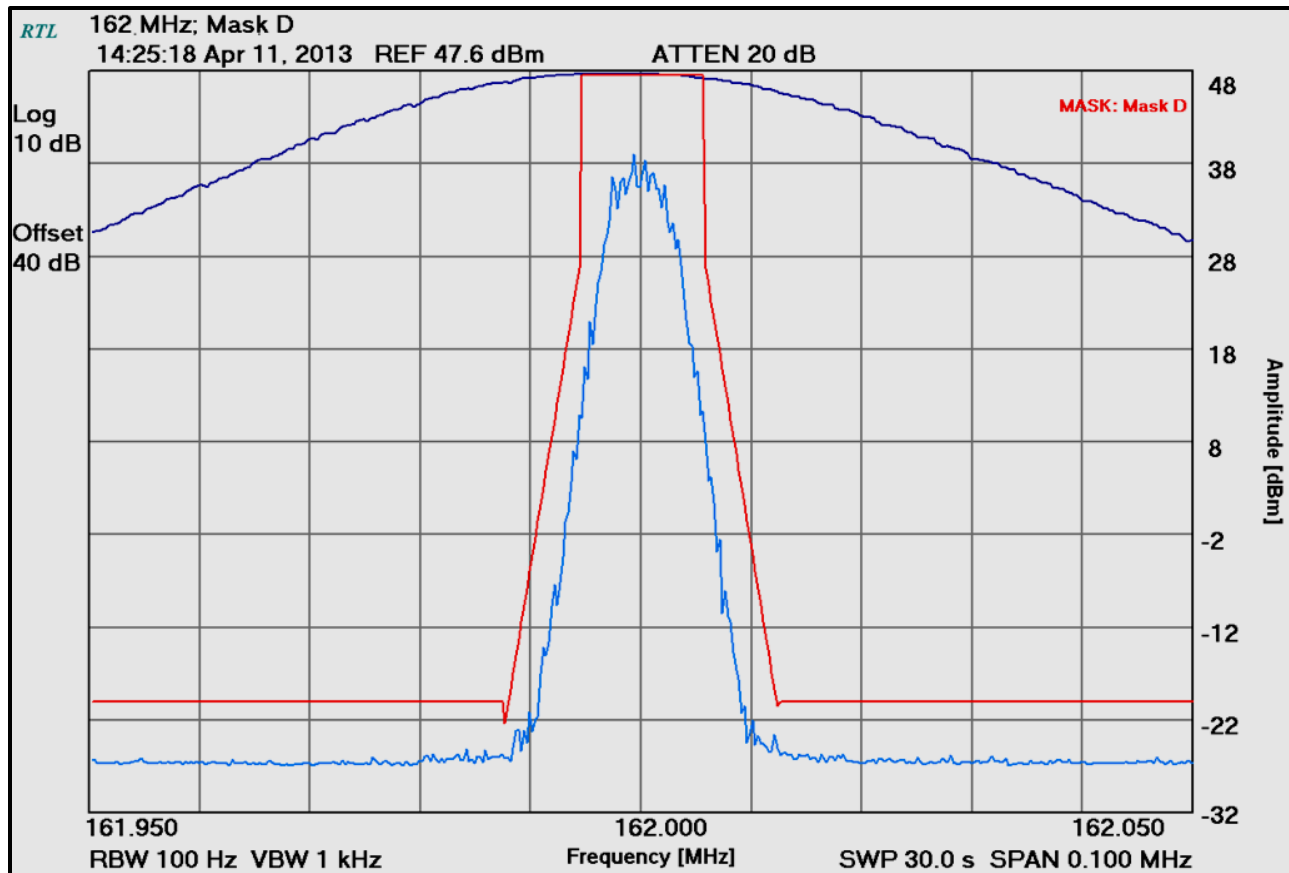


Plot 5-9: Occupied Bandwidth – H-CPM TDMA; 173.1875 MHz; Mask D

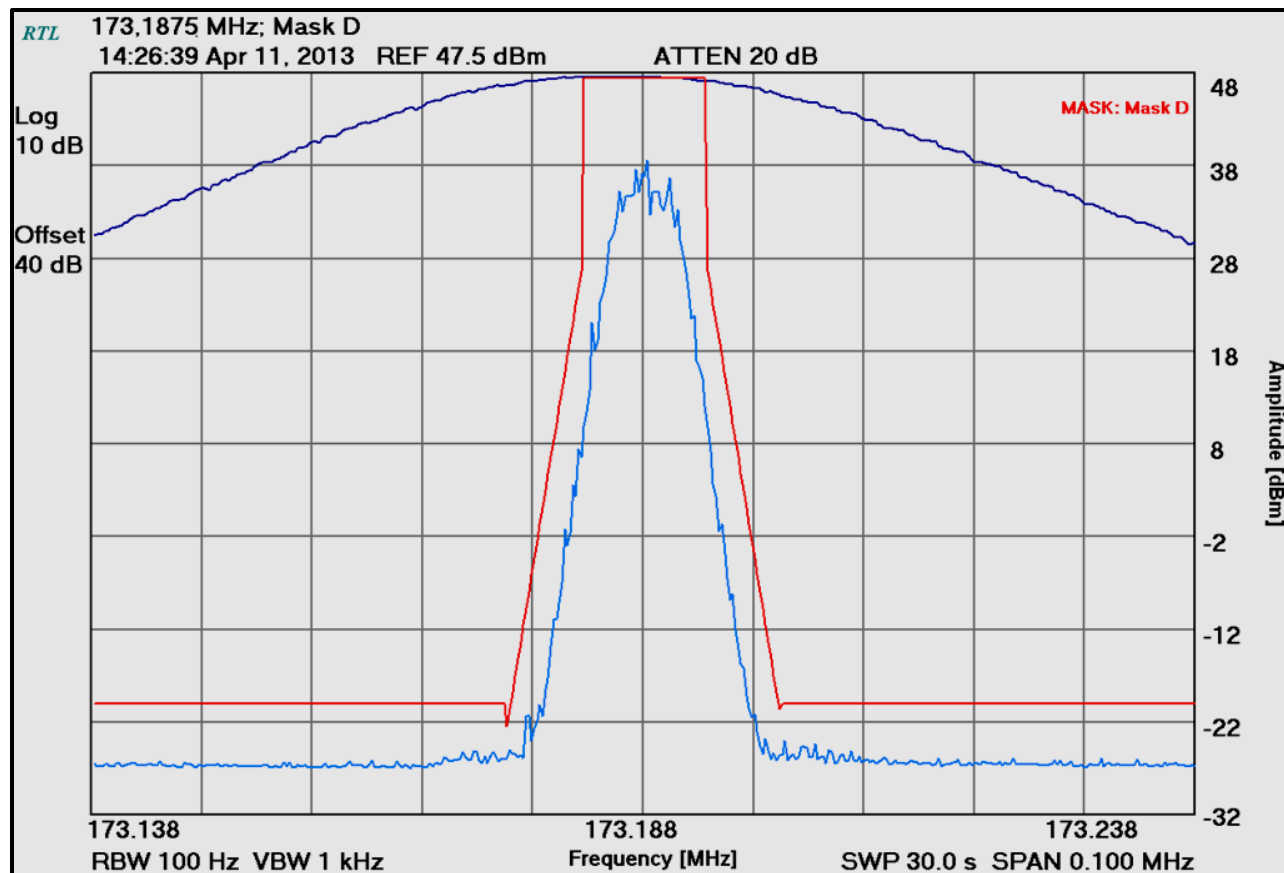


Plot 5-10: Occupied Bandwidth – H-CPM TDMA; 173.9875 MHz; Mask D

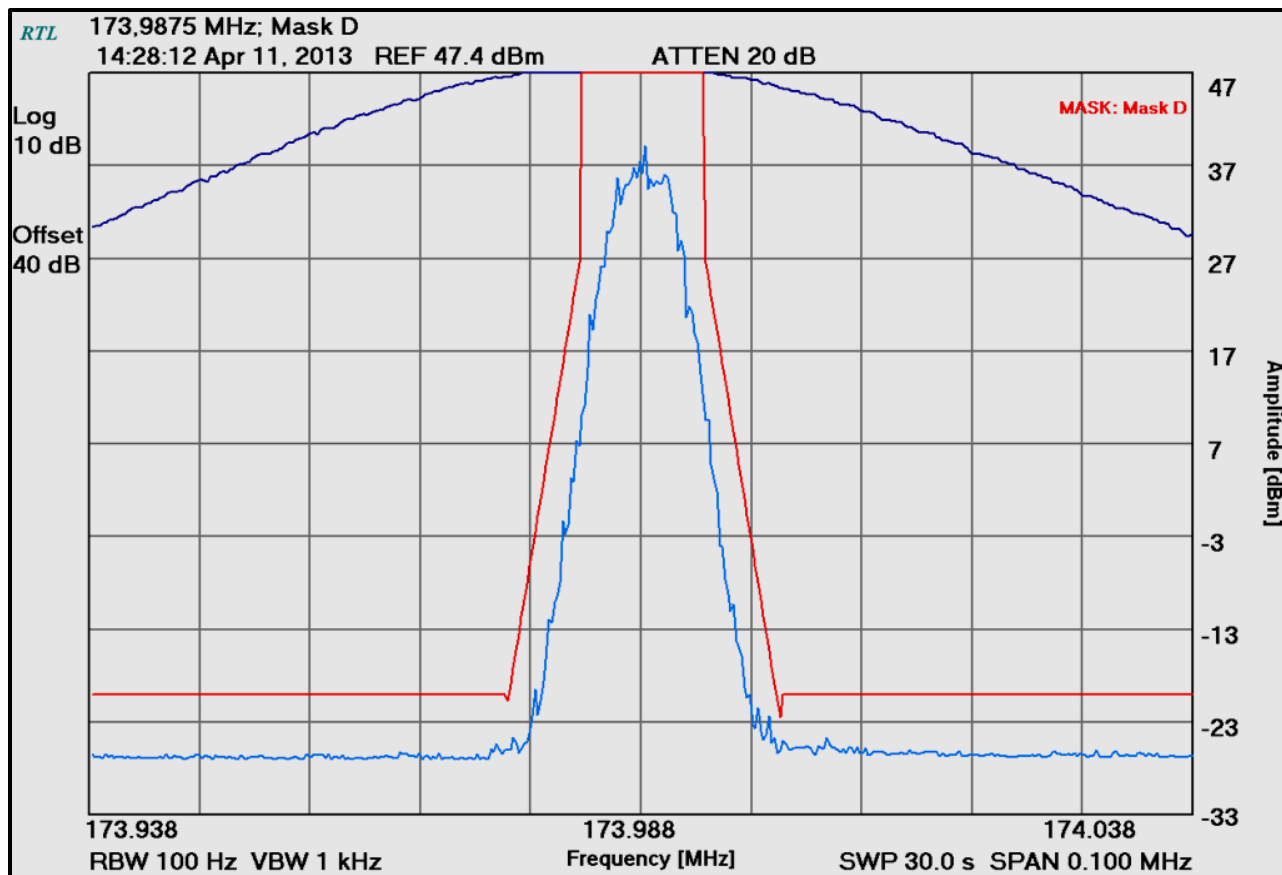


Plot 5-11: Occupied Bandwidth – H-CPM TDMA; 406.1125 MHz; Mask D

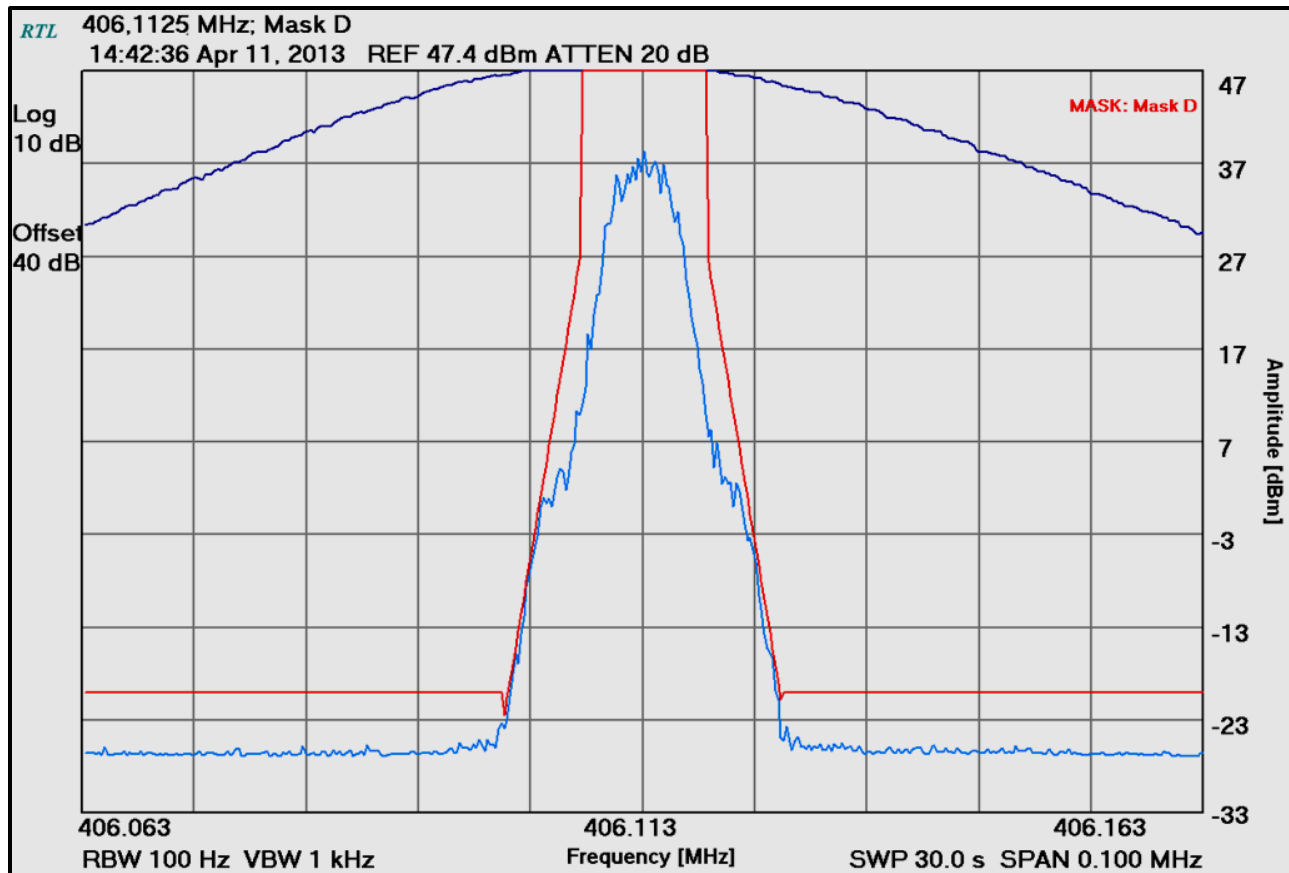


Plot 5-12: Occupied Bandwidth – H-CPM TDMA; 418.0000 MHz; Mask D

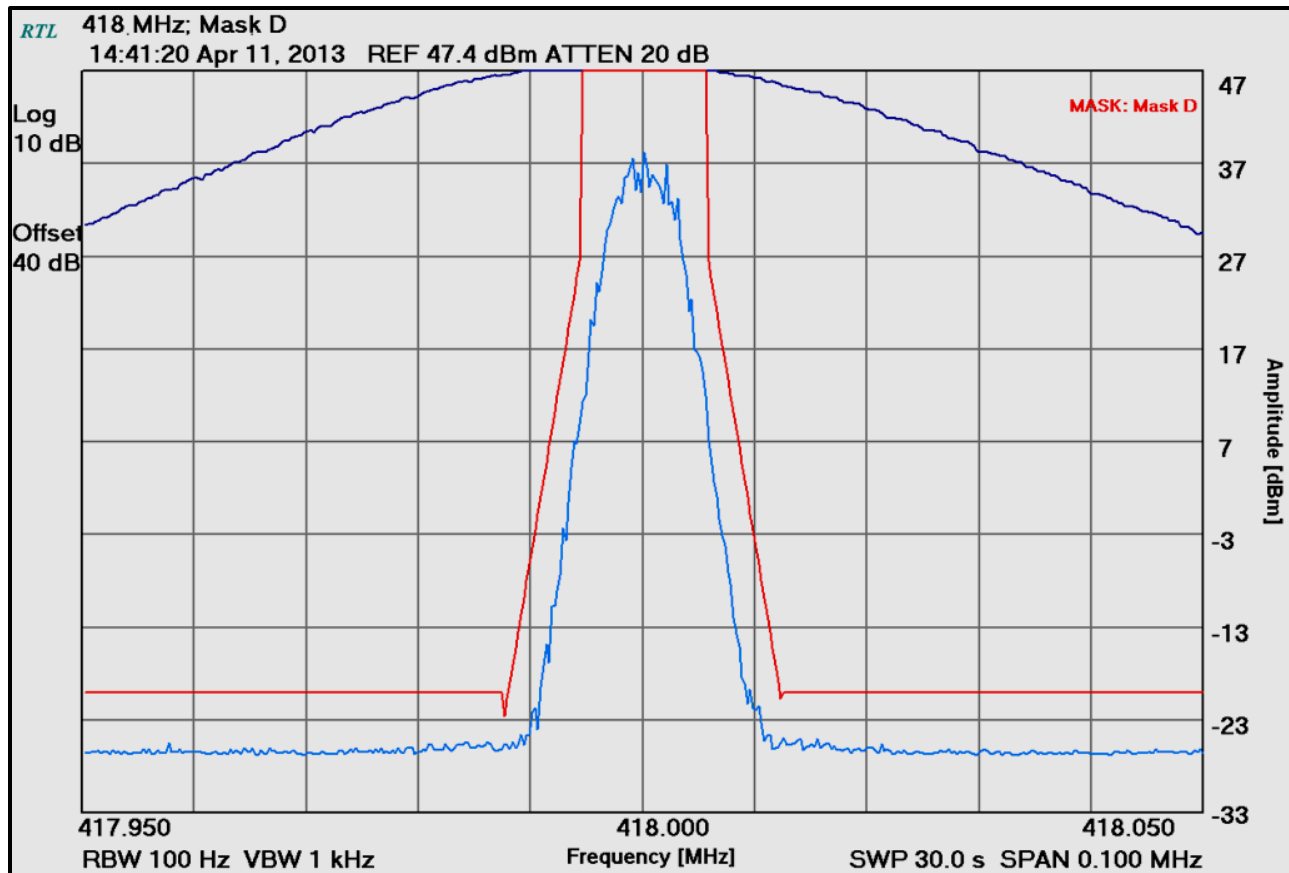


Plot 5-13: Occupied Bandwidth – H-CPM TDMA; 429.9875 MHz; Mask D

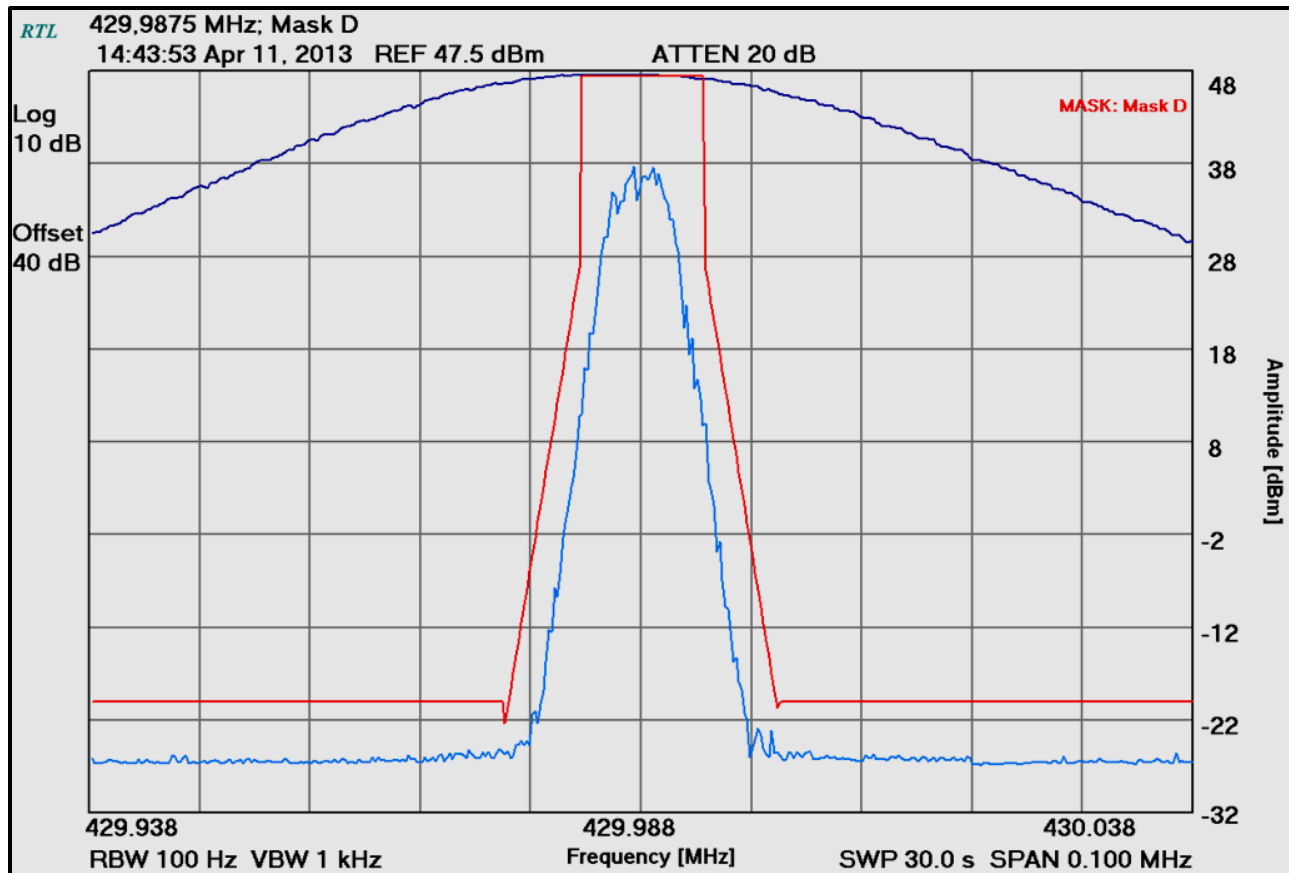


Plot 5-14: Occupied Bandwidth – H-CPM TDMA; 450.0125 MHz; Mask D

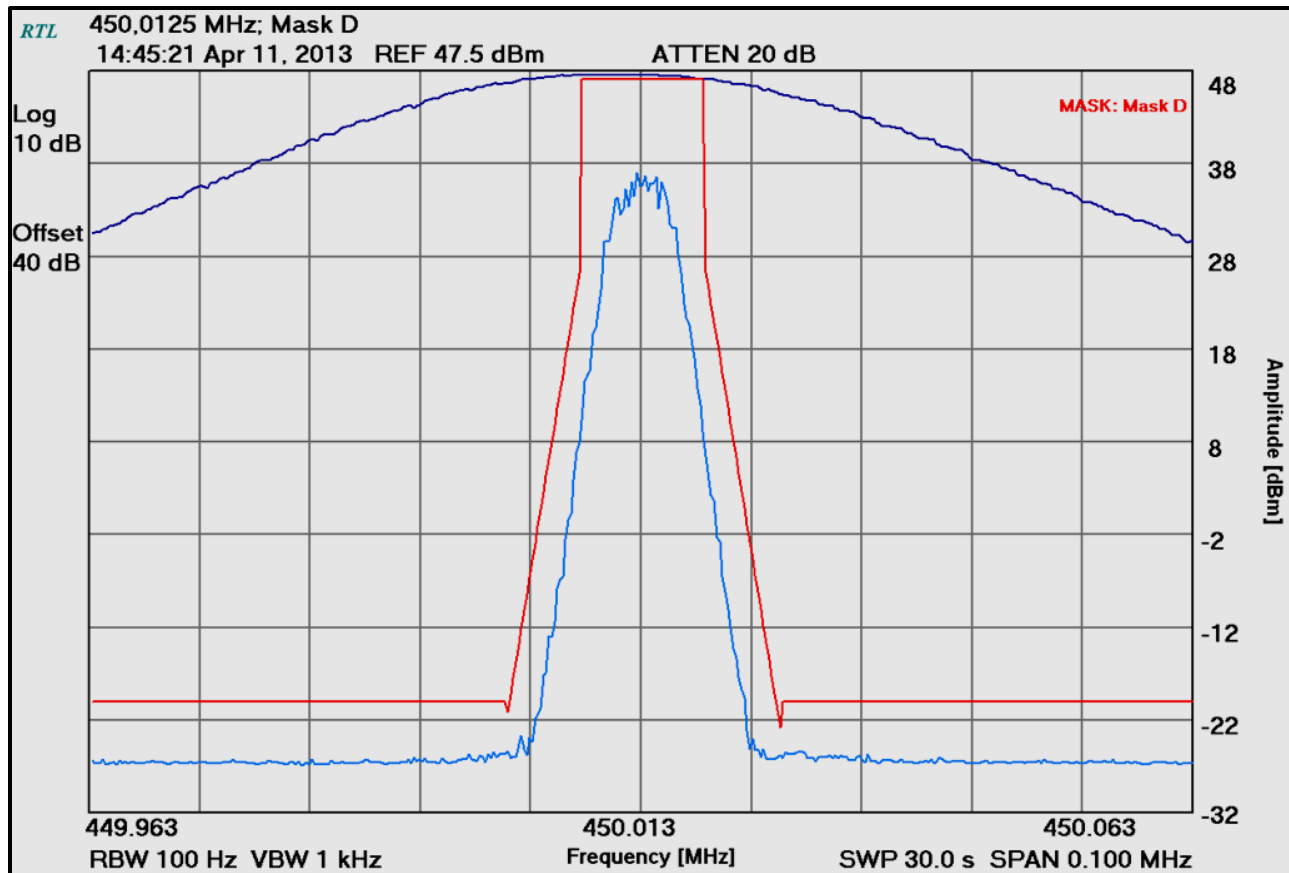


Plot 5-15: Occupied Bandwidth – H-CPM TDMA; 453.9875 MHz; Mask D

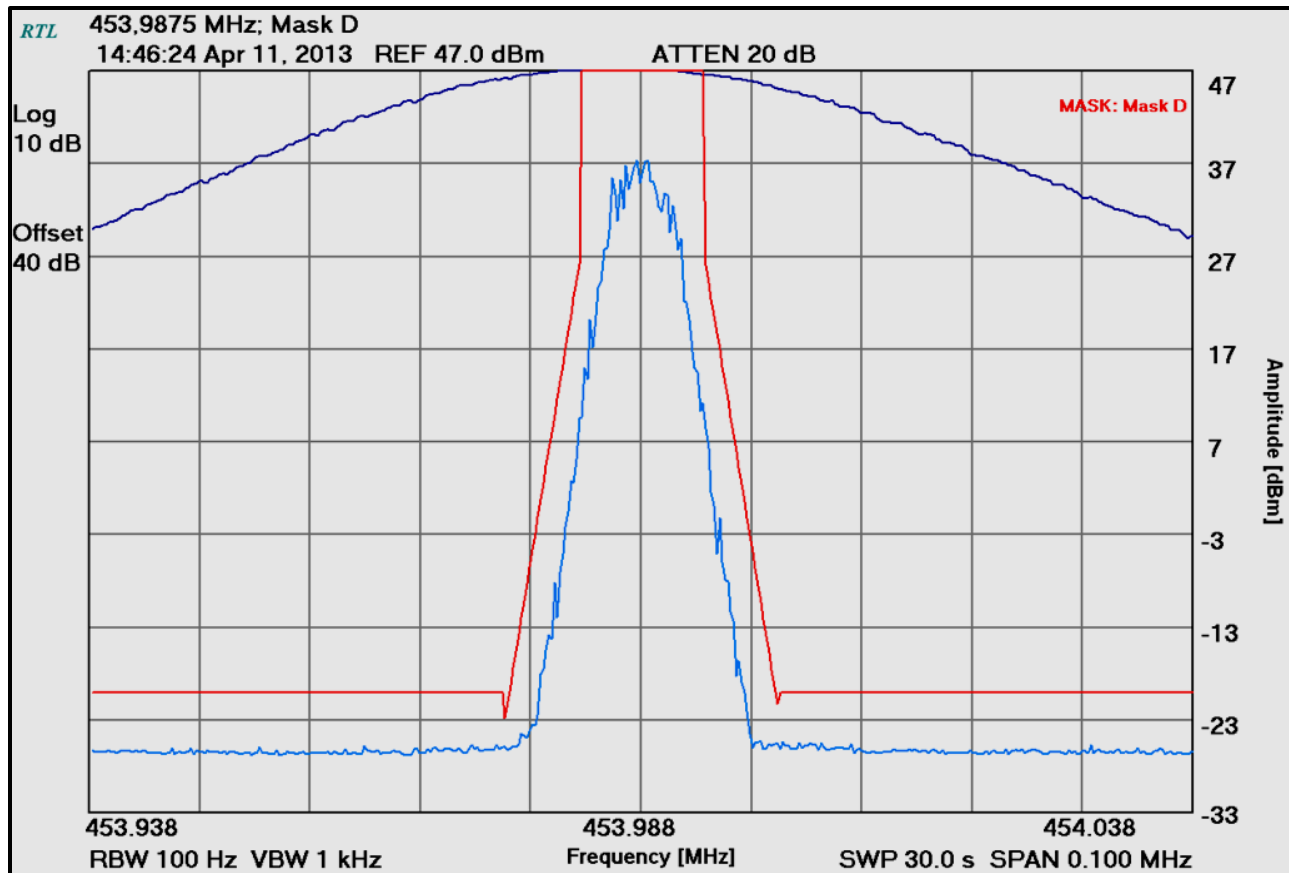


Plot 5-16: Occupied Bandwidth – H-CPM TDMA; 456.0125 MHz; Mask D

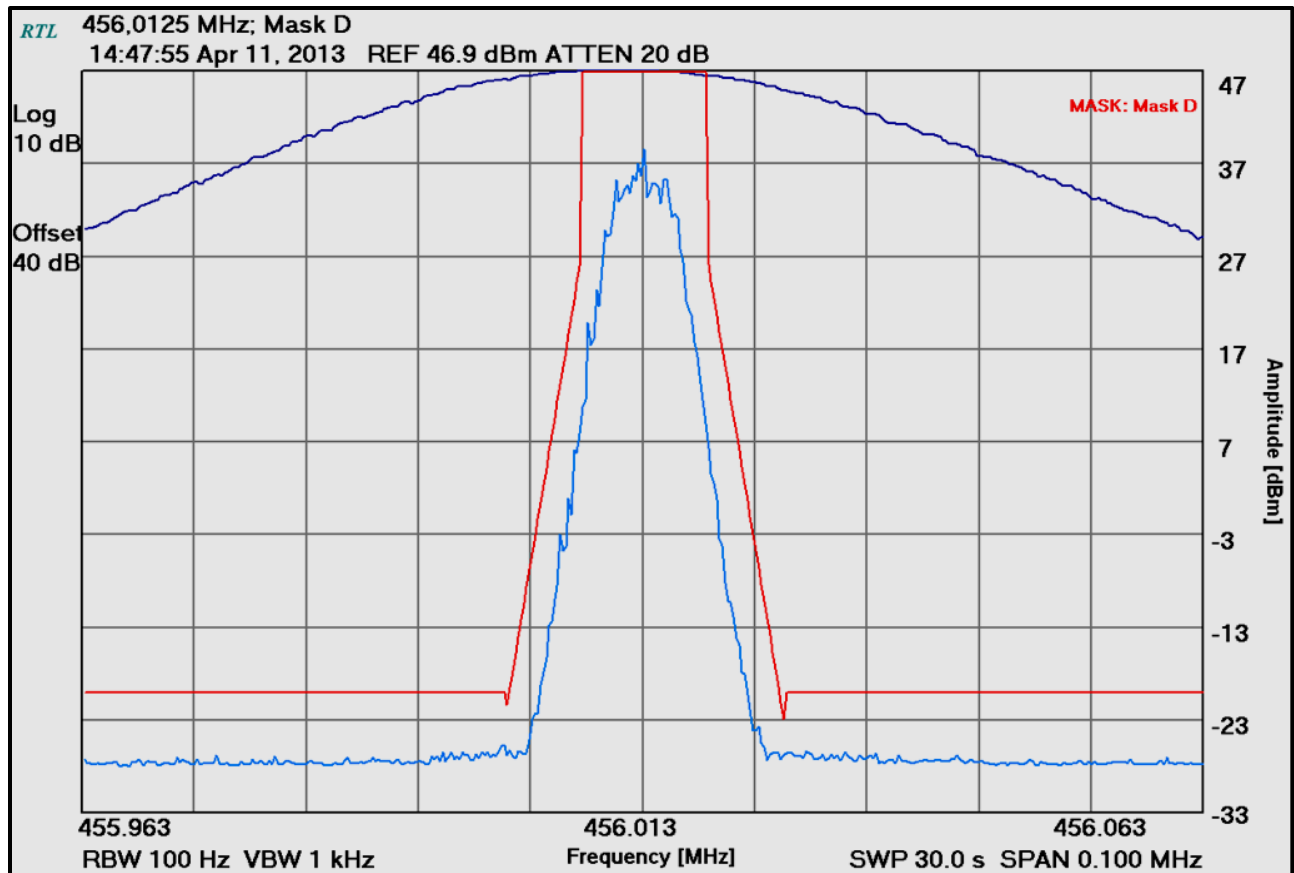


Plot 5-17: Occupied Bandwidth – H-CPM TDMA; 469.9875 MHz; Mask D

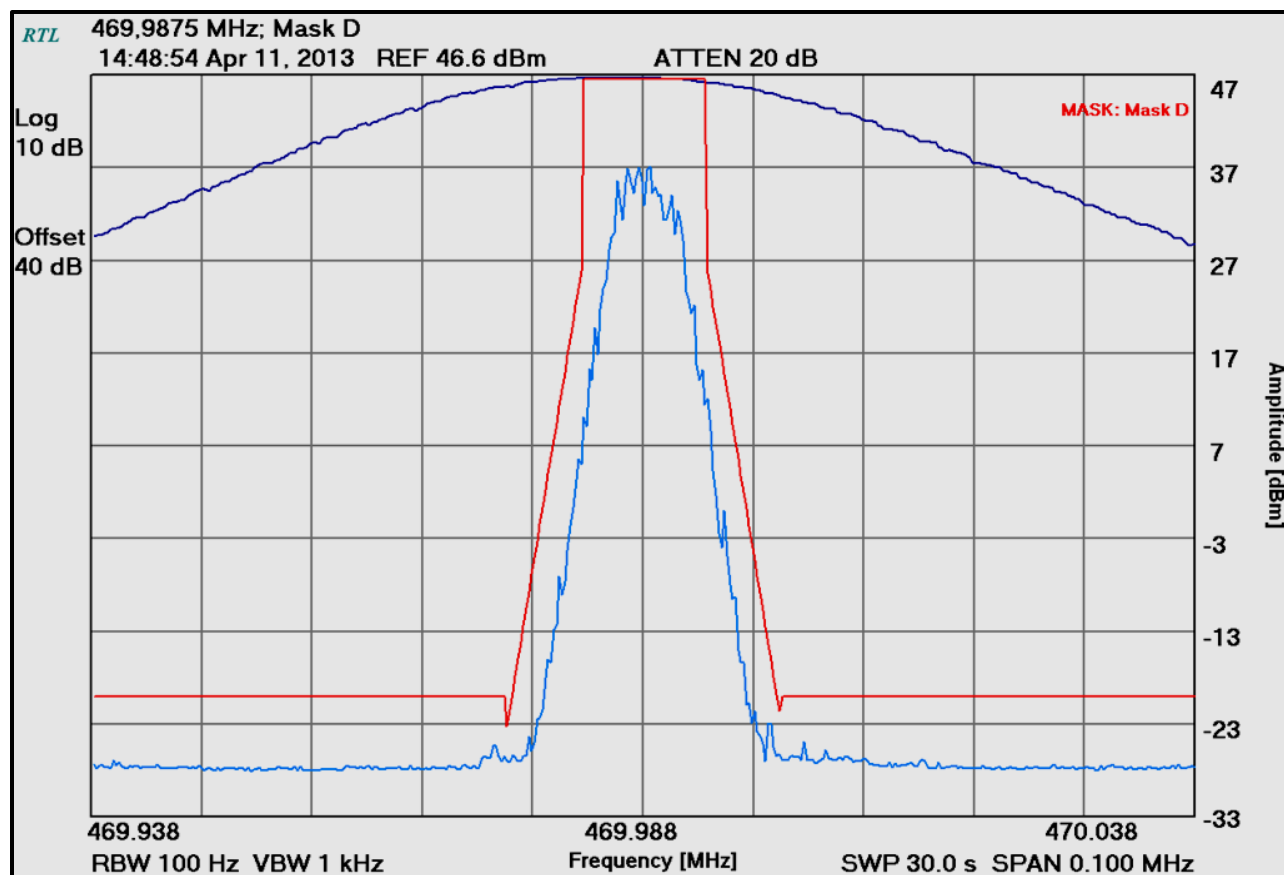


Plot 5-18: Occupied Bandwidth – H-CPM TDMA; 511.9875 MHz; Mask D

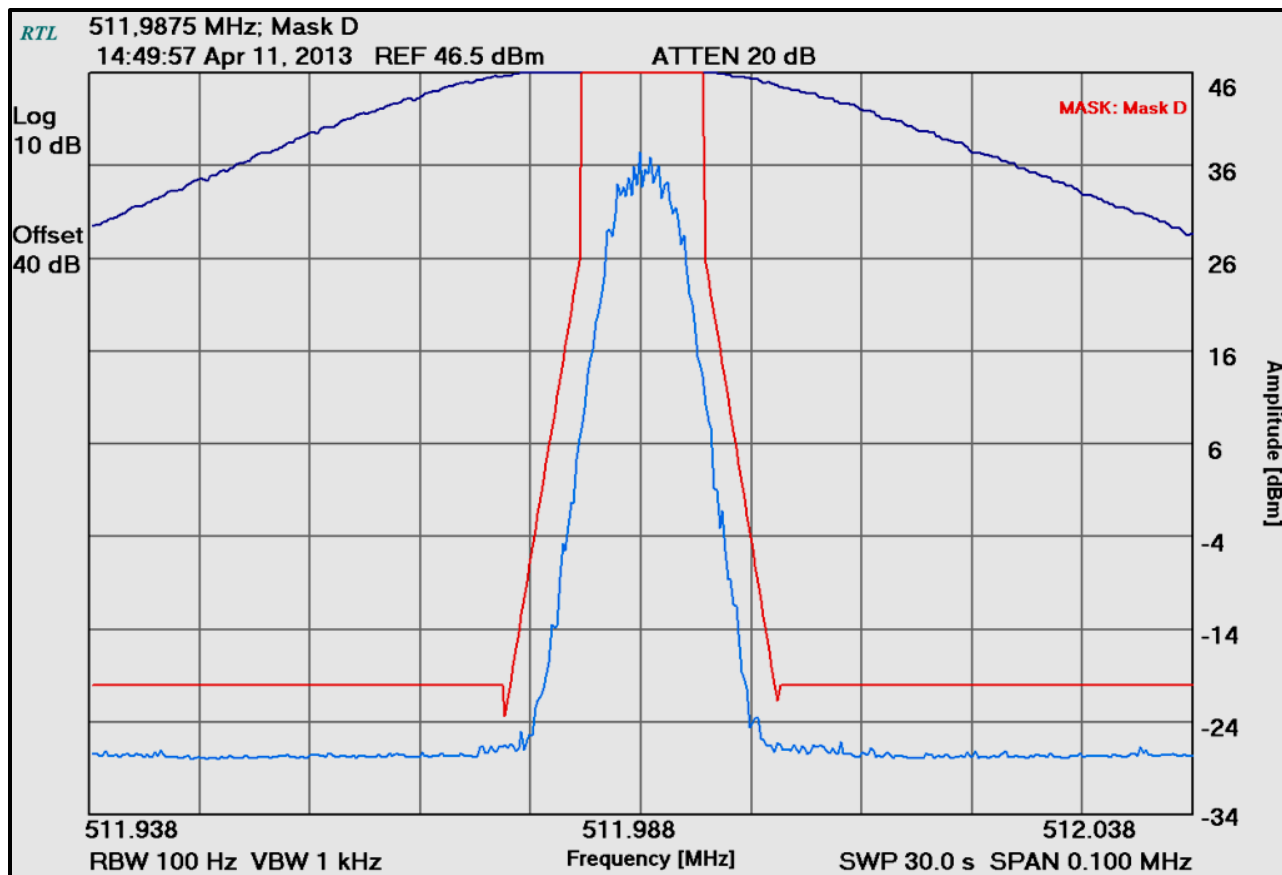


Plot 5-19: Occupied Bandwidth – H-CPM TDMA; 519.9875 MHz; Mask D

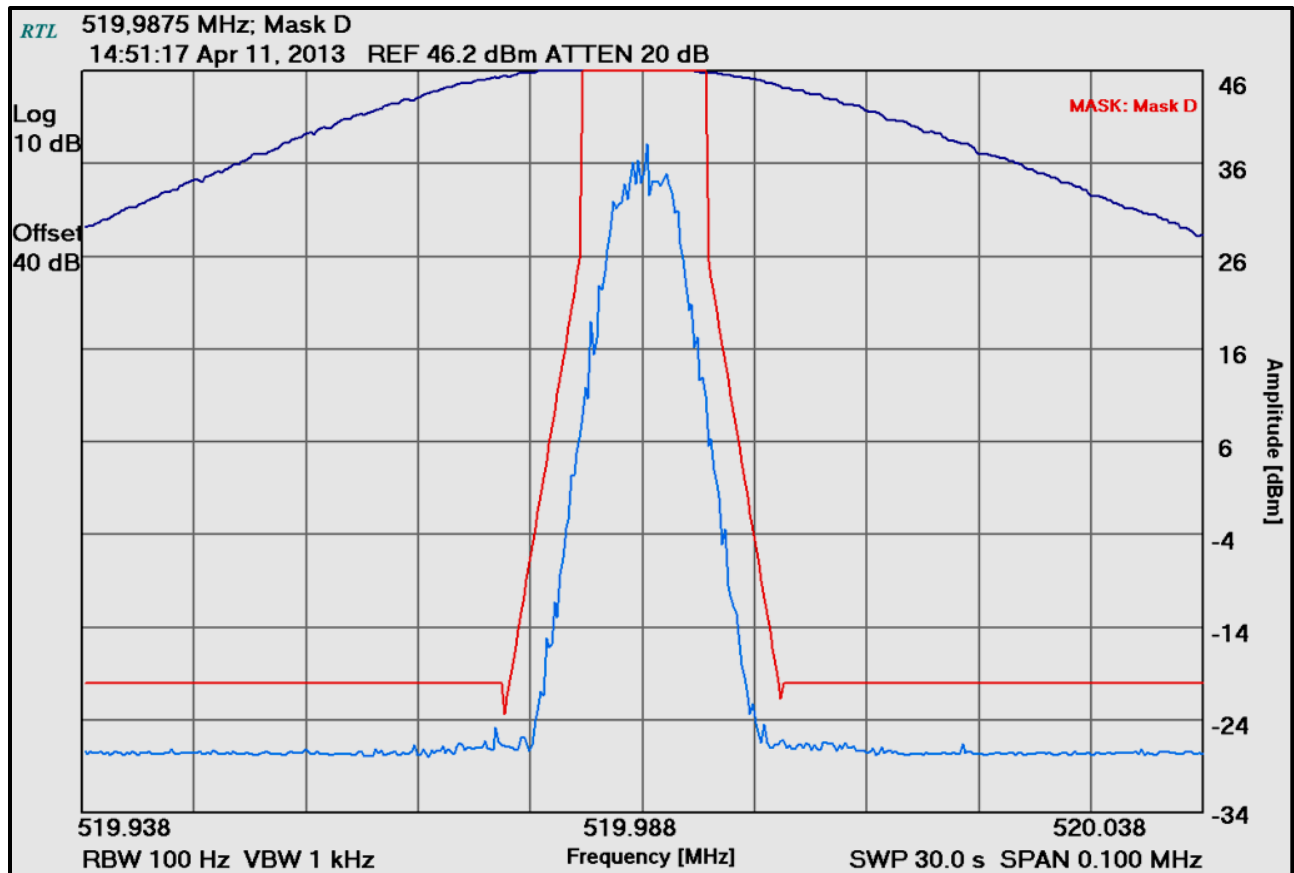


Plot 5-20: Occupied Bandwidth – H-CPM TDMA; 806.0125 MHz; Mask D

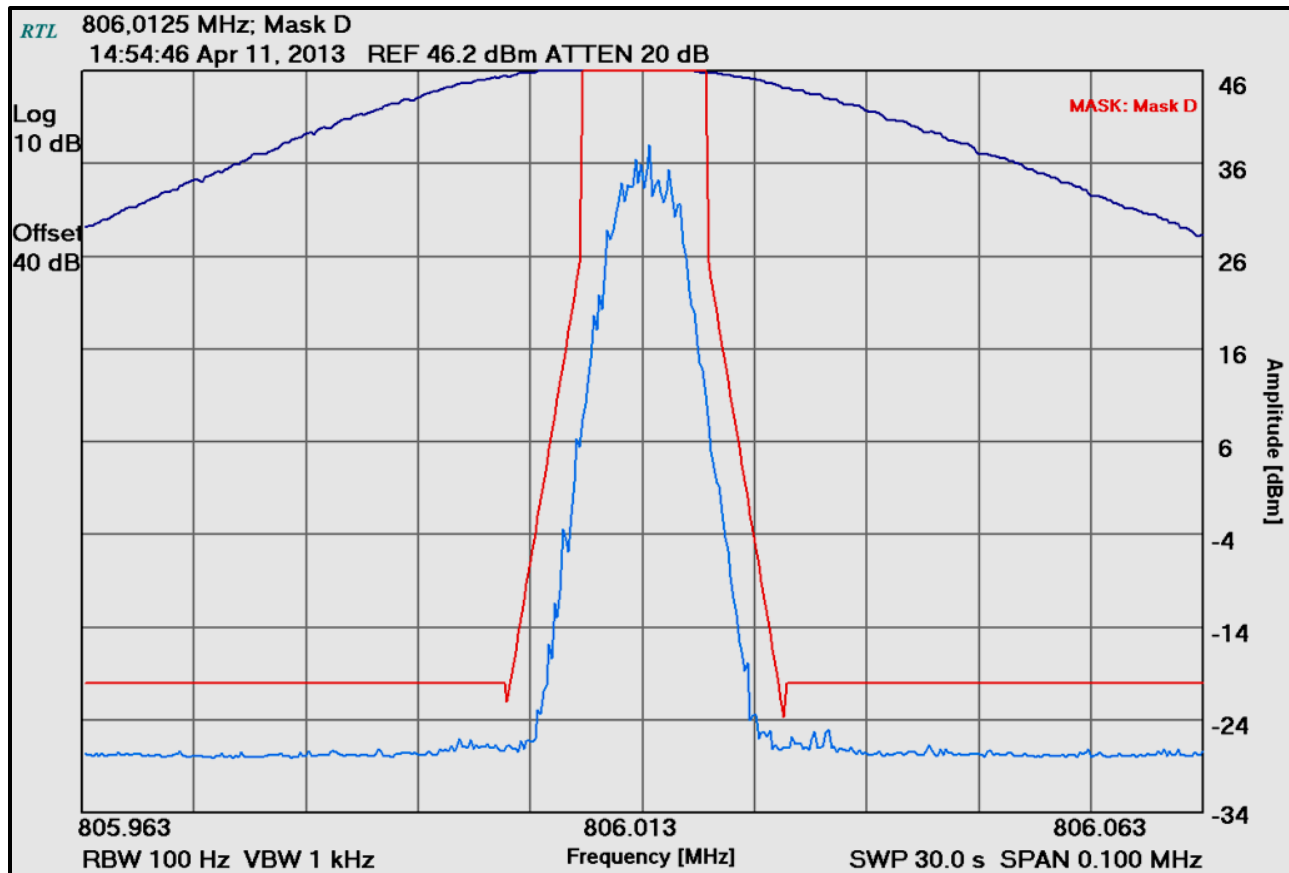


Plot 5-21: Occupied Bandwidth – H-CPM TDMA; 815.0000 MHz; Mask D

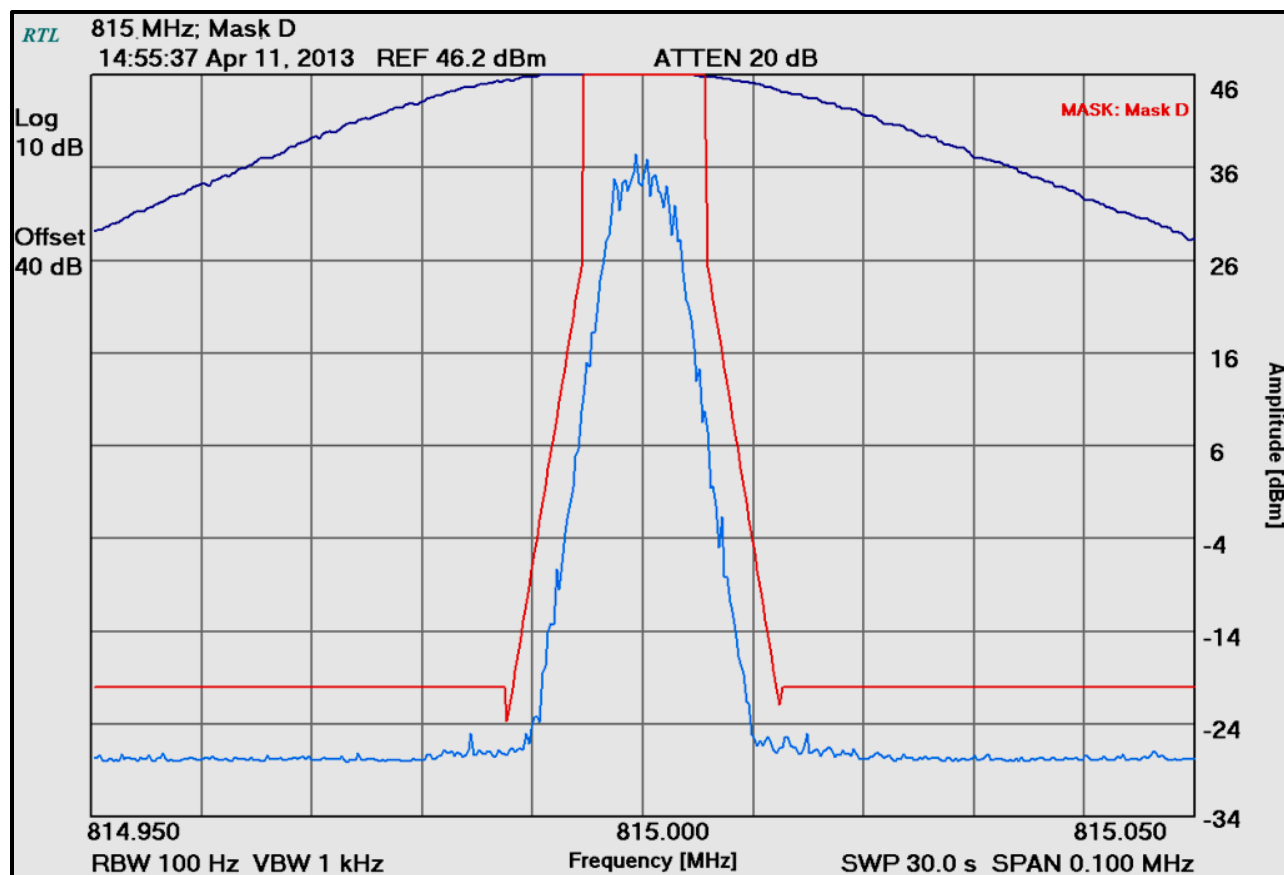


Plot 5-22: Occupied Bandwidth – H-CPM TDMA; 823.9875 MHz; Mask D

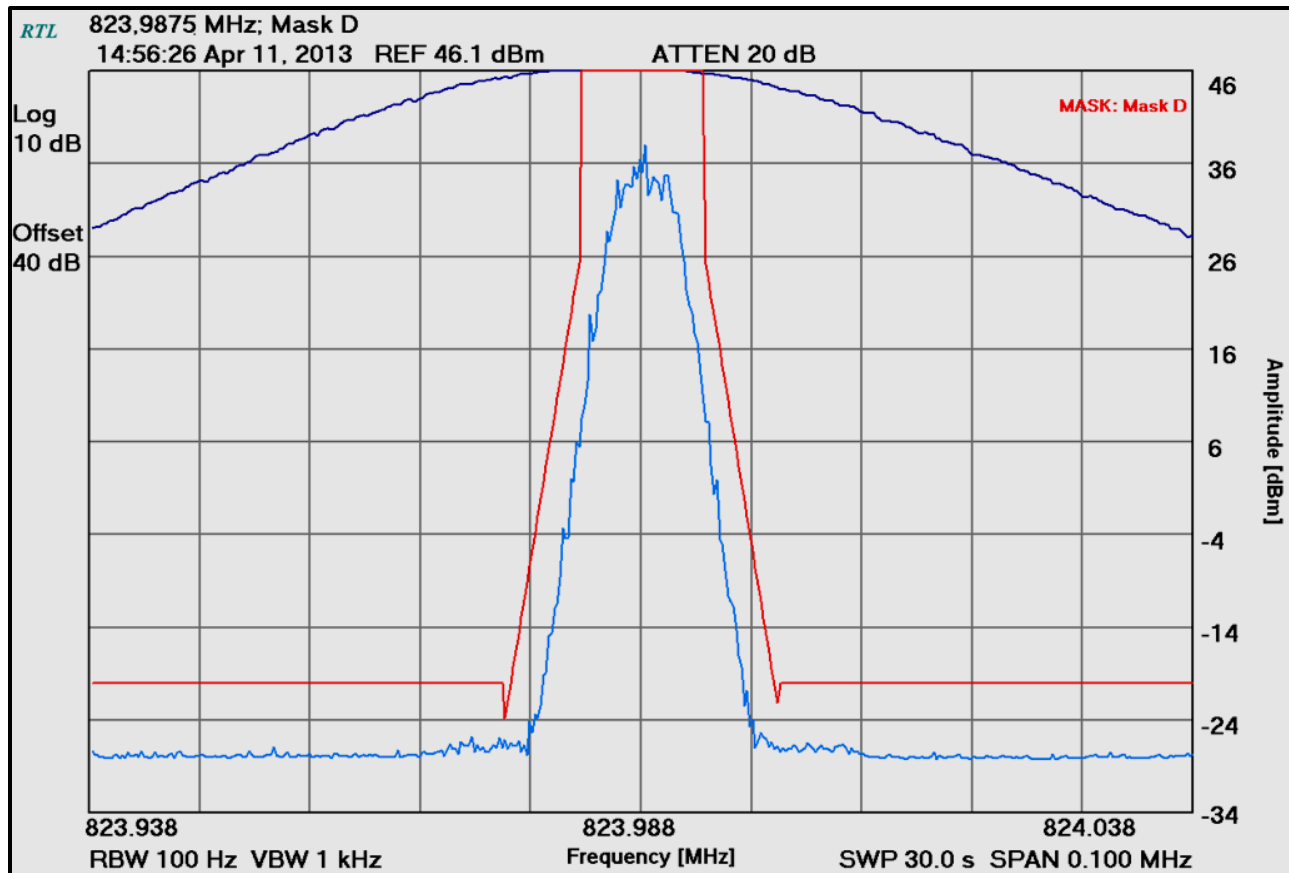


Plot 5-23: Occupied Bandwidth – H-CPM TDMA; 851.0125 MHz; Mask D

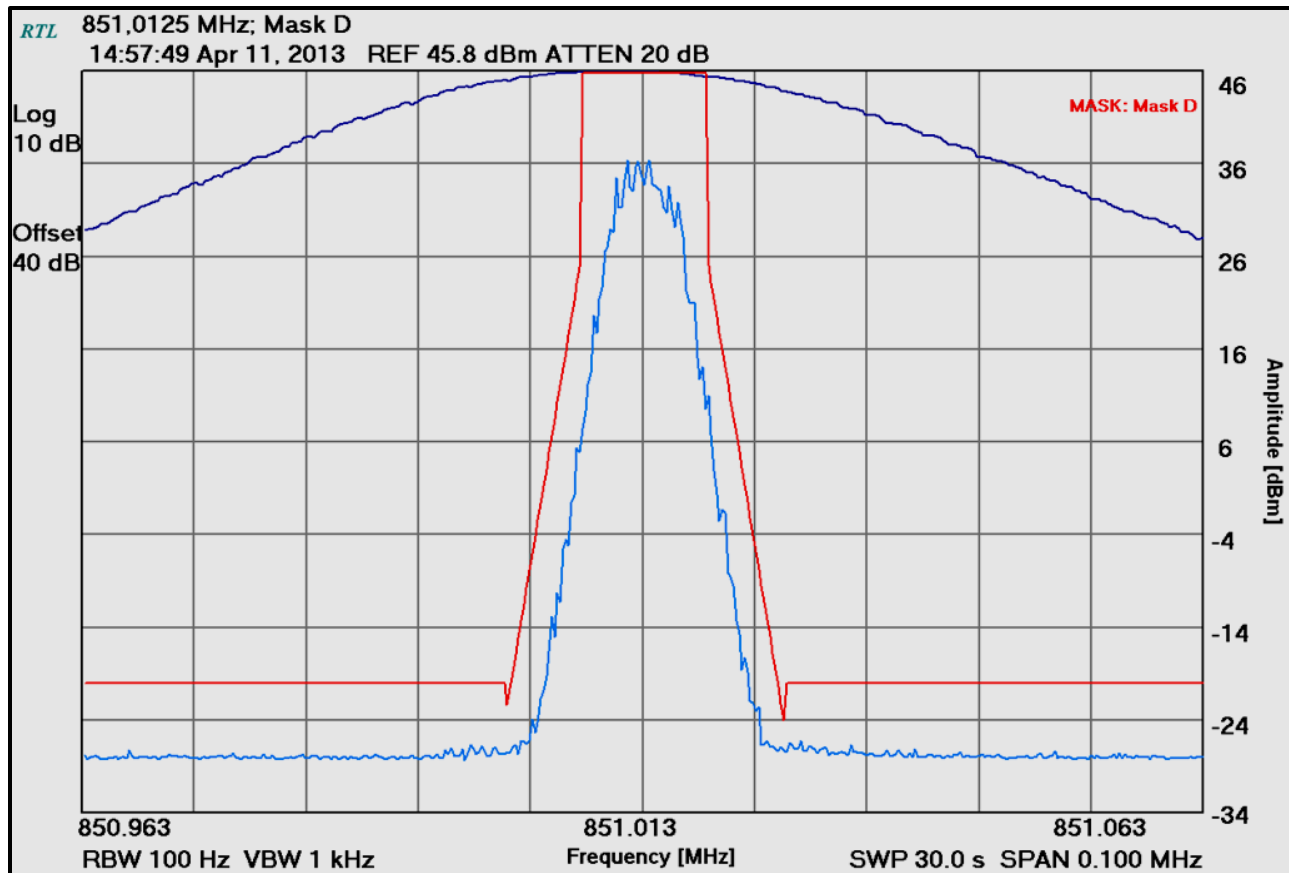


Plot 5-24: Occupied Bandwidth – H-CPM TDMA; 860.0000 MHz; Mask D

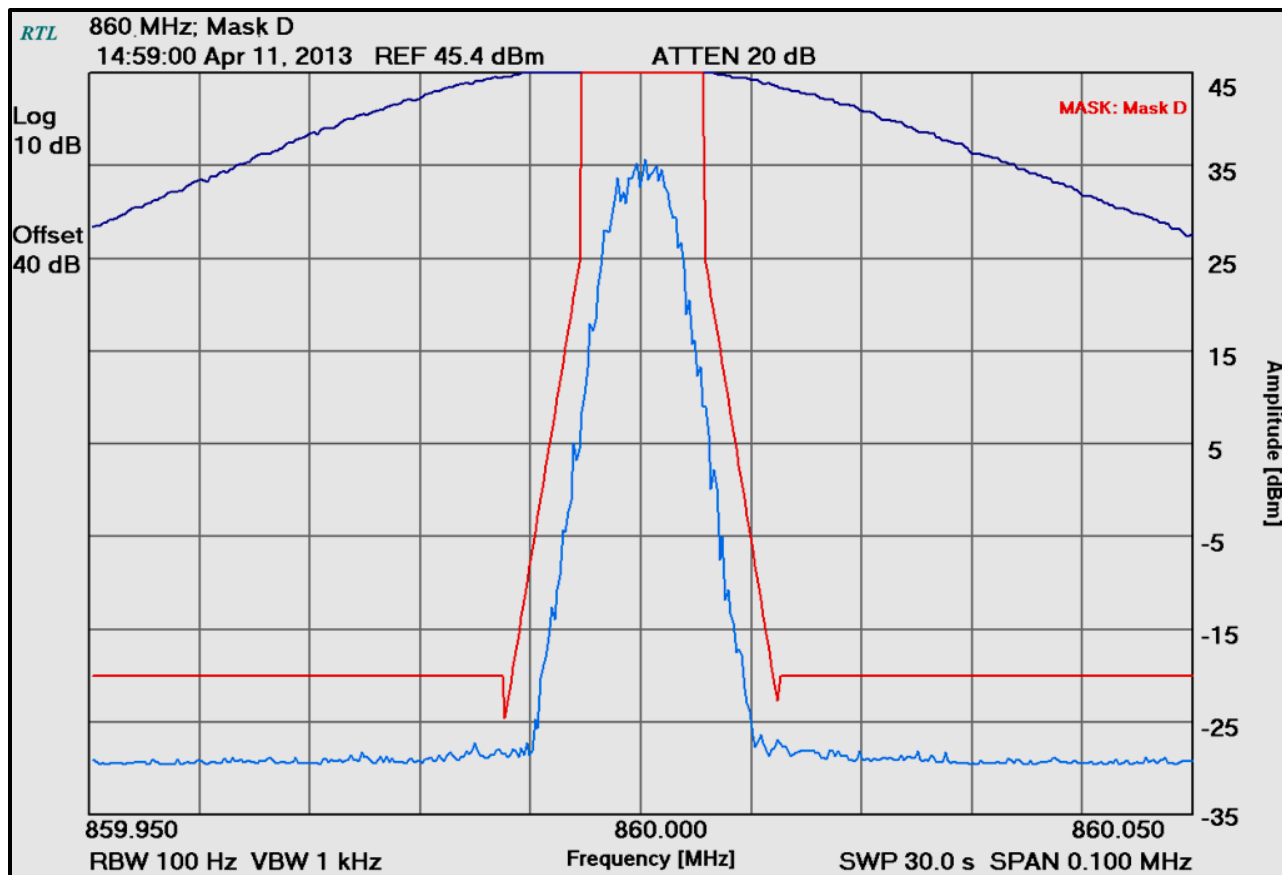


Plot 5-25: Occupied Bandwidth – H-CPM TDMA; 868.9875 MHz; Mask D

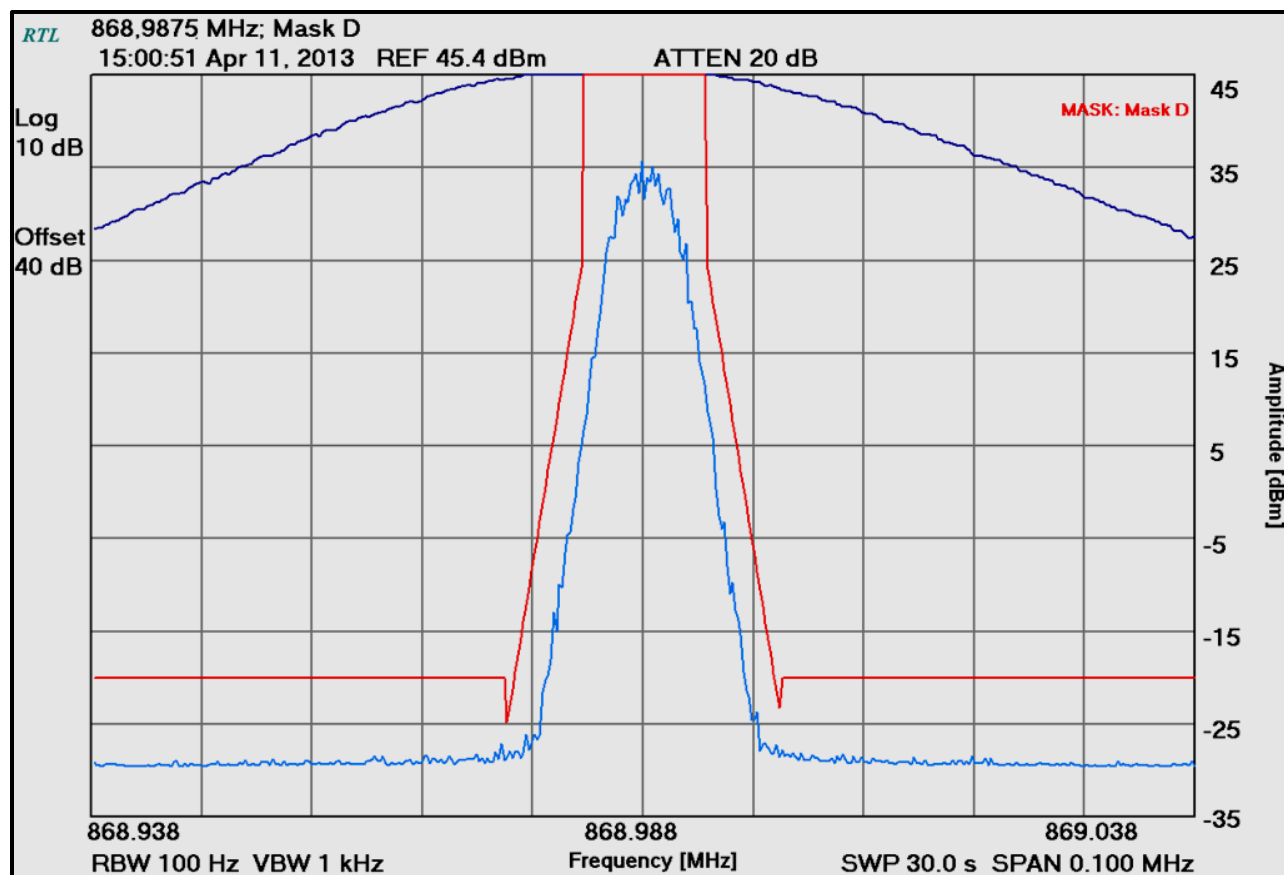


Plot 5-26: Occupied Bandwidth – H-CPM TDMA; 806.0125 MHz; Mask H

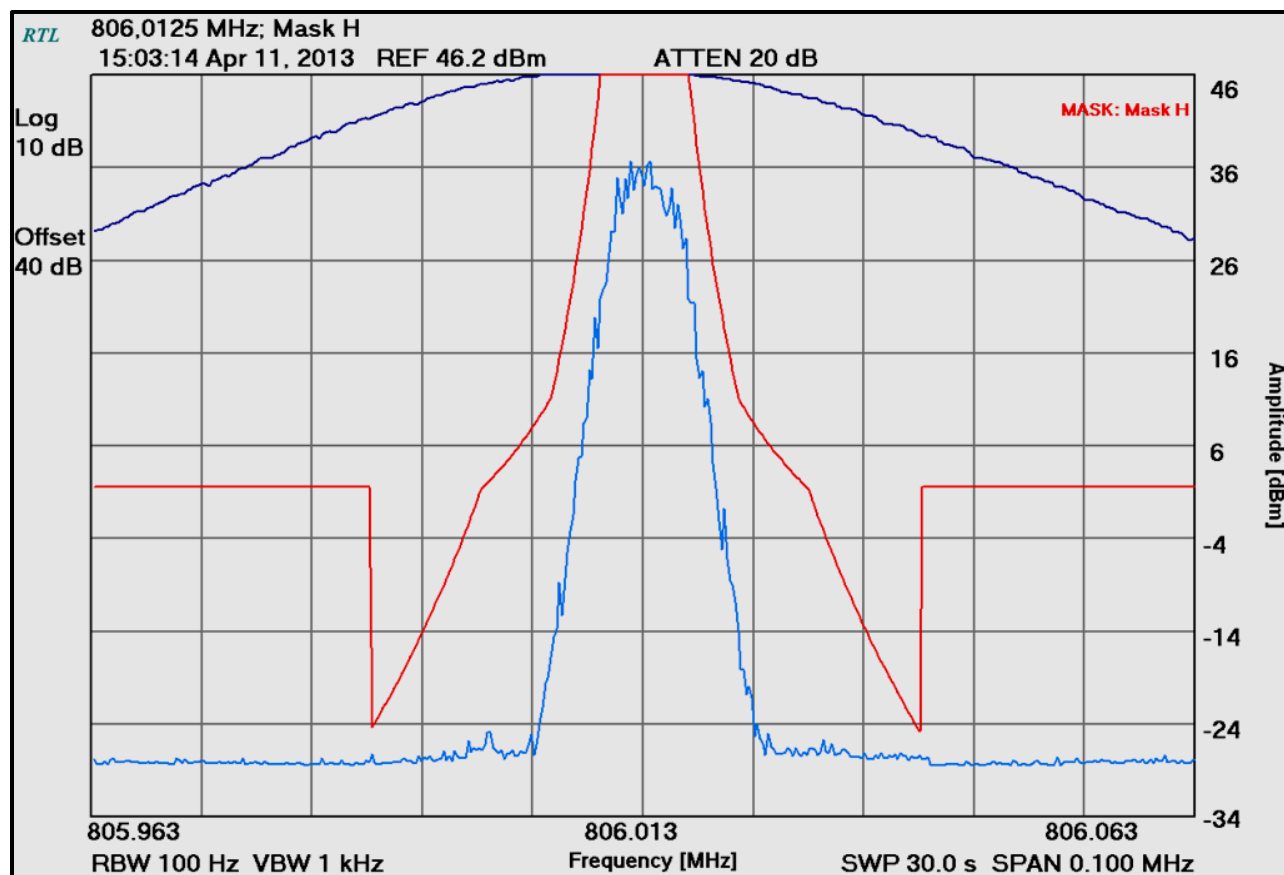


Plot 5-27: Occupied Bandwidth – H-CPM TDMA; 815.0000 MHz; Mask G

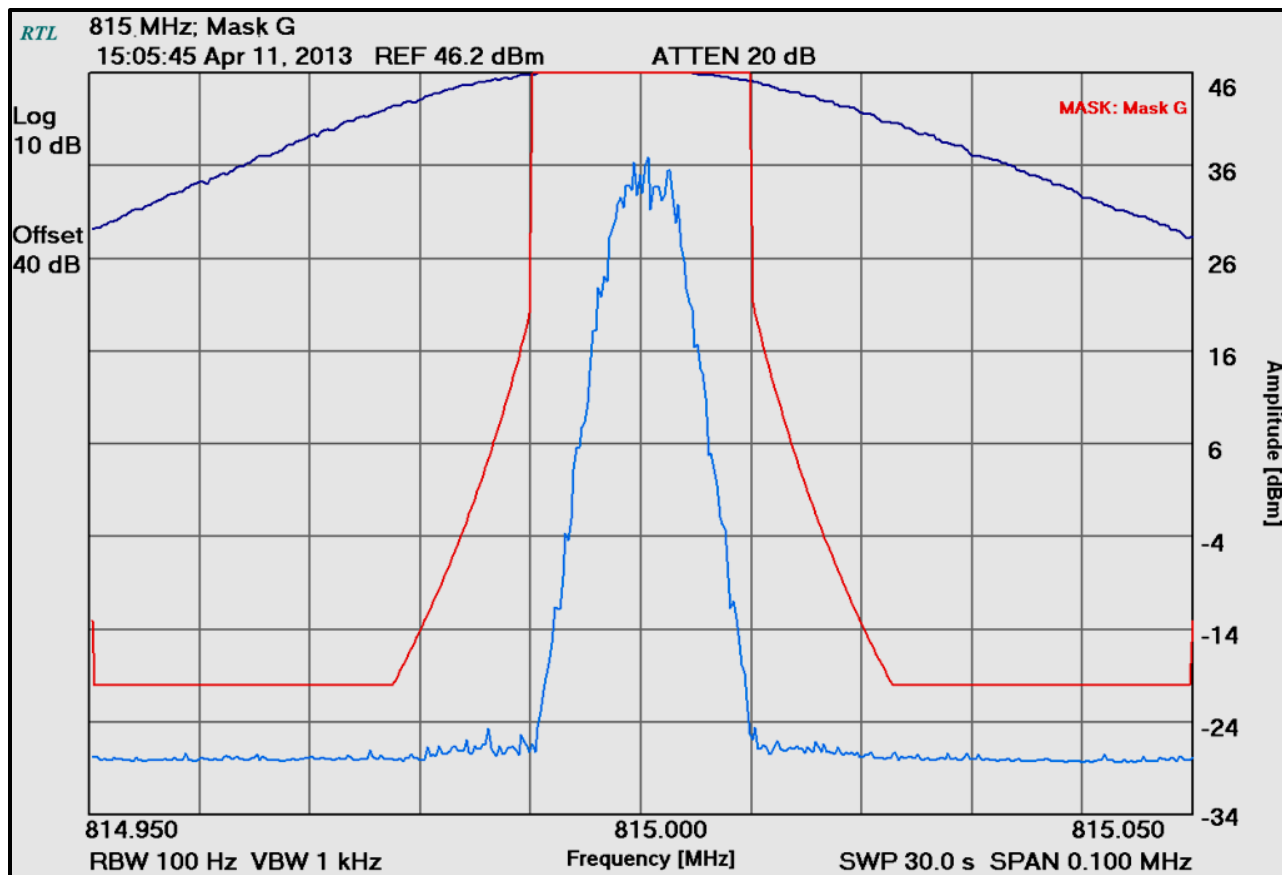


Plot 5-28: Occupied Bandwidth – H-CPM TDMA; 823.9875 MHz; Mask G

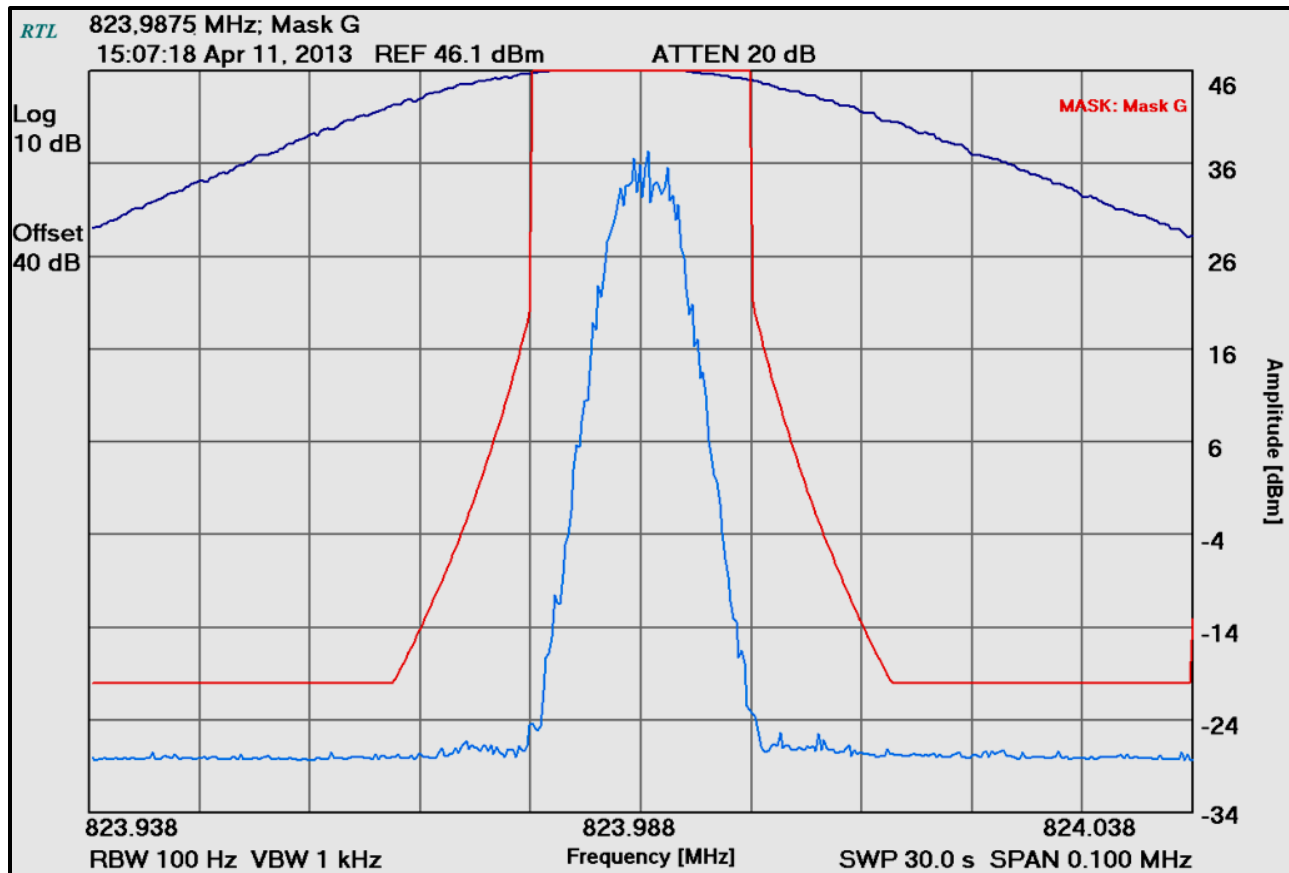

Plot 5-29: Occupied Bandwidth – H-CPM TDMA; 851.0125 MHz; Mask H

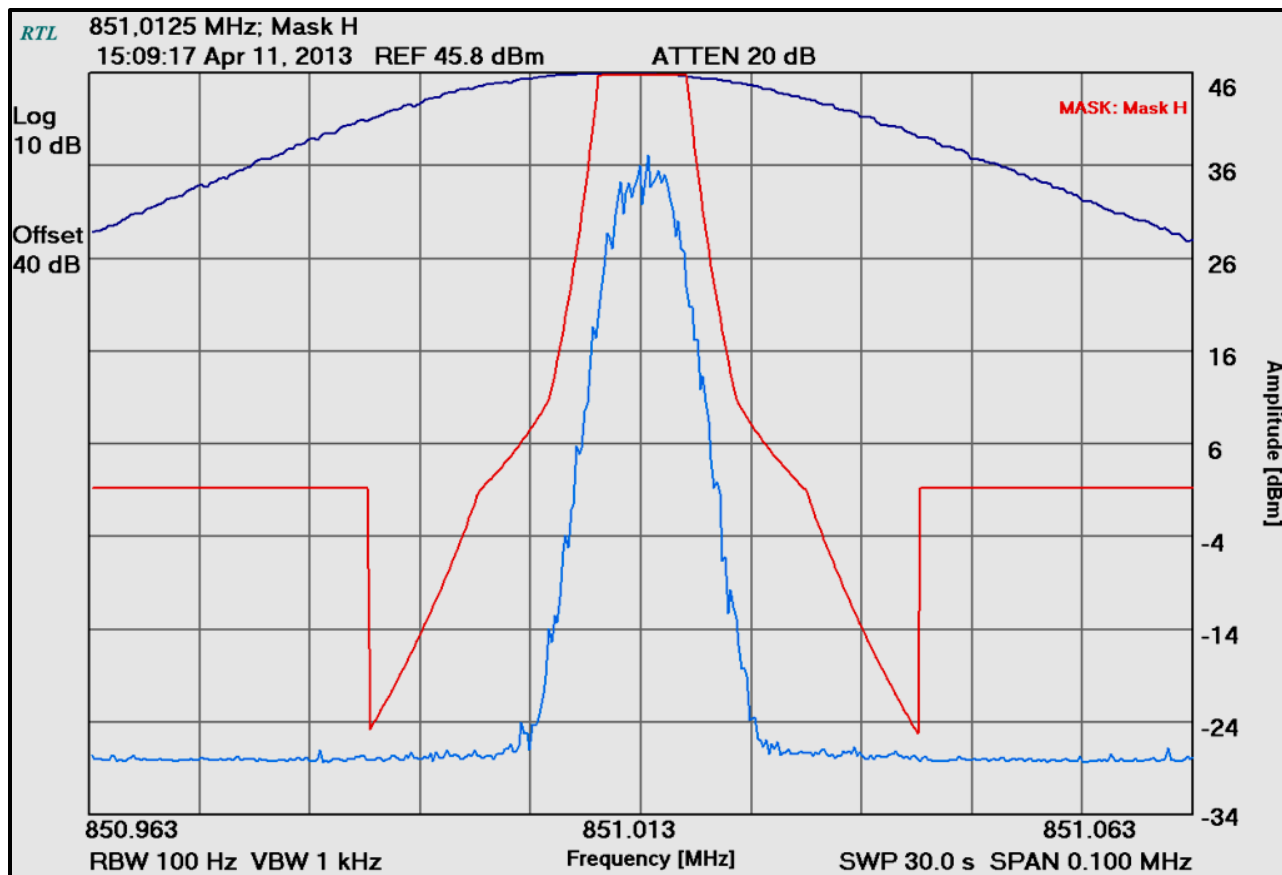

Plot 5-30: Occupied Bandwidth – H-CPM TDMA; 860.0000 MHz; Mask G

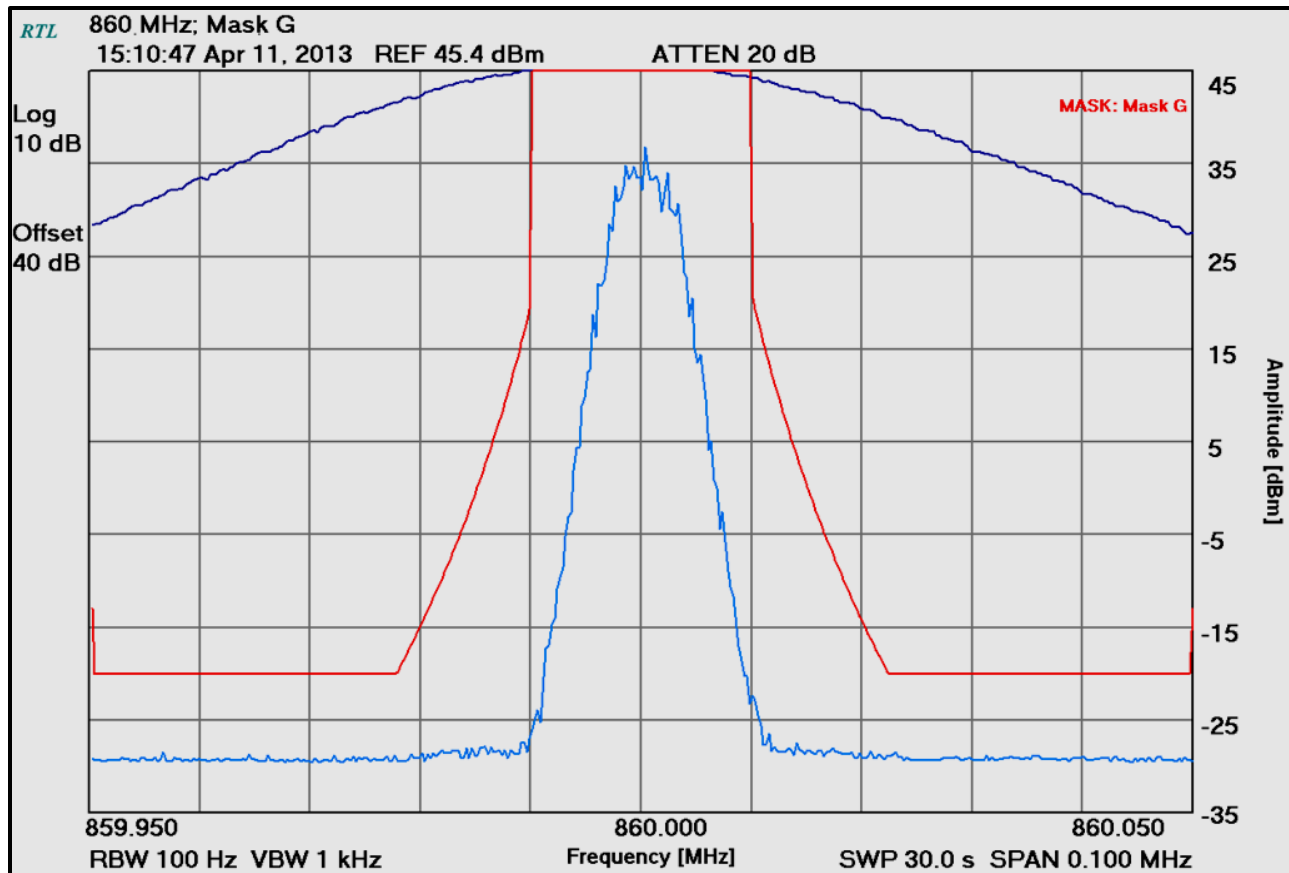

Plot 5-31: Occupied Bandwidth – H-CPM TDMA; 868.9875 MHz; Mask G

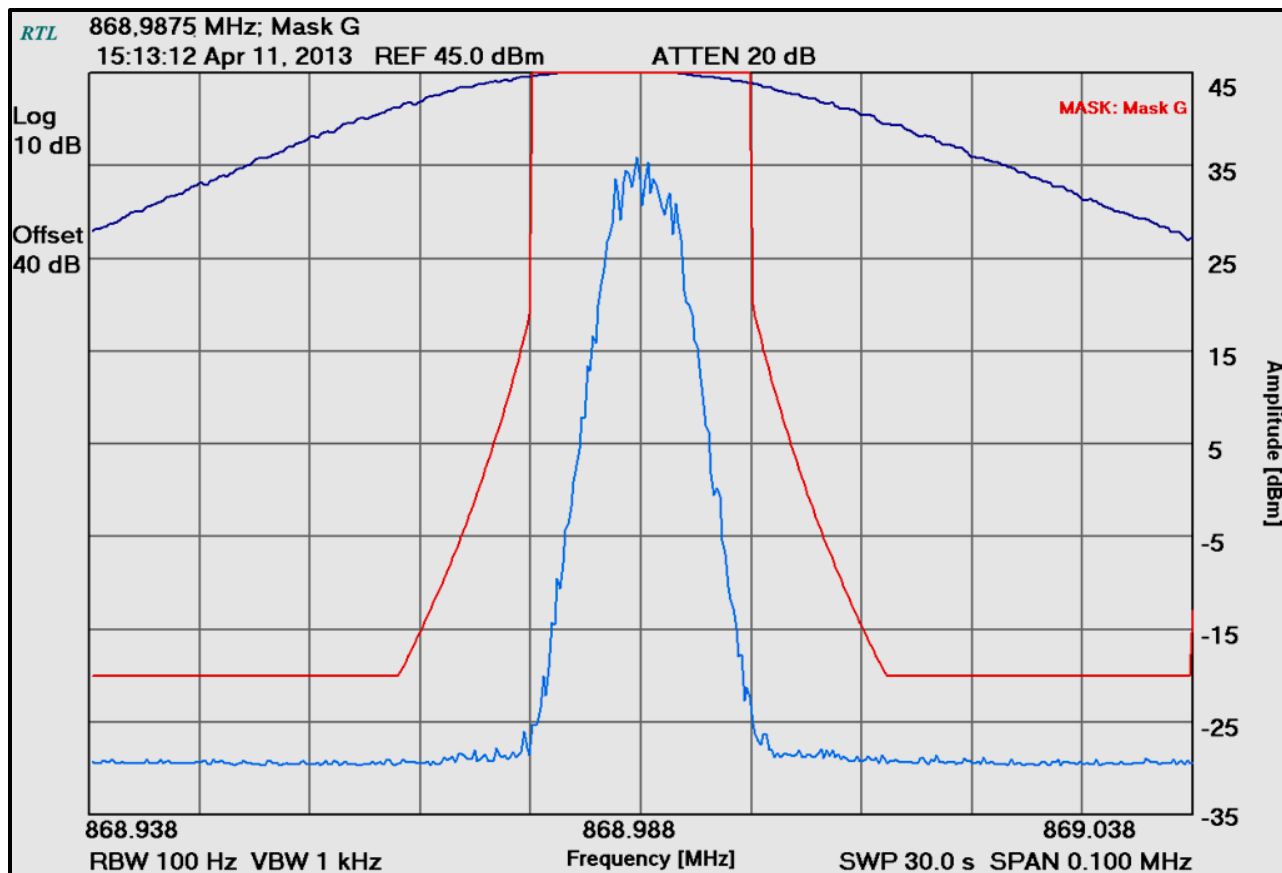


Table 5-1: Test Equipment Used for Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901215	Hewlett Packard	8596EM	Spectrum Analyzer (9 kHz - 12.8 GHz)	3826A00144	3/15/13
901537	Aeroflex	48-40-34	40 dB Attenuator	CB6628	10/14/13

Test Personnel:

Daniel Baltzell
 Test Engineer

Signature

April 11, 2013
 Date of Test

6 FCC Rules and Regulations Part §90.543(a): Emission Limitations: ACP Requirements; IC RSS-119 §4.3 Adjacent Channel Power (ACP) Measurement for Equipment in the Bands 764-776 MHz and 794-806 MHz

Effective October 23, 2007, transmitters designed to operate in the 769–775 MHz and 799–805 MHz frequency bands must meet the emission limitations in paragraphs (a) through (d) of this section. Transmitters operating in the 763–768 MHz and 793–798 MHz bands must meet the emission limitations in (e) of this section.

6.1 Test Procedure

TIA-102.CCAA August 2011, section 2.2.8, TIA-102.CCAB October 2011, section 3.2.8

For a Mobile transmitter designed to operate with a 12.5 kHz channel bandwidth, the ACP shall be in accordance with the values in the following table:

Offset from Center Frequency (kHz)	Measurement Bandwidth (kHz)	Maximum ACP Relative (dBc)
(+/-)9.375	6.25	-40
(+/-)15.625	6.25	-60
(+/-)21.875	6.25	-60
(+/-)37.5	25	-60
(+/-)62.5	25	-65
(+/-)87.5	25	-65
(+/-)150	100	-65
(+/-)250	100	-65
(+/-)350	100	-65
>400 kHz to 12 MHz	30(s)	-75
12 MHz to paired receive band	30(s)	-75
In the paired receive band	30(s)	-100

For a Mobile transmitter designed to operate with a 25 kHz channel bandwidth, the ACP shall be in accordance with the values in the following table:

Offset from Center Frequency (kHz)	Measurement Bandwidth (kHz)	Maximum ACP Relative (dBc)
(+/-)15.625	6.25	-40
(+/-)21.875	6.25	-60
(+/-)37.5	25	-60
(+/-)62.5	25	-65
(+/-)87.5	25	-65
(+/-)150	100	-65
(+/-)250	100	-65
(+/-)350	100	-65
>400 kHz to 12 MHz	30(s)	-75
12 MHz to paired receive band	30(s)	-75
In the paired receive band	30(s)	-100

FCC Rules and Regulations §90.543(b)

Setting Reference Level - 90.543(b)(1): Using a spectrum analyzer capable of ACP measurements, set the measurement bandwidth to the channel size. Set the frequency offset of the measurement to zero and adjust the center frequency of the spectrum analyzer to give the power level in the measurement bandwidth. Record this power as the reference power level.

Measuring the power level at the frequency offset <600 kHz - §90.543(b)(2): Using a spectrum analyzer capable of adjacent channel power (ACP) measurements, set the measurement bandwidth as shown in the table. Measure ACP in dBm. These measurements are made at maximum power. Calculate the coupled power by subtracting the measurements made in this step from the reference power level. The absolute ACP values must be less than the values given in the table for each condition.

Measuring the power level at the frequency offset >600 kHz - §90.543(b)(3): Set the spectrum analyzer to 30 kHz resolution bandwidth, 1 MHz video bandwidth and sample detection mode. Sweep +/-6 MHz from the carrier frequency. Set the reference level to the RMS value of the transmitter power and note the power. The response at frequencies >600 kHz must be less than the values listed in the table.

6.2 Test Data

Plot 6-1: ACP - 764.0125 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)

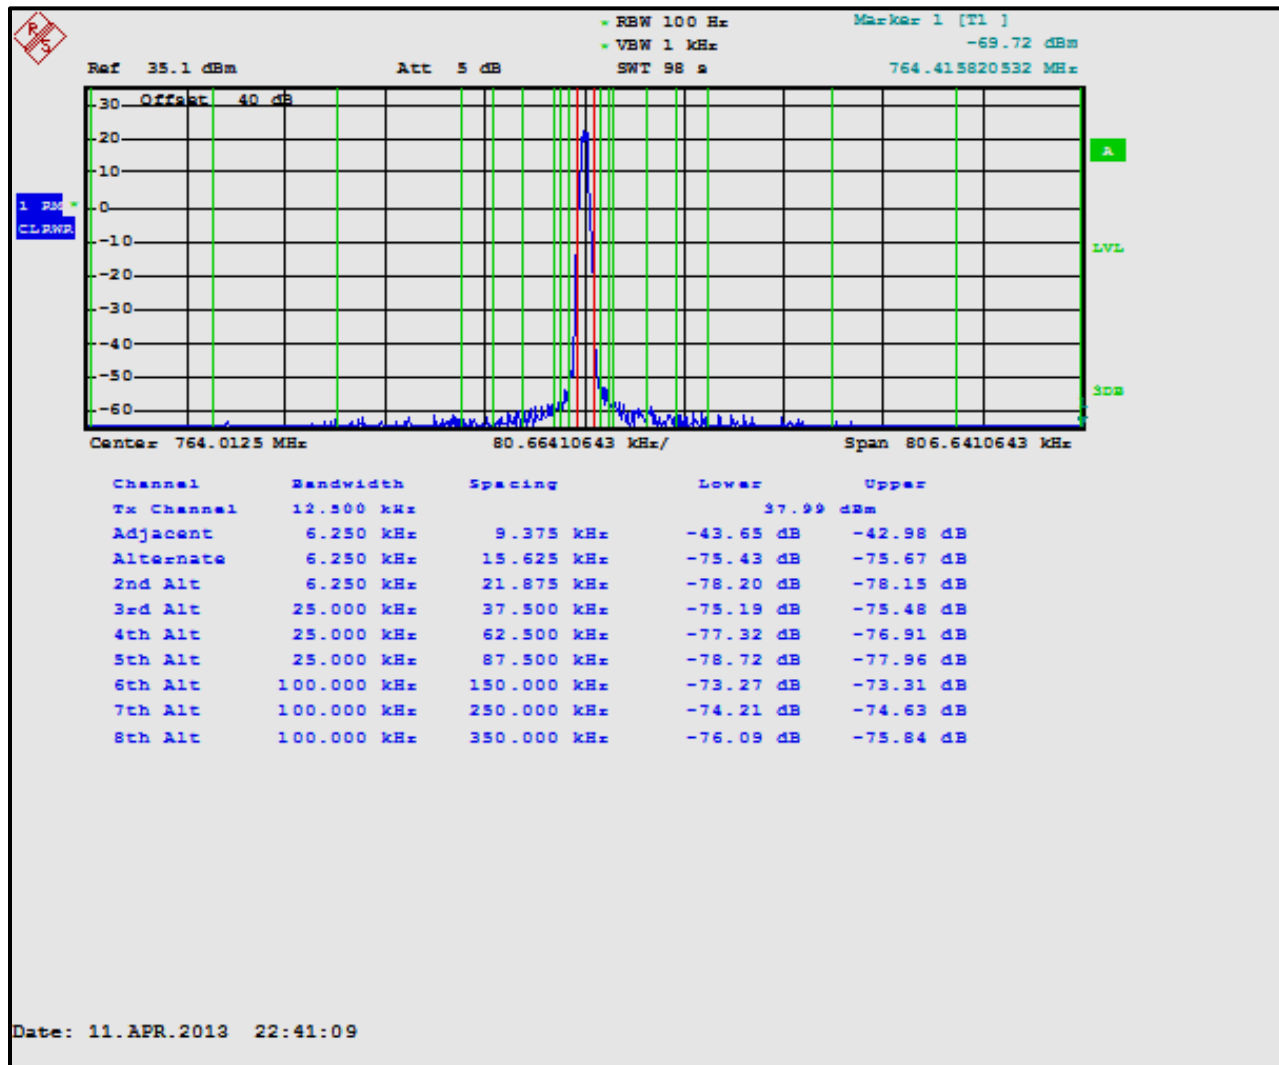


Table 6-1: ACP - 764.0125 MHz; H-CPM TDMA Mode (>400 kHz - RX Band)

Offset from Center Frequency	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 kHz to 12 MHz	30(s)	-75	-81.8
12 MHz to receive band	30(s)	-75	-88.9
In receive band	30(s)	-100	-104.9

Plot 6-2: ACP - 769.0125 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)

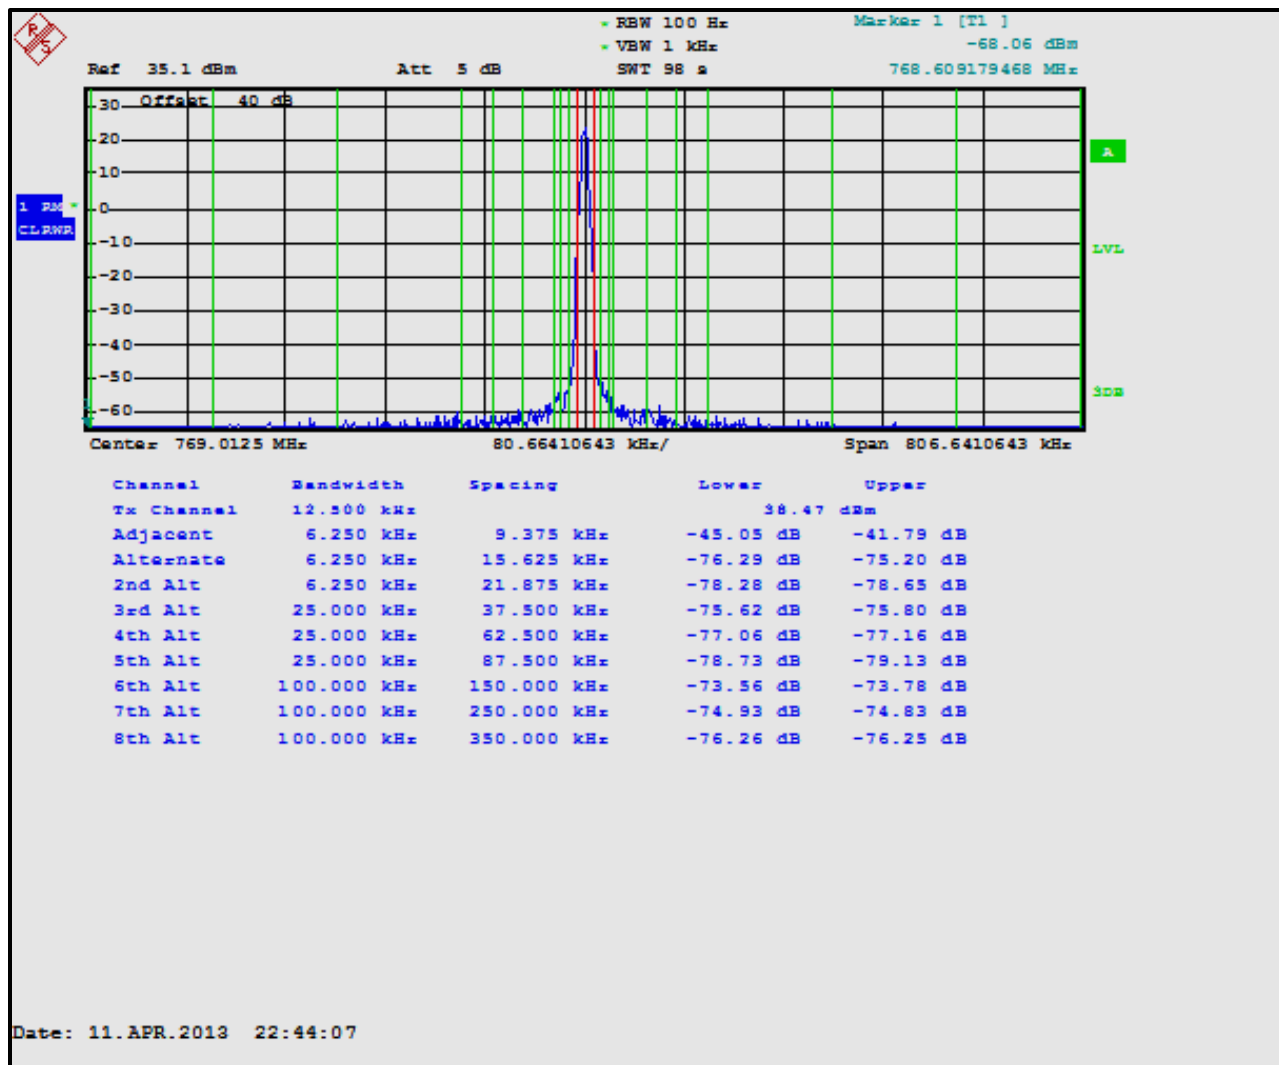


Table 6-2: ACP – 769.0125 MHz; H-CPM TDMA Mode (>400 kHz - RX Band)

Offset from Center Frequency	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 kHz to 12 MHz	30(s)	-75	-83.3
12 MHz to receive band	30(s)	-75	-93.2
In receive band	30(s)	-100	-106.1

Plot 6-3: ACP – 771.0000 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)

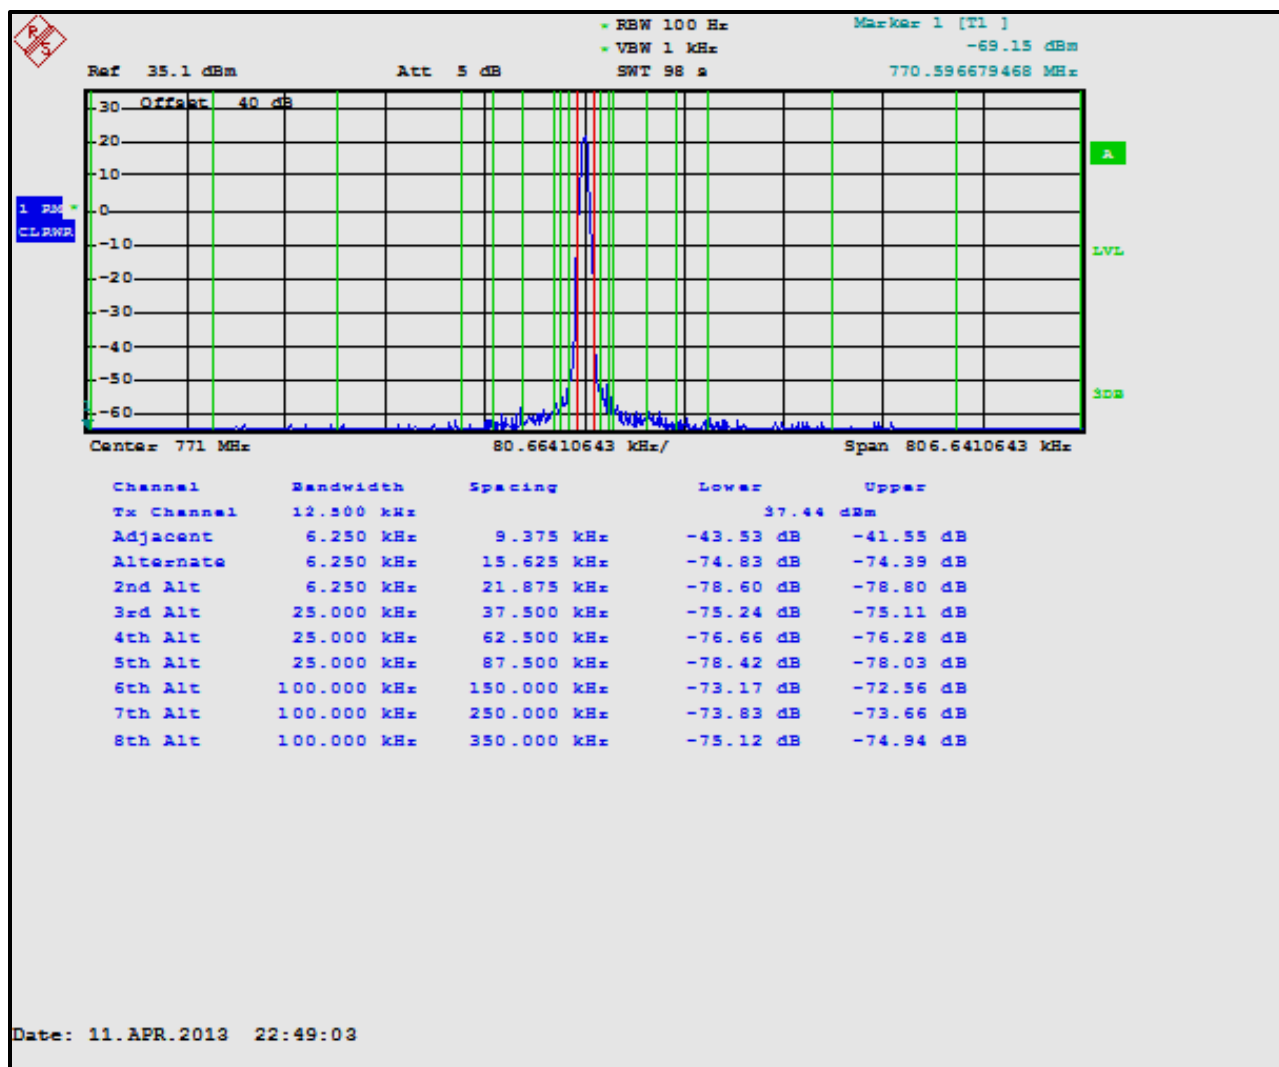


Table 6-3: ACP – 771.0000 MHz; H-CPM TDMA Mode (>400 kHz - RX Band)

Offset from Center Frequency	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 kHz to 12 MHz	30(s)	-75	-84.5
12 MHz to receive band	30(s)	-75	-95.0
In receive band	30(s)	-100	-105.5

Plot 6-4: ACP – 774.9875 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)

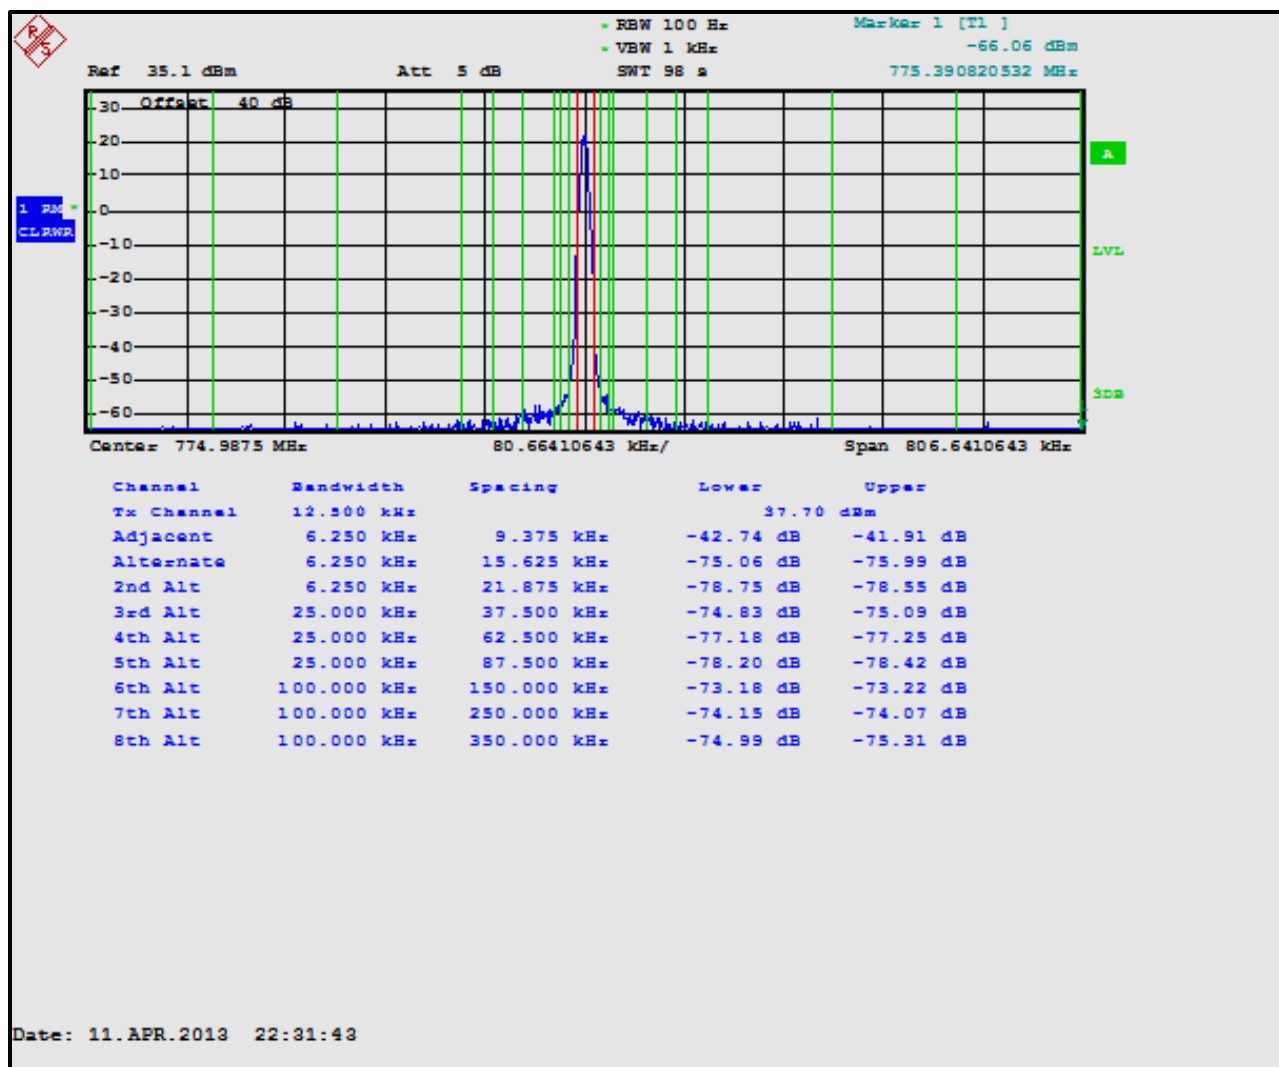


Table 6-4: ACP - 774.9875 MHz; H-CPM TDMA Mode (>400 kHz - RX Band)

Offset from Center Frequency	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 kHz to 12 MHz	30(s)	-75	-82.4
12 MHz to receive band	30(s)	-75	-94.0
In receive band	30(s)	-100	-102.6

Plot 6-5: ACP – 775.9875 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)

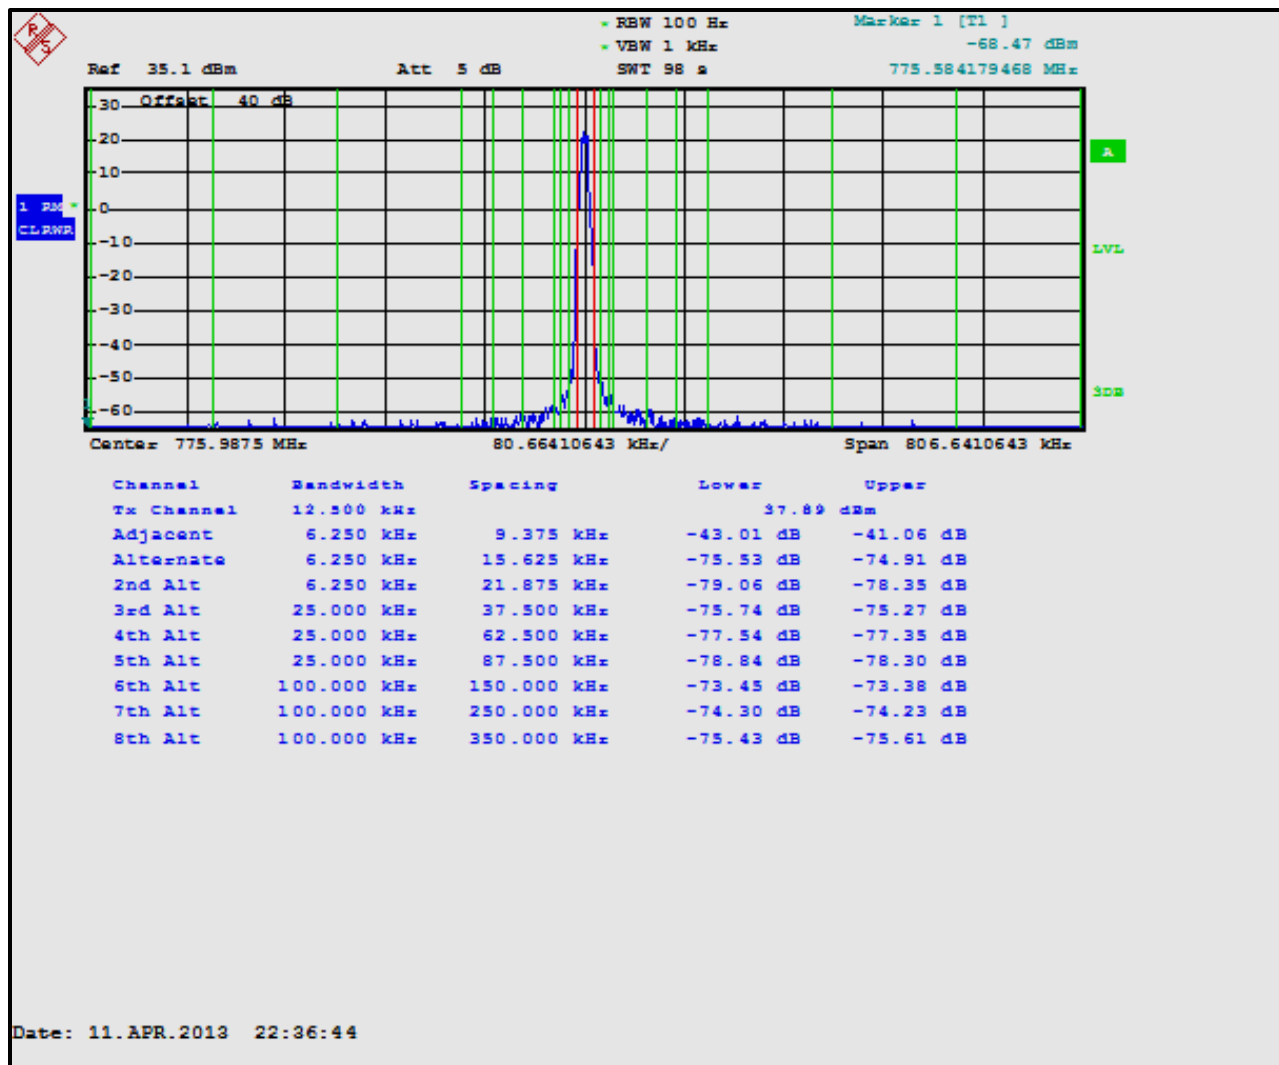


Table 6-5: ACP - 775.9875 MHz; H-CPM TDMA Mode (>400 kHz - RX Band)

Offset from Center Frequency	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 kHz to 12 MHz	30(s)	-75	-82.6
12 MHz to receive band	30(s)	-75	-93.3
In receive band	30(s)	-100	-102.6

Plot 6-6: ACP – 794.0125 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)

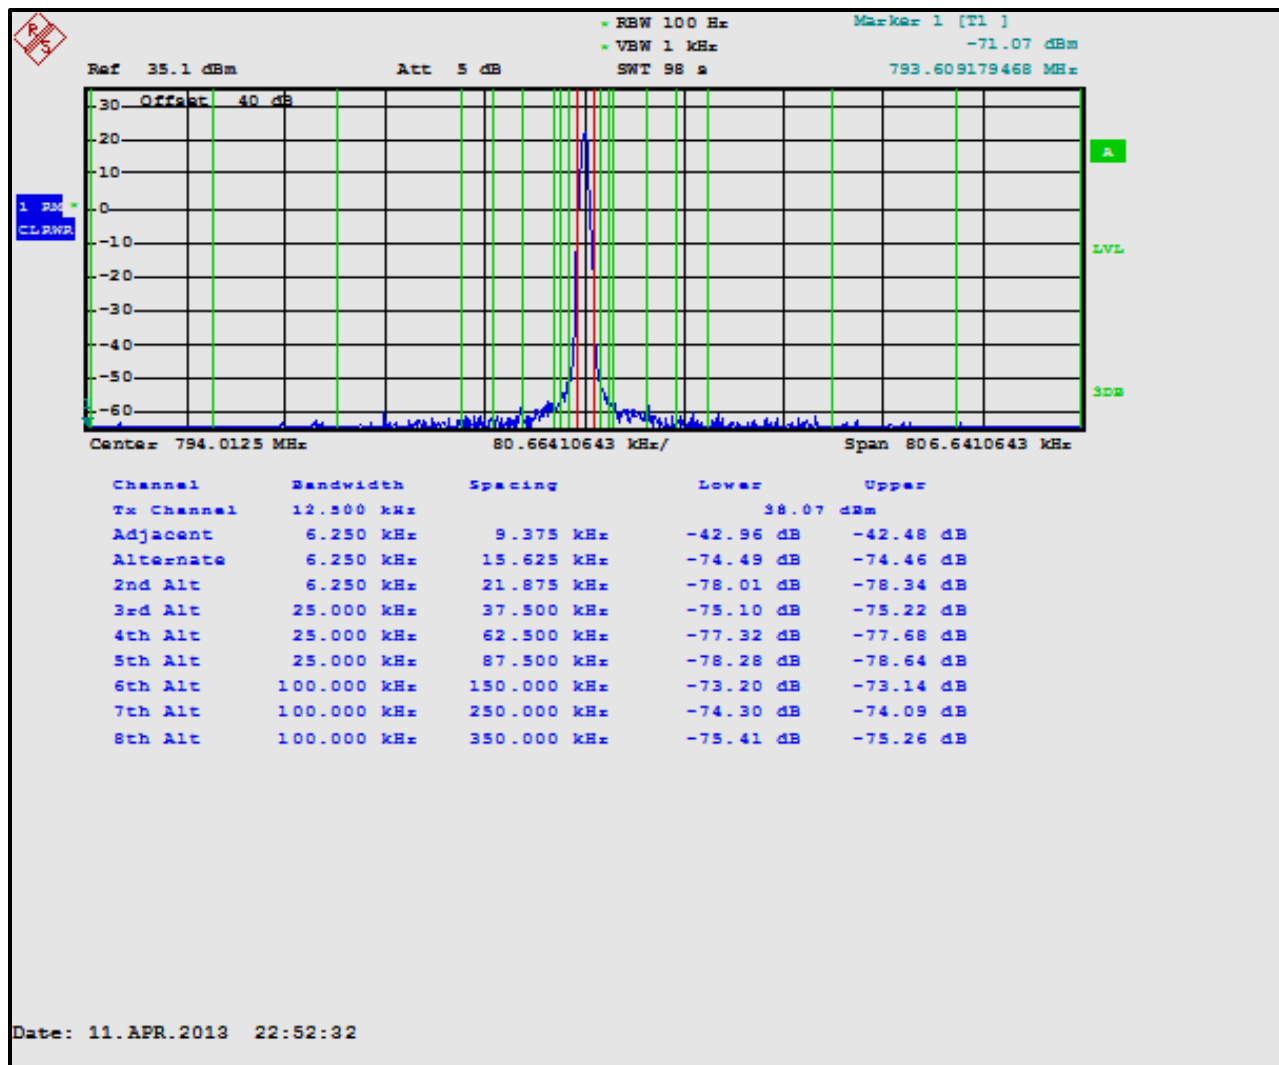


Table 6-6: ACP – 794.0125 MHz; H-CPM TDMA Mode (>400 kHz - RX Band)

Offset from Center Frequency	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 kHz to 12 MHz	30(s)	-75	-82.9
12 MHz to receive band	30(s)	-75	-93.3
In receive band	30(s)	-100	-103.3

Plot 6-7: ACP – 799.0125 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)

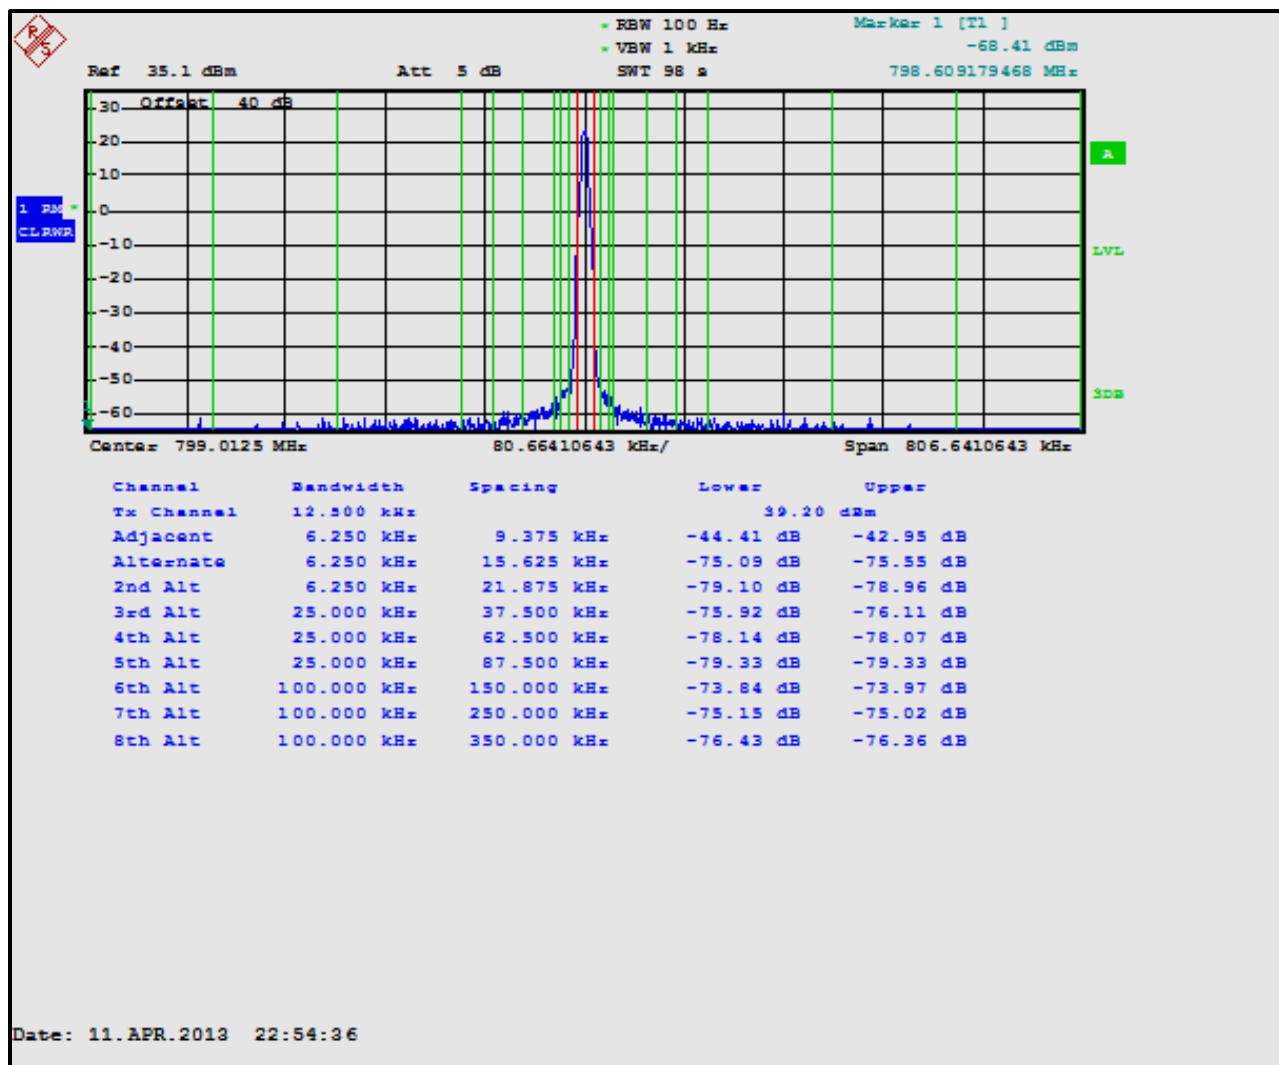


Table 6-7: ACP - 799.0125 MHz; H-CPM TDMA Mode (>400 kHz - RX Band)

Offset from Center Frequency	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 kHz to 12 MHz	30(s)	-75	-80.8
12 MHz to receive band	30(s)	-75	-89.5
In receive band	30(s)	-100	-103.0

Plot 6-8: ACP – 801.0000 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)

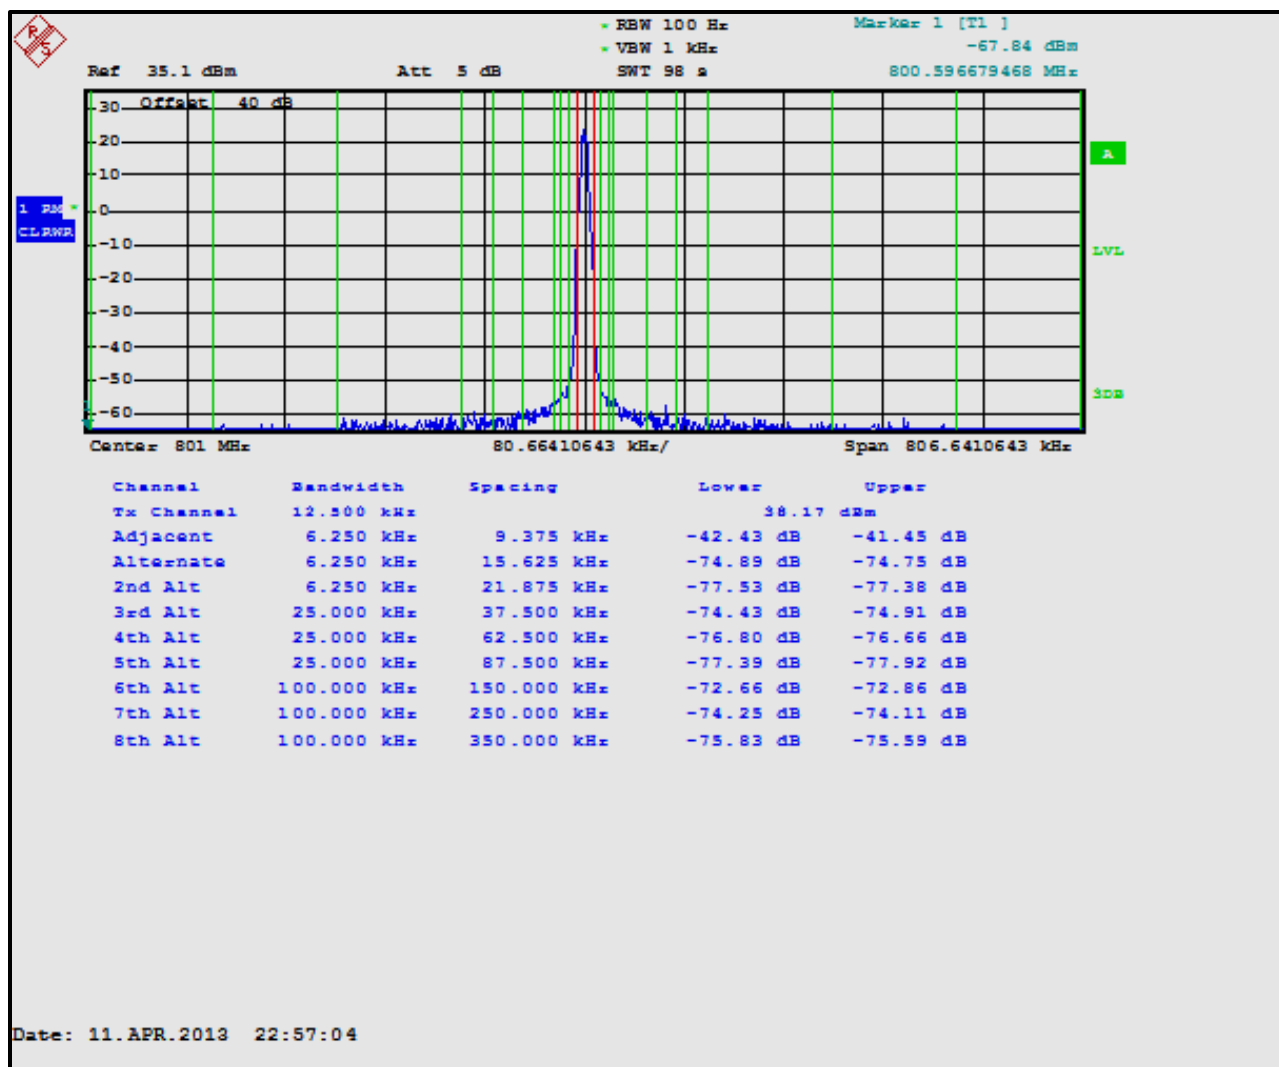


Table 6-8: ACP – 801.0000 MHz; H-CPM TDMA Mode (>400 kHz - RX Band)

Offset from Center Frequency	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 kHz to 12 MHz	30(s)	-75	-79.9
12 MHz to receive band	30(s)	-75	-87.6
In receive band	30(s)	-100	-103.1

Plot 6-9: ACP – 804.9875 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)

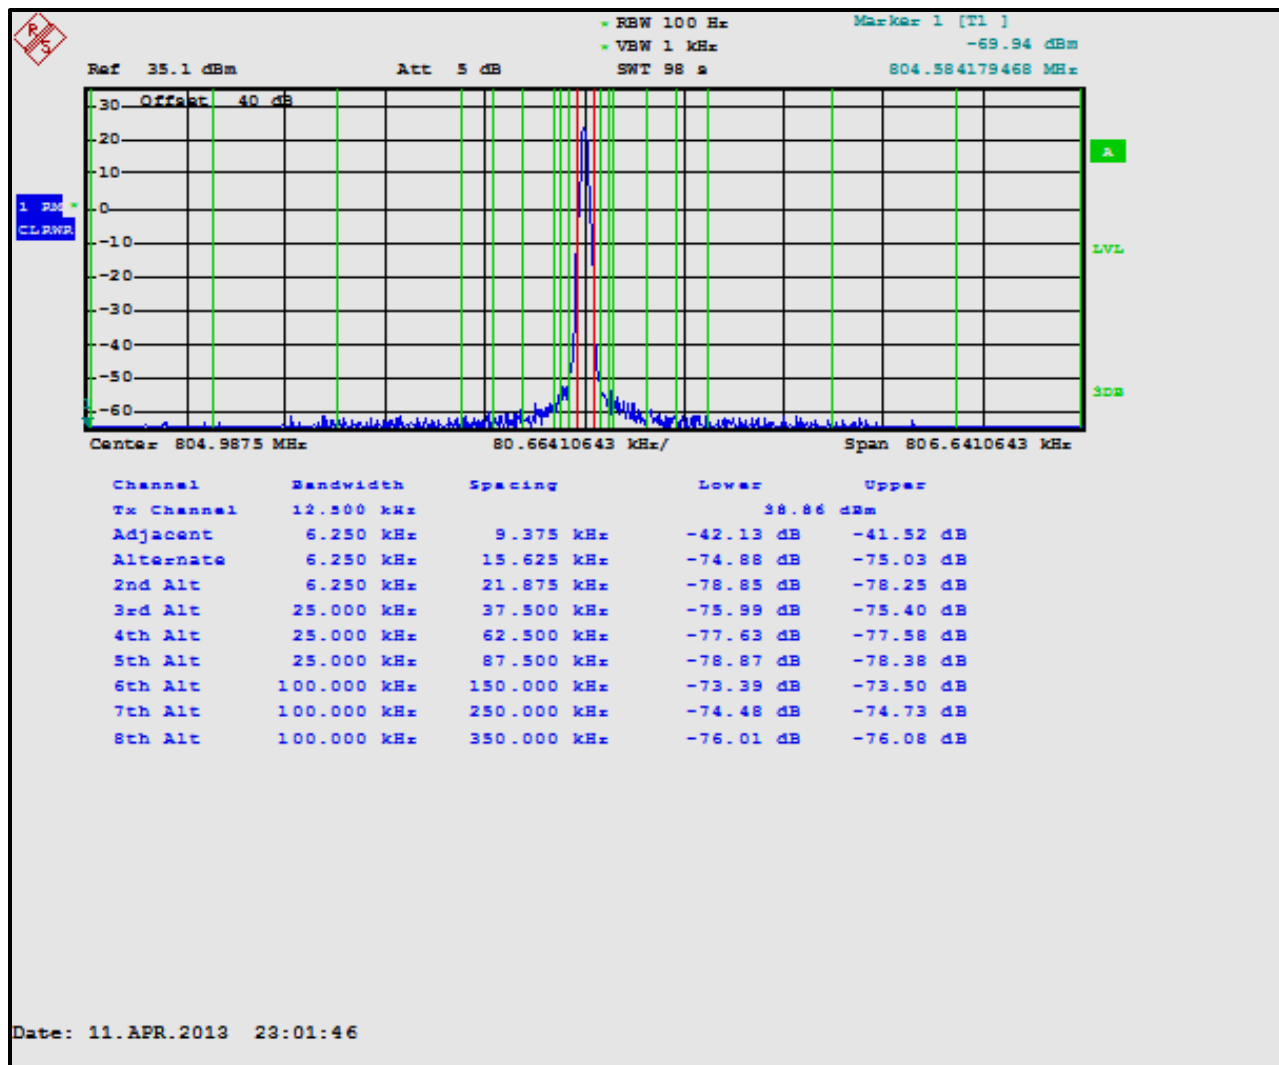


Table 6-9: ACP – 804.9875 MHz; H-CPM TDMA Mode (>400 kHz - RX Band)

Offset from Center Frequency	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 kHz to 12 MHz	30(s)	-75	-78.5
12 MHz to receive band	30(s)	-75	-87.7
In receive band	30(s)	-100	-109.4

Plot 6-10: ACP – 805.9875 MHz; H-CPM TDMA Mode (9.375 kHz - 350 kHz)

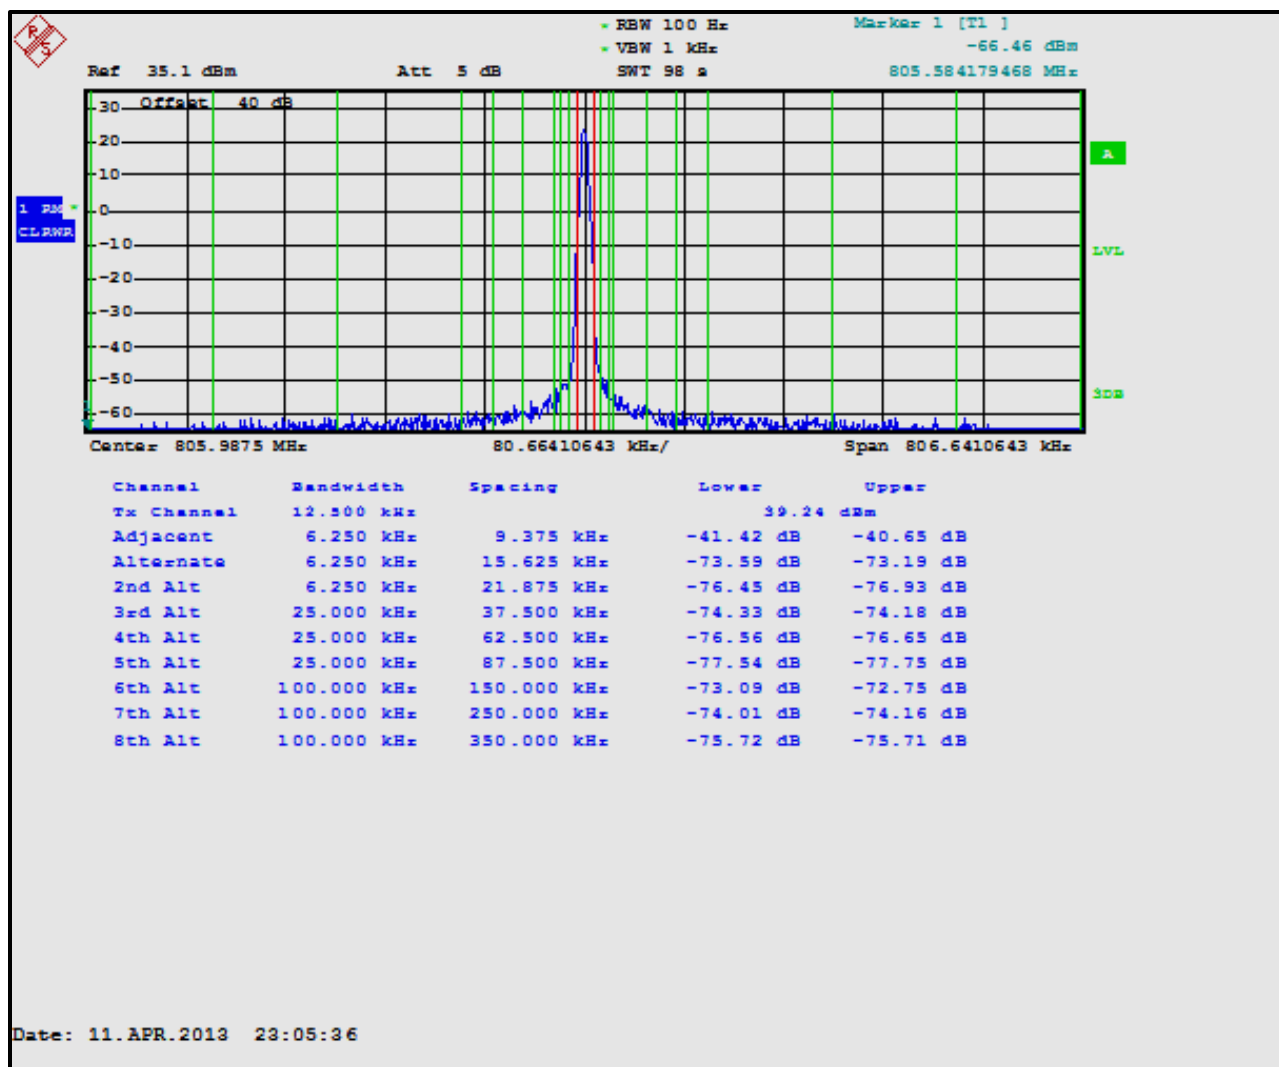



Table 6-10: ACP – 805.9875 MHz; H-CPM TDMA Mode (>400 kHz - RX Band)

Offset from Center Frequency	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 kHz to 12 MHz	30(s)	-75	-84.1
12 MHz to receive band	30(s)	-75	-91.0
In receive band	30(s)	-100	-102.2

Table 6-11: Test Equipment Used for Testing ACP Requirements

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13
901339	Weinschel Corp.	47-40-34	Attenuator (DC-18GHz, 40 dB, 25W)	BM4864	8/17/13
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 20dB	BK5859	3/25/16
901215	Hewlett Packard	8596EM	Spectrum Analyzer (9 kHz - 12.8 GHz)	3826A00144	3/15/14

Test Personnel:

Daniel Baltzell		April 11, 2013
EMC Test Engineer	Signature	Date of Test

7 Conclusion

The data in this Class 2 measurement report shows that the Harris Corporation Model Unity XG-100M; FCC ID: AQZ-XG-100M00, IC: 122D-XG100M00, complies with all the applicable requirements of FCC Parts 90 and 2, and Industry Canada RSS-119 for a Class 2 permissive change.