

TEST REPORT

ACCORDING TO:

FCC 47CFR part 15 2018 subpart E §15.407,
RSS-247 Issue 2:2017, RSS-Gen Issue 5:2018

FOR:

Telrad Networks LTD.
LTE Outdoor Base Station
Model:BreezeU100e-5.X
FCC ID:ARA-BU1005X
IC:899A-BU1005X

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

Table of contents	2
1 Applicant information	3
2 Equipment under test attributes	3
3 Manufacturer information	3
4 Test details	3
5 Tests summary	4
6 EUT description	5
6.1 General information	5
6.2 Ports and lines	5
6.3 Auxiliary equipment	5
6.4 Test configuration	6
6.5 Transmitter characteristics	7
6.6 Table of calculations for the MAX EIRP at frequency range 5725 – 5850 MHz	8
6.7 Table of calculations for the MAX EIRP at frequency range 5150 – 5250 MHz	8
7 Transmitter tests according to 47CFR part 15 subpart E and RSS-247	9
7.1 Occupied 6 dB bandwidth at 5725 – 5850 MHz range	9
7.2 Occupied 99% bandwidth at 5725 – 5850 MHz range	30
7.3 Occupied 26 dB bandwidth at 5150 – 5250 MHz range	51
7.4 Occupied 99% bandwidth at 5150 – 5250 MHz range	72
7.5 Peak output power at 5725 – 5850 MHz range	93
7.6 Peak output power at 5150 – 5250 MHz range	106
7.7 Peak spectral power density at 5150 – 5250 MHz range	119
7.8 Peak spectral power density at 5150 – 5250 MHz range	181
7.9 Conducted out of band emissions at 5725 – 5850 MHz range	243
7.10 Conducted out of band emissions at 5725 – 5850 MHz range	266
7.11 Conducted out of band emissions at 5150 – 5250 MHz range	289
7.12 Conducted out of band emissions at 5150 – 5250 MHz range	312
7.13 Field strength of undesirable emissions at 5150 – 5250 MHz range	335
7.14 Field strength of undesirable emissions at 5725 – 5850 MHz range	353
7.15 Conducted emissions at 5150 – 5250 MHz range	371
7.16 Conducted emissions at 5725 – 5850 MHz range	374
7.17 Antenna requirements	377
8 APPENDIX A Test equipment and ancillaries used for tests	378
9 APPENDIX B Measurement uncertainties	379
10 APPENDIX C Test laboratory description	380
11 APPENDIX D Specification references	380
12 APPENDIX E Test equipment correction factors	381
13 APPENDIX F Abbreviations and acronyms	389

1 Applicant information

Client name: Telrad Networks
Address: P.O. Box 6118, 1 Bat Sheva Str., Lod 7116002, Israel
Telephone: +972 73-2467651
Fax: +972 73-2467504
E-mail: Klara.Milman@telrad.com
Contact name: Mr. Klara Milman

2 Equipment under test attributes

Product name: LTE Outdoor Base Station
Product type: Transceiver
Model(s): BreezeU100e-5X
Serial number: 95029961
Hardware version: 004-002-00
Software release: 0702.09329
Receipt date 03-Mar-19

3 Manufacturer information

Manufacturer name: Telrad Networks Ltd.
Address: P.O. Box 6118, 1 Bat Sheva Str., Lod 7116002, Israel
Telephone: +972 73-2467651
Fax: +972 73-2467504
E-Mail: Klara.Milman@telrad.com
Contact name: Mrs. Klara Milman

4 Test details

Project ID: 31832
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 05-Mar-19
Test completed: 15-Apr-19
Test specification(s): FCC 47CFR part 15 2018 subpart E §15.407 and RSS-247 issue 2 2017 and RSS-Gen Issue 5:2018

5 Tests summary


Test	Status
Transmitter characteristics	
FCC section 15.407(a)(5)/(e), RSS-Gen section 6.7, RSS-247 section 6.2.1.2 26 dB, 6 dB, 99%, occupied bandwidth	Pass
FCC section 15.407(a)(1,3), RSS-247 section 6.2.1.1, 6.2.4.1, Peak output power	Pass
FCC section 15.407(a)(1,3), RSS-247 section 6.2.1.1, Peak spectral power density	Pass
FCC section 15.407(b), RSS-247 sections 6.2.1.2, 6.2.4.2, Conducted out of band emissions	Pass
FCC section 15.407(b), RSS-247 sections 6.2.1.2, 6.2.4.2, Field strength of unwanted emissions	Pass
FCC section 15.407(b)(6), 15.207(a), RSS-Gen section 8.8, Conducted emissions	Pass
FCC section 15.203, RSS-Gen section 6.8, Antenna requirement	Pass
FCC section 15.407(f), RSS-102 section 2.5.2, RF exposure	Pass, the exhibit to the application of certification is provided
FCC section 15.407(c), RSS-247 section 6.4 Continuity of transmission	Comply*
FCC section 15.407(g) Frequency stability	Comply*

* Operation of description.

** Declared by the manufacturer.

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. A. Morozov, test engineer	05-Mar-19 – 15-Apr-19	
Reviewed by:	Mrs. S. Peysahov Sheynin test engineer	25-Apr-19	
Approved by:	Mr. S. Samokha, technical manager, EMC and Radio	23-May-19	

6 EUT description

6.1 General information

BreezeU100 5GHz Base Station is a high capacity, IP services oriented Broadband Wireless Access system. The system contains an all outdoor base station unit. The basic base station system configuration is contains power supply, MODEM and based on RF IC radio.

BreezeU100 5 GHz Base station implements a single LTE BS entity that transmits and receives to/from the registered MSs Over a 10/15/20 MHz (selectable by the operator) frequency channel (Band Width), through one or more ODUs.

Telrad Breeze Compact solution support LTE R9/10 and works with UE up to category 12.


6.2 Ports and lines

Port type	Port description	Conn. from	Conn. to	Qty.	Cable type	Cable length, m	Indoor / outdoor
Telecom	Ethernet	NA	backhaul	3	FTP	100	NA
Telecom	Ethernet	NA	backhaul	1	Fiber optic	100	NA
Power	DC	NA	PS	1	Shielded	100	NA

6.3 Auxiliary equipment

Description	Manufacturer	Model number	Serial number
Smart bits	Spirent communication	SMB200	1563-B
Subscriber unit	NA	CPE4300	NA
DC power supply	NA	Horizon DHR3655D or from Hermon LAB	NA
Router	Cisco	Catalyst 2950	FOC08127T0W P
BreezeGPS	Telrad	TA1556	NA
PC	Lenovo	PC	NA
Splitter	Mini circuit	ZN2PD-9G-S+	F244200801_F 689300614

6.4 Test configuration

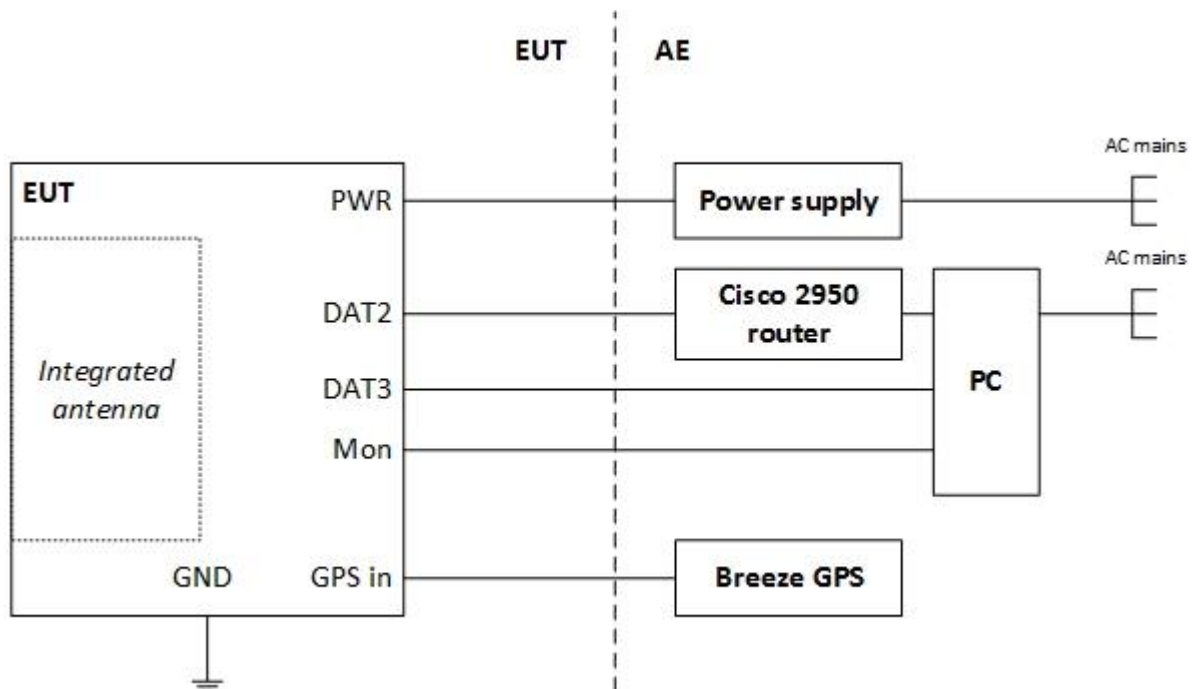

6.5 Transmitter characteristics

Type of equipment										
V	Stand-alone (Equipment with or without its own control provisions)									
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)									
	Plug-in card (Equipment intended for a variety of host systems)									
Intended use			Condition of use							
V	fixed	Always at a distance more than 2 m from all people								
	mobile	Always at a distance more than 20 cm from all people								
	portable	May operate at a distance closer than 20 cm to human body								
Assigned frequency range			5150.0 – 5250.0 MHz, 5725.0 – 5850.0 MHz							
Operating frequency range			5160.0 – 5245.0 MHz 5730.0 – 5845.0 MHz							
RF channel spacing			10 MHz, 15 MHz, 20 MHz							
Maximum rated output power			At transmitter 50 Ω RF output connector (per port) in 5730.0 – 5845.0 MHz					19 dBm for 10 MHz 19 dBm for 15 MHz 18.93 dBm for 20 MHz		
Maximum rated output power			At transmitter 50 Ω RF output connector (per port) in 5160.0 – 5245.0 MHz					Refer to Table 6.7		
Maximum EIRP			Per port in 5730.0 – 5845.0 MHz					36 dBm for 10 MHz 36 dBm for 15 MHz 35.93 dBm for 20 MHz		
Is transmitter output power variable?			V	Yes						
					continuous variable					
					V	stepped variable with step size				0.25dB
					minimum RF power					0dBm
					maximum RF power at antenna connector					19 dBm for 10 MHz 19 dBm for 15 MHz 18.93 dBm for 20 MHz
Antenna connection										
	unique coupling		standard connector	V	Integral	V with temporary RF connector without temporary RF connector				
Antenna/s technical characteristics										
Type		Manufacturer		Model number		Gain				
Integral 2 x Dual Slant		Mars		MA-WC54-DS17TR		17dBi				
Transmitter aggregate data rate/s, Mbps										
Transmitter 26dBc power bandwidth			Type of modulation							
			QPSK	16QAM		64QAM				
10 MHz			12	22		55				
15 MHz			18	34		82				
20 MHz			24	46		109				
Type of modulation			QPSK, 16QAM, 64QAM							
Modulating test signal (baseband)			PRBS							
Maximum transmitter duty cycle in normal use			74%							
Transmitter power source										
		Nominal rated voltage			Battery type					
	DC	Nominal rated voltage								
V	AC mains	Nominal rated voltage		via 48 VDC	Frequency					
Common power source for transmitter and receiver					V	yes			no	

6.6 Table of calculations for the MAX EIRP at frequency range 5725 – 5850 MHz

Frequency channel, MHz			Type of modulation	CBW, MHz	Number of antennas	RF output power per antenna, dBm	Aggregate output power all antennas, dBm	Single antenna gain, dBi	Beam forming gain, dBi	Total* antenna gain, dBi	Total** EIRP, dBm
Low	Mid	High									
1 carrier 1 sector (4 ports: 2 dual slant antennas) coherent signal											
5730.0	5788.0	5845.0	OFDMA	10	4	13.0	15.99	17.0	3	20.0	35.99
5733.0	5788.0	5843.0	OFDMA	15	4	13.0	15.96	17.0	3	20.0	35.96
5735.0	5788.0	5840.0	OFDMA	20	4	12.93	15.90	17.0	3	20.0	35.90
1 carrier 1 sector (4 ports: 2 dual slant antennas) non-coherent signal or 2 carriers from the same band 1 sectors (2 ports: 1 dual slant antenna for 1-st carrier and 2 ports: 1 dual slant antenna for 2-nd carrier)											
5730.0	5788.0	5845.0	OFDMA	10	4	15.88	18.87	17.0	0	17.0	35.87
5733.0	5788.0	5843.0	OFDMA	15	4	15.98	18.92	17.0	0	17.0	35.92
5735.0	5788.0	5840.0	OFDMA	20	4	15.95	18.94	17.0	0	17.0	35.94
2 carrier 1 sector (4 ports: 2 dual slant antennas)											
5730.0	5788.0	5845.0	OFDMA	10	4	19.0	19.0	17.0	0	17.0	36.0
5733.0	5788.0	5843.0	OFDMA	15	4	19.0	19.0	17.0	0	17.0	36.0
5735.0	5788.0	5840.0	OFDMA	20	4	18.92	18.92	17.0	0	17.0	35.92

6.7 Table of calculations for the MAX EIRP at frequency range 5150 – 5250 MHz

Frequency channel, MHz			Type of modulation	CBW, MHz	Number of antennas	RF output power per antenna, dBm	Aggregate output power all antennas, dBm	Single antenna gain, dBi	Beam forming gain, dBi	Total* antenna gain, dBi	Total** EIRP, dBm
Low	Mid	High									
1 carrier 1 sector (4 ports: 2 dual slant antennas) coherent signal											
5160.0			OFDMA	10	4	3.70	6.63	17.0	3	20.0	26.63
	5200.0	5245.0	OFDMA	10	4	8.91	11.91	17.0	3	20.0	31.91
5165.0			OFDMA	15	4	3.66	6.61	17.0	3	20.0	26.61
	5200.0	5240.0	OFDMA	15	4	10.82	13.82	17.0	3	20.0	33.82
5165.0			OFDMA	20	4	2.25	5.20	17.0	3	20.0	25.20
	5200.0	5240.0	OFDMA	20	4	11.83	14.83	17.0	3	20.0	34.83
1 carrier 1 sector (4 ports: 2 dual slant antennas) non-coherent signal or 2 carriers from the same band 1 sectors (2 ports: 1 dual slant antenna for 1-st carrier and 2 ports: 1 dual slant antenna for 2-nd carrier)											
5160.0			OFDMA	10	4	5.33	8.32	17.0	0	17.0	25.32
	5200.0	5245.0	OFDMA	10	4	12.05	15.02	17.0	0	17.0	32.02
5165.0			OFDMA	15	4	6.39	9.36	17.0	0	17.0	26.36
	5200.0	5240.0	OFDMA	15	4	13.99	16.97	17.0	0	17.0	33.97
5165.0			OFDMA	20	4	5.25	8.20	17.0	0	17.0	25.20
	5200.0	5240.0	OFDMA	20	4	14.82	17.82	17.0	0	17.0	34.82
2 carrier 1 sector (4 ports: 2 dual slant antennas)											
5160.0			OFDMA	10	4	5.33	5.33	17.0	0	17.0	22.33
	5200.0	5245.0	OFDMA	10	4	15.02	15.02	17.0	0	17.0	32.02
5165.0			OFDMA	15	4	6.39	6.39	17.0	0	17.0	23.39
	5200.0	5240.0	OFDMA	15	4	16.82	16.82	17.0	0	17.0	33.82
5165.0			OFDMA	20	4	5.25	5.25	17.0	0	17.0	22.25
	5200.0	5240.0	OFDMA	20	4	15.86	15.86	17.0	0	17.0	32.86

* - Total antenna gain, dBi = Single antenna gain, dBi + 10 log (Number of antennas) + Beam forming gain, dBi

** - Total EIRP, dBm = RF output power per antenna, dBm + Single antenna gain, dBi + 10 log (Number of antennas) + Beam forming gain, dBi



Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart E and RSS-247.

7.1 Occupied 6 dB bandwidth at 5725 – 5850 MHz range

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
5150.0 – 5250.0	6.0	500.0
5725.0 – 5850.0	6.0	500.0

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.


7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer RBW=1% of EBW as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and the associated plots.

Figure 7.1.1 The 6 dB bandwidth test setup





HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Table 7.1.2 The 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 5.725 – 5.850 GHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: ≥RBW
 EBW: 10 MHz

Carrier frequency, GHz	Modulation	6 dB bandwidth, MHz	Limit, MHz	Margin*, MHz	Verdict
Low frequency					
5.730	QPSK	9.031	0.5	9.017	Pass
	16QAM	9.031	0.5	9.031	Pass
	64QAM	9.031	0.5	9.035	Pass
Mid frequency					
5.788	QPSK	9.011	0.5	9.004	Pass
	16QAM	9.011	0.5	9.029	Pass
	64QAM	8.951	0.5	9.039	Pass
High frequency					
5.845	QPSK	9.051	0.5	9.001	Pass
	16QAM	8.991	0.5	8.986	Pass
	64QAM	9.071	0.5	9.007	Pass

EBW: 15 MHz

Carrier frequency, GHz	Modulation	6 dB bandwidth, MHz	Limit, MHz	Margin*, MHz	Verdict
Low frequency					
5.7325	QPSK	13.527	0.5	-13.027	Pass
	16QAM	13.497	0.5	-12.997	Pass
	64QAM	13.528	0.5	-13.028	Pass
Mid frequency					
5.7880	QPSK	13.504	0.5	-13.004	Pass
	16QAM	13.549	0.5	-13.049	Pass
	64QAM	13.497	0.5	-12.997	Pass
High frequency					
5.8425	QPSK	13.492	0.5	-12.992	Pass
	16QAM	13.525	0.5	-13.025	Pass
	64QAM	13.516	0.5	-13.016	Pass



HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Table 7.1.2 The 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 5.725 – 5.850 GHz
DETECTOR USED: Peak
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: ≥RBW
EBW: 20 MHz

Carrier frequency, GHz	Modulation	6 dB bandwidth, MHz	Limit, MHz	Margin*, MHz	Verdict
Low frequency					
5.7350	QPSK	18.040	0.5	-17.540	Pass
	16QAM	18.024	0.5	-17.524	Pass
	64QAM	18.024	0.5	-17.524	Pass
Mid frequency					
5.7880	QPSK	18.026	0.5	-17.526	Pass
	16QAM	18.027	0.5	-17.527	Pass
	64QAM	18.014	0.5	-17.514	Pass
High frequency					
5.8400	QPSK	18.032	0.5	-17.532	Pass
	16QAM	18.030	0.5	-17.530	Pass
	64QAM	18.045	0.5	-17.545	Pass

* Margin = 6 dB bandwidth – specification limit

Reference numbers of test equipment used

HL 2909	HL 3655	HL 3901						
---------	---------	---------	--	--	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.1 The 6 dB bandwidth test result at low frequency, QPSK modulation, 10 MHz EBW

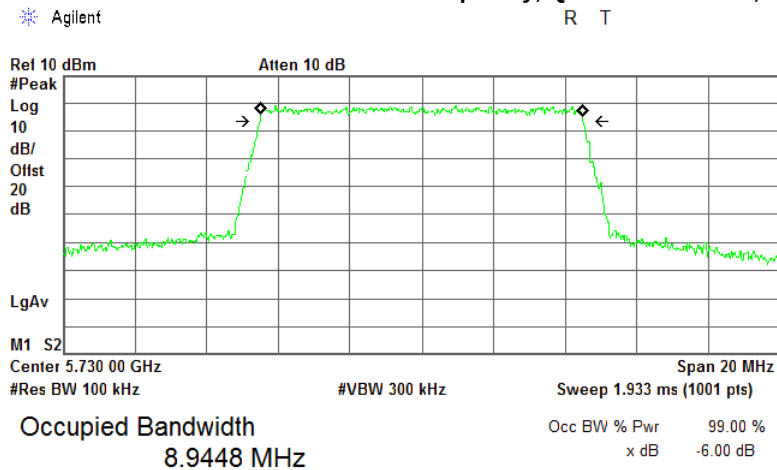

Transmit Freq Error -1.000 kHz
x dB Bandwidth 9.017 MHz

Plot 7.1.2 The 6 dB bandwidth test result at low frequency, 16QAM modulation, 10 MHz EBW

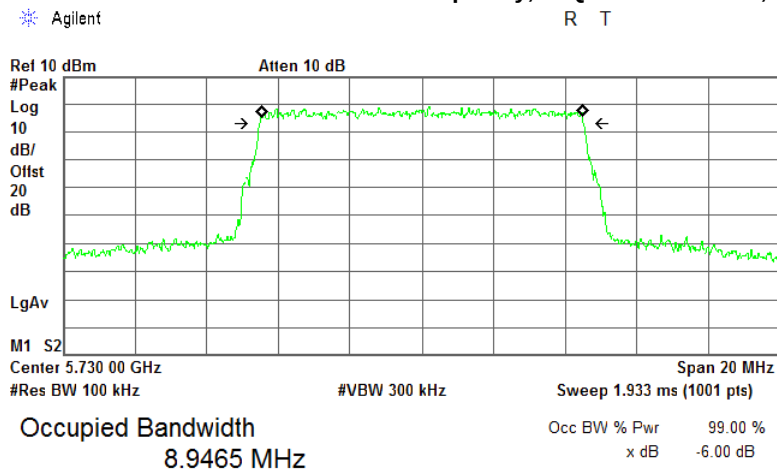

Transmit Freq Error 4.548 kHz
x dB Bandwidth 9.031 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.3 The 6 dB bandwidth test result at low frequency, 64QAM modulation, 10 MHz EBW

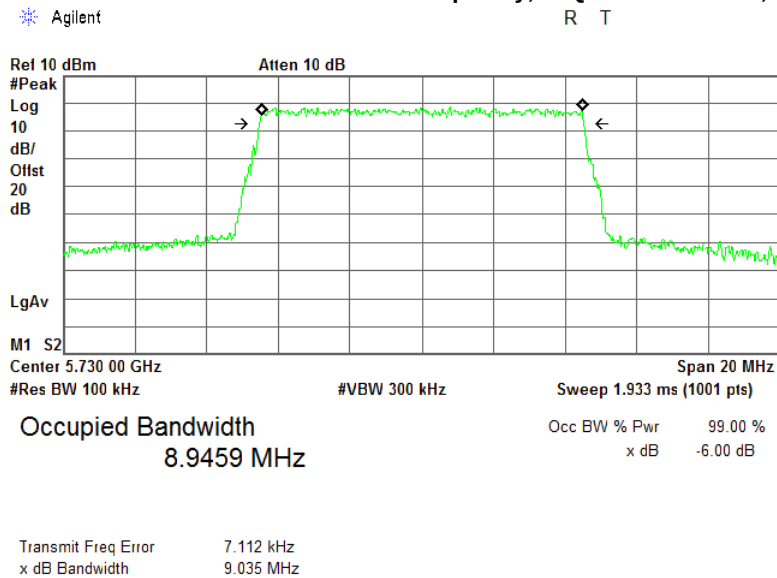




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			


Plot 7.1.4 The 6 dB bandwidth test result at mid frequency, QPSK modulation, 10 MHz EBW

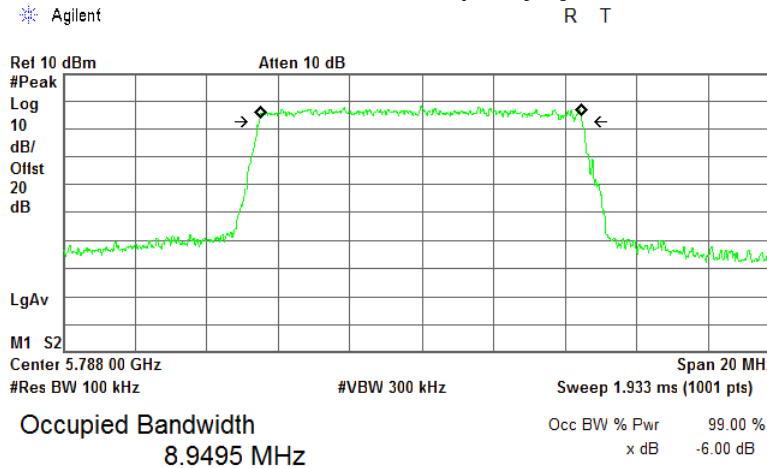

Transmit Freq Error -27.239 kHz

x dB Bandwidth 9.004 MHz

Plot 7.1.5 The 6 dB bandwidth test result at mid frequency, 16QAM modulation, 10 MHz EBW

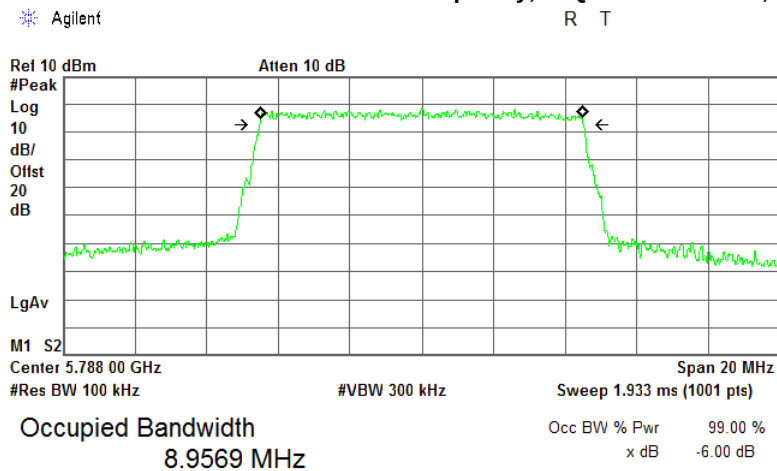

Transmit Freq Error -1.292 kHz

x dB Bandwidth 9.029 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.6 The 6 dB bandwidth test result at mid frequency, 64QAM modulation, 10 MHz EBW

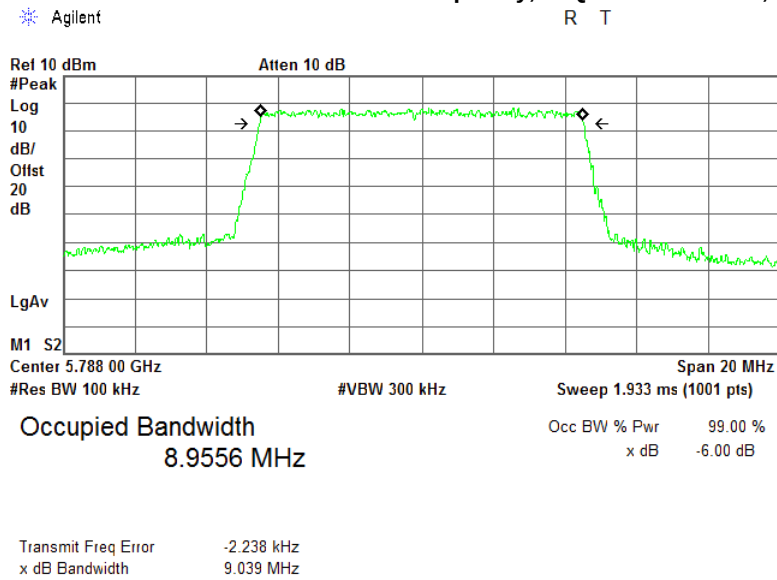




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			


Plot 7.1.7 The 6 dB bandwidth test result at high frequency, QPSK modulation, 10 MHz EBW

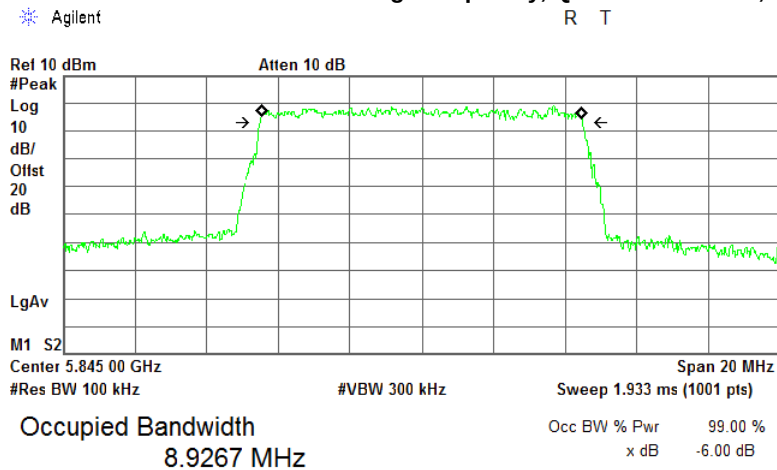

Transmit Freq Error 229.501 Hz

x dB Bandwidth 9.001 MHz

Plot 7.1.8 The 6 dB bandwidth test result at high frequency, 16QAM modulation, 10 MHz EBW

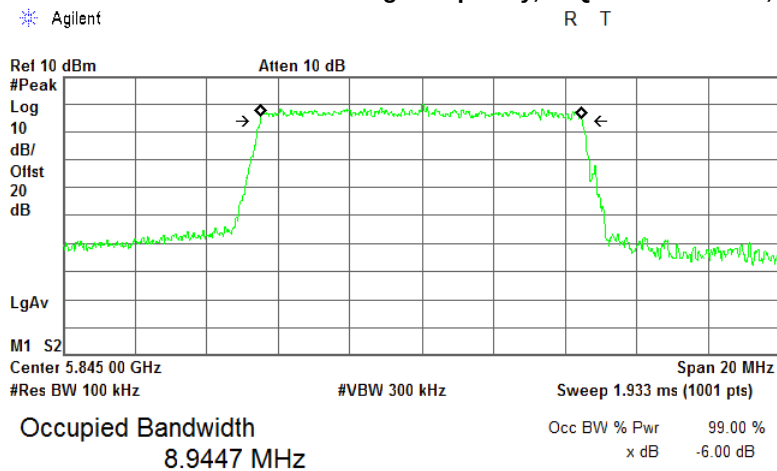

Transmit Freq Error -13.237 kHz

x dB Bandwidth 8.986 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.9 The 6 dB bandwidth test result at high frequency, 64QAM modulation, 10 MHz EBW

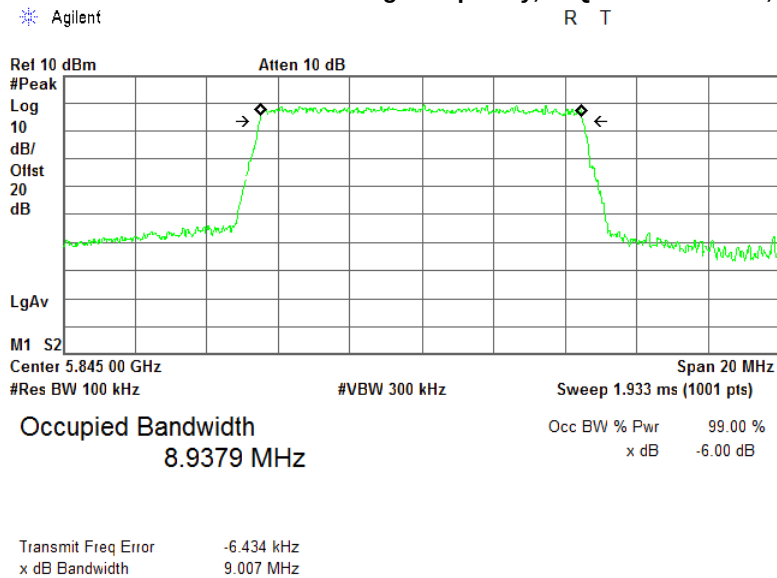




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.10 The 6 dB bandwidth test result at low frequency, QPSK modulation, 15 MHz EBW

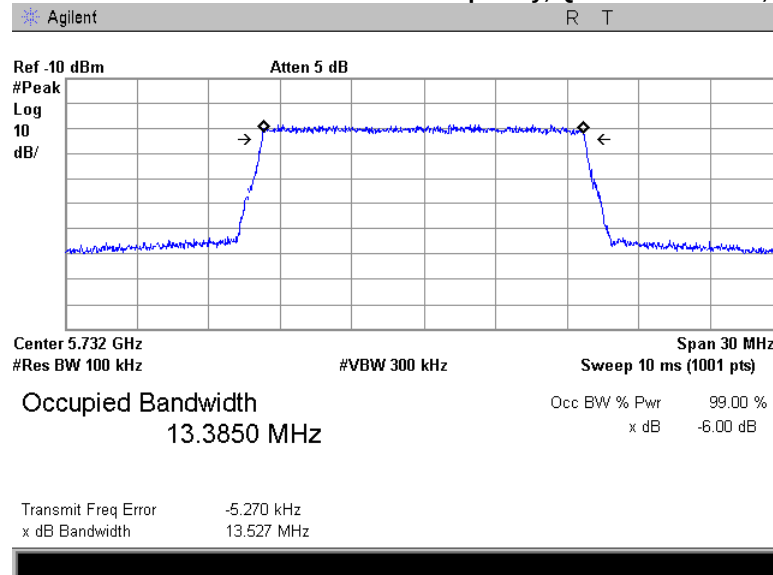

Plot 7.1.11 The 6 dB bandwidth test result at low frequency, 16QAM modulation, 15 MHz EBW

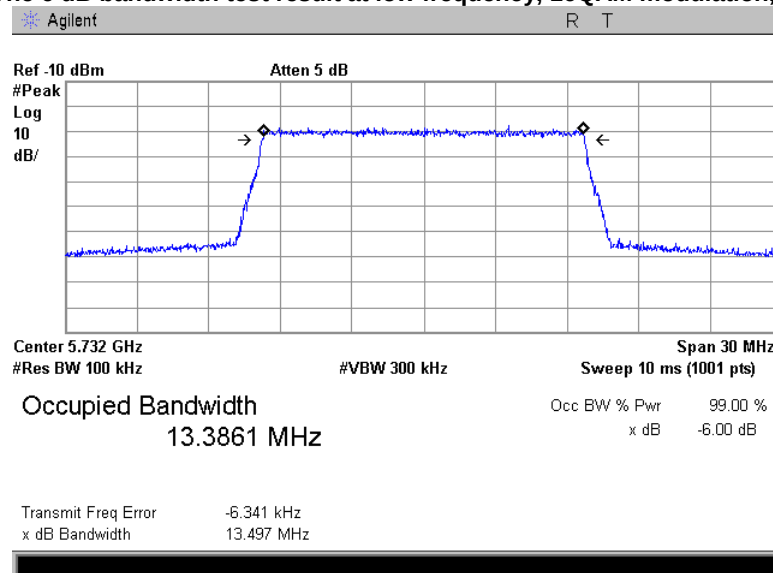




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.12 The 6 dB bandwidth test result at low frequency, 64QAM modulation, 15 MHz EBW

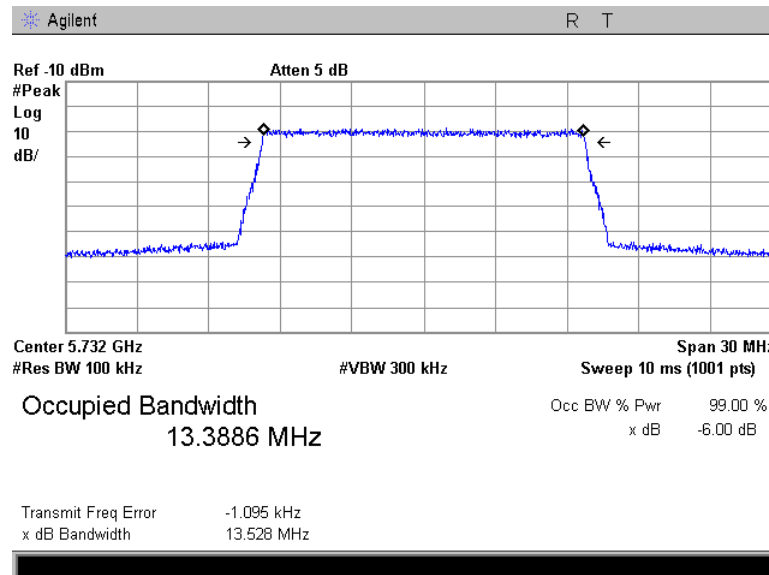




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.13 The 6 dB bandwidth test result at mid frequency, QPSK modulation, 15 MHz EBW

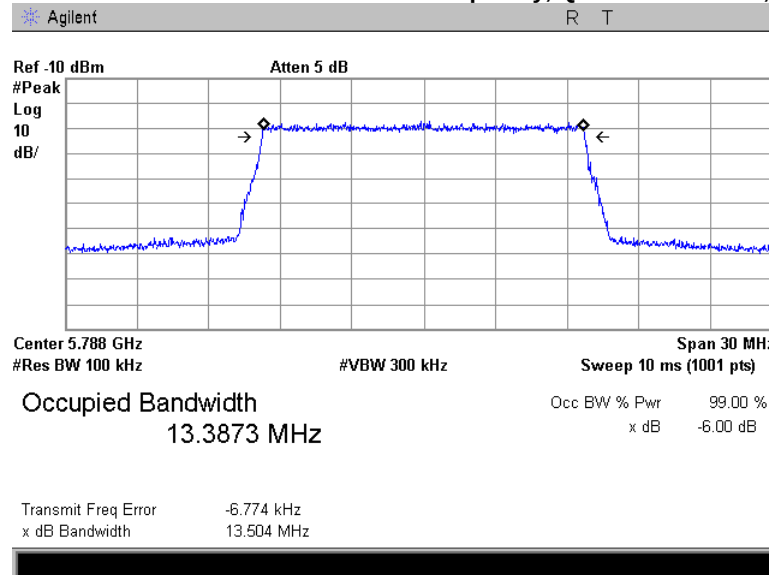


Plot 7.1.14 The 6 dB bandwidth test result at mid frequency, 16QAM modulation, 15 MHz EBW

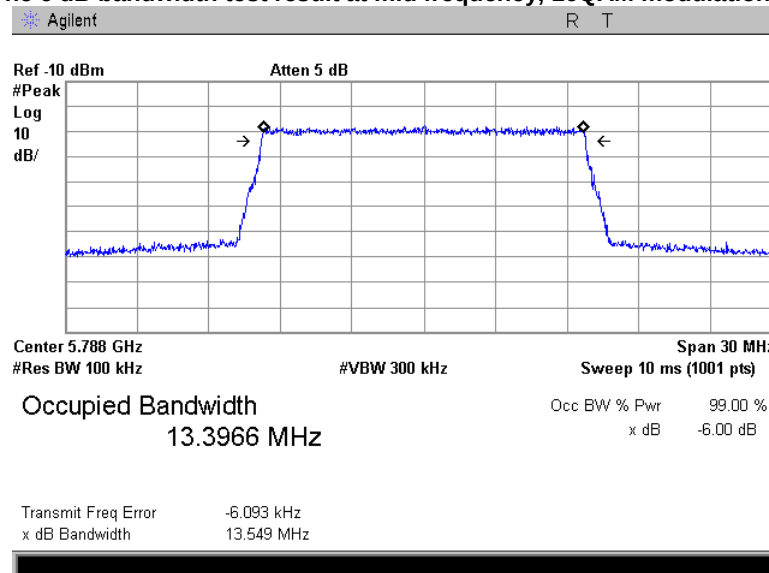



Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.15 The 6 dB bandwidth test result at mid frequency, 64QAM modulation, 15 MHz EBW

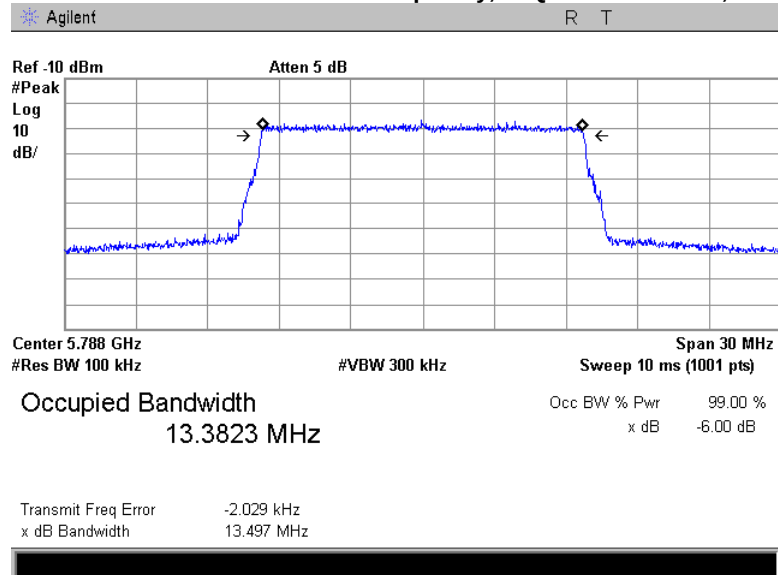




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.16 The 6 dB bandwidth test result at high frequency, QPSK modulation, 15 MHz EBW

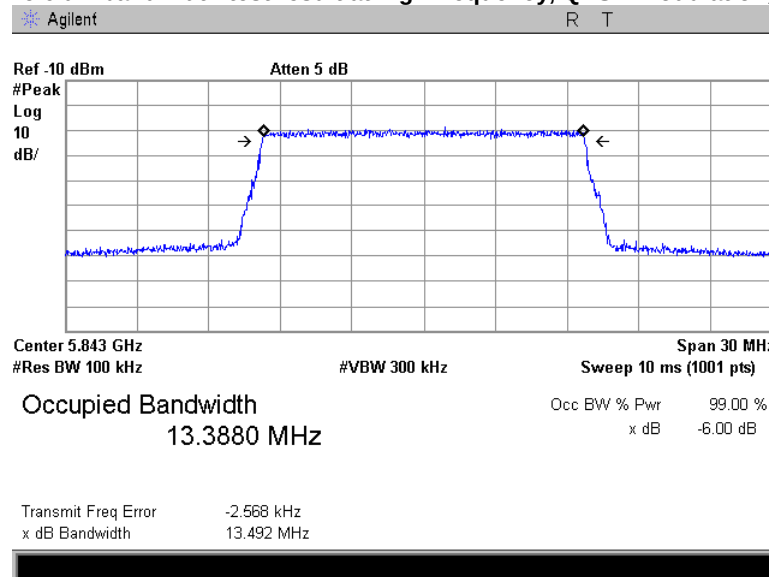

Plot 7.1.17 The 6 dB bandwidth test result at high frequency, 16QAM modulation, 15 MHz EBW

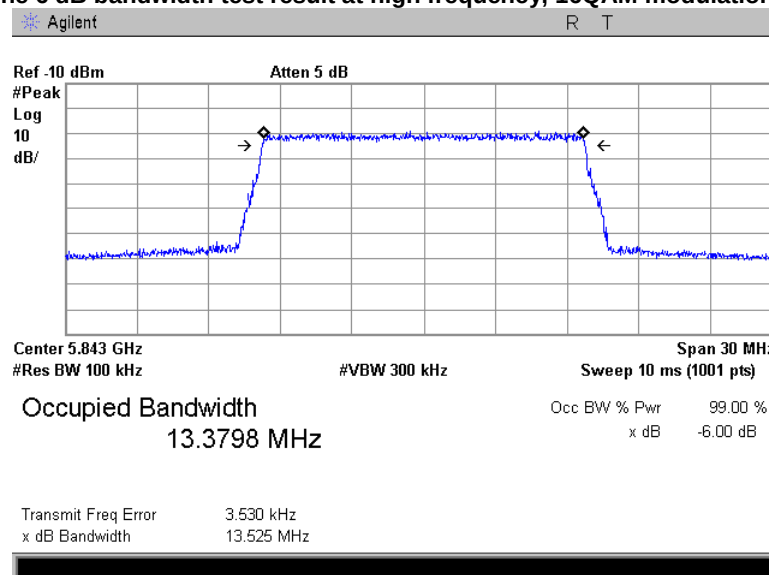




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			


Plot 7.1.18 The 6 dB bandwidth test result at high frequency, 64QAM modulation, 15 MHz EBW

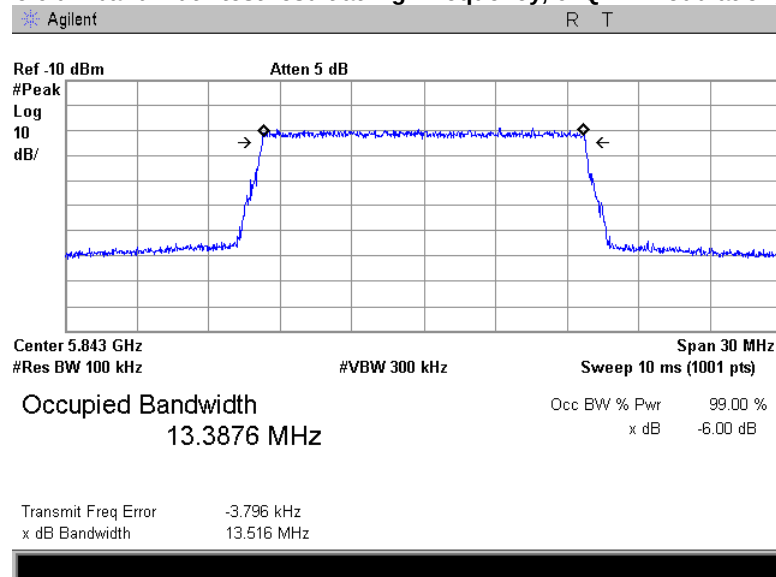




Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.19 The 6 dB bandwidth test result at low frequency, QPSK modulation, 20 MHz EBW

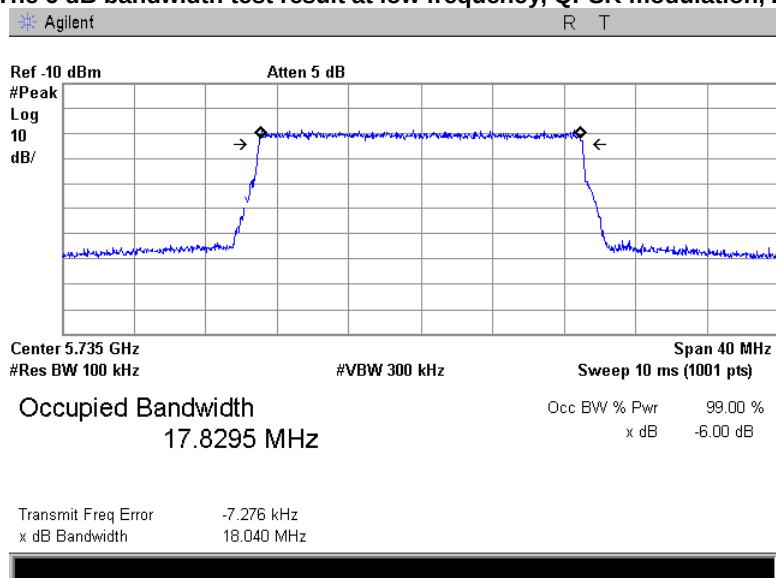

Plot 7.1.20 The 6 dB bandwidth test result at low frequency, 16QAM modulation, 20 MHz EBW

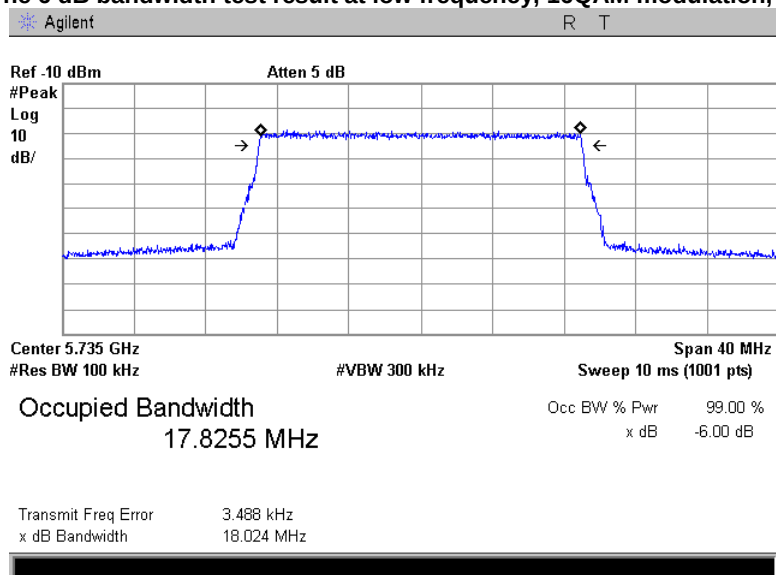




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.21 The 6 dB bandwidth test result at low frequency, 64QAM modulation, 20 MHz EBW

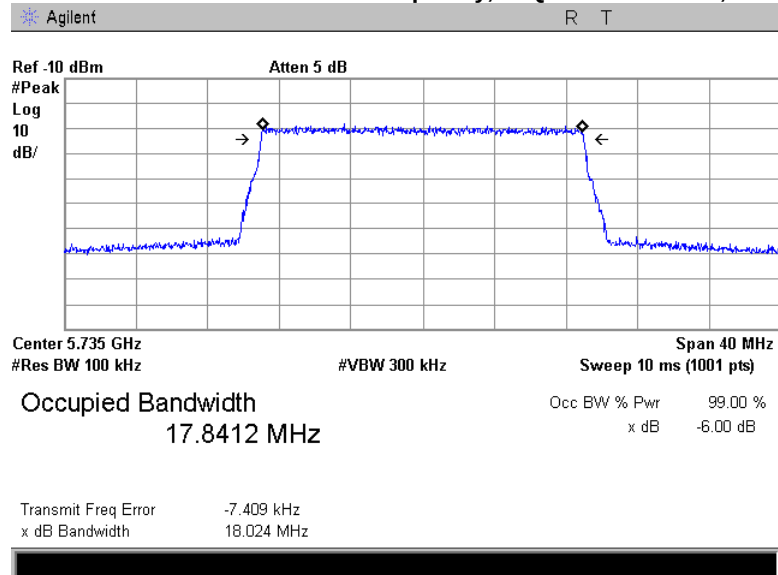




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.22 The 6 dB bandwidth test result at mid frequency, QPSK modulation, 20 MHz EBW

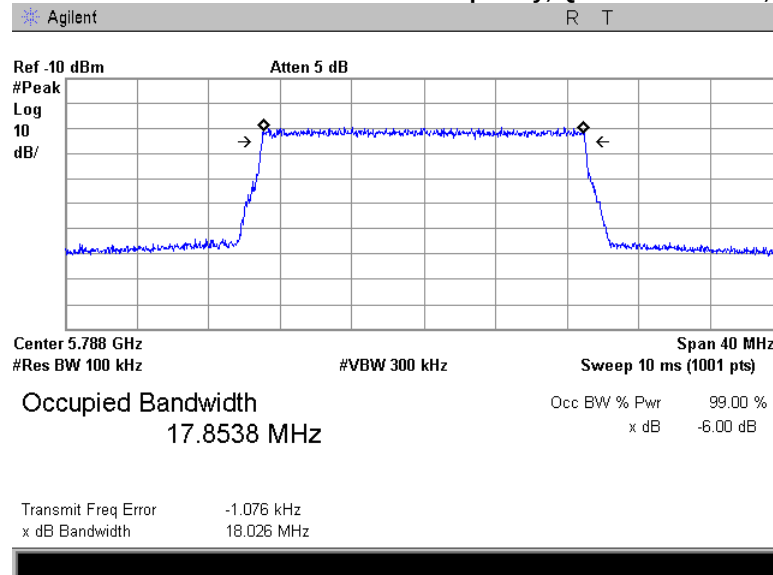

Plot 7.1.23 The 6 dB bandwidth test result at mid frequency, 16QAM modulation, 20 MHz EBW

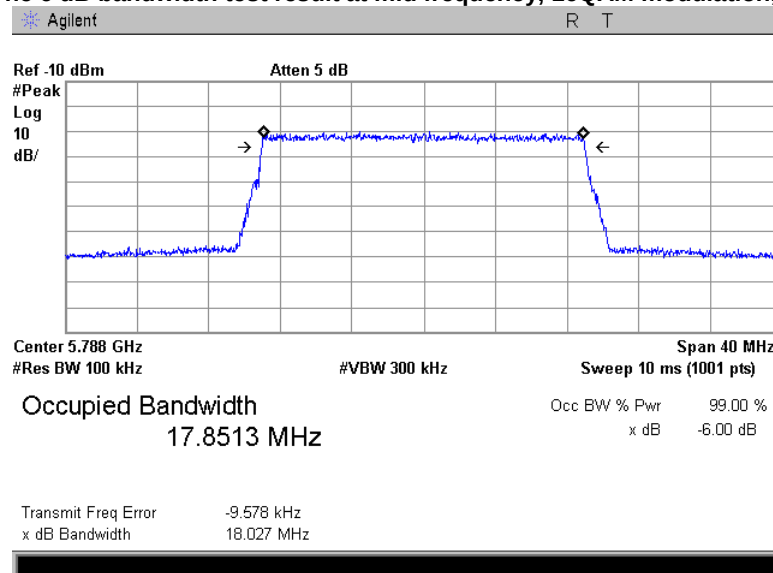




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.24 The 6 dB bandwidth test result at mid frequency, 64QAM modulation, 20 MHz EBW

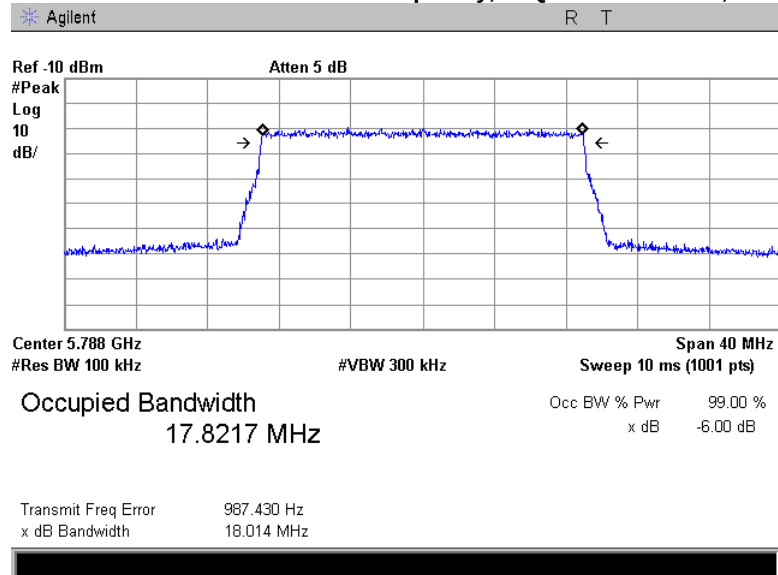




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.25 The 6 dB bandwidth test result at high frequency, QPSK modulation, 20 MHz EBW

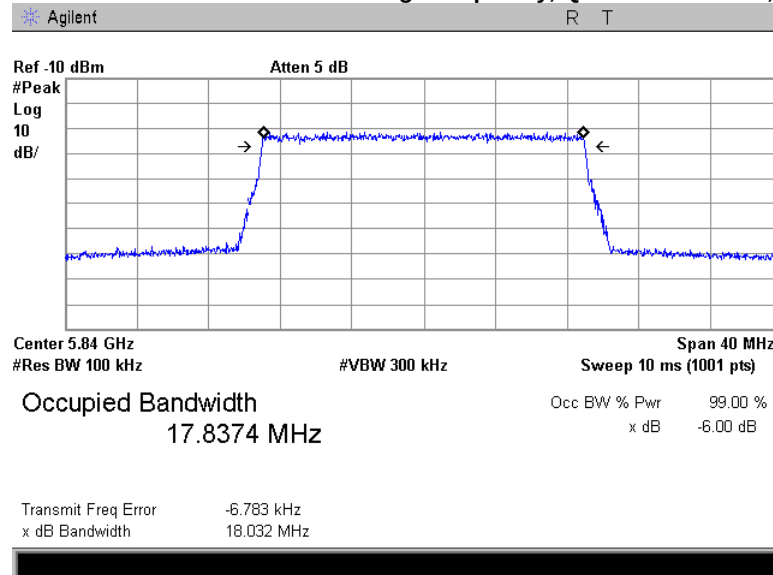

Plot 7.1.26 The 6 dB bandwidth test result at high frequency, 16QAM modulation, 20 MHz EBW

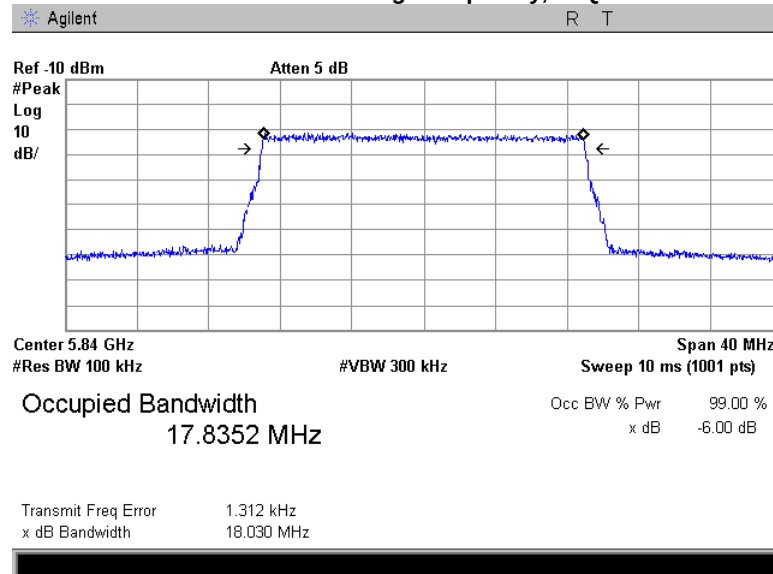




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407(e), RSS-247 section 6.2.4.1, 6 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.1.27 The 6 dB bandwidth test result at high frequency, 64QAM modulation, 20 MHz EBW

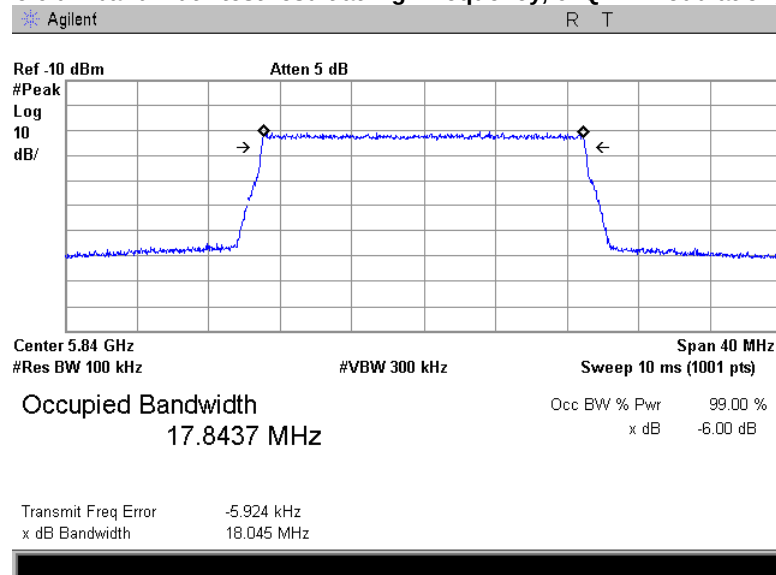



Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

7.2 Occupied 99% bandwidth at 5725 – 5850 MHz range

7.2.1 General

This test was performed to measure 99% bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.2.1.

Table 7.2.1 The 99% bandwidth limits

Assigned frequency, MHz	Modulation envelope, %	Minimum bandwidth, kHz
5150.0 – 5250.0	99	NA
5725.0 – 5850.0	99	NA

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.


7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1 energized and its proper operation was checked.

7.2.2.2 The EUT was set to transmit modulated carrier.

7.2.2.3 The transmitter minimum 99% bandwidth was measured with spectrum analyzer RBW=1% of EBW as frequency delta between reference points on modulation envelope and provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 The 99% bandwidth test setup





Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Table 7.2.2 The 99% bandwidth test results

ASSIGNED FREQUENCY BAND: 5.725 – 5.850 GHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 1% of the EBW
 VIDEO BANDWIDTH: ≥RBW
 EBW: 10 MHz

Carrier frequency, GHz	Modulation	99% bandwidth, MHz
Low frequency		
5.7300	QPSK	8.9392
	16QAM	8.9257
	64QAM	8.9616
Mid frequency		
5.7880	QPSK	8.9612
	16QAM	8.9389
	64QAM	8.9621
High frequency		
5.8450	QPSK	8.9568
	16QAM	8.9419
	64QAM	8.9477

EBW: 15 MHz

Carrier frequency, GHz	Modulation	99% bandwidth, MHz
Low frequency		
5.7325	QPSK	13.4025
	16QAM	13.3981
	64QAM	13.4224
Mid frequency		
5.7880	QPSK	13.4524
	16QAM	13.4483
	64QAM	13.3967
High frequency		
5.8425	QPSK	13.4703
	16QAM	13.4356
	64QAM	13.3886



Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Table 7.2.2 The 99% bandwidth test results

ASSIGNED FREQUENCY BAND: 5.725 – 5.850 GHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 1% of the EBW
 VIDEO BANDWIDTH: ≥RBW
 EBW: 20 MHz

Carrier frequency, GHz	Modulation	99% bandwidth, MHz
Low frequency		
5.7350	QPSK	17.8621
	16QAM	17.8908
	64QAM	17.8575
Mid frequency		
5.7880	QPSK	17.8735
	16QAM	17.8928
	64QAM	17.8827
High frequency		
5.8400	QPSK	17.8967
	16QAM	17.8481
	64QAM	17.8505

Reference numbers of test equipment used

HL 3901	HL 4355							
---------	---------	--	--	--	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.1 The 99% bandwidth test result at low frequency, QPSK modulation, 10 MHz EBW

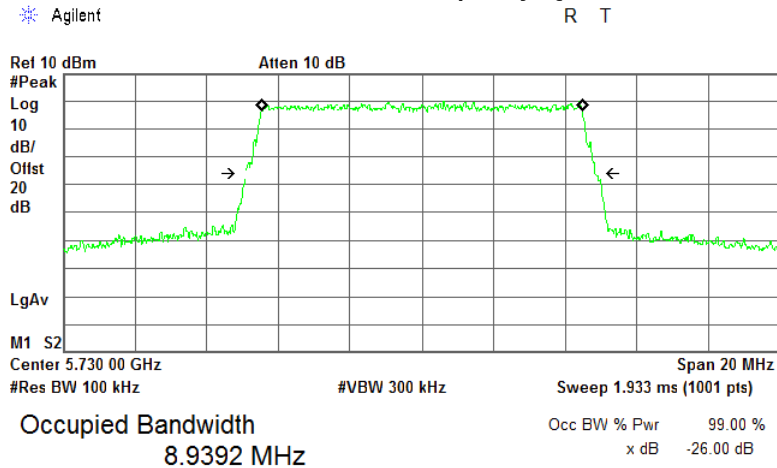

Transmit Freq Error 6.263 kHz
x dB Bandwidth 9.739 MHz

Plot 7.2.2 The 99% bandwidth test result at low frequency, 16QAM modulation, 10 MHz EBW

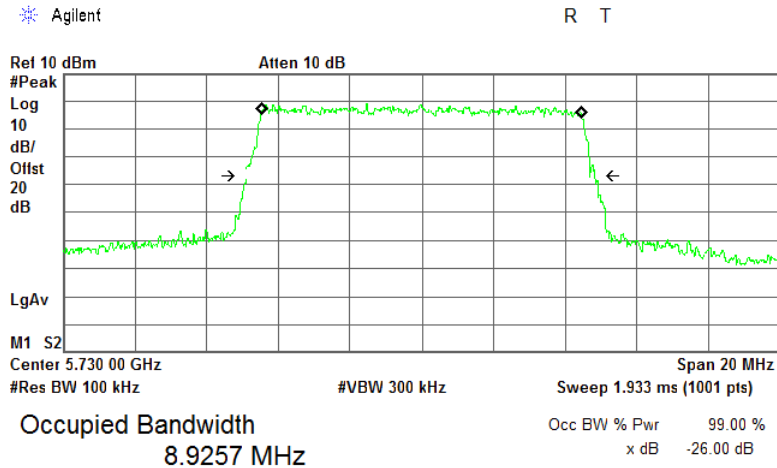

Transmit Freq Error -4.754 kHz
x dB Bandwidth 9.742 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.3 The 99% bandwidth test result at low frequency, 64QAM modulation, 10 MHz EBW

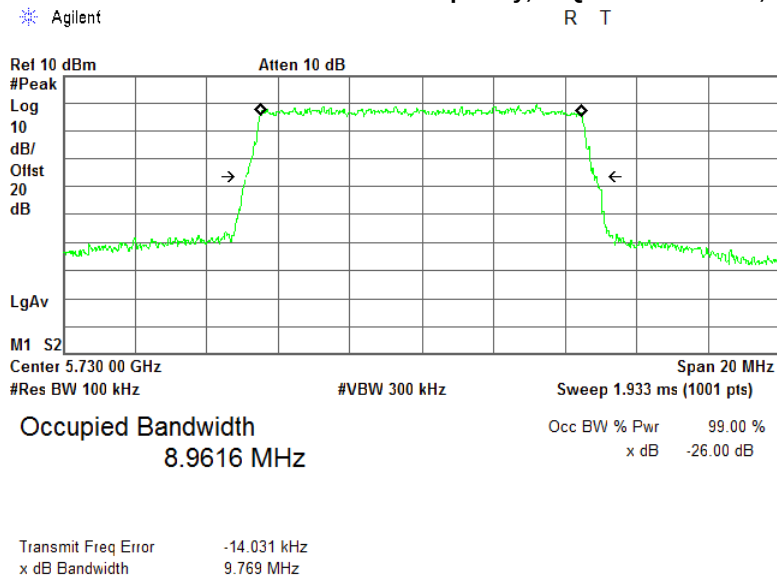




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.4 The 99% bandwidth test result at mid frequency, QPSK modulation, 10 MHz EBW

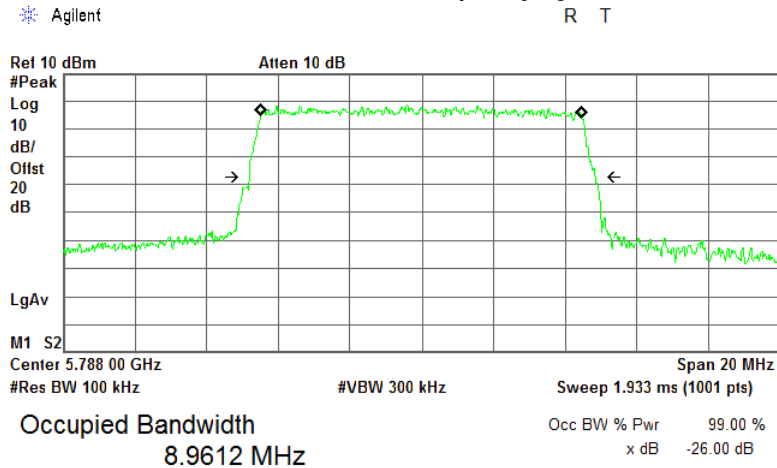

Transmit Freq Error -12.576 kHz
x dB Bandwidth 9.655 MHz

Plot 7.2.5 The 99% bandwidth test result at mid frequency, 16QAM modulation, 10 MHz EBW

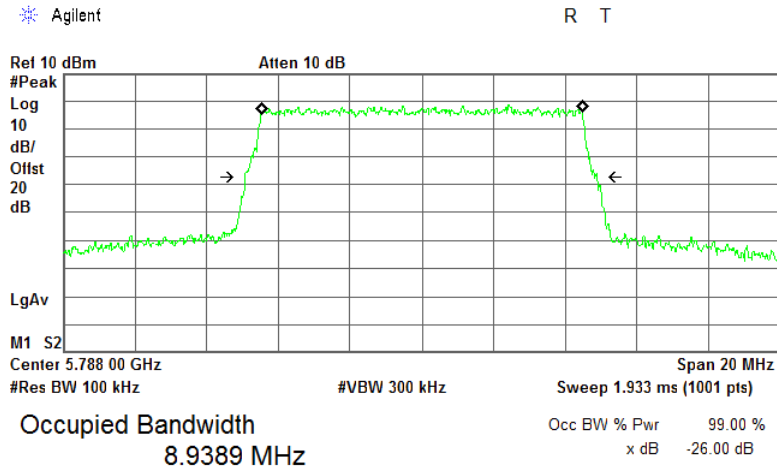

Transmit Freq Error 5.067 kHz
x dB Bandwidth 9.803 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.6 The 99% bandwidth test result at mid frequency, 64QAM modulation, 10 MHz EBW

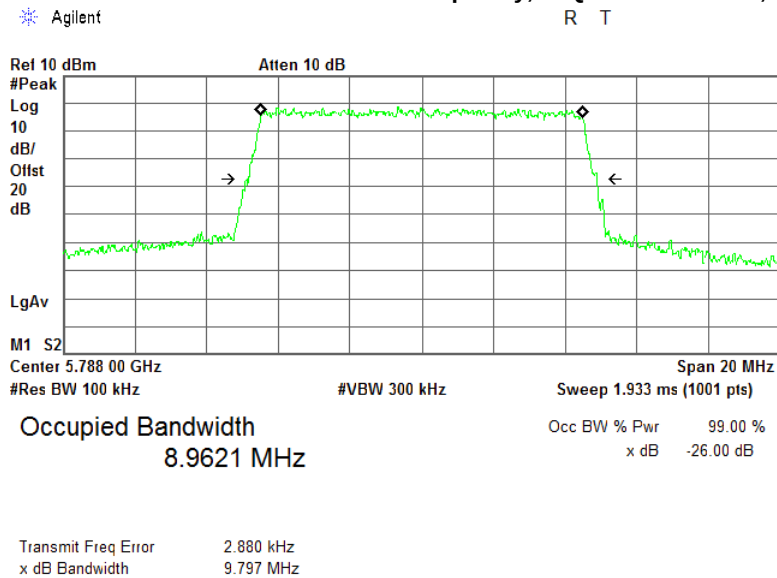




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.7 The 99% bandwidth test result at high frequency, QPSK modulation, 10 MHz EBW

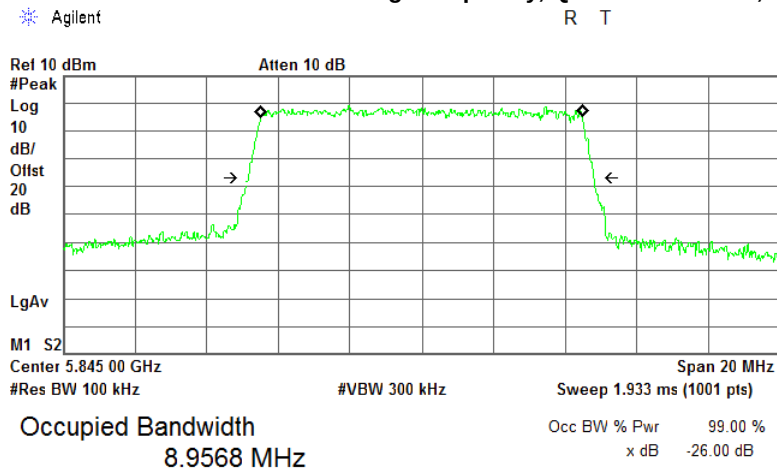

Transmit Freq Error -8.514 kHz
x dB Bandwidth 9.633 MHz

Plot 7.2.8 The 99% bandwidth test result at high frequency, 16QAM modulation, 10 MHz EBW

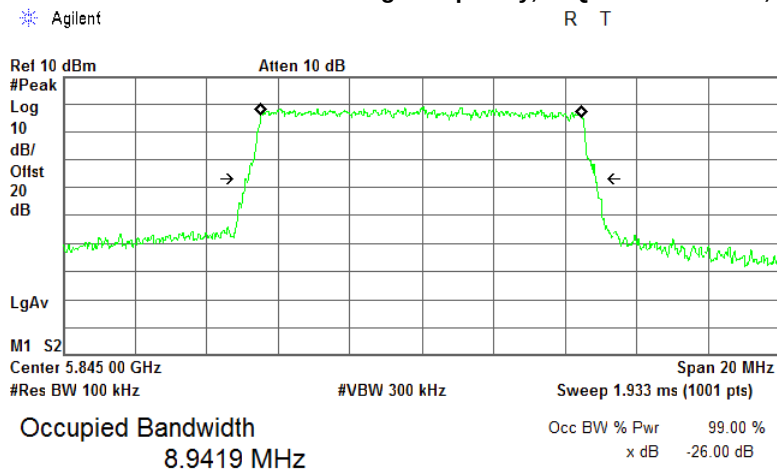

Transmit Freq Error -3.649 kHz
x dB Bandwidth 9.770 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.9 The 99% bandwidth test result at high frequency, 64QAM modulation, 10 MHz EBW

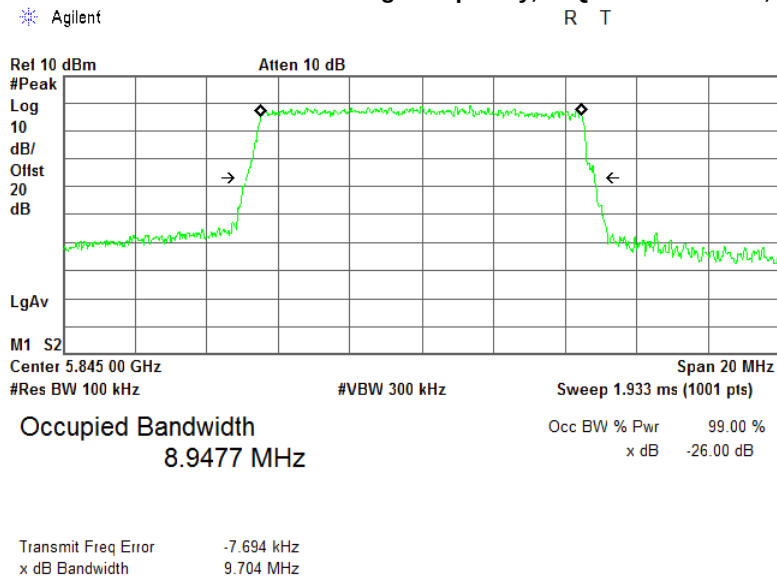




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.10 The 99% bandwidth test result at low frequency, QPSK modulation, 15 MHz EBW

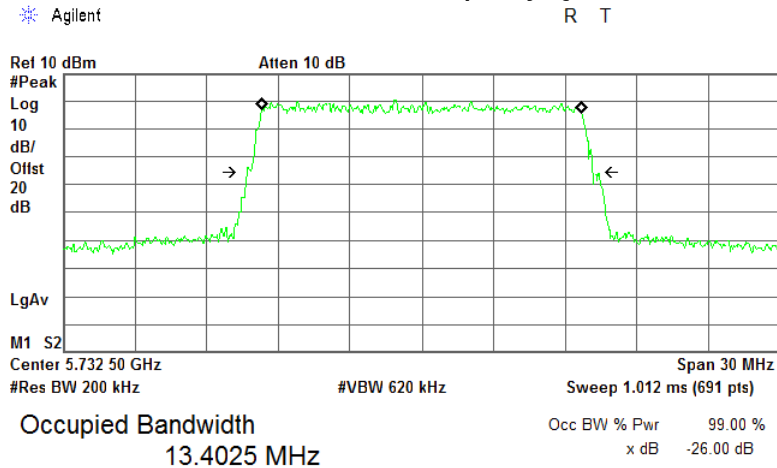

Transmit Freq Error 3.421 kHz
x dB Bandwidth 14.451 MHz

Plot 7.2.11 The 99% bandwidth test result at low frequency, 16QAM modulation, 15 MHz EBW

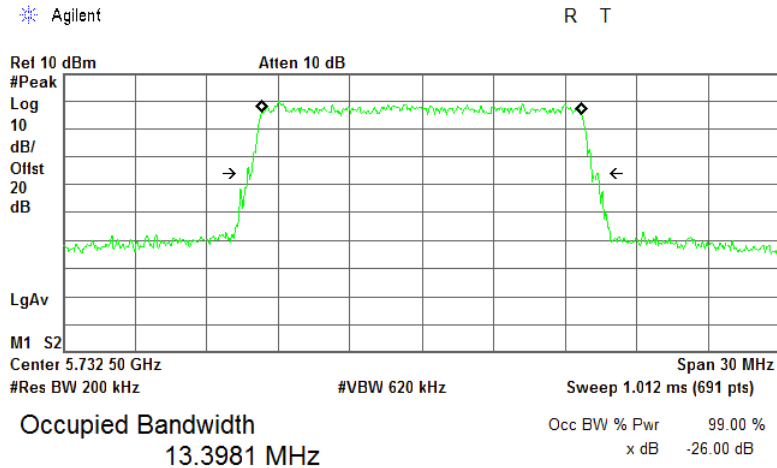

Transmit Freq Error -376.637 Hz
x dB Bandwidth 14.672 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.12 The 99% bandwidth test result at low frequency, 64QAM modulation, 15 MHz EBW

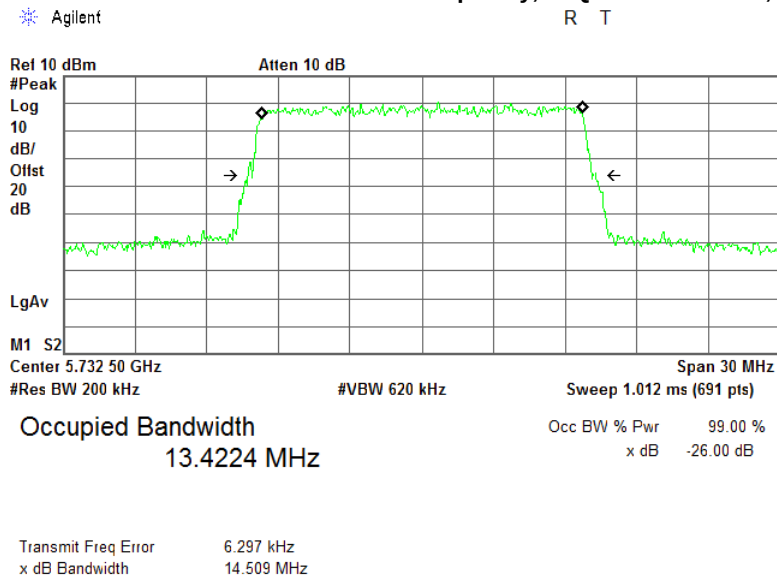




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.13 The 99% bandwidth test result at mid frequency, QPSK modulation, 15 MHz EBW

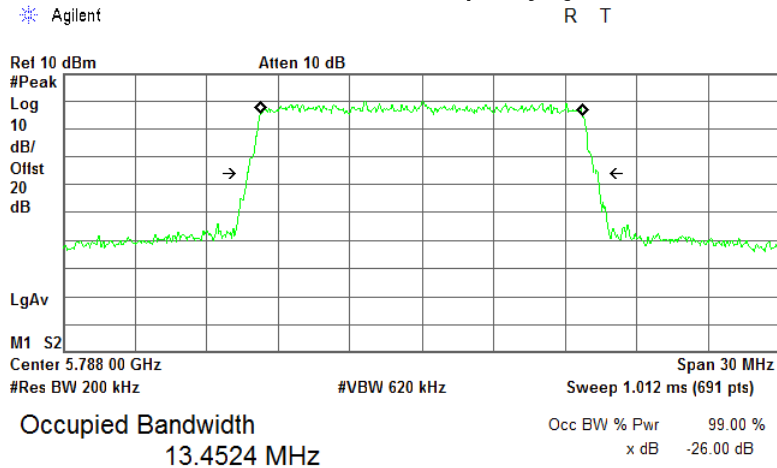

Transmit Freq Error 4.527 kHz
x dB Bandwidth 14.682 MHz

Plot 7.2.14 The 99% bandwidth test result at mid frequency, 16QAM modulation, 15 MHz EBW

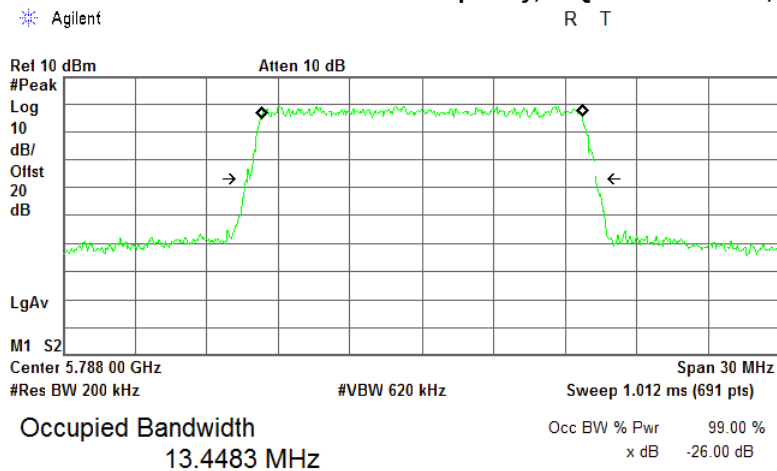

Transmit Freq Error 10.793 kHz
x dB Bandwidth 14.603 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.15 The 99% bandwidth test result at mid frequency, 64QAM modulation, 15 MHz EBW

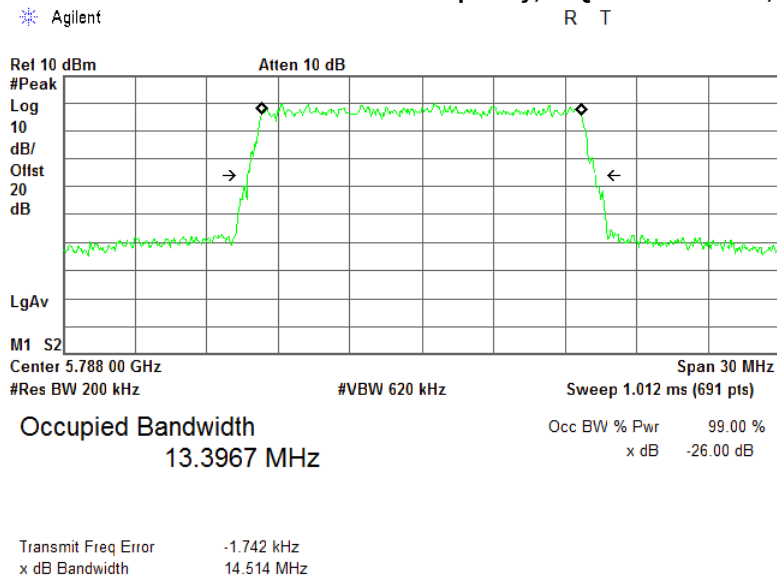




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.16 The 99% bandwidth test result at high frequency, QPSK modulation, 15 MHz EBW

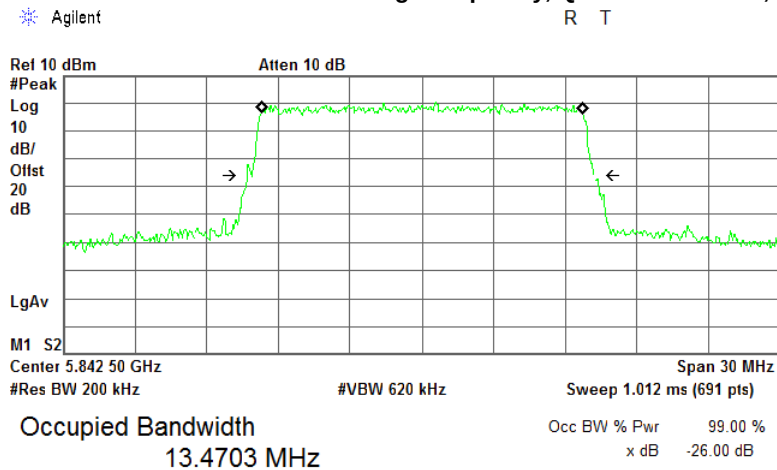

Plot 7.2.17 The 99% bandwidth test result at high frequency, 16QAM modulation, 15 MHz EBW

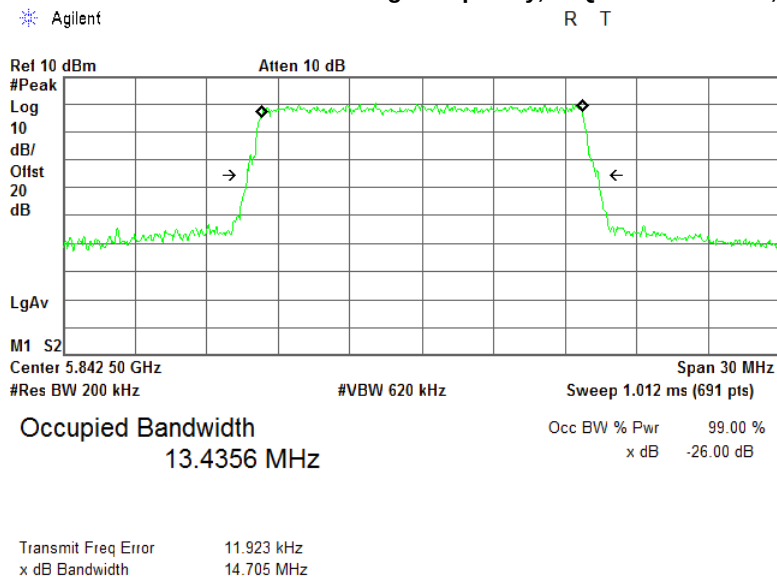




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.18 The 99% bandwidth test result at high frequency, 64QAM modulation, 15 MHz EBW

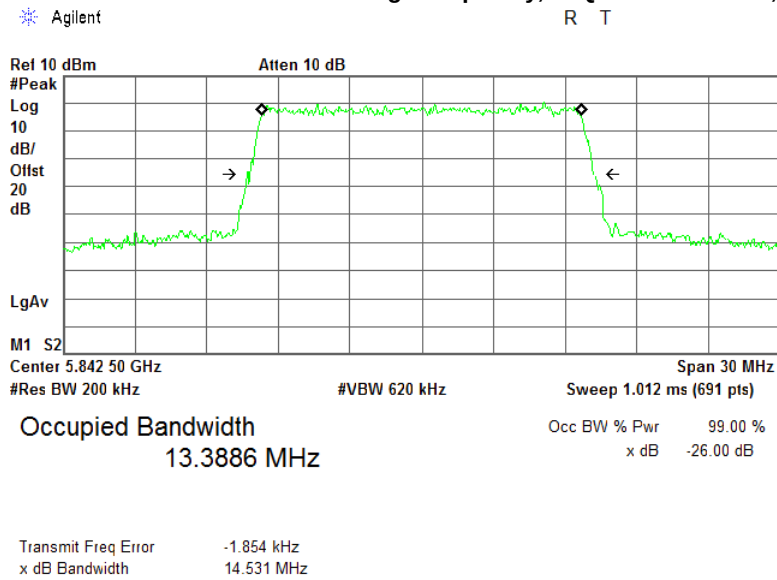




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.19 The 99% bandwidth test result at low frequency, QPSK modulation, 20 MHz EBW

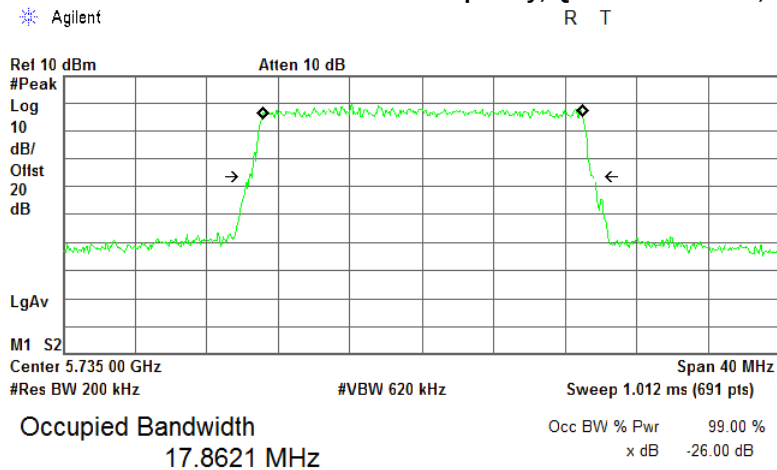

Transmit Freq Error 39.447 kHz
x dB Bandwidth 19.164 MHz

Plot 7.2.20 The 99% bandwidth test result at low frequency, 16QAM modulation, 20 MHz EBW

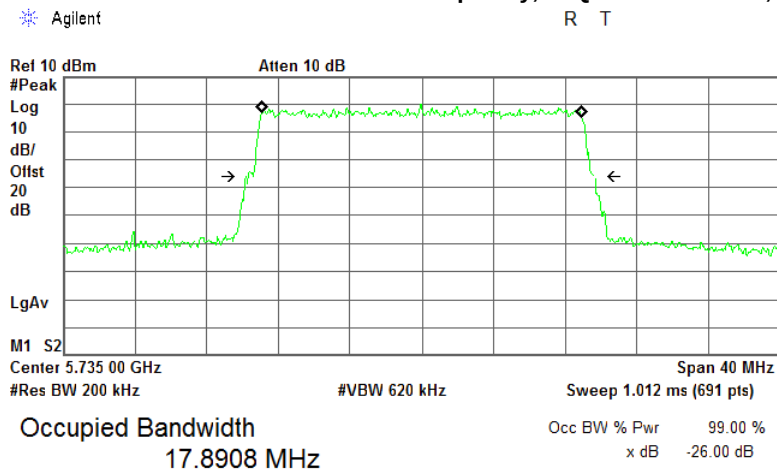

Transmit Freq Error 3.739 kHz
x dB Bandwidth 19.471 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			


Plot 7.2.21 The 99% bandwidth test result at low frequency, 64QAM modulation, 20 MHz EBW

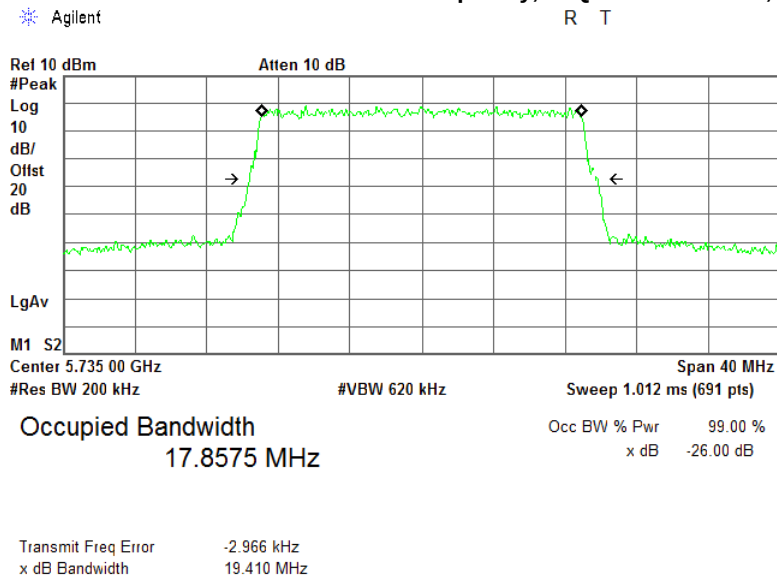




Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.22 The 99% bandwidth test result at mid frequency, QPSK modulation, 20 MHz EBW

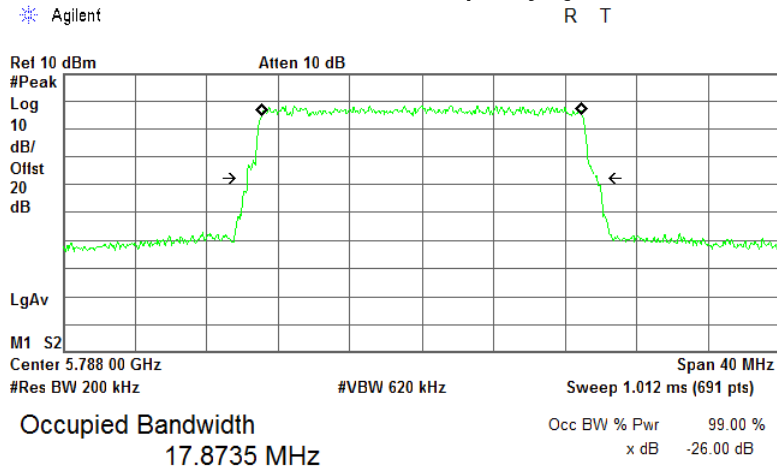

Transmit Freq Error 11.194 kHz
x dB Bandwidth 19.519 MHz

Plot 7.2.23 The 99% bandwidth test result at mid frequency, 16QAM modulation, 20 MHz EBW

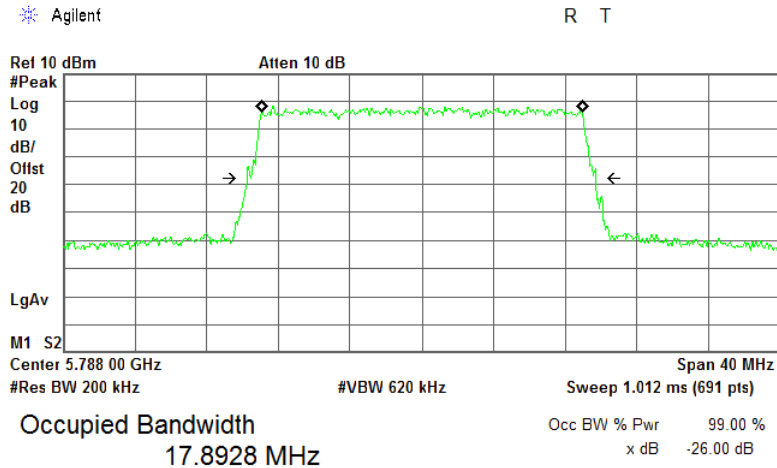

Transmit Freq Error 15.587 kHz
x dB Bandwidth 19.461 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.24 The 99% bandwidth test result at mid frequency, 64QAM modulation, 20 MHz EBW

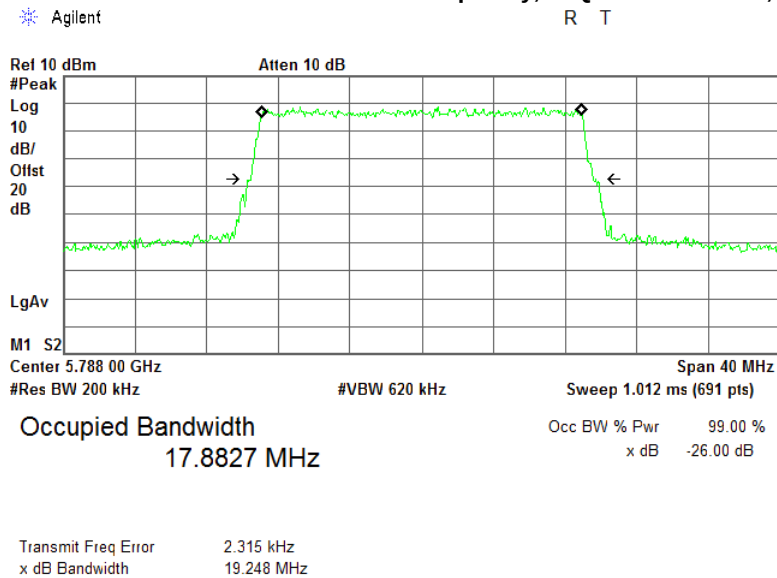




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.25 The 99% bandwidth test result at high frequency, QPSK modulation, 20 MHz EBW

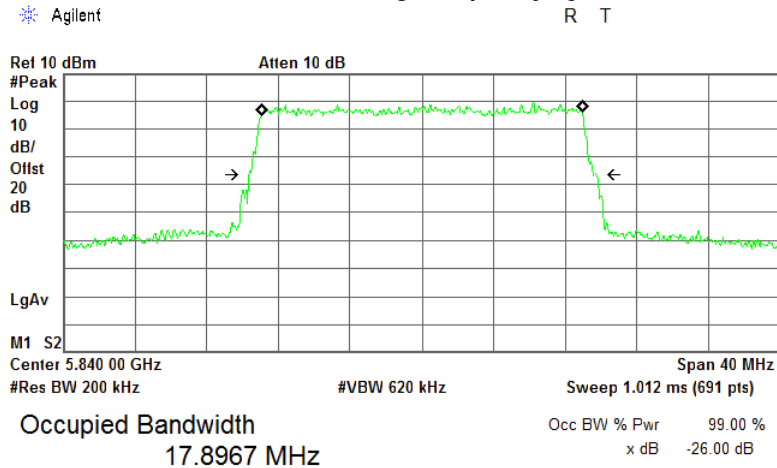

Transmit Freq Error 12.363 kHz
x dB Bandwidth 19.301 MHz

Plot 7.2.26 The 99% bandwidth test result at high frequency, 16QAM modulation, 20 MHz EBW

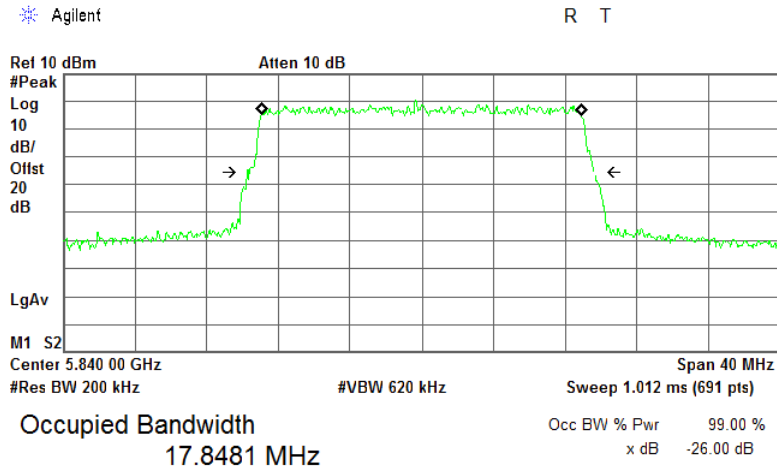

Transmit Freq Error 7.310 kHz
x dB Bandwidth 19.408 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.2.27 The 99% bandwidth test result at high frequency, 64QAM modulation, 20 MHz EBW

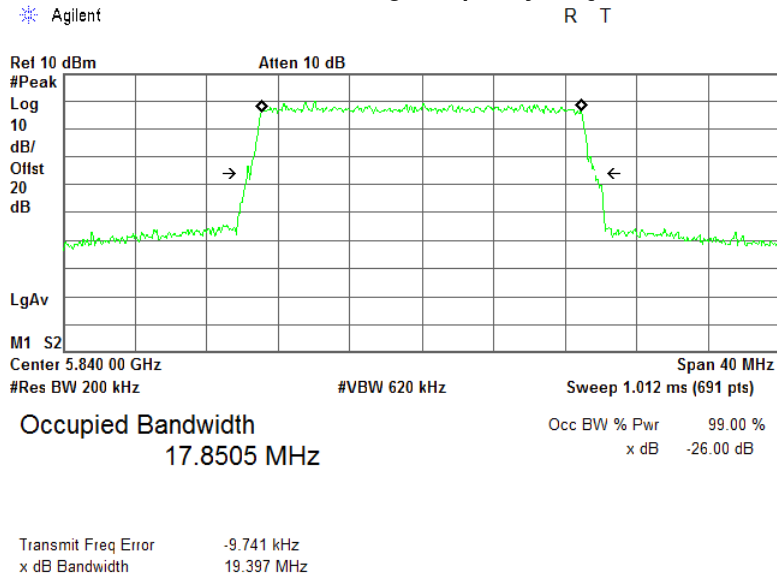



Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

7.3 Occupied 26 dB bandwidth at 5150 – 5250 MHz range

7.3.1 General

This test was performed to measure 26 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.3.1.

Table 7.3.1 The 26 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
5150.0 – 5250.0	26.0	NA
5725.0 – 5850.0	26.0	NA

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.


7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1 energized and its proper operation was checked.

7.3.2.2 The EUT was set to transmit modulated carrier.

7.3.2.3 The transmitter minimum 26 dB bandwidth was measured with spectrum analyzer RBW=1% of EBW as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and the associated plots.

Figure 7.3.1 The 26 dB bandwidth test setup





Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Table 7.3.2 The 26 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 5.15 – 5.25 GHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 1% of the EBW
 VIDEO BANDWIDTH: ≥RBW
 EBW: 10 MHz

Carrier frequency, GHz	Modulation	26 dB bandwidth, MHz
Low frequency		
5.160	QPSK	9.808
	16QAM	9.820
	64QAM	9.692
Mid frequency		
5.200	QPSK	9.832
	16QAM	9.772
	64QAM	9.785
High frequency		
5.245	QPSK	9.814
	16QAM	9.799
	64QAM	9.739

EBW: 15 MHz

Carrier frequency, GHz	Modulation	26 dB bandwidth, MHz
Low frequency		
5.165	QPSK	14.707
	16QAM	14.627
	64QAM	14.564
Mid frequency		
5.200	QPSK	14.652
	16QAM	14.635
	64QAM	14.541
High frequency		
5.240	QPSK	14.806
	16QAM	14.503
	64QAM	14.597



Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Table 7.3.3 The 26 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 5.15 – 5.25 GHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 1% of the EBW
 VIDEO BANDWIDTH: ≥RBW
 EBW: 20 MHz

Carrier frequency, GHz	Modulation	26 dB bandwidth, MHz
Low frequency		
5.165	QPSK	19.349
	16QAM	19.259
	64QAM	19.384
Mid frequency		
5.200	QPSK	19.369
	16QAM	19.446
	64QAM	19.312
High frequency		
5.240	QPSK	19.403
	16QAM	19.180
	64QAM	19.380

Reference numbers of test equipment used


HL 3901	HL 4068							
---------	---------	--	--	--	--	--	--	--

Full description is given in Appendix A.




Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.1 The 26 dB bandwidth test result at low frequency, QPSK modulation, 10 MHz EBW

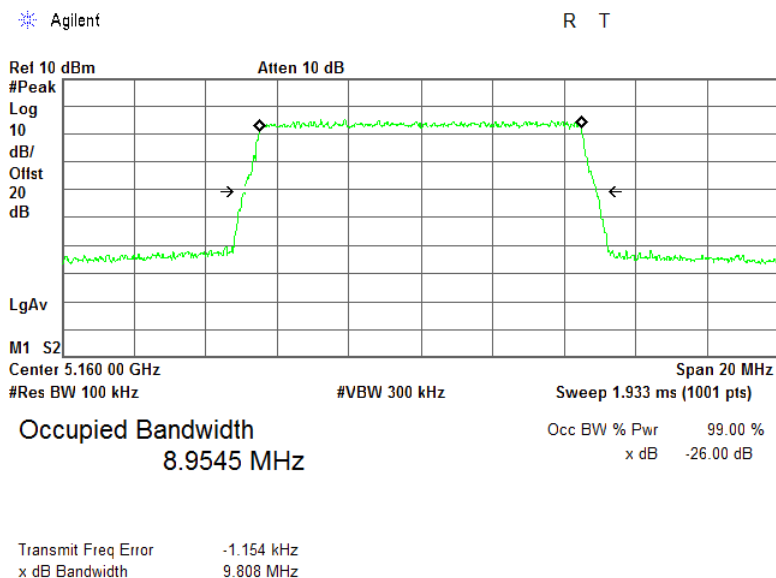

Plot 7.3.2 The 26 dB bandwidth test result at low frequency, 16QAM modulation, 10 MHz EBW

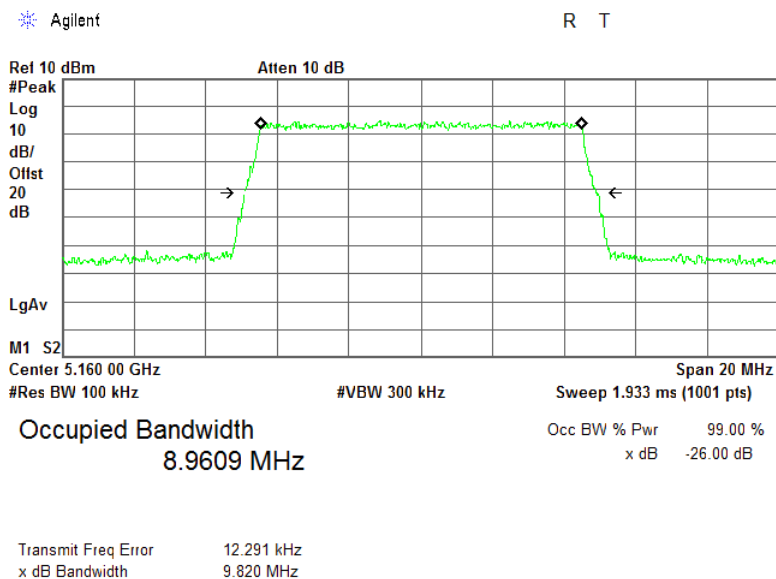




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.3 The 26 dB bandwidth test result at low frequency, 64QAM modulation, 10 MHz EBW

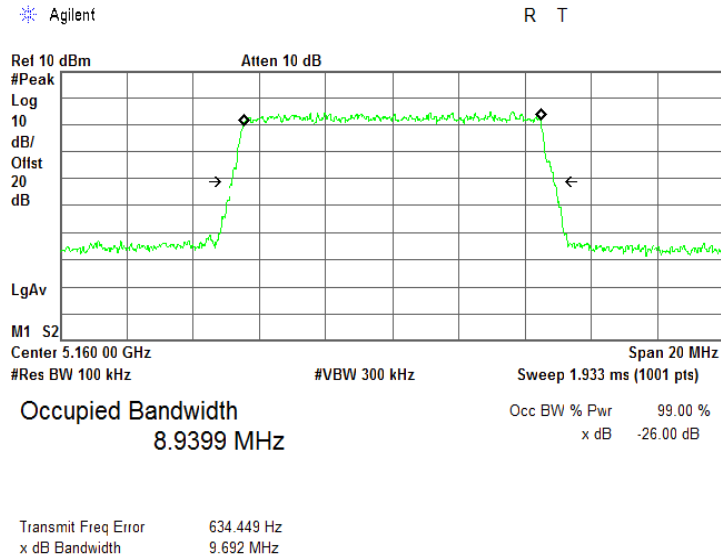




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.4 The 26 dB bandwidth test result at mid frequency, QPSK modulation, 10 MHz EBW

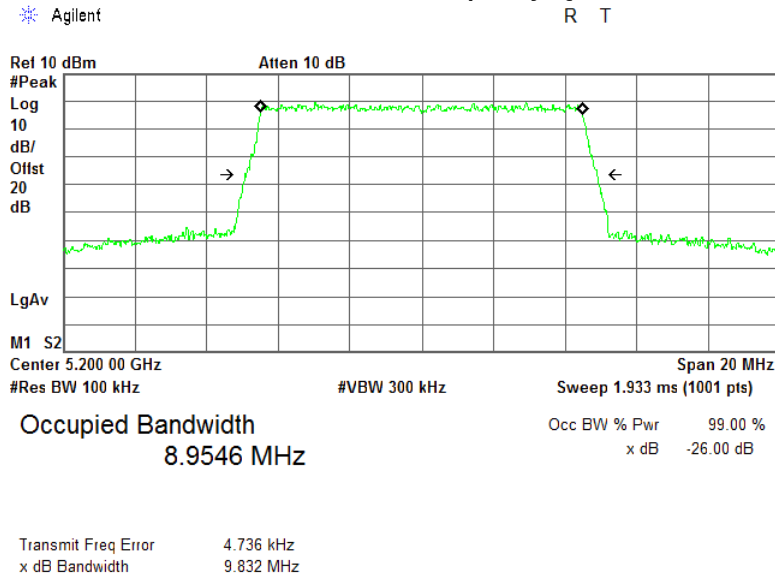

Plot 7.3.5 The 26 dB bandwidth test result at mid frequency, 16QAM modulation, 10 MHz EBW

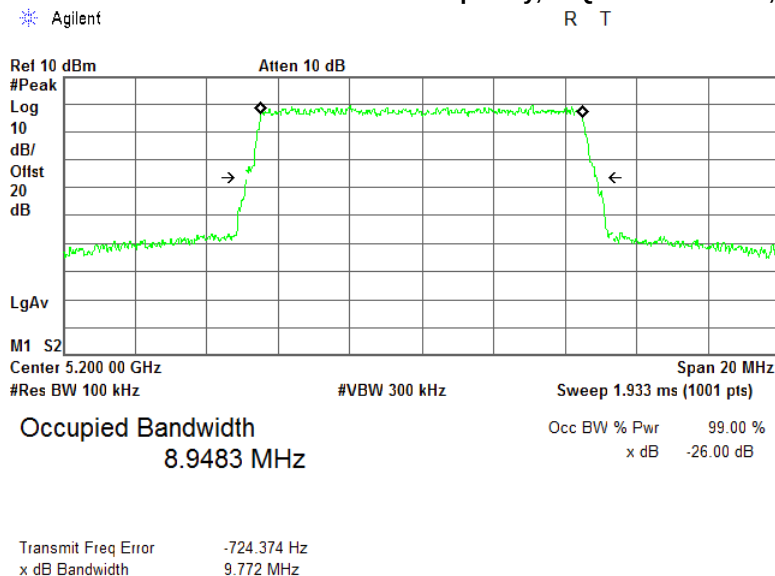




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.6 The 26 dB bandwidth test result at mid frequency, 64QAM modulation, 10 MHz EBW

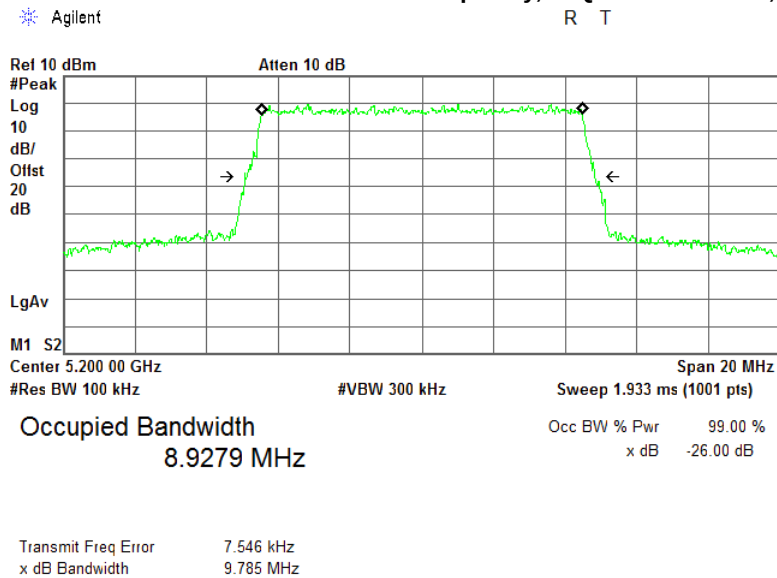




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.7 The 26 dB bandwidth test result at high frequency, QPSK modulation, 10 MHz EBW

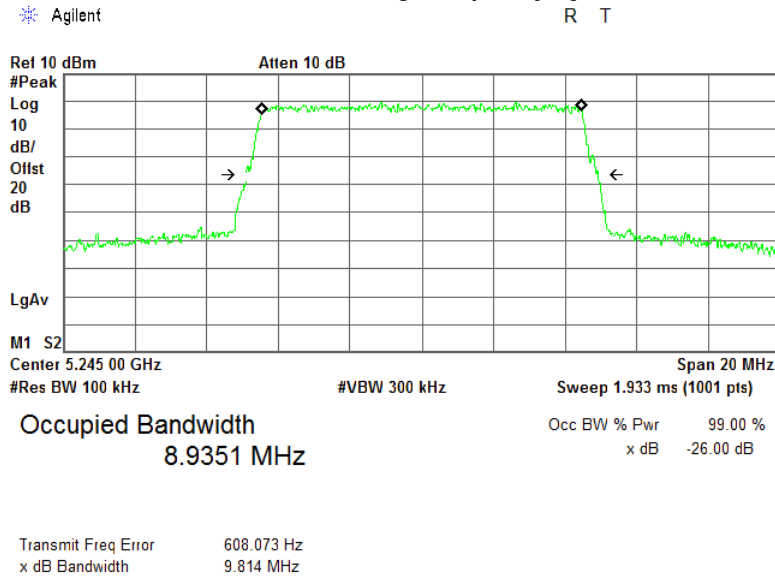

Plot 7.3.8 The 26 dB bandwidth test result at high frequency, 16QAM modulation, 10 MHz EBW

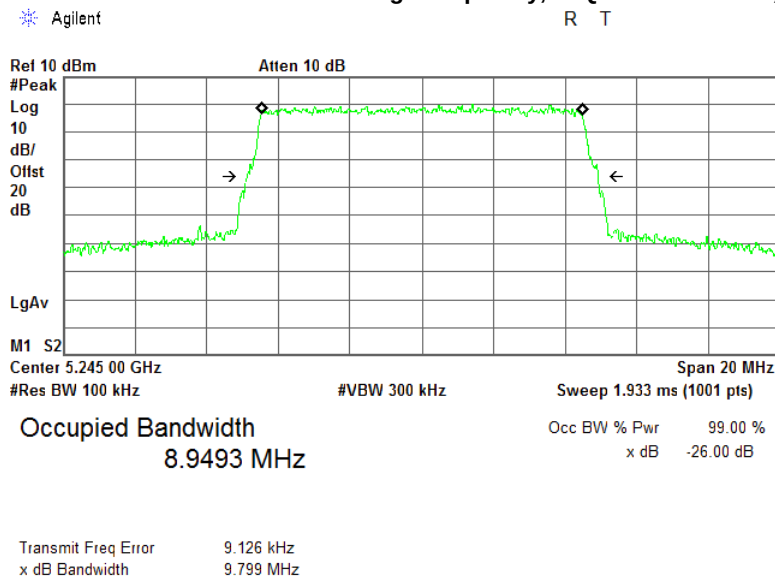




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.9 The 26 dB bandwidth test result at high frequency, 64QAM modulation, 10 MHz EBW

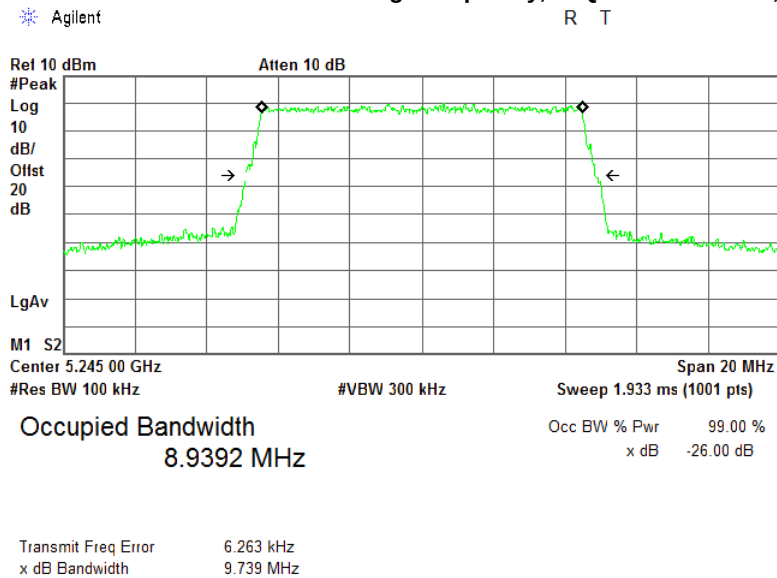




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.10 The 26 dB bandwidth test result at low frequency, QPSK modulation, 15 MHz EBW

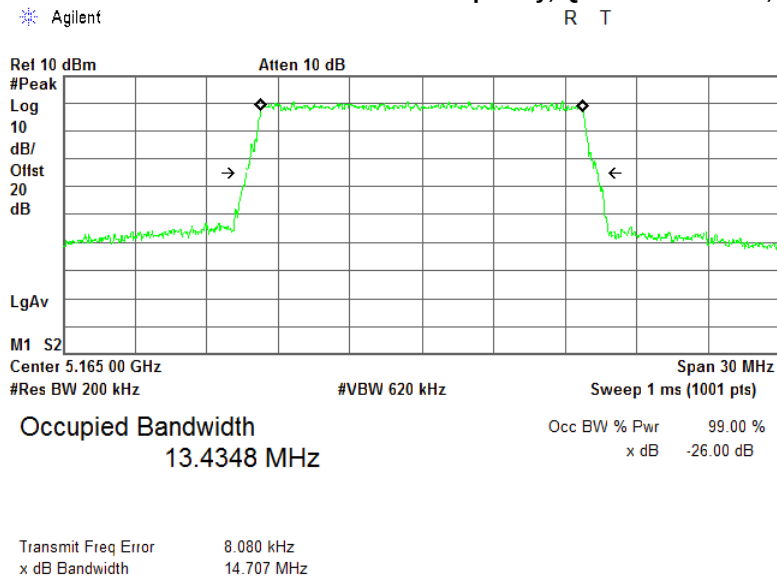

Plot 7.3.11 The 26 dB bandwidth test result at low frequency, 16QAM modulation, 15 MHz EBW

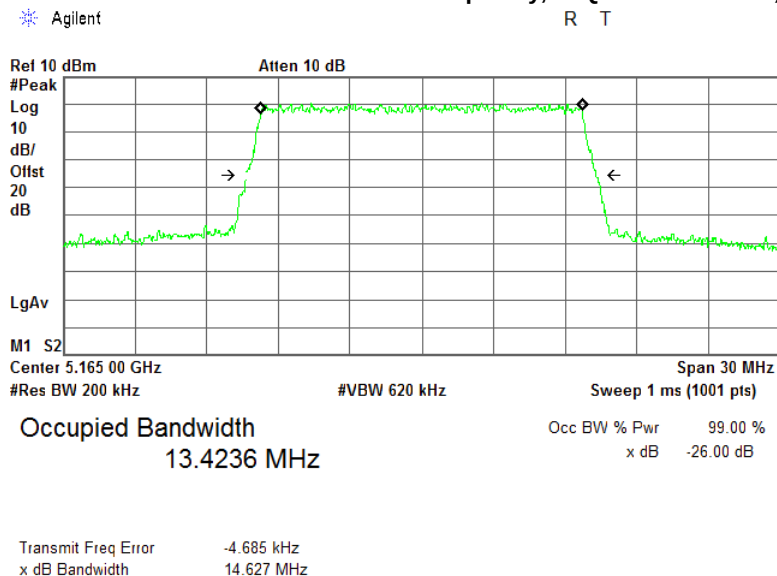




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.12 The 26 dB bandwidth test result at low frequency, 64QAM modulation, 15 MHz EBW

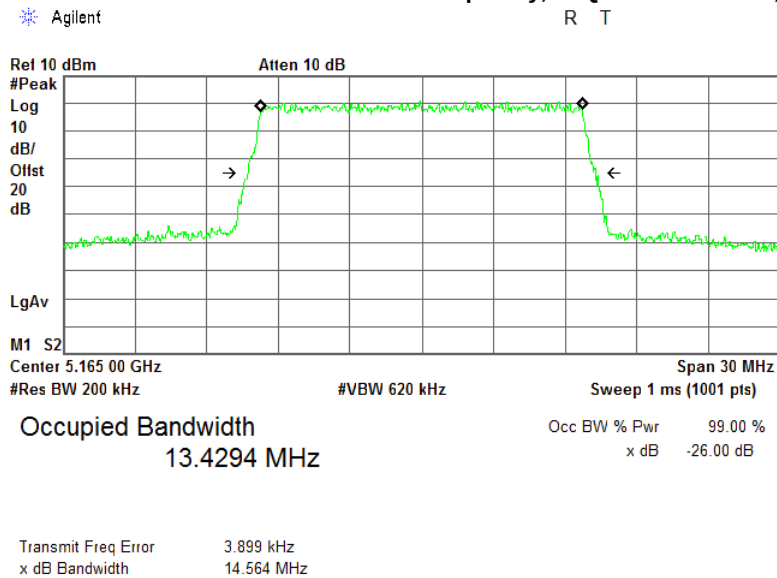




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.13 The 26 dB bandwidth test result at mid frequency, QPSK modulation, 15 MHz EBW

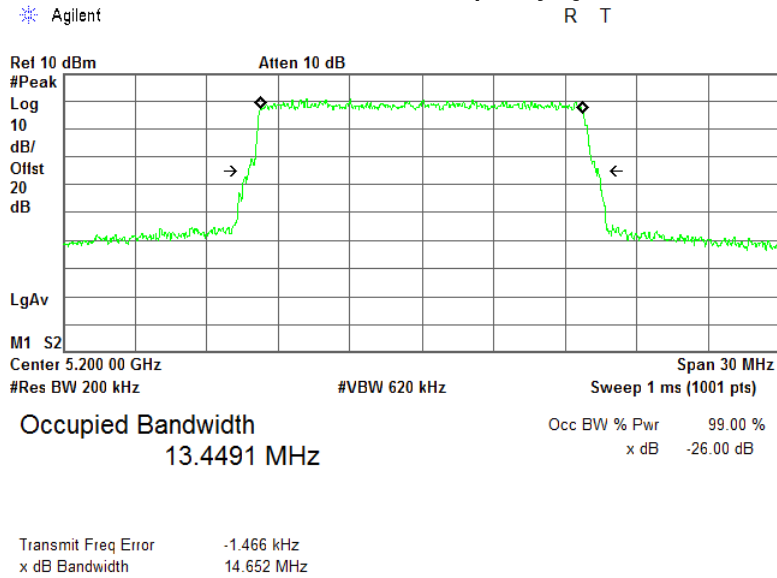

Plot 7.3.14 The 26 dB bandwidth test result at mid frequency, 16QAM modulation, 15 MHz EBW

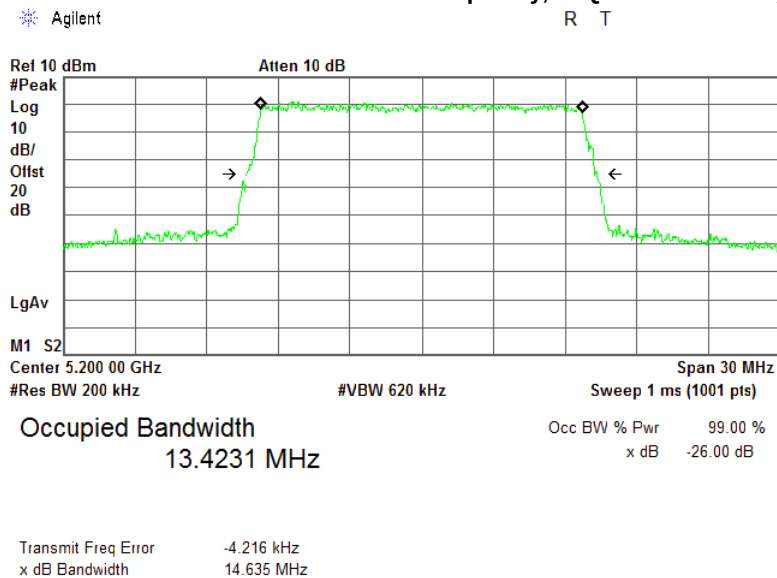




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.15 The 26 dB bandwidth test result at mid frequency, 64QAM modulation, 15 MHz EBW

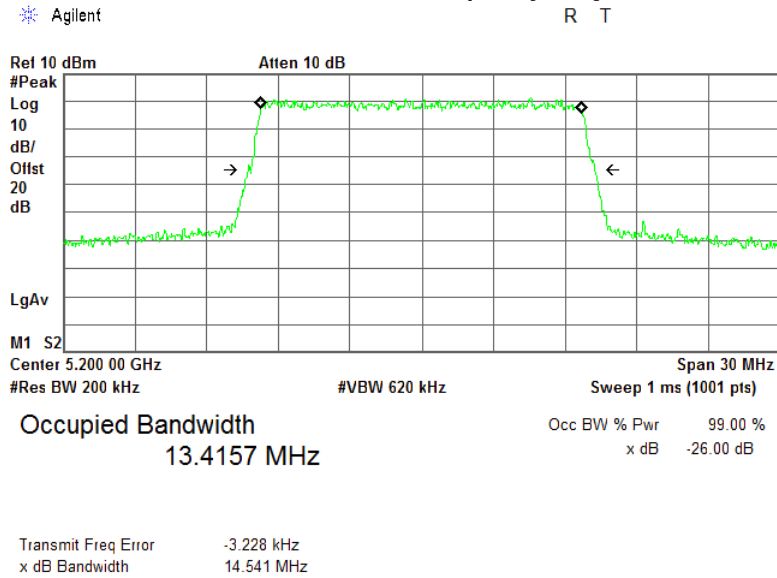




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.16 The 26 dB bandwidth test result at high frequency, QPSK modulation, 15 MHz EBW

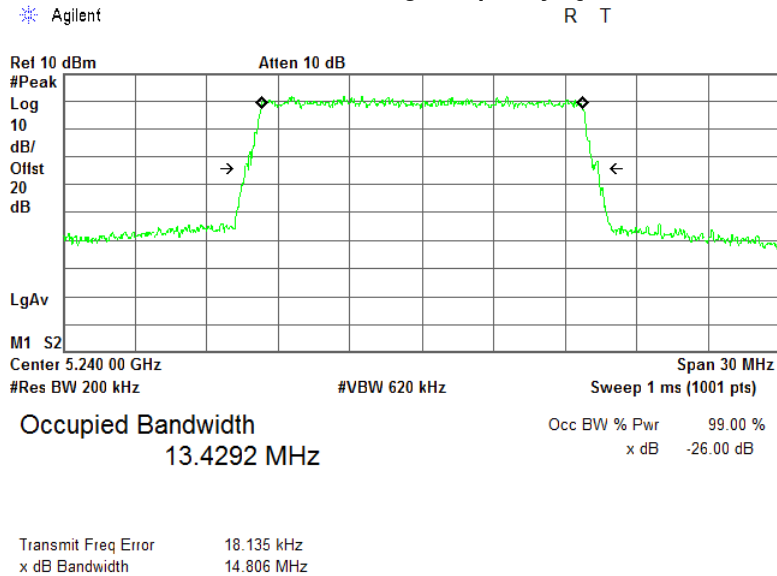

Plot 7.3.17 The 26 dB bandwidth test result at high frequency, 16QAM modulation, 15 MHz EBW

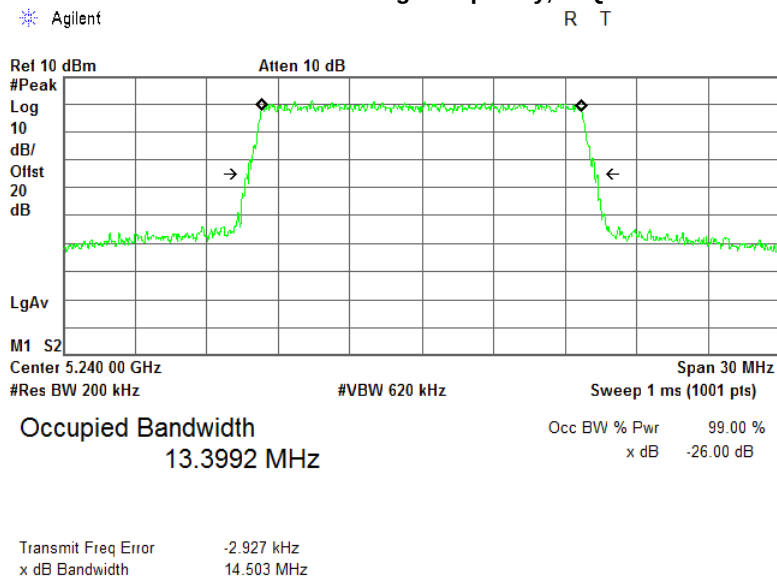




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.18 The 26 dB bandwidth test result at high frequency, 64QAM modulation, 15 MHz EBW

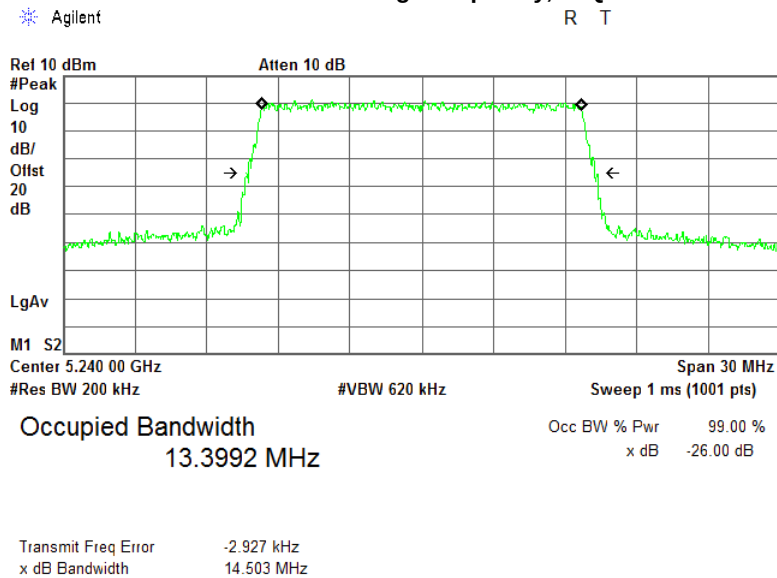




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.19 The 26 dB bandwidth test result at low frequency, QPSK modulation, 20 MHz EBW

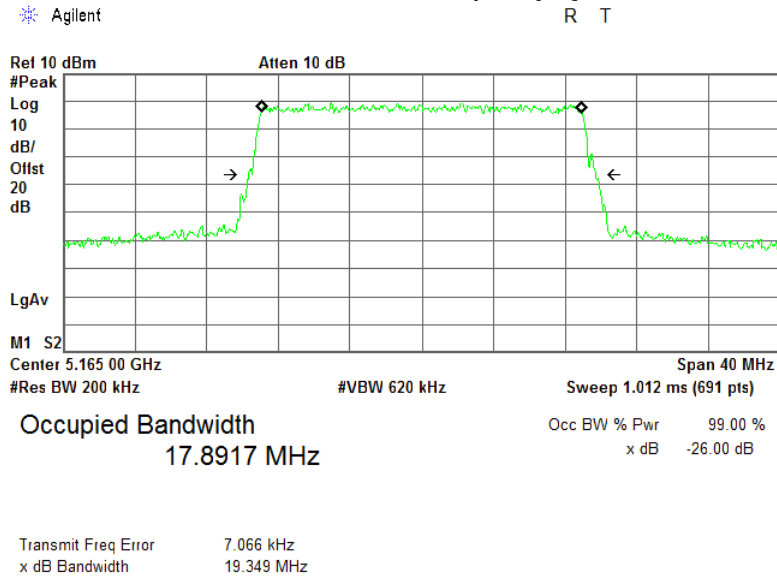

Plot 7.3.20 The 26 dB bandwidth test result at low frequency, 16QAM modulation, 20 MHz EBW

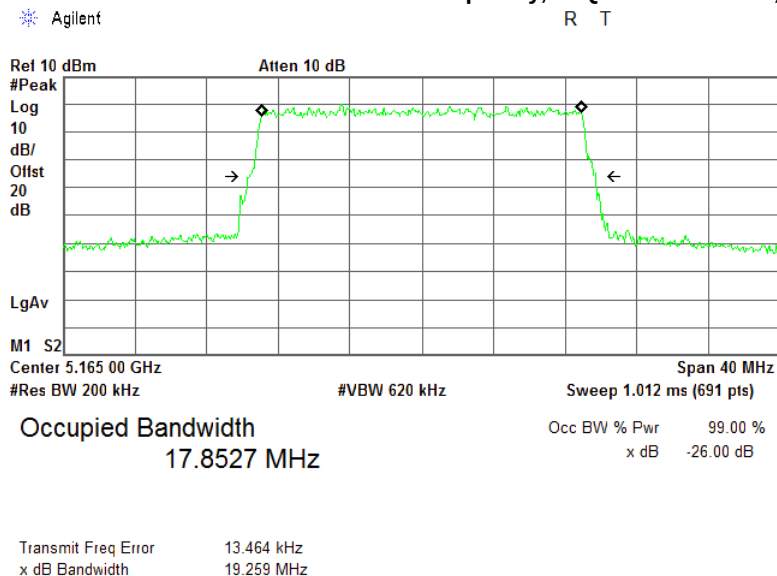




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			


Plot 7.3.21 The 26 dB bandwidth test result at low frequency, 64QAM modulation, 20 MHz EBW

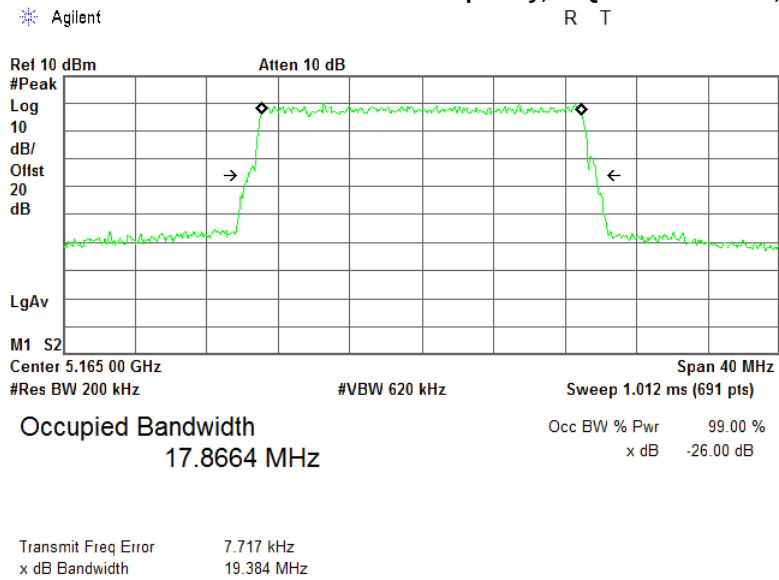




Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.22 The 26 dB bandwidth test result at mid frequency, QPSK modulation, 20 MHz EBW

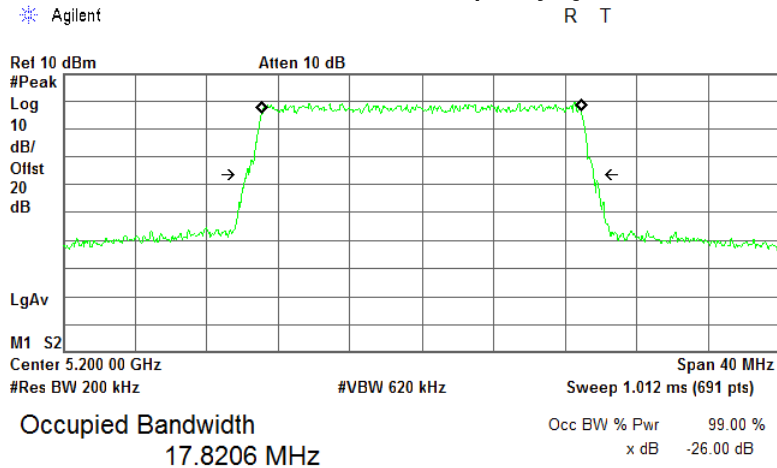

Transmit Freq Error 4.136 kHz
x dB Bandwidth 19.369 MHz

Plot 7.3.23 The 26 dB bandwidth test result at mid frequency, 16QAM modulation, 20 MHz EBW

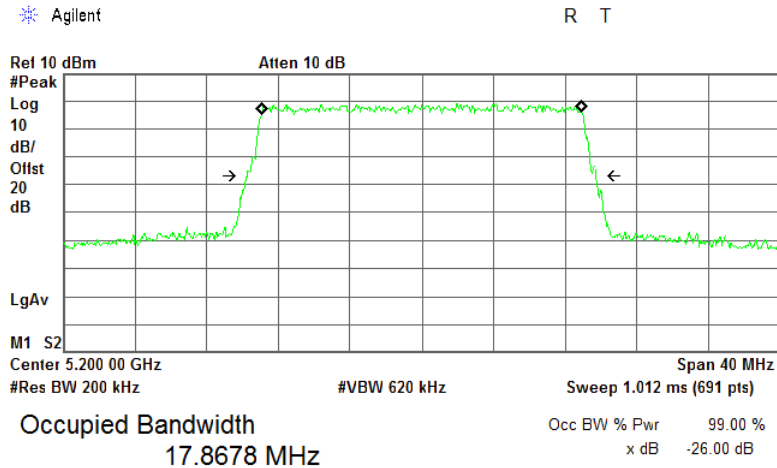


Transmit Freq Error 20.658 kHz
x dB Bandwidth 19.446 MHz



Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.24 The 26 dB bandwidth test result at mid frequency, 64QAM modulation, 20 MHz EBW

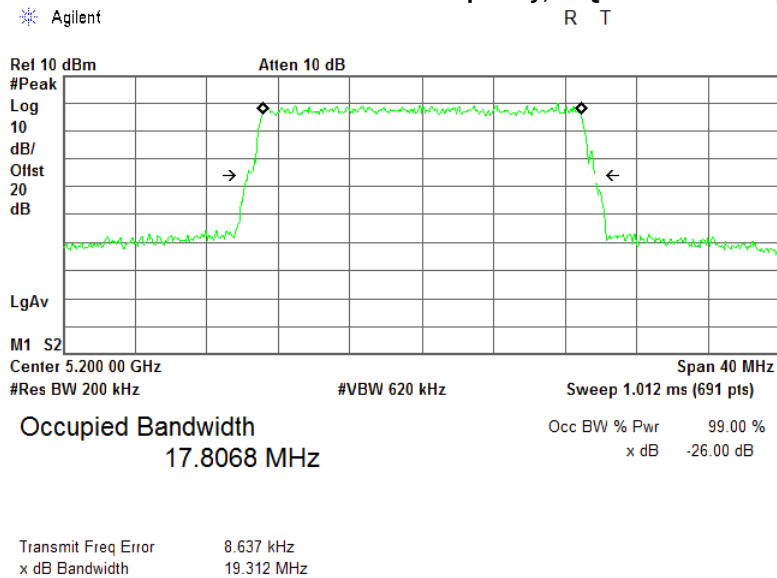




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.25 The 26 dB bandwidth test result at high frequency, QPSK modulation, 20 MHz EBW

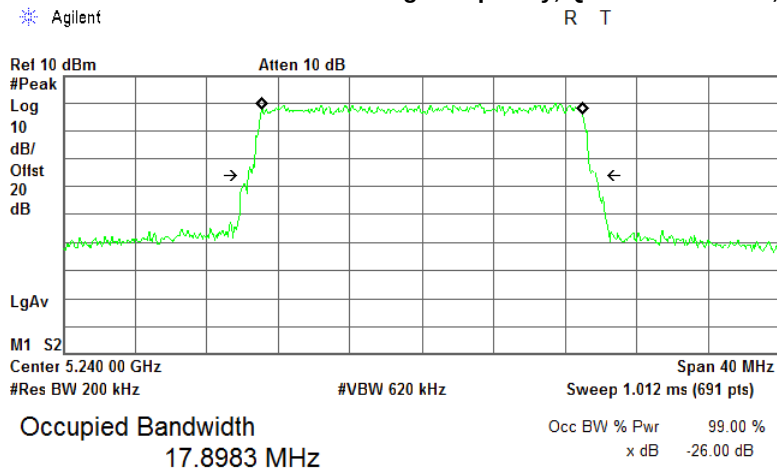

Transmit Freq Error 17.086 kHz
x dB Bandwidth 19.403 MHz

Plot 7.3.26 The 26 dB bandwidth test result at high frequency, 16QAM modulation, 20 MHz EBW

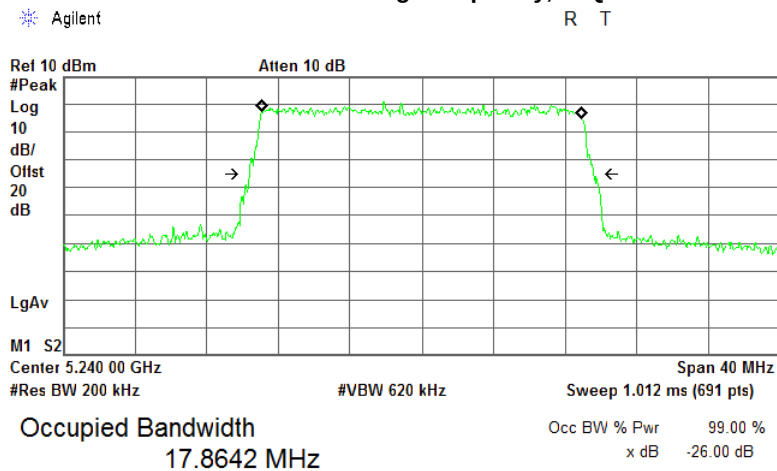

Transmit Freq Error -7.466 Hz
x dB Bandwidth 19.180 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(5), RSS-247 section 6.2.1.2, 26 dB occupied bandwidth			
Test procedure: ANSI C63.10, section 6.9.2; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.27 The 26 dB bandwidth test result at high frequency, 64QAM modulation, 20 MHz EBW

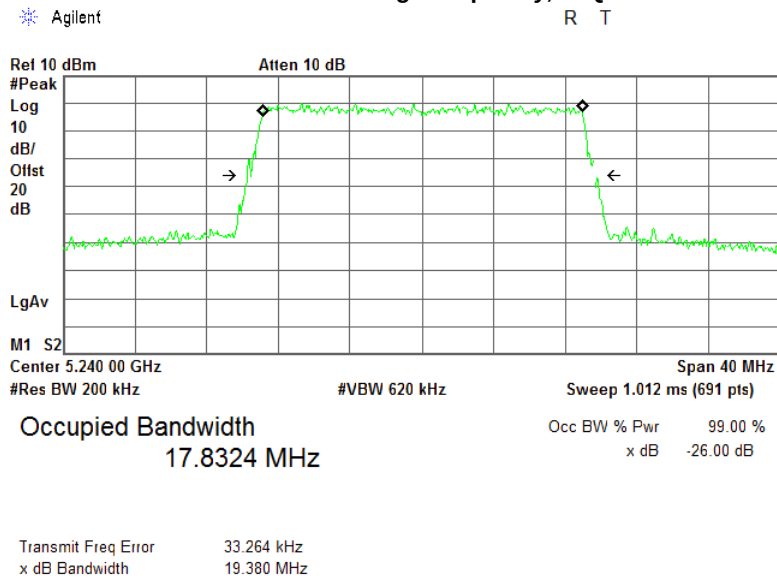



Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

7.4 Occupied 99% bandwidth at 5150 – 5250 MHz range

7.4.1 General

This test was performed to measure 99% bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.4.1.

Table 7.4.1 The 99% bandwidth limits

Assigned frequency, MHz	Modulation envelope, 99%	Minimum bandwidth, kHz
5150.0 – 5250.0	99	NA
5725.0 – 5850.0	99	NA

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.


7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The EUT was set to transmit modulated carrier.

7.4.2.3 The transmitter minimum 99% bandwidth was measured with spectrum analyzer RBW=1% of EBW as frequency delta between reference points on modulation envelope and provided in Table 7.4.2 and the associated plots.

Figure 7.4.1 The 99% bandwidth test setup





Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Table 7.4.2 The 99% bandwidth test results

ASSIGNED FREQUENCY BAND: 5.15 – 5.25 GHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 1% of the EBW
 VIDEO BANDWIDTH: ≥RBW
 EBW: 10 MHz

Carrier frequency, GHz	Modulation	99% bandwidth, MHz
Low frequency		
5.160	QPSK	8.9545
	16QAM	8.9609
	64QAM	8.9399
Mid frequency		
5.200	QPSK	8.9546
	16QAM	8.9483
	64QAM	8.9279
High frequency		
5.245	QPSK	8.9351
	16QAM	8.9493
	64QAM	8.9392

EBW: 15 MHz

Carrier frequency, GHz	Modulation	99% bandwidth, MHz
Low frequency		
5.165	QPSK	13.4348
	16QAM	13.4236
	64QAM	13.4294
Mid frequency		
5.200	QPSK	13.4491
	16QAM	13.4231
	64QAM	13.4157
High frequency		
5.240	QPSK	13.4292
	16QAM	13.3992
	64QAM	13.3898



Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Table 7.4.3 The 99% bandwidth test results

ASSIGNED FREQUENCY BAND: 5.15 – 5.25 GHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 1% of the EBW
 VIDEO BANDWIDTH: ≥RBW
 EBW: 20 MHz

Carrier frequency, GHz	Modulation	99% bandwidth, MHz
Low frequency		
5.165	QPSK	17.8917
	16QAM	17.8527
	64QAM	17.8664
Mid frequency		
5.200	QPSK	17.8206
	16QAM	17.8678
	64QAM	17.8068
High frequency		
5.240	QPSK	17.8983
	16QAM	17.8642
	64QAM	17.8324

Reference numbers of test equipment used

HL 3901	HL 4068							
---------	---------	--	--	--	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.1 The 99% bandwidth test result at low frequency, QPSK modulation, 10 MHz EBW

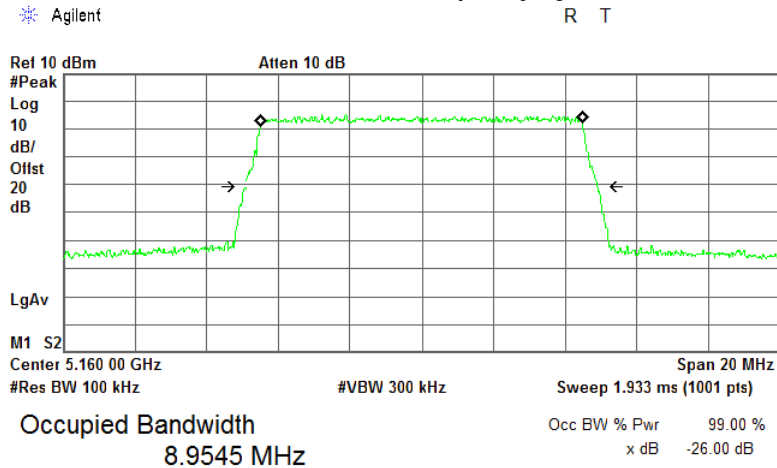

Transmit Freq Error -1.154 kHz
x dB Bandwidth 9.808 MHz

Plot 7.4.2 The 99% bandwidth test result at low frequency, 16QAM modulation, 10 MHz EBW

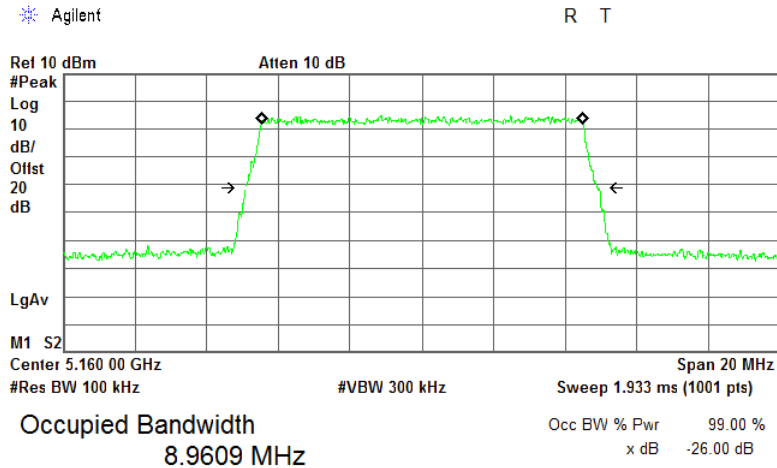

Transmit Freq Error 12.291 kHz
x dB Bandwidth 9.820 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.3 The 99% bandwidth test result at low frequency, 64QAM modulation, 10 MHz EBW

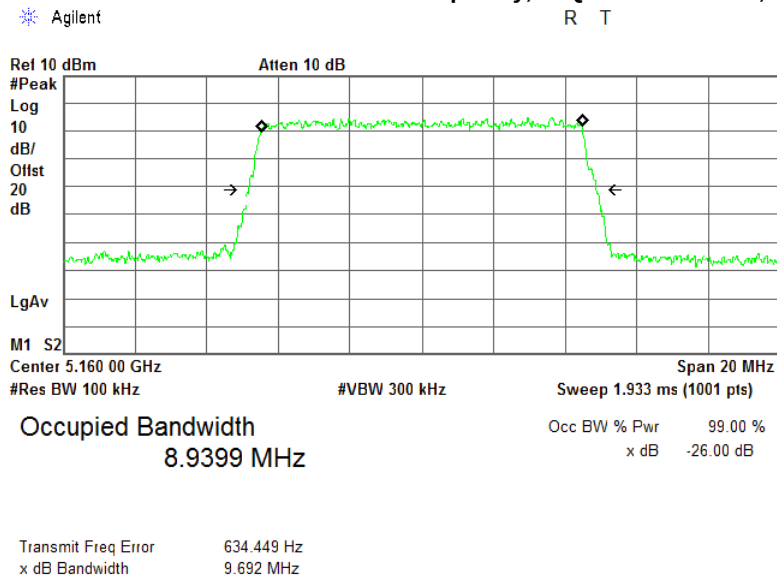




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.4 The 99% bandwidth test result at mid frequency, QPSK modulation, 10 MHz EBW

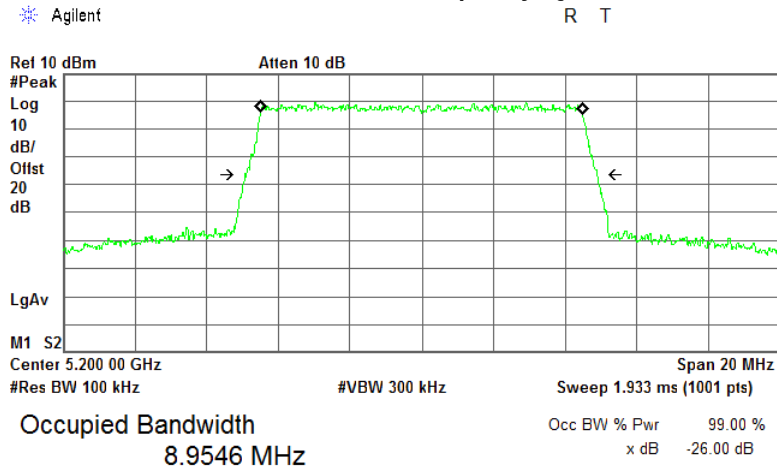

Transmit Freq Error 4.736 kHz
x dB Bandwidth 9.832 MHz

Plot 7.4.5 The 99% bandwidth test result at mid frequency, 16QAM modulation, 10 MHz EBW

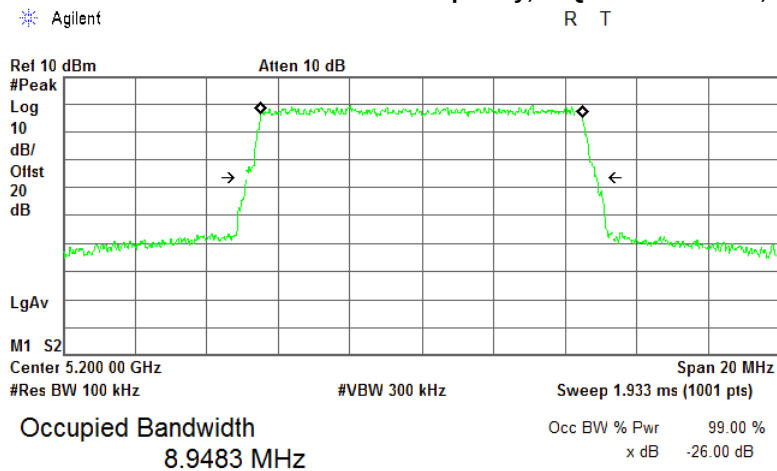

Transmit Freq Error -724.374 Hz
x dB Bandwidth 9.772 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.6 The 99% bandwidth test result at mid frequency, 64QAM modulation, 10 MHz EBW

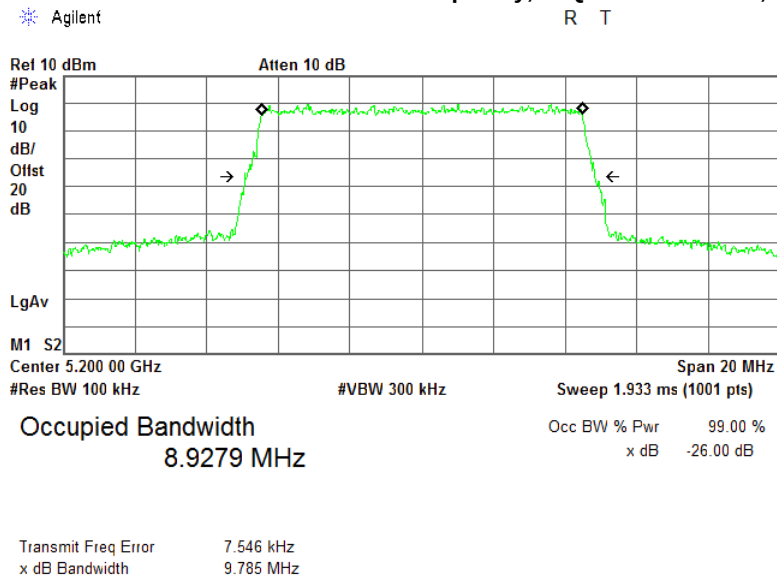




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.7 The 99% bandwidth test result at high frequency, QPSK modulation, 10 MHz EBW

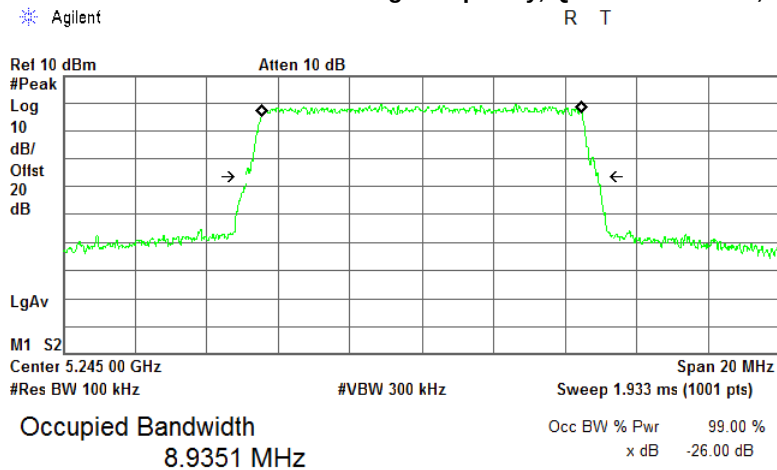

Transmit Freq Error 608.073 Hz
x dB Bandwidth 9.814 MHz

Plot 7.4.8 The 99% bandwidth test result at high frequency, 16QAM modulation, 10 MHz EBW

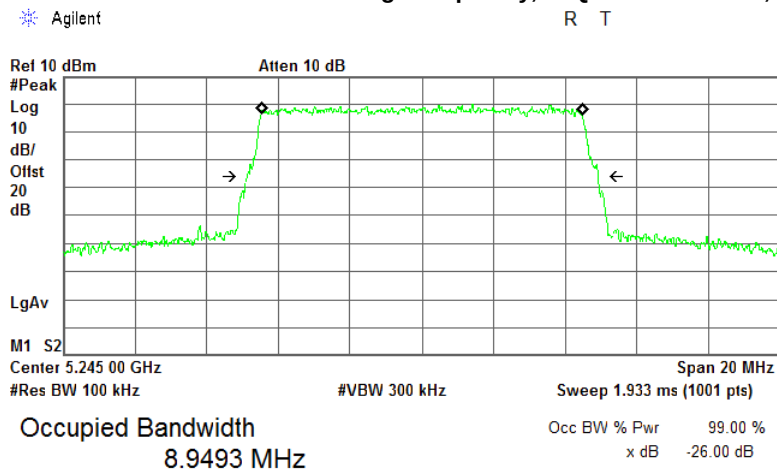

Transmit Freq Error 9.126 kHz
x dB Bandwidth 9.799 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.9 The 99% bandwidth test result at high frequency, 64QAM modulation, 10 MHz EBW

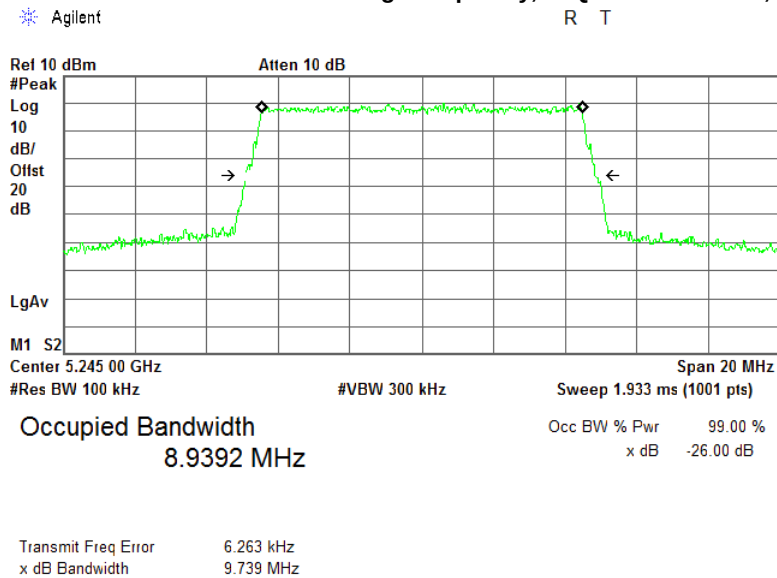




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.10 The 99% bandwidth test result at low frequency, QPSK modulation, 15 MHz EBW

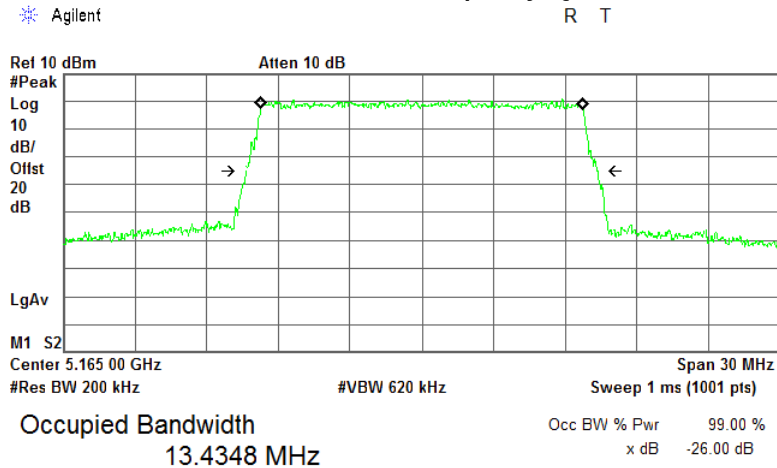

Plot 7.4.11 The 99% bandwidth test result at low frequency, 16QAM modulation, 15 MHz EBW

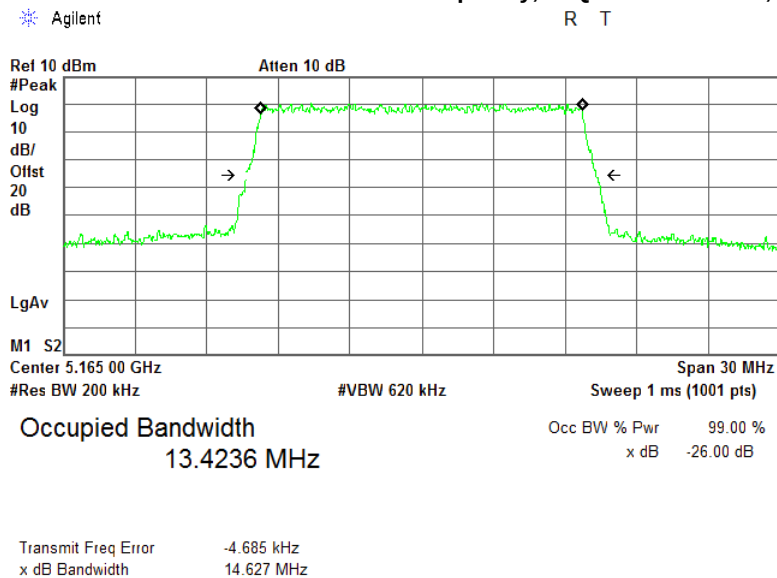




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.12 The 99% bandwidth test result at low frequency, 64QAM modulation, 15 MHz EBW

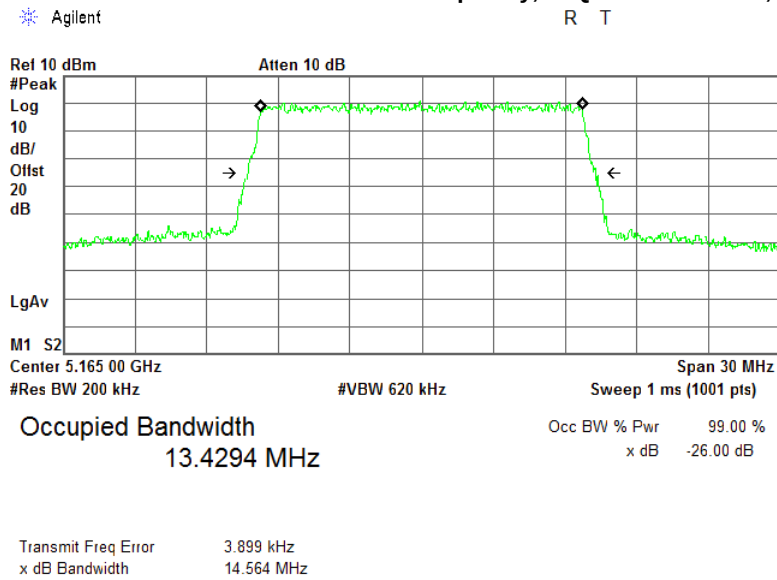




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.13 The 99% bandwidth test result at mid frequency, QPSK modulation, 15 MHz EBW

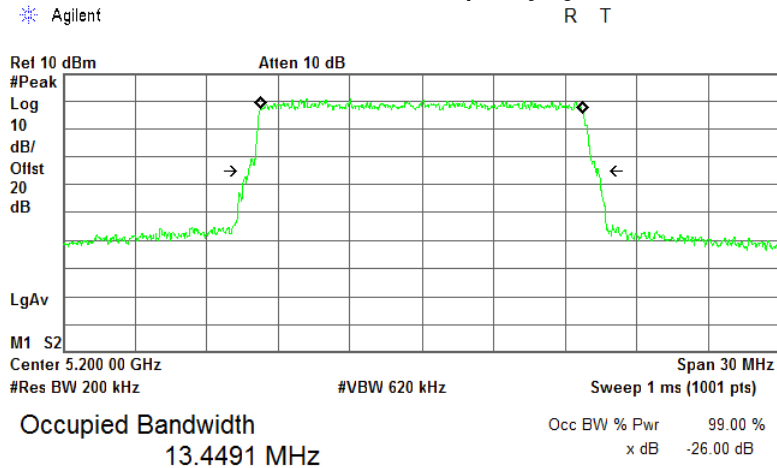

Transmit Freq Error -1.466 kHz
x dB Bandwidth 14.652 MHz

Plot 7.4.14 The 99% bandwidth test result at mid frequency, 16QAM modulation, 15 MHz EBW

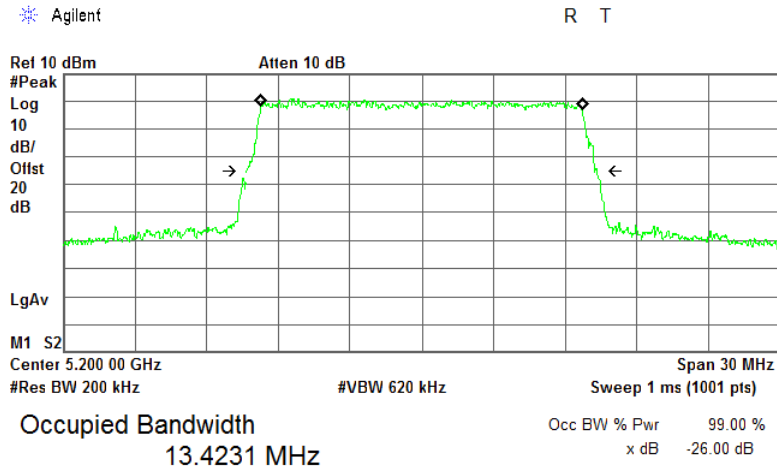

Transmit Freq Error -4.216 kHz
x dB Bandwidth 14.635 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.15 The 99% bandwidth test result at mid frequency, 64QAM modulation, 15 MHz EBW

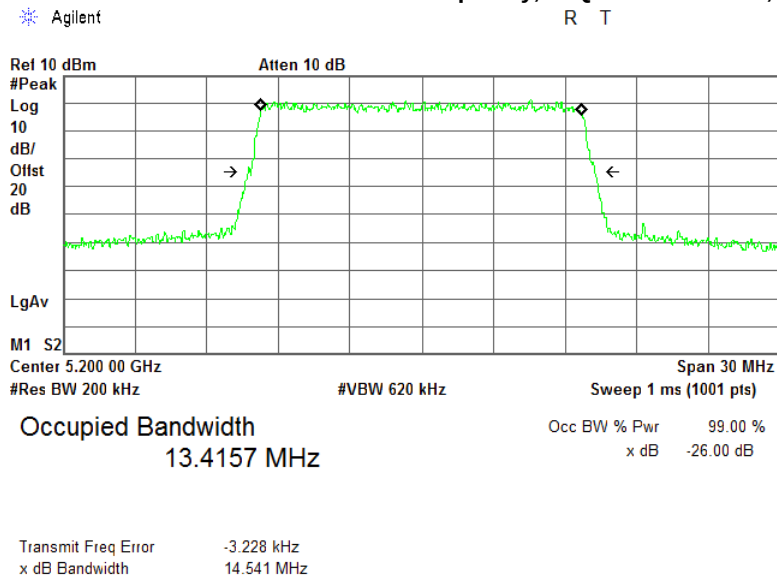




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.16 The 99% bandwidth test result at high frequency, QPSK modulation, 15 MHz EBW

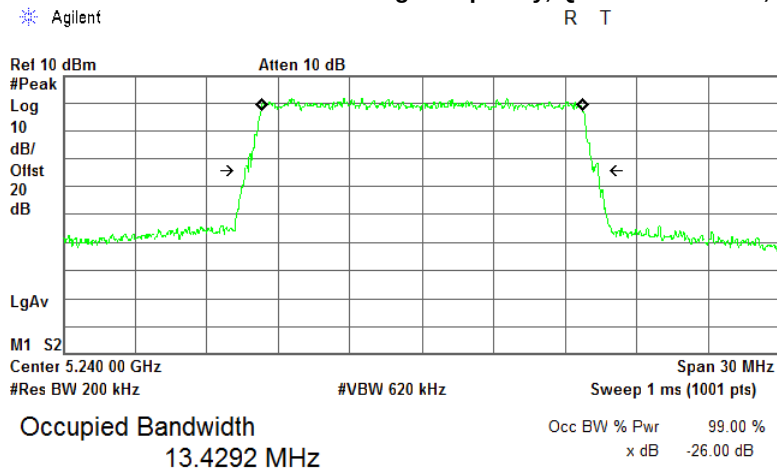

Transmit Freq Error 18.135 kHz
x dB Bandwidth 14.806 MHz

Plot 7.4.17 The 99% bandwidth test result at high frequency, 16QAM modulation, 15 MHz EBW

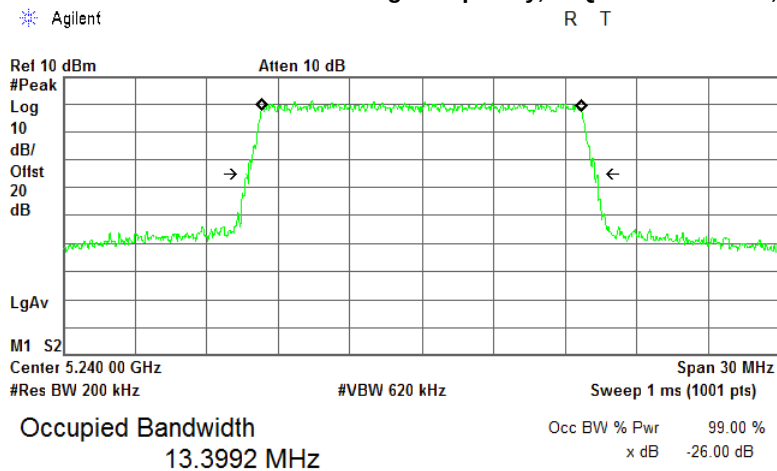

Transmit Freq Error -2.927 kHz
x dB Bandwidth 14.503 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.19 The 99% bandwidth test result at low frequency, QPSK modulation, 20 MHz EBW

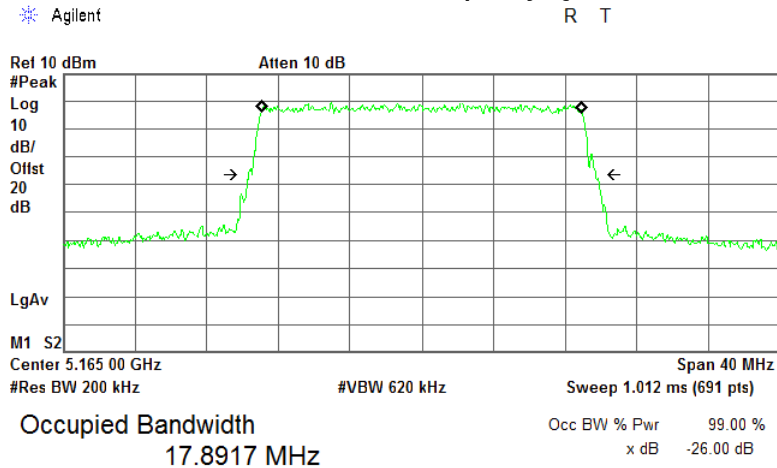

Transmit Freq Error 7.066 kHz
x dB Bandwidth 19.349 MHz

Plot 7.4.20 The 99% bandwidth test result at low frequency, 16QAM modulation, 20 MHz EBW

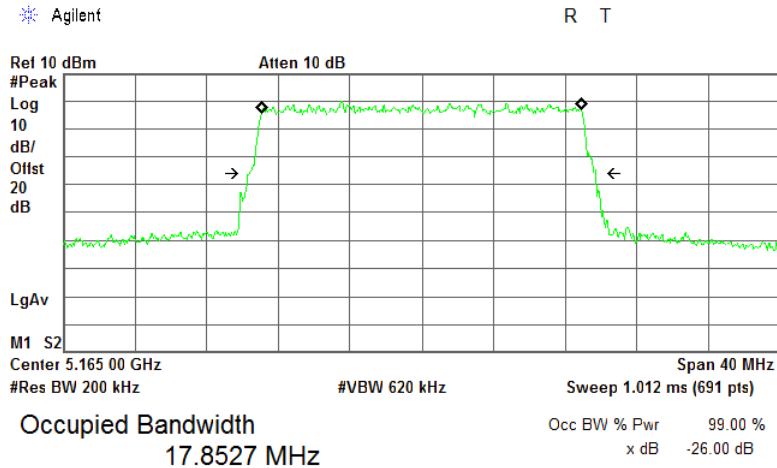

Transmit Freq Error 13.464 kHz
x dB Bandwidth 19.259 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.21 The 99% bandwidth test result at low frequency, 64QAM modulation, 20 MHz EBW

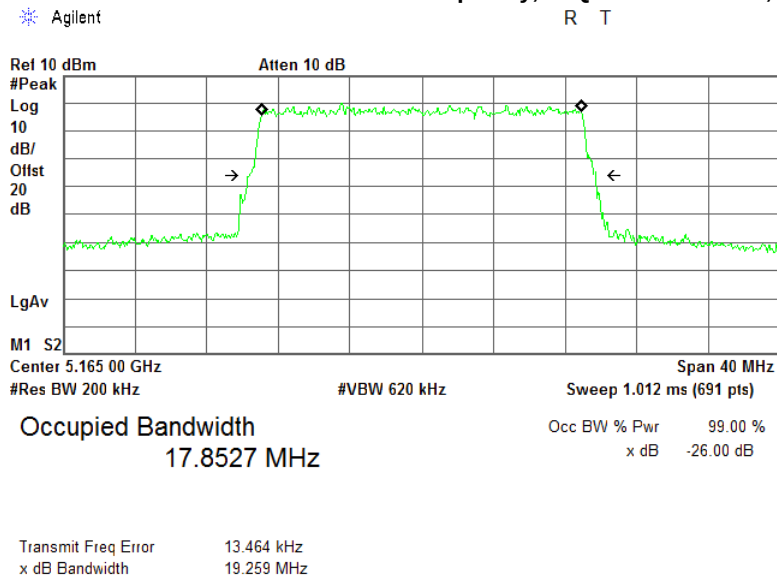




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19


Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.22 The 99% bandwidth test result at mid frequency, QPSK modulation, 20 MHz EBW

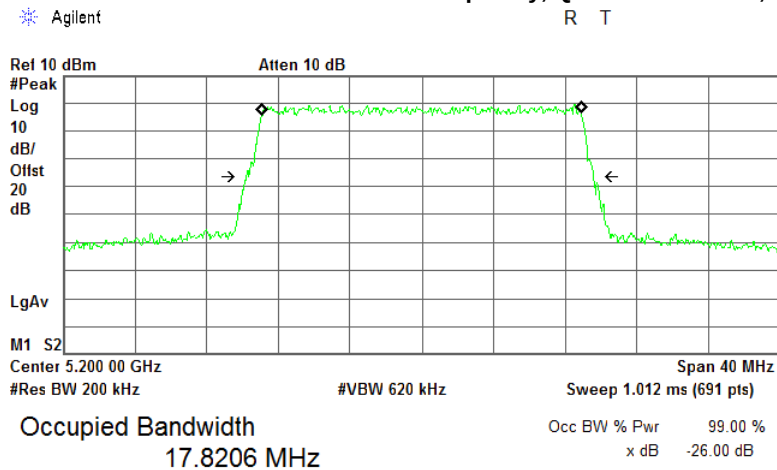

Transmit Freq Error 4.136 kHz
x dB Bandwidth 19.369 MHz

Plot 7.4.23 The 99% bandwidth test result at mid frequency, 16QAM modulation, 20 MHz EBW

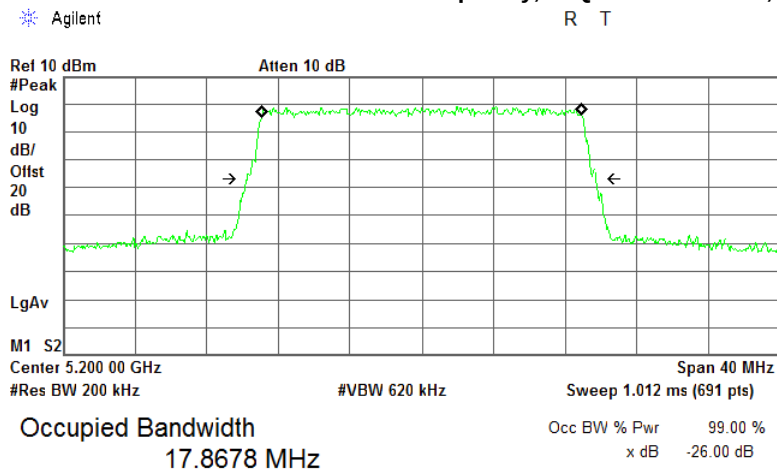

Transmit Freq Error 20.658 kHz
x dB Bandwidth 19.446 MHz




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830
Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.24 The 99% bandwidth test result at mid frequency, 64QAM modulation, 20 MHz EBW

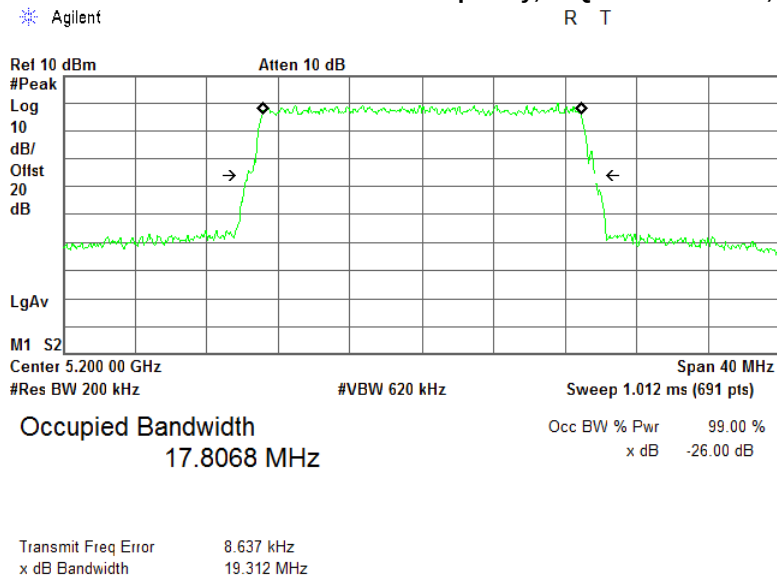




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830


Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.25 The 99% bandwidth test result at high frequency, QPSK modulation, 20 MHz EBW

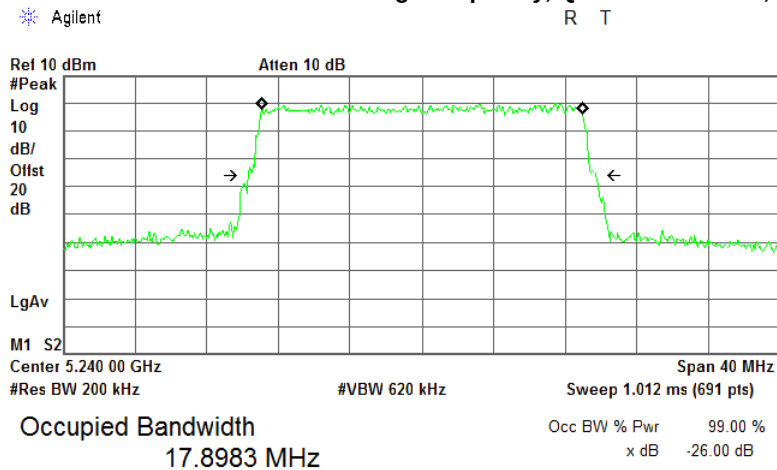

Plot 7.4.26 The 99% bandwidth test result at high frequency, 16QAM modulation, 20 MHz EBW

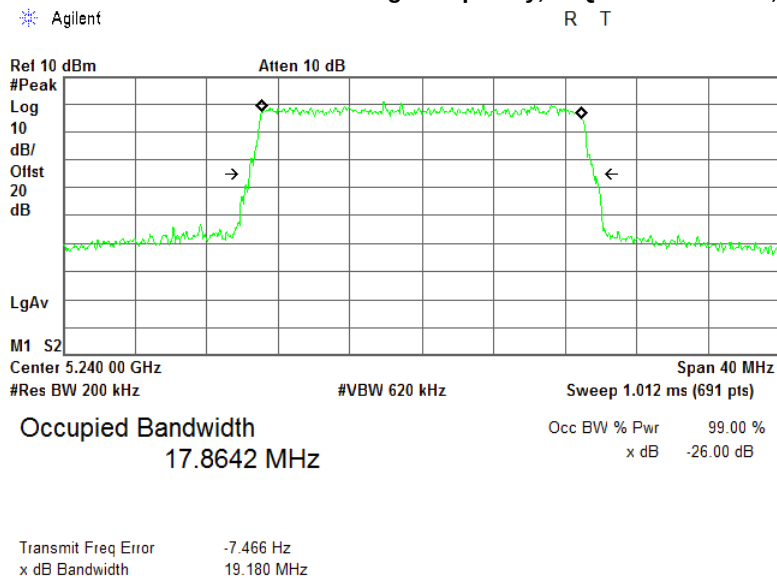




HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407, RSS-Gen section 6.7, Occupied 99% bandwidth			
Test procedure: ANSI C63.10, section 6.9.3; KDB 789033			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Jan-19			
Temperature: 26 °C	Relative Humidity: 49 %	Air Pressure: 1018 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.27 The 99% bandwidth test result at high frequency, 64QAM modulation, 20 MHz EBW

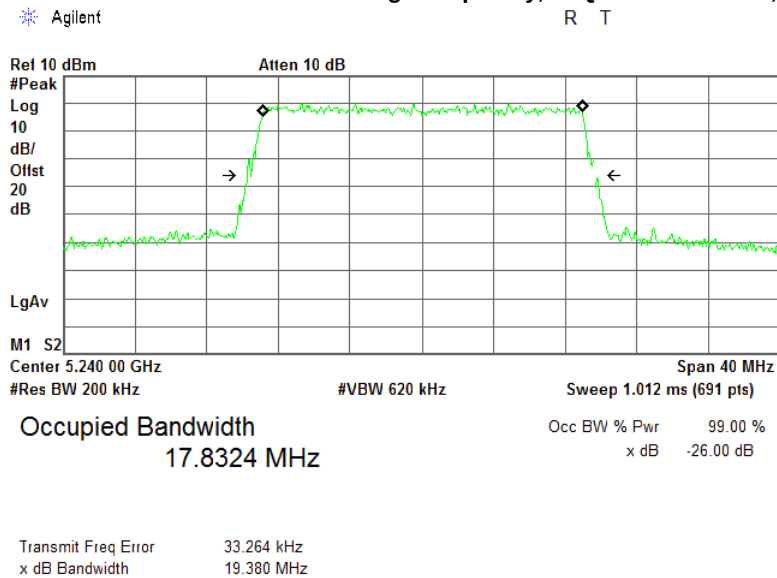



Test specification: FCC section 15.407(a)(1-3), RSS-247 section 6.2.4.1, Peak output power			
Test procedure: FCC section 15.407(a)(4); KDB 662911, KDB 789033, ANSI C63.10, section 12.3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Jan-19			
Temperature: 25 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

7.5 Peak output power at 5725 – 5850 MHz range

7.5.1 General

This test was performed to measure the maximum peak output power at the transmitter RF antenna connector. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range, MHz	Conducted output power limit	EIRP limit
5725 - 5850	1 W (30 dBm)	36 dBm


7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.5.2.3 The measurements were performed in continuous transmission mode of operation for carrier (channel) frequency at low, mid and high edges with a peak detector. The power was computed by integrating the spectrum across the 26 dB bandwidth of the signal as provided in the associated tables and plots.

Figure 7.5.1 Peak output power test setup





HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(1-3), RSS-247 section 6.2.4.1, Peak output power			
Test procedure: FCC section 15.407(a)(4); KDB 662911, KDB 789033, ANSI C63.10, section 12.3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Jan-19			
Temperature: 25 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY RANGE: 5.725 - 5.850 GHz
DETECTOR USED: Average
METHOD OF POWER MEASUREMENTS: PM-G (789033 D02)
MIMO CONFIGURATION: 1 carrier, 1 sector (4 ports to 2 dual slant antennas), coherent signal

Channel bandwidth, MHz	Modulation	Frequency, MHz	Output power per port, dBm				Total output power*, dBm	Limit, dBm	Margin**, dB	Verdict
			ANT1	ANT2	ANT3	ANT4				
10	QPSK	5730	13.00	12.97	12.86	12.79	18.91	30.00	-11.09	Pass
		5788	12.91	12.85	12.79	12.78	18.83	30.00	-11.17	Pass
		5845	12.98	12.90	12.93	12.81	18.91	30.00	-11.09	Pass
	16QAM	5730	12.98	12.98	12.86	12.78	18.90	30.00	-11.10	Pass
		5788	12.91	12.85	12.79	12.78	18.83	30.00	-11.17	Pass
		5845	13.00	12.90	12.95	12.82	18.92	30.00	-11.08	Pass
	64QAM	5730	12.99	12.99	12.87	12.78	18.91	30.00	-11.09	Pass
		5788	12.92	12.86	12.76	12.79	18.83	30.00	-11.17	Pass
		5845	13.00	12.89	12.95	12.81	18.91	30.00	-11.09	Pass
15	QPSK	5733	12.90	12.93	12.78	12.86	18.87	30.00	-11.13	Pass
		5788	13.00	12.91	12.87	12.73	18.88	30.00	-11.12	Pass
		5843	12.85	12.85	12.99	12.71	18.85	30.00	-11.15	Pass
	16QAM	5733	12.90	12.93	12.78	12.85	18.87	30.00	-11.13	Pass
		5788	13.00	12.90	12.87	12.72	18.87	30.00	-11.13	Pass
		5843	13.00	12.84	13.00	12.71	18.89	30.00	-11.11	Pass
	64QAM	5733	12.89	12.93	12.77	12.87	18.87	30.00	-11.13	Pass
		5788	12.99	12.89	12.86	12.72	18.87	30.00	-11.13	Pass
		5843	12.83	12.85	12.99	12.71	18.85	30.00	-11.15	Pass
20	QPSK	5735	12.88	12.92	12.77	12.81	18.85	30.00	-11.15	Pass
		5788	12.93	12.76	12.82	12.69	18.80	30.00	-11.20	Pass
		5840	12.86	12.88	12.91	12.75	18.85	30.00	-11.15	Pass
	16QAM	5735	12.80	12.92	12.78	12.87	18.84	30.00	-11.16	Pass
		5788	12.92	12.76	12.84	12.70	18.81	30.00	-11.19	Pass
		5840	12.85	12.88	12.92	12.74	18.85	30.00	-11.15	Pass
	64QAM	5735	12.80	12.93	12.79	12.88	18.85	30.00	-11.15	Pass
		5788	12.93	12.77	12.82	12.71	18.81	30.00	-11.19	Pass
		5840	12.86	12.88	12.93	12.72	18.85	30.00	-11.15	Pass

* Total output power = (10*LOG (10^(Output power ANT1/10) + 10^(Output power ANT2/10) + 10^(Output power ANT3/10) + 10^(Output power ANT4/10)))

** Margin = Total output power – specification limit



Test specification: FCC section 15.407(a)(1-3), RSS-247 section 6.2.4.1, Peak output power			
Test procedure: FCC section 15.407(a)(4); KDB 662911, KDB 789033, ANSI C63.10, section 12.3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Jan-19			
Temperature: 25 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.5.3 Peak output power test results

ASSIGNED FREQUENCY RANGE: 5.725 - 5.850 GHz
 DETECTOR USED: Average
 METHOD OF POWER MEASUREMENTS: PM-G (789033 D02)
 MIMO CONFIGURATION: 1 carrier, 1 sector (4 ports to 2 dual slant antennas), non-coherent signal

Channel bandwidth, MHz	Modulation	Frequency, MHz	Output power per port, dBm				Total output power*, dBm	Limit, dBm	Margin**, dB	Verdict
			ANT1	ANT2	ANT3	ANT4				
10	QPSK	5730	15.83	15.84	15.76	15.87	21.83	30.00	-8.17	Pass
		5788	15.88	15.78	15.74	15.75	21.79	30.00	-8.21	Pass
		5845	15.86	15.85	15.78	15.81	21.83	30.00	-8.17	Pass
	16QAM	5730	15.82	15.85	15.77	15.85	21.82	30.00	-8.18	Pass
		5788	15.88	15.78	15.74	15.75	21.79	30.00	-8.21	Pass
		5845	15.87	15.85	15.78	15.82	21.83	30.00	-8.17	Pass
	64QAM	5730	15.83	15.86	15.78	15.85	21.83	30.00	-8.17	Pass
		5788	15.88	15.76	15.76	15.74	21.79	30.00	-8.21	Pass
		5845	15.88	15.86	15.80	15.81	21.84	30.00	-8.16	Pass
15	QPSK	5733	15.98	15.82	15.93	15.81	21.89	30.00	-8.11	Pass
		5788	15.93	15.91	15.78	15.70	21.83	30.00	-8.17	Pass
		5843	15.93	15.81	15.83	15.95	21.88	30.00	-8.12	Pass
	16QAM	5733	15.97	15.82	15.93	15.81	21.88	30.00	-8.12	Pass
		5788	15.93	15.91	15.78	15.70	21.83	30.00	-8.17	Pass
		5843	15.95	15.81	15.84	15.94	21.89	30.00	-8.11	Pass
	64QAM	5733	15.96	15.81	15.92	15.82	21.88	30.00	-8.12	Pass
		5788	15.93	15.91	15.79	15.70	21.83	30.00	-8.17	Pass
		5843	15.94	15.79	15.82	15.94	21.87	30.00	-8.13	Pass
20	QPSK	5735	15.81	15.88	15.65	15.87	21.80	30.00	-8.20	Pass
		5788	15.67	15.76	15.90	15.77	21.78	30.00	-8.22	Pass
		5840	15.95	15.93	15.78	15.83	21.87	30.00	-8.13	Pass
	16QAM	5735	15.81	15.87	15.64	15.87	21.80	30.00	-8.20	Pass
		5788	15.66	15.77	15.90	15.78	21.78	30.00	-8.22	Pass
		5840	15.95	15.93	15.78	15.83	21.87	30.00	-8.13	Pass
	64QAM	5735	15.82	15.87	15.64	15.88	21.80	30.00	-8.20	Pass
		5788	15.64	15.77	15.88	15.77	21.77	30.00	-8.23	Pass
		5840	15.95	15.93	15.81	15.82	21.88	30.00	-8.12	Pass

* Total output power = (10*LOG (10^(Output power ANT1/10) + 10^(Output power ANT2/10) + 10^(Output power ANT3/10) + 10^(Output power ANT4/10)))

** Margin = Total output power – specification limit



HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(1-3), RSS-247 section 6.2.4.1, Peak output power			
Test procedure: FCC section 15.407(a)(4); KDB 662911, KDB 789033, ANSI C63.10, section 12.3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Jan-19			
Temperature: 25 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.5.4 Peak output power test results (continued)

ASSIGNED FREQUENCY RANGE:

5.725 - 5.850 GHz

DETECTOR USED:

Average

METHOD OF POWER MEASUREMENTS:

PM-G (789033 D02)

MIMO CONFIGURATION:

2 carrier, 1 sectors (4 ports to 2 dual slant antennas)

Channel bandwidth, MHz	Modulation	Frequency, MHz	Output power per port, dBm		Total output power*, dBm	Limit, dBm	Margin**, dB	Verdict
			ANT1	ANT3				
10	QPSK	5730	19.00	19.00	22.00	30.00	-8.00	Pass
		5788	19.00	18.95	21.98	30.00	-8.02	Pass
		5845	19.00	19.00	22.00	30.00	-8.00	Pass
	16QAM	5730	19.00	18.98	21.99	30.00	-8.01	Pass
		5788	19.00	18.96	21.98	30.00	-8.02	Pass
		5845	19.00	19.00	22.00	30.00	-8.00	Pass
	64QAM	5730	18.99	18.97	21.98	30.00	-8.02	Pass
		5788	19.00	18.94	21.97	30.00	-8.03	Pass
		5845	19.00	19.00	22.00	30.00	-8.00	Pass
15	QPSK	5733	18.88	19.00	21.94	30.00	-8.06	Pass
		5788	18.99	18.97	21.98	30.00	-8.02	Pass
		5843	18.91	18.94	21.93	30.00	-8.07	Pass
	16QAM	5733	18.88	19.00	21.94	30.00	-8.06	Pass
		5788	19.00	18.96	21.98	30.00	-8.02	Pass
		5843	18.90	18.94	21.92	30.00	-8.08	Pass
	64QAM	5733	18.88	19.00	21.94	30.00	-8.06	Pass
		5788	18.98	18.96	21.97	30.00	-8.03	Pass
		5843	18.91	18.95	21.93	30.00	-8.07	Pass
20	QPSK	5735	18.81	18.92	21.87	30.00	-8.13	Pass
		5788	18.79	18.82	21.81	30.00	-8.19	Pass
		5840	18.90	18.83	21.87	30.00	-8.13	Pass
	16QAM	5735	18.82	18.92	21.87	30.00	-8.13	Pass
		5788	18.82	18.82	21.82	30.00	-8.18	Pass
		5840	18.90	18.84	21.87	30.00	-8.13	Pass
	64QAM	5735	18.81	18.91	21.86	30.00	-8.14	Pass
		5788	18.81	18.81	21.81	30.00	-8.19	Pass
		5840	18.91	18.85	21.88	30.00	-8.12	Pass

* Total output power = (10*LOG (10^(Output power ANT1/10) + 10^(Output power ANT3/10))

** Margin = Total output power – specification limit



Test specification: FCC section 15.407(a)(1-3), RSS-247 section 6.2.4.1, Peak output power			
Test procedure: FCC section 15.407(a)(4); KDB 662911, KDB 789033, ANSI C63.10, section 12.3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Jan-19			
Temperature: 25 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.5.5 Peak output power test results (continue)

ASSIGNED FREQUENCY RANGE:

5.725 - 5.850 GHz

DETECTOR USED:

Average

METHOD OF POWER MEASUREMENTS:

PM-G (789033 D02)

MIMO CONFIGURATION:

2 carrier, 1 sectors (4 ports to 2 dual slant antennas)

Channel bandwidth, MHz	Modulation	Frequency, MHz	Output power per port, dBm		Total output power*, dBm	Limit, dBm	Margin**, dB	Verdict
			ANT2	ANT4				
10	QPSK	5730	18.99	18.96	21.98	30.00	-8.02	Pass
		5788	18.87	19.00	21.94	30.00	-8.06	Pass
		5845	19.00	18.92	21.96	30.00	-8.04	Pass
	16QAM	5730	18.99	18.93	21.96	30.00	-8.04	Pass
		5788	18.87	19.00	21.94	30.00	-8.06	Pass
		5845	19.00	18.93	21.97	30.00	-8.03	Pass
	64QAM	5730	18.99	18.94	21.97	30.00	-8.03	Pass
		5788	18.87	19.00	21.94	30.00	-8.06	Pass
		5845	19.00	18.94	21.97	30.00	-8.03	Pass
15	QPSK	5733	18.95	18.76	21.86	30.00	-8.14	Pass
		5788	19.00	19.00	22.00	30.00	-8.00	Pass
		5843	18.95	18.79	21.87	30.00	-8.13	Pass
	16QAM	5733	18.95	18.77	21.86	30.00	-8.14	Pass
		5788	19.00	19.00	22.00	30.00	-8.00	Pass
		5843	18.96	18.79	21.88	30.00	-8.12	Pass
	64QAM	5733	18.94	18.76	21.85	30.00	-8.15	Pass
		5788	19.00	18.99	22.00	30.00	-8.00	Pass
		5843	18.95	18.78	21.87	30.00	-8.13	Pass
20	QPSK	5735	18.93	18.76	21.85	30.00	-8.15	Pass
		5788	18.70	18.84	21.77	30.00	-8.23	Pass
		5840	18.87	18.90	21.89	30.00	-8.11	Pass
	16QAM	5735	18.91	18.68	21.80	30.00	-8.20	Pass
		5788	18.72	18.78	21.75	30.00	-8.25	Pass
		5840	18.88	18.89	21.89	30.00	-8.11	Pass
	64QAM	5735	18.93	18.68	21.81	30.00	-8.19	Pass
		5788	18.71	18.78	21.75	30.00	-8.25	Pass
		5840	18.86	18.88	21.87	30.00	-8.13	Pass

* Total output power = (10*LOG (10^(Output power ANT2/10) + 10^(Output power ANT4/10))

** Margin = Total output power – specification limit



HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(1-3), RSS-247 section 6.2.4.1, Peak output power			
Test procedure: FCC section 15.407(a)(4); KDB 662911, KDB 789033, ANSI C63.10, section 12.3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Jan-19			
Temperature: 25 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.5.6 EIRP test results (continued)

ASSIGNED FREQUENCY RANGE: 5.725 - 5.850 GHz
DETECTOR USED: Average
METHOD OF POWER MEASUREMENTS: PM-G (789033 D02)
MIMO CONFIGURATION: 1 carrier, 1 sector (4 ports to 2 dual slant antennas), coherent signal

Channel bandwidth, MHz	Modulation	Frequency, MHz	Output power per port, dBm		Total output power*, dBm	Antenna gain array, dB	Single antenna gain, dBi	Total EIRP**, dBm	Limit, dBm	Margin**, dB	Verdict
			ANT1	ANT2							
10	QPSK	5730	13.00	12.97	15.99	3.00	17.00	35.99	36.00	-0.01	Pass
		5788	12.91	12.85	15.88	3.00	17.00	35.88	36.00	-0.12	Pass
		5845	12.98	12.90	15.94	3.00	17.00	35.94	36.00	-0.06	Pass
	16QAM	5730	12.98	12.98	15.98	3.00	17.00	35.98	36.00	-0.02	Pass
		5788	12.91	12.85	15.88	3.00	17.00	35.88	36.00	-0.12	Pass
		5845	13.00	12.90	15.95	3.00	17.00	35.95	36.00	-0.05	Pass
	64QAM	5730	12.99	12.99	15.99	3.00	17.00	35.99	36.00	-0.01	Pass
		5788	12.92	12.86	15.89	3.00	17.00	35.89	36.00	-0.11	Pass
		5845	13.00	12.89	15.95	3.00	17.00	35.95	36.00	-0.05	Pass
15	QPSK	5732.5	12.90	12.93	15.92	3.00	17.00	35.92	36.00	-0.08	Pass
		5788	13.00	12.91	15.96	3.00	17.00	35.96	36.00	-0.04	Pass
		5842.5	12.85	12.85	15.85	3.00	17.00	35.85	36.00	-0.15	Pass
	16QAM	5732.5	12.90	12.93	15.92	3.00	17.00	35.92	36.00	-0.08	Pass
		5788	13.00	12.90	15.95	3.00	17.00	35.95	36.00	-0.05	Pass
		5842.5	13.00	12.84	15.92	3.00	17.00	35.92	36.00	-0.08	Pass
	64QAM	5732.5	12.89	12.93	15.91	3.00	17.00	35.91	36.00	-0.09	Pass
		5788	12.99	12.89	15.94	3.00	17.00	35.94	36.00	-0.06	Pass
		5842.5	12.83	12.85	15.84	3.00	17.00	35.84	36.00	-0.16	Pass
20	QPSK	5735	12.88	12.92	15.90	3.00	17.00	35.90	36.00	-0.10	Pass
		5788	12.93	12.76	15.85	3.00	17.00	35.85	36.00	-0.15	Pass
		5840	12.86	12.88	15.87	3.00	17.00	35.87	36.00	-0.13	Pass
	16QAM	5735	12.80	12.92	15.86	3.00	17.00	35.86	36.00	-0.14	Pass
		5788	12.92	12.76	15.84	3.00	17.00	35.84	36.00	-0.16	Pass
		5840	12.85	12.88	15.87	3.00	17.00	35.87	36.00	-0.13	Pass
	64QAM	5735	12.80	12.93	15.87	3.00	17.00	35.87	36.00	-0.13	Pass
		5788	12.93	12.77	15.85	3.00	17.00	35.85	36.00	-0.15	Pass
		5840	12.86	12.88	15.87	3.00	17.00	35.87	36.00	-0.13	Pass

* Total output power = (10*LOG (10^(Output power ANT1/10) + 10^(Output power ANT2/10)))

** Total EIRP = Total output power + Antenna gain array + Single antenna gain

** Margin = Total output power – specification limit



HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(1-3), RSS-247 section 6.2.4.1, Peak output power			
Test procedure: FCC section 15.407(a)(4); KDB 662911, KDB 789033, ANSI C63.10, section 12.3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Jan-19			
Temperature: 25 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.5.7 EIRP test results (continue)

ASSIGNED FREQUENCY RANGE: 5.725 - 5.850 GHz
 DETECTOR USED: Average
 METHOD OF POWER MEASUREMENTS: PM-G (789033 D02)
 MIMO CONFIGURATION: 1 carrier, 1 sector (4 ports to 2 dual slant antennas), coherent signal

Channel bandwidth, MHz	Modulation	Frequency, MHz	Output power per port, dBm		Total output power*, dBm	Antenna gain array, dB	Single antenna gain, dBi	Total EIRP**, dBm	Limit, dBm	Margin**, dB	Verdict
			ANT3	ANT4							
10	QPSK	5730	12.86	12.79	15.83	3.00	17.00	35.83	36.00	-0.17	Pass
		5788	12.79	12.78	15.79	3.00	17.00	35.79	36.00	-0.21	Pass
		5845	12.93	12.81	15.87	3.00	17.00	35.87	36.00	-0.13	Pass
	16QAM	5730	12.86	12.78	15.82	3.00	17.00	35.82	36.00	-0.18	Pass
		5788	12.79	12.78	15.79	3.00	17.00	35.79	36.00	-0.21	Pass
		5845	12.95	12.82	15.89	3.00	17.00	35.89	36.00	-0.11	Pass
	64QAM	5730	12.87	12.78	15.83	3.00	17.00	35.83	36.00	-0.17	Pass
		5788	12.76	12.79	15.78	3.00	17.00	35.78	36.00	-0.22	Pass
		5845	12.95	12.81	15.88	3.00	17.00	35.88	36.00	-0.12	Pass
15	QPSK	5732.5	12.78	12.86	15.82	3.00	17.00	35.82	36.00	-0.18	Pass
		5788	12.87	12.73	15.80	3.00	17.00	35.80	36.00	-0.20	Pass
		5842.5	12.99	12.71	15.85	3.00	17.00	35.85	36.00	-0.15	Pass
	16QAM	5732.5	12.78	12.85	15.82	3.00	17.00	35.82	36.00	-0.18	Pass
		5788	12.87	12.72	15.80	3.00	17.00	35.80	36.00	-0.20	Pass
		5842.5	13.00	12.71	15.86	3.00	17.00	35.86	36.00	-0.14	Pass
	64QAM	5732.5	12.77	12.87	15.82	3.00	17.00	35.82	36.00	-0.18	Pass
		5788	12.86	12.72	15.79	3.00	17.00	35.79	36.00	-0.21	Pass
		5842.5	12.99	12.71	15.85	3.00	17.00	35.85	36.00	-0.15	Pass
20	QPSK	5735	12.77	12.81	15.79	3.00	17.00	35.79	36.00	-0.21	Pass
		5788	12.82	12.69	15.76	3.00	17.00	35.76	36.00	-0.24	Pass
		5840	12.91	12.75	15.83	3.00	17.00	35.83	36.00	-0.17	Pass
	16QAM	5735	12.78	12.87	15.83	3.00	17.00	35.83	36.00	-0.17	Pass
		5788	12.84	12.70	15.77	3.00	17.00	35.77	36.00	-0.23	Pass
		5840	12.92	12.74	15.83	3.00	17.00	35.83	36.00	-0.17	Pass
	64QAM	5735	12.79	12.88	15.84	3.00	17.00	35.84	36.00	-0.16	Pass
		5788	12.82	12.71	15.77	3.00	17.00	35.77	36.00	-0.23	Pass
		5840	12.93	12.72	15.83	3.00	17.00	35.83	36.00	-0.17	Pass

* Total output power = (10*LOG (10^(Output power ANT3/10) + 10^(Output power ANT4/10)))

** Total EIRP = Total output power + Antenna gain array + Single antenna gain

** Margin = Total output power – specification limit



HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(1-3), RSS-247 section 6.2.4.1, Peak output power			
Test procedure: FCC section 15.407(a)(4); KDB 662911, KDB 789033, ANSI C63.10, section 12.3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Jan-19			
Temperature: 25 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.5.8 EIRP test results (continued)

ASSIGNED FREQUENCY RANGE: 5.725 - 5.850 GHz
DETECTOR USED: Average
METHOD OF POWER MEASUREMENTS: PM-G (789033 D02)
MIMO CONFIGURATION: 1 carrier, 1 sector (4 ports to 2 dual slant antennas), non-coherent signal

Channel bandwidth, MHz	Modulation	Frequency, MHz	Output power per port, dBm		Total output power*, dBm	Antenna gain array, dB	Single antenna gain, dBi	Total EIRP**, dBm	Limit, dBm	Margin**, dB	Verdict
			ANT1	ANT2							
10	QPSK	5730	15.83	15.84	18.84	0	17.00	35.84	36.00	-0.16	Pass
		5788	15.88	15.78	18.83	0	17.00	35.83	36.00	-0.17	Pass
		5845	15.86	15.85	18.86	0	17.00	35.86	36.00	-0.14	Pass
	16QAM	5730	15.82	15.85	18.84	0	17.00	35.84	36.00	-0.16	Pass
		5788	15.88	15.78	18.83	0	17.00	35.83	36.00	-0.17	Pass
		5845	15.87	15.85	18.86	0	17.00	35.86	36.00	-0.14	Pass
	64QAM	5730	15.83	15.86	18.85	0	17.00	35.85	36.00	-0.15	Pass
		5788	15.88	15.76	18.82	0	17.00	35.82	36.00	-0.18	Pass
		5845	15.88	15.86	18.87	0	17.00	35.87	36.00	-0.13	Pass
15	QPSK	5732.5	15.98	15.82	18.90	0	17.00	35.90	36.00	-0.10	Pass
		5788	15.93	15.91	18.92	0	17.00	35.92	36.00	-0.08	Pass
		5842.5	15.93	15.81	18.87	0	17.00	35.87	36.00	-0.13	Pass
	16QAM	5732.5	15.97	15.82	18.90	0	17.00	35.90	36.00	-0.10	Pass
		5788	15.93	15.91	18.92	0	17.00	35.92	36.00	-0.08	Pass
		5842.5	15.95	15.81	18.88	0	17.00	35.88	36.00	-0.12	Pass
	64QAM	5732.5	15.96	15.81	18.89	0	17.00	35.89	36.00	-0.11	Pass
		5788	15.93	15.91	18.92	0	17.00	35.92	36.00	-0.08	Pass
		5842.5	15.94	15.79	18.87	0	17.00	35.87	36.00	-0.13	Pass
20	QPSK	5735	15.81	15.88	18.85	0	17.00	35.85	36.00	-0.15	Pass
		5788	15.67	15.76	18.72	0	17.00	35.72	36.00	-0.28	Pass
		5840	15.95	15.93	18.94	0	17.00	35.94	36.00	-0.06	Pass
	16QAM	5735	15.81	15.87	18.84	0	17.00	35.84	36.00	-0.16	Pass
		5788	15.66	15.77	18.72	0	17.00	35.72	36.00	-0.28	Pass
		5840	15.95	15.93	18.94	0	17.00	35.94	36.00	-0.06	Pass
	64QAM	5735	15.82	15.87	18.85	0	17.00	35.85	36.00	-0.15	Pass
		5788	15.64	15.77	18.71	0	17.00	35.71	36.00	-0.29	Pass
		5840	15.95	15.93	18.94	0	17.00	35.94	36.00	-0.06	Pass

* Total output power = (10*LOG (10^(Output power ANT1/10) + 10^(Output power ANT2/10)))

** Total EIRP = Total output power + Antenna gain array + Single antenna gain

** Margin = Total output power – specification limit



HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(1-3), RSS-247 section 6.2.4.1, Peak output power			
Test procedure: FCC section 15.407(a)(4); KDB 662911, KDB 789033, ANSI C63.10, section 12.3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Jan-19			
Temperature: 25 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.5.9 EIRP test results (continue)

ASSIGNED FREQUENCY RANGE: 5.725 - 5.850 GHz
DETECTOR USED: Average
METHOD OF POWER MEASUREMENTS: PM-G (789033 D02)
MIMO CONFIGURATION: 1 carrier, 1 sector (4 ports to 2 dual slant antennas), non-coherent signal

Channel bandwidth, MHz	Modulation	Frequency, MHz	Output power per port, dBm		Total output power*, dBm	Antenna gain array, dB	Single antenna gain, dBi	Total EIRP**, dBm	Limit, dBm	Margin**, dB	Verdict
			ANT3	ANT4							
10	QPSK	5730	15.76	15.87	18.82	0	17.00	35.82	36.00	-0.18	Pass
		5788	15.74	15.75	18.75	0	17.00	35.75	36.00	-0.25	Pass
		5845	15.78	15.81	18.80	0	17.00	35.80	36.00	-0.20	Pass
	16QAM	5730	15.77	15.85	18.81	0	17.00	35.81	36.00	-0.19	Pass
		5788	15.74	15.75	18.75	0	17.00	35.75	36.00	-0.25	Pass
		5845	15.78	15.82	18.80	0	17.00	35.80	36.00	-0.20	Pass
	64QAM	5730	15.78	15.85	18.82	0	17.00	35.82	36.00	-0.18	Pass
		5788	15.76	15.74	18.75	0	17.00	35.75	36.00	-0.25	Pass
		5845	15.80	15.81	18.81	0	17.00	35.81	36.00	-0.19	Pass
15	QPSK	5732.5	15.93	15.81	18.87	0	17.00	35.87	36.00	-0.13	Pass
		5788	15.78	15.70	18.74	0	17.00	35.74	36.00	-0.26	Pass
		5842.5	15.83	15.95	18.89	0	17.00	35.89	36.00	-0.11	Pass
	16QAM	5732.5	15.93	15.81	18.87	0	17.00	35.87	36.00	-0.13	Pass
		5788	15.78	15.70	18.74	0	17.00	35.74	36.00	-0.26	Pass
		5842.5	15.84	15.94	18.89	0	17.00	35.89	36.00	-0.11	Pass
	64QAM	5732.5	15.92	15.82	18.87	0	17.00	35.87	36.00	-0.13	Pass
		5788	15.79	15.70	18.75	0	17.00	35.75	36.00	-0.25	Pass
		5842.5	15.82	15.94	18.88	0	17.00	35.88	36.00	-0.12	Pass
20	QPSK	5735	15.65	15.87	18.76	0	17.00	35.76	36.00	-0.24	Pass
		5788	15.90	15.77	18.84	0	17.00	35.84	36.00	-0.16	Pass
		5840	15.78	15.83	18.81	0	17.00	35.81	36.00	-0.19	Pass
	16QAM	5735	15.64	15.87	18.76	0	17.00	35.76	36.00	-0.24	Pass
		5788	15.90	15.78	18.84	0	17.00	35.84	36.00	-0.16	Pass
		5840	15.78	15.83	18.81	0	17.00	35.81	36.00	-0.19	Pass
	64QAM	5735	15.64	15.88	18.76	0	17.00	35.76	36.00	-0.24	Pass
		5788	15.88	15.77	18.83	0	17.00	35.83	36.00	-0.17	Pass
		5840	15.81	15.82	18.82	0	17.00	35.82	36.00	-0.18	Pass

* Total output power = (10*LOG (10^(Output power ANT3/10) + 10^(Output power ANT4/10)))

** Total EIRP = Total output power + Antenna gain array + Single antenna gain

*** Margin = Total output power – specification limit



HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(1-3), RSS-247 section 6.2.4.1, Peak output power			
Test procedure: FCC section 15.407(a)(4); KDB 662911, KDB 789033, ANSI C63.10, section 12.3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Jan-19			
Temperature: 25 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.5.10 EIRP test results (continued)

ASSIGNED FREQUENCY RANGE: 5.725 - 5.850 GHz
 DETECTOR USED: Average
 METHOD OF POWER MEASUREMENTS: PM-G (789033 D02)
 MIMO CONFIGURATION: 2 carrier, 1 sectors (4 ports to 2 dual slant antennas)

Channel bandwidth, MHz	Modulation	Frequency, MHz	Output power, dBm	Antenna gain array, dB	Single antenna gain, dBi	Total EIRP*, dBm	Limit, dBm	Margin**, dB	Verdict
			ANT1						
10	QPSK	5730	19.00	0	17.00	36.00	36.00	0.00	Pass
		5788	19.00	0	17.00	36.00	36.00	0.00	Pass
		5845	19.00	0	17.00	36.00	36.00	0.00	Pass
	16QAM	5730	19.00	0	17.00	36.00	36.00	0.00	Pass
		5788	19.00	0	17.00	36.00	36.00	0.00	Pass
		5845	19.00	0	17.00	36.00	36.00	0.00	Pass
	64QAM	5730	18.99	0	17.00	35.99	36.00	-0.01	Pass
		5788	19.00	0	17.00	36.00	36.00	0.00	Pass
		5845	19.00	0	17.00	36.00	36.00	0.00	Pass
15	QPSK	5732.5	18.88	0	17.00	35.88	36.00	-0.12	Pass
		5788	18.99	0	17.00	35.99	36.00	-0.01	Pass
		5842.5	18.91	0	17.00	35.91	36.00	-0.09	Pass
	16QAM	5732.5	18.88	0	17.00	35.88	36.00	-0.12	Pass
		5788	19.00	0	17.00	36.00	36.00	0.00	Pass
		5842.5	18.90	0	17.00	35.90	36.00	-0.10	Pass
	64QAM	5732.5	18.88	0	17.00	35.88	36.00	-0.12	Pass
		5788	18.98	0	17.00	35.98	36.00	-0.02	Pass
		5842.5	18.91	0	17.00	35.91	36.00	-0.09	Pass
20	QPSK	5735	18.81	0	17.00	35.81	36.00	-0.19	Pass
		5788	18.79	0	17.00	35.79	36.00	-0.21	Pass
		5840	18.90	0	17.00	35.90	36.00	-0.10	Pass
	16QAM	5735	18.82	0	17.00	35.82	36.00	-0.18	Pass
		5788	18.82	0	17.00	35.82	36.00	-0.18	Pass
		5840	18.90	0	17.00	35.90	36.00	-0.10	Pass
	64QAM	5735	18.81	0	17.00	35.81	36.00	-0.19	Pass
		5788	18.81	0	17.00	35.81	36.00	-0.19	Pass
		5840	18.91	0	17.00	35.91	36.00	-0.09	Pass

* Total EIRP = Output power + Antenna gain array + Single antenna gain

** Margin = Total output power – specification limit



HERMON LABORATORIES

Report ID: TELRAD_FCC.31830

Date of Issue: 28-May-19

Test specification: FCC section 15.407(a)(1-3), RSS-247 section 6.2.4.1, Peak output power			
Test procedure: FCC section 15.407(a)(4); KDB 662911, KDB 789033, ANSI C63.10, section 12.3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Jan-19			
Temperature: 25 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 48 VDC
Remarks:			

Table 7.5.11 EIRP test results (continue)

ASSIGNED FREQUENCY RANGE: 5.725 - 5.850 GHz
DETECTOR USED: Average
METHOD OF POWER MEASUREMENTS: PM-G (789033 D02)
MIMO CONFIGURATION: 2 carrier, 1 sectors (4 ports to 2 dual slant antennas)

Channel bandwidth, MHz	Modulation	Frequency, MHz	Output power, dBm	Antenna gain array, dB	Single antenna gain, dBi	Total EIRP*, dBm	Limit, dBm	Margin**, dB	Verdict
			ANT2						
10	QPSK	5730	18.99	0	17.00	35.99	36.00	-0.01	Pass
		5788	18.87	0	17.00	35.87	36.00	-0.13	Pass
		5845	19.00	0	17.00	36.00	36.00	0.00	Pass
	16QAM	5730	18.99	0	17.00	35.99	36.00	-0.01	Pass
		5788	18.87	0	17.00	35.87	36.00	-0.13	Pass
		5845	19.00	0	17.00	36.00	36.00	0.00	Pass
	64QAM	5730	18.99	0	17.00	35.99	36.00	-0.01	Pass
		5788	18.87	0	17.00	35.87	36.00	-0.13	Pass
		5845	19.00	0	17.00	36.00	36.00	0.00	Pass
15	QPSK	5732.5	18.95	0	17.00	35.95	36.00	-0.05	Pass
		5788	19.00	0	17.00	36.00	36.00	0.00	Pass
		5842.5	18.95	0	17.00	35.95	36.00	-0.05	Pass
	16QAM	5732.5	18.95	0	17.00	35.95	36.00	-0.05	Pass
		5788	19.00	0	17.00	36.00	36.00	0.00	Pass
		5842.5	18.96	0	17.00	35.96	36.00	-0.04	Pass
	64QAM	5732.5	18.94	0	17.00	35.94	36.00	-0.06	Pass
		5788	19.00	0	17.00	36.00	36.00	0.00	Pass
		5842.5	18.95	0	17.00	35.95	36.00	-0.05	Pass
20	QPSK	5735	18.93	0	17.00	35.93	36.00	-0.07	Pass
		5788	18.70	0	17.00	35.70	36.00	-0.30	Pass
		5840	18.87	0	17.00	35.87	36.00	-0.13	Pass
	16QAM	5735	18.91	0	17.00	35.91	36.00	-0.09	Pass
		5788	18.72	0	17.00	35.72	36.00	-0.28	Pass
		5840	18.88	0	17.00	35.88	36.00	-0.12	Pass
	64QAM	5735	18.93	0	17.00	35.93	36.00	-0.07	Pass
		5788	18.71	0	17.00	35.71	36.00	-0.29	Pass
		5840	18.86	0	17.00	35.86	36.00	-0.14	Pass

* Total EIRP = Output power + Antenna gain array + Single antenna gain

** Margin = Total output power – specification limit