

TEST REPORT
of the accredited test laboratory

TÜV Nr.:M/FG-12/116

:
Deutschstraße 10
A-1230 Vienna
Tel.:
+43(0)1 610 91-0
pzw@tuv.at

Division:
Medical Technology/
Communication
Technology/ EMC

Department:
Testing Body for
Communication
Technology/ EMC

TÜV®

Applicant: Cardolution Handels GmbH
Lainzerstraße 162/6
1130 Wien

Tested Product: NFC USB-Stick

FCC-ID: ARHCSP90921451

Manufacturer: See above

Output power / 51 dBµV/m @ **power supply:** 5 VDC (USB)
field strength: 3m distance


Frequency range: 13,56 MHz **Channel separation:** N/A

Standard: FCC: 47 CFR Part 15 (October 1, 2011 edition)



TUV Austria Services GmbH
Test laboratory for EMC

Supervisor of EMC-laboratory:

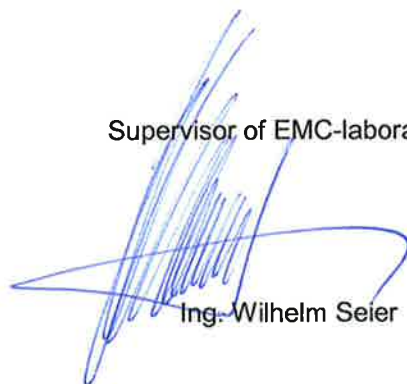

Ing. Wilhelm Seier



30.03.2012

Copy Nbr.: 01

checked by:

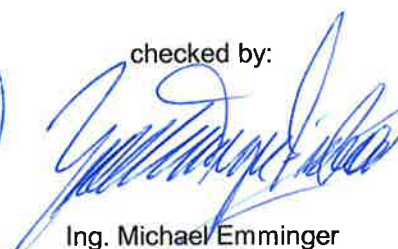
Ing. Michael Emminger

Testing Laboratory,
Inspection Body,
Certification Body,
Calibration Laboratory

Notified Body 0408
IC 2932K-1

Chairman of the
Supervisory Board:
KR Dipl.-Ing. Johann
MARIHART

Management:
Dipl.-Ing. Dr. Hugo
EBERHARDT
Mag. Christoph
WENNINGER

Registered Office:
Krugerstrasse 16
1015 Vienna/Austria

Branch Office:
Dornbirn, Graz,
Innsbruck, Klagenfurt,
Linz, Salzburg, St. Pölz
Wels, Wien 1, Wien 2,
Wien 23, Brixen (I) und
Filderstadt (D)

Company Register
Court / - Number:
Vienna / FN 288476 f

Banking Connections
BA CA 52949 001 066
IBAN
AT1312000529490010
BIC BKAUATWW
RBI 001-04.093.282
IBAN
AT1531000001040932
BIC RZBAATWW

UID ATU63240488
DVR 3002476

A publication of this test report is only permitted literally.
Copying or reproduction of partial sections needs a written permission of
TUV Austria Services GmbH.

The results of this test report only refer to the provided equipment.

LIST OF MEASUREMENTS

The complete list of measurements called for in 47 CFR 15 is given below.

SUBCLAUSE	PARAMETER TO BE MEASURED	PAGE
	Intentional Radiators	
	Test object data	3
15.225 (a) (b) (c)	Field strength of emissions at 13,110 – 14,010 MHz	4
15.225 (d)	Emissions outside 13,110 – 14,010 MHz (15.209)	5-8
15.225 (e)	Frequency tolerance	9

TEST OBJECT DATA

General EUT Description

This USB plug-in device is intended to read data from NFC tags. It therefore uses 13,56 MHz at a very low transmitter signal level.

2.1033 (c) Technical description

2.1033 (4) Type of emission: Pulsed signal with about 220 ms on and 130ms off.

2.1033 (5) Frequency range: only one operating frequency 13,56 MHz.

2.1033 (6) Power range and Controls: Fixed output power resulting in 51 dBµV/m field strength in 3m distance.

2.1033 (7) Maximum output power rating: 51 dBµV/m @ 3m distance.


2.1033 (8) DC Voltage and Current: 5 V DC USB powered
maximum current consumption: 70 mA

Field strength of emissions at 13,110 – 14,010 MHz

§ 15.225 (a) (b) (c)

NFC-Stick_FCC_bis30MHz

1 / 1

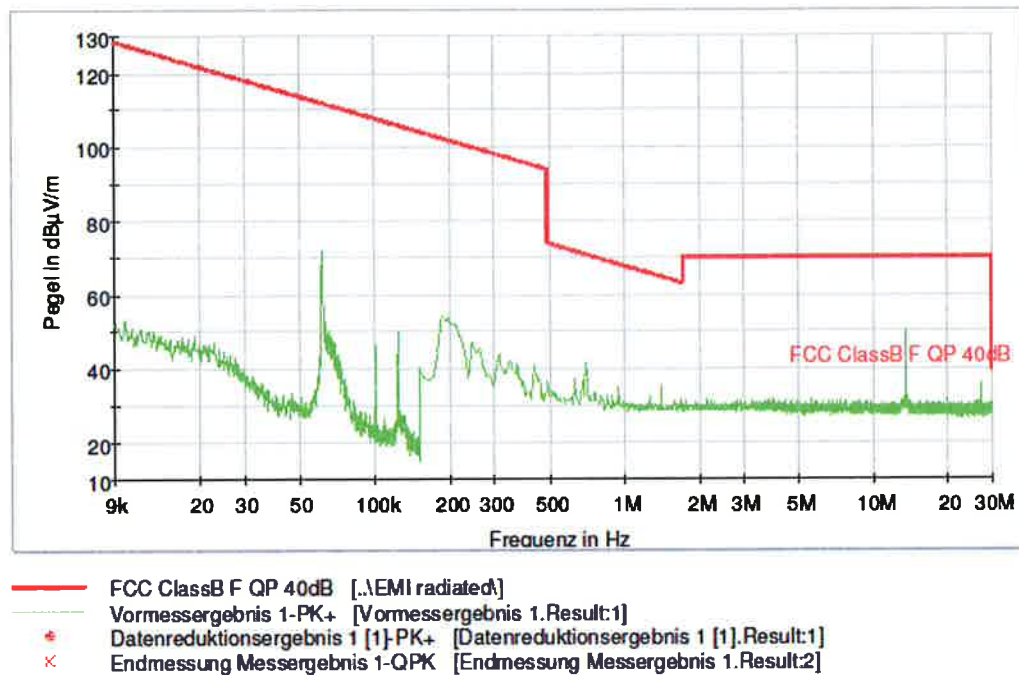

01.02.2012

10:22:56

Field strength at 13,56 MHz: 51 dBµV/m = 355 µV/m at 3 m distance. Converted with 40dB per decade for the 30m Limit this would be a Level of 11dBµV/m or 3,55 µV/m.

LIMIT SUBCLAUSE 15.225(a) (b) (c)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-151; NT-207

Emissions outside 13,110 – 14,010 MHz

§ 15.225 (d)

NFC-Stick_FCC_bis30MHz

1 / 1

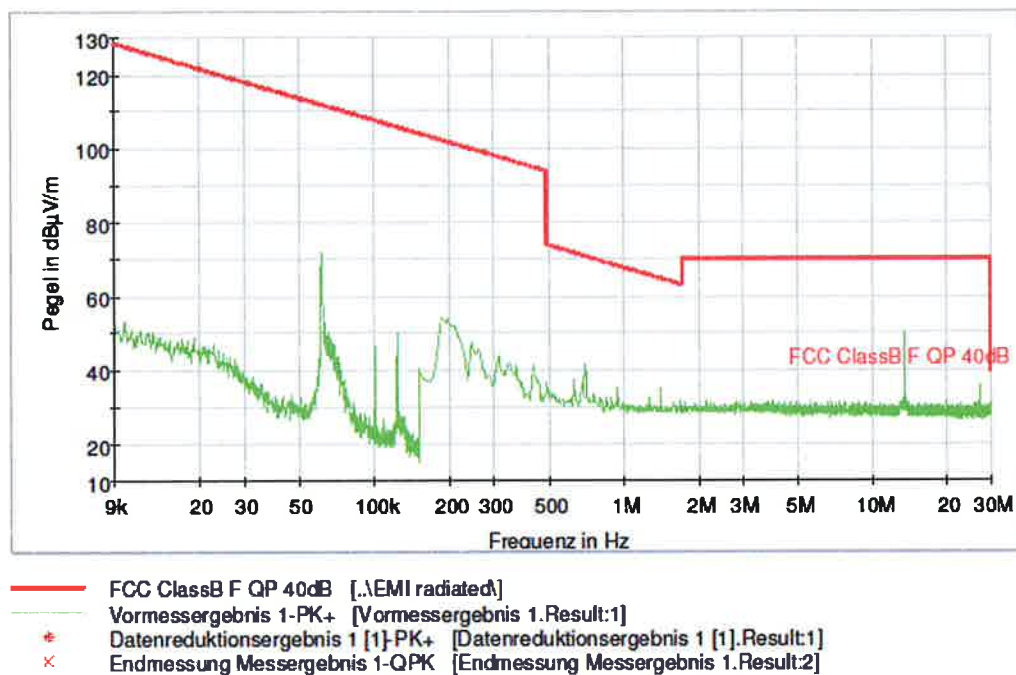

01.02.2012

10:22:56

LIMIT

SUBCLAUSE 15.225(d) (15.209)

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-122; NT-151; NT-207

Emissions outside 13,110 – 14,010 MHz

§ 15.225 (d)

NFC-Stick_FCC_30bis200MHz_Messung2

1 / 1

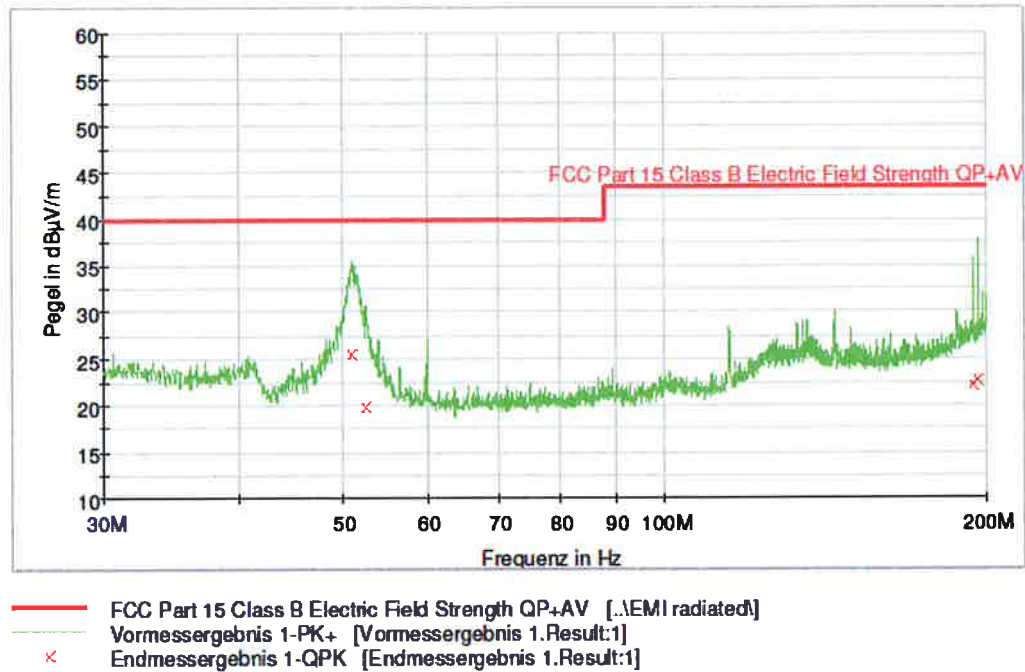

01.02.2012

12:33:43

LIMIT

SUBCLAUSE 15.225(d) (15.209)

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-129; NT-131; NT-207

Emissions outside 13,110 – 14,010 MHz

§ 15.225 (d)

NFC-Stick_FCC_200bis1000MHz

1 / 1

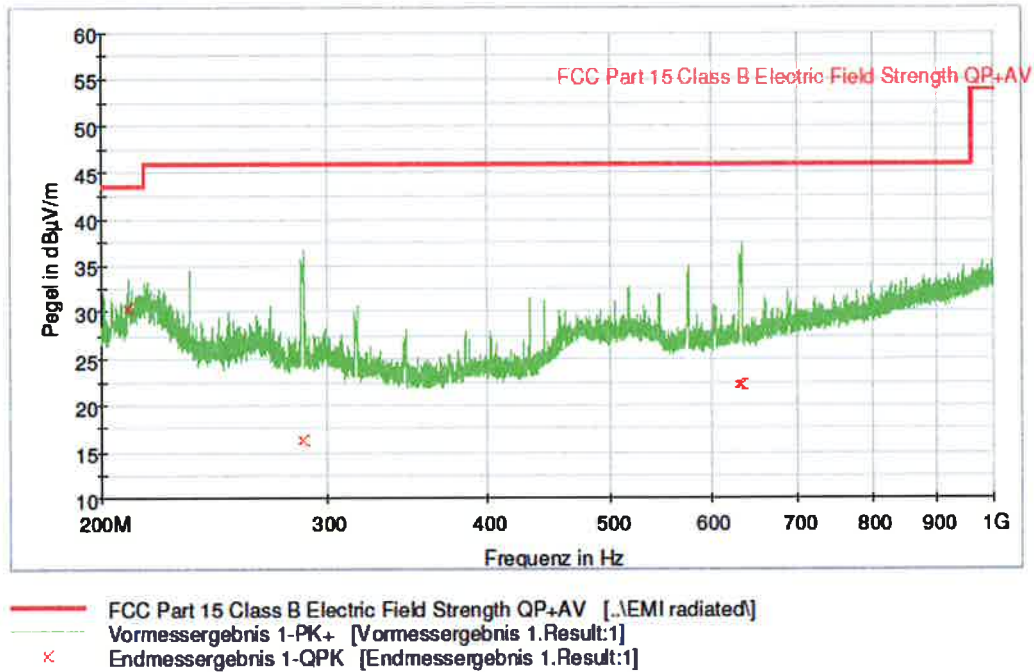

01.02.2012

13:05:57

LIMIT

SUBCLAUSE 15.225(d) (15.209)

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-129; NT-131; NT-207

Emissions outside 13,110 – 14,010 MHz

§ 15.225 (d)

Quasipeak Levels at 3m measuring distance:

Frequency MHz	Quasipeak Level dBµV/m	Quasipeak Voltage µV/m
51,15	25,4	18,62
52,65	19,7	9,66
194,90	22,1	12,74
196,70	22,6	13,49
209,70	30,4	33,11
287,70	16,3	6,53
630,85	22,3	13,03
633,00	22,3	13,03

LIMIT

SUBCLAUSE 15.225(d) (15.209)

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used: NT-100; NT-110; NT-111; NT-112; NT-129; NT-131; NT-207

Frequency tolerance

§ 15.225 (e)

Frequency error vs. Supply voltage

DC-Voltage	Frequency Error Hz	Frequency Error %
4,25 V	-276	-0,00204
5 V	-274	-0,00202
5,75 V	-276	-0,00204

Frequency error vs. Temperature

Temperature °C	Frequency Error Hz	Frequency Error %
-20	-317	-0,00234
-10	-260	-0,00192
±0	-244	-0,00180
+10	-244	-0,00180
+20	-274	-0,00202
+30	-274	-0,00202
+40	-276	-0,00204
+50	-274	-0,00202

LIMIT

SUBCLAUSE 15.225(e)

(e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Appendix 1

Test equipment used

☐	Anechoic Chamber with 3m measurement distance	NT-100	☐	ESVP - Test receiver 20 - 1000 MHz	NT-201
☐	Stripline according to ISO 11452-5	NT-108	☐	ESCI - Test receiver 9 kHz - 7 GHz	NT-203/1
☐	MA 240 - Antenna mast 1 - 4 m height	NT-110	☐	ESI26 - Test receiver 20 Hz - 26,5 GHz	NT-207
☐	DS 412 - Turntable 0 - 400 ° Azimuth	NT-111	☐	Digital Radio Tester CTS55	NT-208
☐	HD 100 Controller Mast+Turntable	NT-112	☐	Noise-gen., ITU-R 559-2 20 Hz - 20 kHz	NT-209
☐	HUF-Z3 - Log. Per. Antenna 200 - 1000 MHz	NT-121	☐	CMTA - Radiocommunication analyzer ; 0,1 - 1000 MHz	NT-210
☐	HFH-Z2 - Loop Antenna 9 kHz - 30 MHz	NT-122	☐	3271 - Spectrum analyzer 100 Hz - 26,5 GHz	NT-211
☐	HFH-Z6 - Rod Antenna 9 kHz - 30 MHz	NT-123	☐	Digital Radio Tester Aeroflex 3920	NT-212/1
☐	3121C - Dipole Antenna 28 - 1000 MHz	NT-124	☐	2855S - Communication analyzer	NT-213
☐	3115 - Horn Antenna 1 - 18 GHz (immunity)	NT-125	☐	Mixer M28HW 26,5 GHz - 40 GHz	NT-214
☐	3116 - Horn Antenna 18 - 40 GHz	NT-126	☐	Diode Detector 0,01 GHz - 26,5 GHz	NT-215
☐	SAS-200/543 - Bicon. Antenna 20 MHz - 300 MHz	NT-127	☐	RubiSource T&M Timing reference	NT-216
☐	AT-1080 - Log. Per. Antenna 80 - 1000 MHz	NT-128	☐	Radiocommunicationanalyzer SWR 1180 MD	NT-217
☐	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-129	☐	Mixer M19HWD 40 GHz - 60 GHz	NT-218
☐	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-130	☐	Mixer M12HWD 60 GHz - 90 GHz	NT-219
☐	3146 - Log. Per. Antenna 200 - 1000 MHz	NT-131	☐	DSO9104 Digital scope	NT-220/1
☐	Loop Antenna H-Field	NT-132	☐	TPS 2014 Digital scope	NT-222
☐	Horn Antenna 500 MHz - 2900 MHz	NT-133	☐	Artificial Ear according to IEC 60318	NT-224
☐	Horn Antenna 500 MHz - 6000 MHz	NT-133/1	☐	1 kHz Sound calibrator	NT-225
☐	Log. per. Antenna 800 MHz - 2500 MHz	NT-134	☐	B10 - Harmonics and flicker analyzer	NT-232
☐	Log. per. Antenna 800 MHz - 2500 MHz	NT-135	☐	SRM-3000 Spectrumanalyzer	NT-233
☐	BiConiLog Antenna 26 MHz - 2000 MHz	NT-137	☐	SRM-3006 Spectrumanalyzer	NT-233/1a
☐	Conical Dipol Antenna PCD8250	NT-138	☐	E-field probe SRM 75 MHz - 3 GHz	NT-234
☐	HF 906 - Horn Antenna 1 - 18 GHz (emission)	NT-139	☐	Field Meter NBM-500 incl. E- and H-Field probes	NT-240a-d
☐	HZ-1 Antenna tripod	NT-150	☐	Hall-Teslameter ETM-1	NT-241
☐	BN 1500 Antenna tripod	NT-151	☐	EFA-3 H-field- / E-field probe	NT-243
☐	Ant. tripod for EN61000-4-3 Model TP1000A	NT-156	☐	Field Meter EMR-200 100 kHz - 3 GHz	NT-244
☐	Power quality analyzer Fluke 1760 (complete set)	NT-160 - NT-172	☐	E-field probe 100 kHz - 3 GHz	NT-245
☐	Spectrumanalyzer - FSP7 9 kHz - 7 GHz	NT-200	☐	H-field probe 300 kHz - 30 MHz	NT-246

Division Medical
Technology/
Communication
Technology/ EMC

Department: FG

Test report number:
M/FG-12/116

Page: 1 of 3

Date: 30.03.2012

Checked by: 

Appendix 1 (continued)

Test equipment used

☐ E-field probe 3 MHz – 18 GHz	NT-247	☐ VCS 500-M6 Surge-Generator	NT-326
☐ H-field probe 27 MHz – 1 GHz	NT-248	☐ BTA-250 - RF-Amplifier 9 kHz - 220 MHz / 250 W	NT-330
☐ ELT-400 1 Hz – 400 kHz	NT-249	☐ T82-50 RF-Amplifier 2 GHz – 8 GHz	NT-331
☐ MDS 21 - Absorbing clamp 30 - 1000 MHz	NT-250	☐ 500W1000M7 - RF-Amplifier 80 - 1000 MHz / 500 W	NT-332
☐ FCC-203I EM Injection clamp	NT-251	☐ AS0102-65R - RF-Amplifier 1 GHz - 2 GHz	NT-333
☐ FCC-203I-DCN Ferrite decoupling network	NT-252	☐ APA01 – RF-Amplifier 0,5 GHz – 2,5 GHz	NT-334
☐ PR50 Current Probe	NT-253	☐ Preamplifier 1 GHz - 4 GHz	NT-335
☐ PR630 Current Probe	NT-254	☐ Preamplifier for GPS MKU 152 A	NT-336
☐ Fluke 87 V True RMS Multimeter	NT-260	☐ Preamplifier 100 MHz – 23 GHz	NT-337
☐ Model 2000 Digital Multimeter	NT-261	☐ DC Block 10 MHz – 18 GHz Model 8048	NT-338
☐ Fluke 87 V Digital Multimeter	NT-262/1	☐ 2-97201 Electronic load	NT-341
☐ ESH2-Z5-U1 Artificial mains network 4x25A	NT-300	☐ TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-344
☐ ESH3-Z5-U1 Artificial mains network 2x10A	NT-301	☐ TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-345
☐ ESH3-Z6-U1 Artificial mains network 1x100A	NT-302	☐ VDS 200 Mobil-impuls-generator	NT-350
☐ ESH3-Z6-U1 Artificial mains network 1x100A	NT-302a	☐ LD 200 Mobil-impuls-generator	NT-351
☐ PHE 4500/B Power amplifier	NT-304	☐ MPG 200 Mobil-Impuls-Generators	NT-352
☐ EZ10 T-Artificial Network	NT-305	☐ EFT 200 Mobil-impuls-generator	NT-353
☐ SMG - Signal generator 0,1 - 1000 MHz	NT-310	☐ AN 200 S1 Artificial Network	NT-354
☐ SMA100A - Signal generator 9 kHz - 6 GHz	NT-310/1	☐ FP-EFT 32M 3 ph. Coupling filter (Burst)	NT-400/1
☐ PM 5518 TXVPS Video generator	NT-311	☐ PHE 4500 - Mains impedance network	NT-401
☐ RefRad Reference generator	NT-312	☐ IP 6.2 Coupling filter for data lines (Surge)	NT-403
☐ SMP 02 Signal generator 10 MHz - 20 GHz	NT-313	☐ TK 9421 High Power Volt. Probe 150 kHz - 30 MHz	NT-409
☐ 40 MHz Arbitrary Generator TGA1241	NT-315	☐ ESH2-Z3 - Probe 9 kHz - 30 MHz	NT-410
☐ Artificial mains network NSLK 8127-PLC	NT-316	☐ IP 4 - Capacitive clamp (Burst)	NT-411
☐ PEFT - Burst generator up to 4 kV	NT-320	☐ Highpass-Filter 100 MHz – 3 GHz	NT-412
☐ ESD 30 System up to 25 kV	NT-321	☐ Highpass-Filter 600 MHz – 4 GHz	NT-413
☐ PSURGE 4.1 Surge generator	NT-324	☐ Highpass-Filter 1250 MHz – 4 GHz	NT-414
☐ TRANSIENT 1000 Immunity test system	NT-325	☐ Highpass-Filter 1800 MHz – 16 GHz	NT-415

Division Medical
Technology/
Communication
Technology/ EMC

Department: FG

Test report number:
M/FG-12/116

Page: 2 of 3

Date: 30.03.2012

Checked by: 

Appendix 1 (continued)

Test equipment used

☐ Highpass-Filter 3500 MHz – 18 GHz	NT-416	☐ FCC-801-S25 Coupling decoupling network	NT-462
☐ RF-Attenuator 10 dB DC – 18 GHz / 50 W	NT-417	☐ FCC-801-T4 Coupling decoupling network	NT-463
☐ RF-Attenuator 6 dB DC – 18 GHz / 50 W	NT-418	☐ FCC-801-C1 Coupling decoupling network	NT-464
☐ RF-Attenuator 3 dB DC – 18 GHz / 50 W	NT-419	☐ F-16A - Current probe 1kHz - 70MHz	NT-465
☐ RF-Attenuator 20 dB DC - 1000 MHz / 25 W	NT-421	☐ 95242-1 – Current probe 1 MHz – 400 MHz	NT-468
☐ RF-Attenuator 30 dB DC - 1000 MHz / 1 W	NT-423	☐ 94106-1L-1 – Current probe 100 kHz – 450 MHz	NT-471
☐ RF-Attenuator 30 dB	NT-424	☐ GA 1240 Power amplifier according to EN 61000-4-16	NT-480
☐ RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-425	☐ Coupling networks according to EN 61000-4-16	NT-481 - NT-483
☐ RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-426	☐ Van der Hoofden Test Head	NT-484
☐ RF-Attenuator 6 dB	NT-428	☐ PC P4 3 GHz Test computer	NT-500
☐ RF-Attenuator 0 dB - 81 dB	NT-429	☐ PC P4 1700 MHz Notebook	NT-505
☐ WRU 27 - Band blocking 27 MHz	NT-430	☐ Monitoring camera with Monitor	NT-511
☐ WHJ450C9 AA - High pass 450 MHz	NT-431	☐ ES-K1 Version 1.71 SP2 Test software	NT-520
☐ WHJ250C9 AA - High pass 250 MHz	NT-432	☐ EMC32 Version 8.52 Test software	NT-520/1
☐ RF-Load 150 W	NT-433	☐ SRM-TS Version 1.3 software for SRM-3000	NT-522
☐ Impedance transducer 1:4 ; 1:9 ; 1:16	NT-435	☐ SRM-TS Version 1.2 software for SRM-3006	NT-522/1
☐ RF-Attenuator DC – 18 GHz 6 dB	NT-436	☐ SPS-PHE Test software V2.5 voltage fluctuations/harmonics	NT-525
☐ RF-Attenuator DC – 18 GHz 6 dB	NT-437	☐ SPS-EM Test software V4.0 EN61000-4-11	NT-527
☐ RF-Attenuator DC – 18 GHz 10 dB	NT-438	☐ Noise power test apparatus according to EN 55014	NT-530
☐ RF-Attenuator DC – 18 GHz 20 dB	NT-439	☐ Vertical coupling plane (ESD)	NT-531
☐ I+P 7780 Directional coupler 100 - 2000 MHz	NT-440	☐ Test cable #4 for EN 61000-4-6	NT-553
☐ ESH3-Z2 - Pulse limiter 9 kHz - 30 MHz	NT-441	☐ Test cable #3 for conducted emission	NT-554
☐ Power Divider 6 dB/1 W/50 Ohm	NT-443	☐ Test cable #5+#6 ESD-cable (2x470k)	NT-555 + NT-556
☐ Directional coupler 0,1 MHz – 70 MHz	NT-444	☐ Test cable #8 Sucoflex 104EA	NT-559
☐ Directional coupler 0,1 MHz – 70 MHz	NT-445	☐ Test cable #9 (for outdoor measurements)	NT-580
☐ Tube imitations according to EN 55015	NT-450	☐ Test cable #10 (for outdoor measurements)	NT-581
☐ FCC-801-M3-16A Coupling decoupling network	NT-458	☐ Test cable #13 Sucoflex 104PE	NT-584
☐ FCC-801-M2-50A Coupling decoupling network	NT-459	☐ Test cable #21 for SRM-3000	NT-592
☐ FCC-801-M5-25 Coupling decoupling network	NT-460	☐ Shield chamber	NT-600
☐ FCC-801-AF10 Coupling decoupling network	NT-461	☐ Climatic chamber	M-1200

Division Medical
Technology/
Communication
Technology/ EMC

Department: FG

Test report number:
M/FG-12/116

Page: 3 of 3

Date: 30.03.2012

Checked by: 