

Test Report No.10053819 001

Appendix D: Radiated and Mains Spurious Emission Data



(File: 10053819AppendixD)

Contents



Spurious Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 1-18G.....	10
Spurious Emissions, TX Mode, 18-26G.....	22
Spurious Emissions, TX Mode, 30M-1G	34
Spurious Emissions, RX Mode, 1-18G	36
Spurious Emissions, RX Mode, 18-26G	48
Spurious Emissions, RX Mode, 30M-1G.....	60
Spurious Emissions, Mains, 150kHz - 30MHz.....	62

Radiated Bandedge (GFSK)

Low Channel (Hor)

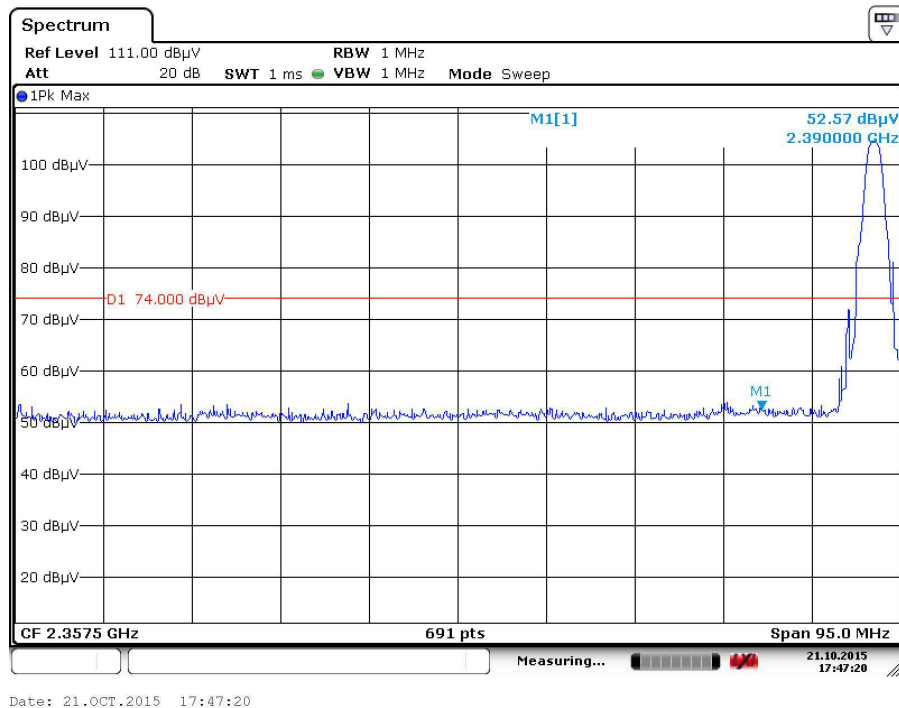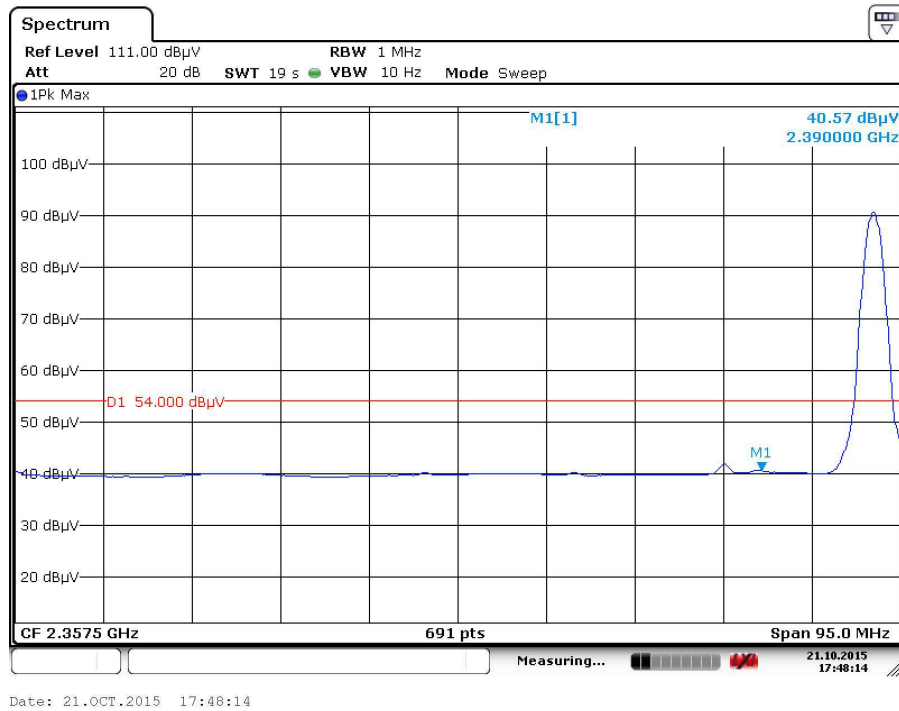



Low Channel (Ver)

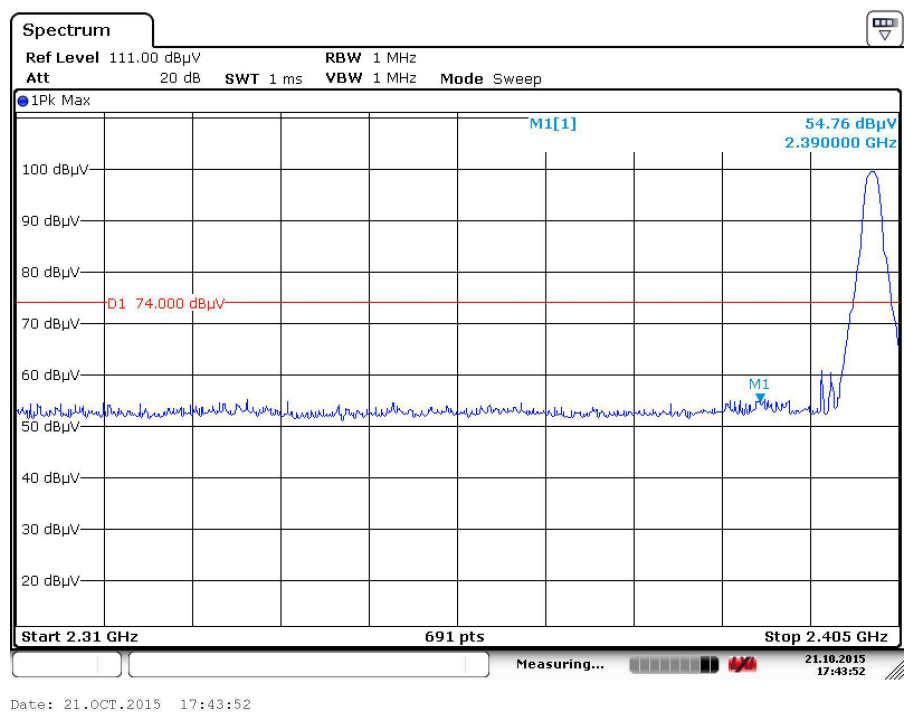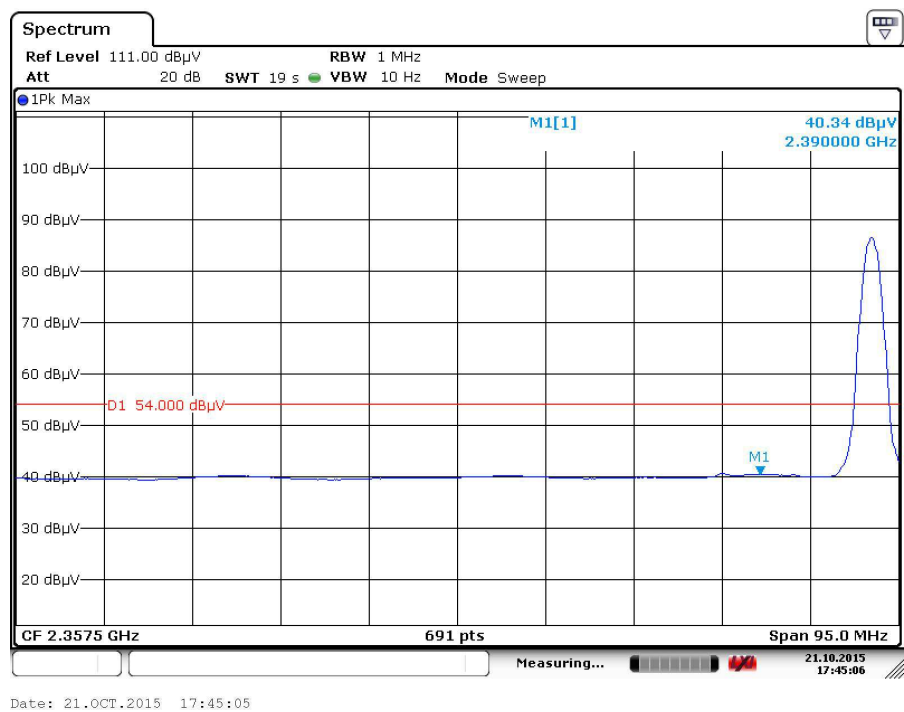

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge (GFSK)

High Channel (Hor)

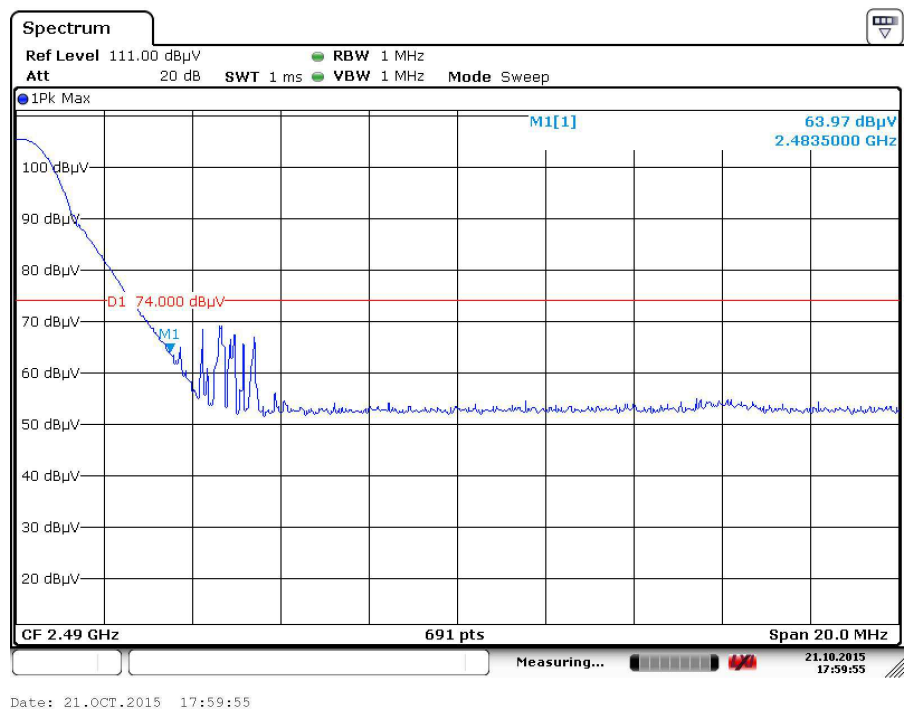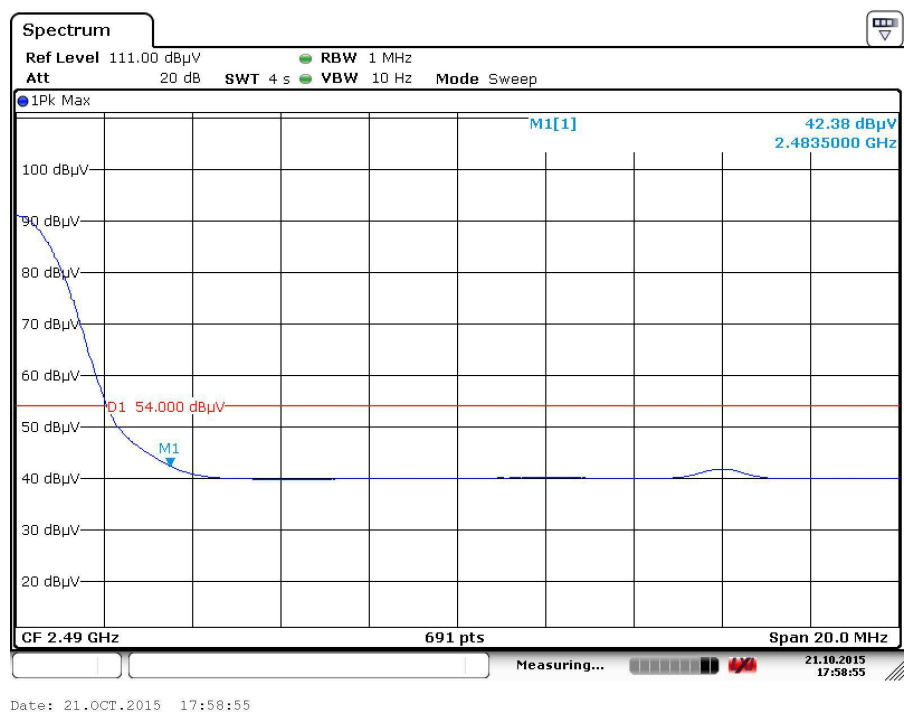

Spurious Emissions, Band Edge, 2.35-2.5G



High Channel (Ver)

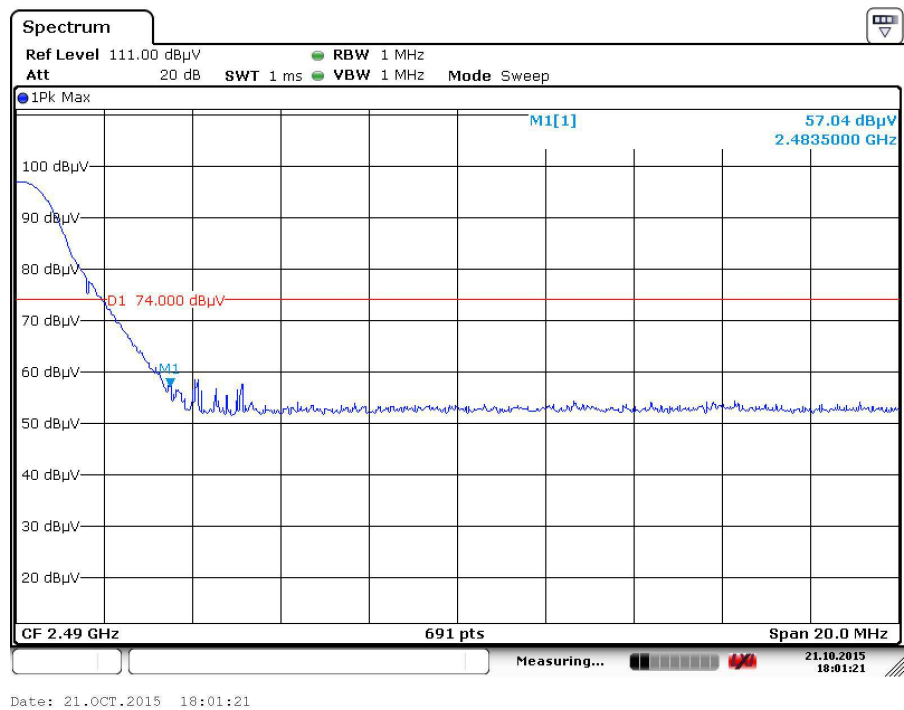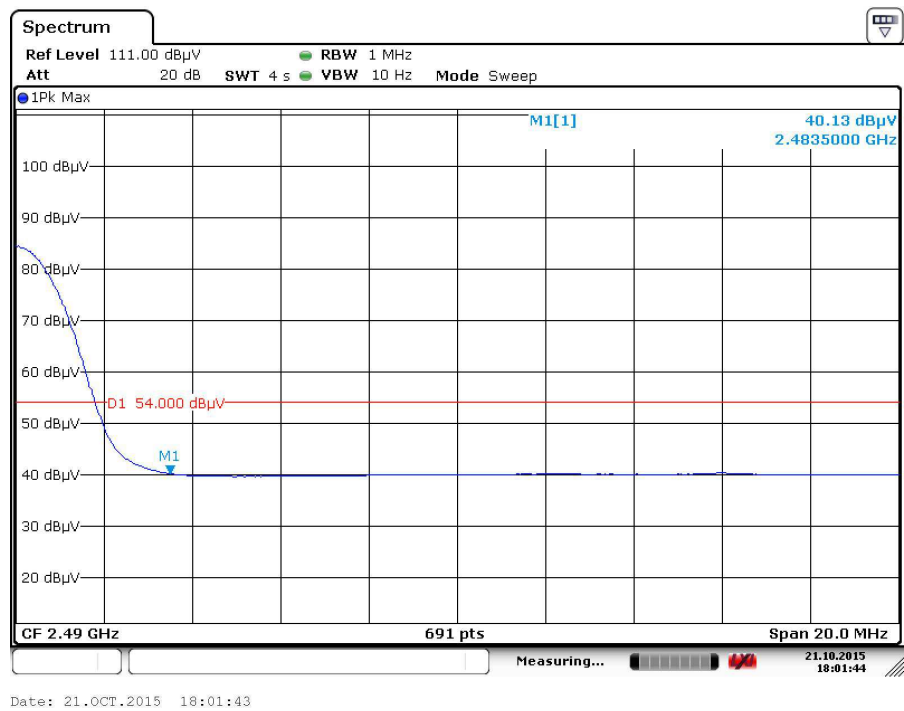

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge (8DPSK)

Low Channel (Hor)

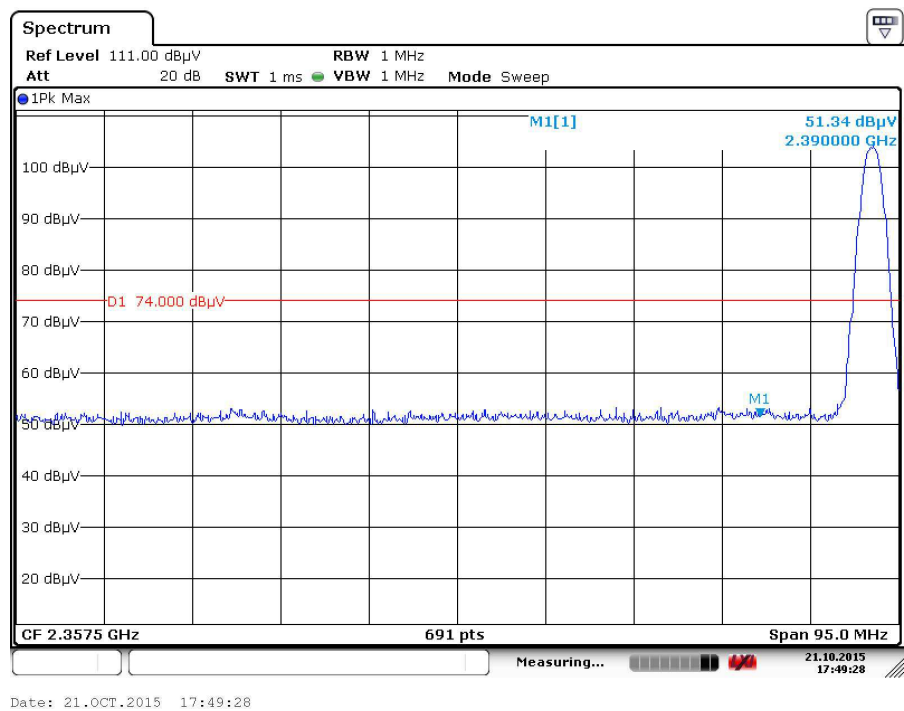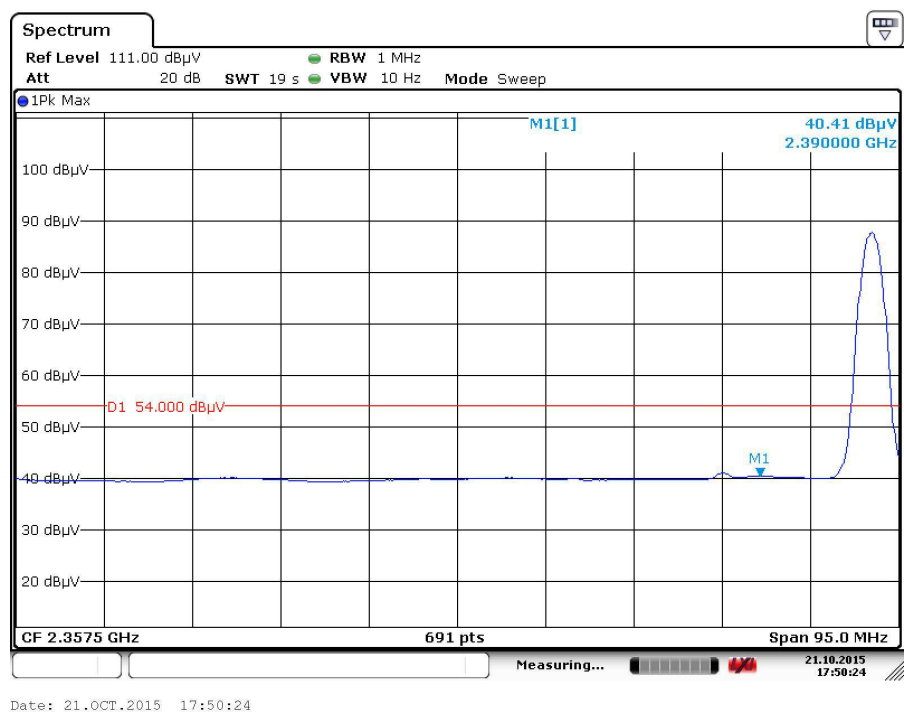

Spurious Emissions, Band Edge, 2.35-2.5G



Low Channel (Ver)

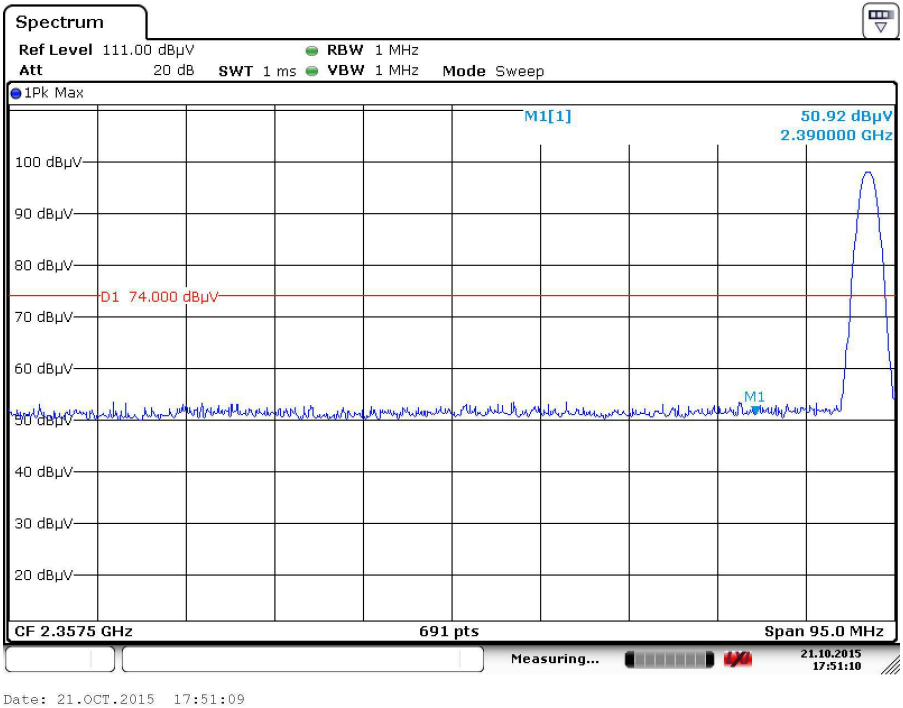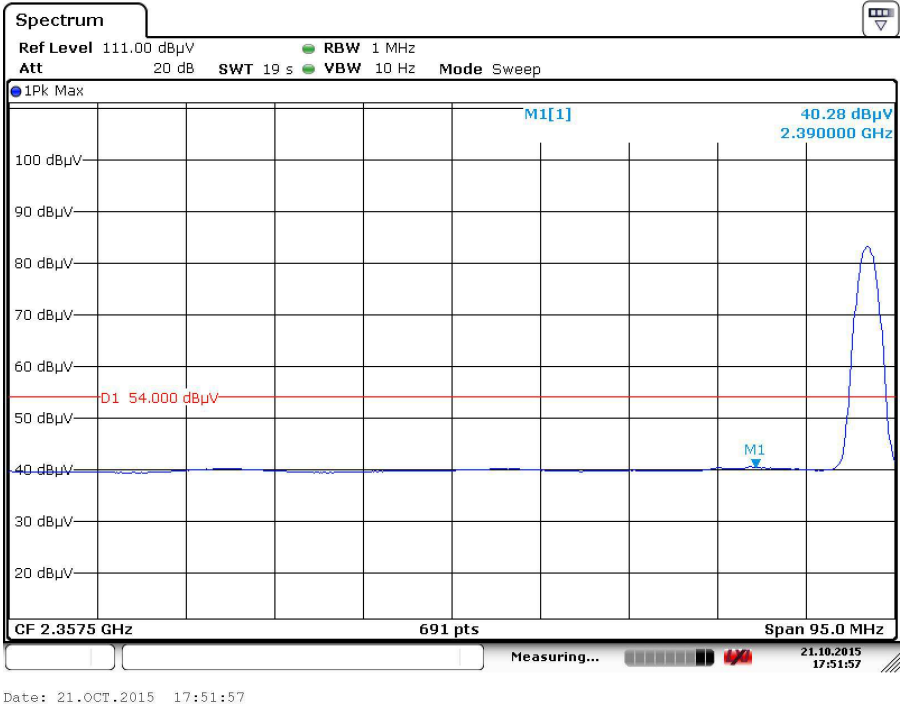

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge (8DPSK)

High Channel (Hor)

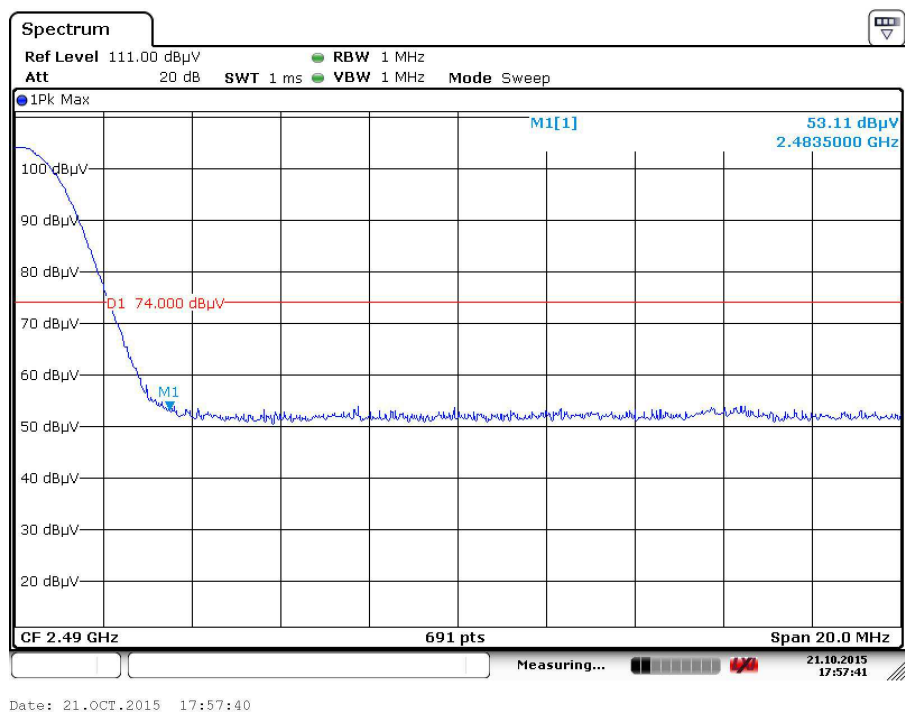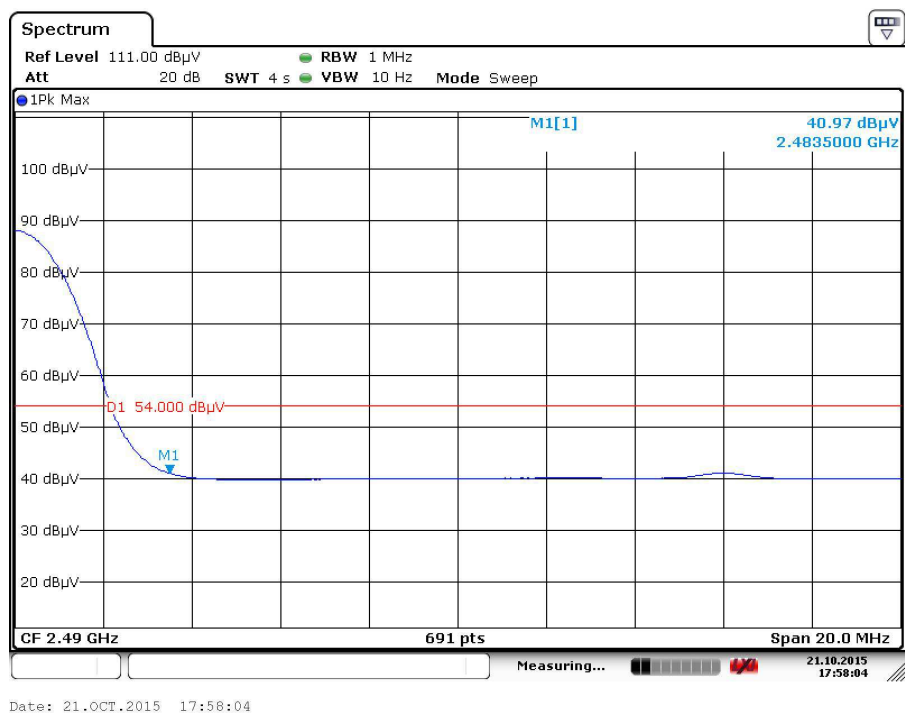

Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver)

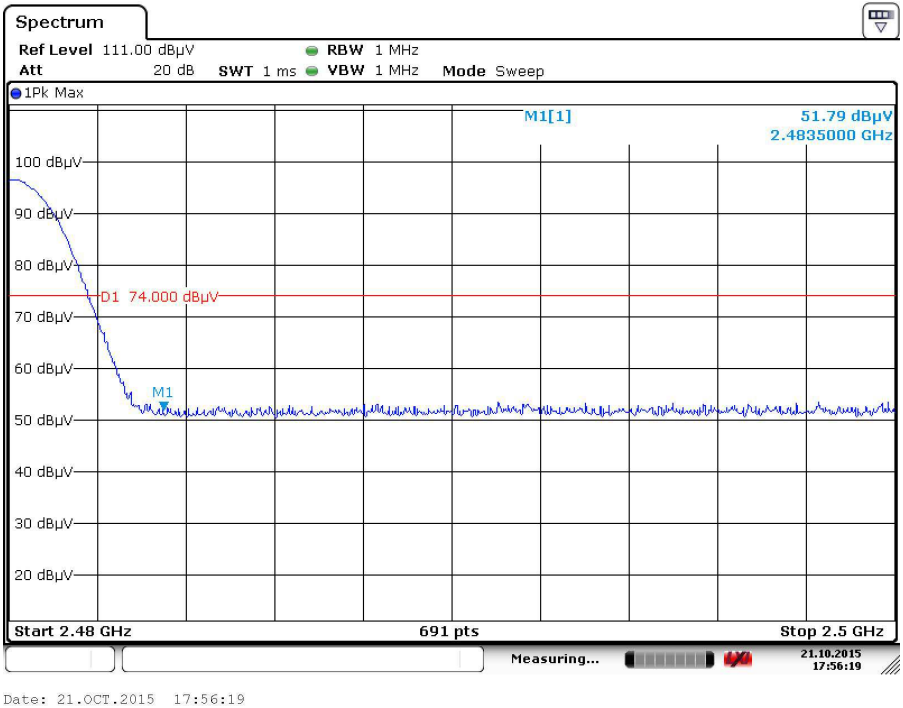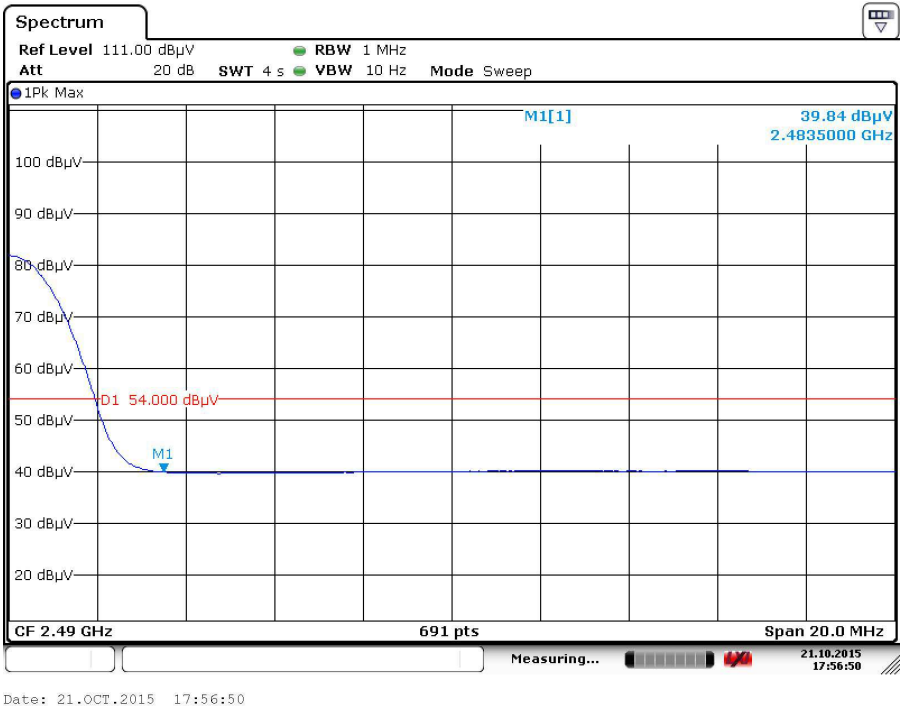

Spurious Emissions, Band Edge, 2.35-2.5G


Spurious Emissions, TX Mode, 1-18G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

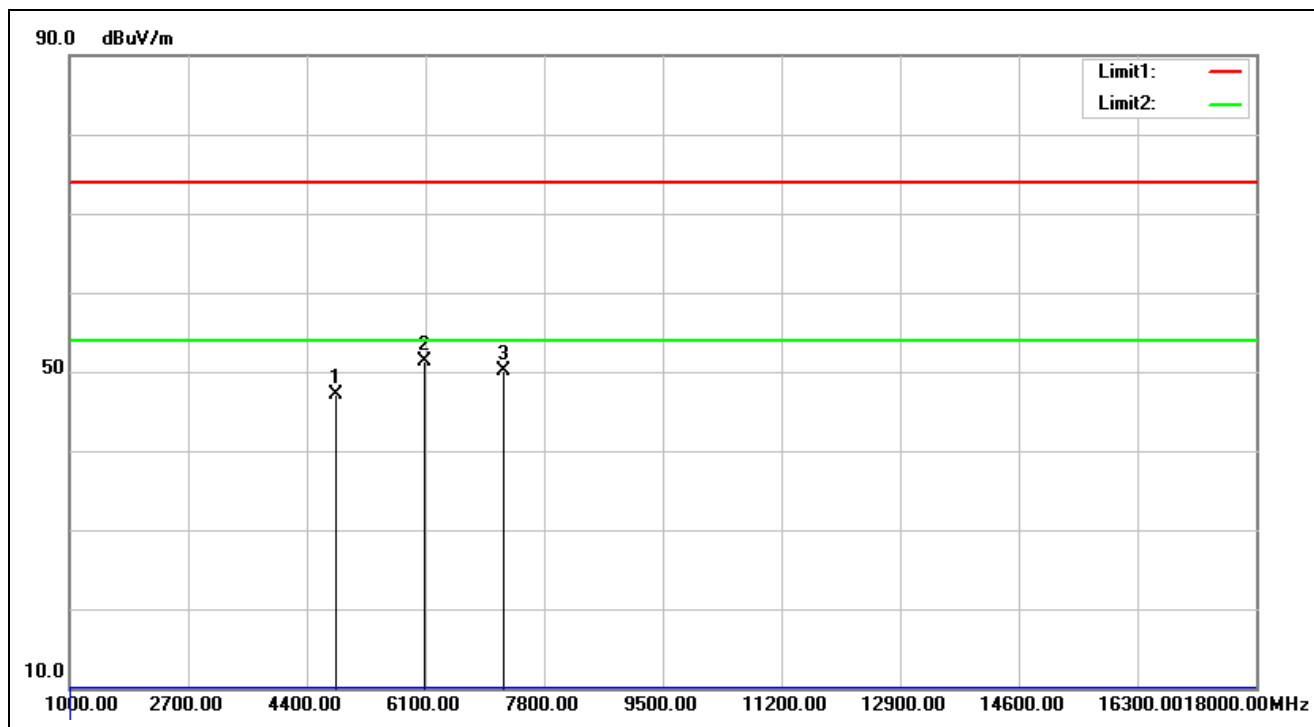


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 16:25:33
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.35	49.38	47.03	74.00	-26.97	peak		0	
2	6083.000	4.41	46.90	51.31	74.00	-22.69	peak	100	150	
3	7206.000	5.78	44.31	50.09	74.00	-23.91	peak		0	

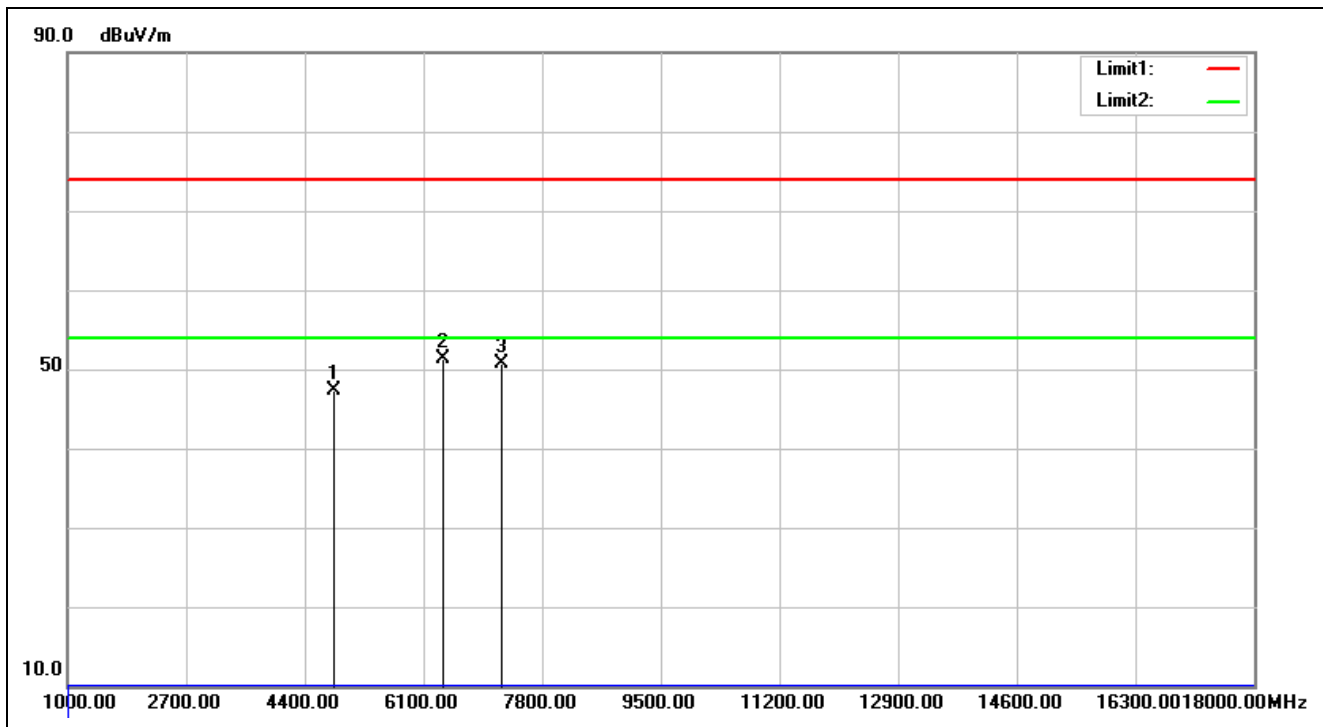


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 16:26:35
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.35	49.61	47.26	74.00	-26.74	peak			
2	6389.000	5.61	45.64	51.25	74.00	-22.75	peak	100	105	
3	7206.000	5.78	45.00	50.78	74.00	-23.22	peak			

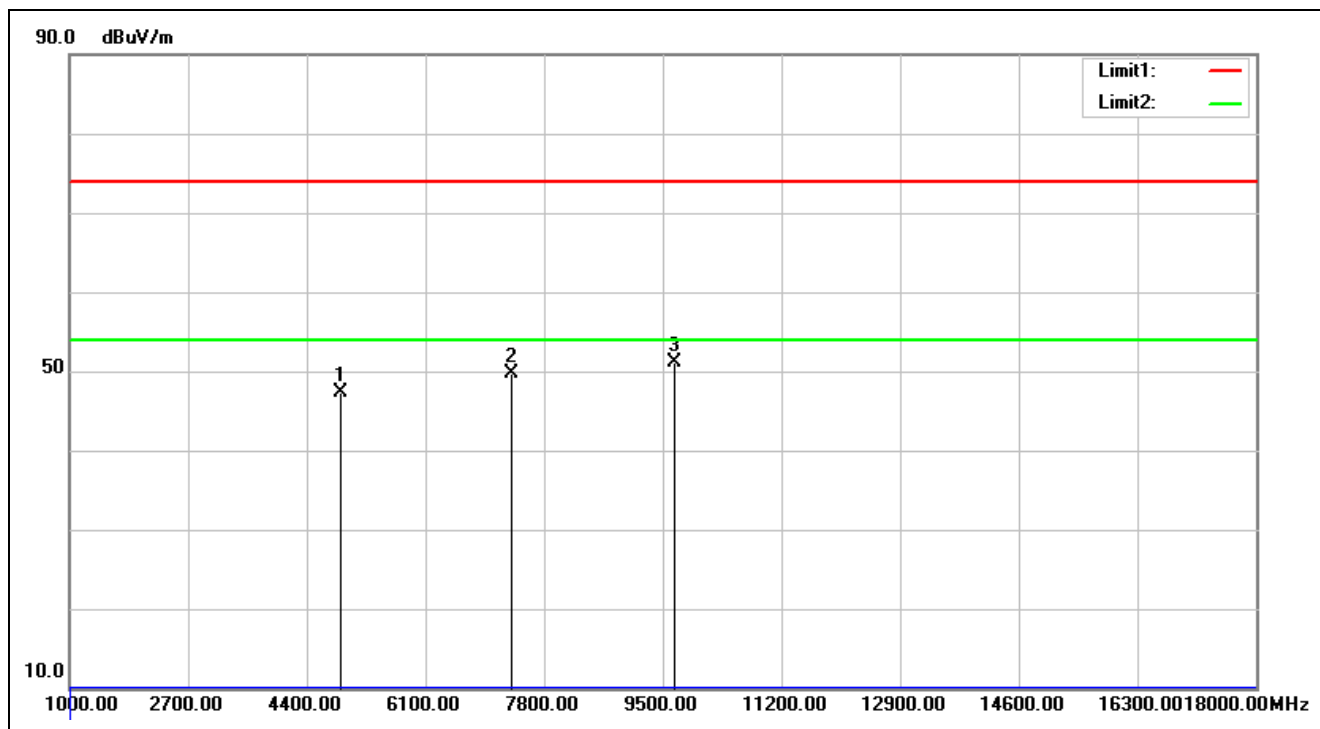


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 16:33:07
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4882.000	-2.16	49.40	47.24	74.00	-26.76	peak			
2	7323.000	6.13	43.51	49.64	74.00	-24.36	peak			
3	9670.000	6.58	44.61	51.19	74.00	-22.81	peak	100	294	

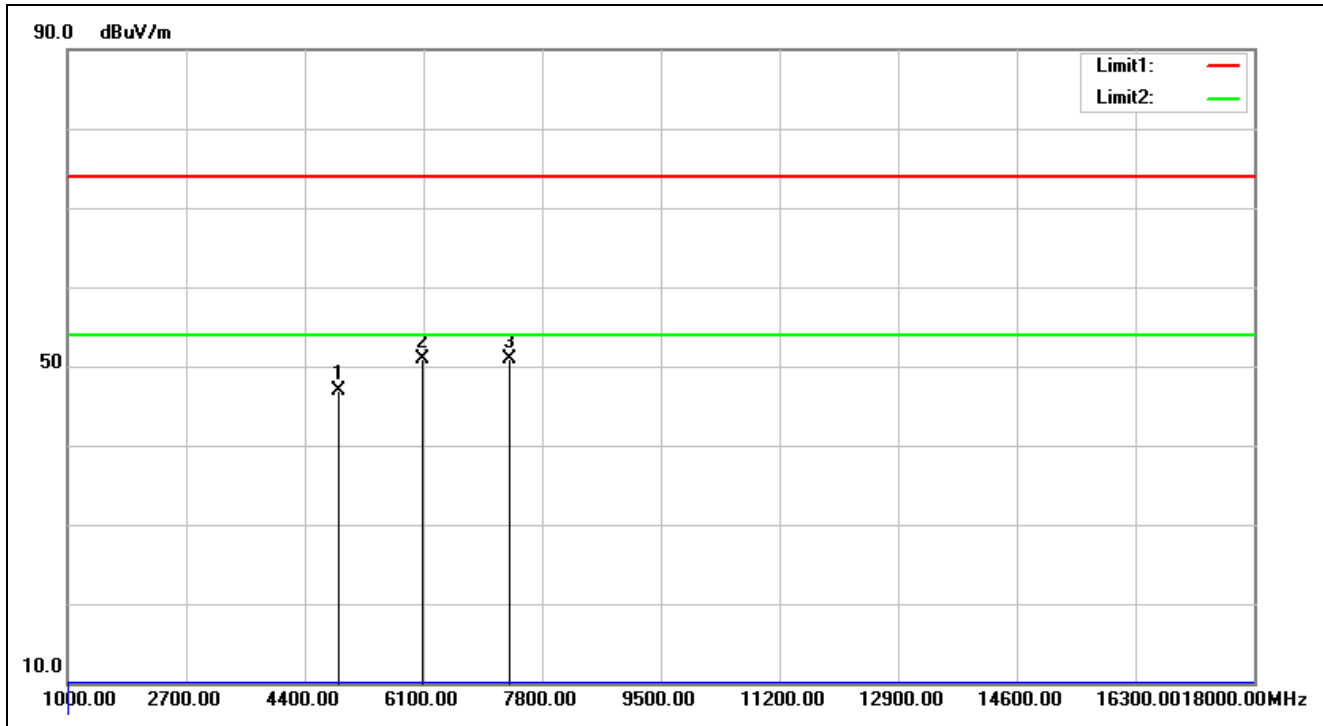


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 16:34:10
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4882.000	-2.16	49.16	47.00	74.00	-27.00	peak			
2	6083.000	4.41	46.56	50.97	74.00	-23.03	peak	100	360	
3	7323.000	6.13	44.85	50.98	74.00	-23.02	peak			

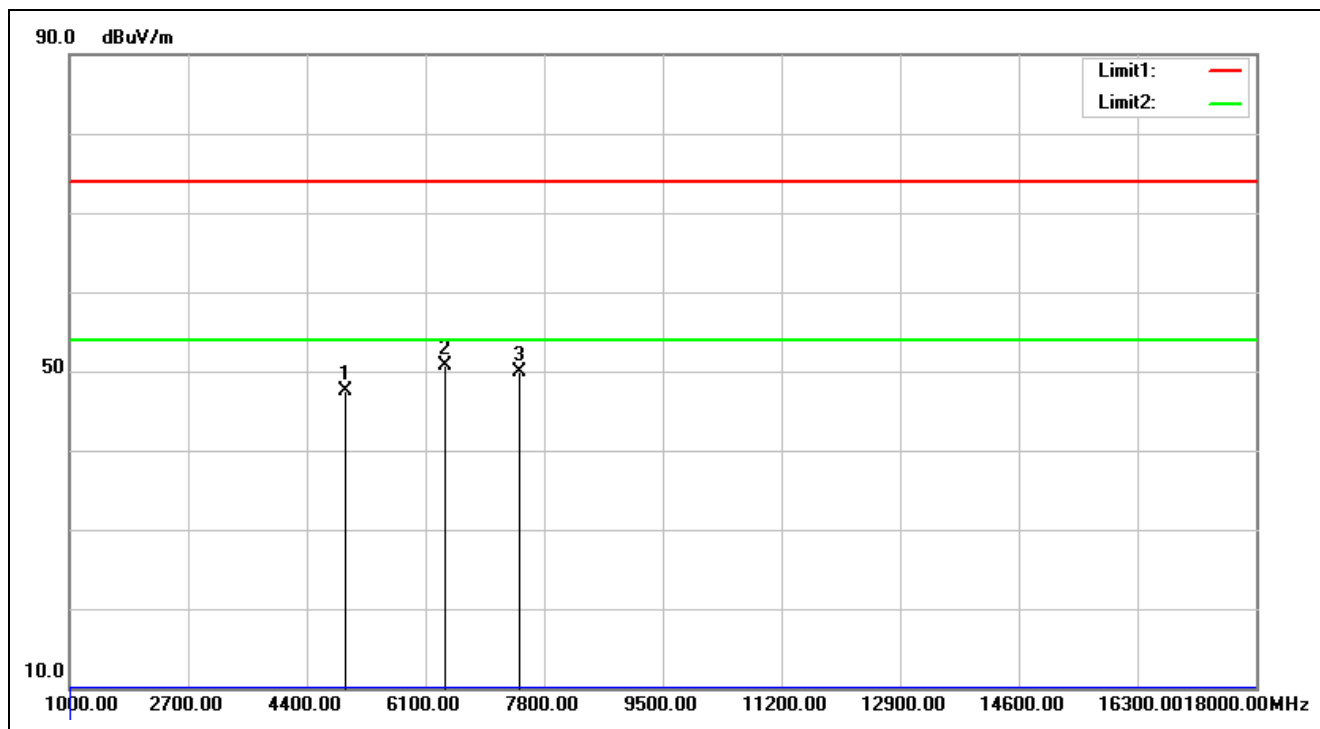


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 16:39:26
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-1.97	49.41	47.44	74.00	-26.56	peak			
2	6389.000	5.61	45.11	50.72	74.00	-23.28	peak	100	133	
3	7440.000	6.47	43.44	49.91	74.00	-24.09	peak			

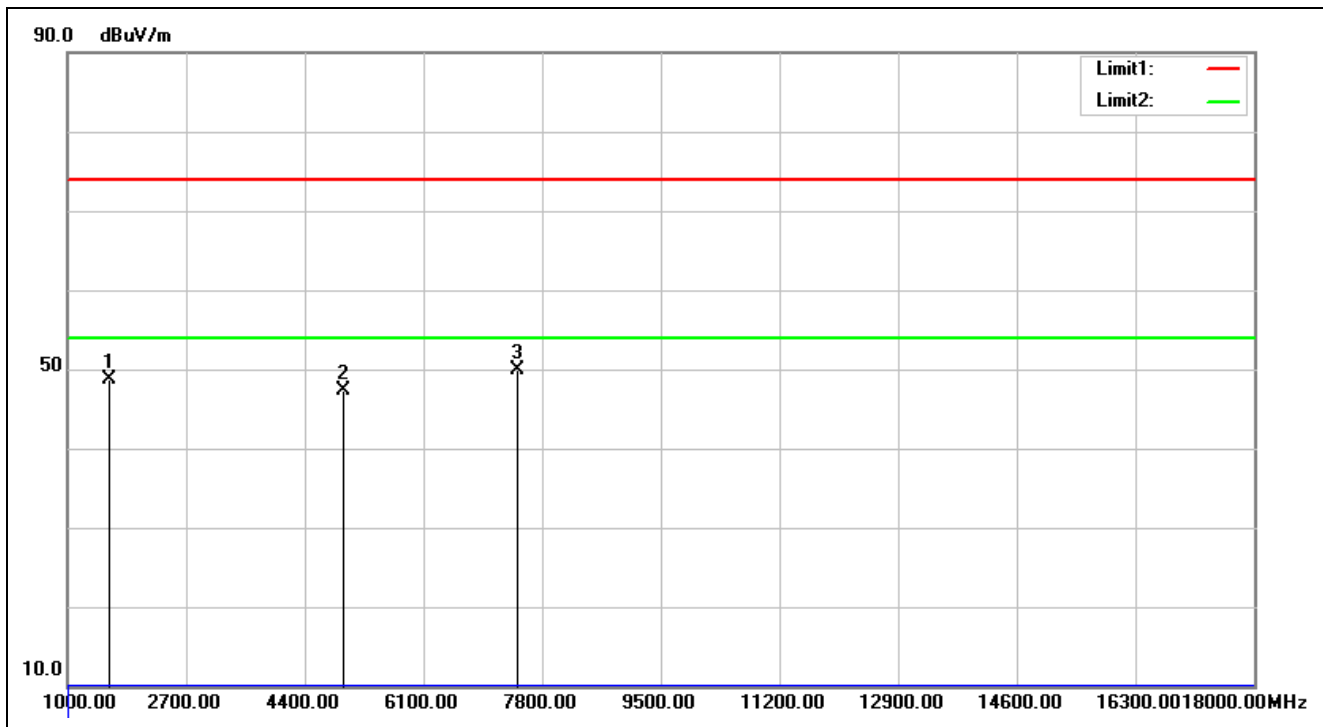


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 16:40:29
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1595.000	-9.63	58.34	48.71	74.00	-25.29	peak	100	168	
2	4960.000	-1.97	49.22	47.25	74.00	-26.75	peak			
3	7440.000	6.47	43.35	49.82	74.00	-24.18	peak			

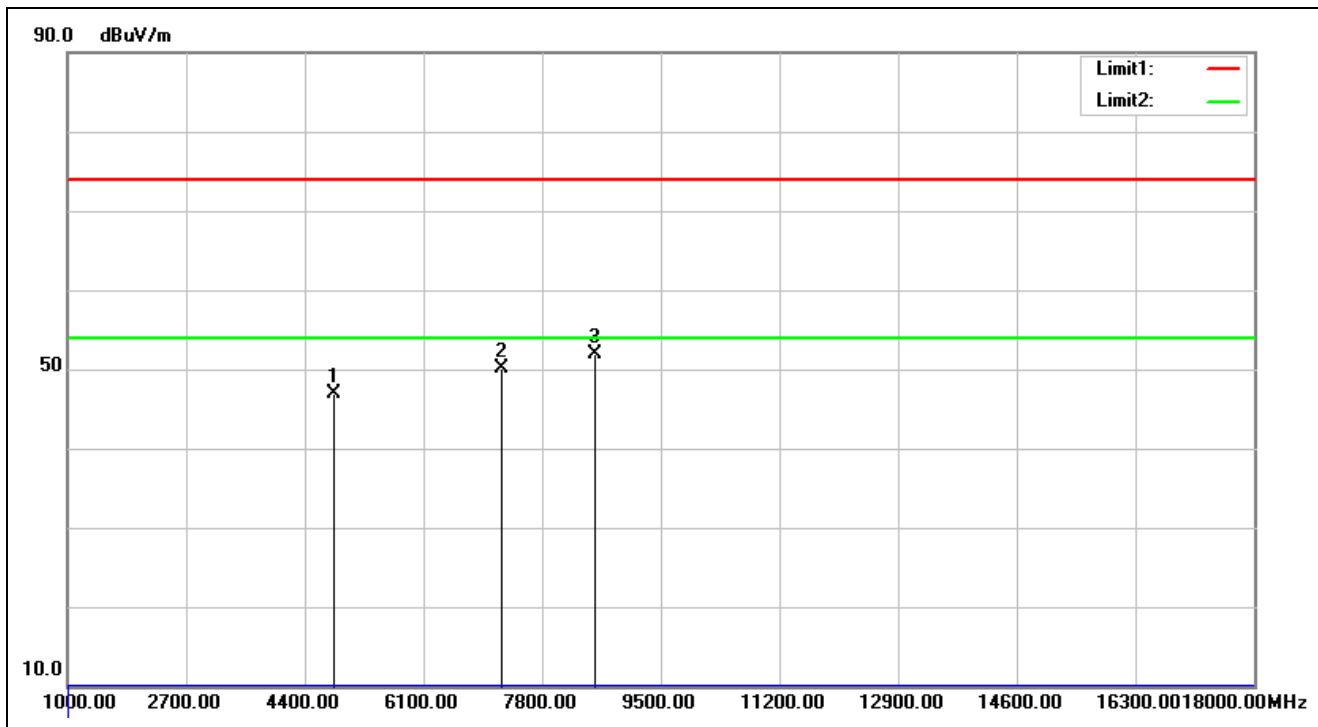


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 16:46:51
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.35	49.31	46.96	74.00	-27.04	peak			
2	7206.000	5.78	44.35	50.13	74.00	-23.87	peak			
3	8548.000	6.78	45.22	52.00	74.00	-22.00	peak	100	9	

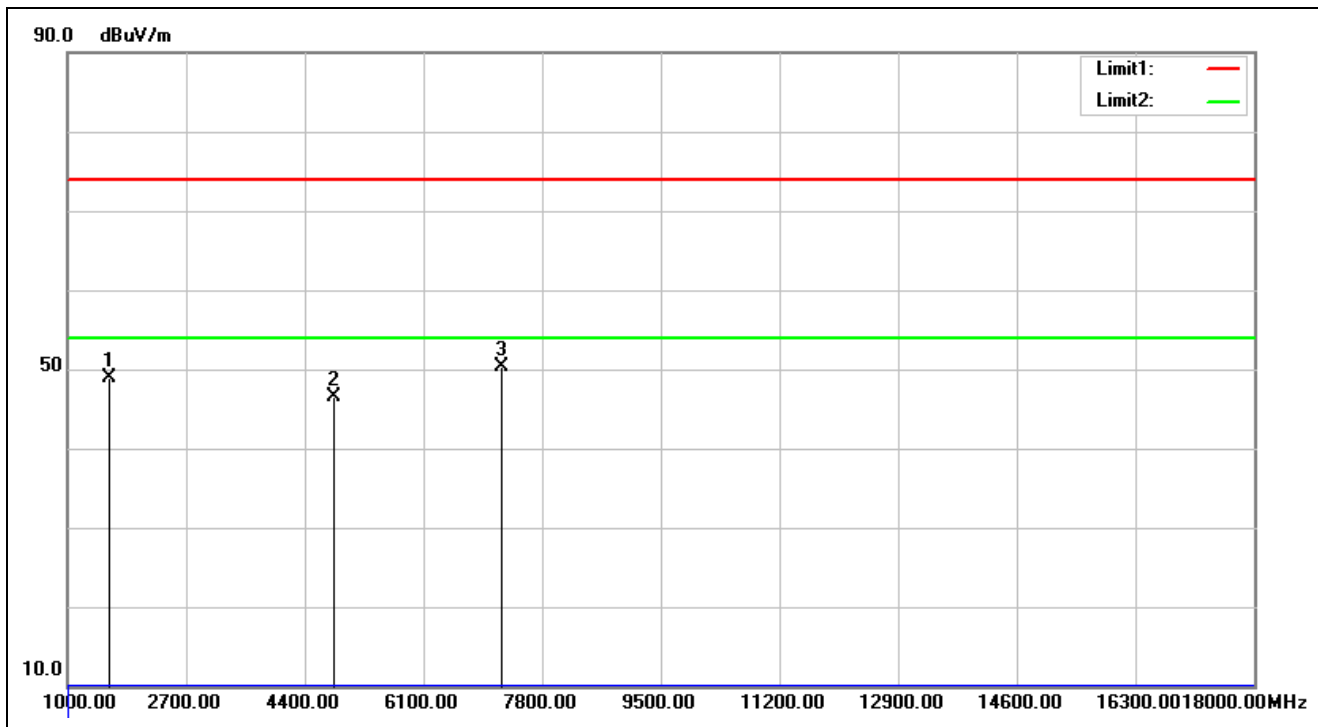


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 16:47:54
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1595.000	-9.63	58.52	48.89	74.00	-25.11	peak	100	158	
2	4804.000	-2.35	48.82	46.47	74.00	-27.53	peak			
3	7206.000	5.78	44.61	50.39	74.00	-23.61	peak			

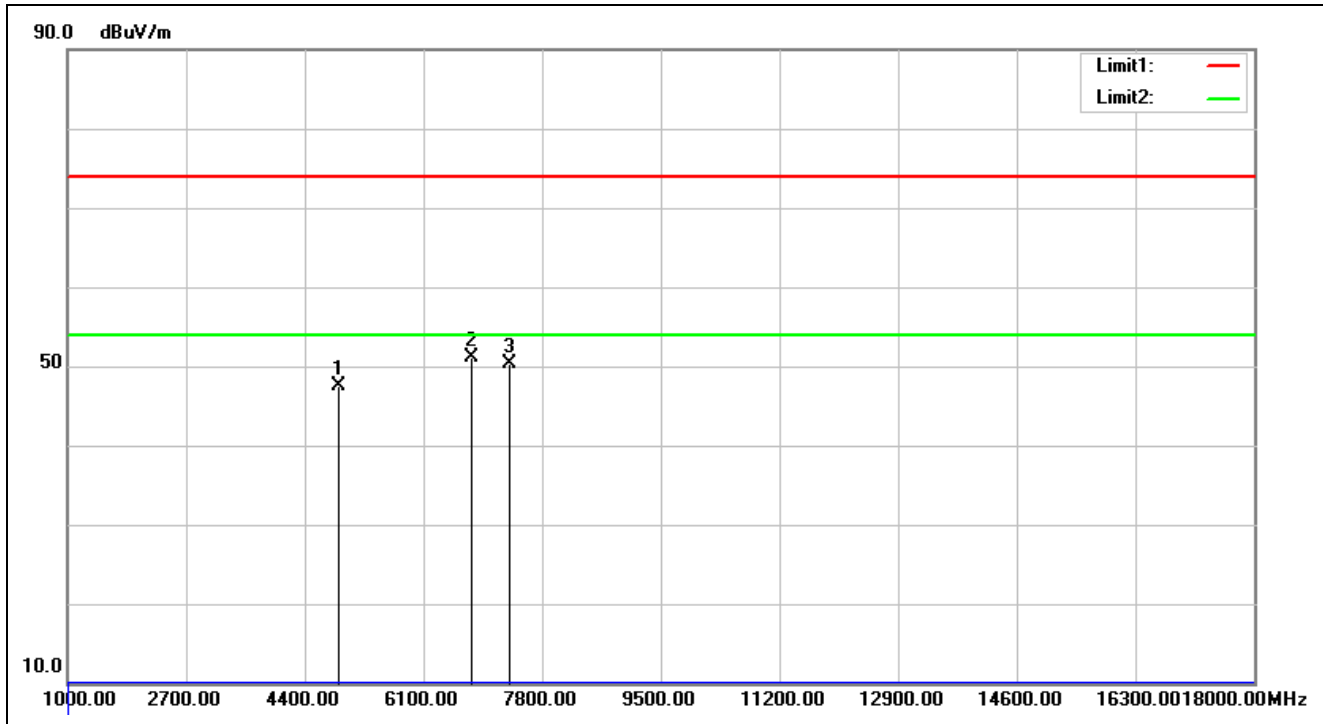


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 16:52:53
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4882.000	-2.16	49.67	47.51	74.00	-26.49	peak			
2	6780.000	5.55	45.65	51.20	74.00	-22.80	peak	100	20	
3	7323.000	6.13	44.27	50.40	74.00	-23.60	peak			

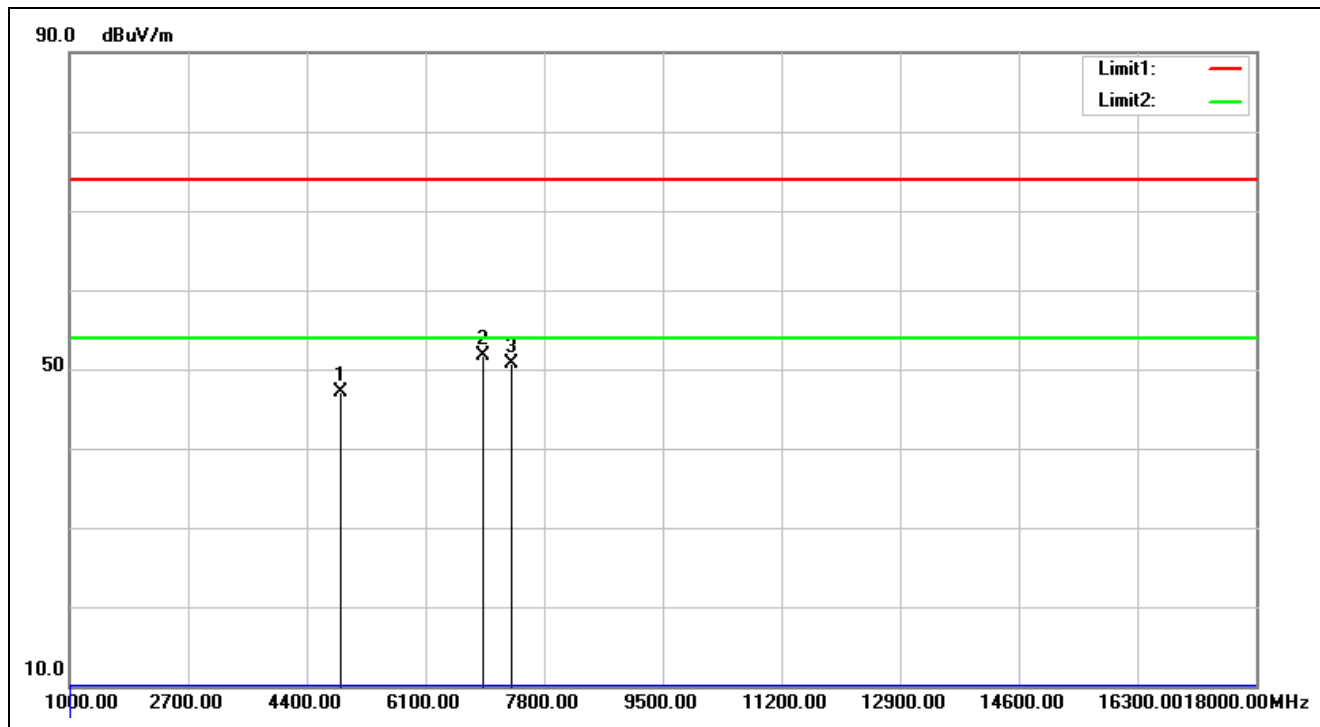


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 16:53:55
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4882.000	-2.16	49.25	47.09	74.00	-26.91	peak			
2	6916.000	5.31	46.49	51.80	74.00	-22.20	peak	100	254	
3	7323.000	6.13	44.50	50.63	74.00	-23.37	peak			

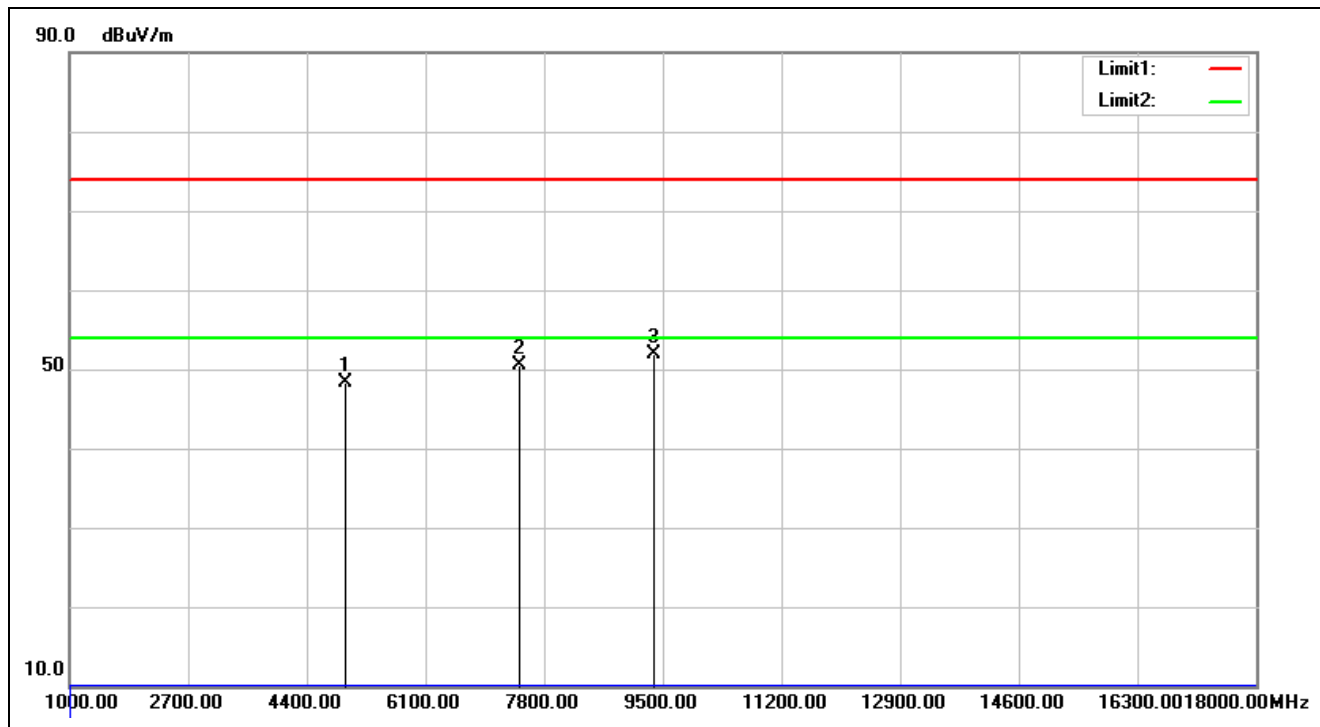

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 16:58:16
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-1.97	50.25	48.28	74.00	-25.72	peak			
2	7440.000	6.47	44.12	50.59	74.00	-23.41	peak			
3	9381.000	7.05	44.90	51.95	74.00	-22.05	peak	100	333	

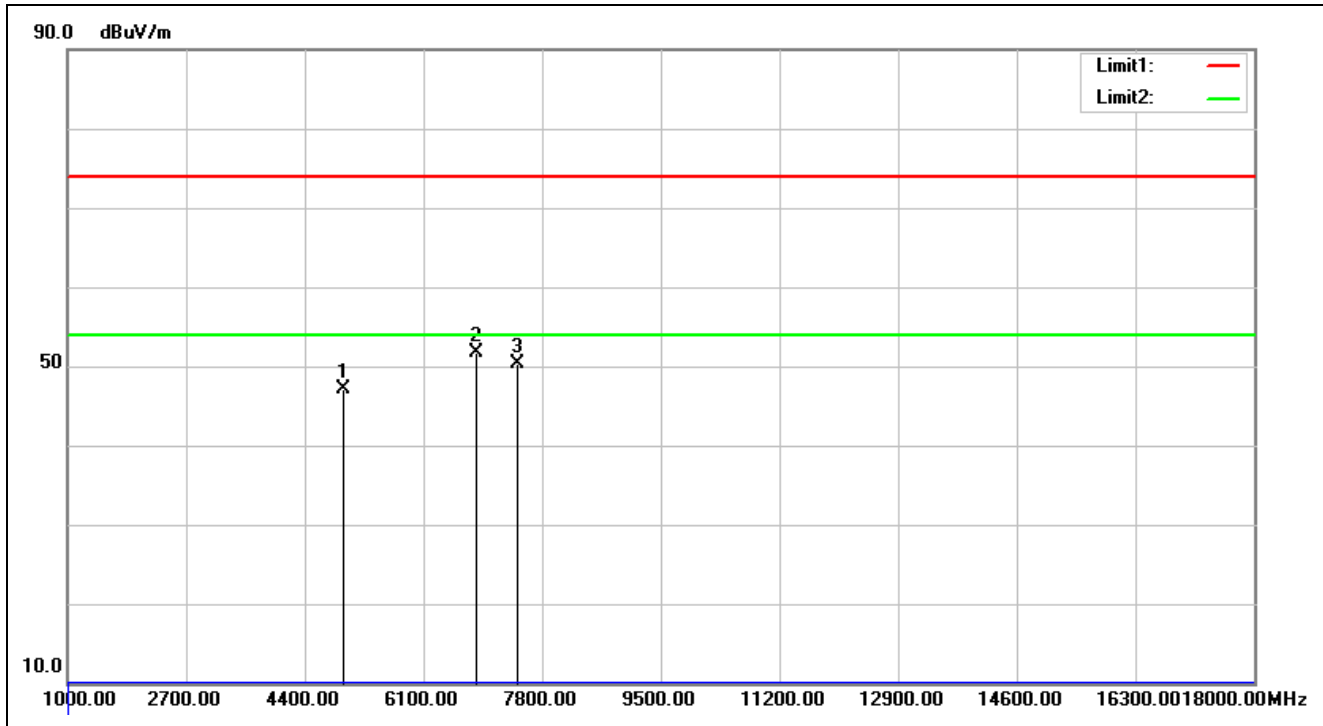

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 16:59:18
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-1.97	49.06	47.09	74.00	-26.91	peak			
2	6848.000	5.43	46.29	51.72	74.00	-22.28	peak	100	169	
3	7440.000	6.47	43.78	50.25	74.00	-23.75	peak			


Spurious Emissions, TX Mode, 18-26G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

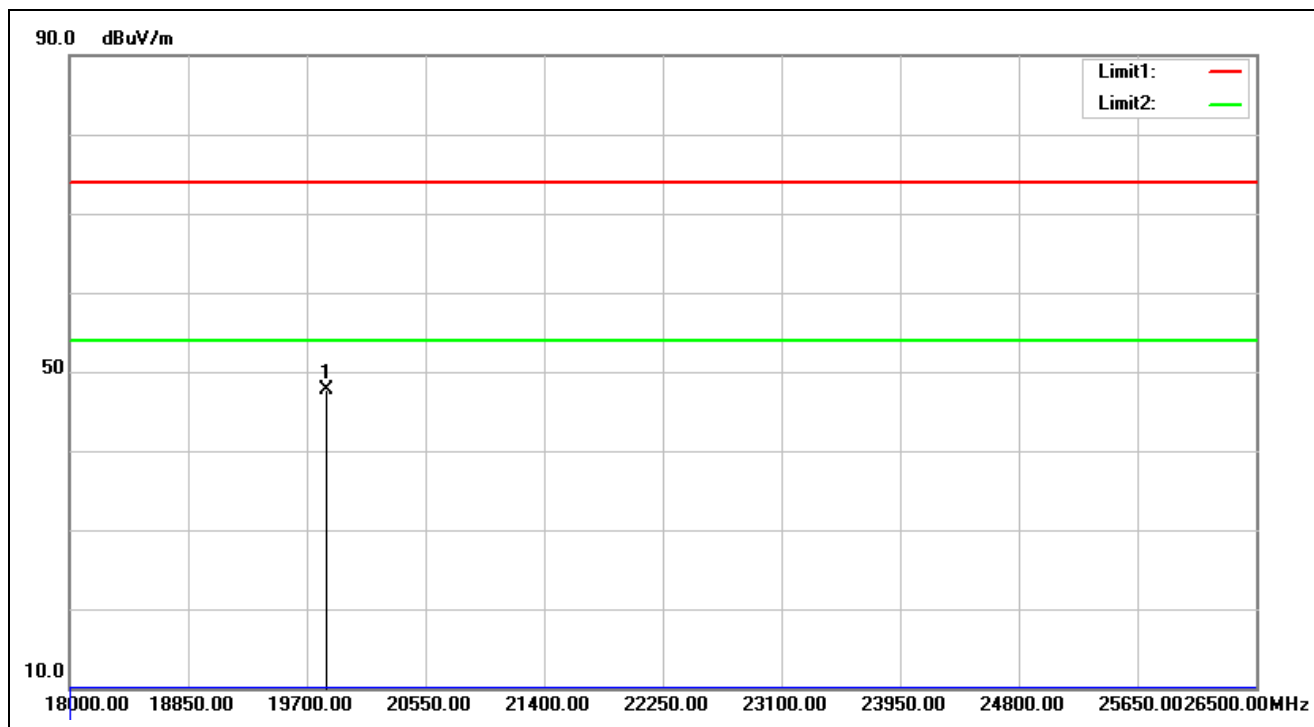


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:14:36
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19844.500	-1.04	48.81	47.77	74.00	-26.23	peak		0	

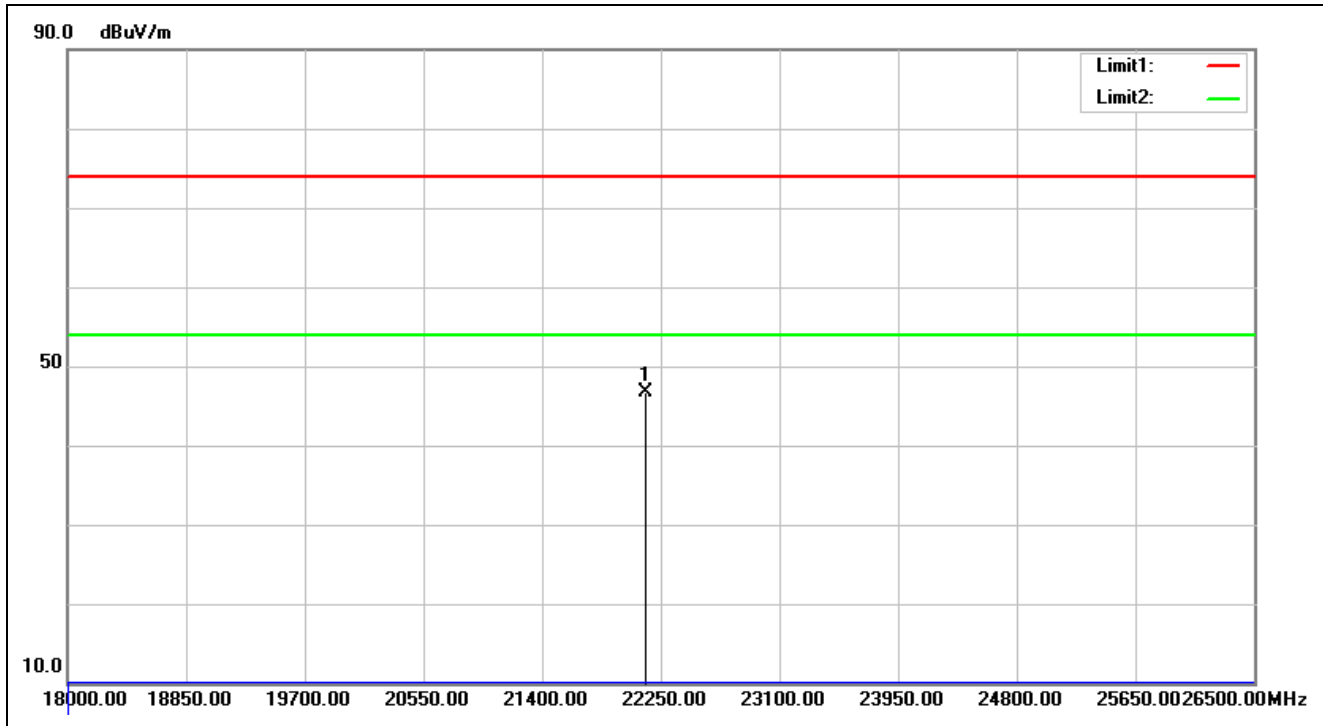


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:15:59
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22139.500	-1.21	47.95	46.74	74.00	-27.26	peak			

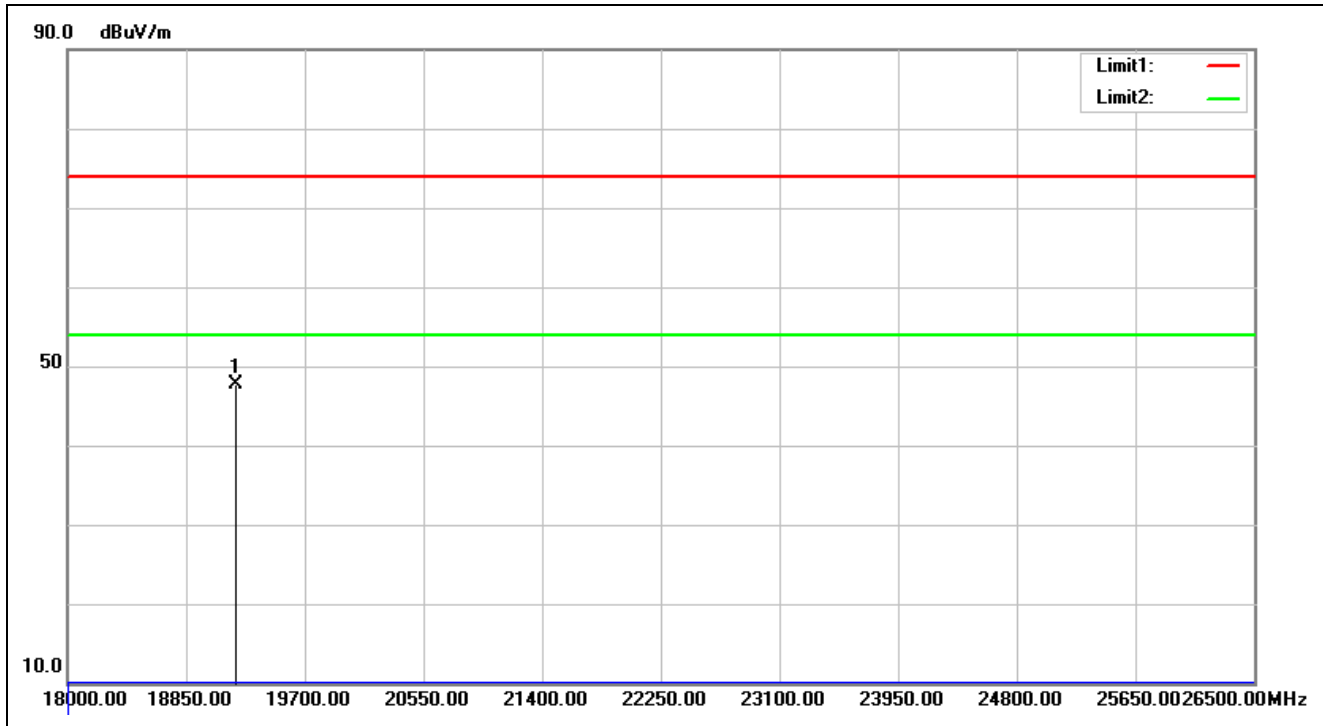


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:17:27
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19207.000	-1.41	49.07	47.66	74.00	-26.34	peak			

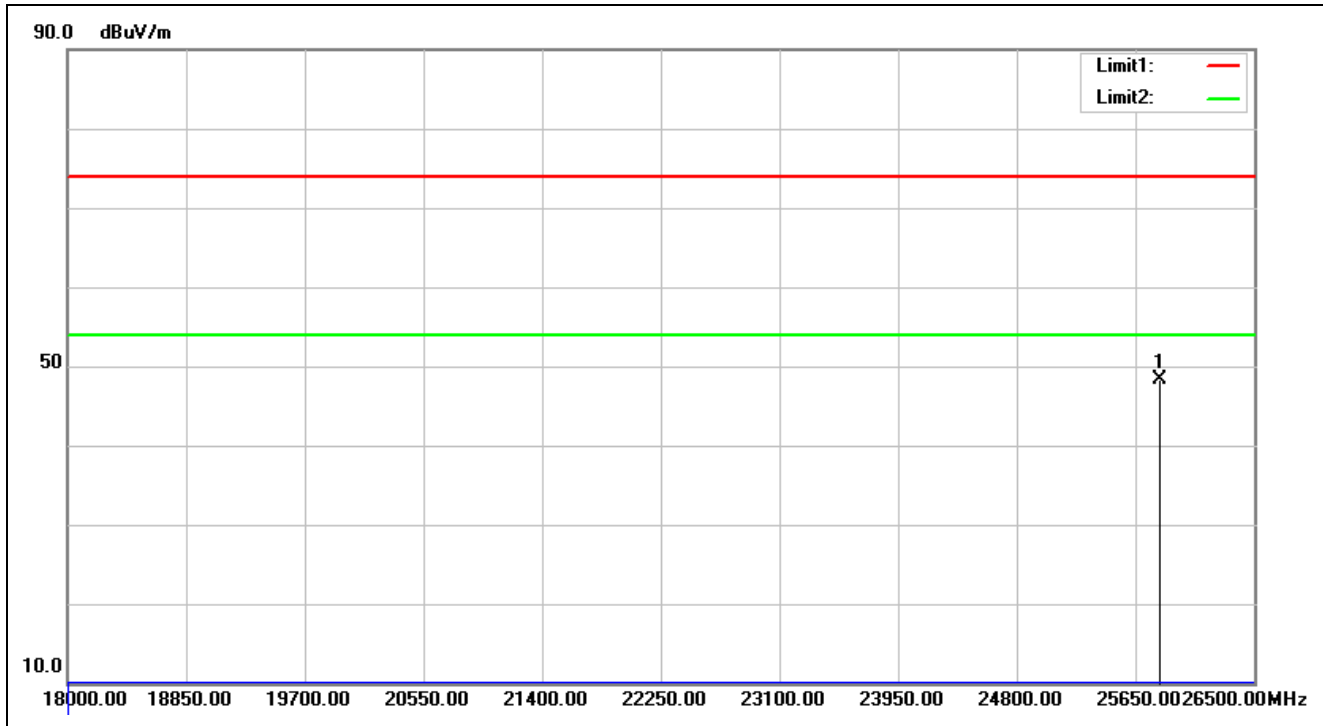


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:19:43
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	25828.500	2.51	45.86	48.37	74.00	-25.63	peak			

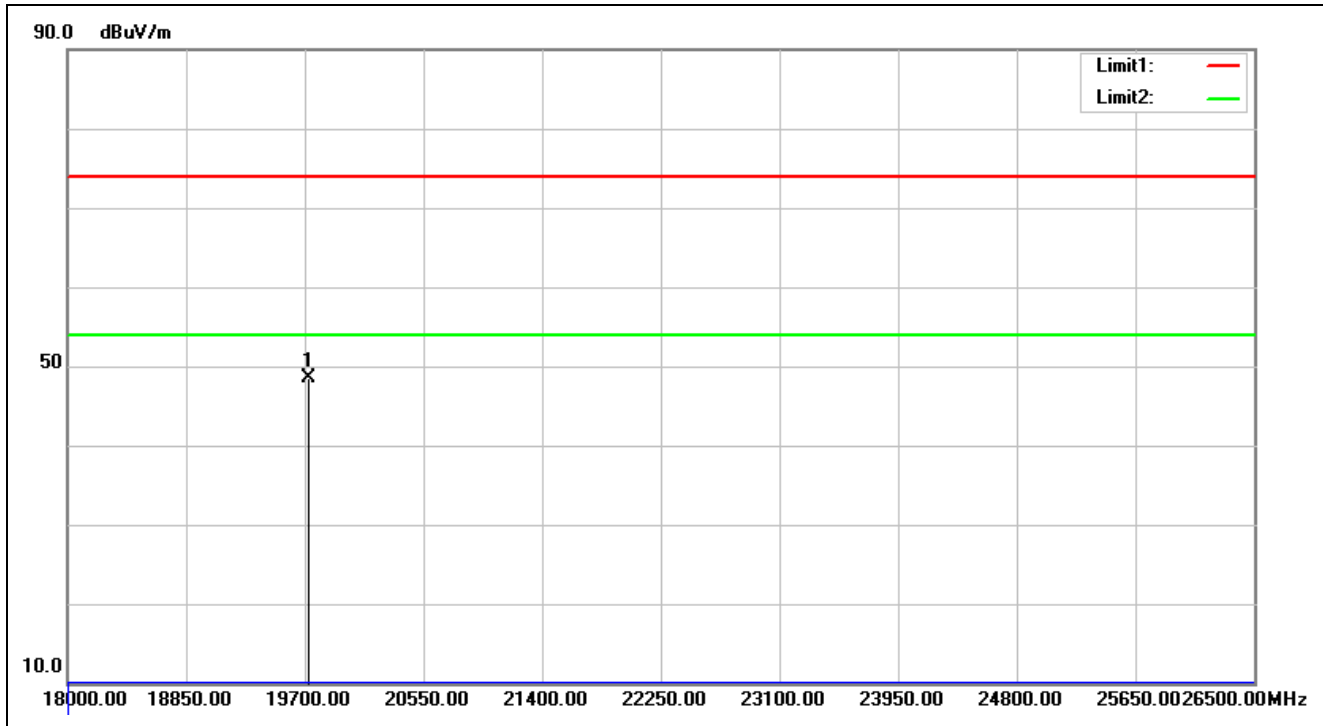


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:21:09
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19725.500	-1.09	49.51	48.42	74.00	-25.58	peak			

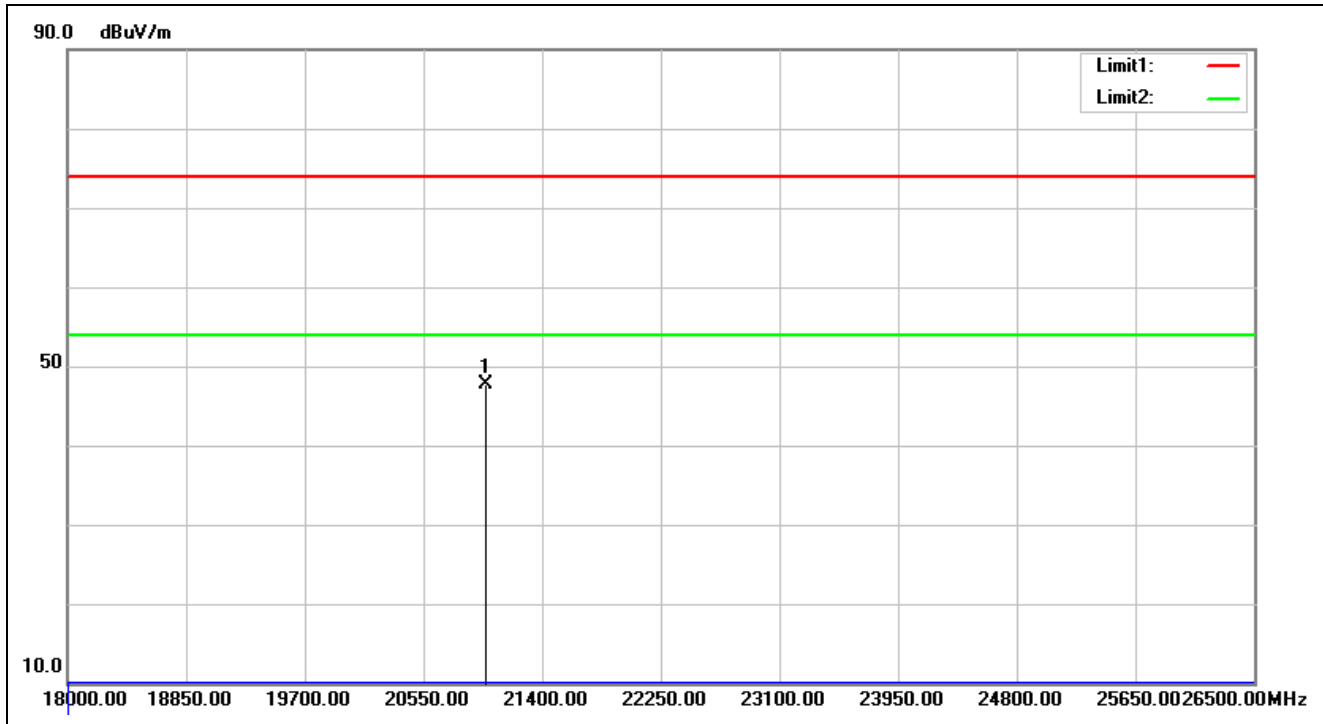


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:23:24
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21000.500	-0.43	48.07	47.64	74.00	-26.36	peak			

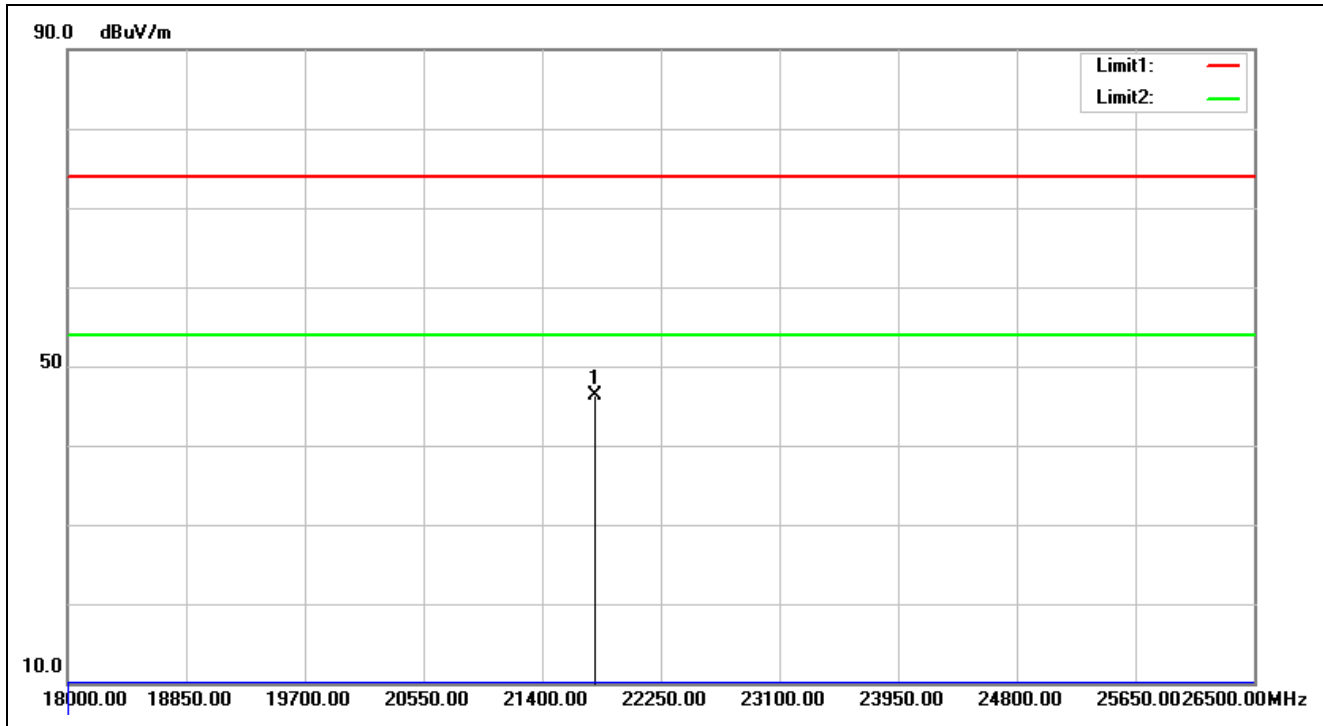


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:24:52
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21782.500	-1.30	47.53	46.23	74.00	-27.77	peak			

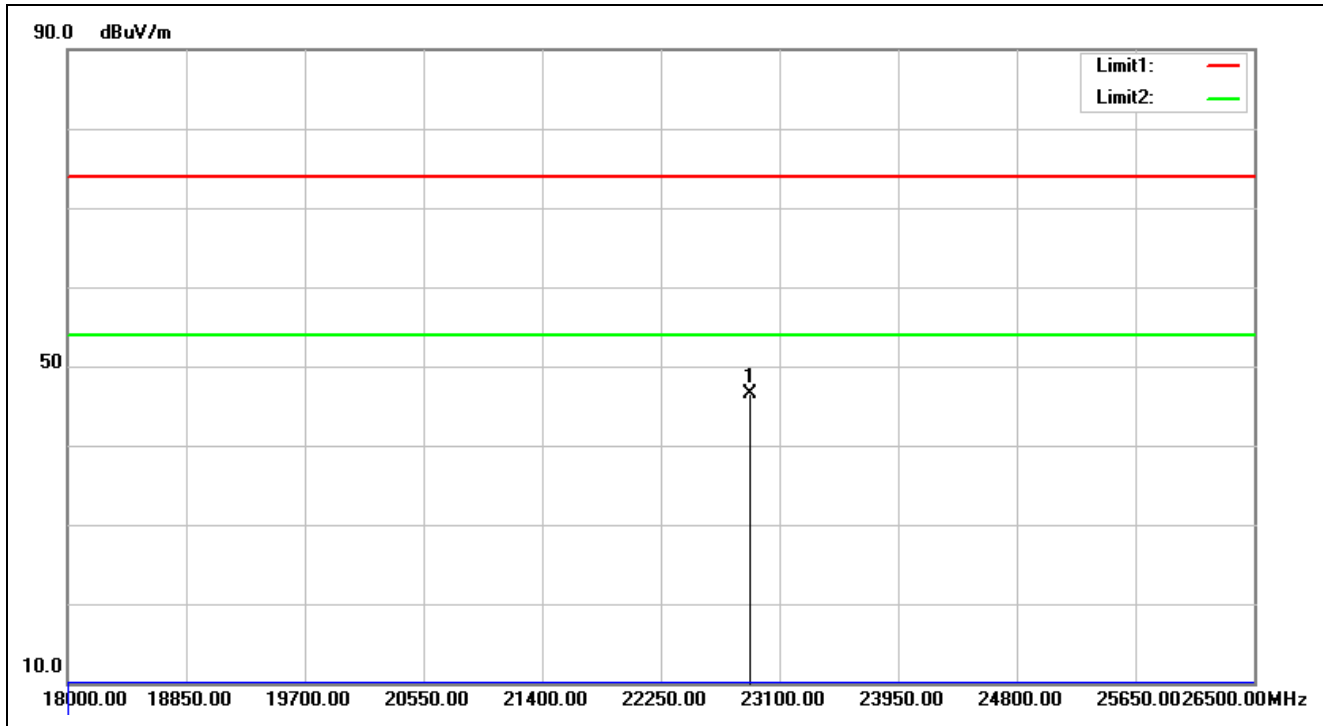


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:25:06
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22887.500	0.61	45.86	46.47	74.00	-27.53	peak			

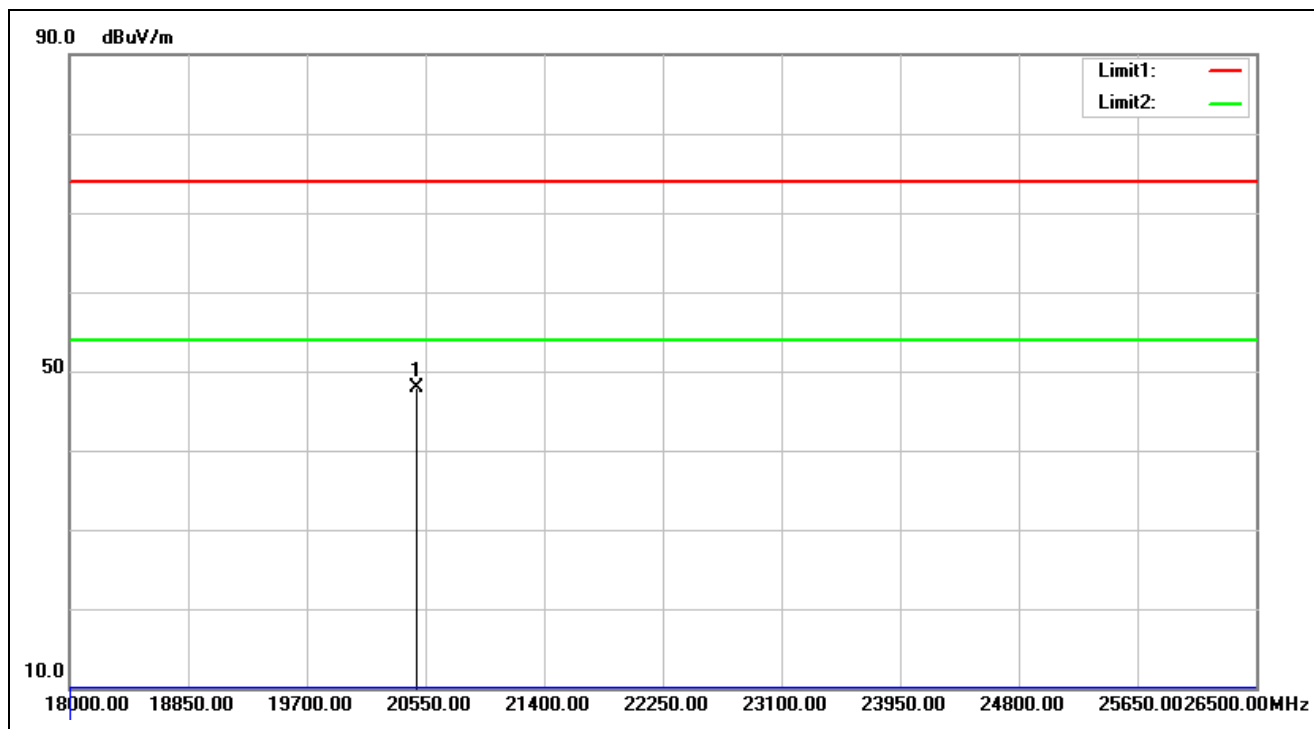


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:27:43
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20490.500	-0.68	48.49	47.81	74.00	-26.19	peak			

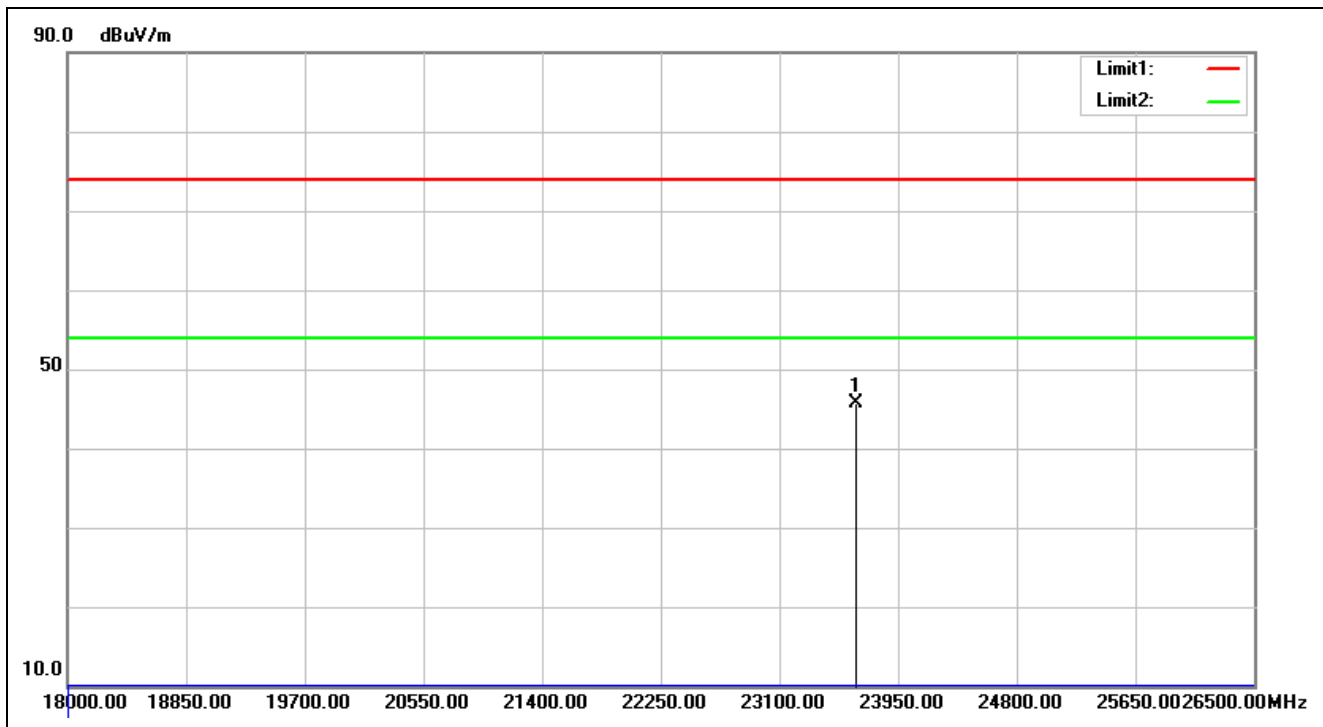


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:28:57
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23652.500	0.54	45.26	45.80	74.00	-28.20	peak			

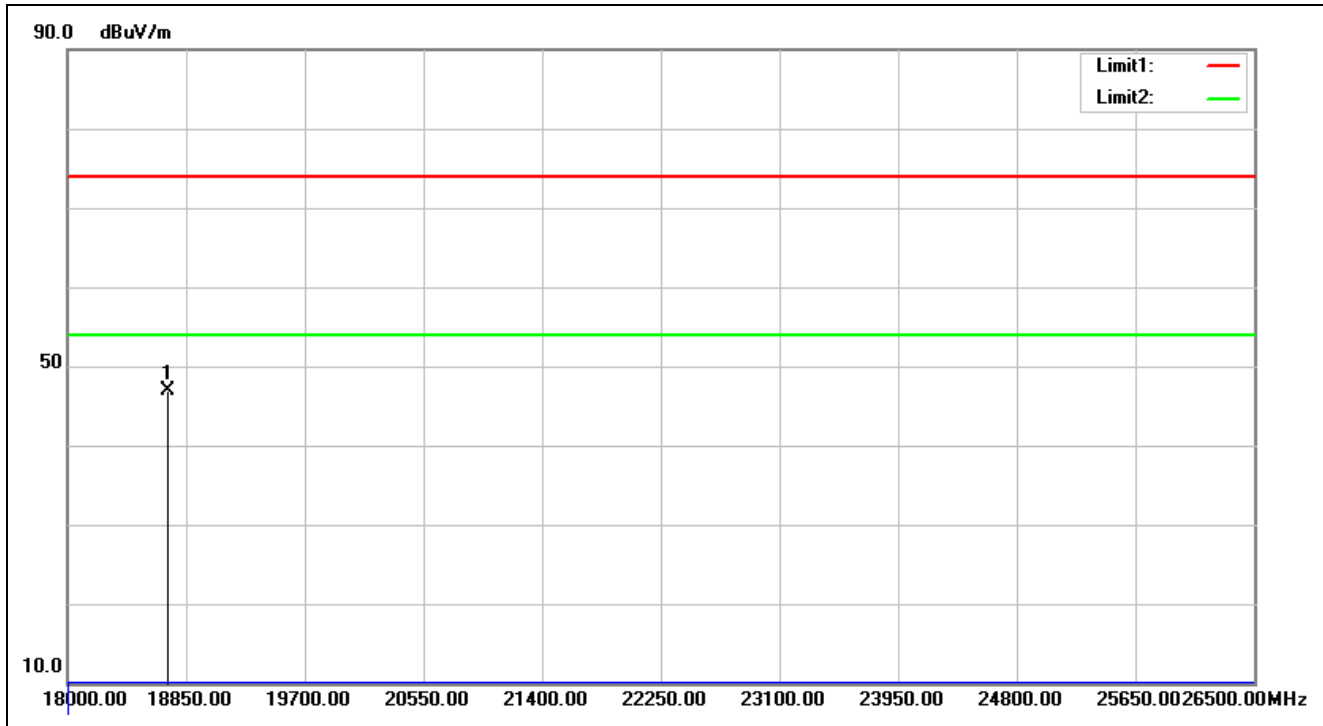

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:30:11
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18722.500	-1.59	48.41	46.82	74.00	-27.18	peak			

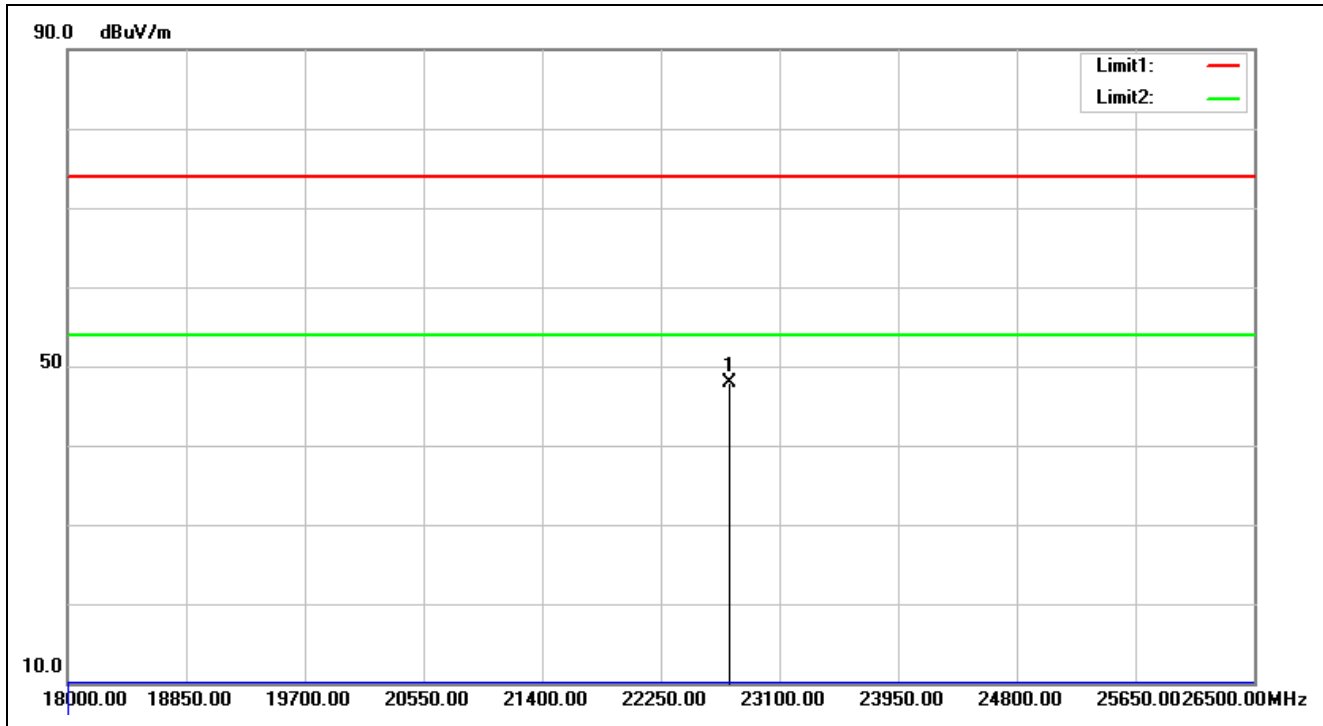

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:31:24
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-3DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22743.000	0.25	47.65	47.90	74.00	-26.10	peak			


Spurious Emissions, TX Mode, 30M-1G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

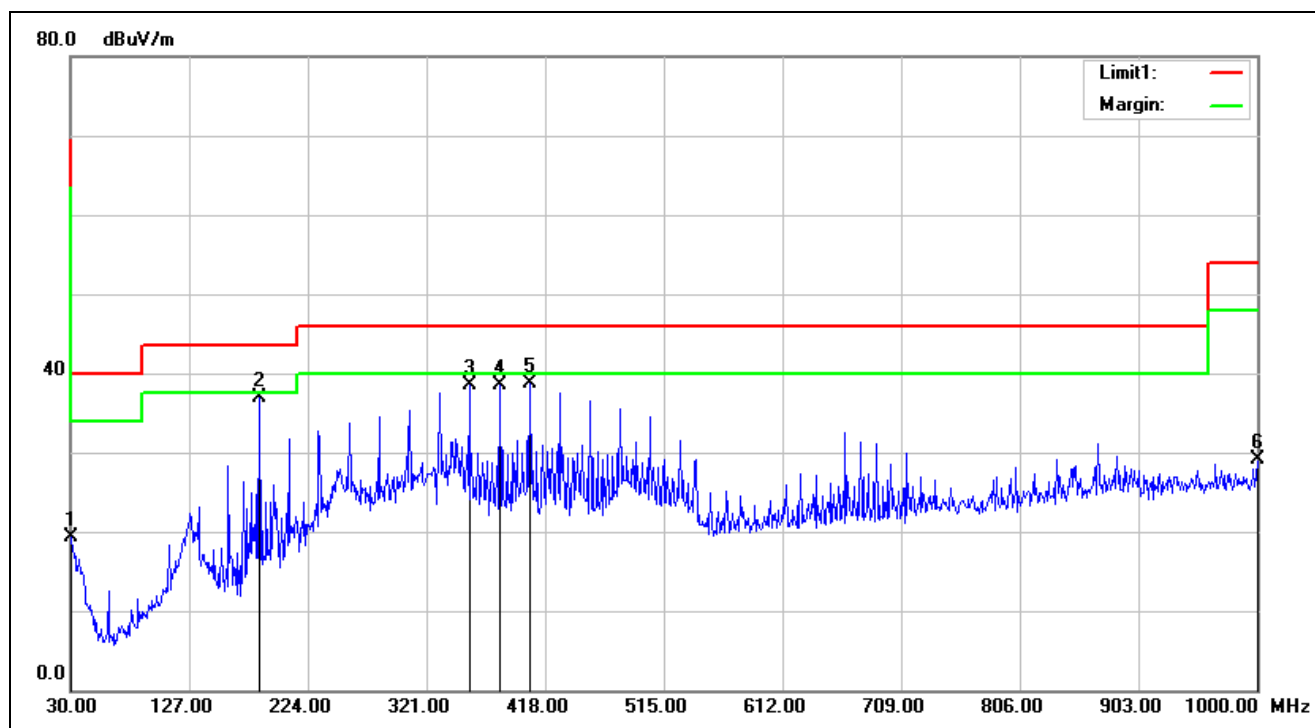

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 15:33:41
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-5.85	25.08	19.23	40.00	-20.77	QP	100	182	
2	184.2300	-15.56	52.49	36.93	43.50	-6.57	QP	100	293	
3	355.9200	-9.30	47.75	38.45	46.00	-7.55	QP	100	6	
4	381.1400	-8.94	47.49	38.55	46.00	-7.45	QP	100	357	
5	405.3900	-8.61	47.35	38.74	46.00	-7.26	QP	100	0	
6	1000.0000	0.01	29.19	29.20	54.00	-24.80	QP	100	14	

Spurious Emissions, RX Mode, 1-18G

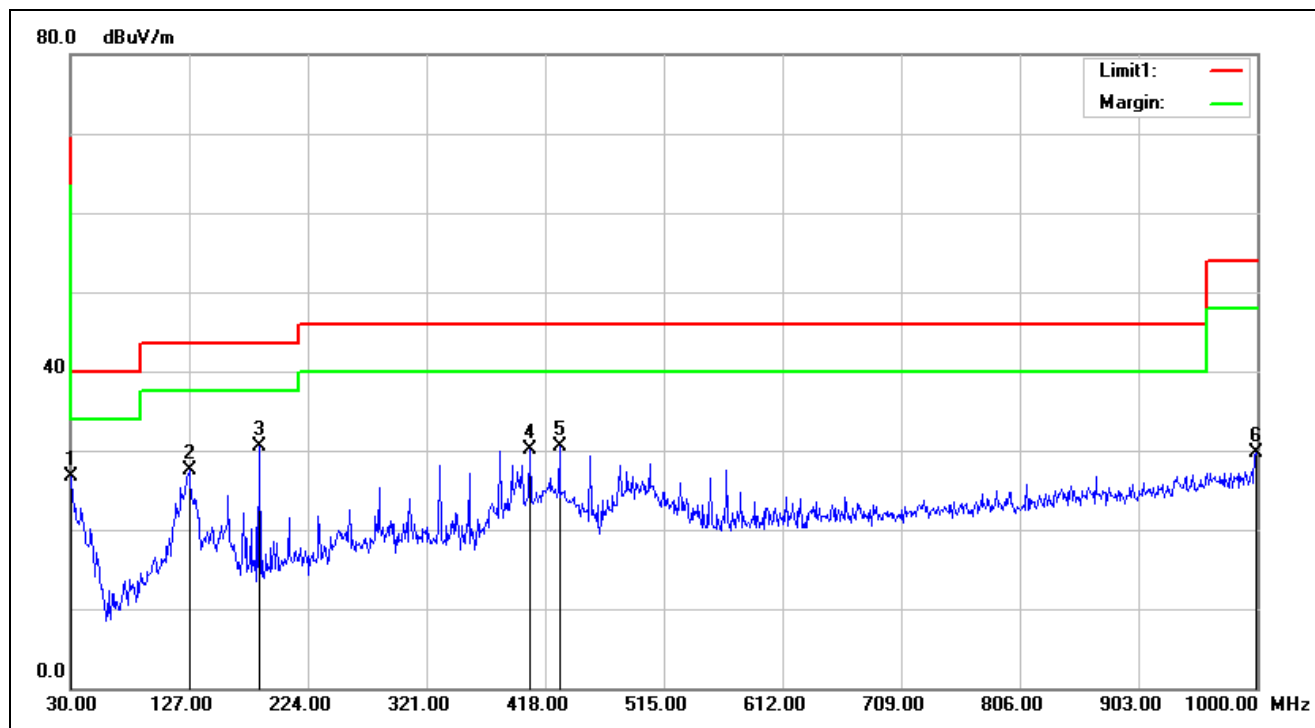

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 15:34:43
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	TX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-5.85	32.61	26.76	40.00	-13.24	QP	100	219	
2	127.0000	-12.77	40.19	27.42	43.50	-16.08	QP	100	224	
3	184.2300	-15.56	46.01	30.45	43.50	-13.05	QP	100	283	
4	405.3900	-8.61	38.81	30.20	46.00	-15.80	QP	100	120	
5	429.6400	-8.30	38.72	30.42	46.00	-15.58	QP	100	293	
6	999.0300	0.00	29.77	29.77	54.00	-24.23	QP	100	307	


Spurious Emissions, RX Mode, 1-18G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

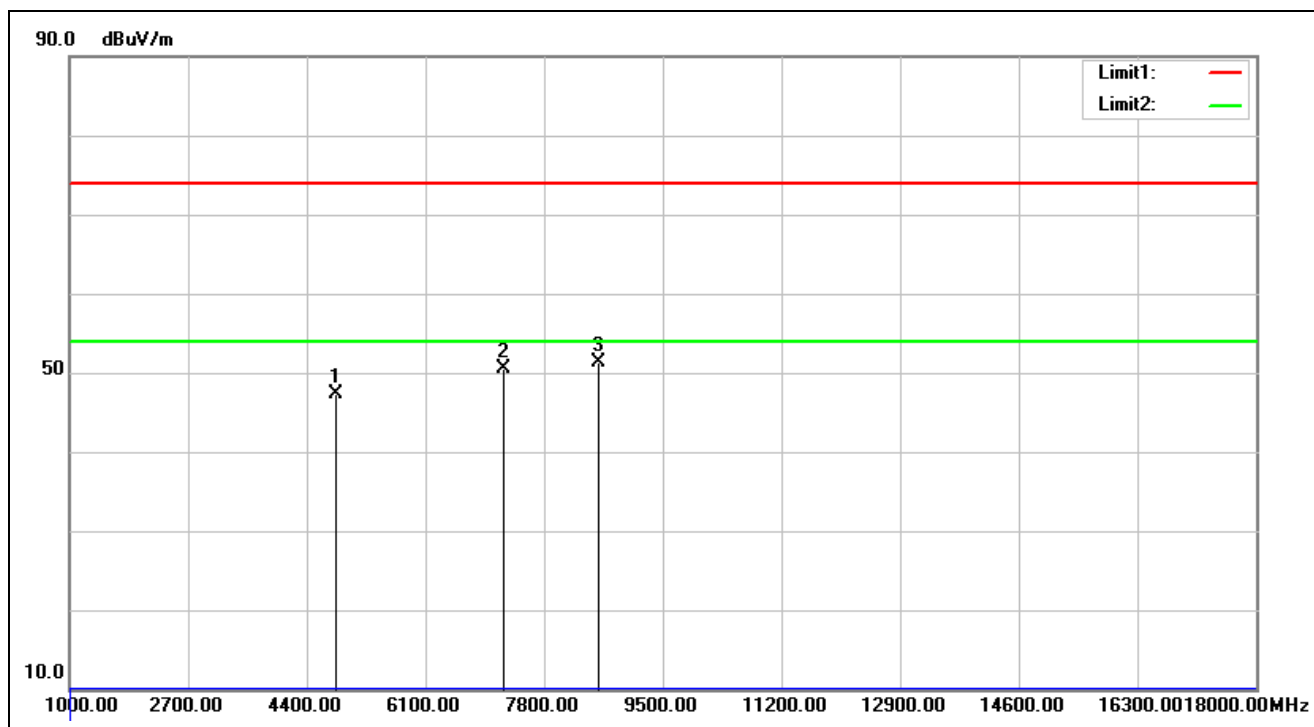


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 17:06:16
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.35	49.65	47.30	74.00	-26.70	peak		0	
2	7206.000	5.78	44.67	50.45	74.00	-23.55	peak		0	
3	8582.000	6.82	44.49	51.31	74.00	-22.69	peak	100	354	

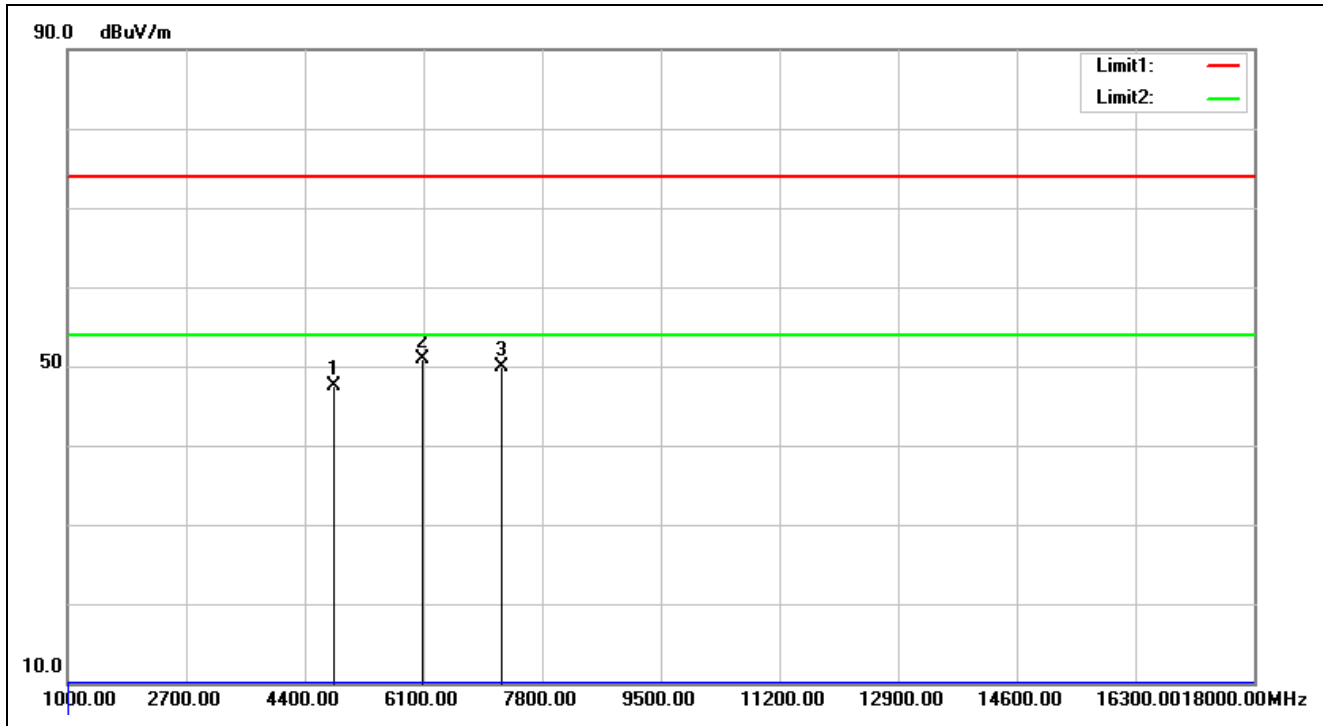


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 17:07:18
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.35	49.77	47.42	74.00	-26.58	peak			
2	6083.000	4.41	46.41	50.82	74.00	-23.18	peak	100	94	
3	7206.000	5.78	44.15	49.93	74.00	-24.07	peak			

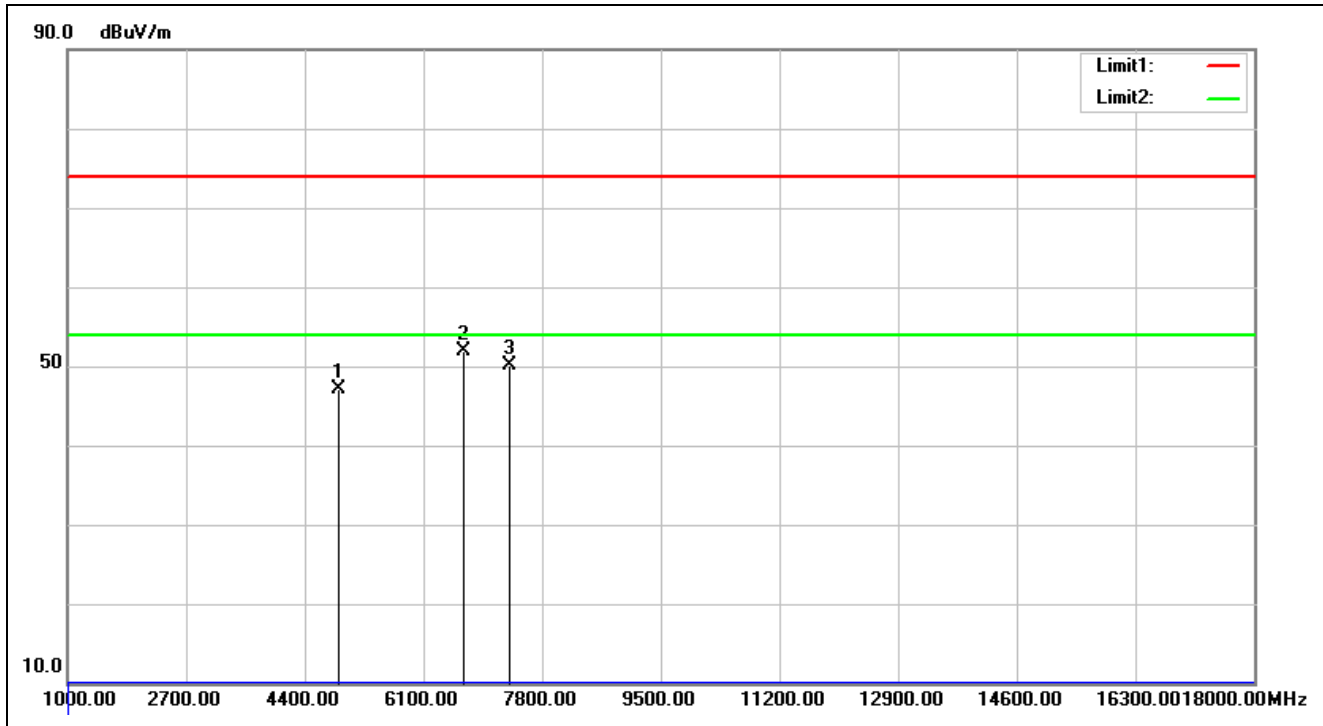


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 17:11:38
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4882.000	-2.16	49.19	47.03	74.00	-26.97	peak			
2	6678.000	5.73	46.10	51.83	74.00	-22.17	peak	100	9	
3	7323.000	6.13	43.98	50.11	74.00	-23.89	peak			

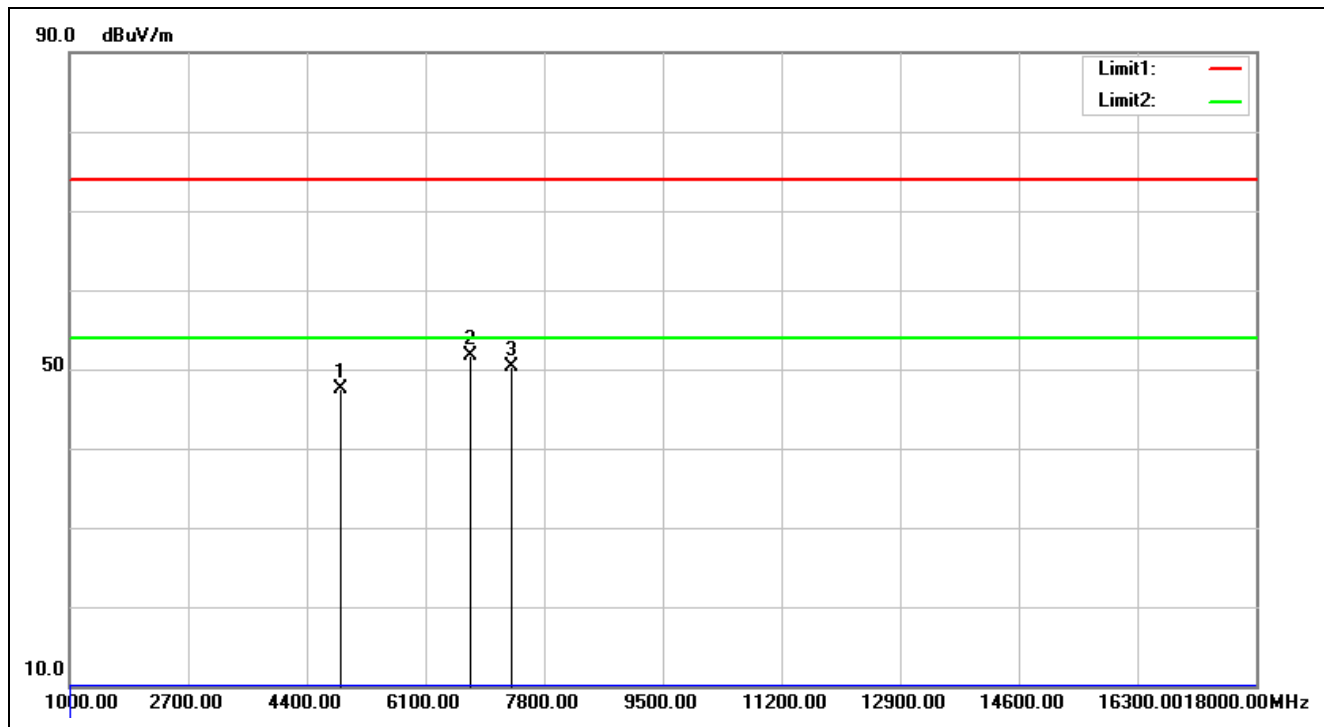


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 17:12:40
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4882.000	-2.16	49.60	47.44	74.00	-26.56	peak			
2	6746.000	5.60	46.01	51.61	74.00	-22.39	peak	100	307	
3	7323.000	6.13	44.11	50.24	74.00	-23.76	peak			

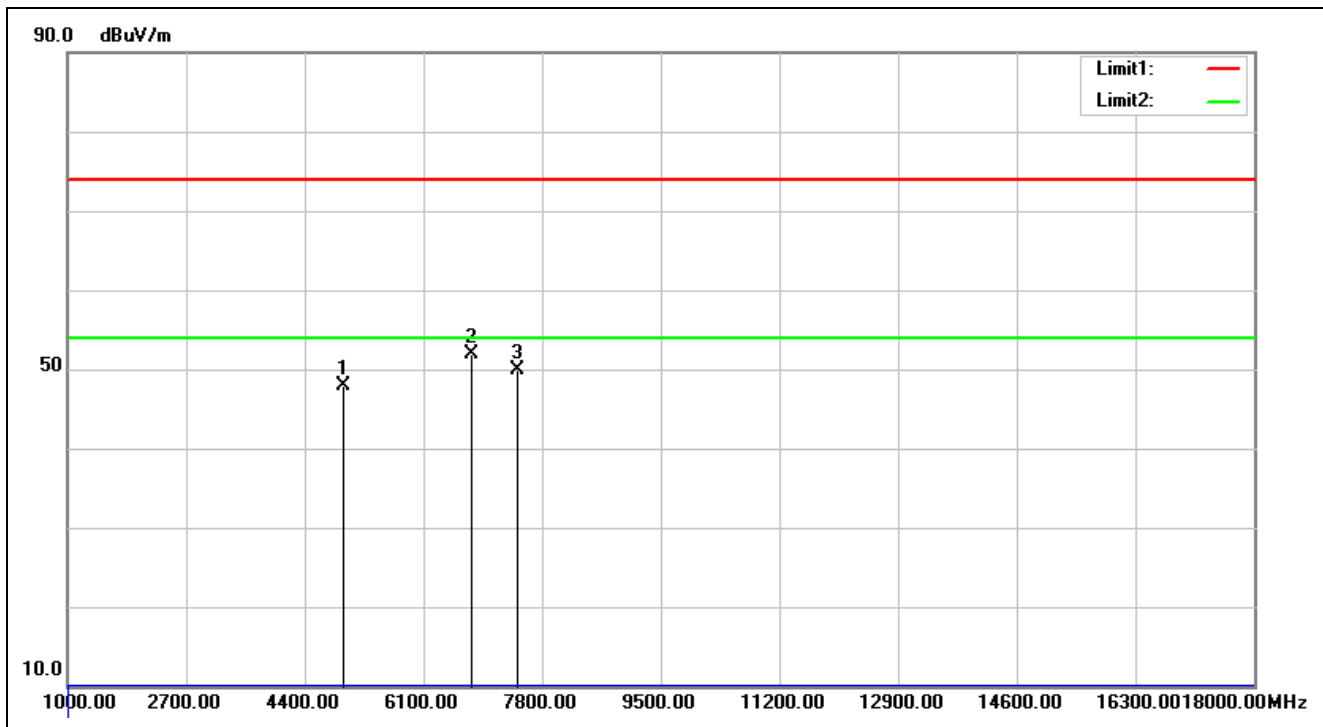


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 17:16:19
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-1.97	49.81	47.84	74.00	-26.16	peak			
2	6780.000	5.55	46.30	51.85	74.00	-22.15	peak	100	178	
3	7440.000	6.47	43.36	49.83	74.00	-24.17	peak			

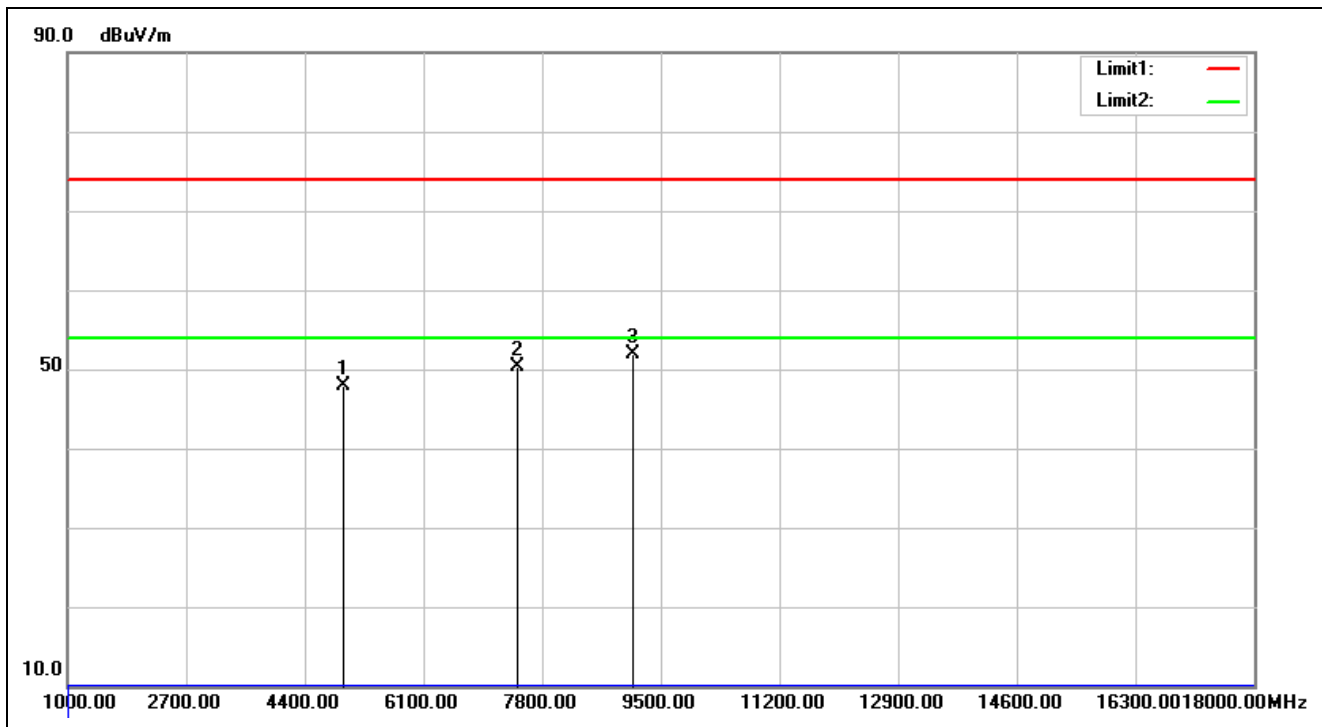


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 17:17:21
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-1.97	49.94	47.97	74.00	-26.03	peak			
2	7440.000	6.47	43.79	50.26	74.00	-23.74	peak			
3	9109.000	7.26	44.68	51.94	74.00	-22.06	peak	100	287	

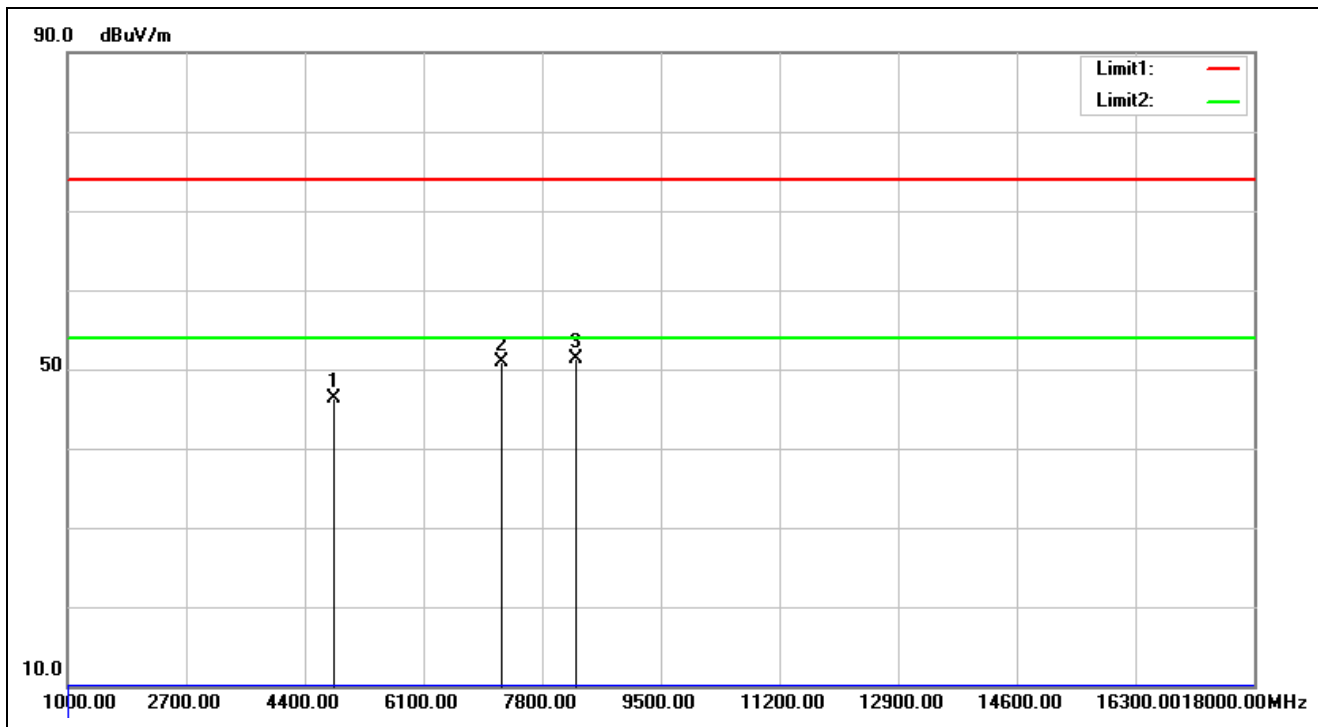


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 17:19:51
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.35	48.64	46.29	74.00	-27.71	peak			
2	7206.000	5.78	45.16	50.94	74.00	-23.06	peak			
3	8293.000	6.65	44.56	51.21	74.00	-22.79	peak	100	242	

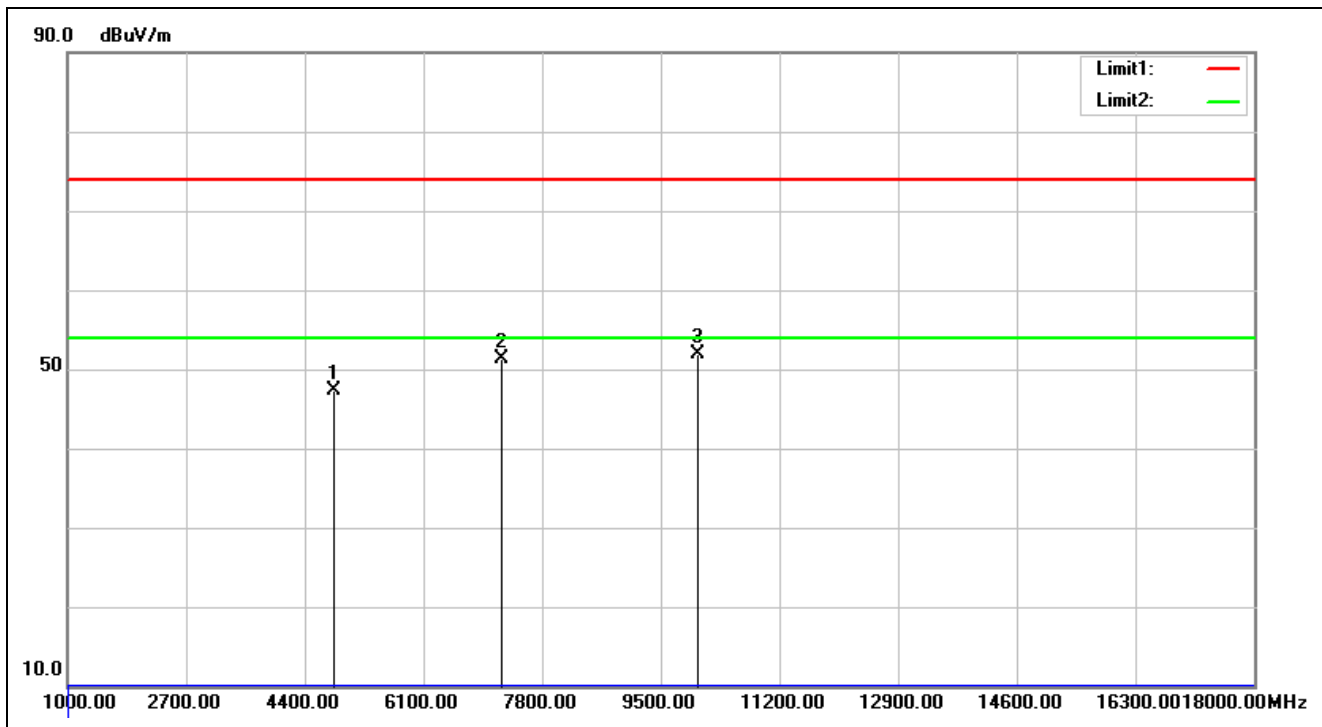


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 17:20:54
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4804.000	-2.35	49.75	47.40	74.00	-26.60	peak			
2	7206.000	5.78	45.52	51.30	74.00	-22.70	peak			
3	10027.000	5.86	46.04	51.90	74.00	-22.10	peak	100	111	

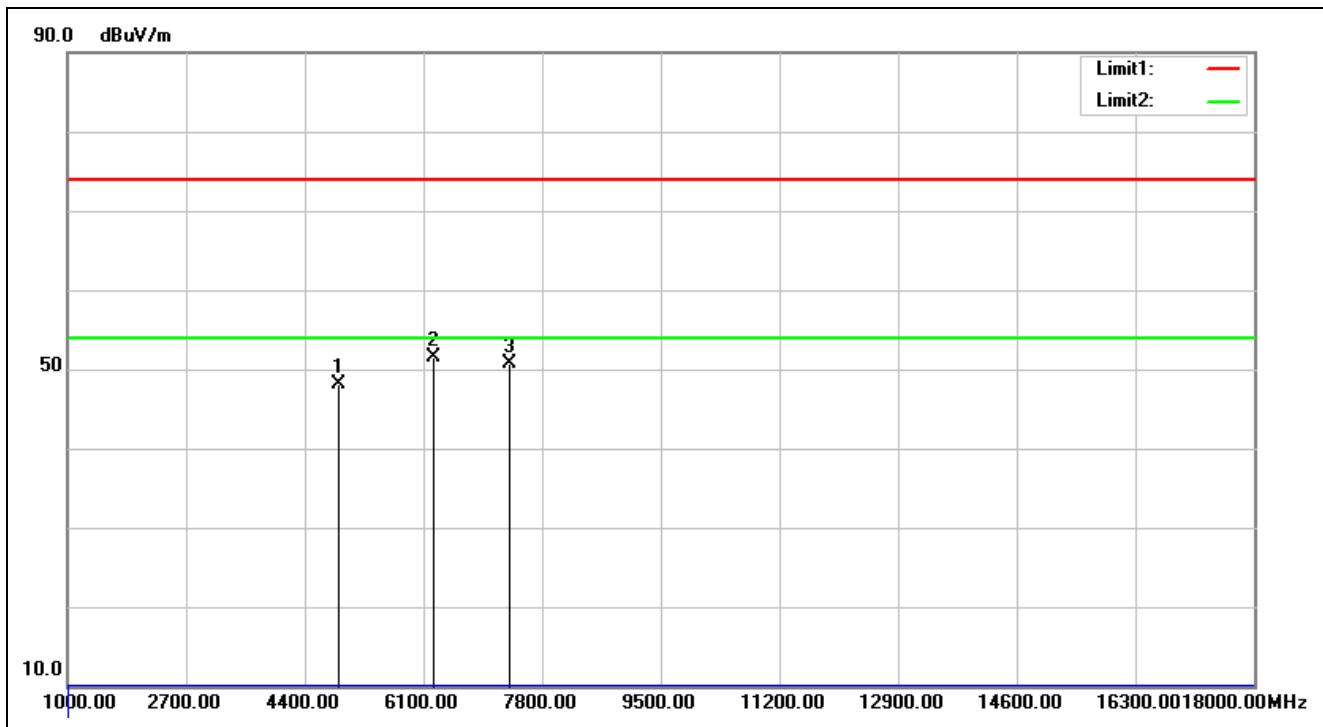


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 17:23:48
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4882.000	-2.16	50.29	48.13	74.00	-25.87	peak			
2	6253.000	5.07	46.35	51.42	74.00	-22.58	peak	100	310	
3	7323.000	6.13	44.62	50.75	74.00	-23.25	peak			

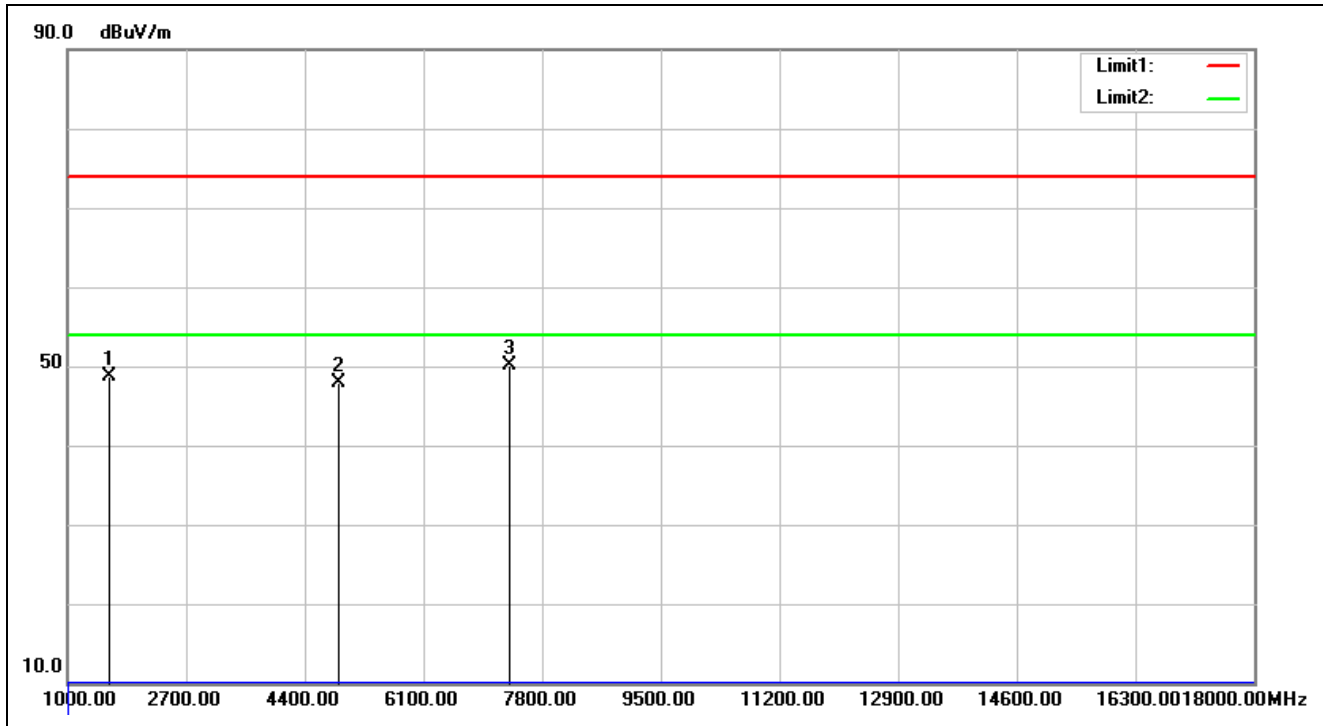


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 17:24:50
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1595.000	-9.63	58.39	48.76	74.00	-25.24	peak	100	254	
2	4882.000	-2.16	50.03	47.87	74.00	-26.13	peak			
3	7323.000	6.13	43.99	50.12	74.00	-23.88	peak			

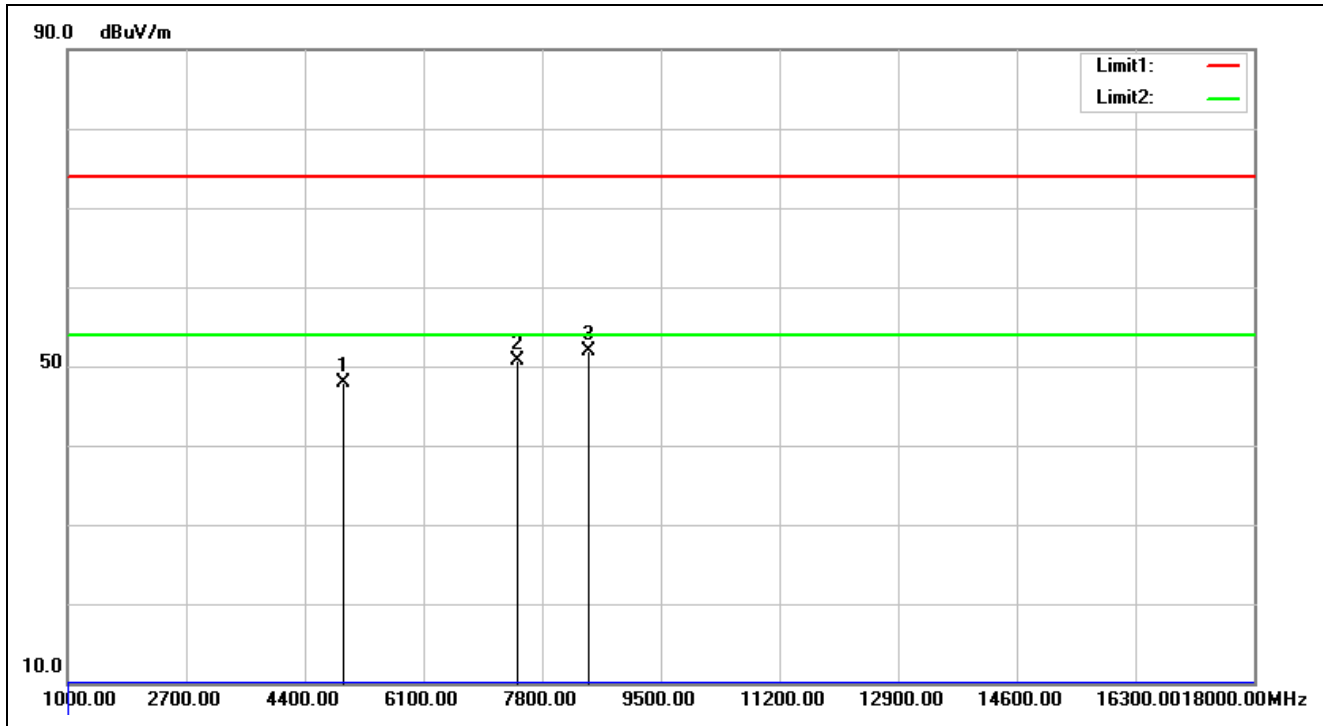

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 17:26:36
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-1.97	49.78	47.81	74.00	-26.19	peak			
2	7440.000	6.47	44.20	50.67	74.00	-23.33	peak			
3	8463.000	6.70	45.23	51.93	74.00	-22.07	peak	100	220	

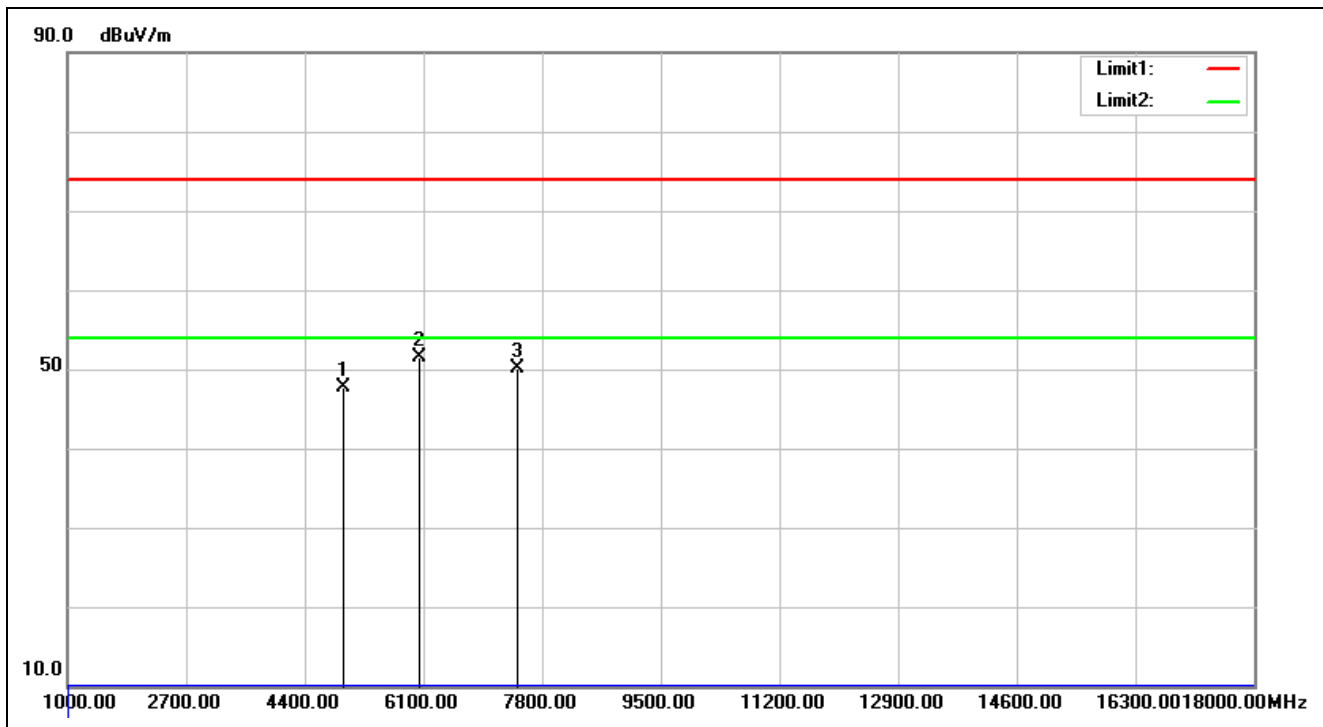

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 17:27:39
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4960.000	-1.97	49.68	47.71	74.00	-26.29	peak			
2	6032.000	4.21	47.32	51.53	74.00	-22.47	peak	100	260	
3	7440.000	6.47	43.58	50.05	74.00	-23.95	peak			


Spurious Emissions, RX Mode, 18-26G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

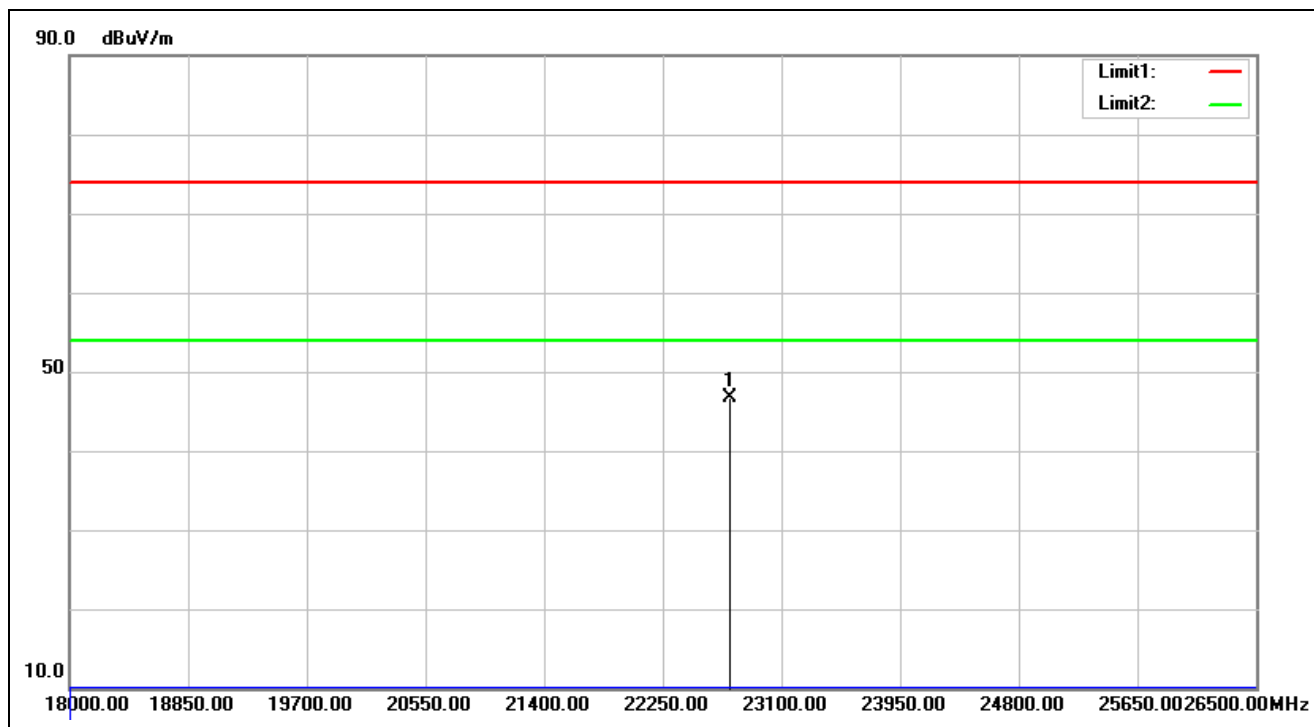


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:33:11
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22734.500	0.23	46.53	46.76	74.00	-27.24	peak			

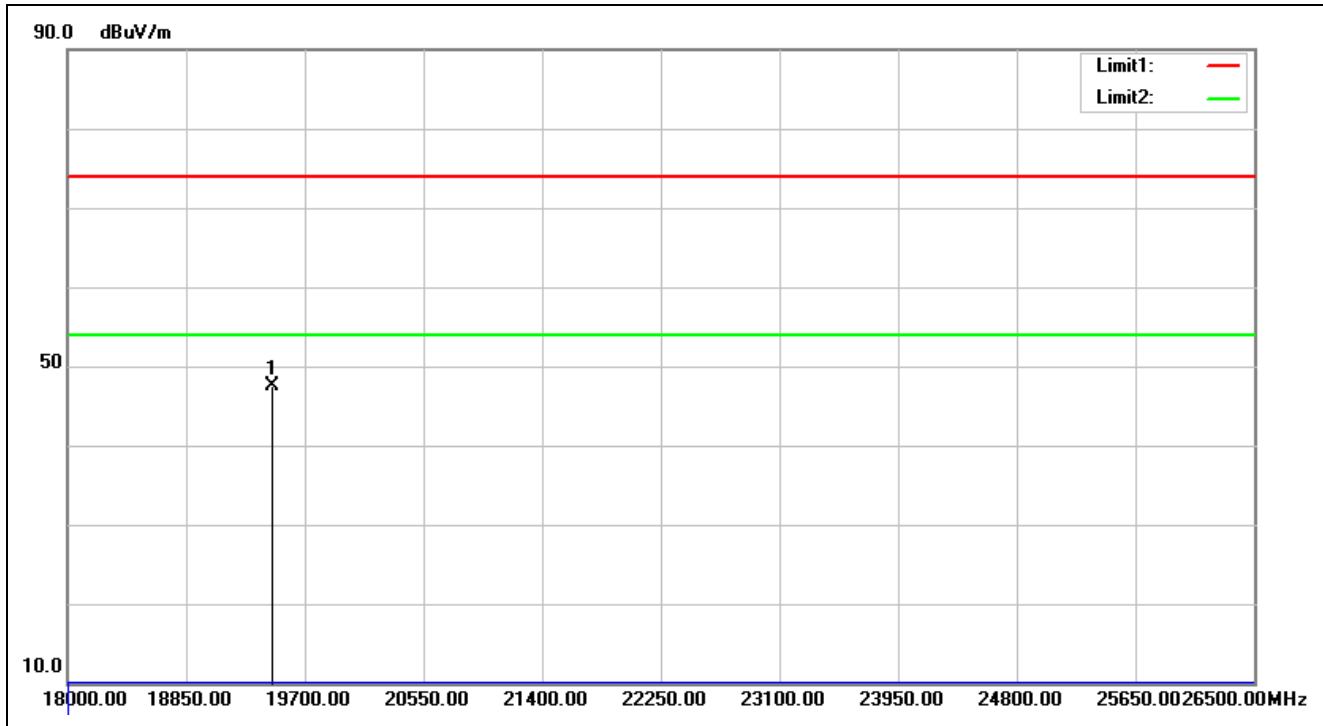


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:34:19
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19470.500	-1.25	48.73	47.48	74.00	-26.52	peak			

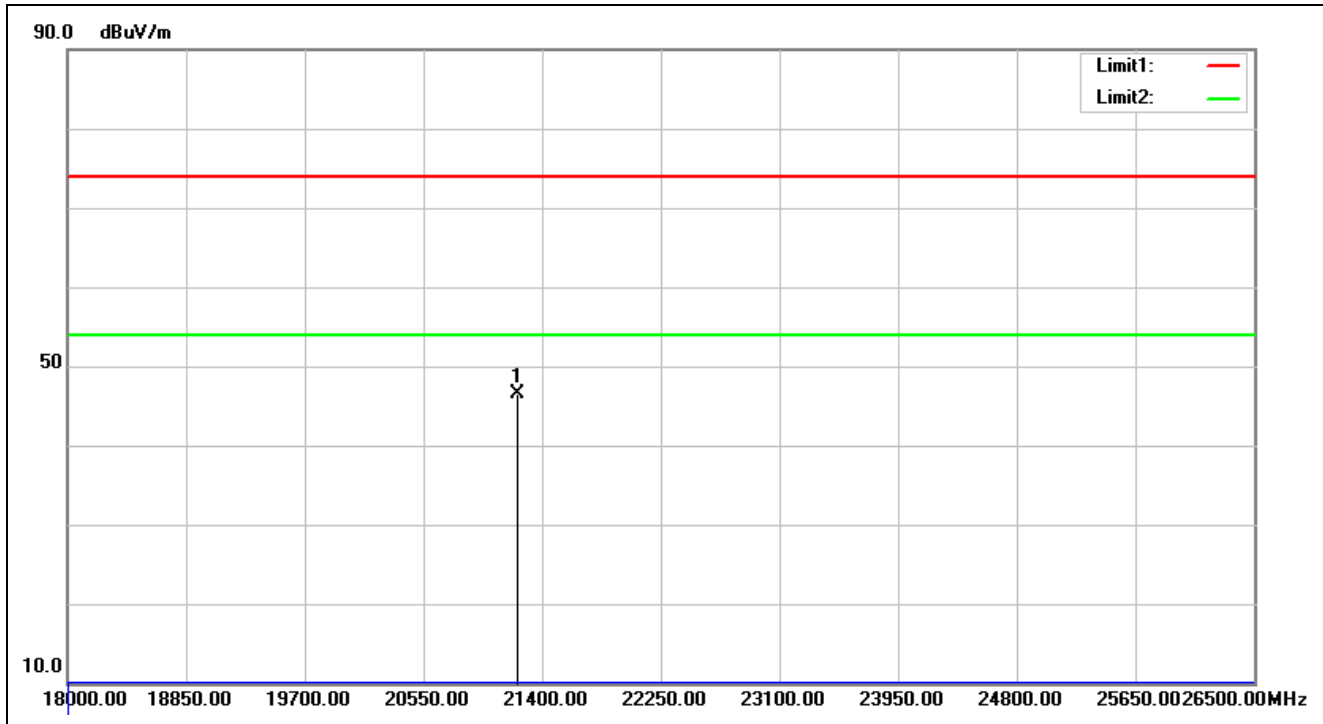


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:36:37
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21221.500	-0.68	47.14	46.46	74.00	-27.54	peak			

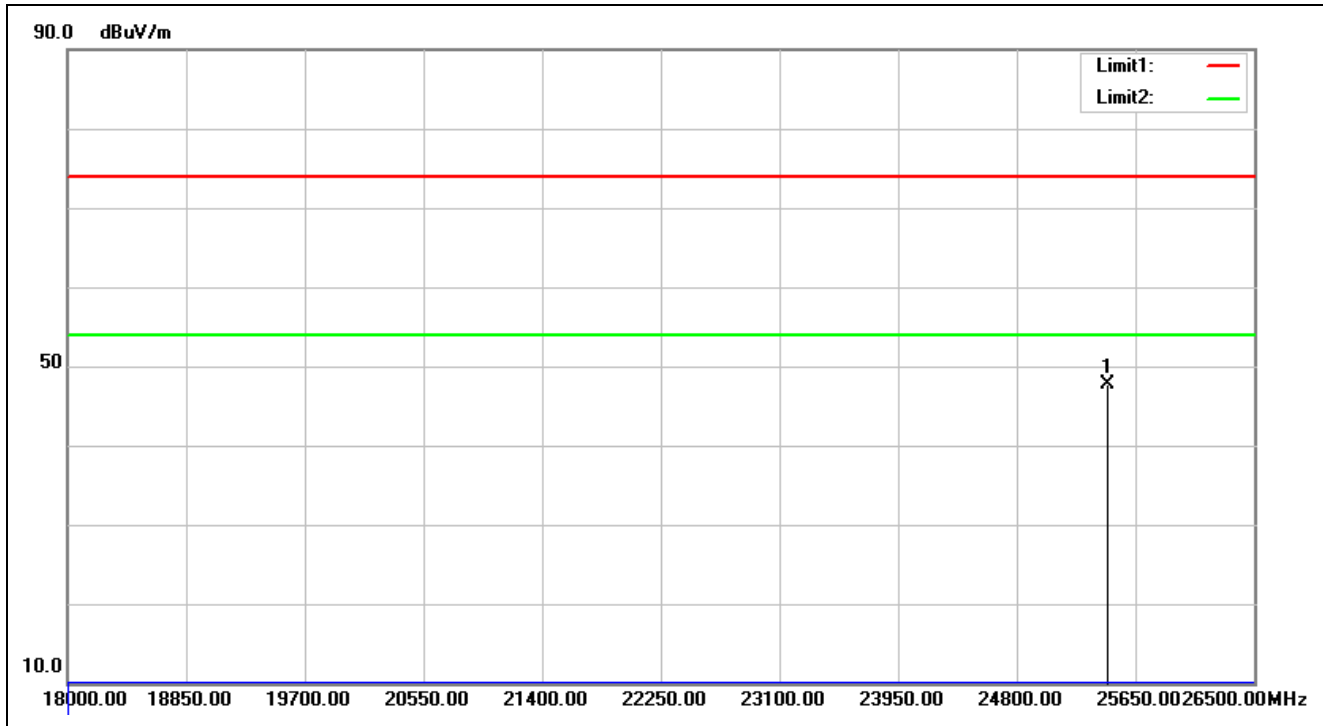


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:37:47
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	25454.500	2.01	45.77	47.78	74.00	-26.22	peak			

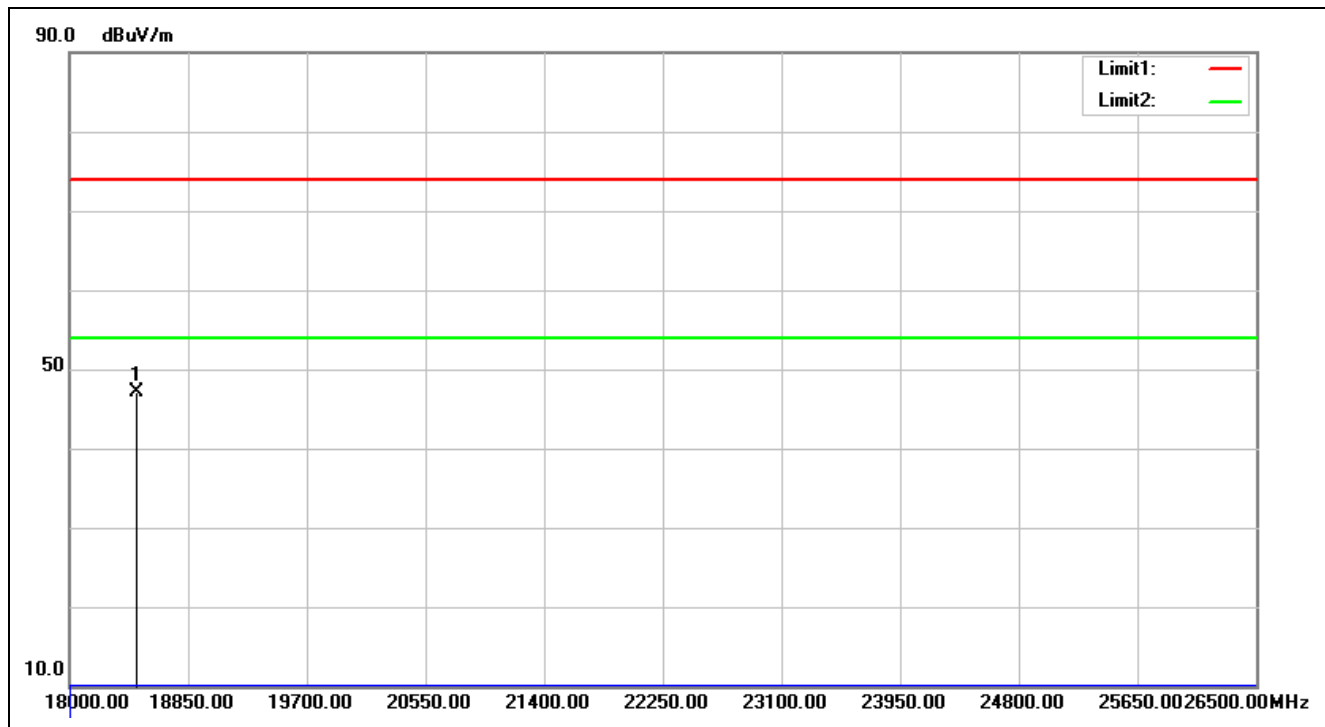


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:40:10
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18476.000	-1.63	48.76	47.13	74.00	-26.87	peak			

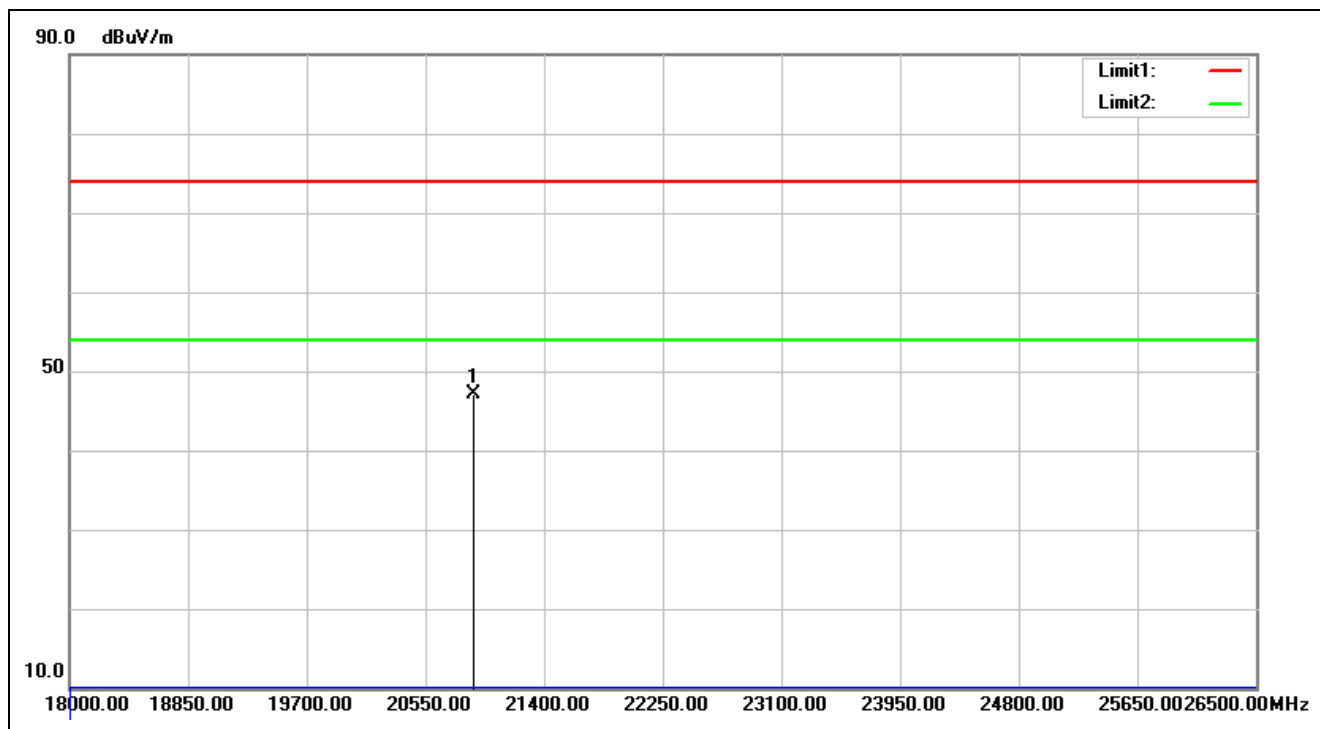


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:42:17
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20898.500	-0.48	47.49	47.01	74.00	-26.99	peak			

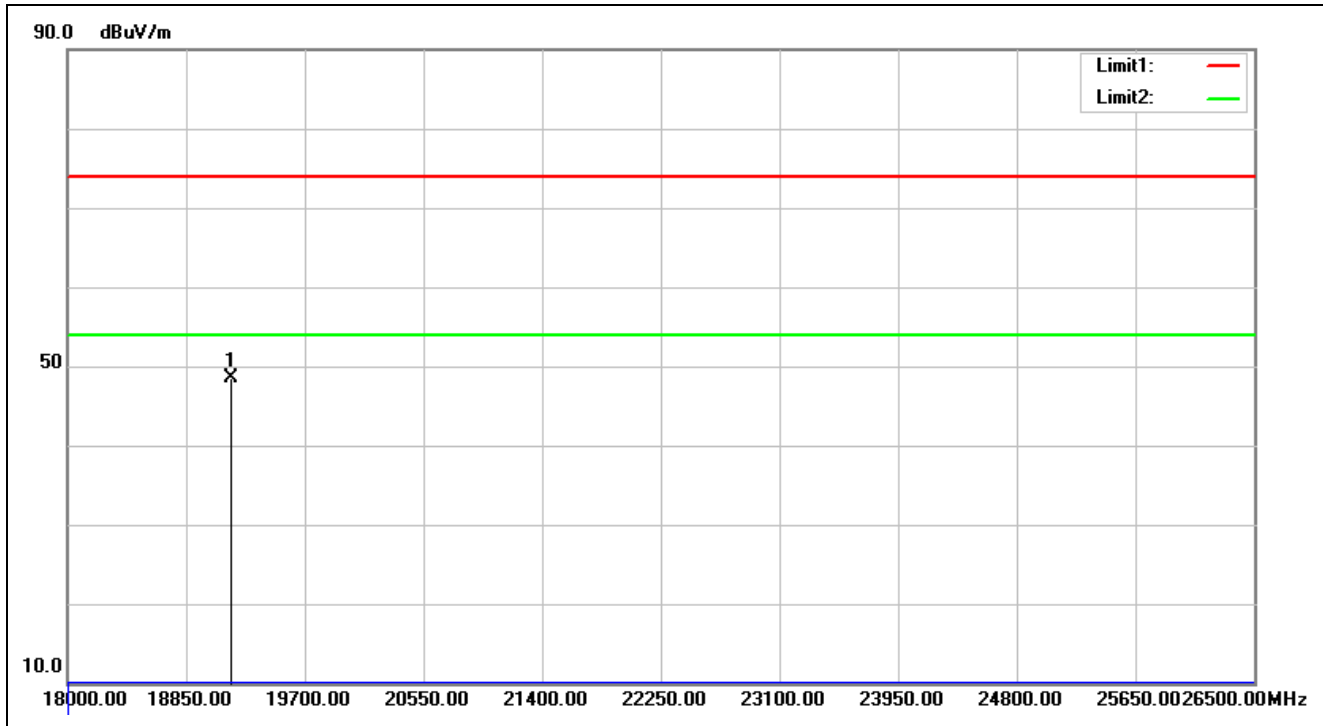


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:44:38
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19173.000	-1.43	49.89	48.46	74.00	-25.54	peak			

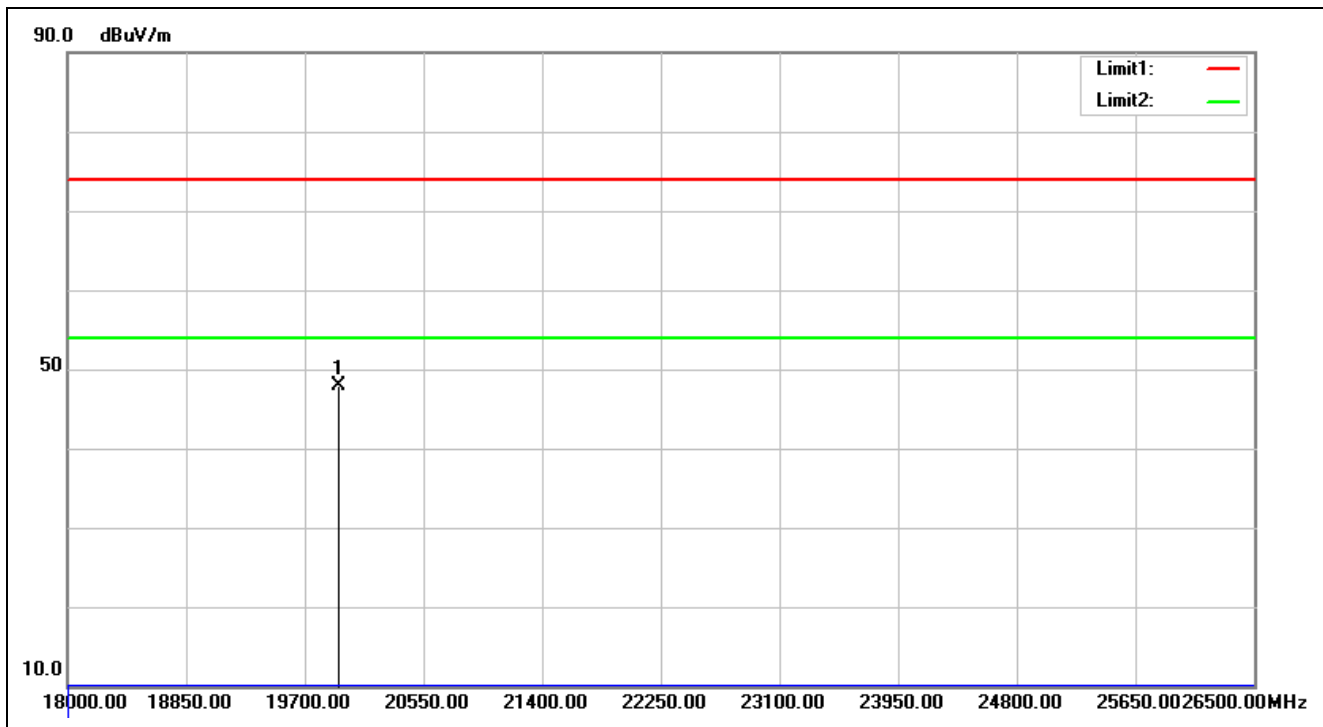


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:45:47
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2402		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19938.000	-0.98	48.93	47.95	74.00	-26.05	peak			

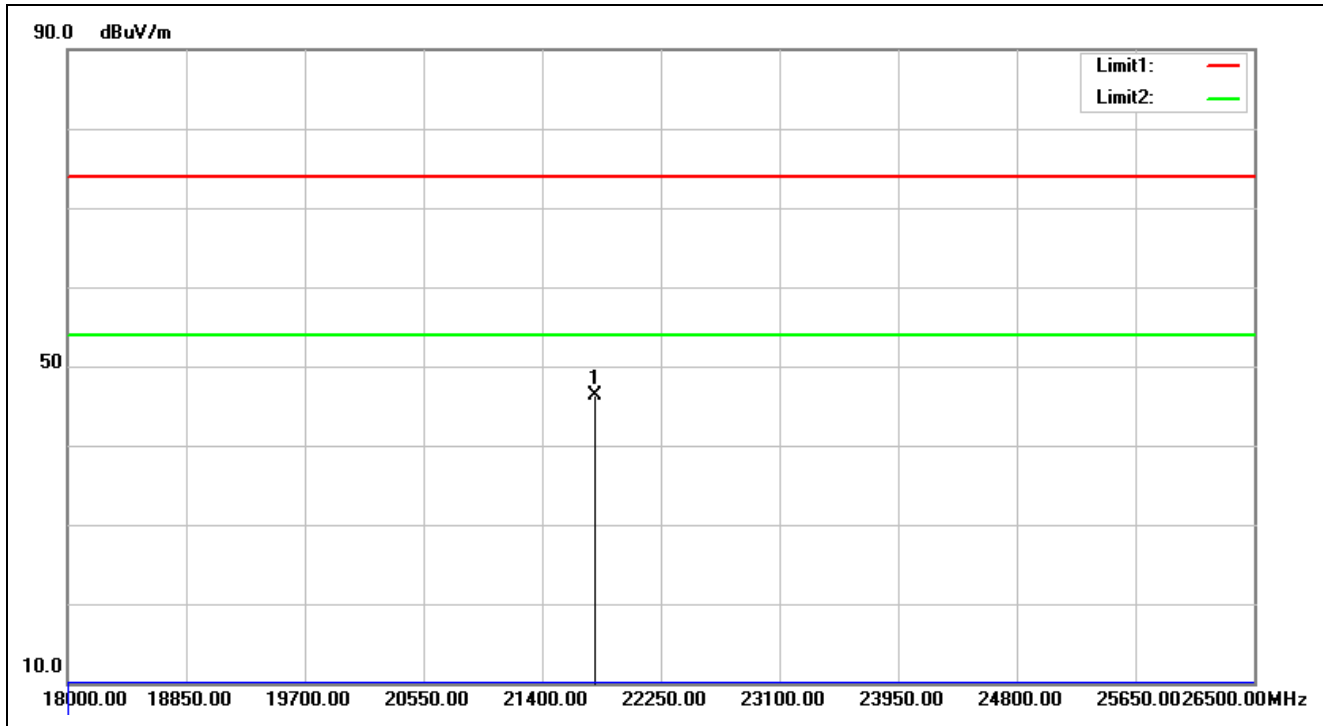


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:48:01
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21774.000	-1.29	47.51	46.22	74.00	-27.78	peak			

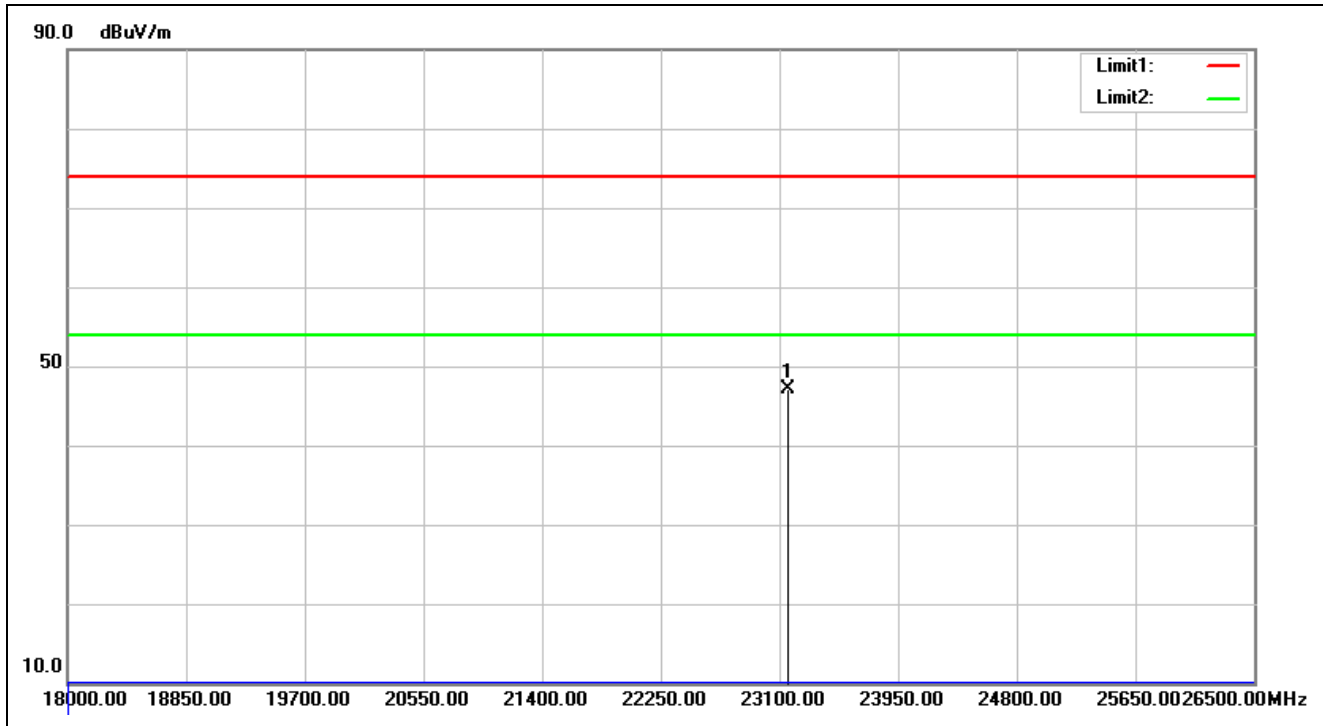


Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:49:10
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23159.500	0.79	46.23	47.02	74.00	-26.98	peak			

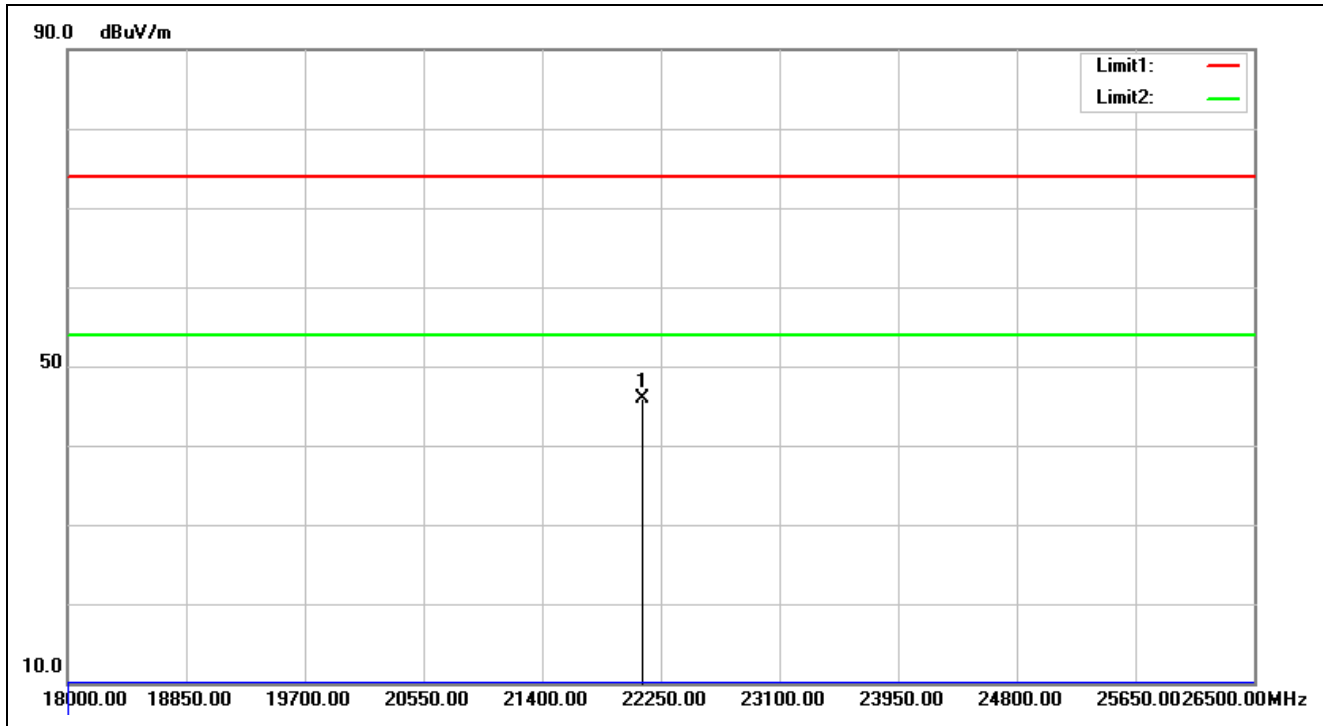

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 18:54:03
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22122.500	-1.25	47.20	45.95	74.00	-28.05	peak			

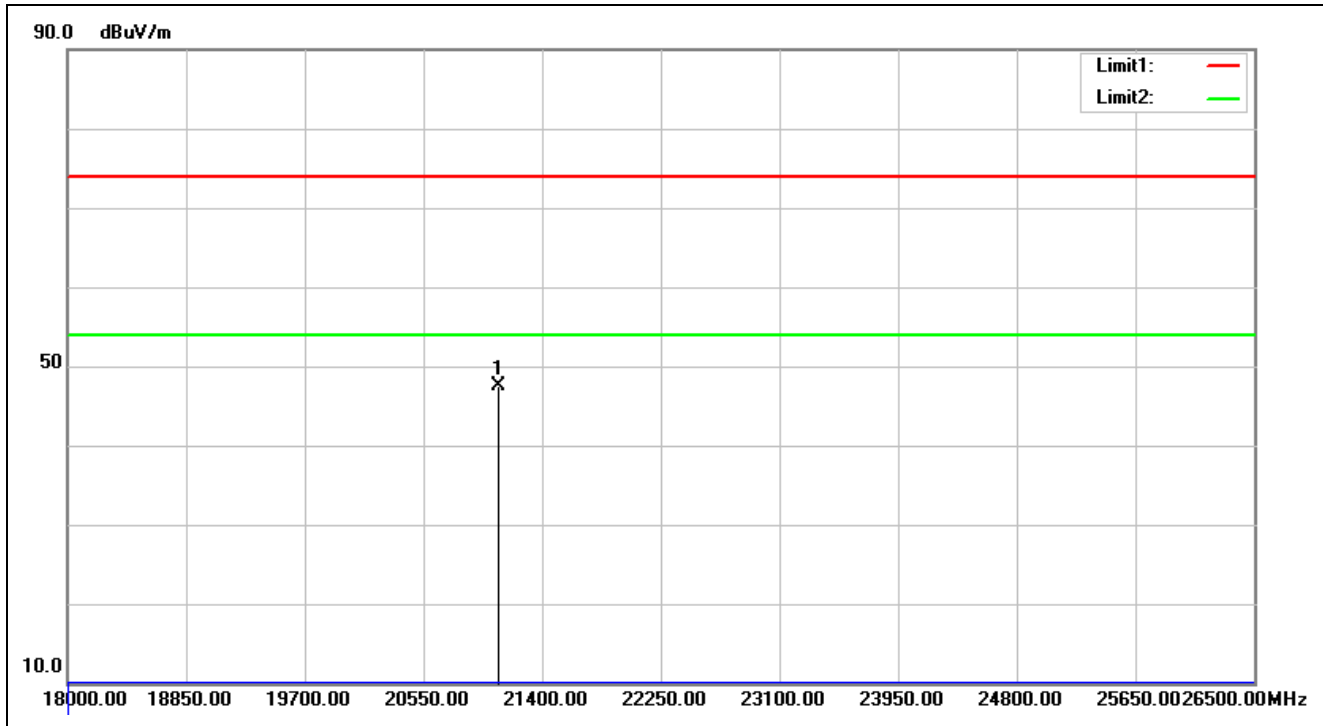

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 18:56:16
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%):	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-3DH5-2480		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21085.500	-0.53	48.03	47.50	74.00	-26.50	peak			


Spurious Emissions, RX Mode, 30M-1G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

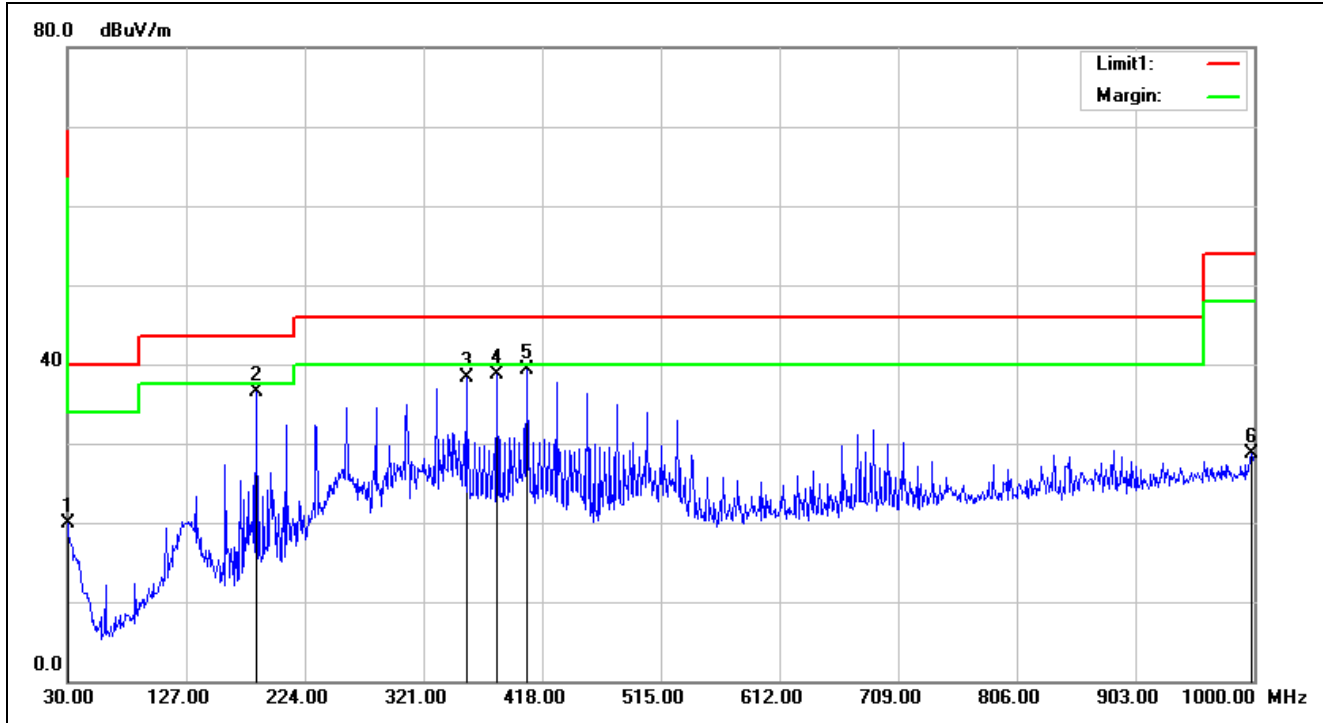

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2015/10/21 15:39:58
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-5.85	25.82	19.97	40.00	-20.03	QP	100	89	
2	184.2300	-15.56	52.07	36.51	43.50	-6.99	QP	100	275	
3	355.9200	-9.30	47.62	38.32	46.00	-7.68	QP	100	0	
4	381.1400	-8.94	47.66	38.72	46.00	-7.28	QP	100	6	
5	405.3900	-8.61	47.90	39.29	46.00	-6.71	QP	100	339	
6	998.0600	-0.01	28.68	28.67	54.00	-25.33	QP	100	91	


Spurious Emissions, RX Mode, 30M-1G

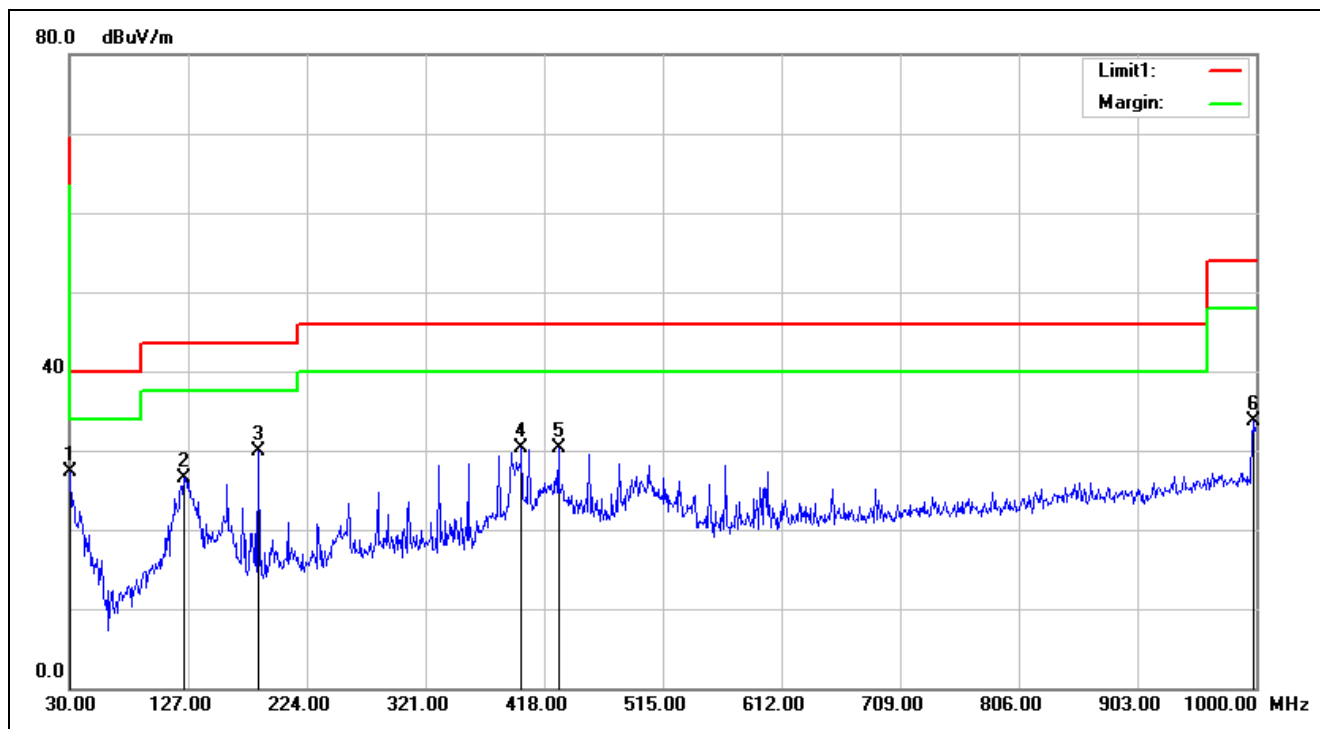

Service No.:	114041127-FCC	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2015/10/21 15:41:01
Applicant:	Global Power	Test Rating:	DC 5V
Product:	Bluetooth Speaker	Temp.(°C)/Hum.(%)	22(°C)/50%
Model No.:	DP1301ADB	Test Engineer:	George Yang
Test Mode:	RX-1DH5-2441		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-5.85	33.19	27.34	40.00	-12.66	QP	100	168	
2	123.1200	-12.91	39.50	26.59	43.50	-16.91	QP	100	210	
3	184.2300	-15.56	45.56	30.00	43.50	-13.50	QP	100	290	
4	399.5700	-8.69	38.94	30.25	46.00	-15.75	QP	100	205	
5	429.6400	-8.30	38.60	30.30	46.00	-15.70	QP	100	88	
6	998.0600	-0.01	33.78	33.77	54.00	-20.23	QP	100	189	

Mains Spurious Emissions

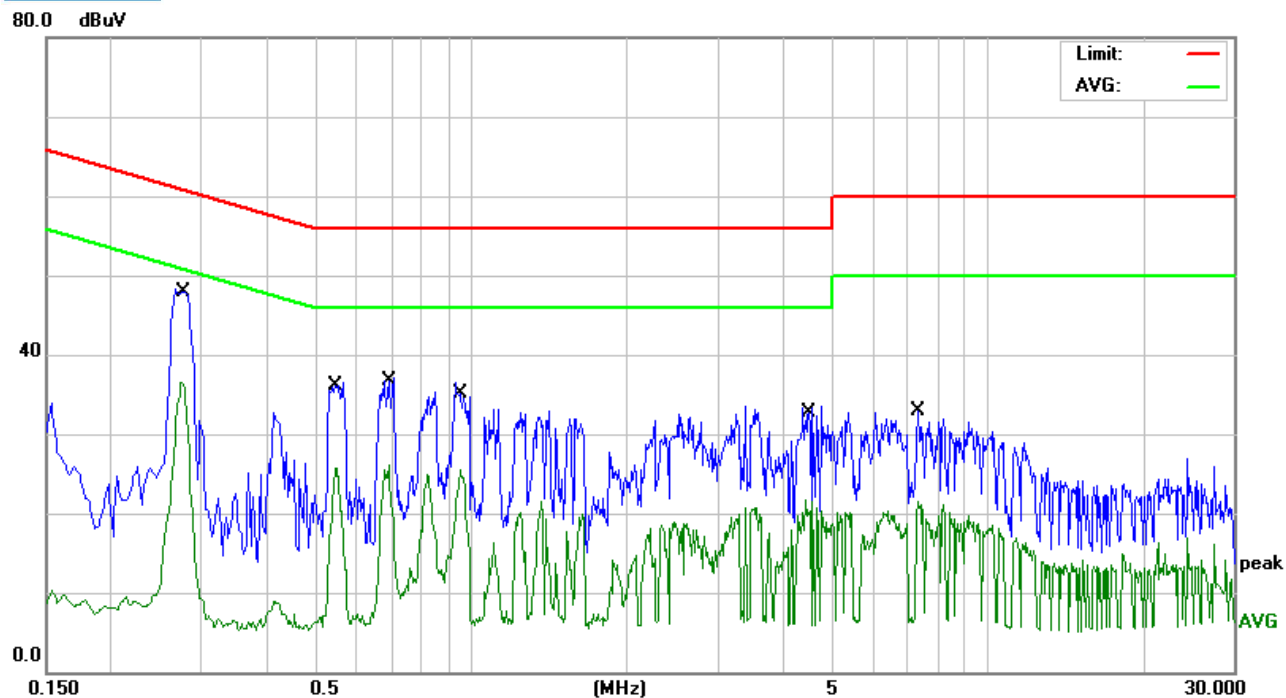

Service No.: 114041127

Test Standard: FCC Class B Conduction(QP)

Probe: L1

Test item: Conduction Emission

Test Time: 2015/10/22 19:38:18

Applicant: Global Power

Test Rating: AC 120V/60Hz

Product: Bluetooth Speaker

Temp.(°C)/Hum.(%): 20.6(°C)/53%

Model No.: DP1301ADB


Test Engineer: George Yang

Test Mode: BT link + Charging

Remark: iPad adapter

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.2740	9.62	34.27	43.89	60.99	-17.10	QP	
2	0.2740	9.62	19.18	28.80	50.99	-22.19	AVG	
3	0.5460	9.63	19.06	28.69	56.00	-27.31	QP	
4	0.5460	9.63	5.69	15.32	46.00	-30.68	AVG	
5	0.6900	9.63	22.29	31.92	56.00	-24.08	QP	
6	0.6900	9.63	11.85	21.48	46.00	-24.52	AVG	
7	0.9500	9.63	23.31	32.94	56.00	-23.06	QP	
8	0.9500	9.63	9.82	19.45	46.00	-26.55	AVG	
9	4.4500	9.67	16.33	26.00	56.00	-30.00	QP	
10	4.4500	9.67	6.74	16.41	46.00	-29.59	AVG	
11	7.3580	9.71	15.14	24.85	60.00	-35.15	QP	
12	7.3580	9.71	5.60	15.31	50.00	-34.69	AVG	

Spurious Emissions, Mains, 150kHz - 30MHz

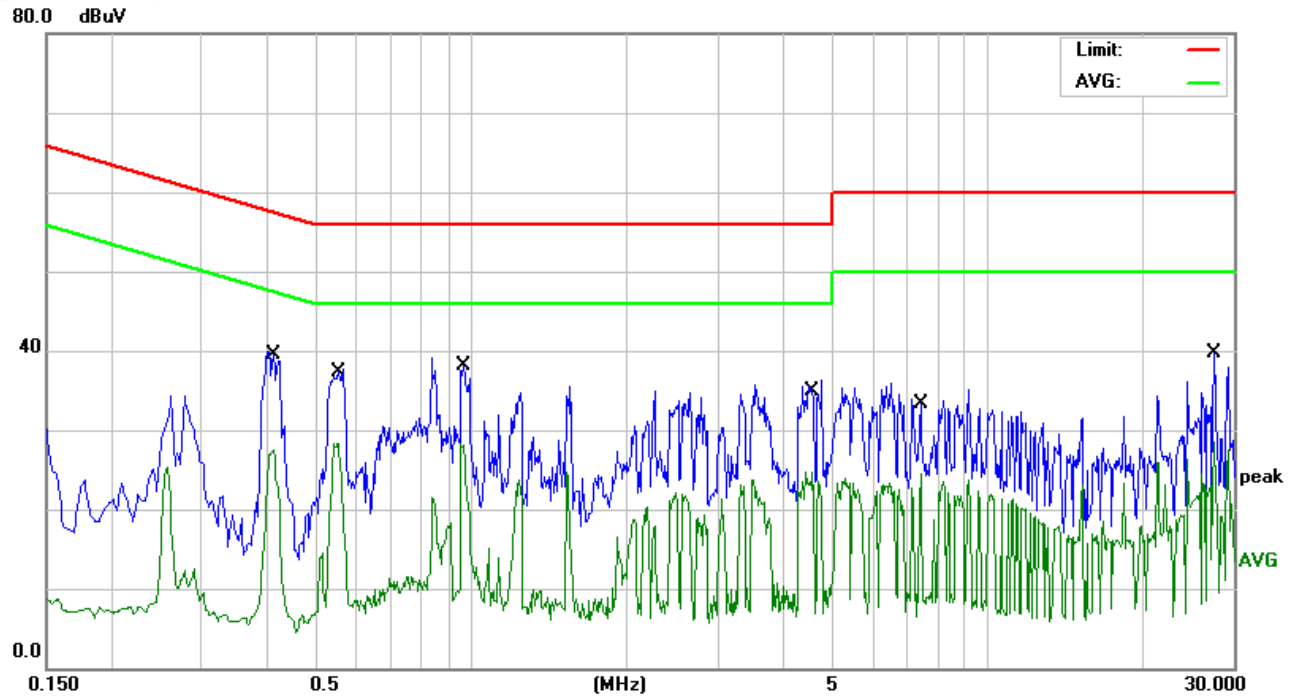

Service No.: 114041127

Test Standard: FCC Class B Conduction(QP)

Probe: N

Test item: Conduction Emission

Test Time: 2015/10/22 19:40:59

Applicant: Global Power

Test Rating: AC 120V/60Hz

Product: Bluetooth Speaker

Temp.(°C)/Hum.(%): 20.6(°C)/53%

Model No.: DP1301ADB

Test Engineer: George Yang

Test Mode: BT link + Charging

Remark: iPad adapter

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.4140	9.64	26.19	35.83	57.57	-21.74	QP	
2	0.4140	9.64	13.90	23.54	47.57	-24.03	AVG	
3	0.5500	9.64	23.29	32.93	56.00	-23.07	QP	
4	0.5500	9.64	11.16	20.80	46.00	-25.20	AVG	
5	0.9580	9.64	23.40	33.04	56.00	-22.96	QP	
6	0.9580	9.64	11.91	21.55	46.00	-24.45	AVG	
7	4.5820	9.70	19.15	28.85	56.00	-27.15	QP	
8	4.5820	9.70	9.33	19.03	46.00	-26.97	AVG	
9	7.4260	9.76	17.69	27.45	60.00	-32.55	QP	
10	7.4260	9.76	9.65	19.41	50.00	-30.59	AVG	
11	27.4700	10.06	21.98	32.04	60.00	-27.96	QP	
12	27.4700	10.06	11.15	21.21	50.00	-28.79	AVG	