

## Exhibit 11 Listing of Required Measurements

### SECTION 2.1033(c)(14)

The data required by Section 2.1046 through 2.1057, inclusive, measured in accordance with the procedures set out in Section 2.1041.

Response:

The lowest clock frequency in the **FLEXENT® OneBTS® PCS CDMA Modular Cell 4.0 with EDPD** is the 10 MHz rubidium reference oscillator. Conducted spurious measurements were performed over the range of 10 MHz to 20 GHz which is above the tenth harmonic of the transmit frequency range.

The following pages include the data required for the Product Certification authorization of the **PCS UMTS-CDMA EDPD Transceiver System / FCC ID: AS5ONEBTS-10**, measured in accordance with the procedures set out in Section 2.1041 of the Rules.

Each required measurement and its corresponding exhibit number are:

Exhibit 12	Section 2.1046	Measurement of Radio Frequency Power Output
Exhibit 13	Section 2.1047	Measurement of Modulation Characteristics
Exhibit 14	Section 2.1049	Measurement of Occupied Bandwidth
Exhibit 15	Section 2.1051	Measurement of Spurious Emissions at Antenna
Exhibit 16	Section 2.1053	Field Strength of Spurious Radiation
Exhibit 17	Section 2.1055	Measurement of Frequency Stability

## Exhibit 12 MEASUREMENT OF RADIO FREQUENCY POWER OUTPUT

### SECTION 2.1046 Measurements required: RF power output.

The test arrangements used to measure the radio frequency power output of the **PCS UMTS-CDMA EDPD Transceiver/ AS5ONEBTS-10** is on the following page. Measurements were made respectively at each frequency where Occupied Bandwidth measurements were performed. This Class II Change is for use of the **PCS UMTS-CDMA EDPD Transceiver** with 3 P2PAM's for 3 CDMA carriers at 40 Watts per carrier 120 Watts total. Demonstration of compliance with the operation using the 40 Watts per carrier 120 Watts total configuration was demonstrated across the PCS band. There is no retuning or change in hardware necessary for operation in any PCS Block. This testing requires that the J4 power level be calibrated for the specific channel of use. The test configuration, Figure 12a, allowed the measurement of output power for each channel investigated for Occupied Bandwidth. These included the upper and lower Block edges and at the center channel for each Block.

In the three carrier via 3 P2PAM configuration, the **PCS UMTS-CDMA EDPD Transceiver** system has a maximum power output of 120 Watts at the antenna terminals (46.02 dBm/c +2/-4 dB for each of the three carriers). It also has a minimum power output at the antenna terminals of 0.040 Watts/c (16.02 dBm +2 / -4 dB), across the PCS downlink Band (1930.00-1995.00 MHz). The signal applied to the **PCS UMTS-CDMA EDPD Transceiver** is defined in Table 12.1. The power was reset to the specified 40 W/c maximum at each measurement frequency to verify the spectral performance at that power level at each specific frequency of interest. The attenuation range was also verified. The specific Frequencies and channels and set power level was documented on each "Occupied Bandwidth" sheet.

The applied signal, from a **PCS UMTS-CDMA EDPD Transceiver/ AS5ONEBTS-10**, met the recommended characteristics per "**Table 6.5.2-1 Base Station Test Model, Nominal**" from **3GPP2 TSG-C.S0010-C-v1.00, February 2005**, Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Base Stations, as defined below in table 12.1.

Type	Number of Channels	Fraction of Power (Linear)	Fraction of Power (dB)	Comments
Pilot	1	0.2	-7	Code channel $W_0^{128}$
Sync	1	0.0471	-13.3	Code channel $W_{32}^{64}$ ; always 1/8 rate
Paging	1	0.1882	-7.3	Code channel $W_1^{64}$ ; full rate only
Traffic	6	0.09412	-10.3	Variable code channel assignments; full rate only

**TABLE 12.1 Base Station Test Model, Nominal for Main Path**


Type	Number of Channels	Fraction of Power (Linear)	Fraction of Power (dB)	Comments
Transmit Diversity Pilot	1	0.2	-7	Code channel $W_{16}^{128}$
Traffic	6	0.09412	-10.3	Variable code channel assignments; full rate only

**TABLE 12.2 Base Station Test Model, Nominal for Transmit Diversity Path**

## Exhibit 12 RF Power Test Configuration

## Test Configuration For RF Power, Occupied Bandwidth and Conducted Spurious

**Alcatel-Lucent FLEXENT® OneBTS PCS CDMA EDPD Transceiver in PCS 9228 Macro (4.0B Modular Cell)**

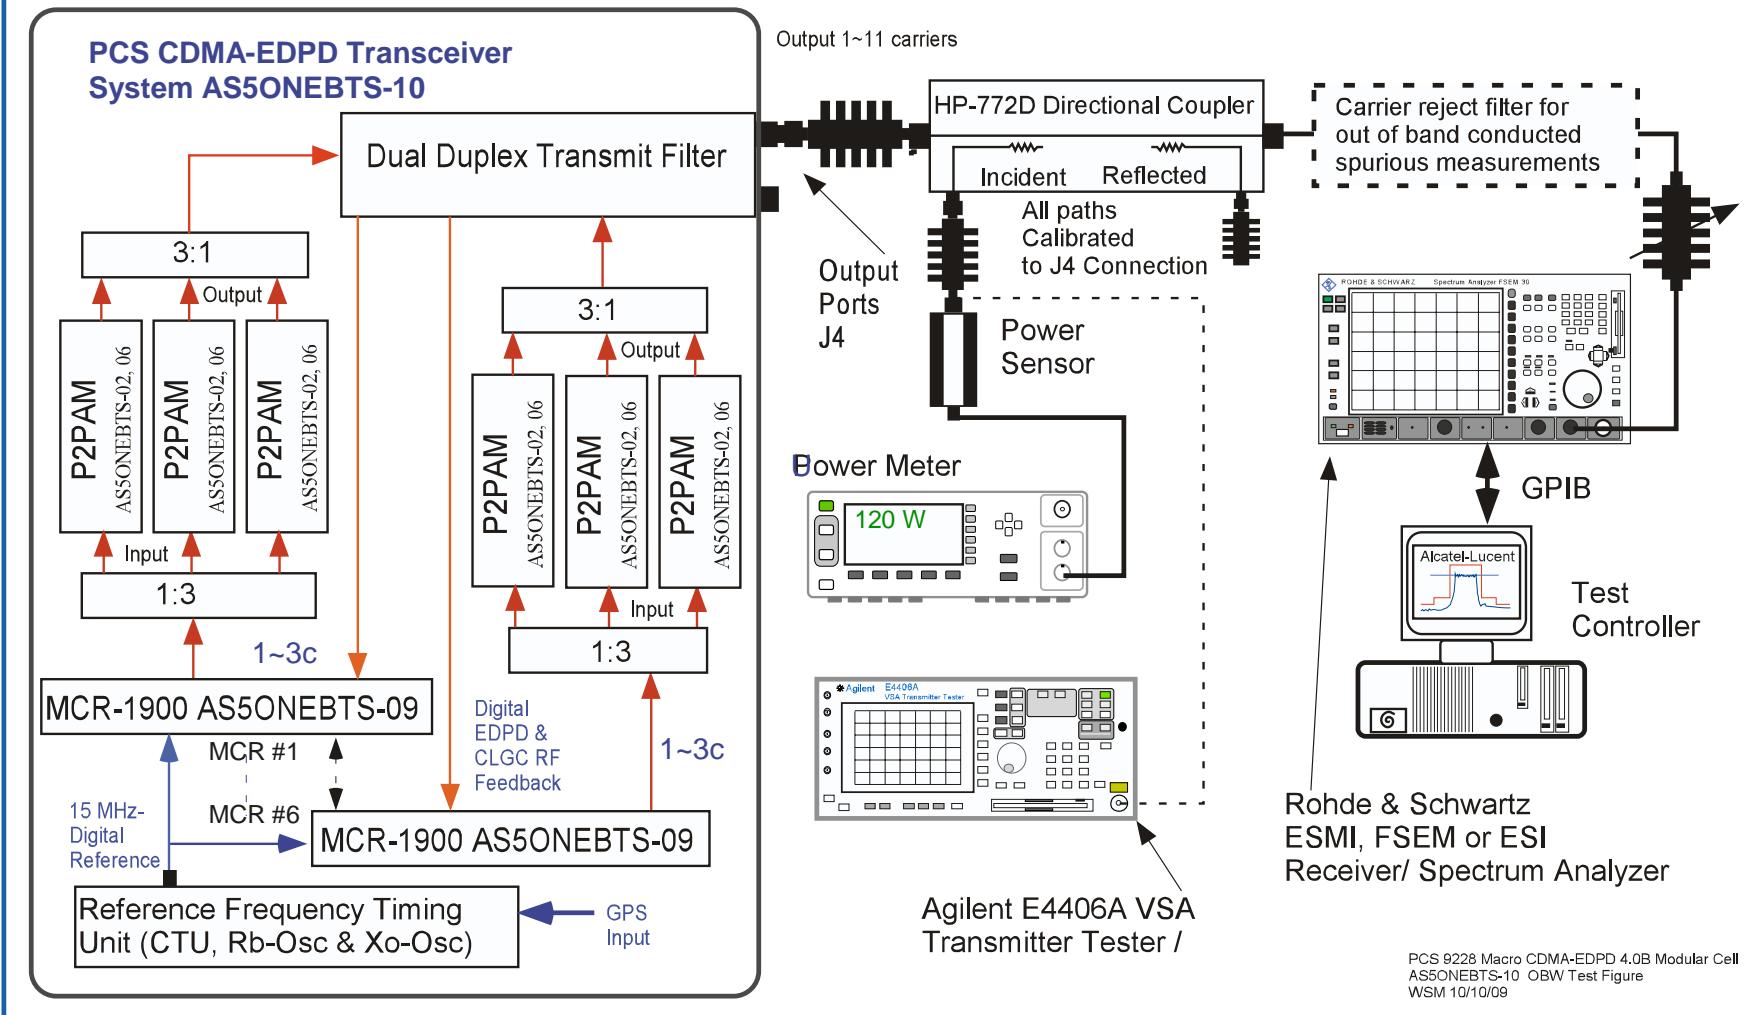

**Exhibit 12 *continued*****Equipment used for RF Power, Modulation, Occupied bandwidth, Conducted Spurious and Radiated Spurious Measurements**

<u>Equipment</u>	<u>Description</u>	<u>Calibration Reference Number</u>	<u>Version date or Calibration</u>
<b>Power Meter:</b>	Agilent E4419B Power Meter	167435	10 Sept 10
<b>Power Head</b>	Agilent E9300A Power Head	169451UR	10 Sept 10
<b>Power Meter:</b>	Agilent N1912A P Series Power Meter	82-11293400	22 Jan 10
<b>Power Head</b>	Agilent N1921A 0.05-18 GHz Wideband Power Sensor	82-11293379	26 Nov 09
<b>Spectrum Analyzer:</b>	Rohde & Schwarz FSEM-30	1000250565	31 Oct 09
<b>EMC Receiver</b>	Rohde & Schwarz ESIB-40	1000304299	30 Nov 09
<b>EMC Receiver</b>	Rohde & Schwarz ESIB-40	1000304298	31 Dec 09
<b>Code Domain Analyzer</b>	Agilent E4406 VSA Transmitter Tester	1000304190	16 Oct. 09
<b>Computer Controller:</b>	EG Technology, Intel Pentium PC w/WIN XP OS	POR-2, 4 & 6	N/A
<b>EMC Test Software</b>	TILE, Quantum Change,	Version 3.4.K.21	TBD
<b>Printer:</b>	HP Model 4500DN Printer	N/A	N/A
<b>Low Pass Filter:</b>	10 MHz-1.93 GHz, Custom manufactured	PCSLPF-11	12 Dec 08
<b>High Pass Filters:</b>	1.99-20 GHz, Custom manufactured	PCSHPF-11	12 Dec 08
<b>Test Cables:</b>	Low loss test cables custom mfg.	Chamber-1 set	V
<b>Antenna</b>	BiConilog Antenna, ETS, Model 3142B	1770	14 July 09
<b>Antenna</b>	Double Ridge guide Antenna, ETS, Model 3115	6685	14 July 09
<b>Antenna</b>	Double Ridge guide Antenna, ETS, Model 3116	3116-24	14 July 09
<b>Preamplifier</b>	Amplifier Low Noise, Miteq, 1.7 dB	LNA-1	14 July 09
<b>GPS Receiver</b>	Symmetricom 58503B (former Agilent)	KR93200849	N/A
<b>RF Test coupler</b>	<u>The equipment below is maintained and calibrated together.</u>		
<b>Directional Coupler:</b>	772D Dual Directional Coupler	<b>Brown-Mule-Lim</b>	
<b>Attenuator, Variable</b>	HP 8494B DC-18 GHz digital attenuator	157171	
<b>Attenuator, Variable</b>	HP 8495B DC-18 GHz digital attenuator	157170	
<b>Attenuator, Fixed</b>	Weinschel Corp DC-18 GHz, various values		
<b>Test Cables:</b>	Low loss test cables custom mfg.		

**Exhibit 12** *continued***Measurements required: RF power output.**

PCS - Block	PCS - Channels	Number of carriers	Amplifier Type	# of amplifiers in MCA	Power per Carrier, W/c	Total Power Watts	Results RF Power
A	25 - 75	3	P2PAM	3	40	120	Compliant
A	250-275	3	P2PAM	3	40	120	Compliant
D	325-375	3	P2PAM	3	40	120	Compliant
B	425 - 475	3	P2PAM	3	40	120	Compliant
B	625-675	3	P2PAM	3	40	120	Compliant
E	725 - 775	3	P2PAM	3	40	120	Compliant
F	825 - 875	3	P2PAM	3	40	120	Compliant
C	925-975	3	P2PAM	3	40	120	Compliant
C	1125-1175	3	P2PAM	3	40	120	Compliant
G	1225-1275	3	P2PAM	3	40	120	Compliant

**RESULTS:**

The **PCS UMTS-CDMA EDPD Transceiver/ AS5ONEBTS-10** was configured in the test setup shown in Figure 12A. For the 3 carrier channel configuration the **PCS UMTS-CDMA EDPD Transceiver/ AS5ONEBTS-10** delivered a minimum of 40.0 Watts/carrier +2/-0 dB when measured at the J4 output connection. This data is recorded on the Occupied Bandwidth Data Sheets for "Left edge" and "Right Edge" of each frequency Block.

Note: The **PCS UMTS-CDMA EDPD Transceiver/ AS5ONEBTS-10** is a multi channel linear amplifier and its maximum power level is verified at each cell site during setup of the Alcatel-Lucent 9228 Macro (Formerly Modular Cell 4.0B)

## Exhibit 13

### SECTION 2.1047 MEASUREMENT OF MODULATION CHARACTERISTICS

The modulation characteristics and accuracy of the **PCS UMTS-CDMA EDPD Transceiver/ AS5ONEBTS-10** output signal is a function of the input signal which is provided by the UMTS-CDMA Multi Carrier Radio (**MCR-1900**), Model BNJ64, which was previously authorized by the Federal Communications Commission under **FCC ID: AS5ONEBTS-09**, granted 22 February 2005 for all PCS Blocks.

#### 13.1 - Modulation Description

The modulation methods used in CDMA drastically differ from those used in a FM analog system. The methods used in evaluating the **EDPD Transceiver's MCR-1900 / AS5ONEBTS-10** are described in the pertinent standards documents which include **TIA/EIA-97-C** "recommended Minimum performance Standards for Base Stations Supporting Dual-Mode Wideband Spread Spectrum Cellular Mobile Stations" and **3GPP2 C.S0010-0**, December 1999, *Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Base Stations*,. The modulation quantify criteria are as follows:

#### 13.2 Modulation Requirements – Section 4.2 of TIA/EIA-97-C and 3GPP2 C.S0010-0

Waveform quality is tested by measuring the waveform quality  $\rho$ , as defined in 6.4.2.1, and code domain power as defined in 6.4.2.2. The range of values for the transmit waveform quality is from 1.0 for a perfect CDMA waveform to 0.0 for a non-CDMA signal. As an example, a base station with a 0.5 dB degradation in its transmit waveform would have a quality,  $\rho$ , of  $10^{-(0.5/10)} = 0.89$ .

#### 13.3 Minimum Standard ...per Section 4.2.2.3 of 3GPP2 C.S0010-0

The normalized cross correlation coefficient,  $\rho$ , shall be greater than 0.912 (excess power  $\leq 0.4$  dB).

#### 13.4 Results

The **PCS UMTS-CDMA EDPD Transceiver's MCR-1900** was configured in the test setup shown in Figure 13A. The **MCR-1900** was configured with its pilot channel and the modulation quality measured with an Agilent -E4406A VSA Series Transmitter Analyzer. Measurements were performed at the PCS Channels shown in table 13.1.

PCS Band	Transmit Channel(s)	Measured Rho	Status
A	275	0.99896	Compliant
D	325	0.99891	Compliant
B	425	0.99891	Compliant
E	725	0.99891	Compliant
F	825	0.99890	Compliant
C	1025	0.99893	Compliant
G	1275	0.99892	Compliant

TABLE 13.1 MCR-1900 Channels for Modulation Characteristics Measurement

##### 13.4.1 Results Summary

For each of the PCS channels tested, the **PCS UMTS-CDMA EDPD Transceiver's** modulation quality factor, Rho ( $\rho$ ), was measured to be  $\geq 0.99890$  which is significantly better than the required 0.912. The **PCS UMTS-CDMA EDPD Transceiver's AS5ONEBTS-10** transmit signal modulation parameters and constellation for PCS channel 275 is shown in Figures 13B and 13C below. The data for channel 275 is representative of the data recorded for the remaining channels listed above and was taken utilizing the Agilent -E4406A VSA Series Transmitter Analyzer. It also verified that the frequency offset is less than (+/- 0.05 PPM) of the frequency assignment.

Figure 13A

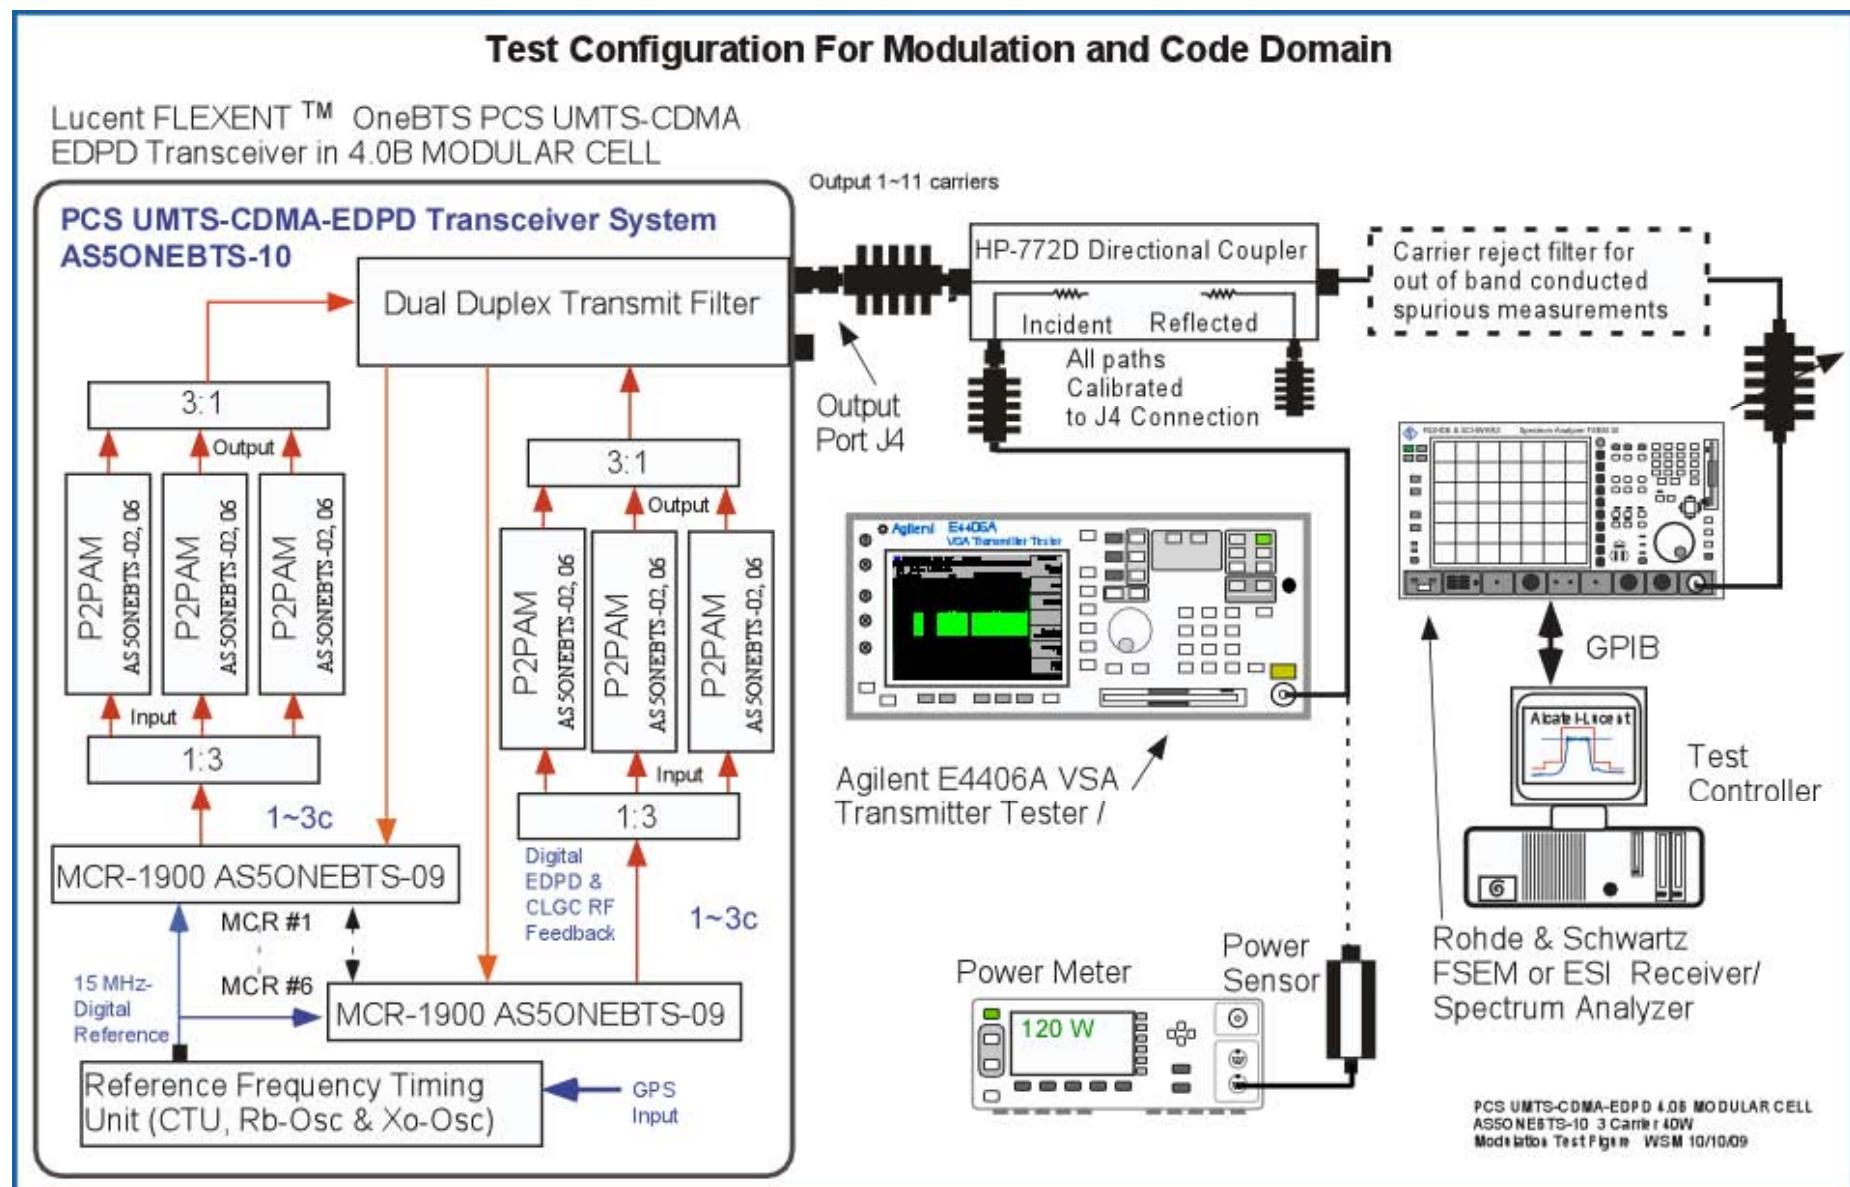


Figure 13B Code Domain 1c A Block, Channel 275 Tx Output 1 Amplifier


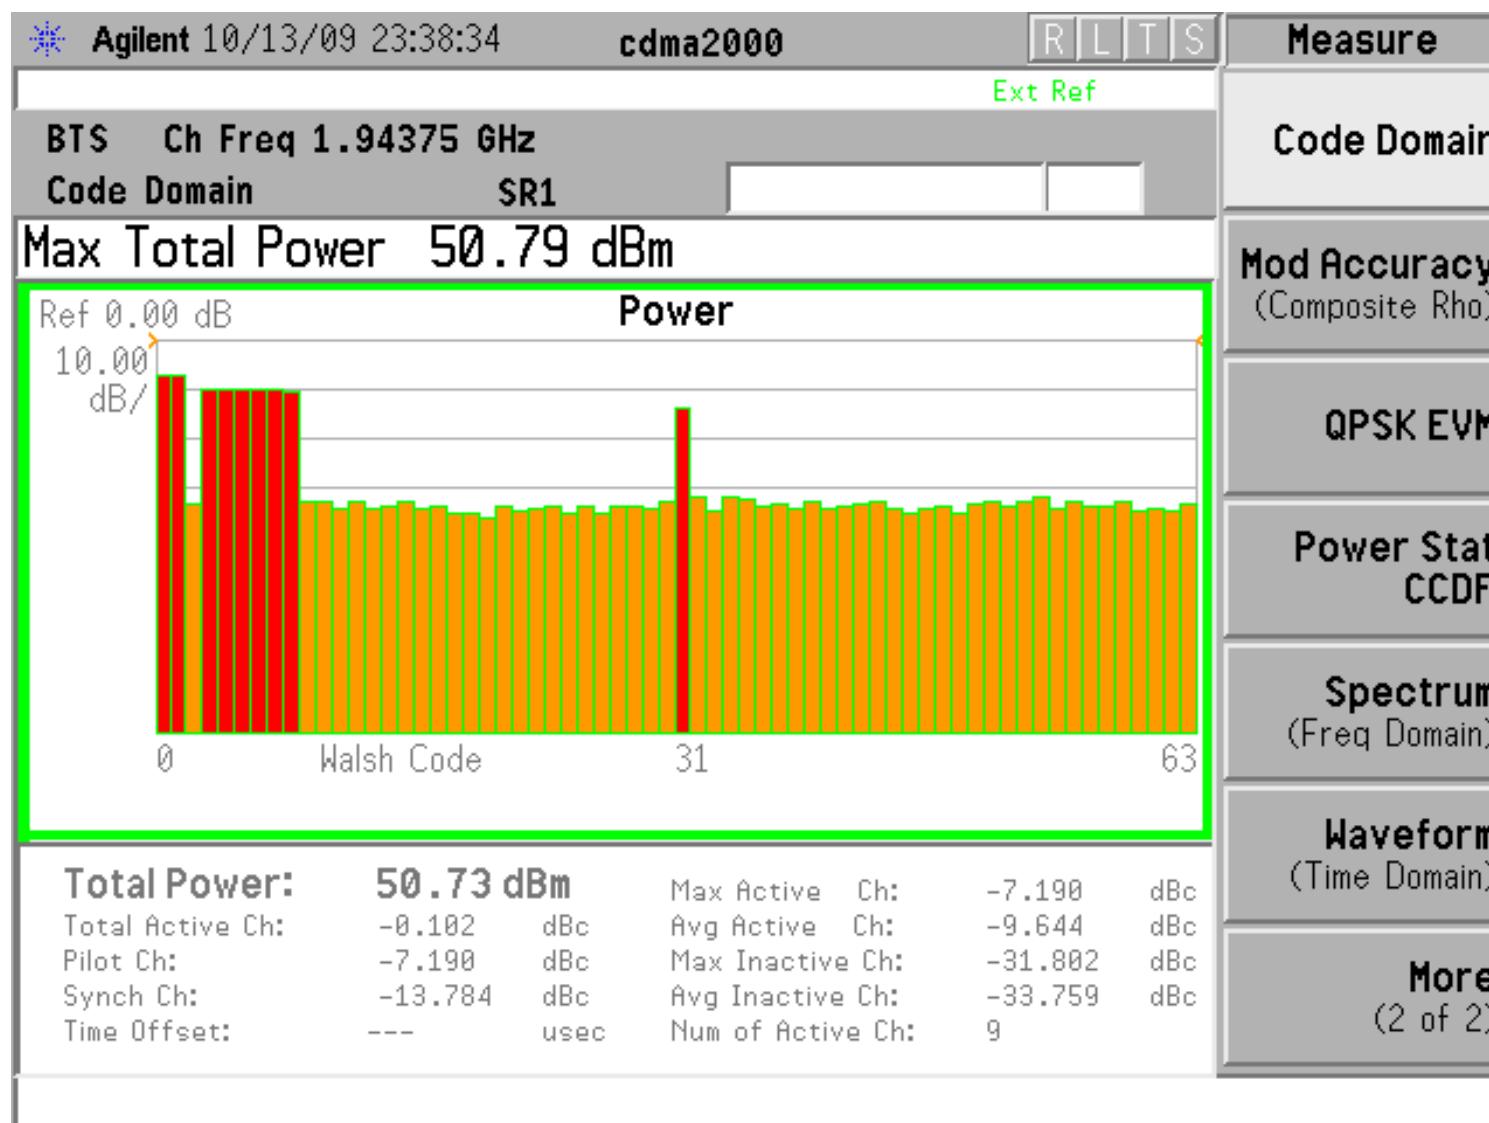


Figure 13C      Rho 1c A Block, Channel 275      Tx Output 1 Amplifier

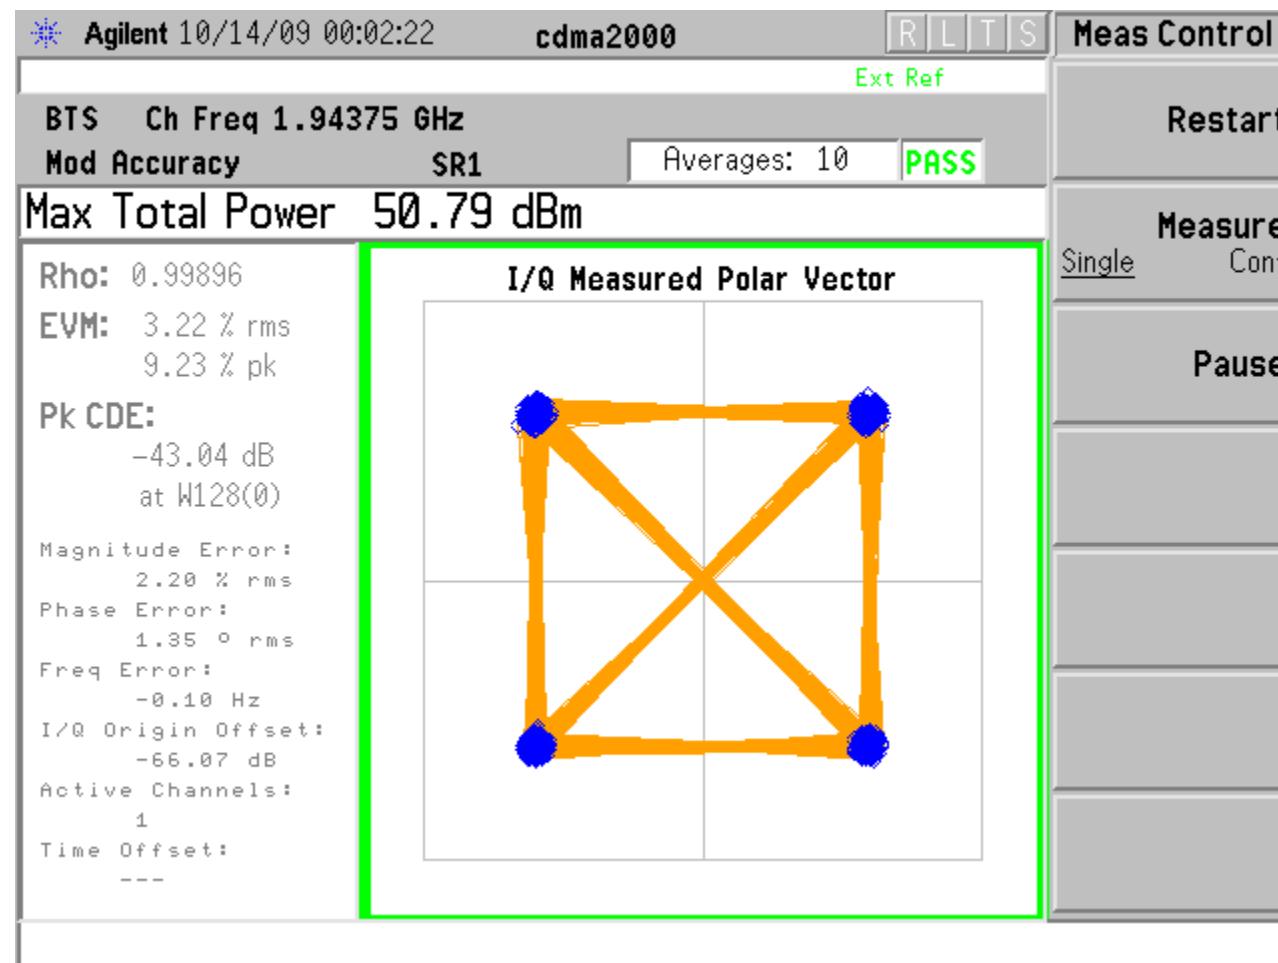

## Exhibit 14 MEASUREMENT OF OCCUPIED BANDWIDTH

### SECTION 2.1049 Measurement Of Occupied Bandwidth

Occupied bandwidth measurements were performed for the **MCA** configurations pertinent to full bandwidth A through G Block operation of the **PCS UMTS-CDMA EDPD Transceiver**. This documents the typical performance of the **PCS UMTS-CDMA EDPD Transceiver** while operating with one through three CDMA carriers at 40W per carrier 120 Watts total. All power adjustments were performed via the **MCR/ AS5ONEBTS-09** and as described below.

The occupied bandwidth of the **PCS UMTS-CDMA EDPD Transceiver/ FCC ID: AS5ONEBTS-10** was measured using a Rohde & Schwarz FSEM-30 Spectrum Analyzer, a PC based instrumentation controller using TILE™ software and calibrated RF attenuation and coupled signal path. The RF power level was measured and adjusted via the test setup in Figure 14A. The set RF output from the transmitter was reduced by calibrated broadband attenuators to amplitudes usable by the spectrum analyzer and power meter. The attenuation factors are reflected in the displayed values of the charts. The typical occupied bandwidth measurement, Figure 14B, displays the signal adjusted to the -16.2 dBc level corresponding to the corrected RF power level for a 30 kHz resolution bandwidth (RBW). This set-point was performed as follows:

For each test the power calibration was individually verified at the transmitter antenna connection (J4) with a power meter by using the test setup depicted in Figure 14A. The power calibration was performed to calibrate the setting power meter measurement as a reference for both the measured 30 kHz Occupied Bandwidth signal at the -16.23 dBc line and a 3 MHz RBW measurement against the “Top of Mask” limit as depicted in Figure 14B. The “Top of Mask” limit corresponds to a single carrier signal at the specified power level of 40 W/c as measured with an RBW of  $\geq 1.25$  MHz. Since at the transmitter J4 output there may be multiple CDMA carriers, the measurement is made with an RBW setting of 3 MHz which is greater than the individual 1.25 MHz signal bandwidth. These power calibration measurements were performed along with each Occupied Bandwidth measurement. The signals measured at RBW’s of 3 MHz and 30 kHz were corrected for path loss and were plotted against the mask limit. As part of the calibration between the power meter measurement and the test analyzer, software was used to place the 3 MHz RBW signal either at the “Top of Mask” for single carriers or at the carrier power calibration line for multi-carrier signals. The carrier as measured with 3 MHz and 30 kHz RBW were corrected with the same attenuation factors and the two measurements are co-plotted on the same graph. A typical single carrier example is shown in Figure 14B which depicts a single carrier (25 F Block) inside the mask appropriate for a single carrier at channel 25 in A Block.

The test procedure described above, calibrates the carrier power to the “Top of Mask” and accurately places the 30 kHz RBW measured carrier at the -16.23 dBc reference line. All of the plots are presented with a sufficiently wide frequency span for the specific signals or Block of interest and again for the entire PCS Band. This allows for ease of comparison of the multi-carrier performance. This data was electronically recorded using the TILE™ software and electronically placed in the Occupied Bandwidth Data Sheets. These sheets contain data for “Left Edge of Block”, and “Right Edge of Block” for each PCS frequency Block.

#### Block Organization and Tests Performed

The FLEXENT PCS Modular Cell 4.0B product line allows the use of transmit filters with bandwidths of 5 MHz to as wide as 65 MHz. The use of EDPD provides the spurious control which allows the use of wide bandwidth filters such as a 60 MHz classic PCS Band, shifted 60MHz for blocks A4 through G or a 65 MHz Full PCS Band filters. These wideband filters provide for the least spurious reduction at “edge of block” and “edge of band” and thus represent the most difficult compliance configuration. The filters do not provide for any spurious reduction at the internal block edges inside the band. The testing of the product documented herein was performed with 60 MHz and shifted 60 MHz PCS band filters. These test configurations are the most difficult for compliance demonstration.

**Exhibit 14** *continued*

The demonstration of compliance for the 3 carrier 3 P2PAM **EDPD** Transceiver configurations were performed for operation in all PCS Blocks. The presented data for this Class II change demonstrates the 3 carriers at 40 W/c configurations compliance.

**Applied Signal Characteristics**

In order to adequately evaluate performance the worst case modulation factors of 2G Voice ( vs. 3G1X or 3G1X-EV-DO) were used from the governing documents. Thus, the applied signal, from a **PCS UMTS-CDMA EDPD Transceiver/ FCC ID: AS5ONEBTS-10**, met the recommended characteristics per "**Table 6.5.2-1 Base Station Test Model, Nominal**" from **3GPP2 TSG-C.S0010-C-v1.00, February 2005**, Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Base Stations, as defined below in table 14.1.

Type	Number of Channels	Fraction of Power (Linear)	Fraction of Power (dB)	Comments
Pilot	1	0.2	-7	Code channel $W_0^{128}$
Sync	1	0.0471	-13.3	Code channel $W_{32}^{64}$ ; always 1/8 rate
Paging	1	0.1882	-7.3	Code channel $W_1^{64}$ ; full rate only
Traffic	6	0.09412	-10.3	Variable code channel assignments; full rate only

**TABLE 14.1 Base Station Test Model, Nominal for Main Path**

Type	Number of Channels	Fraction of Power (Linear)	Fraction of Power (dB)	Comments
Transmit Diversity Pilot	1	0.2	-7	Code channel $W_{16}^{128}$
Traffic	6	0.09412	-10.3	Variable code channel assignments; full rate only

**TABLE 14.2 Base Station Test Model, Nominal for Transmit Diversity Path**

The FCC limits contained in **47CFR 24.238 1-Oct-2005** were followed along with the minimum standard presented in **3GPP2 TSG-C.S0010-B-v2.0 March 2004**. Where combinational measurements of 3G1x-EV-DO are made along with the 2 GV configuration above the applied signal were based upon the 3GPP2 TSG-C.S0032-1 titled "Recommended Minimum Performance Standards for CDMA2000 High Rate Packet Data Access Network". Section 3.1.2.4 Limitations on Emissions. This standard covers the emissions situation except that we use the maximum 25 MAC full traffic configuration as the standard.

**Exhibit 14** *continued***Measurement Offset**

The spectrum analysis output plots shows the peak of the CDMA channel signal 16.19 dB below the Mask reference / “zero dBc line” of the spectrum analyzer for the following reason: For the CDMA system there is no carrier without modulation. Since the CDMA signal is broadband and 1.25 MHz wide, all measurements performed at narrower resolution bandwidths need be adjusted for the reduction in signal energy. The following relationship was used to provide the correct level for an unmodulated carrier vs. the modulated signal.

$$10 \log (\text{Resolution Bandwidth} / \text{Transmit Bandwidth}) = \text{Signal Offset} \quad (1)$$

For the peak of the 1.25 MHz CDMA signal measured with a RBW of 30 kHz the signal offset is:

$$\text{Signal Offset} = 10 \log (30 \text{ kHz} / 1.25 \text{ MHz}) = -16.19 \text{ dB}$$

Limits which are specified as appropriate at a given RBW can be measured and evaluated at other RBW's if the limit is adjusted per equation (1)

**Require Levels**

The minimum standard presented in 3GPP2 TSG-C.S0010-B-v2.0 March 2004 was followed for Suppression inside the Licensee's Frequency Block(s)

Signals that are within the base station transmit band of 1930.000 to 1990.000 MHz and are within the specific block(s) allocated to the operator's system, the total conducted spurious emissions in any 30 kHz band greater than 885 kHz from the CDMA channel center frequency shall not exceed a level of -45 dBc....

The Limit in 47 CFR 24.238(a)(b) for emissions in the 1 MHz band immediately outside and adjacent to a licensees frequency block is:

Emissions  $\leq$  1 MHz outside the Block *when measured with a RBW of 1%* of the emissions Bandwidth shall be attenuated by :

$$- \{43 + 10 \log (\text{mean power output in watts})\} = -13 \text{ dBm}$$

The Limit in 47 CFR 24.238(a) for emissions outside a licensees frequency block is:

Emissions  $> 1$  MHz outside the Block, *when measured with a RBW of 1 MHz*, shall be attenuated by :

$$- \{43 + 10 \log (\text{mean power output in watts})\} = -13 \text{ dBm}.$$

Measurement at a Resolution Bandwidth of 30 kHz is based on our experience with 47 CFR 24.238 and lacking other guidance.

**Adjusted Levels**

The following levels apply when measurement of the above limits are performed with an RBW of 30 kHz.

Measurement at a Resolution Bandwidth of 30 kHz is based on our experience with 47 CFR 24.238 and lacking other guidance.

1. On any frequency removed from the carrier center frequency by greater than 885 kHz up to 1.25 MHz - at least 45 decibels below the carrier; and
2. On any frequency removed from the carrier center frequency by greater than 1.25 MHz to 2.25 MHz the level shall not exceed -9.2 dBm when measured in a 30 kHz resolution bandwidth (Note 2 below).  
*For 40 Watts* the required level is -9.2 dBm/ -55.22 dBc. and
3. From the edge of the Block to the 10th harmonic of the carrier at least

$$- \{43 + 10 \log (\text{mean power output in watts})\} \text{ dBm.}$$

**Exhibit 14** *continued*

**For 40 Watts** the required level is  $-74.25 \text{ dBc} / -28.2 \text{ dBm}$  as measured with a 30 kHz resolution bandwidth (see Note 3). This is equal to  $-13 \text{ dBm}$  measured with a 1 MHz resolution bandwidth

+++++

**Note 2:** The  $-9.2 \text{ dBm} / -52.22 \text{ dBc}$  level was computed as follows: The limit is specified as

$$-\{43+10\log(\text{mean power output in watts})\} \text{ dB} = -13 \text{ dBm}$$

When measured in a resolution bandwidth not less than 1% of the signal bandwidth.  
Since the carrier is a 1.25 MHz bandwidth signal, the limit is adjusted to

$$-13 + 10\log(30\text{kHz}/12.5 \text{ kHz}) \text{ dBm} = -9.2 \text{ dBm}; \text{ which given a } 46.02 \text{ dBm carrier (40W) equals } -55.22 \text{ dBc}$$

**Note 3:** The  $-28.2 \text{ dBm} / -71.21 \text{ dBc}$  level is computed from  $-13 \text{ dBm}$  measured with a 1 MHz resolution bandwidth adjusted by :

$$-13 + 10\log(30\text{kHz}/1.0 \text{ MHz}) \text{ dBm} = -28.23 \text{ dBm}; \text{ which given a } 46.02 \text{ dBm carrier (40W) equals } -74.25 \text{ dBc}$$

**Mask Description for a Single Carrier in a 40 Watts per carrier multi-carrier application.**

The Mask limits are identical for the left and right side of the PCS Blocks and are as follows:

Figure 14B shows the Mask limit for PCS channel 25 which is the left block edge for Block A and shows limits levels identical for the band edge of the PCS band. The Spectrum Analyzer reference level is set above the Signal Reference to allow for the necessary dynamic range of a three CDMA carrier presentation. The top of a typical 46.02 dBm single carrier CDMA signal viewed at a resolution bandwidth of 30 kHz is shown at the 29.82 dBm/ -16.23 dBc line. This line is based on equation 1, and the ratio of the 1.25 MHz bandwidth and the 30 kHz resolution bandwidth of the spectrum analyzer. The vertical line from a to b (i.e. a-b) is at 885 kHz from the center of channel 25 (i.e. Fc), per 3GPP2 TSG-C.S0010-B-v2.0. The horizontal line b-c is 45 dB below the 46.02 dBm/ 0 dBc reference level. The vertical line c-d is at 1.25 MHz from the center of the channel. The placement of line d-e is derived from evaluation of the signal and 12.5 kHz (1%) resolution bandwidth, using the suggested value in section 24.238 of the rules. The ratio of 30 kHz to 12.5 kHz in equation (1) gives 3.8 dB. Adjusting the tolerance line to reflect this difference puts the  $-13 \text{ dBm}$  limit line at  $-9.2 \text{ dBm}$  or  $-52.21 \text{ dBc}$  below the reference line. The vertical line, e-f is at 2.25 MHz from the center of channel 25. The horizontal line f-g is drawn at  $-74.25 \text{ dBc}$  below the 0 dBc / 46.02 dBm reference because the rules require a 1 MHz resolution bandwidth for measurements 1 MHz or greater outside the PCS band. Again, equation (1) and the ratio of 1 MHz to 1.25 MHz provides this value. The same logic was used in determining the other block and band edge tolerances.

**Mask Description for Multiple Carriers at 40 Watts per carrier**

The mask for multiple carriers only adjusts the width of the carrier portion of the mask. For the example given above...with multiple carriers there would be no adjustments made to the "Left Edge of Block" requirements. The specified "Right Edge Limit" is treated as an expansion of the non Block edge corner **bb**, as depicted in Figure 14C, to be the required + 885 kHz from the center of the "right most" channel. The "Right Edge of Block" limits were derived consistently.

## Exhibit 14 *continued*

### Trace Description and Power Calibration

Figure 14C shows the three carrier channel 25-50-75 CDMA signal measured with two different resolution bandwidths. The additional upper magenta trace displays the signal as measured with a resolution bandwidth of 3 MHz. The black trace is the same signal as measured with a 30 kHz resolution bandwidth and is the appropriate trace for the mask evaluation. The wider resolution bandwidth allows for a true power calibration of the measured signal against the top of mask. The top of the mask is appropriate for a single carrier power calibration as it represents the true power level of a single carrier as measured with a power meter. For a two carrier signal the total power is 3 dB higher. For three carrier signals the total power is 4.77 dB higher when measured with a resolution bandwidth greater than signal bandwidth of 3.75 MHz. The spectrum analyzers maximum bandwidth is only 3 MHz and therefore a correction factor is necessary. The bandwidth correction factor for the 3 carrier signal is therefore:

$$4.77 \text{ dB} - 10 * \text{LOG}(3.75/3) \text{ dB} = + 3.80 \text{ dB}$$

The Power Calibration level for 3 or more carriers equals:

$$\text{Single Carrier Power level (dBm)} + 4.77 - 10 * \text{LOG}(3.75/3) = \text{Single Carrier Power level (dBm)} + 3.80 \text{ dB}$$

$$46.02 \text{ dBm} + 3.80 \text{ dB} = 49.82 \text{ dBm}$$

The power calibration value for 3 carrier configurations at 40 W/c is 49.82 dBm. These values are depicted on the occupied bandwidth charts as the dashed magenta Power Calibration Line h-hh on each chart and as shown on example Chart 14C.

### Measurement of the 3 Carrier Configuration

All of the tolerance lines for the output are referenced to the top of the Occupied Bandwidth mask, which is defined as 46.02 dBm/ zero dBc. For all measurements of the **PCS UMTS-CDMA EDPD Transceiver/ FCC ID: AS5ONEBTS-10** Occupied Bandwidth, the output power was measured / adjusted individually to the 40 W level for each carrier and this is the 46.02 dBm value at the 0 dBc reference line.

In order to depict the tolerance lines that are required by Sec 24.238 of the FCC Rules and 3GPP2 C.S0010-0, all measurements were made with a resolution bandwidth of 30 kHz and the limits were adjusted using equation (1). A sample detector was employed using minimum of 25 sweeps averaging per trace.

**Exhibit 14** *continued***TABLE 14.2 PCS Occupied Bandwidth Compliance Tabulation**

PCS - Block	PCS - Channels	Number of carriers	Amplifier Type	# of amplifiers in MCA	Power per Carrier, W/c	Total Power Watts	Results Occupied Bandwidth
A	25 - 75	3	P2PAM	3	40	120	Compliant
A	250-275	3	P2PAM	3	40	120	Compliant
D	325-375	3	P2PAM	3	40	120	Compliant
B	425 - 475	3	P2PAM	3	40	120	Compliant
B	625-675	3	P2PAM	3	40	120	Compliant
E	725 - 775	3	P2PAM	3	40	120	Compliant
F	825 - 875	3	P2PAM	3	40	120	Compliant
C	925-975	3	P2PAM	3	40	120	Compliant
C	1125-1175	3	P2PAM	3	40	120	Compliant
G	1225-1275	3	P2PAM	3	40	120	Compliant


**Exhibit 14 Results**

The Block designation, PCS channels, frequencies and Measured RF Power are tabulated on each plot. The transmitter output signals are plotted for each frequency/ channel of interest. Plots are provided for Left Edge and Right Edge of each PCS Block evaluated. These frequencies were chosen to show the occupied bandwidth in the channels in each of the PCS Blocks in which this product can be operated, in compliance with Section 24.229 and 24.238 (c) of the Commission code. The signal used to show the occupied bandwidth is defined in table 14.1. This is the signal recommended in 3GPP2 C.S0010-0. The power output level was adjusted to provide the documented value on each chart.


**RESULTS: The following exhibits illustrate the spectrums investigated and document compliance.**

**W. Steve Majkowski NCE**


Figure 14A Test Setup for Antenna Port Measurement of Transmit Power, Occupied Bandwidth and Conducted Spurious Emissions

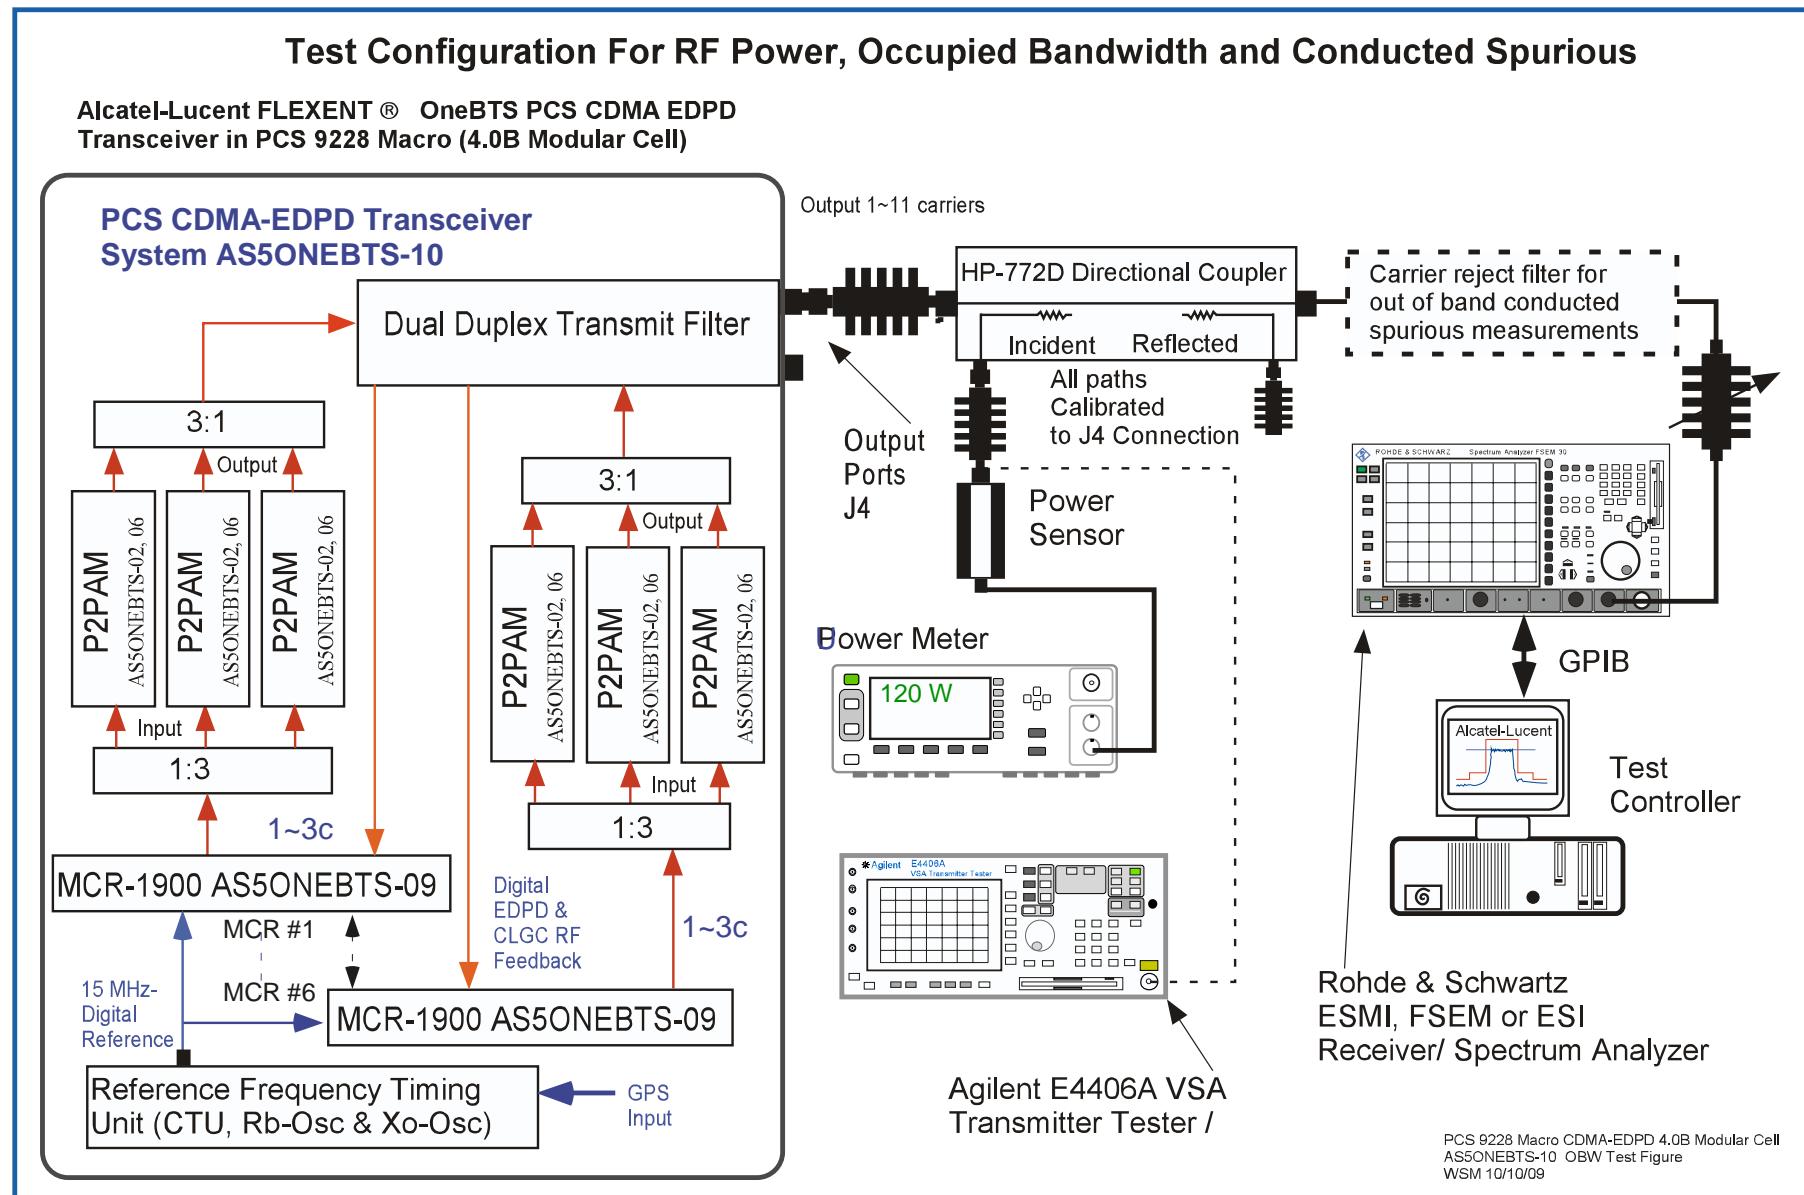

**Figure 14B Occupied Bandwidth Mask for PCS Block Operation at 40 W with Power Calibration (PCS A Block is depicted with a single carrier signal showing use of the Power Calibration Trace )**

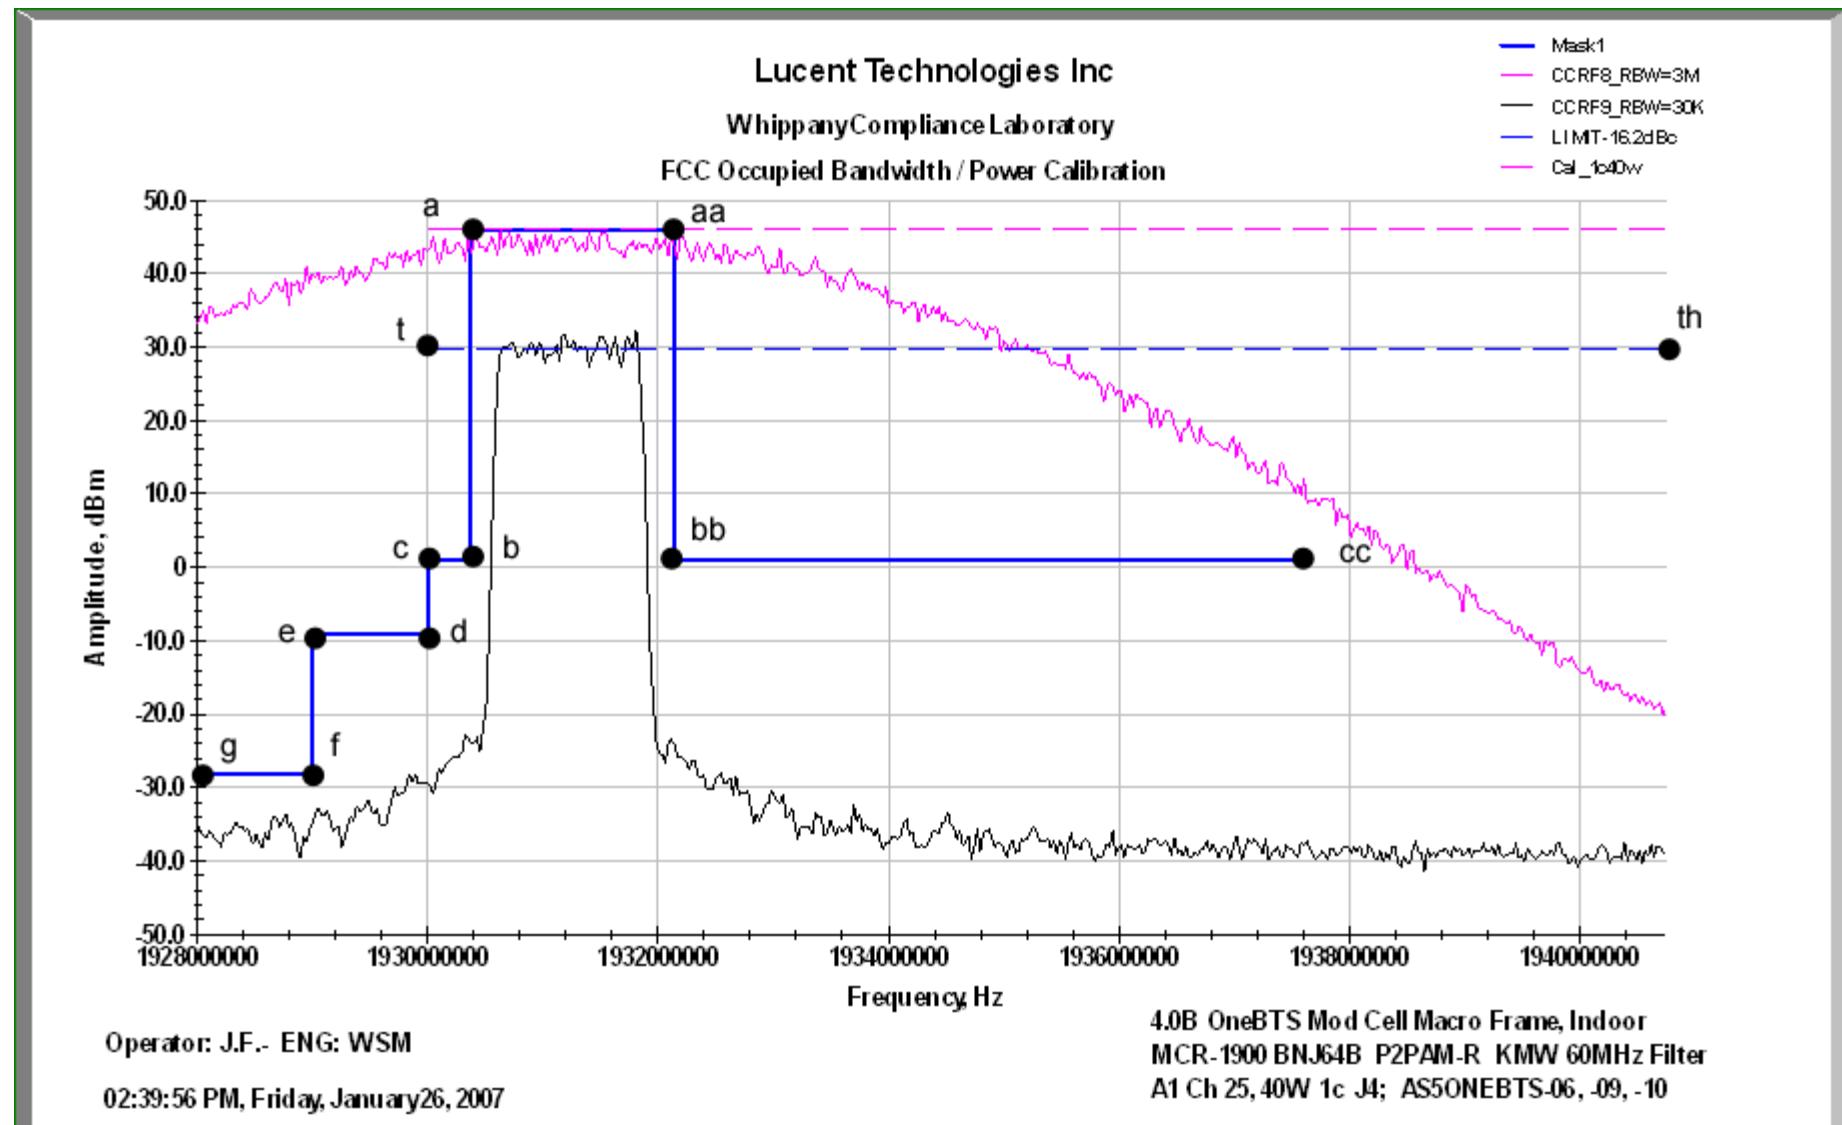

**Figure 14C Multi-Carrier Occupied Bandwidth Power Calibration  
(PCS A Block is depicted with a three carrier signal showing use of the Power Calibration Trace )**

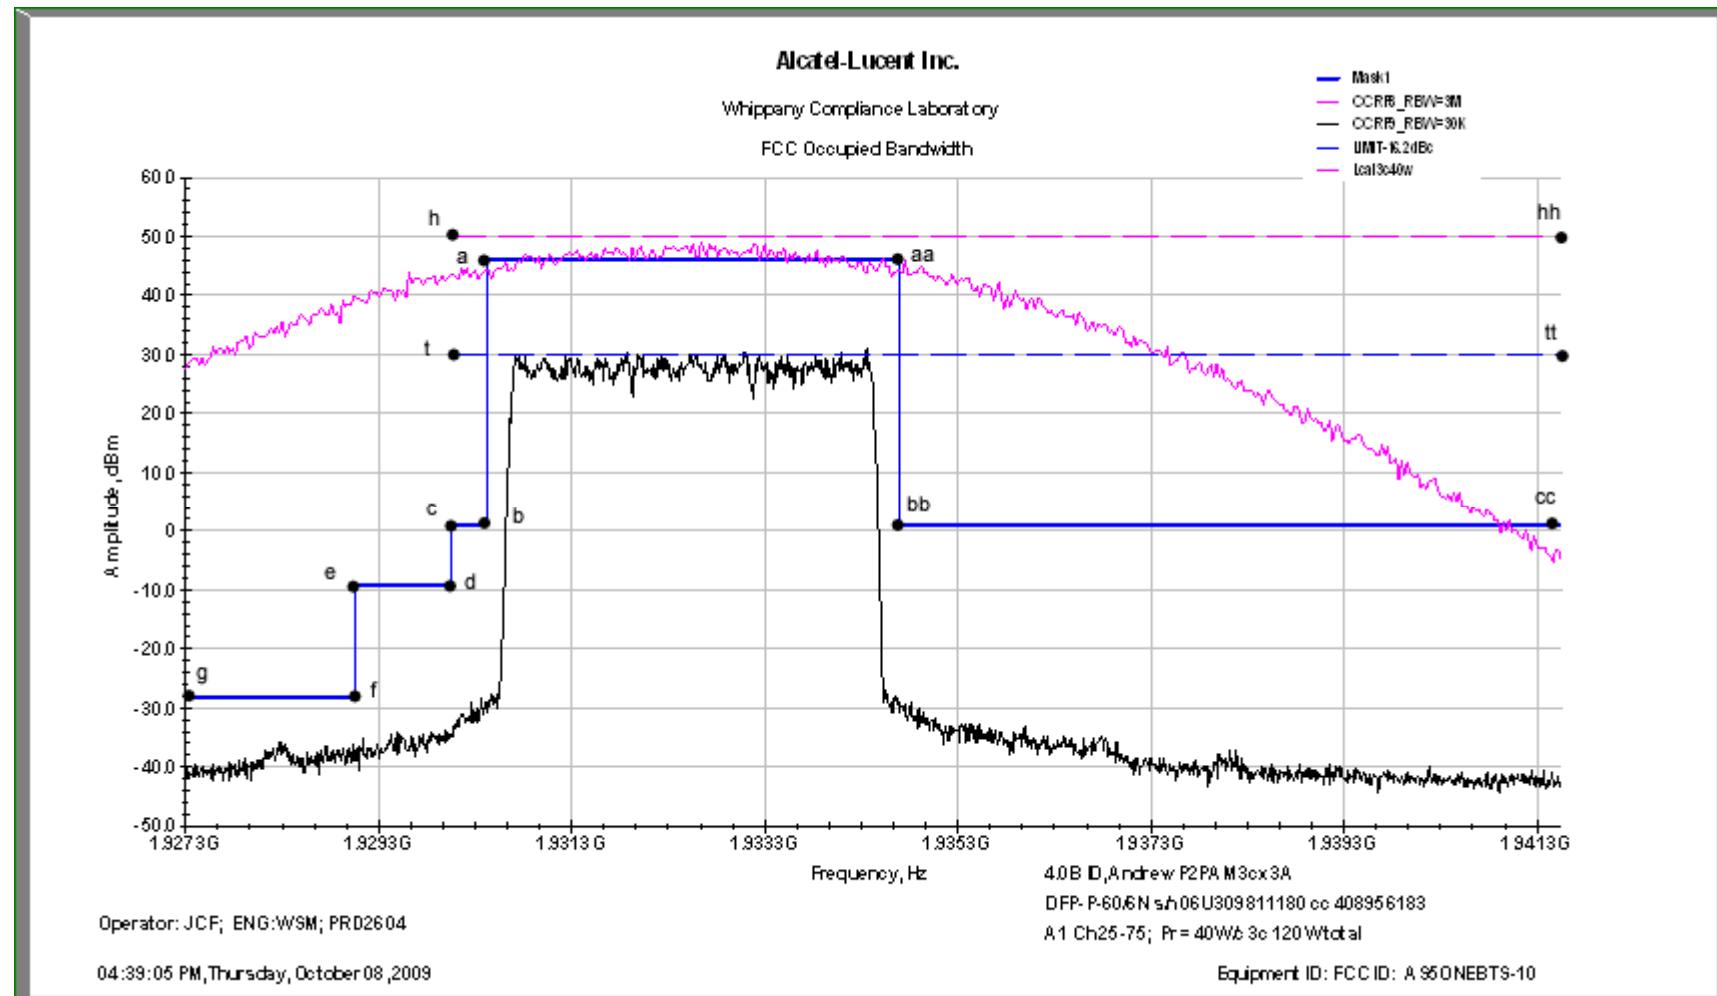


**Transmitter Measurements  
of  
CDMA Occupied Bandwidth  
for  
Alcatel-Lucent Inc.  
PCS UMTS-CDMA EDPD Transceiver  
FCC ID: AS5ONEBTS-10  
Installed in  
FLEXENT PCS CDMA Modular Cell 4.0B  
9228 Base Station Macro  
Operational Configuration with  
3 P2PAMs per transmit path  
3c at 40W/carrier, 120W Total**

W. Steve Majkowski NCE  
CDMA Certification Lead  
Whippany FCC Compliance Laboratory  
Alcatel-Lucent.  
Lab: 973-386-2135  
majkowski@alcatel-lucent.com

Occupied Bandwidth PCS Ch A1-25-75

3c w/EDPD


120W Total

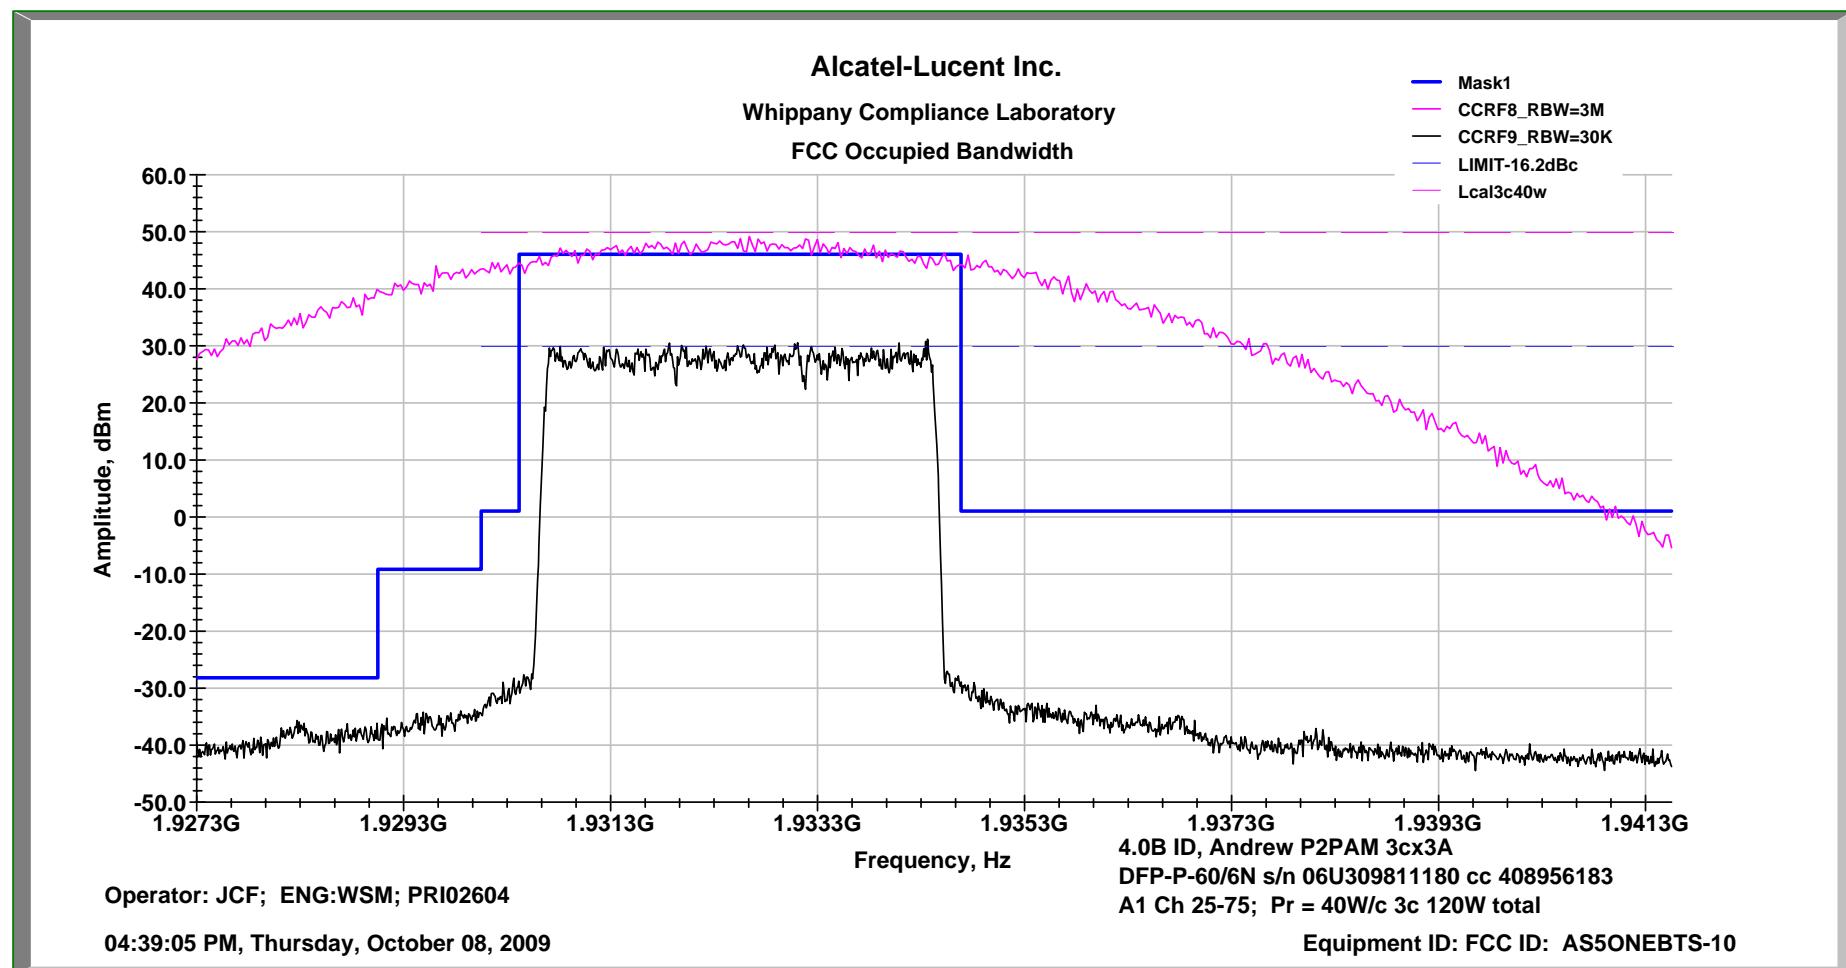

In-band Inter-modulation PCS Ch A1-25-75

3c w/EDPD


120W Total

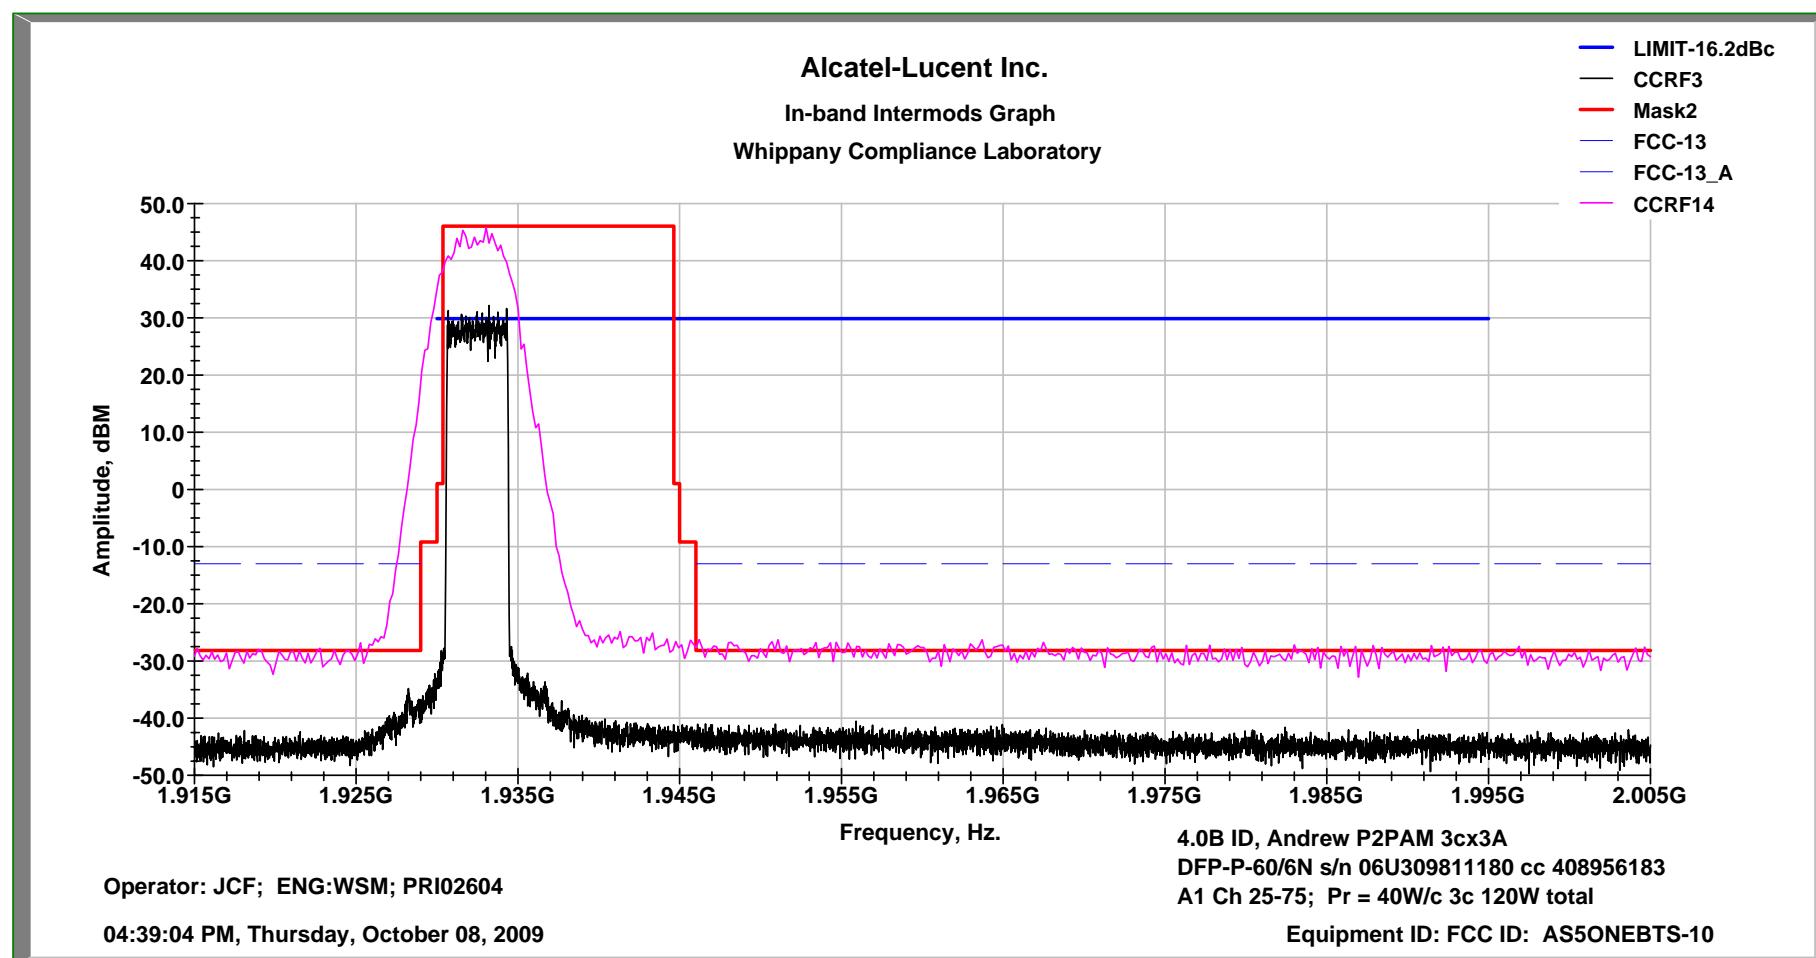

Occupied Bandwidth    PCS Ch A5-225-275

3c w/EDPD

120W Total

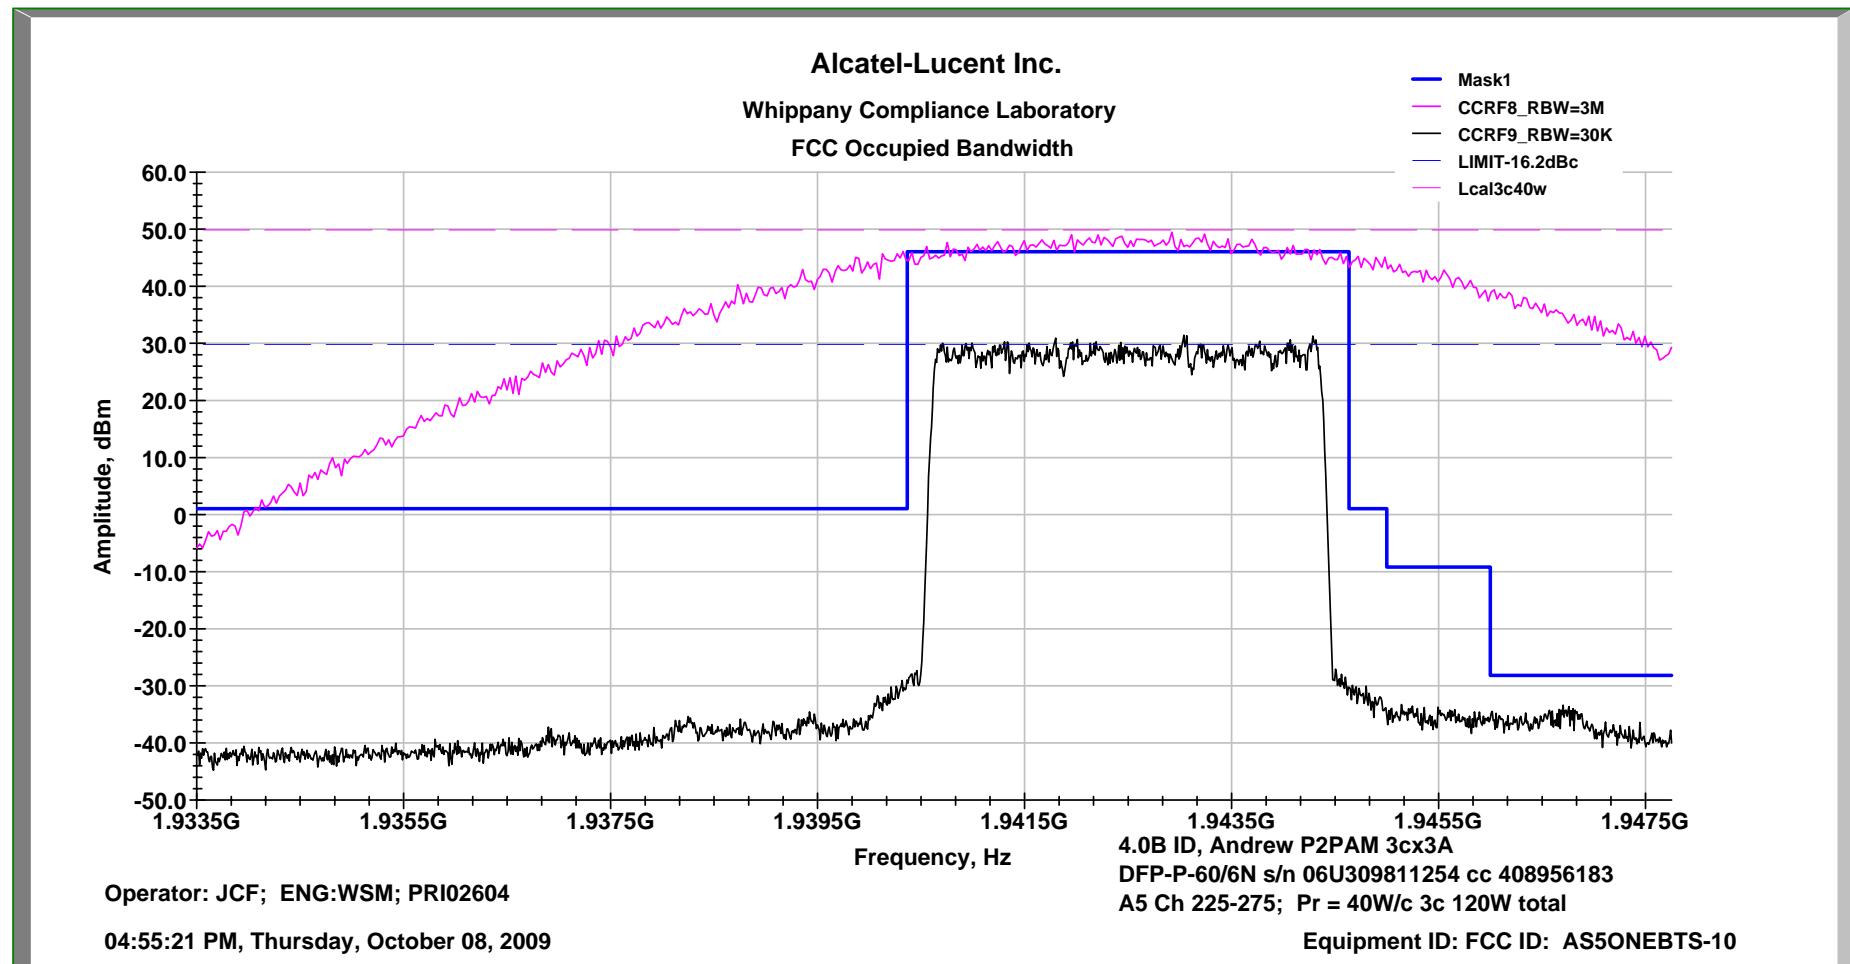


In-band Inter-modulation

PCS Ch A5-225-275

3c w/EDPD


120W Total

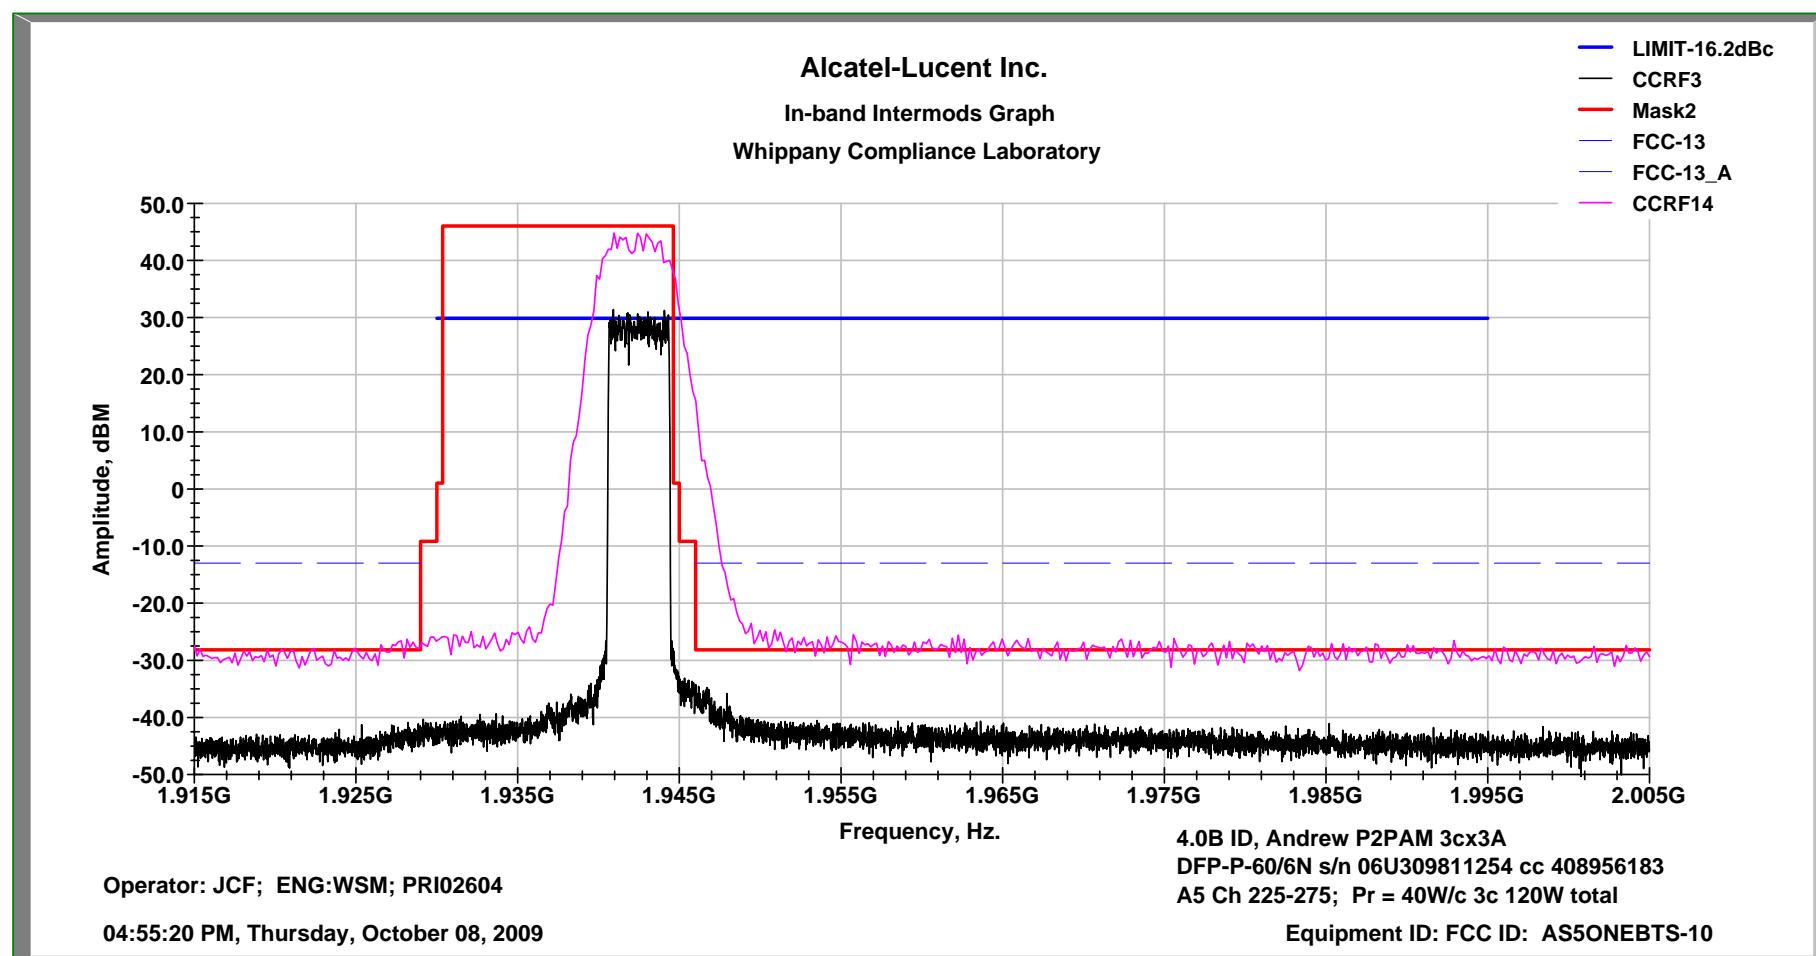

Occupied Bandwidth PCS Ch D-325-375

3c w/EDPD

120W Total

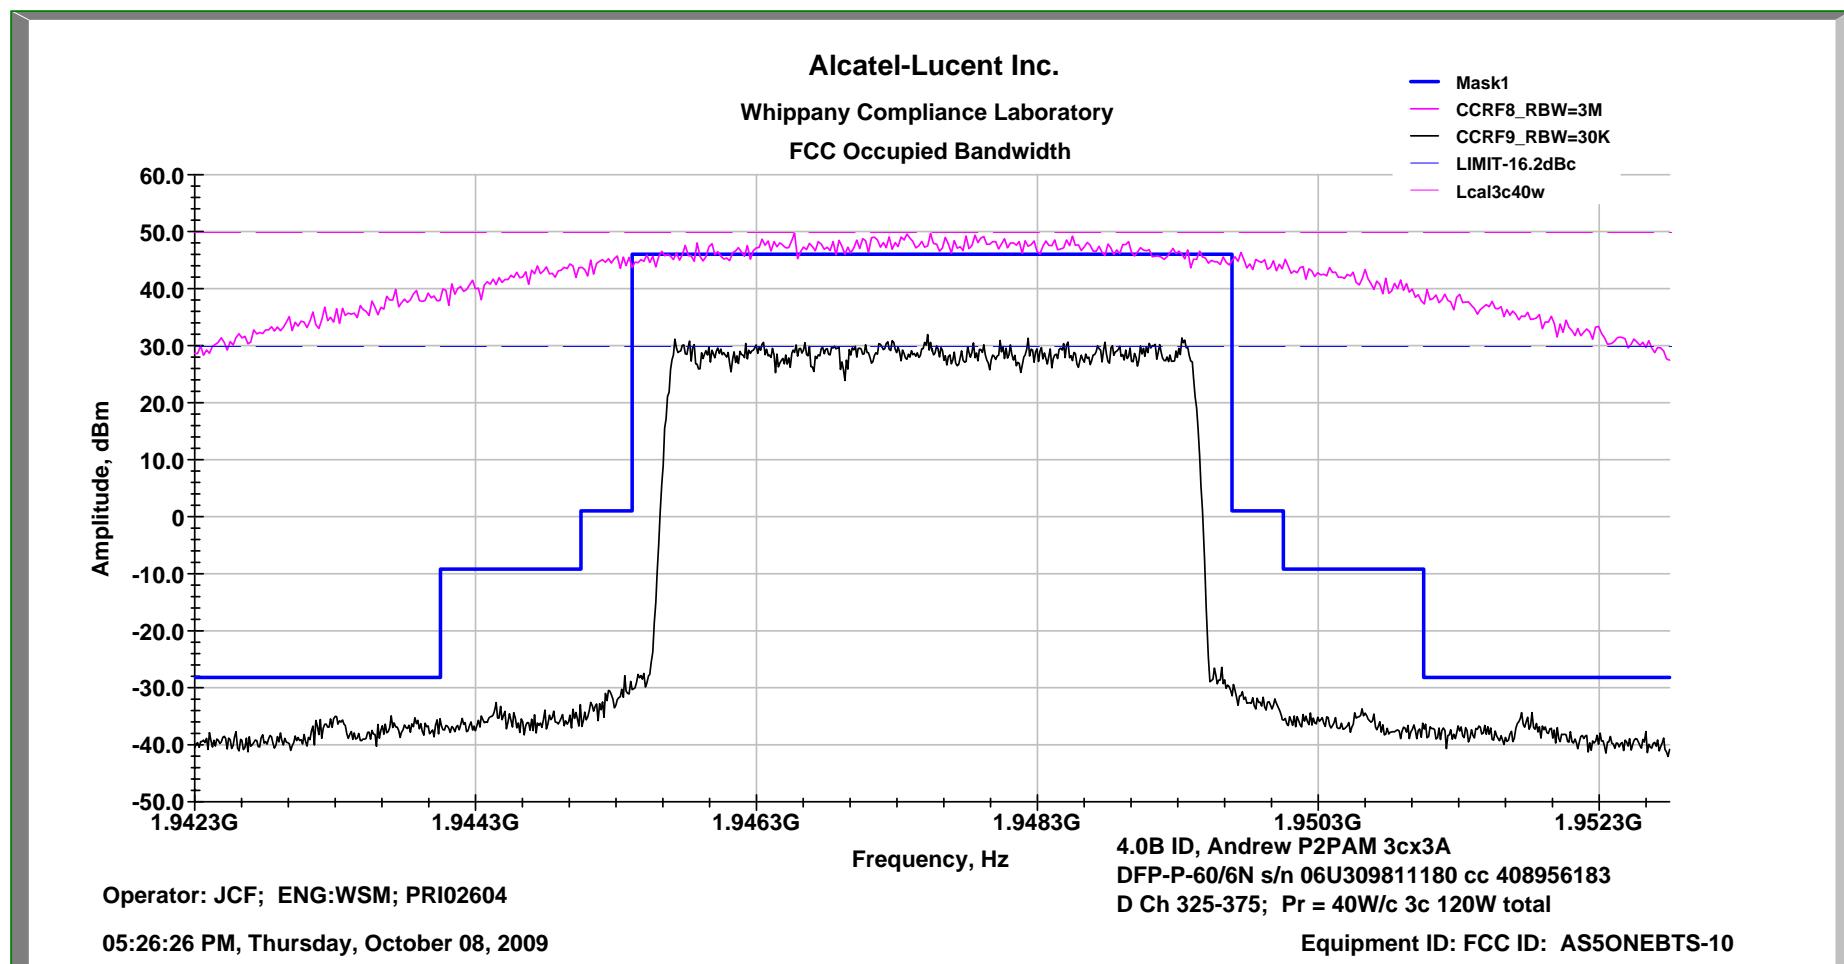


In-band Inter-modulation


PCS Ch D-325-375

3c w/EDPD

120W Total

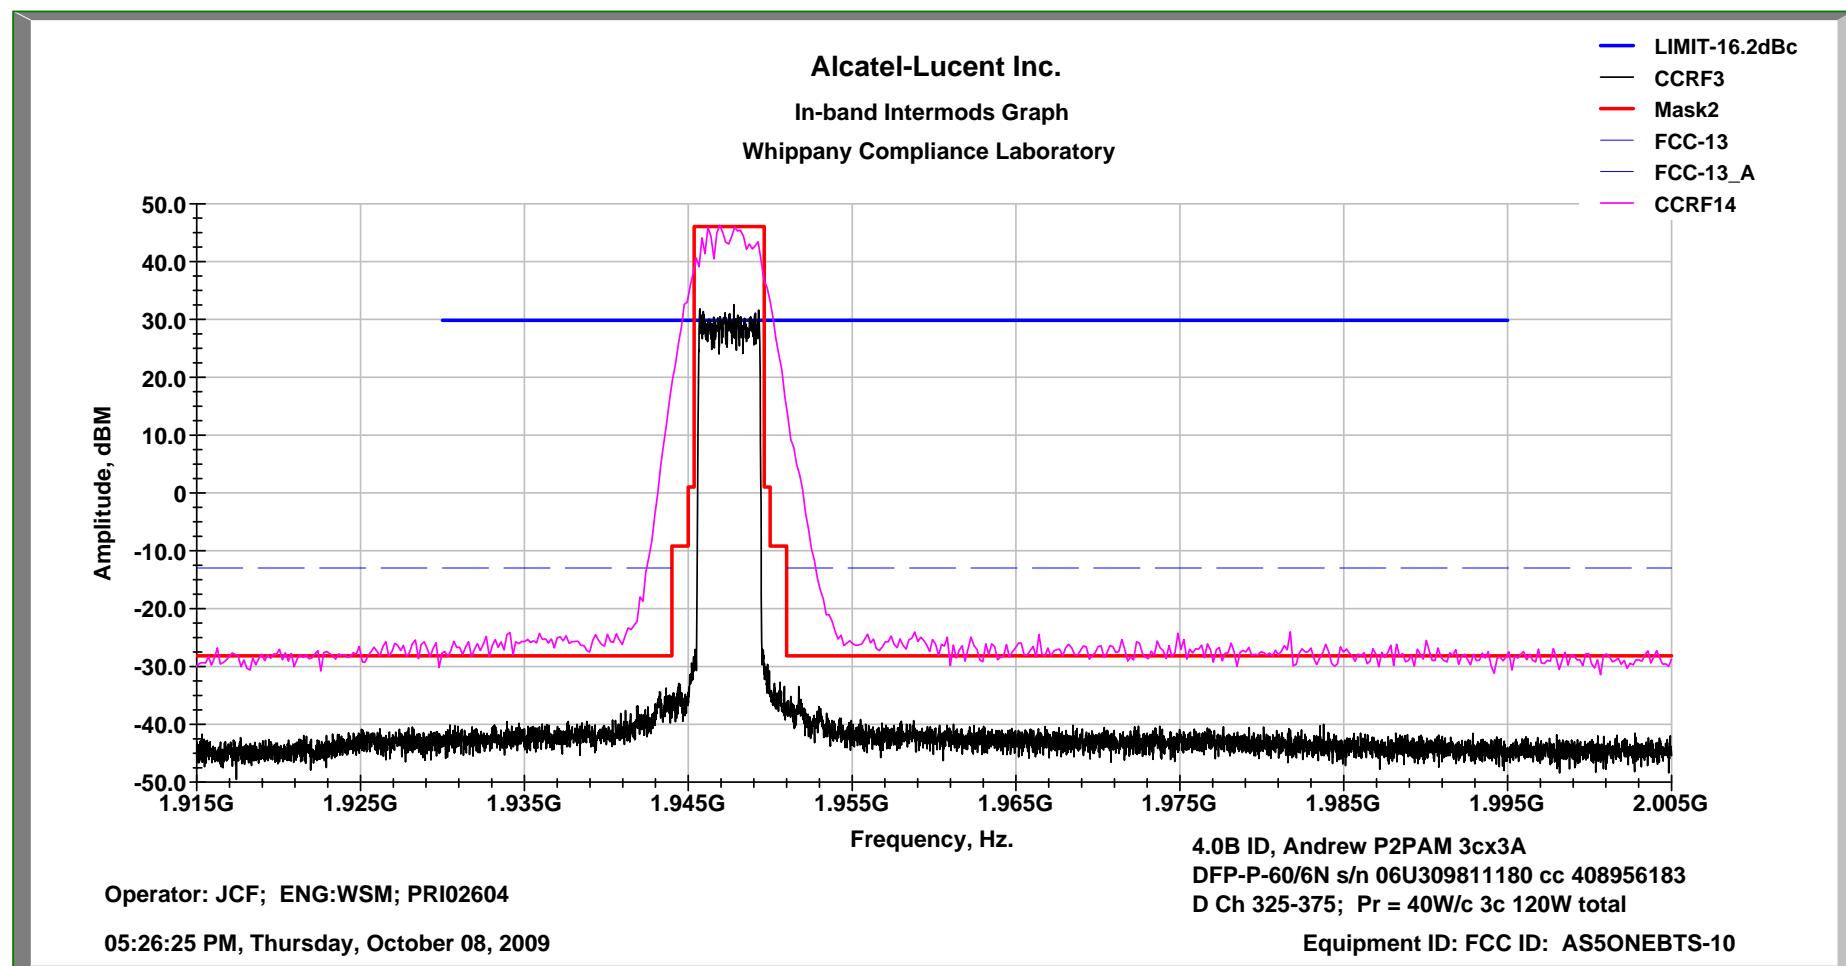

Occupied Bandwidth    PCS Ch B1-425-475    3c w/EDPD    120W Total

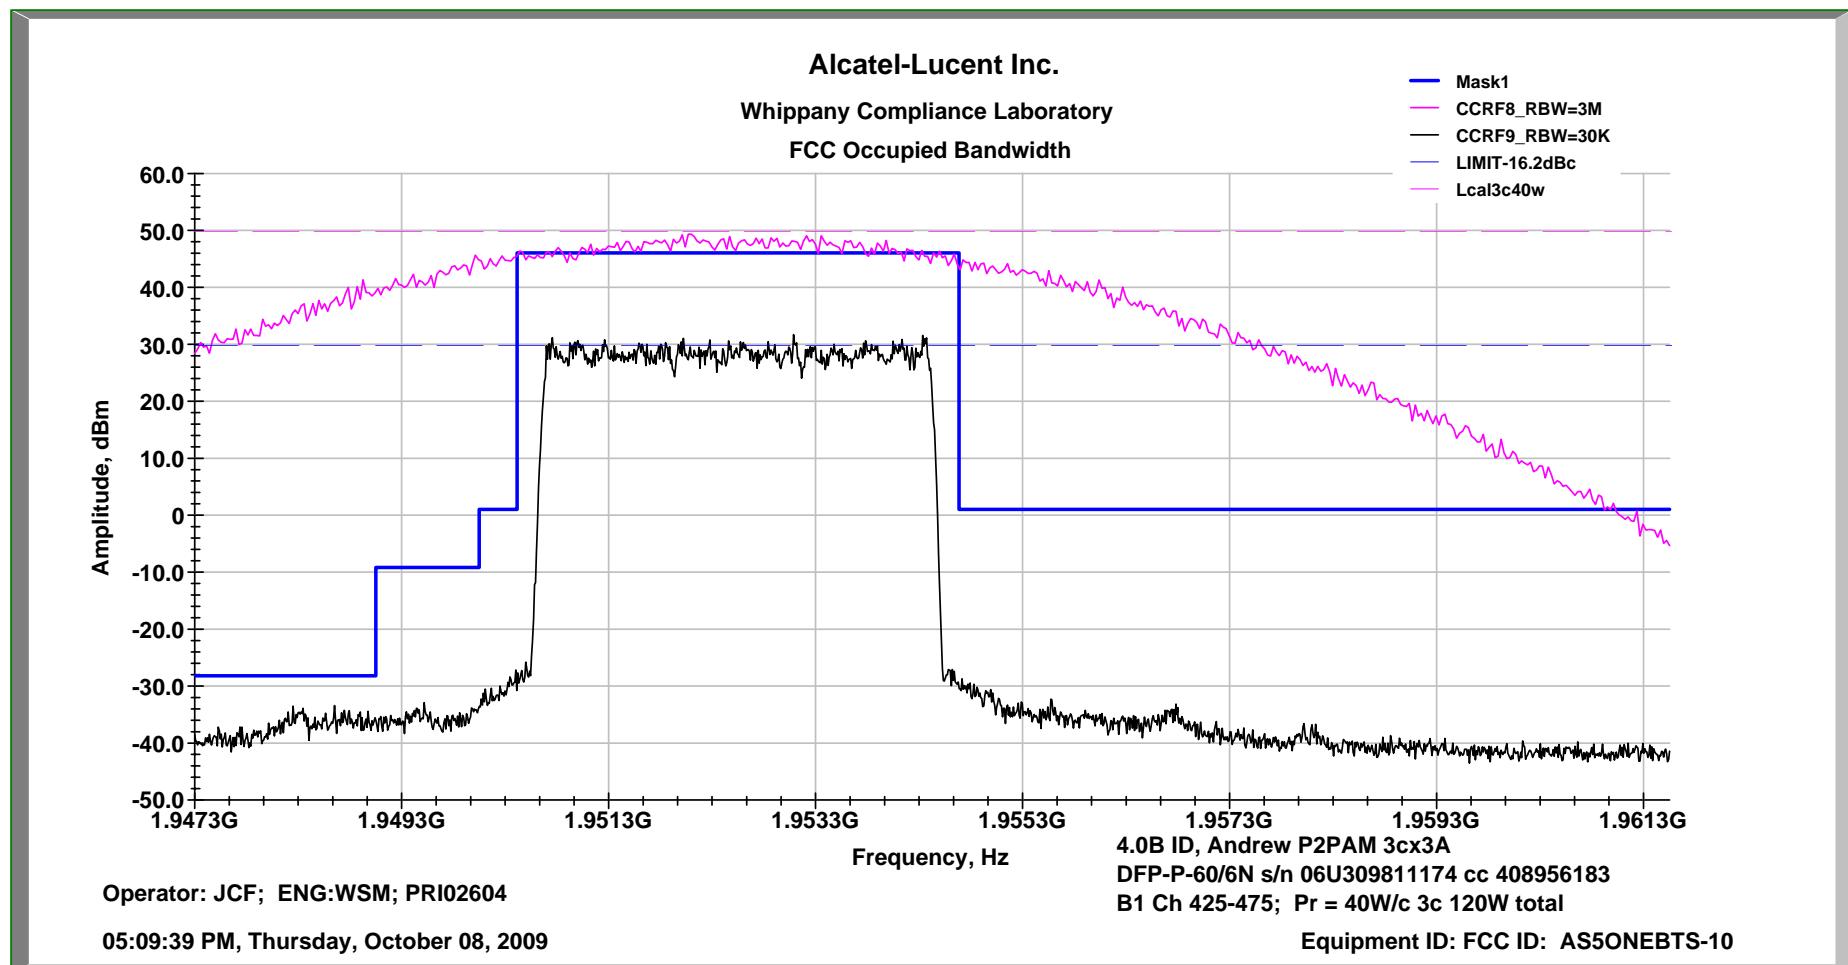


In-band Inter-modulation

PCS Ch B1-425-475

3c w/EDPD


120W Total

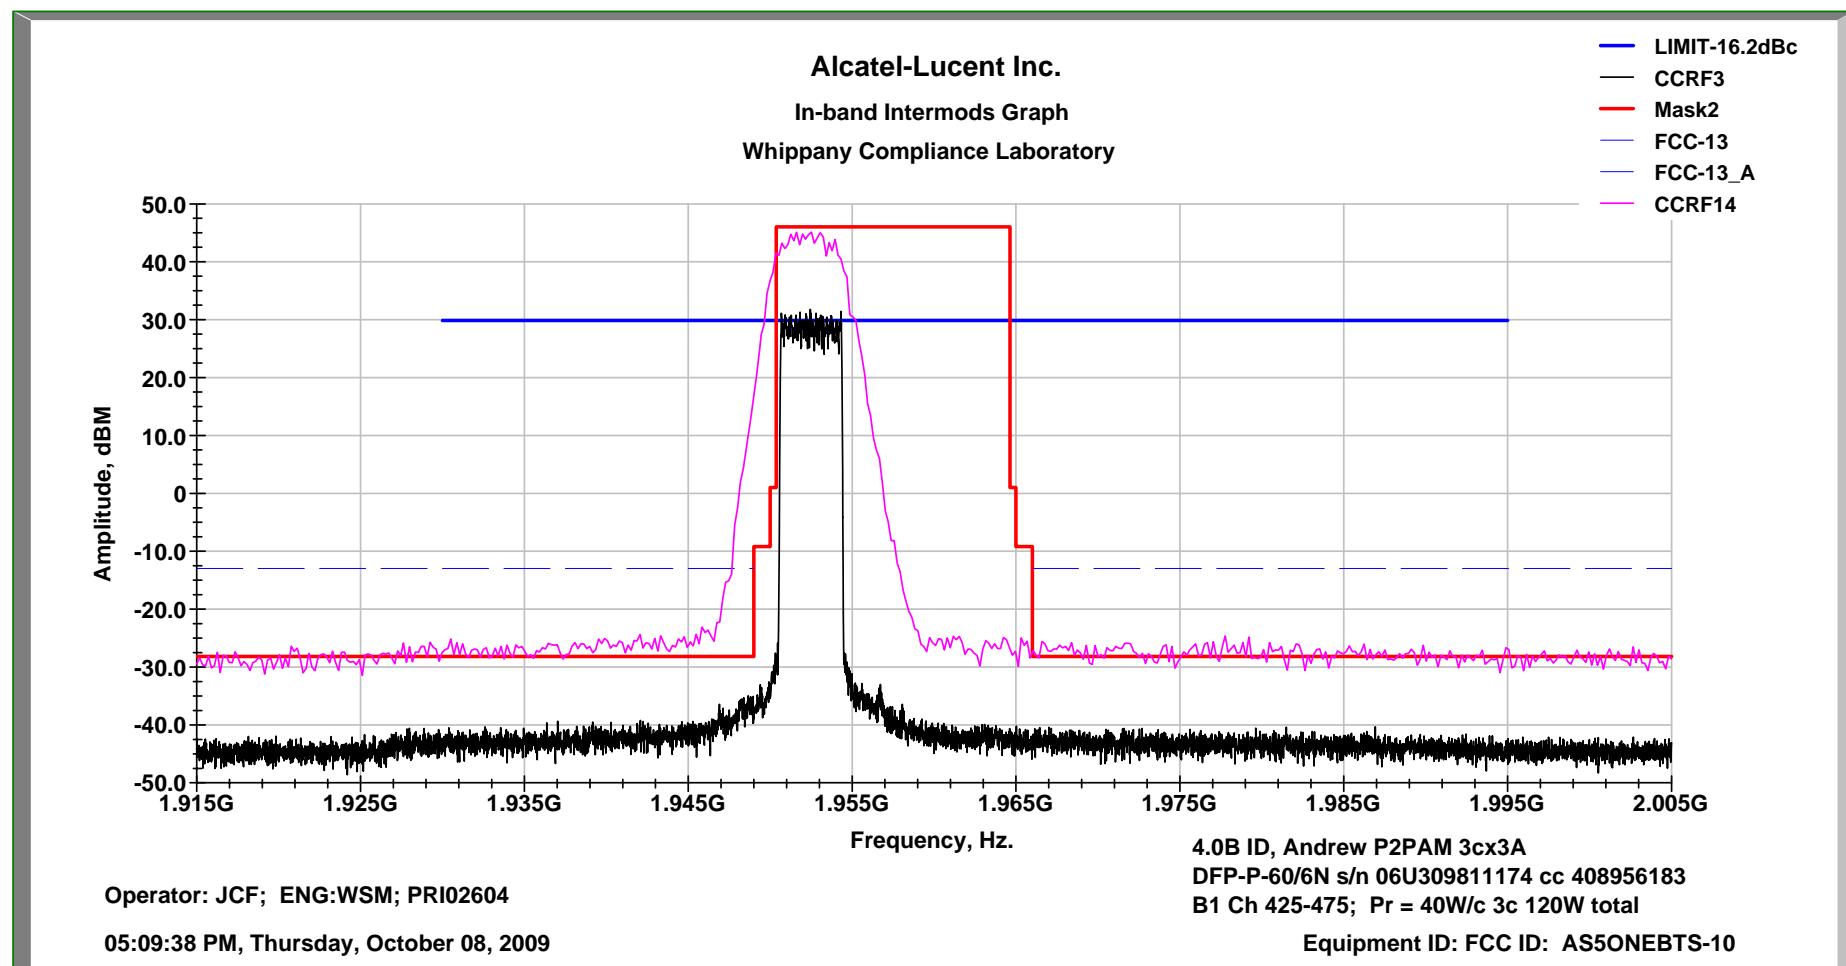

Occupied Bandwidth PCS Ch B5-625-675

3c w/EDPD

120W Total

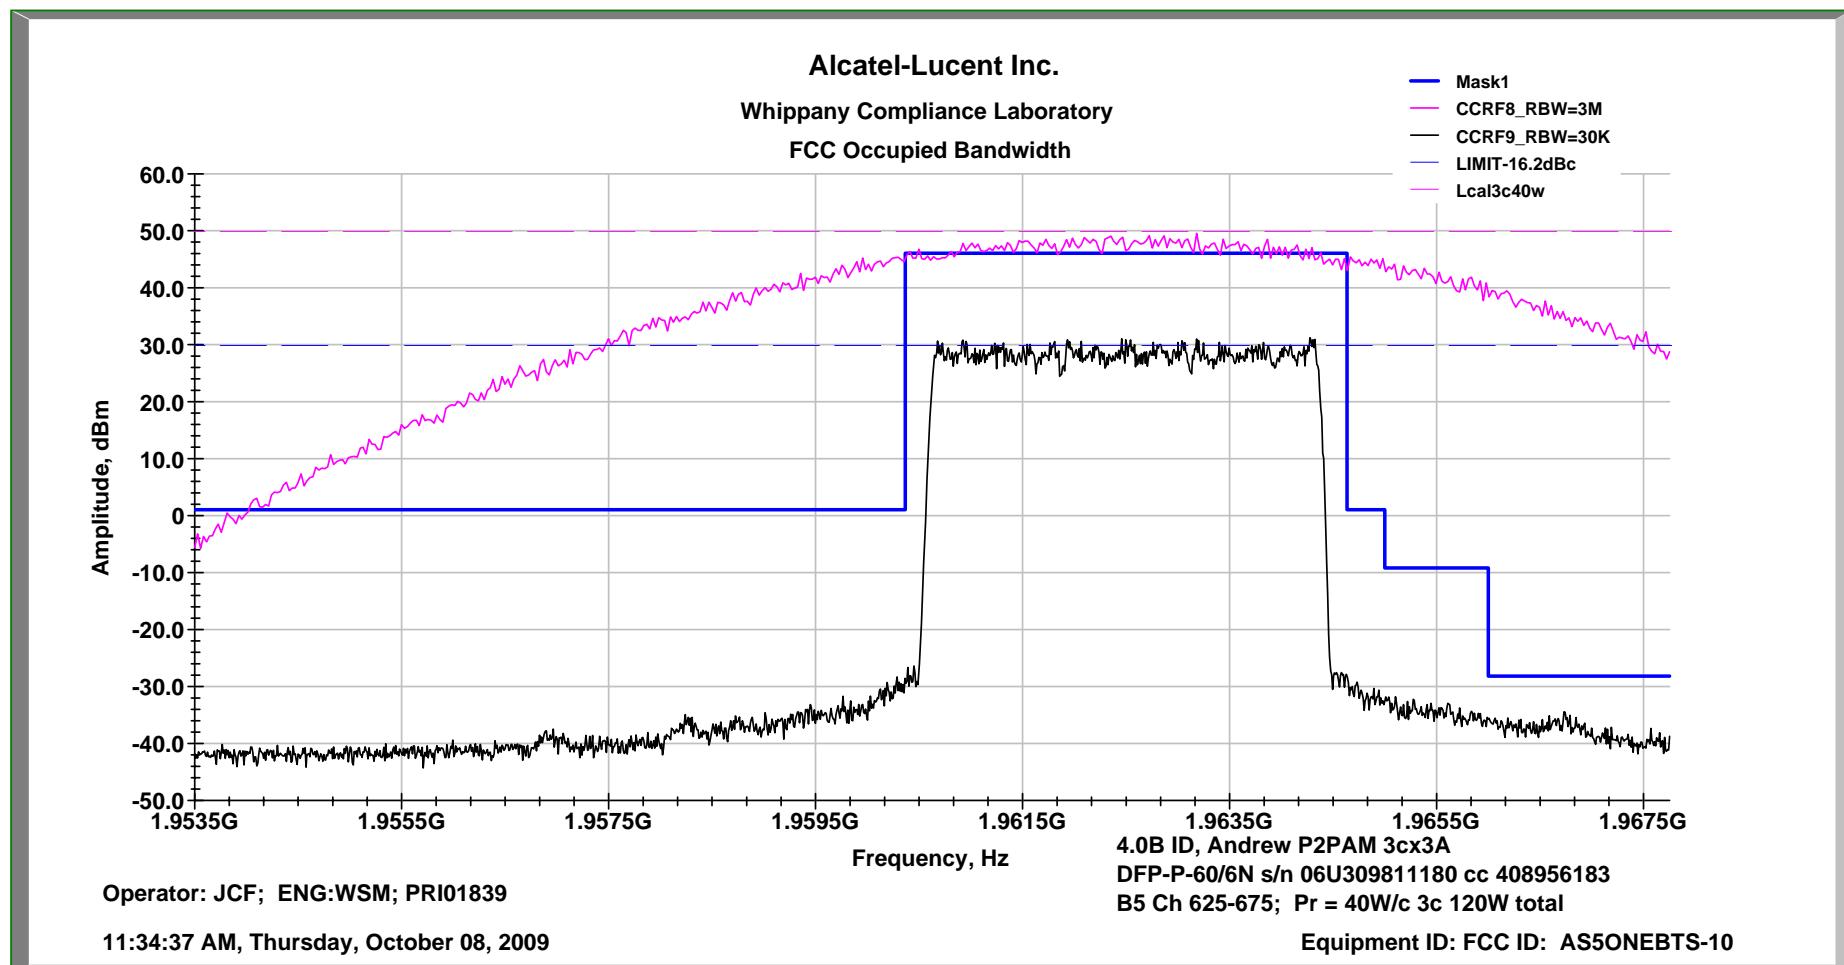


In-band Inter-modulation

PCS Ch B5-625-675

3c w/EDPD


120W Total

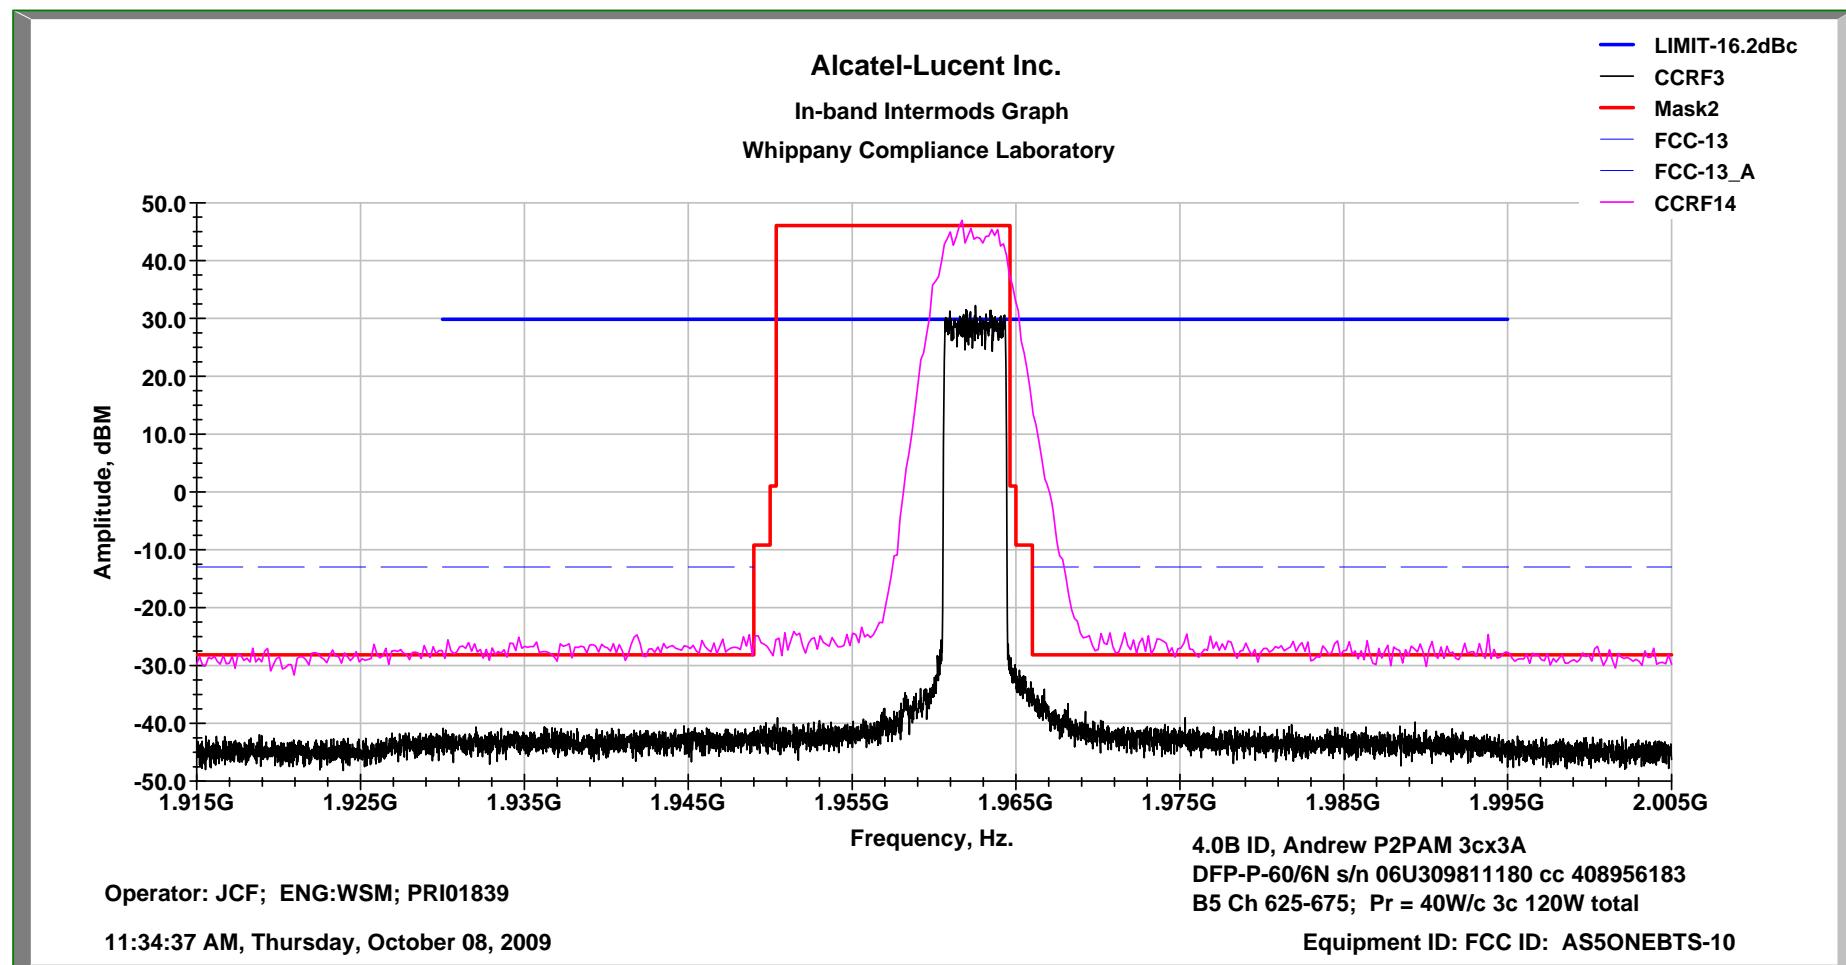

Occupied Bandwidth PCS Ch E-725-775

3c w/EDPD

120W Total

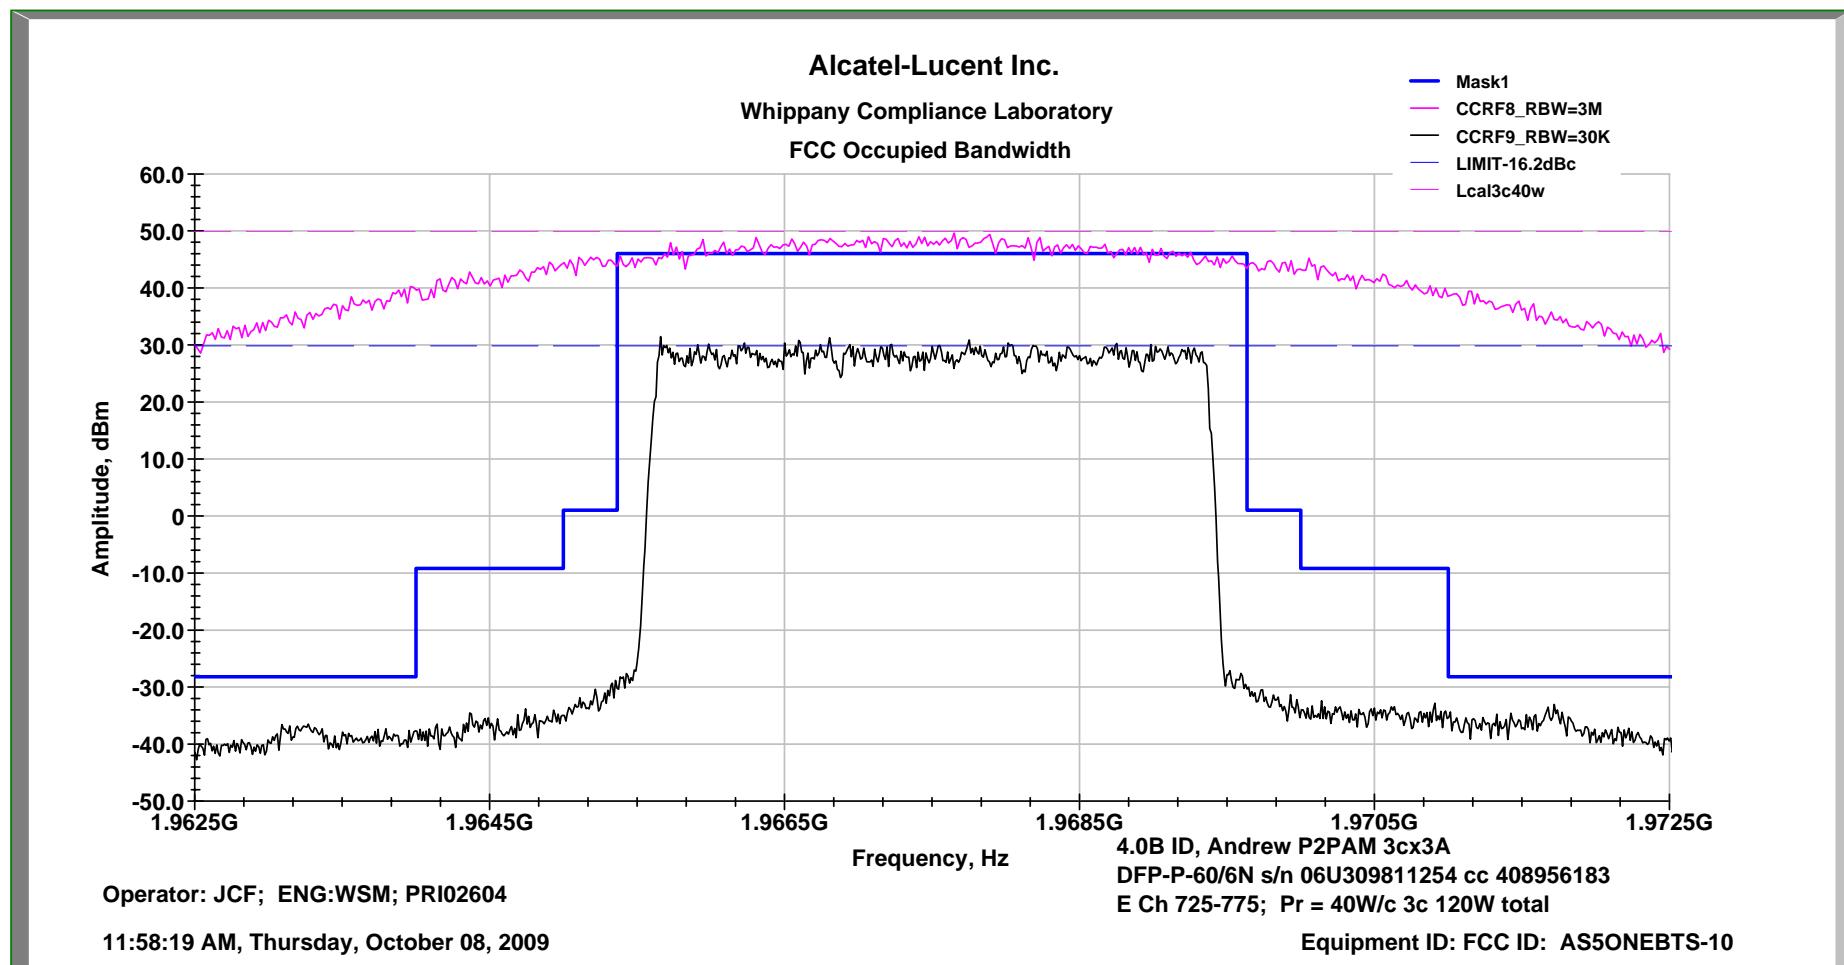


In-band Inter-modulation

PCS Ch E-725-775

3c w/EDPD


120W Total

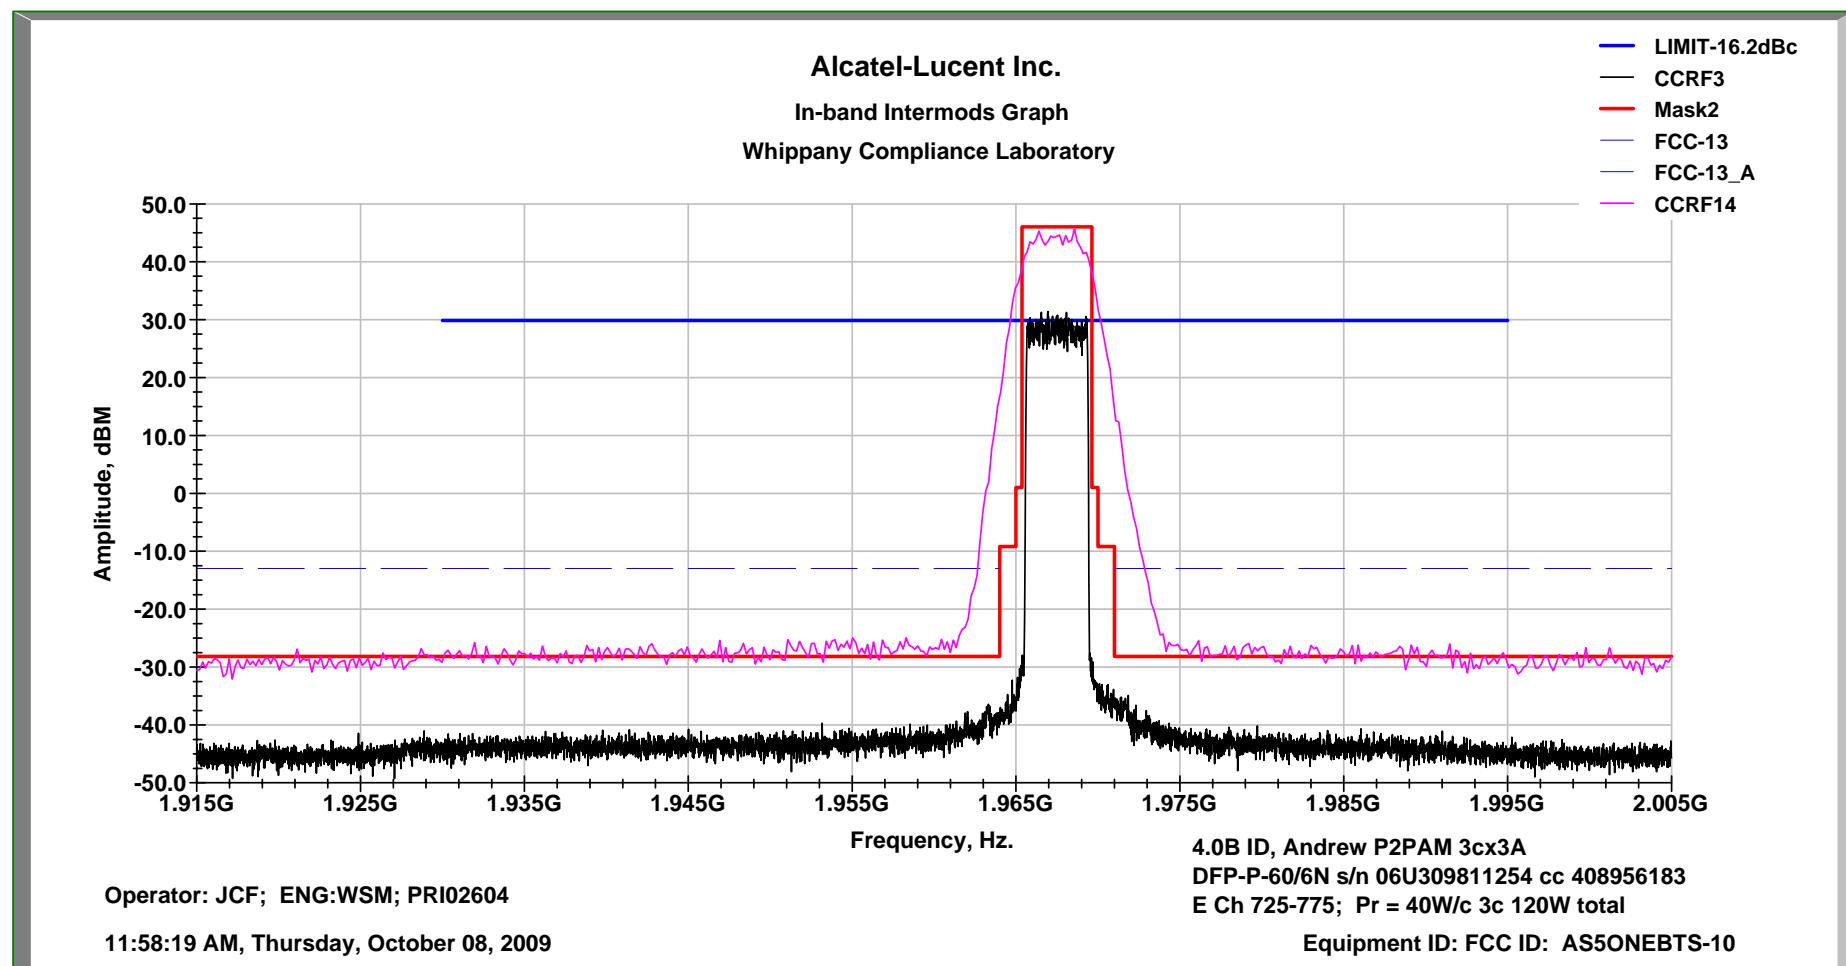

Occupied Bandwidth PCS Ch F-825-875

3c w/EDPD

120W Total

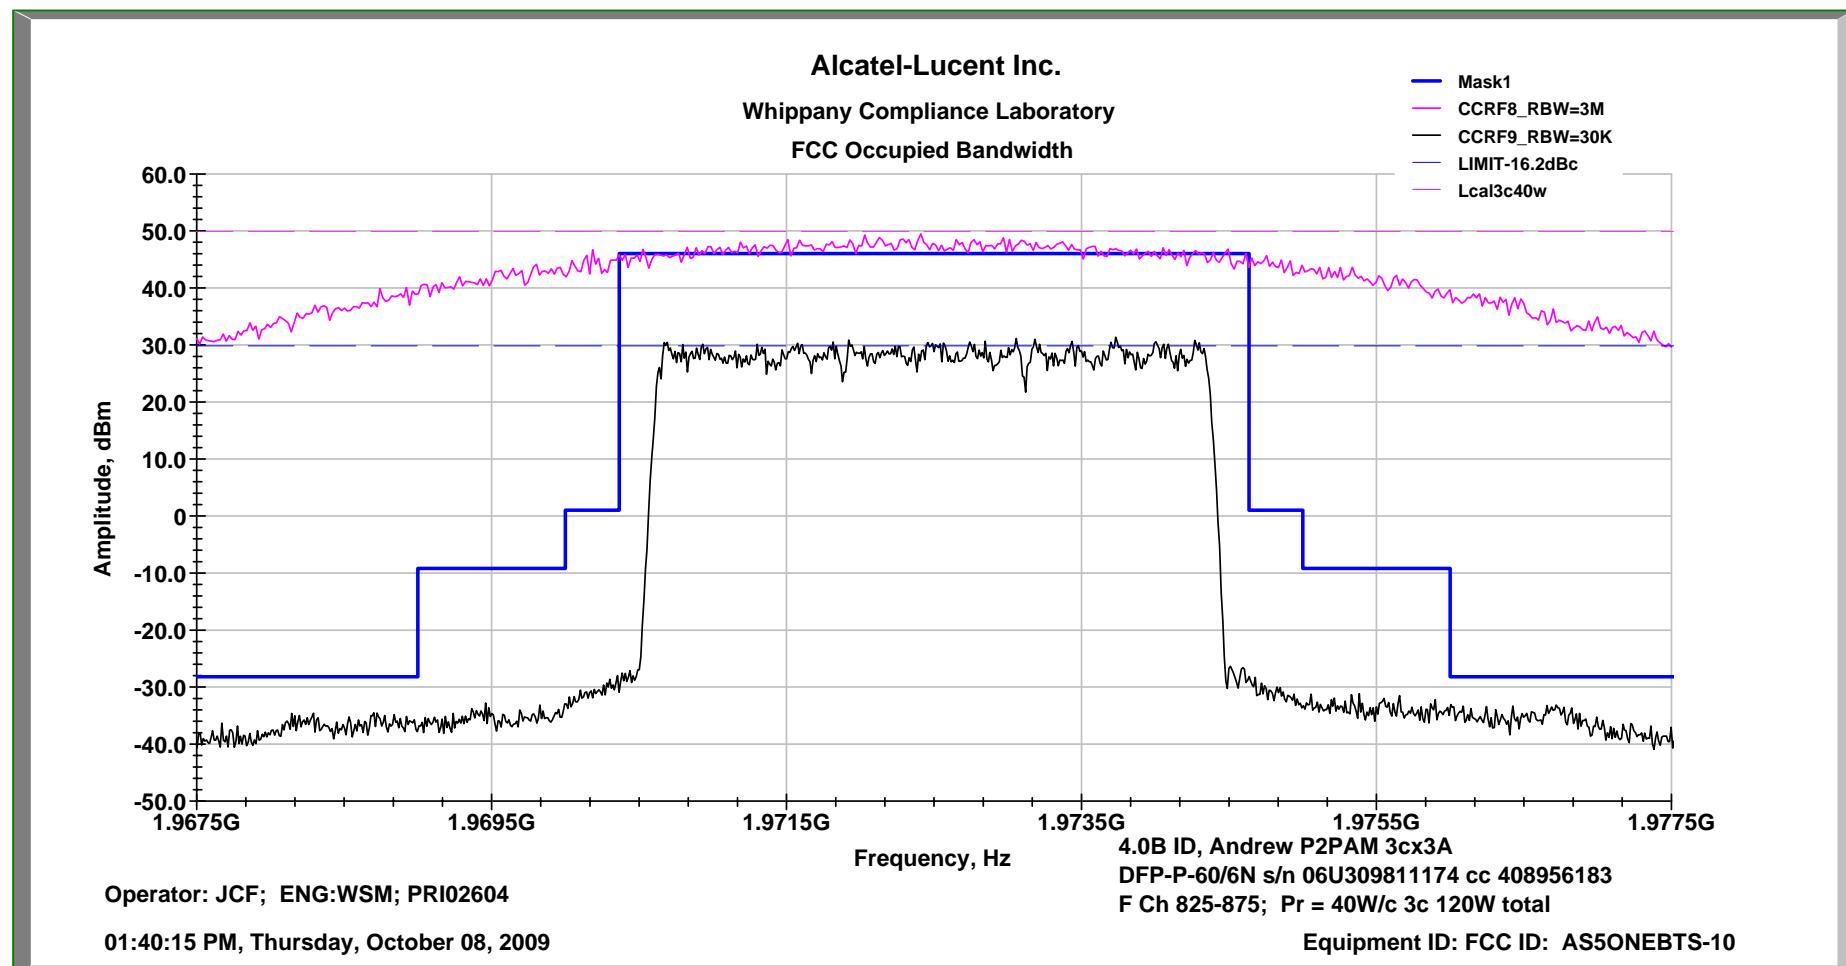


In-band Inter-modulation


PCS Ch F-825-875

3c w/EDPD

120W Total

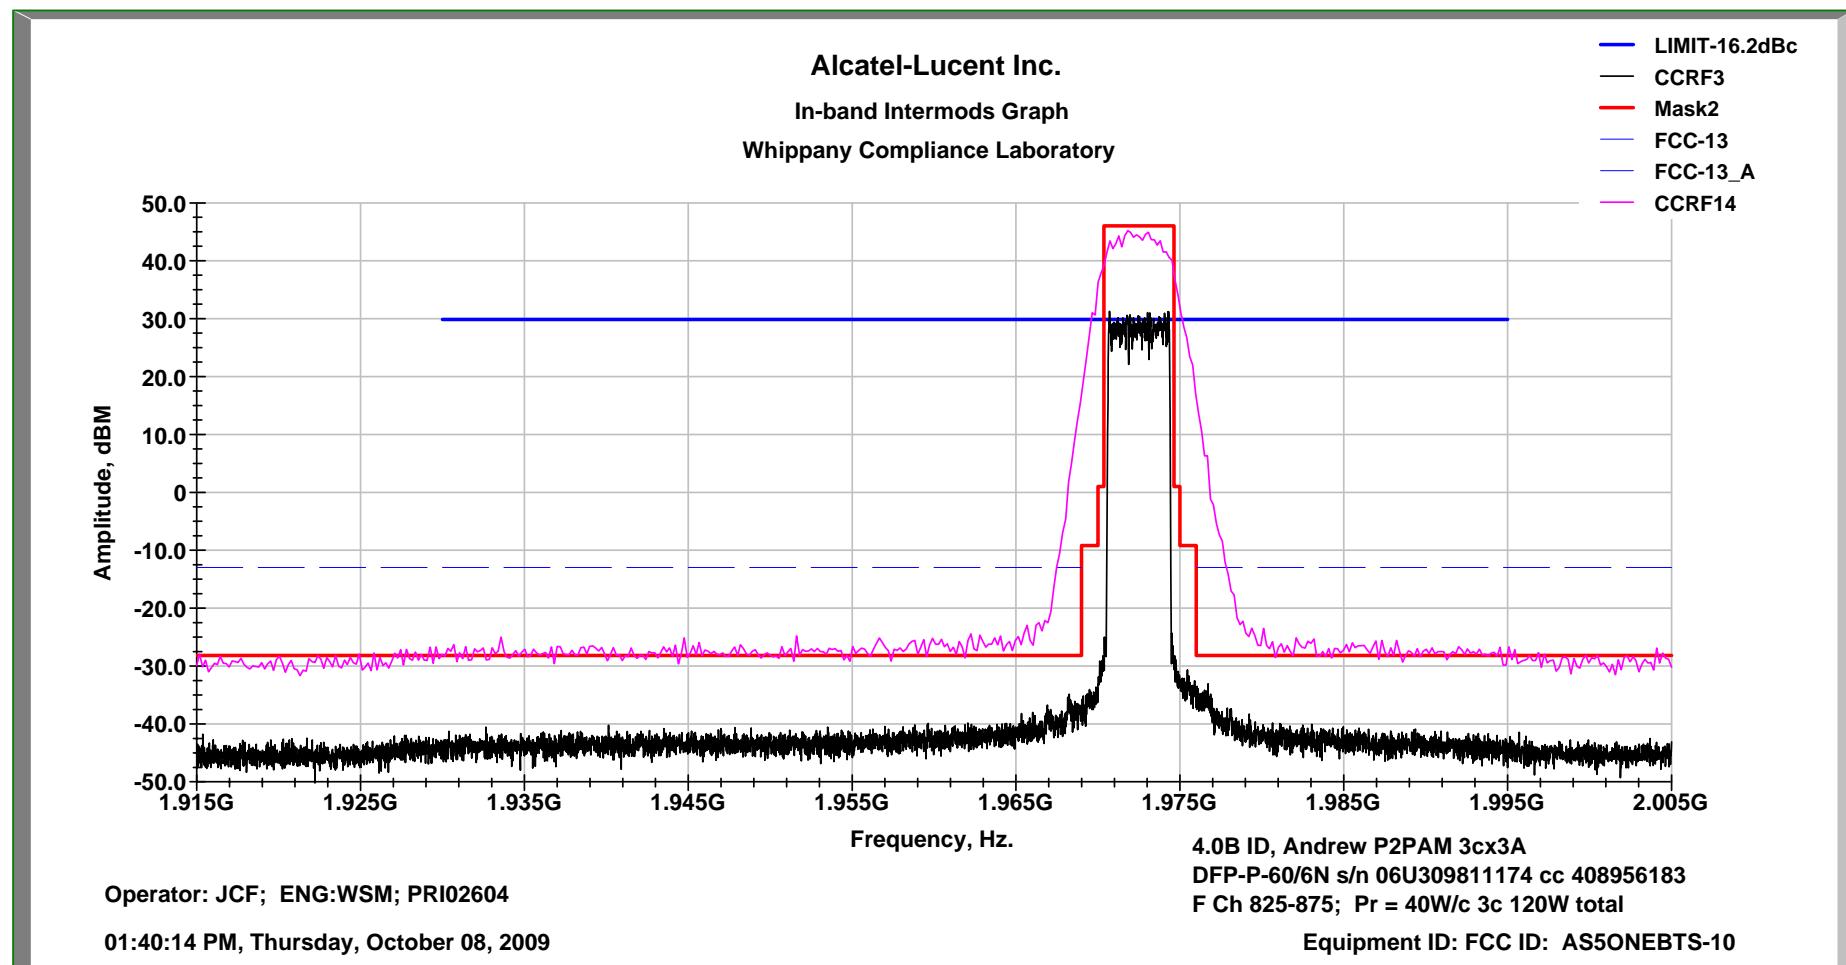

Occupied Bandwidth    PCS Ch C1-925-975    3c w/EDPD    120W Total

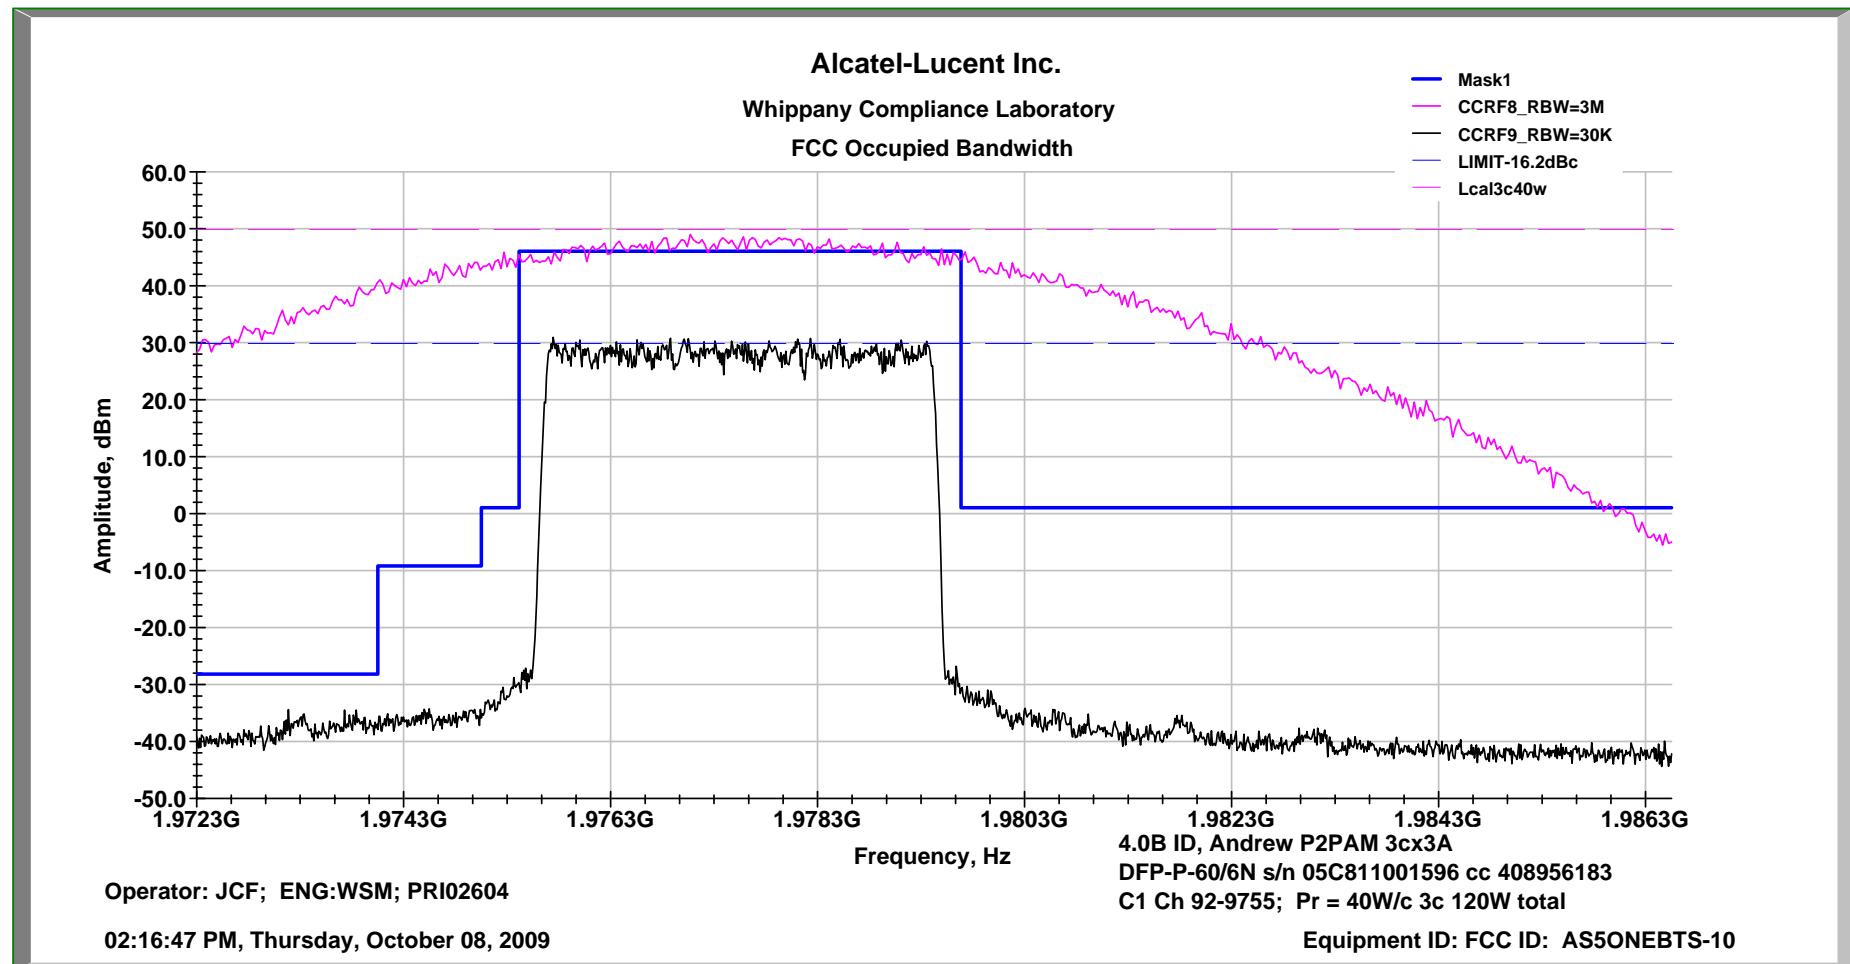


In-band Inter-modulation


PCS Ch C1-925-975

3c w/EDPD

120W Total

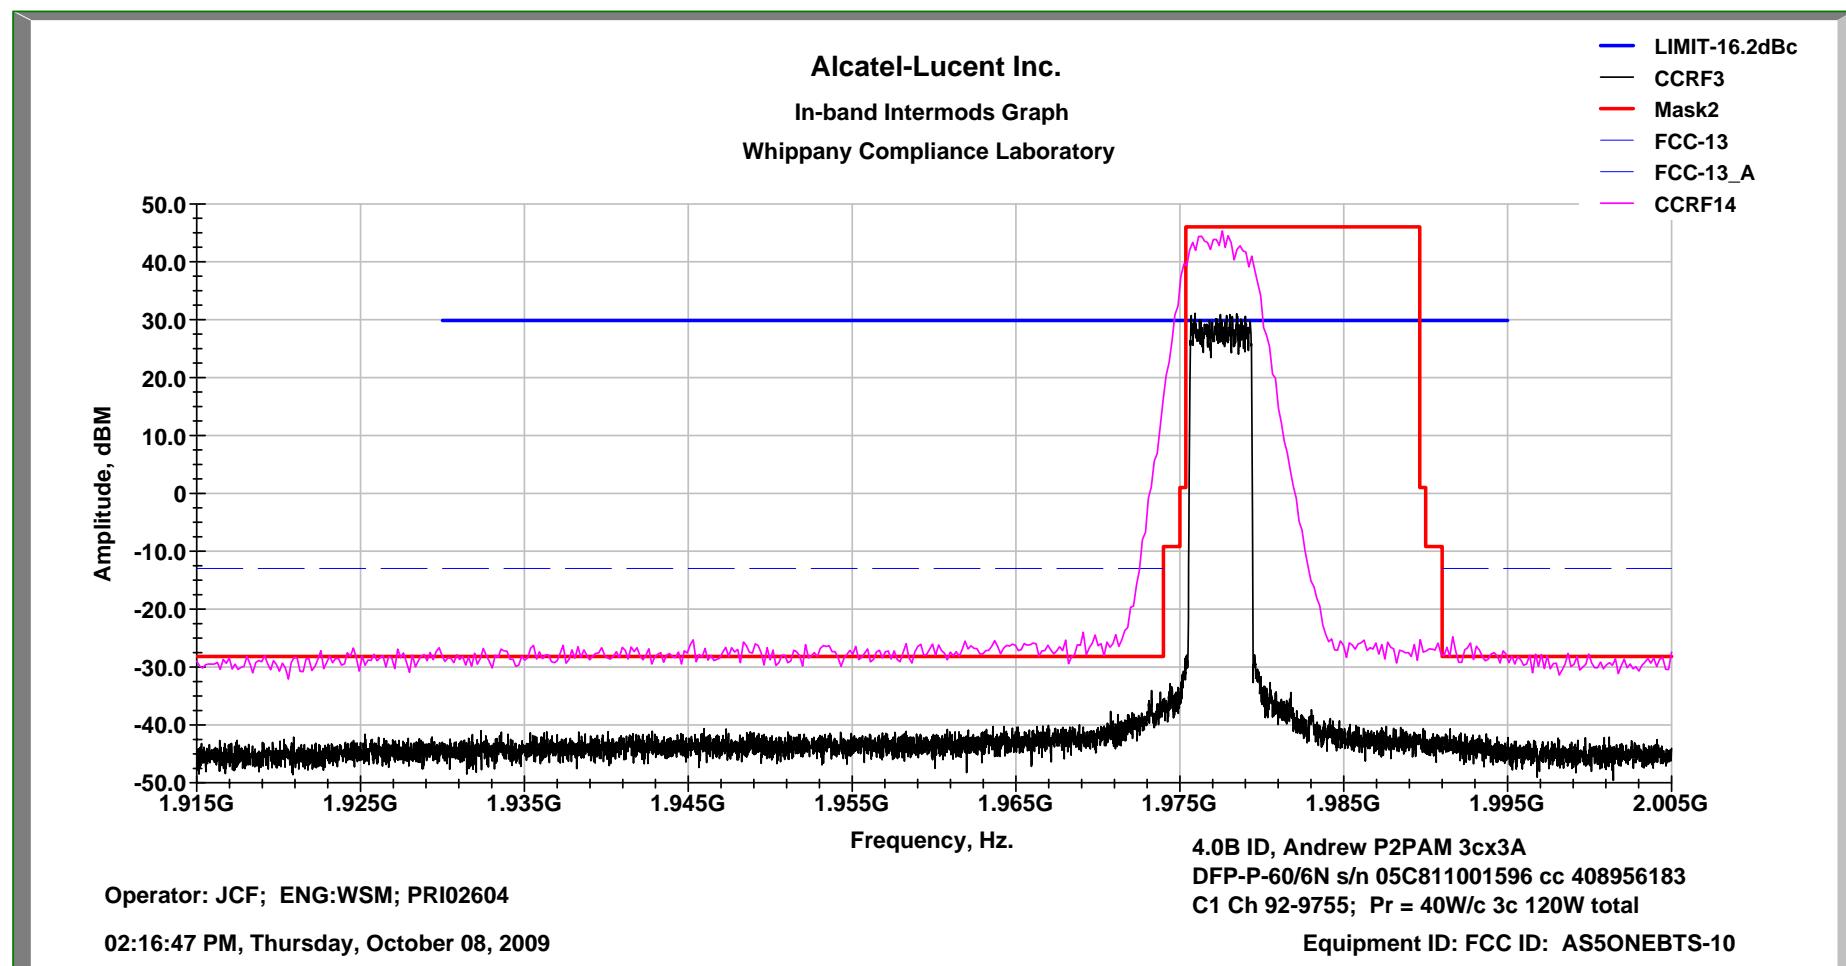


Occupied Bandwidth    PCS Ch C5-1125-1175    3c w/EDPD    120W Total

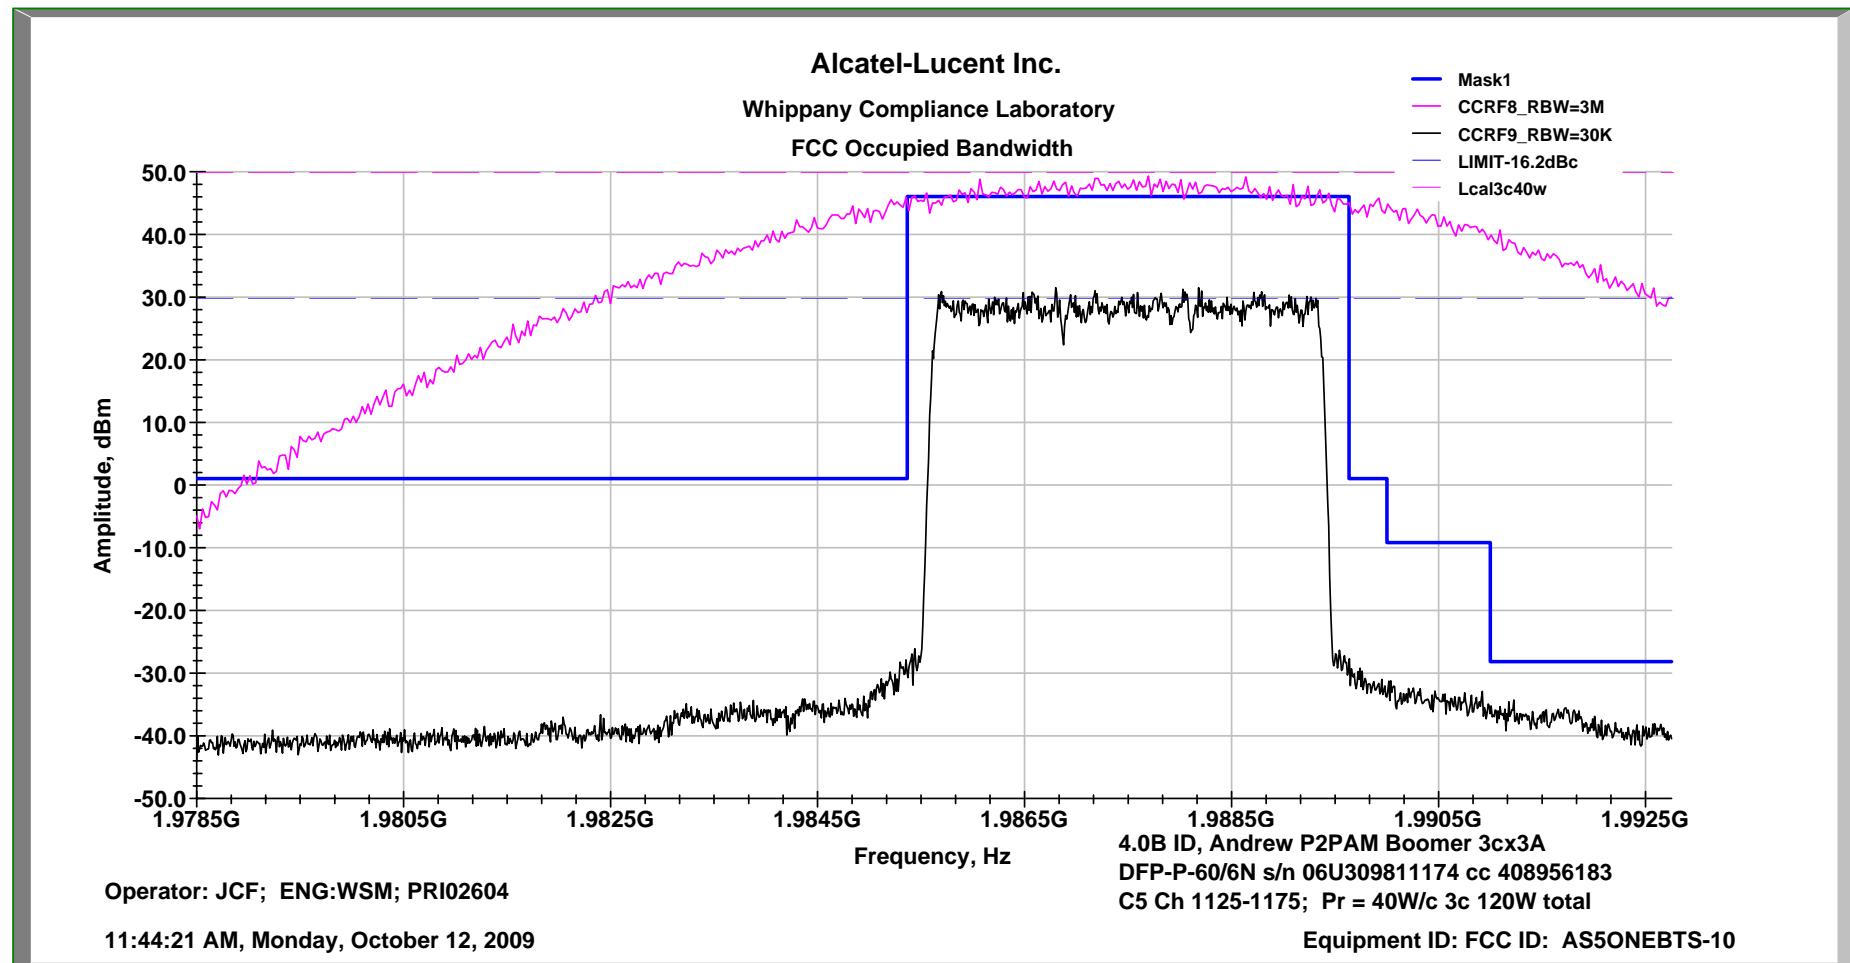


In-band Inter-modulation

PCS Ch C5-1125-1175 3c w/EDPD

120W Total

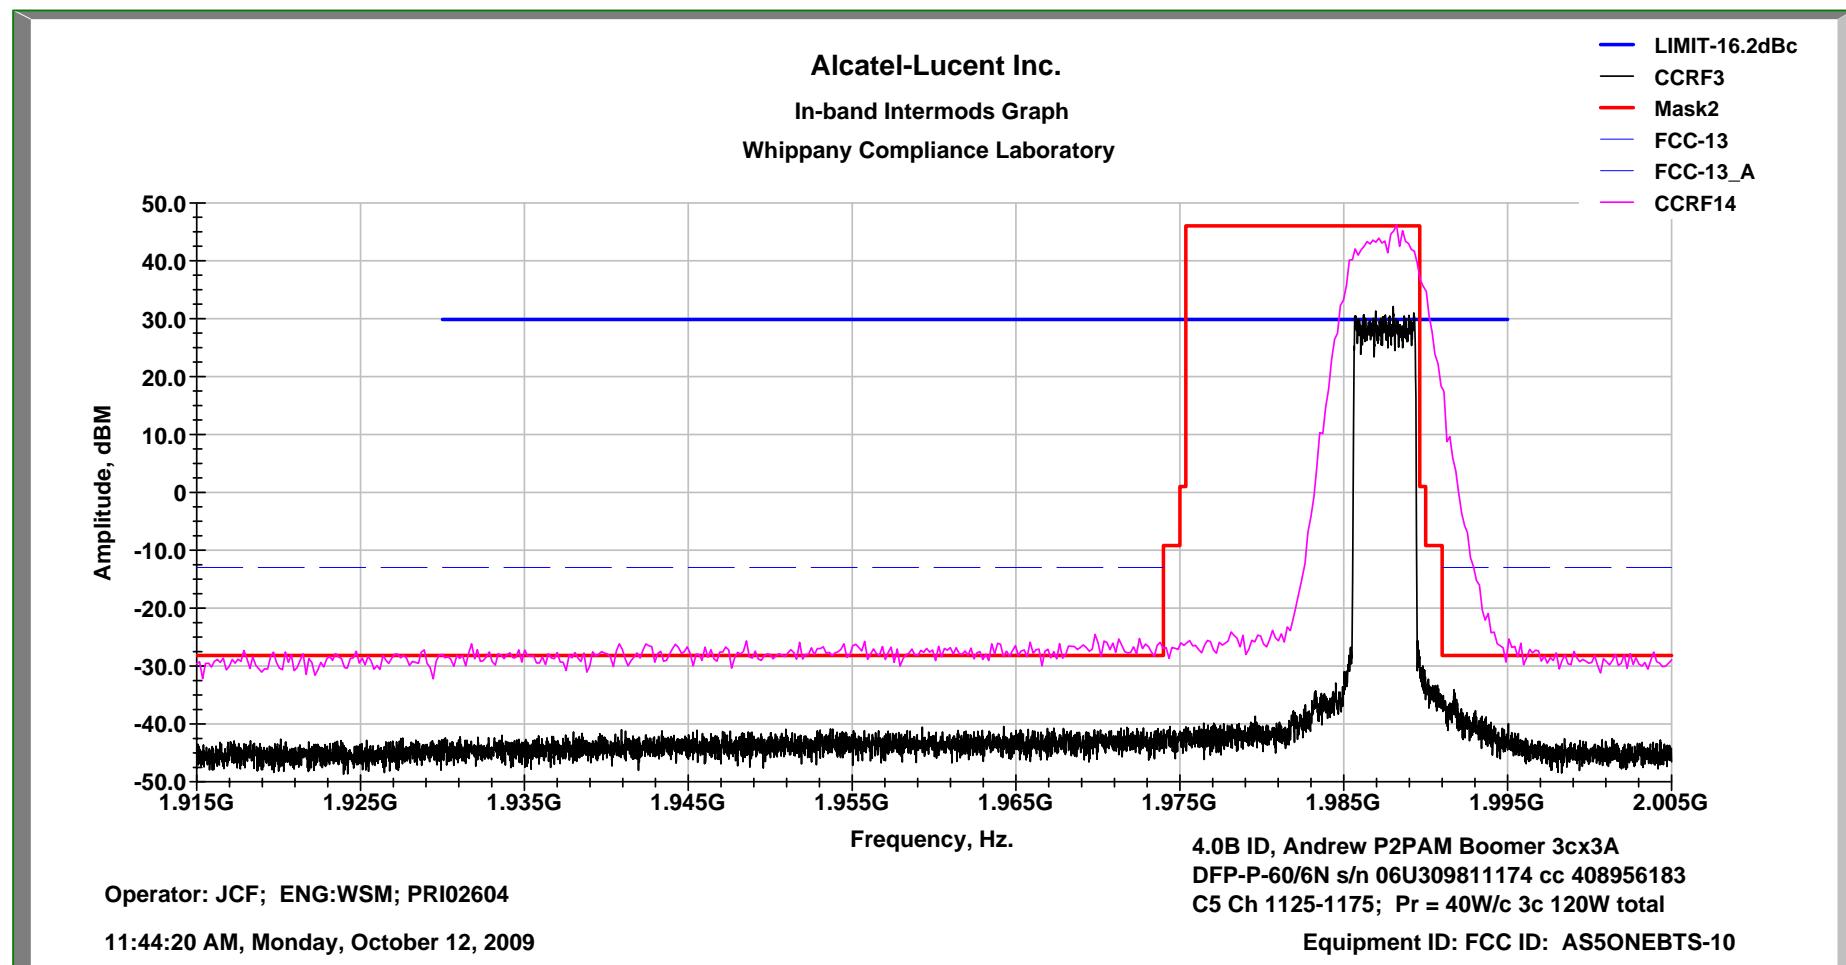


Occupied Bandwidth    PCS Ch G-1225-1275    3c w/EDPD    120W Total

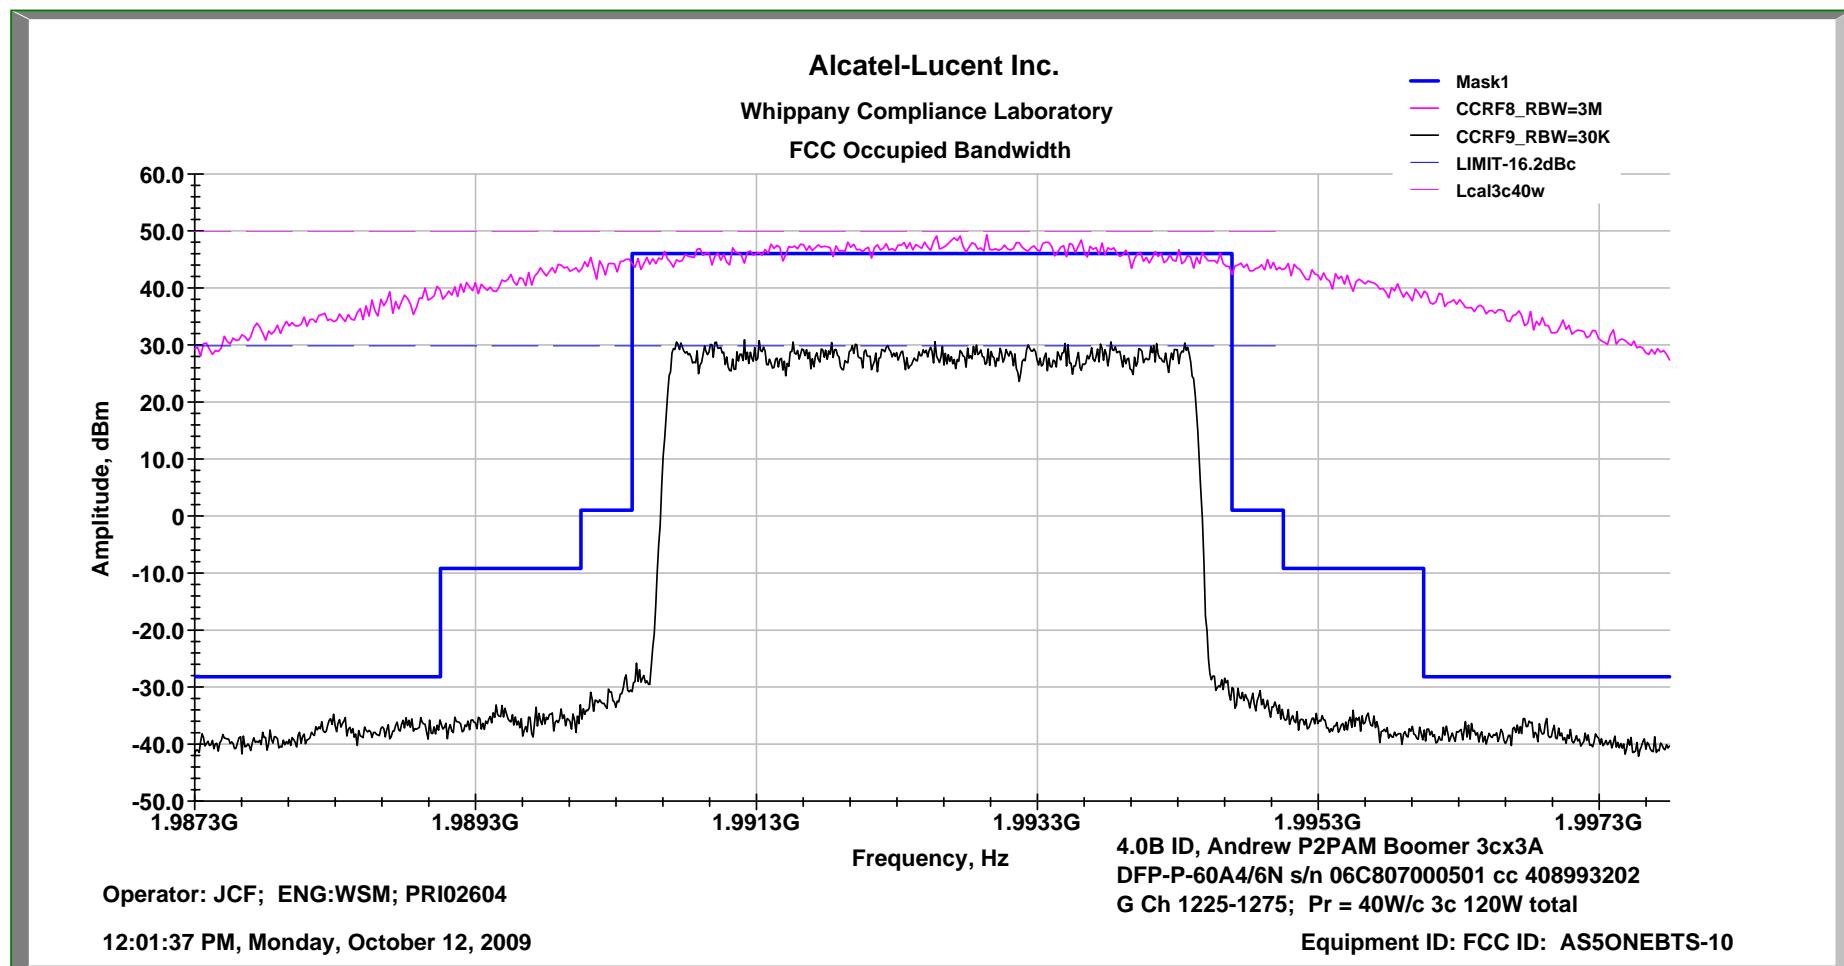

In-band Inter-modulation

PCS Ch G-1225-1275 3c w/EDPD

120W Total

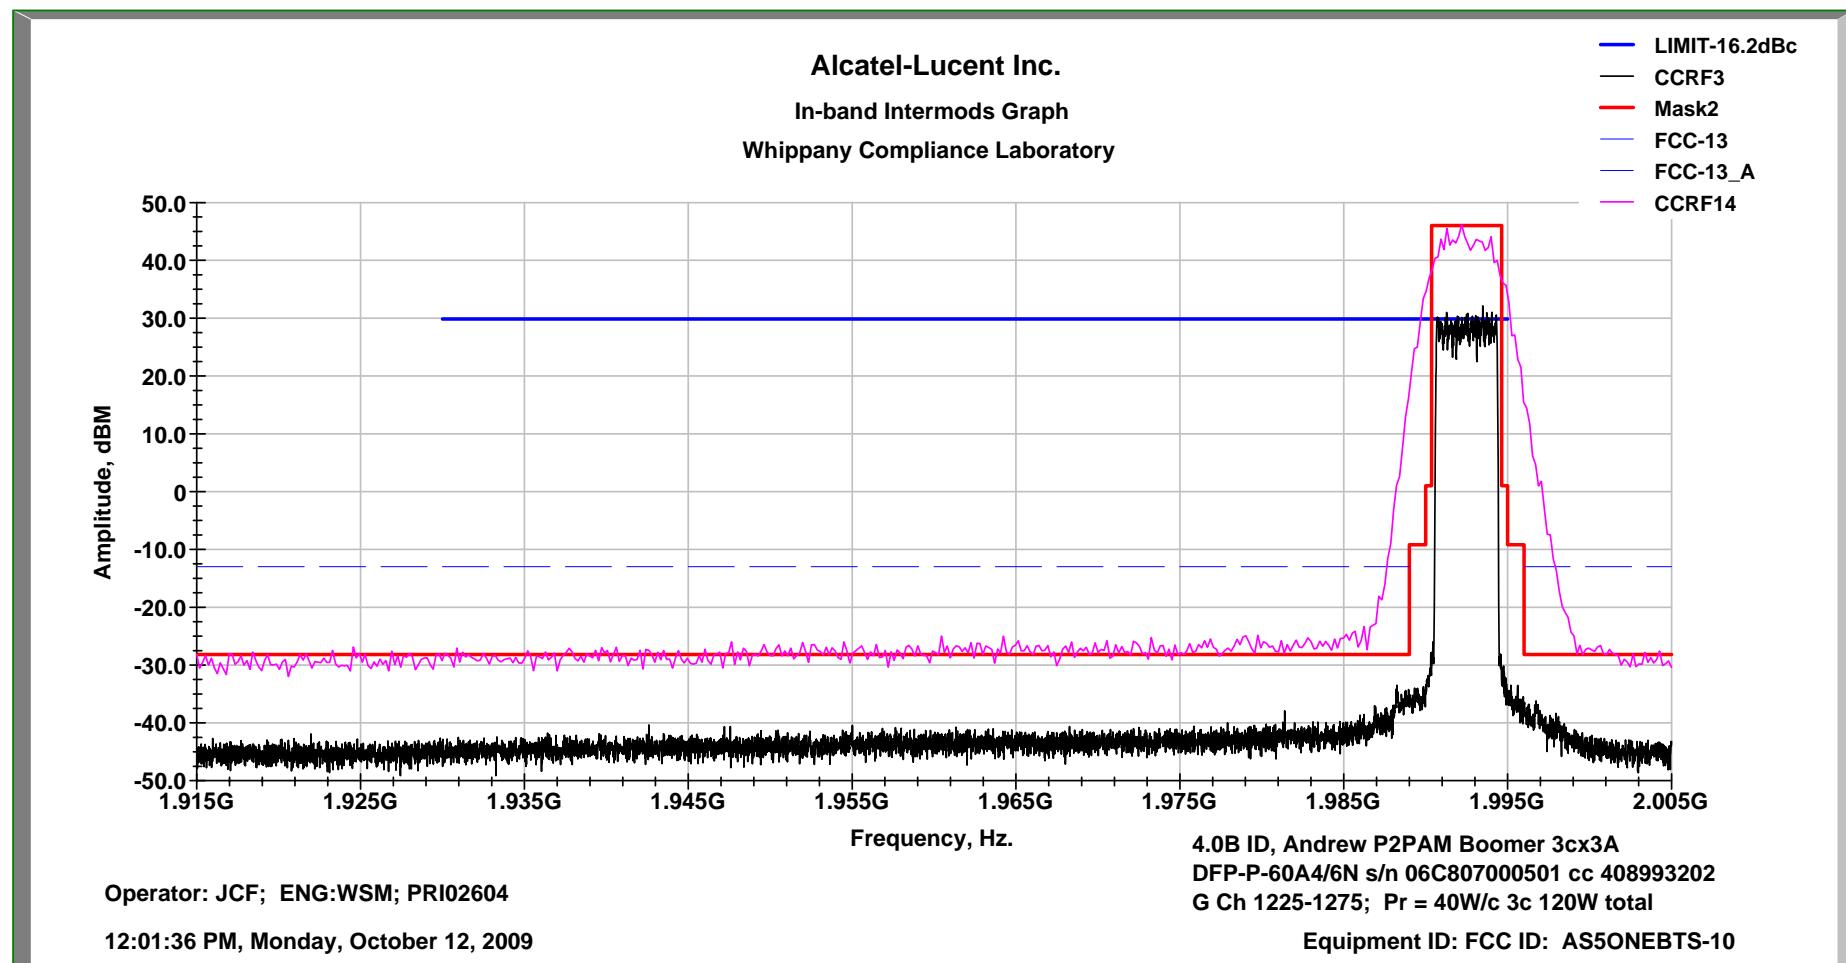

## Exhibit 15: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Section 2.1051 Spurious Emissions at Antenna Terminals

Spurious Emissions at the antenna terminals were investigated over the frequency range of 10 MHz to 20 GHz which is beyond the 10th harmonic of the carrier frequency. The RF output from the transmitter was reduced, to an amplitude usable by the spectrum analyzer, by use of a broadband attenuator. The complete RF test path was calibrated over the 10 MHz-20 GHz range. The RF power level was measured and monitored prior to and during the test via the test setup in Figure 15A. The spurious measurements were made using an automated test system. The test system consists of a Rohde & Schwarz FSEM30 Spectrum Analyzer (or ESIB Test Receiver), a PC based computer test controller, calibrated test hardware and a TILE™ software program to acquire the test data. This system allows measurement and presentation of the data in an accurate and compact form for FCC review. The volume of collected data is greater than  $2 \times 10^5$  data points over the frequency range of 10 MHz to 20 GHz.

The required emission limitation specified in Section 24.238 of the Code was applied to these tests. Based upon the criterion given in Section 24.238 of the Code and as developed in Exhibit 14, the required emission limit is -13 dBm when measured with a resolution bandwidth of 1 MHz. The measurements of the spurious signals were therefore made using a resolution bandwidth of 1 MHz. All spurious and harmonics of the CDMA Carrier was also shown to be lower than -13 dBm limit.

The carrier signal shown on these plots was measured at a resolution Bandwidths of 3 MHz. This was done so that the carrier plot correctly and accurately depicts the carrier output power in relation to the spurious signals and the defined limit.

In order to adequately evaluate performance the worst case modulation factors of 2G Voice ( vs. 3G1X or 3G1X-EV-DO) were used from the governing documents. Thus, the applied signal, from a **PCS UMTS-CDMA EDPD Transceiver/ FCC ID: AS5ONEBTS-10**, met the recommended characteristics per "**Table 6.5.2-1 Base Station Test Model, Nominal**" from **3GPP2 TSG-C.S0010-C-v1.00, February 2005**, Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Base Stations, as defined below in table 15.1 and as previously filed.

Type	Number of Channels	Fraction of Power (Linear)	Fraction of Power (dB)	Comments
Pilot	1	0.2	-7	Code channel $W_0^{128}$
Sync	1	0.0471	-13.3	Code channel $W_{32}^{64}$ ; always 1/8 rate
Paging	1	0.1882	-7.3	Code channel $W_1^{64}$ ; full rate only
Traffic	6	0.09412	-10.3	Variable code channel assignments; full rate only

**TABLE 15.1 Base Station Test Model, Nominal for Main Path**

Type	Number of Channels	Fraction of Power (Linear)	Fraction of Power (dB)	Comments
Transmit Diversity Pilot	1	0.2	-7	Code channel $W_{16}^{128}$
Traffic	6	0.09412	-10.3	Variable code channel assignments; full rate only

**TABLE 15.2 Base Station Test Model, Nominal for Transmit Diversity Path**

**Exhibit 15** *continued*

The FCC limits contained in **47CFR 24.238 1-Oct-2005** were followed along with the minimum standard presented in **3GPP2 TSG-C.S0010-B-v2.0 March 2004**.

**Test Results Summary:**


Conducted Spurious measurements were performed for the three carrier **PCS UMTS-CDMA EDPD Transceiver** configurations supporting operation at 40 Watts/c. Conducted Transmit Spurious measurements were performed as part of the test profile for Occupied bandwidth. Every PCS Block Edge measurements configuration therefore included a Conducted Transmit Spurious measurements as documented in Table 15.2.

The attached spectral plots are representative of the Conducted Spurious compliance performance of the **PCS UMTS-CDMA EDPD Transceiver**. The compliance for all of the representative transmit configurations are documented in Table 15.2. This Table lists PCS Blocks/ Channels tested the amplifier configuration and the status of the performance. The performance data, charts and tables all show that there are no “Out of Block” harmonics or spurious emissions above the applicable limit of -13 dBm. The attached table and sample data plots document the results. The results are compliant with FCC requirements and were within the parameters as previously filed.

PCS - Block	PCS - Channels	Number of carriers	Amplifier Type	# of amplifiers in MCA	Power per Carrier, W/c	Total Power Watts	Results Conducted Spurious Emissions
A	25 - 75	3	P2PAM	3	40	120	Compliant
A	250-275	3	P2PAM	3	40	120	Compliant
D	325-375	3	P2PAM	3	40	120	Compliant
B	425 - 475	3	P2PAM	3	40	120	Compliant
B	625-675	3	P2PAM	3	40	120	Compliant
E	725 - 775	3	P2PAM	3	40	120	Compliant
F	825 - 875	3	P2PAM	3	40	120	Compliant
C	925-975	3	P2PAM	3	40	120	Compliant
C	1125-1175	3	P2PAM	3	40	120	Compliant
G	1225-1275	3	P2PAM	3	40	120	Compliant

**TABLE 15.2 PCS Conducted Spurious Compliance Tabulation**


Figure 15A Test Setup for Antenna Port Measurement of Transmit Power, Occupied Bandwidth and Conducted Spurious Emission S

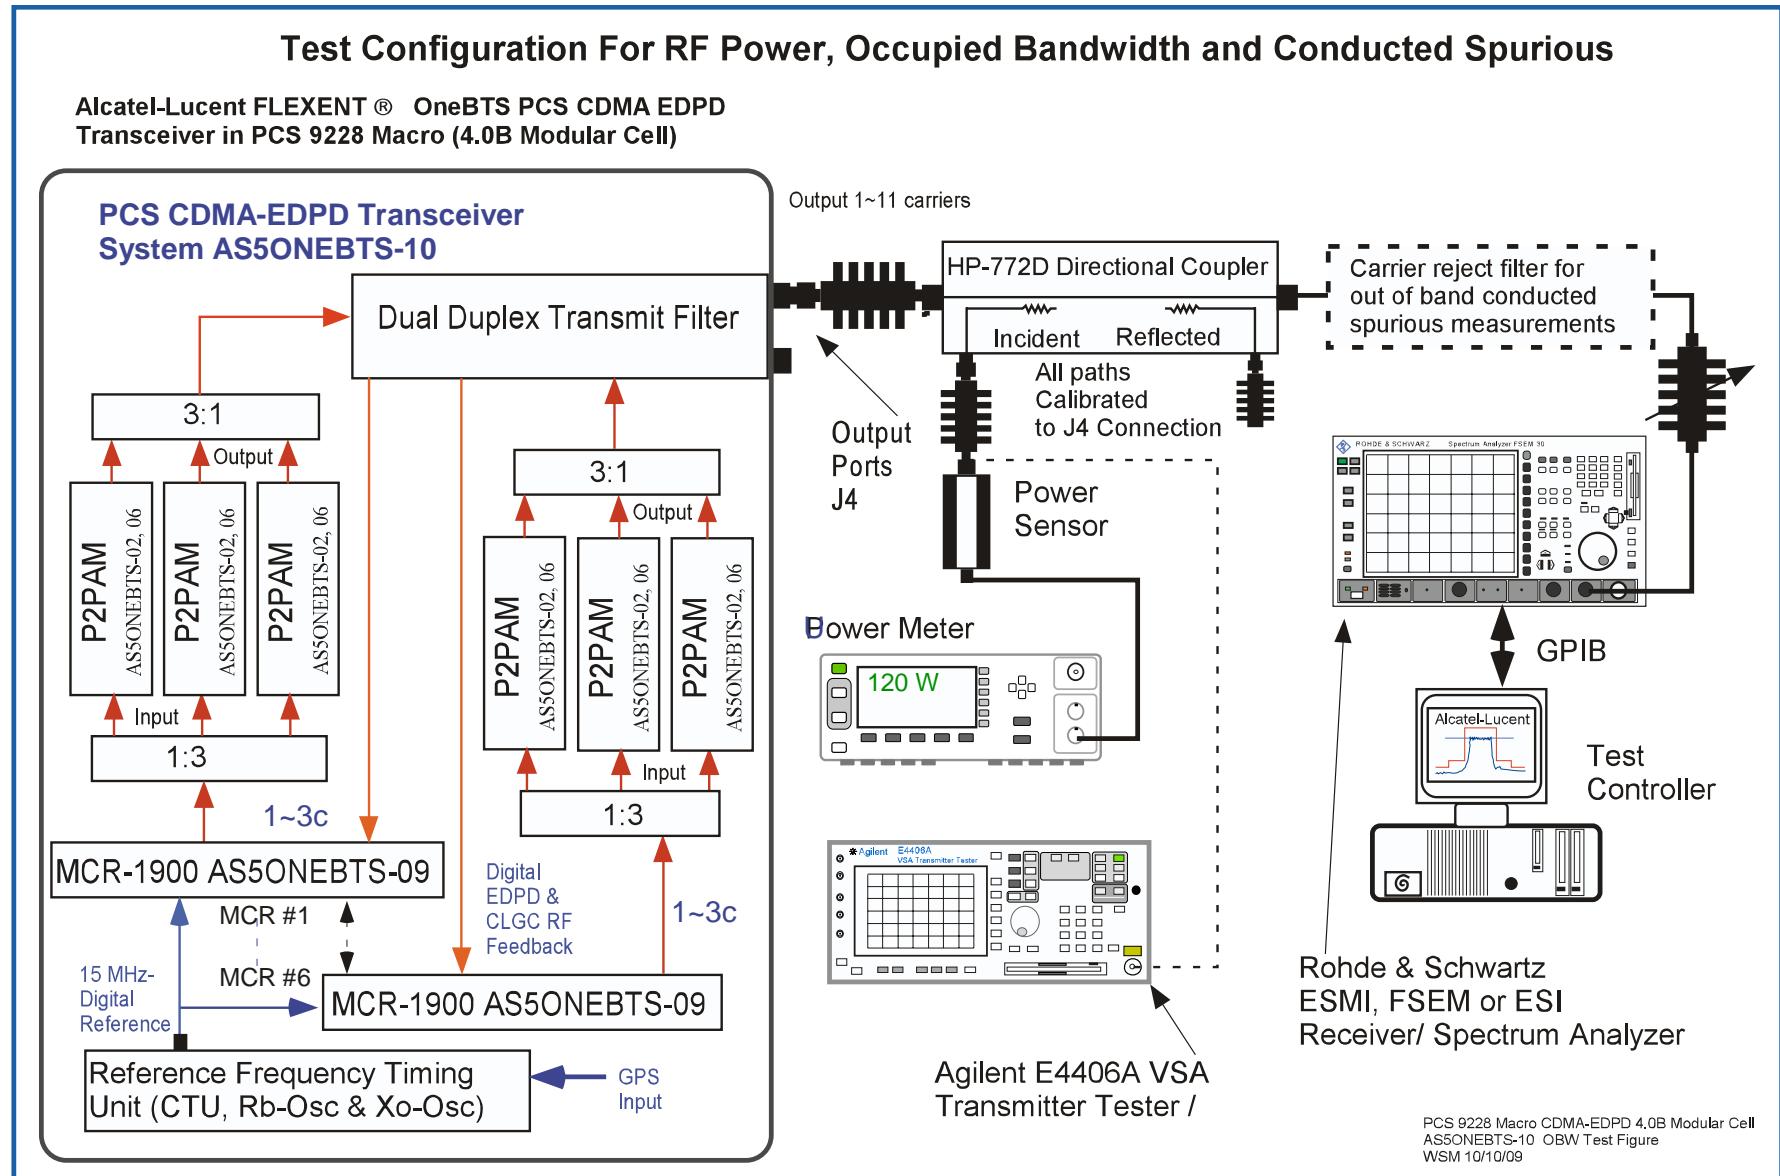


**Transmitter Measurements  
of  
Conducted Spurious Emissions  
for  
Alcatel-Lucent Inc.  
PCS UMTS-CDMA EDPD Transceiver  
FCC ID: AS5ONEBTS-10  
Installed in  
Alcatel-Lucent 9228 Base Station Macro  
FLEXENT PCS CDMA Modular Cell 4.0B  
Operational Configuration with  
3 P2PAMs per transmit path  
3c at 40W/carrier, 120W Total**

W. Steve Majkowski NCE  
CDMA Certification Lead  
Whippany FCC Compliance Laboratory  
Alcatel-Lucent.  
Lab: 973-386-2135  
majkowski@alcatel-lucent.com


Transmitter Conducted Spurious 10 MHz – 10 GHz PCS Ch A1-25-75 3c w/EDPD 120W Total

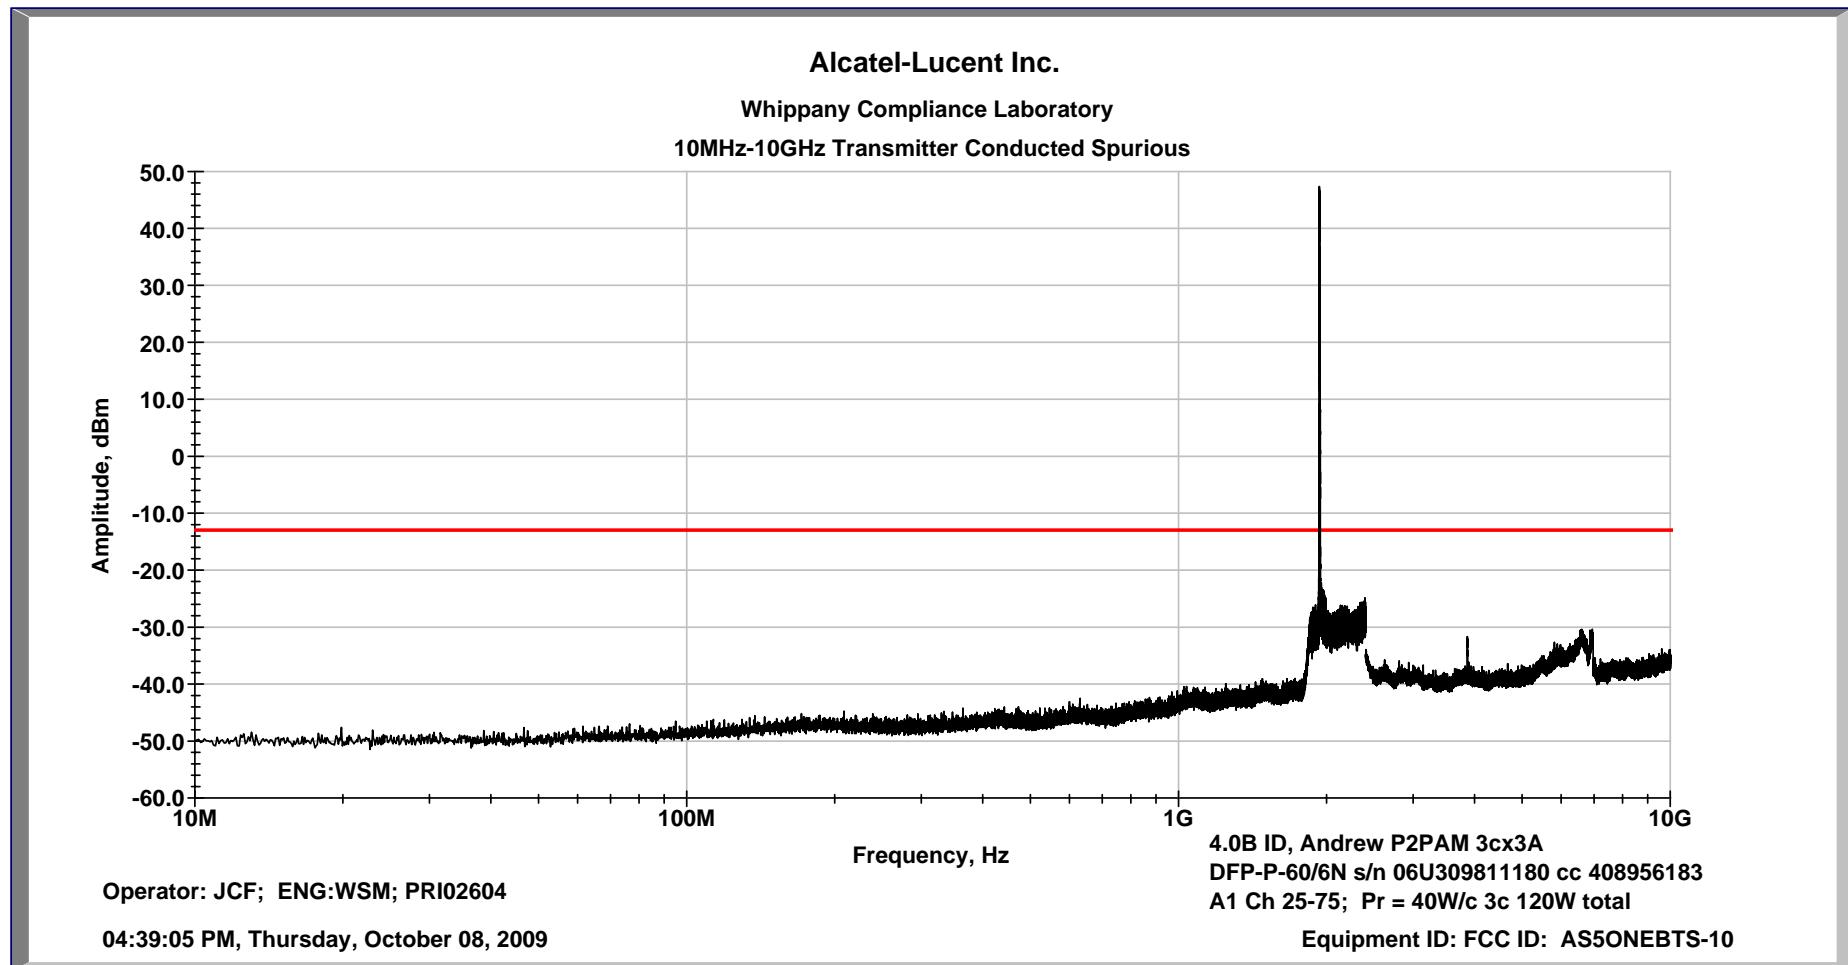


Transmitter Conducted Spurious 1 GHz – 20 GHz PCS Ch A1-25-75 3c w/EDPD 120W Total

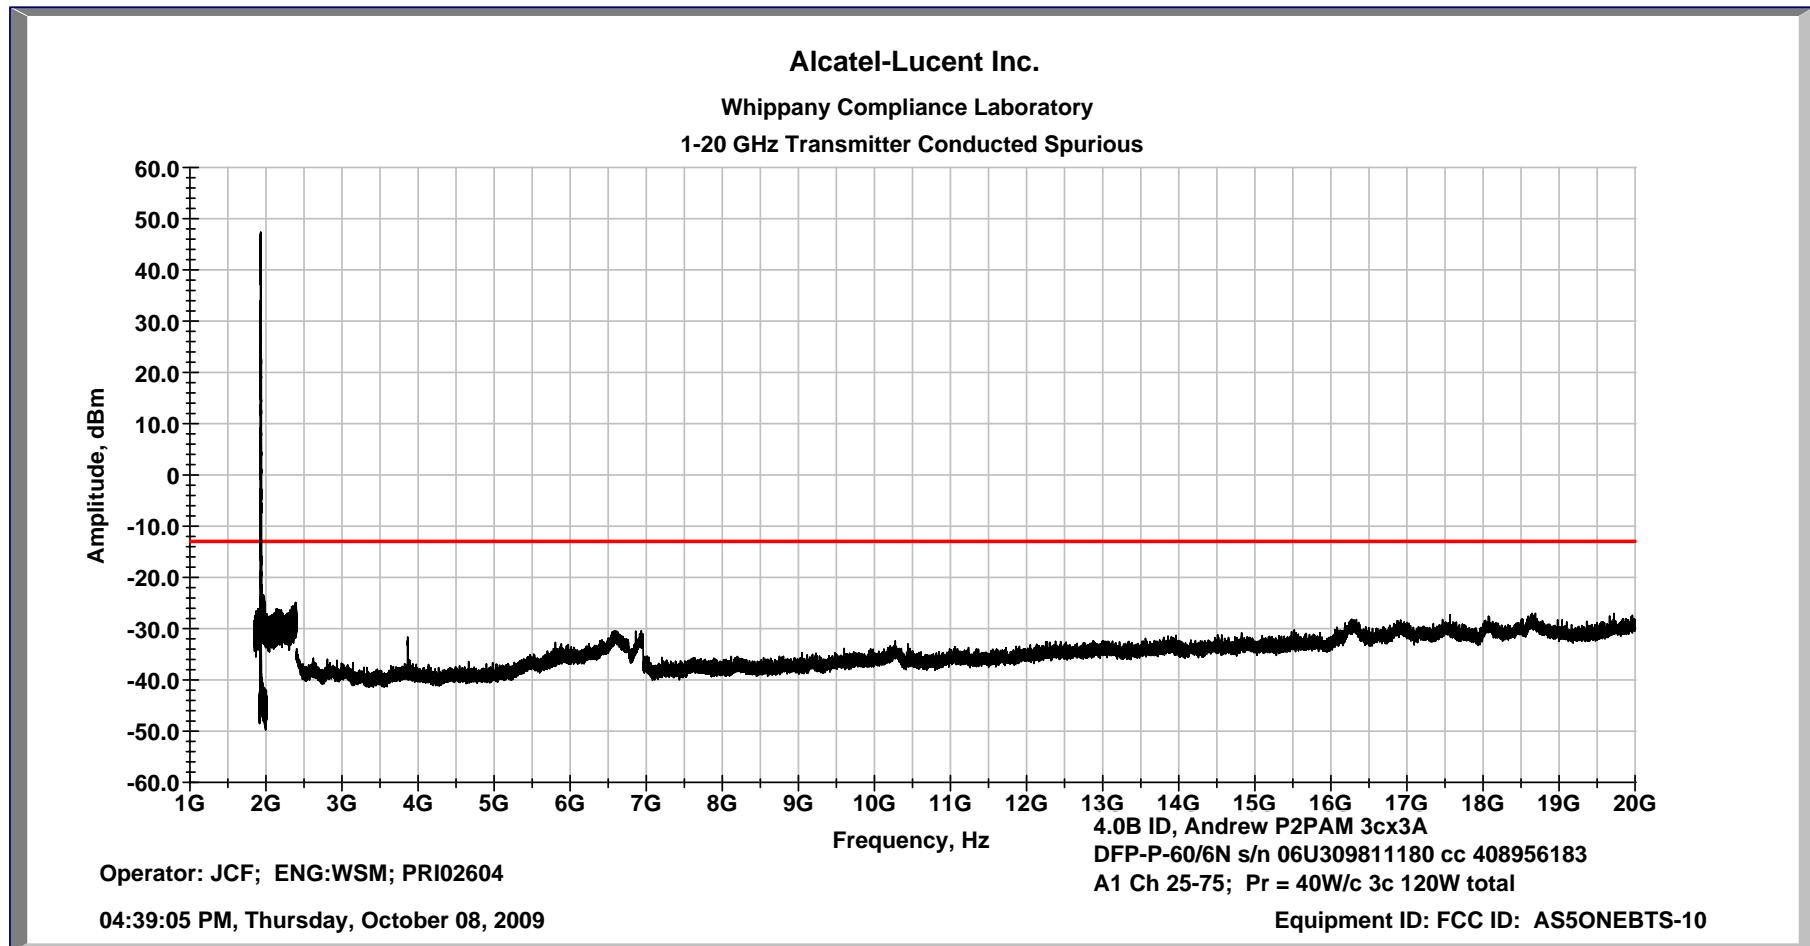


Transmitter Conducted Spurious 10 MHz – 10 GHz PCS Ch A5-225-275 3c w/EDPD 120W Total

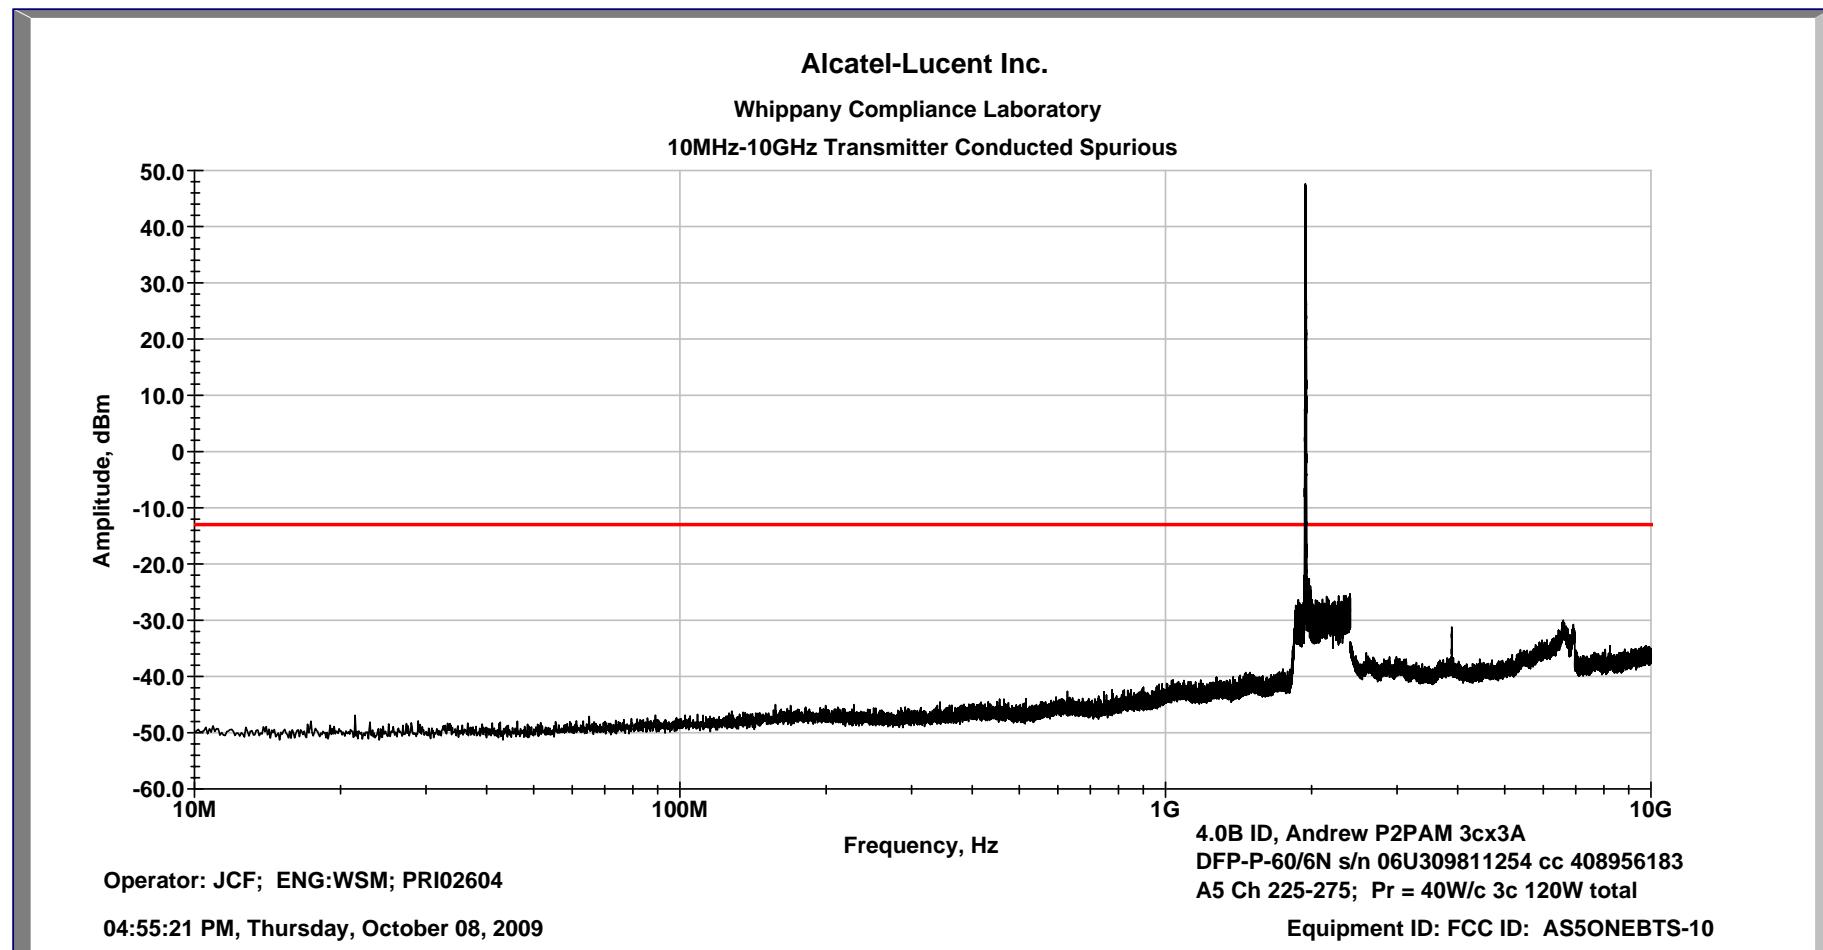


Transmitter Conducted Spurious 1 GHz – 20 GHz PCS Ch A5-225-275 3c w/EDPD 120W Total

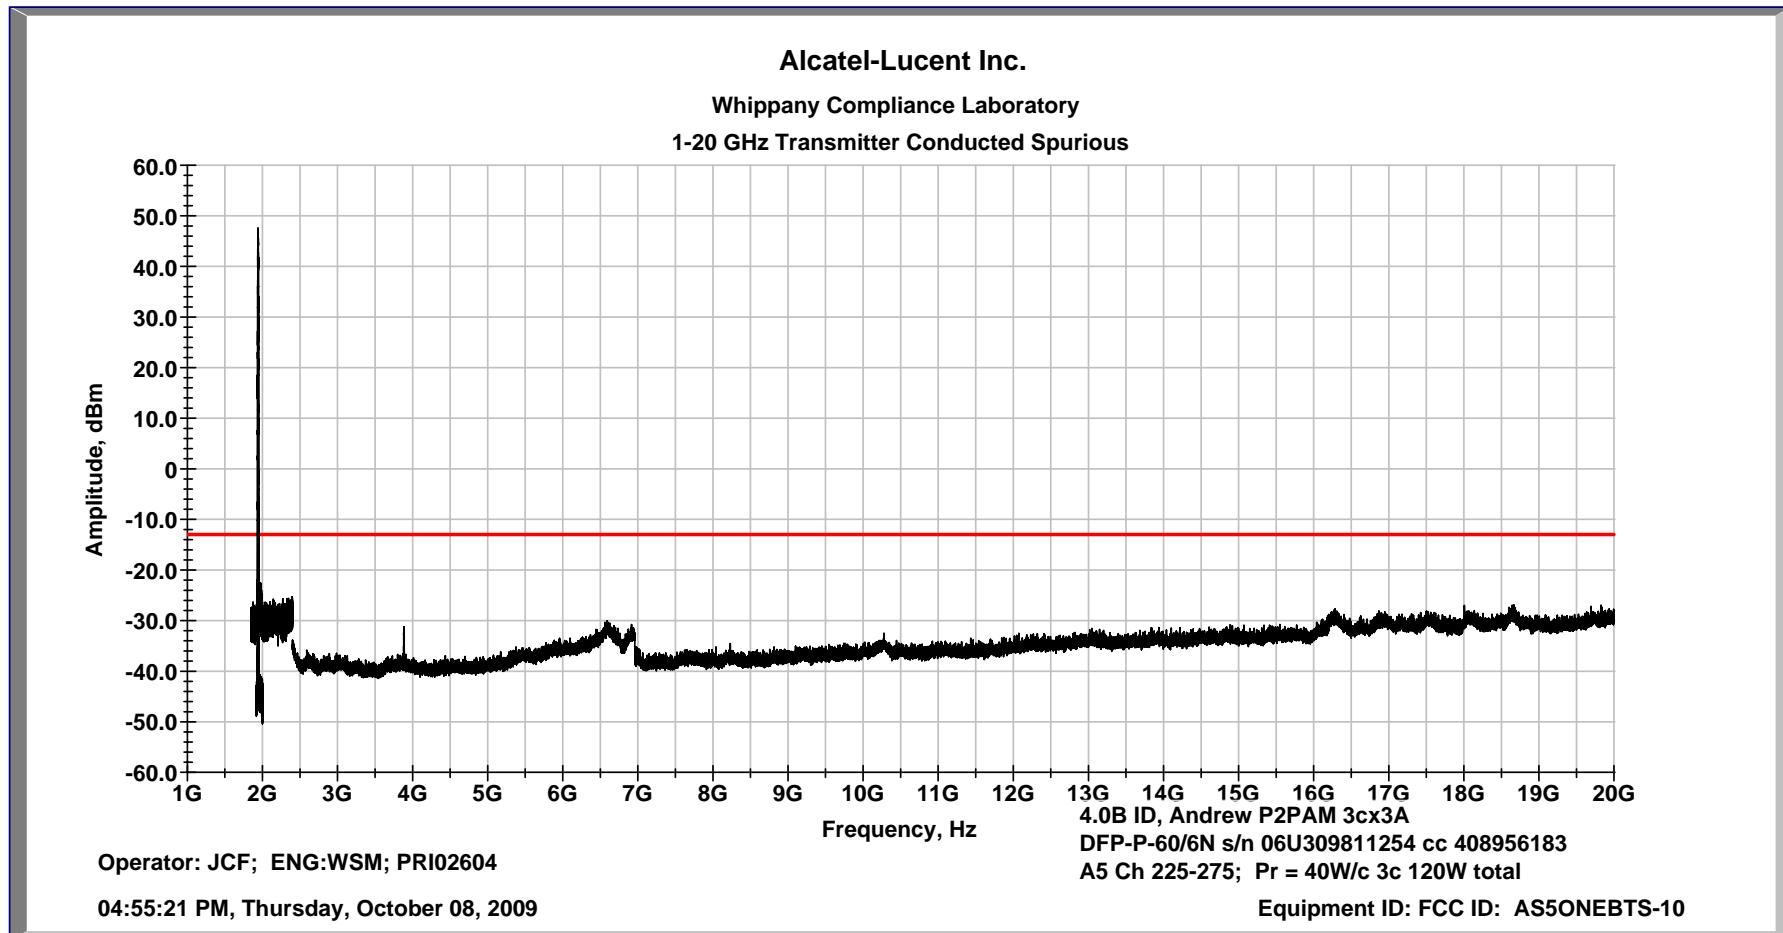


Transmitter Conducted Spurious 10 MHz – 10 GHz PCS Ch D-325-375 3c w/EDPD 120W Total

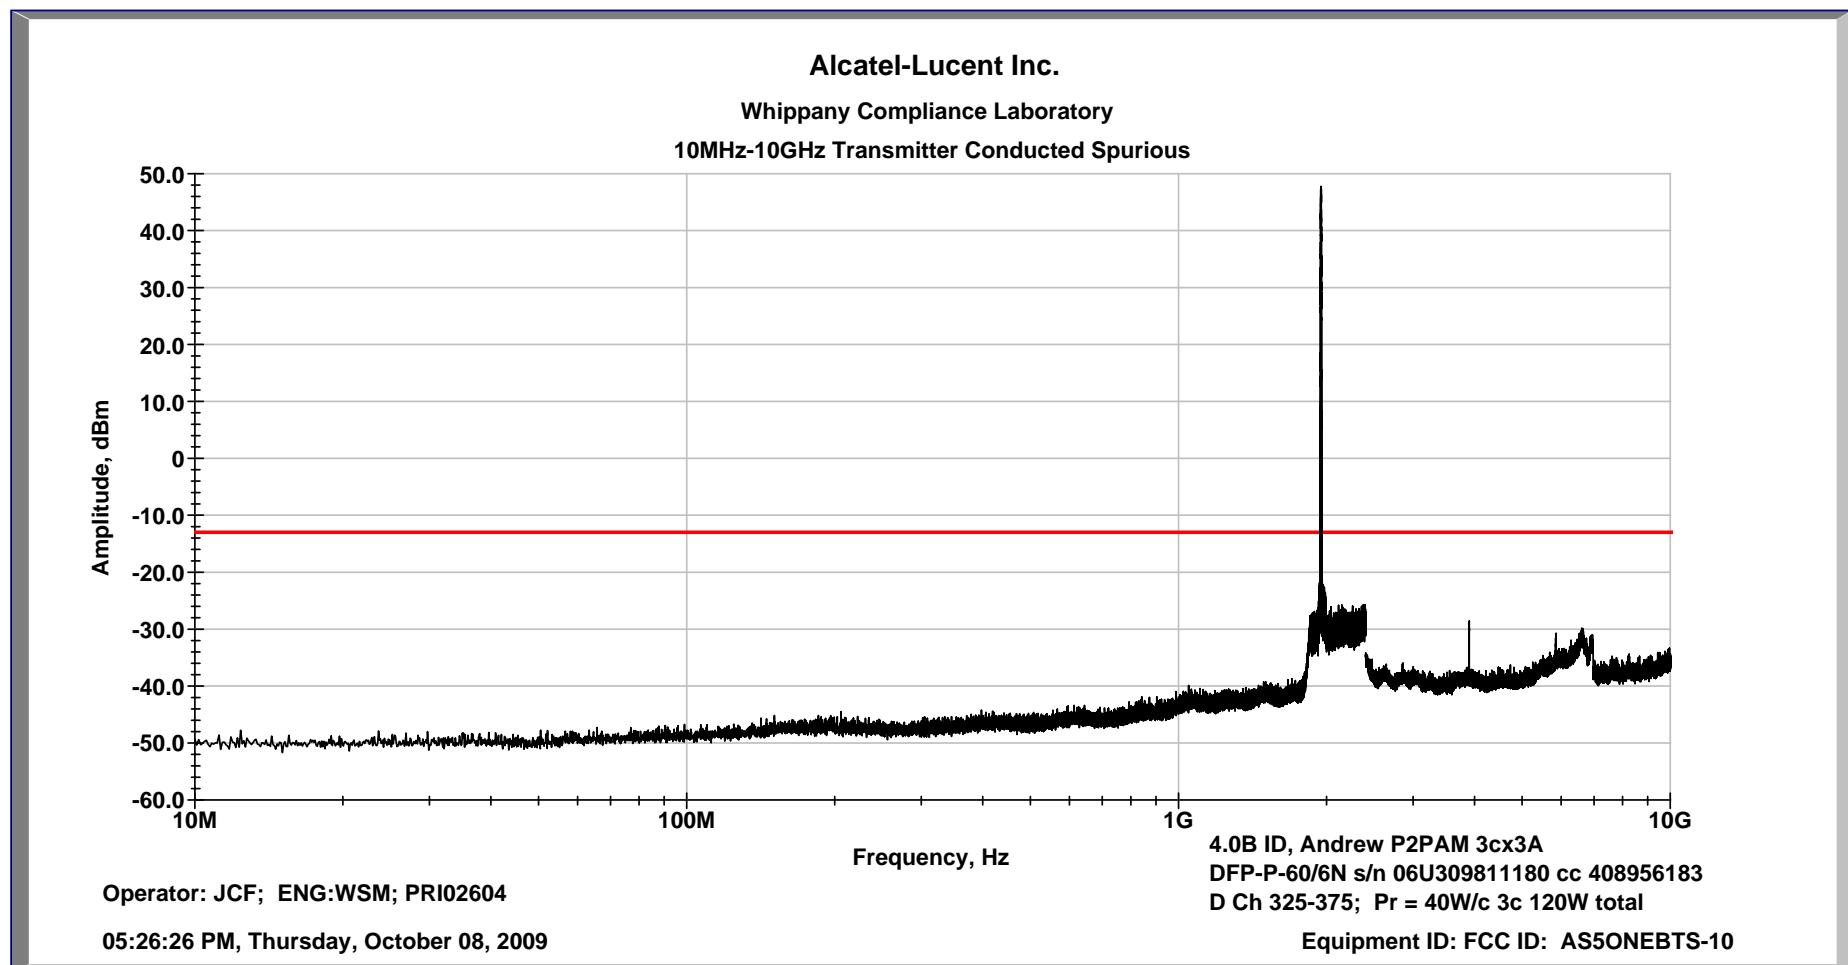


Transmitter Conducted Spurious 1 GHz – 20 GHz PCS Ch D-325-375 3c w/EDPD 120W Total

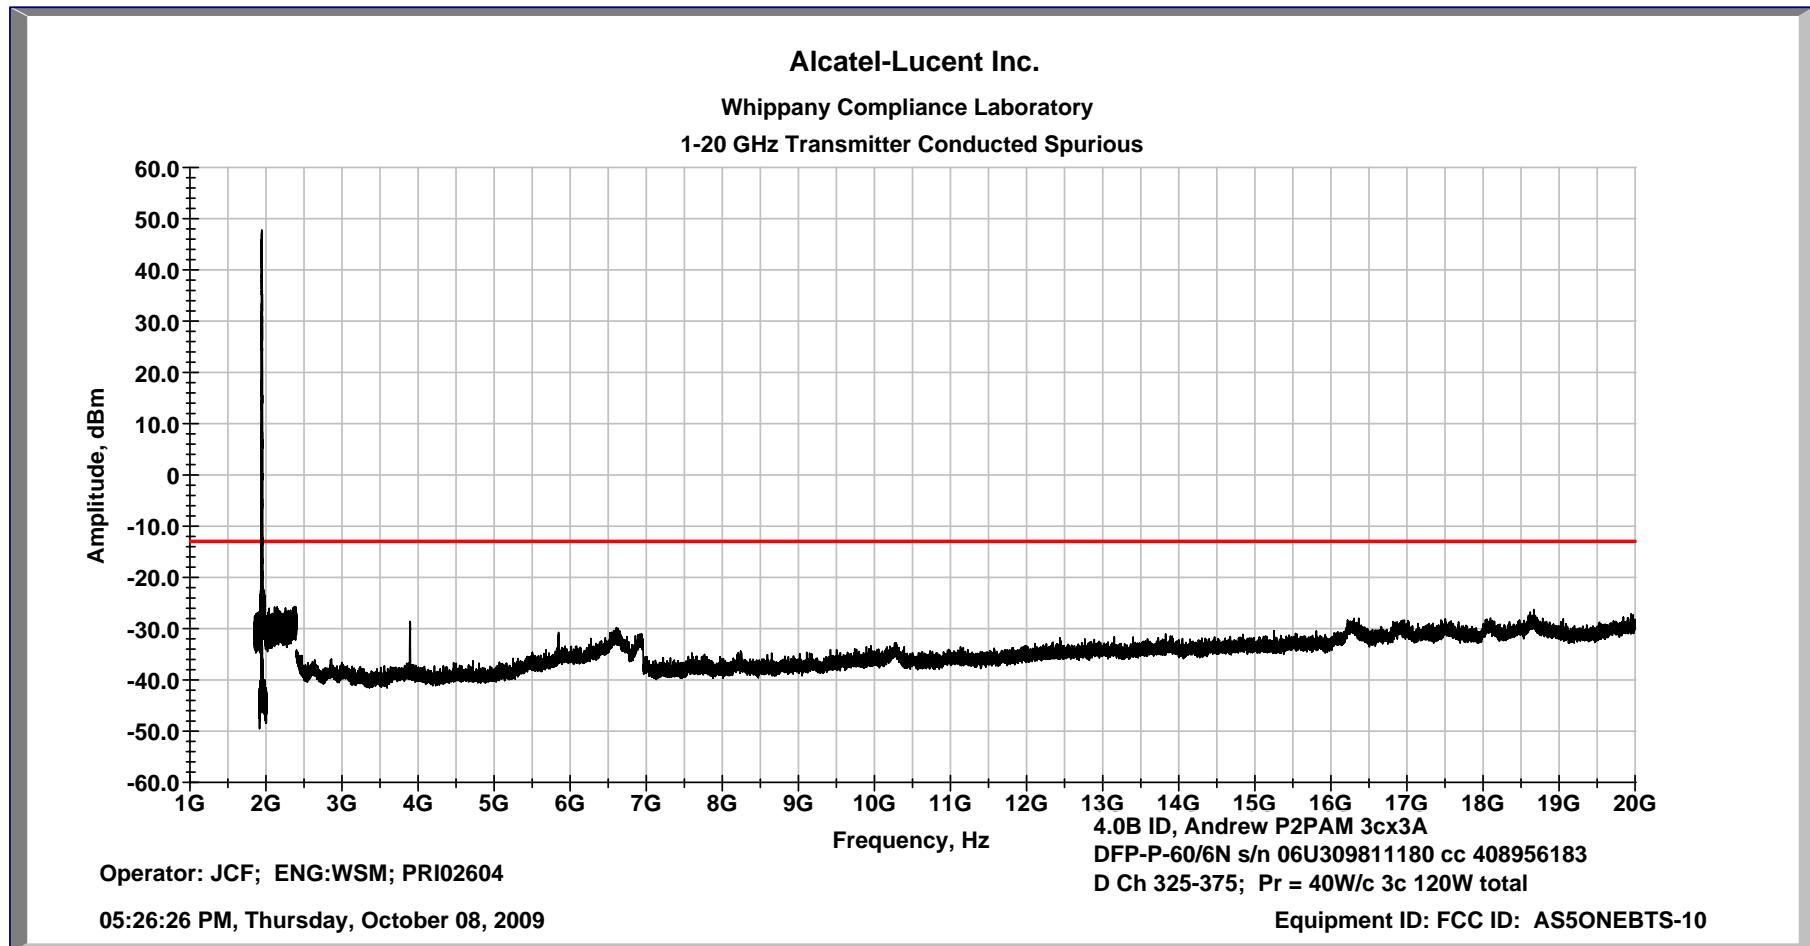


Transmitter Conducted Spurious 10 MHz – 10 GHz PCS Ch B1-425-475 3c w/EDPD 120W Total

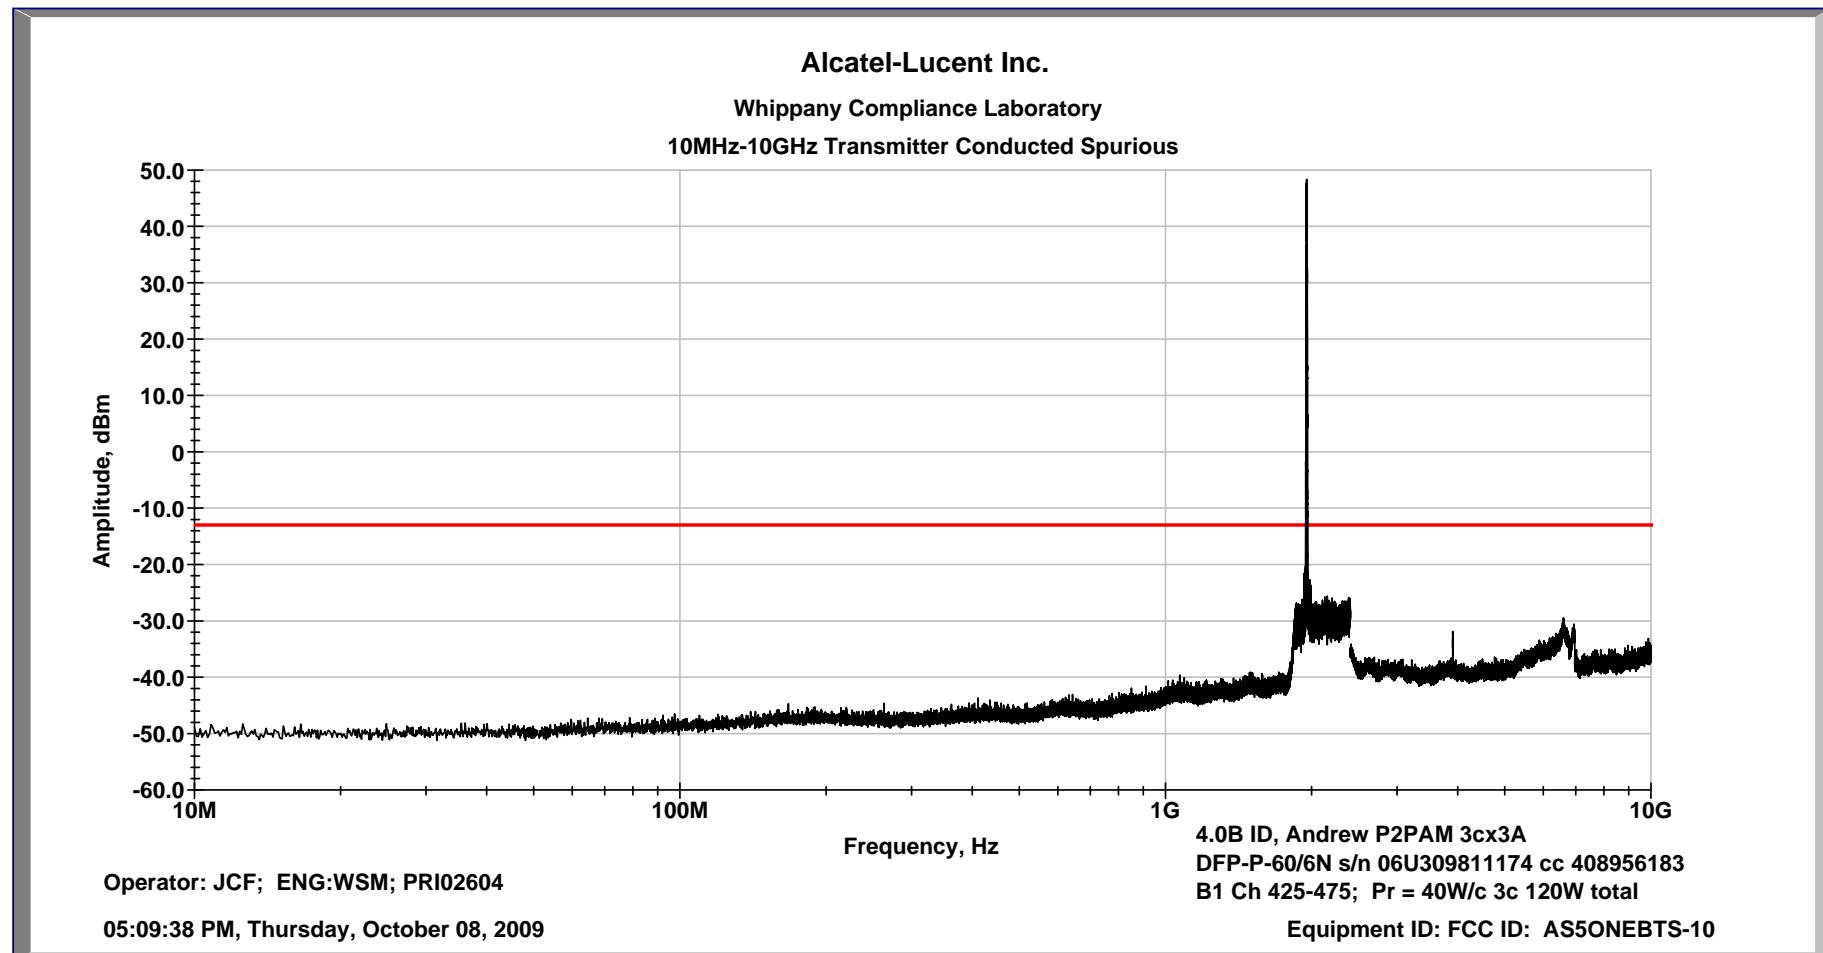


Transmitter Conducted Spurious 1 GHz – 20 GHz PCS Ch B1-425-475 3c w/EDPD 120W Total

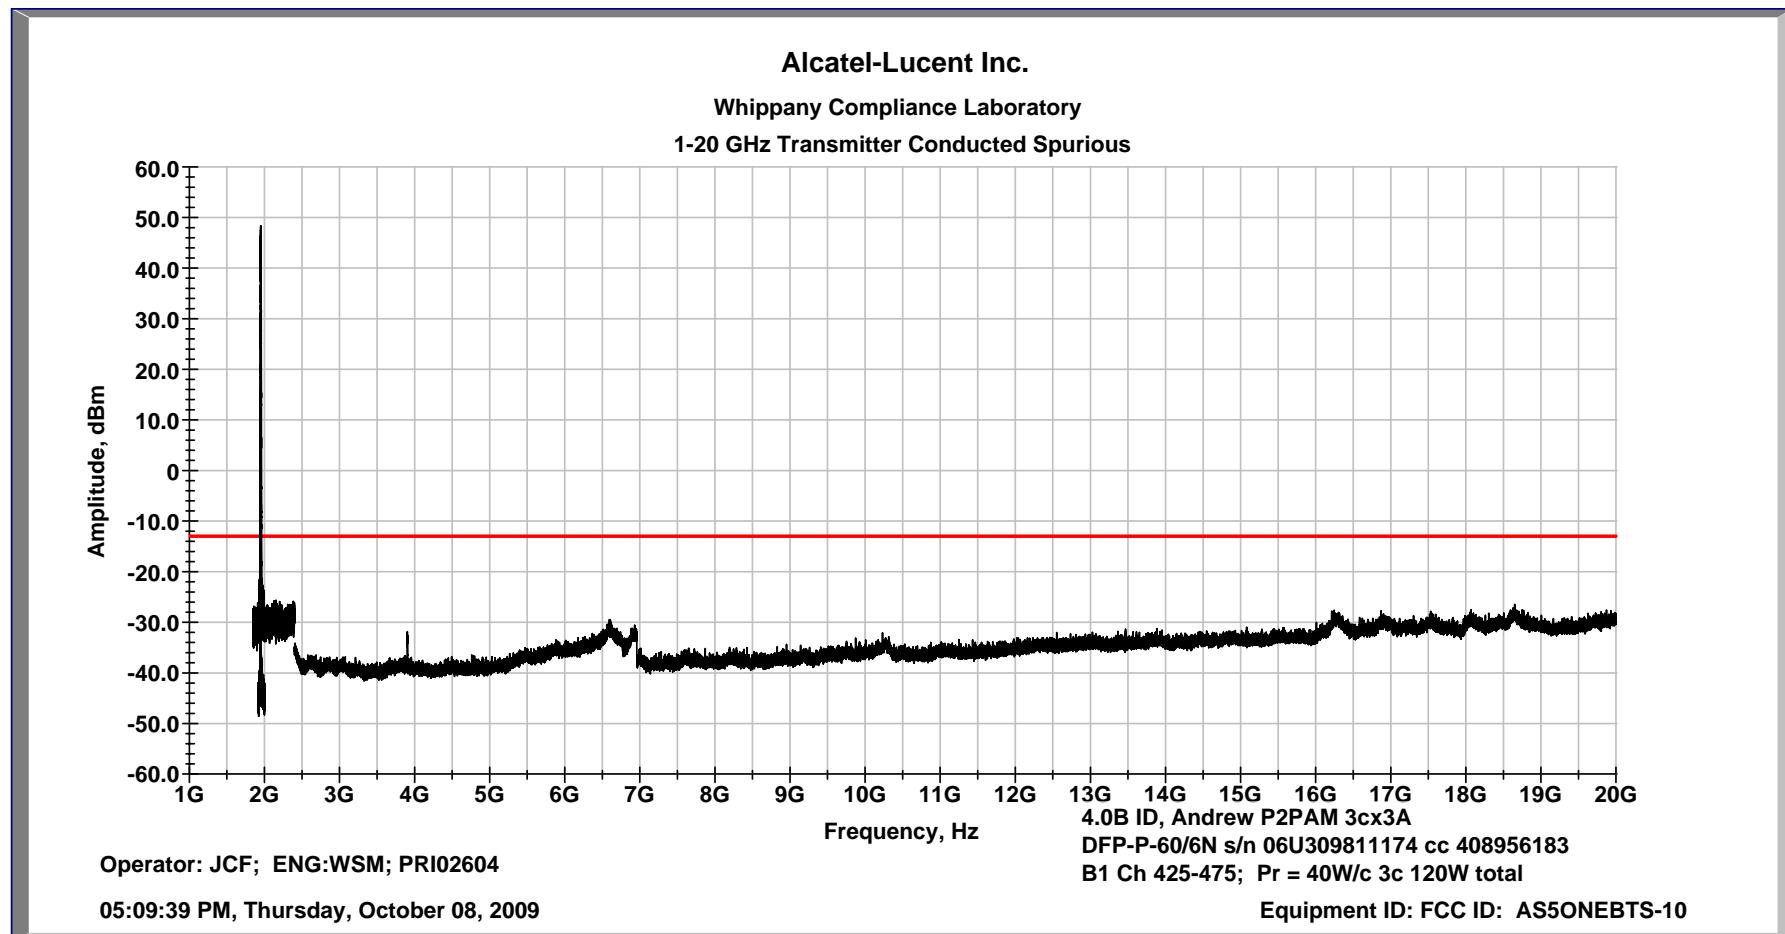


Transmitter Conducted Spurious 10 MHz – 10 GHz PCS Ch B5-625-675 3c w/EDPD 120W Total

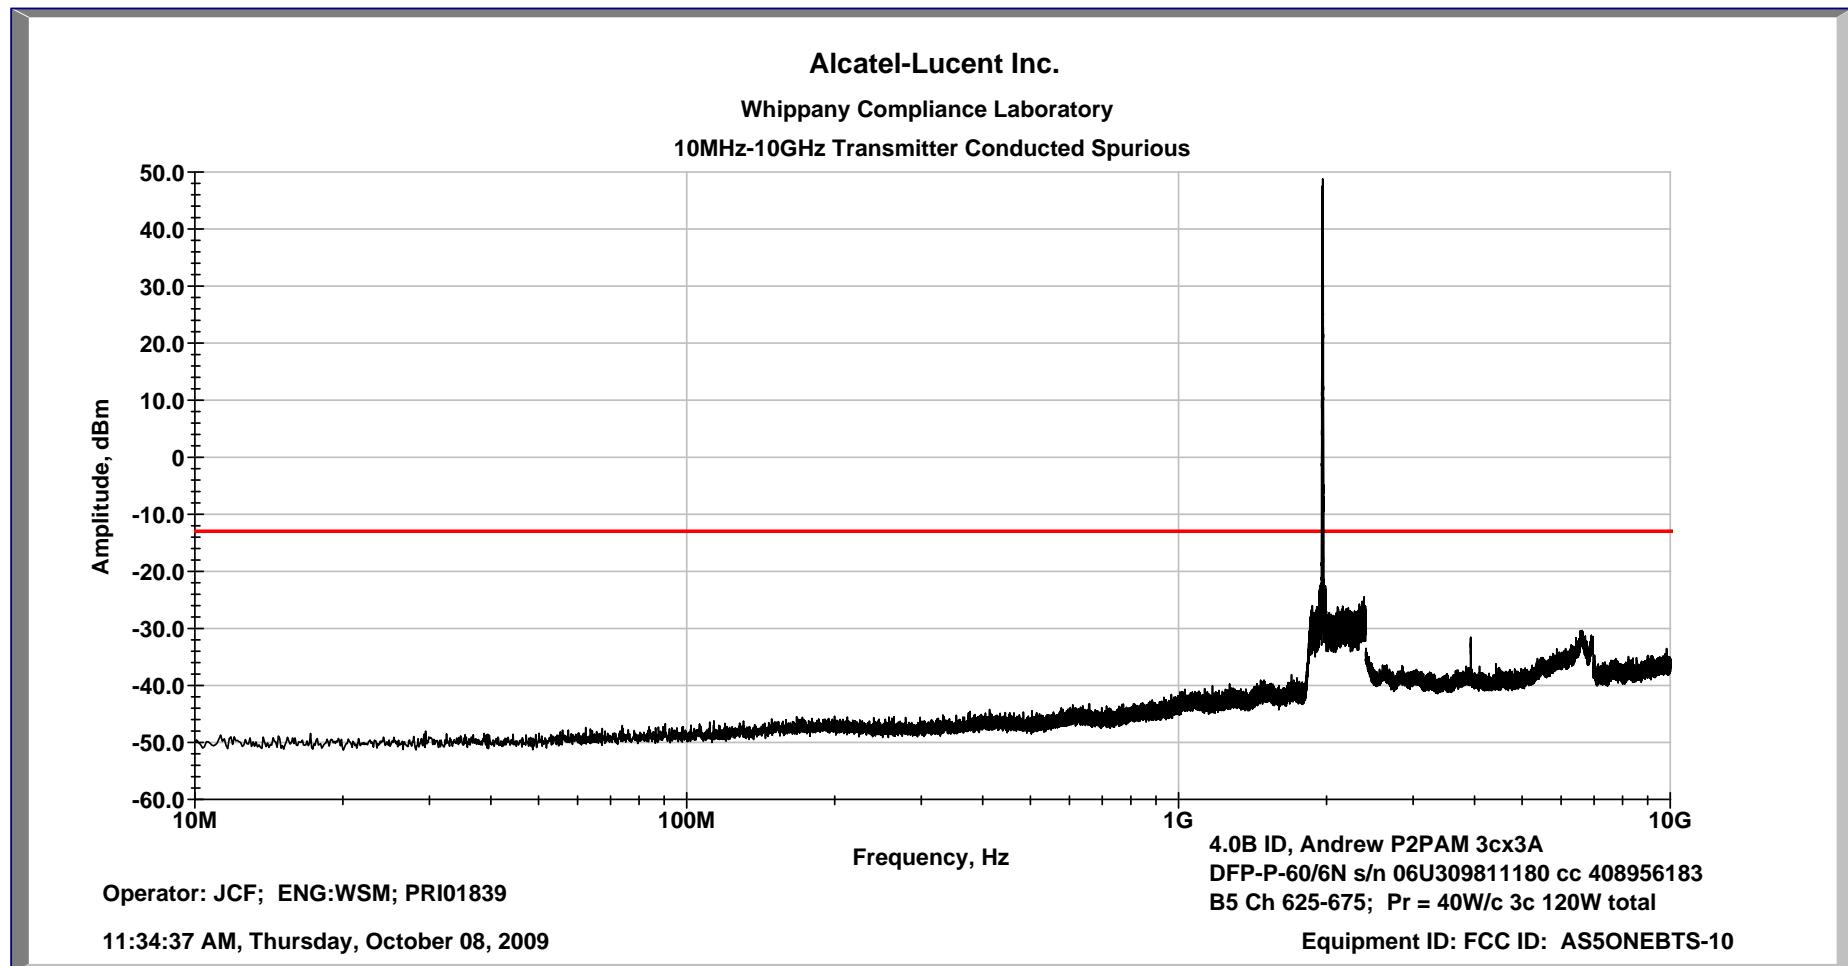


Transmitter Conducted Spurious 1 GHz – 20 GHz PCS Ch B5-625-675 3c w/EDPD 120W Total

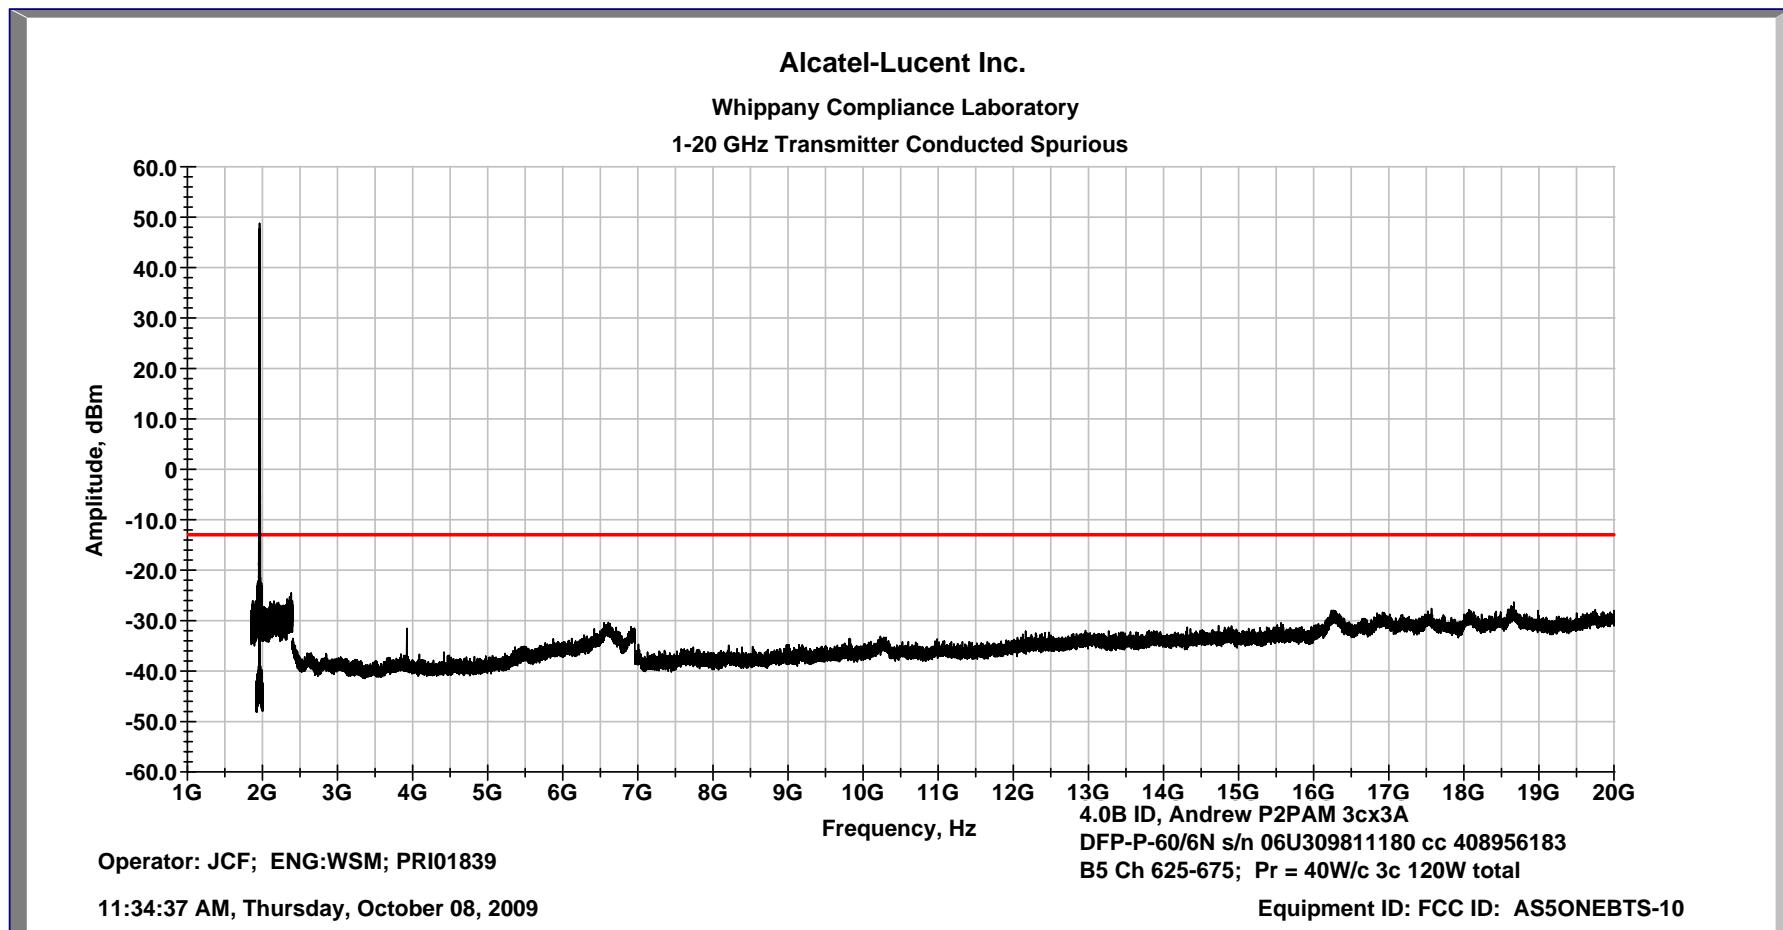


Transmitter Conducted Spurious 10 MHz – 10 GHz PCS Ch E-725-775 3c w/EDPD 120W Total

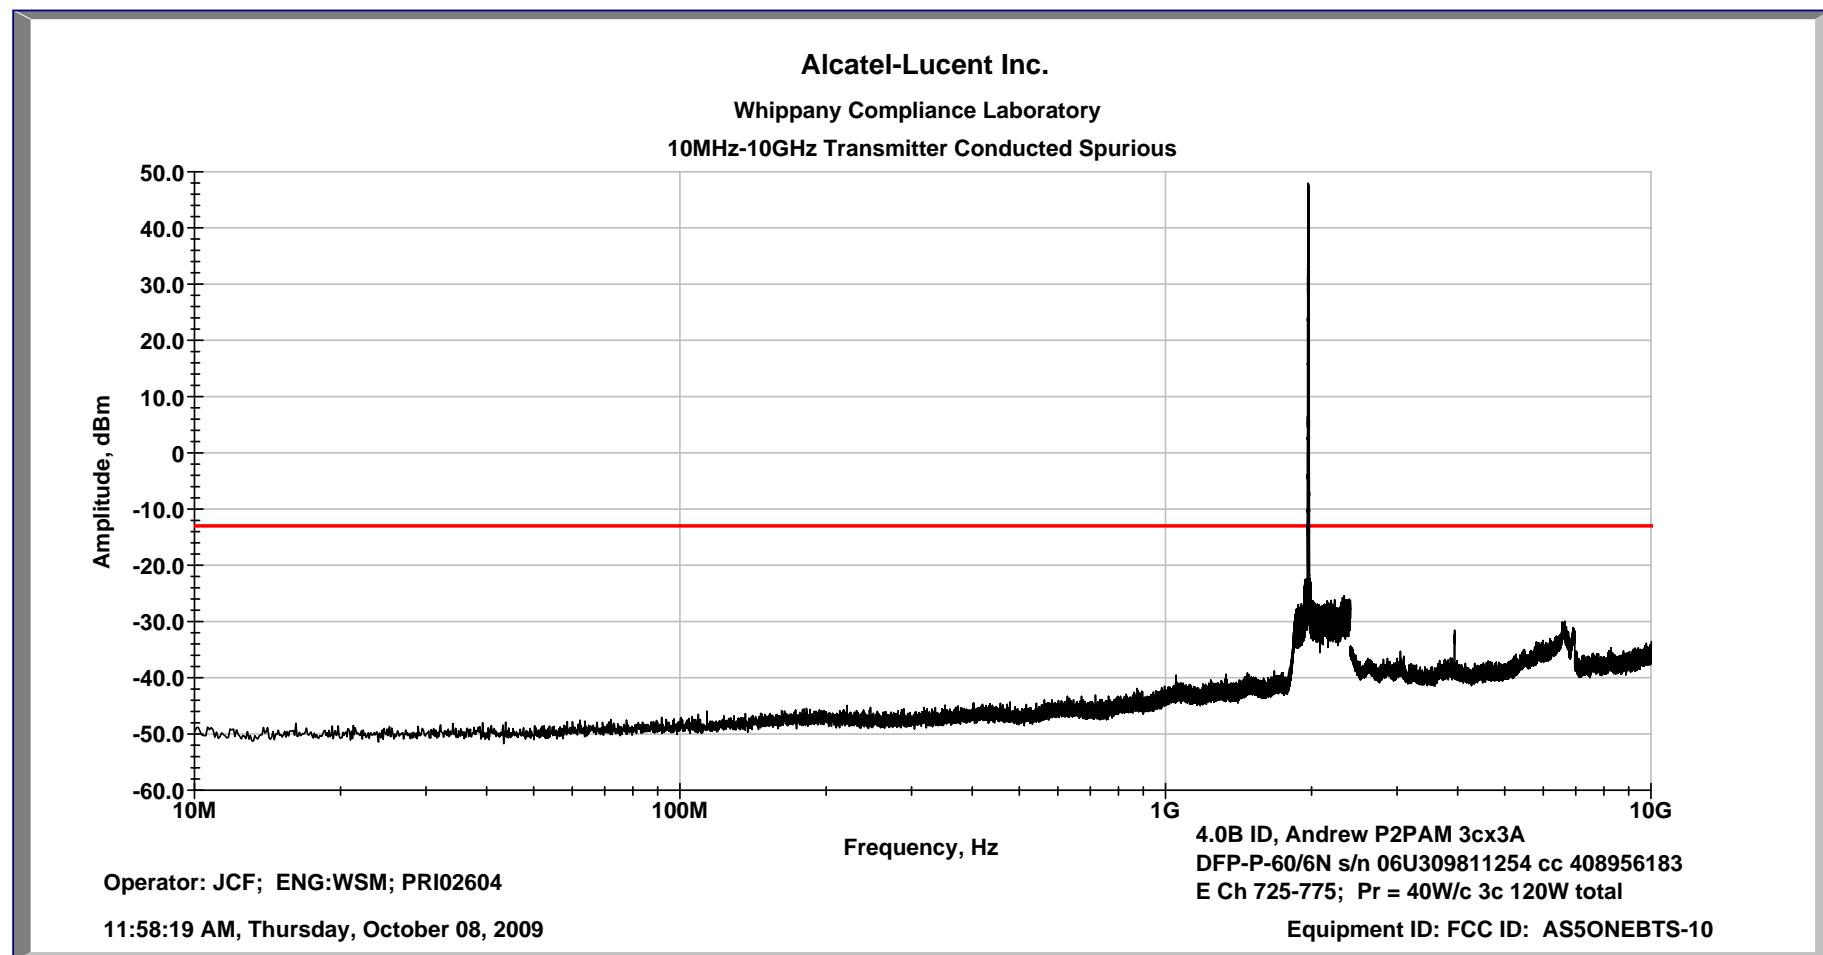


Transmitter Conducted Spurious 1 GHz – 20 GHz PCS Ch E-725-775 3c w/EDPD 120W Total

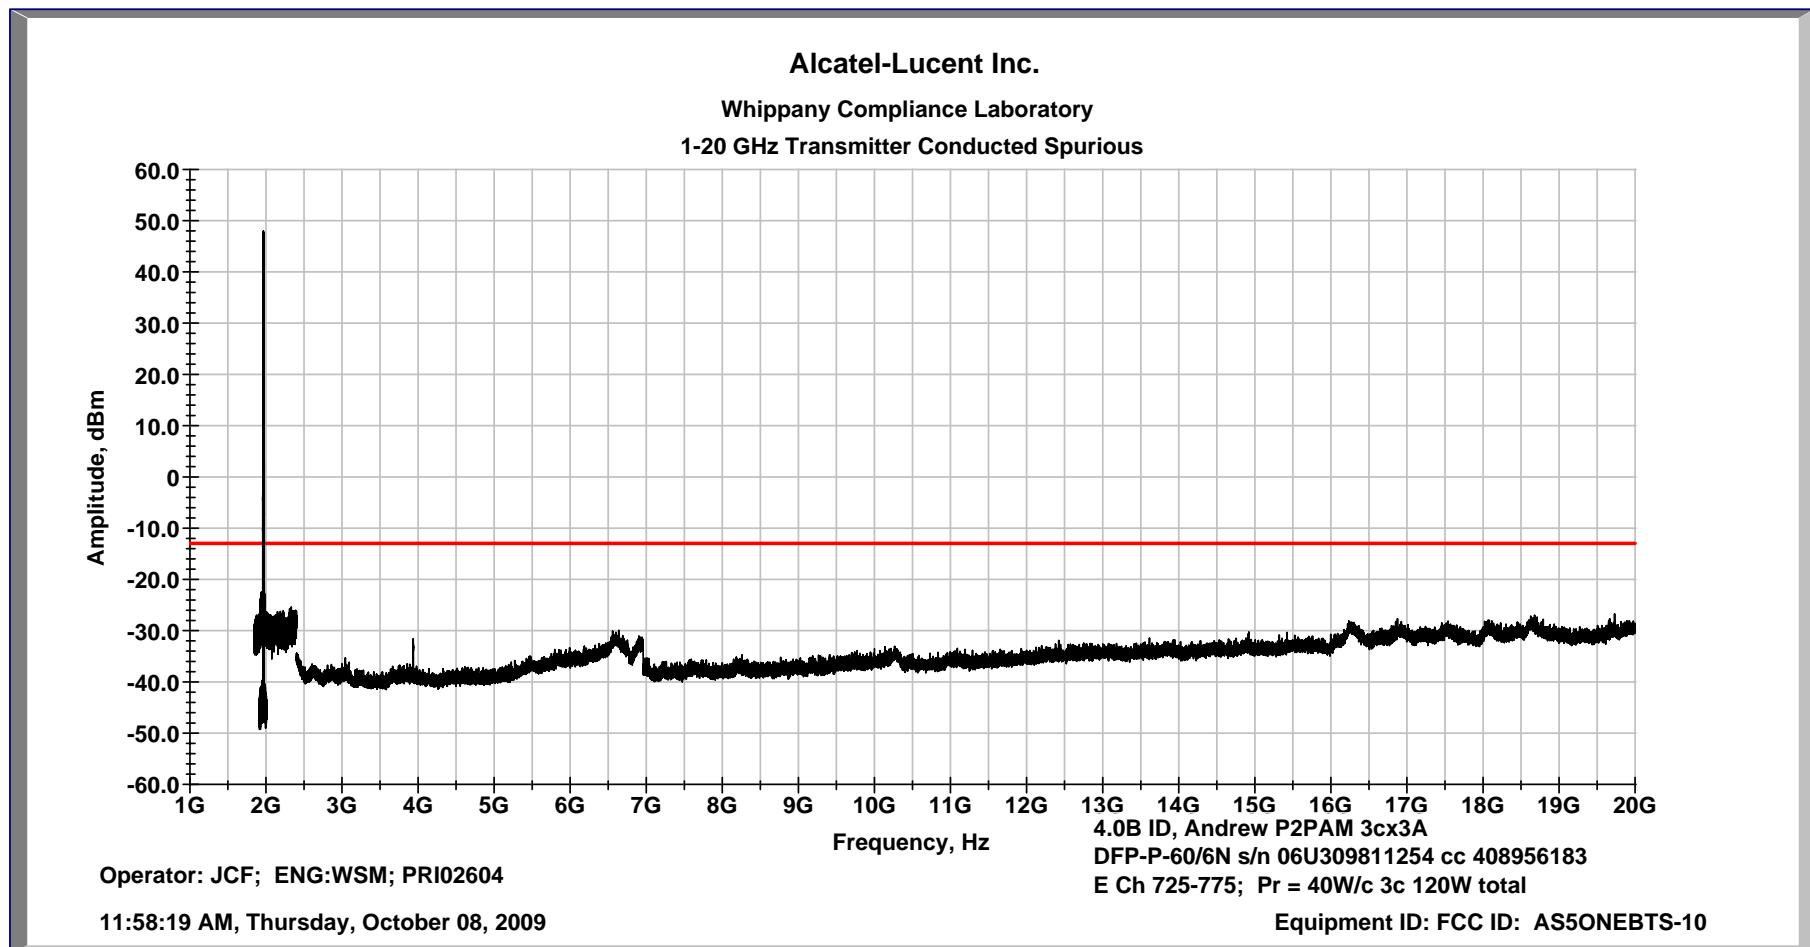


Transmitter Conducted Spurious 10 MHz – 10 GHz PCS Ch F-825-875 3c w/EDPD 120W Total

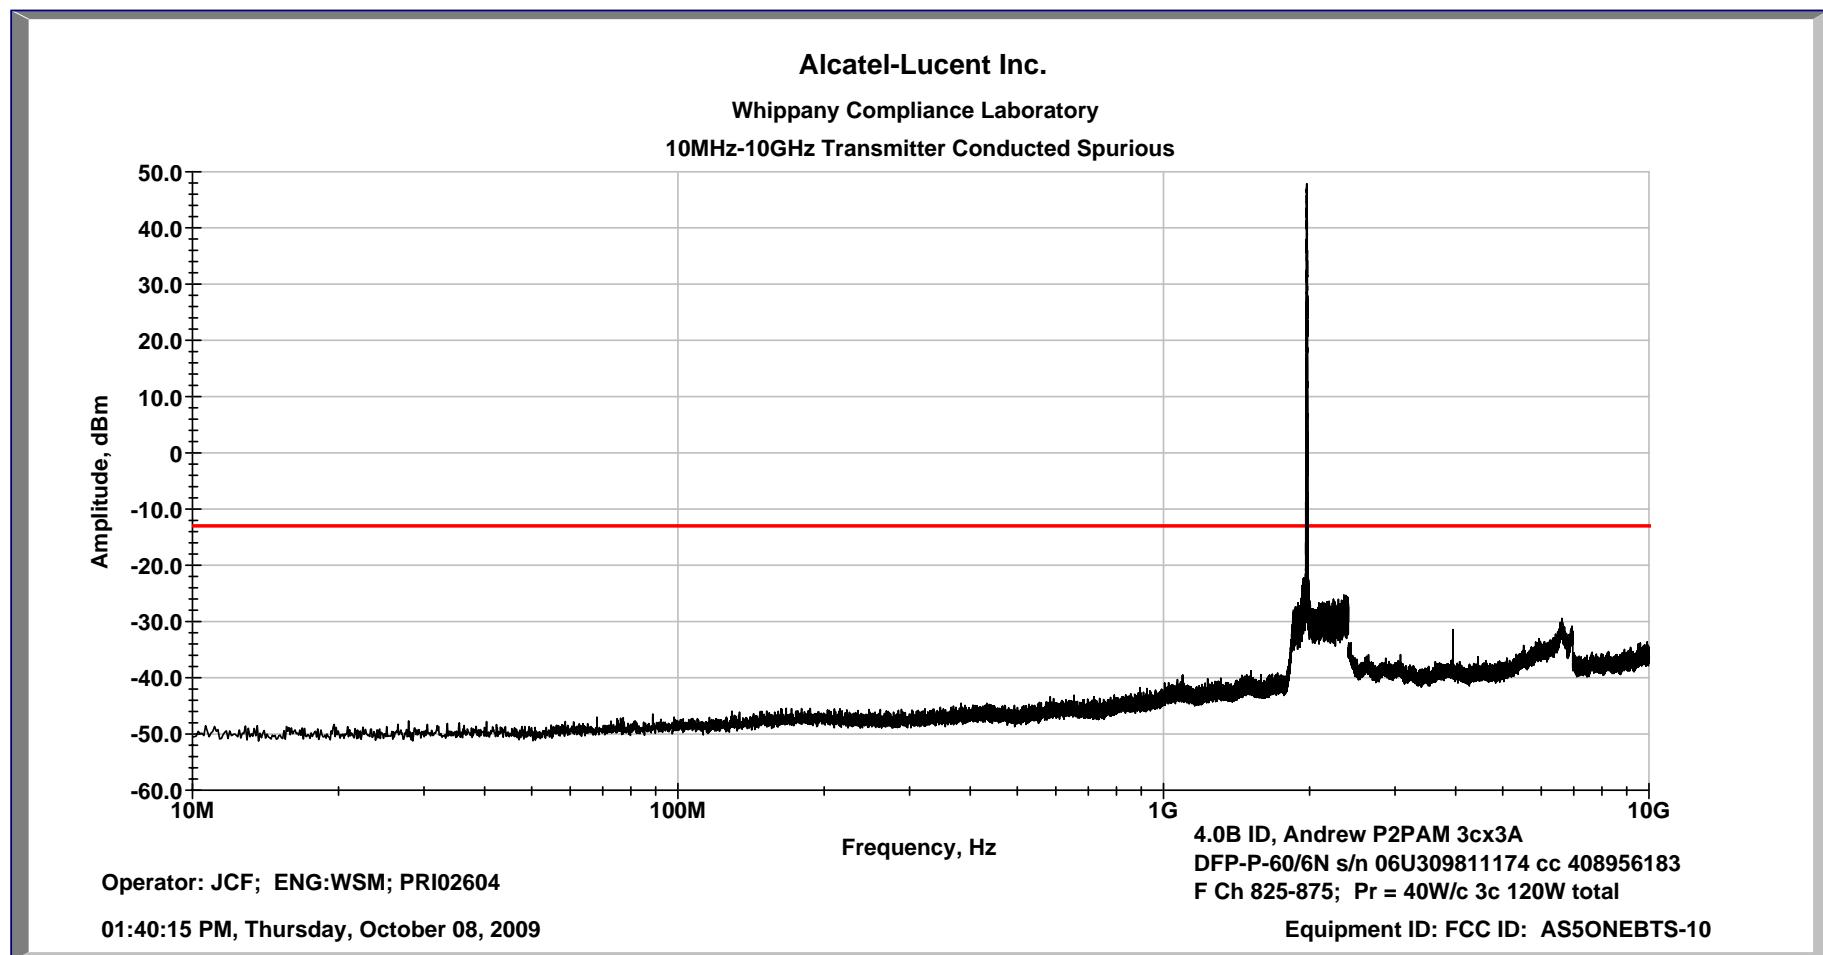


Transmitter Conducted Spurious 1 GHz – 20 GHz PCS Ch F-825-875 3c w/EDPD 120W Total

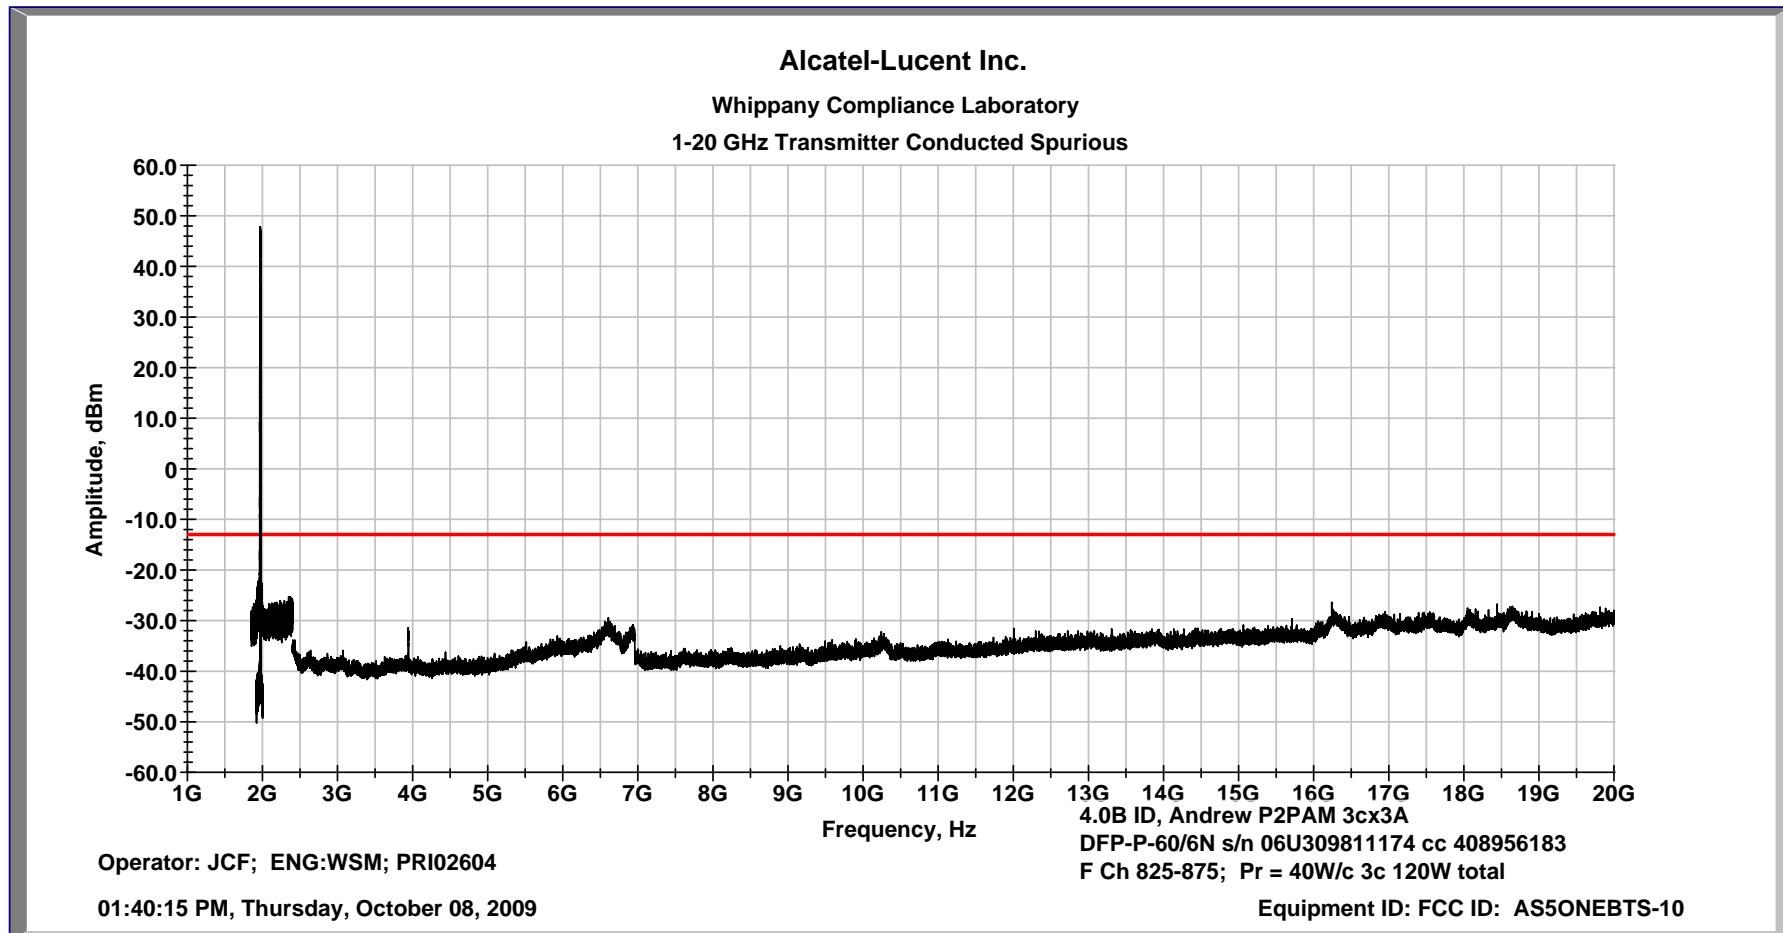


Transmitter Conducted Spurious 10 MHz – 10 GHz PCS Ch C1-925-975 3c w/EDPD 120W Total

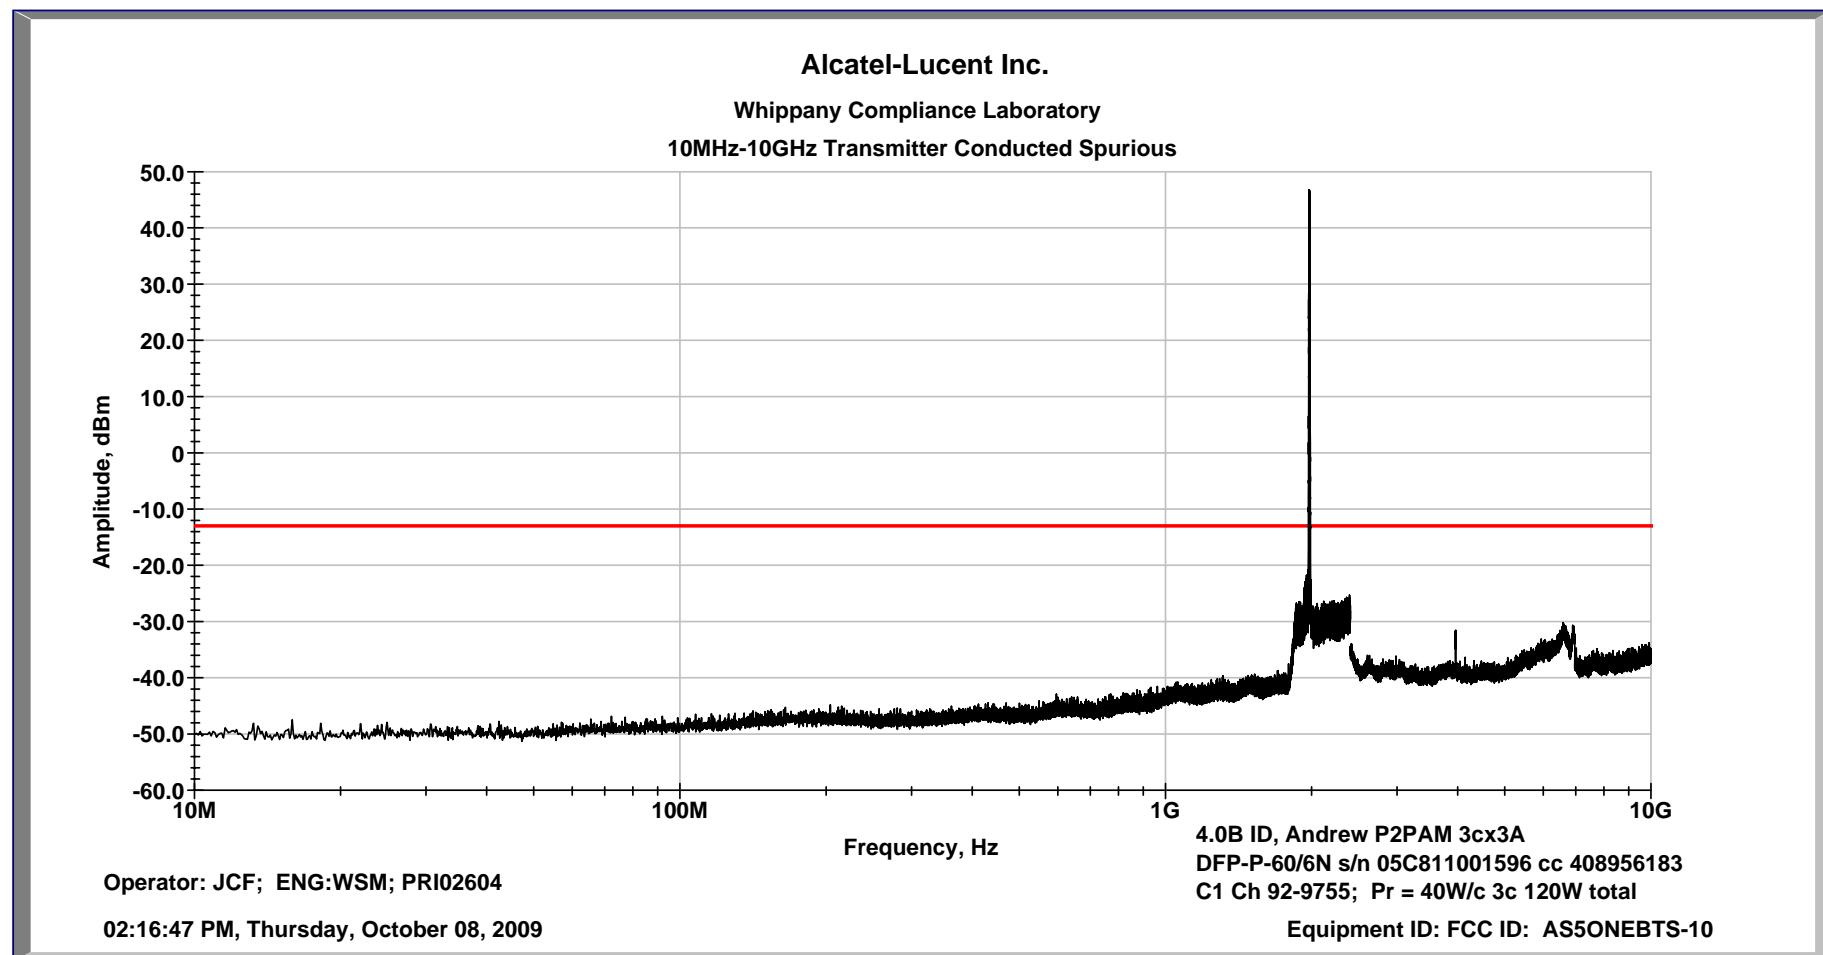


Transmitter Conducted Spurious 1 GHz – 20 GHz PCS Ch C1-925-975 3c w/EDPD 120W Total

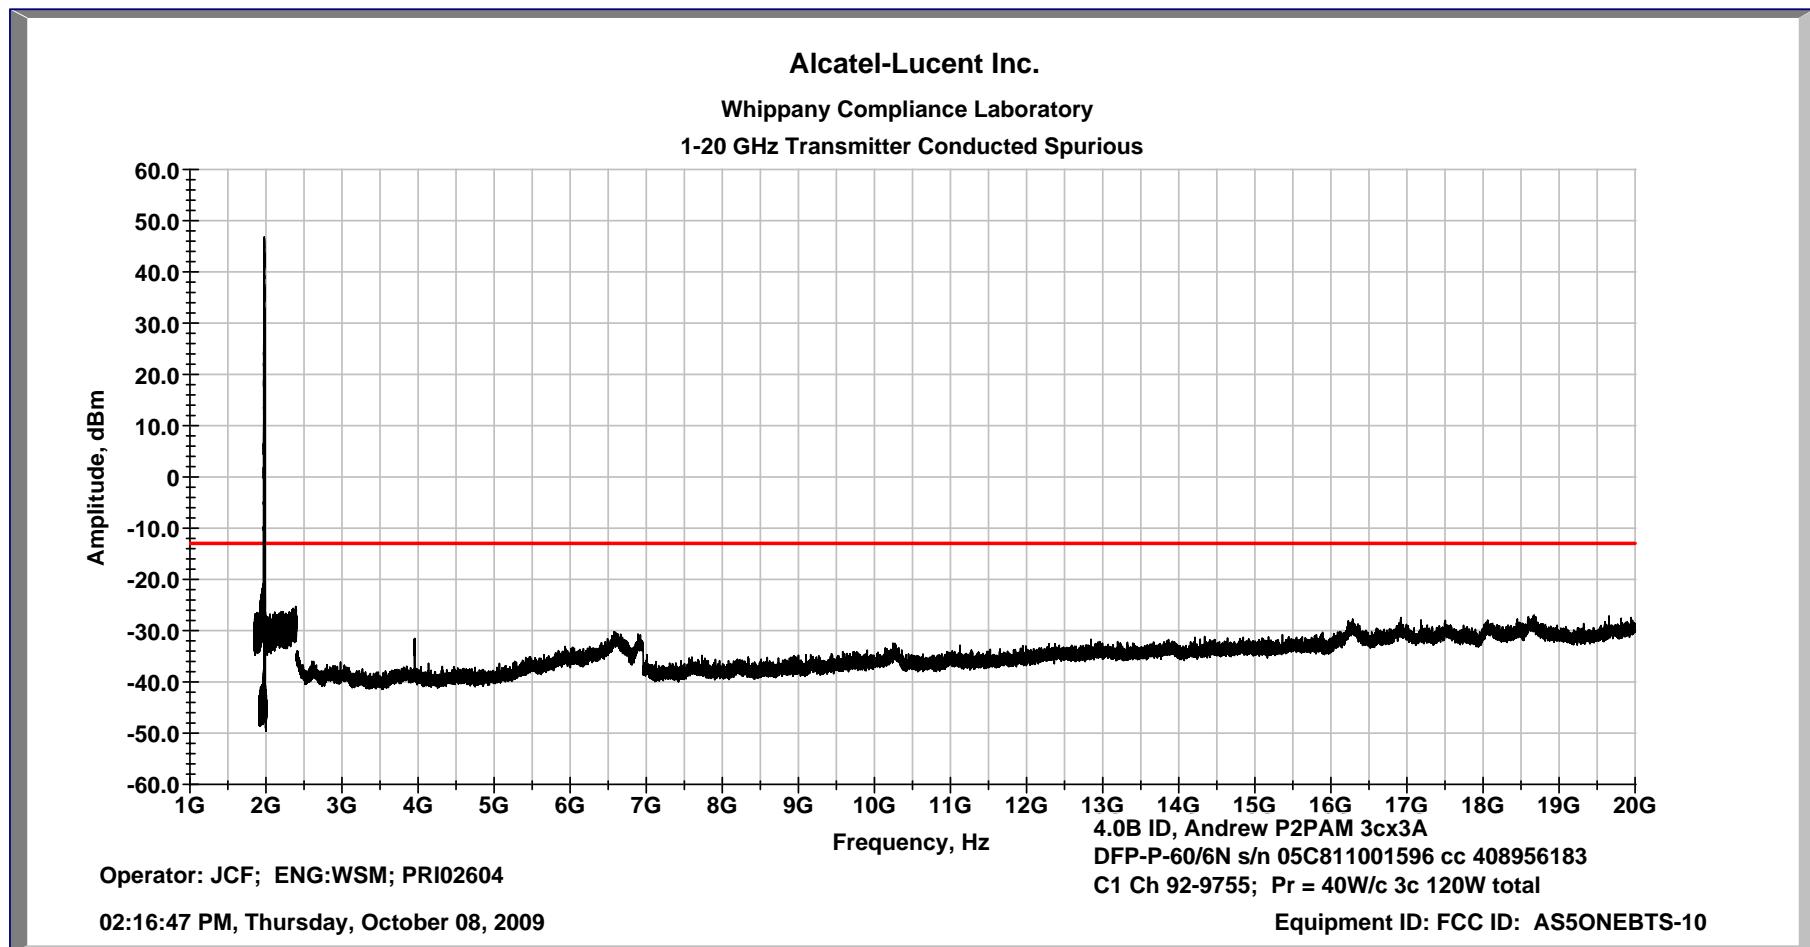


Transmitter Conducted Spurious 10 MHz – 10 GHz PCS Ch C5-1125-1175 3c w/EDPD 120W Total

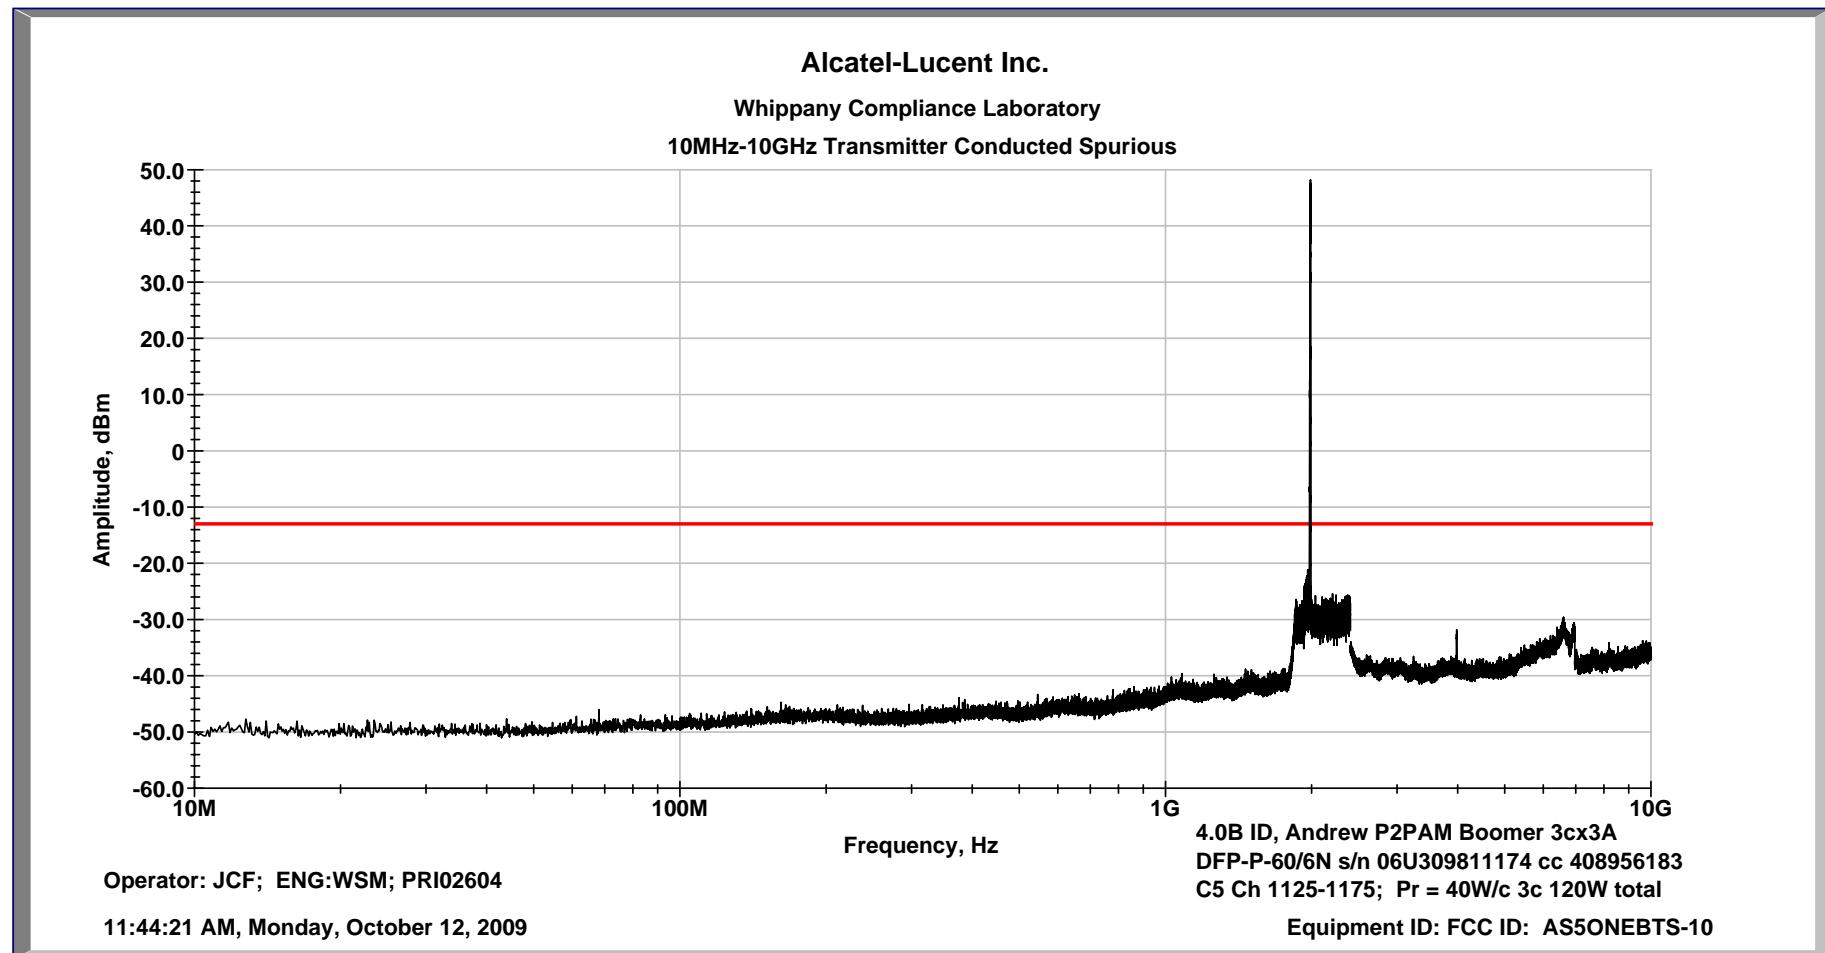


Transmitter Conducted Spurious 1 GHz – 20 GHz PCS Ch C5-1125-1175 3c w/EDPD 120W Total

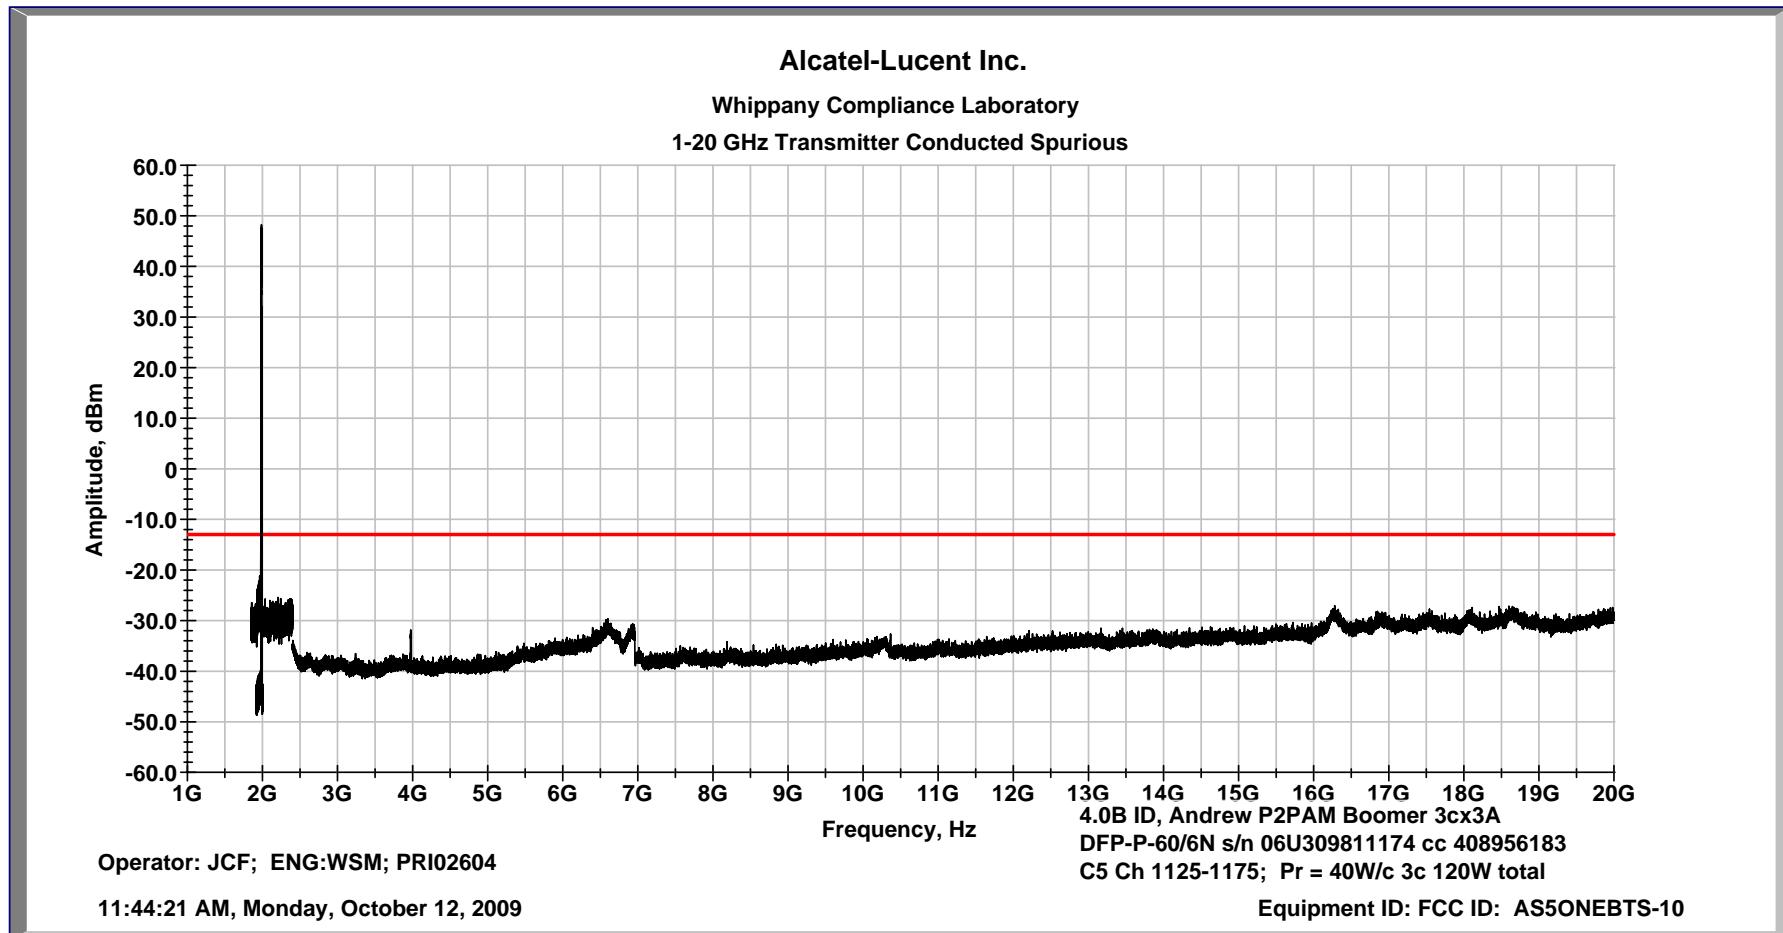

## Transmitter Conducted Spurious 10 MHz – 10 GHz PCS Ch G-1225-1275 3c w/EDPD 120W Total

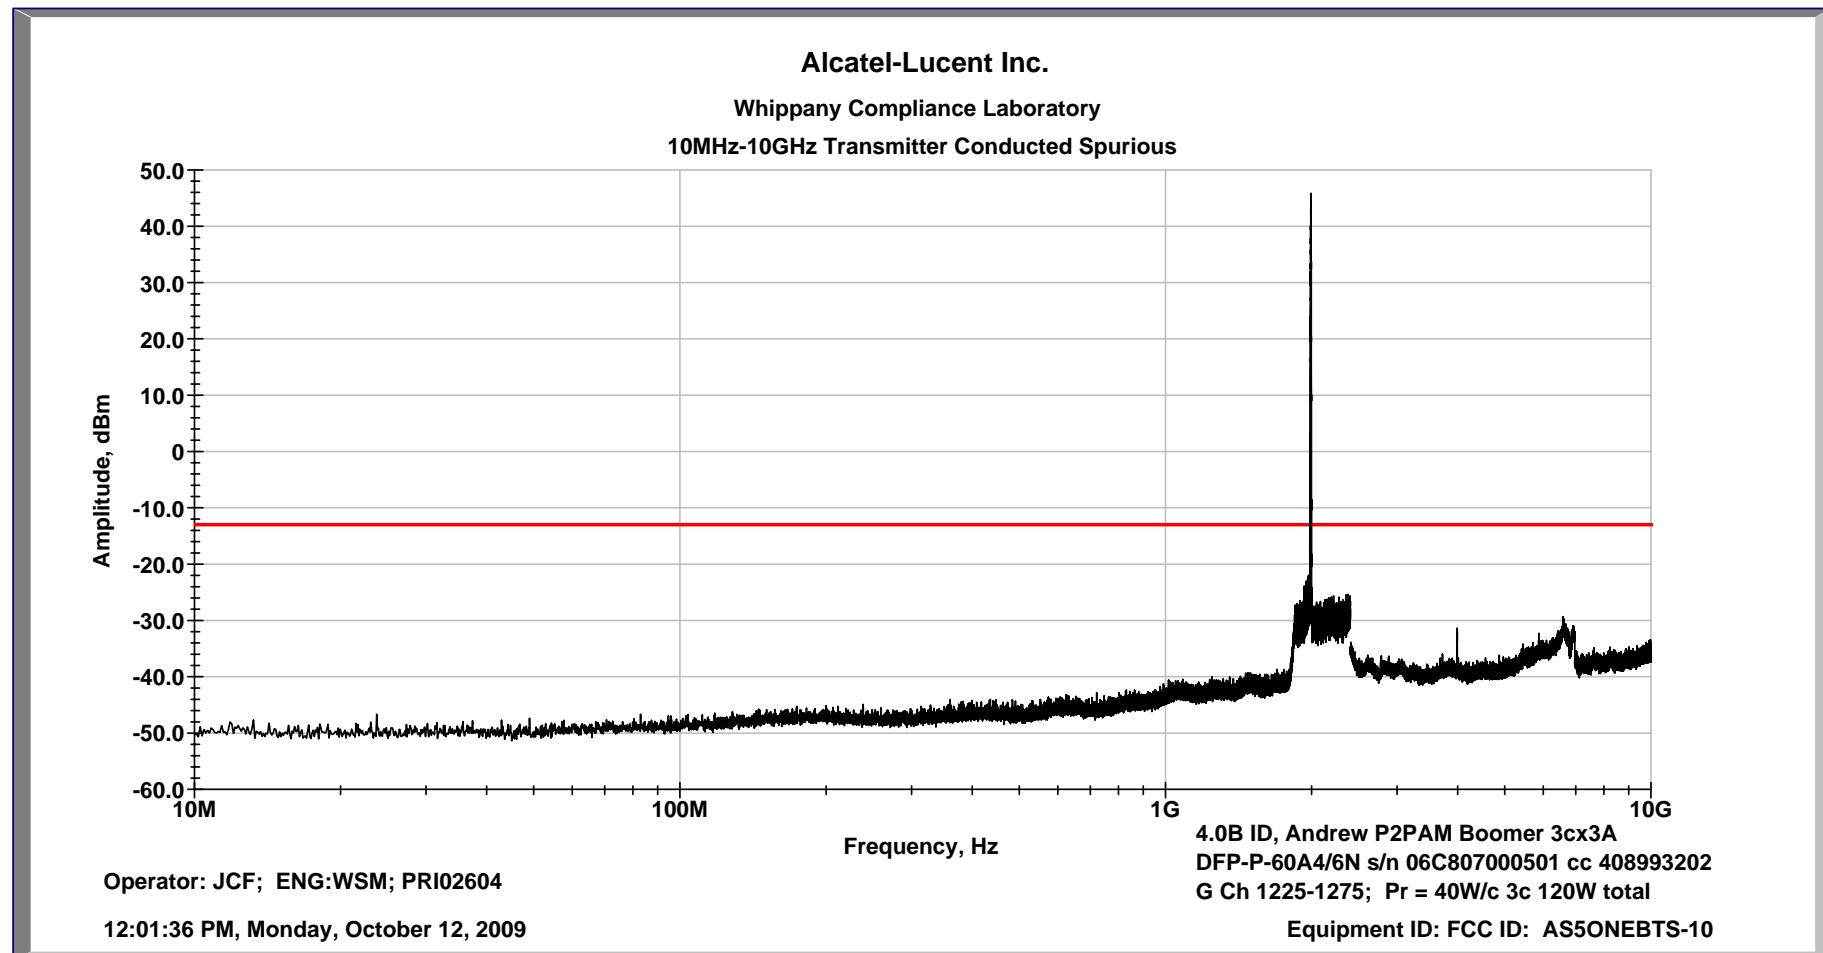

Transmitter Conducted Spurious 1 GHz – 20 GHz PCS Ch G-1225-1275 3c w/EDPD 120W Total

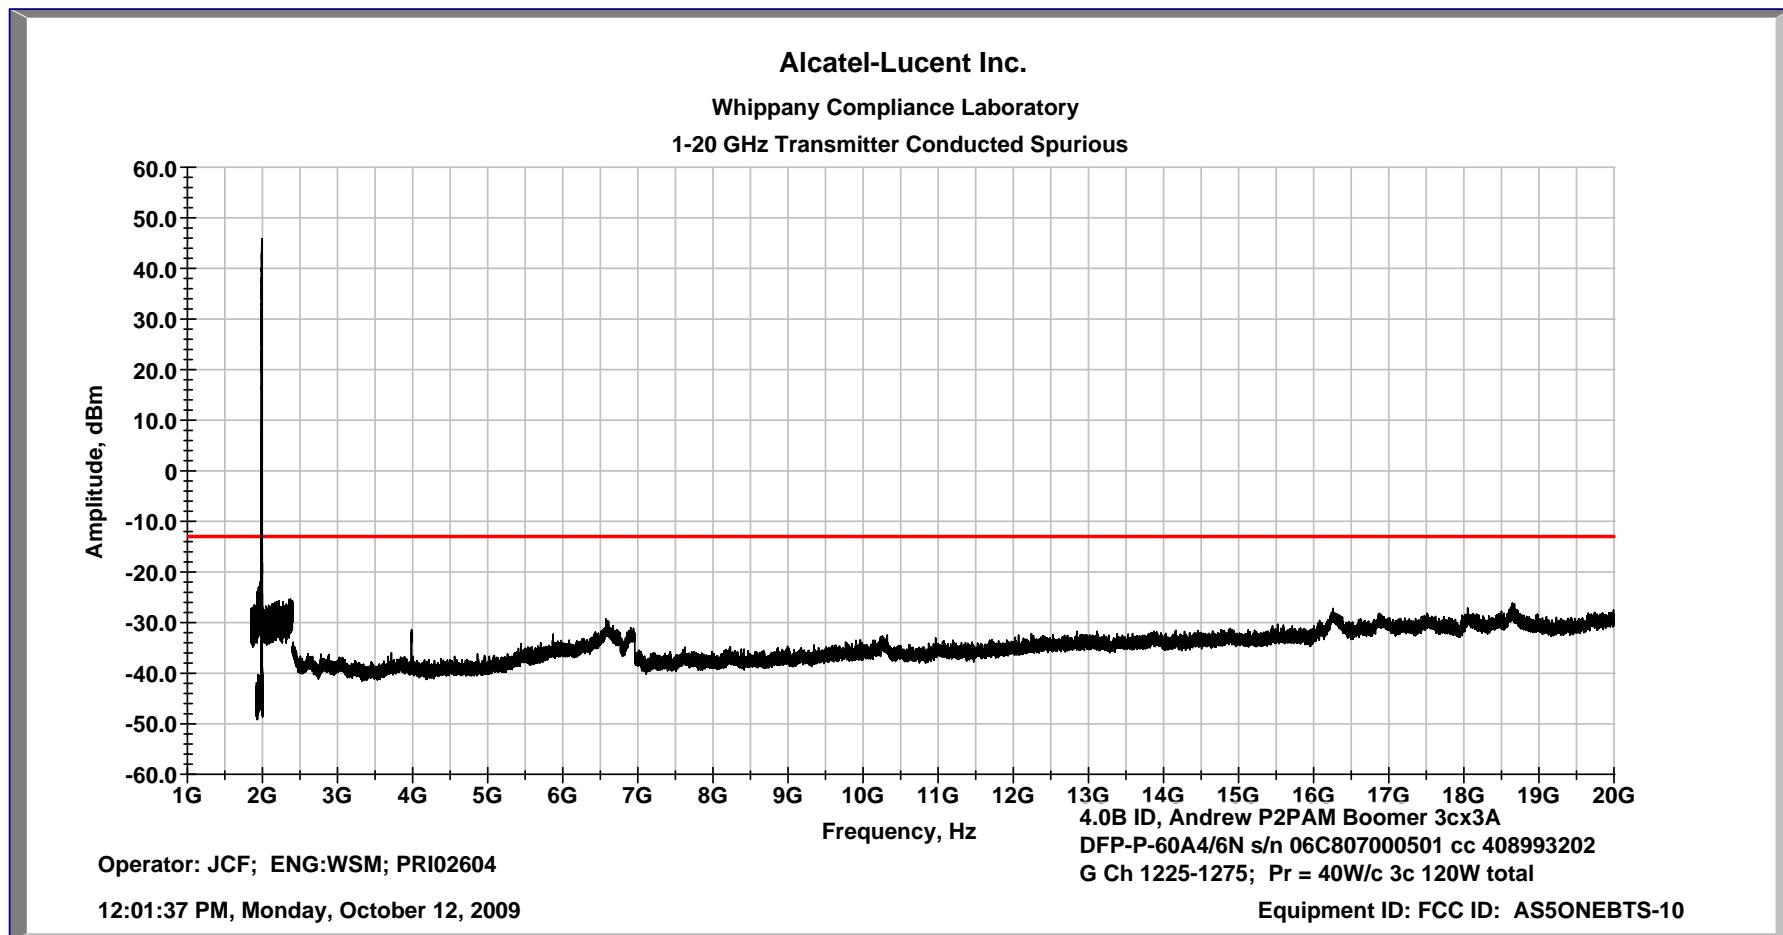

## Exhibit 16 FIELD STRENGTH OF SPURIOUS RADIATION

## SECTION 2.1053 Field Strength Of Spurious Radiation

Field strength measurements of radiated spurious emissions were evaluated in a 3m anechoic pre-compliance chamber and verified as required at the ten meter Open Area Test Site OATS maintained by Lucent Technologies Bell Laboratories FCC Compliance Laboratory in Whippany, New Jersey. A complete description and full measurement data for the site have been placed on file with the Commission.

The four **MCR1900s** were configured with twelve **P2PAMs** and all other associated equipment in a **PCS Indoor FLEXENT ® OneBTS Modular Cell 4.0 frames** operating in all PCS blocks as four sectors of three carrier **PCS UMTS-CDMA EDPD Transceivers/ FCC ID: AS5ONEBTS-10**. Each sector was configured to provide the three carrier 40W/c 120W total performance. The spectrum from 10 MHz to the tenth harmonic of the carrier (20 GHz) was searched for spurious radiation. Measurements were made using both horizontally and vertically polarized broadband antennas. Per FCC regulations, the comparison of out of band spurious emissions directly to the limit is appropriately made using the substitution method. However, when the emissions are more than 20 dB below the specification limit, the use of field strength measurements for compliance determination is acceptable and those emissions are considered not reportable (Section 2.1053 and the FCC Interpretive database for 2.1053). For this case the evaluation of acceptable radiated field strength is as follows.

The calculated emission levels were found by:

Pmeas (dBm) + Cable Loss(dB) + Antenna Factor(dB) + 107 (dB $\mu$ V/dBm) -Amplifier Gain (dB)  
= Field Strength (dB $\mu$ V/m)

Section 24.238 and 2.1053 contains the requirements for the levels of spurious radiation as a function of the EIRP of the unmodulated carrier. The reference level for the unmodulated carrier is calculated as the field produced by an isotropic radiator excited by the transmitter output power according to the following relation taken from Reference Data for Radio Engineers, page 27-7, 6th edition, I T & T Corp.

$$E = (120\pi P)^{1/2} = [(30*P)^{1/2}] / R$$

$$20 \log (E \cdot 10^6) - (43 + 10 \log P) = 71.77 \text{ dB } \mu\text{V/meter}$$

Where:  $E = \text{Field Intensity in Volts/ meter}$   $R = \text{Distance in meters} = 10 \text{ m}$   
 $P = \text{Transmitted Power in watts} = 40 \text{ W/ Carrier}$

## RESULTS:

For this particular test, the field strength of any spurious radiation, measured at 10m, is required to be less than 71.8 dB $\mu$ V/meter. Emissions equal to or less than 51.8 dB $\mu$ V/meter are not reportable and may be verified using field strength measurements and broadband antennas. Over the out of band spectrum investigated from 10 MHz to beyond the tenth harmonic of the carrier (20GHz), no reportable spurious emissions were detected. This demonstrates that the **PCS UMTS-CDMA EDPD Transceiver/ FCC ID: AS5ONEBTS-10**, the subject of this application, complies with Sections 2.1053, 24.238 and 2.1057 of the Rules.

Although not required for certification, additional testing to 47CFR Part 15 documented compliance with the Class B requirement for radiated emissions.

**Exhibit 17****MEASUREMENT OF FREQUENCY STABILITY****SECTION 2.1055 Measurement of Frequency Stability**

The design and performance of the MCR-1900 has not been changed. The frequency stability performance remains within the parameters as previously filed.

**Previous results:**

The previously filed data documented that the maximum frequency deviation measured for the RF carrier frequency (1957.5 MHz) at the transmit antenna port was +0.00062 ppm (1.21 Hz). The specification for FCC compliance is +/- 0.05 ppm (+/- 97.87 Hz). The maximum frequency deviation measured for the OMU-RB output (15MHz) was +0.00004 ppm ( $7 \times 10^{-4}$  Hz). The specification for FCC compliance is +/- 0.05 ppm (+/-0.75 Hz).