



Subject: **Application for Class II Permissive Change, under
FCC ID: AS5ONEBTS-27, Both to Add the 15 MHz
Emission Designator and to Document MIMO
Limitation Exception for the RRH 2x60-1900 Model.**

**Michael P. Farina
Alcatel-Lucent USA Inc.
600-700 Mountain Avenue, MH28-114M
Murray Hill, NJ 07974-0636
E-Mail: Michael.Farina@alcatel-lucent.com**

January 12, 2015

EXHIBIT 9: TEST REPORT

ATTESTATION:

All tests were performed by qualified staff members of:

Global Product Compliance Laboratory (GPCL)
Alcatel-Lucent USA, Inc.
600-700 Mountain Avenue
Murray Hill, New Jersey 07974-0636

All tests of emissions and emission characteristics conducted to the transmit port (antenna terminal) were either performed or directed by me and radiated emissions testing was also directed by me. As Project Lead Engineer, I was responsible for the definition and execution of all EMC/EMI testing.

A handwritten signature in black ink that reads "Michael P. Farina".

Michael P. Farina
Member of Technical Staff
Global Product Compliance Laboratory (GPCL)
Alcatel-Lucent USA, Inc.
600-700 Mountain Avenue
Murray Hill, New Jersey 07974-0636
Desk: 908-582-3857

INTRODUCTION:

FCC ID: AS5ONEBTS-27 covers two separate Alcatel-Lucent products (1) RRH 2x60-1900 and (2) RRH 2x60-1900A. Both are dual technology, WCDMA and LTE, Remote Radio Heads (RRH), and both have the same (a) frequency determining and stabilization circuitry, and (b) transmit power rating 60 W (47.78 dBm) at each of the two Tx antenna terminals. They differ primarily by the manufacturer of their respective power amplifiers.

The purpose and objective of this application for a Class II Permissive Change, under FCC ID: AS5ONEBTS-27, is to add the LTE 15 MHz emission bandwidth and designator to the original RRH2x60-1900 model. However, in accordance with Rule Part 24.238 (b), certain out-of-band emissions exceed the 2x2 MIMO limitation by ≤ 0.5 dB. Since this model has been deployed, since the original Grant dated 3/30/12, the FCC has agreed to accept this permissive change without explicit compliance to the KDB pub 662911 D01 v02r01 *Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)*. The FCC response, per Tracking Number 701143, is attached as a Confidential Exhibit.

Three LTE (Long Term Evolution) modulation schemes are supported: QPSK, 16QAM and 64QAM. Design and operation employs the guidelines set forth in ETSI TS 36.104 *LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) radio transmission and reception (3GPP TS 36.104 version 10.9.0 Release 10)*. Full compliance has been demonstrated with FCC Part 24 — Personal Communications Services, § 24.238 Emission Limitations for Broadband PCS Equipment, following the procedural requirements specified in Part 2 — Frequency Allocations And Radio Treaty Matters; General Rules And Regulations Subpart J — Equipment Authorization Procedures. The spectrum covered is Rule Part 24E, 1930 – 1990 MHz.

In accordance with Sec. 2.1043 *Changes In Certificated Equipment*, only the characteristics affected by this Class II Change need to be reported. As such, the applicable measurements affected are contained in these Test Report Exhibits, and all other Exhibits submitted with the initial filing, that remain unchanged, need not be repeated.

APPLICABLE FCC RULES AND INDUSTRY STANDARDS:

The specific test procedures that are both required for and are applicable to this Class II certification are listed below. Note that Frequency Stability measurements need not be repeated.


Part 2.1046	RF Power Output
Part 2.1047	Modulation Characteristics
Part 2.1049	Occupied Bandwidth
Part 2.1051	Spurious Emissions at the Antenna Terminals.
Part 2.1053	Field Strength of Spurious Radiation
Part 2.1057	Frequency Spectrum to be Investigated
Part 24	Personal Communications Services; Subpart E — Broadband PCS
Part 24.238	Emission Limitations for Broadband PCS Equipment

ETSI TS 36.104 *LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) radio transmission and reception (3GPP TS 36.104 version 10.9.0 Release 10)*

ANSI C63.4-2009 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic in the Range of 9 kHz to 40 GHz; September 15, 2009.

PART 2.1046 MEASUREMENTS REQUIRED: RF POWER OUTPUT

The RF power of the single 15 MHz BW carrier, tuned to 1937.5 MHz (Block A center frequency), 1957.5 MHz (Block B center frequency) and 1982.5 MHz (Block C center frequency), were measured at 60 W (47.8 dBm) long term average power at a single transmit terminal (Tx1) and for each of the 3 LTE test modulation schemes: QPSK, 16QAM and 64QAM. The RF power was measured and confirmed prior to each test.

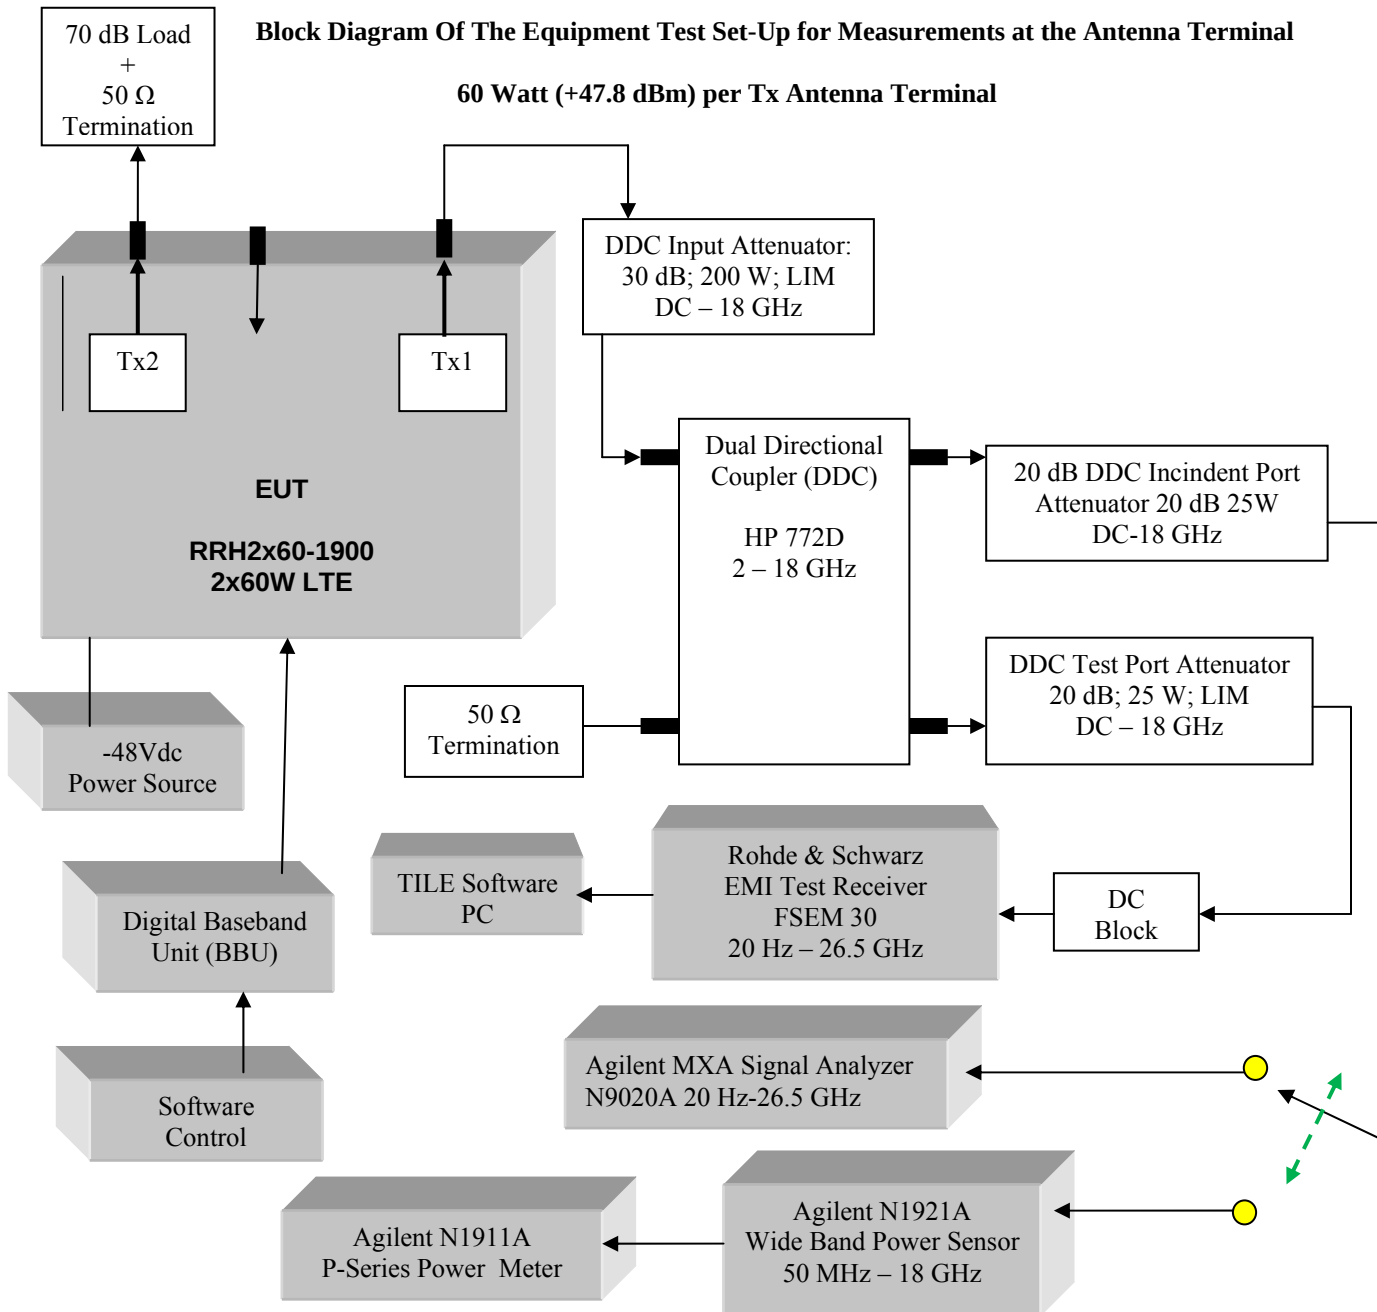


PART 2.1047 MEASUREMENTS REQUIRED: MODULATION CHARACTERISTICS

The LTE modulation characteristics were measured and recorded at Tx1 for each of the LTE test modulation schemes: QPSK, and 64QAM, for the 3 carriers tabulated below.


Frequency Block	Fundamental Center Frequency	Emission Bandwidth	RF Power
A: 1930 – 1945 MHz	1937.5 MHz	15 MHz	60 W (47.8 dBm)
B: 1950 – 1965 MHz	1957.5 MHz	15 MHz	60 W (47.8 dBm)
C: 1975 – 1990 MHz	1982.5 MHz	15 MHz	60 W (47.8 dBm)

Modulation Schemes for Tx1 1937.5 MHz, BW 15 MHz**LTE QPSK**


Tx1 1937.5 MHz, 60W (47.8 dBm), 15 MHz BW

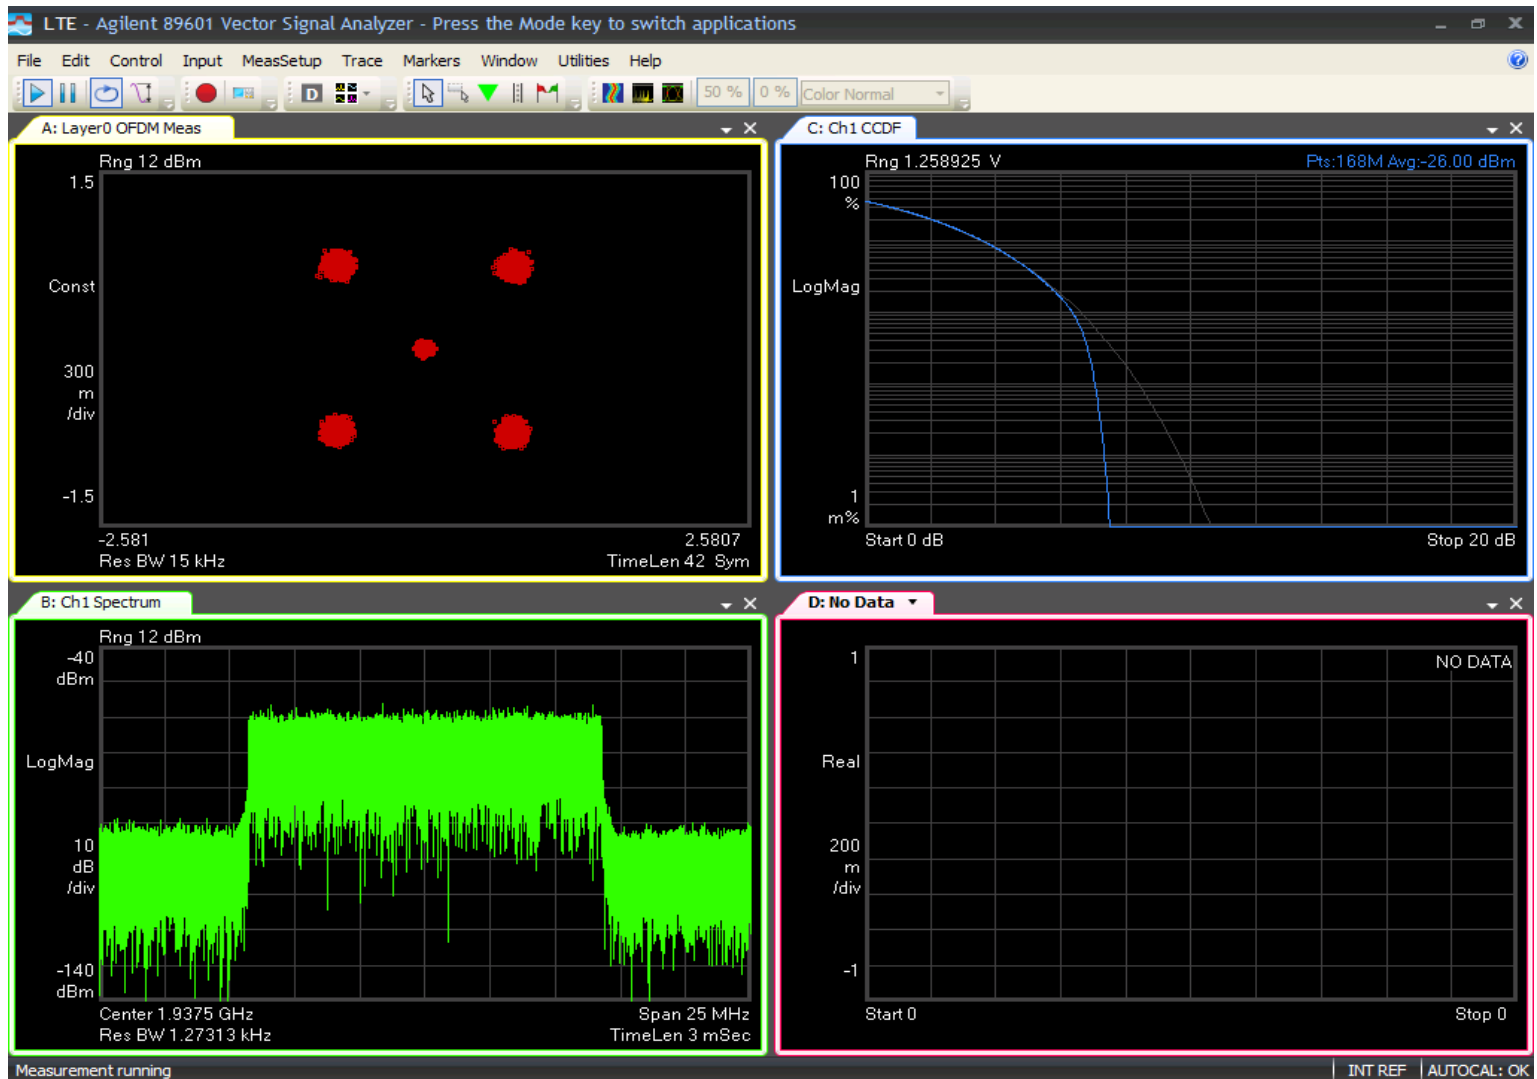


Modulation Schemes for Tx1 1937.5 MHz, BW 15 MHz
LTE 64QAM
Tx1 1937.5 MHz, 60W (47.8 dBm), 15 MHz BW

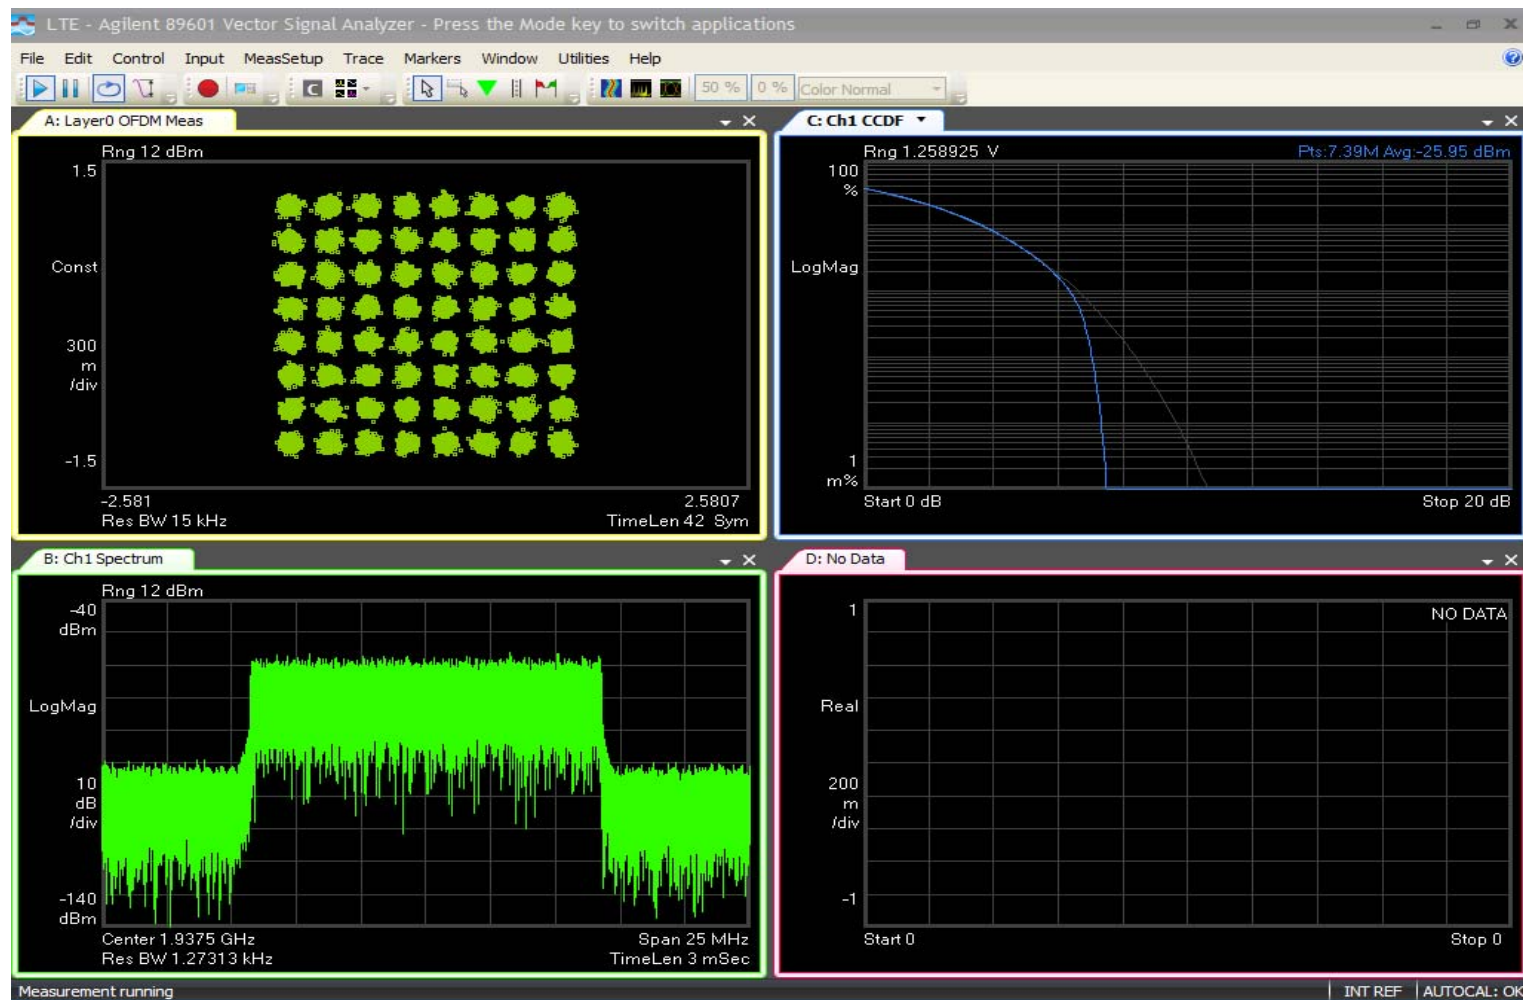


Modulation Schemes for Tx1 1957.5 MHz, BW 15 MHz
LTE QPSK
Tx1 1957.5 MHz, 60W (47.8 dBm), 15 MHz BW

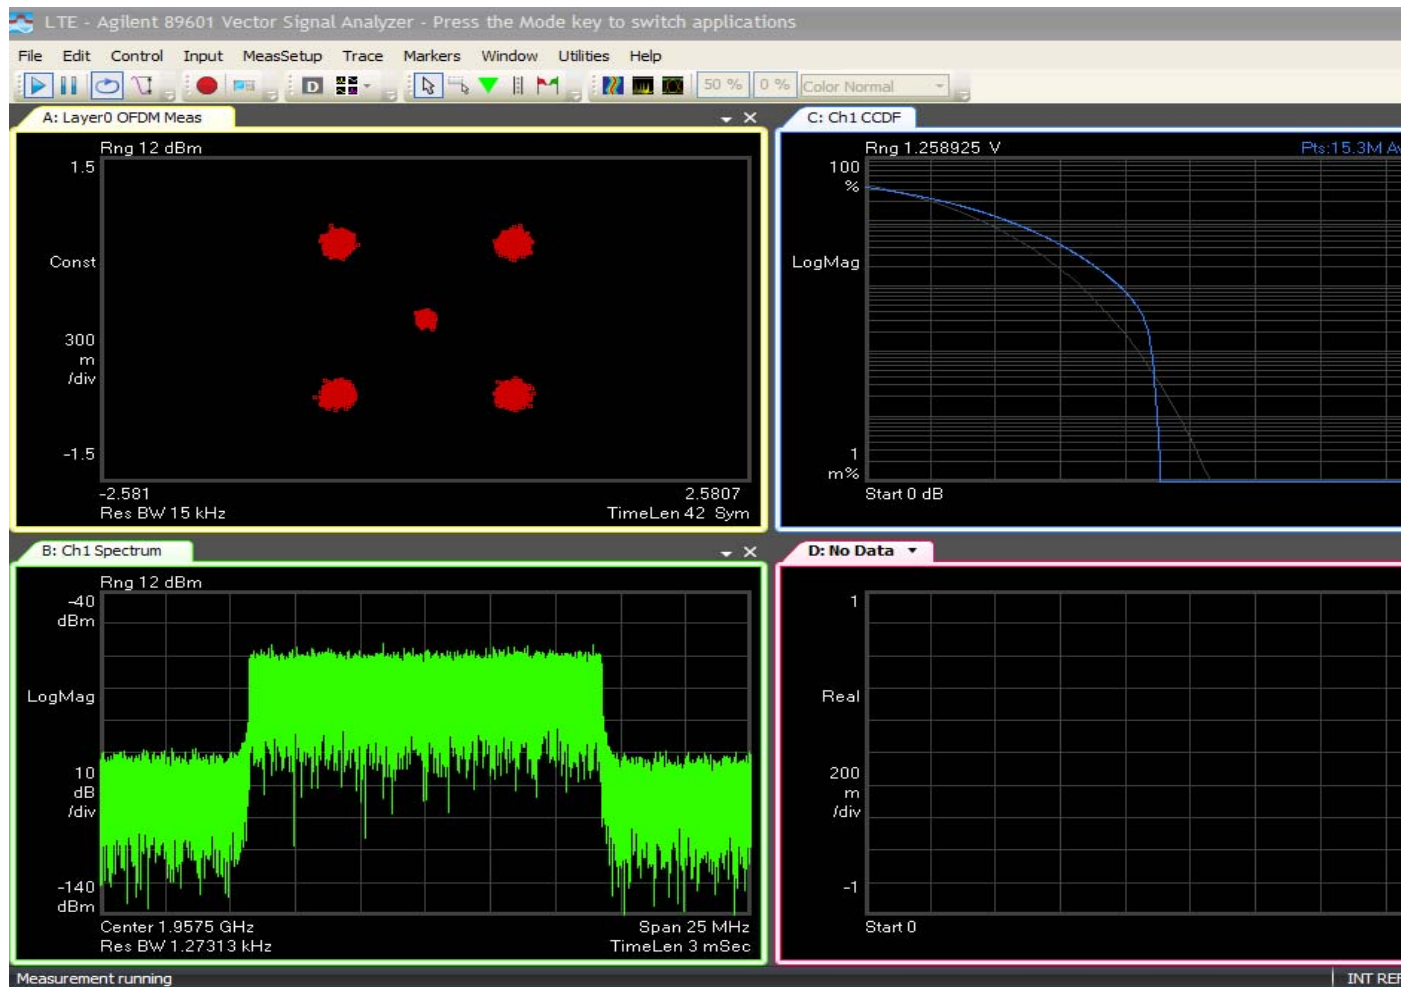


Modulation Schemes for Tx1 1957.5 MHz, BW 15 MHz
LTE 64QAM
Tx1 1957.5 MHz, 60W (47.8 dBm), 15 MHz BW

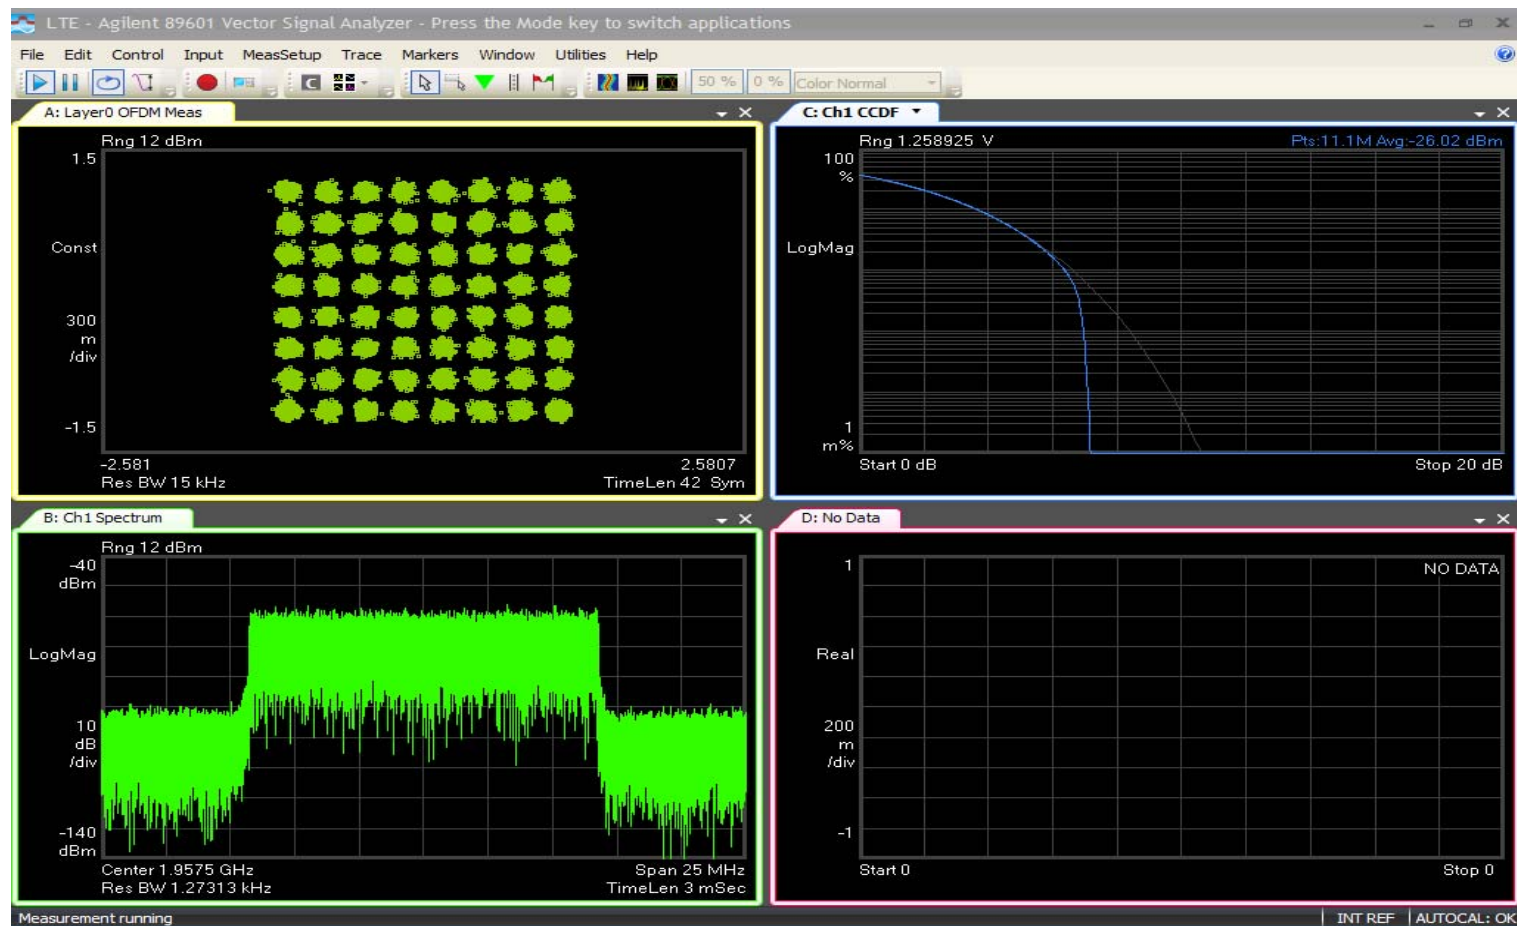

Modulation Schemes for Tx1 1982.5 MHz, BW 15 MHz
LTE QPSK
Tx1 1982.5 MHz, 60W (47.8 dBm), 15 MHz BW

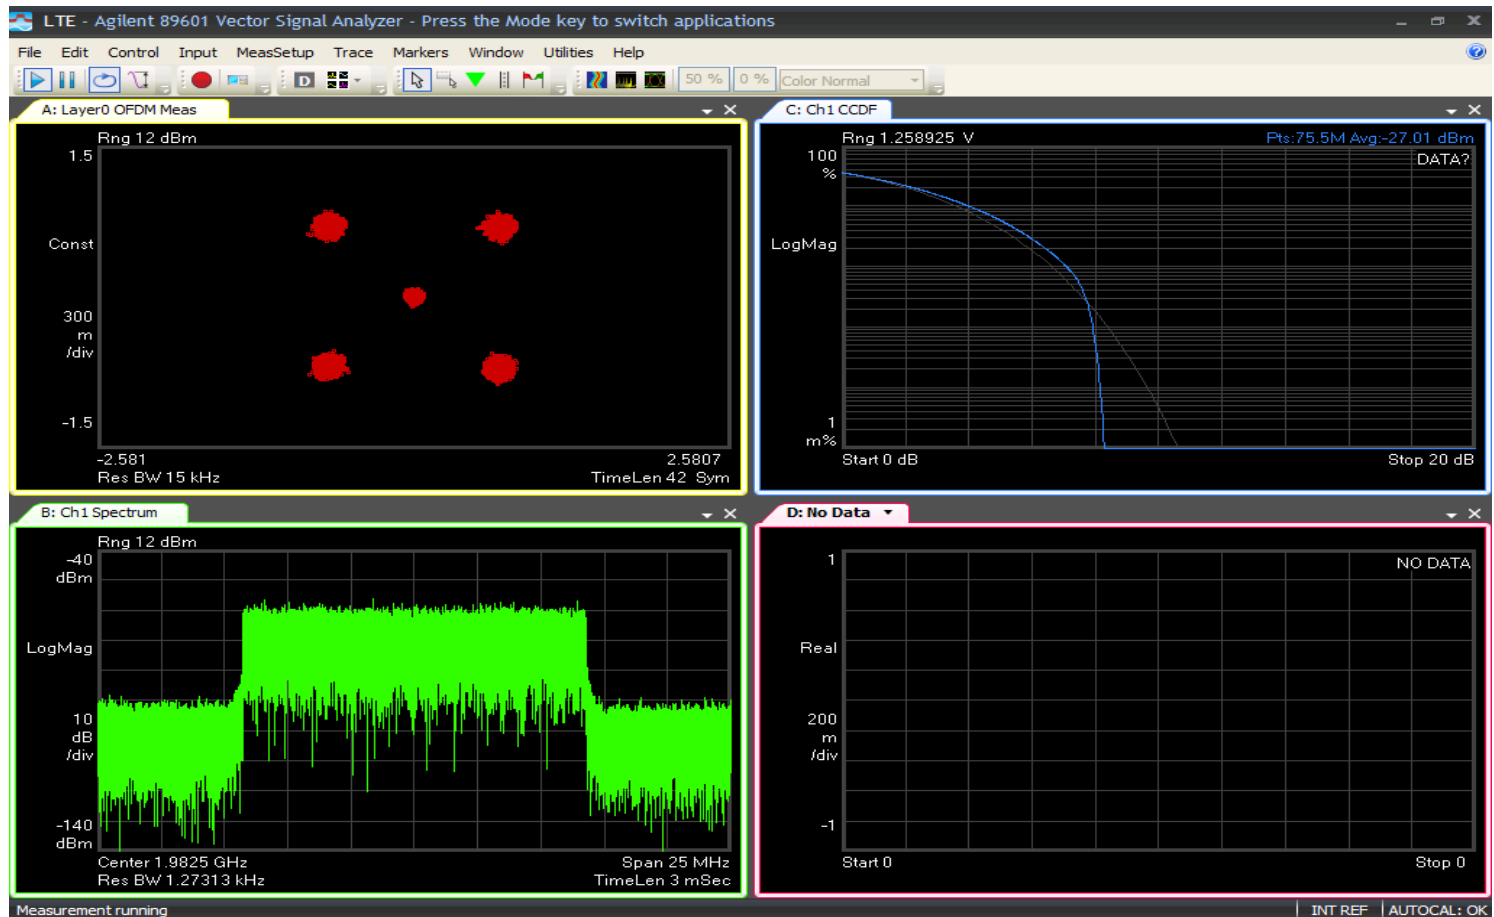

Modulation Schemes for Tx1 1982.5 MHz, BW 15 MHz
LTE 64QAM
Tx1 1982.5 MHz, 60W (47.8 dBm), 15 MHz BW

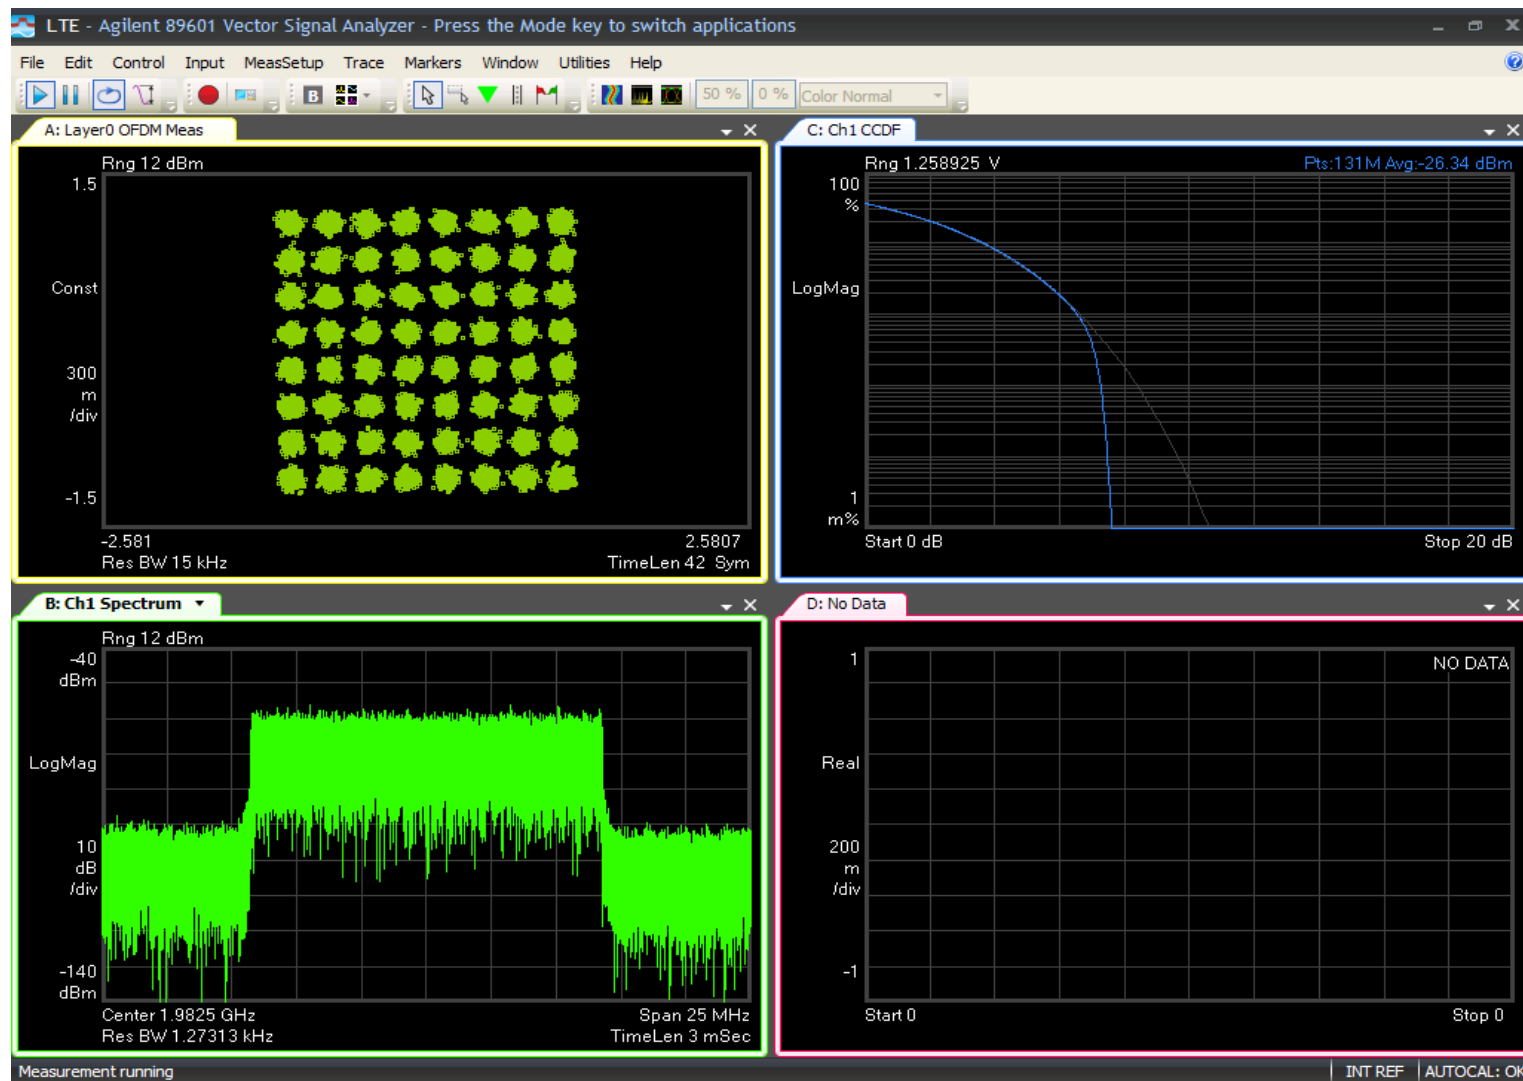

PART 2.1049 MEASUREMENTS REQUIRED: OCCUPIED BANDWIDTH – 99% POWER BANDWIDTH


Both the 99% Power Bandwidth (In-Band), which defines the emission designator, and the Emission Mask Compliance (Out-Of-Band) were measured and recorded at Tx1 for each of the LTE test modulation schemes: QPSK and 64QAM, for the 3 carriers tabulated below.

Frequency Block	Fundamental Center Frequency	Emission Bandwidth	RF Power
A: 1930 – 1945 MHz	1937.5 MHz	15 MHz	60 W (47.8 dBm)
B: 1950 – 1965 MHz	1957.5 MHz	15 MHz	60 W (47.8 dBm)
C: 1975 – 1990 MHz	1982.5 MHz	15 MHz	60 W (47.8 dBm)


Compliance was demonstrated by each of the two methods:

1. The carrier 99% Power Bandwidth, which defines the necessary bandwidth declared in the emission designator, using an Agilent MXA Signal Analyzer N9020A 20 Hz – 26.5 GHz.
2. In lieu of the ETSI TS 36.104 emission mask limitation, emission masks were abstracted and assembled from Part 24.238 (a) and (b), incorporating the additional 2x2 MIMO limitation from KDB pub 662911 D01 v02r01 *Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc).*


99% Power Bandwidth
LTE QPSK
Tx1 1937.5 MHz, 60 W (47.8 dBm), 15 MHz BW

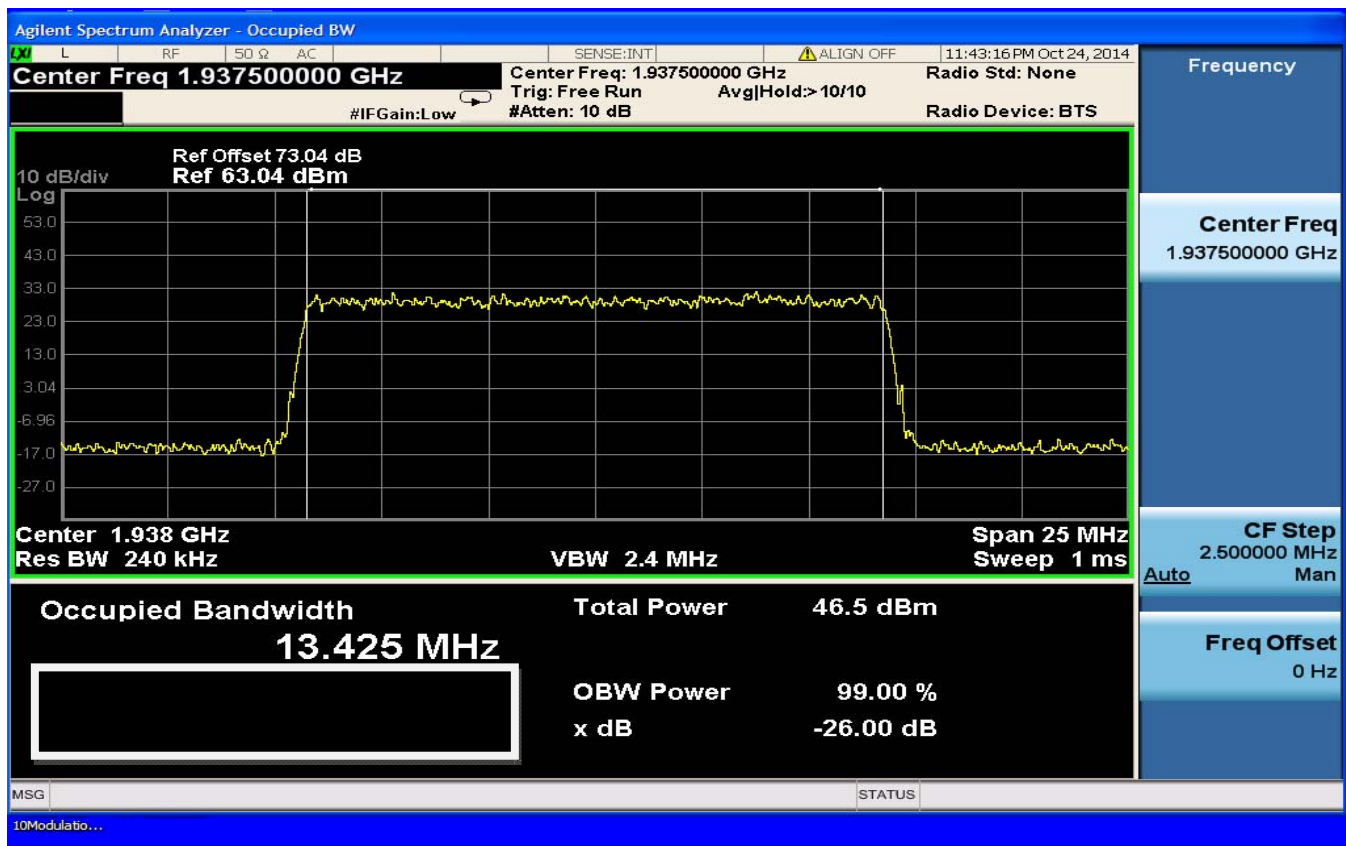


99% Power Bandwidth
LTE 64QAM
Tx1 1937.5 MHz, 60 W (47.8 dBm), 15 MHz BW

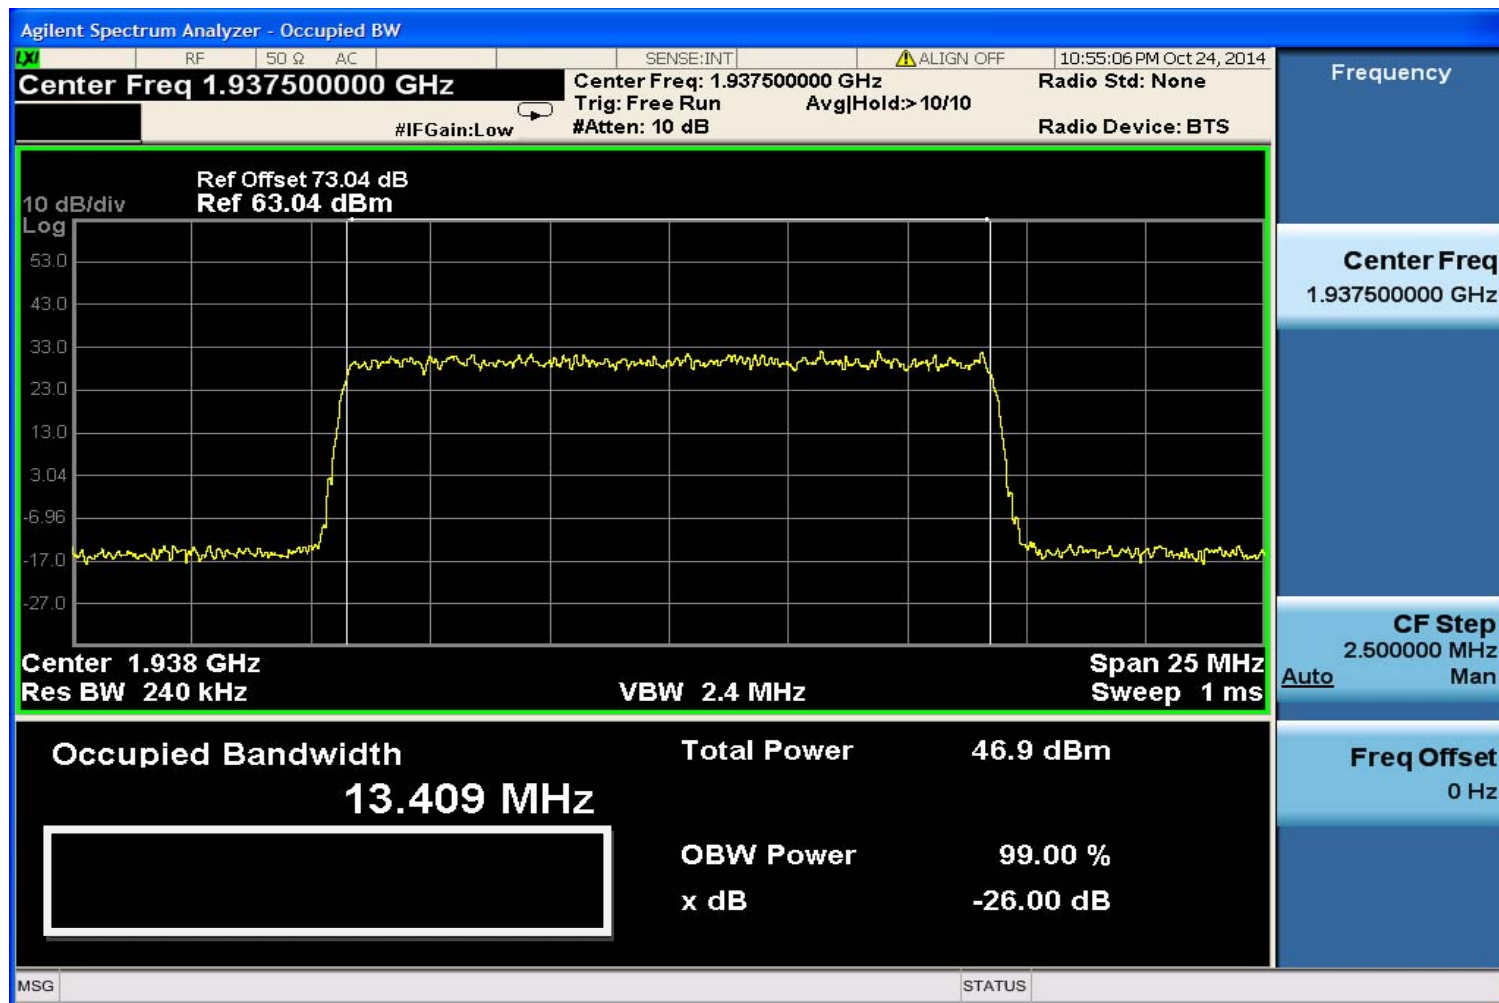


99% Power Bandwidth
LTE QPSK
Tx1 1957.5 MHz, 60 W (47.8 dBm), 15 MHz BW

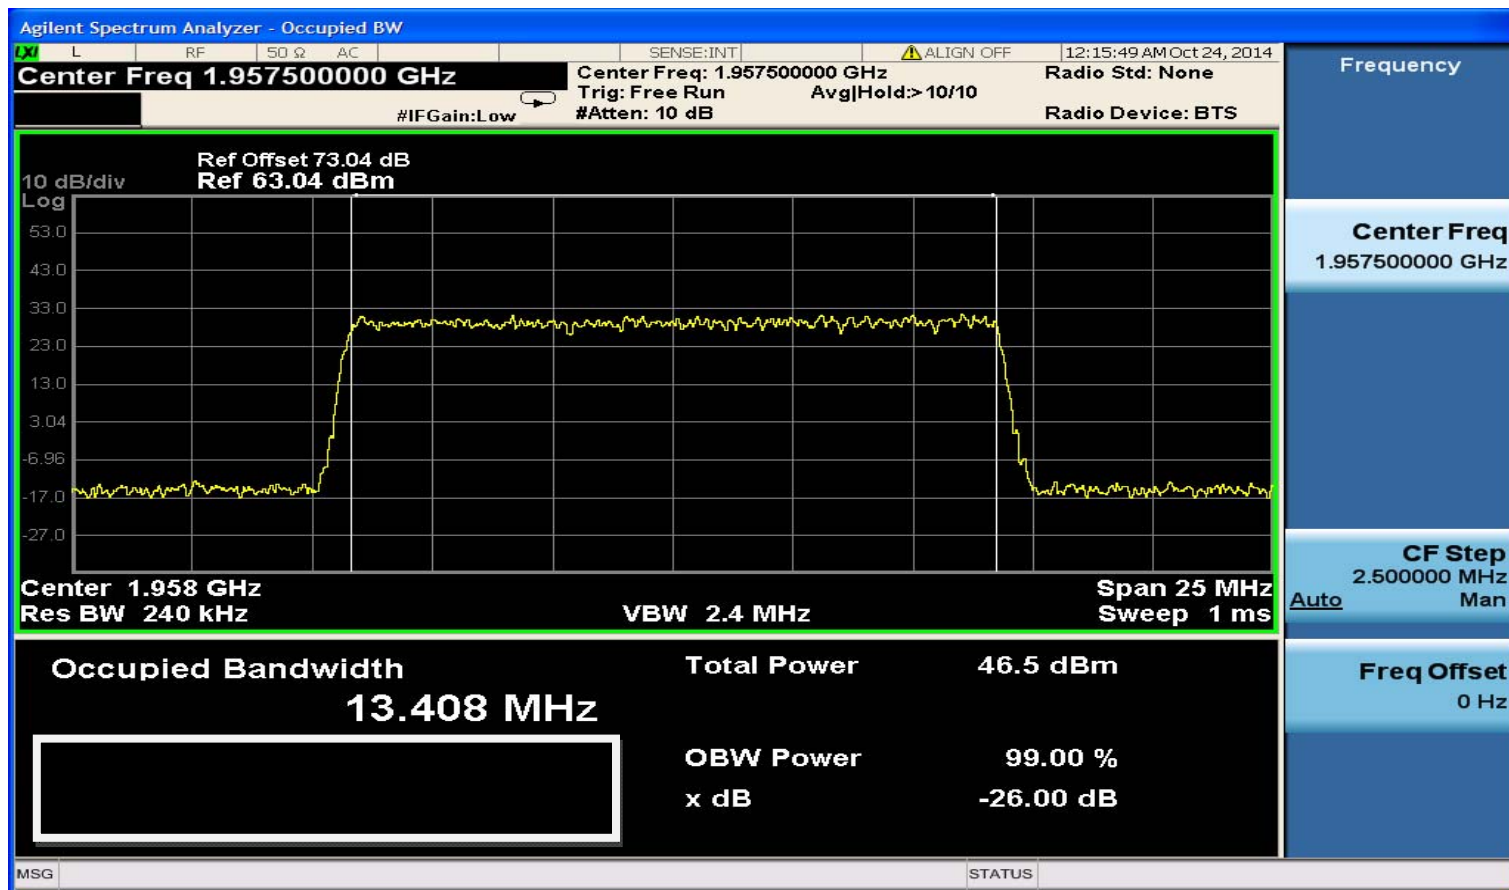


99% Power Bandwidth
LTE 64QAM
Tx1 1957.5 MHz, 60 W (47.8 dBm), 15 MHz BW

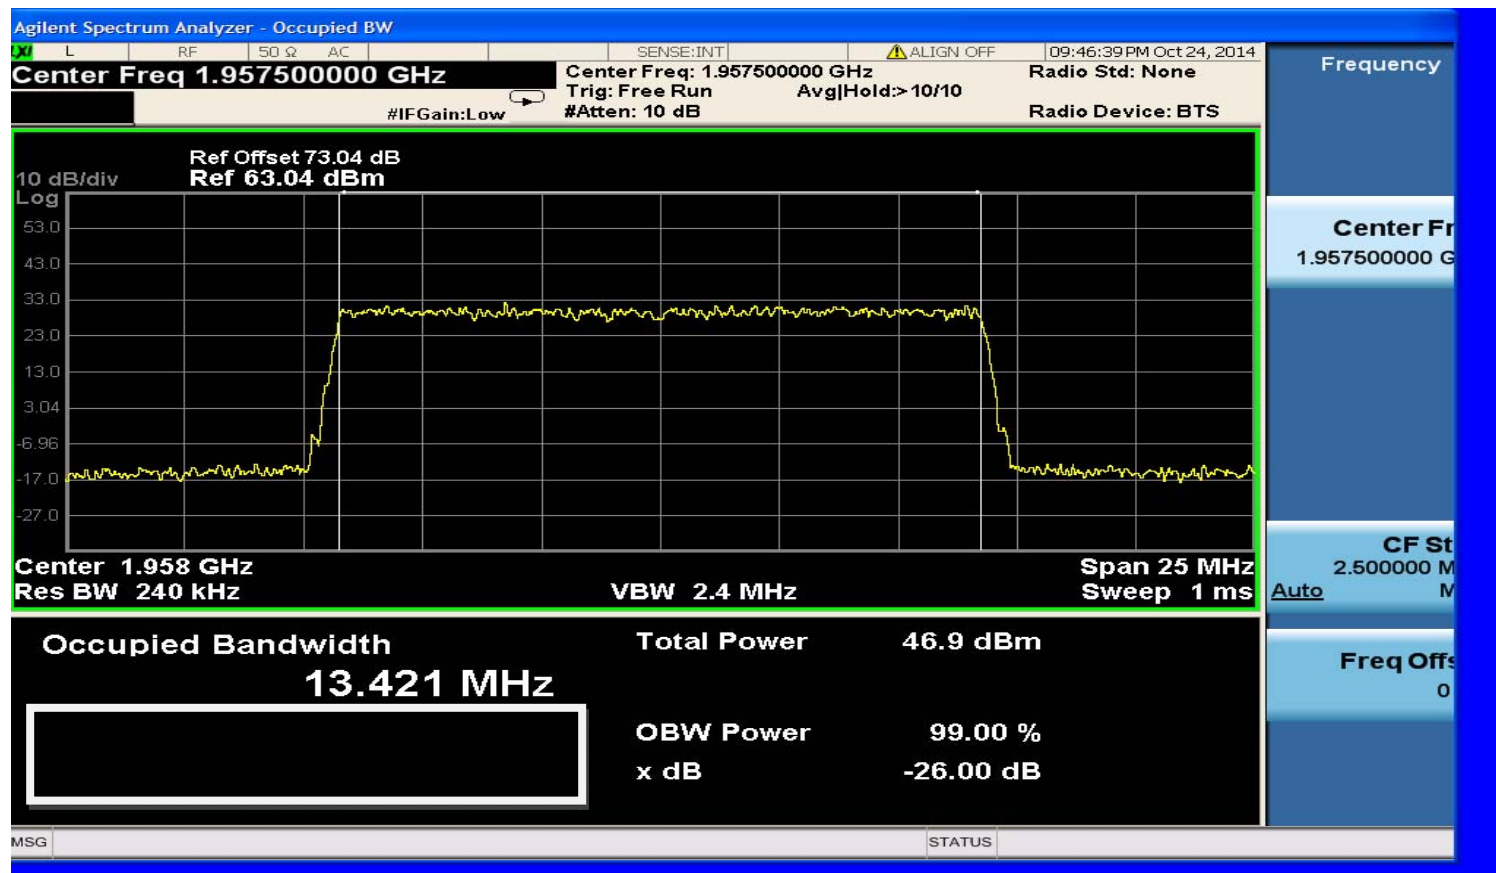

99% Power Bandwidth
LTE QPSK
Tx1 1982.5 MHz, 60 W (47.8 dBm), 15 MHz BW

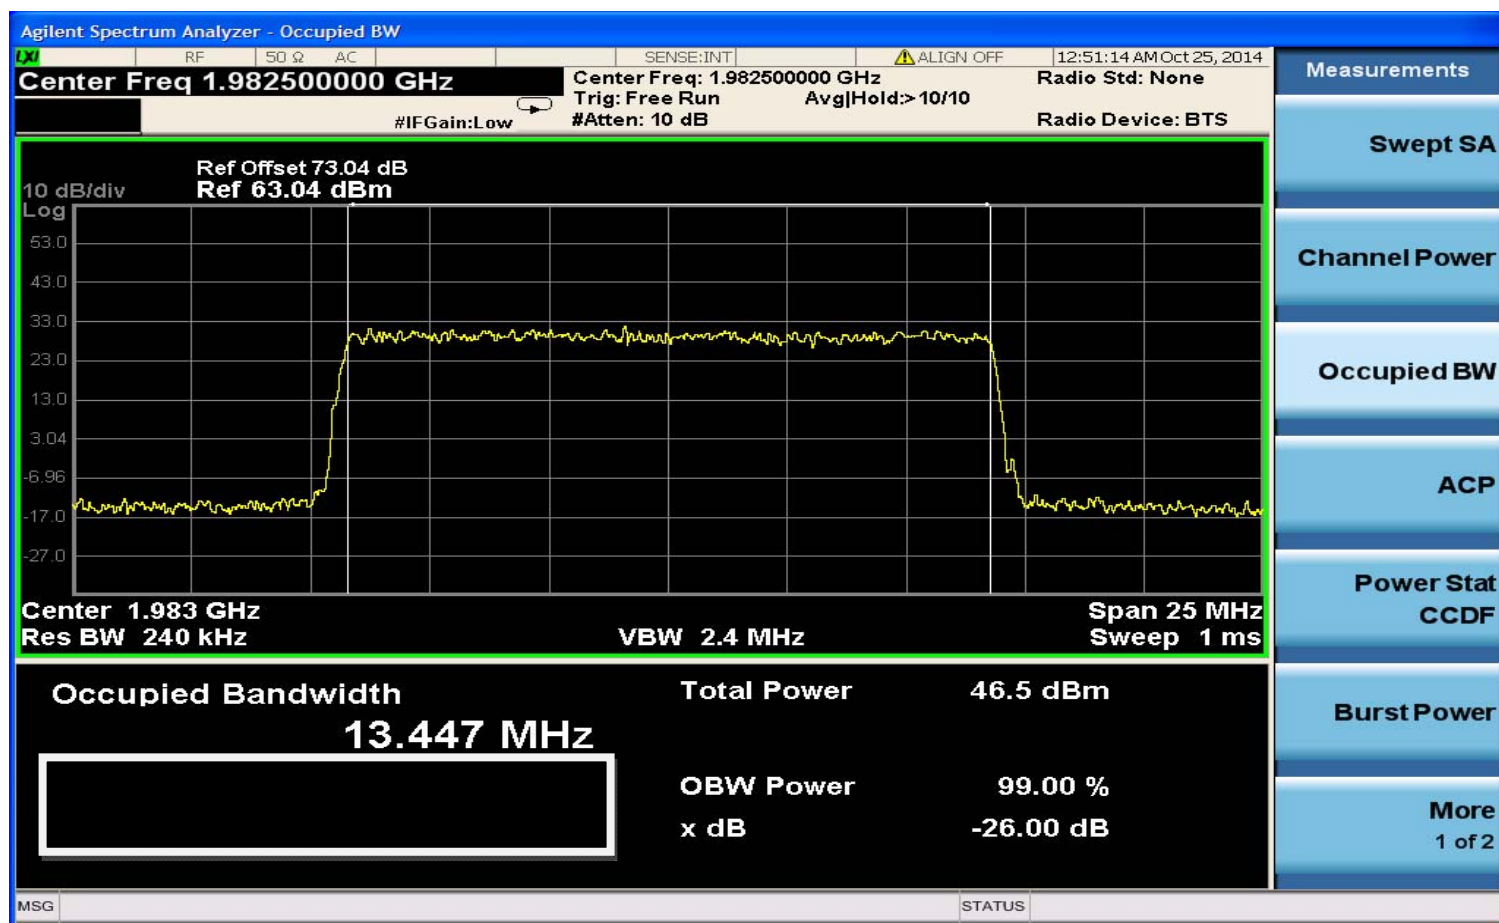

99% Power Bandwidth
LTE 64QAM
Tx1 1982.5 MHz, 60 W (47.8 dBm), 15 MHz BW

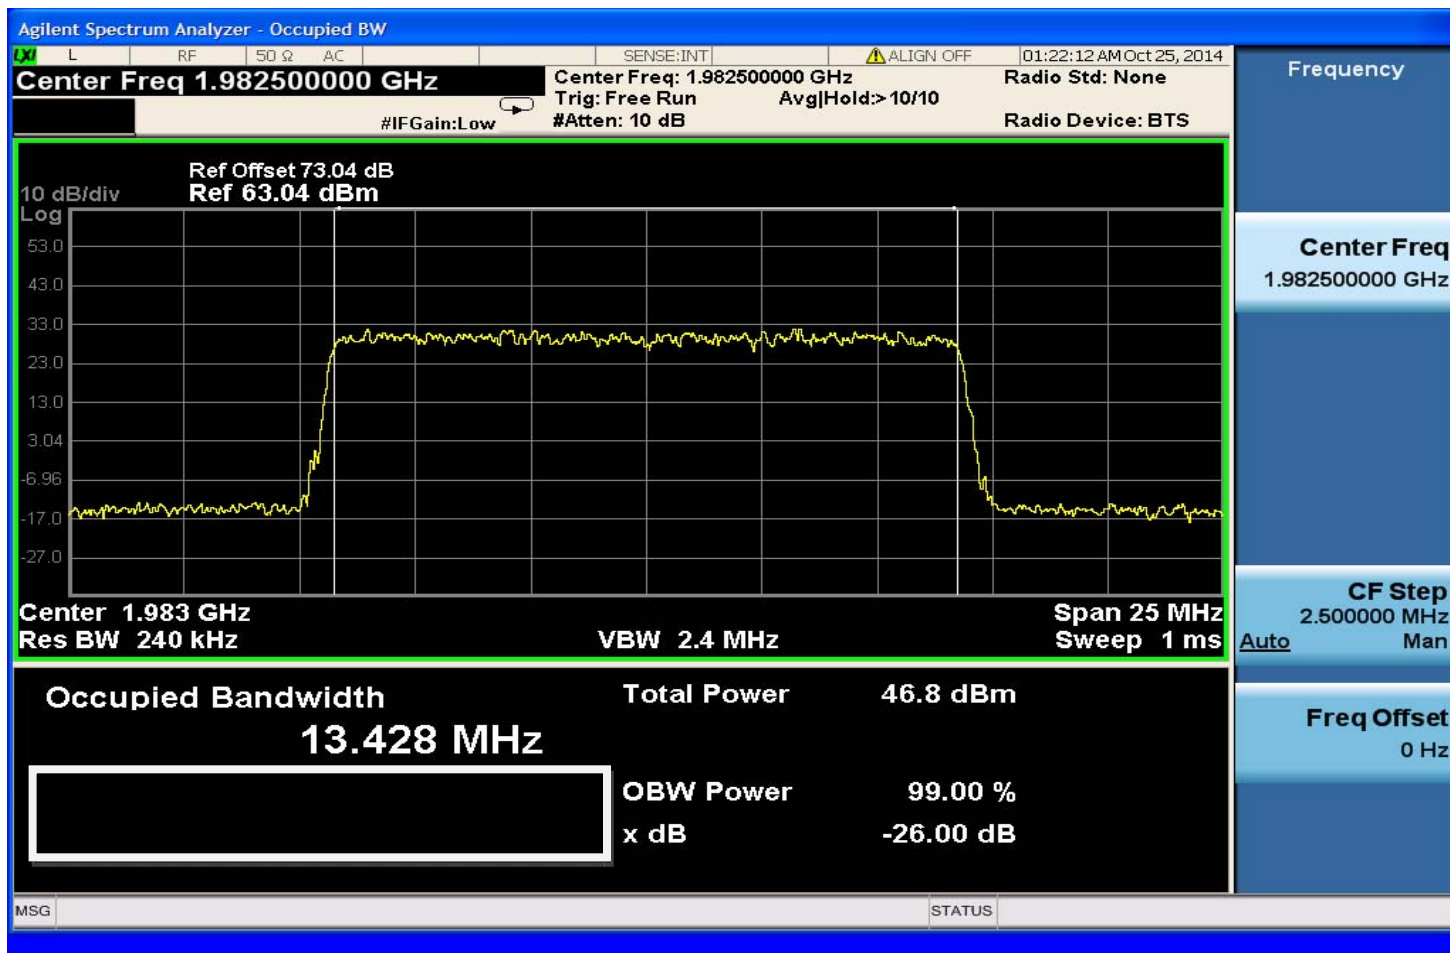

99% Power Bandwidth Results Summary

Frequency Block	Fundamental Center Frequency	Emission Bandwidth	RF Power	LTE Modulation	Measured 99% Power Bandwidth (MHz)
A: 1930 – 1945 MHz	1937.5 MHz	15 MHz	W (47.8 dBm)	QPSK	13.425
	1937.5 MHz	15 MHz	60 W (47.8 dBm)	64QAM	13.409
B: 1950 – 1965 MHz	1957.5 MHz	15 MHz	60 W (47.8 dBm)	QPSK	13.408
	1957.5 MHz	15 MHz	60 W (47.8 dBm)	64QAM	13.421
C: 1975 – 1990 MHz	1982.5 MHz	15 MHz	60 W (47.8 dBm)	QPSK	13.447
	1982.5 MHz	15 MHz	60 W (47.8 dBm)	64QAM	13.428

The average 99% Power Bandwidth, i.e. the Necessary Bandwidth, rounded off to 1 decimal point determines the emission designator to be:

13M4F9W at 15 MHz BW

PART 2.1049 MEASUREMENTS REQUIRED: OCCUPIED BANDWIDTH – EMISSION MASK

Method 2. Emission mask limitation using an EMI Test Receiver

In lieu of the ETSI TS 36.104 emission mask limitation, emission masks were abstracted and assembled from Part 24.238 (a) and (b), incorporating the additional 2x2 MIMO limitation from KDB pub 662911 D01 v02r01 *Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc.)*.

§24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Emission Mask Compliance (Out-Of-Band) was measured and recorded at Tx1 for each of the 3 LTE carriers tabulated below. A single LTE test modulation scheme was sufficient: 64QAM.

Frequency Block	Fundamental Center Frequency	Emission Bandwidth	RF Power
A: 1930 – 1945 MHz	1937.5 MHz	15 MHz	60 W (47.8 dBm)
B: 1950 – 1965 MHz	1957.5 MHz	15 MHz	60 W (47.8 dBm)
C: 1975 – 1990 MHz	1982.5 MHz	15 MHz	60 W (47.8 dBm)

In accordance with Part 24.238, the *out of band emissions* must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB, based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz. The limitation for RBW 30 kHz + 2x2 MIMO (i.e., $10 \log N$) is calculated as follows:

$$47.78 \text{ dBm} - (43 + 10 \log(60) \text{ dB}) - 10 \log 30 \text{ kHz}/1 \text{ MHz} - 10 \log 2 \\ 47.78 \text{ dBm} - 60.78 - 15.23 - 3 = -31.23 \text{ dBm}$$


However, in the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission may be employed.

$$47.78 \text{ dBm} - (43 + 10 \log(60) \text{ dB}) - 10 \log 30 \text{ kHz}/150 \text{ kHz} - 10 \log 2 \\ 47.78 \text{ dBm} - 60.78 \text{ dBc} - 6.99 \text{ dB} - 3 \text{ dB} = -22.99 \text{ dBm}$$


Using an RBW 30 kHz, the *carrier offset* is calculated at $10 \log (30 \text{ kHz}/15 \text{ MHz}) = -27.0 \text{ dBc}$. This results in the 60 W (47.78 dBm) carrier being offset to 20.8 dBm.

However, in accordance with Rule Part 24.238 (b), certain out-of-band emissions exceed the 2x2 MIMO limitation by ≤ 0.5 dB. Since this model has been deployed, since the original Grant dated 3/30/12, the FCC has agreed to accept this permissive change without explicit compliance to the KDB pub 662911 D01 v02r01 *Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)*. (FCC Tracking Number 701143)

The resulting measurements and limitations are displayed on the following pages.

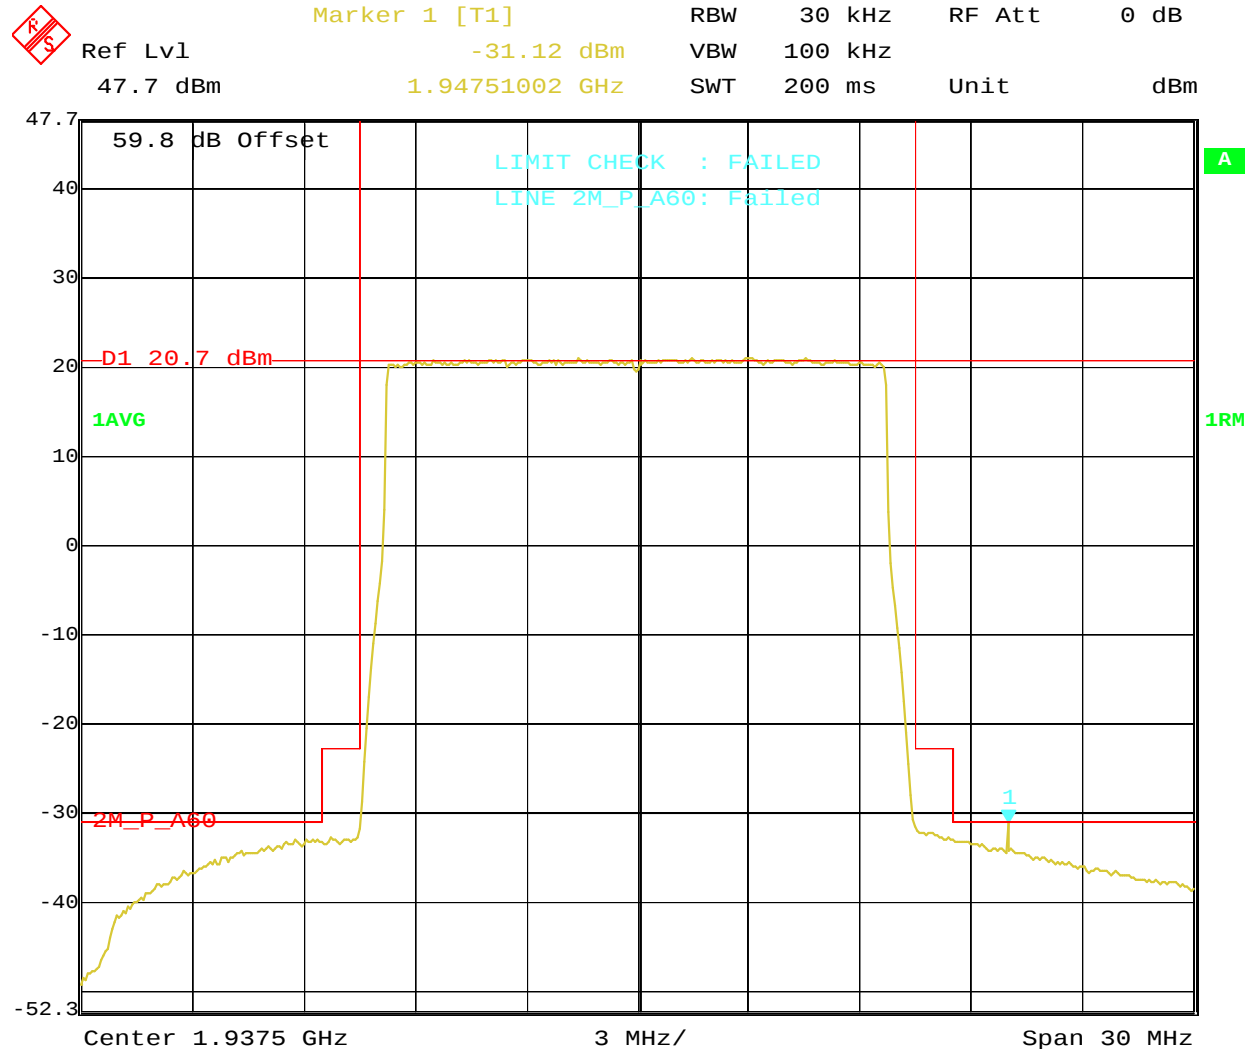Lowest Settable Carrier 1937.5 MHz, BW 15 MHz, Modulation 64QAM

Title: OCCUPIED BANDWIDTH; TEST ENGINEER:SEG; CLASS II CHANGE
Comment A: PCS RRH 1900; BLK: A; 1937.5 MHZ
PWR: 60W; 2X2MIMO; 64QAM LTE; FCC PRT 24; FCCID:AS50NEBTS-27
Date: 10.NOV.2014 17:45:47

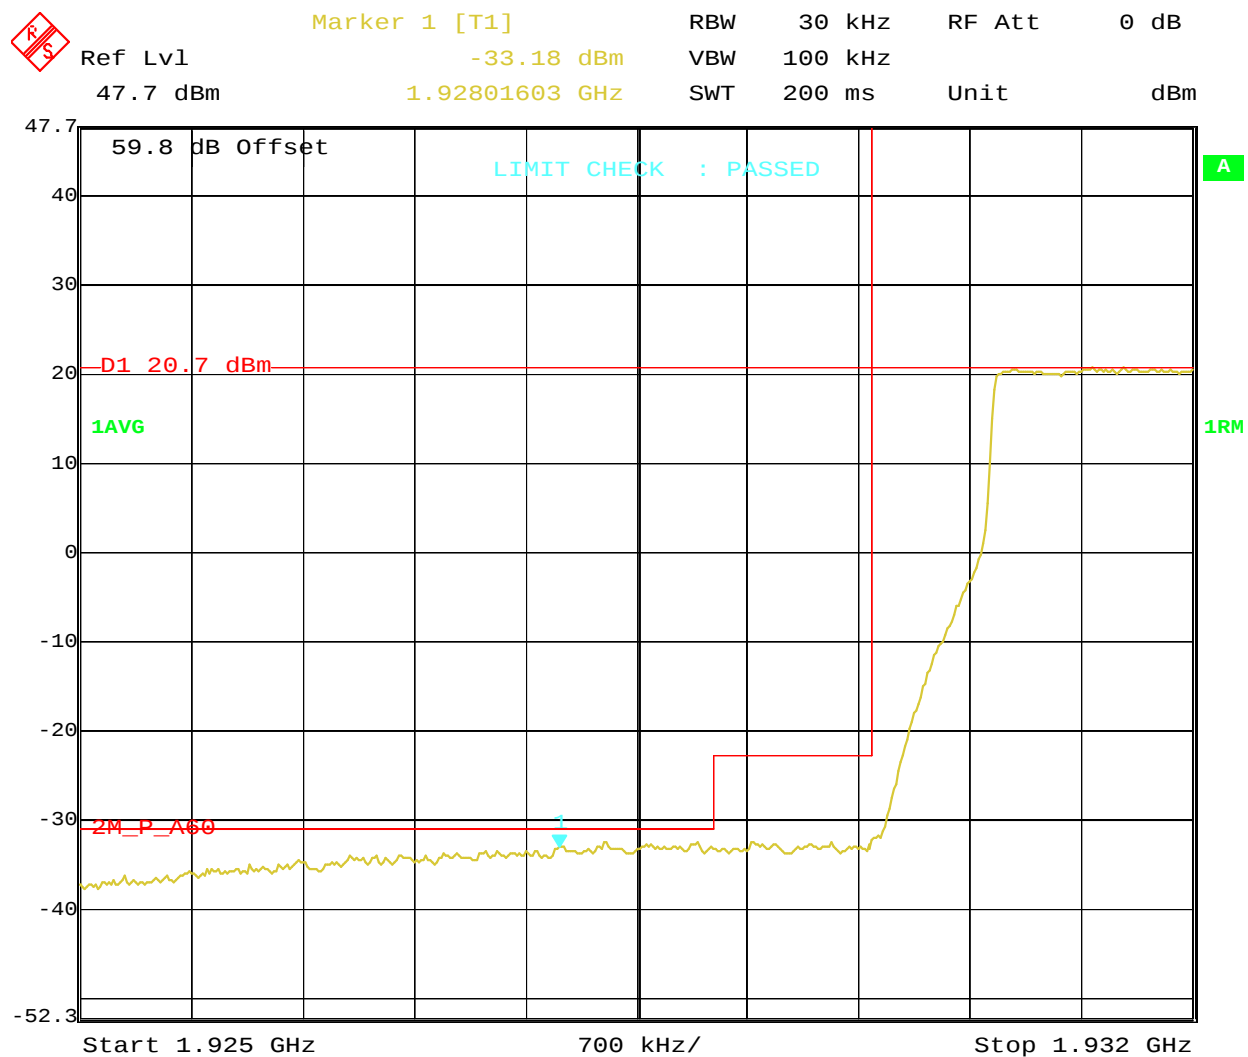
Lowest Settable Carrier 1937.5 MHz, BW 15 MHz, Modulation 64QAM
Close-up of the Low End with Span of 7 MHz

Title: OCCUPIED BANDWIDTH; TEST ENGINEER: SEG; CLASS II CHANGE


Comment A: PCS RRH 1900; BLK: A; 1937.5 MHz

PWR: 60W; 2X2MIMO; 64QAM LTE; FCC PRT 24; FCCID: AS50NEBTS-27

Date: 10.NOV.2014 17:48:56

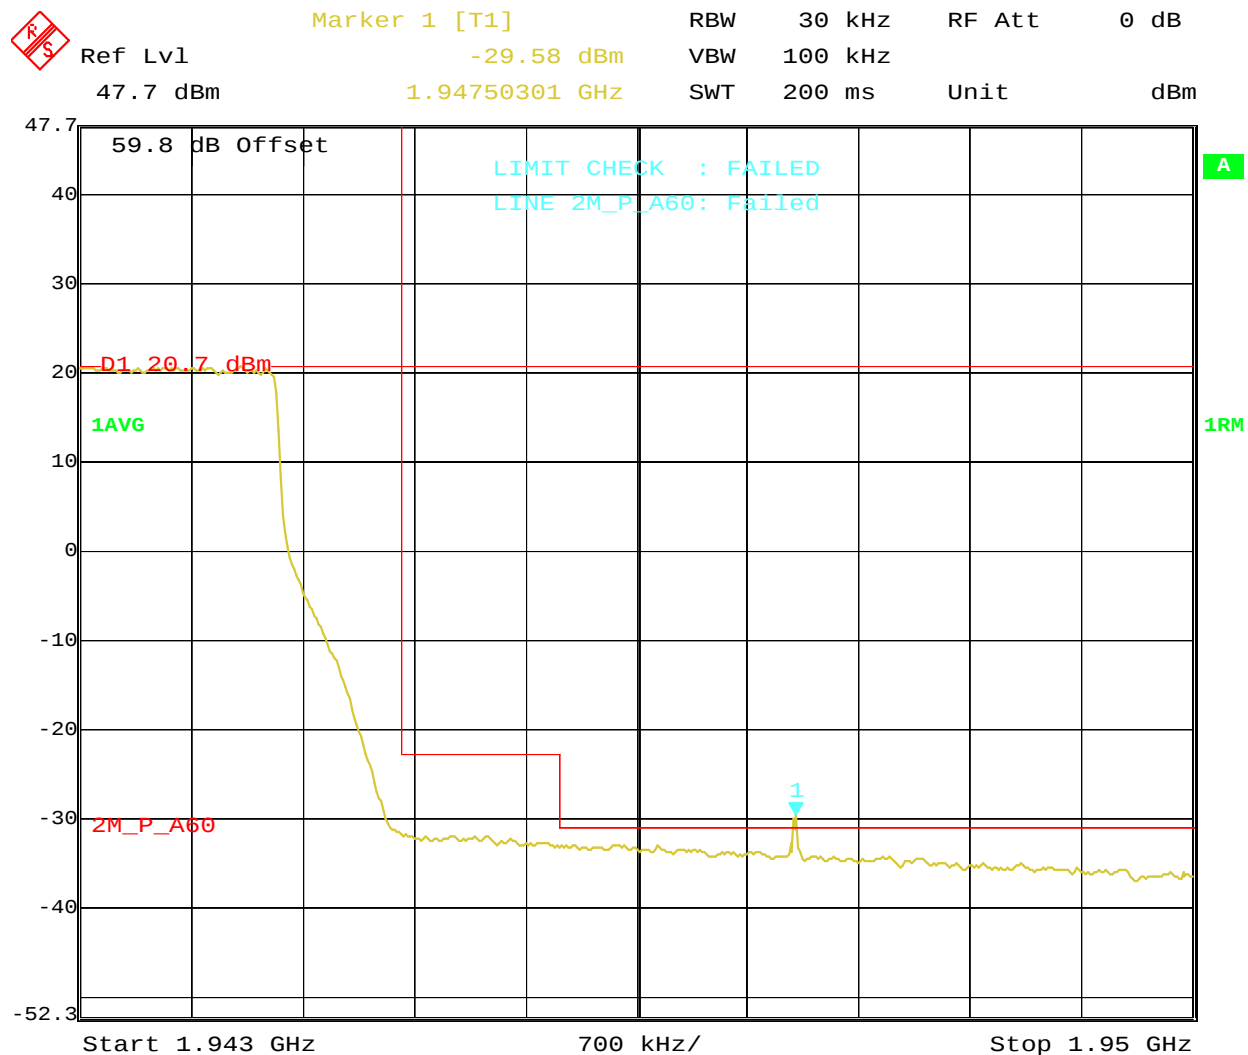
Lowest Settable Carrier 1937.5 MHz, BW 15 MHz, Modulation 64QAM
Close-up of the High End with Span of 7 MHz

Title: OCCUPIED BANDWIDTH; TEST ENGINEER:SEG; CLASS II CHANGE
Comment A: PCS RRH 1900; BLK: A; 1937.5 MHz
PWR: 60W; 2X2MIMO; 64QAM LTE; FCC PRT 24; FCCID:AS50NEBTS-27
Date: 10.NOV.2014 17:50:13

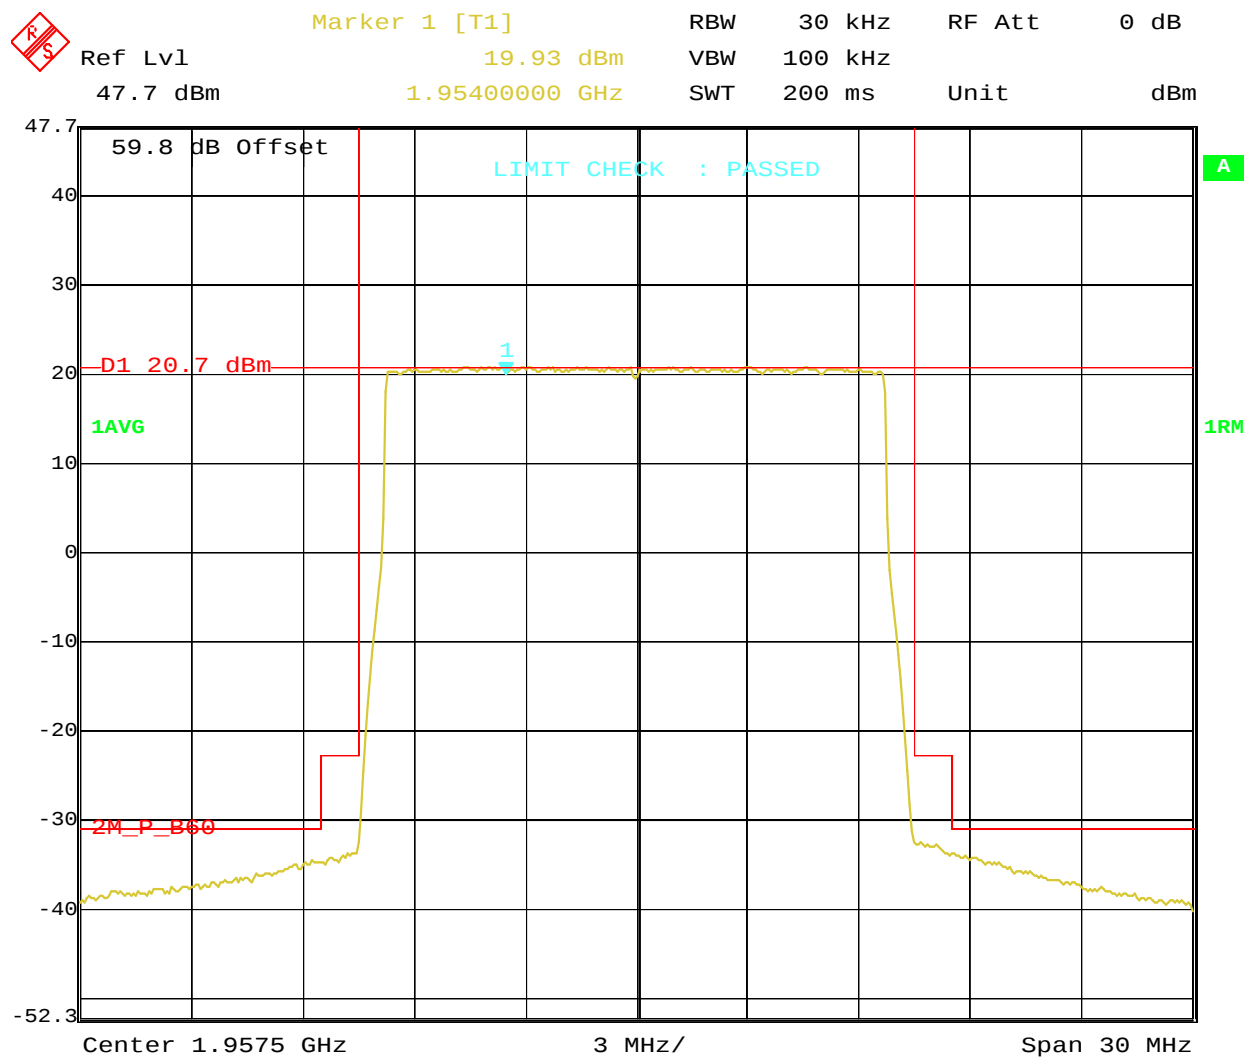Mid-Band Carrier 1957.5 MHz, BW 15 MHz, Modulation 64QAM


Title: OCCUPIED BANDWIDTH; TEST ENGINEER:SEG; CLASS II CHANGE
Comment A: PCS RRH 1900; BLK: B; 1957.5 MHZ
PWR: 60W; 2X2MIMO; 64QAM LTE; FCC PRT 24; FCCID:AS50NEBTS-27
Date: 10.NOV.2014 18:07:13

Mid-Band Carrier 1957.5 MHz, BW 15 MHz, Modulation 64QAM
Close-up of Low End with 7 MHz Measurement Span

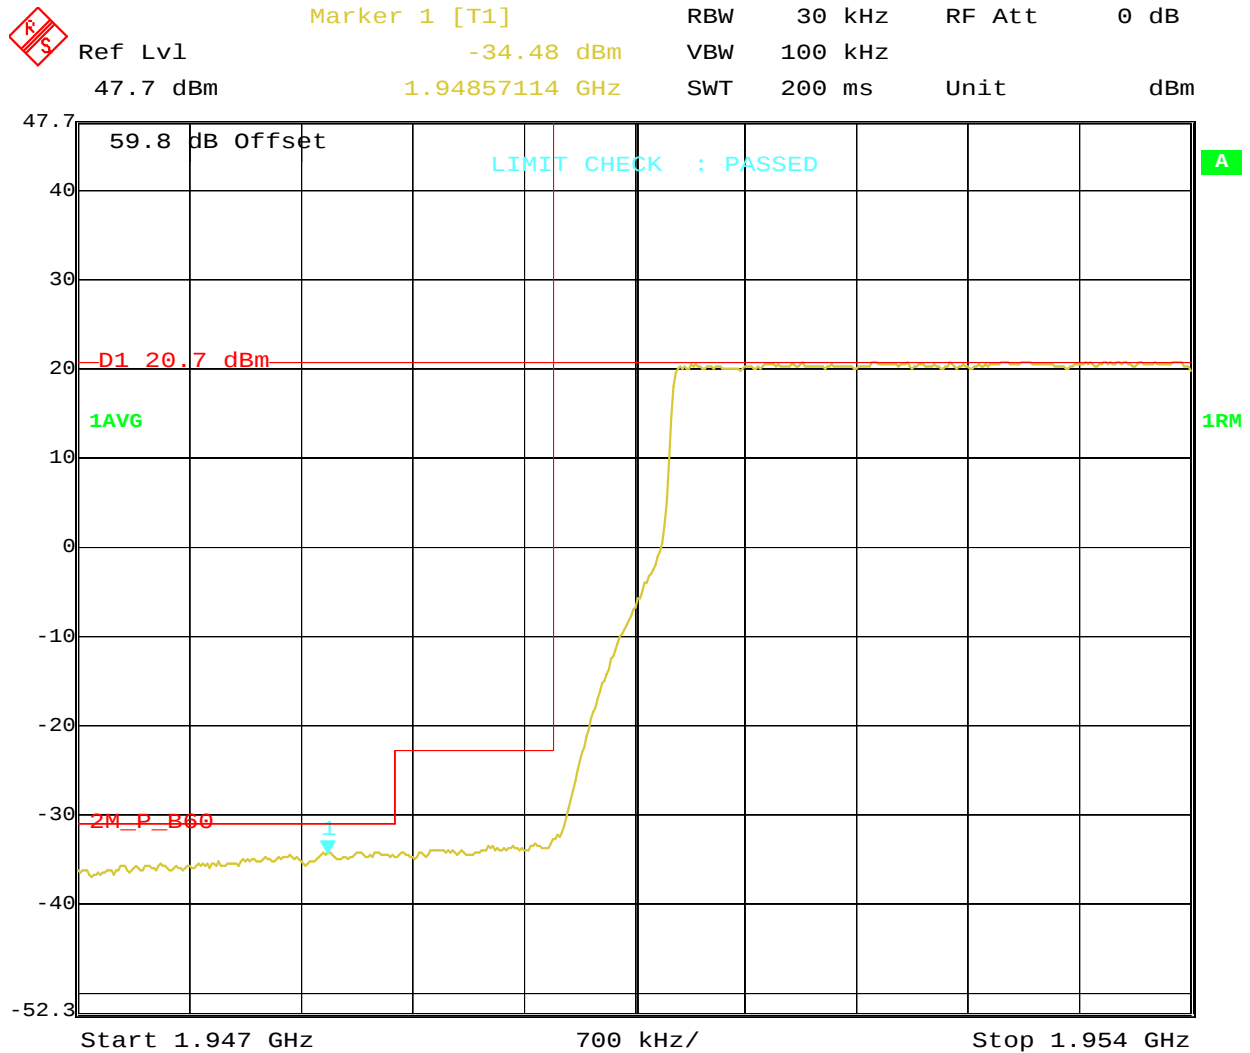


Title: OCCUPIED BANDWIDTH; TEST ENGINEER:SEG; CLASS II CHANGE
 Comment A: PCS RRH 1900; BLK: B; 1957.5 MHz
 PWR: 60W; 2X2MIMO; 64QAM LTE; FCC PRT 24; FCCID:AS50NEBTS-27
 Date: 10.NOV.2014 18:10:00

Mid-Band Carrier 1957.5 MHz, BW 15 MHz, Modulation 64QAM
Close-up of the High End with a 7 MHz Measurement Span

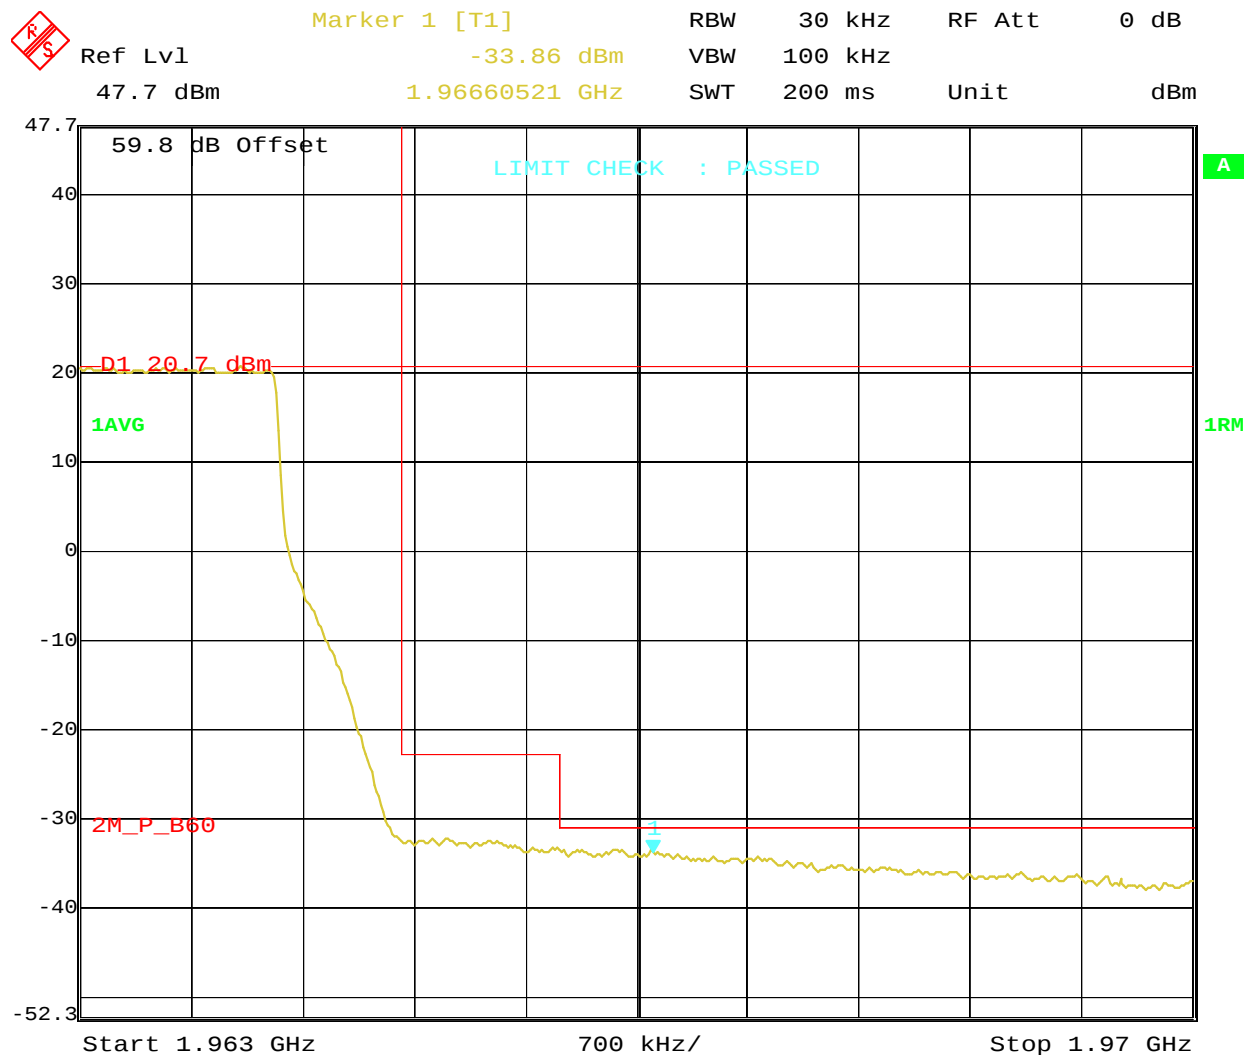

Title: OCCUPIED BANDWIDTH; TEST ENGINEER:SEG; CLASS II CHANGE
Comment A: PCS RRH 1900; BLK: B; 1957.5 MHZ
PWR: 60W; 2X2MIMO; 64QAM LTE; FCC PRT 24; FCCID:AS50NEBTS-27
Date: 10.NOV.2014 18:11:28

Highest Settable Carrier 1982.5 MHz, BW 15 MHz, Modulation 64QAM

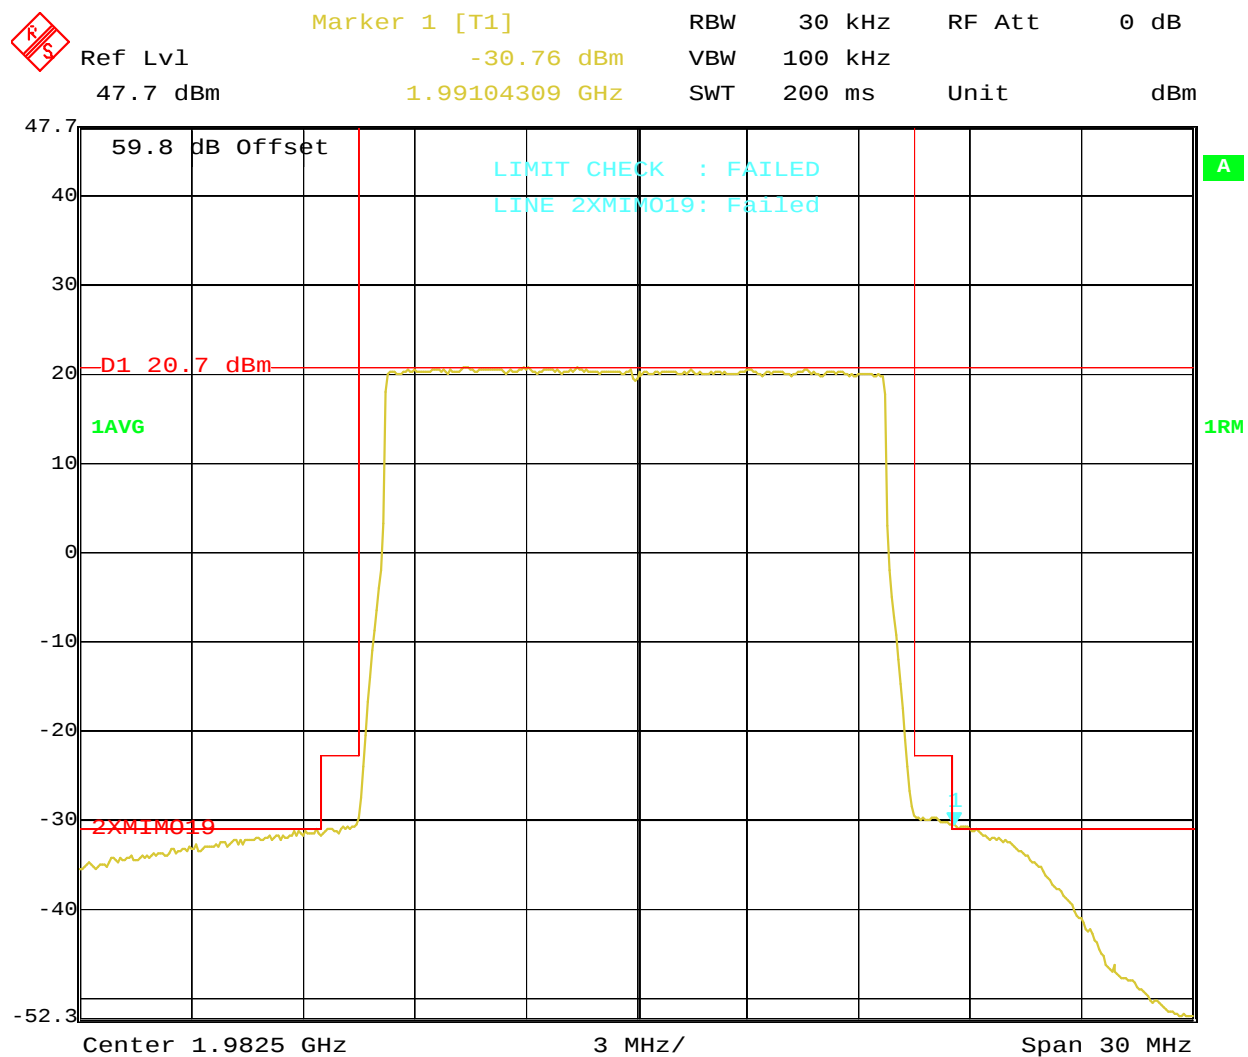


Title: OCCUPIED BANDWIDTH; TEST ENGINEER: SEG; CLASS II CHANGE

Comment A: PCS RRH 1900; BLK: C; 1982.5 MHz

PWR: 60W; 2X2MIMO; 64QAM LTE; FCC PRT 24; FCCID: AS50NEBTS-27


Date: 10.NOV.2014 17:23:46

Highest Settable Carrier 1982.5 MHz, BW 15 MHz, Modulation 64QAM
Close-up of the Low End with a 6 MHz Measurement Span.

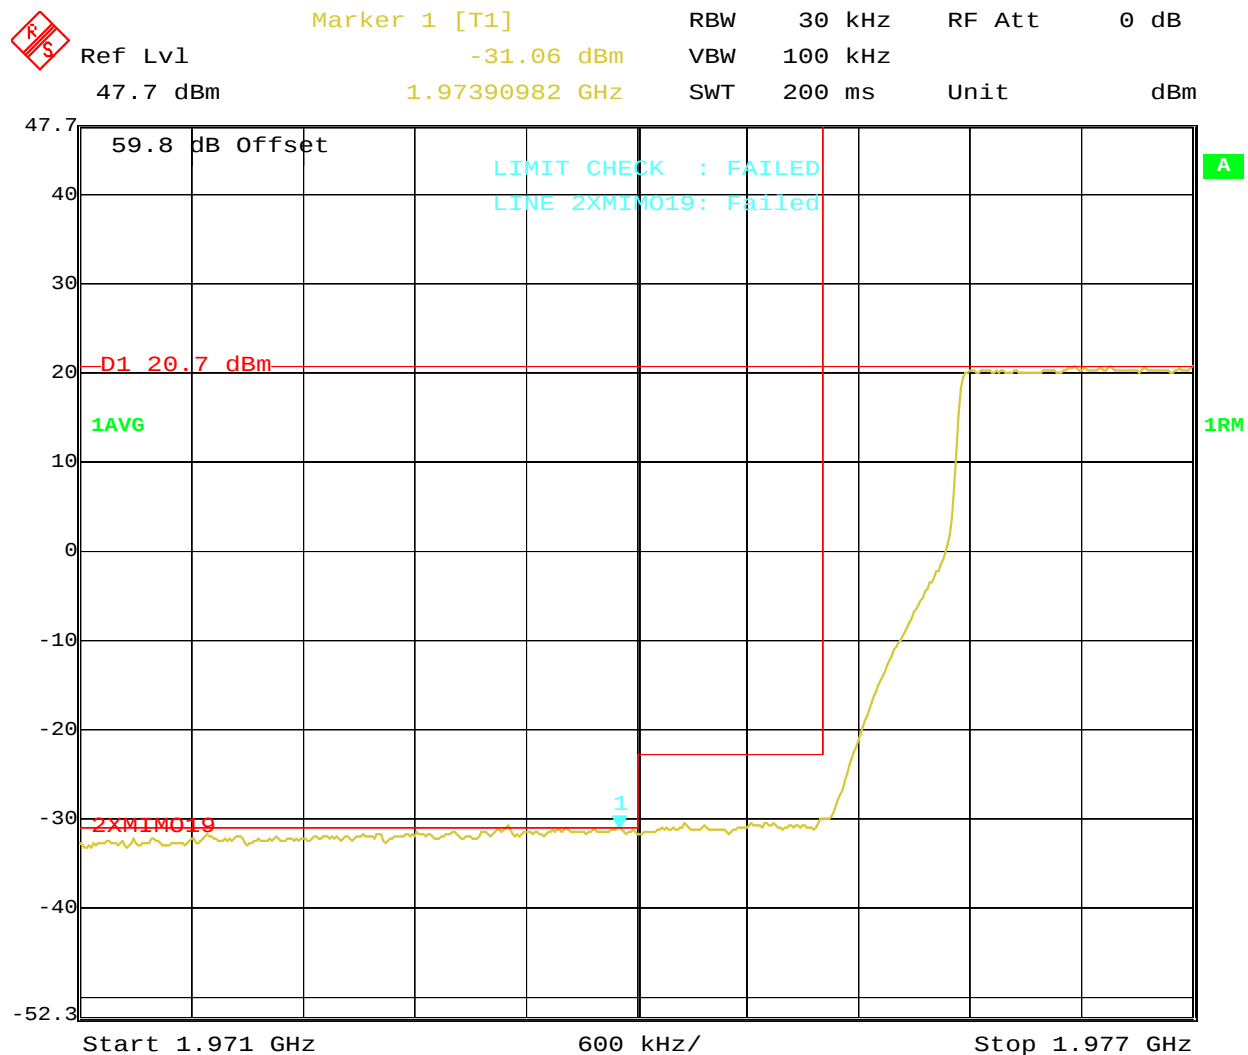

Title: OCCUPIED BANDWIDTH; TEST ENGINEER:SEG; CLASS II CHANGE
Comment A: PCS RRH 1900; BLK: C; 1982.5 MHz
PWR: 60W; 2X2MIMO; 64QAM LTE; FCC PRT 24; FCCID:AS50NEBTS-27
Date: 10.NOV.2014 17:22:38

Highest Settable Carrier 1982.5 MHz, BW 15 MHz, Modulation 64QAM
Close-up of the High End with a 7 MHz Measurement Span

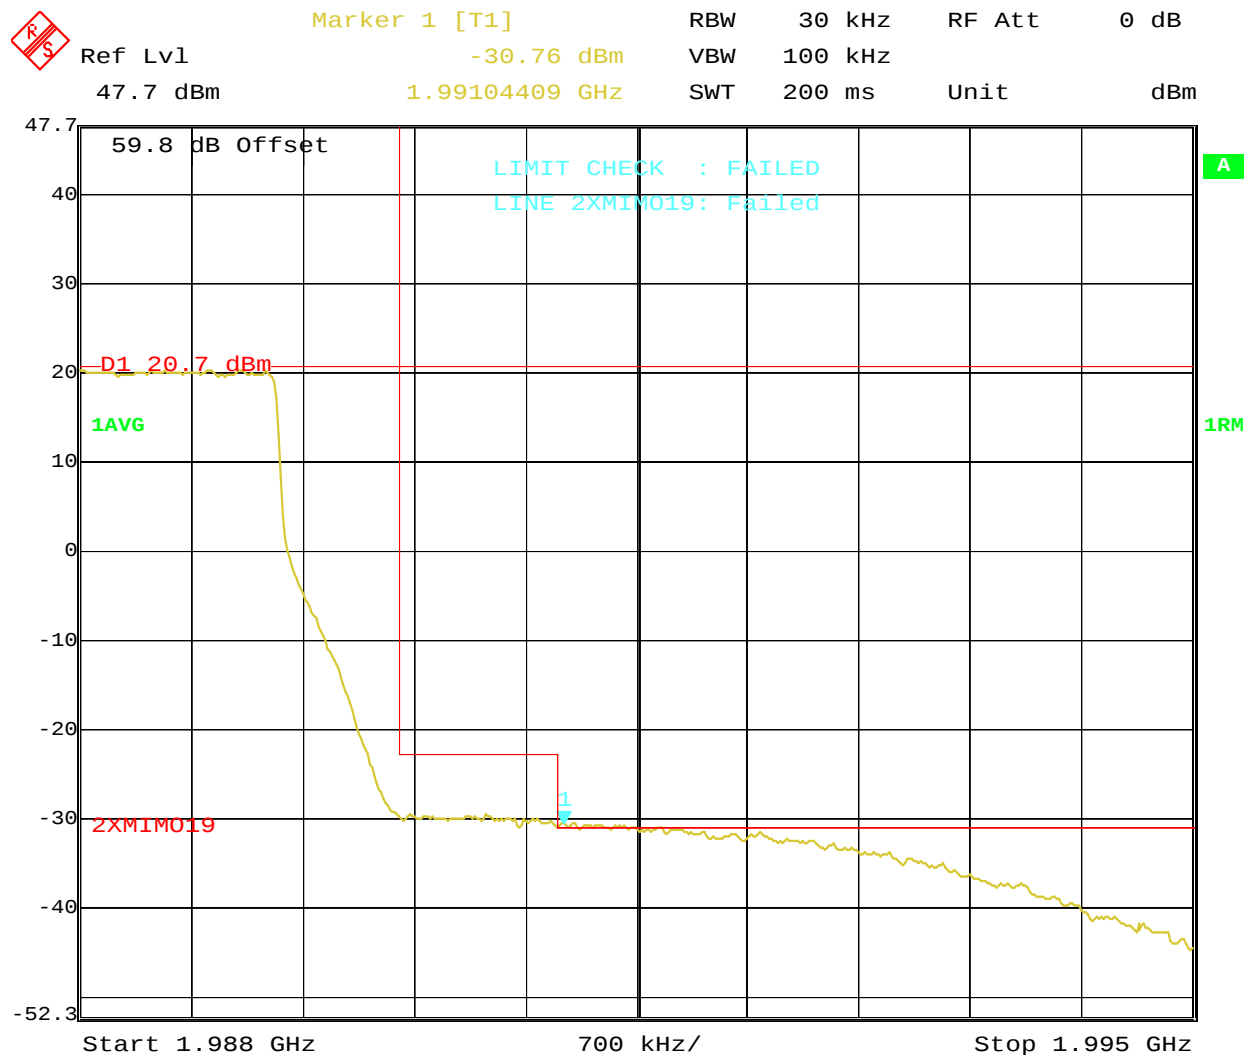

Title: OCCUPIED BANDWIDTH; TEST ENGINEER:SEG; CLASS II CHANGE
 Comment A: PCS RRH 1900; BLK: C; 1982.5 MHz
 PWR: 60W; 2X2MIMO; 64QAM LTE; FCC PRT 24; FCCID:AS50NEBTS-27
 Date: 10.NOV.2014 17:21:19

PART 2.1051 MEASUREMENTS REQUIRED: SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS.

This test procedure is an extension of the occupied bandwidth measurement at the Equipment Antenna Connector (EAC) terminal, i.e., the downlink transmit antenna, using the same carrier frequencies, configurations, power level settings and test modulations, as in the preceding *PART 2.1049 MEASUREMENTS REQUIRED: OCCUPIED BANDWIDTH – EMISSION MASK*.

In accordance with Part 2.1057(a), the required frequency spectrum to be investigated extends from the lowest RF signal generated to the 10th harmonic of the carrier at the EAC terminal. The emission limits at the antenna terminal are specified in §24.238(a)(b) *Out of band emissions*. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. In accordance with Part 2.1051, “the magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified”; i.e., these are not reportable.

In order to suppress the instrumentation noise floor sufficient to detect and measure spurious signals that have power levels as low as 20 dB below the required limit, an EMC software package was employed to drive the spectrum analyzer, collect and compile the acquired data, perform mathematical corrections to the data by incorporating pre-measured path losses into the software, and then generate a graphical display as shown in the following exhibits. The software package is: *TILE/IC (Total Integrated Laboratory Environment/Instrument Control System)*; purchased and licensed from ETS-Lindgren. The instrumentation noise floor is suppressed by the software’s ability to split the spectrum being measured into many small segments/ranges and then sequentially compile them for the continuous graphical display. Using a 1 MHz RBW, the measured spectrum 10 MHz – 20 GHz was broken into 87 segments, averaging 230 MHz per segment, and then mathematically combined by the previously cited TILE software as displayed in the following data plots.

In accordance with §24.238(a)(b), unwanted emissions must be suppressed by


$$43 + 10 \log 60W = 60.78 \text{ dBc, which equates to } -13 \text{ dBm}$$

Consistent with 2x2 MIMO requirements, an additional 3 dB attenuation is required, in accordance with:

$$43 + 10 \log P + 10 \log (N_{\text{ant}}) \\ 43 + 10 \log 60W + 10 \log 2 = 63.79 \text{ dBc, which equates to } -16 \text{ dBm}$$

where, N_{ant} is the number of outputs, i.e., transmit antenna terminals.

Spurious Emissions – 1937.5 MHz, BW 15 MHz, QPSK and 64QAM

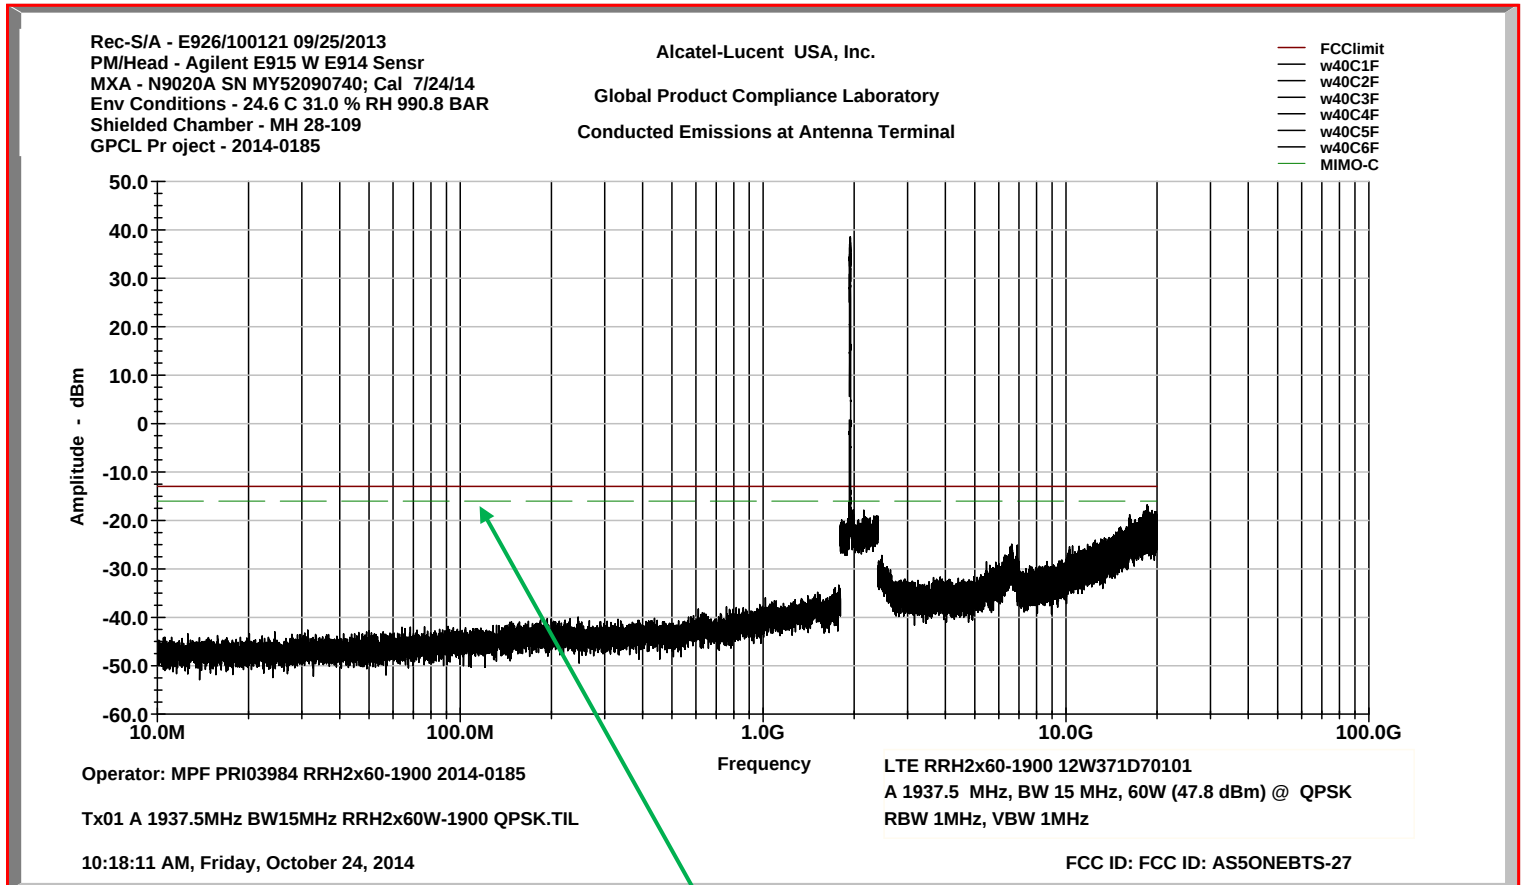Conducted Emissions
LTE QPSK
Tx1 1937.5 MHz, 60 W (47.8 dBm), 15 MHz BW


2x2 MIMO

Conducted Emissions
LTE 64QAM
Tx1 1937.5 MHz, 60 W (47.8 dBm), 15 MHz BW

Rec-S/A - E926/100121 09/25/2013
PM/Head - Agilent E915 W E914 Sensr
MXA - N9020A SN MY52090740; Cal 7/24/14
Env Conditions - 24.6 C 31.0 % RH 990.8 BAR
Shielded Chamber - MH 28-109
GPCL Project - 2014-0185

Alcatel-Lucent USA, Inc.
Global Product Compliance Laboratory
Conducted Emissions at Antenna Terminal

— FCClimit
— w40C1F
— w40C2F
— w40C3F
— w40C4F
— w40C5F
— w40C6F
— MIMO-C

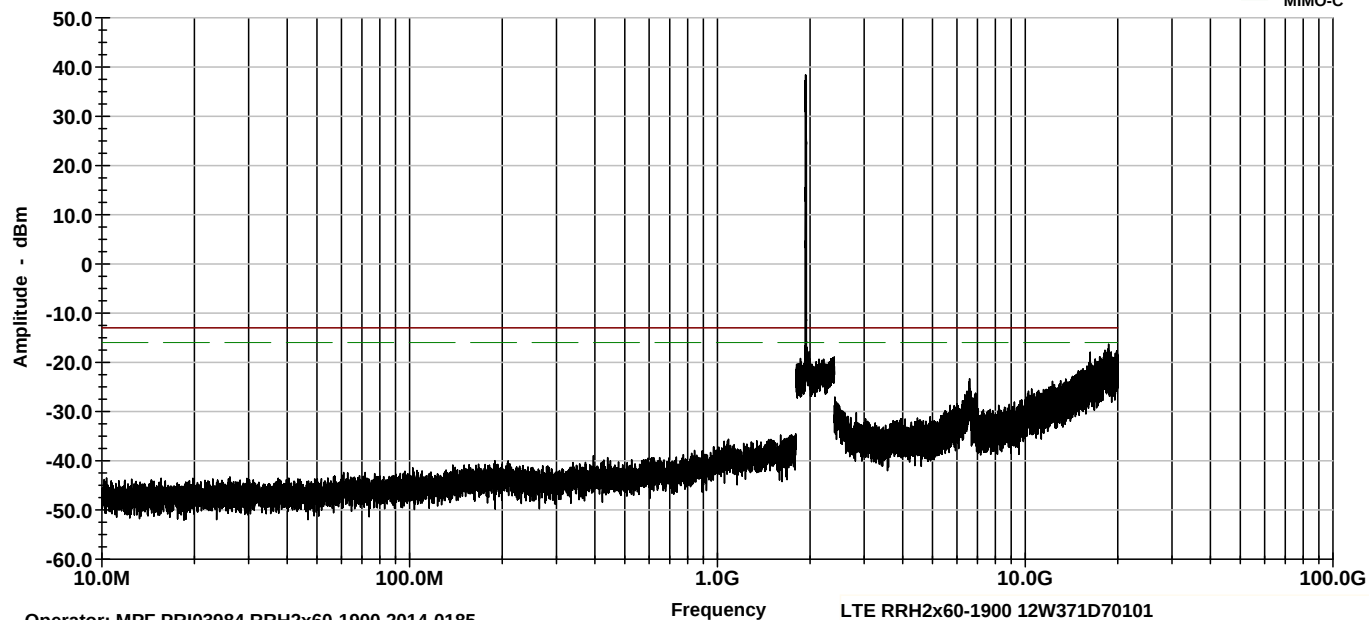

Operator: MPF PRI03984 RRH2x60-1900 2014-0185

Tx02 A 1937.5MHz BW15MHz RRH2x60W-1900 64QAM.TIL

09:22:51 AM, Friday, October 24, 2014

LTE RRH2x60-1900 12W371D70101

A 1937.5 MHz, BW 15 MHz, 60W (47.8 dBm) @ 64QAM
RBW 1MHz, VBW 1MHz

FCC ID: FCC ID: AS5ONEBTS-27


Spurious Emissions – 1957.5 MHz, BW 15 MHz, QPSK and 64QAM

Conducted Emissions
LTE QPSK
Tx1 1957.5 MHz, 60 W (47.8 dBm), 15 MHz BW

Rec-S/A - E926/100121 09/25/2013
PM/Head - Agilent E915 W E914 Sensr
MXA - N9020A SN MY52090740; Cal 7/24/14
Env Conditions - 22.7 C 42.2 % RH 988.6 BAR
Shielded Chamber - MH 28-109
GPCL Project - 2014-0185

Alcatel-Lucent USA, Inc.
Global Product Compliance Laboratory
Conducted Emissions at Antenna Terminal

— FCClimit
— w40C1F
— w40C2F
— w40C3F
— w40C4F
— w40C5F
— w40C6F
— MIMO-C

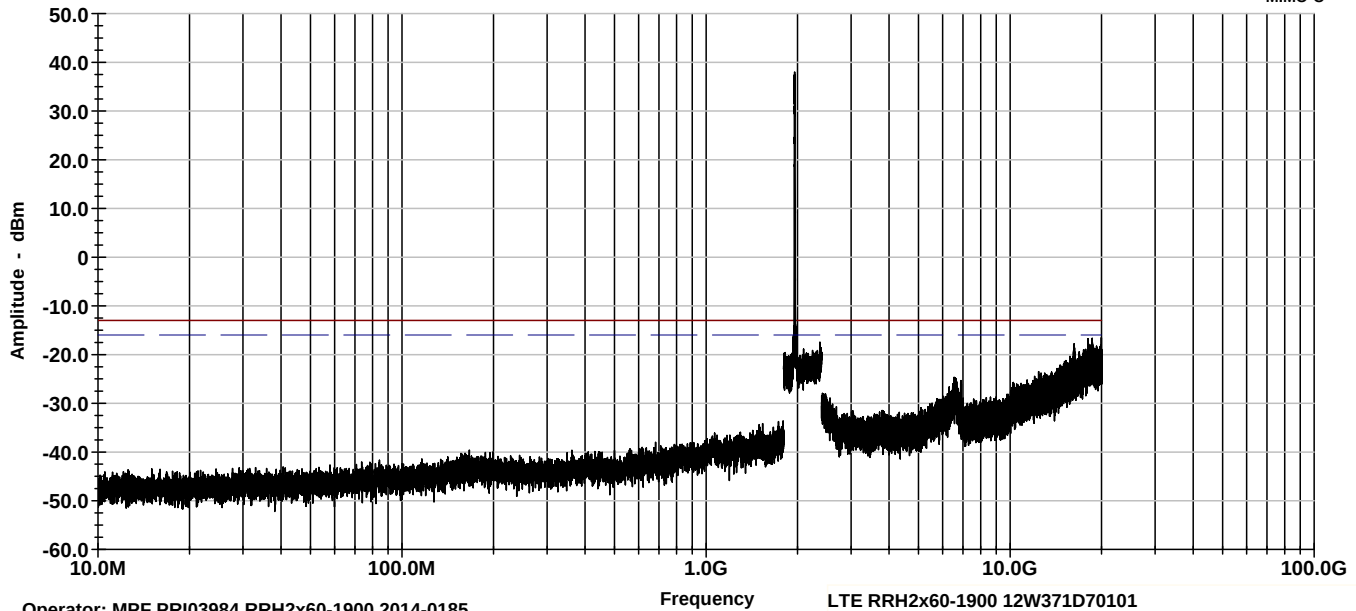

Operator: MPF PRI03984 RRH2x60-1900 2014-0185

Tx03 B 1957.5MHz BW15MHz RRH2x60W-1900 QPSK.TIL

11:15:43 AM, Thursday, October 23, 2014

LTE RRH2x60-1900 12W371D70101
B 1957.5 MHz, BW 15 MHz, 60W (47.8 dBm) @ QPSK
RBW 1MHz, VBW 1MHz


FCC ID: FCC ID: AS5ONEBTS-27

Conducted Emissions
LTE 64QAM
Tx1 1957.5 MHz, 60 W (47.8 dBm), 15 MHz BW

Rec-S/A - E926/100121 09/25/2013
PM/Head - Agilent E915 W E914 Sensr
MXA - N9020A SN MY52090740; Cal 7/24/14
Env Conditions - 24.6 C 31.0 % RH 990.8 BAR
Shielded Chamber - MH 28-109
GPCL Project - 2014-0185

Alcatel-Lucent USA, Inc.
Global Product Compliance Laboratory
Conducted Emissions at Antenna Terminal

— FCClimit
— w40C1F
— w40C2F
— w40C3F
— w40C4F
— w40C5F
— w40C6F
— MIMO-C

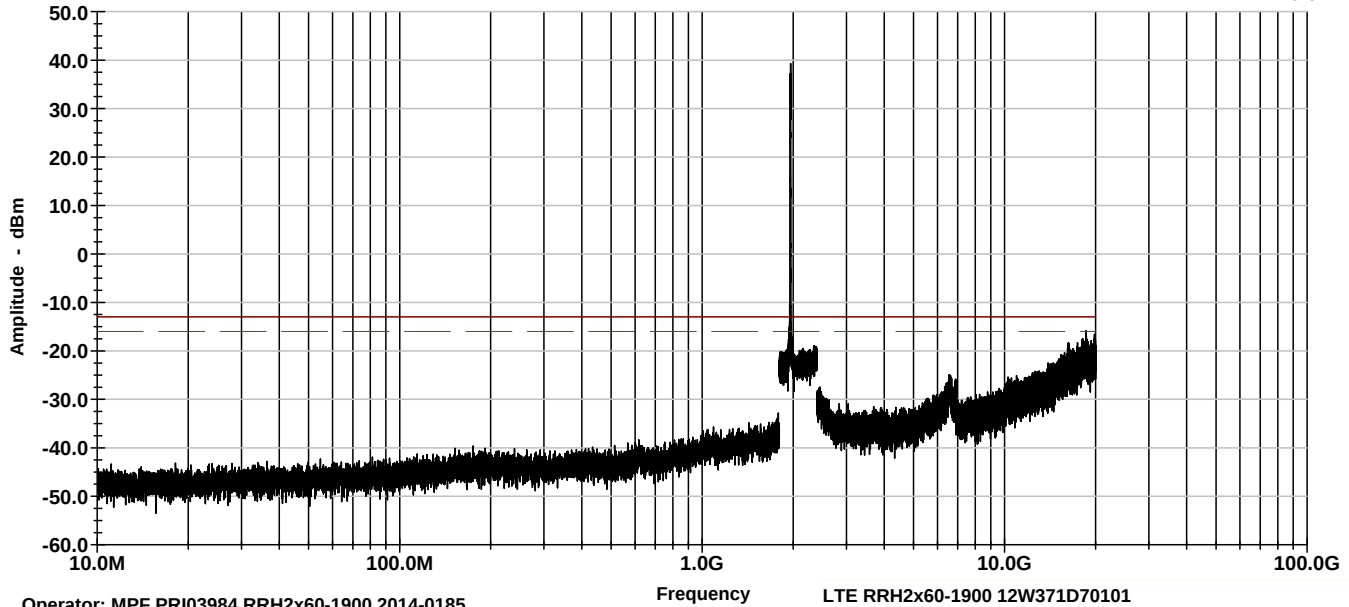

Operator: MPF PRI03984 RRH2x60-1900 2014-0185


Tx04 B 1957.5MHz BW15MHz RRH2x60W-1900 64QAM.TIL

08:14:42 AM, Friday, October 24, 2014

LTE RRH2x60-1900 12W371D70101
B 1957.5 MHz, BW 15 MHz, 60W (47.8 dBm) @ 64QAM
RBW 1MHz, VBW 1MHz

FCC ID: FCC ID: AS5ONEBTS-27

Spurious Emissions – 1982.5 MHz, BW 15 MHz, QPSK and 64QAM

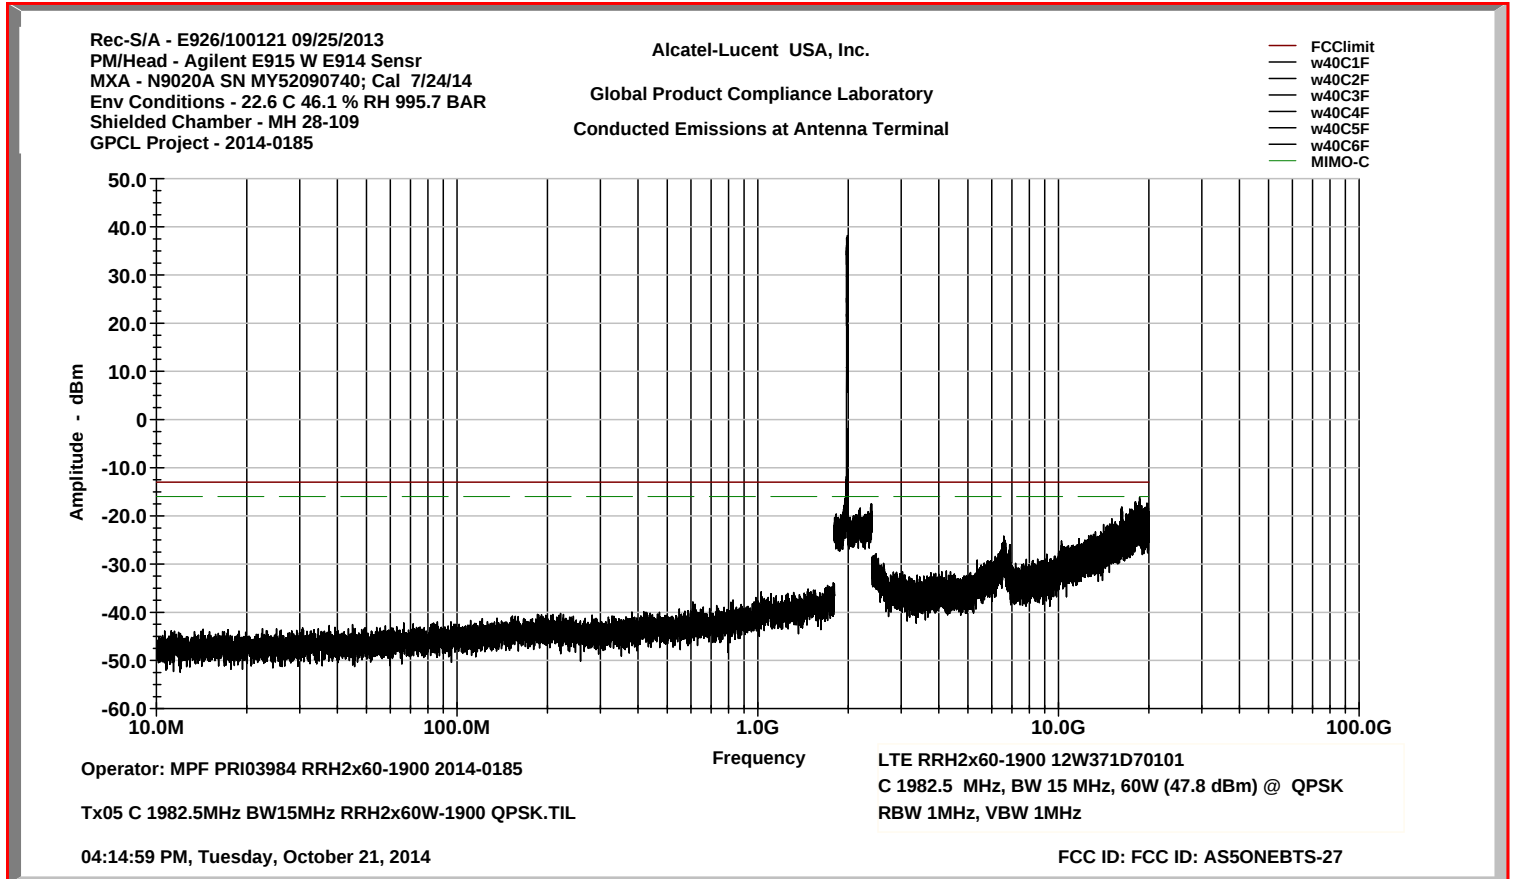Conducted Emissions
LTE QPSK
Tx1 1982.5 MHz, 60 W (47.8 dBm), 15 MHz BW


Conducted Emissions
LTE 64QAM
Tx1 1982.5 MHz, 60 W (47.8 dBm), 15 MHz BW

Rec-S/A - E926/100121 09/25/2013
PM/Head - Agilent E915 W E914 Sensr
MXA - N9020A SN MY52090740; Cal 7/24/14
Env Conditions - 22.4 C 45.5 % RH 993.5 BAR
Shielded Chamber - MH 28-109
GPCL Project - 2014-0185

Alcatel-Lucent USA, Inc.

Global Product Compliance Laboratory
Conducted Emissions at Antenna Terminal

FCCLimit
w40C1F
w40C2F
w40C3F
w40C4F
w40C5F
w40C6F
MIMO-C

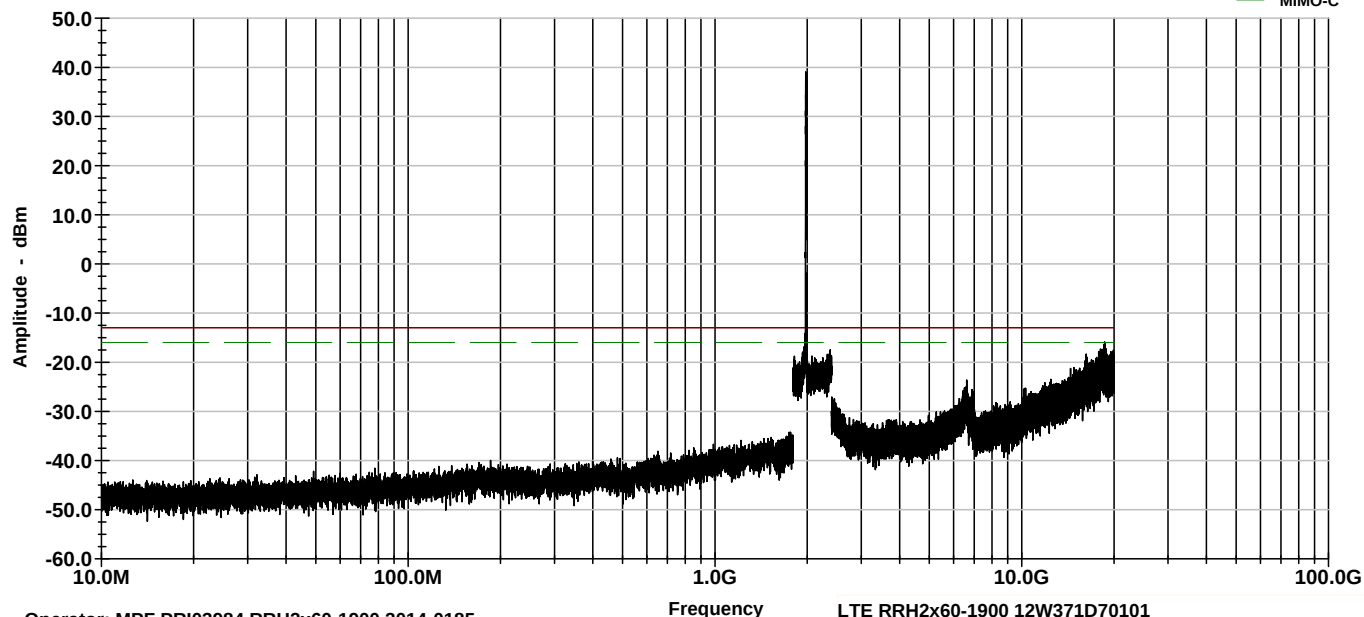

Operator: MPF PRI03984 RRH2x60-1900 2014-0185

Tx06 C 1982.5MHz BW15MHz RRH2x60W-1900 64QAM.TIL

02:59:14 PM, Wednesday, October 22, 2014

LTE RRH2x60-1900 12W371D70101
C 1982.5 MHz, BW 15 MHz, 60W (47.8 dBm) @ 64QAM
RBW 1MHz, VBW 1MHz

FCC ID: FCC ID: AS5ONEBTS-27

PART 2.1053 MEASUREMENTS REQUIRED: FIELD STRENGTH OF SPURIOUS RADIATION

Radiated spurious emissions (RE) were investigated over the spectrum 30 MHz – 20 GHz for a single 2xMIMO carrier/fundamental configuration:

Carrier	Carrier Center Frequency	Emission Bandwidth	Test Modulation
Lowest Frequency	1937.5 MHz	15 MHz	QPSK

The equipment under test (EUT) was configured as recommended for *floor standing equipment*, following the guidelines of ANSI C63.4-2009. The EUT was installed and operated as in the *normal mode of operation*. Field strength measurements of radiated spurious emissions were evaluated in a 3m semi-anechoic chamber (FCC Site RN 353147), using an EUT-to-Antenna separation of 3-meters. Test software was Vasona by EMIsoft.

Measurements were made using both horizontally and vertically polarized broadband antennas. Per FCC regulations, the comparison of out of band spurious emissions directly to the limit is appropriately made using the substitution method. However, *when the emissions are more than 20 dB below the specification limit*, the use of field strength measurements for compliance determination is acceptable and those emissions are considered *not reportable* (Section 2.1057 and the FCC Interpretive database for 2.1053).

For this case the evaluation of acceptable radiated field strength is as follows. The calculated emission levels were found by:

$$P_{\text{meas}} (\text{dBm}) + \text{Cable Loss}(\text{dB}) + \text{Antenna Factor}(\text{dB}) + 107 (\text{dB}\mu\text{V}/\text{dBm}) - \text{Amplifier Gain} (\text{dB}) \\ = \text{Field Strength} (\text{dB}\mu\text{V}/\text{m})$$

Section 27.53 and 2.1053 contains the requirements for the levels of spurious radiation as a function of the EIRP of the unmodulated carrier. The reference level for the unmodulated carrier is calculated as the field produced by an isotropic radiator excited by the transmitter output power according to the following relation taken from Reference Data for Radio Engineers, page 27-7, 6th edition, IT&T Corp.

$$E = (120\pi P)^{1/2} / R$$

$$20 \log (E \cdot 10^6) - (43 + 10 \log P) = 82.23 \text{ dB } \mu\text{V}/\text{meter}$$

Where: E = Field Intensity in Volts/ meter

R = Distance in meters = 3 m

P = Transmitted Power in watts = 60W

Results: Complies - Over the out-of-band spectrum investigated from 30 MHz to the tenth harmonic of the carrier (20GHz), the power levels of all emissions observed were greater than 20 dB below the 82.23 dB $\mu\text{V}/\text{meter}$ limit. **Therefore, there were no reportable radiated spurious emissions.**

PART 2.1055 MEASUREMENTS REQUIRED: FREQUENCY STABILITY

**ALREADY PROVIDED IN THE ORIGINAL FILING
NO ADDITIONAL INFORMATION ADDED**

LIST OF TEST EQUIPMENT

Measurement of Emissions Conducted to the Transmit Port/Antenna Terminal

Equipment Function	Manufacturer	Model	Serial Number	Calibration Date	Next Due Date	GPCL
Spectrum Analyzer	Rohde & Schwarz	FSEM 30 20 Hz – 26.5 GHz	DE35292	9/25/13	9/25/15	E926
Spectrum Analyzer	Rohde & Schwarz	FSEM 30 20 Hz – 26.5 GHz	DE35291	5/23/14	5/23/16	E927
MXA Signal Analyzer	Agilent	N9020A 10 Hz – 3.6GHz	MY52090740	7/24/14	7/24/16	---
Power Meter	Agilent	N1912A P-Series Power Meter	GB44440226	6/17/14	6/17/16	E915
Power Meter Sensor	Agilent	N1921A 50 MHz – 18 GHz	US44510270	7/26/14	7/26/15	E914
E914Dual Directional Coupler	Hewlett-Packard	HP 772D 2 – 18 GHz	2839A01045	NR	NR	E1136
Attenuator/Fan Assembly (Input)	Aeroflex/Weinschel	6791	004	NR	NR	E1136
Attenuator (Input)	Aeroflex/Weinschel	66A-30-33-LIM 30 dB, 200 W	BV2470	NR	NR	
Attenuator (Incident)	Weinschel	46-20-34 DC – 18 GHz 20 dB, 25 W	BJ2719	NR	NR	
Attenuator (Test Port)	MCE/Weinschel	46-20-34-LIM DC – 18 GHz 20 dB, 25 W	BN3125	NR	NR	
Termination (Reflected)	MCE/Weinschel	M1404N	8936	NR	NR	
Regulated Power Supply	Electronic Measurements, Inc.	TCR 50T200	---	NR	NR	

Radiated Emissions Test Equipment List
AR-6/2014-0185

Test Equipment List

Manufacturer	Model	Serial Number	Type	Description	GPCL ID	Last Cal	Interval	Status
A.H. Systems Inc.	SAS-521-2	410	Biological Antenna	25 - 2000 MHz	E602	10/1/2012	24	Active
Sonoma Instrument Co.	310N	185826	Amplifier	9KHz-1GHz	E512	1/24/2014	24	Active
Weinschel	2-6	BX3430	Attenuator	6 dB DC-18GHz 5 Watt	E887	3/5/2014	24	Active
Rohde & Schwarz	FSEM30	835533/002	Spectrum Analyzer	20 Hz - 26.5 GHz	E927	5/23/2014	24	Active
Rohde & Schwarz	ESIB40	DE25338	Test Receiver	EMI Test Receiver	E1190	6/19/2014	24	Active
Hewlett Packard	8449B	3008A00426	Pre-Amplifier	20Hz-26.5GHz	E123	7/26/2013	24	Active
EMCO	3115	9903-5769	Horn Antenna	1- 26.5 GHz	E393	1/30/2013	24	Active
EMC Test Systems	3116	2539	Horn Antenna	Double Ridged Horn 1-18 GHz	E513	3/22/2013	24	Active
Trilithic	5HC2850/18050-1.8-KK	PCS-HPF-11	High Pass Filter	Double Ridged Horn 18-40 GHz	E988	n/a	0	Active