



# TEST REPORT

*For*

**Applicant : iLUV Creative Technology**

**Address : 2 Harbor Park Drive, Port Washington, NY 11050, USA**

**Product Name : Wi-Fi&Bluetooth Speaker**

**Model Name : Aud Click, AudAir Can, WB-18**

**Brand Name : N/A**

**FCC Number : FCC ID :ATL-AUDCLICK**

**Report No. : MTE/CEC/S16091980**

**Date of Issue : Sep.13, 2016**

**Issued by : Most Technology Service Co., Ltd.**

**Address : No.5, 2nd Langshan Road, North District, Hi-tech Industrial  
Park, Nanshan, Shenzhen, Guangdong, China**

**Tel : 86-755-8602 6850**

**Fax : 86-755-26013350**

*The report consists 62 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.*

## TABLE OF CONTENTS

|                                               |          |
|-----------------------------------------------|----------|
| <b>1. PRODUCT INFORMATION .....</b>           | <b>4</b> |
| <b>2. GENERAL INFORMATION .....</b>           | <b>5</b> |
| 2.1 Product Information.....                  | 5        |
| 2.2 Objective .....                           | 5        |
| 2.3 Test Standards and Results.....           | 6        |
| 2.4 Environmental Conditions.....             | 6        |
| <b>3. TEST METHODOLOGY.....</b>               | <b>7</b> |
| 3.1 TEST FACILITY .....                       | 7        |
| 3.2 GENERAL TEST PROCEDURES .....             | 7        |
| <b>4. SETUP OF EQUIPMENT UNDER TEST .....</b> | <b>8</b> |
| 4.1 SETUP CONFIGURATION OF EUT .....          | 8        |
| 4.2 TEST EQUIPMENT LIST .....                 | 8        |
| <b>5. 47 CFR Part 15 C Requirements .....</b> | <b>9</b> |
| 5.1 RF EXPOSURE .....                         | 9        |
| 5.1.1 Applicable Standard .....               | 9        |
| 5.1.2 Measurement Result.....                 | 9        |
| 5.2 ANTENNA REQUIREMENT .....                 | 10       |
| 5.2.1 Applicable Standard.....                | 10       |
| 5.2.2 Evaluation Criteria.....                | 10       |
| 5.2.3 Result: Compliance. ....                | 10       |
| 5.3 AC Power Line Conducted Emission.....     | 11       |
| 5.3.1 Requirement .....                       | 11       |
| 5.3.2 Block Diagram of Test Setup .....       | 11       |
| 5.3.3 Test procedure .....                    | 11       |
| 5.3.4 Test Result .....                       | 11       |
| 5.4 Radiated Emission .....                   | 14       |
| 5.4.1 Requirement .....                       | 14       |
| 5.4.2 Test Configuration .....                | 14       |
| 5.4.3 Test Procedure: .....                   | 15       |
| 5.4.4 Test Result .....                       | 16       |
| 5.5.1 Requirement .....                       | 35       |
| 5.5.2 Block Diagram of Test Setup .....       | 35       |
| 5.5.3 Test Procedure .....                    | 35       |
| 5.5.4 Test Result .....                       | 35       |
| 5.6 20dB Emission Bandwidth .....             | 39       |
| 5.6.1 Test Requirement.....                   | 39       |
| 5.6.2 Test Procedure .....                    | 39       |
| 5.6.3 Test Result .....                       | 39       |
| 5.7 Carrier Frequency Separation .....        | 43       |
| 5.7.1 Test Requirement .....                  | 43       |
| 5.7.2 Test Procedure .....                    | 43       |
| 5.7.3 Test Result .....                       | 43       |
| 5.8 Number of Hopping Channel .....           | 47       |
| 5.8.1 Test Requirement .....                  | 47       |
| 5.8.2 Test Procedure .....                    | 47       |
| 5.8.3 Test Result .....                       | 47       |
| 5.9 Dwell Time .....                          | 49       |

|                                                      |    |
|------------------------------------------------------|----|
| 5.9.1 Test Requirement .....                         | 49 |
| 5.9.2 Test Procedure .....                           | 49 |
| 5.9.3 Test Result .....                              | 49 |
| 5.9 Band Edge and Conducted Spurious Emissions ..... | 53 |
| 5.9.1 Test Requirement .....                         | 53 |
| 5.9.2 Test Procedure .....                           | 53 |
| 5.9.3 Test Result .....                              | 53 |
| 5.10 Restricted Frequency Bands.....                 | 58 |
| 5.10.1 Test Requirement .....                        | 58 |
| 5.10.2 Test Configuration .....                      | 58 |
| 5.10.3 Test Procedure: .....                         | 58 |
| 5.10.4 Test Result .....                             | 58 |

## 1. PRODUCT INFORMATION

**Equipment Under Test:** Wi-Fi&Bluetooth Speaker  
**Brand Name:** N/A  
**Model Number:** Aud Click  
**FCC Number:** FCC ID: ATL-AUDCLICK  
**Applicant:** iLUV Creative Technology  
 2 Harbor Park Drive, Port Washington, NY11050, USA  
**Manufacturer:** Wonders Technology Co., Ltd  
 DOSS Industrial Zone, Qiping Kengdu Industrial Area Guihua  
 Village, Guanlan Town Baoan District, ShenZhen, China  
**Technical Standards:** 47 CFR Part 15 Subpart C (Part 15.247 of the FCC Rules)  
**File Number:** MTE/CEC/S16091980  
**Date of test:** Sep.01-12, 2016  
**Deviation:** None  
**Condition of Test Sample:** Normal  
**Test Result:** PASS

The above equipment was tested by Most Technology Service Co., Ltd. for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature): chloe  
 Chloe Cai (Engineer) Sep.01-12, 2016  
 Review by (+ signature): John  
 John Lin (Engineer)  Sep.13, 2016  
 Approved by (+ signature): Yvette  
 Yvette Zhou (Manager) Sep.13, 2016

## 2. GENERAL INFORMATION

### 2.1 Product Information

|                                             |                                          |
|---------------------------------------------|------------------------------------------|
| <b>Product</b>                              | Wi-Fi&Bluetooth Speaker                  |
| <b>Brand Name</b>                           | N/A                                      |
| <b>Model Number</b>                         | Aud Click                                |
| <b>Series Model Name:</b>                   | AudAir Can, WB-18                        |
| <b>Series Model Difference description:</b> | Only different in model name.            |
| <b>Power Supply</b>                         | DC 5V by USB Port<br>DC 3.7V by Battery  |
| <b>Frequency Range</b>                      | 2402MHz -2480MHz                         |
| <b>Modulation Type:</b>                     | GFSK, $\pi/4$ -DQPSK, 8DPSK              |
| <b>Modulation Technique</b>                 | FHSS                                     |
| <b>Channel Number</b>                       | 79                                       |
| <b>Antenna Type</b>                         | Internal PCB Antenna, Antenna Gain :0dBi |
| <b>Temperature Range</b>                    | -10°C ~ +55°C                            |

**NOTE:**

1. For a more detailed features description about the EUT, please refer to User's Manual.

### 2.2 Objective

The objective of the report is to perform tests according to FCC Part 15 Subpart C for the EUT FCC ID Certification:

| No. | Identity       | Document Title                                                                   |
|-----|----------------|----------------------------------------------------------------------------------|
| 1   | 47 CFR Part 15 | Radio Frequency Devices                                                          |
| 2   | DA00-705       | Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. |

## 2.3 Test Standards and Results

| No.                              | Section                 | Test Items                                 | Result | Date of Test |
|----------------------------------|-------------------------|--------------------------------------------|--------|--------------|
| 1                                | FCC 15.247 (i)          | RF EXPOSURE                                | PASS   | 2016-09-09   |
| 2                                | FCC 15.203              | Antenna Requirement                        | PASS   | 2016-09-09   |
| 3                                | FCC15.207 (a)           | AC Power Line Conducted Emission           | PASS   | 2016-09-08   |
| 4                                | FCC15.209, 15.247(d)    | Radiated Emission                          | PASS   | 2016-09-09   |
| 5                                | FCC 15.247 (b)(1)       | Conducted Peak Output Power                | PASS   | 2016-09-08   |
| 6                                | FCC 15.247 (a)(1)       | 20dB Emission Bandwidth                    | PASS   | 2016-09-08   |
| 7                                | FCC 15.247 (a)(1)       | Carrier Frequency Separation               | PASS   | 2016-09-08   |
| 8                                | FCC 15.247 (a)(1)(iii)  | Number of Hopping Channel                  | PASS   | 2016-09-08   |
| 9                                | FCC 15.247 (a)(1) (iii) | Dwell Time                                 | PASS   | 2016-09-08   |
| 10                               | FCC15.247(d)            | Band Edge and Conducted Spurious Emissions | PASS   | 2016-09-08   |
| 11                               | FCC15.247(d)            | Restricted Frequency Bands                 | PASS   | 2016-09-09   |
| Remark: N/A means not applicable |                         |                                            |        |              |

*Note:* 1. The test result judgment is decided by the limit of measurement standard  
 2. The information of measurement uncertainty is available upon the customer's request.

## 2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

### 3. TEST METHODOLOGY

#### 3.1 TEST FACILITY

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Site:</b>    | Most Technology Service Co., Ltd                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Location:</b>     | No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Description:</b>  | There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013 and CISPR 16 requirements.<br><br>The FCC Registration Number is <b>490827</b> . The IC Registration Number is <b>7103A-1</b> .                                                                                                                                                                                                                                                                                                                                   |
| <b>Site Filing:</b>  | The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Instrument</b>    | All measuring equipment is in accord with ANSI C63.10:2013 and CISPR 16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Tolerance:</b>    | requirements that meet industry regulatory agency and accreditation agency requirement.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Ground Plane:</b> | Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. |

#### 3.2 GENERAL TEST PROCEDURES

##### Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.5 of ANSI C63.10:2013.

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10:2013, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

## 4. SETUP OF EQUIPMENT UNDER TEST

### 4.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 4.2 TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipment used at Most for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

| No. | Equipment                      | Manufacturer     | Model No.  | S/N        | Calibration date | Calibration Interval |
|-----|--------------------------------|------------------|------------|------------|------------------|----------------------|
| 1   | Test Receiver                  | Rohde & Schwarz  | ESCI       | 100492     | 2016/03/10       | 1 Year               |
| 2   | Spectrum Analyzer              | Agilent          | E7405A     | US44210471 | 2016/03/14       | 1 Year               |
| 3   | L.I.S.N.                       | Rohde & Schwarz  | ENV216     | 100093     | 2016/03/10       | 1 Year               |
| 4   | Coaxial Switch                 | Anritsu Corp     | MP59B      | 6200283933 | 2016/03/07       | 1 Year               |
| 5   | Terminator                     | Hubersuhner      | 50Ω        | No.1       | 2016/03/07       | 1 Year               |
| 6   | RF Cable                       | SchwarzBeck      | N/A        | No.1       | 2016/03/07       | 1 Year               |
| 7   | Test Receiver                  | Rohde & Schwarz  | ESPI       | 101202     | 2016/03/10       | 1 Year               |
| 8   | Bilog Antenna                  | Sunol            | JB3        | A121206    | 2016/03/14       | 1 Year               |
| 9   | Horn Antenna                   | SCHWARZBECK      | BBHA9120D  | 756        | 2016/03/14       | 1 Year               |
| 10  | Horn Antenna                   | Penn Engineering | 9034       | 8376       | 2016/03/14       | 1 Year               |
| 11  | Cable                          | Resenberger      | N/A        | NO.1       | 2016/03/07       | 1 Year               |
| 12  | Cable                          | SchwarzBeck      | N/A        | NO.2       | 2016/03/07       | 1 Year               |
| 13  | Cable                          | SchwarzBeck      | N/A        | NO.3       | 2016/03/07       | 1 Year               |
| 14  | Single Phase Power Line Filter | DuoJi            | FNF 202B30 | N/A        | 2016/03/07       | 1 Year               |
| 15  | Test Receiver                  | Rohde & Schwarz  | ESCI       | 100492     | 2016/03/10       | 1 Year               |
| 16  | Loop antenna                   | ARA              | PLA-1030/B | 1039       | 2016/03/14       | 1 Year               |

**NOTE:** Equipments listed above have been calibrated and are in the period of validation.



## 5. 47 CFR Part 15 C Requirements

### 5.1 RF EXPOSURE

#### 5.1.1 Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$\left[ \frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

$f(\text{GHz})$  is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

#### 5.1.2 Measurement Result

The maximum conducted output power = 4.812 dBm (3.028 mW) at 2480 MHz  $\left[ \frac{\text{max. power of channel, mW}}{\text{min. test separation distance, mm}} \right] [\sqrt{f(\text{GHz})}]$

$$= 3.028 / 5 \cdot (\sqrt{2.480}) = 0.954 < 3.0$$

Thus, the EUT complies with the RF exposure requirements and the stand-alone SAR evaluation is not required.

## **5.2 ANTENNA REQUIREMENT**

### **5.2.1 Applicable Standard**

According to FCC § 15.203 , An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **5.2.2 Evaluation Criteria**

(a) Antenna must be permanently attached to the unit.

(b) Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, Installer shall be responsible for verifying that the correct antenna is employed with the unit.

### **5.2.3 Result: Compliance.**

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section.

### 5.3 AC Power Line Conducted Emission

#### 5.3.1 Requirement


A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the and 150 kHz-30 MHz, shall not exceed the limits in the following table:

| Frequency     | Maximum RF Line Voltage |                |
|---------------|-------------------------|----------------|
|               | Q.P.( dBuV)             | Average( dBuV) |
| 150kHz-500kHz | 66-56                   | 56-46          |
| 500kHz-5MHz   | 56                      | 46             |
| 5MHz-30MHz    | 60                      | 50             |

**\*\*Note:** 1. the lower limit shall apply at the band edges.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

#### 5.3.2 Block Diagram of Test Setup

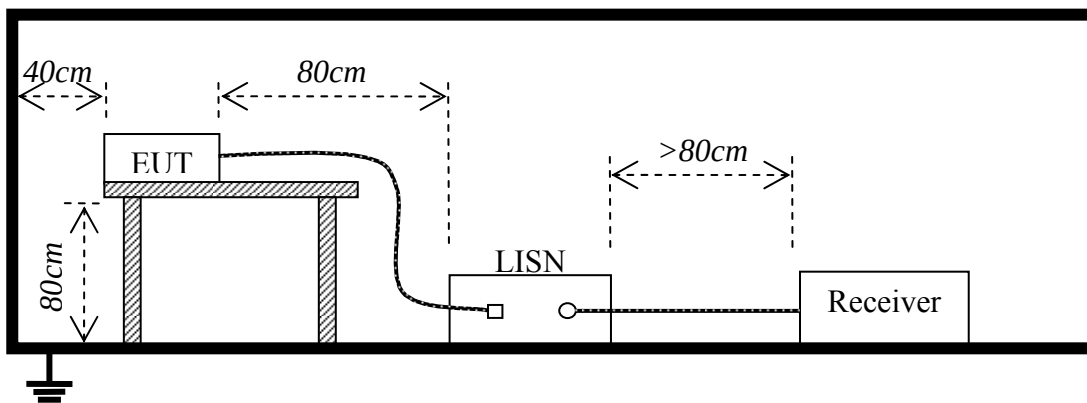

#### 5.3.3 Test procedure

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. Exploratory measurements were made to identify the frequency of the emission that has the highest amplitude relative to the limit;
3. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
4. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.
5. The bandwidth of test receiver (ESCI) set at 9 KHz.
6. All data was recorded in the Quasi-peak and average detection mode.

#### 5.3.4 Test Result


Pass

Note: All test modes are performed, only the worst case is recorded in this report.

Please refer the following pages.

|                         |                         |            |                   |
|-------------------------|-------------------------|------------|-------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:       | Aud Click         |
| Mode:                   | Charging                | Phase:     | L1                |
| Tested by:              | Windy Hu(Engineer)      | Power:     | DC 5V by USB Port |
| Temperature: / Humidity | 23.4°C / 52.9%          | Test date: | 2016-09-08        |

80.0 dBuV

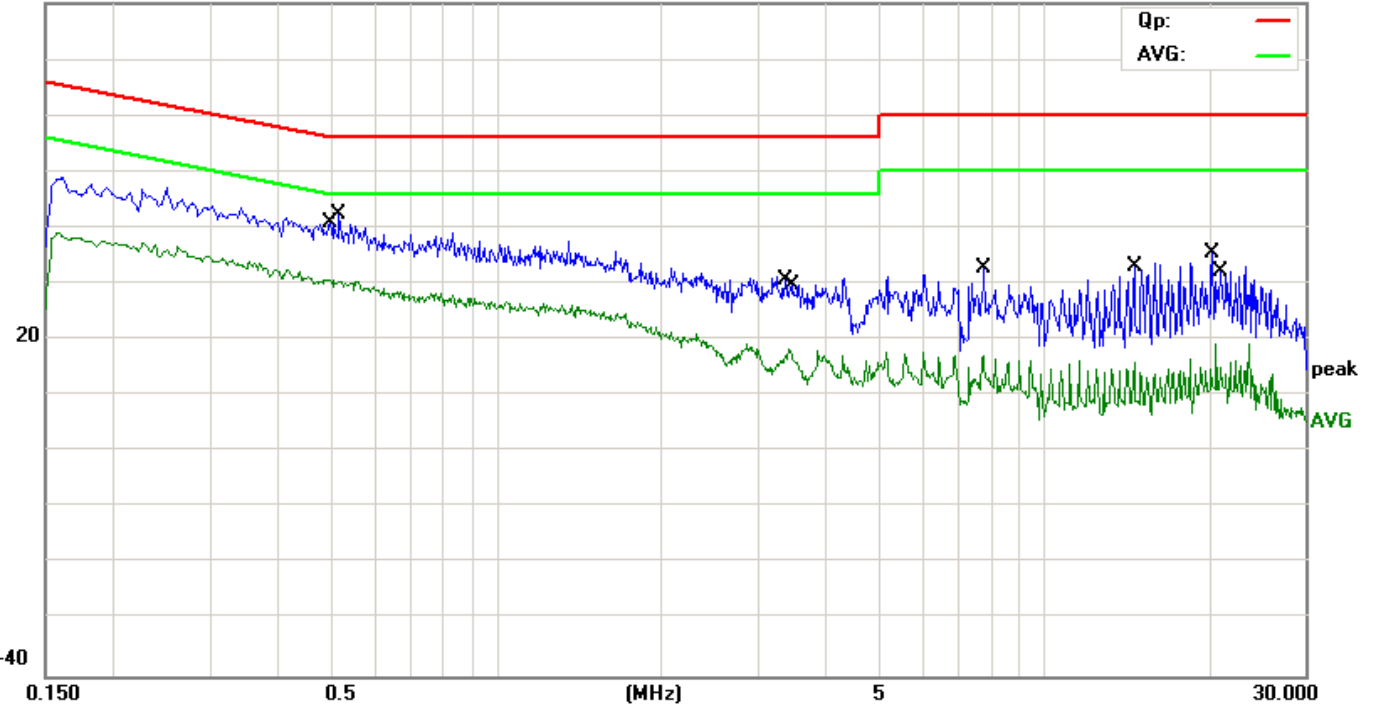


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.4940       | 17.10                    | 9.59                    | 26.69                    | 46.10         | -19.41     | AVG      |         |
| 2   | *   | 0.5180       | 28.10                    | 9.59                    | 37.69                    | 56.00         | -18.31     | QP       |         |
| 3   |     | 20.2940      | 21.60                    | 9.73                    | 31.33                    | 60.00         | -28.67     | QP       |         |
| 4   |     | 20.6500      | 5.20                     | 9.73                    | 14.93                    | 50.00         | -35.07     | AVG      |         |
| 5   |     | 14.5980      | 2.60                     | 9.70                    | 12.30                    | 50.00         | -37.70     | AVG      |         |
| 6   |     | 14.5980      | 19.80                    | 9.70                    | 29.50                    | 60.00         | -30.50     | QP       |         |
| 7   |     | 7.7740       | 18.70                    | 9.66                    | 28.36                    | 60.00         | -31.64     | QP       |         |
| 8   |     | 7.7300       | 3.30                     | 9.66                    | 12.96                    | 50.00         | -37.04     | AVG      |         |
| 9   |     | 3.4340       | 4.70                     | 9.61                    | 14.31                    | 46.00         | -31.69     | AVG      |         |
| 10  |     | 3.3700       | 17.40                    | 9.61                    | 27.01                    | 56.00         | -28.99     | QP       |         |

\*:Maximum data    x:Over limit    !:over margin

|                         |                         |            |                   |
|-------------------------|-------------------------|------------|-------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:       | Aud Click         |
| Mode:                   | Charging                | Phase:     | N                 |
| Tested by:              | Windy Hu(Engineer)      | Power:     | DC 5V by USB Port |
| Temperature: / Humidity | 23.4°C / 52.9%          | Test date: | 2016-09-08        |

80.0 dBuV

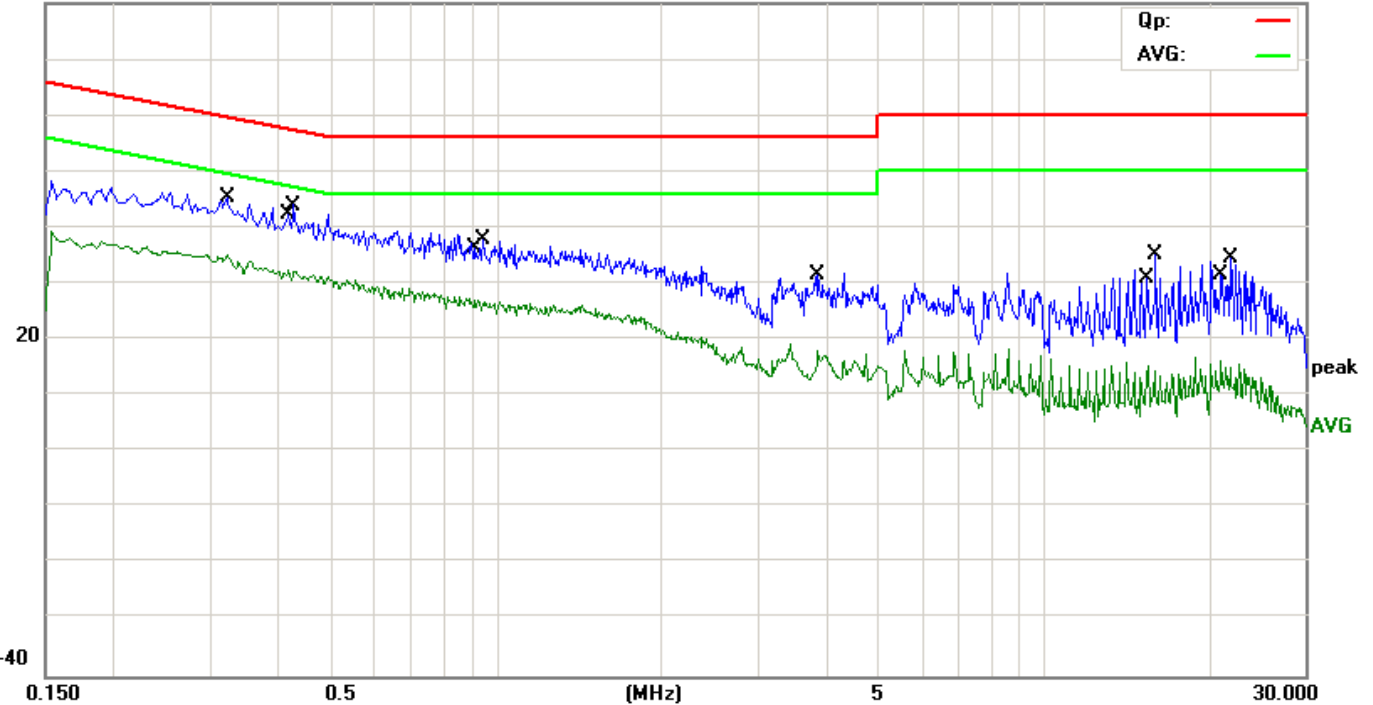

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 3.8700       | 4.40                     | 9.62                    | 14.02                    | 46.00         | -31.98     | AVG      |         |
| 2   |     | 3.8700       | 17.70                    | 9.62                    | 27.32                    | 56.00         | -28.68     | QP       |         |
| 3   |     | 21.8940      | 20.10                    | 9.74                    | 29.84                    | 60.00         | -30.16     | QP       |         |
| 4   |     | 21.0740      | 2.80                     | 9.73                    | 12.53                    | 50.00         | -37.47     | AVG      |         |
| 5   |     | 15.4860      | 1.90                     | 9.70                    | 11.60                    | 50.00         | -38.40     | AVG      |         |
| 6   |     | 15.9700      | 21.90                    | 9.71                    | 31.61                    | 60.00         | -28.39     | QP       |         |
| 7   |     | 0.3220       | 30.50                    | 9.59                    | 40.09                    | 59.66         | -19.57     | QP       |         |
| 8   |     | 0.3220       | 20.60                    | 9.59                    | 30.19                    | 49.66         | -19.47     | AVG      |         |
| 9   |     | 0.4180       | 18.70                    | 9.59                    | 28.29                    | 47.49         | -19.20     | AVG      |         |
| 10  | *   | 0.4260       | 29.90                    | 9.59                    | 39.49                    | 57.33         | -17.84     | QP       |         |
| 11  |     | 0.9460       | 24.10                    | 9.60                    | 33.70                    | 56.00         | -22.30     | QP       |         |
| 12  |     | 0.9180       | 12.60                    | 9.60                    | 22.20                    | 46.00         | -23.80     | AVG      |         |

\*:Maximum data    x:Over limit    !:over margin

## 5.4 Radiated Emission

### 5.4.1 Requirement

According to FCC section 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC section 15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ at 3-meter) | Test Distance (m) | Field Strength ( $\text{dB}\mu\text{V/m}$ at 3-meter) |
|-----------------|----------------------------------------------|-------------------|-------------------------------------------------------|
| 0.009 - 0.490   | $2400/F(\text{kHz})$                         | 300               |                                                       |
| 0.490 - 1.705   | $24000/F(\text{kHz})$                        | 30                |                                                       |
| 1.705-30        | 30                                           | 30                |                                                       |
| 30-88           | 100                                          | 3                 | 40                                                    |
| 88-216          | 150                                          | 3                 | 43.5                                                  |
| 216-960         | 200                                          | 3                 | 46                                                    |
| Above 960       | 500                                          | 3                 | 54                                                    |

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### 5.4.2 Test Configuration

#### Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

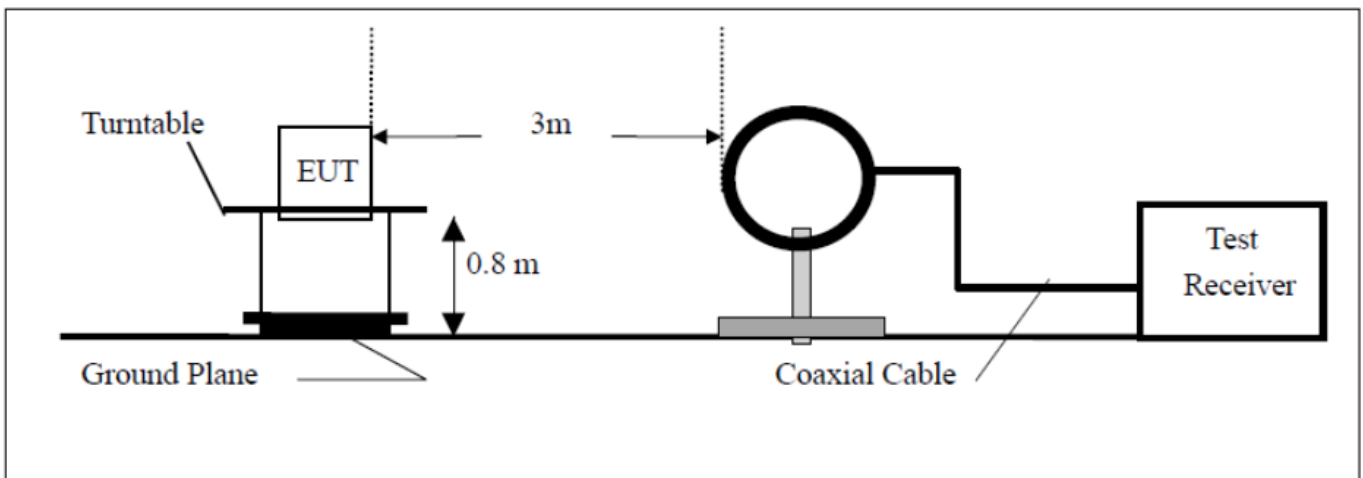

## 2) For radiated emissions from 30MHz to 1GHz

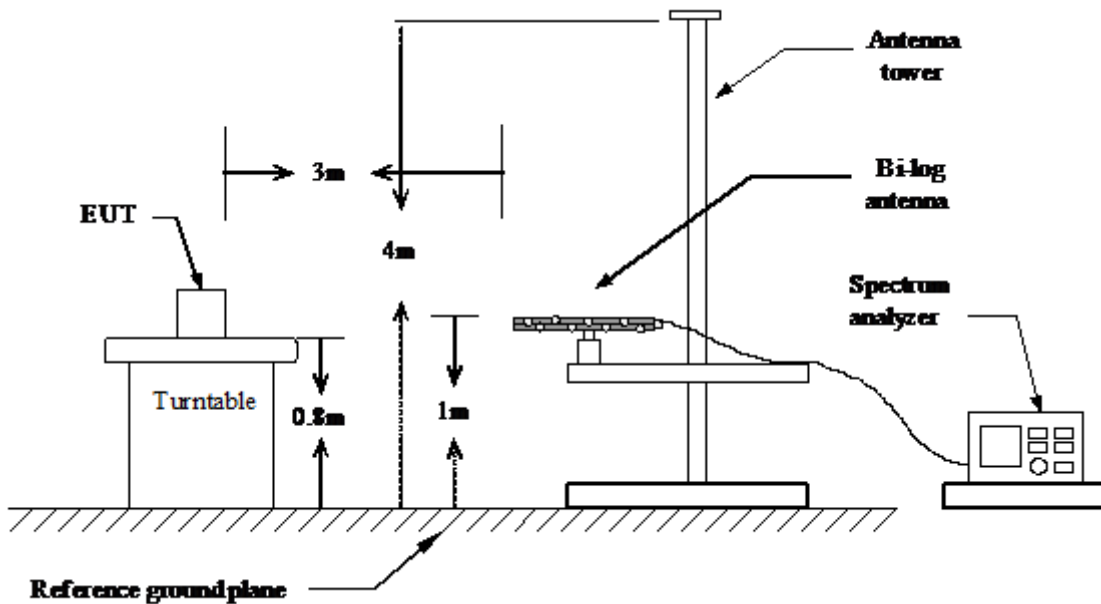

## 3) For radiated emissions above 1GHz

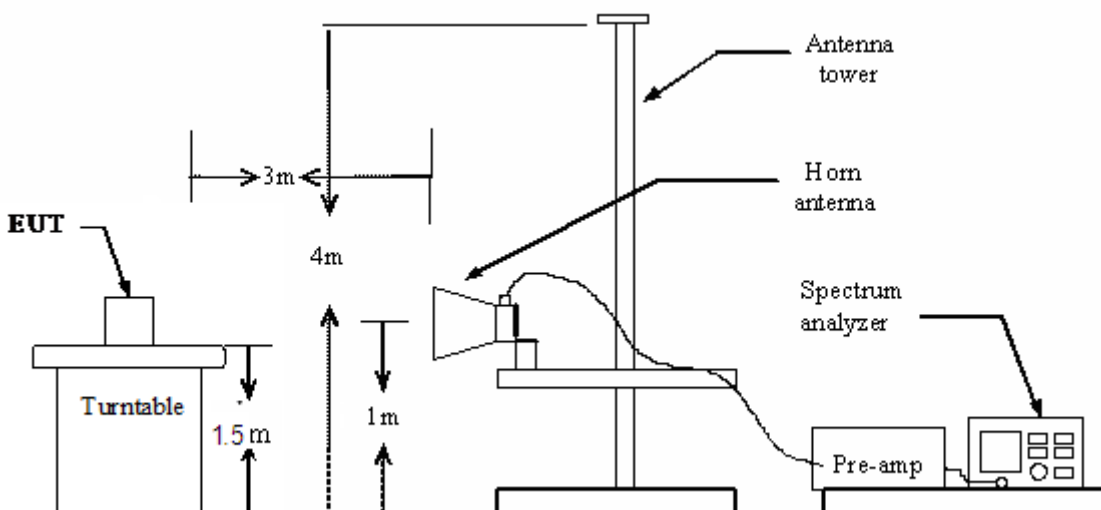**5.4.3 Test Procedure:**

1. The EUT was placed on the top of a wooden table 0.8 meters (for measurement at frequency below 1GHz) and a wooden table 1.5 meters (for measurement at frequency above 1GHz) above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter, for the test frequency of above 1GHz, horn antenna opening in the test would have been facing the EUT when rise or fall) and the table was turned from 0 degrees to 360 degrees to find the maximum reading.

6. Set the spectrum analyzer in the following setting as:

Below 1GHz: PEAK: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO QP: RBW=120 kHz / Sweep=AUTO

Above 1GHz: (a)PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b)AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

7. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### 5.4.4 Test Result

Pass

##### Remark:

1. During the test, pre-scan the GFSK,  $\pi/4$ -QPSK, 8DPSK modulation, and found the GFSK modulation Low channel is worse case in above 1GHz and below 1GHz.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
3. For radiated emissions from 9kHz to 30MHz, Test results show that the margin of over -20db.


Note: All test modes are performed, only the worst case is recorded in this report.

Please refer the following pages



## Below 1GHz:


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH0                | Polarization: | Horizontal         |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 23.9℃ / 53.6%           | Test date:    | 2016-09-09         |

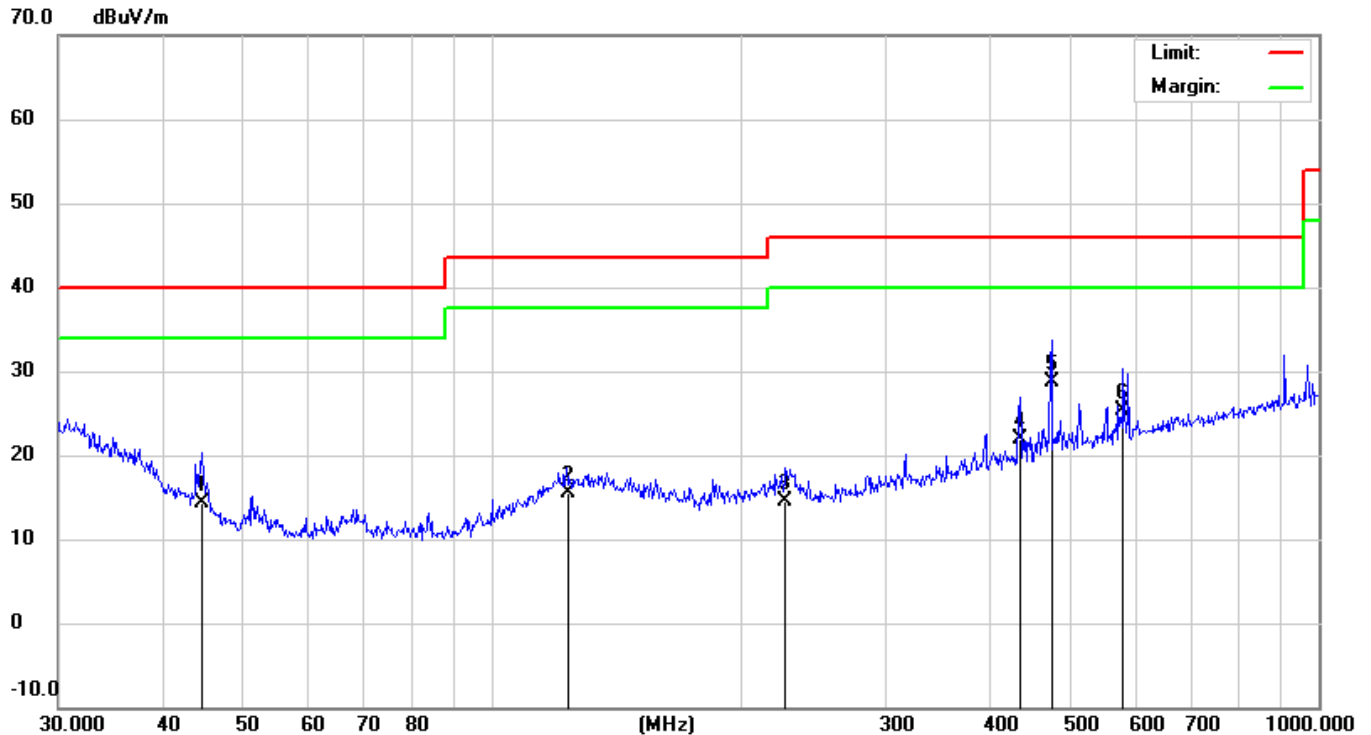

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 44.7433  | 3.70          | 10.67          | 14.37        | 40.00  | -25.63 | QP             |              |         |
| 2   |     | 123.2655 | 1.66          | 13.93          | 15.59        | 43.50  | -27.91 | QP             |              |         |
| 3   |     | 226.8936 | 2.48          | 11.98          | 14.46        | 46.00  | -31.54 | QP             |              |         |
| 4   |     | 435.5898 | 5.62          | 16.22          | 21.84        | 46.00  | -24.16 | QP             |              |         |
| 5   | *   | 475.4991 | 11.61         | 17.14          | 28.75        | 46.00  | -17.25 | QP             |              |         |
| 6   |     | 580.7026 | 6.71          | 18.59          | 25.30        | 46.00  | -20.70 | QP             |              |         |

\*:Maximum data    x:Over limit    !:over margin


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH0                | Polarization: | Vertical           |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 23.9℃ / 53.6%           | Test date:    | 2016-09-09         |

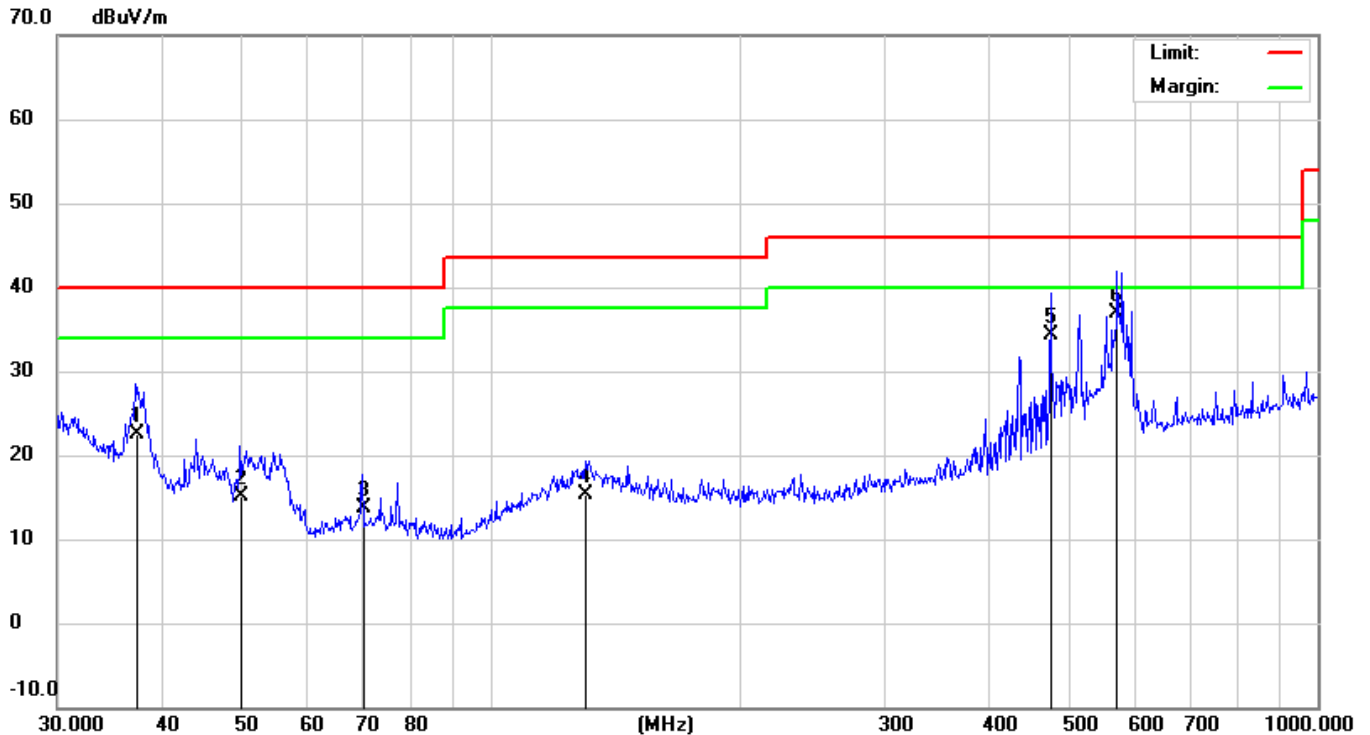

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 37.2855  | 6.61          | 15.81          | 22.42       | 40.00  | -17.58 | QP             |              |         |
| 2   |     | 49.8814  | 6.89          | 8.16           | 15.05       | 40.00  | -24.95 | QP             |              |         |
| 3   |     | 70.0903  | 5.43          | 8.30           | 13.73       | 40.00  | -26.27 | QP             |              |         |
| 4   |     | 130.3789 | 1.62          | 13.78          | 15.40       | 43.50  | -28.10 | QP             |              |         |
| 5   |     | 475.4991 | 17.25         | 17.14          | 34.39       | 46.00  | -11.61 | QP             |              |         |
| 6   | *   | 572.6144 | 18.36         | 18.50          | 36.86       | 46.00  | -9.14  | QP             |              |         |

\*:Maximum data    x:Over limit    !:over margin


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH39               | Polarization: | Horizontal         |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 23.9℃ / 53.6%           | Test date:    | 2016-09-09         |

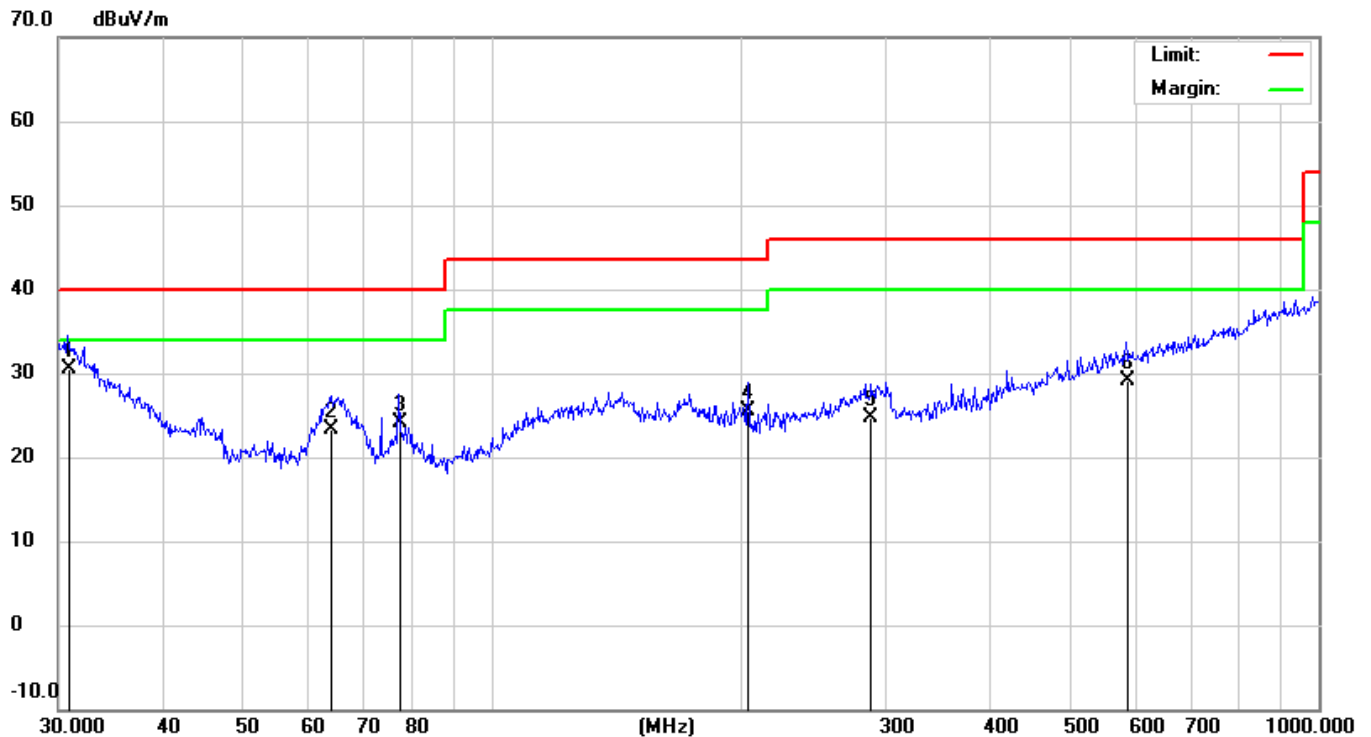

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|-------------------------|---------------------------|---------|
| 1   | *   | 30.7455      | 7.80                     | 22.66                   | 30.46                      | 40.00           | -9.54      | QP       |                         |                           |         |
| 2   |     | 64.2074      | 12.20                    | 11.17                   | 23.37                      | 40.00           | -16.63     | QP       |                         |                           |         |
| 3   |     | 77.3212      | 12.60                    | 11.48                   | 24.08                      | 40.00           | -15.92     | QP       |                         |                           |         |
| 4   |     | 204.2377     | 8.80                     | 16.76                   | 25.56                      | 43.50           | -17.94     | QP       |                         |                           |         |
| 5   |     | 287.9904     | 5.30                     | 19.40                   | 24.70                      | 46.00           | -21.30     | QP       |                         |                           |         |
| 6   |     | 584.7895     | 6.20                     | 22.85                   | 29.05                      | 46.00           | -16.95     | QP       |                         |                           |         |

\*:Maximum data    x:Over limit    !:over margin


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH39               | Polarization: | Vertical           |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 23.9℃ / 53.6%           | Test date:    | 2016-09-09         |

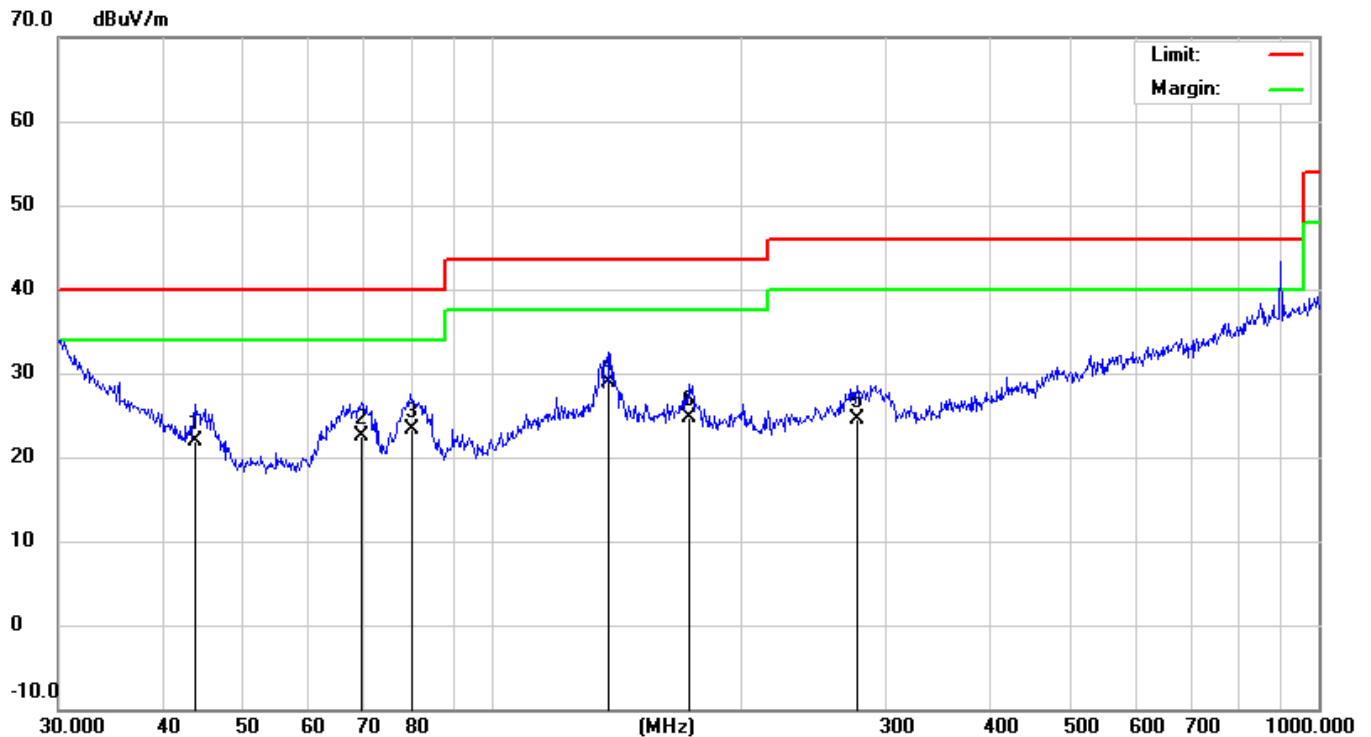

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 43.9658  | 8.20          | 13.74          | 21.94       | 40.00  | -18.06 | QP             |              |         |
| 2   |     | 69.6005  | 10.80         | 11.66          | 22.46       | 40.00  | -17.54 | QP             |              |         |
| 3   |     | 79.8003  | 11.90         | 11.40          | 23.30       | 40.00  | -16.70 | QP             |              |         |
| 4   | *   | 138.3873 | 11.60         | 17.28          | 28.88       | 43.50  | -14.62 | QP             |              |         |
| 5   |     | 277.0935 | 5.30          | 19.25          | 24.55       | 46.00  | -21.45 | QP             |              |         |
| 6   |     | 173.2051 | 7.70          | 17.04          | 24.74       | 43.50  | -18.76 | QP             |              |         |

\*:Maximum data    x:Over limit    !:over margin


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH78               | Polarization: | Horizontal         |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 23.9℃ / 53.6%           | Test date:    | 2016-09-09         |

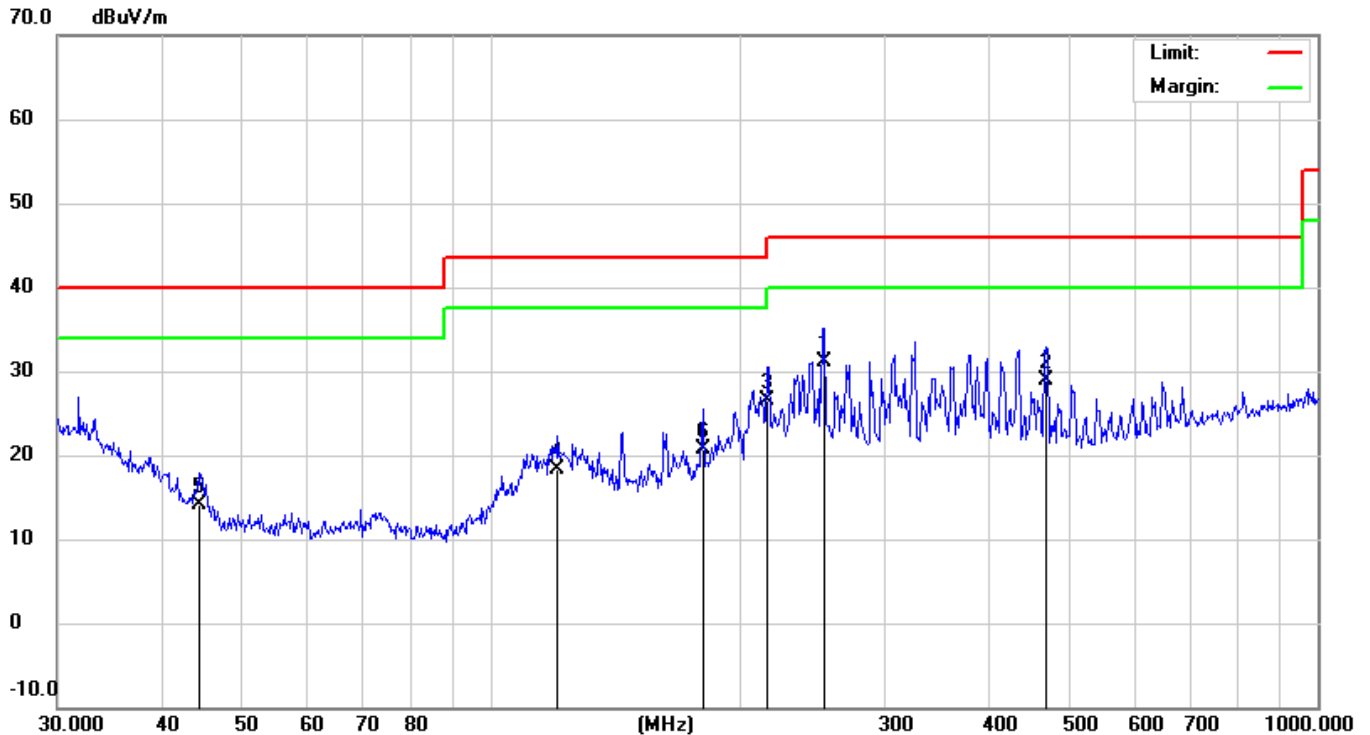

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   | *   | 253.8366 | 19.20         | 11.93          | 31.13       | 46.00  | -14.87 | QP             |              |         |
| 2   |     | 470.5232 | 11.80         | 17.02          | 28.82       | 46.00  | -17.18 | QP             |              |         |
| 3   |     | 216.0238 | 14.40         | 12.07          | 26.47       | 46.00  | -19.53 | QP             |              |         |
| 4   |     | 120.6991 | 4.50          | 13.83          | 18.33       | 43.50  | -25.17 | QP             |              |         |
| 5   |     | 44.4307  | 3.20          | 10.88          | 14.08       | 40.00  | -25.92 | QP             |              |         |
| 6   |     | 180.6488 | 9.10          | 11.62          | 20.72       | 43.50  | -22.78 | QP             |              |         |

\*:Maximum data    x:Over limit    !:over margin

|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH78               | Polarization: | Vertical           |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 23.9℃ / 53.6%           | Test date:    | 2016-09-09         |

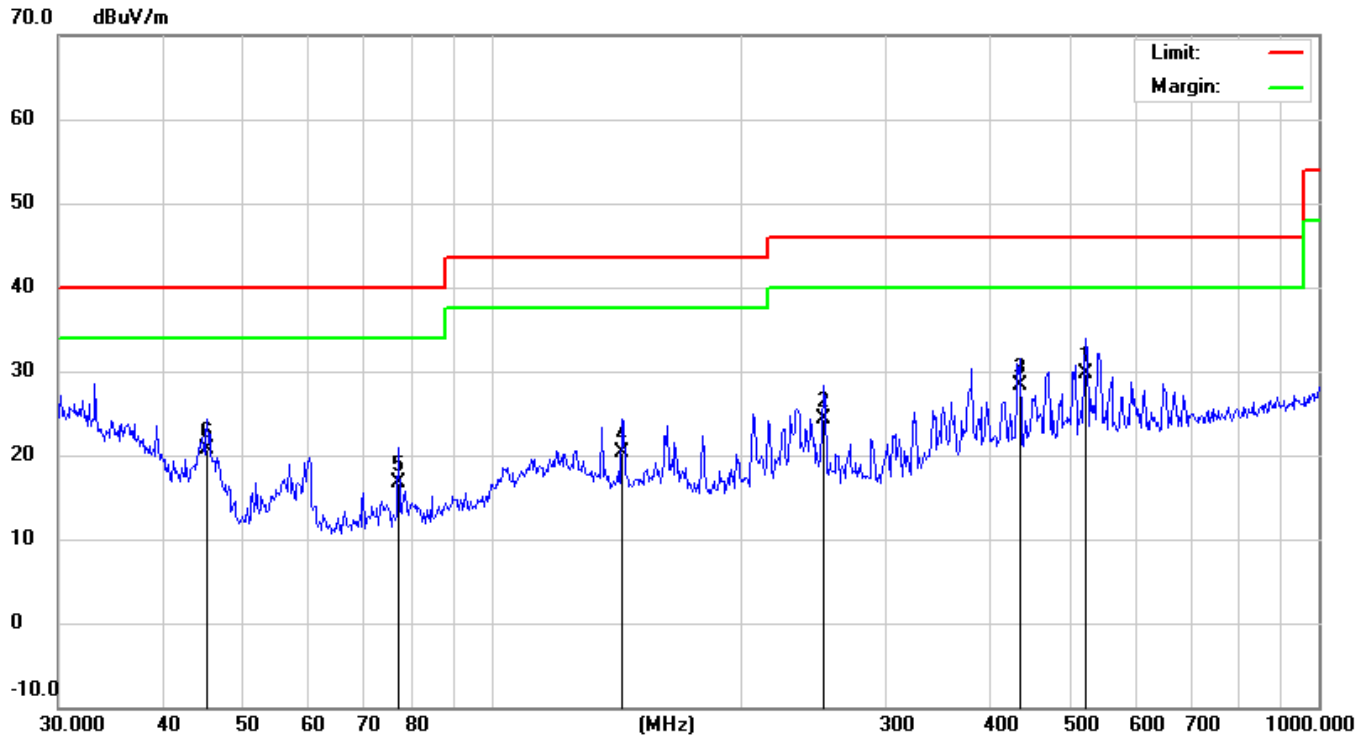


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   | *   | 522.7178 | 11.80         | 17.95          | 29.75       | 46.00  | -16.25 | QP             |              |         |
| 2   |     | 252.0627 | 12.40         | 11.87          | 24.27       | 46.00  | -21.73 | QP             |              |         |
| 3   |     | 435.5898 | 12.00         | 16.22          | 28.22       | 46.00  | -17.78 | QP             |              |         |
| 4   |     | 143.8294 | 7.20          | 13.13          | 20.33       | 43.50  | -23.17 | QP             |              |         |
| 5   |     | 77.3210  | 8.60          | 8.15           | 16.75       | 40.00  | -23.25 | QP             |              |         |
| 6   |     | 45.3753  | 10.30         | 10.32          | 20.62       | 40.00  | -19.38 | QP             |              |         |

\*:Maximum data    x:Over limit    !:over margin

## Above 1GHz:


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH0                | Polarization: | Horizontal         |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8℃ / 53.5%           | Test date:    | 2016-09-09         |

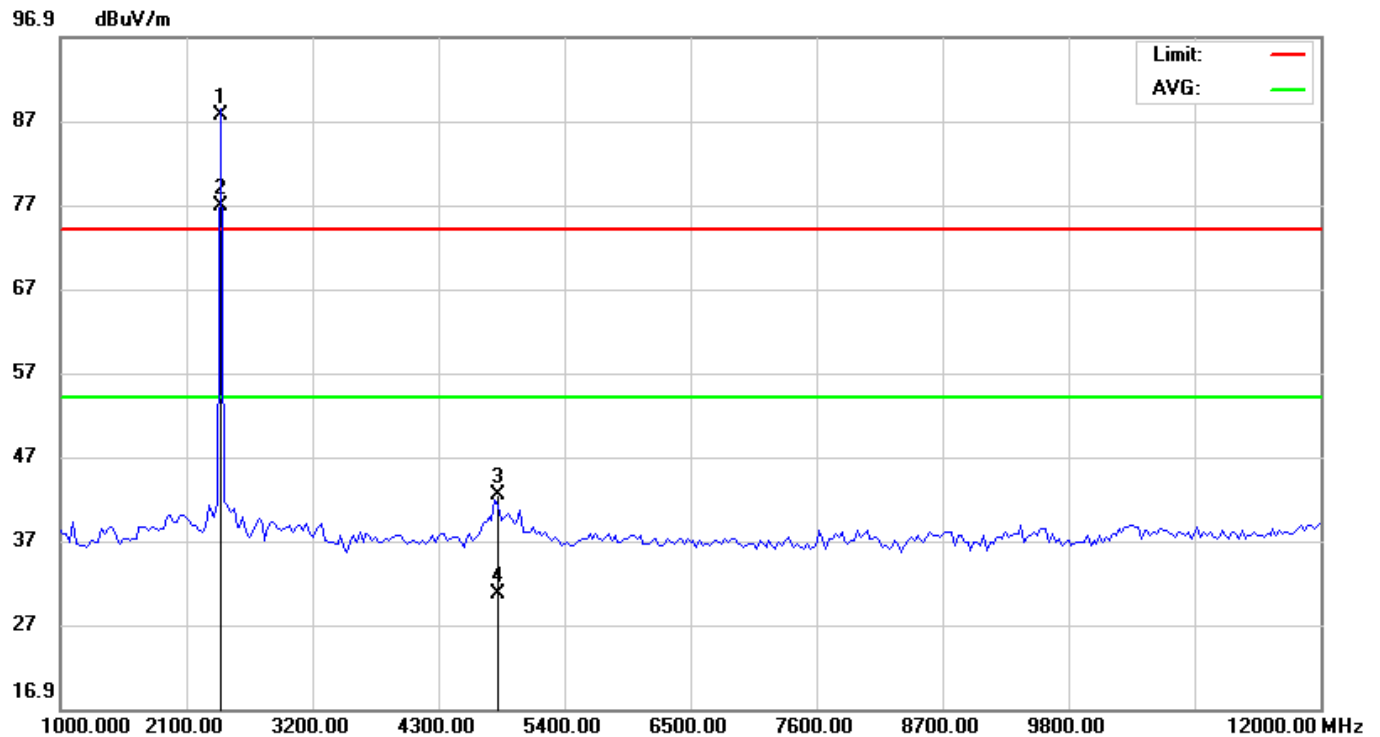

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   | X   | 2402.000 | 96.13         | -8.43          | 87.70       | 74.00  | 13.70  |                |              | peak    |
| 2   | *   | 2402.000 | 85.17         | -8.43          | 76.74       | 54.00  | 22.74  |                |              | AVG     |
| 3   |     | 4804.000 | 48.55         | -6.15          | 42.40       | 74.00  | -31.60 |                |              | peak    |
| 4   |     | 4804.000 | 36.72         | -6.15          | 30.57       | 54.00  | -23.43 |                |              | AVG     |

\*:Maximum data    x:Over limit    !:over margin

|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH0                | Polarization: | Horizontal         |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8℃ / 53.5%           | Test date:    | 2016-09-09         |

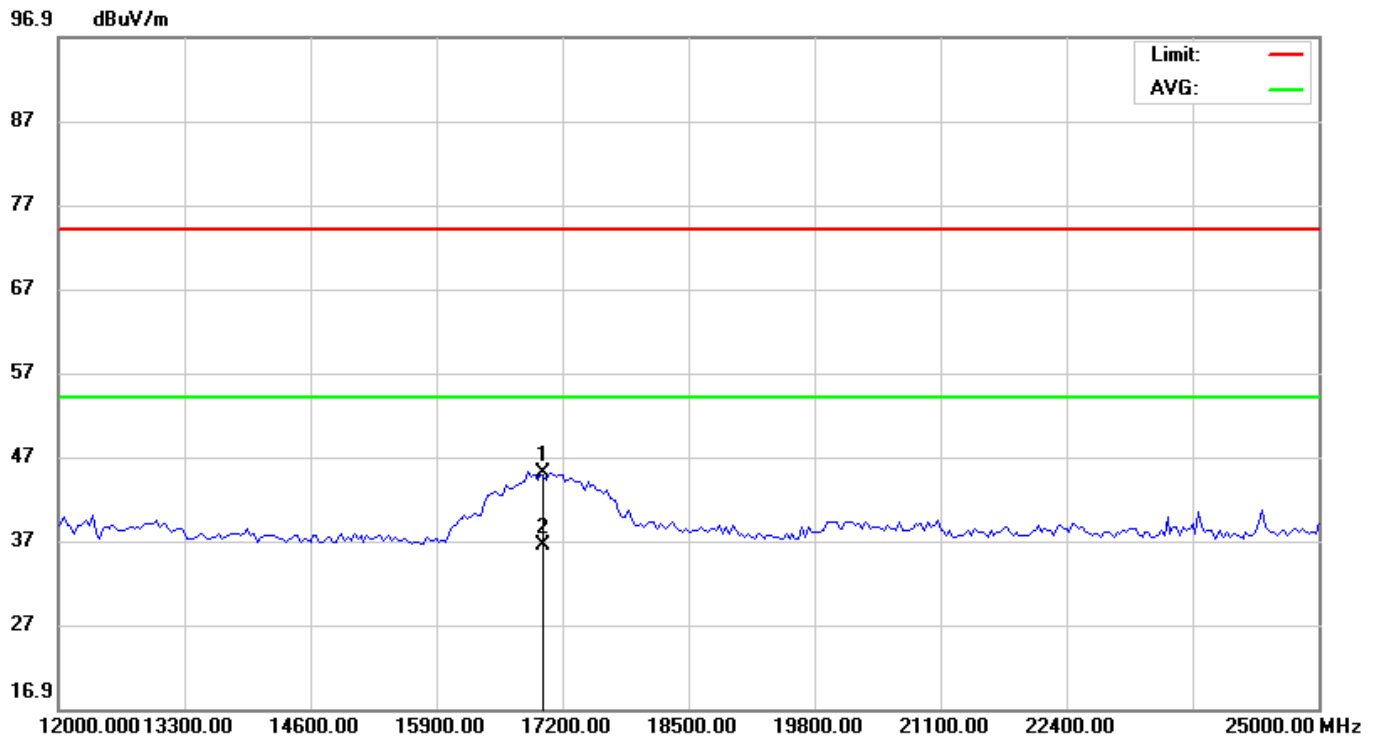


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|-------------------------|---------------------------|---------|
| 1   |     | 17005.00     | 38.03                    | 6.90                    | 44.93                      | 74.00           | -29.07     | peak     |                         |                           |         |
| 2   | *   | 17005.00     | 29.55                    | 6.90                    | 36.45                      | 54.00           | -17.55     | AVG      |                         |                           |         |

\*:Maximum data    x:Over limit    !:over margin



|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH0                | Polarization: | Vertical           |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8℃ / 53.5%           | Test date:    | 2016-09-09         |

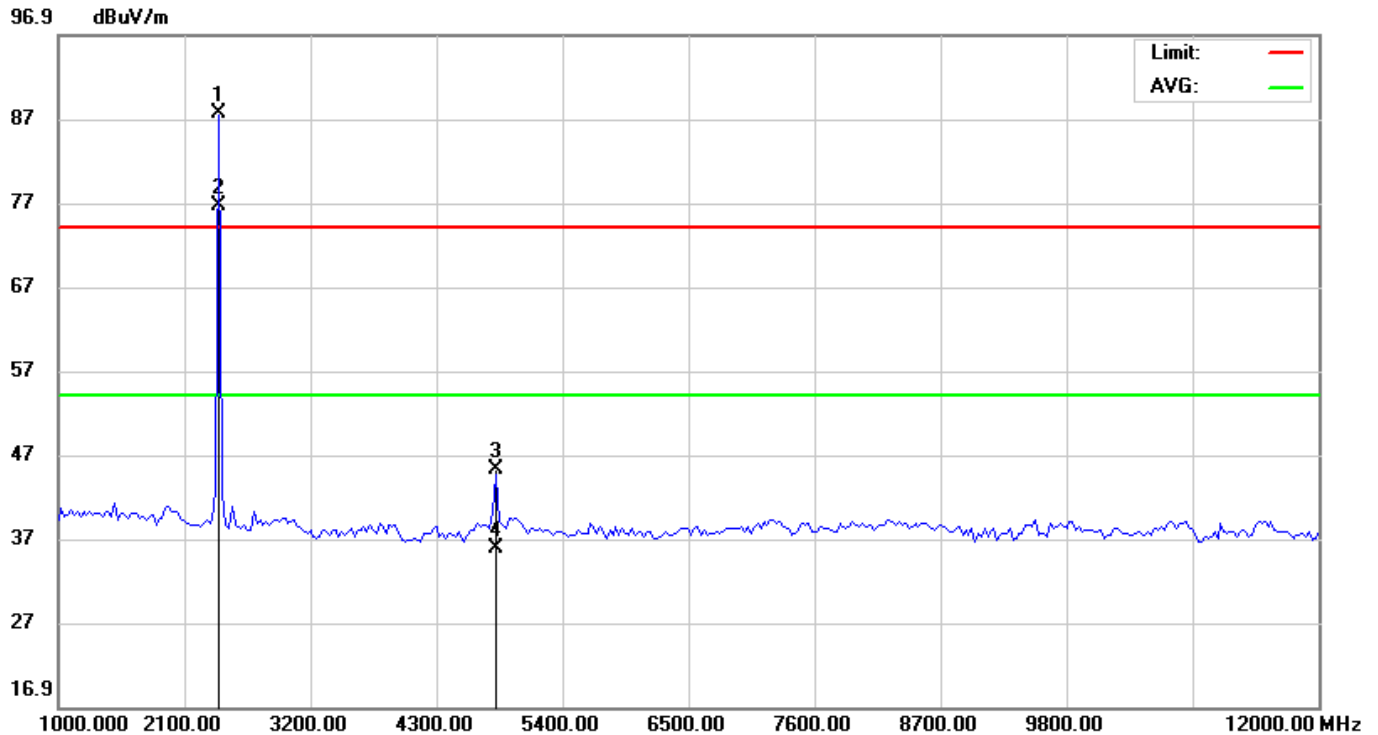


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|-------------------------|---------------------------|---------|
| 1   | X   | 2402.500     | 96.13                    | -8.43                   | 87.70                      | 74.00           | 13.70      | peak     |                         |                           |         |
| 2   | *   | 2402.500     | 85.03                    | -8.43                   | 76.60                      | 54.00           | 22.60      | AVG      |                         |                           |         |
| 3   |     | 4804.000     | 51.42                    | -6.15                   | 45.27                      | 74.00           | -28.73     | peak     |                         |                           |         |
| 4   |     | 4804.000     | 42.03                    | -6.15                   | 35.88                      | 54.00           | -18.12     | AVG      |                         |                           |         |

\*:Maximum data    x:Over limit    !:over margin

|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH0                | Polarization: | Vertical           |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8℃ / 53.5%           | Test date:    | 2016-09-09         |


96.9 dBuV/m

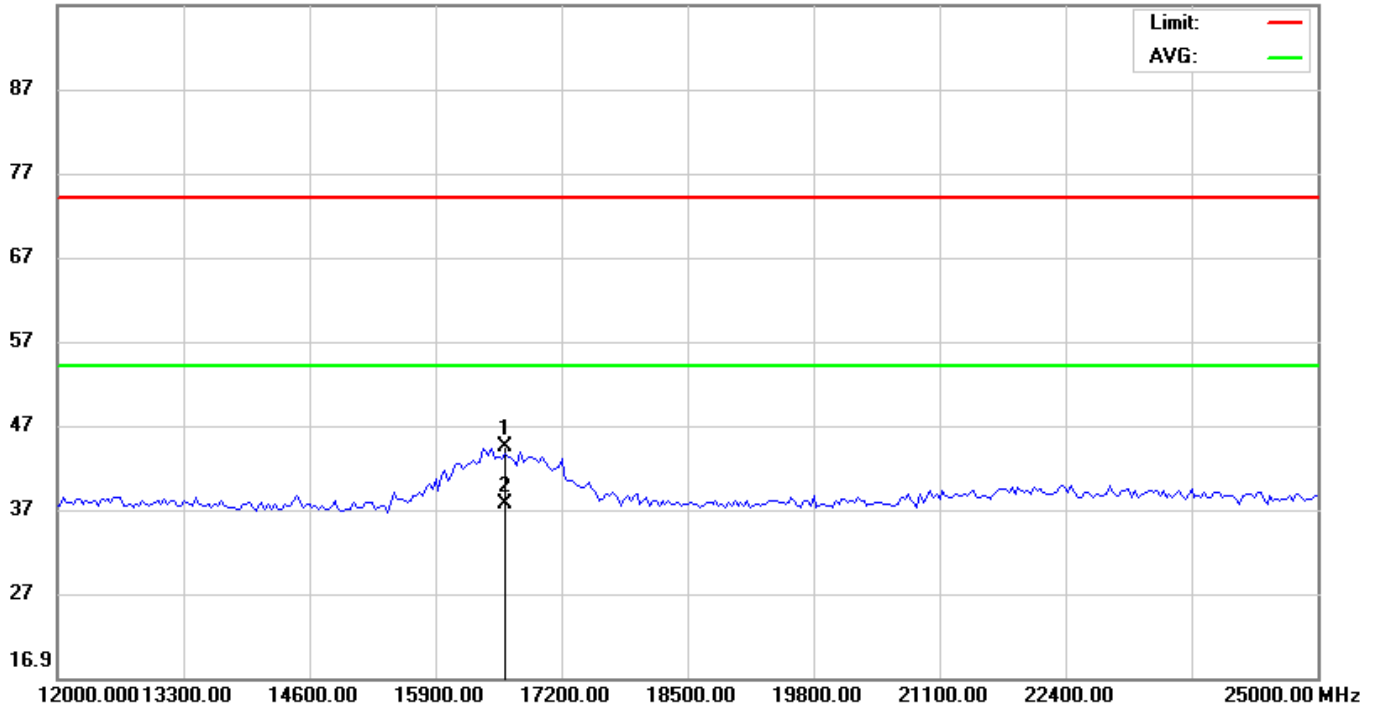

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|-------------------------|---------------------------|---------|
| 1   |     | 16615.00     | 38.68                    | 5.65                    | 44.33                      | 74.00           | -29.67     | peak     |                         |                           |         |
| 2   | *   | 16615.00     | 31.97                    | 5.65                    | 37.62                      | 54.00           | -16.38     | AVG      |                         |                           |         |

\*:Maximum data    x:Over limit    !:over margin


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH39               | Polarization: | Horizontal         |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8℃ / 53.5%           | Test date:    | 2016-09-09         |

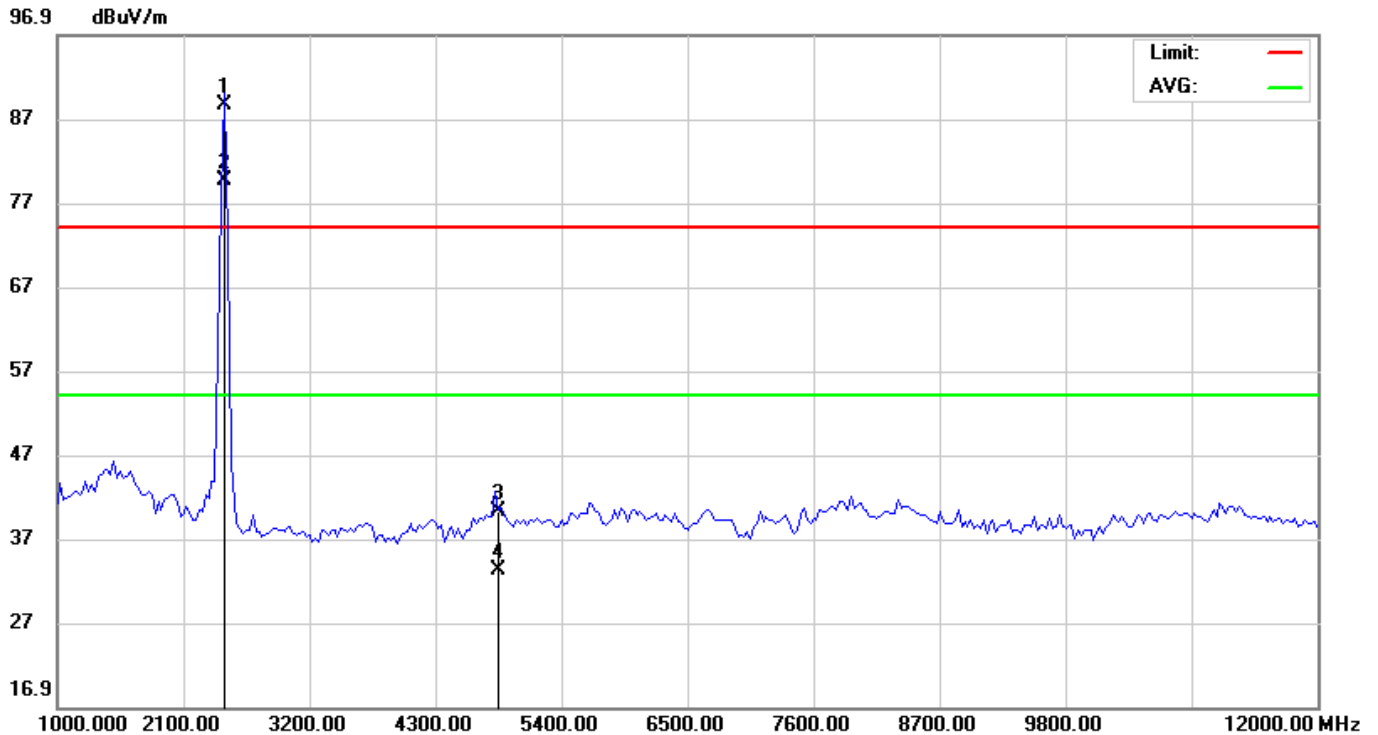

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   | X   | 2441.000 | 96.90         | -8.36          | 88.54       | 74.00  | 14.54  |                |              | peak    |
| 2   | *   | 2441.000 | 87.90         | -8.36          | 79.54       | 54.00  | 25.54  |                |              | AVG     |
| 3   |     | 4824.000 | 46.20         | -5.91          | 40.29       | 74.00  | -33.71 |                |              | peak    |
| 4   |     | 4824.000 | 39.10         | -5.91          | 33.19       | 54.00  | -20.81 |                |              | AVG     |

\*:Maximum data    x:Over limit    !:over margin


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH39               | Polarization: | Horizontal         |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8°C / 53.5%          | Test date:    | 2016-09-09         |

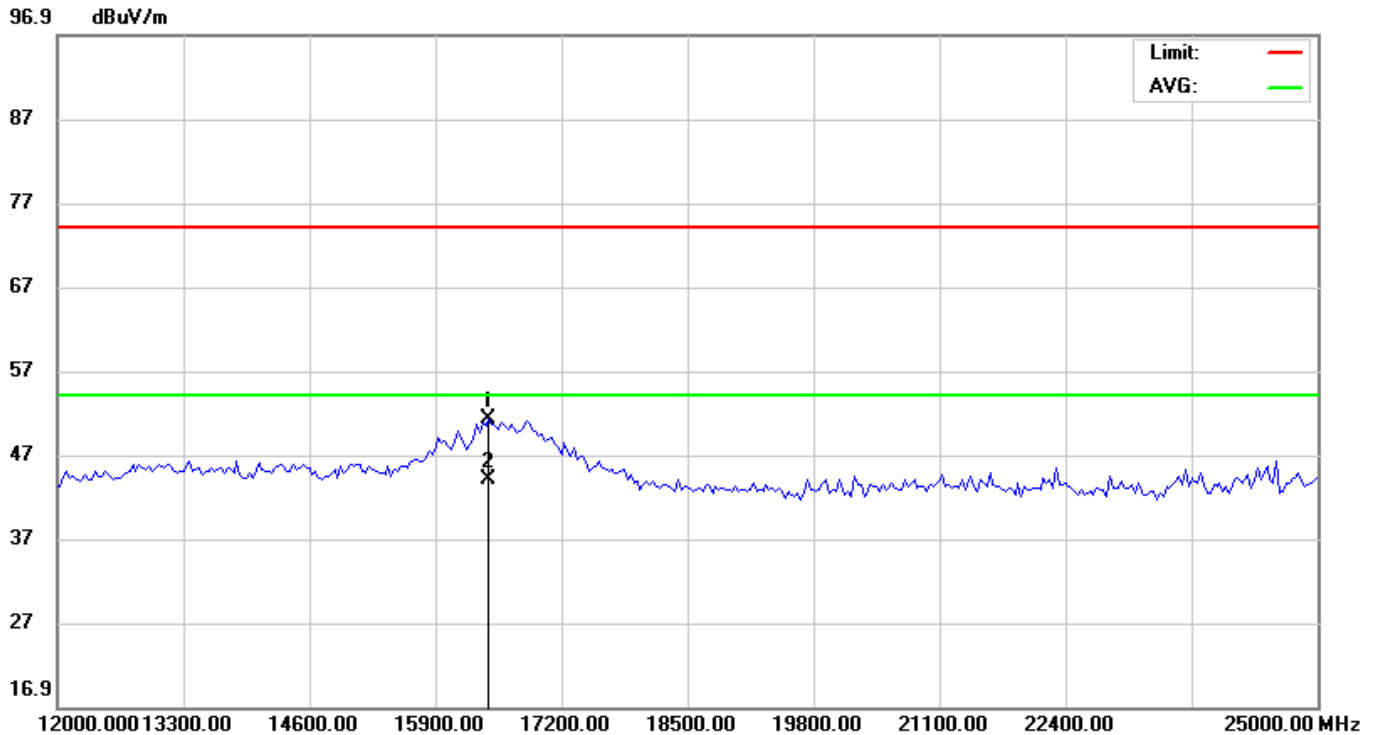

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 16452.50 | 46.13         | 5.01           | 51.14       | 74.00  | -22.86 |                |              | peak    |
| 2   | *   | 16452.50 | 38.97         | 5.01           | 43.98       | 54.00  | -10.02 |                |              | AVG     |

\*:Maximum data    x:Over limit    !:over margin

|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH39               | Polarization: | Vertical           |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8°C / 53.5%          | Test date:    | 2016-09-09         |

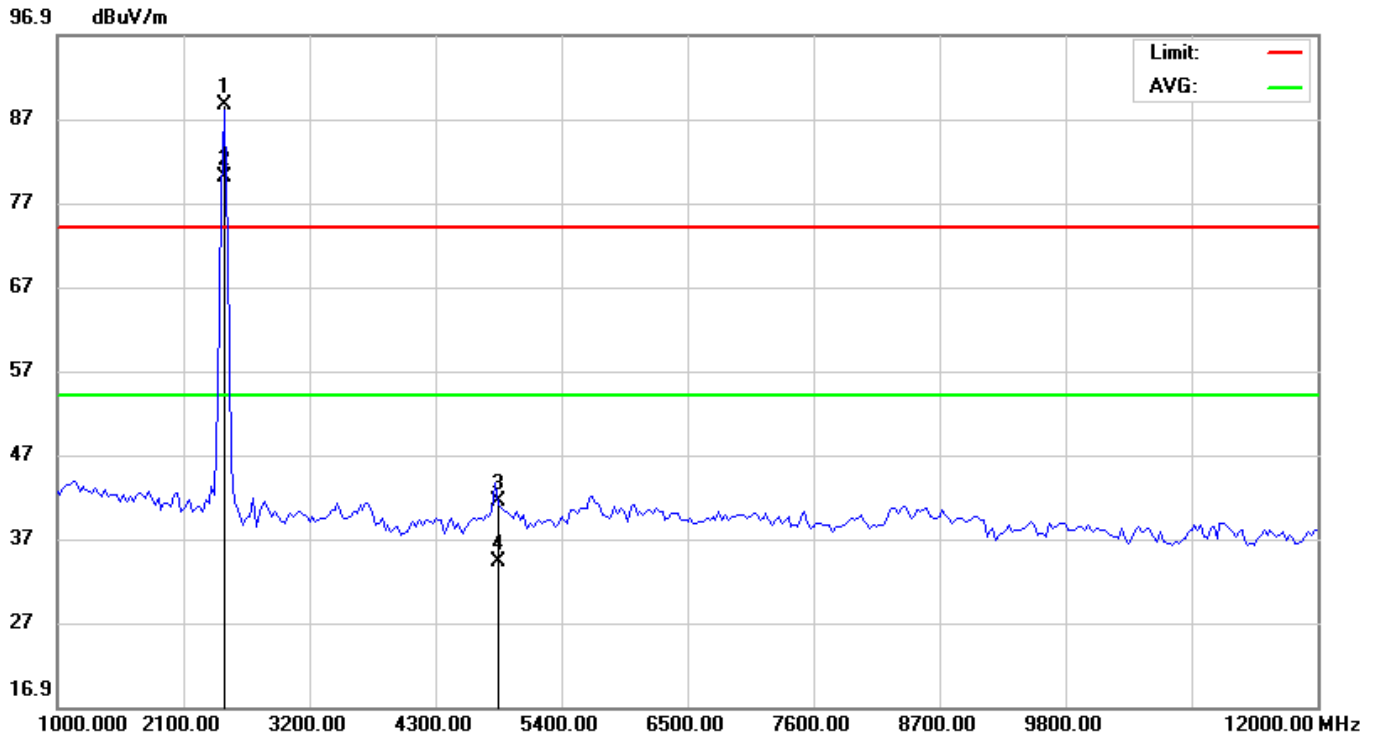


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|-------------------------|---------------------------|---------|
| 1   | X   | 2441.000     | 96.90                    | -8.36                   | 88.54                      | 74.00           | 14.54      | peak     |                         |                           |         |
| 2   | *   | 2441.000     | 88.40                    | -8.36                   | 80.04                      | 54.00           | 26.04      | AVG      |                         |                           |         |
| 3   |     | 4824.000     | 47.30                    | -5.91                   | 41.39                      | 74.00           | -32.61     | peak     |                         |                           |         |
| 4   |     | 4824.000     | 40.20                    | -5.91                   | 34.29                      | 54.00           | -19.71     | AVG      |                         |                           |         |

\*:Maximum data    x:Over limit    !:over margin

|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH39               | Polarization: | Vertical           |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8℃ / 53.5%           | Test date:    | 2016-09-09         |


96.9 dBuV/m

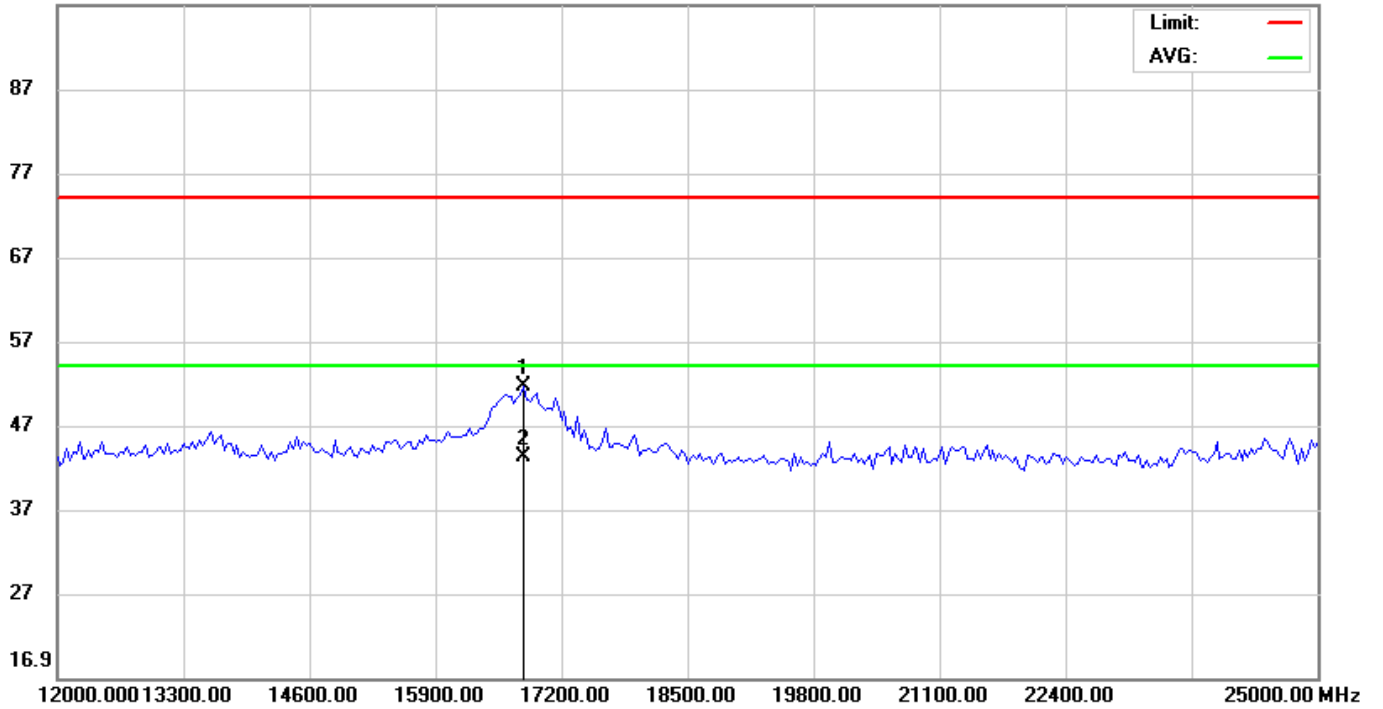

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|-----------------|---------|
| 1   |     | 16810.00     | 45.22                    | 6.30                    | 51.52                      | 74.00           | -22.48     | peak                    |                 |         |
| 2   | *   | 16810.00     | 36.90                    | 6.30                    | 43.20                      | 54.00           | -10.80     | AVG                     |                 |         |

\*:Maximum data    x:Over limit    !:over margin


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH78               | Polarization: | Horizontal         |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8°C / 53.5%          | Test date:    | 2016-09-09         |

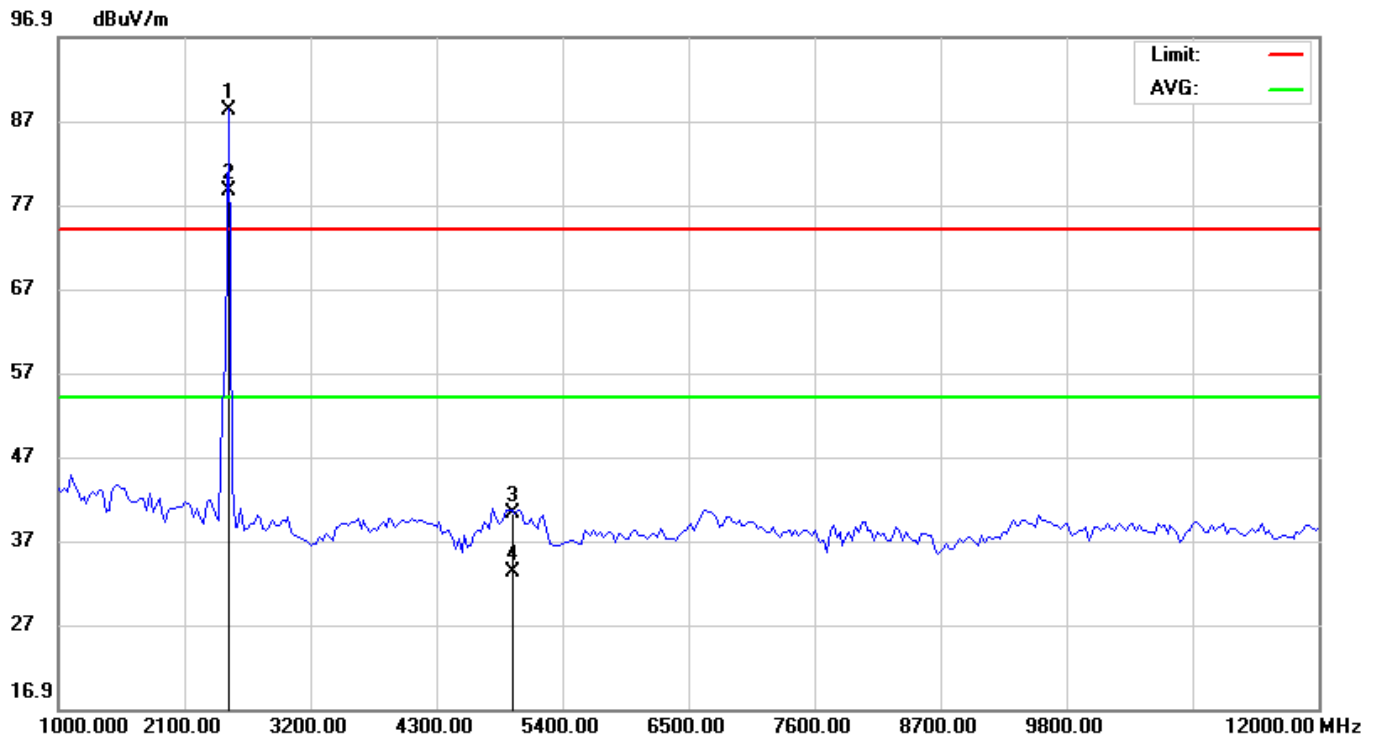

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   | X   | 2480.000 | 96.50         | -8.30          | 88.20       | 74.00  | 14.20  |                |              | peak    |
| 2   | *   | 2480.000 | 86.90         | -8.30          | 78.60       | 54.00  | 24.60  |                |              | AVG     |
| 3   |     | 4960.000 | 44.50         | -4.27          | 40.23       | 74.00  | -33.77 |                |              | peak    |
| 4   |     | 4960.000 | 37.40         | -4.27          | 33.13       | 54.00  | -20.87 |                |              | AVG     |

\*:Maximum data    x:Over limit    !:over margin

|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH78               | Polarization: | Horizontal         |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8℃ / 53.5%           | Test date:    | 2016-09-09         |

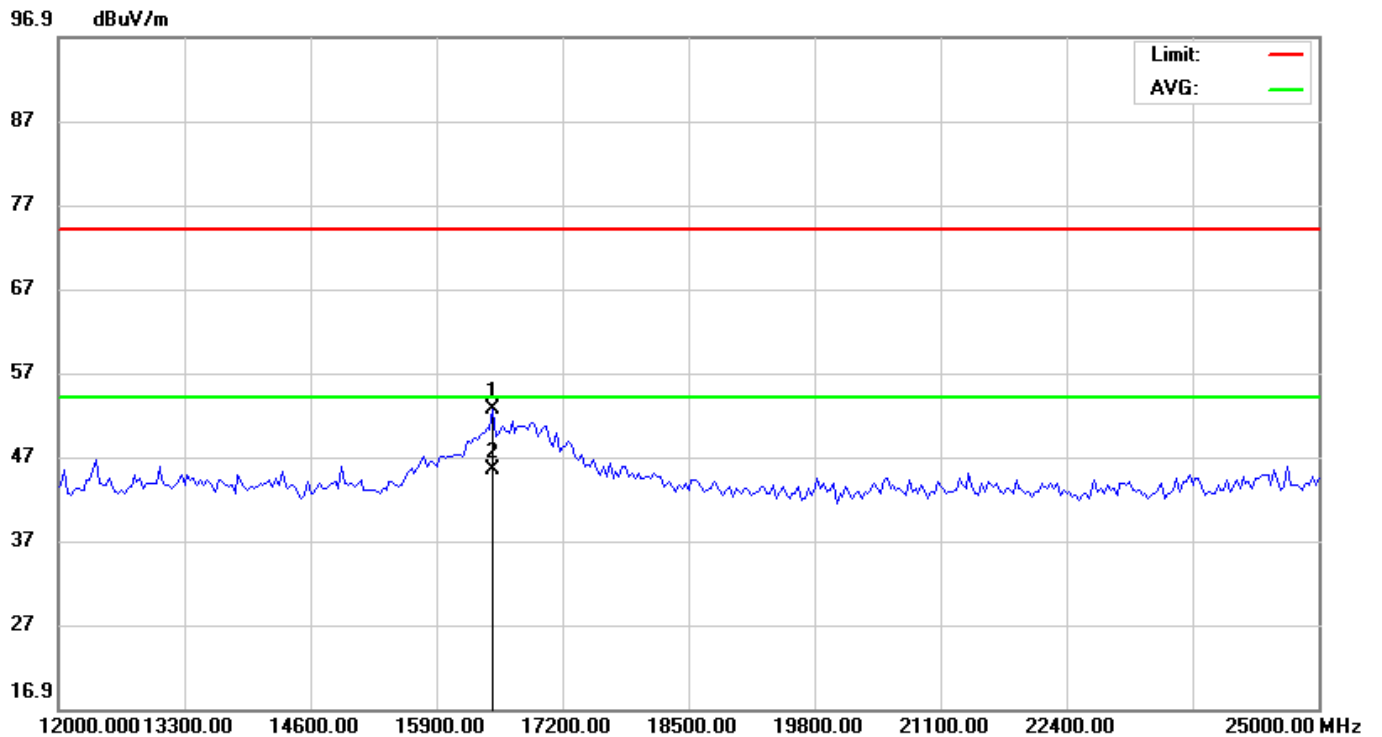


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 16485.00 | 47.49         | 5.19           | 52.68       | 74.00  | -21.32 |                |              | peak    |
| 2   | *   | 16485.00 | 40.12         | 5.19           | 45.31       | 54.00  | -8.69  |                |              | AVG     |

\*:Maximum data    x:Over limit    !:over margin



|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH78               | Polarization: | Vertical           |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8°C / 53.5%          | Test date:    | 2016-09-09         |

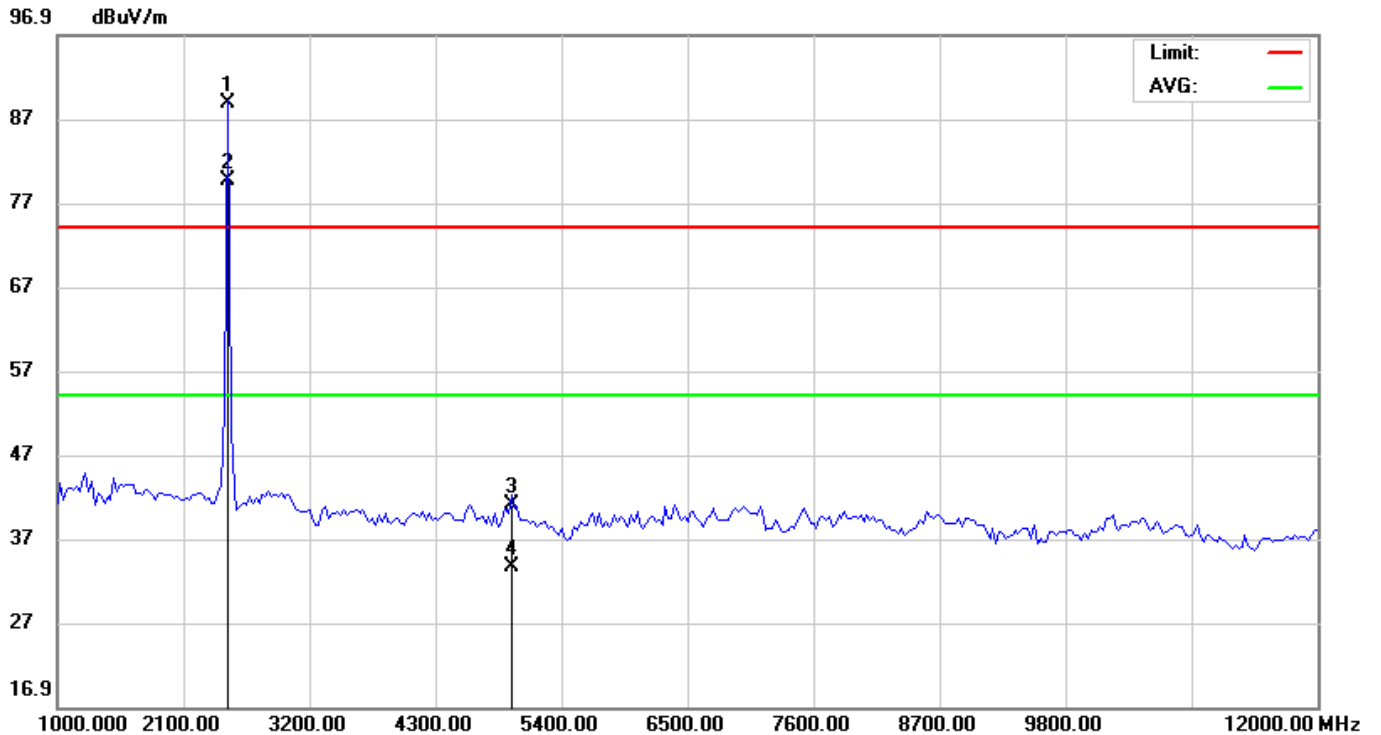


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   | X   | 2480.000 | 97.20         | -8.30          | 88.90       | 74.00  | 14.90  |                |              | peak    |
| 2   | *   | 2480.000 | 87.90         | -8.30          | 79.60       | 54.00  | 25.60  |                |              | AVG     |
| 3   |     | 4960.000 | 45.30         | -4.27          | 41.03       | 74.00  | -32.97 |                |              | peak    |
| 4   |     | 4960.000 | 37.90         | -4.27          | 33.63       | 54.00  | -20.37 |                |              | AVG     |

\*:Maximum data    x:Over limit    !:over margin

|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH78               | Polarization: | Vertical           |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 22.8℃ / 53.5%           | Test date:    | 2016-09-09         |

96.9 dBuV/m

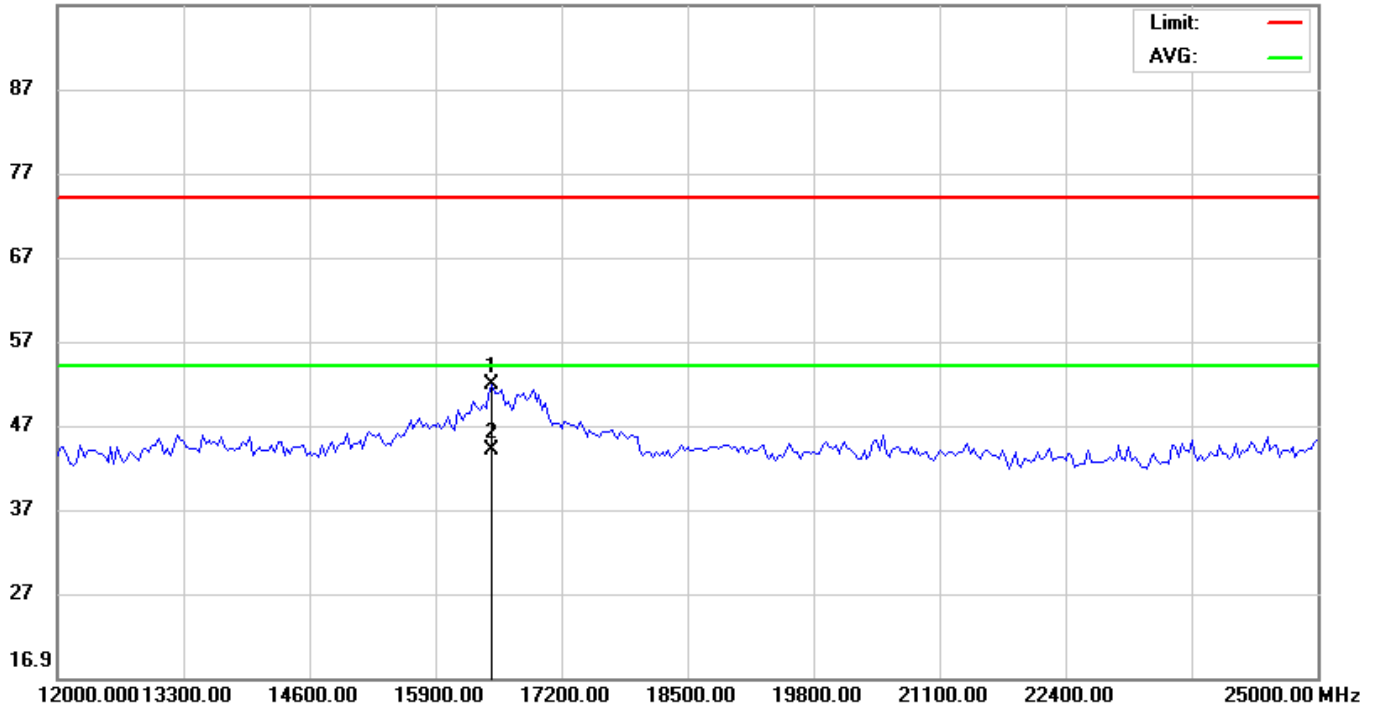

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|-----------------|---------|
| 1   |     | 16485.00     | 46.52                    | 5.19                    | 51.71                      | 74.00           | -22.29     | peak                    |                 |         |
| 2   | *   | 16485.00     | 38.84                    | 5.19                    | 44.03                      | 54.00           | -9.97      | AVG                     |                 |         |


\*:Maximum data    x:Over limit    !:over margin

## 5.5 Conducted Peak Output Power

### 5.5.1 Requirement

According to FCC Section 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725– 5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

### 5.5.2 Block Diagram of Test Setup

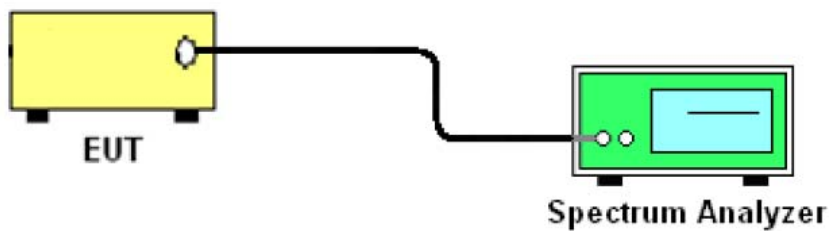


### 5.5.3 Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.


### 5.5.4 Test Result

|            |                   |                     |      |
|------------|-------------------|---------------------|------|
| Test Item: | Peak Output Power | Temperature :       | 21°C |
| Tested by: | Kang              | Relative Humidity : | 59%  |


| Mode                  | Channel | Frequency (MHz) | Peak Output Power(dBm) | Limit |       | Pass/Fail |
|-----------------------|---------|-----------------|------------------------|-------|-------|-----------|
|                       |         |                 |                        | (mW)  | (dBm) |           |
| BDR (GFSK)            | Low     | 2402            | 4.713                  | 125   | 20.97 | Pass      |
|                       | Middle  | 2441            | 4.704                  | 125   | 20.97 | Pass      |
|                       | High    | 2480            | 4.812                  | 125   | 20.97 | Pass      |
| EDR ( $\pi/4$ -DQPSK) | Low     | 2402            | 3.805                  | 125   | 20.97 | Pass      |
|                       | Middle  | 2441            | 3.846                  | 125   | 20.97 | Pass      |
|                       | High    | 2480            | 4.025                  | 125   | 20.97 | Pass      |
| EDR (8DPSK)           | Low     | 2402            | 3.953                  | 125   | 20.97 | Pass      |
|                       | Middle  | 2441            | 3.960                  | 125   | 20.97 | Pass      |
|                       | High    | 2480            | 4.122                  | 125   | 20.97 | Pass      |

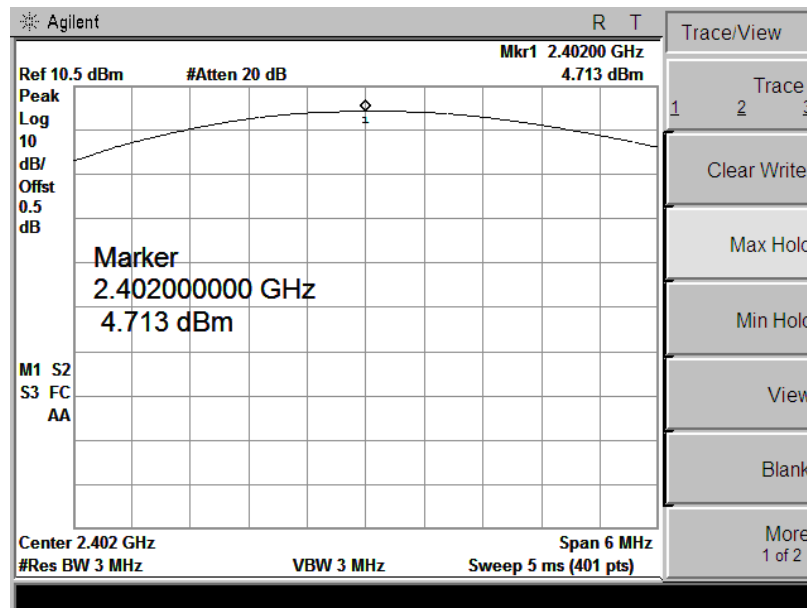


Ch 0

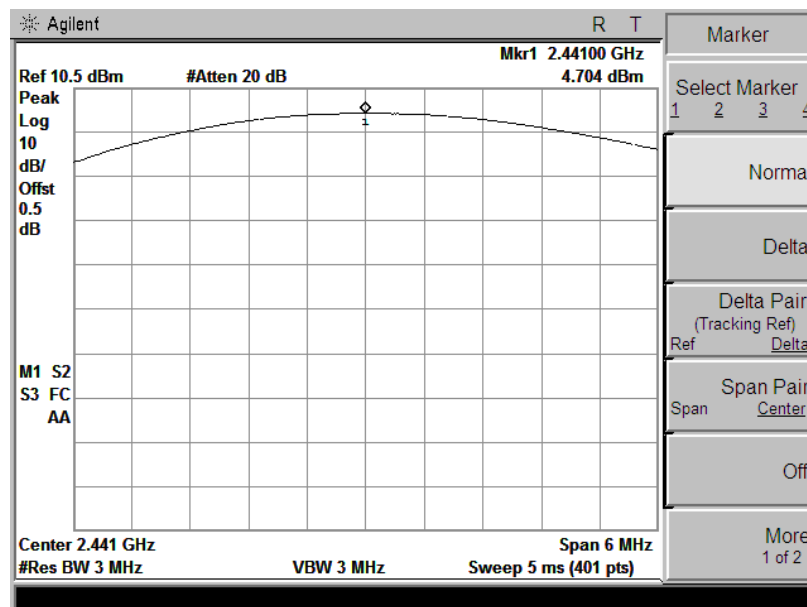


Ch 39

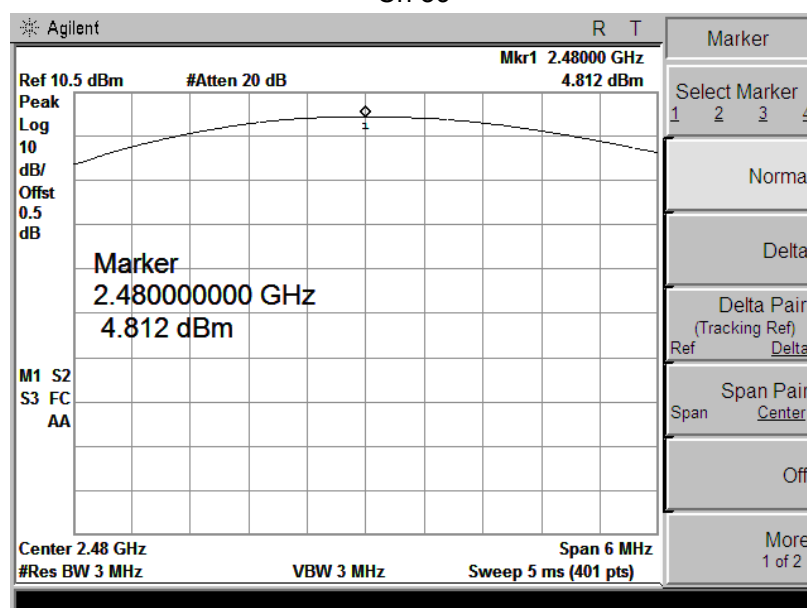


Ch 78

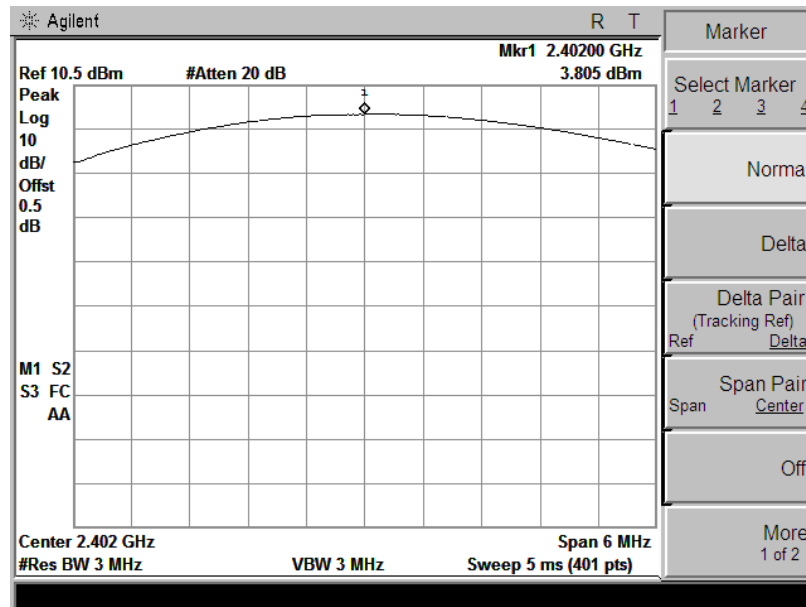$\pi/4$ -DQPSK Mode

Ch 0

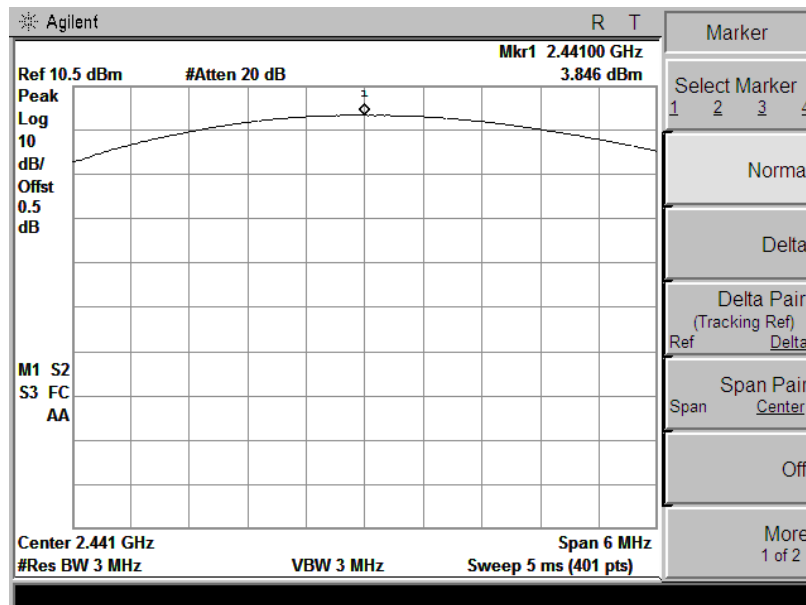


Ch 39

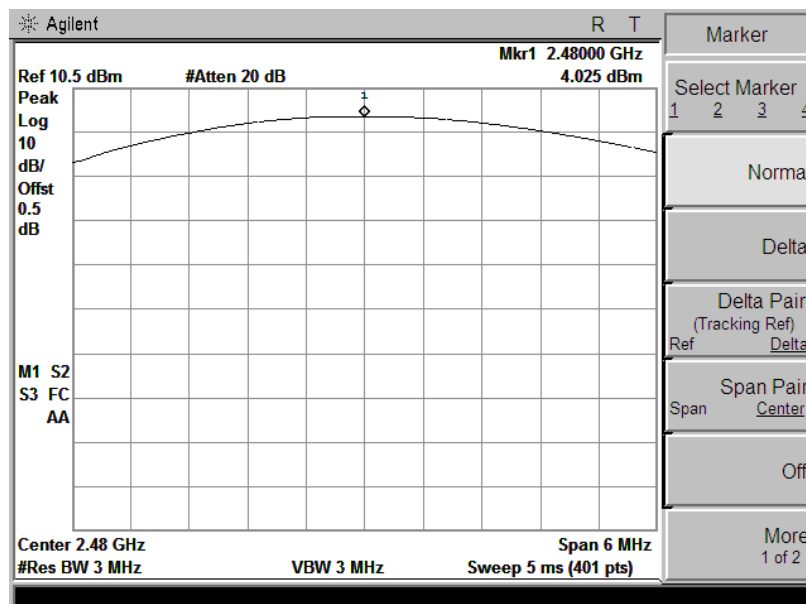


Ch 78


## 8DPSK Mode

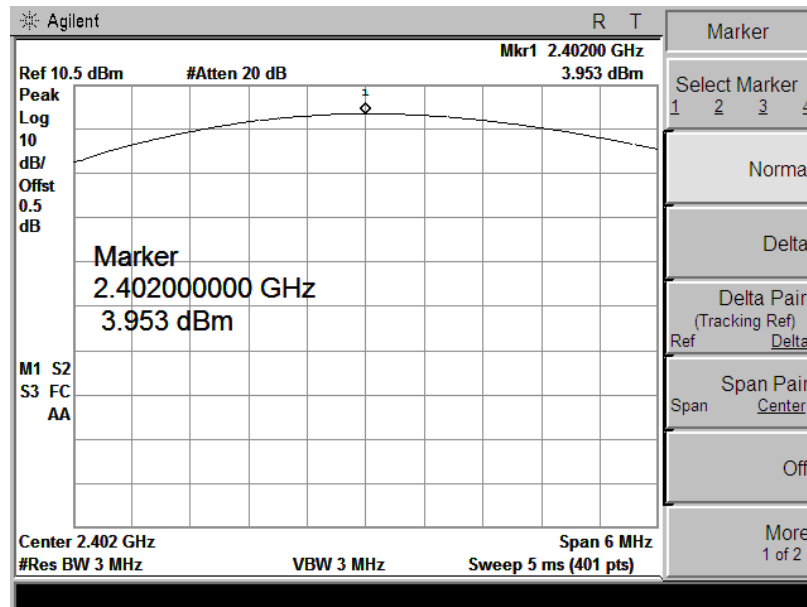

## Ch 0

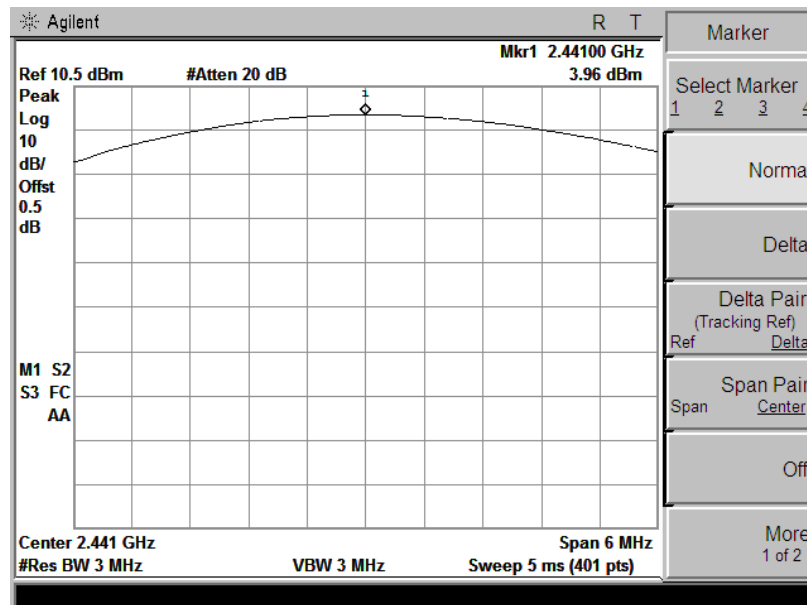

## Ch 39

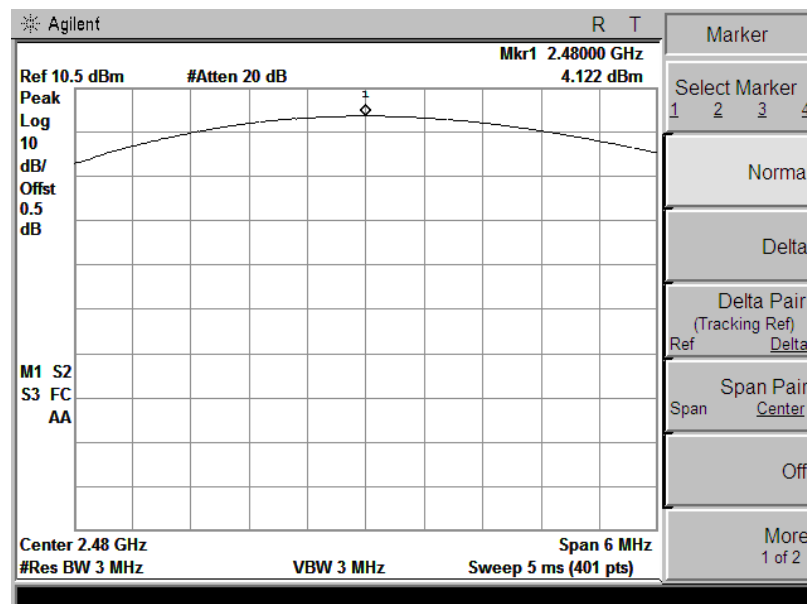

## 5.6 20dB Emission Bandwidth

### 5.6.1 Test Requirement

The bandwidth of a frequency hopping channel is the -20 dB emission bandwidth, measured with the hopping stopped.

### 5.6.2 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### 5.6.3 Test Result


|                   |                         |                            |      |
|-------------------|-------------------------|----------------------------|------|
| <b>Test Item:</b> | 20dB Emission Bandwidth | <b>Temperature :</b>       | 23°C |
| <b>Tested by:</b> | Kang                    | <b>Relative Humidity :</b> | 65%  |

| Mode                     | Channel | Frequency (MHz) | 20dB Bandwidth(MHz) |
|--------------------------|---------|-----------------|---------------------|
| BDR<br>(GFSK)            | Low     | 2402            | 0.937               |
|                          | Middle  | 2441            | 0.939               |
|                          | High    | 2480            | 0.946               |
| EDR<br>( $\pi/4$ -DQPSK) | Low     | 2402            | 1.280               |
|                          | Middle  | 2441            | 1.252               |
|                          | High    | 2480            | 1.200               |
| EDR<br>(8DPSK)           | Low     | 2402            | 1.264               |
|                          | Middle  | 2441            | 1.271               |
|                          | High    | 2480            | 1.301               |


## GFSK Mode

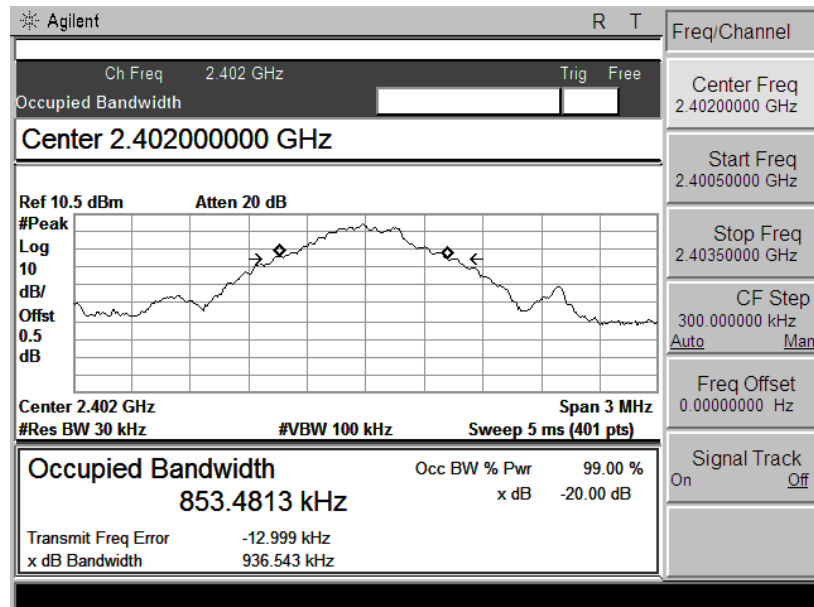

## Ch 0

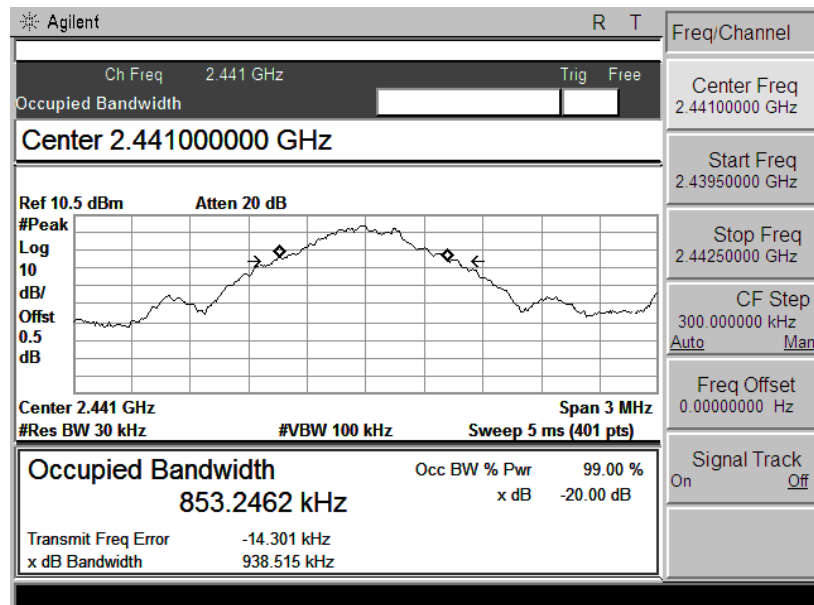


## Ch 39

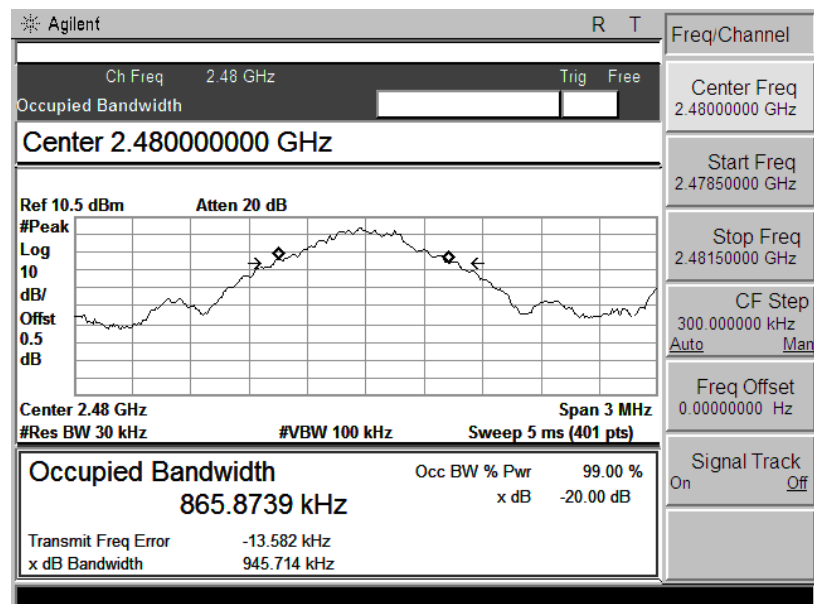


## Ch 78

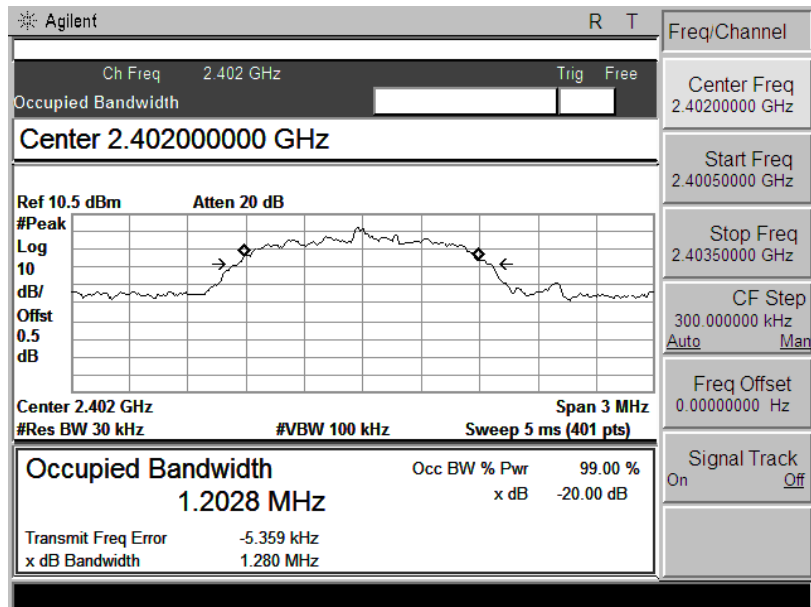


$\pi/4$ -DQPSK Mode

## Ch 0

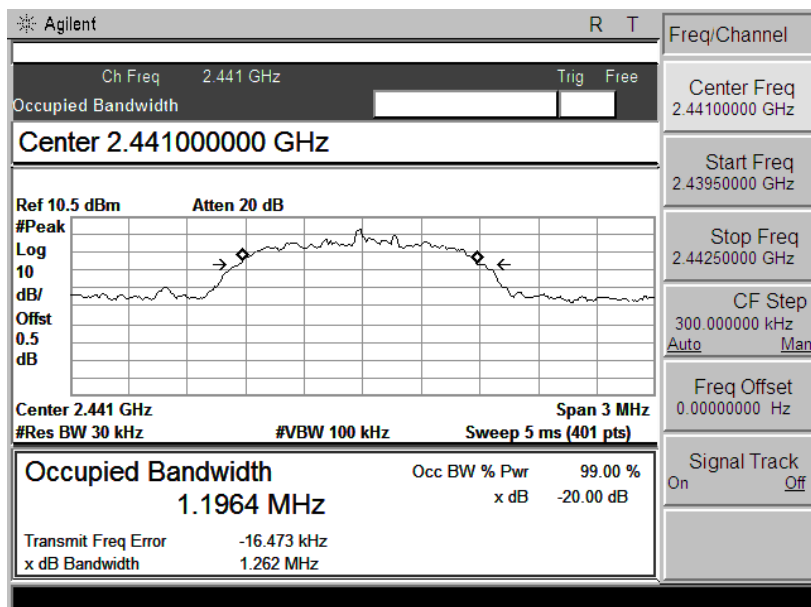


## Ch 39

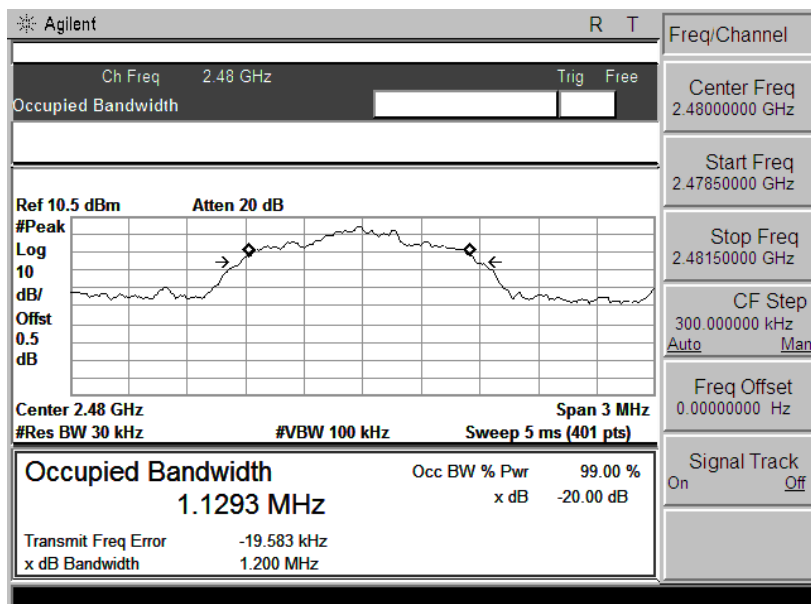


## Ch 78


## 8DPSK Mode

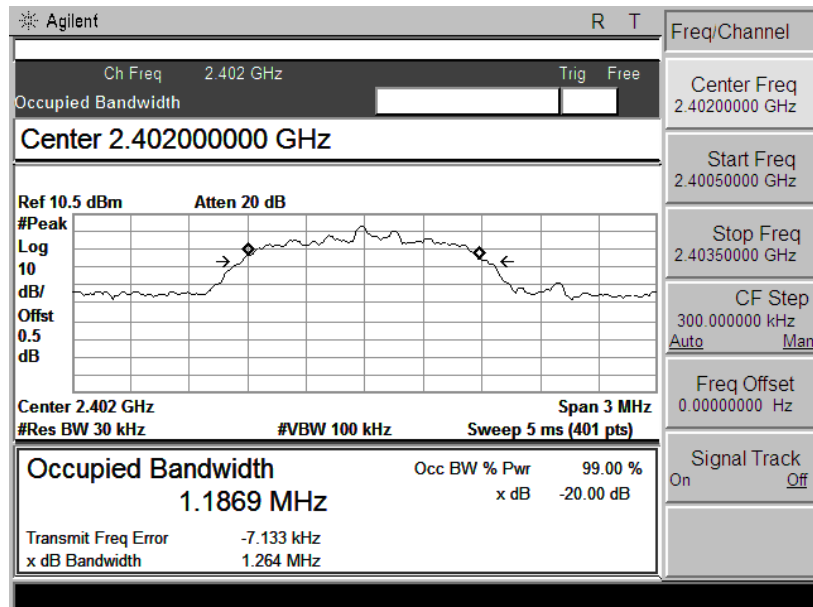

## Ch 0

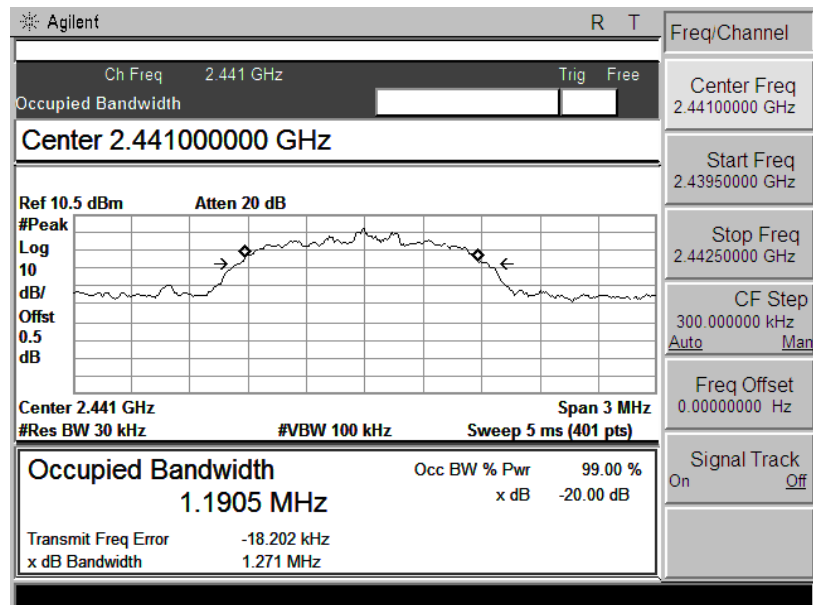

## Ch 39

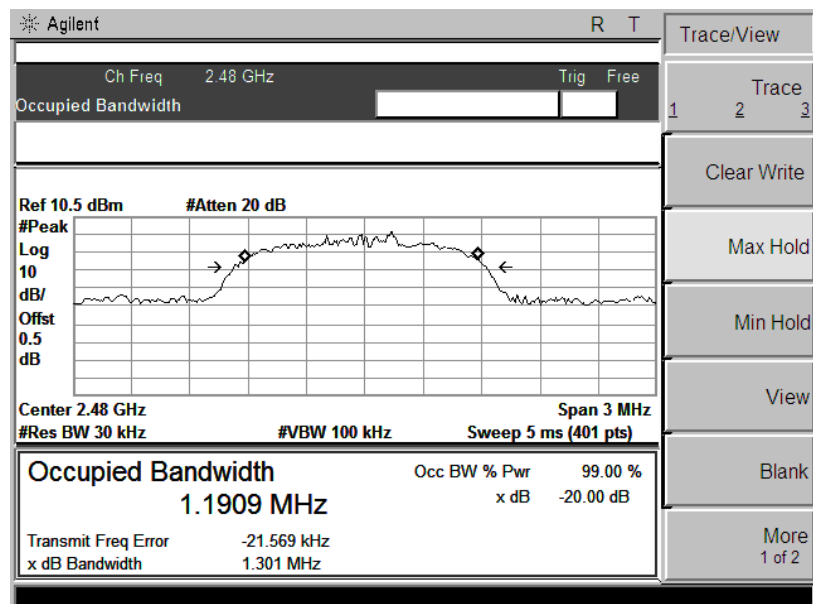

## 5.7 Carrier Frequency Separation

### 5.7.1 Test Requirement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### 5.7.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span=wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span

Video (or Average) Bandwidth (VBW)  $\leq$  RBW

Sweep=auto

Detector function=peak


Trace=max hold

### 5.7.3 Test Result


|                   |                              |                            |      |
|-------------------|------------------------------|----------------------------|------|
| <b>Test Item:</b> | Carrier Frequency Separation | <b>Temperature :</b>       | 23°C |
| <b>Tested by:</b> | Kang                         | <b>Relative Humidity :</b> | 65%  |

| Mode                  | Channel | Frequency (MHz) | Channel Separation (MHz) | Limit (MHz) | Result |
|-----------------------|---------|-----------------|--------------------------|-------------|--------|
| BDR (GFSK)            | Low     | 2402            | 0.975                    | 0.625       | Pass   |
|                       | Middle  | 2441            | 0.998                    | 0.626       | Pass   |
|                       | High    | 2480            | 0.983                    | 0.631       | Pass   |
| EDR ( $\pi/4$ -DQPSK) | Low     | 2402            | 1.028                    | 0.853       | Pass   |
|                       | Middle  | 2441            | 1.005                    | 0.835       | Pass   |
|                       | High    | 2480            | 1.013                    | 0.800       | Pass   |
| EDR (8DPSK)           | Low     | 2402            | 1.020                    | 0.843       | Pass   |
|                       | Middle  | 2441            | 1.028                    | 0.847       | Pass   |
|                       | High    | 2480            | 1.020                    | 0.867       | Pass   |


## GFSK Mode

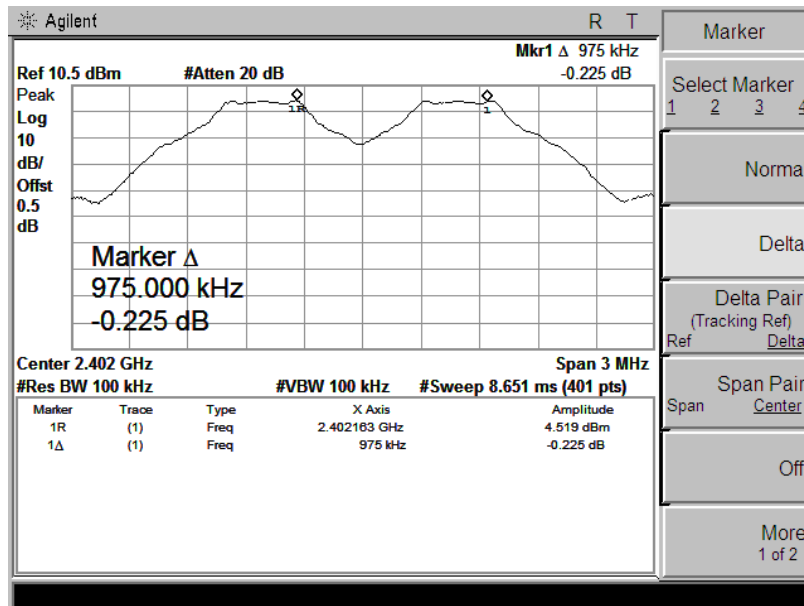


Ch 0

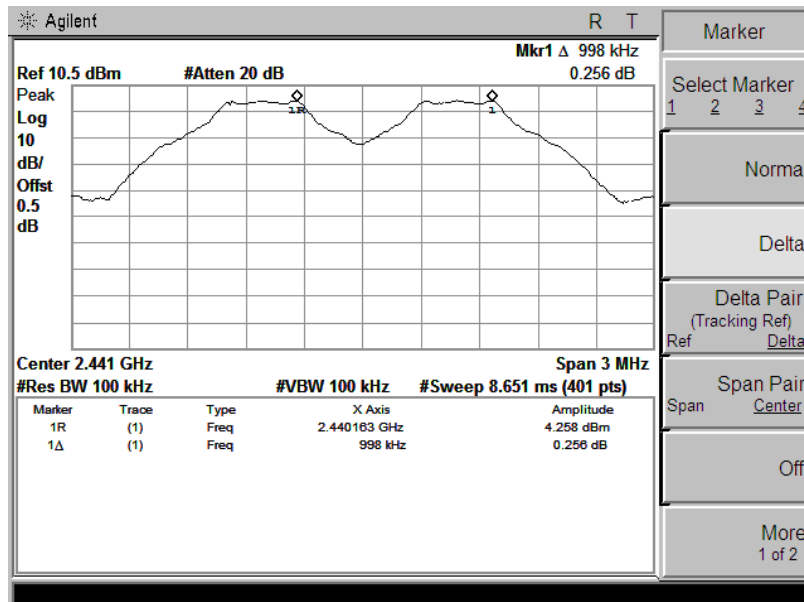


Ch 39

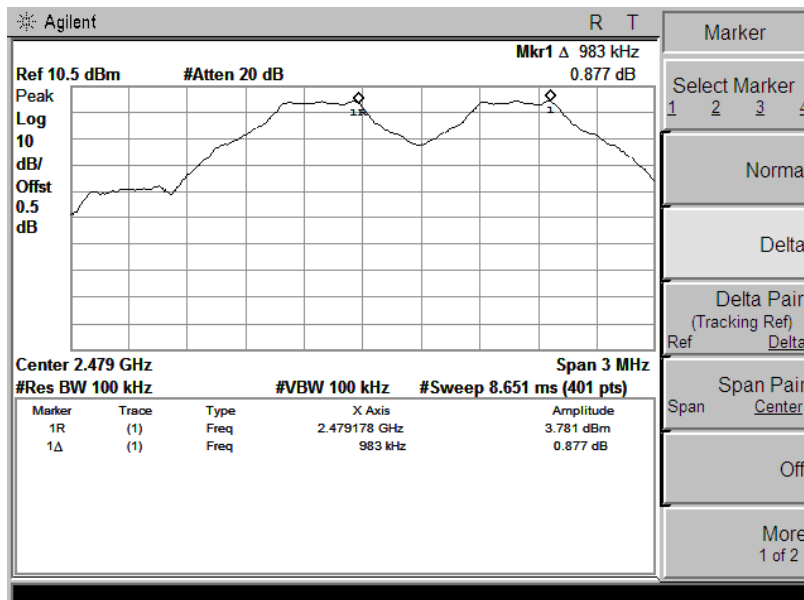


Ch 78

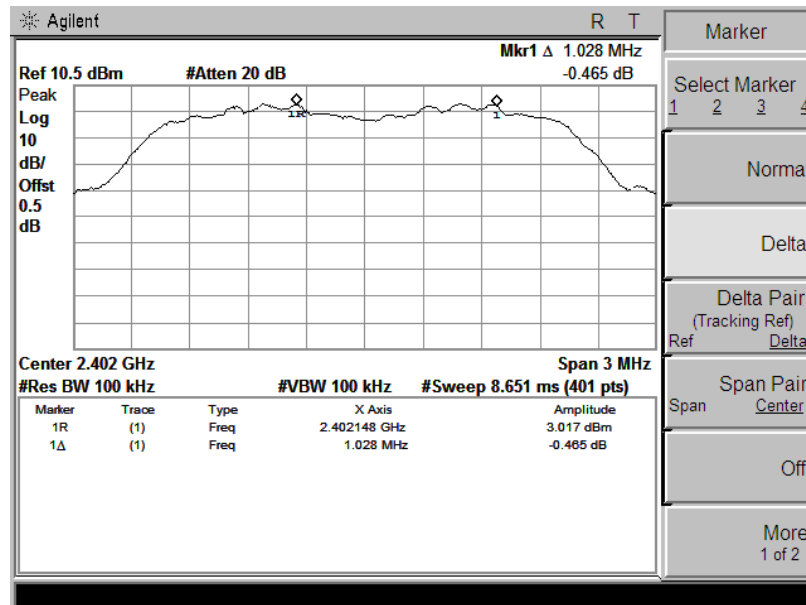$\pi/4$ -DQPSK Mode

## Ch 0

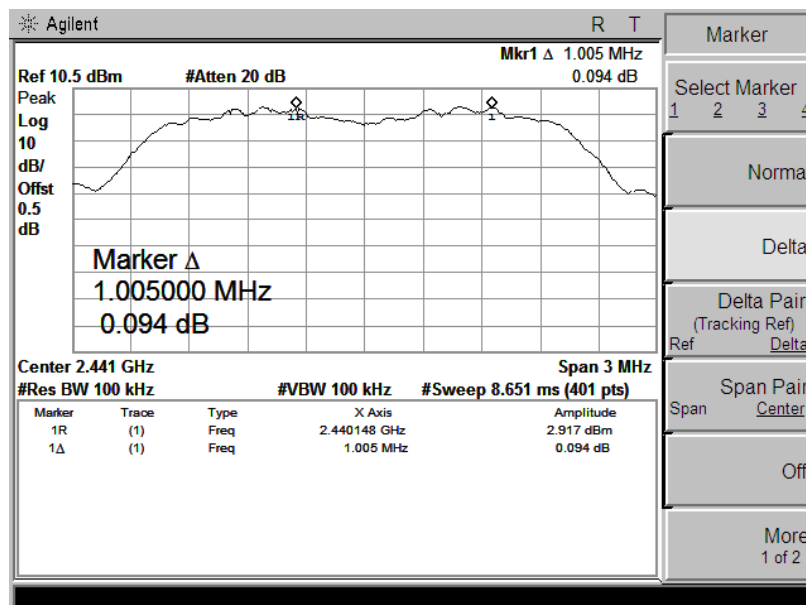


## Ch 39

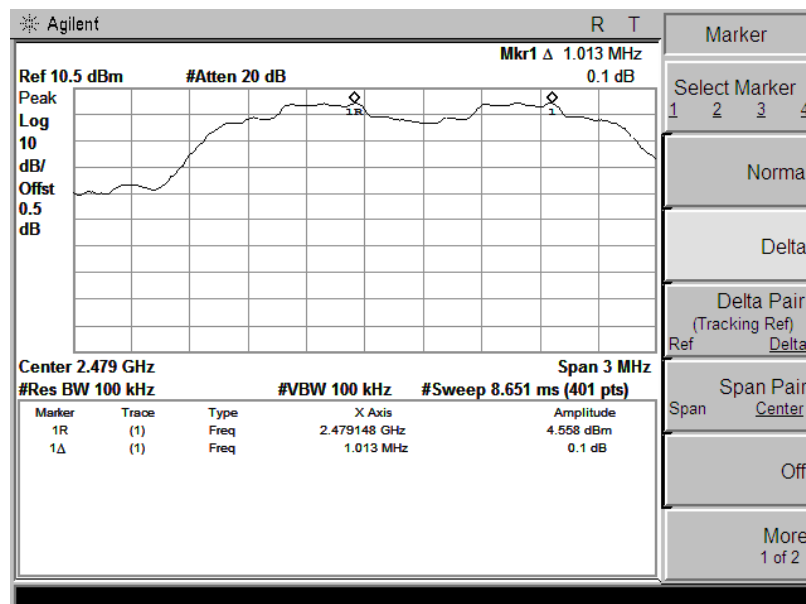


## Ch 78


## 8DPSK Mode

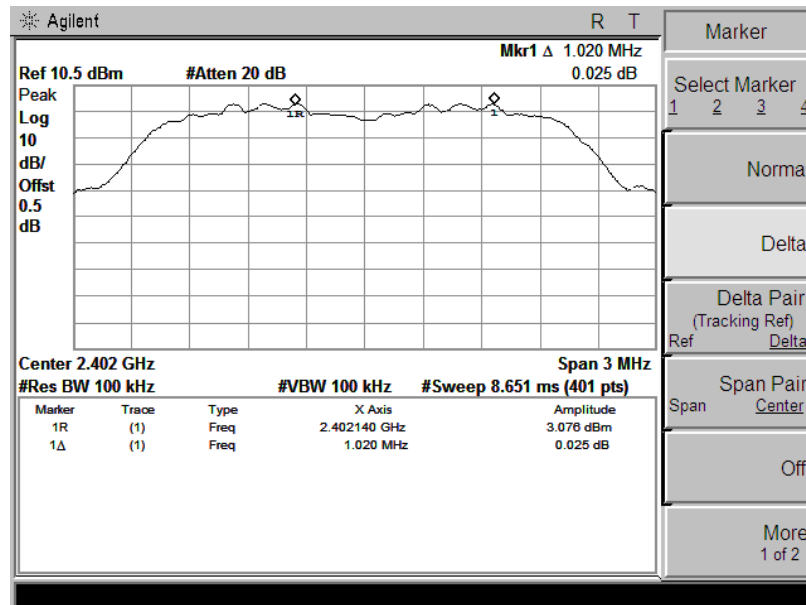

## Ch 0

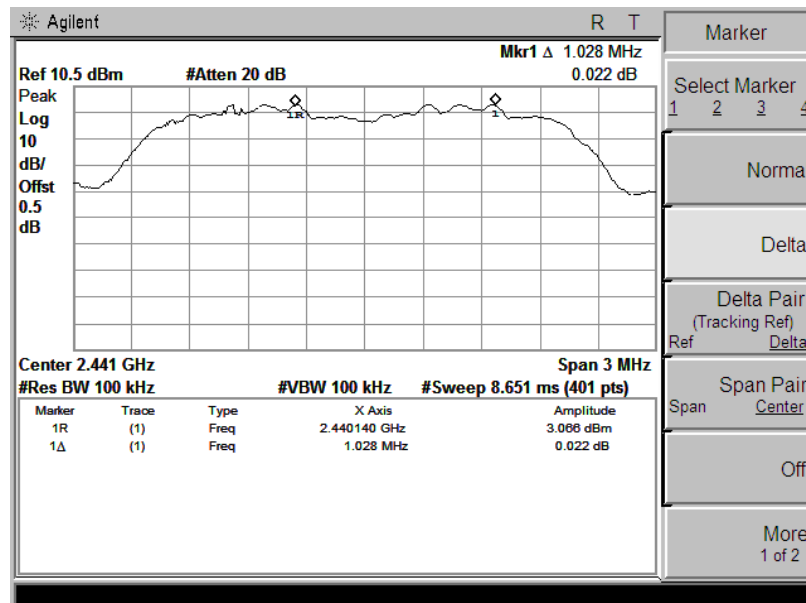

## Ch 39

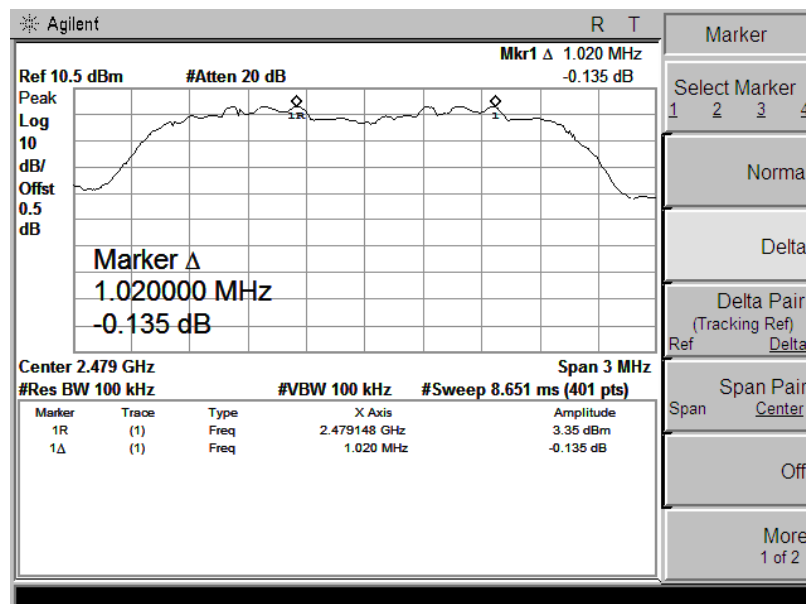

## Ch 78

## 5.8 Number of Hopping Channel

### 5.8.1 Test Requirement

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


### 5.8.2 Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.



### 5.8.3 Test Result

|                   |                           |                            |      |
|-------------------|---------------------------|----------------------------|------|
| <b>Test Item:</b> | Number of Hopping Channel | <b>Temperature :</b>       | 23°C |
| <b>Tested by:</b> | Kang                      | <b>Relative Humidity :</b> | 65%  |

| Mode           | Frequency Range (MHz) | Number of Hopping Channel | Limit |
|----------------|-----------------------|---------------------------|-------|
| GFSK           | 2400-2483.5           | 79                        | ≥15   |
| $\pi/4$ -DQPSK | 2400-2483.5           | 79                        | ≥15   |
| 8DPSK          | 2400-2483.5           | 79                        | ≥15   |

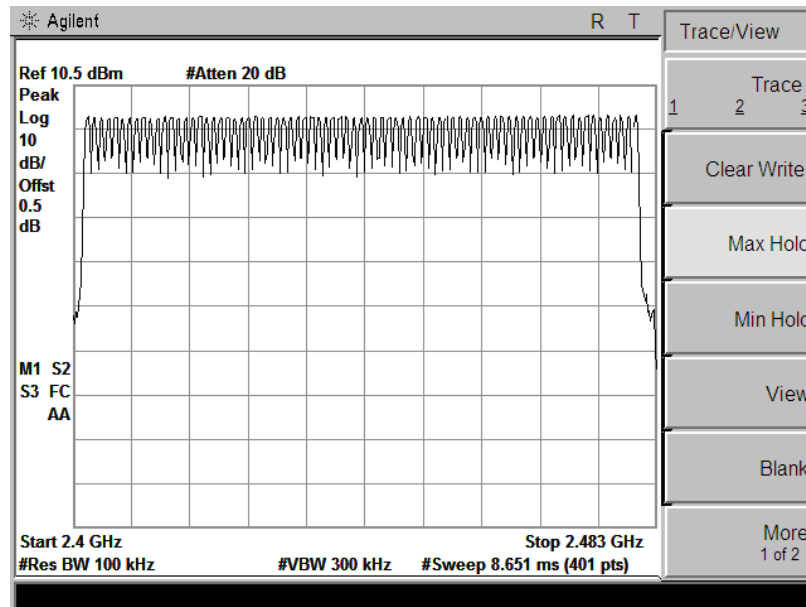

GFSK Mode

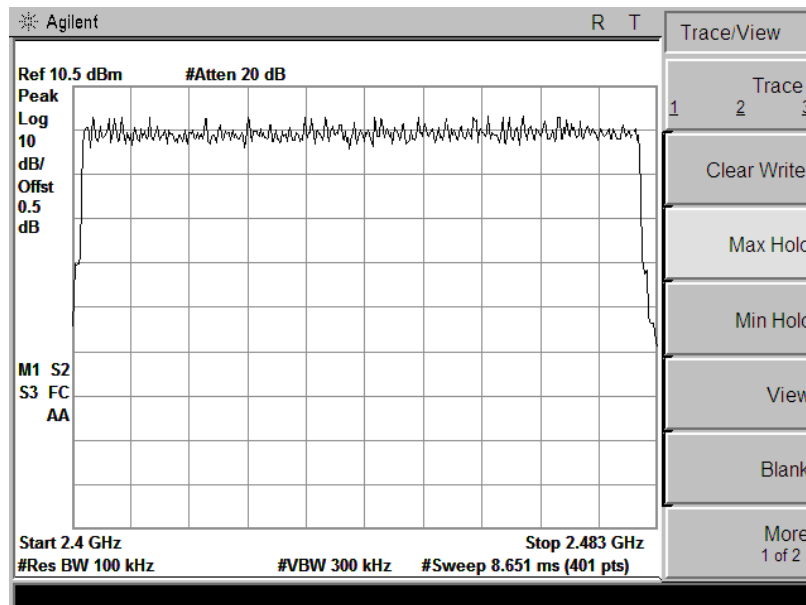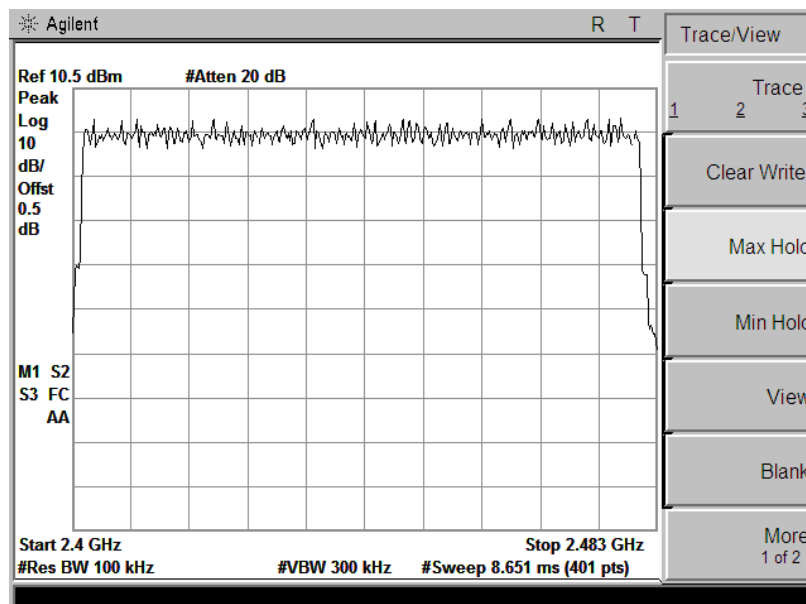 $\pi/4$ -DQPSK

8DPSK Mode



## 5.9 Dwell Time

### 5.9.1 Test Requirement

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 5.9.2 Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 \* channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length \* hope rate/ number of hopping channels \* 31.6s Hop rate=1600/s

### 5.9.3 Test Result

|            |            |                     |      |
|------------|------------|---------------------|------|
| Test Item: | Dwell Time | Temperature :       | 25°C |
| Tested by: | Henry      | Relative Humidity : | 65%  |


| Mode          | Packet | Pulse Time (ms) | Dwell Time(ms) | Limit(ms) | Result |
|---------------|--------|-----------------|----------------|-----------|--------|
| GFSK          | DH1    | 0.497           | 159.04         | 400       | Pass   |
|               | DH3    | 1.752           | 280.32         | 400       | Pass   |
|               | DH5    | 3.028           | 323.00         | 400       | Pass   |
| $\pi/4$ DQPSK | 2DH1   | 0.460           | 147.20         | 400       | Pass   |
|               | 2DH3   | 1.730           | 276.80         | 400       | Pass   |
|               | 2DH5   | 3.028           | 323.00         | 400       | Pass   |
| 8DPSK         | 3DH1   | 0.450           | 144.00         | 400       | Pass   |
|               | 3DH3   | 1.773           | 283.68         | 400       | Pass   |
|               | 3DH5   | 3.006           | 320.65         | 400       | Pass   |

Note: DH1/2DH1/3DH1: Dwell Time=Pulse Time(ms)X[(1600/2/79)X31.6]


DH3/2DH3/3DH3: Dwell Time= Pulse Time(ms)X[(1600/4/79)X31.6]

DH5/2DH5/3DH5: Dwell Time= Pulse Time(ms)X[(1600/6/79)X31.6]


## GFSK Mode

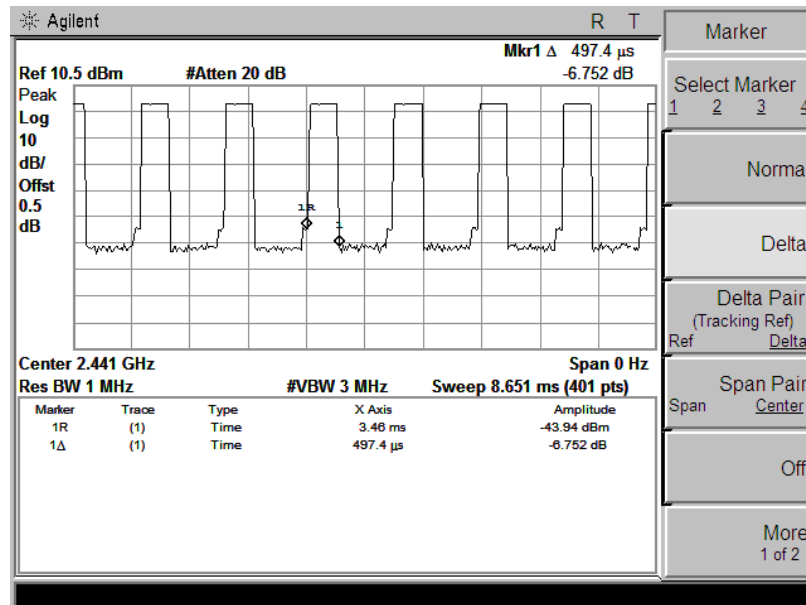


## DH1

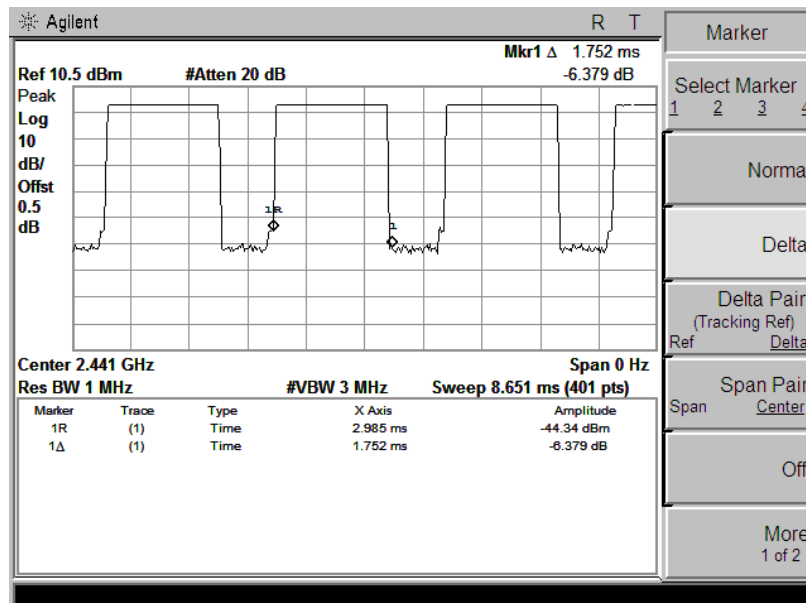


## DH3

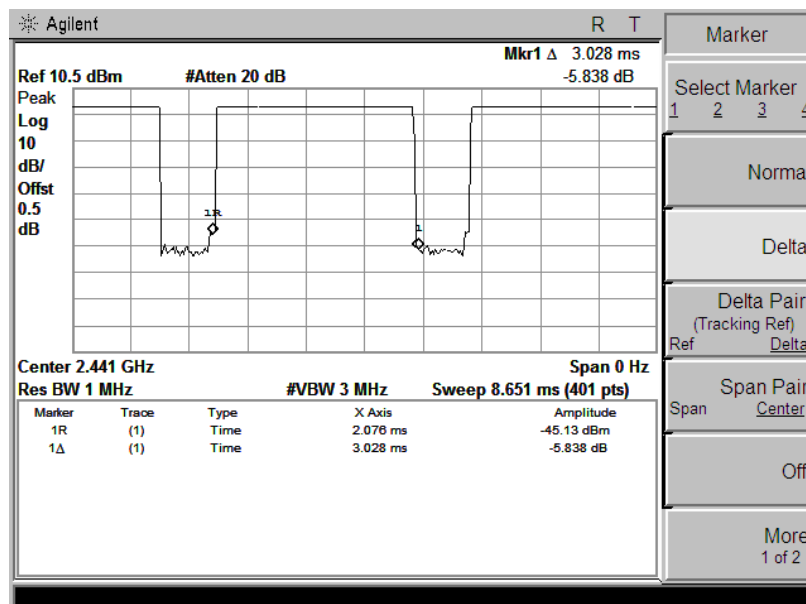


## DH5

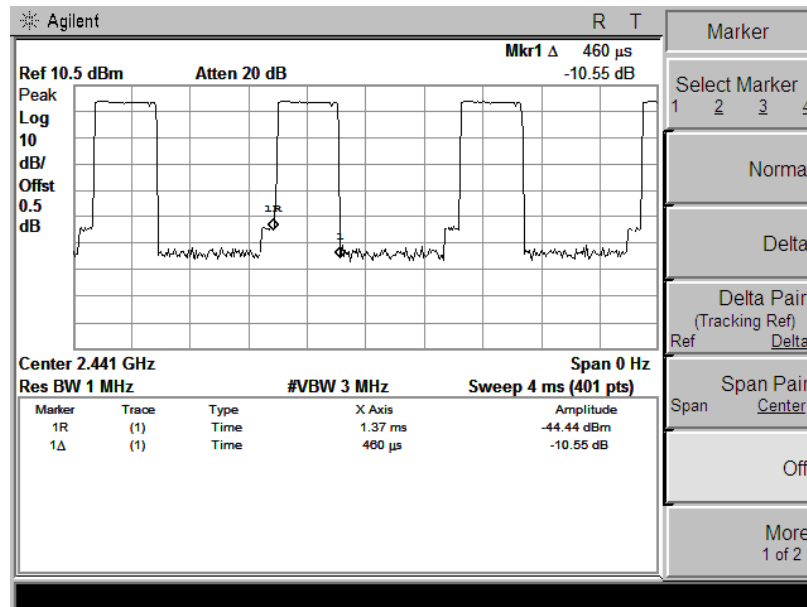$\pi/4$ -DQPSK Mode

## DH1

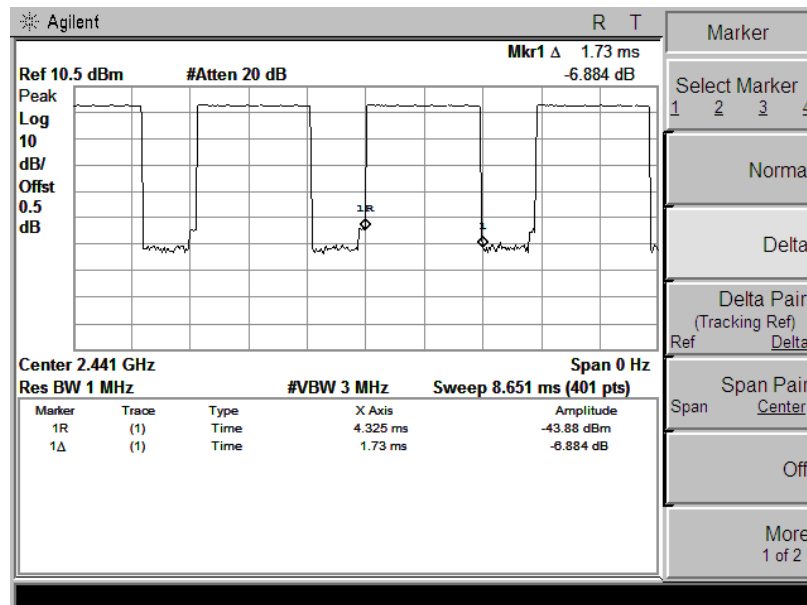


## DH3

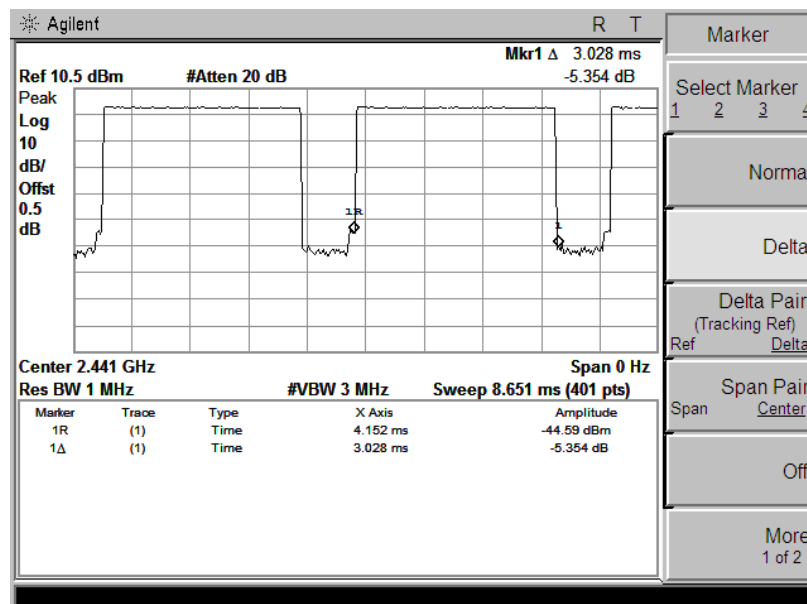


## DH5


## 8DPSK Mode

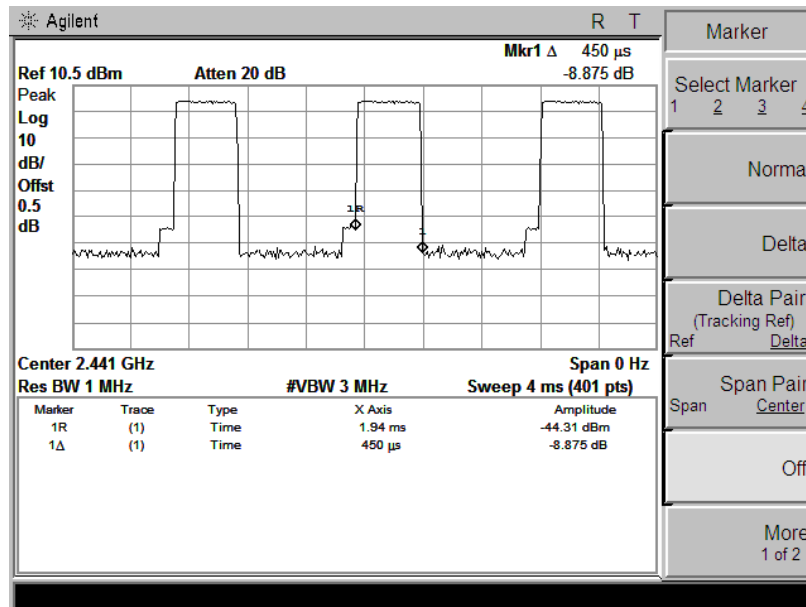

## DH1

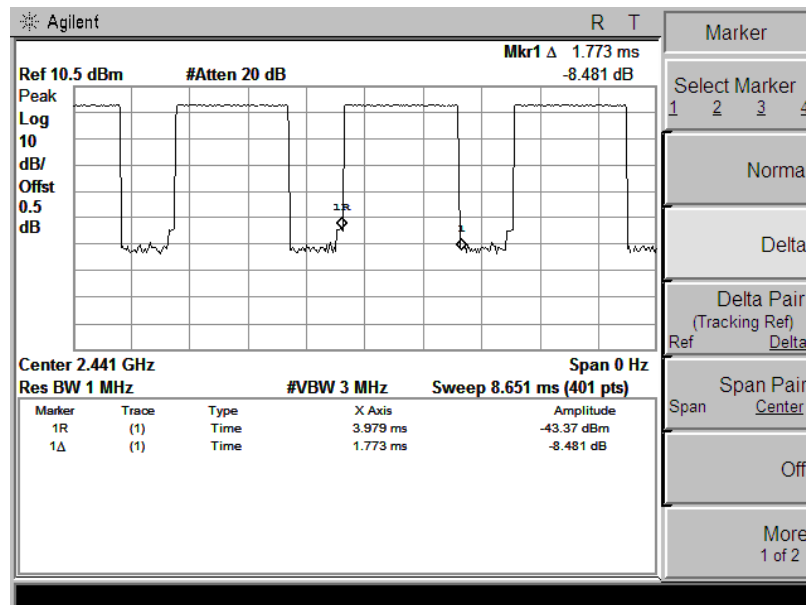

## DH3

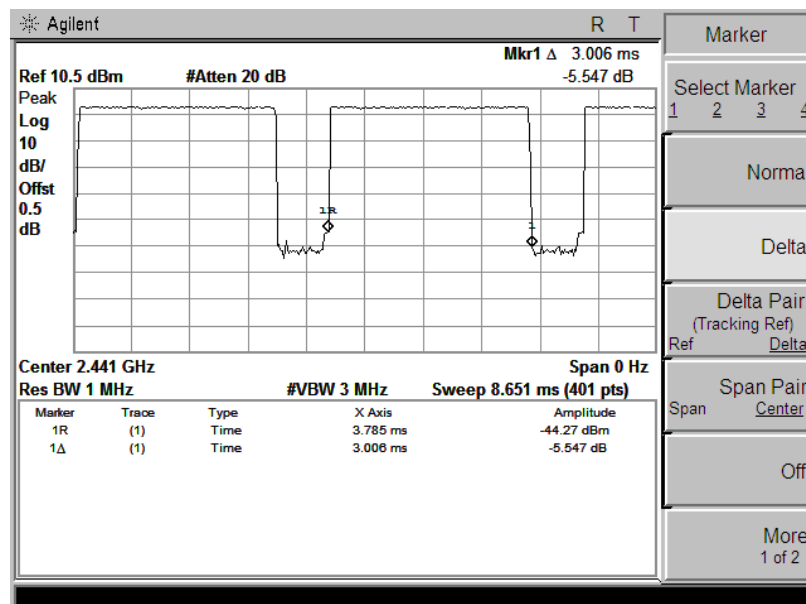

## DH5

## 5.9 Band Edge and Conducted Spurious Emissions

### 5.9.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### 5.9.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 5.9.3 Test Result


Pass

#### Remark:


During the Conducted Spurious Emissions test, pre-scan the GFSK,  $\pi/4$ -QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.

|            |           |                     |      |
|------------|-----------|---------------------|------|
| Test Item: | Band Edge | Temperature :       | 23°C |
| Tested by: | Kang      | Relative Humidity : | 65%  |




## Band Edge, Left Side

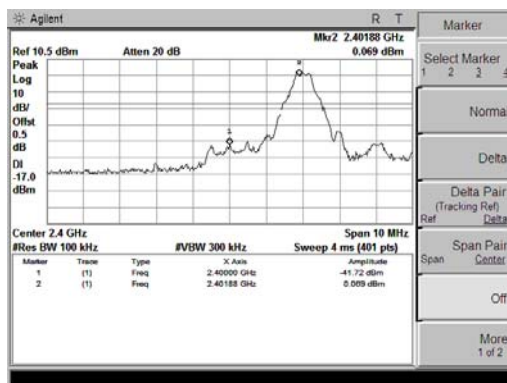


GFSK Mode, Non-Hopping

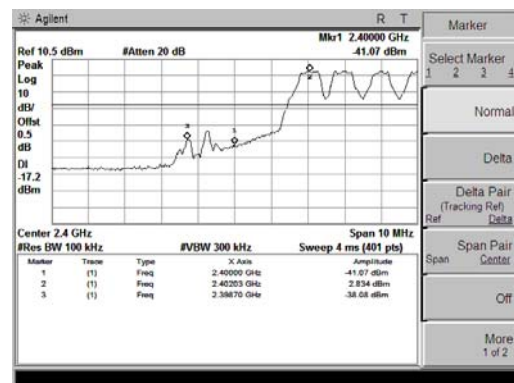

GFSK Mode, Hopping

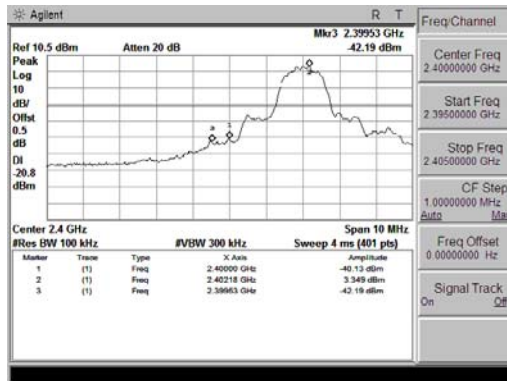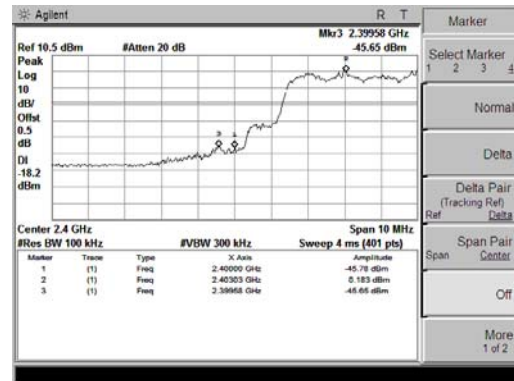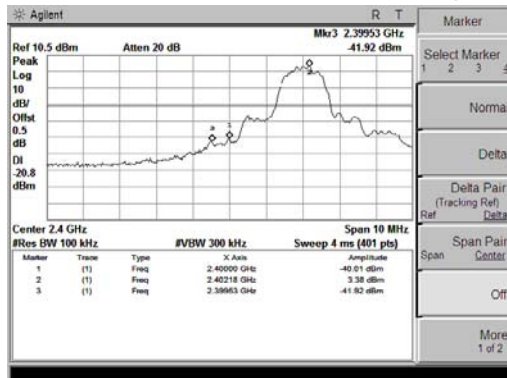
 $\pi/4$ -DQPSK Mode, Non-Hopping $\pi/4$ -DQPSK Mode, Hopping

8DPSK Mode, Non-Hopping

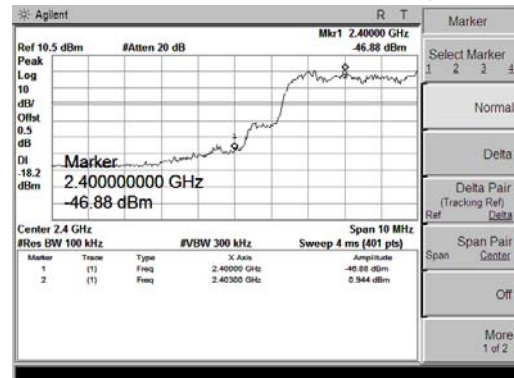


8DPSK Mode, Hopping




## Band Edge, Right Side

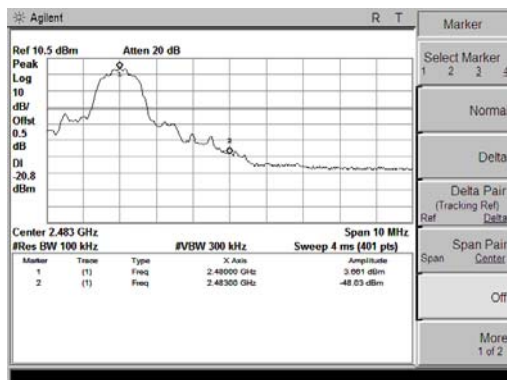


GFSK Mode, Non-Hopping

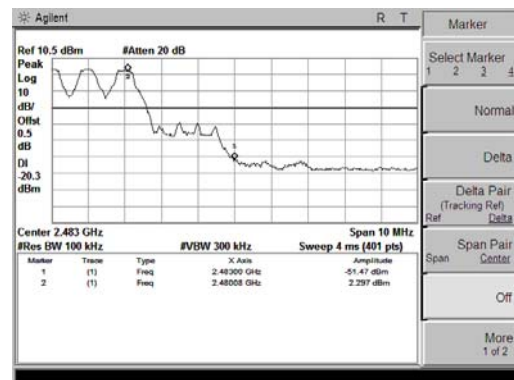

GFSK Mode, Hopping

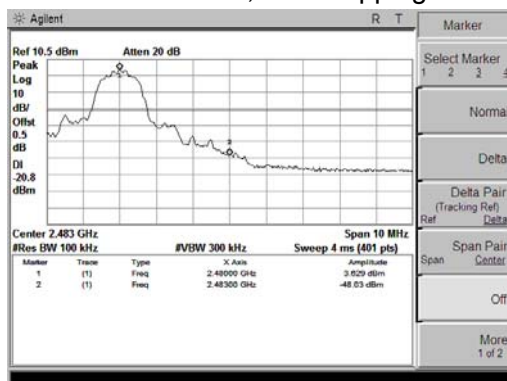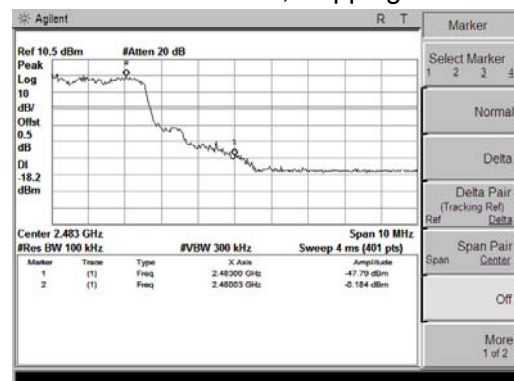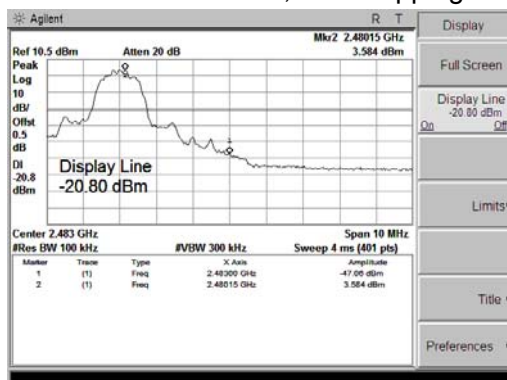
 $\pi/4$ -DQPSK Mode, Non-Hopping $\pi/4$ -DQPSK Mode, Hopping

8DPSK Mode, Non-Hopping


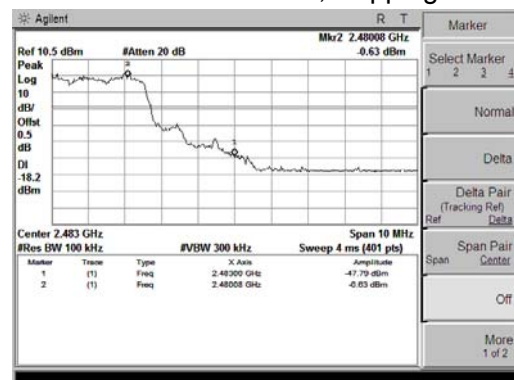


8DPSK Mode, Hopping


## Conducted Spurious Emissions

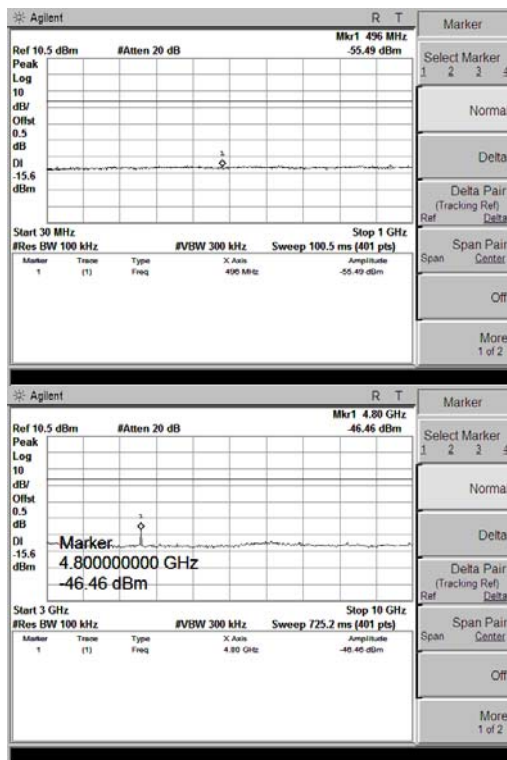

GFSK Mode, Ch0

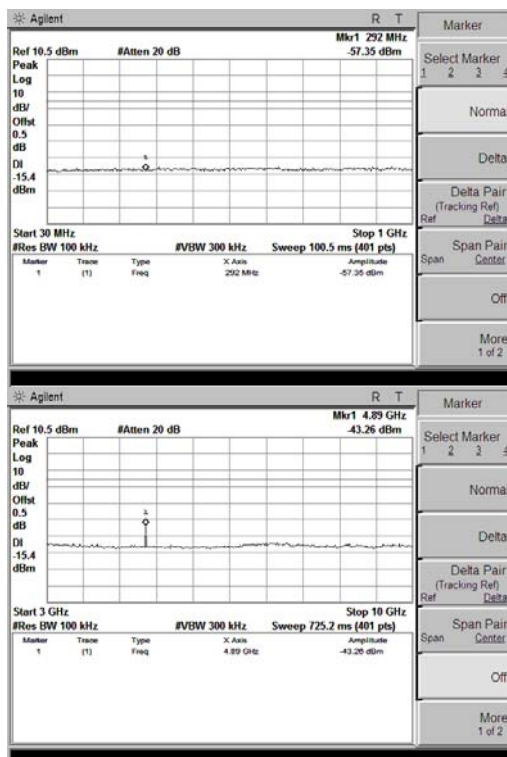
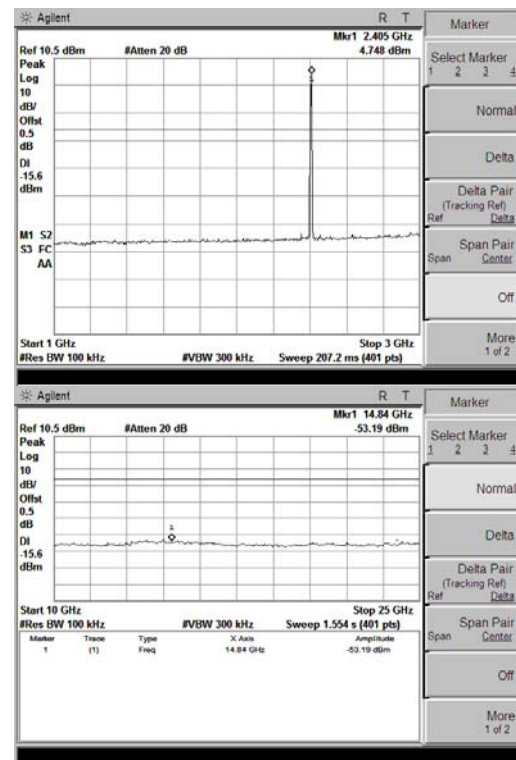


GFSK Mode, Ch39

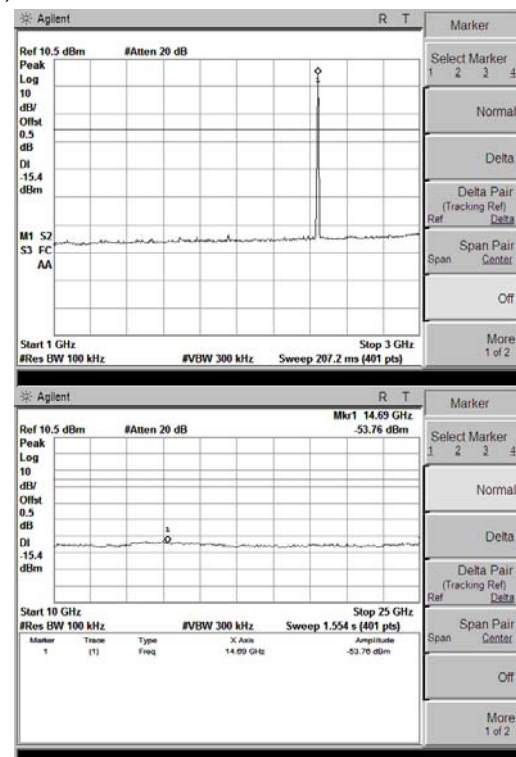



## Conducted Spurious Emissions

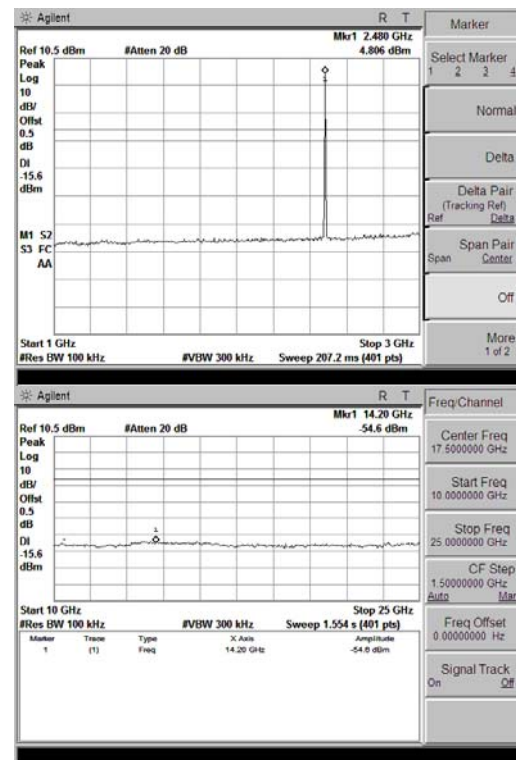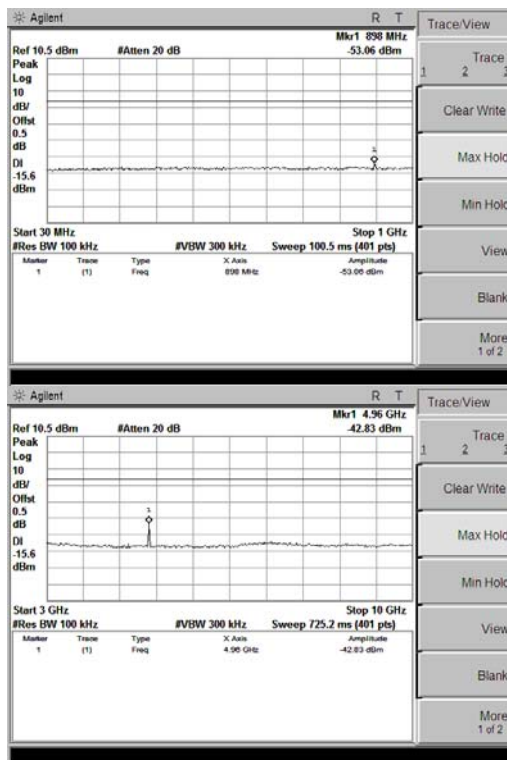

GFSK Mode, Ch78  
 $\pi/4$ -DQPSK Mode, Hopping


## 5.10 Restricted Frequency Bands

### 5.10.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.10.2 Test Configuration

#### Test Setup:

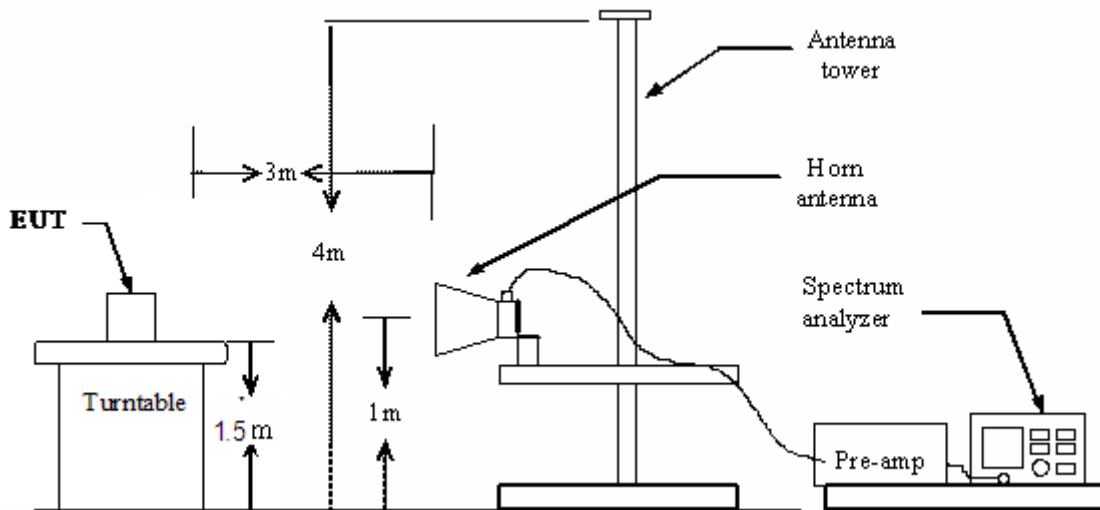

### 5.10.3 Test Procedure:

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.


### 5.10.4 Test Result

Pass

Note: All test modes are performed, only the worst case is recorded in this report.

Please refer the following plots.


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH0                | Polarization: | Horizontal         |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 23.7°C / 52.9%          | Test date:    | 2016-09-09         |

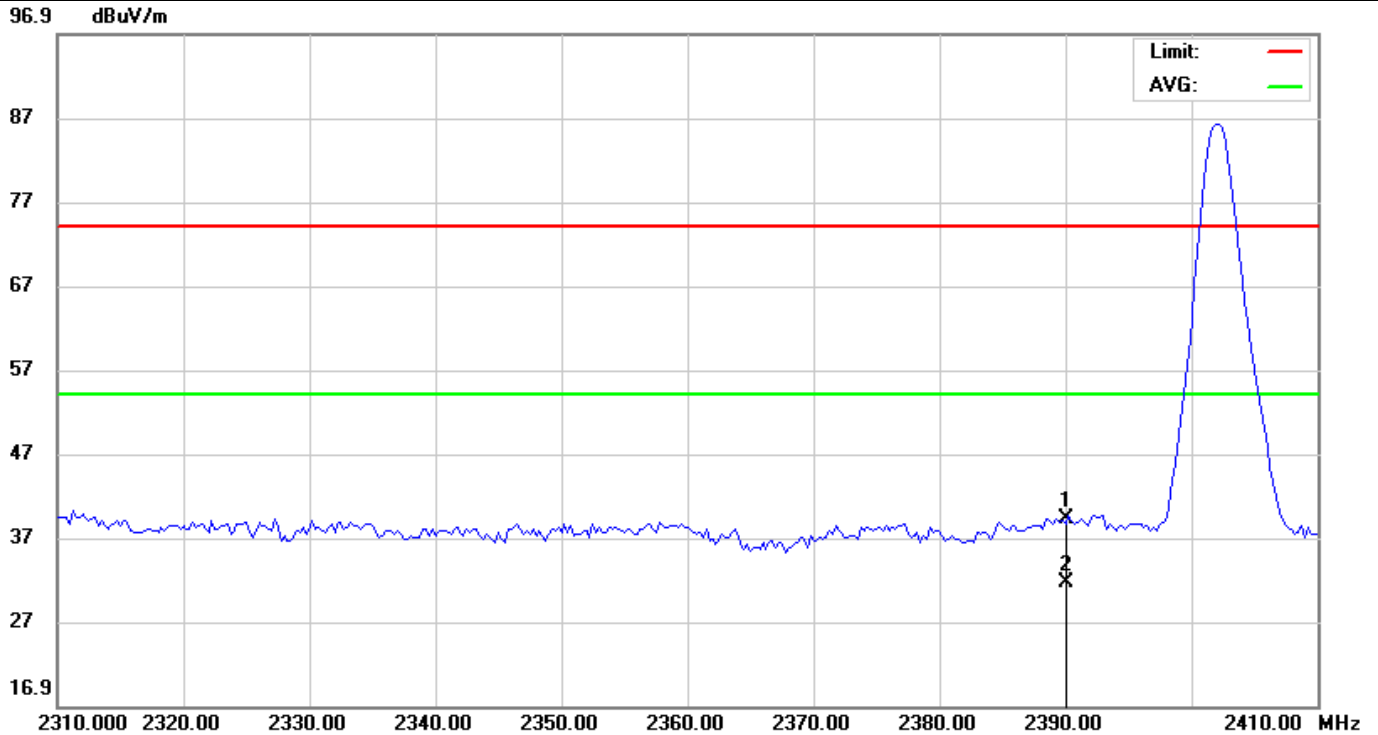

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|-------------------------|---------------------------|---------|
| 1   |     | 2390.000     | 47.55                    | -8.43                   | 39.12                      | 74.00           | -34.88     | peak     |                         |                           |         |
| 2   | *   | 2390.000     | 40.10                    | -8.43                   | 31.67                      | 54.00           | -22.33     | AVG      |                         |                           |         |

\*:Maximum data    x:Over limit    !:over margin


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH0                | Polarization: | Vertical           |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 23.7°C / 52.9%          | Test date:    | 2016-09-09         |

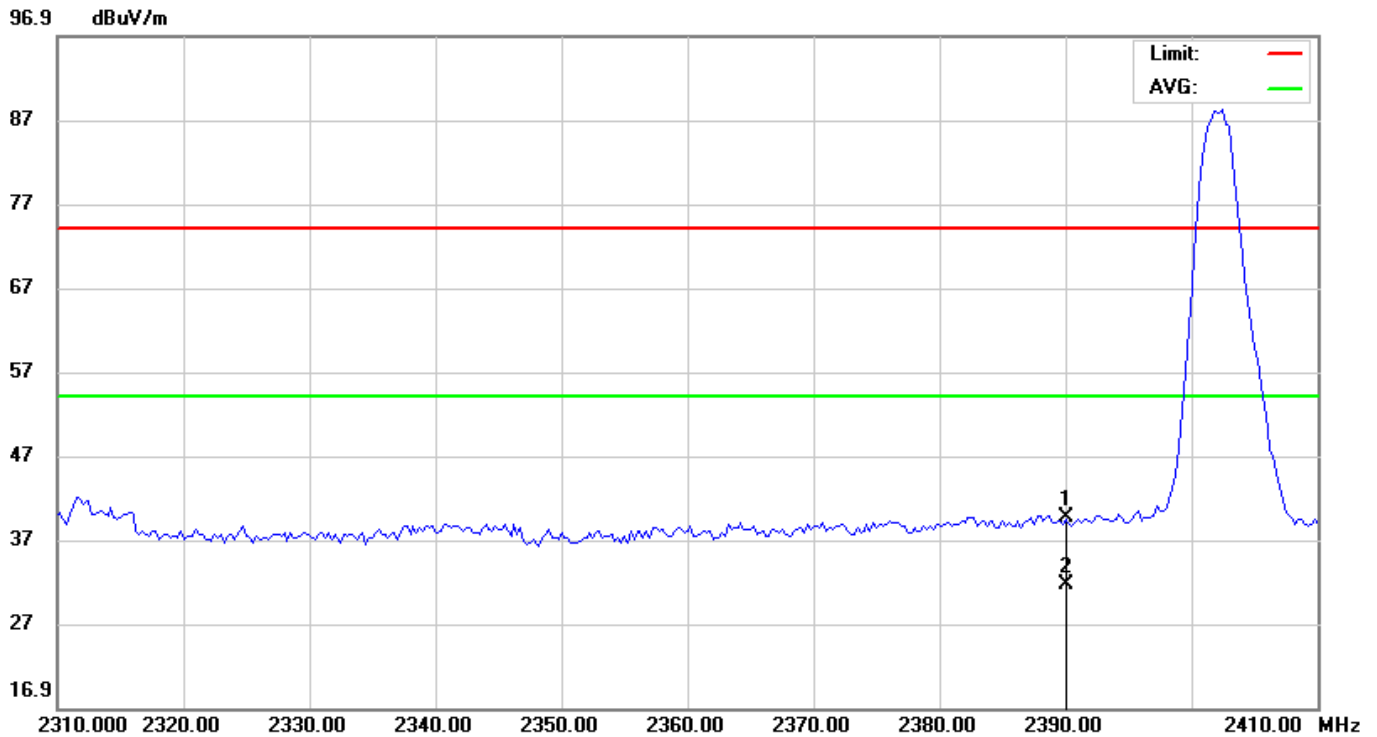

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 2390.000 | 48.03         | -8.43          | 39.60       | 74.00  | -34.40 | peak           |              |         |
| 2   | *   | 2390.000 | 40.13         | -8.43          | 31.70       | 54.00  | -22.30 | AVG            |              |         |

\*:Maximum data    x:Over limit    !:over margin


|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH78               | Polarization: | Horizontal         |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 23.7°C / 52.9%          | Test date:    | 2016-09-09         |

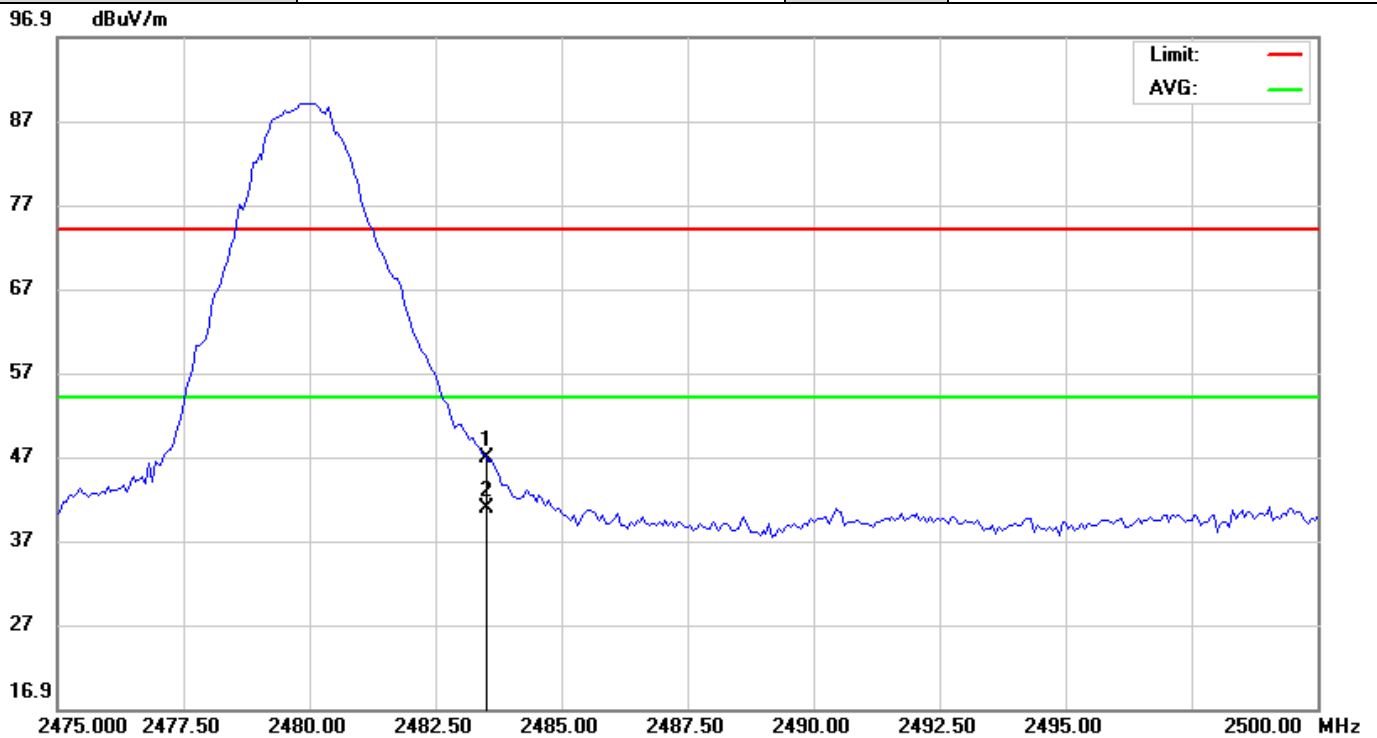

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|---------------------------|---------|
| 1   |     | 2483.500     | 55.03                    | -8.29                   | 46.74                      | 74.00           | -27.26     | peak                    |                           |         |
| 2   | *   | 2483.500     | 49.06                    | -8.29                   | 40.77                      | 54.00           | -13.23     | AVG                     |                           |         |

\*:Maximum data    x:Over limit    !:over margin

|                         |                         |               |                    |
|-------------------------|-------------------------|---------------|--------------------|
| EUT:                    | Wi-Fi&Bluetooth Speaker | M/N:          | Aud Click          |
| Mode:                   | GFSK-CH78               | Polarization: | Vertical           |
| Tested by:              | Windy Hu(Engineer)      | Power:        | DC 3.7V by Battery |
| Temperature: / Humidity | 23.7°C / 52.9%          | Test date:    | 2016-09-09         |

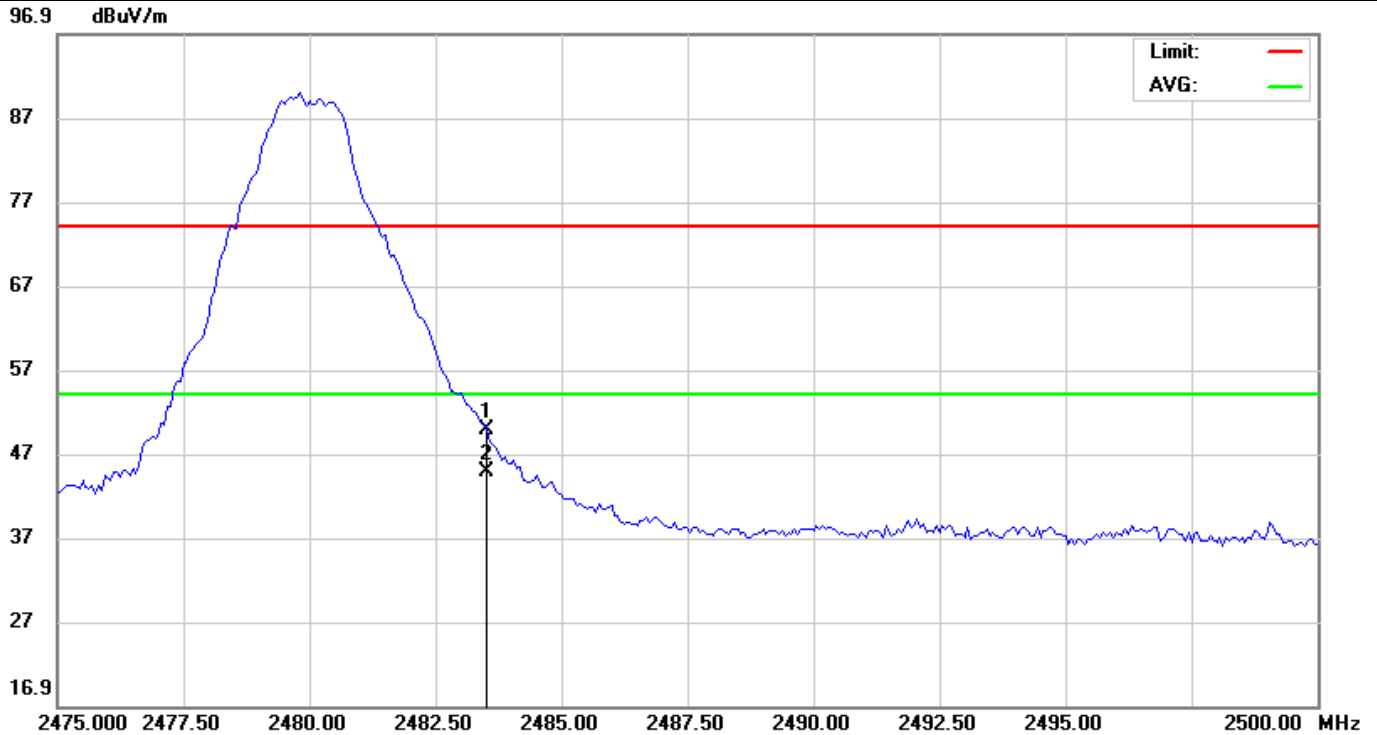

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|---------------------------|---------|
| 1   |     | 2483.500     | 58.03                    | -8.29                   | 49.74                      | 74.00           | -24.26     | peak                    |                           |         |
| 2   | *   | 2483.500     | 53.01                    | -8.29                   | 44.72                      | 54.00           | -9.28      | AVG                     |                           |         |

\*:Maximum data    x:Over limit    !:over margin

End of the Report