


# Wireless External Antenna for 900 MHz Applications

Pulse Part Number: W1063

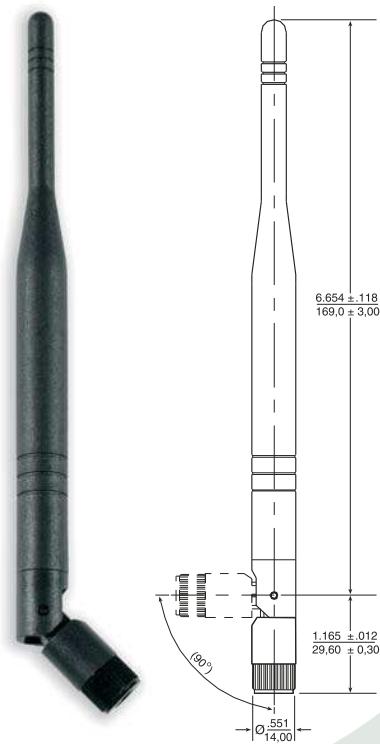

## Features

- Ideal for lower frequency wireless applications in the ISM 900 MHz band
- Omni-directional radiation pattern provides broad 360° coverage
- One-eighth wavelength dipole configuration
- Connection and color options easily integrate with OEM designs

## Color Options

- Black\*
- Gray (Pantone cool gray 8C)
- Gray (Pantone 429C)
- Gray (Pantone cool gray 7C)

## Connector Options

- Reverse SMA (Male)\*
- SMA (Male)

\* Default Configuration – Please contact Pulse Applications Engineering for assistance in ordering colors and connectors

Weight..... 25.6 grams

Carton..... 20/bag; 500/carton

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{.025}$

## Electrical Specifications @ 25 °C

Note: This part number is lead-free and RoHS compliant. No additional suffix or identifier is required.

Antenna Part No.	Frequency [MHz]	Gain [dBi]	Impedance [Nom]	VSWR	Polarization	Electrical Length	Radiation	Color
W1063	868 – 928	3.0	50 Ω	$\leq 2.0$	Vertical	1/4 dipole	Omni	Black

### Pulse Antennas

Takatie 6  
90440 Kempele, Finland  
Tel: +358 207 935 500  
Fax: +358 207 935 501  
[www.pulseeng.com/antennas](http://www.pulseeng.com/antennas)

### External Antennas

#### Sales Contacts

USA	858 674 8100	Shanghai	86 21 32181071
UK	44 1483 401 700	China	86 769 5538070
France	33 3 84 35 04 04	Taiwan	886 2 26980228
	Singapore 65 6287 8998		

# Wireless External Antenna for 900 MHz Applications

Pulse Part Number: W1063


## Application Notes

Omni-directional antennas provide a uniform, donut-shaped, 360° radiation pattern. The omni-directional pattern is suitable for point-to-multipoint broadcasting in all directions. This antenna is primarily used for WLAN applications. However, it

can also be used for a variety of other applications within the specified frequency range. When used as an access point, the antenna is ideally located at the center of the coverage area.

## Gain Performance W1063

### Horizontal Position

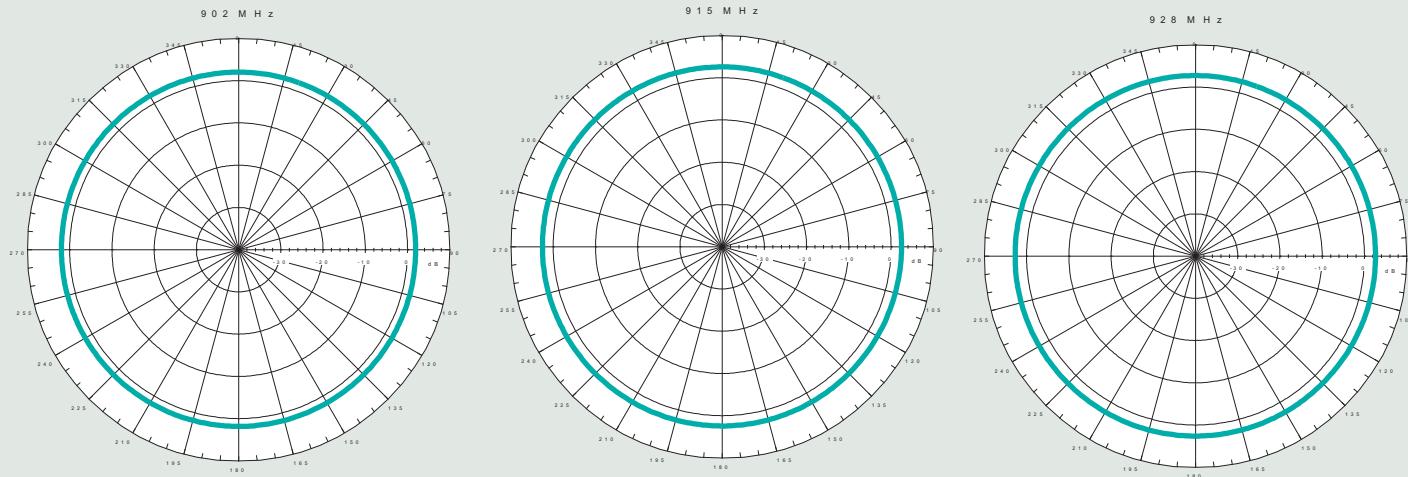

### Vertical Position

