

### 3 DTS CHANNELS

#### 3.1 6dB BANDWIDTH

<b>EUT Nomenclature</b>	Wireless Photo Detector	<b>Test Request No.</b>	EMC0420-1
<b>Model No.</b>	FWD-200P	<b>Serial No.</b>	138
<b>Test Start Date</b>	14-Dec-2019	<b>Temperature (°C)</b>	24.6°C
<b>Test End Date</b>	28-Feb-2020	<b>Humidity RH (%)</b>	53.9%RH
<b>Tested By</b>	Shaithanya C	<b>Pressure (mbar)</b>	NR
<b>Input Voltage /</b>	3.3V, 24mA		
<b>Operating Mode</b>	Refer Page 6 for Operating Mode Table		
<b>Test configuration</b>	Refer Page 6 for Test Configuration Table		
<b>Deviation from Std.</b>	NA		
<b>Applicable</b>	FCC Part 15.247:2010		
<b>Test Method</b>	KDB 558074		
<b>Comment</b>	NA		

#### TEST DETAILS


<b>Method</b>	Radiated <input type="checkbox"/>	Conducted <input checked="" type="checkbox"/>
---------------	-----------------------------------	---


#### TEST PARAMETERS

<b>Antenna Height</b>	NA	<b>Turntable Rotation</b>	NA
<b>Equipment Class</b>	NA	<b>Measurement Distance</b>	NA

#### TEST EQUIPMENT

Y/N	Equipment	Make	Model	Serial Number	Cal Due Date
Y	Spectrum Analyzer	Agilent	N9010A	MY48031005	27-Feb-2021
Y	RF Cable	Huber- Suhner	SF104/2X11PC3542/500	NA	NA

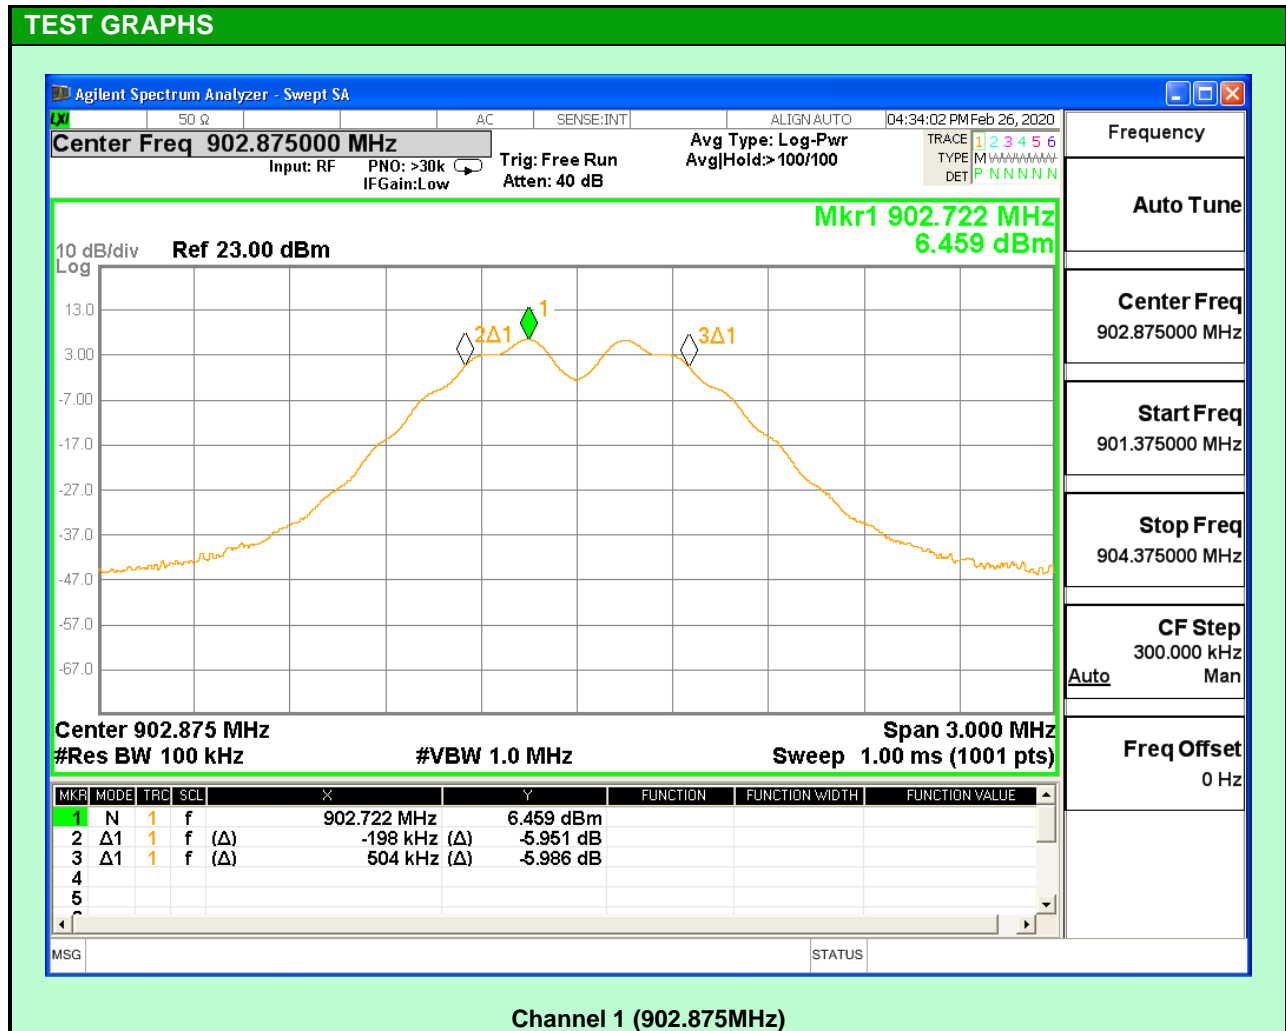

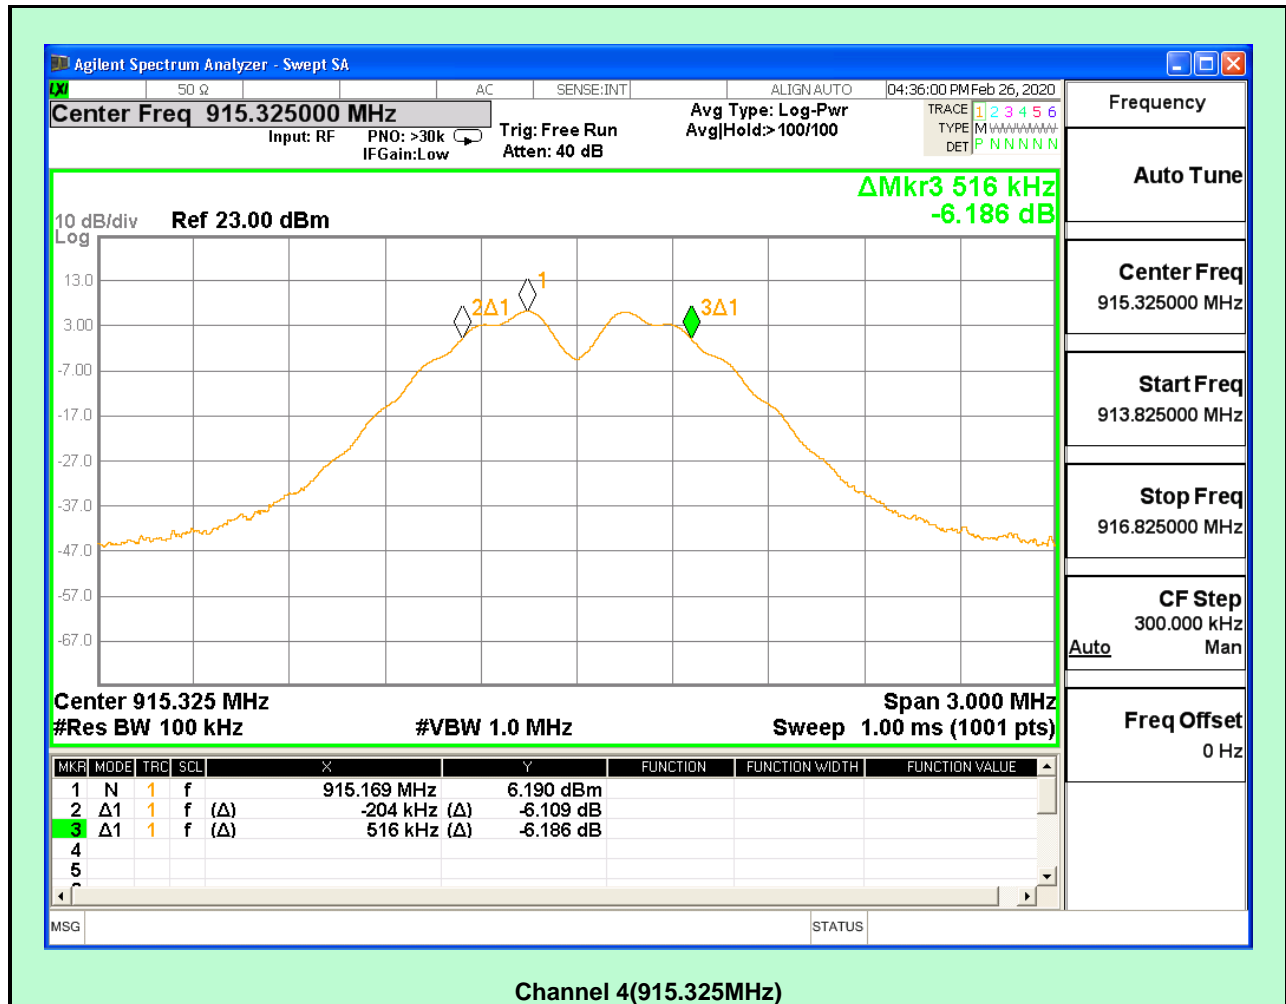



TEST RESULT				
Channel #	Frequency MHz	Measured Bandwidth KHz	Limit KHz	Result
1	902.875	702	>500	PASS
4	915.325	720	>500	PASS
6	927.125	732	>500	PASS

**TEST SETUP PHOTOGRAPH**

Refer Annexure -1

**Conducted RF Test setup**

### 3.2 PEAK OUTPUT POWER LEVEL

<b>EUT Nomenclature</b>	Wireless Photo Detector	<b>Test Request No.</b>	EMC0420-1
<b>Model No.</b>	FWD-200P	<b>Serial No.</b>	138
<b>Test Start Date</b>	14-Dec-2019	<b>Temperature (°C)</b>	23.6°C
<b>Test End Date</b>	28-Feb-2020	<b>Humidity RH (%)</b>	51.9%RH
<b>Tested By</b>	Shaithanya C	<b>Pressure (mbar)</b>	NR
<b>Input Voltage /</b>	3.3V, 24mA		
<b>Operating Mode</b>	Refer Page 6 for Operating Mode Table		
<b>Test configuration</b>	Refer Page 6 for Test Configuration Table		
<b>Deviation from Std.</b>	NA		
<b>Applicable</b>	FCC Part 15.247:2010		
<b>Test Method</b>	KDB 558074		
<b>Comment</b>	NA		

#### TEST DETAILS


<b>Method</b>	Radiated <input type="checkbox"/>	Conducted <input checked="" type="checkbox"/>
---------------	-----------------------------------	---


#### TEST PARAMETERS

<b>Antenna Height</b>	NA	<b>Turntable Rotation</b>	NA
<b>Equipment Class</b>	NA	<b>Measurement</b>	NA


#### TEST EQUIPMENT

Y/N	Equipment	Make	Model	Serial Number	Cal Due Date
Y	Spectrum Analyzer	Agilent	N9010A	MY48031005	27-Feb-2021
Y	RF Cable	Huber- Suhner	SF104/2X11PC3542/500	NA	NA

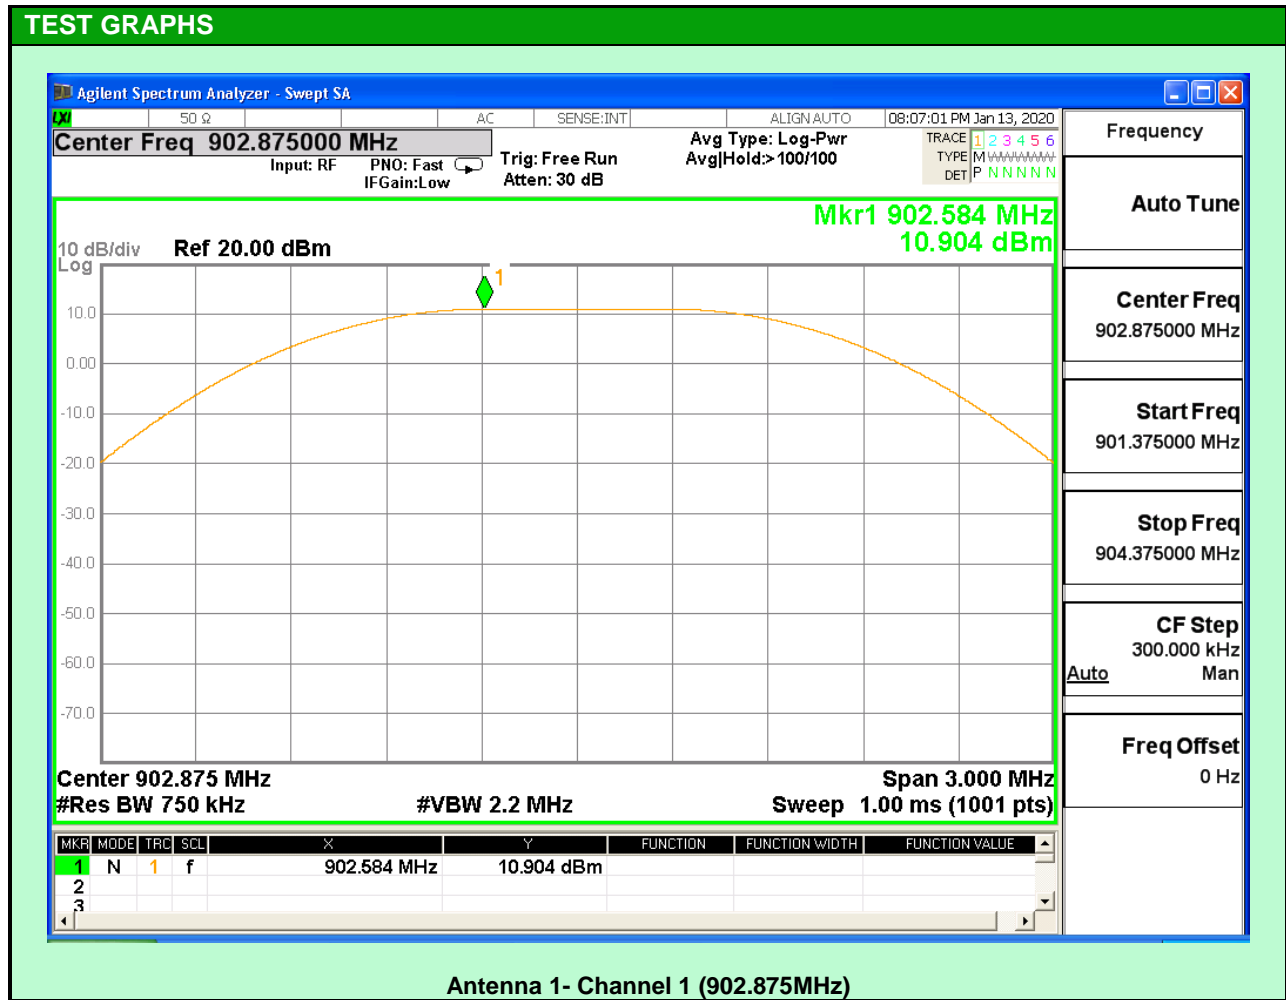

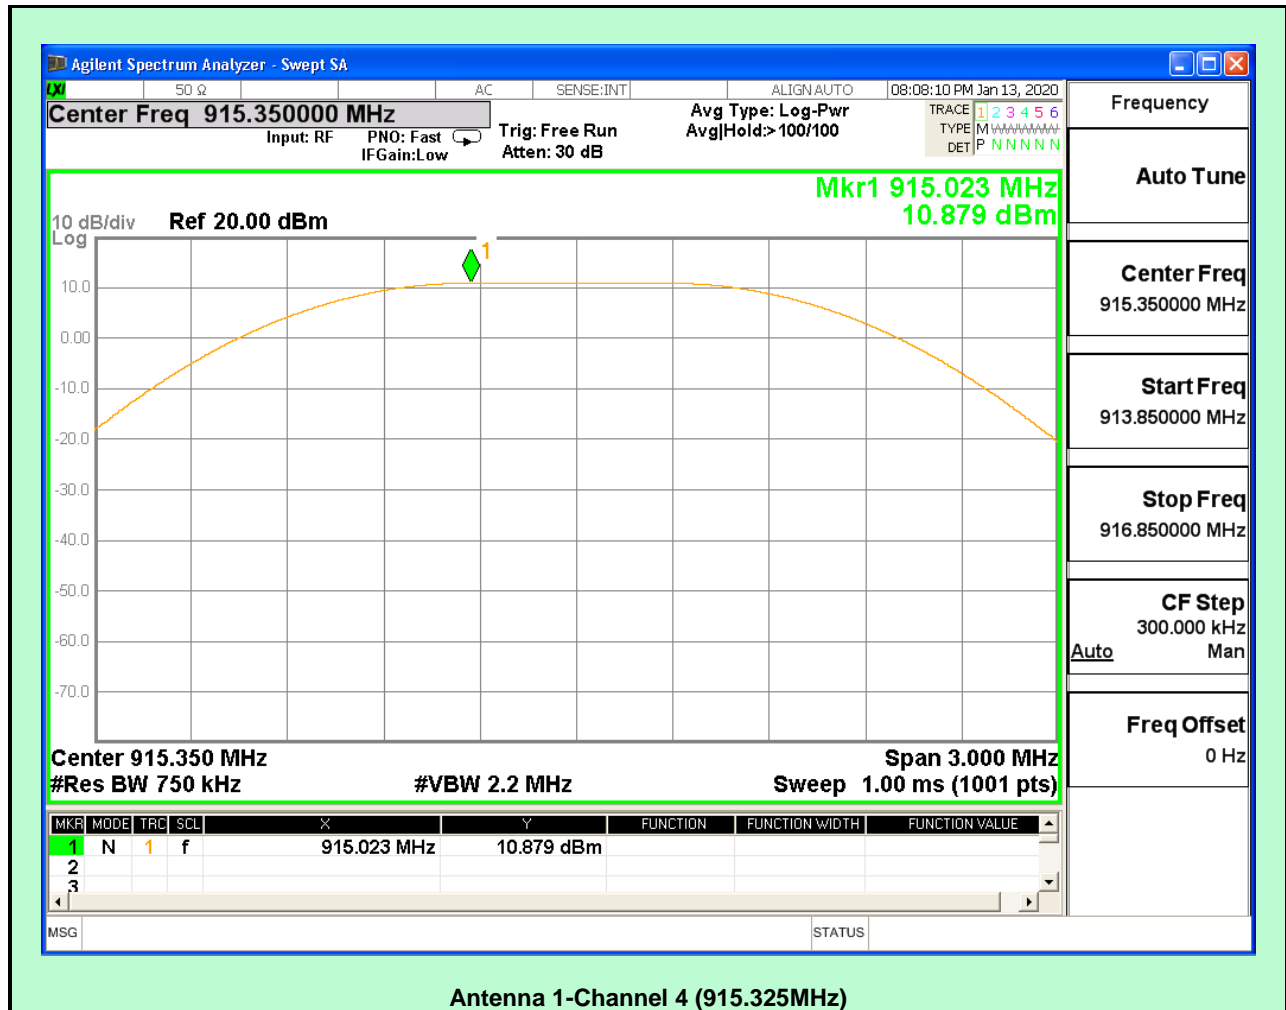



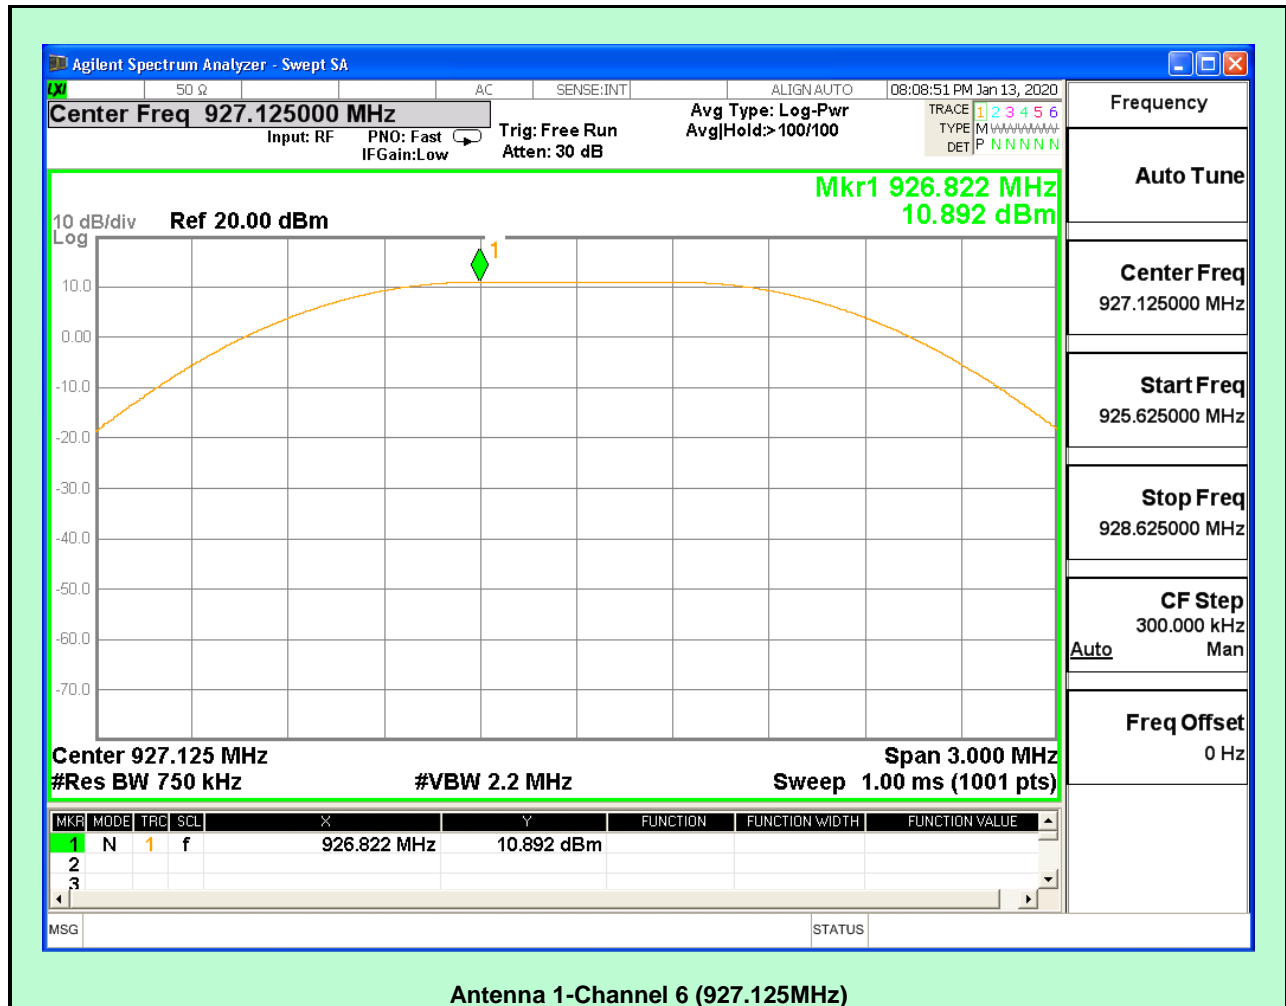

TEST RESULT						
Channe l #	Frequency MHz	Measured Power Level dBm	Cable Loss dB	Transmitter Power Level dBm	Limit dBm	Result
Antenna 1						
1	902.875	10.90	0.8	11.70	≤30	PASS
4	915.325	10.87	0.8	11.67	≤30	PASS
6	927.125	10.89	0.8	11.69	≤30	PASS

Note: Transmitter Output Power = Measured Level (dBm) + Cable Loss (dB)

**TEST SETUP PHOTOGRAPH**

Refer Annexure -1

**Conducted RF Test setup**

### 3.3 MAXIMUM POWER SPECTRAL DENSITY

<b>EUT Nomenclature</b>	Wireless Photo Detector	<b>Test Request No.</b>	EMC0420-1
<b>Model No.</b>	FWD-200P	<b>Serial No.</b>	138
<b>Test Start Date</b>	14-Dec-2019	<b>Temperature (°C)</b>	23.6°C
<b>Test End Date</b>	28-Feb-2020	<b>Humidity RH (%)</b>	51.9%RH
<b>Tested By</b>	Shaithanya C	<b>Pressure (mbar)</b>	NR
<b>Input Voltage /</b>	3.3V, 24mA		
<b>Operating Mode</b>	Refer Page 6 for Operating Mode Table		
<b>Test configuration</b>	Refer Page 6 for Test Configuration Table		
<b>Deviation from Std.</b>	NA		
<b>Applicable</b>	FCC Part 15.247:2010		
<b>Test Method</b>	KDB 558074		
<b>Comment</b>	NA		

### TEST DETAILS

<b>Method</b>	Radiated <input type="checkbox"/>	Conducted <input checked="" type="checkbox"/>
---------------	-----------------------------------	---


### TEST PARAMETERS


<b>Antenna Height</b>	NA	<b>Turntable Rotation</b>	NA
<b>Equipment Class</b>	NA	<b>Measurement</b>	NA

### TEST EQUIPMENT

Y/N	Equipment	Make	Model	Serial Number	Cal Due Date
Y	Spectrum Analyzer	Agilent	N9010A	MY48031005	27-Feb-2021
Y	RF Cable	Huber- Suhner	SF104/2X11PC3542/500	NA	NA



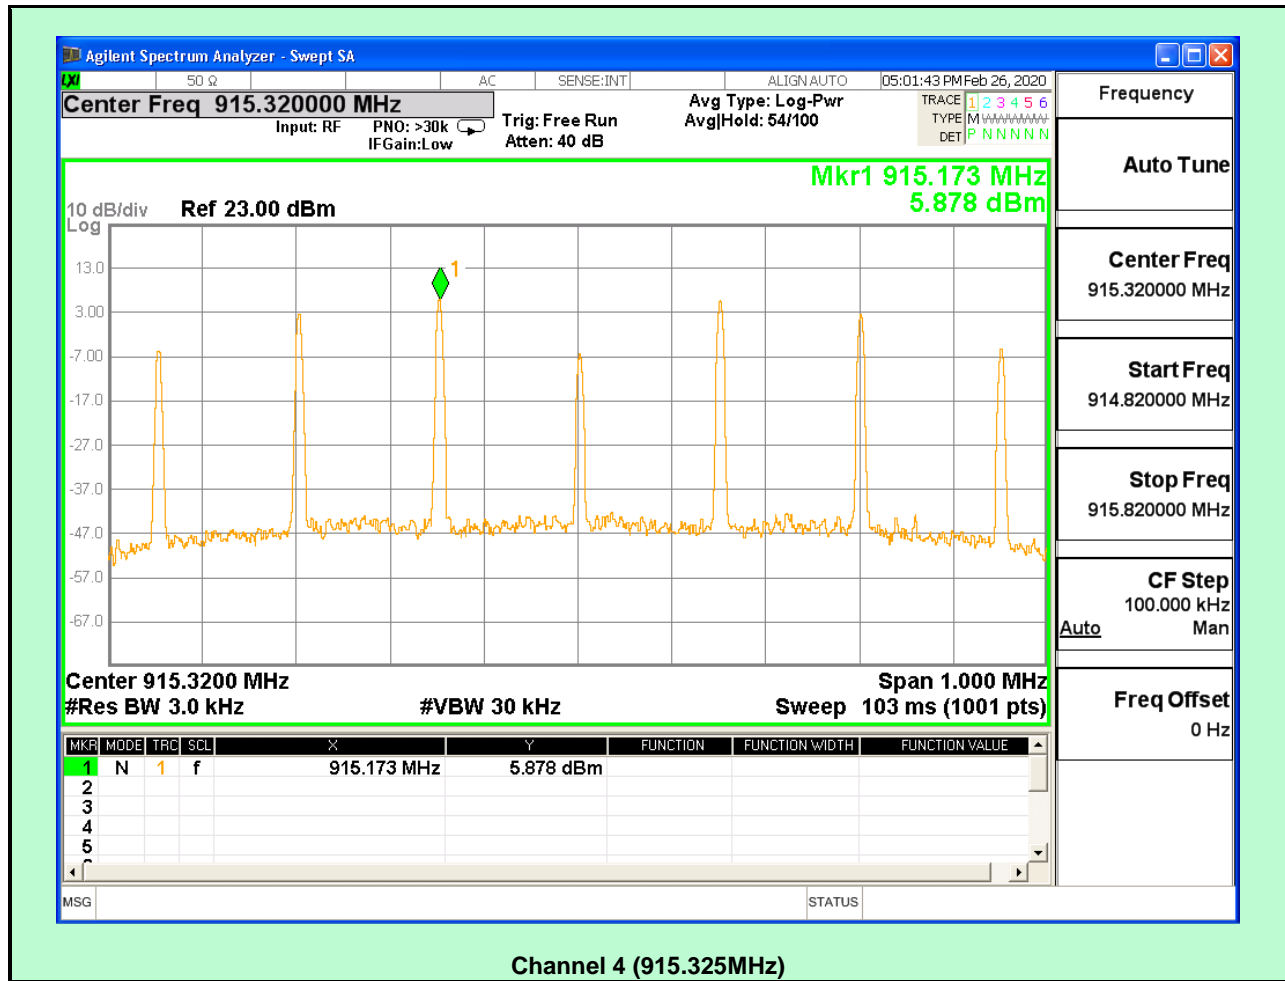

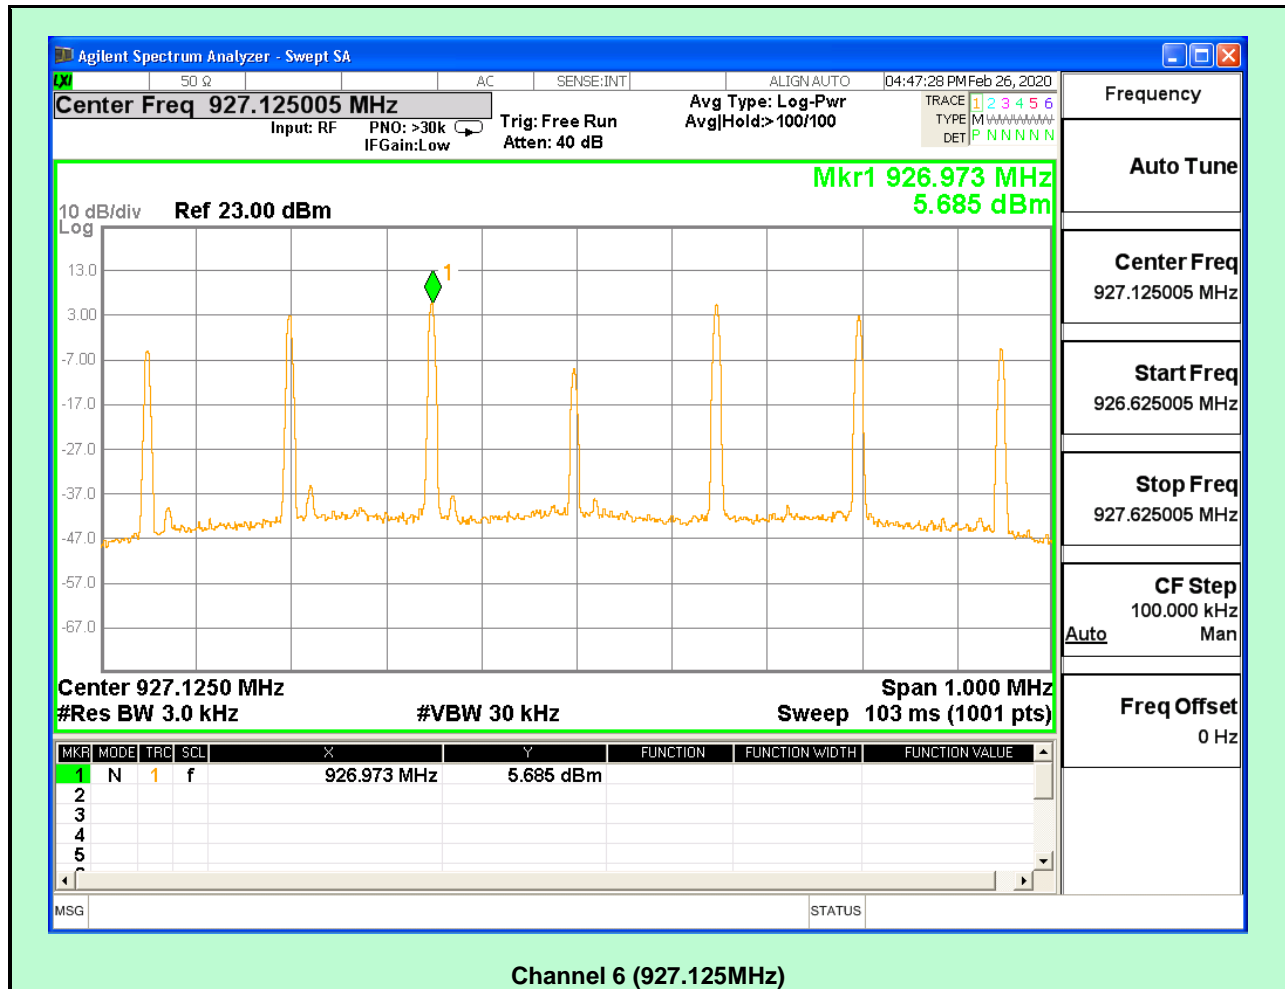

TEST RESULT				
Channel #	Frequency MHz	Measured Level dBm/3KHz	Limit dBm/3KHz	Result
1	902.875	6.14	<8	Pass
4	915.325	5.87	<8	Pass
6	927.125	5.68	<8	Pass

**TEST SETUP PHOTOGRAPH**

Refer Annexure -1

Conducted RF Test setup

### 3.4 BAND EDGE COMPLIANCE

<b>EUT Nomenclature</b>	Wireless Photo Detector	<b>Test Request No.</b>	EMC0420-1
<b>Model No.</b>	FWD-200P	<b>Serial No.</b>	138
<b>Test Start Date</b>	14-Dec-2019	<b>Temperature (°C)</b>	23.6°C
<b>Test End Date</b>	28-Feb-2020	<b>Humidity RH (%)</b>	51.9%RH
<b>Tested By</b>	Shaithanya C	<b>Pressure (mbar)</b>	NR
<b>Input Voltage /</b>	3.3V, 24mA		
<b>Operating Mode</b>	Refer Page 6 for Operating Mode Table		
<b>Test configuration</b>	Refer Page 6 for Test Configuration Table		
<b>Deviation from Std.</b>	NA		
<b>Applicable</b>	FCC Part 15.247:2010		
<b>Test Method</b>	KDB 558074		
<b>Comment</b>	NA		

### TEST DETAILS


<b>Method</b>	Radiated <input type="checkbox"/>	Conducted <input checked="" type="checkbox"/>
---------------	-----------------------------------	---

### TEST PARAMETERS

<b>Antenna Height</b>	NA	<b>Turntable Rotation</b>	NA
<b>Equipment Class</b>	NA	<b>Measurement</b>	NA

### TEST EQUIPMENT

Y/N	Equipment	Make	Model	Serial Number	Cal Due Date
Y	Spectrum Analyzer	Agilent	N9010A	MY48031005	27-Feb-2021
Y	RF Cable	Huber- Suhner	SF104/2X11PC3542/500	NA	NA

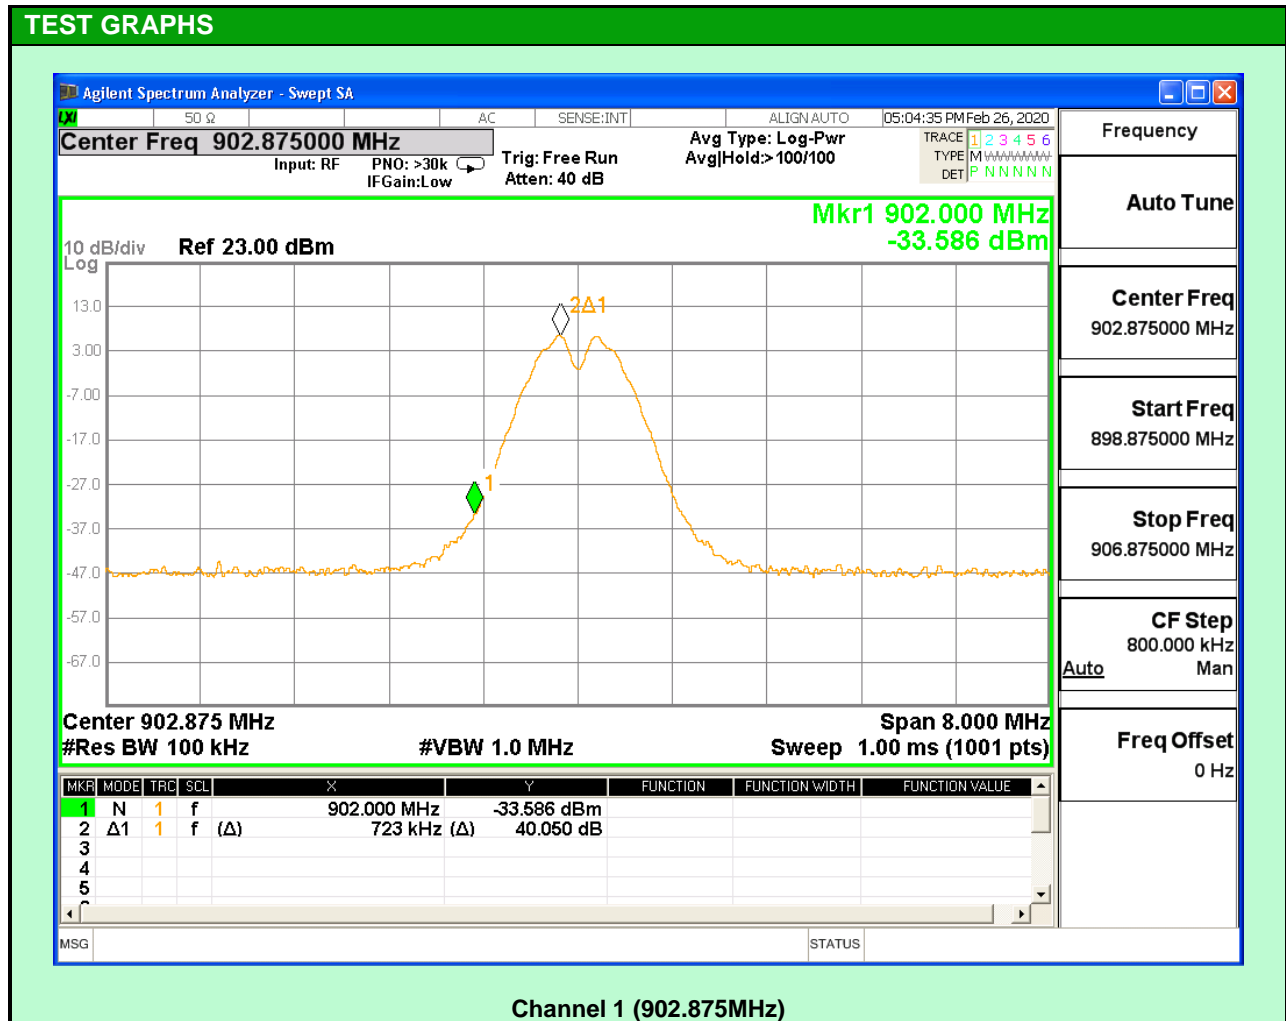






TEST RESULT				
Channel #	Frequency MHz	Measured Level dBm/3KHz	Limit dBm/3KHz	Result
1	902.875	40.05	>20	PASS
6	927.125	35.09	>20	PASS

TEST SETUP PHOTOGRAPH
<p>Refer Annexure -1</p> <p>Conducted RF Test setup</p>

3.5 EFFECTIVE ISOTROPIC RADIATED POWER			
<b>EUT Nomenclature</b>	Wireless Photo Detector	<b>Test Request No.</b>	EMC0420-1
<b>Model No.</b>	FWD-200P	<b>Serial No.</b>	138
<b>Test Start Date</b>	14-Dec-2019	<b>Temperature (°C)</b>	23 ± 2
<b>Test End Date</b>	28-Feb-2020	<b>Humidity RH (%)</b>	55 ± 3
<b>Tested By</b>	Shaithanya C	<b>Pressure (mbar)</b>	NR
<b>Input Voltage / Freq</b>	3.3V, 24mA		
<b>Operating Mode</b>	Refer Page 6 for Operating Mode Table		
<b>Test configuration</b>	Refer Page 6 for Test Configuration Table		
<b>Deviation from Std</b>	NA		
<b>Applicable standard</b>	FCC Part 15.247: 2010 & 15.209 :2010		
<b>Test Method</b>	KDB 412172		
<b>Comment</b>	NA		
TEST DETAILS			
<b>Method</b>	<input checked="" type="checkbox"/> Radiated		<input type="checkbox"/> Conducted
TEST PARAMETERS			
<b>Antenna Height</b>	1m to 4m	<b>Turntable Rotation</b>	0° to 360°
<b>Equipment Class</b>	NA	<b>Measurement Distance</b>	3m

TEST EQUIPMENT					
Y/N	Equipment	Make	Model	Sl. No.	Cal Due Date
Y	EMI Test Receiver	R&S	ESU26	100525	7-Aug-20
Y	3m Semi Anechoic Chamber	ETS Lindgren	DKE 6X7 DBL.DR	1625	30-Jul-22
Y	Bilog Antenna	ETS Lindgren	HLP3003C	130525	5-Nov-21
Y	RF cable (9KHz to 18GHz)	Huber + Schuner	Sucoflex100	515518/126E	04-Oct-21
Note: Switch ON /OFF the Internal Preamplifier based on carrier level and or noise floor without overloading the receiver					




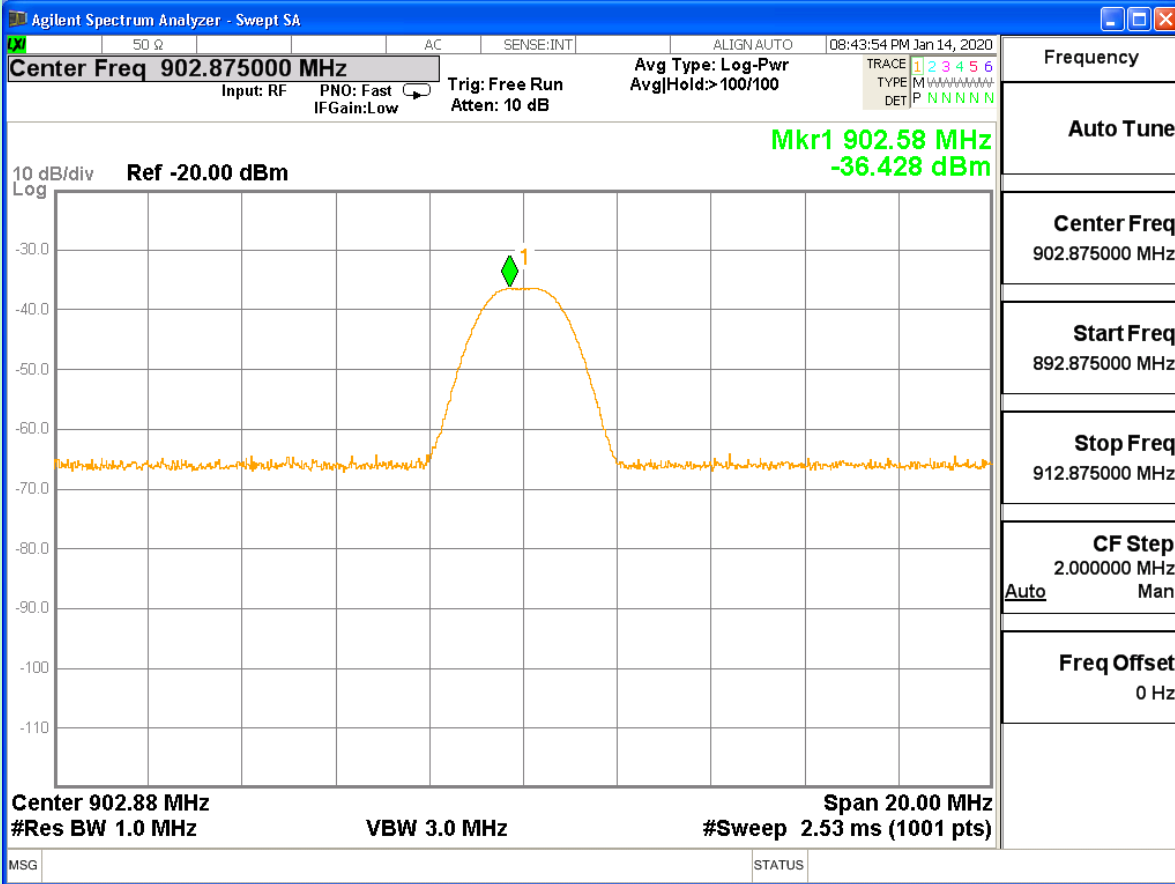

Antenna-1, Channel 1 (902.875MHz)


Note : Peak Graph - Vertical polarization

TEST GRAPHS – EIRP

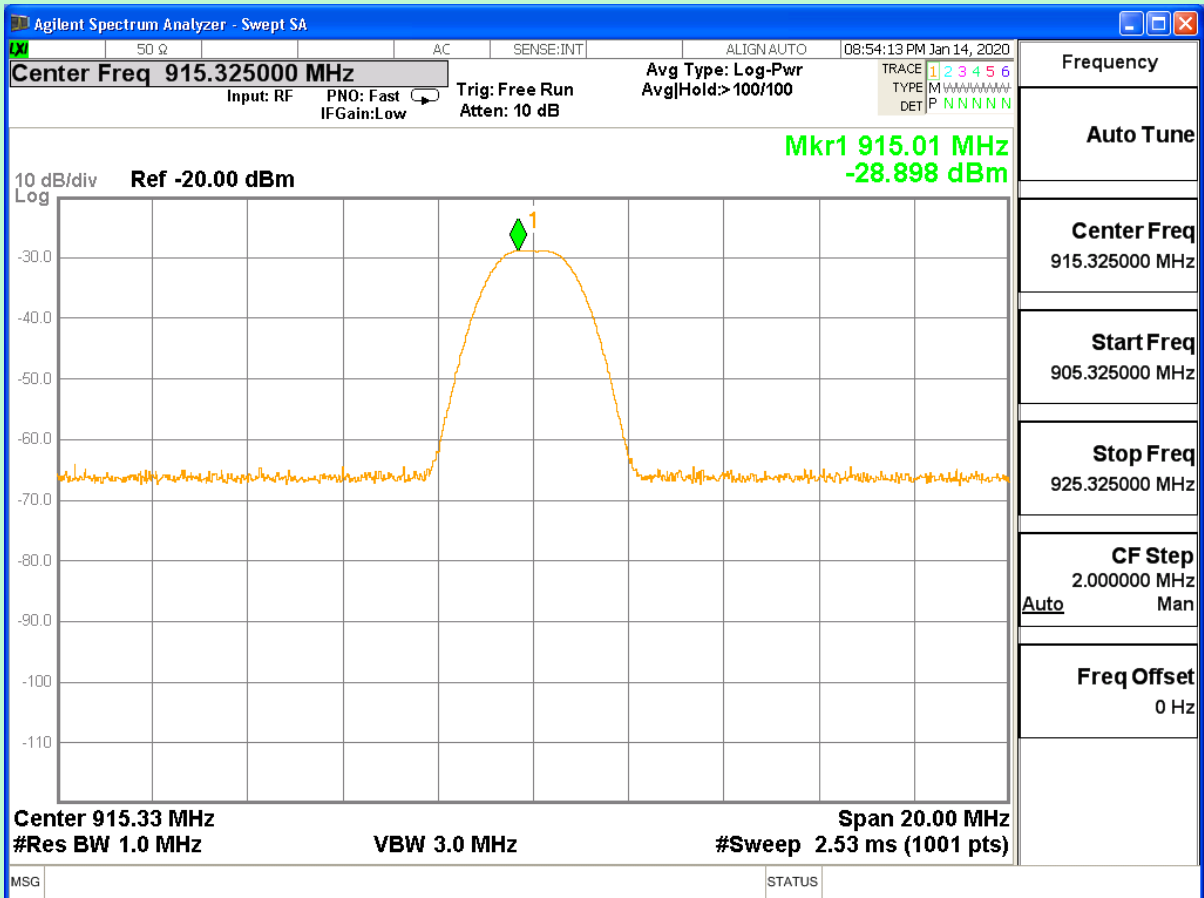


Antenna-1, Channel 4 (915.325MHz)

Note : Peak Graph - Horizontal polarization

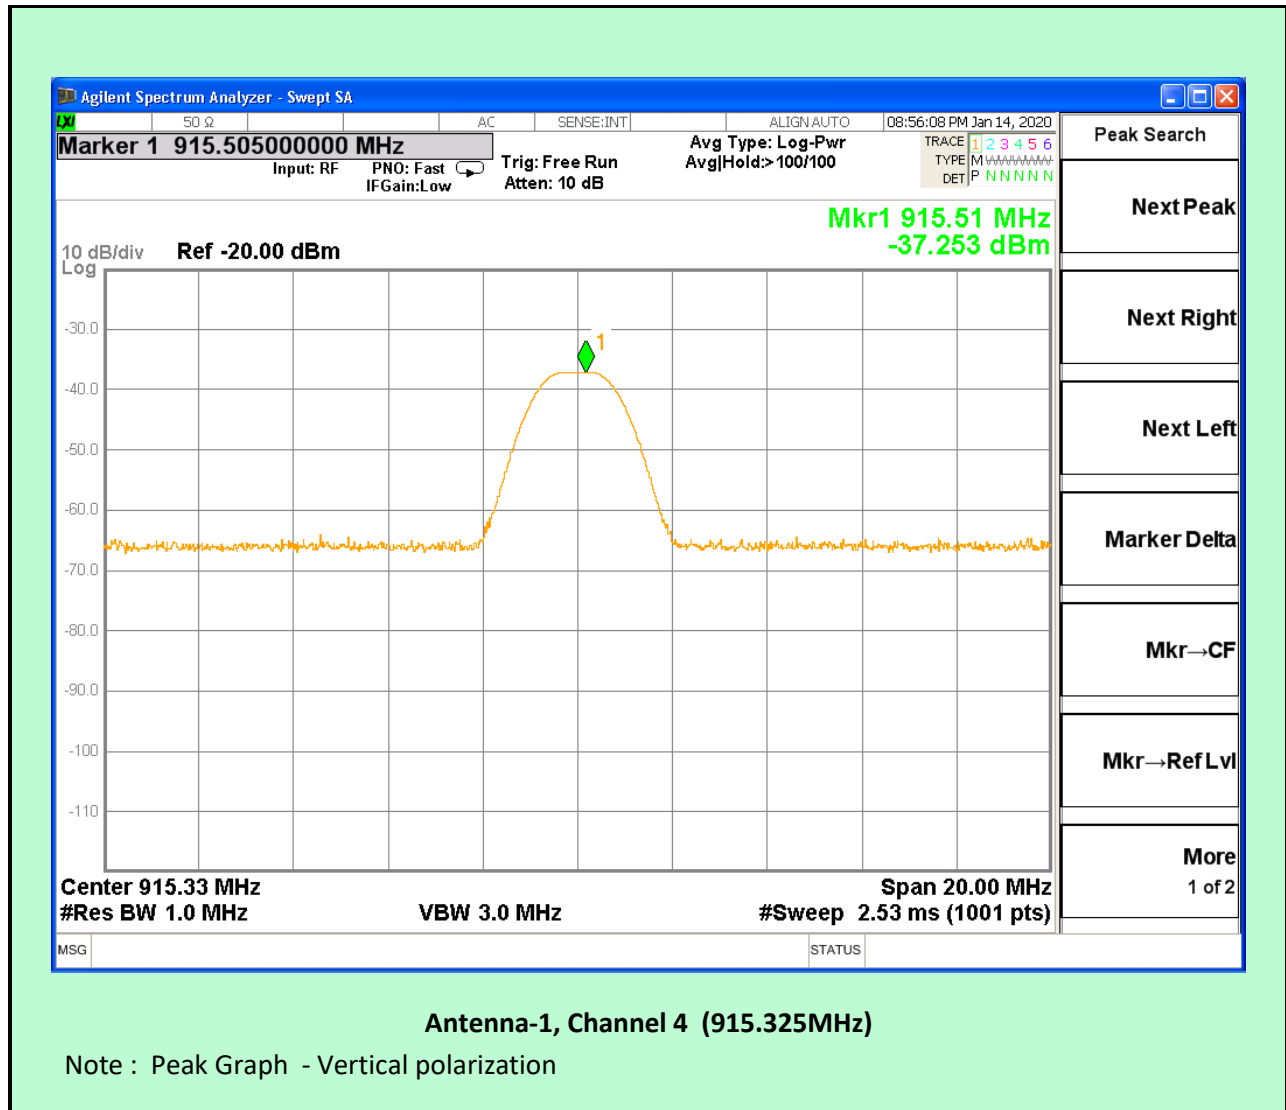


TEST GRAPHS – EIRP

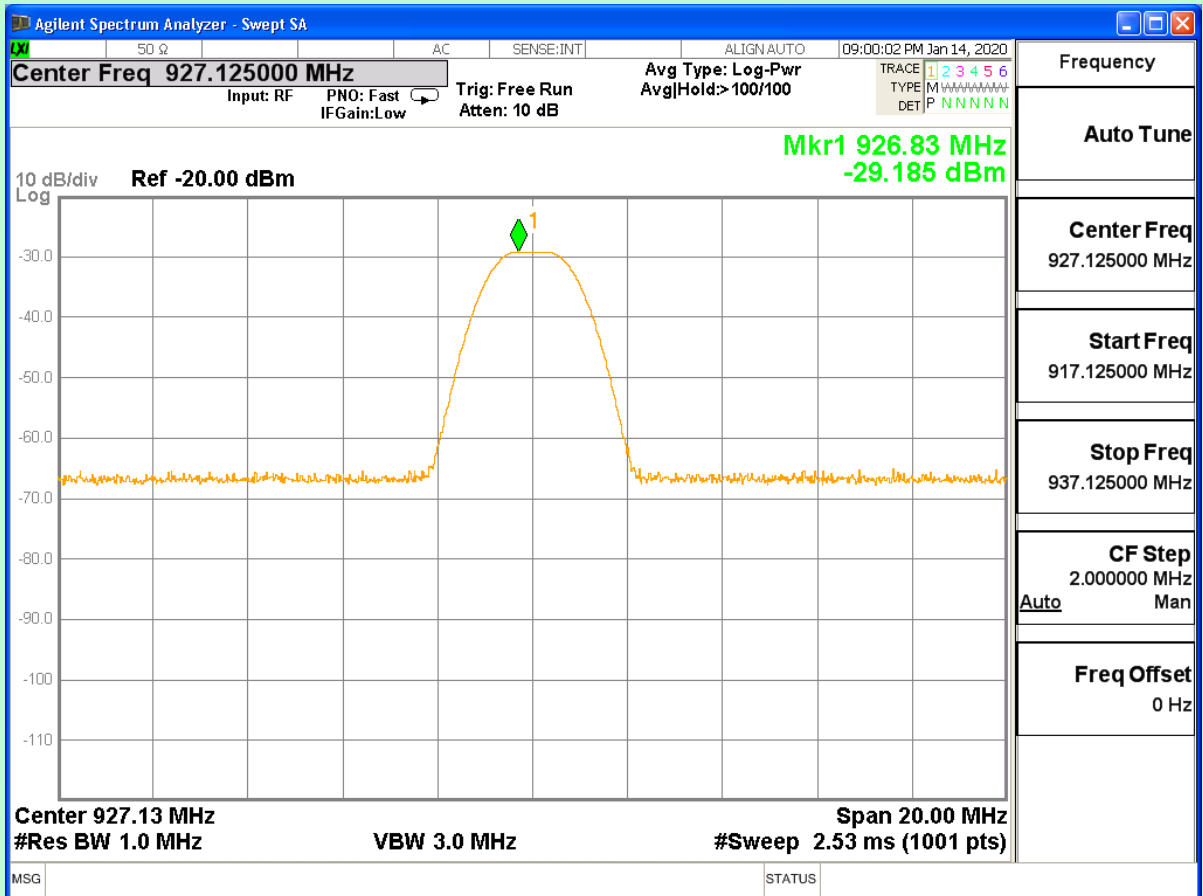

Antenna-1, Channel 6 (927.125MHz)

Note : Peak Graph - Horizontal polarization

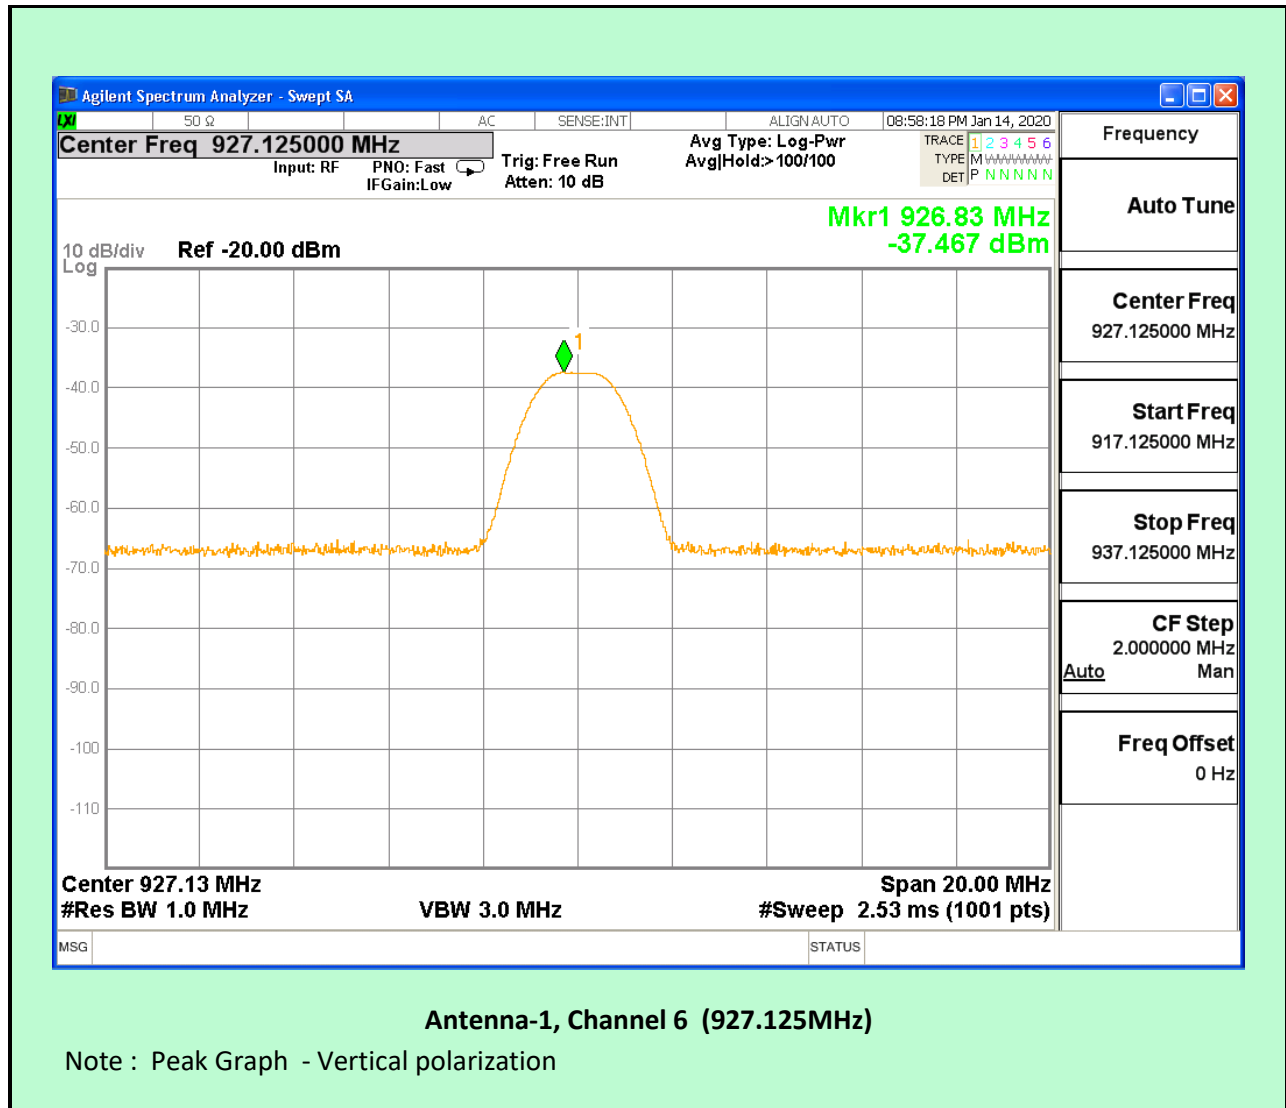



TEST RESULT – EIRP										
Channel	Channel Freq	Rx Antenna Height	Rx Ant Pol	Measured Level	Cable Loss	External Att	Path loss @ 3m	Rx Antenna Gain	Calculated Rx Power	Calculated EIRP
#	MHz	cm	H/V	dBm	dB	dB	dB	dBi	dBm	dBm
Antenna – 1 (DTS Mode)										
CH-1	902.875	150	H	-28.03	2.91	6	41.21	6.3	-25.42	15.79
CH-1	902.875	100	V	-36.42	2.91	6	41.21	6.3	-33.81	7.4
CH-4	915.325	150	H	-28.89	2.91	6	41.21	6.3	-26.28	14.93
CH-4	915.325	160	V	-37.25	2.91	6	41.21	6.3	-34.64	6.57
CH-6	927.125	180	H	-29.18	2.91	6	41.21	6.3	-26.57	14.64
CH-6	927.125	160	V	-37.46	2.91	6	41.21	6.3	-34.85	6.36
<p><b>Note :</b>                      Effective Isotropic Radiated Power (dBm)= Pr(dBm) +Lp(dB)                      Pr = Pmeas(dBm)-Gr(dBi)+Lc(dB)+Latt(dB)                      Lp =20Log F+20LogD-27.5                      Where:                      Pr =Calculated Received Power Level(dBm)                      Lp= Free Space Path Loss(dB)                      Pmeas= Measured Power Level(dBm)                      Gr = Receiver Antenna Gain(dBi)                      Lc = Cable Loss (dB)                      Latt= External Attenuator(dB)                      F = Frequency (MHz)                      D= Distance (m)</p>										

## 3.6 SPURIOUS RADIATED EMISSIONS


<b>EUT Nomenclature</b>	Wireless Photo Detector	<b>Test Report No.</b>	EMC0420-1
<b>Model No.</b>	FWD-200P	<b>Serial No.</b>	138
<b>Test Start Date</b>	14-Dec-2019	<b>Temperature (°C)</b>	23 ± 2
<b>Test End Date</b>	28-Feb-2020	<b>Humidity RH (%)</b>	55 ± 3
<b>Tested By</b>	Shaithanya C	<b>Pressure (mbar)</b>	NR
<b>Input Voltage / Freq</b>	3.3V, 24mA		
<b>Operating Mode</b>	Refer Page 6 Operating Modes Table		
<b>Test configuration</b>	Refer Page 6 Test Configuration Table		
<b>Deviation from Std</b>	NA		
<b>Comment</b>	NA		
<b>TEST FREQUENCY RANGE</b>			
<b>Start Frequency</b>	9KHz	<b>Stop Frequency</b>	10GHz
<b>MAXIMUM OPERATING FREQUENCY</b>			
902MHz to 928MHz			
<b>TEST PARAMETERS</b>			
<b>Antenna Height</b>	1m to 4m	<b>Turntable Rotation</b>	0° to 360°
<b>Applicable standard</b>	FCC Part 15.209	<b>Test Method</b>	KDB 558074
<b>Equipment Class</b>	NA	<b>Measurement Distance</b>	3m

## TEST EQUIPMENT

Y/N	Equipment	Make	Model	Sl. No.	Cal Due Date
Y	EMI Test Receiver	R&S	ESU26	100229	7-Aug-20
Y	3m Semi Anechoic Chamber	ETS Lindgren	DKE 6X7 DBL.DR	1625	30-Jul-22
Y	Double Ridge Guide Horn Antenna	ETS Lindgren	3117	64055	1-Nov-21
Y	Bilog Antenna	ETS Lindgren	HLP3003C	130525	5-Nov-21
Y	Loop Antenna	ETS Lindgren	6507	103694	15-Nov-21
Y	RF cable (9KHz to 18GHz)	Huber + Schuner	Sucoflex100	515518/126E	04-Oct-21
Y	Signal Conditioning unit	R&S	SCU-18	10178	5-Jun-20
Y	High Pass Filter	Wainwright	WHKX1.5/15G-12ST	1	24-Feb-21
Y	EMC32 Software	R&S	8.30.0	820-OT101248	NA


Note: Switch ON /OFF the Internal Preamplifier based on carrier level and or noise floor without overloading the receiver

TEST GRAPHS – 9 KHz to 30 MHz (Antenna 1)

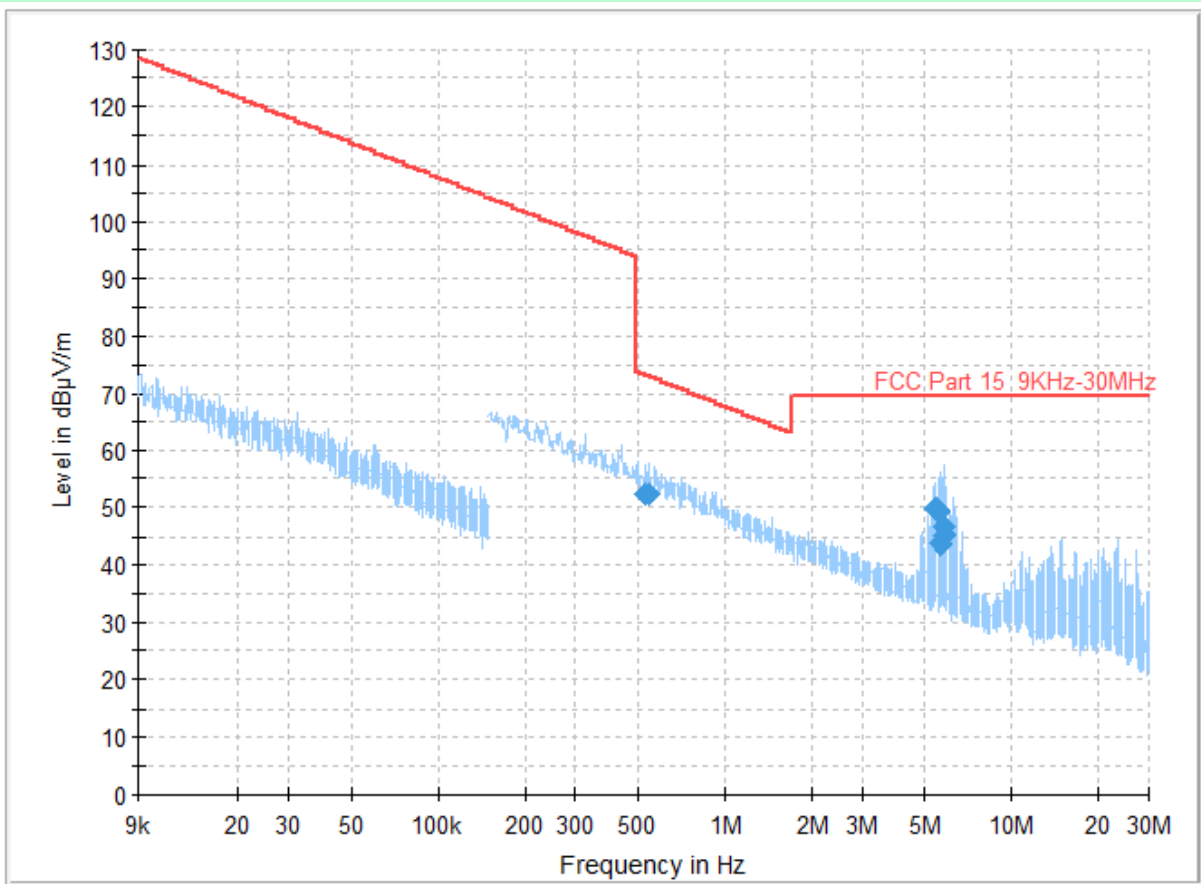


Channel 1 (902.875MHz) – Parallel

TEST GRAPHS – 9 KHz to 30 MHz (Antenna 1)

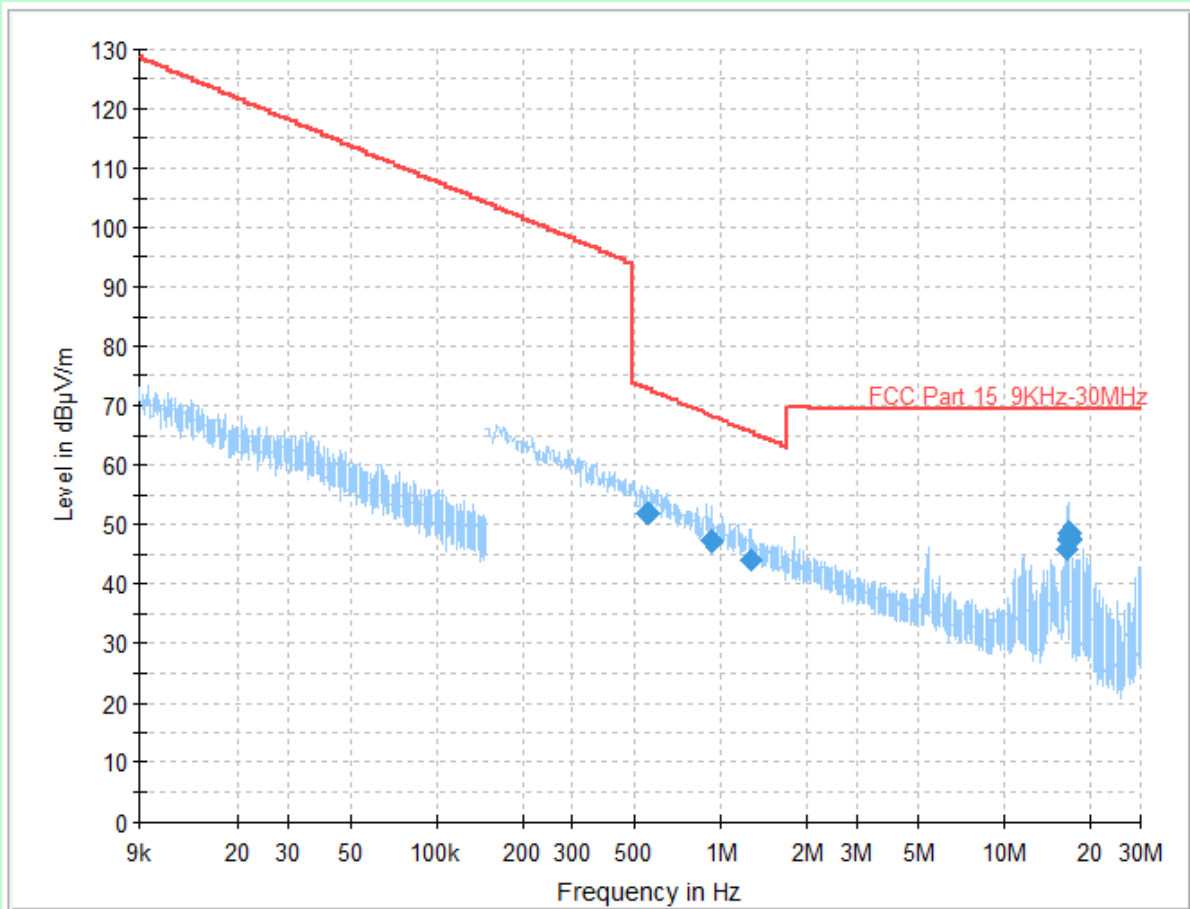


Channel 1 (902.875MHz) – Perpendicular

TEST GRAPHS – 9 KHz to 30 MHz (Antenna 1)

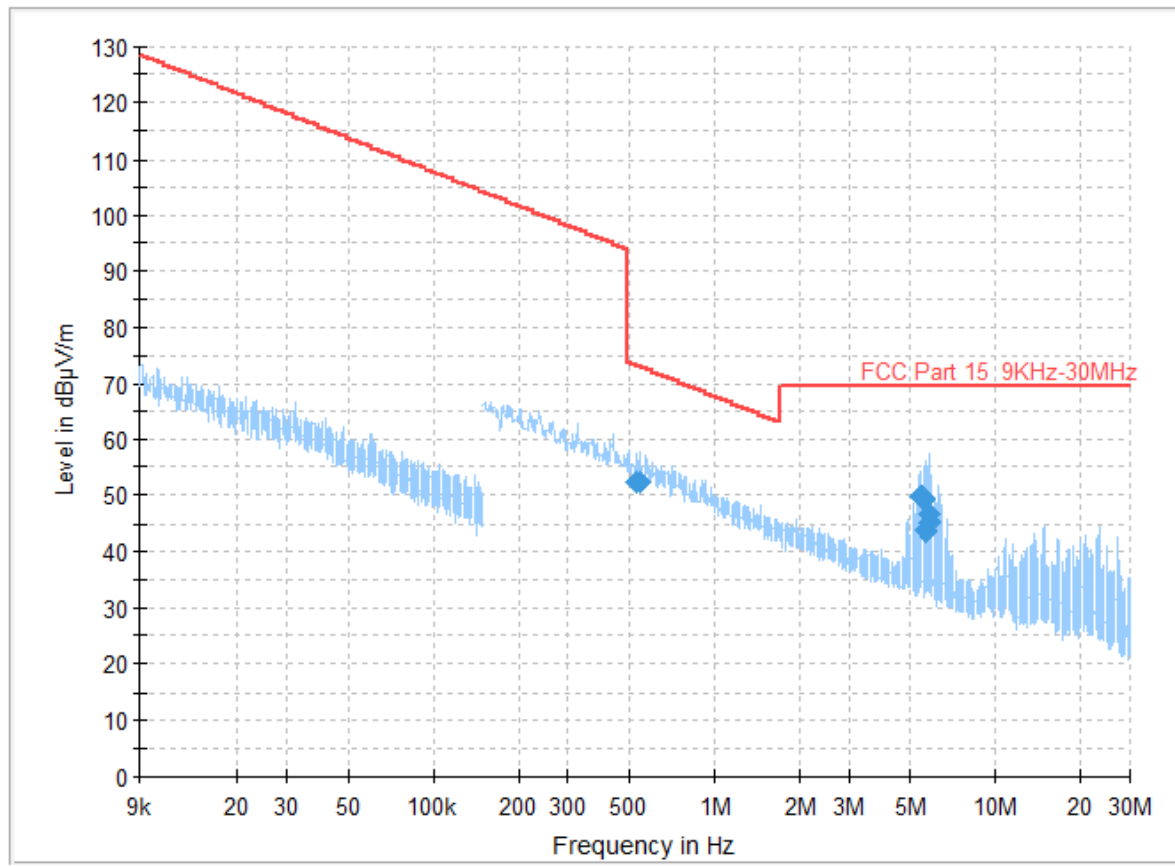


Channel 4 (915.325MHz) – Parallel

TEST GRAPHS – 9 KHz to 30 MHz (Antenna 1)

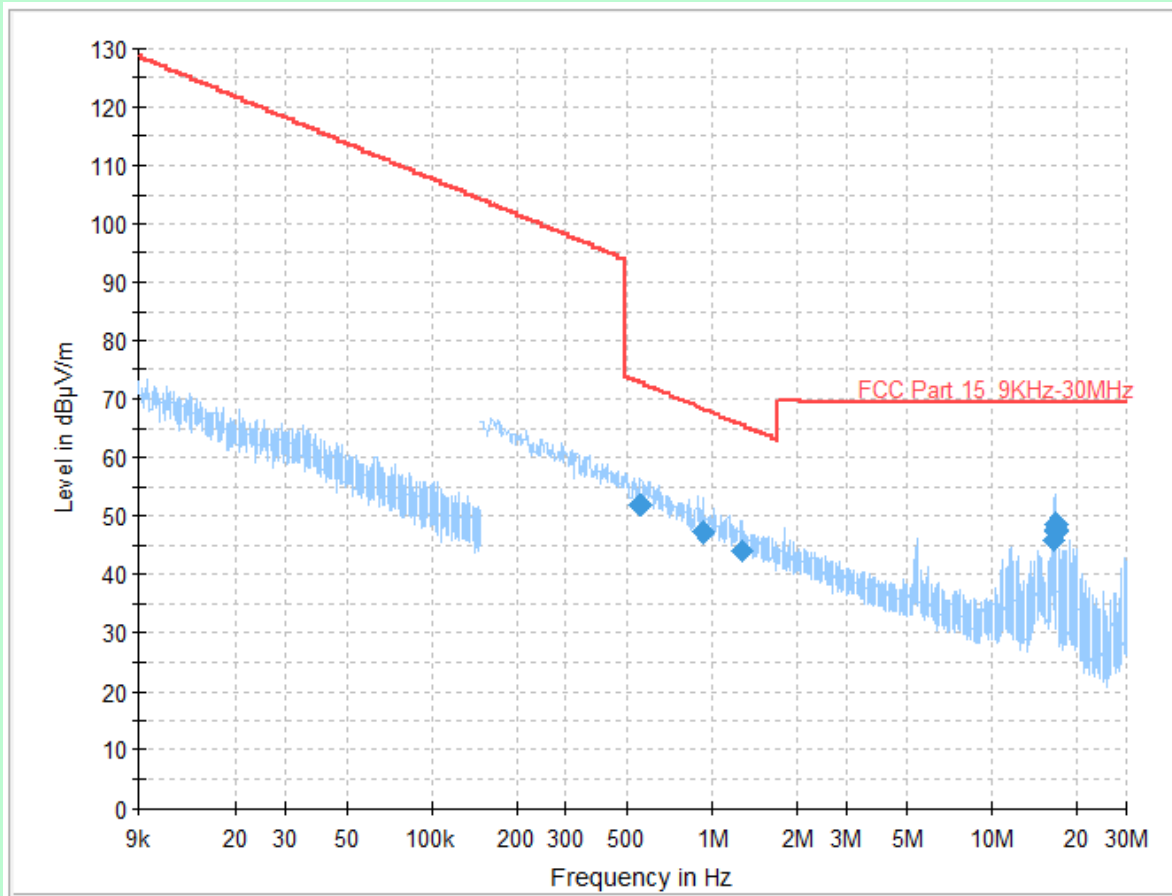


Channel 4 (915.325MHz) – Perpendicular

TEST GRAPHS – 9 KHz to 30 MHz (Antenna 1)

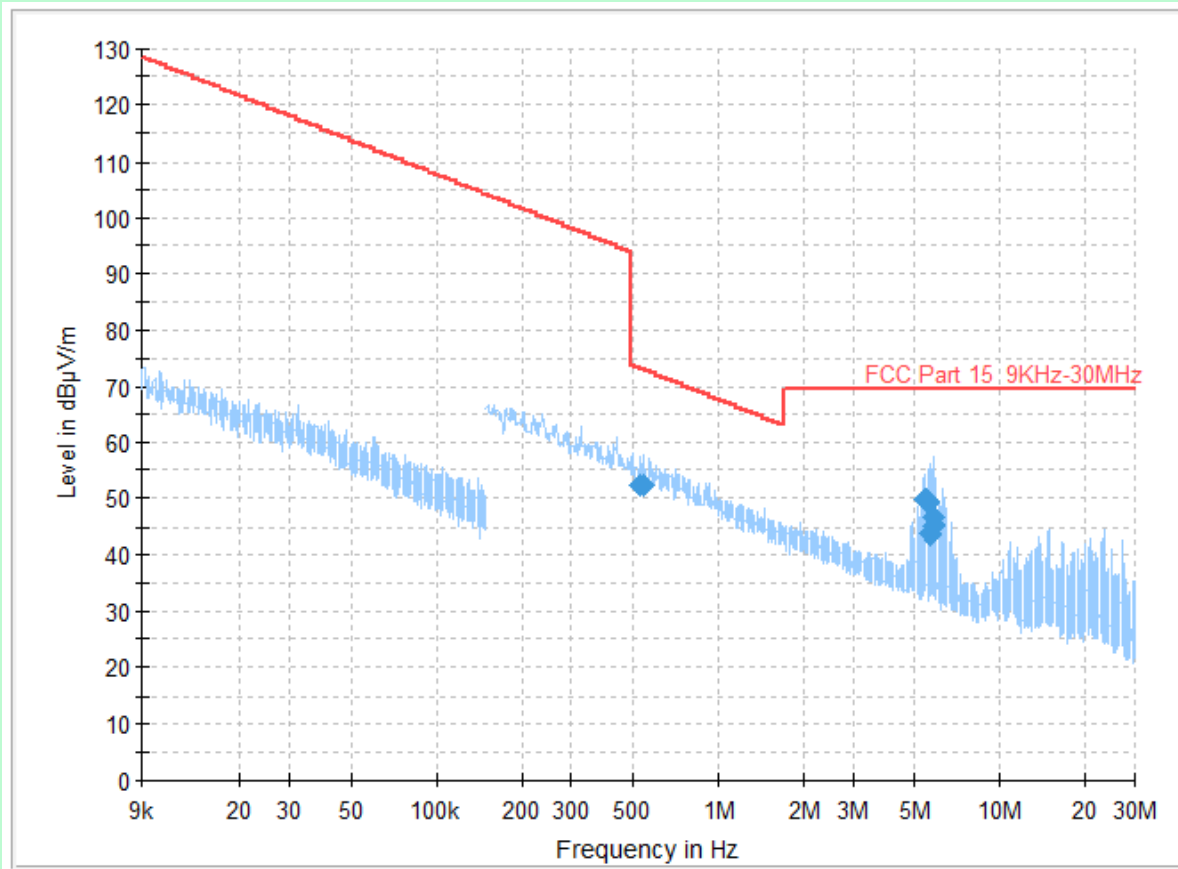

Channel 6 (927.125MHz) – Parallel

TEST GRAPHS – 9 KHz to 30 MHz (Antenna 1)

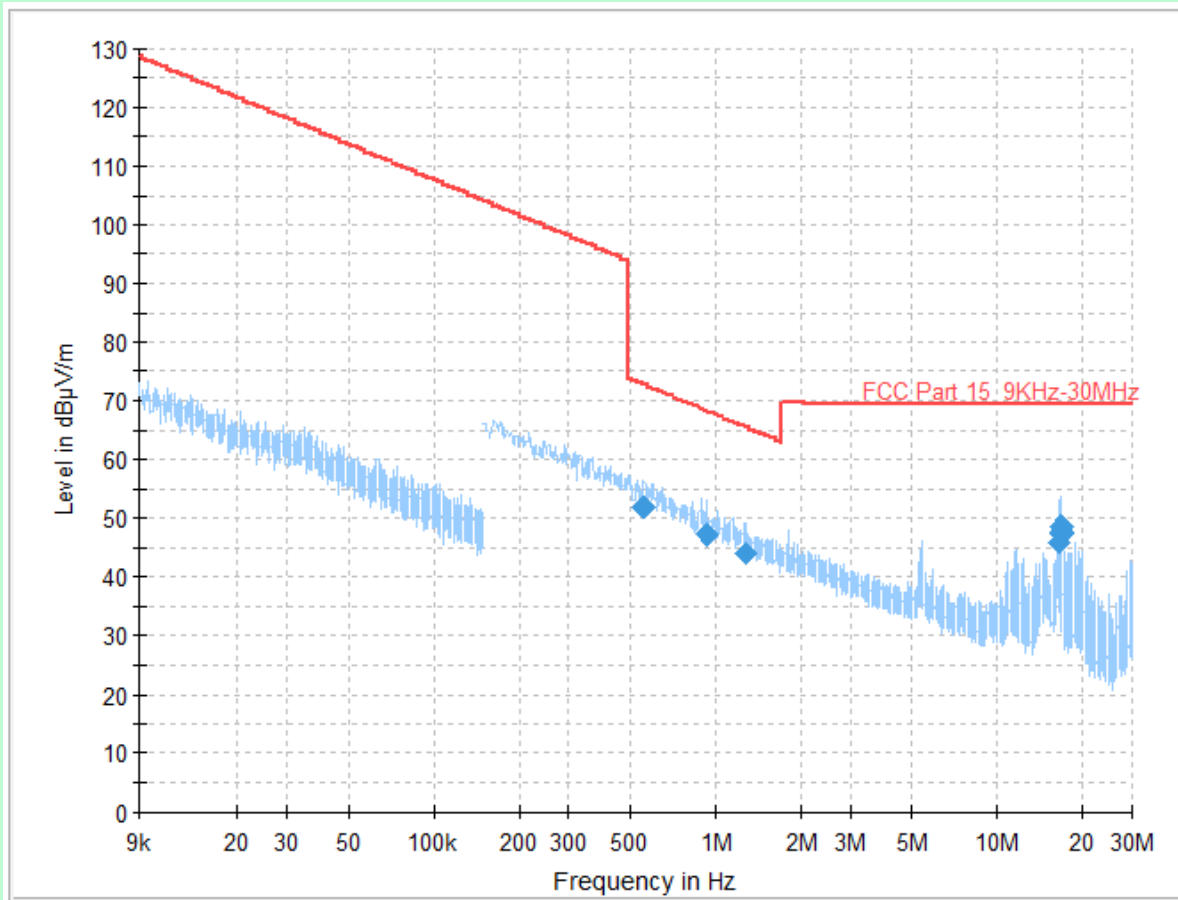


Channel 6 (927.125MHz) – Perpendicular




TEST RESULT – 9 KHz to 30 MHz									
Channel	Channel Frequency	Measured Spurious	Quasi Peak	Height	Ant Pol	Azimuth	Margin	Limit @ 3m Distance	Results
#	MHz	MHz	dBµV/m	cm	Parallel / Perpendicular	deg	dB	dBµV/m	
No emissions detected that are a product of the transmitter. Emissions shown in the plot are related to the chamber ambient									
NOTE: Measured Field Strength –dBuV/m (9 KHz to 1 GHz) = Receiver Readings (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)									

TEST GRAPHS – 30MHz to 1GHz (Antenna 1)

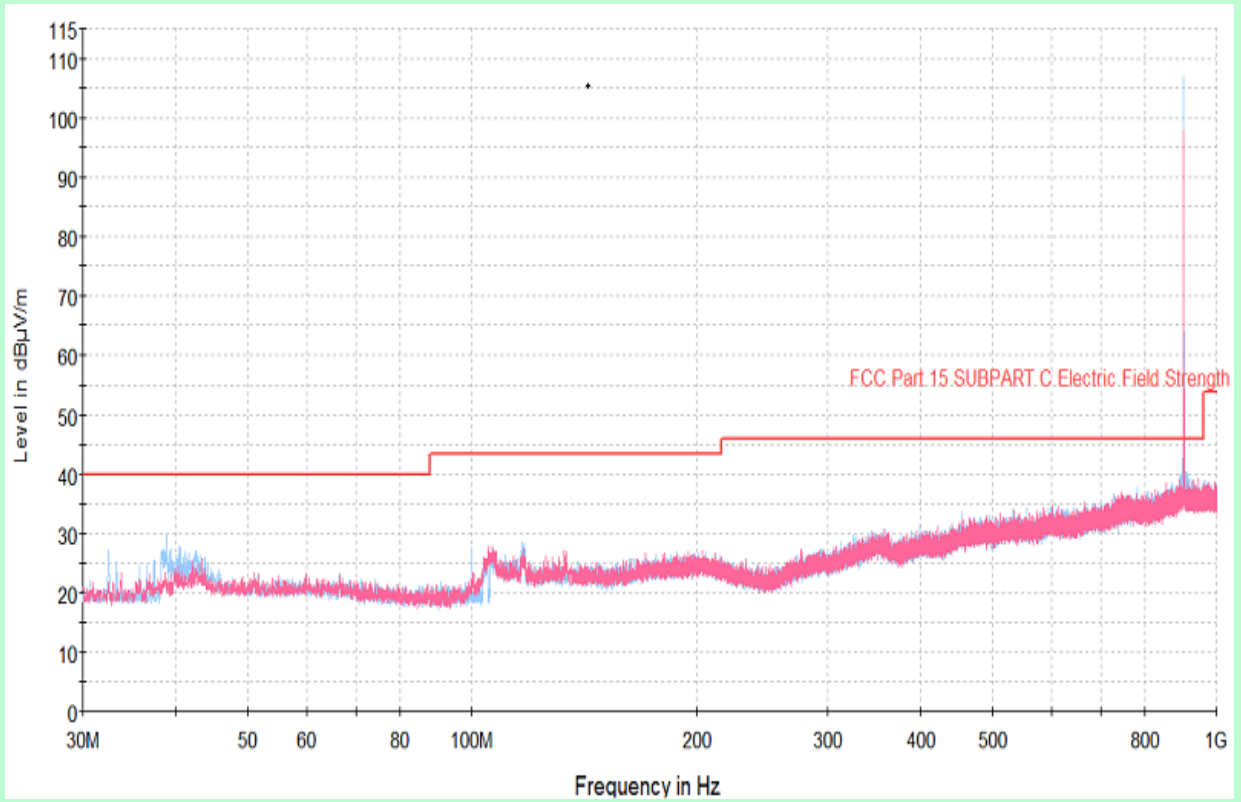


Channel 1 (902.875MHz) – Antenna 1

TEST GRAPHS – 30MHz to 1GHz (Antenna 1)

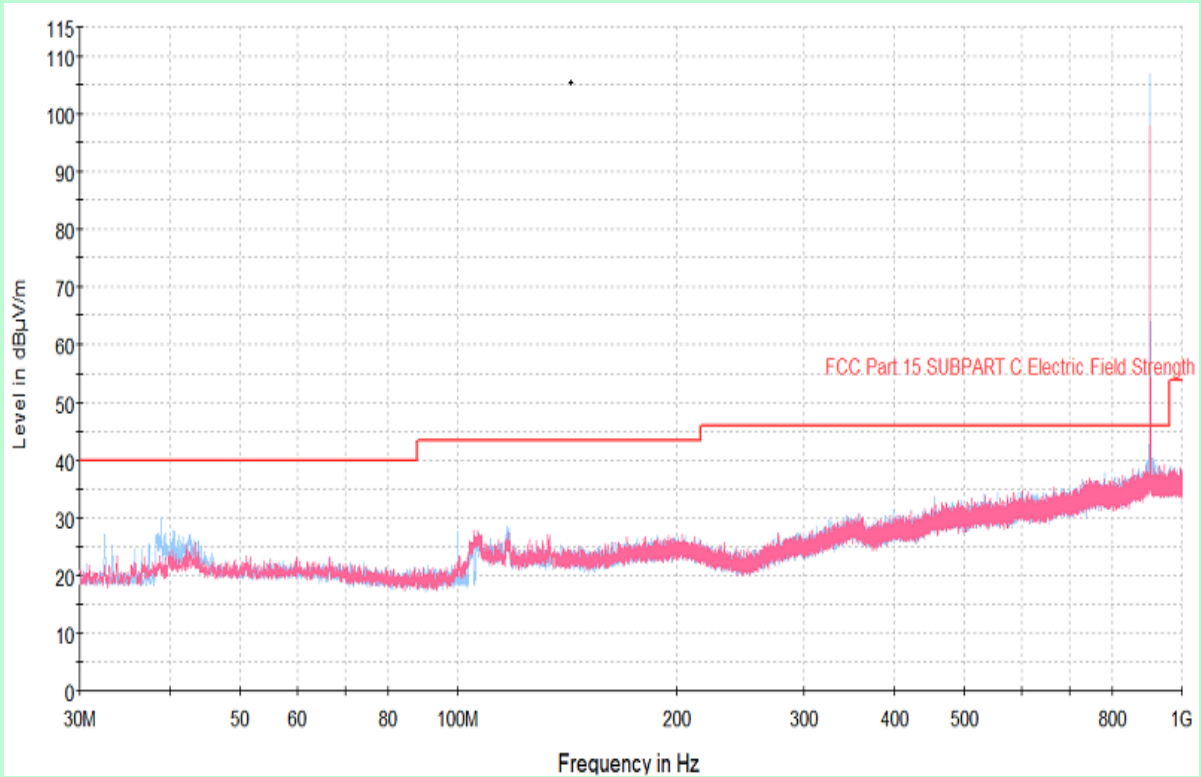

Channel 4 (915.325MHz) – Antenna 1


TEST GRAPHS – 30MHz to 1GHz (Antenna 1)

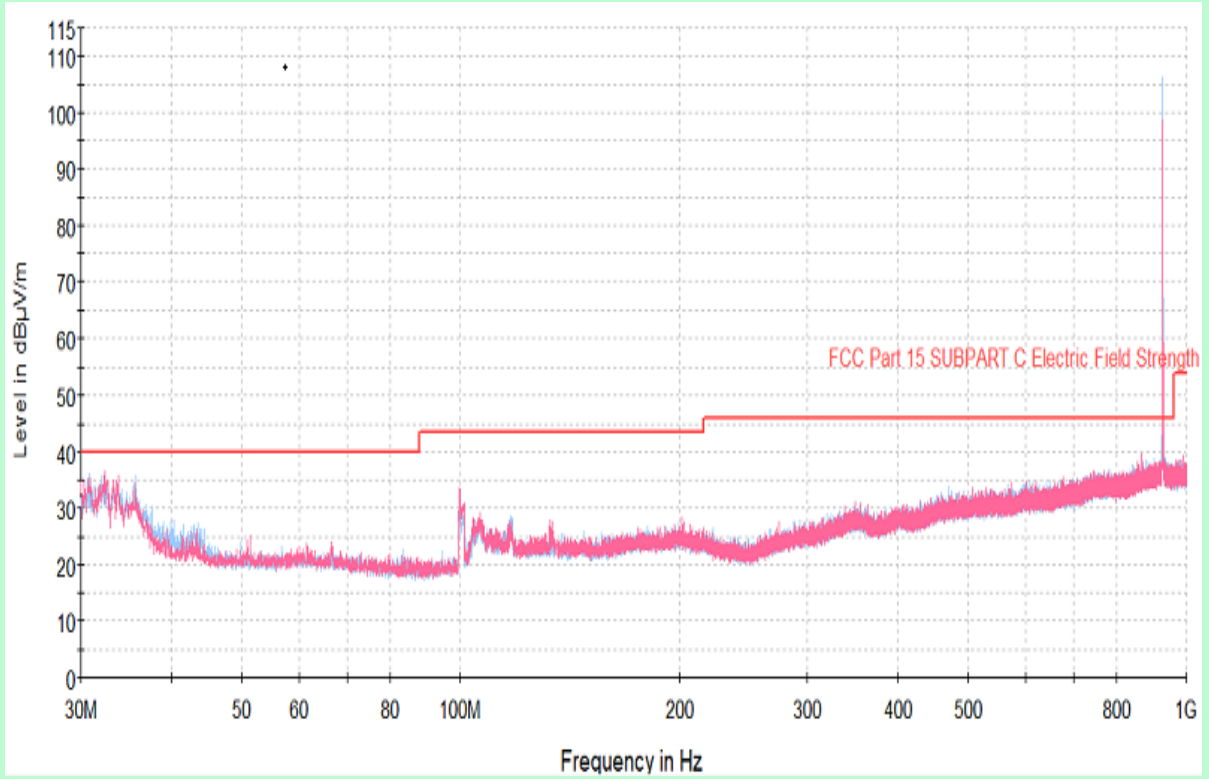

Channel 6 (927.125MHz) – Antenna 1


TEST RESULT – 30 MHz to 1 GHz								
Channel	Measured Spurious	Quasi Peak	Height	Ant Pol	Azimuth	Margin	Limit @ 3m Distance	Results
#	MHz	dBµV/m	Cm	H / V	deg	dB	dBµV/m	
Antenna – 1								
CH-1	340.01	27.41	100	V	35	18.59	46	Pass
CH-1	355.14	27.69	100	H	199	18.31	46	Pass
CH-1	364.26	27.42	100	V	187	18.58	46	Pass
CH-1	509.95	31.38	100	H	327	14.62	46	Pass
CH-1	512.09	31.43	400	H	61	14.57	46	Pass
CH-1	519.65	31.57	200	V	146	14.43	46	Pass
CH-1	683.39	34.98	200	H	356	11.02	46	Pass
CH-1	688.04	35.08	400	H	21	10.92	46	Pass
CH-1	838.39	37.39	300	V	91	8.61	46	Pass
CH-1	839.95	37.38	100	V	229	8.62	46	Pass
CH-1	841.69	37.51	200	H	80	8.49	46	Pass
CH-1	902.74	106.89	100	H	6	-	-	Intended Frequency
CH-4	519.07	31.52	200	V	299	14.48	46	Pass
CH-4	523.34	31.63	400	V	94	14.37	46	Pass
CH-4	693.48	35.21	200	H	158	10.79	46	Pass
CH-4	695.03	35.27	100	H	191	10.73	46	Pass
CH-4	696.97	35.32	300	H	220	10.68	46	Pass
CH-4	797.27	36.56	400	H	74	9.44	46	Pass
CH-4	840.53	37.42	400	H	202	8.58	46	Pass
CH-4	847.71	37.53	300	V	133	8.47	46	Pass
CH-4	915.22	106.74	100	H	275	-	-	Intended Frequency
CH-6	506.85	31.3	100	V	227	14.7	46	Pass
CH-6	517.32	31.5	400	H	171	14.5	46	Pass
CH-6	522.76	31.62	400	H	189	14.38	46	Pass
CH-6	675.82	34.74	100	H	169	11.26	46	Pass
CH-6	691.54	35.16	100	V	337	10.84	46	Pass
CH-6	839.36	37.36	400	V	67	8.64	46	Pass
CH-6	843.63	37.53	100	H	228	8.47	46	Pass
CH-6	847.12	37.59	100	H	151	8.41	46	Pass
CH-6	926.99	106.34	100	H	97	-	-	Intended Frequency
NOTE: Measured Field Strength –dBuV/m (9 KHz to 1 GHz) = Receiver Readings (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)								

TEST GRAPHS – 1GHz to 10GHz (Antenna 1)

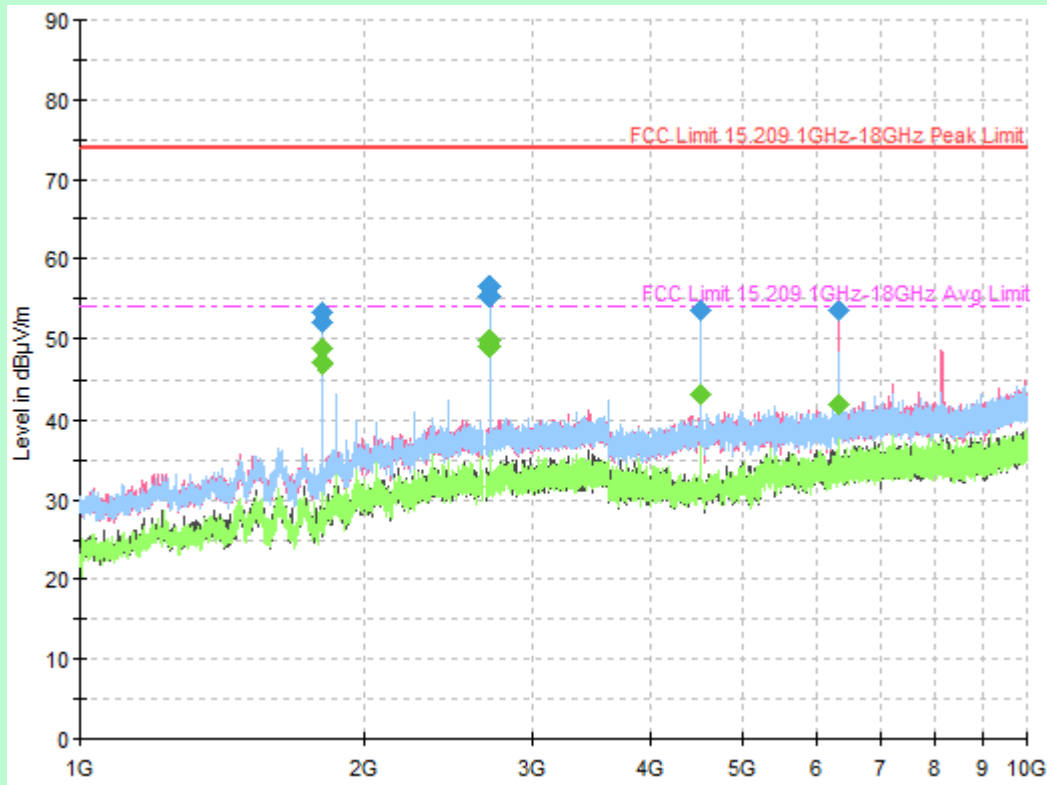


Channel 1 (902.875MHz) – Antenna 1

TEST GRAPHS – 1GHz to 10GHz (Antenna 1)

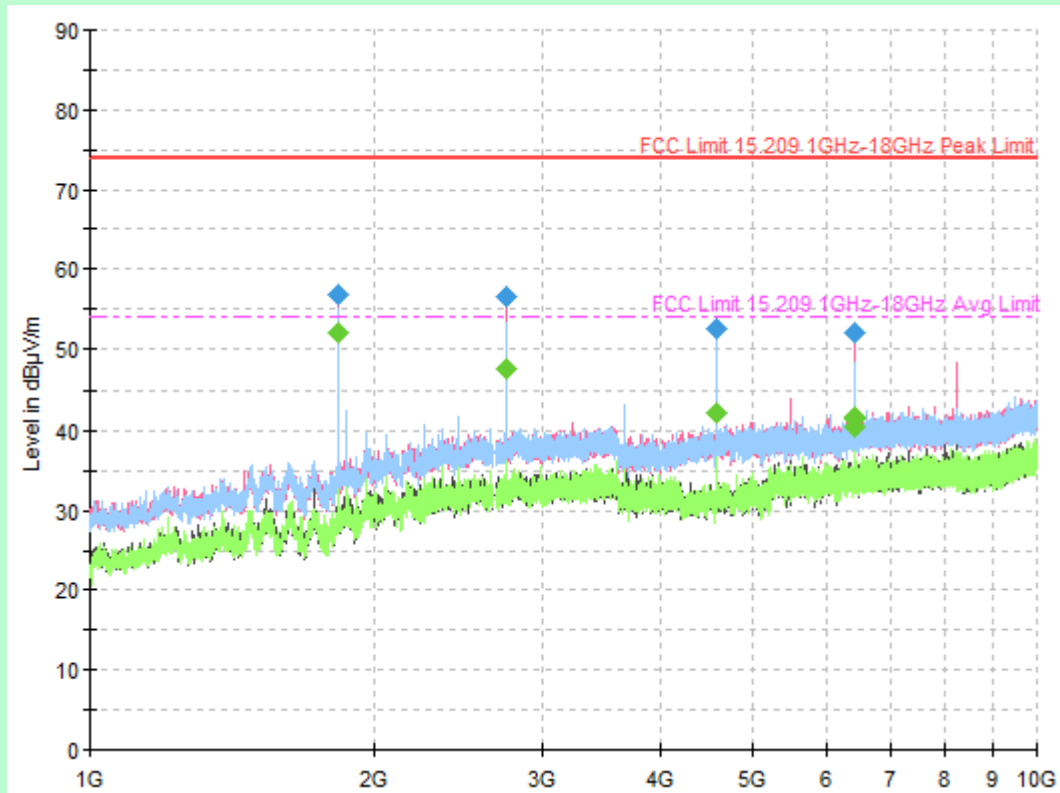

Channel 4 (915.325MHz) – Antenna 1

TEST GRAPHS – 1GHz to 10GHz (Antenna 1)

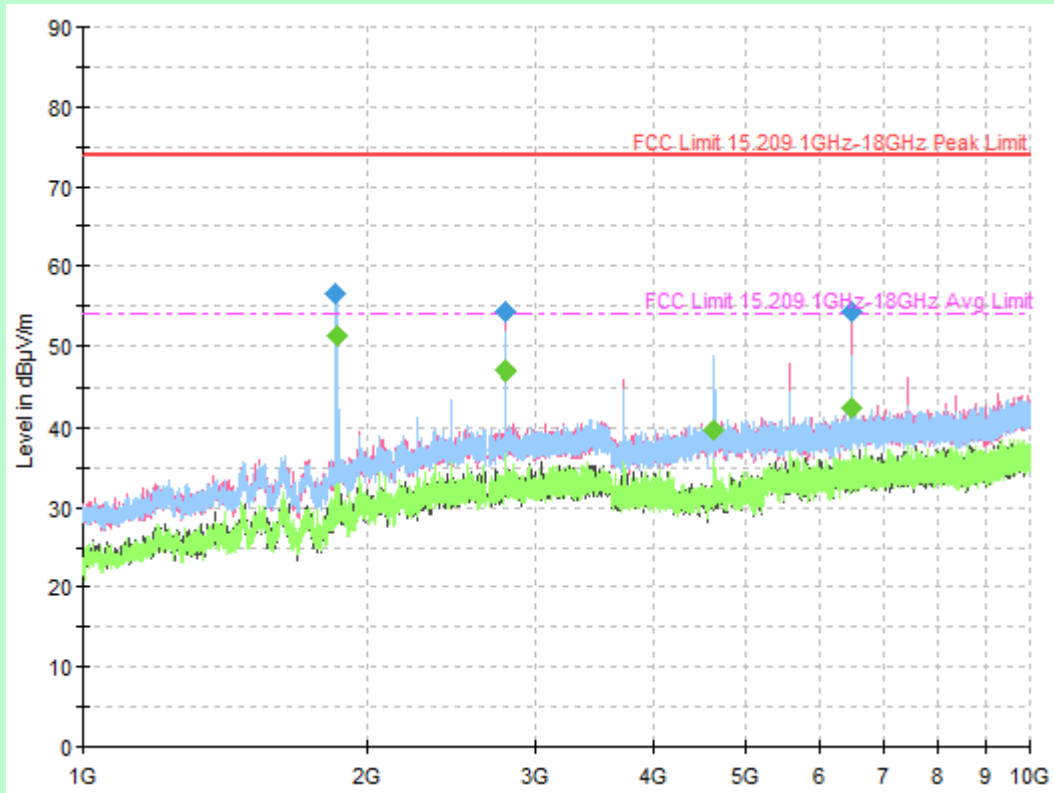

Channel 6 (927.125MHz) – Antenna 1




TEST RESULT – 1 GHz to 10 GHz						RESTRICTED BAND – PEAK		
Channel	Frequency	Measured Field Strength	Height	Ant Pol	Azimuth	Margin	Limit	Result
#	(MHz)	(dBµV/m)	(cm)	H / V	(deg)	(dB)	(dBµV/m)	
Antenna – 1								
CH-1	2707.43	55.34	300	V	15	18.66	74	PASS
CH-1	2709.04	56.52	300	V	359	17.48	74	PASS
CH-1	4515.79	53.52	400	H	317	20.48	74	PASS
CH-4	2745.04	56.55	300	V	300	17.45	74	PASS
CH-4	4574.93	52.53	400	H	228	21.47	74	PASS
CH-6	2782.00	54.22	300	V	196	19.78	74	PASS
Note : Measured Field Strength (dBuV/m) = Receiver Readings (dBuV) + Antenna Factor (dB/m) + Cable loss (dB) + Filter Insertion loss - Pre amplifier Gain (dB)								

TEST RESULT – 1 GHz to 10 GHz					RESTRICTED BAND – AVERAGE			
Channel	Frequency	Measured Average	Height	Ant Pol	Azimuth	Margin	Limit	Result
#	(MHz)	(dBµV/m)	(cm)	H / V	(deg)	(dB)	(dBµV/m)	
Antenna – 1								
CH-1	2707.75	48.92	300	V	359	5.08	54	PASS
CH-1	2709.04	49.76	300	V	359	4.24	54	PASS
CH-1	4515.46	43.33	400	H	317	10.67	54	PASS
CH-4	2745.04	47.42	300	V	300	6.58	54	PASS
CH-4	4575.57	42.32	400	H	233	11.68	54	PASS
CH-6	2780.71	46.9	300	V	191	7.1	54	PASS
CH-6	4636.96	39.74	300	H	133	14.26	54	PASS
Note : Measured Field Strength (dBuV/m) = Receiver Readings (dBuV) + Antenna Factor (dB/m) + Cable loss (dB) + Filter Insertion loss - Pre amplifier Gain (dB)								

TEST RESULT – 1 GHz to 10 GHz							NON- RESTRICTED BAND - PEAK		
Channel	Measured Fundamental	Spurious Emission	Measured Harmonic	Height	Ant Pol	Azimuth	Limit	Margin	Results
							[Fundamental – 20 dB]		
#	dBµV/m	MHz	dBµV/m	cm	H / V	deg	dBuV/m	dB	
Antenna – 1									
CH-1	106.89	1804.85	51.93	300	V	0	86.89	34.96	PASS
CH-1	106.89	1806.14	53.38	400	V	359	86.89	33.51	PASS
CH-1	106.89	6318.03	53.43	300	V	303	86.89	33.46	PASS
CH-4	106.74	1830.89	56.82	400	V	277	86.74	29.92	PASS
CH-4	106.74	6408.67	52.05	300	V	228	86.74	34.69	PASS
CH-6	106.34	1853.39	56.6	400	V	201	86.34	29.74	PASS
CH-6	106.34	6492.25	54.3	300	V	138	86.34	32.04	PASS
<b>Note :</b>									
Measured Harmonic Field Strength (dBuV/m) = Receiver Readings (dBuV) + Antenna Factor (dB/m) + Cable loss (dB) + Filter Insertion loss - Pre amplifier Gain (dB)									

# Annexure – 1

CONDUCTED RF TEST SETUP

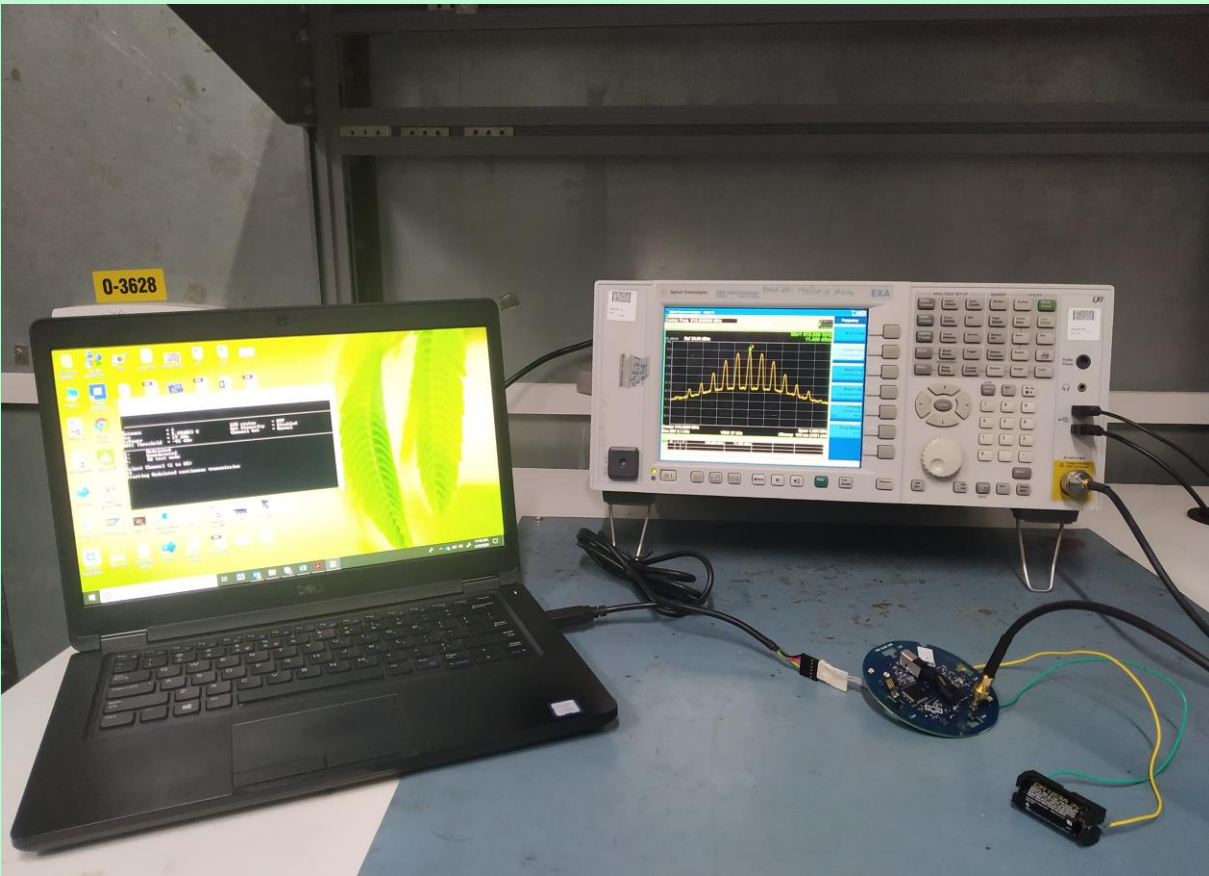

Conducted RF test setup

RADIATED EMISSION SETUP



Radiated Emission Setup – 9 KHz to 30 MHz [ Parallel ]







Radiated Emission Setup -30 MHz to 1 GHz [ Horizontal Polarization]





**Radiated Emission Setup –30 MHz to 1 GHz [ Vertical Polarization]**



Radiated Emission Setup –1 GHz to 10 GHz [ Vertical Polarization]



Radiated Emission Setup -1 GHz to 10 GHz [Horizontal Polarization]