



Measurement of RF Interference from a W4 Zigbee Transmitter

For	Honeywell - System Sensor 3825 Ohio Avenue St. Charles, IL 60174
P.O. Number	4300843679
Date Tested	May 2 and 3, 2016
Test Personnel	Brandon Lugo
Specification	FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.247 for Digital Modulation Intentional Radiators Operating within the band 2400-2483.5MHz Industry Canada RSS-247 Industry Canada RSS-GEN

Test Report By:

A handwritten signature in black ink that reads "Brandon Lugo".

Brandon Lugo
EMC Engineer

Requested By:

Paul Brouillette
Honeywell - System Sensor

Approved By:

A handwritten signature in black ink that reads "Raymond J. Klouda".

Raymond J. Klouda
Registered Professional
Engineer of Illinois - 44894

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1. INTRODUCTION		5
1.1 Scope of Tests		5
1.2 Purpose		5
1.3 Deviations, Additions and Exclusions		5
1.4 EMC Laboratory Identification		5
1.5 Laboratory Conditions		5
2. APPLICABLE DOCUMENTS		5
3. EUT SETUP AND OPERATION		6
3.1 General Description		6
3.1.1 Power Input		6
3.1.2 Grounding		6
3.2 Software		6
3.3 Operational Mode		6
The EUT was energized. The unit was programmed to operate in one of the following modes:		6
3.4 EUT Modifications		6
4. TEST FACILITY AND TEST INSTRUMENTATION		6
4.1 Shielded Enclosure		6
4.2 Test Instrumentation		6
4.3 Calibration Traceability		6
4.4 Measurement Uncertainty		7
5. TEST PROCEDURES		7
5.1 Transmitter		7
5.1.1 Powerline Conducted Emissions		7
5.1.1.1 Requirements		7
5.1.1.2 DTS (6dB) Bandwidth		7
5.1.2.1 Requirements		7
5.1.2.2 Procedures		7
5.1.2.3 Results		7
5.1.3 Peak Output Power/EIRP		8
5.1.3.1 Requirements		8
5.1.3.2 Procedures		8
5.1.3.2.1 Antenna Conducted Peak Output Power		8
5.1.3.2.2 Radiated Method EIRP		8
5.1.3.3 Results		8
5.1.4 Duty Cycle Factor Measurements		8
5.1.4.1 Procedures		8
5.1.4.2 Results		9
5.1.5 Antenna Conducted Spurious Emissions		9
5.1.5.1 Requirements		9
5.1.5.2 Procedures		9
5.1.5.3 Results		9
5.1.6 Radiated Spurious Emissions Measurements		9
5.1.6.1 Requirements		9
5.1.6.2 Procedures		9
5.1.6.3 Results		10
5.1.7 Band Edge Compliance		10
5.1.7.1 Requirements		10
5.1.7.2 Procedures		10

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

5.1.7.2.1 Low Band Edge	10
5.1.7.2.2 High Band Edge.....	11
5.1.7.3 Results	11
5.1.8 Power Spectral Density	11
5.1.8.1 Requirement	11
5.1.8.2 Procedures	11
5.1.8.3 Results	12
6. CONCLUSIONS	12
7. CERTIFICATION	12
8. ENDORSEMENT DISCLAIMER	12
9. EQUIPMENT LIST	13
Table 9-1 Equipment List	13

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

REVISION HISTORY

Revision	Date	Description
—	05/06/2016	Initial release

Measurement of RF Emissions from a Transmitter, Part No. W4 Zigbee

1. INTRODUCTION

1.1 Scope of Tests

This document represents the results of the series of radio interference measurements performed on a Honeywell - System Sensor Transmitter, Part No. W4 Zigbee, Serial No. W4-IC, (hereinafter referred to as the EUT). The EUT is a digital modulation transmitter. The transmitter was designed to transmit in the 2400-2483.5 MHz band using an integral, non-removable monopole radiator antenna printed directly on the RF PCB. Three separate samples were submitted for the radiated measurements with each set to a low, mid, or high channel transmit frequency. Three separate samples were submitted for the conducted measurements with coaxial connector to the antenna port, each set to a low, mid, or high channel transmit frequency. The EUT was manufactured and submitted for testing by Honeywell - System Sensor located in St. Charles, IL.

1.2 Purpose

The test series was performed to determine if the EUT meets the conducted RF emission requirements, radiated RF emissions requirements, and additional provisions of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.249 for Intentional Radiators Operating within the 2400-2483.5 MHz band.

The test series was also performed to determine if the EUT meets the conducted RF emission requirements, radiated RF emissions requirements, and additional provisions of the Industry Canada Radio Standards Specification RSS-Gen Section 8.8 and Industry Canada Radio Standards Specification RSS-247 for Transmitters.

Testing was performed in accordance with ANSI C63.4-2014.

1.3 Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series

1.4 EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the American Association for Laboratory Accreditation (A2LA), A2LA Lab Code: 1786-01.

1.5 Laboratory Conditions

The temperature at the time of the test was 23°C and the relative humidity was 19%.

2. APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 2015
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- Federal Communications Commission Office of Engineering and Technology Laboratory Division, Guidance For Performing Compliance Measurements On Digital Transmissions Systems (DTS) Operating Under §15.247

April 8, 2016

- Industry Canada RSS-247, Issue 1, May 2015, "Spectrum Management and Telecommunications Radio Standards Specification, Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs), and License-Exempt Local Area Network (LE-LAN) Devices"
- Industry Canada RSS-GEN, Issue 4, November 2014, "Spectrum Management and Telecommunications Radio Standards Specification, General Requirements for Compliance of Radio Apparatus"

3. EUT SETUP AND OPERATION

3.1 General Description

The EUT is a Transmitter, Part No. W4 Zigbee. A block diagram of the EUT setup is shown as Figure 1 and Figure 2.

3.1.1 Power Input

The EUT was powered by 3VDC from four (4) CR123A lithium internal batteries.

3.1.2 Grounding

The EUT was ungrounded during the tests.

3.2 Software

For all tests the EUT had Firmware P/N S05-0051, Rev. A loaded onto the device to provide correct load characteristics.

3.3 Operational Mode

The EUT was energized. The unit was programmed to operate in one of the following modes:

- Transmit at 2405MHz (Output Power Setting = 16dBm)
- Transmit at 2440MHz (Output Power Setting = 16dBm)
- Transmit at 2480MHz (Output Power Setting = 10dBm)

3.4 EUT Modifications

No modifications were required for compliance.

4. TEST FACILITY AND TEST INSTRUMENTATION

4.1 Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.

4.2 Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1..

Conducted and radiated emission tests were performed with an EMI receiver utilizes the bandwidths and detectors specified in the requirements.

4.3 Calibration Traceability

Test equipment is maintained and calibrated on a regular basis with a calibration interval no greater than two

years. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

4.4 Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty for these tests is presented below:

Conducted Emissions Measurements			
Combined Standard Uncertainty		1.06	-1.06
Expanded Uncertainty (95% confidence)		2.12	-2.12

Radiated Emissions Measurements			
Combined Standard Uncertainty		2.09	-2.09
Expanded Uncertainty (95% confidence)		4.19	-4.19

5. TEST PROCEDURES

5.1 Transmitter

5.1.1 Powerline Conducted Emissions

5.1.1.1 Requirements

Since the EUT was powered by internal batteries and have no connections to AC power, no conducted emissions tests are required.

5.1.2 DTS (6dB) Bandwidth

5.1.2.1 Requirements

Per 15.247 (a)(2), the minimum 6dB bandwidth shall be at least 500kHz for all systems using digital modulation techniques.

5.1.2.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation.

The EUT was allowed to transmit continuously. The transmit channel was set separately to low, middle, and high channels. The resolution bandwidth (RBW) was set to 100kHz, the video bandwidth (VBW) was set to the same as or 3 times greater than the RBW, and the span was set to 3 times the RBW.

The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.

5.1.2.3 Results

The plots on pages 20 through 25 show that the minimum 6 dB bandwidth was 1.64MHz, which is greater than minimum allowable 6dB bandwidth requirement of 500kHz for systems using digital modulation techniques. The 99% bandwidth was measured to be 2.64MHz.

5.1.3 Peak Output Power/EIRP

5.1.3.1 Requirements

Per section 15.247(b)(3), for systems using digital modulation the maximum peak output conducted power shall not be greater than 1.0W (30dBm). Per section 15.247(b)(4), this limit is based on the use of antennas with directional gains that do not exceed 6dBi. Since the limit allows for a 6dBi antenna gain, the maximum EIRP can be increased by 6dB to 4 Watt (36dBm).

5.1.3.2 Procedures

5.1.3.2.1 Antenna Conducted Peak Output Power

The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. The maximum meter reading was recorded. The peak power output was calculated for the low, middle and high channels.

The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. The EUT was set to transmit separately at the low, middle, and high channels. The resolution bandwidth (RBW) was set to greater than the 6dB bandwidth. The 'Max-Hold' function was engaged. The maximum meter reading was recorded. The peak power output was calculated for the low, middle and high channels.

5.1.3.2.2 Radiated Method EIRP

The EUT was placed on the non-conductive stand and set to transmit. A dipole antenna (double ridged waveguide antenna for all measurements above 1GHz) was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 6dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle and high channels. Free space propagation loss (-95dBm) was added to the reading to convert to EIRP.

5.1.3.3 Results

The results for the antenna conducted peak output power measurements are presented on pages 26 through 28. The maximum peak conducted output power from the transmitter was 0.0306W (14.86dBm) which is below the 1 Watt limit.

The results for the radiated method EIRP measurements are presented on page 54 and 55. The maximum EIRP measured from the transmitter was 0.0173W (12.4dBm) which is below the 4 Watt limit.

5.1.4 Duty Cycle Factor Measurements

5.1.4.1 Procedures

The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal.

With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning center frequency to the transmitter frequency and then setting a zero span width with 10msec/div. The amplitude settings are adjusted so that the on/off transitions clear the 4th division from the bottom of the display. The markers are set at the beginning and end of the "on-time". The trace is recorded.

Next the spectrum analyzer center frequency is set to the transmitter frequency with a zero span width and 10msec/div. This shows if the word is longer than 100msec or shorter than 100msec. If the word period is less than 100msec, the display is set to show at least one word. The on-time and off-time are then measured. The on-time is total time signal level exceeds the 4th division. Off-time is time under for the word period. The duty cycle is then computed as the (On-time/ word period) where the word period = (On-time + Off-time).

5.1.4.2 Results

The plots of the duty cycle are shown on data pages 30 through 32.

5.1.5 Antenna Conducted Spurious Emissions

5.1.5.1 Requirements

Per section 15.247(c), the spurious emissions in any 100 kHz BW outside the frequency band must be at least 20dB below the highest 100 kHz BW level measured within the band.

5.1.5.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. The resolution bandwidth (RBW) was set to 100kHz. The peak detector and 'Max-Hold' function were engaged. The emissions in the frequency range from 30MHz to 25GHz were observed and plotted separately with the EUT transmitting at low, middle and high channels.

5.1.5.3 Results

The results of the antenna conducted emissions levels were plotted. These plots are presented on pages 33 through 41. These plots show that the spurious emissions were at least 20 dB below the level of the fundamental. Photographs of the test configuration levels are shown on Figure 3.

5.1.6 Radiated Spurious Emissions Measurements

5.1.6.1 Requirements

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Paragraph 15.209(a) has the following radiated emission limits:

Frequency MHz	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30.0-88.0	100	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

5.1.6.2 Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 25GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 25GHz.

- 1) For all emissions in the restricted bands, the following procedure was used:
 - a) The field strengths of all emissions below 1 GHz were measured using a bi-log antenna. The bi-log

antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.

- b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
- d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are re-measured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).
- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken.

5.1.6.3 Results

Preliminary radiated emissions plots with the EUT transmitting at 2405MHz, 2440MHz, and 2480MHz are shown on pages 42 through 65. Final radiated emissions data are presented on data pages 66 through 71. As can be seen from the data, all emissions measured from the EUT were within the specification limits. The emissions level closest to the limit (worst case) occurred at 7320MHz. The emissions level at this frequency was 1.7dB within the limit. See data pages 35 through 46 for details. Photographs of the test configuration which yielded the highest, or worst case, radiated emission levels are shown on Figures 4 through 6.

5.1.7 Band Edge Compliance

5.1.7.1 Requirements

Per section 15.247(d), the emissions at the band-edges must be at least 20dB below the highest level measured within the band but attenuation below the general limits listed in 15.209(a) is not required.

5.1.7.2 Procedures

5.1.7.2.1 Low Band Edge

- 1) The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation.
- 2) The EUT was set to transmit continuously at the channel closest to the low band-edge.

- 3) To determine the band edge compliance, the following spectrum analyzer settings were used:
 - a. Center frequency = low band-edge frequency.
 - b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
 - c. Resolution bandwidth (RBW) $\geq 1\%$ of the span.
 - d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
 - e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.)
 - f. The analyzer's display was plotted using a 'screen dump' utility.

5.1.7.2.2 High Band Edge

- 1) The EUT was set to transmit continuously at the channel closest to the high band-edge.
- 2) A double ridged waveguide was placed 3 meters away from the EUT. The antenna was connected to the input of a spectrum analyzer.
- 3) The center frequency of the analyzer was set to the high band edge (2483.5MHz)
- 4) The resolution bandwidth was set to 1MHz.
- 5) To ensure that the maximum or worst case emission level was measured, the following steps were taken:
 - a. The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - b. Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - c. The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 6) The highest measured peak reading was recorded.
- 7) The highest measured average reading was recorded.

5.1.7.3 Results

Pages 72 through 75 show the band-edge compliance results. As can be seen from these plots, the conducted emissions at the low end band edge are within the 20 dB down limits. The radiated emissions at the high end band edge are within the general limits.

5.1.8 Power Spectral Density

5.1.8.1 Requirement

Per section 15.247(e), the peak power spectral density from the intentional radiator shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.1.8.2 Procedures

- 1) The antenna port of the EUT was connected to the spectrum analyzer through a 40dB pad.
- 2) The EUT was then placed in the normal operation mode (for DTS devices)
- 3) To determine the power spectral density, the following spectrum analyzer settings were used:
 - a. Center frequency = transmit frequency
 - b. Span = 1.5 times the DTS (6 dB) bandwidth
 - c. Resolution bandwidth (RBW): $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
 - d. Sweep time = auto
 - e. The peak detector and 'Max-Hold' function was engaged.
 - f. The display line represents the 8 dBm limit

- g. The analyzer's display was plotted using a 'screen dump' utility.
- 4) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

5.1.8.3 Results

Pages 76 through 78 show the power spectral density results. As can be seen from these plots, the peak power density is less than 8dBm in a 3kHz band during any time interval of continuous transmission.

6. CONCLUSIONS

It was determined that the Honeywell - System Sensor Transmitter, Part No. W4 Zigbee digital modulation transmitter, Serial No. W4-IC, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.247 for Intentional Radiators Operating within the 2400-2483.5 MHz band, when tested per ANSI C63.4-2014.

It was also determined that the Honeywell - System Sensor Transmitter, Part No. W4 Zigbee digital modulation transmitter, Serial No. W4-IC, did fully meet the conducted and radiated RF emission requirements of the Industry Canada Radio Standards Specification RSS-Gen Section 8.8 and Radio Standards Specification RSS-247 for transmitters, when tested per ANSI C63.4-2014.

7. CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUT at the test date. Any electrical or mechanical modification made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

8. ENDORSEMENT DISCLAIMER

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST or any agency of the Federal Government.


9. EQUIPMENT LIST

Table 9-1 Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW0	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-30-20G20R6G	PL2926/0646	20GHZ-26.5GHZ	3/2/2016	3/2/2017
APW11	PREAMPLIFIER	PMI	PE2-35-120-5R0-10-12-SFF	PL11685/1241	1GHZ-20GHZ	4/18/2016	4/18/2017
CDX8	COMPUTER	ELITE	WORKSTATION			N/A	
CDY3	LAB COMPUTER	ELITE	WORKSTATION		WINDOWS 7	N/A	
NHG1	STANDARD GAIN HORN ANTENNA	NARDA	638	---	18-26.5GHZ	NOTE 1	
NTA3	BILOG ANTENNA	TESEQ	6112D	32853	25-1000MHz	3/23/2016	3/23/2017
NWQ0	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66657	1GHZ-18GHZ	5/11/2014	5/11/2016
RBA0	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB26	100145	20HZ-26.5GHZ	3/2/2016	3/2/2017
T1P0	10dB ATTENUATOR (40GHz)	WEINSCHEL	89-10-12	254	DC-40GHz	3/3/2016	3/3/2018
T2DH	20DB, 25W ATTENUATOR	WEINSCHEL	46-20-34	BN1039	DC-18GHZ	8/7/2015	8/7/2016
T2Q1	20DB/20W ATTENUATOR	AEROFLEX/WEINSCHEL	89-20-21	335	DC-40GHz	8/20/2015	8/20/2017
T2S2	20DB 25W ATTENUATOR	WEINSCHEL	46-20-34	BV3540	DC-18GHz	6/29/2015	6/29/2016
T2S7	20DB 25W ATTENUATOR	WEINSCHEL	46-20-34	BU8139	DC-18GHz	8/7/2015	8/7/2016
XOB2	ADAPTER	HEWLETT PACKARD	K281C,012	09407	18-26.5GHz	NOTE 1	

I/O: Initial Only N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

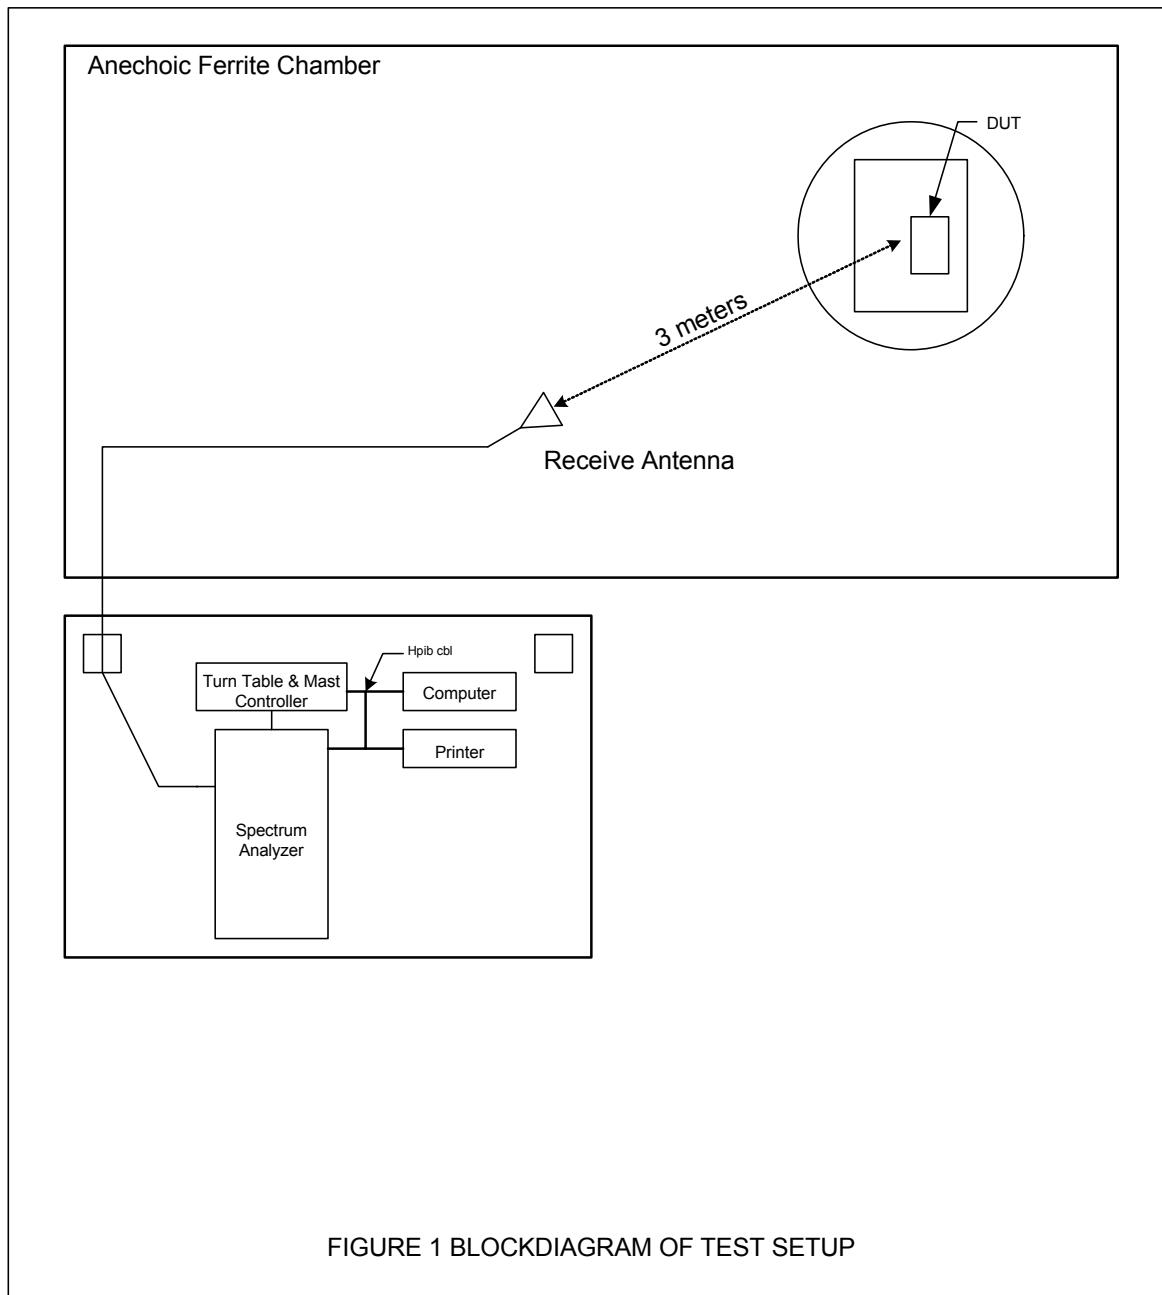


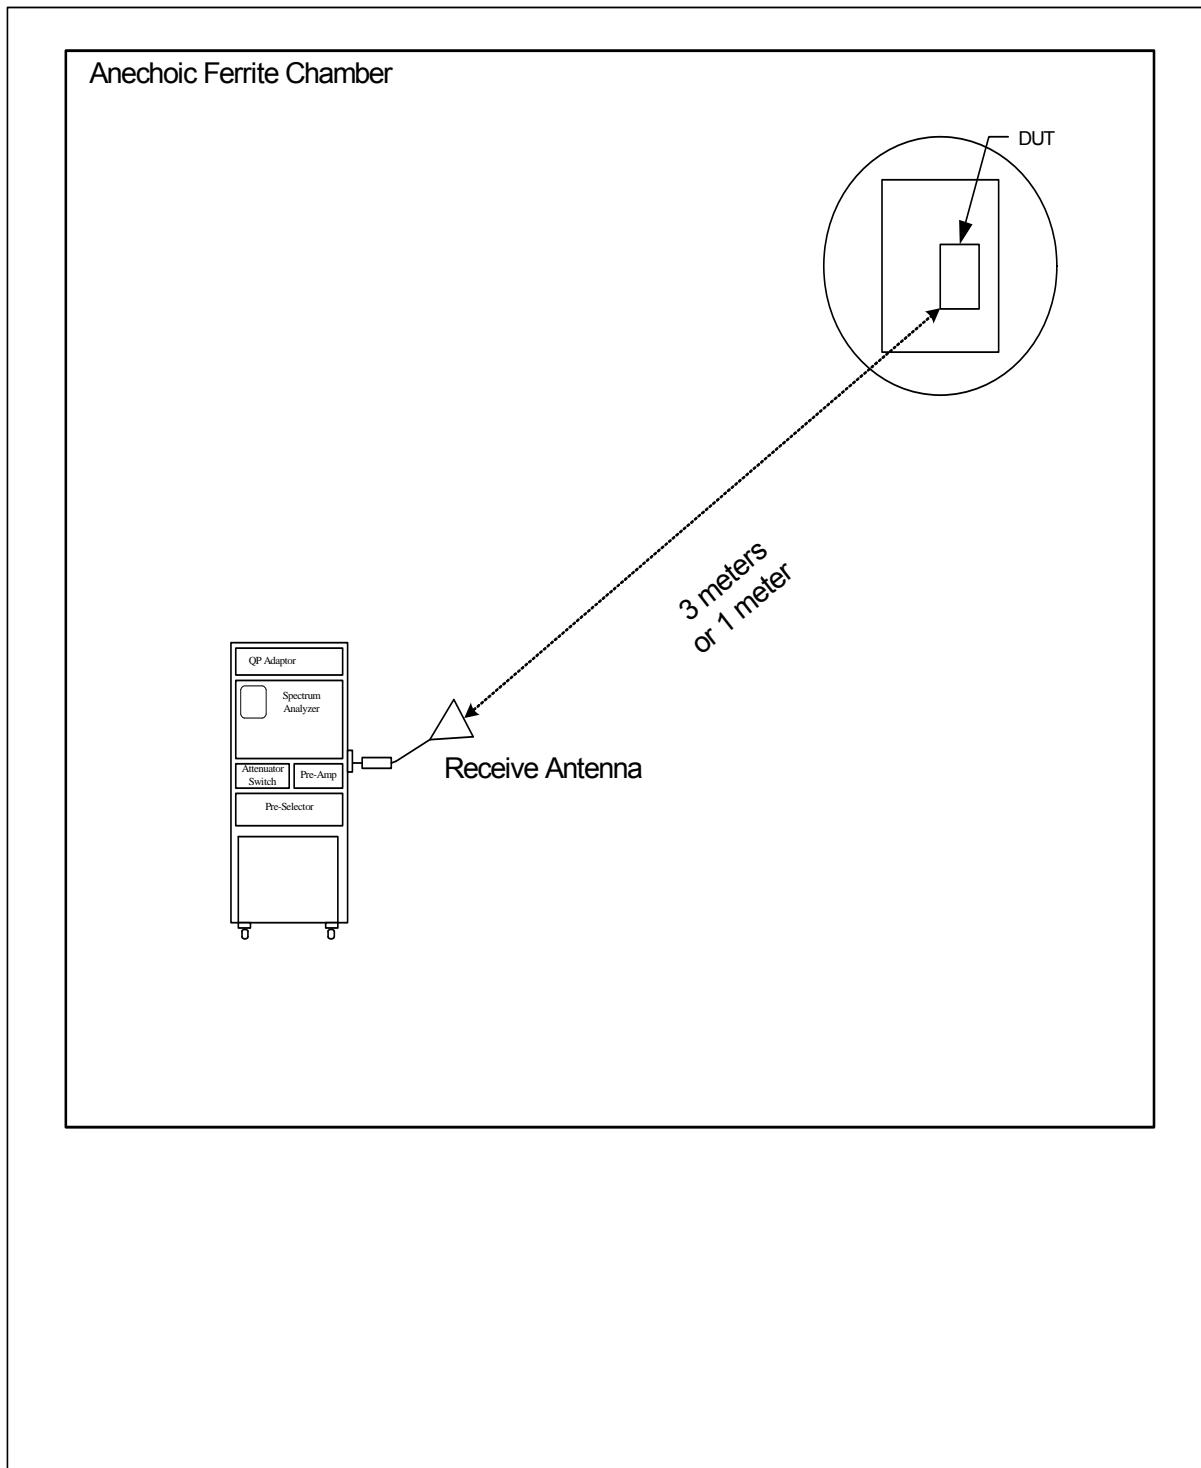


Figure 2: BLOCK DIAGRAM OF TEST SETUP FOR RADIATED EMISSIONS ABOVE 18GHZ

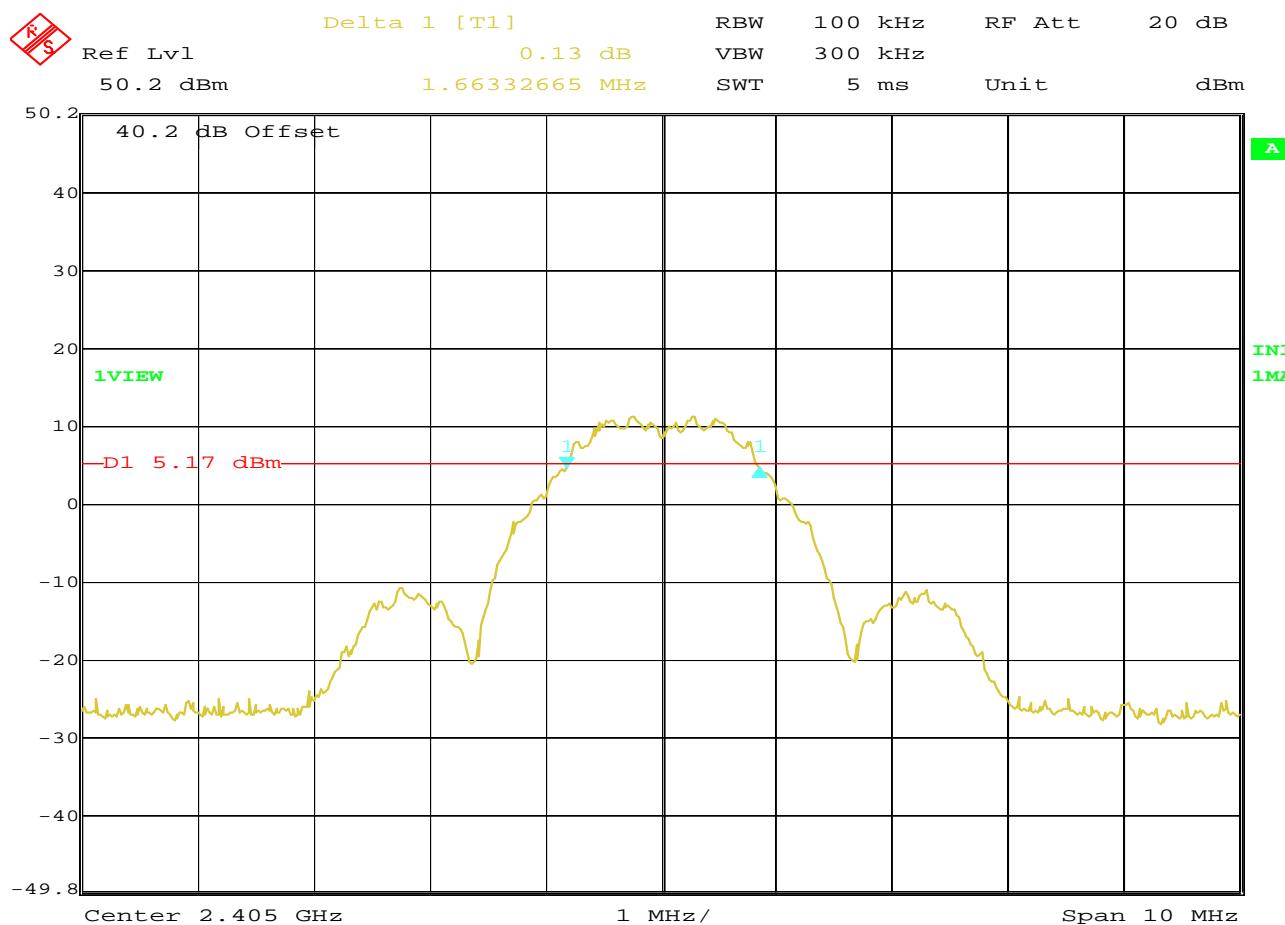


Date: 3.MAY.2016 10:26:04

DTS (6dB) Bandwidth

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2405MHz
 TEST PARAMETERS : DTS Bandwidth = 1.66MHz
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

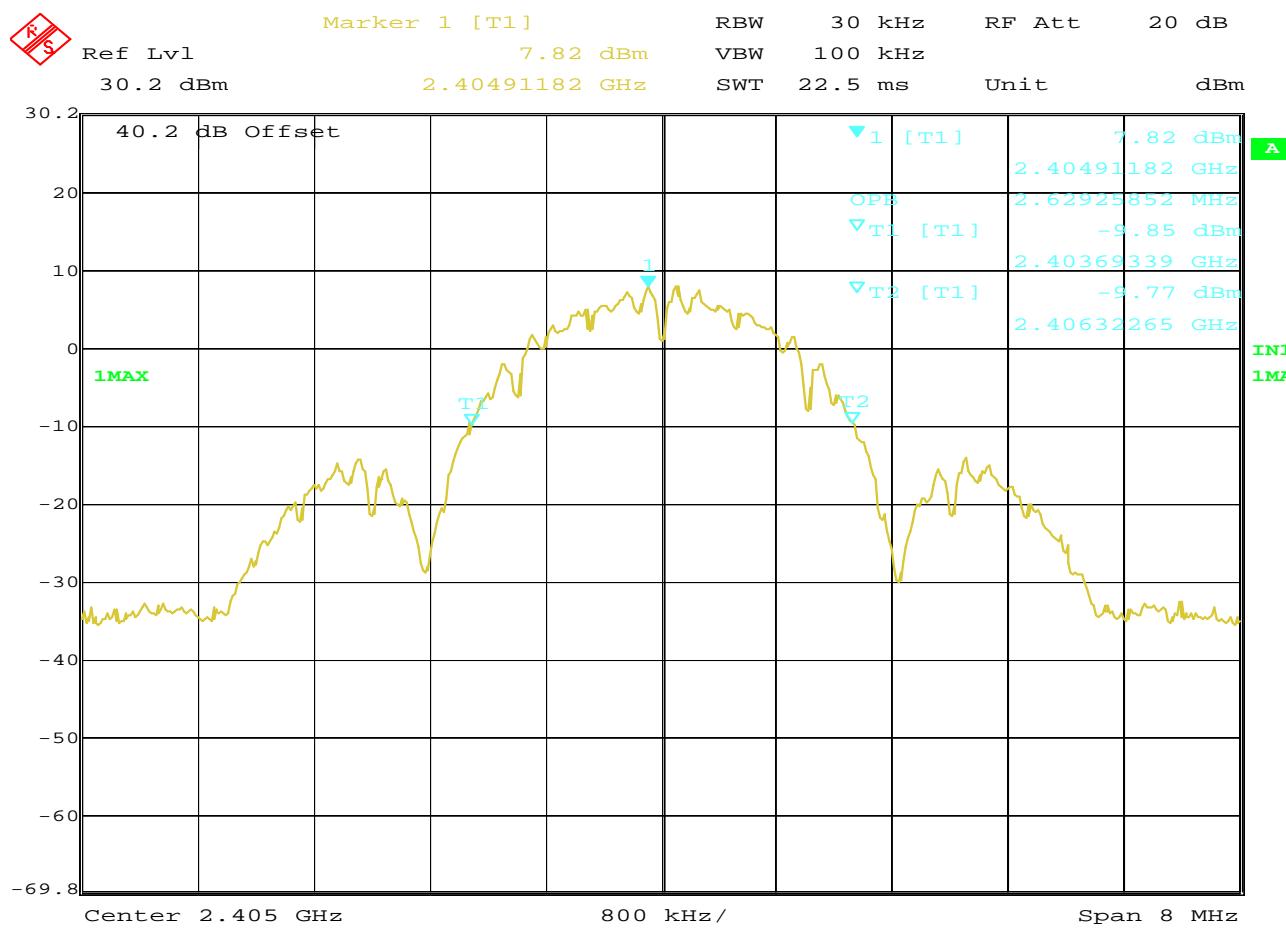


Date: 3.MAY.2016 11:02:48

99% Bandwidth (OBW)

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2405MHz
 TEST PARAMETERS : 99% Bandwidth (OBW) = 2.63MHz
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

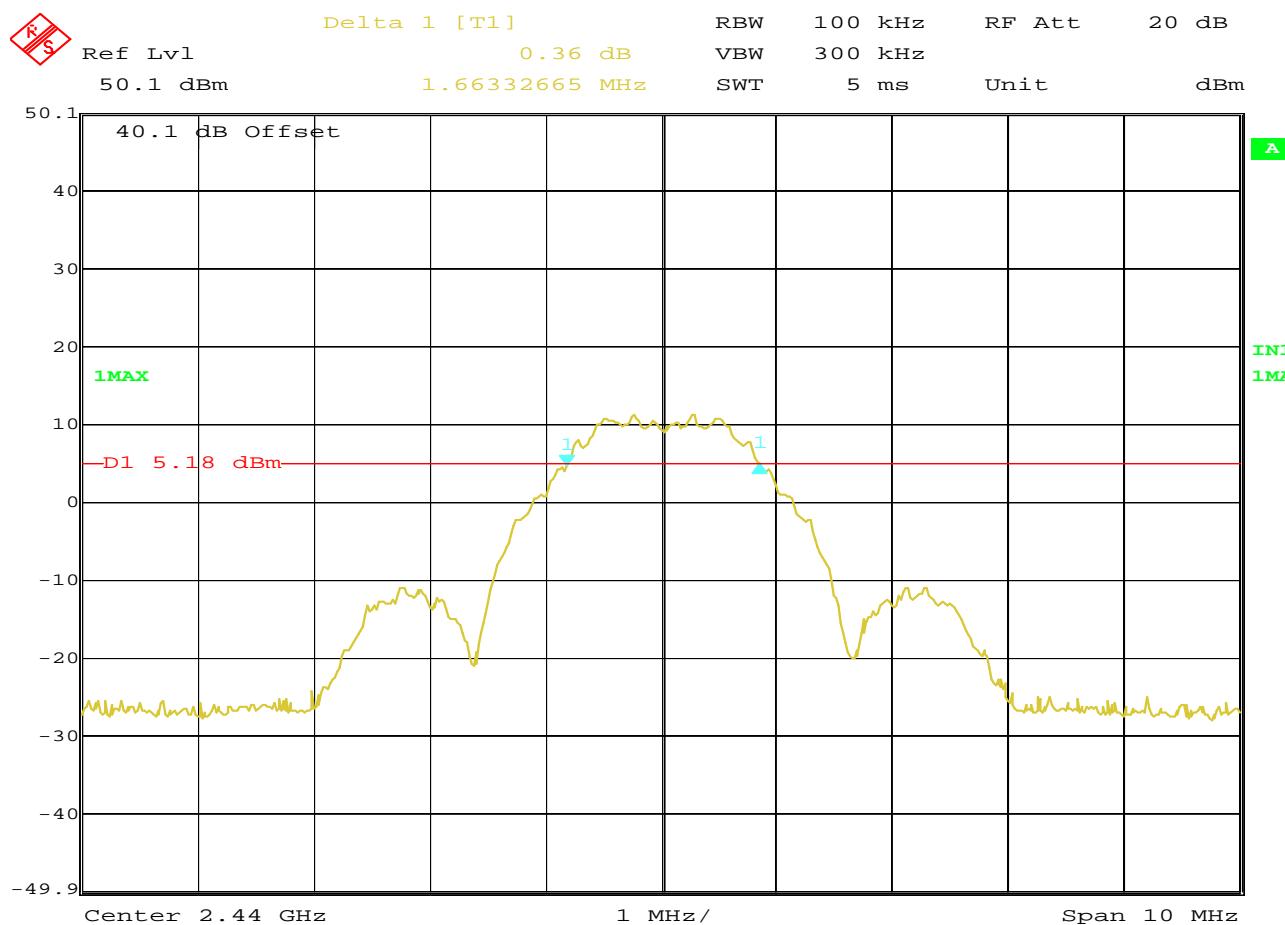


Date: 3.MAY.2016 15:43:53

DTS (6dB) Bandwidth

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2440MHz
 TEST PARAMETERS : DTS Bandwidth = 1.66MHz
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

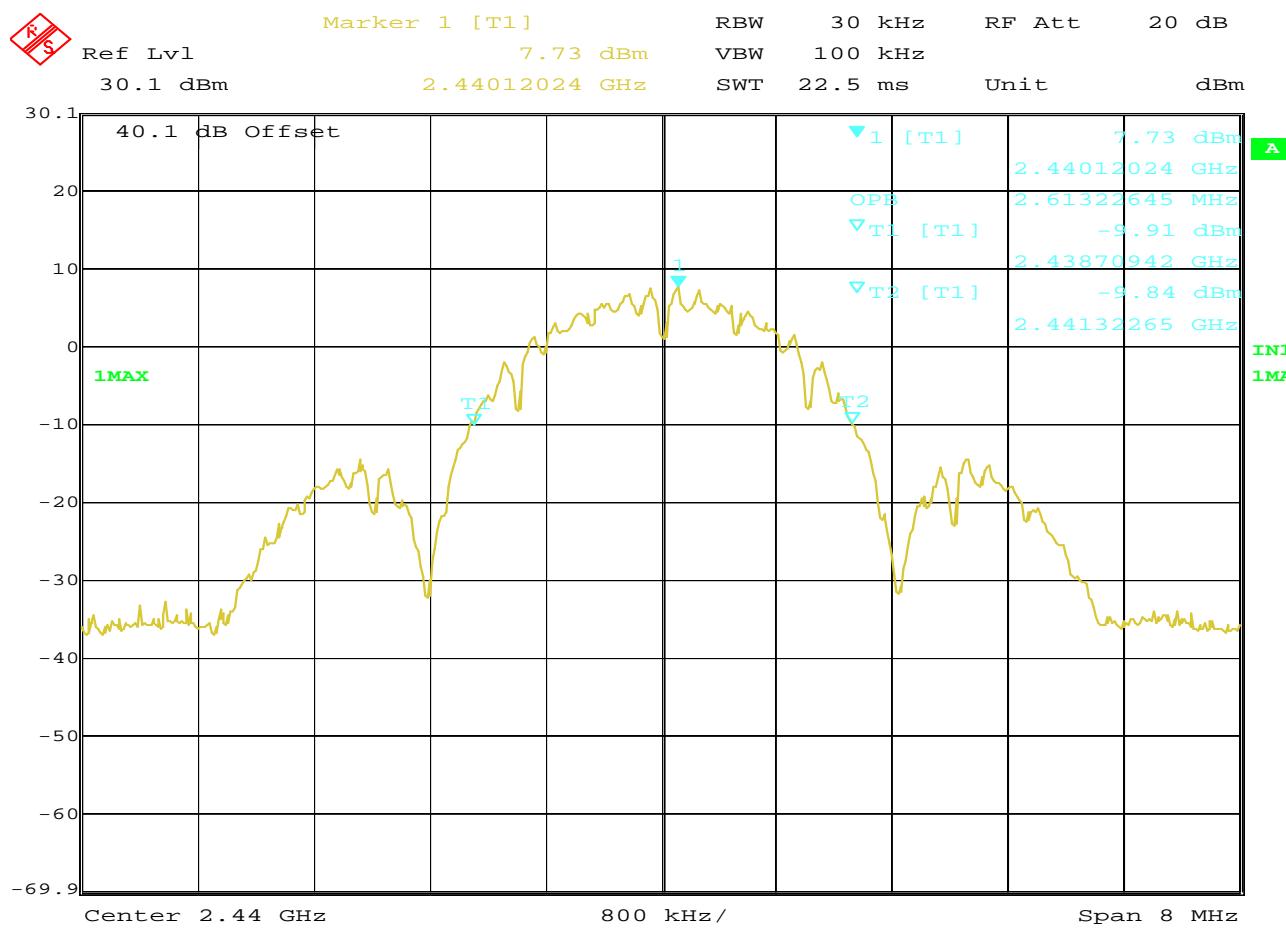


Date: 3.MAY.2016 15:52:05

99% Bandwidth (OBW)

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2440MHz
 TEST PARAMETERS : 99% Bandwidth (OBW) = 2.61MHz
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

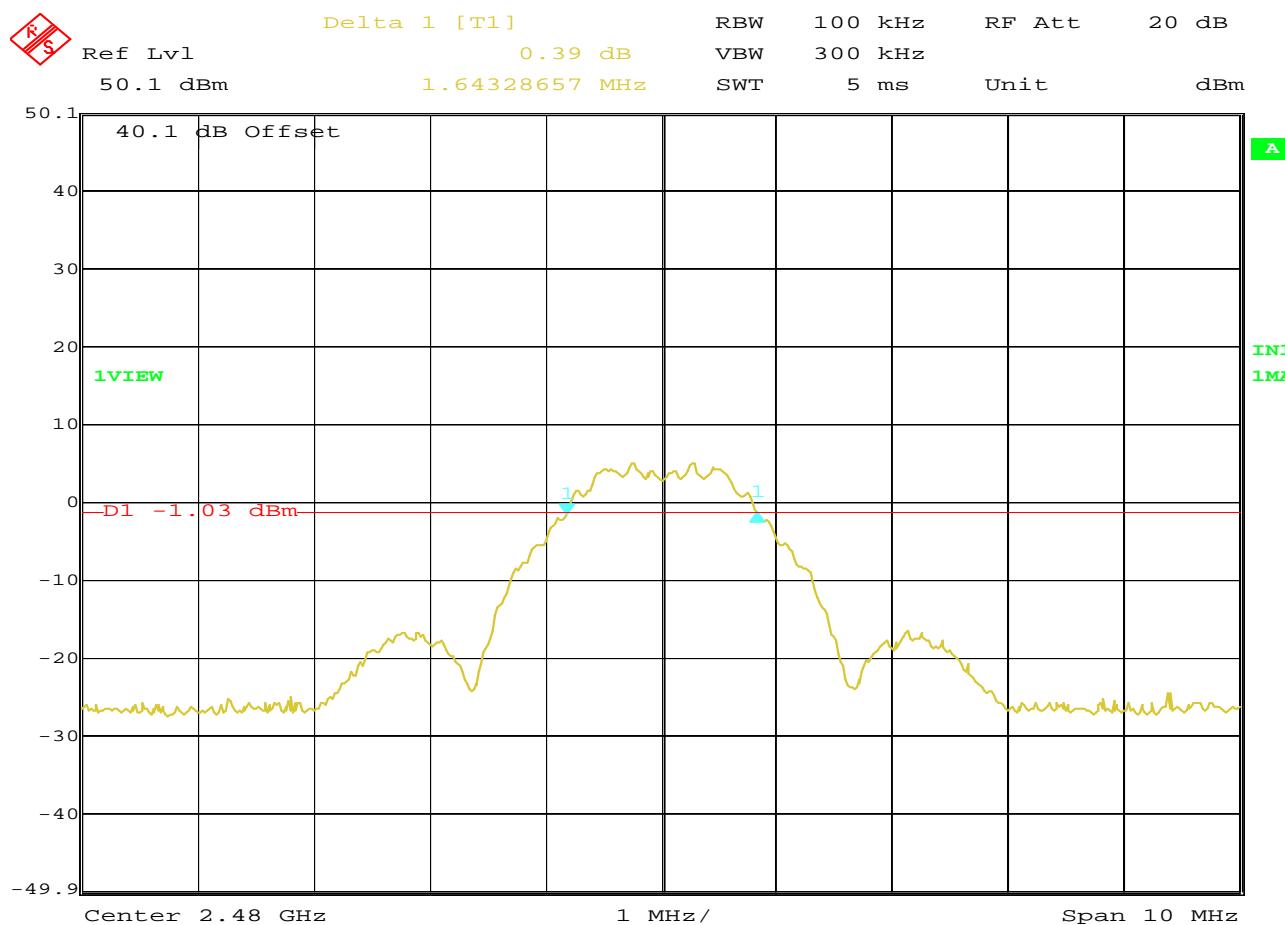


Date: 3.MAY.2016 14:50:16

DTS (6dB) Bandwidth

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2480MHz
 TEST PARAMETERS : DTS Bandwidth = 1.64MHz
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

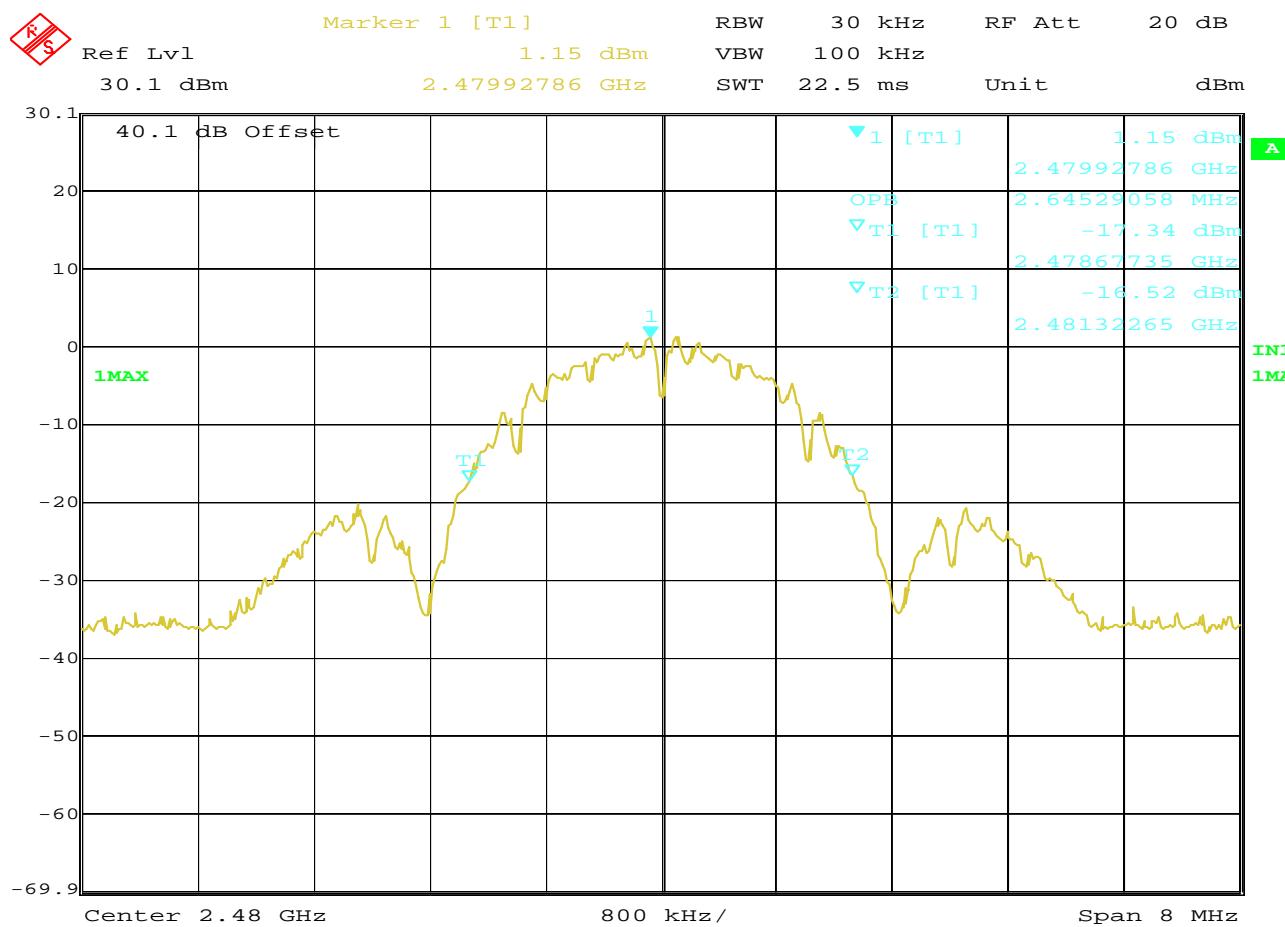


Date: 3.MAY.2016 15:09:12

99% Bandwidth (OBW)

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2480MHz
 TEST PARAMETERS : 99% Bandwidth (OBW) = 2.64MHz
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

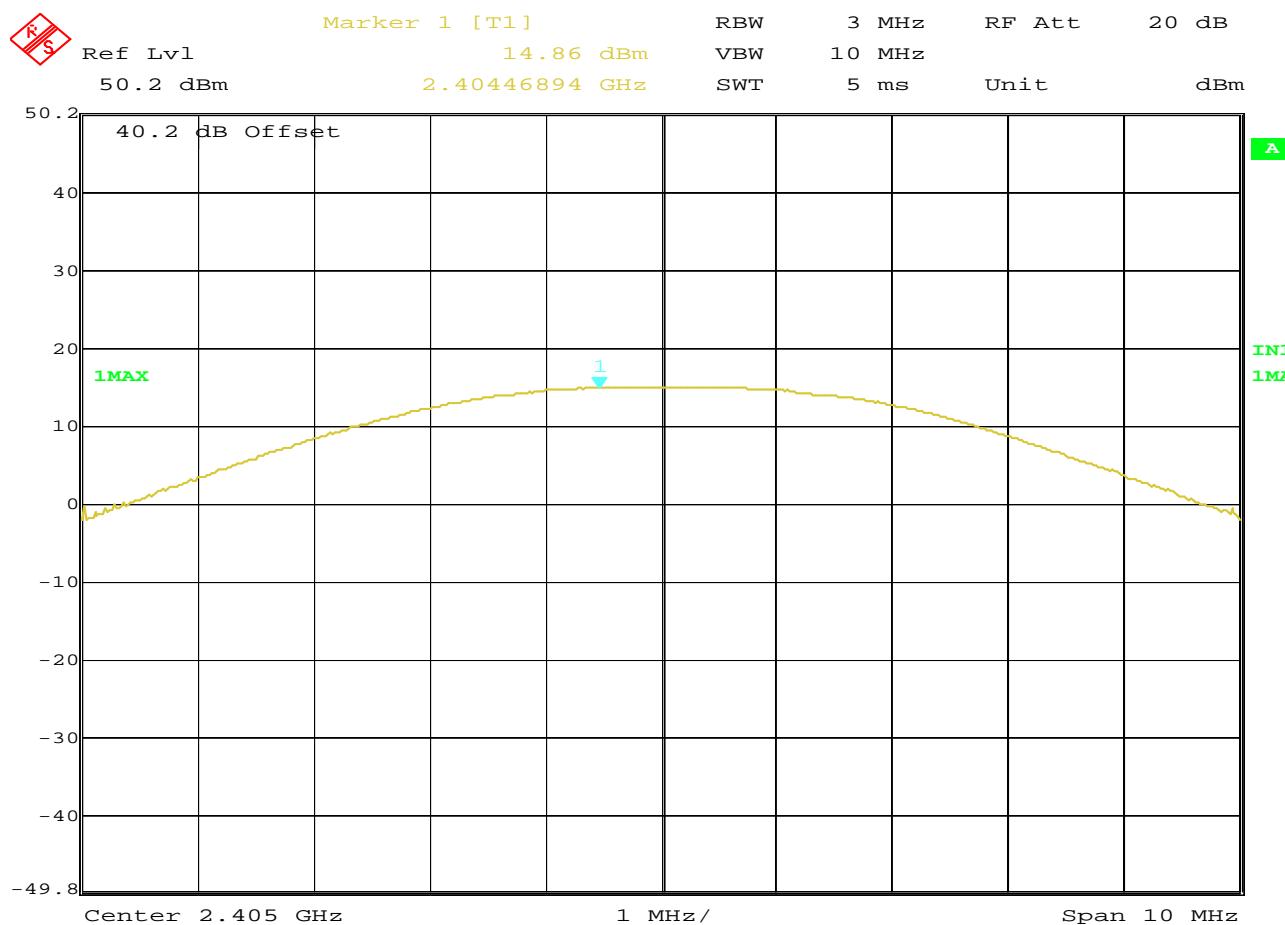


Date: 3.MAY.2016 10:17:02

Antenna Port Peak Conducted Output Power

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2405MHz
 TEST PARAMETERS : Output Power = 14.86dBm
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

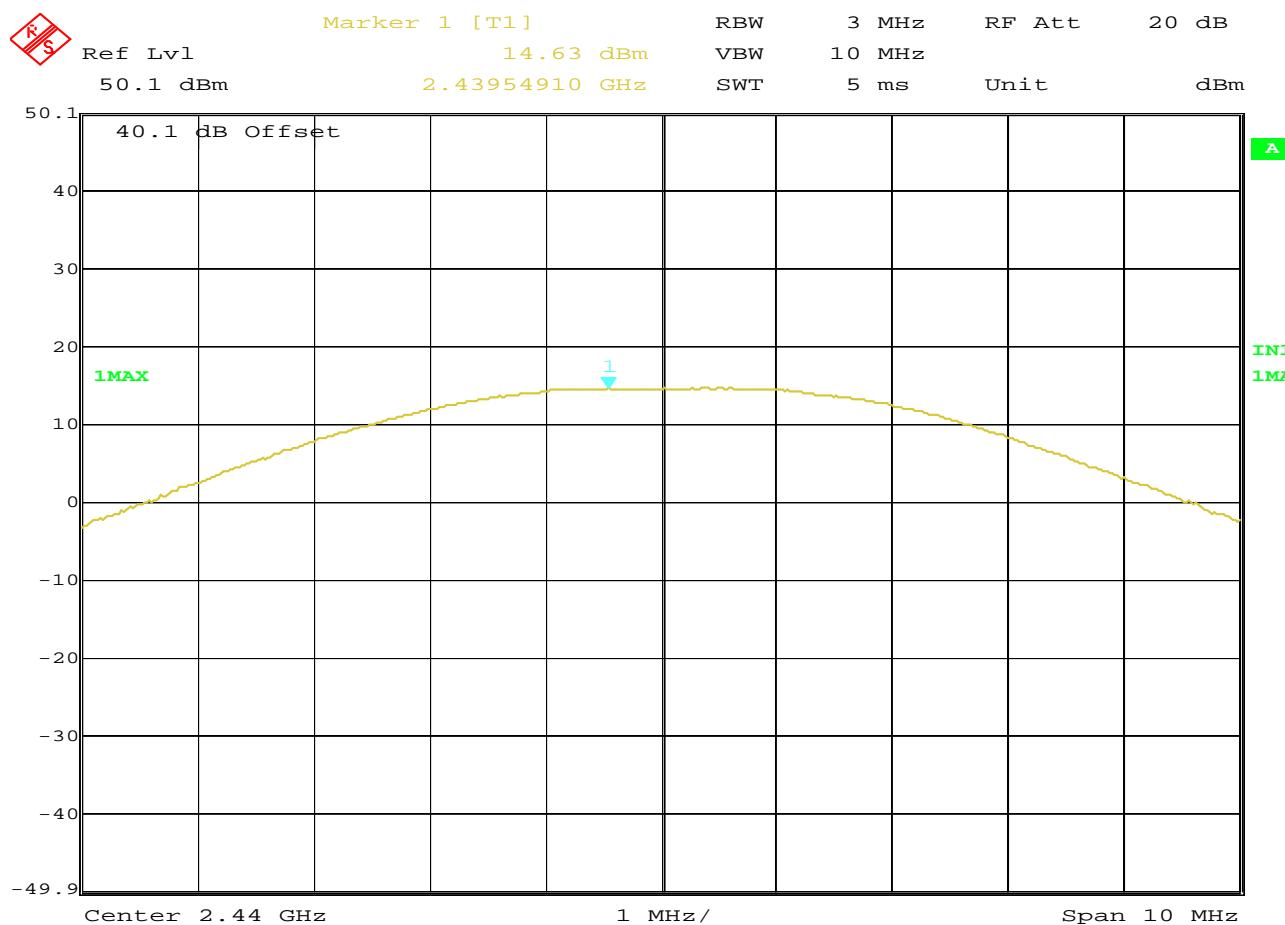


Date: 3.MAY.2016 15:37:29

Antenna Port Peak Conducted Output Power

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2440MHz
 TEST PARAMETERS : Output Power = 14.63dBm
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

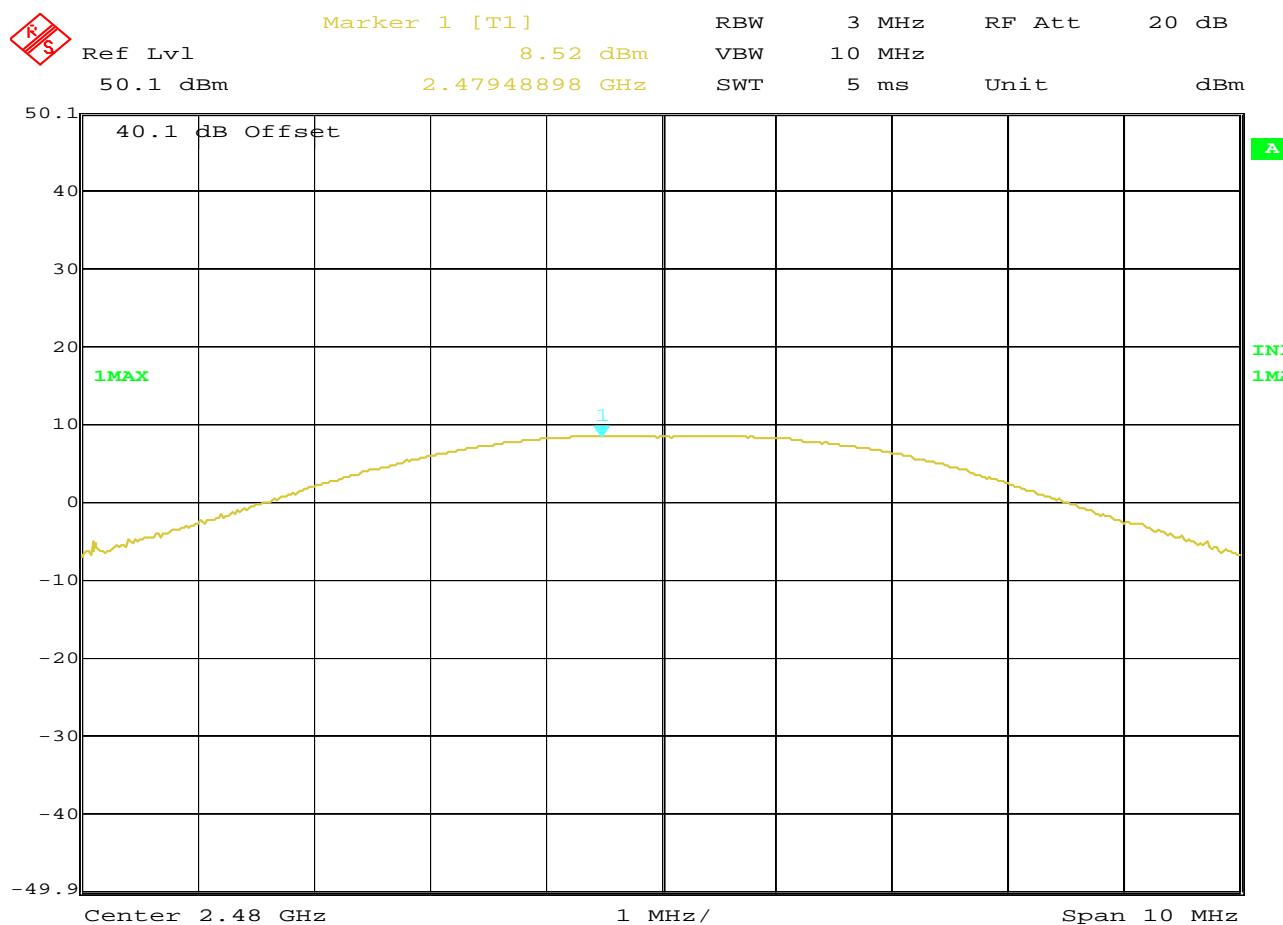

Date: 3.MAY.2016 14:43:48

Antenna Port Peak Conducted Output Power


MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2480MHz
 TEST PARAMETERS : Output Power = 8.52dBm
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

Manufacturer : Honeywell - System Sensor
 Test Item : Transmitter
 Model No. : W4 Zigbee
 Serial No. : W4-IC
 Mode : See Below
 Test Specification : FCC-15.247, RSS-247 Peak EIRP
 Date : May 2, 2016
 Test Distance : 3 meters
 Notes : None

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	EIRP (dBm)	Limit (dBm)	Margin (dBm)
2405.00	H	71.6	2.6	32.4	0.0	106.6	11.6	36.0	-24.4
2405.00	V	68.2	2.6	32.4	0.0	103.2	8.2	36.0	-27.8
2440.00	H	72.3	2.6	32.4	0.0	107.4	12.4	36.0	-23.6
2440.00	V	71.0	2.6	32.4	0.0	106.0	11.0	36.0	-25.0
2480.00	H	63.5	2.7	32.6	0.0	98.8	3.8	36.0	-32.2
2480.00	V	65.7	2.7	32.6	0.0	101.0	6.0	36.0	-30.0

EIRP (dBm) = Meter Reading + CBL FAC + Ant Fac + Pre Amp + free space propagation loss (-95dB)

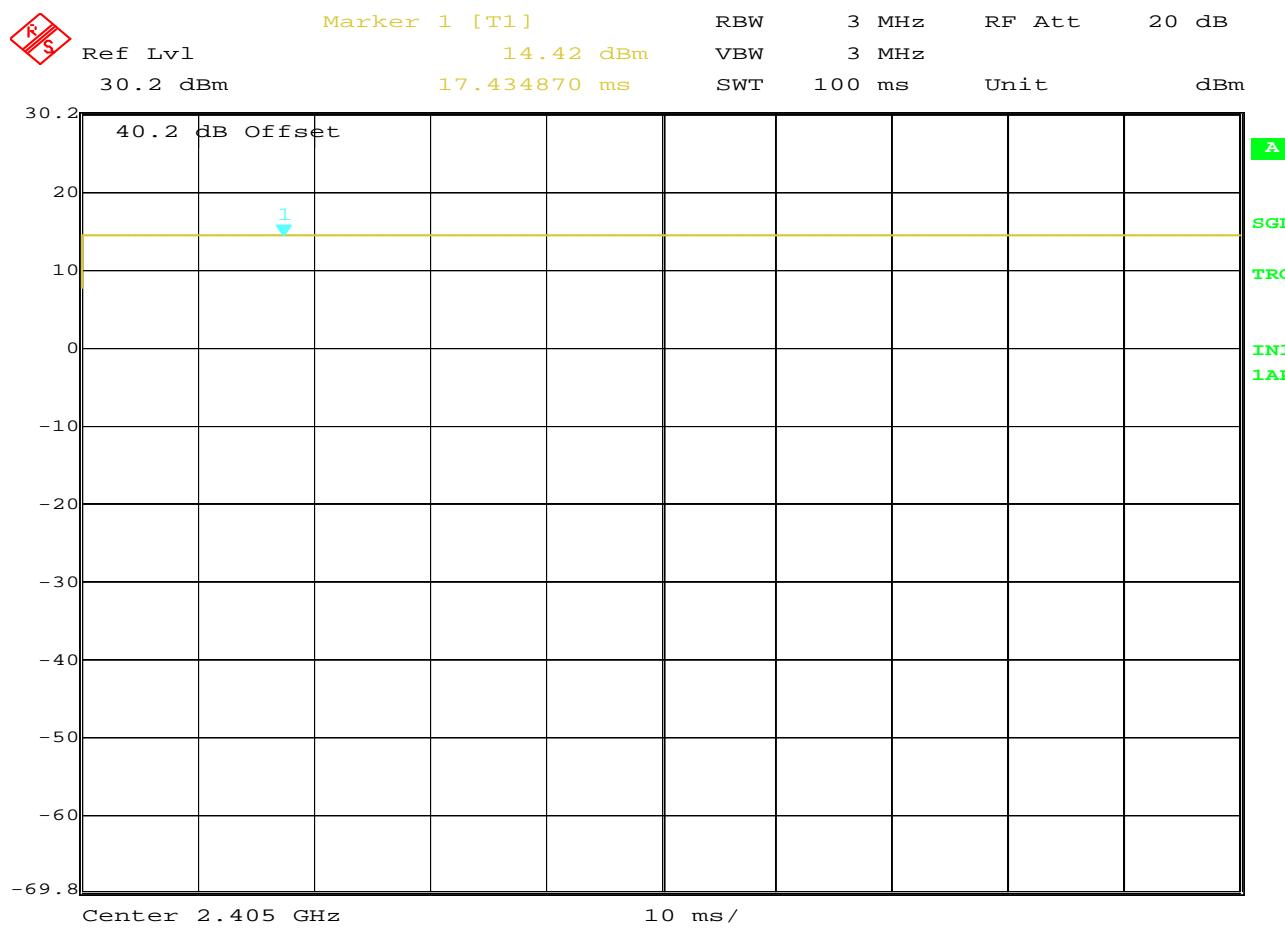


Date: 3.MAY.2016 12:57:26

Duty Cycle Correction

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2405MHz
 TEST PARAMETERS : Duty Cycle = 100%. No correction factor.
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

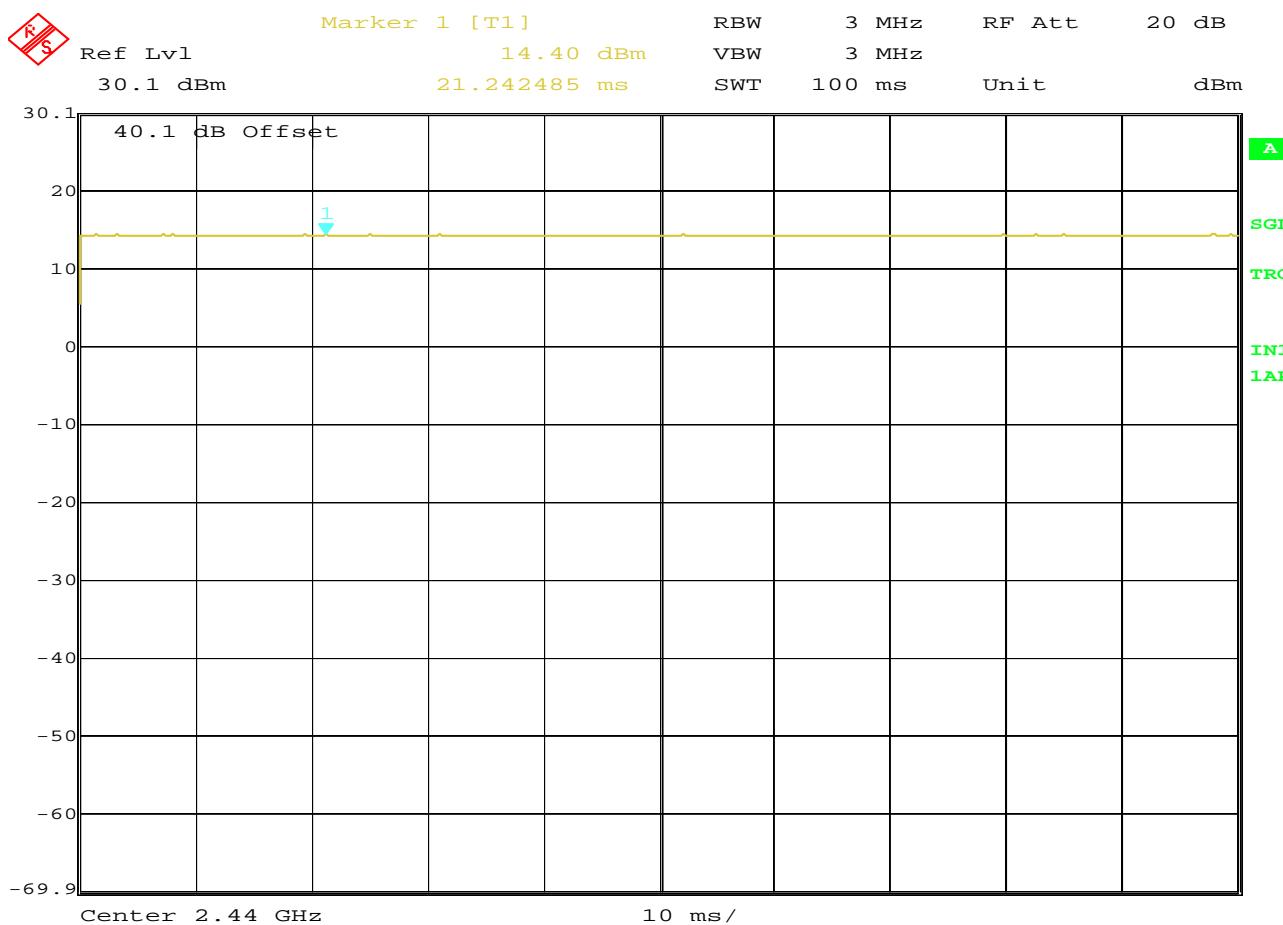


Date: 3.MAY.2016 15:55:04

Duty Cycle Correction

MANUFACTURER : Honeywell
MODEL NUMBER : W4 Zigbee
SERIAL NUMBER : W4-IC
TEST MODE : Transmit @ 2440MHz
TEST PARAMETERS : Duty Cycle = 100%. No correction factor.
EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

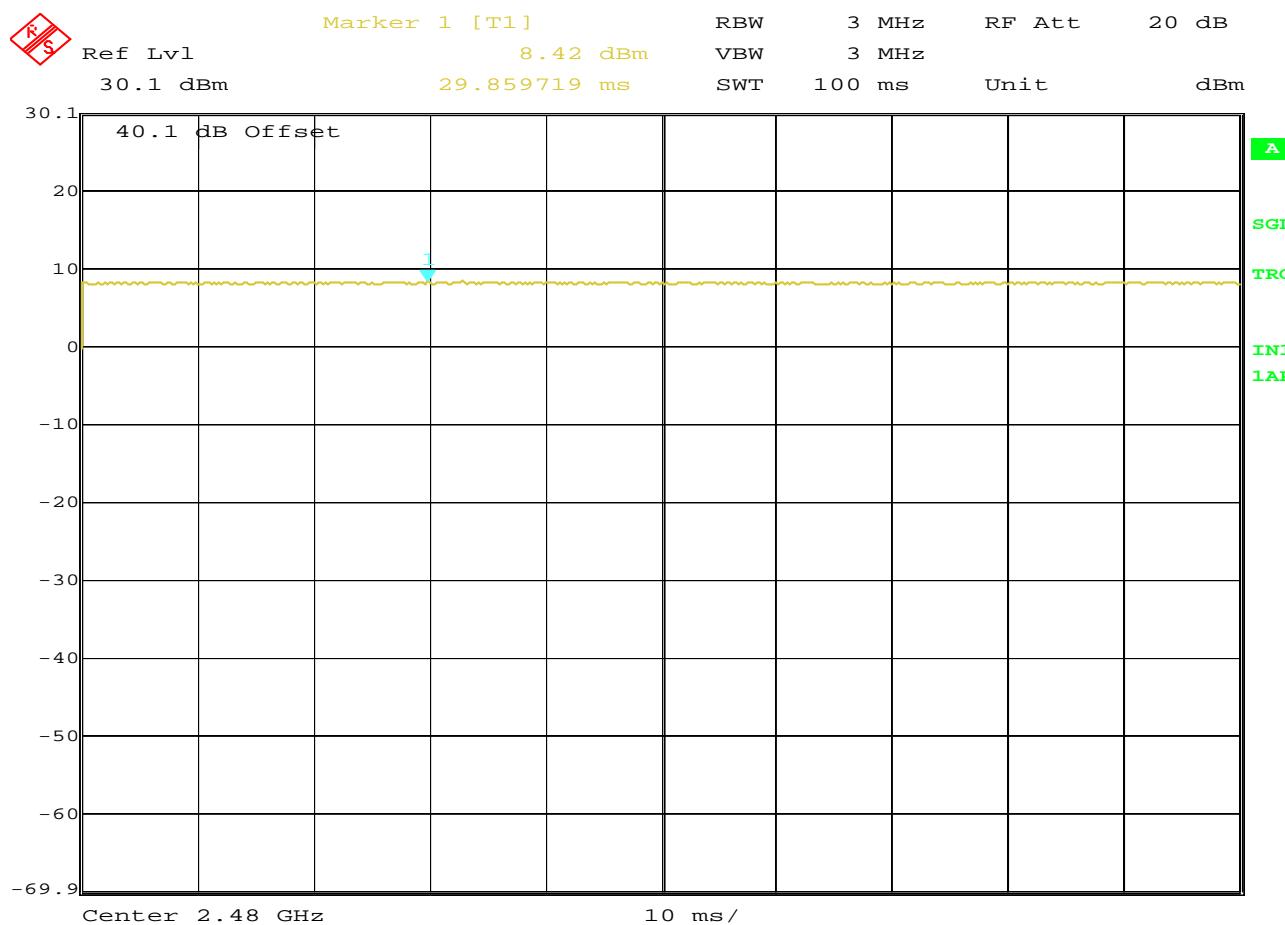



Date: 3.MAY.2016 15:15:05


Duty Cycle Correction


MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2480MHz
 TEST PARAMETERS : Duty Cycle = 100%. No correction factor.
 EQUIPMENT USED : RBA1, T2S2, T2S7


NOTES

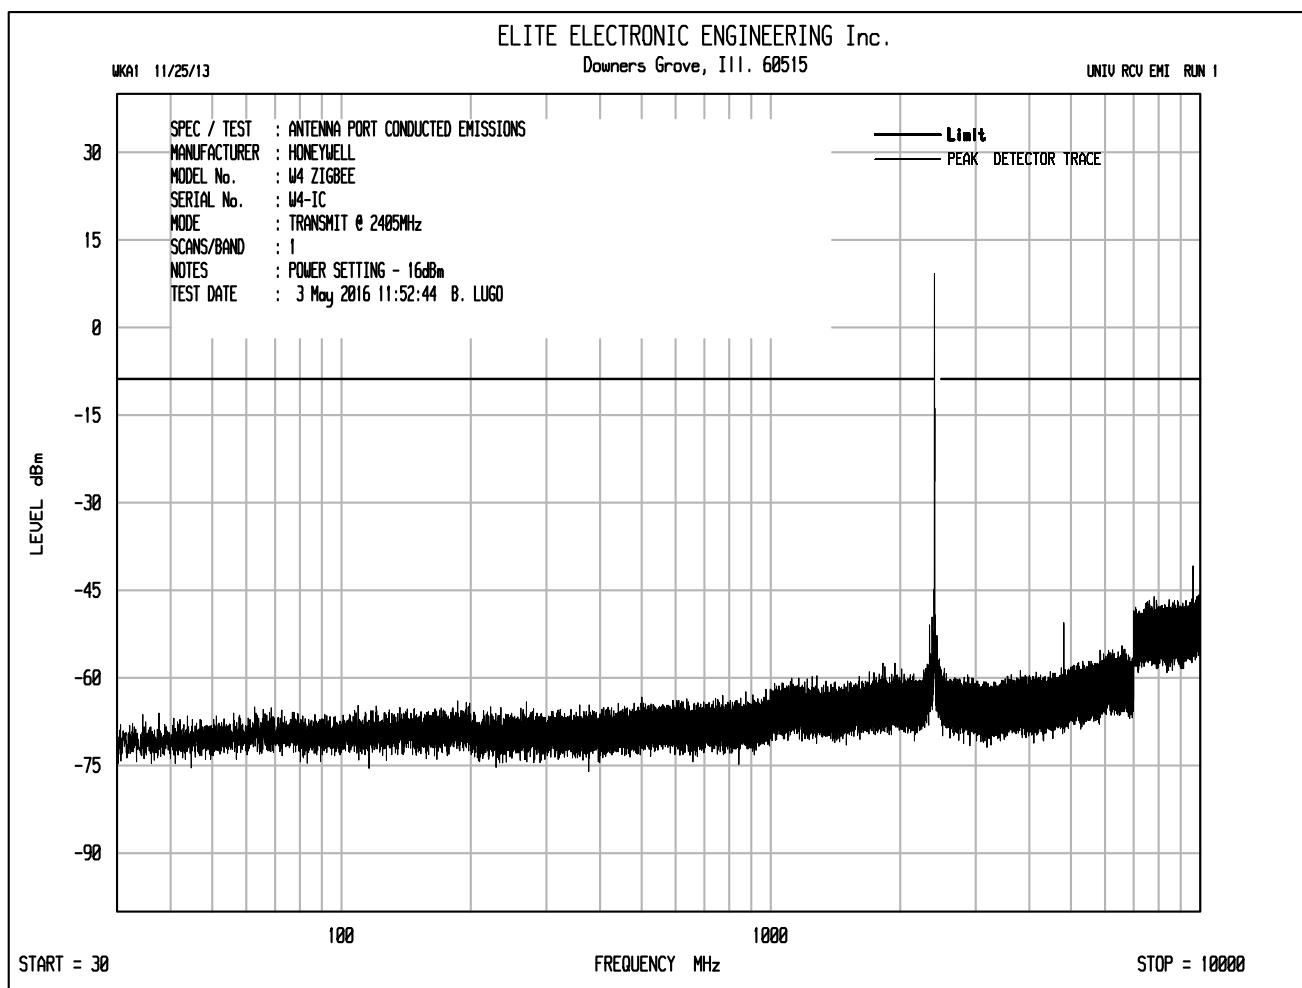


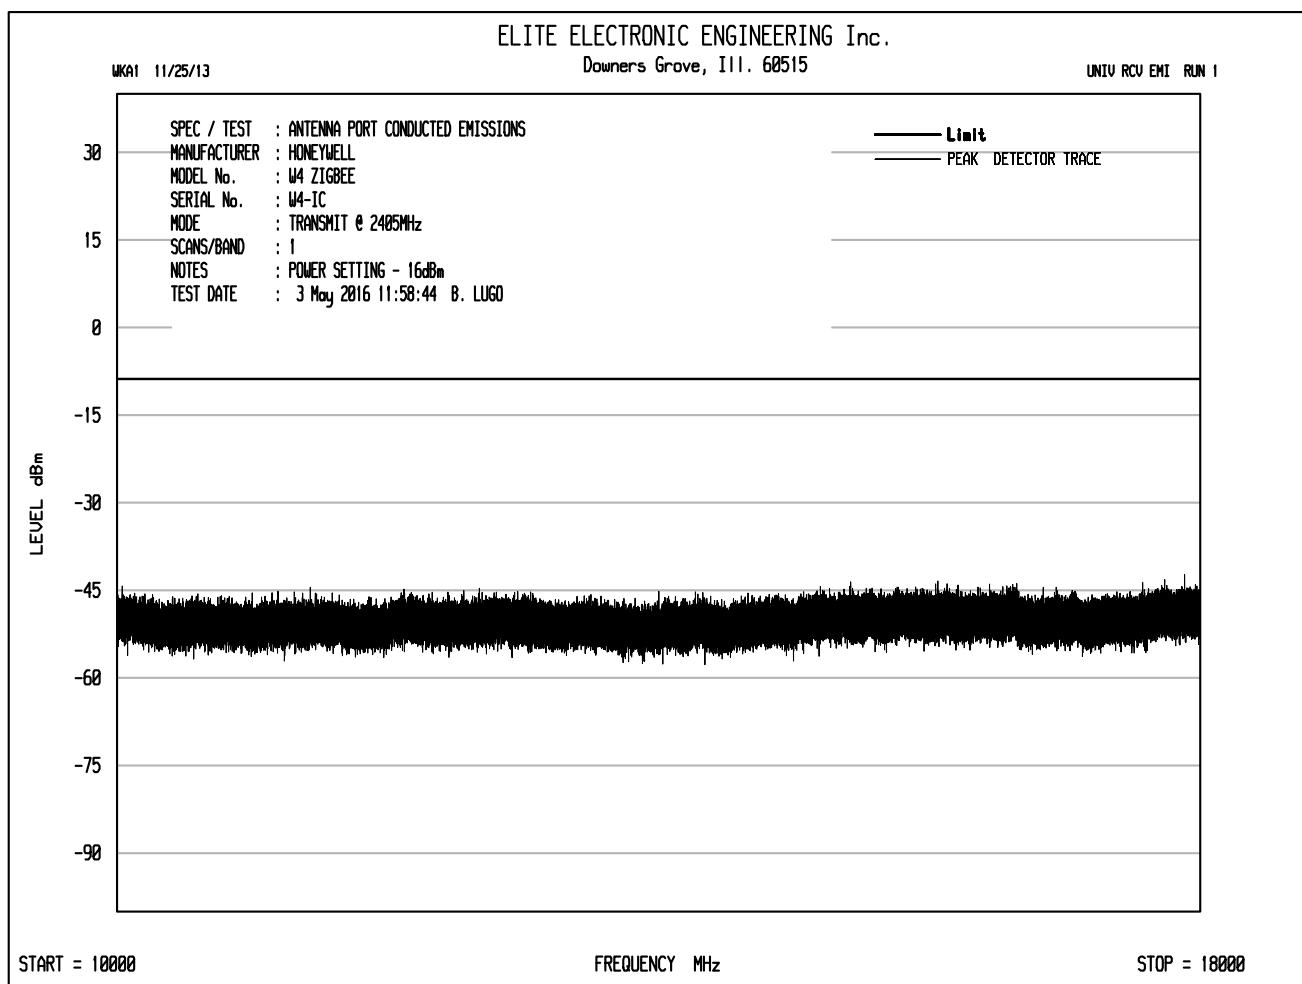


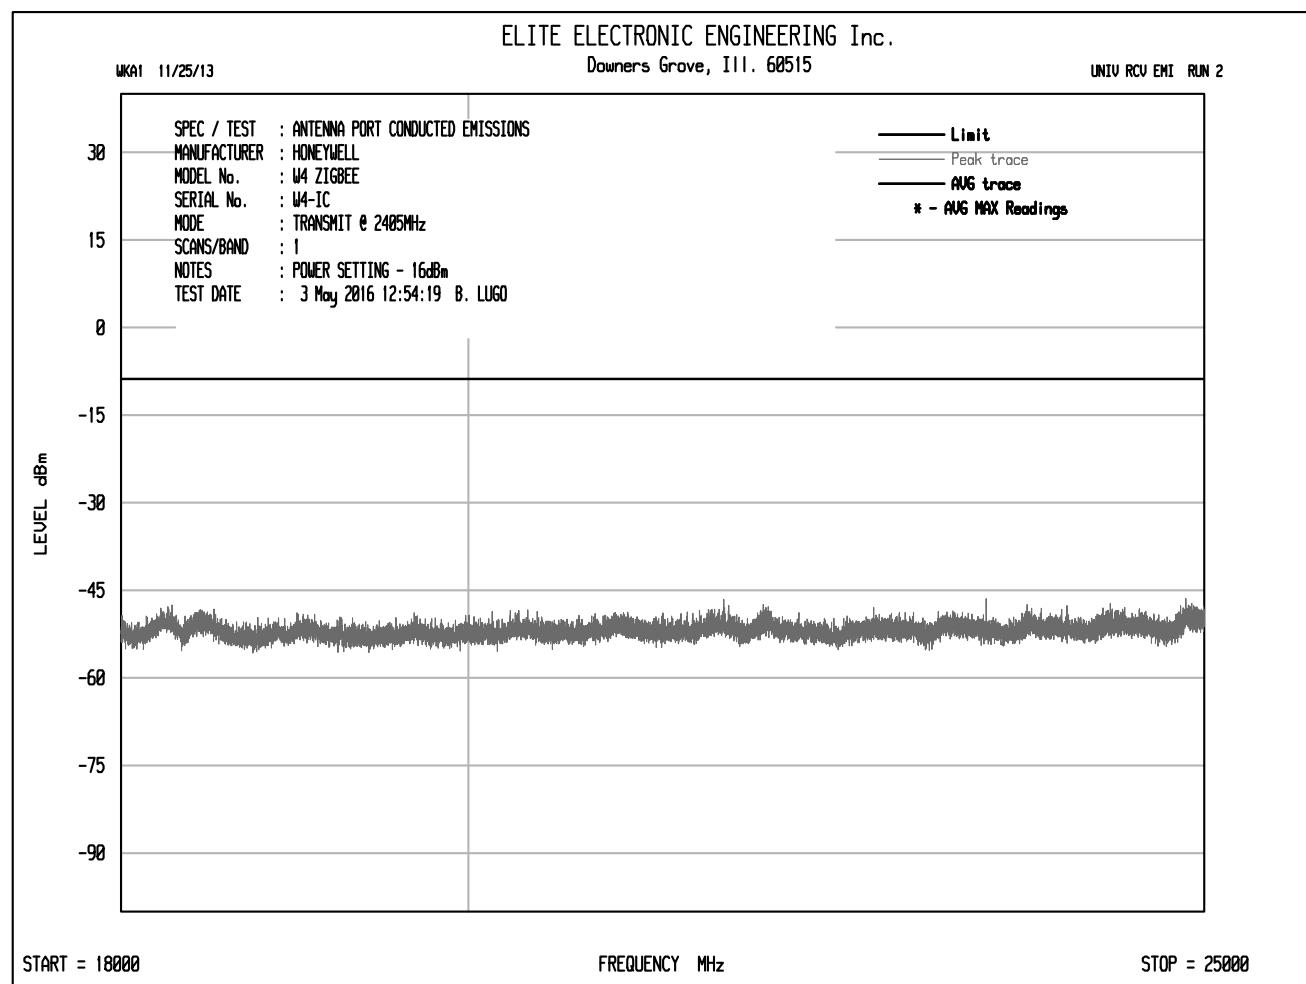


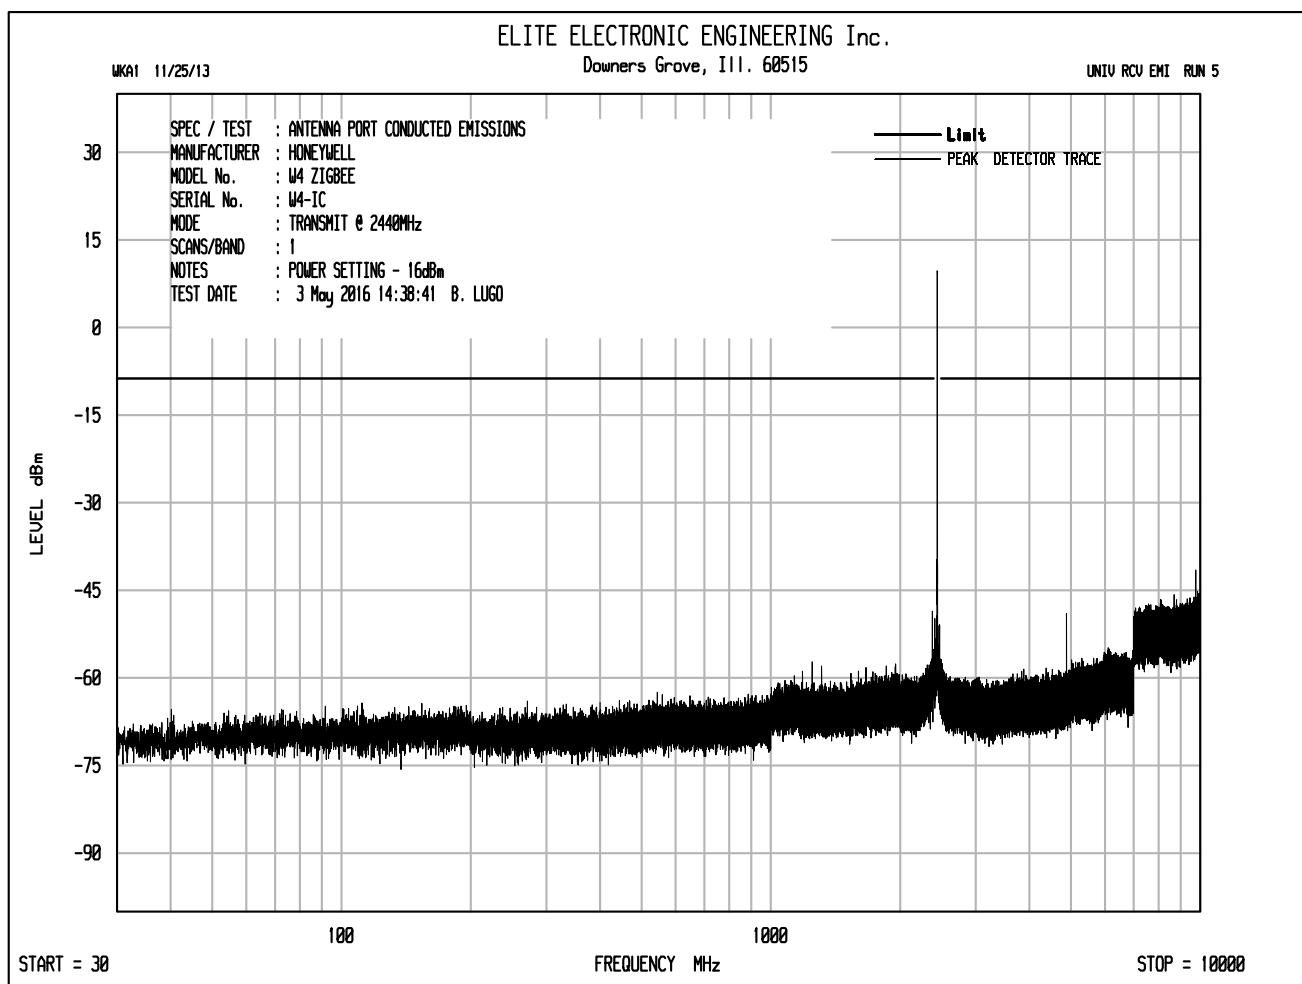


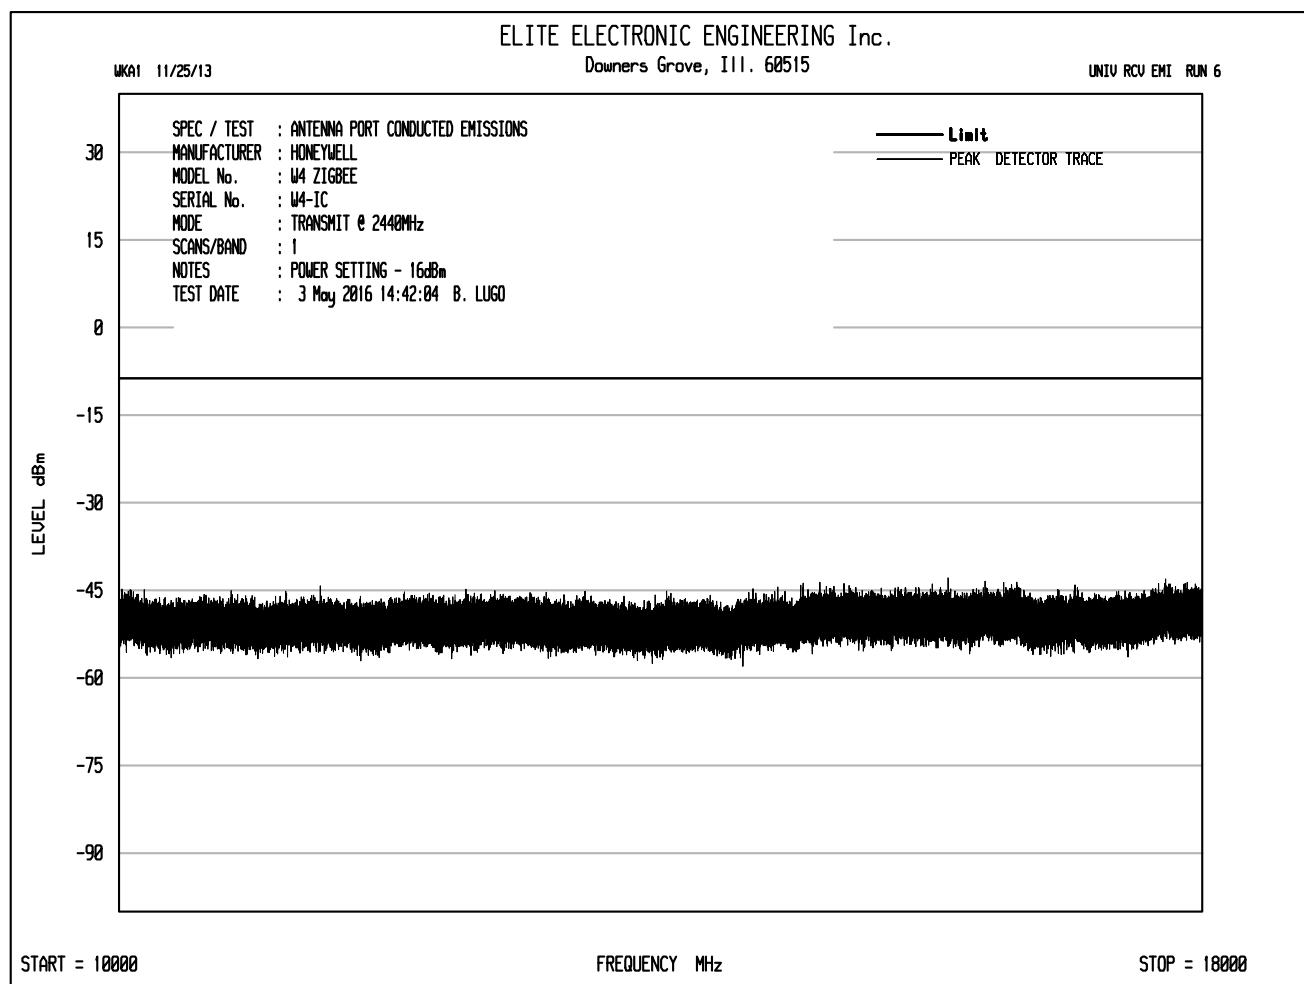


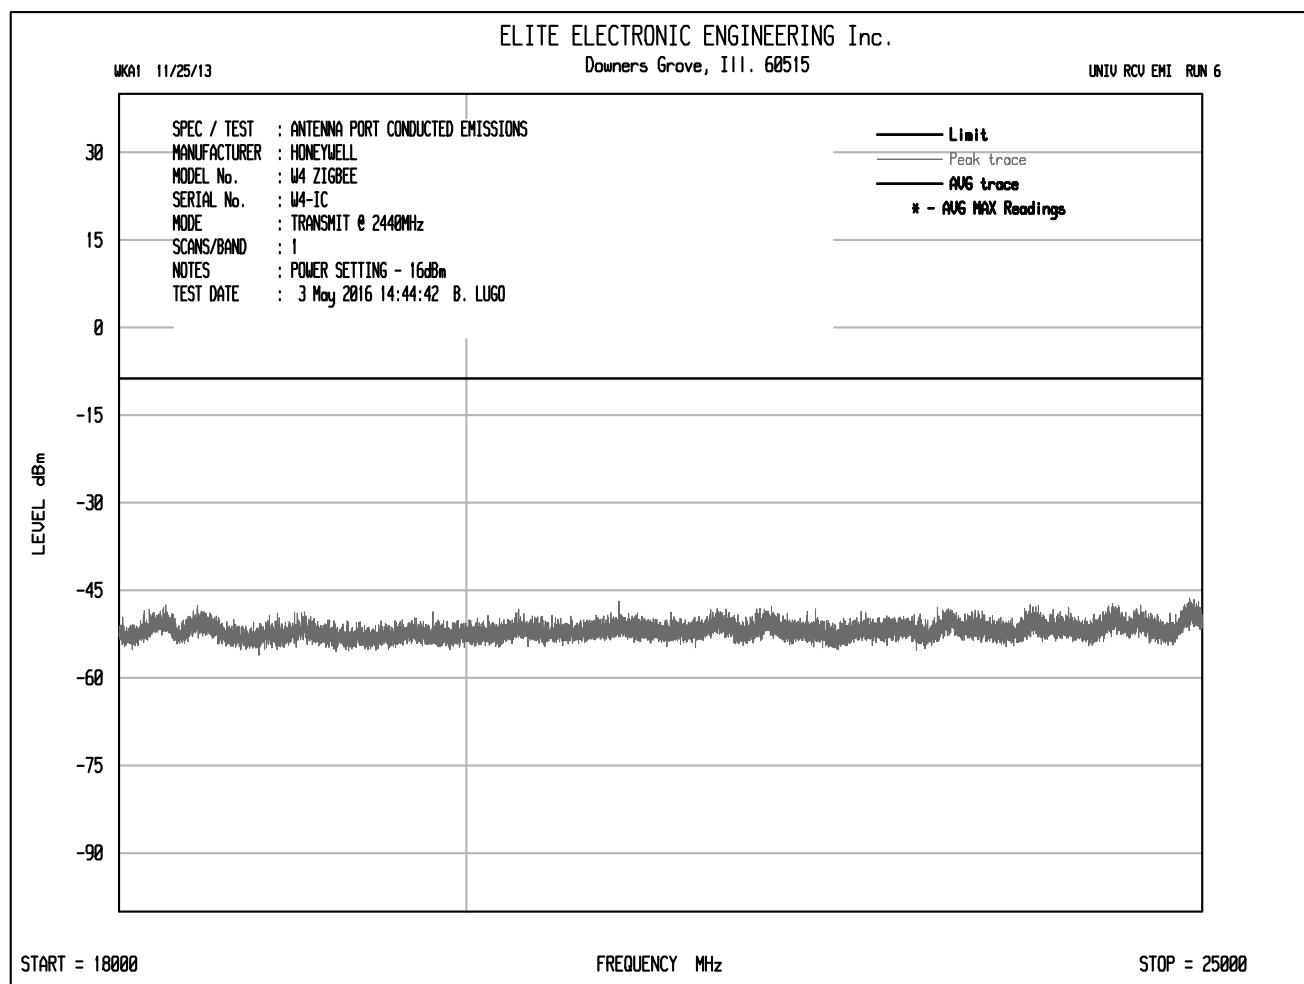


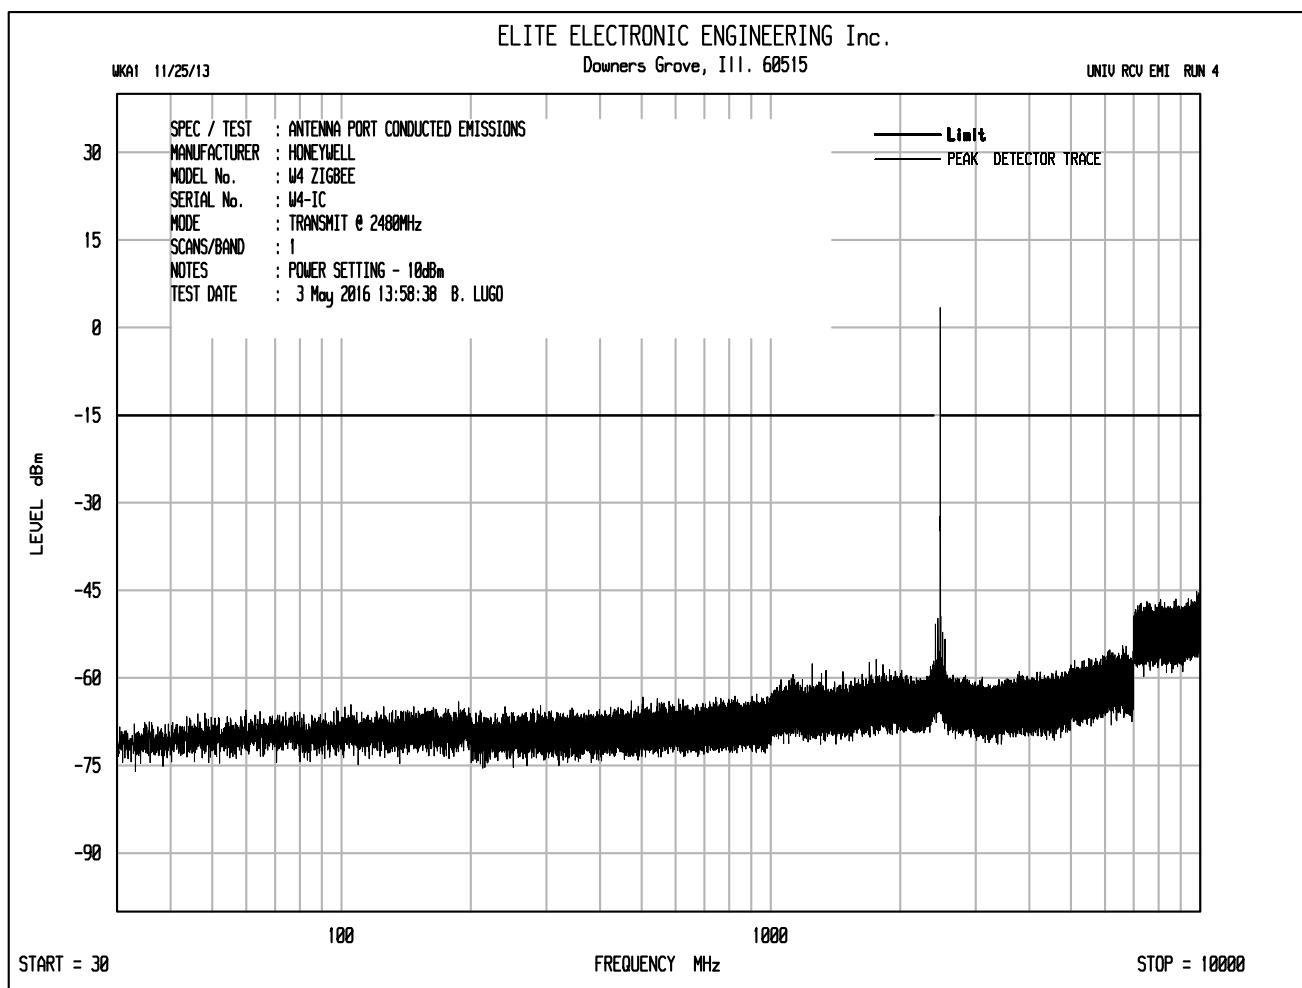


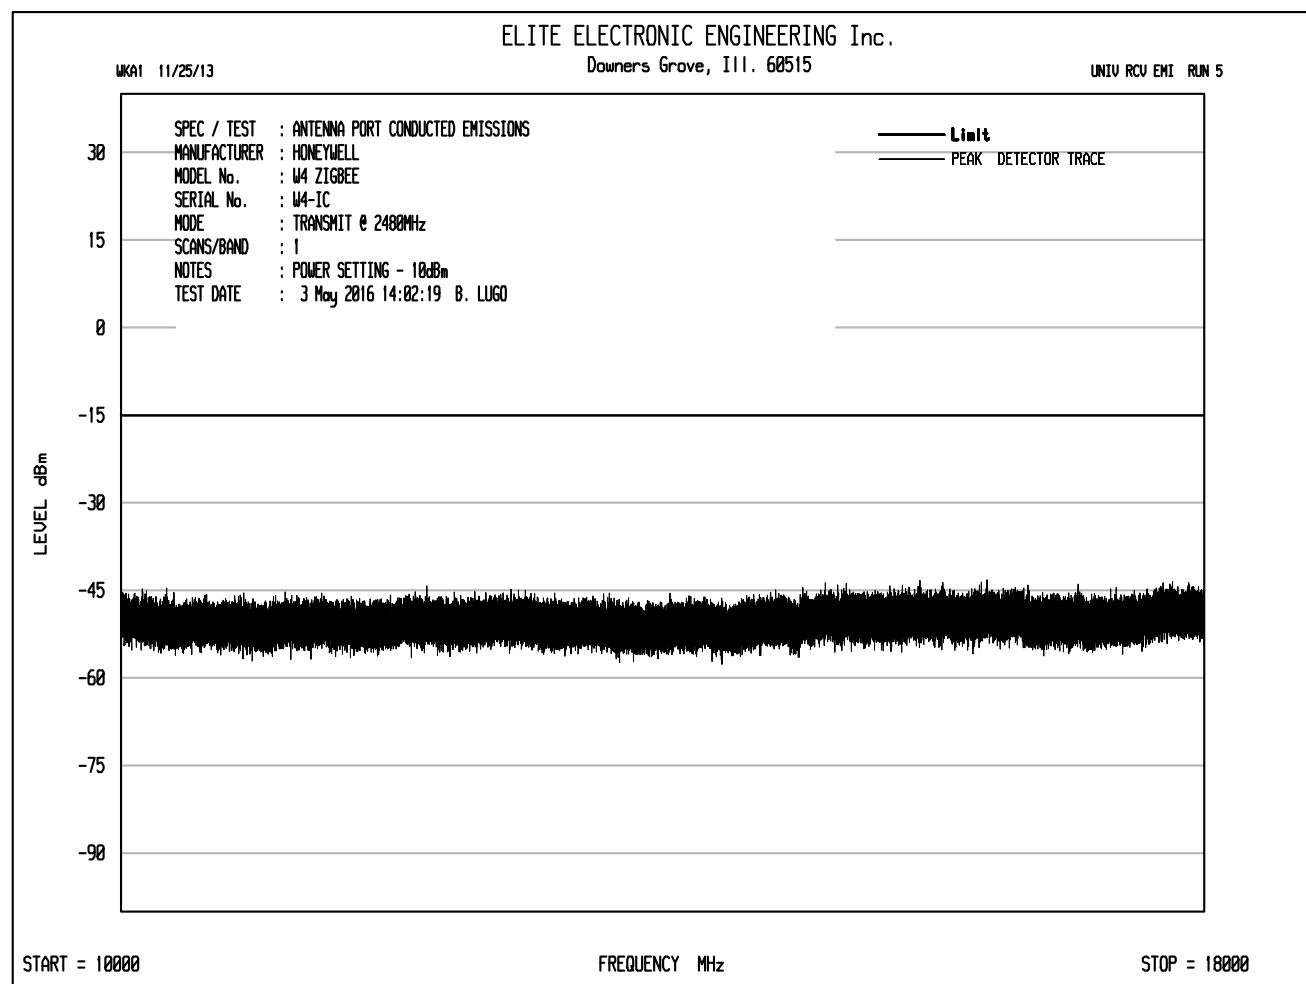


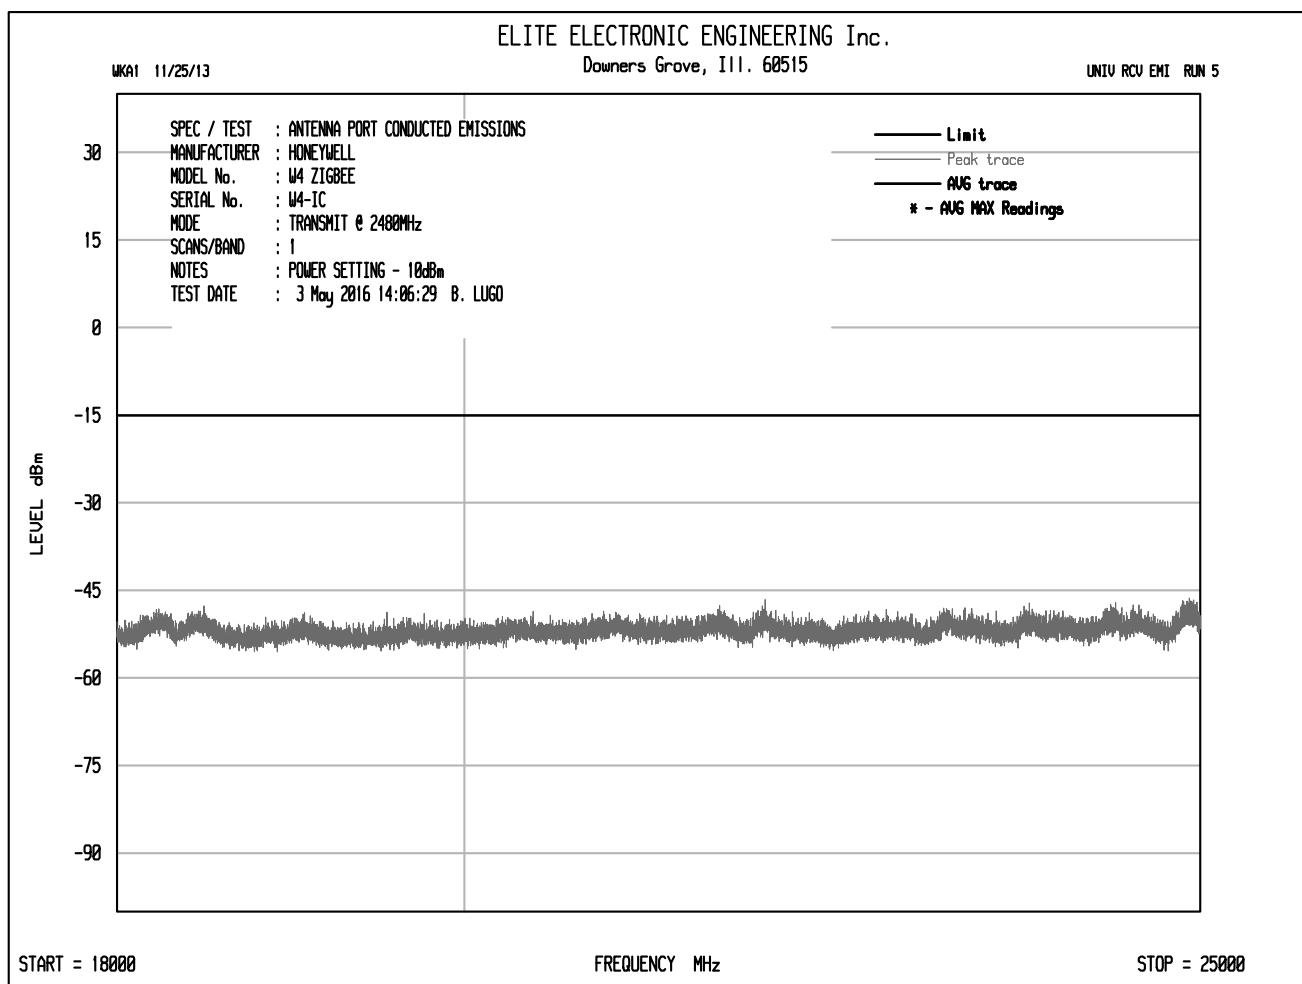


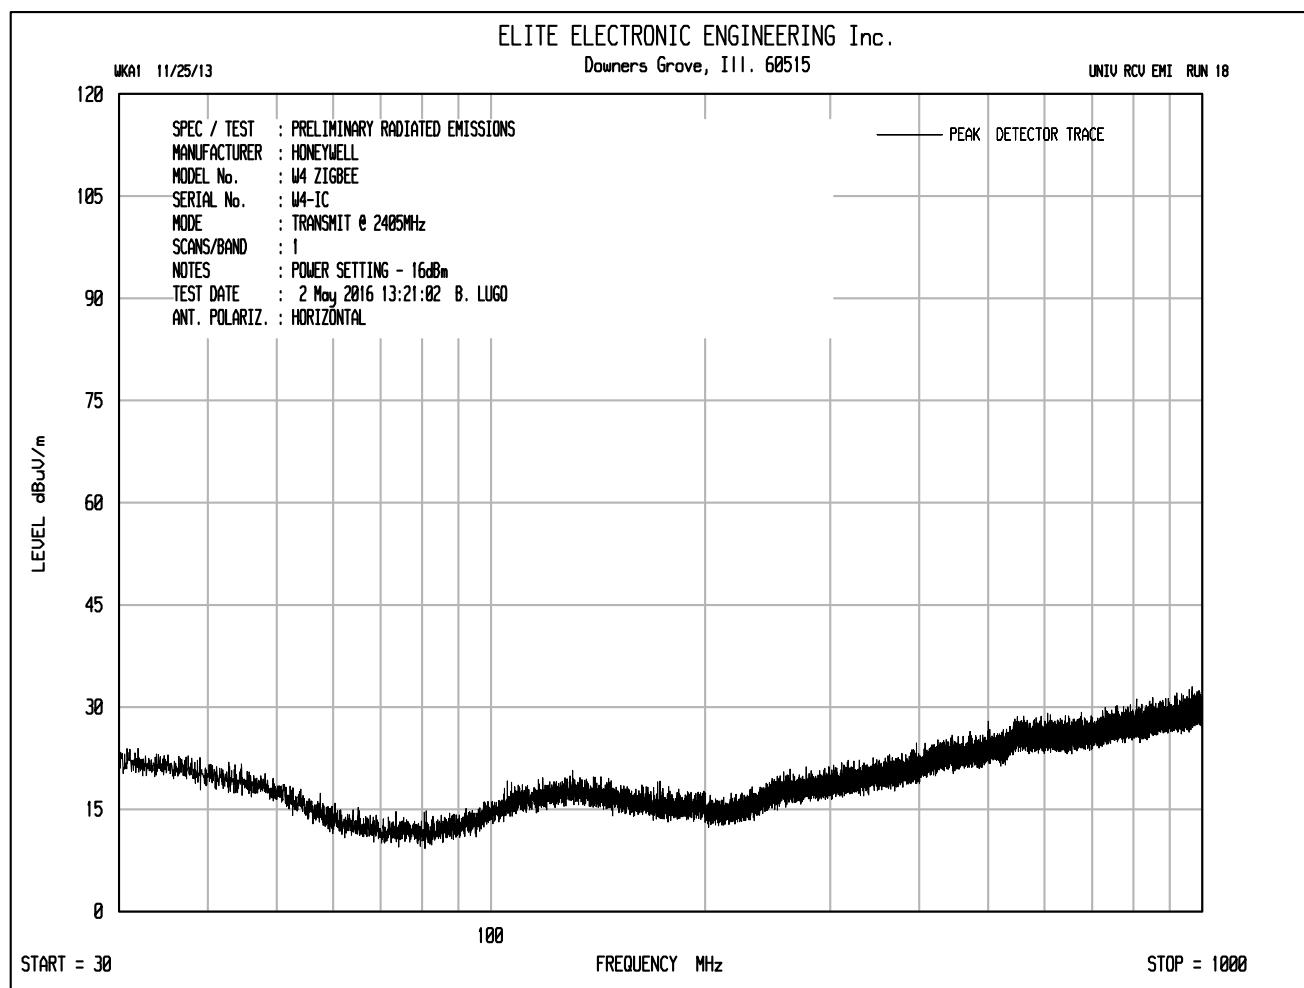


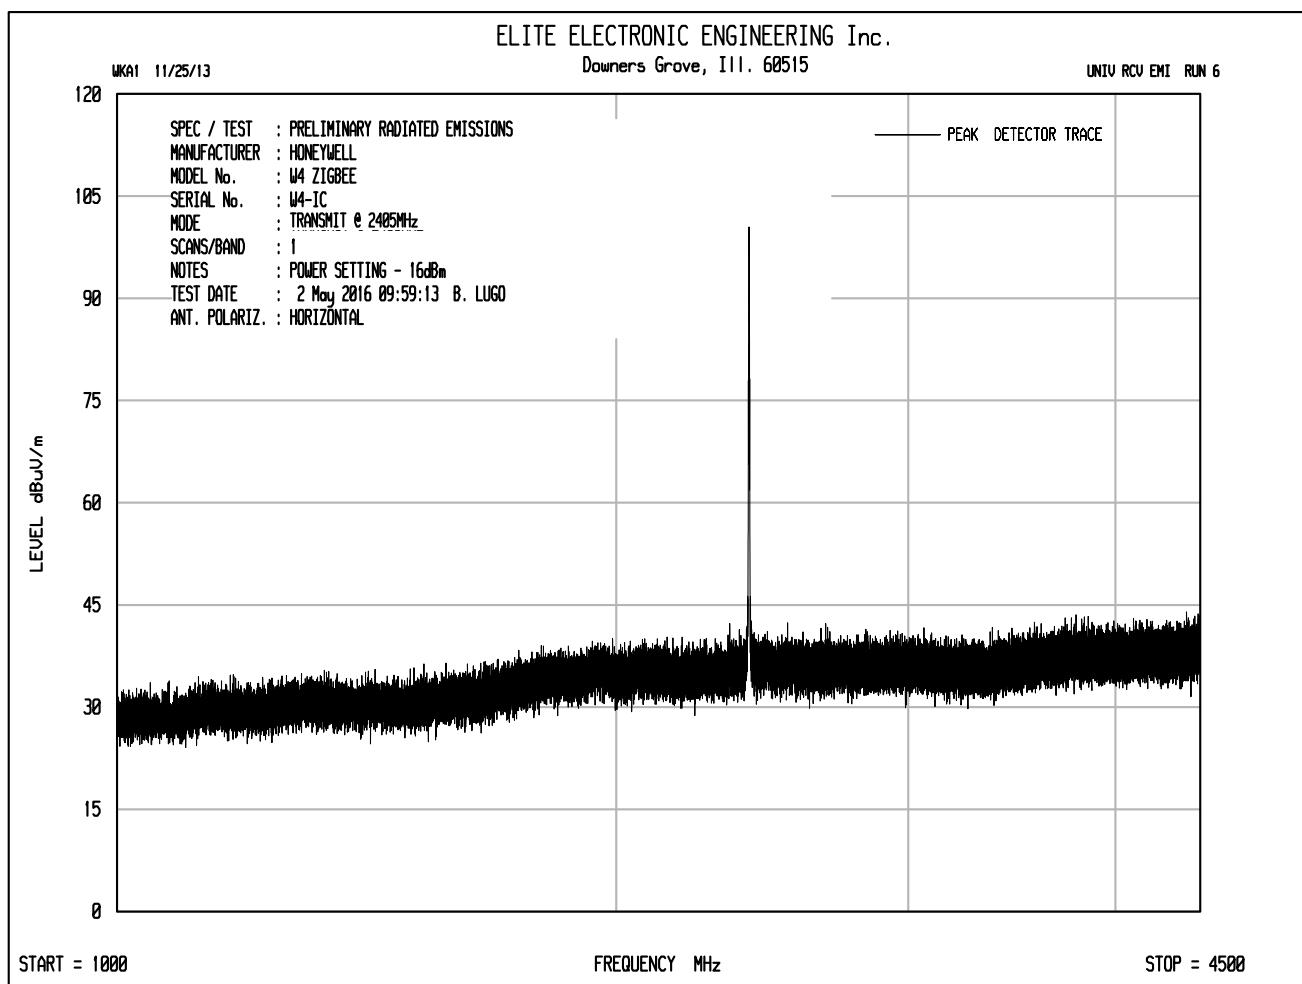


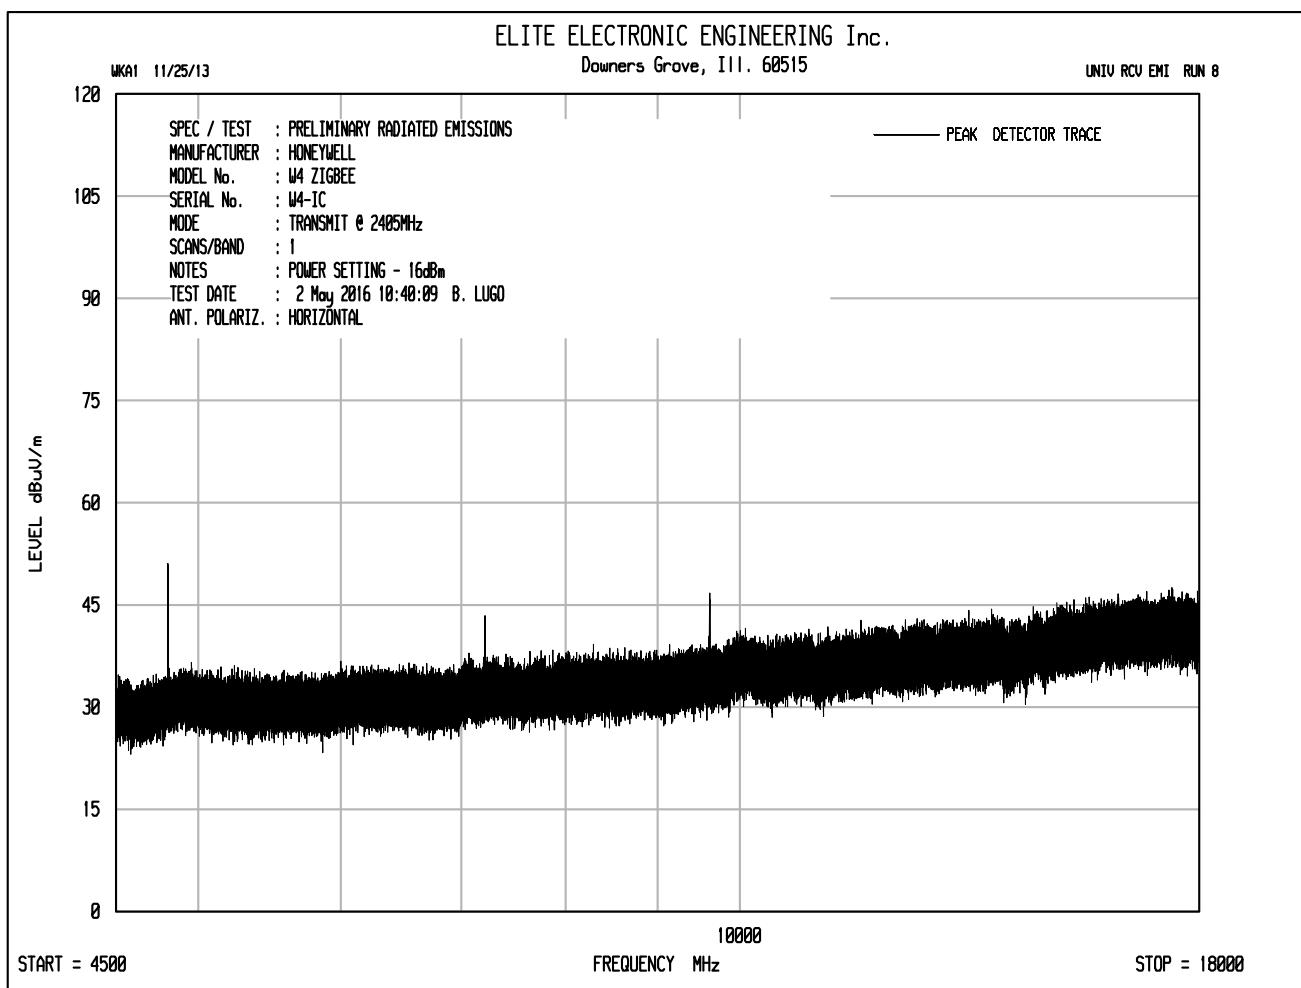


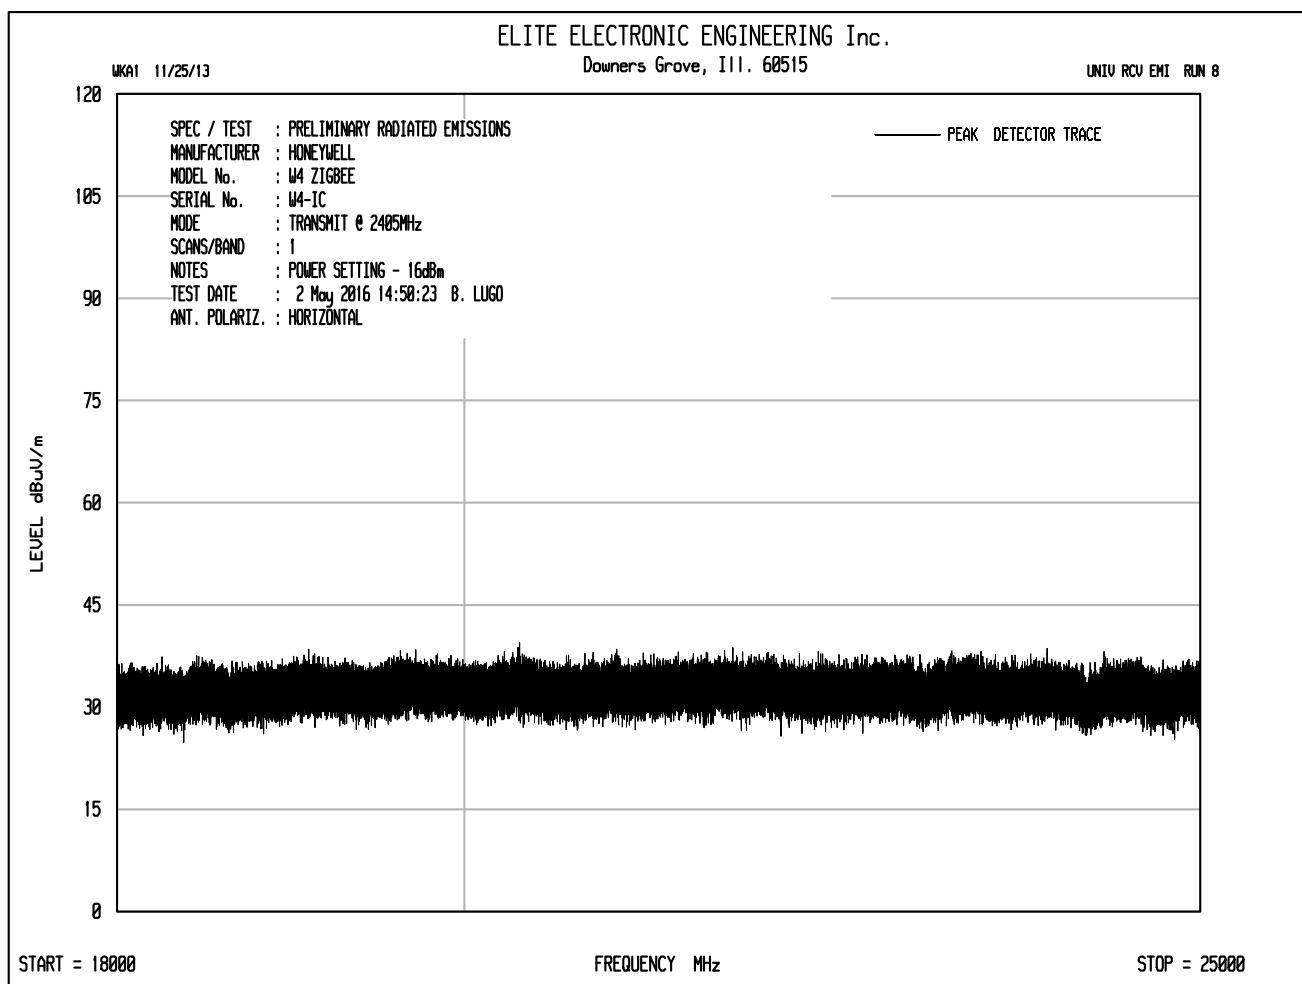


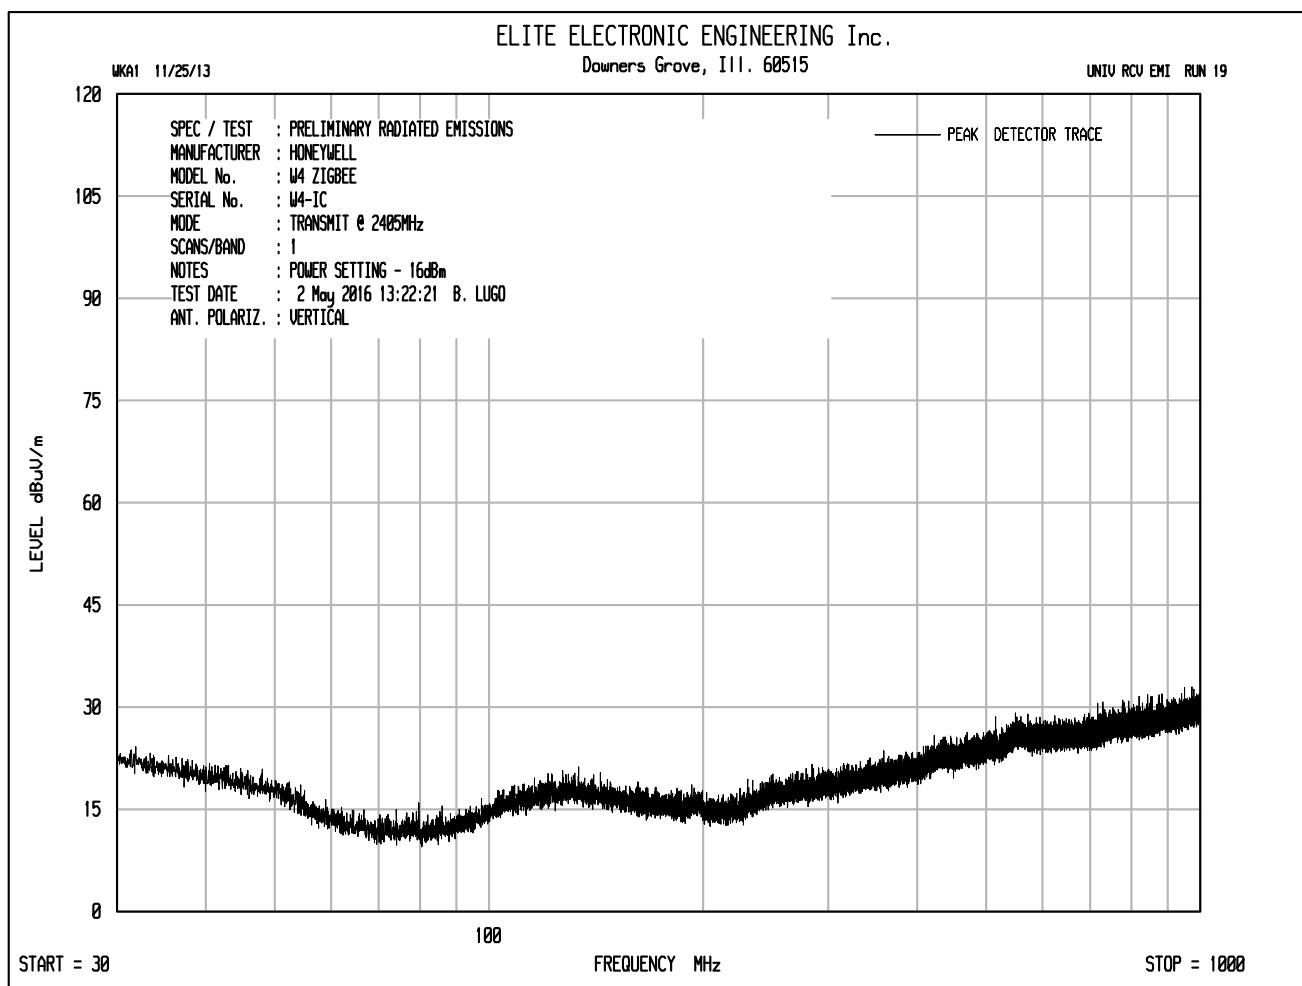


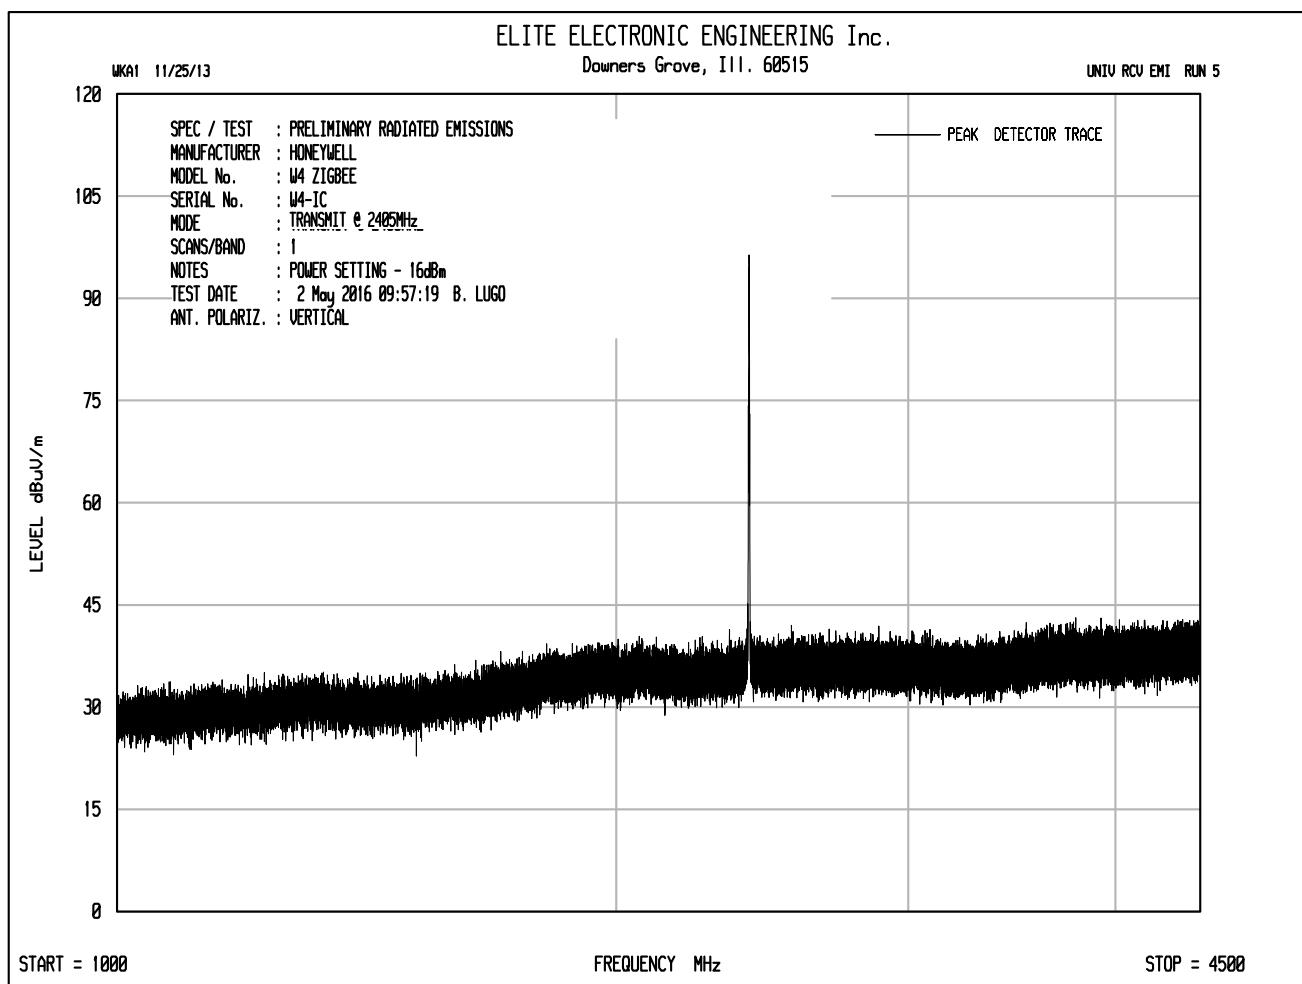


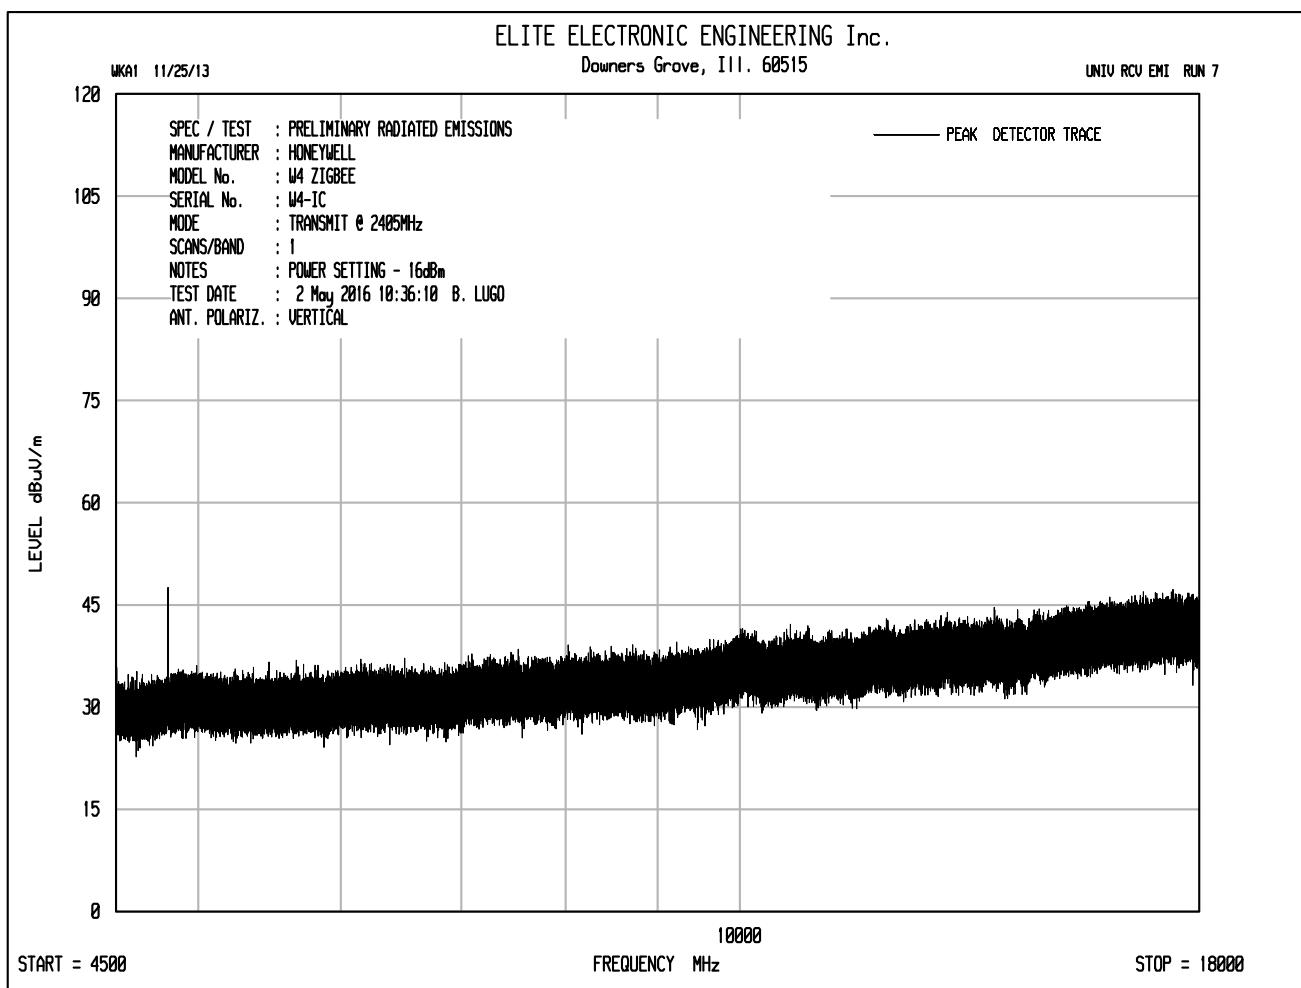


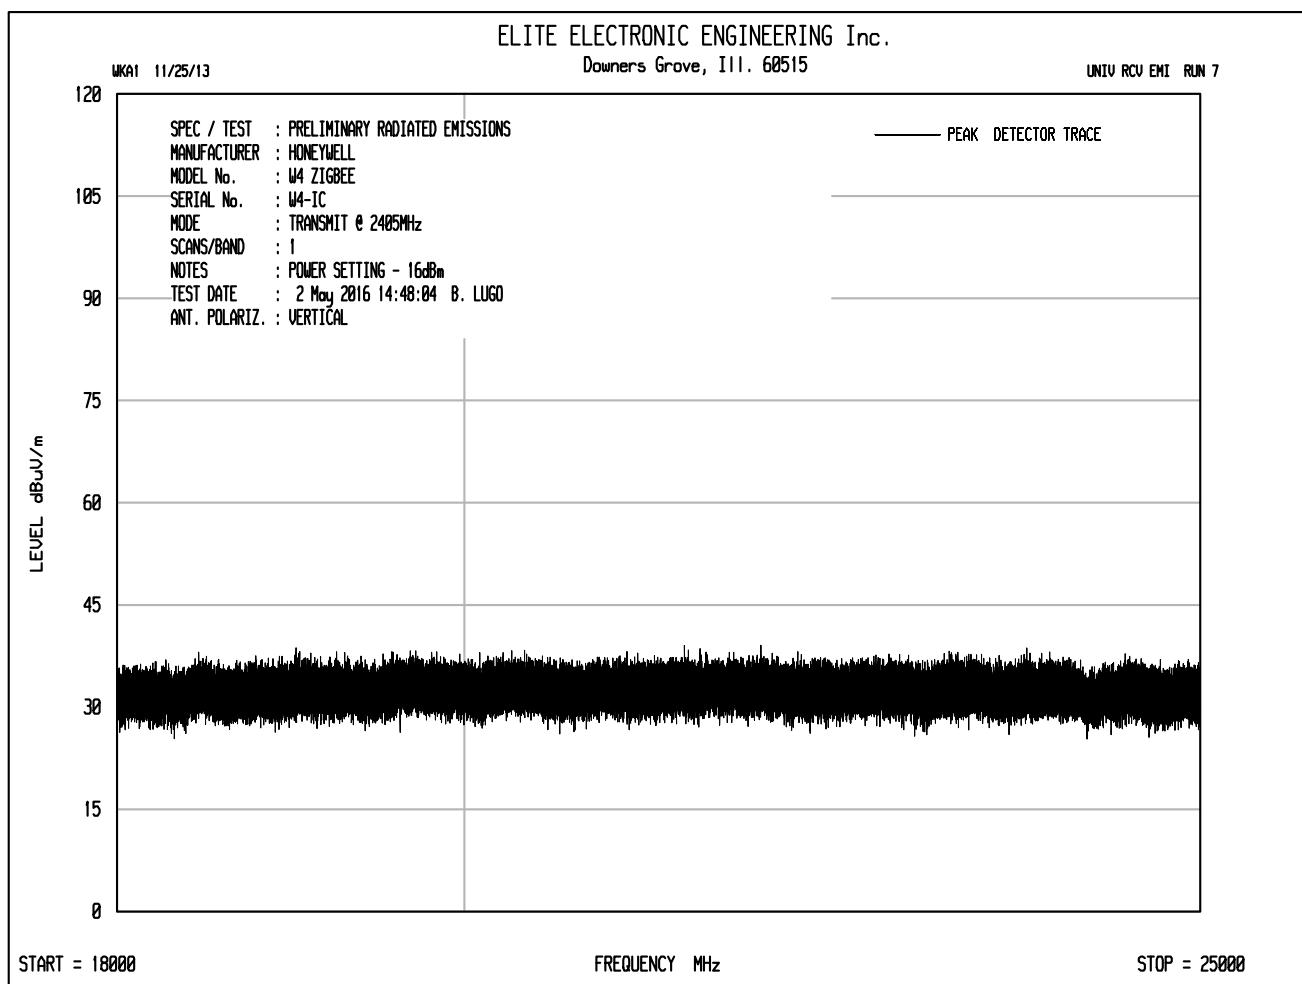


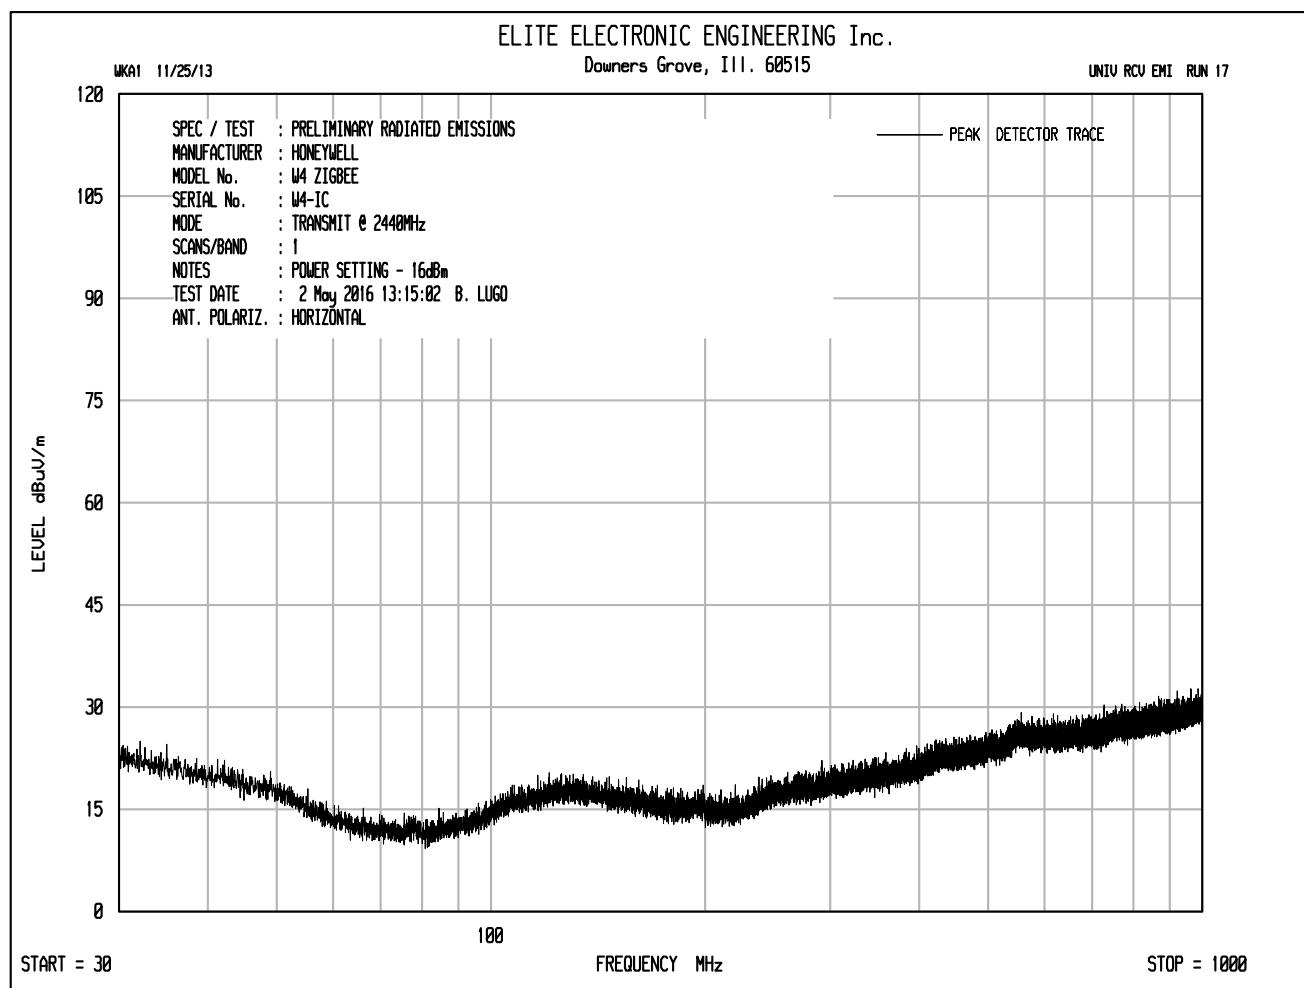


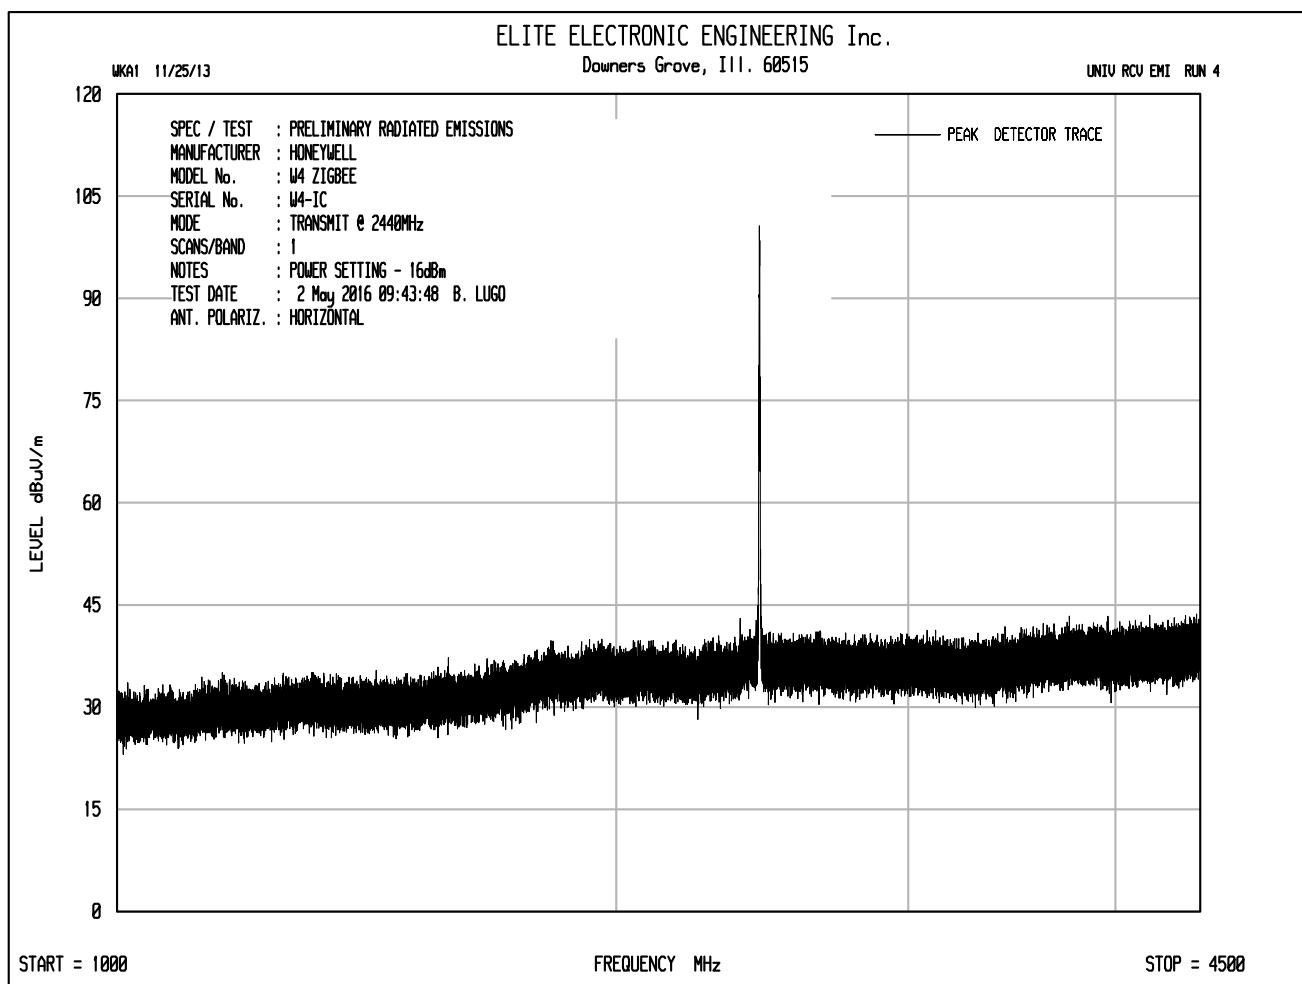


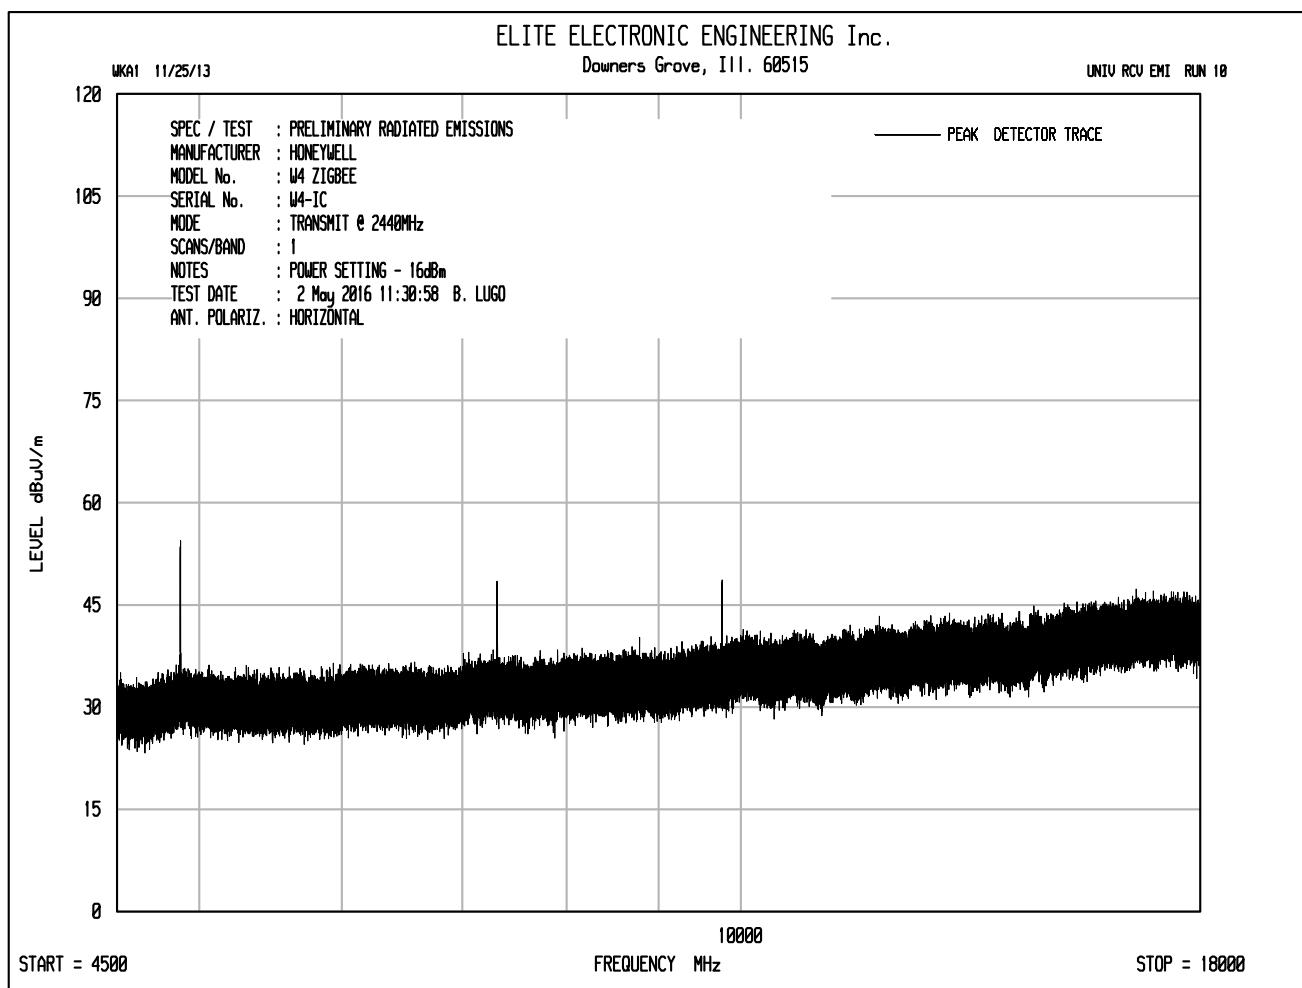


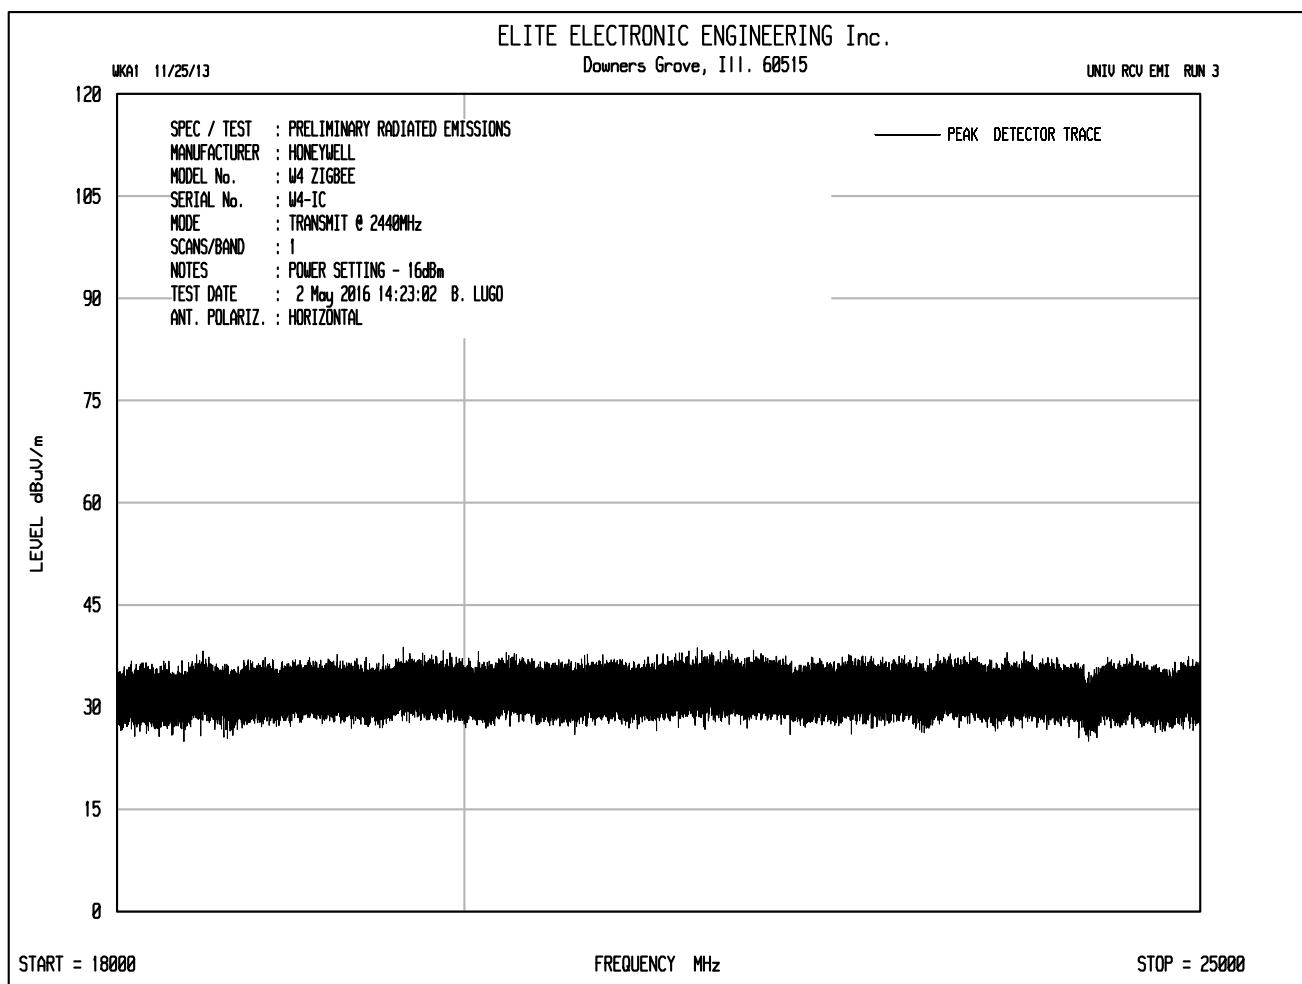


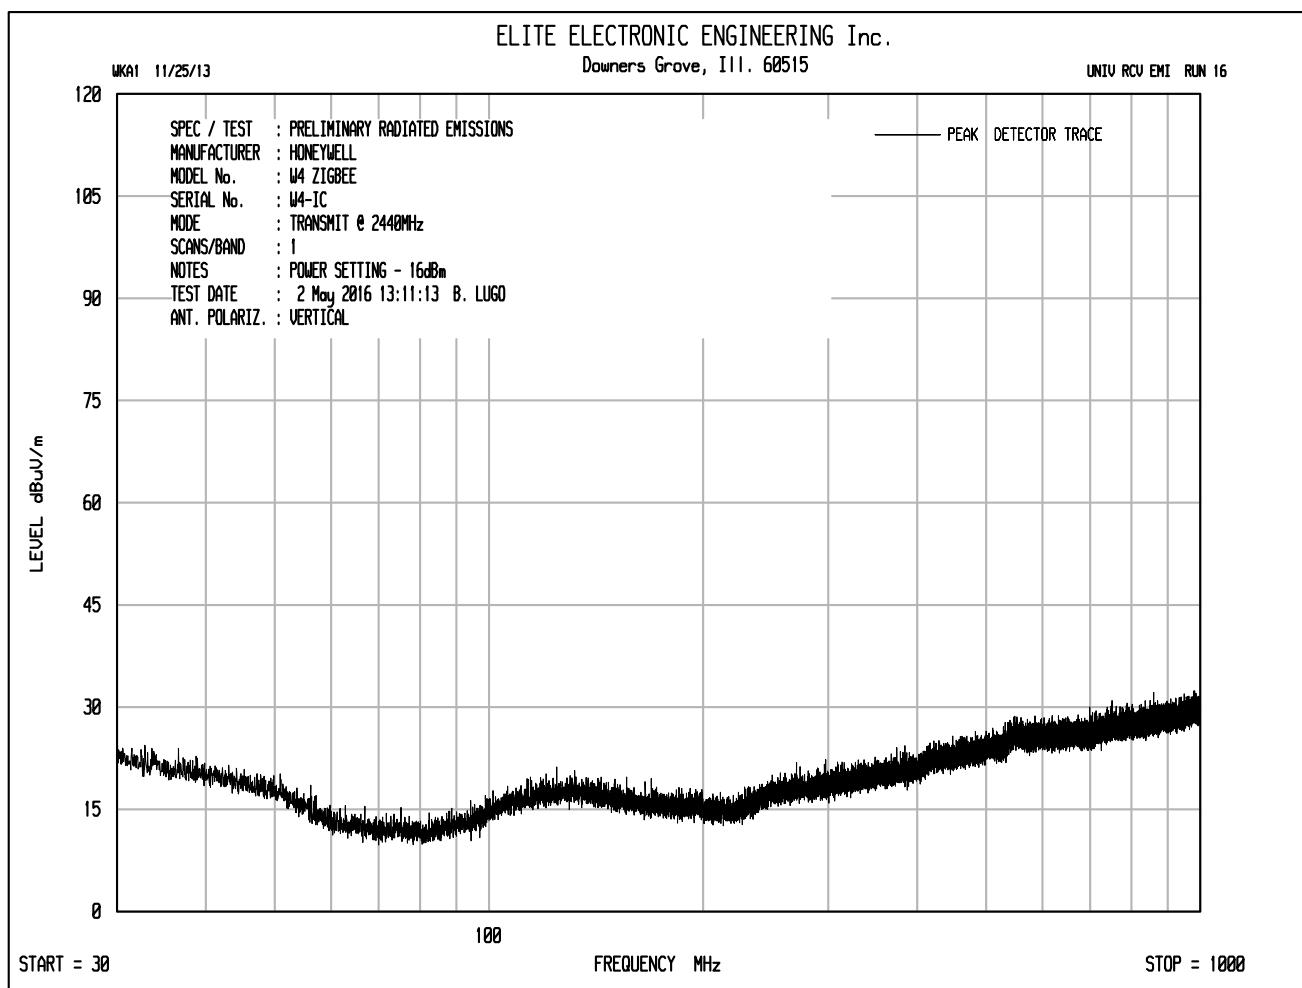


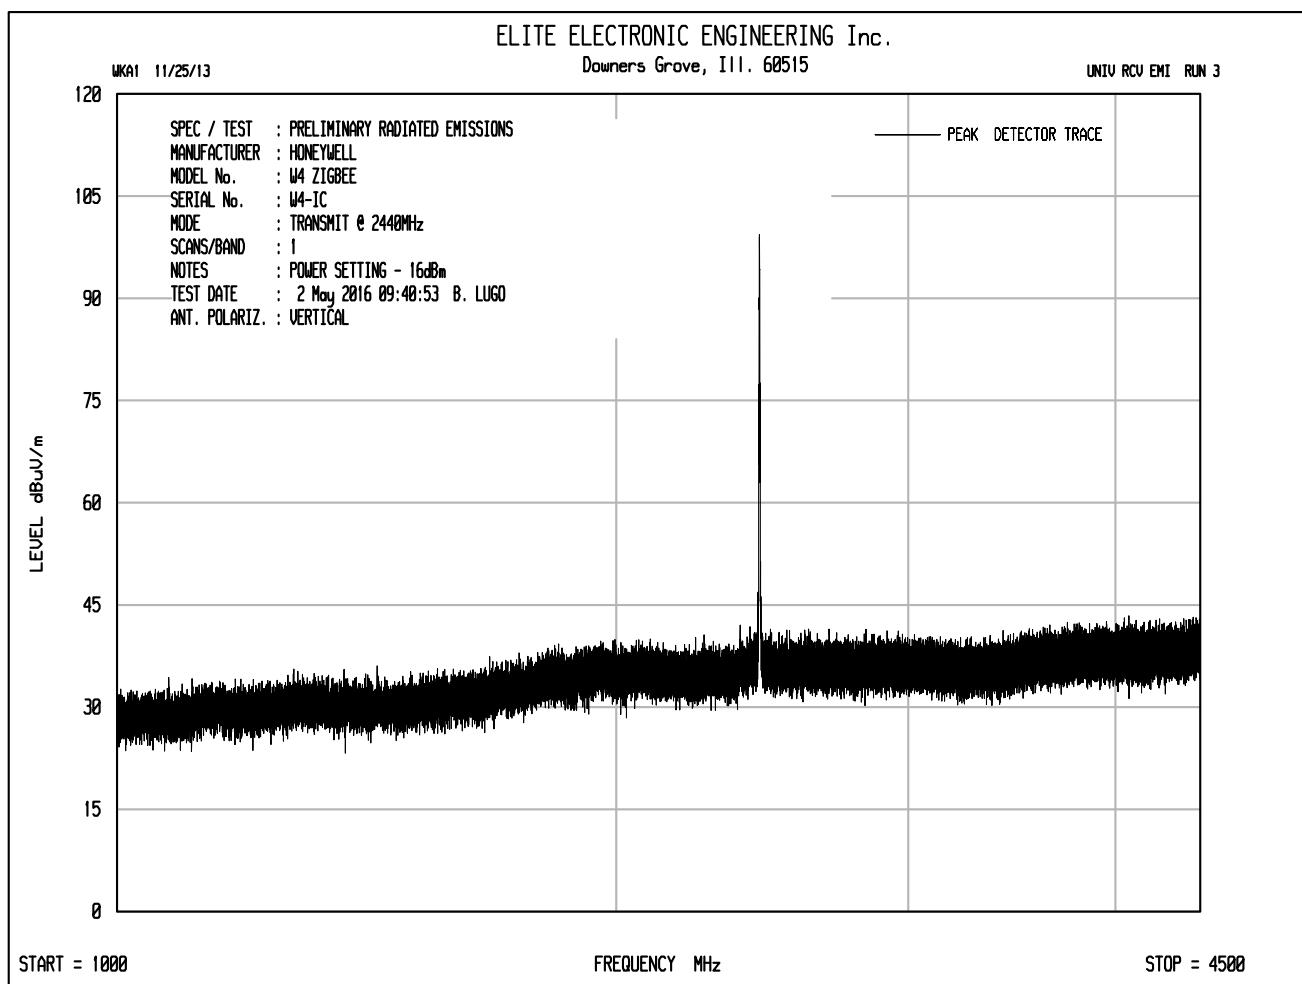


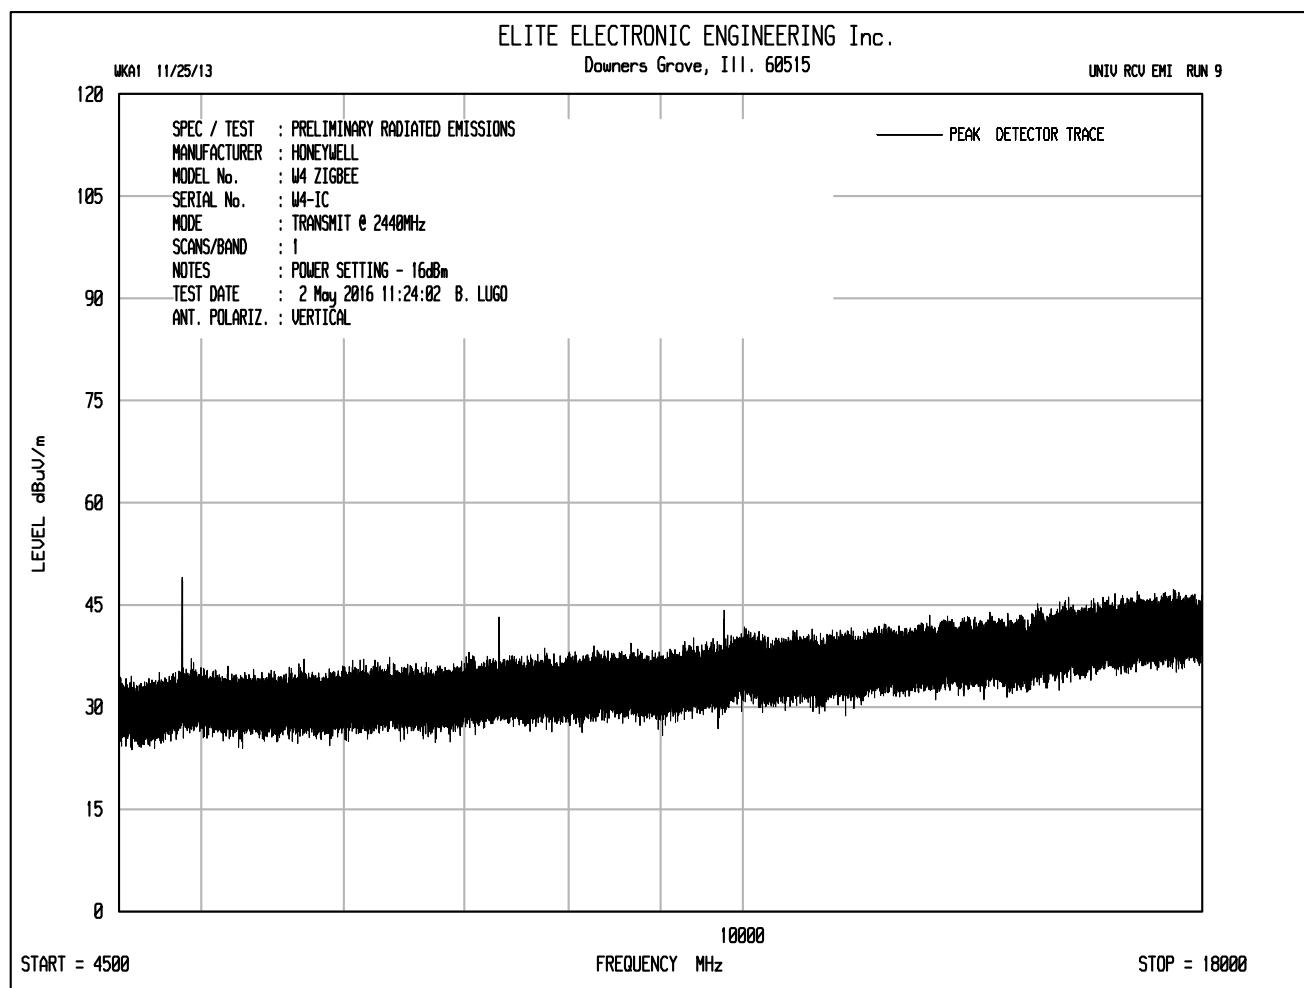


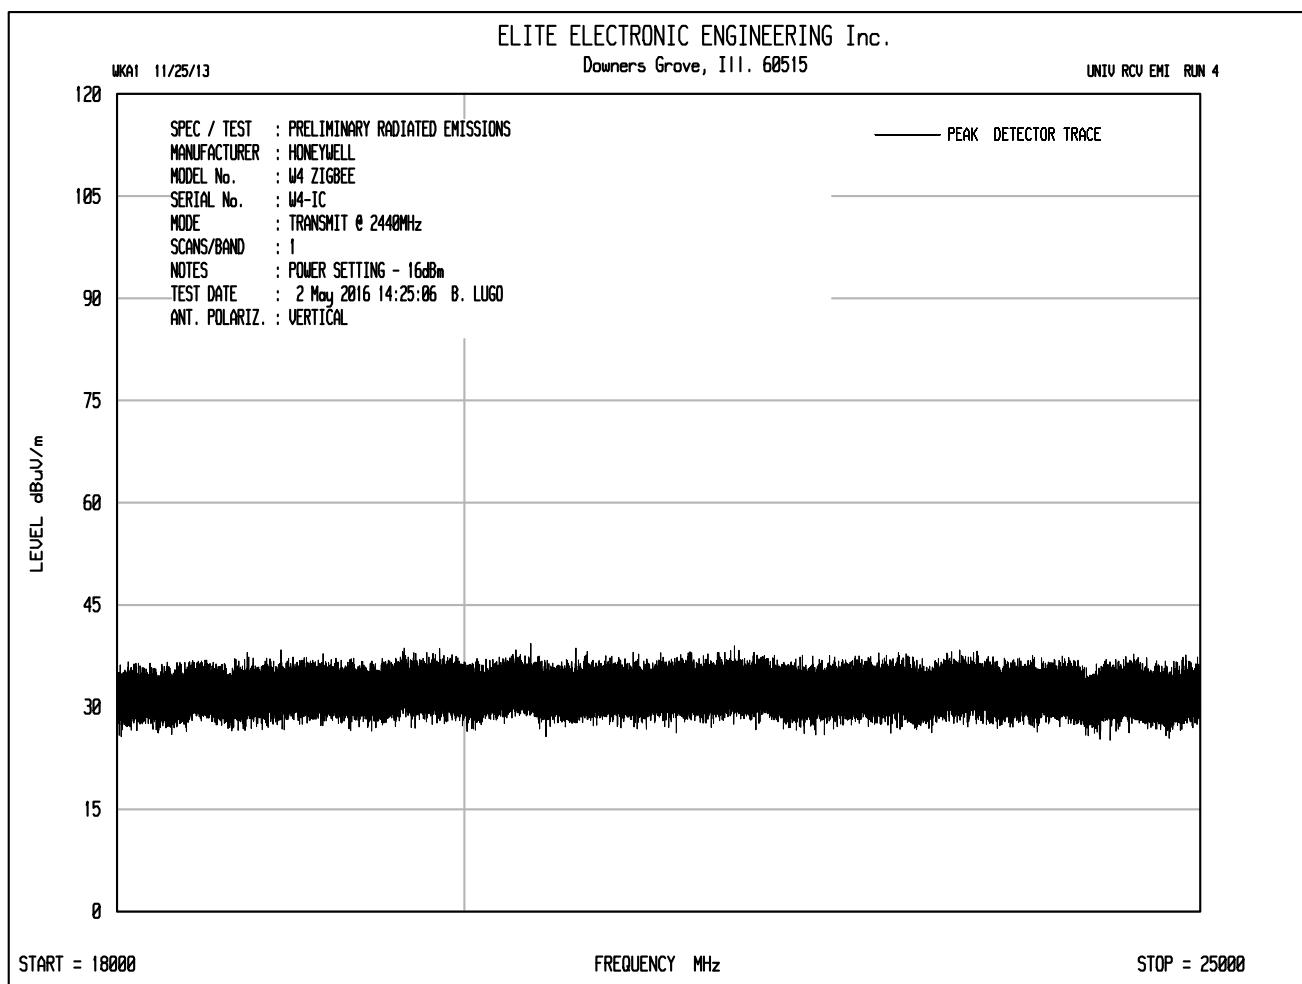


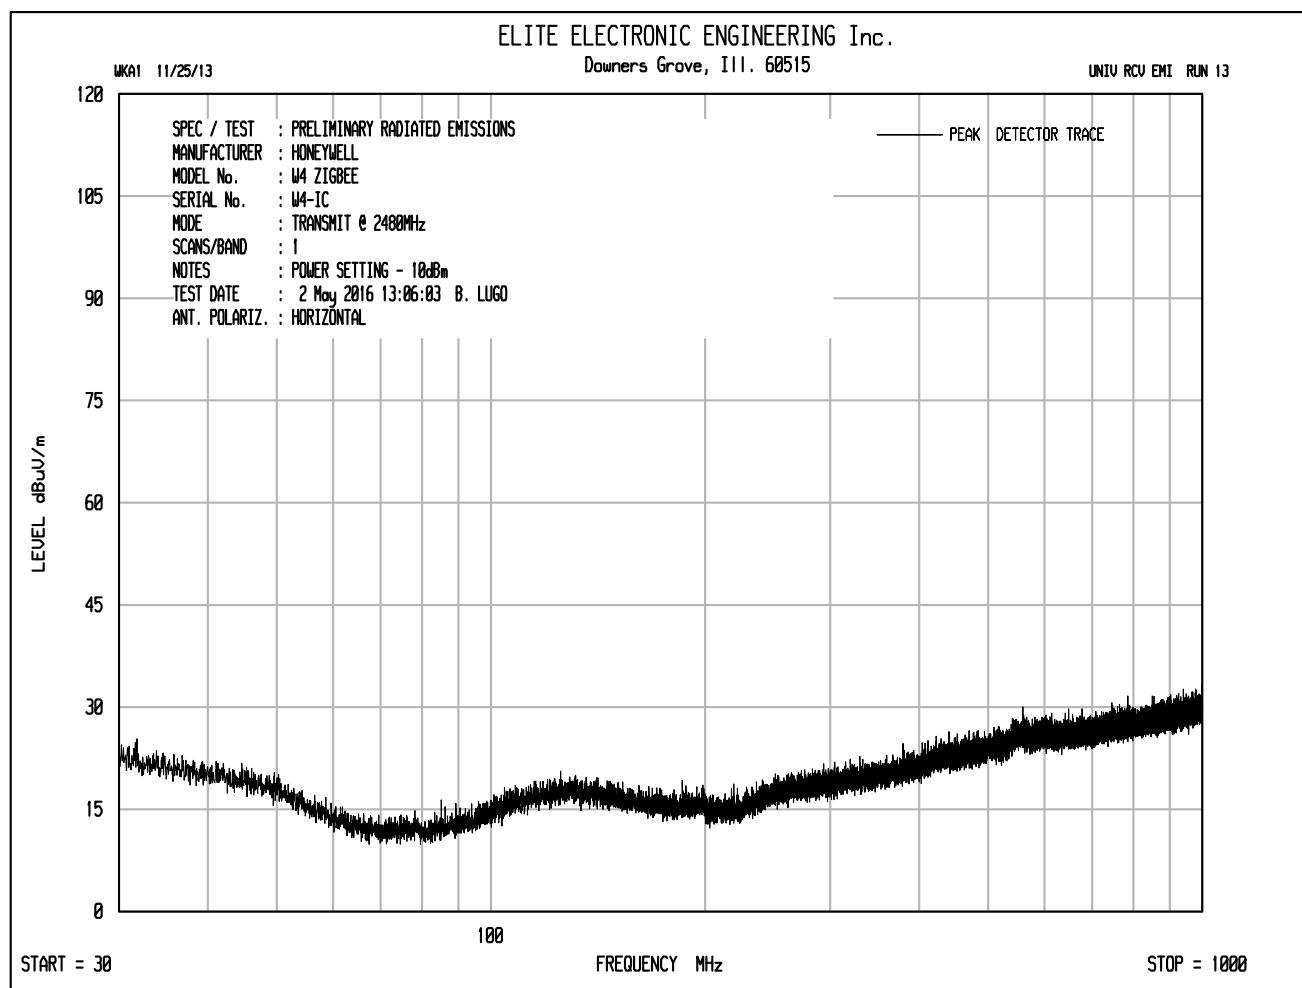


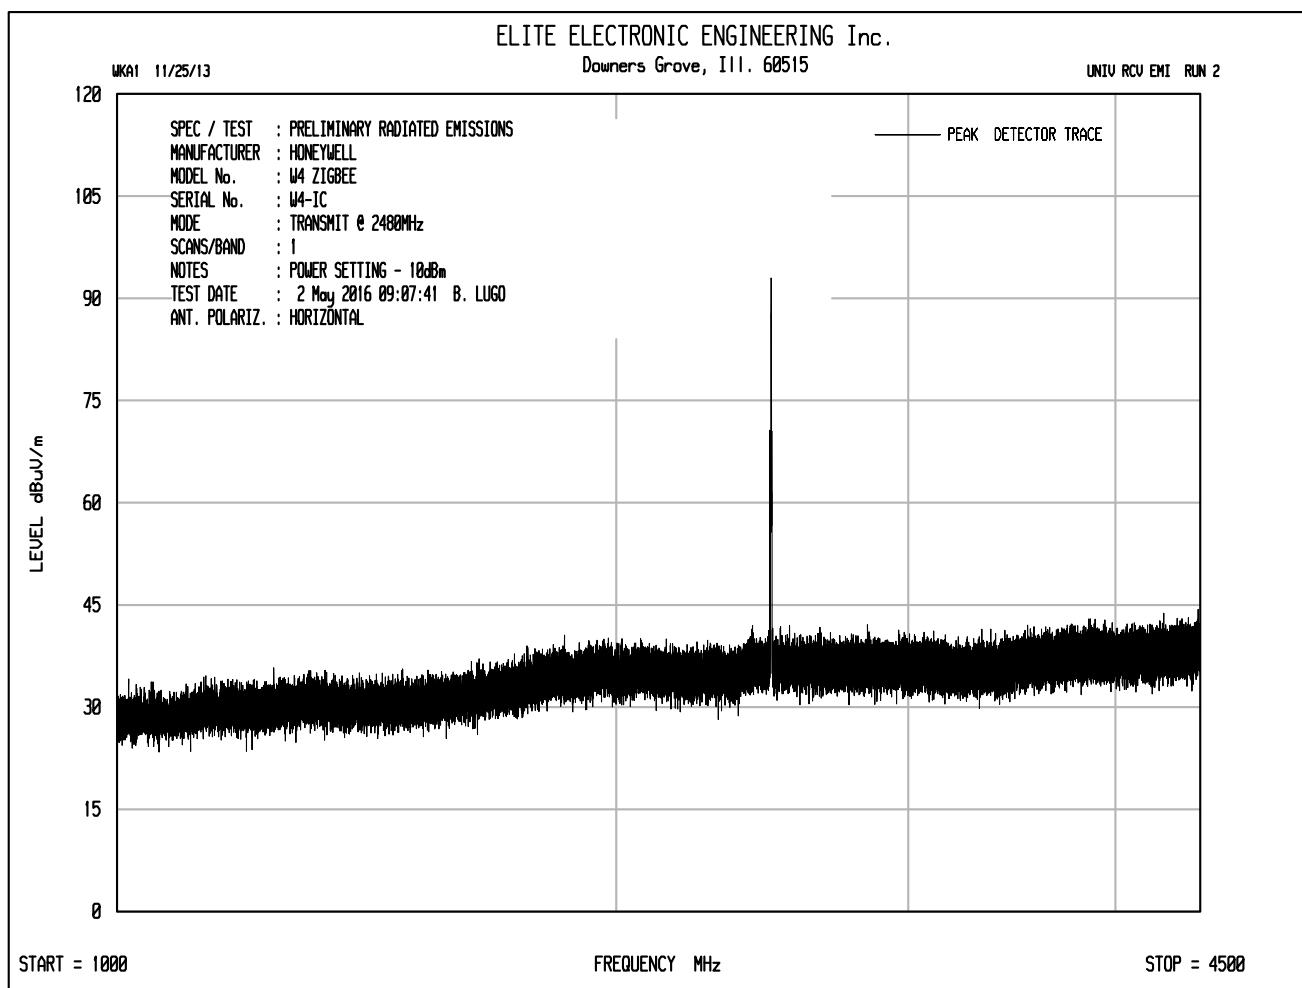


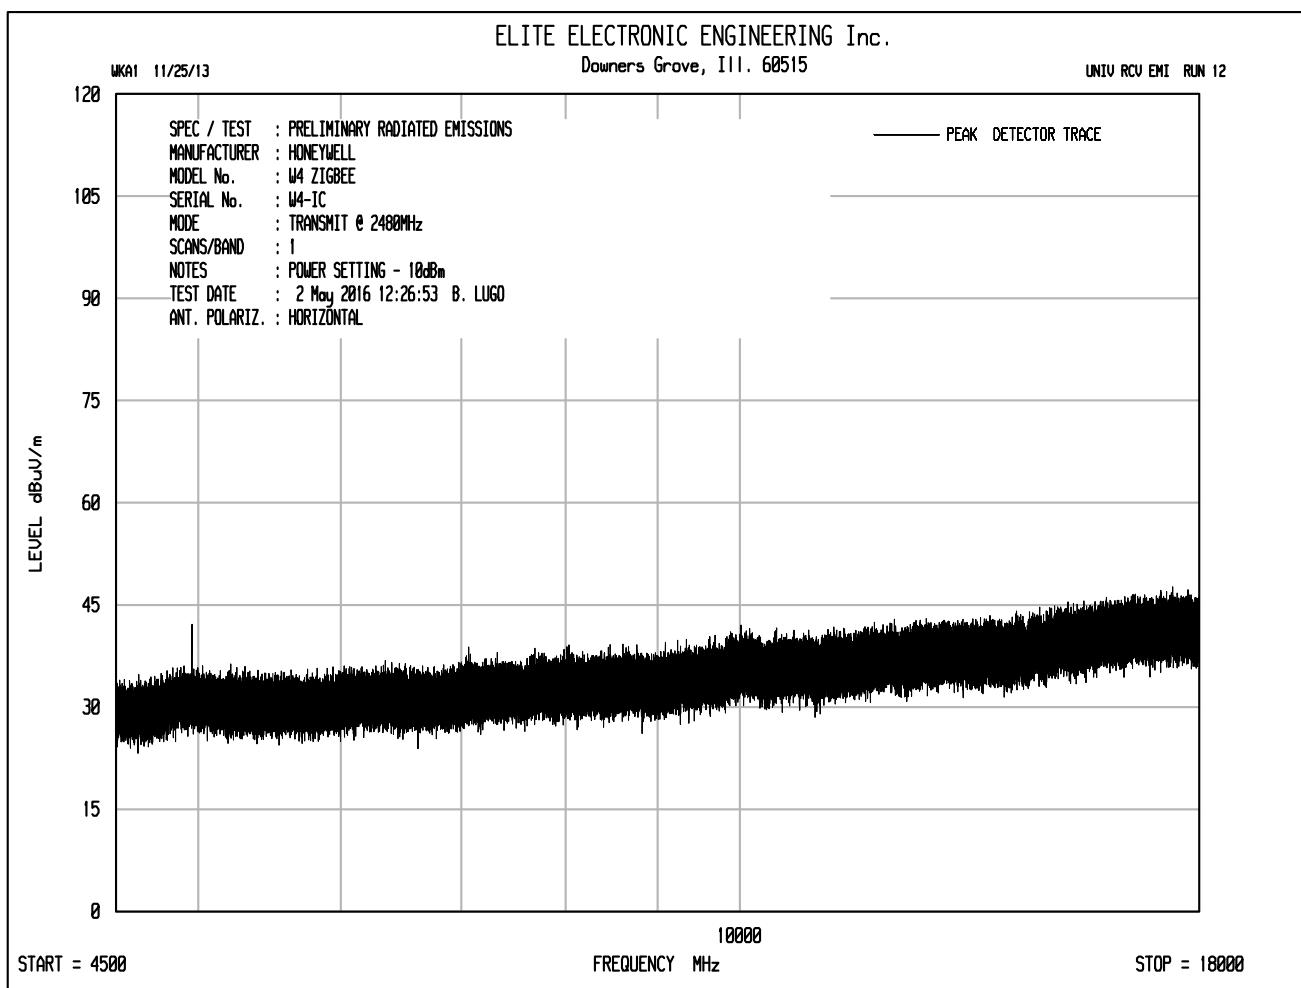


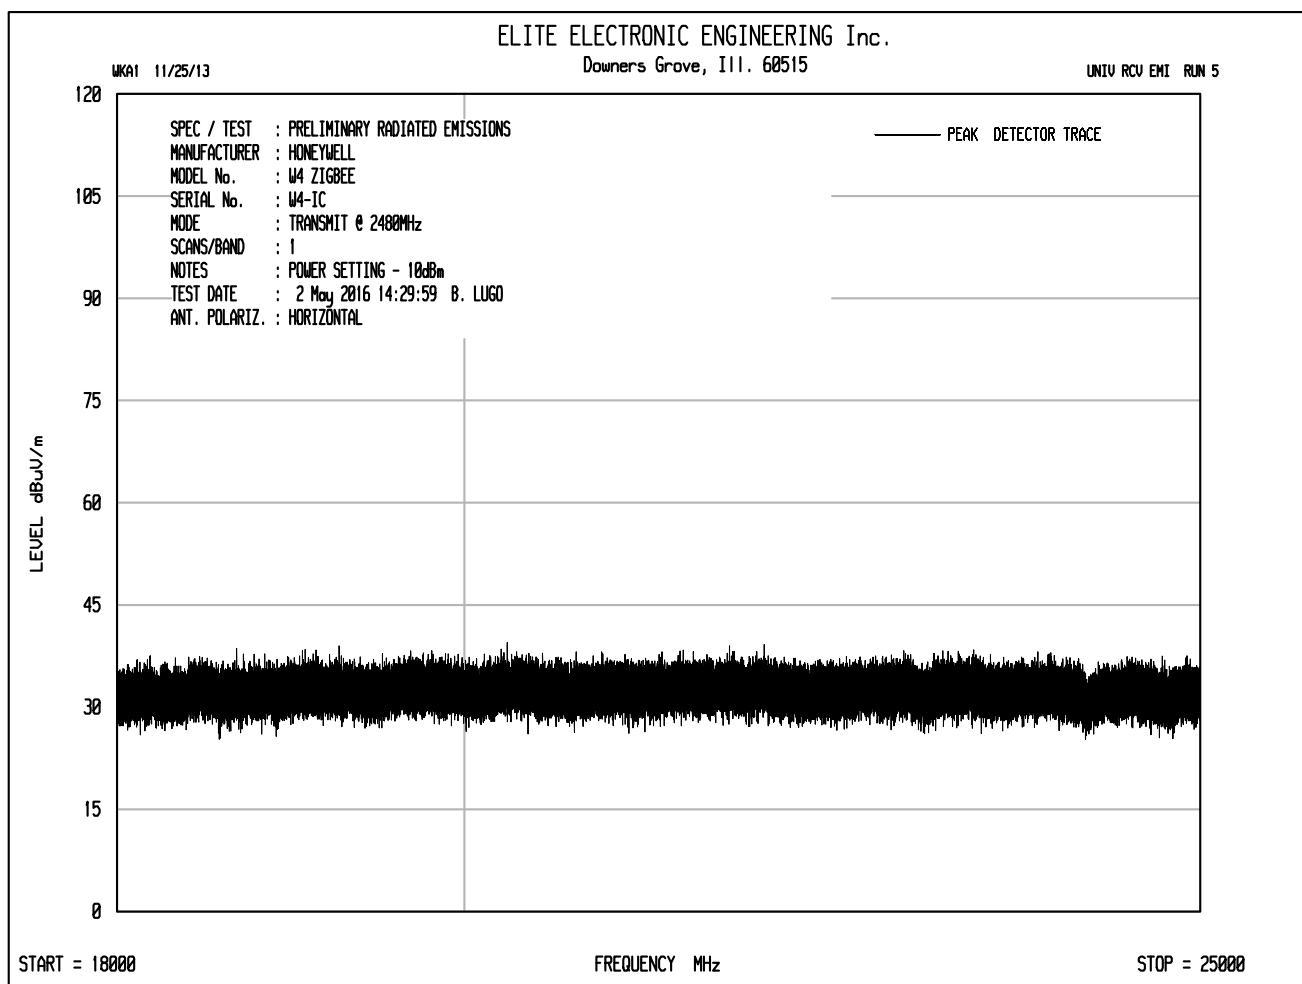

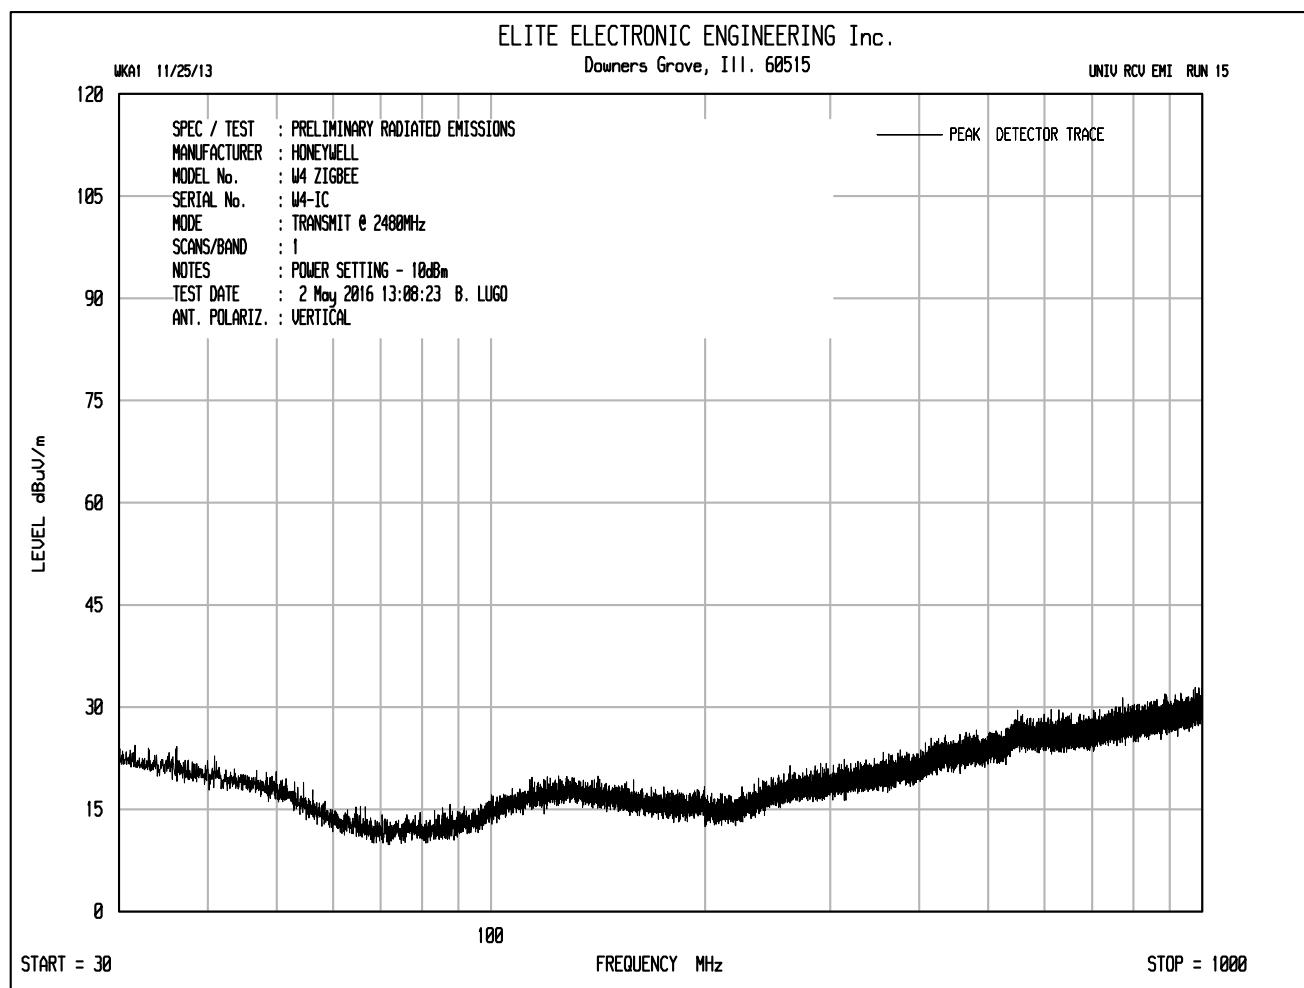

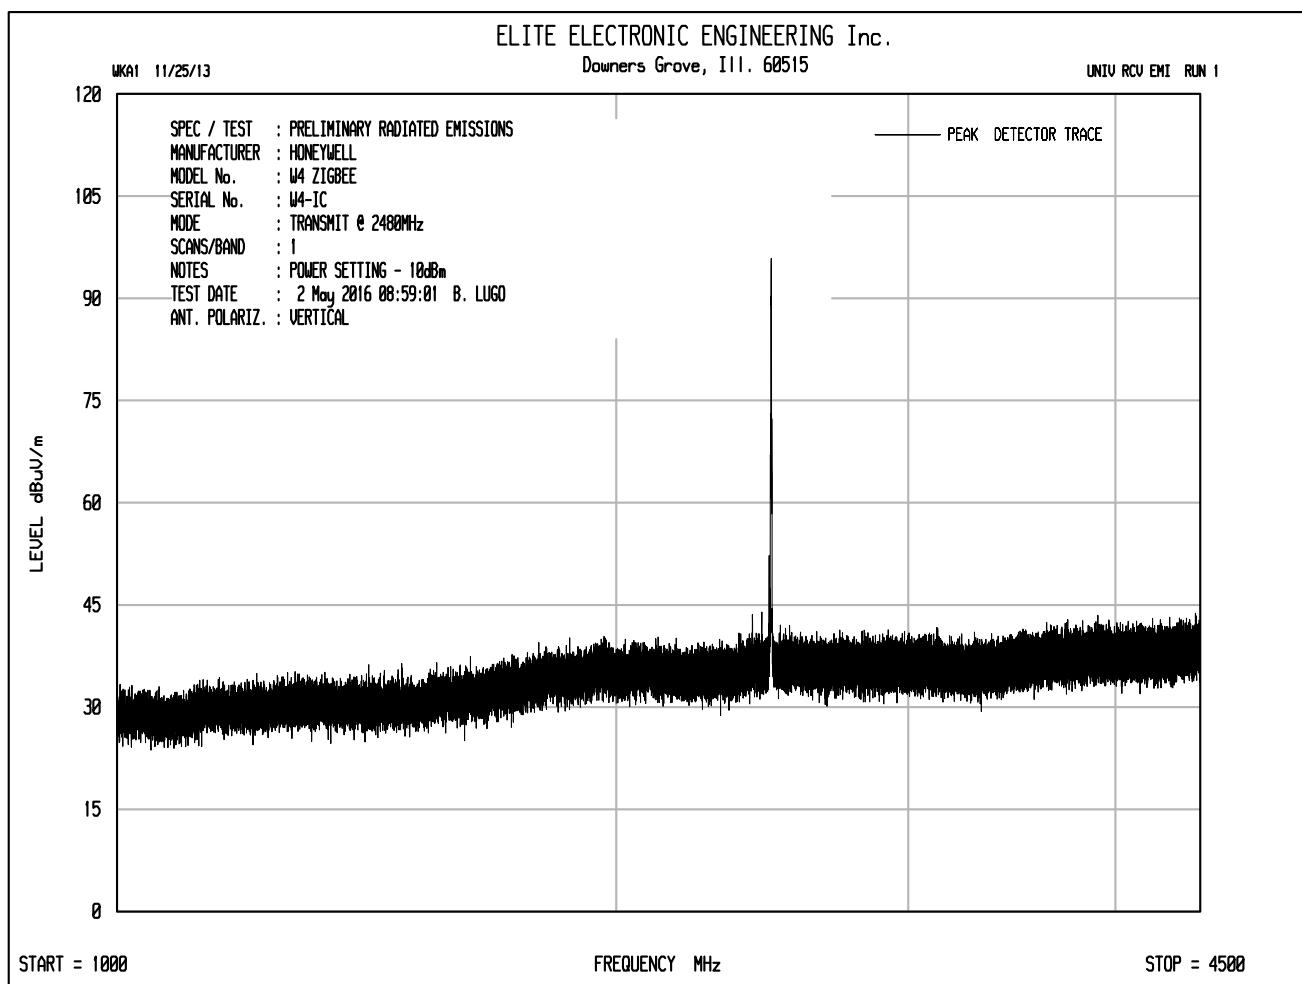

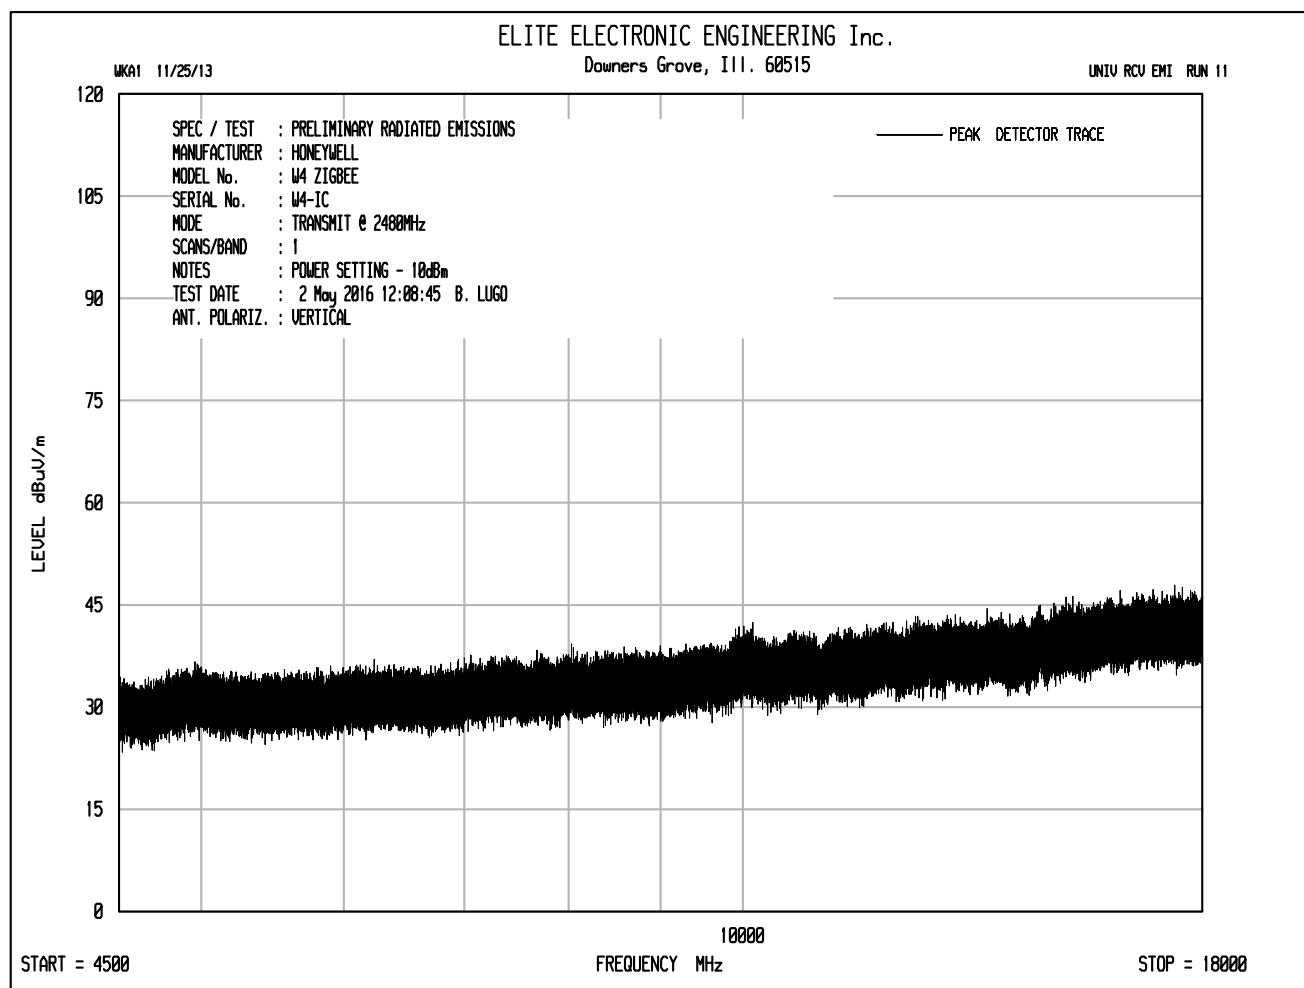

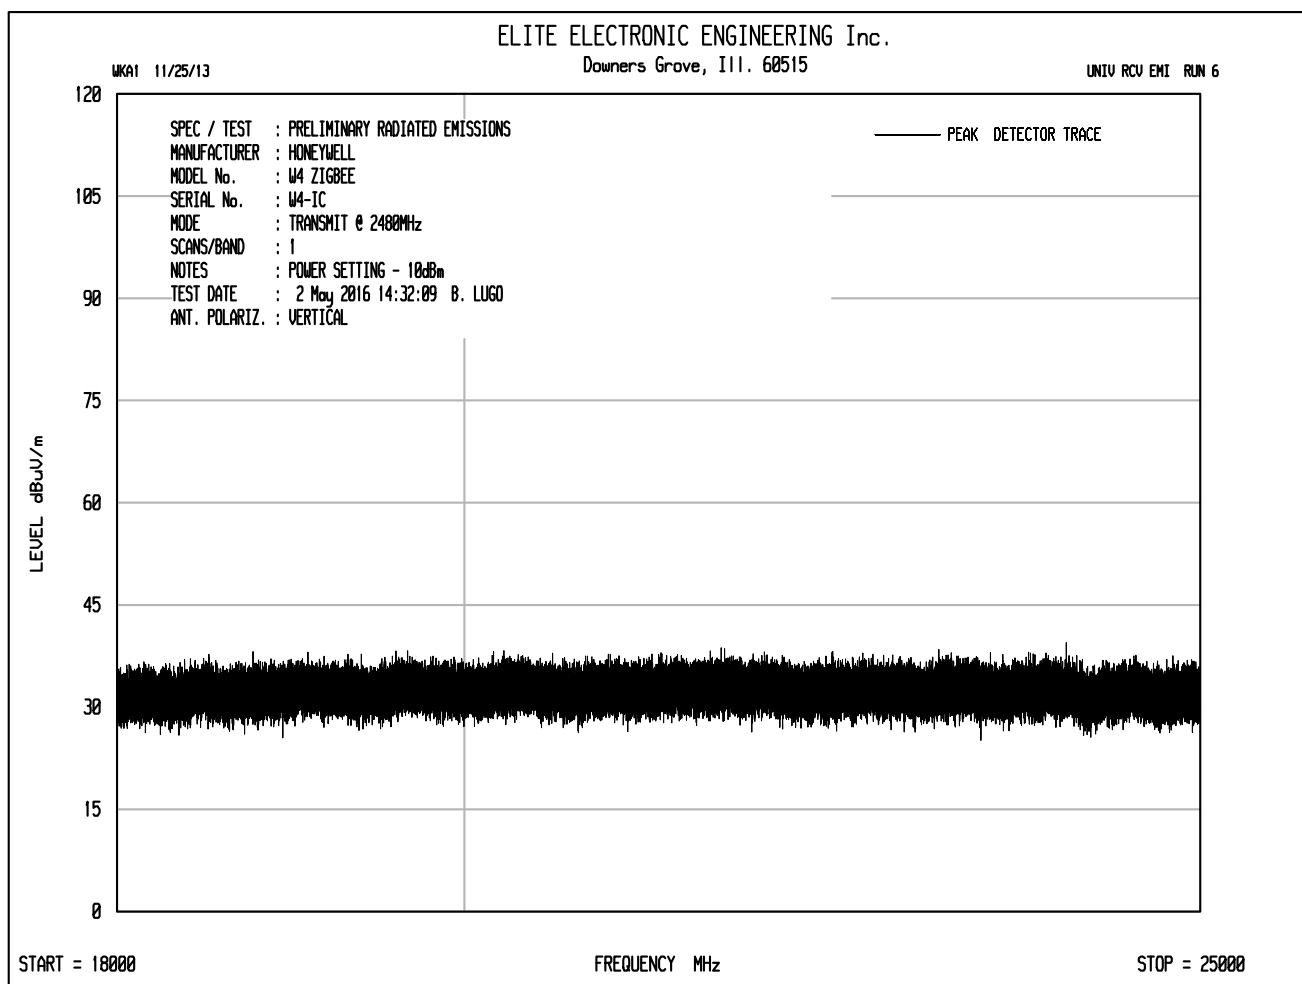

Manufacturer : Honeywell - System Sensor
 Test Item : Transmitter
 Model No. : W4 Zigbee
 Serial No. : W4-IC
 Mode : Transmit @ 2405MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : May 2, 2016
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
4810.00	H	57.3		3.7	34.5	-39.3	56.2	643.6	5000.0	-17.8
4810.00	V	52.0		3.7	34.5	-39.3	50.9	349.2	5000.0	-23.1
12025.00	H	48.1	Ambient	6.1	38.8	-39.2	53.8	487.1	5000.0	-20.2
12025.00	V	47.7	Ambient	6.1	38.8	-39.2	53.4	468.9	5000.0	-20.6
19240.00	H	32.4	Ambient	2.2	40.4	-28.5	46.5	211.4	5000.0	-27.5
19240.00	V	32.1	Ambient	2.2	40.4	-28.5	46.2	203.5	5000.0	-27.8

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Manufacturer : Honeywell - System Sensor
 Test Item : Transmitter
 Model No. : W4 Zigbee
 Serial No. : W4-IC
 Mode : Transmit @ 2405MHz
 Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
 Date : May 2, 2016
 Test Distance : 3 meters
 Notes : Average Detector with 1MHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
4810.00	H	49.9		3.7	34.5	-39.3	48.8	274.2	500.0	-5.2
4810.00	V	46.0		3.7	34.5	-39.3	44.9	175.0	500.0	-9.1
12025.00	H	36.2	Ambient	6.1	38.8	-39.2	41.9	123.9	500.0	-12.1
12025.00	V	36.2	Ambient	6.1	38.8	-39.2	41.9	124.1	500.0	-12.1
19240.00	H	20.6	Ambient	2.2	40.4	-28.5	34.7	54.3	500.0	-19.3
19240.00	V	20.4	Ambient	2.2	40.4	-28.5	34.5	53.3	500.0	-19.4

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Manufacturer : Honeywell - System Sensor
 Test Item : Transmitter
 Model No. : W4 Zigbee
 Serial No. : W4-IC
 Mode : Transmit @ 2440MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : May 2, 2016
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
4880.00	H	49.2		3.7	34.8	-39.3	48.3	261.0	5000.0	-25.6
4880.00	V	56.0		3.7	34.8	-39.3	55.2	576.9	5000.0	-18.8
7320.00	H	53.7		4.7	35.6	-39.4	54.6	535.7	5000.0	-19.4
7320.00	V	59.3		4.7	35.6	-39.4	60.2	1020.8	5000.0	-13.8
12200.00	H	46.5	Ambient	6.1	38.9	-39.1	52.4	417.9	5000.0	-21.6
12200.00	V	47.0	Ambient	6.1	38.9	-39.1	52.9	443.2	5000.0	-21.0
19520.00	H	31.8	Ambient	2.2	40.4	-28.5	45.9	196.8	5000.0	-28.1
19520.00	V	32.6	Ambient	2.2	40.4	-28.5	46.7	215.6	5000.0	-27.3

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Manufacturer : Honeywell - System Sensor
 Test Item : Transmitter
 Model No. : W4 Zigbee
 Serial No. : W4-IC
 Mode : Transmit @ 2440MHz
 Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
 Date : May 2, 2016
 Test Distance : 3 meters
 Notes : Average Detector with 1MHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
4880.00	H	50.4		3.7	34.8	-39.3	49.6	301.4	500.0	-4.4
4880.00	V	48.2		3.7	34.8	-39.3	47.4	233.4	500.0	-6.6
7320.00	H	45.35		4.7	35.6	-39.4	46.2	204.9	500.0	-7.8
7320.00	V	51.5		4.7	35.6	-39.4	52.3	413.5	500.0	-1.7
12200.00	H	33.8	Ambient	6.1	38.9	-39.1	39.7	96.4	500.0	-14.3
12200.00	V	33.8	Ambient	6.1	38.9	-39.1	39.7	96.5	500.0	-14.3
19520.00	H	20.2	Ambient	2.2	40.4	-28.5	34.3	51.8	500.0	-19.7
19520.00	V	20.4	Ambient	2.2	40.4	-28.5	34.5	52.9	500.0	-19.5

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Manufacturer : Honeywell - System Sensor
 Test Item : Transmitter
 Model No. : W4 Zigbee
 Serial No. : W4-IC
 Mode : Transmit @ 2480MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : May 2, 2016
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth


Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
4960.00	H	48.7		3.7	35.1	-39.3	48.1	255.3	5000.0	-25.8
4960.00	V	47.8		3.7	35.1	-39.3	47.3	230.4	5000.0	-26.7
7440.00	H	47.1	Ambient	4.7	35.7	-39.4	48.0	252.3	5000.0	-25.9
7440.00	V	46.8	Ambient	4.7	35.7	-39.4	47.7	243.2	5000.0	-26.3
12400.00	H	46.1	Ambient	6.1	38.9	-39.0	52.0	399.6	5000.0	-21.9
12400.00	V	45.7	Ambient	6.1	38.9	-39.0	51.7	384.7	5000.0	-22.3
19840.00	H	32.2	Ambient	2.2	40.4	-28.2	46.7	215.6	5000.0	-27.3
19840.00	V	32.3	Ambient	2.2	40.4	-28.2	46.7	217.4	5000.0	-27.2
22320.00	H	33.1	Ambient	2.2	40.6	-29.1	46.8	218.7	5000.0	-27.2
22320.00	V	33.4	Ambient	2.2	40.6	-29.1	47.1	227.7	5000.0	-26.8

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Manufacturer : Honeywell - System Sensor
 Test Item : Transmitter
 Model No. : W4 Zigbee
 Serial No. : W4-IC
 Mode : Transmit @ 2480MHz
 Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
 Date : May 2, 2016
 Test Distance : 3 meters
 Notes : Average Detector with 1MHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
4960.00	H	40.7		3.7	35.1	-39.3	40.2	102.6	500.0	-13.8
4960.00	V	36.8		3.7	35.1	-39.3	36.3	64.9	500.0	-17.7
7440.00	H	34.38	Ambient	4.7	35.7	-39.4	35.3	58.5	500.0	-18.6
7440.00	V	34.4	Ambient	4.7	35.7	-39.4	35.3	58.5	500.0	-18.6
12400.00	H	33.8	Ambient	6.1	38.9	-39.0	39.8	97.9	500.0	-14.2
12400.00	V	33.8	Ambient	6.1	38.9	-39.0	39.8	97.6	500.0	-14.2
19840.00	H	20.2	Ambient	2.2	40.4	-28.2	34.7	54.3	500.0	-19.3
19840.00	V	20.2	Ambient	2.2	40.4	-28.2	34.7	54.2	500.0	-19.3
22320.00	H	20.7	Ambient	2.2	40.6	-29.1	34.4	52.5	500.0	-19.6
22320.00	V	20.7	Ambient	2.2	40.6	-29.1	34.5	53.0	500.0	-19.5

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

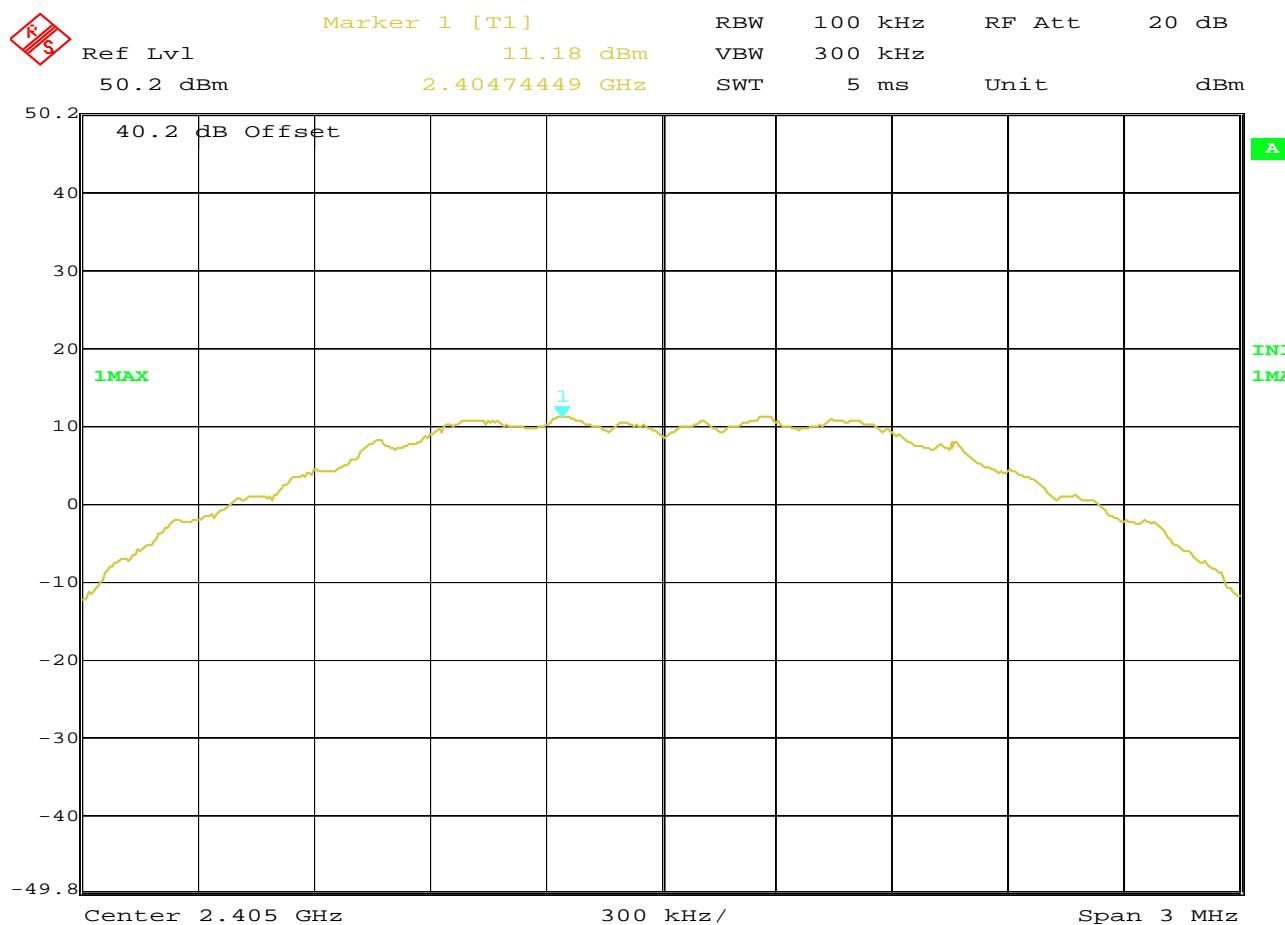


Date: 3.MAY.2016 10:30:55

Band Edge Measurement

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2405MHz
 TEST PARAMETERS : Reference Level = 11.18dBm
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

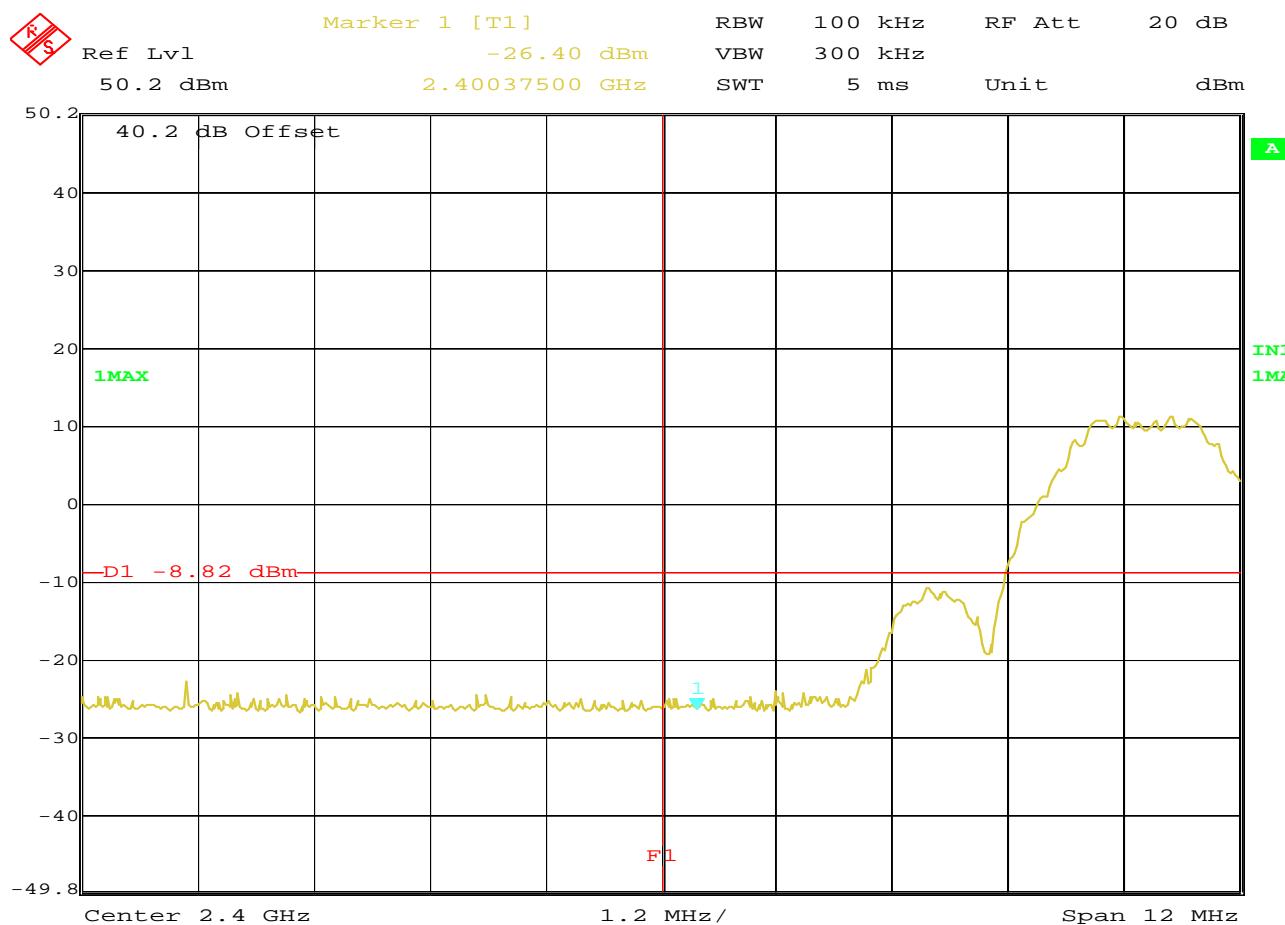

Date: 3.MAY.2016 10:39:07

Band Edge Measurement

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2405MHz
 TEST PARAMETERS : Display Line 1 represents 20dB down level from reference. Frequency Line 1 represents Band Edge (2400MHz). All emissions below 2400MHz must be below Display Line 1 (-8.82dBm).
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

Manufacturer : Honeywell - System Sensor
 Test Item : Transmitter
 Model No. : W4 Zigbee
 Serial No. : W4-IC
 Mode : Transmit @ 2480MHz
 Test Specification : FCC-15.247, RSS-247 Bandedge Compliance (Radiated)
 Date : May 2, 2016
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2483.50	H	19.0		2.7	32.6	0.0	54.3	517.5	5000.0	-19.7
2483.50	V	20.9		2.7	32.6	0.0	56.2	644.0	5000.0	-17.8

Peak Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp


Peak Total (uV/m) = $10^{(Peak\ Total\ (dBuV/m)/20)}$

Manufacturer : Honeywell - System Sensor
 Test Item : Transmitter
 Model No. : W4 Zigbee
 Serial No. : W4-IC
 Mode : Transmit @ 2480MHz
 Test Specification : FCC-15.247, RSS-247 Bandedge Compliance (Radiated)
 Date : May 2, 2016
 Test Distance : 3 meters
 Notes : Average Detector with 1MHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2483.50	H	17.2		2.7	32.6	0.0	52.5	420.6	500.0	-1.5
2483.50	V	18.0		2.7	32.6	0.0	53.3	461.2	500.0	-0.7

Average Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp

Average Total (uV/m) = $10^{(Average\ Total\ (dBuV/m)/20)}$

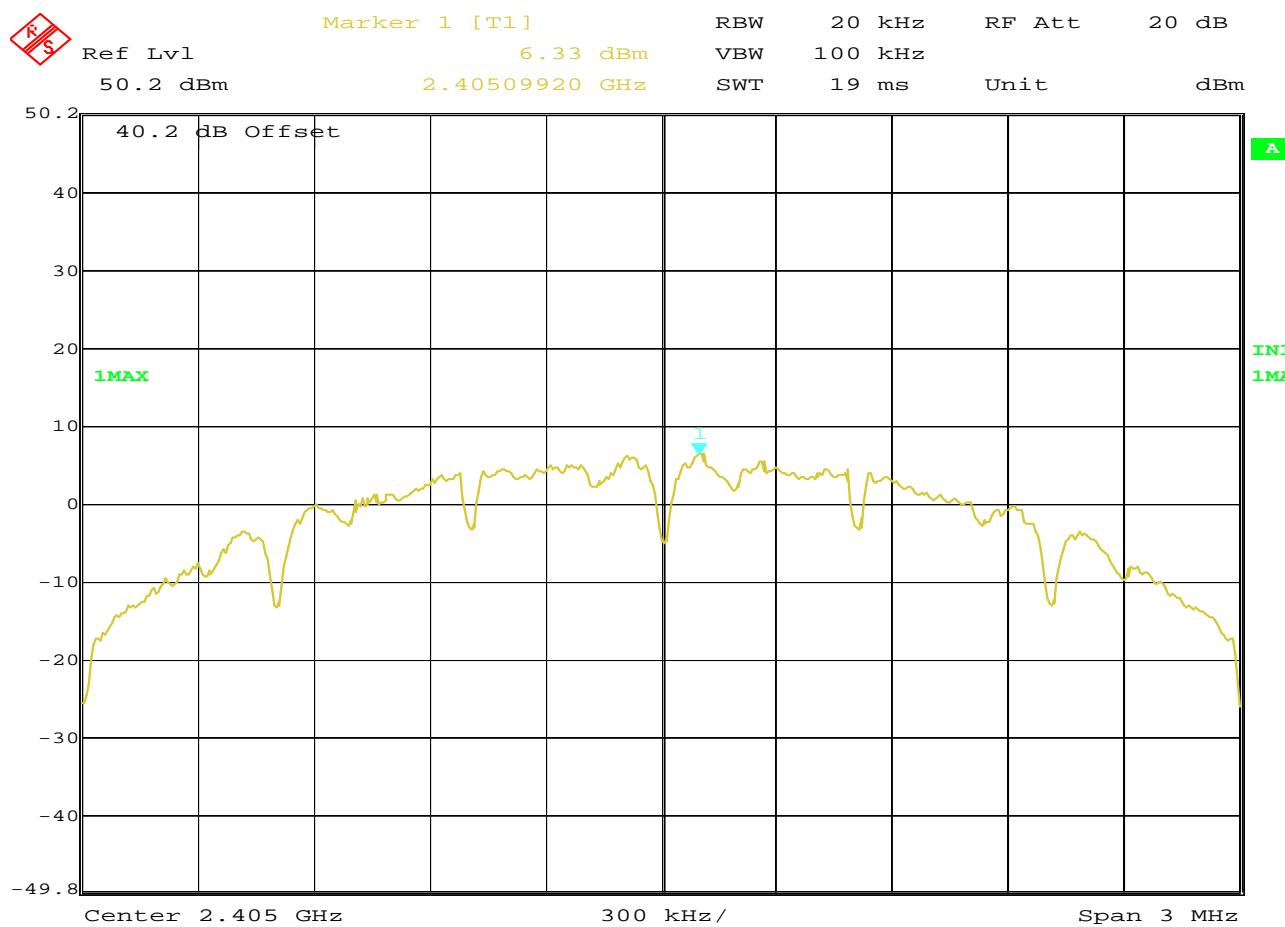


Date: 3.MAY.2016 10:49:57

Power Spectral Density

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2405MHz
 TEST PARAMETERS : PSD with 20kHz BW = 6.33dBm. Must be below 8dBm.
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

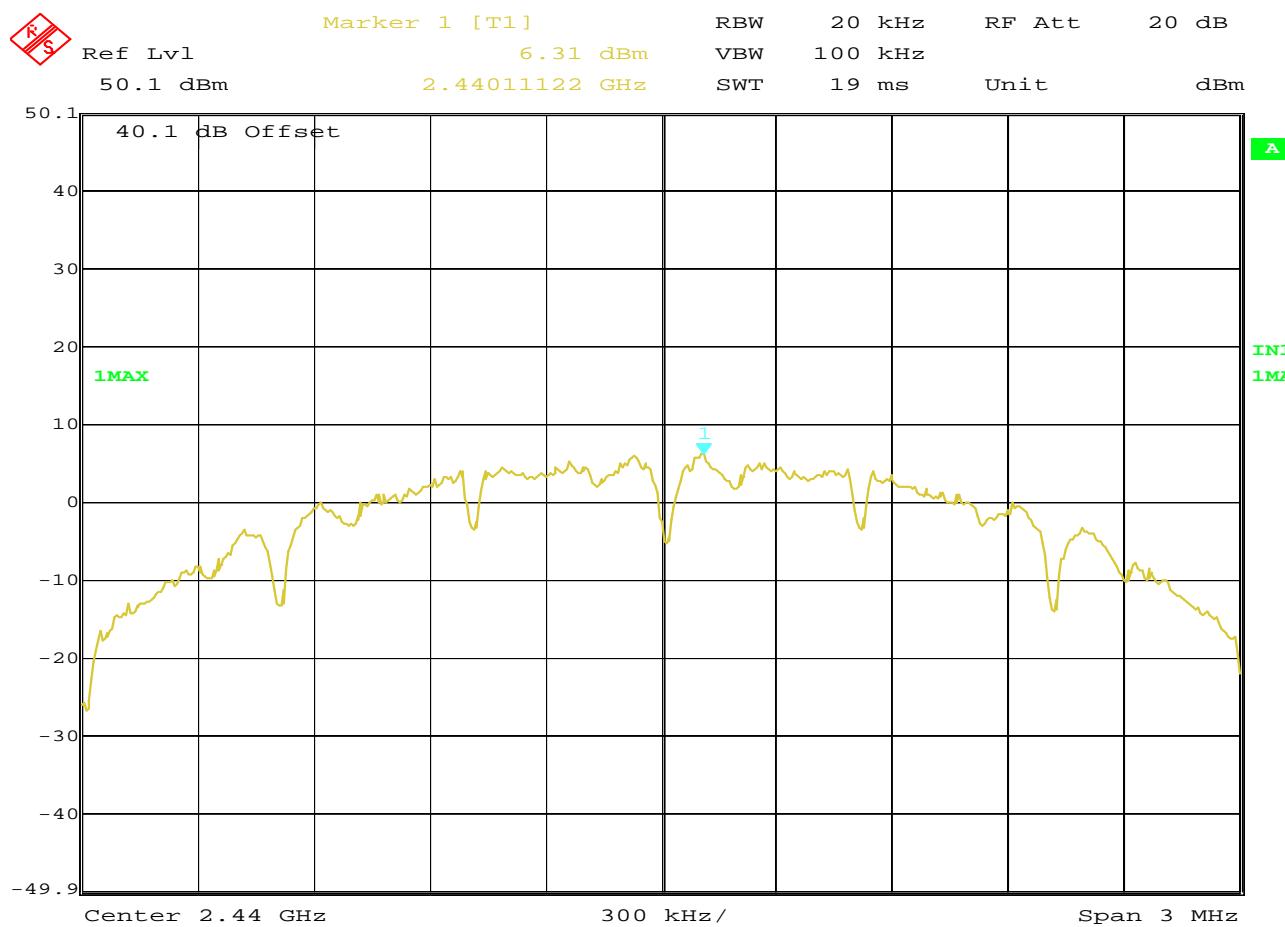


Date: 3.MAY.2016 15:49:47

Power Spectral Density

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2440MHz
 TEST PARAMETERS : PSD with 20kHz BW = 6.31dBm. Must be below 8dBm.
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES

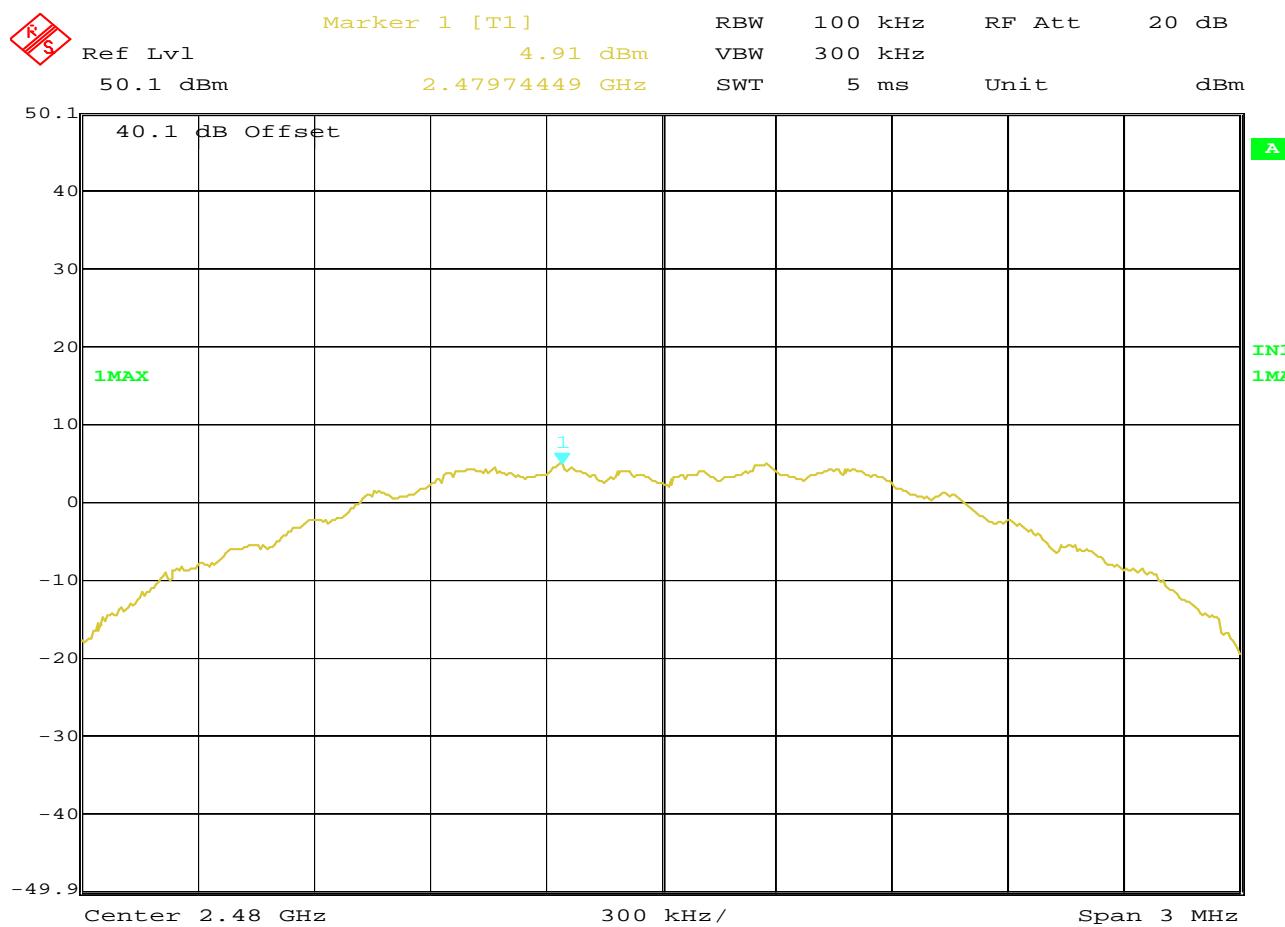

Date: 3.MAY.2016 15:05:45

Power Spectral Density

MANUFACTURER : Honeywell
 MODEL NUMBER : W4 Zigbee
 SERIAL NUMBER : W4-IC
 TEST MODE : Transmit @ 2480MHz
 TEST PARAMETERS : PSD with 100kHz BW = 4.91dBm. Must be below 8dBm.
 EQUIPMENT USED : RBA1, T2S2, T2S7

NOTES