




TEST GRAPHS –1 GHz to 10 GHz (ANTENNA 3)

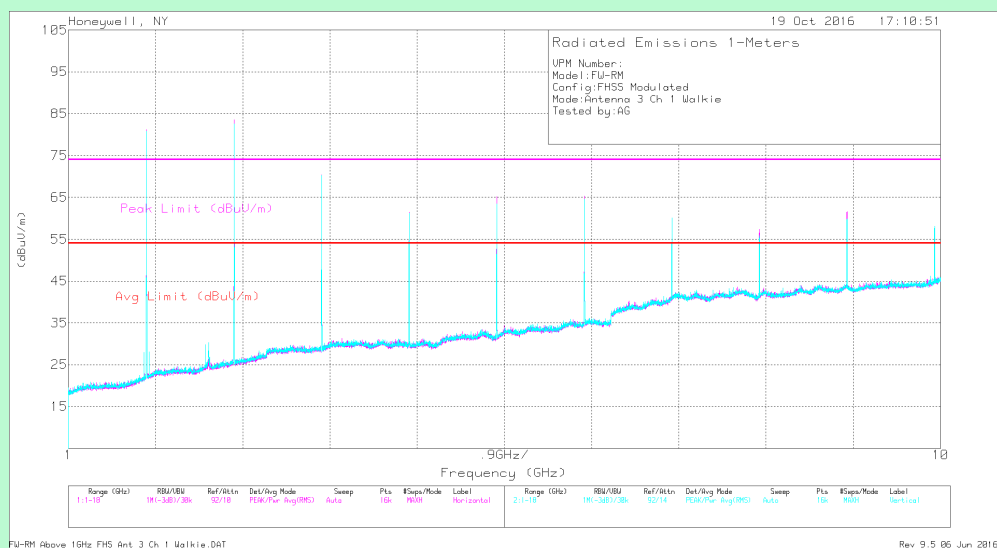

Channel 1 (903.55 MHz) – Antenna 3

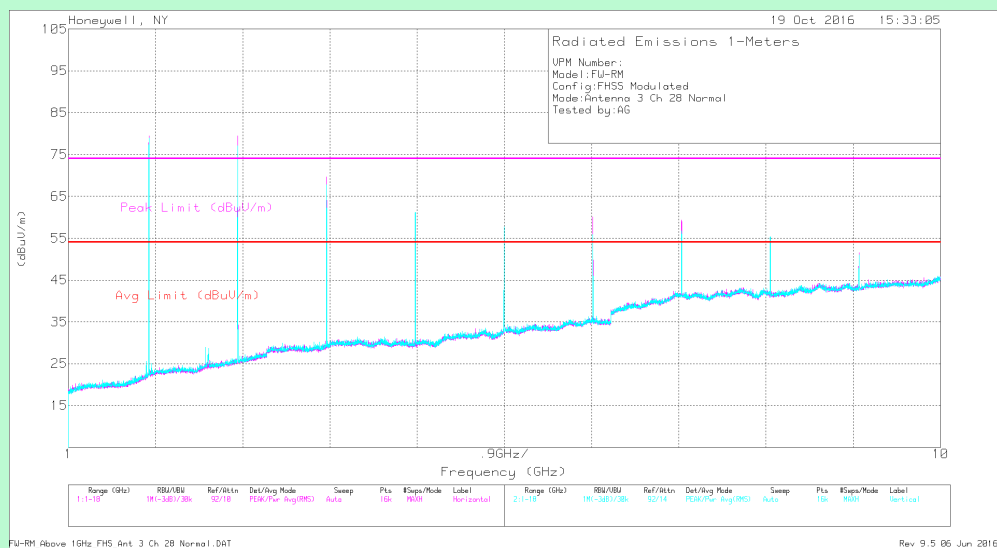

Channel 28 (916.00 MHz) – Antenna 3

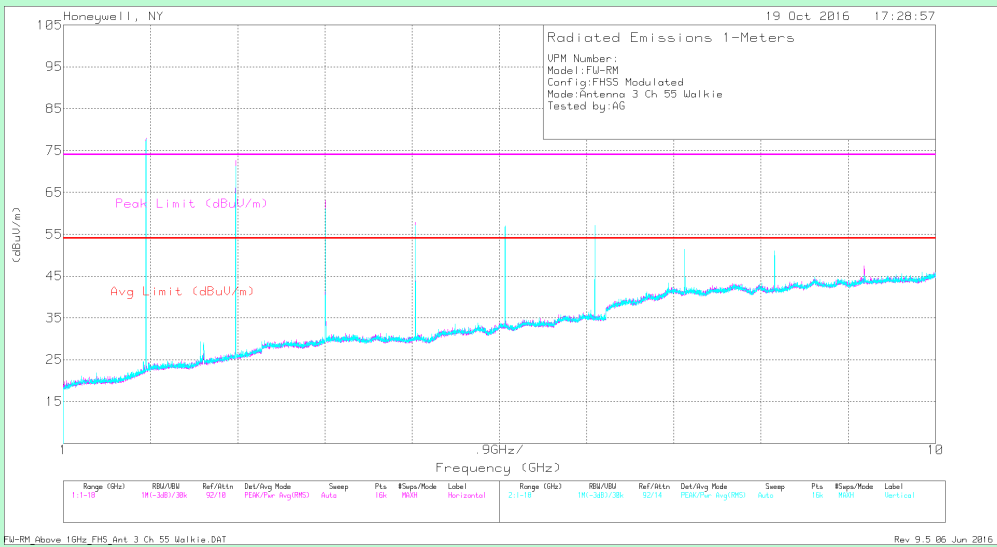

Channel 55 (926.45 MHz) – Antenna 3

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 1

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.711	49.02	PKFH	29.3	-27.1	9	60.22	74	13.78	158	195	H
* 3.615	40.01	PKFH	31.6	-26.8	10.4	55.21	74	18.79	200	327	H
* 4.518	34.1	PKFH	32.2	-26.6	11.7	51.4	74	22.6	129	308	H
* 5.421	38.14	PKFH	34.3	-26.7	12.9	58.64	74	15.36	13	359	H
* 8.133	35.79	PKFH	37.1	-26.2	16	62.69	74	11.31	33	327	H
* 9.036	32.95	PKFH	37.6	-25.9	16.9	61.55	74	12.45	13	332	H
* 2.71	49.25	PKFH	29.3	-27.1	9	60.45	74	13.55	340	181	V
* 3.614	37.5	PKFH	31.6	-26.8	10.4	52.7	74	21.3	348	347	V
* 4.517	35.87	PKFH	32.2	-26.6	11.7	53.17	74	20.83	72	117	V
* 5.422	40.35	PKFH	34.3	-26.7	12.9	60.85	74	13.15	345	138	V
* 8.133	32.8	PKFH	37.1	-26.2	16	59.7	74	14.3	123	139	V
* 9.035	31.33	PKFH	37.6	-25.9	16.9	59.93	74	14.07	172	235	V

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental-20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.807	62.19	PKFH	27.1	-26.9	7.3	69.69	92.5	22.81	338	157	H
6.325	34	PKFH	34.9	-26.4	14	56.5	92.5	36	192	333	H
7.228	34.1	PKFH	36.3	-26.2	15	59.2	92.5	33.3	39	331	H
1.807	60.27	PKFH	27.1	-26.9	7.3	67.77	92.5	24.73	144	216	V
6.325	39.1	PKFH	34.9	-26.4	14	61.6	92.5	30.9	354	122	V
7.229	37.86	PKFH	36.3	-26.2	15	62.96	92.5	29.54	127	104	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	DC Corr [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.711	47.32	VA1T	29.3	-27.1	9	-12.53	45.99	54	8.01	158	195	H
* 3.614	36.39	VA1T	31.6	-26.8	10.4	-12.53	39.06	54	14.94	200	327	H
* 4.518	25.17	VA1T	32.2	-26.6	11.7	-12.53	29.94	54	24.06	129	308	H
* 5.421	32.47	VA1T	34.3	-26.7	12.9	-12.53	40.44	54	13.56	13	359	H
* 8.133	27.28	VA1T	37.1	-26.2	16	-12.53	41.65	54	12.35	33	327	H
* 9.036	23.83	VA1T	37.6	-25.9	16.9	-12.53	39.9	54	14.1	13	332	H
* 2.711	47.51	VA1T	29.3	-27.1	9	-12.53	46.18	54	7.82	340	181	V
* 3.614	33.88	VA1T	31.6	-26.8	10.4	-12.53	36.55	54	17.45	348	347	V
* 4.518	28.95	VA1T	32.2	-26.6	11.7	-12.53	33.72	54	20.28	72	117	V
* 5.421	34.61	VA1T	34.3	-26.7	12.9	-12.53	42.58	54	11.42	345	138	V
* 8.131	24.88	VA1T	37.1	-26.2	16	-12.53	39.25	54	14.75	123	139	V
* 9.037	21.46	VA1T	37.6	-25.9	16.9	-12.53	37.53	54	16.47	172	235	V

Note: * Indicates Frequency in CFR47 Pt 15 Restricted Band
 PKFH – FHSS: RB=1MHz, VB=3x RB, Peak
 VA1T-FHSS: Linear Voltage Average RB=1MHzVB=10Hz

Field Strength – dBuV/m = Receiver Readings (dBuV) + Antenna Factor (dB/m) + Cable loss (dB) + Filter Insertion loss – Preamplifier Gain (dB)

Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS

Duty Cycle Correction Factor is calculated using the guidelines provided in DA 00 -705

Duty Cycle Factor = $20 \cdot \log(\text{Dwell time} / 100\text{msec})$, Number of Transmission for 100msec: 8, Dwell time per Transmission: 1.575 msec
 Duty Cycle correction Factor = $20 \log(1.575 \cdot 8 / 100) = -17.99\text{dB}$

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 28

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.748	53.72	PKFH	29.4	-27	9	65.12	74	8.88	152	262	H
* 2.748	53.76	PKFH	29.4	-27	9	65.16	74	8.84	152	262	H
* 3.664	42.92	PKFH	31.8	-26.9	10.4	58.22	74	15.78	200	320	H
* 4.58	34.08	PKFH	32.2	-26.7	11.8	51.38	74	22.62	143	363	H
* 7.328	32.65	PKFH	36.7	-26.2	15.1	58.25	74	15.75	103	349	H
* 8.245	33.99	PKFH	37.1	-26.1	16.2	61.19	74	12.81	357	351	H
* 9.16	32.49	PKFH	37.6	-25.9	17	61.19	74	12.81	11	343	H
* 2.748	54.83	PKFH	29.4	-27	9	66.23	74	7.77	13	166	V
* 3.664	44.44	PKFH	31.8	-26.9	10.4	59.74	74	14.26	347	146	V
* 4.58	35.75	PKFH	32.2	-26.7	11.8	53.05	74	20.95	24	148	V
* 7.329	37.27	PKFH	36.7	-26.2	15.1	62.87	74	11.13	123	119	V
* 8.243	33.93	PKFH	37.1	-26.1	16.2	61.13	74	12.87	128	105	V
* 9.161	32.93	PKFH	37.6	-25.9	17	61.63	74	12.37	31	247	V

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental -20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.832	60.76	PKFH	27.3	-26.9	7.3	68.46	93.4	24.94	336	377	H
5.496	36.95	PKFH	34.4	-26.6	13	57.75	93.4	35.65	9	357	H
6.412	36.87	PKFH	34.8	-26.3	14.1	59.47	93.4	33.93	295	300	H
1.832	62.14	PKFH	27.3	-26.9	7.3	69.84	93.4	23.56	100	194	V
5.496	39.34	PKFH	34.4	-26.6	13	60.14	93.4	33.26	291	115	V
6.411	39.35	PKFH	34.8	-26.3	14.1	61.95	93.4	31.45	357	135	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	DC Corr [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.748	52.32	VA1T	29.4	-27	9	-12.53	51.19	54	2.81	152	262	H
* 3.664	39.8	VA1T	31.8	-26.9	10.4	-12.53	42.57	54	11.43	200	320	H
* 4.58	27.3	VA1T	32.2	-26.7	11.8	-12.53	32.07	54	21.93	143	363	H
* 7.329	23.99	VA1T	36.7	-26.2	15.1	-12.53	37.06	54	16.94	103	349	H
* 8.243	26.41	VA1T	37.1	-26.1	16.2	-12.53	41.08	54	12.92	357	351	H
* 9.161	22.89	VA1T	37.6	-25.9	17	-12.53	39.06	54	14.94	11	343	H
* 2.748	53.24	VA1T	29.4	-27	9	-12.53	52.11	54	1.89	13	166	V
* 3.664	41.29	VA1T	31.8	-26.9	10.4	-12.53	44.06	54	9.94	347	146	V
* 4.58	29.6	VA1T	32.2	-26.7	11.8	-12.53	34.37	54	19.63	24	148	V
* 7.328	28.81	VA1T	36.7	-26.2	15.1	-12.53	41.88	54	12.12	123	119	V
* 8.245	26.13	VA1T	37.1	-26.1	16.2	-12.53	40.8	54	13.2	128	105	V
* 9.161	24.75	VA1T	37.6	-25.9	17	-12.53	40.92	54	13.08	31	247	V

Note: * Indicates Frequency in CFR47 Pt 15 Restricted Band

PKFH – FHSS: RB=1MHz ,VB=3x RB ,Peak

VA1T-FHSS: Linear Voltage Average RB=1MHzVB=10Hz

Field Strength –dBuV/m = Receiver Readings (dBuV) + Antenna Factor (dB/m) + Cable loss (dB) + Filter Insertion loss – Preamplifier Gain (dB)

Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS

Duty Cycle Correction Factor is calculated using the guidelines provided in DA 00 -705

Duty Cycle Factor =20*log (Dwell time /100msec), Number of Transmission for 100msec: 8, Dwell time per Transmission: 1.575 msec

Duty Cycle correction Factor =20 log (1.575*8/100) = -17.99dB

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 55

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.78	52.49	PKFH	29.5	-27.1	9.1	63.99	74	10.01	89	131	H
* 3.706	41.95	PKFH	32	-26.9	10.6	57.65	74	16.35	198	100	H
* 4.632	33.1	PKFH	32.4	-26.6	11.8	50.7	74	23.3	170	258	H
* 7.411	35.94	PKFH	36.8	-26.2	15.2	61.74	74	12.26	302	265	H
* 8.339	35.47	PKFH	37.3	-26.1	16.2	62.87	74	11.13	328	250	H
* 2.779	53.18	PKFH	29.5	-27.1	9.1	64.68	74	9.32	93	118	V
* 3.705	44.15	PKFH	32	-26.9	10.6	59.85	74	14.15	15	133	V
* 4.632	35.7	PKFH	32.4	-26.6	11.8	53.3	74	20.7	166	104	V
* 7.411	36.55	PKFH	36.8	-26.2	15.2	62.35	74	11.65	51	264	V
* 8.338	34.8	PKFH	37.3	-26.1	16.2	62.2	74	11.8	273	264	V

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental-20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.853	63.14	PKFH	27.5	-26.9	7.4	71.14	89.7	18.56	154	169	H
5.558	40	PKFH	34.4	-26.4	13.1	61.1	89.7	28.6	352	315	H
6.486	38.72	PKFH	34.8	-26.4	14.2	61.32	89.7	28.38	112	284	H
9.264	32.04	PKFH	37.8	-26	17.1	60.94	89.7	28.76	350	257	H
1.853	59.87	PKFH	27.5	-26.9	7.4	67.87	89.7	21.83	275	147	V
5.558	40.73	PKFH	34.4	-26.4	13.1	61.83	89.7	27.87	357	295	V
6.485	44.4	PKFH	34.8	-26.4	14.2	67	89.7	22.7	6	267	V
9.265	32.48	PKFH	37.8	-26	17.1	61.38	89.7	28.32	328	243	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	DC Corr [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.779	50.89	VA1T	29.5	-27.1	9.1	-12.53	49.86	54	4.14	89	131	H
* 3.706	38.88	VA1T	32	-26.9	10.6	-12.53	42.05	54	11.95	198	100	H
* 4.632	23.64	VA1T	32.3	-26.6	11.8	-12.53	28.61	54	25.39	170	258	H
* 7.411	28.31	VA1T	36.8	-26.2	15.2	-12.53	41.58	54	12.42	302	265	H
* 8.339	27.82	VA1T	37.3	-26.1	16.2	-12.53	42.69	54	11.31	328	250	H
* 2.779	51.48	VA1T	29.5	-27.1	9.1	-12.53	50.45	54	3.55	93	118	V
* 3.706	41.03	VA1T	32	-26.9	10.6	-12.53	44.2	54	9.8	15	133	V
* 4.632	28.86	VA1T	32.3	-26.6	11.8	-12.53	33.83	54	20.17	166	104	V
* 7.412	28.82	VA1T	36.8	-26.2	15.2	-12.53	42.09	54	11.91	51	264	V
* 8.339	27.22	VA1T	37.3	-26.1	16.2	-12.53	42.09	54	11.91	273	264	V

Note: * Indicates Frequency in CFR47 Pt 15 Restricted Band

PKFH – FHSS: RB=1MHz, VB=3x RB, Peak

VA1T-FHSS: Linear Voltage Average RB=1MHz/VB=10Hz

Field Strength –dBuV/m = Receiver Readings (dBuV) + Antenna Factor (dB/m) + Cable loss (dB) + Filter Insertion loss – Preamplifier Gain (dB)

Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS

Duty Cycle Correction Factor is calculated using the guidelines provided in DA 00 -705

Duty Cycle Factor = $20 \times \log(\text{Dwell time} / 100\text{msec})$, Number of Transmission for 100msec: 8, Dwell time per Transmission: 1.575 msec

Duty Cycle correction Factor = $20 \log(1.575 \times 8 / 100) = -17.99\text{dB}$

2.9 Effective Isotropic Radiated Power

EUT Nomenclature	Wireless Relay Module	Test Request No.	20294-1
Model No.	FW-RM	Serial No.	MEL-159
Test Start Date	2017-04-17	Temperature (°C)	0°C-35°C
Test End Date	2017-04-17	Humidity RH (%)	10%RH-90%RH
Tested By	Chris Locke	Pressure (mbar)	NR
Input Voltage / Freq.	3.3 Vdc		
Operating Mode	Refer Page 5 for Operating Mode Table		
Test configuration	Refer Page 5 for Test Configuration Table		
Deviation from Std.	NA		
Comment	NA		

MAXIMUM OPERATING FREQUENCY

902 MHz to 928 MHz

TEST PARAMETERS

Antenna Height	1m to 4m	Turntable Rotation	NA
Applicable Standard	ANSI C63.10 - 2013	Test Method	KDB 412172 v01r01
Equipment Class	NA	Measurement Distance	3m

TEST EQUIPMENT

Y/N	Equipment	Make	Model	Sl. No.	Cal Due Date
Y	Spectrum Analyzer	Rohde & Schwarz	FSW26	103125	2018-02-14
Y	Bilog Antenna	Sunol	JB6	A012816	2018-03-09
Y	Log Periodic Antenna	A.H.Systems	SAS-200	365TX	2018-02-02
Y	Preamplifier (Below 1GHz)	HP	8447D	2443AUF555	NA
Y	Signal Generator	Agilent	N5183A (MXG)	MY50140667	2018-06-02

Note: Switch ON /OFF the Internal Preamplifier based on carrier level and or noise floor without overloading the receiver

TEST RESULT – EIRP

ANTENNA	Frequency (MHz)	Polarity	Fundamental Target (dBuV/m)	Signal Generator Level (dBm)	EIRP (dBm)
1	903.55	H	106.87	15.5	16.320.9
1	903.55	V	95.03	4.3	5.1
1	916	H	104.97	14.2	15
1	916	V	93.66	3.3	5.1
1	926.45	H	102.36	12.9	13.7
1	926.45	V	93.76	5	5.8
2	903.55	H	107.56	16.2	17
2	903.55	V	99.42	8.7	9.5
2	916	H	104.87	14.1	14.9
2	916	V	98.97	8.65	9.45
2	926.45	H	109.39	20.1	20.9
2	926.45	V	96.27	7.5	8.3
3	903.55	H	107.64	16.3	17.1
3	903.55	V	89.91	-.09	-0.1
3	916	H	107.99	17.2	18
3	916	V	99.74	9.4	10.2
3	926.45	H	106.5	17.1	17.9
3	926.45	V	94.52	5.75	6.55

Note: EIRP=Signal Generator Level (dBm)+ Substitute Antenna Gain(dBi)+Cable loss(dB)
 Substitute Antenna Gain =5.4dBi
 Cable Loss =4.6dB

TEST SETUP PHOTOGRAPH

Refer Annexure -1

EIRP Test Setup

3 DTS CHANNELS

3.1 DTS 6dB BANDWIDTH

EUT Nomenclature	Wireless Relay Module	Test Request No.	20294-1
Model No.	FW-RM	Serial No.	MEL-159
Test Start Date	2016-08-24	Temperature (°C)	23.6°C
Test End Date	2016-08-24	Humidity RH (%)	51.9%RH
Tested By	Jose Badia/Arnoldo Garcia	Pressure (mbar)	NR
Input Voltage / Freq.	3.3 Vdc		
Operating Mode	Refer Page 5 for Operating Mode Table		
Test configuration	Refer Page 5 for Test Configuration Table		
Deviation from Std.	NA		
Applicable standard	FCC Part 15.247:2010		
Test Method	KDB 558074		
Comment	NA		

TEST DETAILS

Method	Radiated ☐	Conducted ☒
--------	-----------------------------------	---



TEST PARAMETERS

Antenna Height	NA	Turntable Rotation	NA
Equipment Class	NA	Measurement Distance	NA

TEST EQUIPMENT

Y/N	Equipment	Make	Model	Serial Number	Cal Due Date
Y	Spectrum Analyzer	Agilent	E4440A	MY41000078	2017-05-18
Y	RF Cable	Digikey	1	NA	NA

TEST GRAPHS

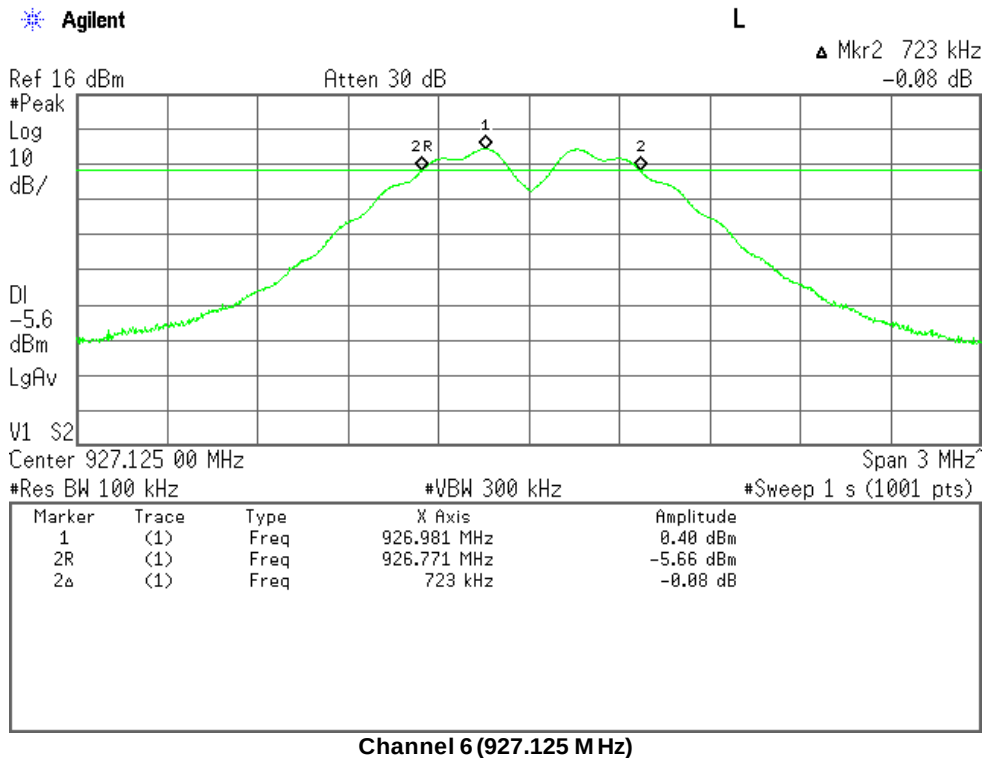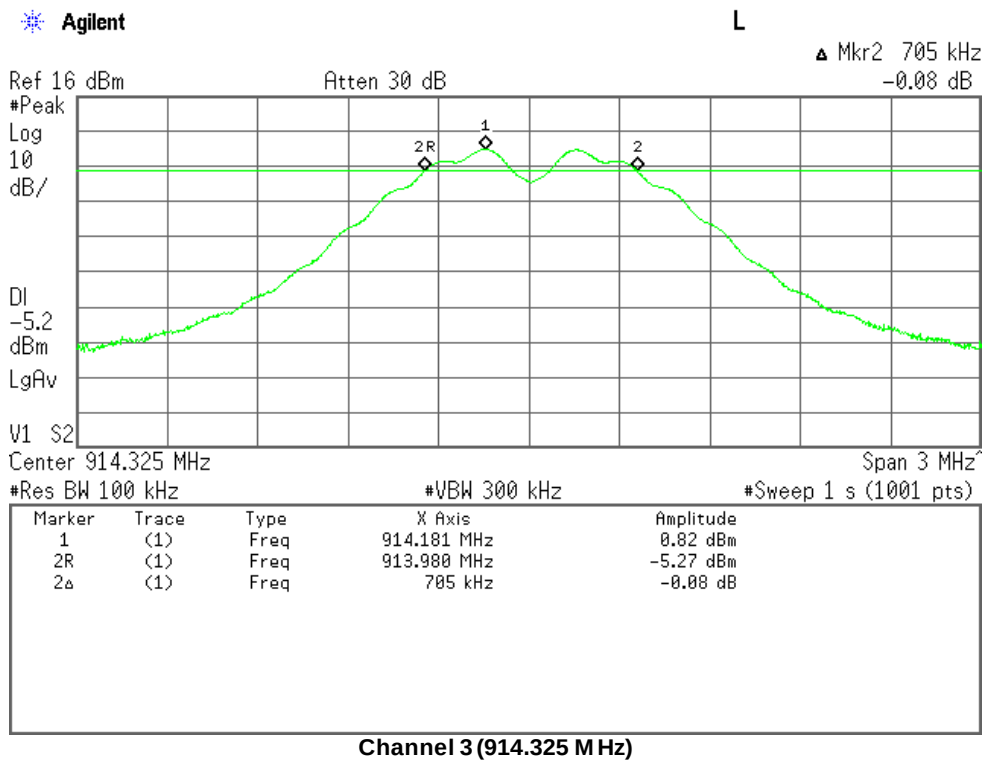

TEST RESULT				
Channel	Frequency	Measured Value	Limit	Result
#	MHz	KHz	KHz	
3	914.325	705	>500	PASS
6	927.125	723	>500	PASS

TEST SETUP PHOTOGRAPH

Refer Annexure -1

Conducted RF Test Setup

3.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

EUT Nomenclature	Wireless Relay Module	Test Request No.	20294-1
Model No.	FW-RM	Serial No.	MEL-159
Test Start Date	2016-08-30	Temperature (°C)	23.6°C
Test End Date	2016-08-30	Humidity RH (%)	51.9%RH
Tested By	Jose Badia/Arnoldo Garcia	Pressure (mbar)	NR
Input Voltage / Freq.	3.3 Vdc		
Operating Mode	Refer Page 5 for Operating Mode Table		
Test configuration	Refer Page 5 for Test Configuration Table		
Deviation from Std.	NA		
Applicable standard	FCC Part 15.247:2010		
Test Method	KDB 558074		
Comment	NA		

TEST DETAILS

Method	Radiated ☐	Conducted ☒
--------	-----------------------------------	---



TEST PARAMETERS



Antenna Height	NA	Turntable Rotation	NA
Equipment Class	NA	Measurement Distance	NA



TEST EQUIPMENT



Y/N	Equipment	Make	Model	Serial Number	Cal Due Date
Y	Spectrum Analyzer	Agilent	E4440A	MY41000078	2017-05-18
Y	RF Cable	Digikey	1	NA	NA


TEST GRAPHS

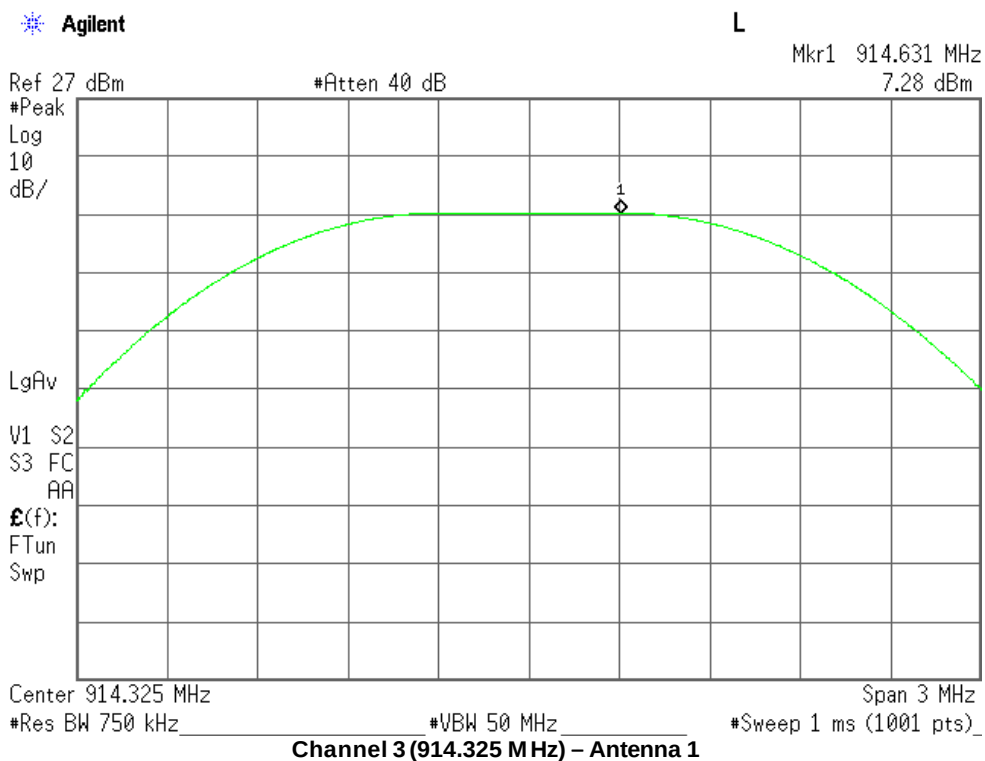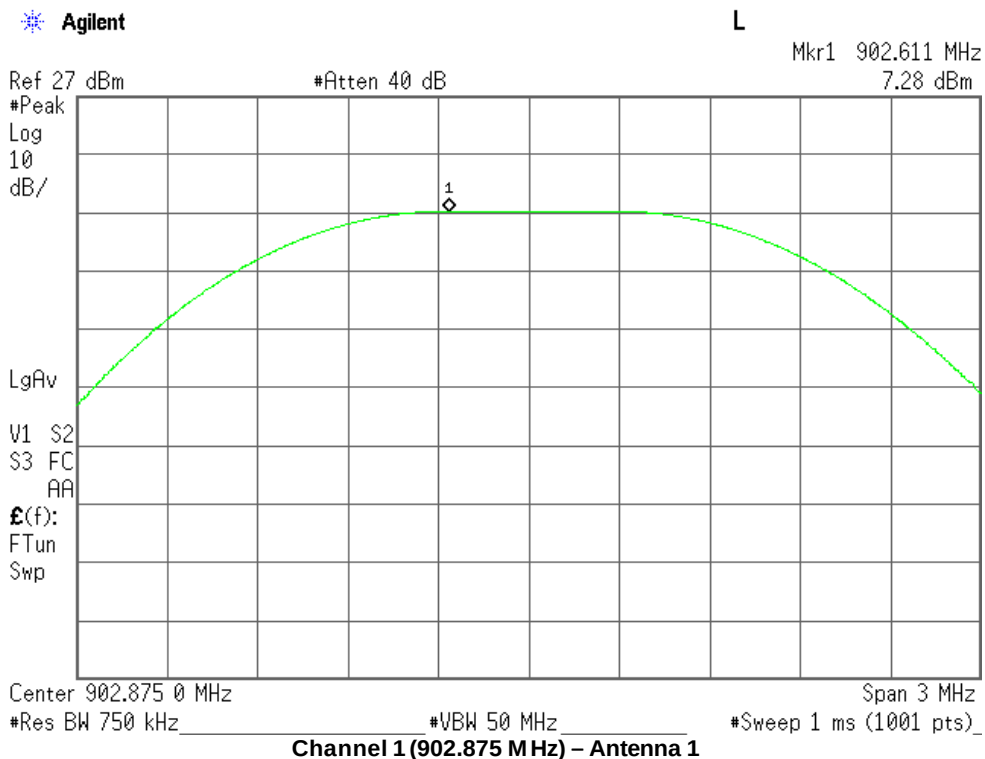

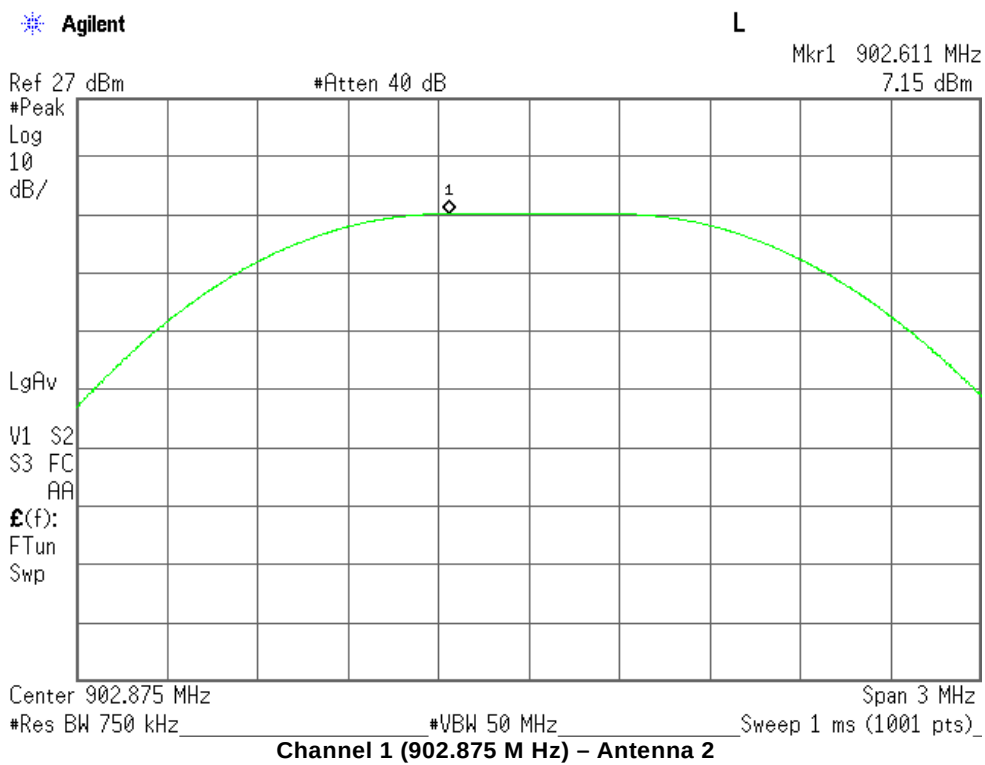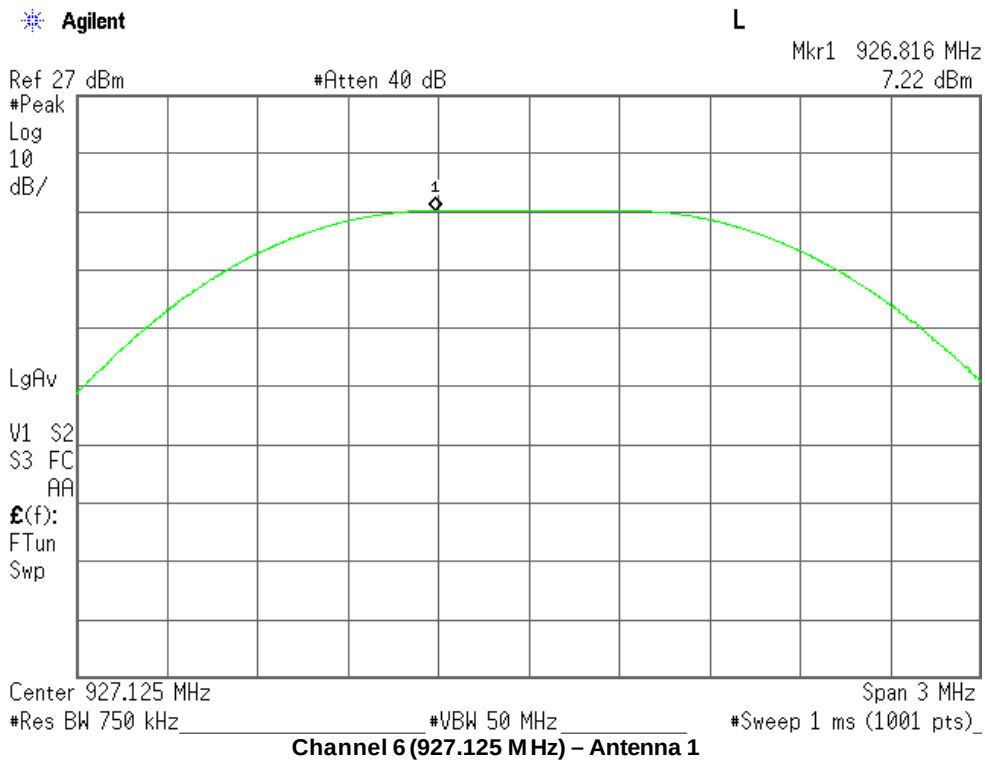

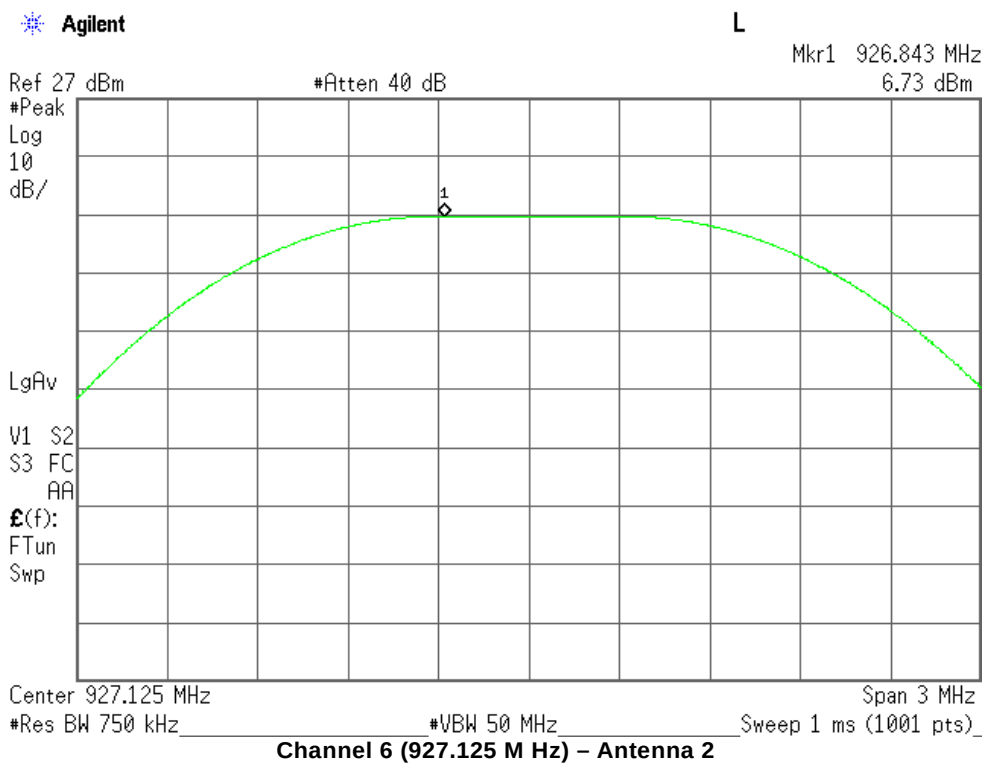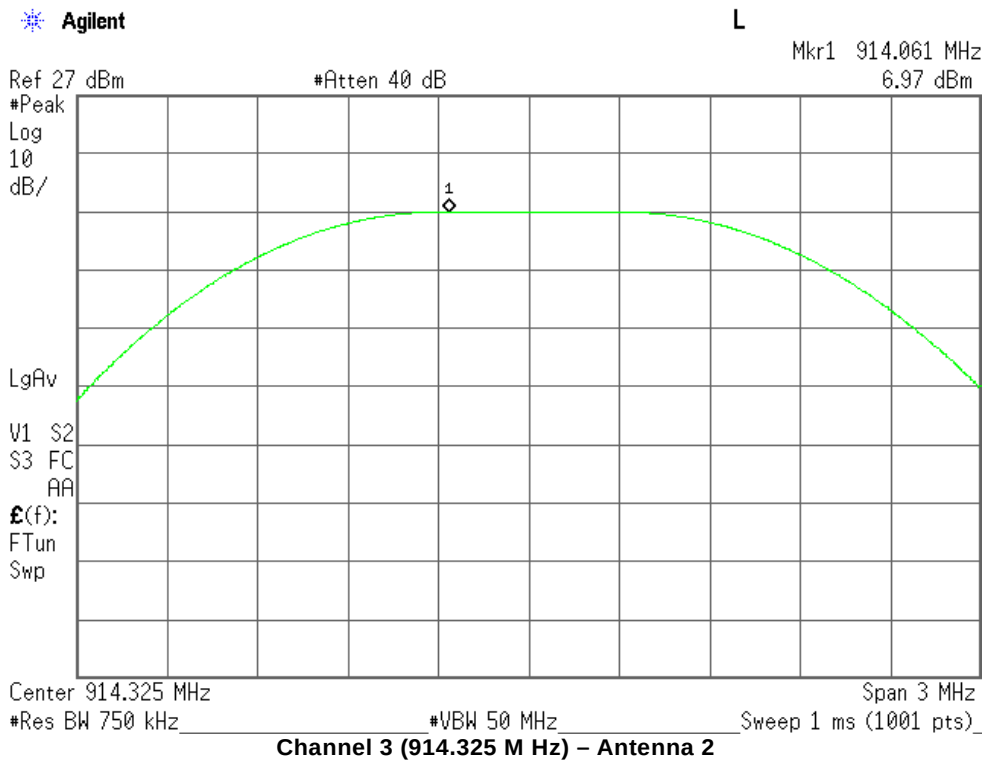

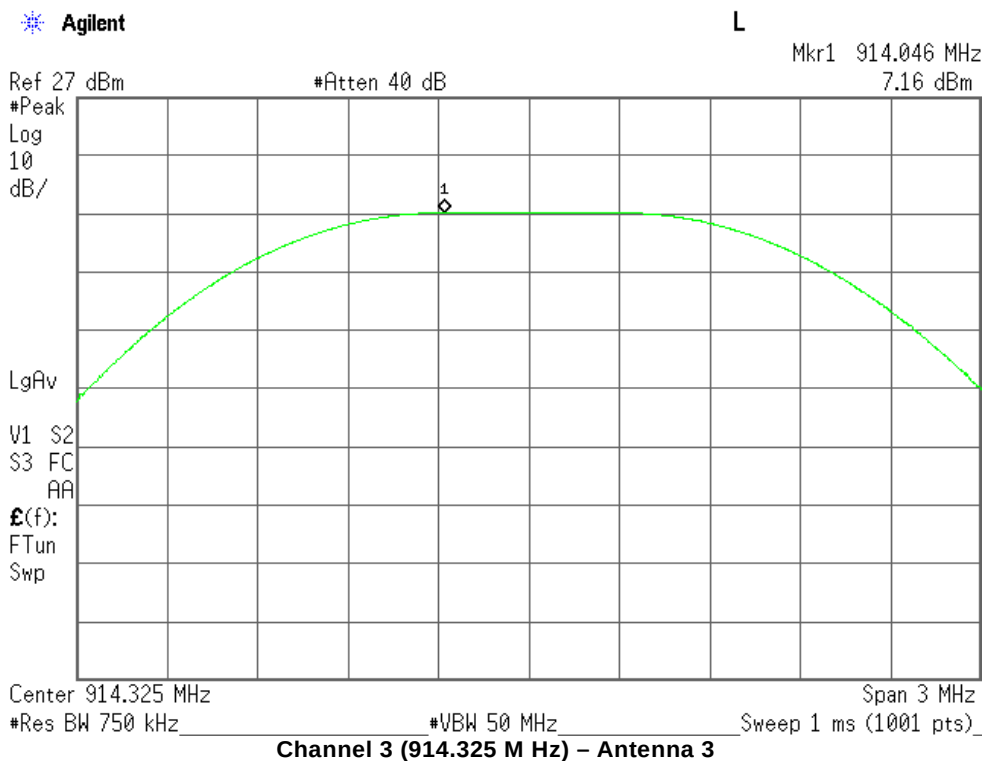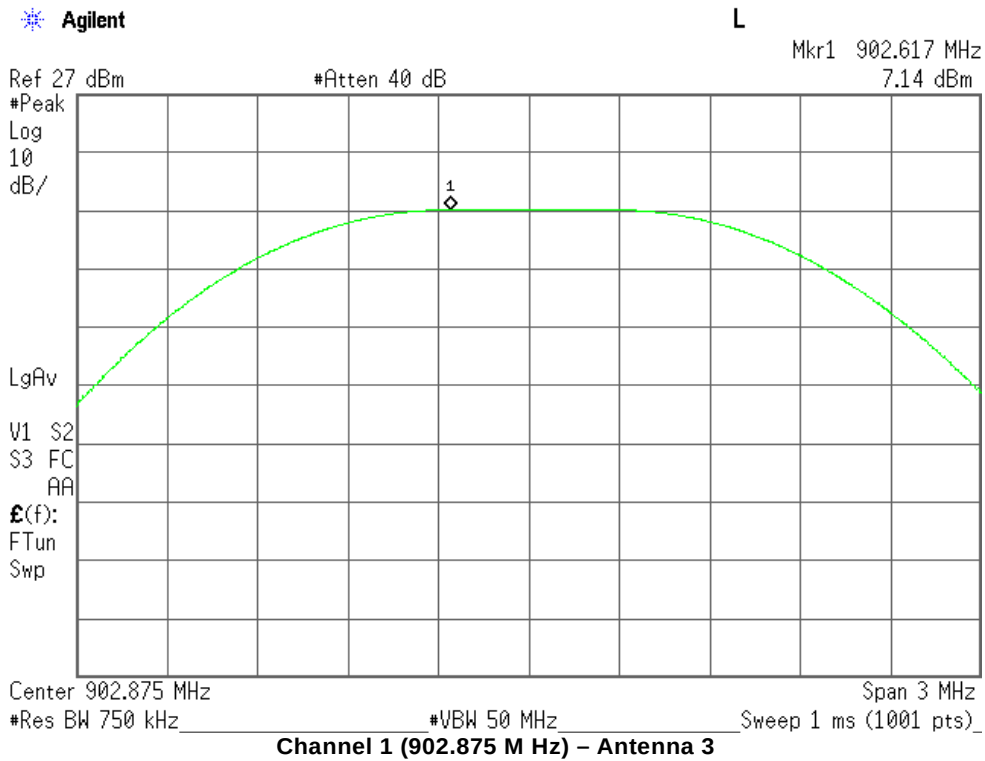

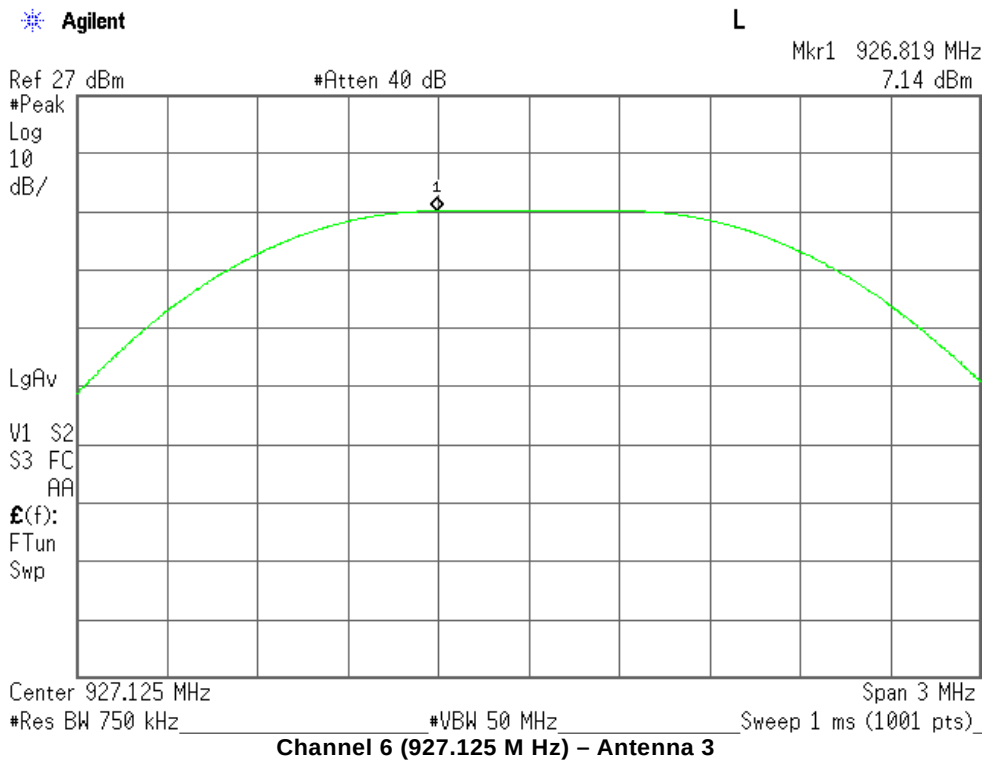

TEST RESULT						
Channel	Frequency	Measured Level	Cable Loss + Attenuator	Measured Level	Limit	Result
#	MHz	dBm	dB	KHz	dBm	
Antenna 1						
1	902.875	7.28	6.5	13.78	≤30	PASS
3	914.325	7.28	6.5	13.78	≤30	PASS
6	927.125	7.22	6.5	13.72	≤30	PASS
Antenna 2						
1	902.875	7.15	6.5	13.65	≤30	PASS
3	914.325	6.97	6.5	13.47	≤30	PASS
6	927.125	6.73	6.5	13.23	≤30	PASS
Antenna 3						
1	902.875	7.14	6.5	13.64	≤30	PASS
3	914.325	7.16	6.5	13.66	≤30	PASS
6	927.125	7.14	6.5	13.64	≤30	PASS

TEST SETUP PHOTOGRAPH

Refer Annexure -1

Conducted RF Test Setup

3.3 MAXIMUM POWER SPECTRAL DENSITY

EUT Nomenclature	Wireless Relay Module	Test Request No.	20294-1
Model No.	FW-RM	Serial No.	MEL-159
Test Start Date	2017-04-21	Temperature (°C)	23.6°C
Test End Date	2017-04-21	Humidity RH (%)	51.9%RH
Tested By	Jose Badia	Pressure (mbar)	NR
Input Voltage / Freq.	3.3 Vdc		
Operating Mode	Refer Page 5 for Operating Mode Table		
Test configuration	Refer Page 5 for Test Configuration Table		
Deviation from Std.	NA		
Applicable standard	FCC Part 15.247 :2010		
Test Method	KDB 558074		
Comment	NA		

TEST DETAILS

Method	Radiated ☐	Conducted ☒
--------	-----------------------------------	---



TEST PARAMETERS

Antenna Height	NA	Turntable Rotation	NA
Equipment Class	NA	Measurement Distance	NA

TEST EQUIPMENT

Y/N	Equipment	Make	Model	Serial Number	Cal Due Date
Y	Spectrum Analyzer	Agilent	E4440A	MY41000078	2017-05-18
Y	RF Cable	Digikey	1	NA	NA

TEST GRAPHS

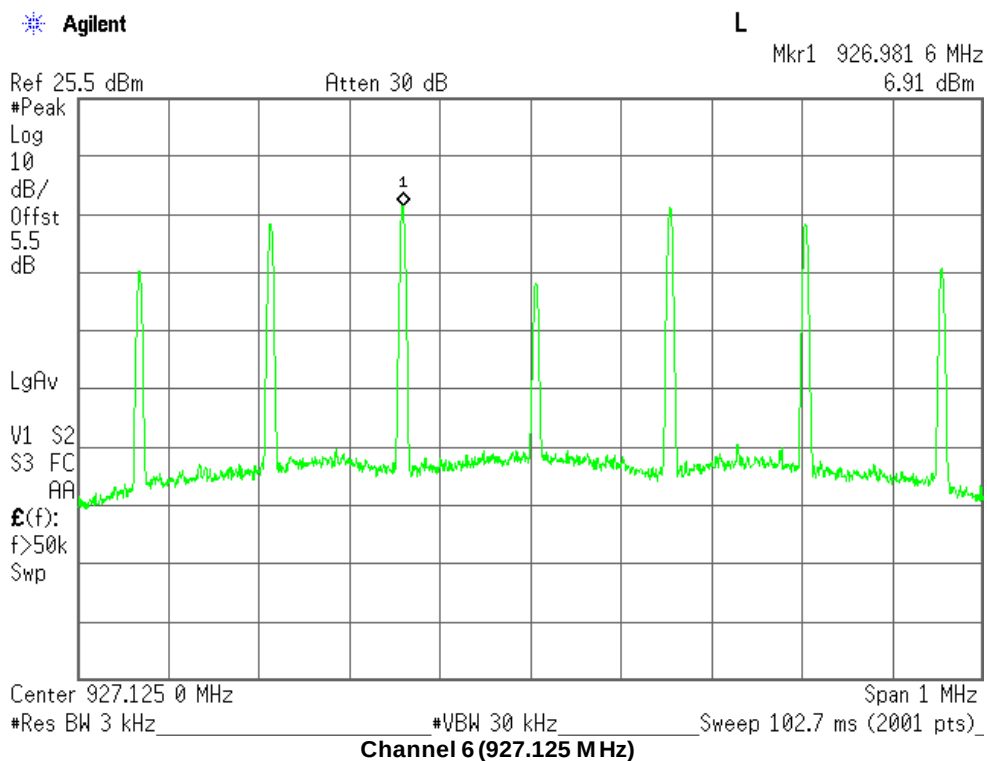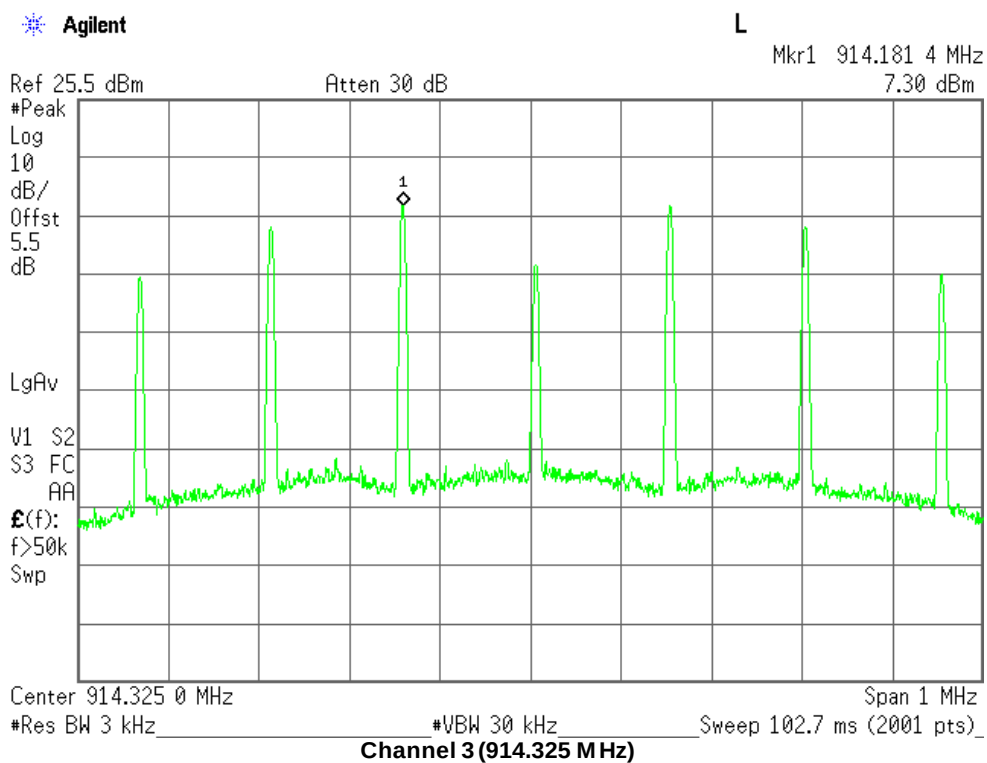

TEST RESULT				
Channel	Freq	Measured Level	Limit	Result
#	MHz	dBm/3KHz	dBm/ 3KHz	
3	914.325	7.30	<8	PASS
6	927.125	6.91	<8	PASS
Note: Cable + Attenuator factor was added as an offset in the analyzer.				

TEST SETUP PHOTOGRAPH

Refer Annexure -1

Conducted RFTest Setup

3.4 BAND-EDGE MEASUREMENTS

EUT Nomenclature	Wireless Relay Module	Test Request No.	20294-1
Model No.	FW-RM	Serial No.	MEL-159
Test Start Date	2016-08-24	Temperature (°C)	23.6°C
Test End Date	2016-08-24	Humidity RH (%)	51.9%RH
Tested By	Jose Badia/Arnoldo Garcia	Pressure (mbar)	NR
Input Voltage / Freq.	3.3 Vdc		
Operating Mode	Refer Page 5 for Operating Mode Table		
Test configuration	Refer Page 5 for Test Configuration Table		
Deviation from Std.	NA		
Applicable standard	FCC Part 15.247 :2010		
Test Method	KDB 558074		
Comment	NA		

TEST DETAILS

Method	Radiated ☐	Conducted ☒
--------	-----------------------------------	---



TEST PARAMETERS

Antenna Height	NA	Turntable Rotation	NA
Equipment Class	NA	Measurement Distance	NA

TEST EQUIPMENT

Y/N	Equipment	Make	Model	Serial Number	Cal Due Date
Y	Spectrum Analyzer	Agilent	E4440A	MY41000078	2017-05-18
Y	RF Cable	Digikey	1	NA	NA

TEST GRAPHS

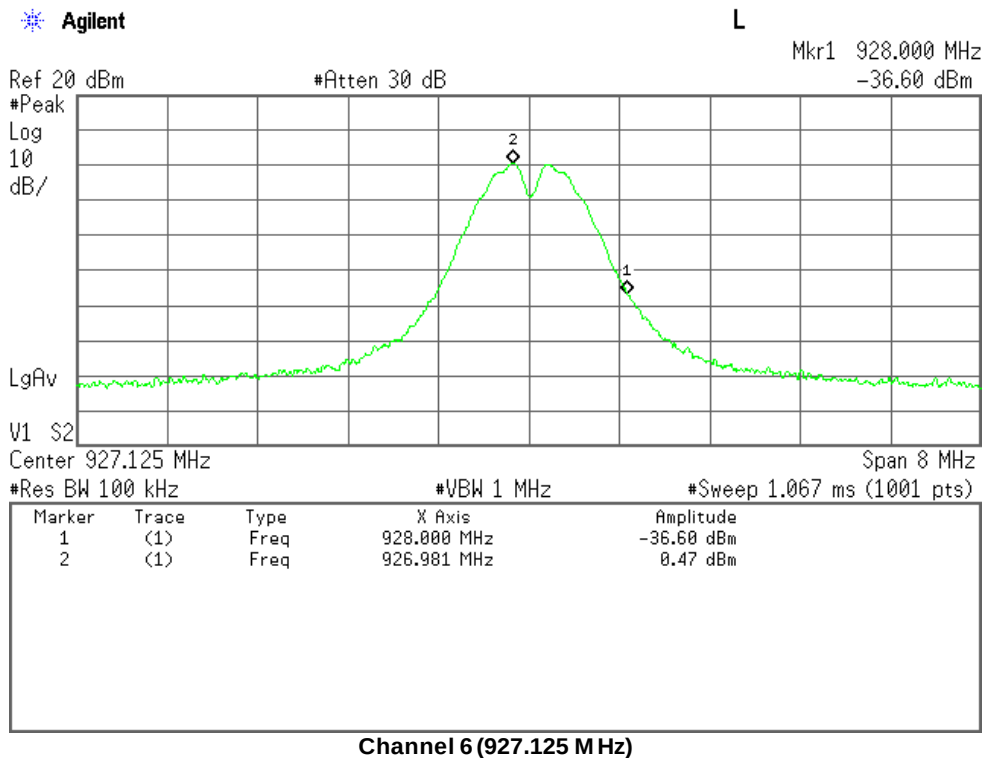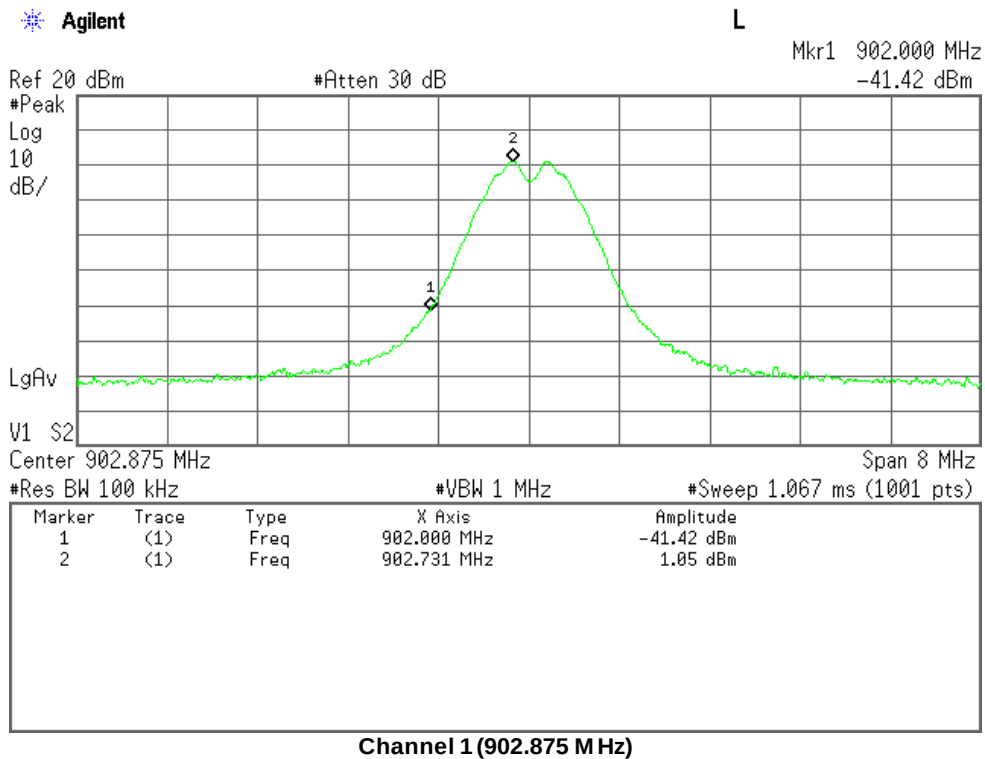

TEST RESULT

Channel	Frequency	Measured Level	Limit	Results
#	MHz	dB	dBc	
1	902.875	42.47	>20	PASS
6	927.125	37.07	>20	PASS

TEST SETUP PHOTOGRAPH

Refer Annexure -1

Conducted RF Test Setup

3.5 SPURIOUS RADIATED EMISSIONS


EUT Nomenclature	Wireless Relay Module	Test Request No.	20294-1
Model No.	FW-RM	Serial No.	MEL-159
Test Start Date	2016-09-22	Temperature (°C)	0°C-35°C
Test End Date	2017-03-28	Humidity RH (%)	10%RH-90%RH
Tested By	Jose Badia/Arnoldo Garcia/Chris Locke	Pressure (mbar)	NR
Input Voltage / Freq.	3.3 Vdc		
Operating Mode	Refer Page 5 for Operating Mode Table		
Test configuration	Refer Page 5 for Test Configuration Table		
Deviation from Std.	NA		
Applicable standard	FCC Part 15.247 : 2010 & 15.209 : 2010		
Test Method	ANSI 63.10 - 2013		
Comment	NA		
TEST FREQUENCY RANGE			
Start Frequency	9kHz	Stop Frequency	10GHz
TEST PARAMETERS			
Antenna Height	1m to 4m	Turntable Rotation	0° to 360°
Equipment Class	NA	Measurement Distance	3m

TEST EQUIPMENT


Y/N	Equipment	Make	Model	Sl. No.	Cal Due Date
Y	Spectrum Analyzer	Rohde & Schwarz	FSW26	103125	2018-02-14
Y	Spectrum Analyzer	Rohde & Schwarz	FSU26	100303	2017-03-31
Y	Bilog Antenna	Sunol	JB6	A012816	2018-03-09
Y	Bilog Antenna	Sunol	JB5	A022406	2017-12-18
Y	Horn Antenna	EMCO	RGA-60	3127	2017-02-03
Y	Preamplifier (Below 1GHz)	HP	8447D	2443AUF555	NA
Y	Preamplifier (Above 1GHz)	Amplicial	AMP1G18-35	160362	NA
Y	Active Loop Antenna	Com-Power	AL-130R	121080	2017-08-15

Note: Switch ON /OFF the Internal Preamplifier based on carrier level and or noise floor without overloading the receiver


TEST GRAPHS – 9 KHz to 30 MHz (ANTENNA 1)

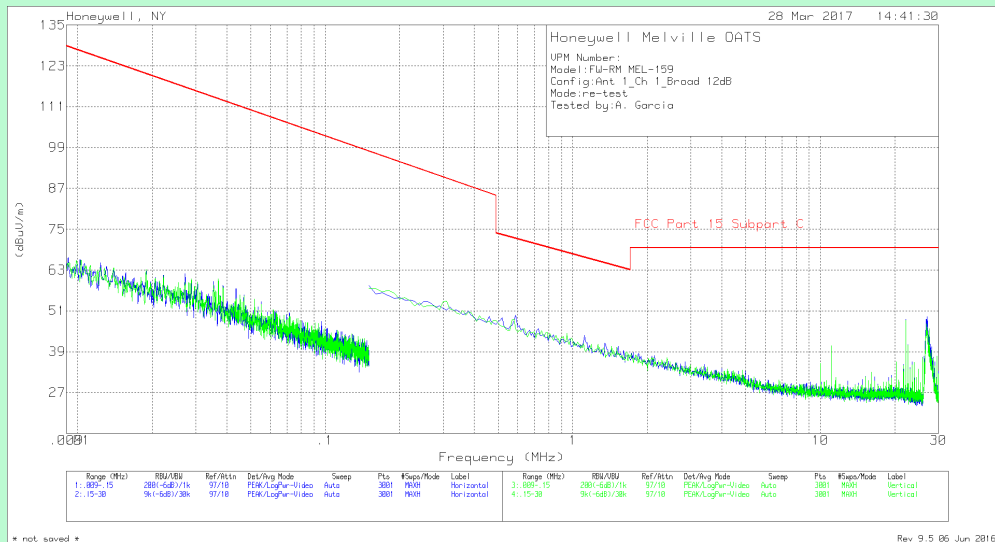

Channel 1 (902.875 MHz) – Antenna 1

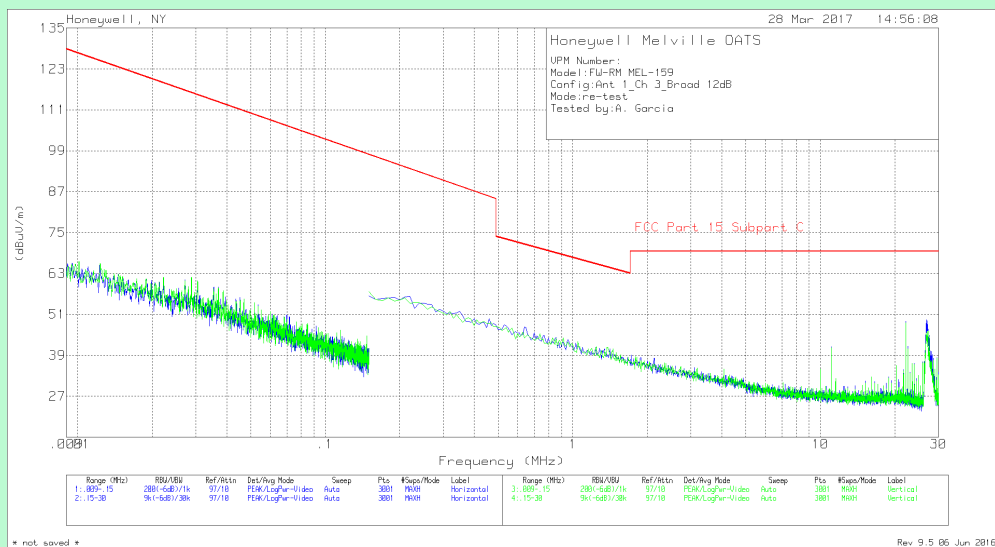

Channel 3 (914.325 MHz) – Antenna 1

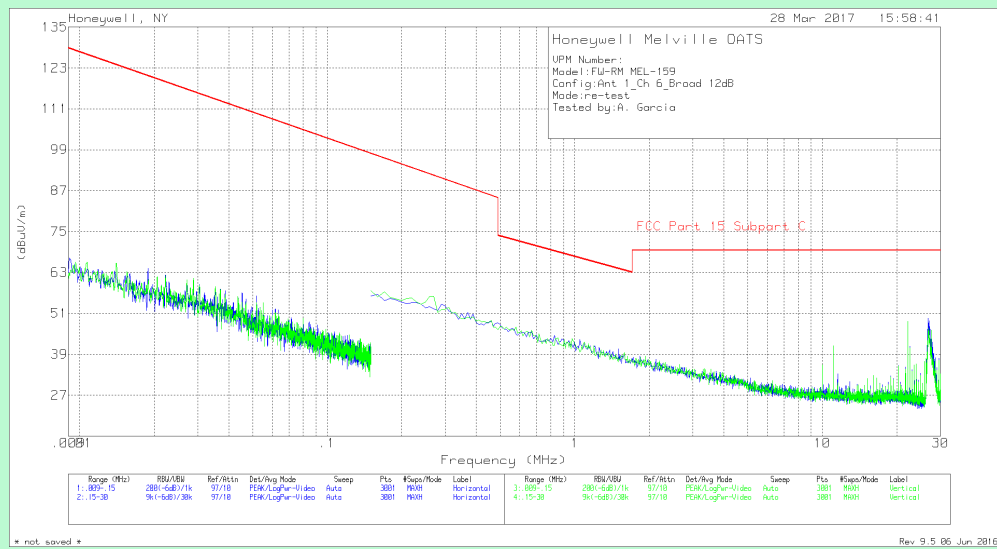


Channel 6 (927.125 MHz) – Antenna 1


TEST RESULT – 9 KHz to 30 MHz

Channel	Channel Frequency	Measured Spurious	Quasi Peak	Height	Ant Pol	Azimuth	Margin	Limit @ 3m Distance	Results
#	MHz	MHz	dBμV/m	cm	Parallel / Perpendicular	deg	dB	dBμV/m	
No emissions detected that are a product of the transmitter. Emissions shown in the plot are related to the chamber ambient									
<u>Note :</u> Measured Field Strength –dBuV/m = Receiver Readings (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)									


TEST GRAPHS – 9 KHz to 30 MHz (ANTENNA 2)

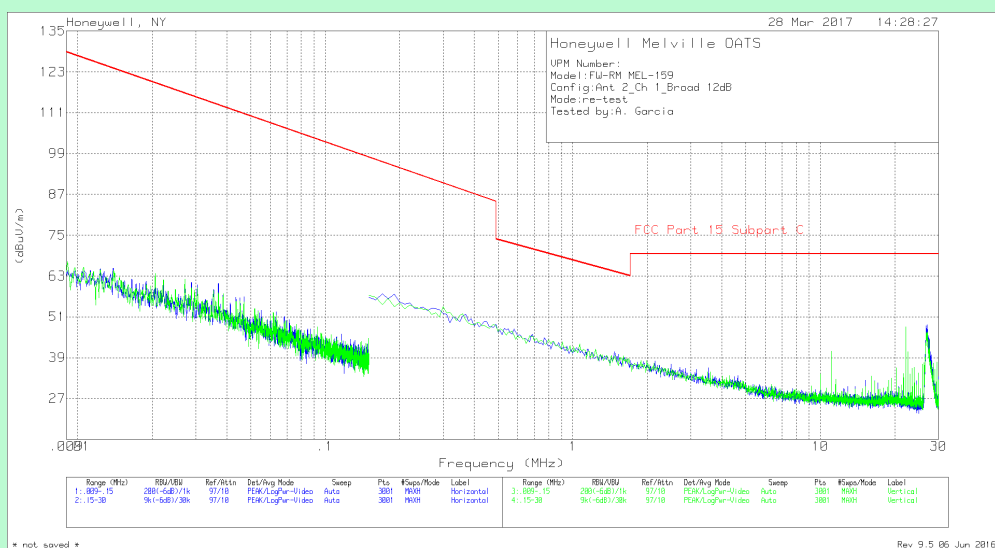

Channel 1 (902.875 MHz) – Antenna 2

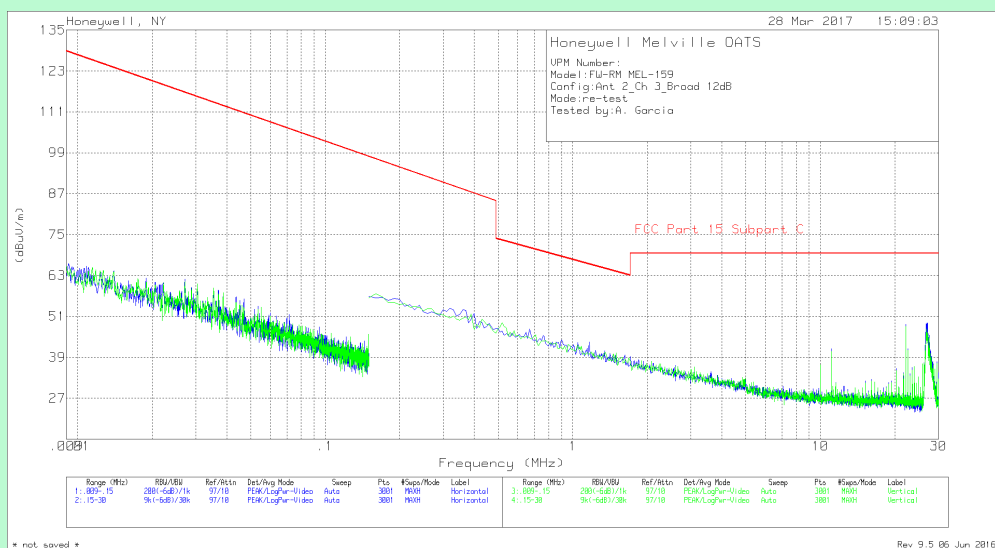

Channel 3 (914.325 MHz) – Antenna 2

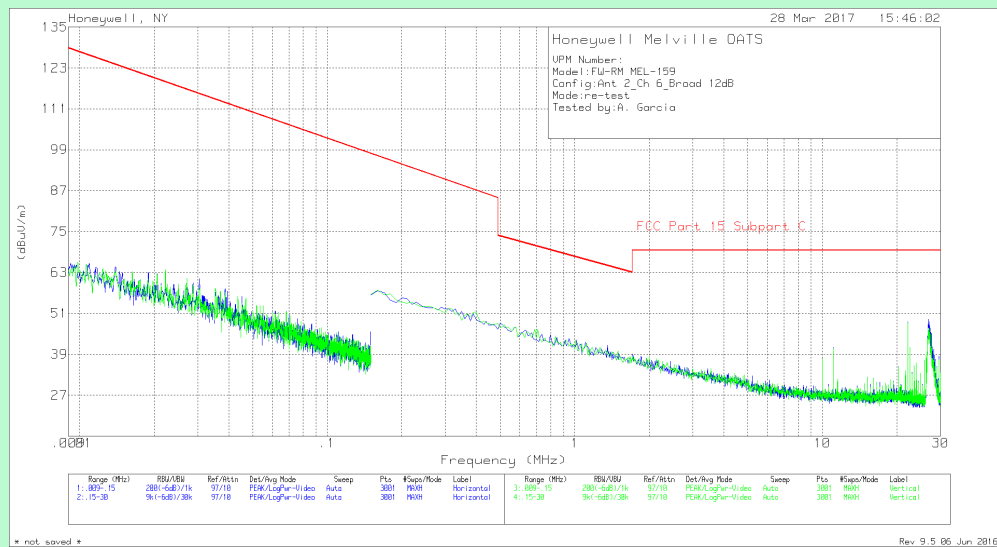


Channel 6 (927.125 MHz) – Antenna 2


TEST RESULT – 9 KHz to 30 MHz

Channel	Channel Frequency	Measured Spurious	Quasi Peak	Height	Ant Pol	Azimuth	Margin	Limit @ 3m Distance	Results
#	MHz	MHz	dBµV/m	cm	Parallel / Perpendicular	deg	dB	dBµV/m	
No emissions detected that are a product of the transmitter. Emissions shown in the plot are related to the chamber ambient									
<u>Note :</u> Measured Field Strength –dBuV/m = Receiver Readings (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)									


TEST GRAPHS – 9 KHz to 30 MHz (ANTENNA 3)

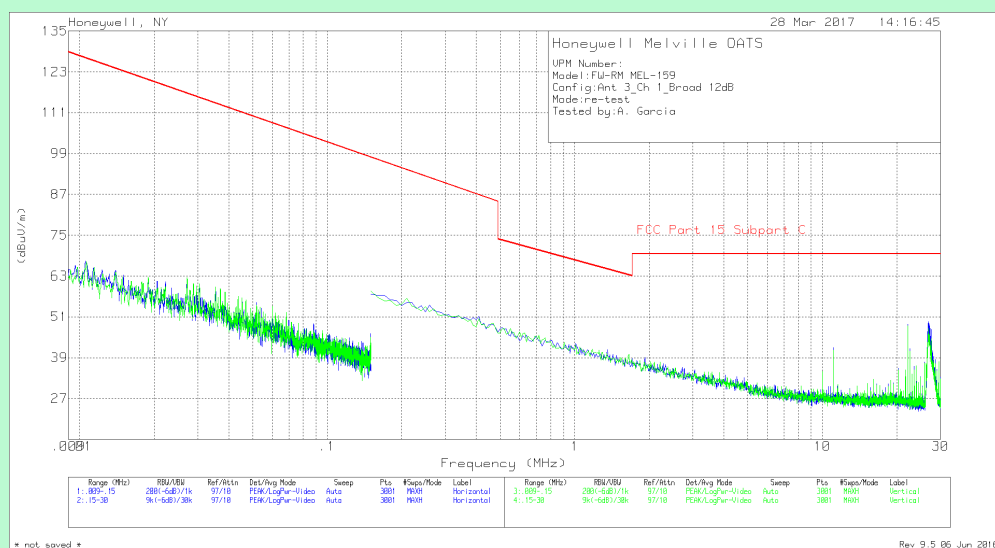

Channel 1 (902.875 MHz) – Antenna 3

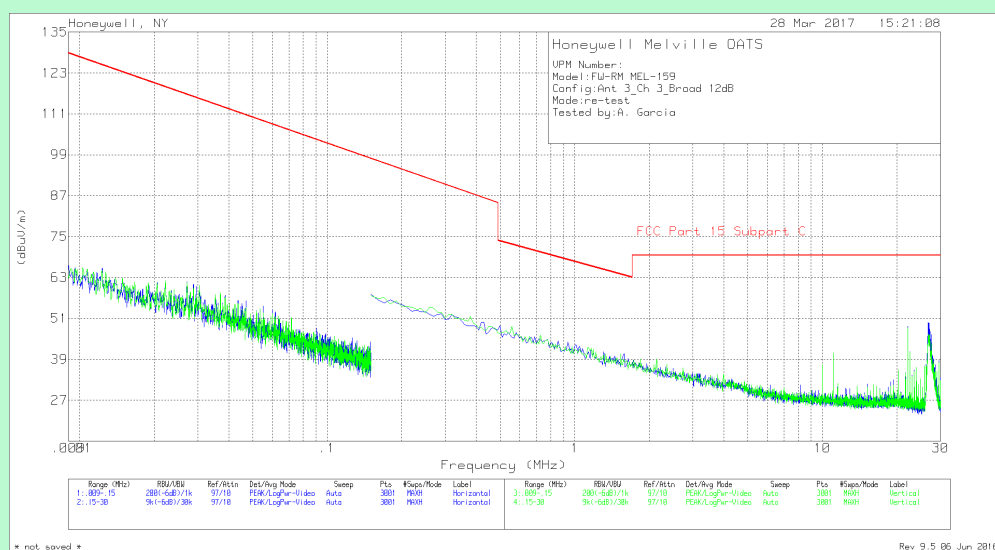

Channel 3 (914.325 MHz) – Antenna 3

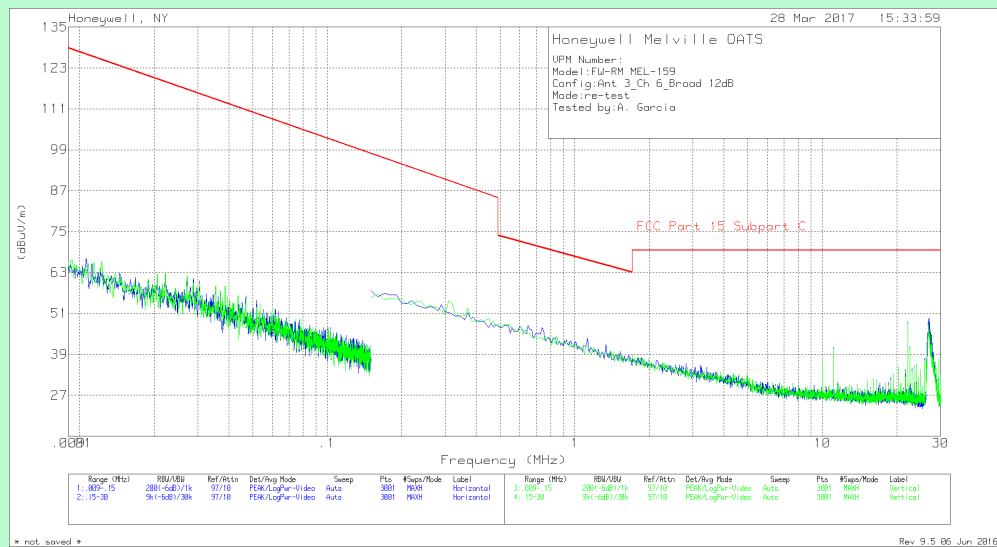


Channel 6 (927.125 MHz) – Antenna 3


TEST RESULT – 9 KHz to 30 MHz

Channel	Channel Frequency	Measured Spurious	Quasi Peak	Height	Ant Pol	Azimuth	Margin	Limit @ 3m Distance	Results
#	MHz	MHz	dBμV/m	cm	Parallel / Perpendicular	deg	dB	dBμV/m	
No emissions detected that are a product of the transmitter. Emissions shown in the plot are related to the chamber ambient									
Note : Measured Field Strength –dBuV/m = Receiver Readings (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)									


TEST GRAPHS – 30 MHz to 1GHz (ANTENNA 1)

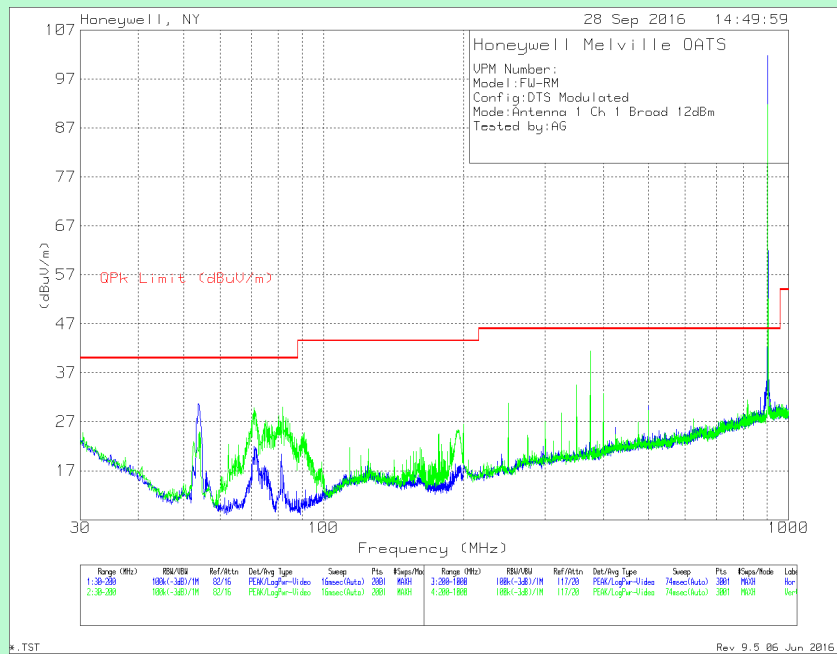

Channel 1 (902.875 MHz) – Antenna 1

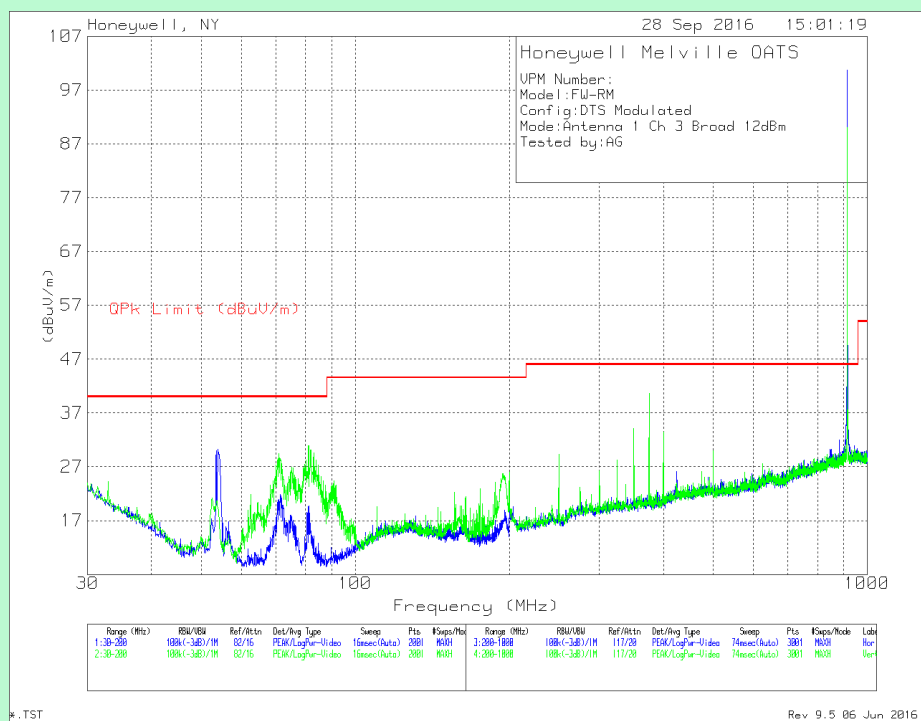

Channel 3 (914.325 MHz) – Antenna 1

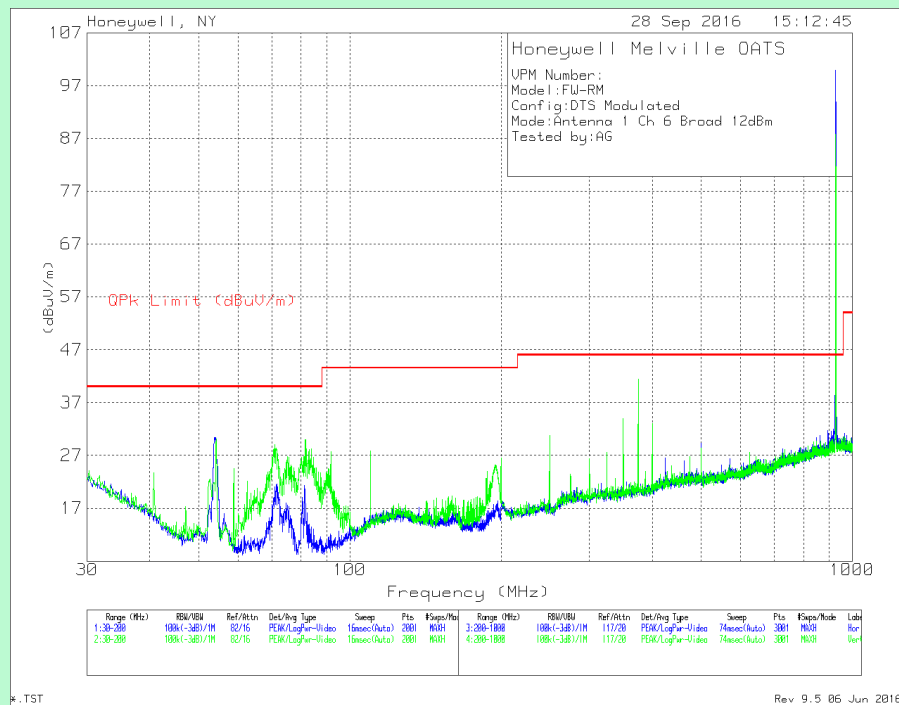

Channel 6 (927.125 MHz) – Antenna 1

TEST RESULT – 30 MHz to 1 GHz

Channel 1											
Frequency (MHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Pre Amp #1 [dB]	RDE #1 [dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
51.9539	37.36	Qp	12.2	-29	1	21.56	40	18.44	256	382	H
70.867	44.71	Qp	12.2	-28.9	1.2	29.21	40	10.79	257	391	V
81.4502	46.63	Qp	11.8	-28.9	1.3	30.83	40	9.17	257	101	V
**902.731	85.17	Pk	27	-27.6	5.5	90.07	-	-	33	101	H
374.789	29.34	Qp	19.7	-28	3.1	24.14	46.02	21.88	71	107	H
**902.735	72.46	Pk	27	-27.6	5.5	77.36	-	-	128	254	V
349.8543	29.24	Qp	19.4	-27.9	2.9	23.64	46.02	22.38	41	186	V
374.5424	29.46	Qp	19.7	-28	3.1	24.26	46.02	21.76	128	327	V
Channel 3											
Frequency (MHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Pre Amp #1 [dB]	RDE #1 [dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
53.97	41.48	Qp	12	-29	1.1	25.58	40	14.42	243	399	H
70.97	45	Qp	12.2	-28.9	1.2	29.5	40	10.5	0	399	V
80.9347	46.56	Qp	11.8	-28.9	1.3	30.76	40	9.24	299	134	V
**914.181	82.85	Pk	27.3	-27.5	5.6	88.25	-	-	45	101	H
374.8996	32.28	Qp	19.7	-28	3.1	27.08	46.02	18.94	299	101	H
**914.493	74.71	Pk	27.3	-27.5	5.6	80.11	-	-	269	113	V
350.1335	29.4	Qp	19.4	-27.9	2.9	23.8	46.02	22.22	348	314	V
374.9336	29.46	Qp	19.7	-28	3.1	24.26	46.02	21.76	303	361	V
Channel 6											
Frequency (MHz)	Meter Reading (dBuV)	Det	AF [dB/m] JB6 w/4dB pad	Pre Amp #1	RDE #1	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
54.086	36.4	Qp	12	-29	1.1	20.5	40	19.5	114	400	H
54.2999	47.82	Qp	12	-29	1.1	31.92	40	8.08	12	171	V
71.0891	43.65	Qp	12.2	-28.9	1.2	28.15	40	11.85	275	223	V
81.486	39.96	Qp	11.8	-28.9	1.3	24.16	40	15.84	104	159	V
**926.985	96.05	Pk	27.3	-27.5	5.7	101.55	-	-	53	101	H
375.0107	29.9	Qp	19.7	-28	3.1	24.7	46.02	21.32	328	282	H
**926.985	89.05	Pk	27.3	-27.5	5.7	94.55	-	-	326	111	V
375.0245	30.11	Qp	19.7	-28	3.1	24.91	46.02	21.11	6	307	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency


Pk - Peak detector

Qp - Quasi-Peak detector


Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient


TEST GRAPHS – 30 MHz to 1GHz (ANTENNA 2)

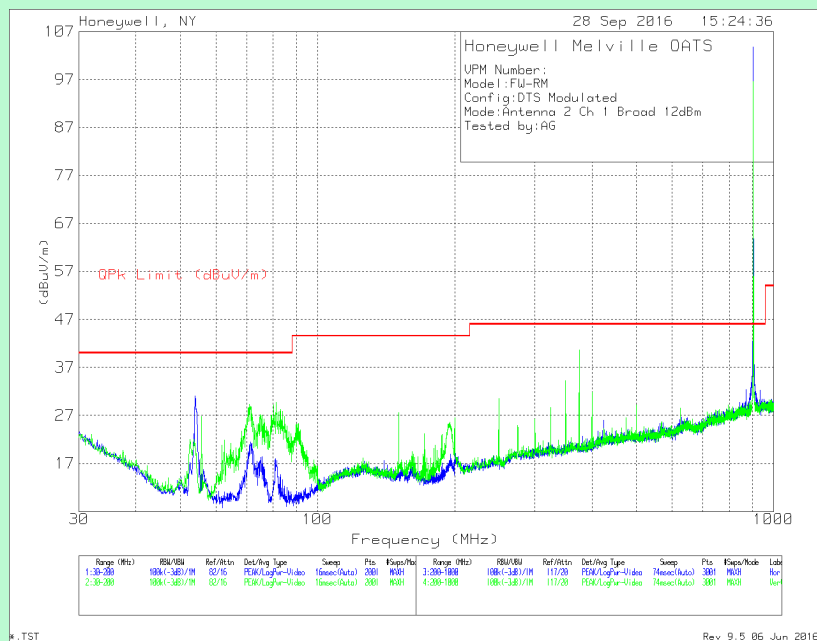

Channel 1 (902.875 MHz) – Antenna 2

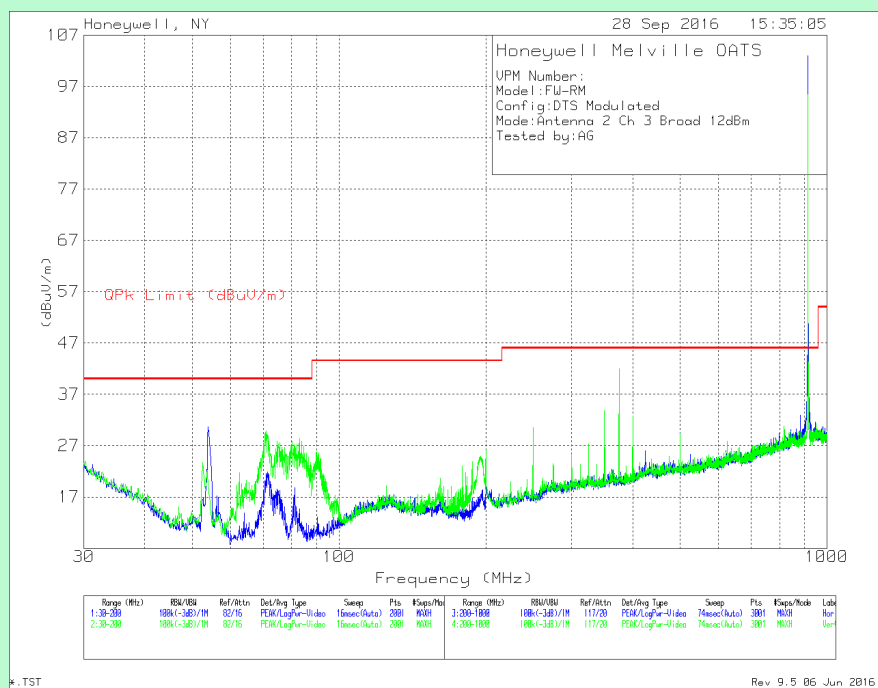

Channel 3 (914.325 MHz) – Antenna 2

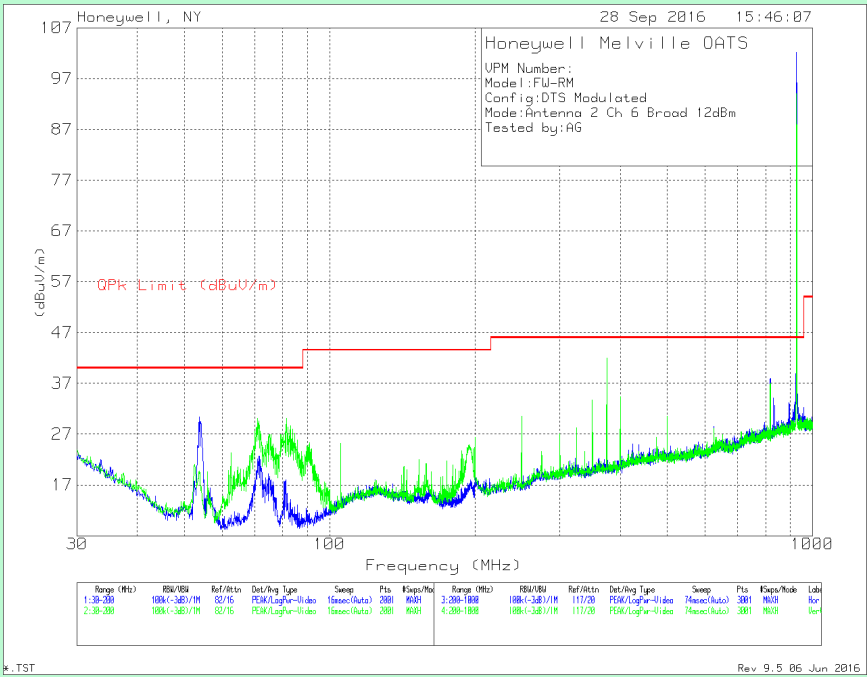

Channel 6 (927.125 MHz) – Antenna 2

TEST RESULT – 30 MHz to 1 GHz

Channel 1											
Frequency (MHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Pre Amp #1 [dB]	RDE #1 [dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
53.97	36.77	Qp	12	-29	1.1	20.87	40	19.13	6	148	H
85.7998	40.53	Qp	11.7	-28.9	1.3	24.63	40	15.37	124	385	H
71.2422	39.73	Qp	12.2	-28.9	1.2	24.23	40	15.77	38	219	V
81.3707	46.74	Qp	11.8	-28.9	1.3	30.94	40	9.06	100	138	V
** 902.731	85.26	Pk	27	-27.6	5.5	90.16	-	-	198	157	H
374.6403	29.4	Qp	19.7	-28	3.1	24.2	46.02	21.82	72	382	H
** 902.731	75.03	Pk	27	-27.6	5.5	79.93	-	-	277	156	V
375.0356	29.45	Qp	19.7	-28	3.1	24.25	46.02	21.77	33	172	V
53.97	36.77	Qp	12	-29	1.1	20.87	40	19.13	6	148	H
Channel 3											
Frequency (MHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Pre Amp #1 [dB]	RDE #1 [dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
54.3367	47.17	Qp	12	-29	1.1	31.27	40	8.73	347	370	H
71.2487	43.43	Qp	12.2	-28.9	1.2	27.93	40	12.07	332	160	V
83.1919	47.23	Qp	11.8	-28.9	1.3	31.43	40	8.57	334	246	V
** 914.181	97.4	Pk	27.3	-27.5	5.6	102.8	-	-	34	101	H
375.016	30.05	Qp	19.7	-28	3.1	24.85	46.02	21.17	245	345	H
** 914.181	89.2	Pk	27.3	-27.5	5.6	94.6	-	-	314	112	V
349.9823	29.79	Qp	19.4	-27.9	2.9	24.19	46.02	21.83	337	306	V
375.0039	30.03	Qp	19.7	-28	3.1	24.83	46.02	21.19	203	254	V
54.3367	47.17	Qp	12	-29	1.1	31.27	40	8.73	347	370	H
Channel 6											
Frequency (MHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Pre Amp #1 [dB]	RDE #1 [dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
53.8876	36.24	Qp	12	-29	1.1	20.34	40	19.66	320	399	H
70.8236	39.46	Qp	12.2	-28.9	1.2	23.96	40	16.04	218	369	V
81.2049	41.91	Qp	11.8	-28.9	1.3	26.11	40	13.89	76	132	V
** 926.987	97.94	Pk	27.3	-27.5	5.7	103.44	-	-	351	100	H
375.0404	29.75	Qp	19.7	-28	3.1	24.55	46.02	21.47	91	183	H
817.9164	29.77	Qp	26.3	-27.9	5.2	33.37	46.02	12.65	337	385	H
** 926.985	86.47	Pk	27.3	-27.5	5.7	91.97	-	-	75	104	V
374.6014	32.49	Qp	19.7	-28	3.1	27.29	46.02	18.73	337	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency


Pk - Peak detector

Qp - Quasi-Peak detector


Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient


TEST GRAPHS – 30 MHz to 1GHz (ANTENNA 3)

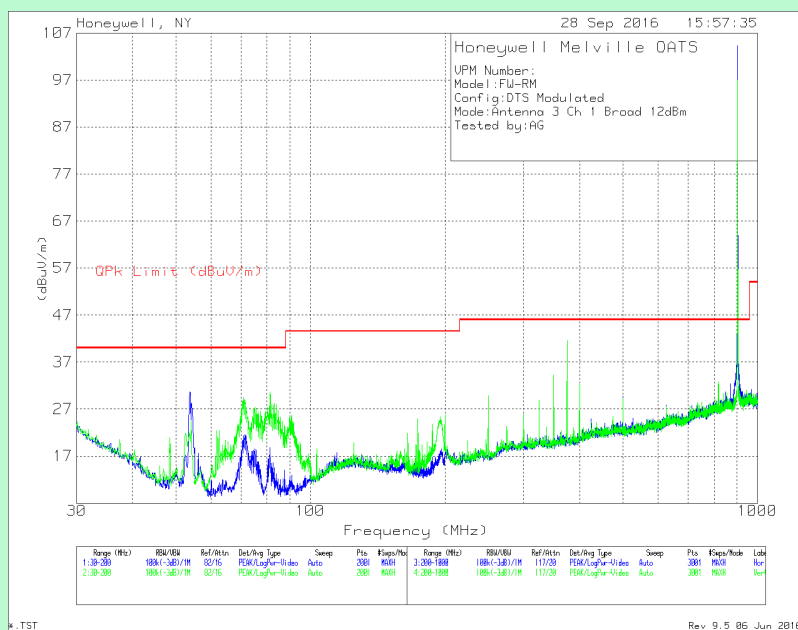

Channel 1 (902.875 MHz) – Antenna 3

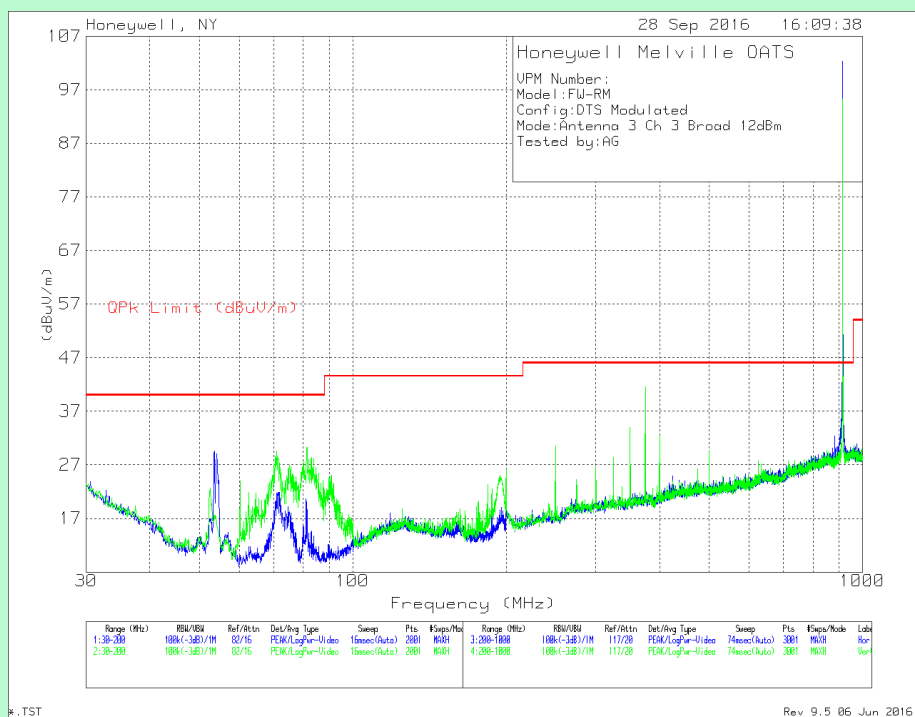

Channel 3 (914.325 MHz) – Antenna 3

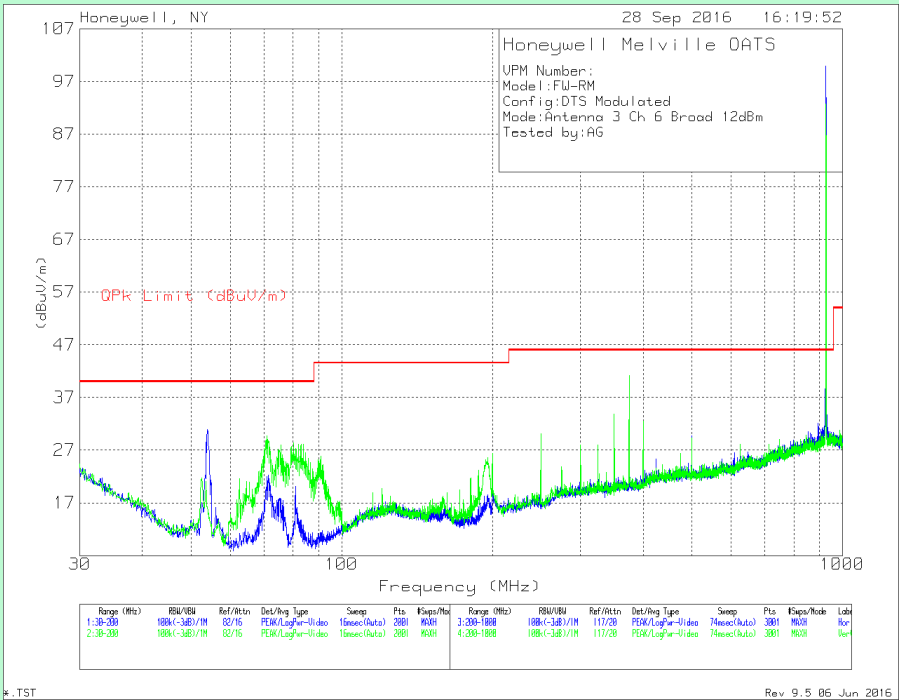

Channel 6 (927.125 MHz) – Antenna 3

TEST RESULT – 30 MHz to 1 GHz

Channel 1											
Frequency (MHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Pre Amp #1 [dB]	RDE #1 [dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
54.0789	41.66	Qp	12	-29	1.1	25.76	40	14.24	286	384	H
70.5512	43.73	Qp	12.2	-28.9	1.2	28.23	40	11.77	286	101	V
81.2447	45.67	Qp	11.8	-28.9	1.3	29.87	40	10.13	0	124	V
** 902.731	85.83	Pk	27	-27.6	5.5	90.73	-	-	168	159	H
375.009	29.44	Qp	19.7	-28	3.1	24.24	46.02	21.78	10	274	H
349.8332	29.35	Qp	19.4	-27.9	2.9	23.75	46.02	22.27	195	357	V
375.151	29.48	Qp	19.7	-28	3.1	24.28	46.02	21.74	358	353	V
** 903.475	55.95	Pk	27	-27.6	5.5	60.85	-	-	95	207	V
Channel 3											
Frequency (MHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Pre Amp #1 [dB]	RDE #1 [dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
53.8892	42.54	Qp	12	-29	1.1	26.64	40	13.36	234	380	H
71.2369	43.63	Qp	12.2	-28.9	1.2	28.13	40	11.87	91	177	V
81.6168	49.54	Qp	11.8	-28.9	1.3	33.74	40	6.26	35	141	V
** 914.185	99.58	Pk	27.3	-27.5	5.6	104.98	-	-	157	155	H
374.7431	29.75	Qp	19.7	-28	3.1	24.55	46.02	21.47	84	290	H
** 914.181	92.29	Pk	27.3	-27.5	5.6	97.69	-	-	100	220	V
350.0188	29.83	Qp	19.4	-27.9	2.9	24.23	46.02	21.79	169	287	V
375.0161	30.12	Qp	19.7	-28	3.1	24.92	46.02	21.1	182	400	V
Channel 6											
Frequency (MHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Pre Amp #1 [dB]	RDE #1 [dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
53.676	33.21	Qp	12	-29	1.1	17.31	40	22.69	185	287	H
70.9047	40.14	Qp	12.2	-28.9	1.2	24.64	40	15.36	91	179	V
82.6694	38.64	Qp	11.8	-28.9	1.3	22.84	40	17.16	318	360	V
** 926.9859	98.83	Pk	27.3	-27.5	5.7	104.33	-	-	39	101	H
374.6055	29.66	Qp	19.7	-28	3.1	24.46	46.02	21.56	341	363	H
** 926.985	80.82	Pk	27.3	-27.5	5.7	86.32	-	-	54	244	V
350.0193	29.65	Qp	19.4	-27.9	2.9	24.05	46.02	21.97	323	149	V
374.7442	29.69	Qp	19.7	-28	3.1	24.49	46.02	21.53	13	384	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency


Pk - Peak detector

Qp - Quasi-Peak detector


Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient


TEST GRAPHS – 1GHz to 10GHz (ANTENNA 1)

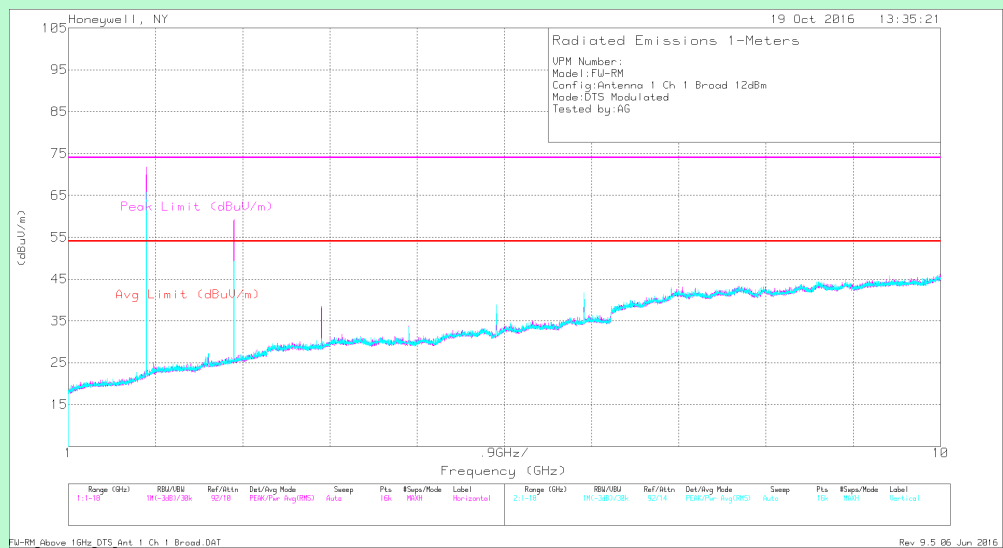

Channel 1 (902.875 MHz) – Antenna 1

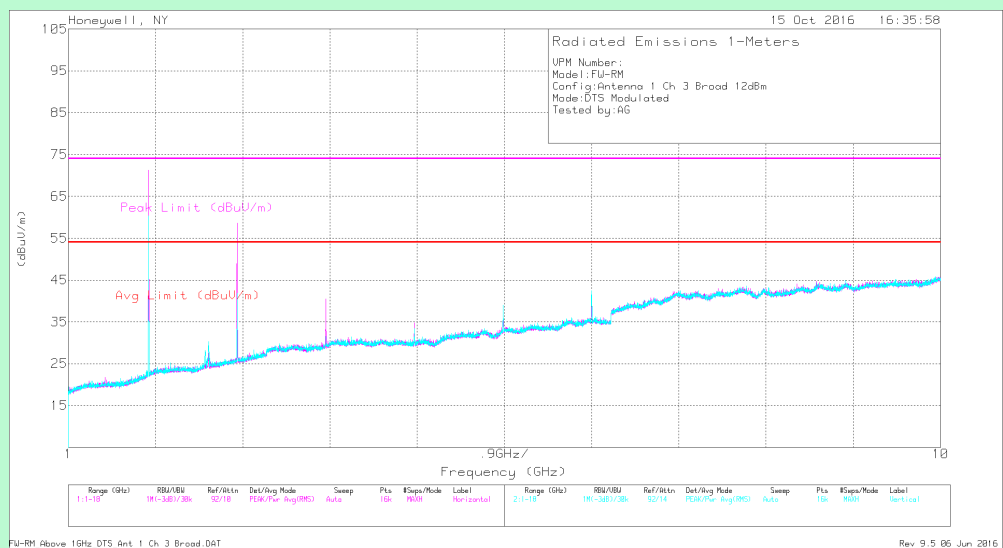

Channel 3 (914.325 MHz) – Antenna 1

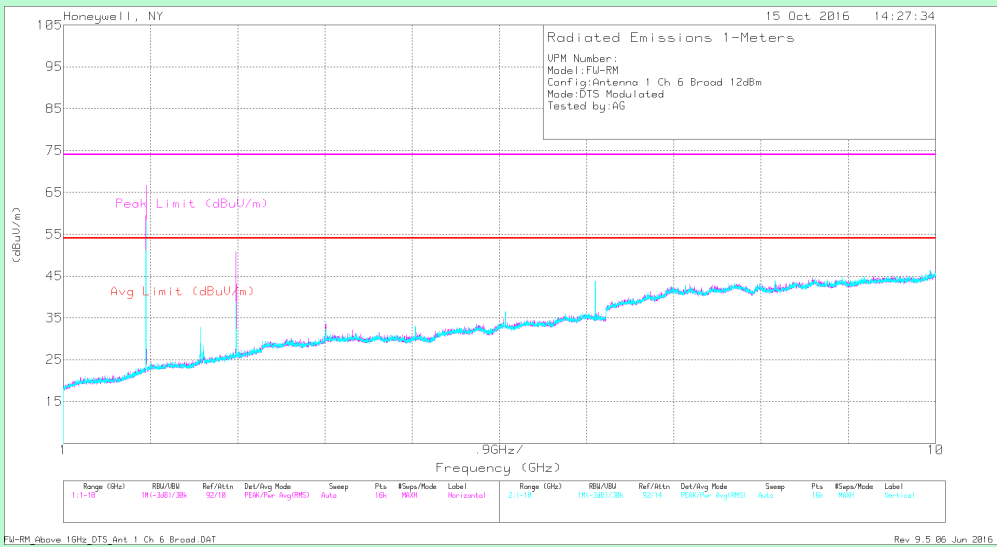

Channel 6 (927.125 MHz) – Antenna 1

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 1

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.71	44.64	PK2	29.3	-27.1	5	51.84	74	22.16	40	191	H
* 3.613	42.3	PK2	31.6	-26.8	5.4	52.5	74	21.5	150	316	H
* 4.515	41.69	PK2	32.2	-26.6	6	53.29	74	20.71	324	342	H
* 5.419	43.48	PK2	34.3	-26.7	6.4	57.48	74	16.52	5	301	H
* 8.125	41.99	PK2	37.1	-26.2	7.5	60.39	74	13.61	339	221	H
* 9.028	41.57	PK2	37.6	-25.9	7.3	60.57	74	13.43	67	390	H
* 2.71	46.11	PK2	29.3	-27.1	5	53.31	74	20.69	216	367	V
* 3.612	42.77	PK2	31.6	-26.8	5.4	52.97	74	21.03	261	340	V
* 4.513	41.29	PK2	32.2	-26.6	6	52.89	74	21.11	143	266	V
* 5.416	42.76	PK2	34.3	-26.7	6.4	56.76	74	17.24	5	276	V
* 8.124	41.02	PK2	37.1	-26.2	7.5	59.42	74	14.58	180	199	V
* 9.028	42.2	PK2	37.6	-25.9	7.3	61.2	74	12.8	205	267	V

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental-20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.805	63.25	PK2	27	-26.9	4.2	67.55	70.1	2.55	34	189	H
6.322	41.38	PK2	34.9	-26.4	7.1	56.98	70.1	13.12	124	308	H
7.225	41.48	PK2	36.3	-26.2	6.8	58.38	70.1	11.72	321	266	H
1.805	49.72	PK2	27	-26.9	4.2	54.02	70.1	16.08	244	276	V
6.322	43.72	PK2	34.9	-26.4	7.1	59.32	70.1	10.78	7	268	V
7.223	42.67	PK2	36.3	-26.2	6.8	59.57	70.1	10.53	246	209	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.708	36.17	MAv1	29.3	-27.1	5	43.37	54	10.63	40	191	H
* 3.611	30.48	MAv1	31.6	-26.8	5.4	40.68	54	13.32	150	316	H
* 4.516	29.91	MAv1	32.2	-26.6	6	41.51	54	12.49	324	342	H
* 5.416	32.27	MAv1	34.3	-26.7	6.4	46.27	54	7.73	5	301	H
* 8.124	29.24	MAv1	37.1	-26.2	7.5	47.64	54	6.36	339	221	H
* 9.03	28.86	MAv1	37.6	-25.9	7.3	47.86	54	6.14	67	390	H
* 2.708	38.53	MAv1	29.3	-27.1	5	45.73	54	8.27	216	367	V
* 3.612	30.46	MAv1	31.6	-26.8	5.4	40.66	54	13.34	261	340	V
* 4.516	28.88	MAv1	32.2	-26.6	6	40.48	54	13.52	143	266	V
* 5.419	31.13	MAv1	34.3	-26.7	6.4	45.13	54	8.87	5	276	V
* 8.125	28.45	MAv1	37.1	-26.2	7.5	46.85	54	7.15	180	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency

Pk - Peak detector

Qp - Quasi-Peak detector

Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 3

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.744	46.38	PK2	29.4	-27	4.9	53.68	74	20.32	264	104	H
* 3.659	42.12	PK2	31.8	-26.9	5.4	52.42	74	21.58	241	107	H
* 4.572	41.65	PK2	32.2	-26.7	6	53.15	74	20.85	111	391	H
* 7.313	40.25	PK2	36.7	-26.2	6.2	56.95	74	17.05	202	374	H
* 8.228	40.17	PK2	37.1	-26.1	7.3	58.47	74	15.53	279	145	H
* 9.145	41.52	PK2	37.6	-25.9	7.4	60.62	74	13.38	6	398	H
* 2.744	48.54	PK2	29.4	-27	4.9	55.84	74	18.16	211	292	V
* 3.658	47.31	PK2	31.8	-26.9	5.5	57.71	74	16.29	223	317	V
* 4.572	46.08	PK2	32.2	-26.7	6	57.58	74	16.42	157	380	V
* 7.313	44.57	PK2	36.7	-26.2	6.2	61.27	74	12.73	4	133	V
* 8.229	45.86	PK2	37.1	-26.1	7.3	64.16	74	9.84	122	234	V
* 9.142	46.4	PK2	37.6	-25.9	7.4	65.5	74	8.5	102	323	V

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental-20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.828	59.57	PK2	27.2	-26.9	4.2	64.07	68.3	4.23	49	185	H
5.487	43.02	PK2	34.4	-26.6	6.7	57.52	68.3	10.78	343	325	H
6.399	42.2	PK2	34.8	-26.2	7.1	57.9	68.3	10.4	108	266	H
1.828	50.5	PK2	27.2	-26.9	4.2	55	68.3	13.3	124	301	V
5.487	46.61	PK2	34.4	-26.6	6.7	61.11	68.3	7.19	350	283	V
6.402	47.35	PK2	34.8	-26.2	7.1	63.05	68.3	5.25	1	261	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.744	38.86	MAv1	29.4	-27	4.9	46.16	54	7.84	264	104	H
* 3.656	29.71	MAv1	31.8	-26.9	5.5	40.11	54	13.89	241	107	H
* 4.57	29.64	MAv1	32.2	-26.7	6	41.14	54	12.86	111	391	H
* 7.317	27.8	MAv1	36.7	-26.2	6.2	44.5	54	9.5	202	374	H
* 8.23	28	MAv1	37.1	-26.1	7.3	46.3	54	7.7	279	145	H
* 9.145	28.96	MAv1	37.6	-25.9	7.4	48.06	54	5.94	6	398	H
* 2.742	39.24	MAv1	29.4	-27	4.9	46.54	54	7.46	211	292	V
* 3.657	34.5	MAv1	31.8	-26.9	5.5	44.9	54	9.1	223	317	V
* 4.57	33.63	MAv1	32.2	-26.7	6	45.13	54	8.87	157	380	V
* 7.314	32.72	MAv1	36.7	-26.2	6.2	49.42	54	4.58	4	133	V
* 8.231	33.08	MAv1	37.1	-26.1	7.3	51.38	54	2.62	122	234	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency

Pk - Peak detector

Qp - Quasi-Peak detector

Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 6

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.782	45.15	PK2	29.5	-27.1	4.9	52.45	74	21.55	115	377	H
* 3.707	42.19	PK2	32	-26.9	5.6	52.89	74	21.11	316	230	H
* 4.637	40.45	PK2	32.4	-26.6	6.1	52.35	74	21.65	201	164	H
* 7.417	40.25	PK2	36.8	-26.2	7.1	57.95	74	16.05	171	229	H
* 8.345	40.72	PK2	37.3	-26.1	7.6	59.52	74	14.48	129	206	H
* 2.78	49.43	PK2	29.5	-27.1	4.8	56.63	74	17.37	13	389	V
* 3.71	46.63	PK2	32	-26.9	5.6	57.33	74	16.67	42	288	V
* 4.636	45.64	PK2	32.4	-26.6	6.1	57.54	74	16.46	223	133	V
* 7.417	45.58	PK2	36.8	-26.2	7.1	63.28	74	10.72	286	344	V
* 8.345	45.31	PK2	37.3	-26.1	7.6	64.11	74	9.89	255	116	V

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental-20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.855	58.34	PK2	27.5	-26.9	4.2	63.14	81.6	18.46	201	176	H
5.564	40.81	PK2	34.4	-26.4	6.7	55.51	81.6	26.09	260	336	H
6.488	41.7	PK2	34.8	-26.4	7.3	57.4	81.6	24.2	264	276	H
9.272	40.88	PK2	37.8	-26	7.5	60.18	81.6	22.06	156	189	H
1.856	60.77	PK2	27.5	-26.9	4.2	65.57	81.6	19.4	89	224	V
5.563	44.84	PK2	34.4	-26.4	6.7	59.54	81.6	18.46	320	285	V
6.488	46.6	PK2	34.8	-26.4	7.2	62.2	81.6	26.09	139	238	V
9.272	45.85	PK2	37.8	-26	7.5	65.15	81.6	24.2	351	220	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.781	37.29	MAv1	29.5	-27.1	4.8	44.49	54	9.51	115	377	H
* 3.709	29.82	MAv1	32	-26.9	5.6	40.52	54	13.48	316	230	H
* 4.635	28.01	MAv1	32.4	-26.6	6.1	39.91	54	14.09	201	164	H
* 7.416	27.8	MAv1	36.8	-26.2	7.1	45.5	54	8.5	171	229	H
* 8.343	28.28	MAv1	37.3	-26.1	7.6	47.08	54	6.92	129	206	H
* 2.781	40.26	MAv1	29.5	-27.1	4.8	47.46	54	6.54	13	389	V
* 3.708	33.93	MAv1	32	-26.9	5.6	44.63	54	9.37	42	288	V
* 4.634	33.19	MAv1	32.4	-26.6	6.1	45.09	54	8.91	223	133	V
* 7.419	32.82	MAv1	36.8	-26.2	7.1	50.52	54	3.48	286	344	V
* 8.345	33.09	MAv1	37.3	-26.1	7.6	51.89	54	2.11	255	116	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency


Pk - Peak detector

Qp - Quasi-Peak detector


Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient


TEST GRAPHS – 1GHz to 10GHz (ANTENNA 2)

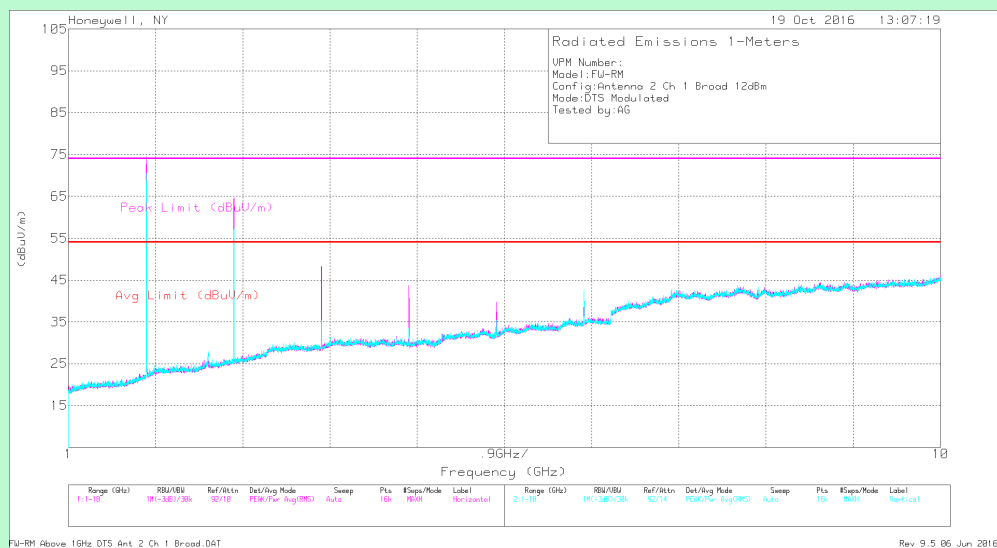

Channel 1 (902.875 MHz) – Antenna 2

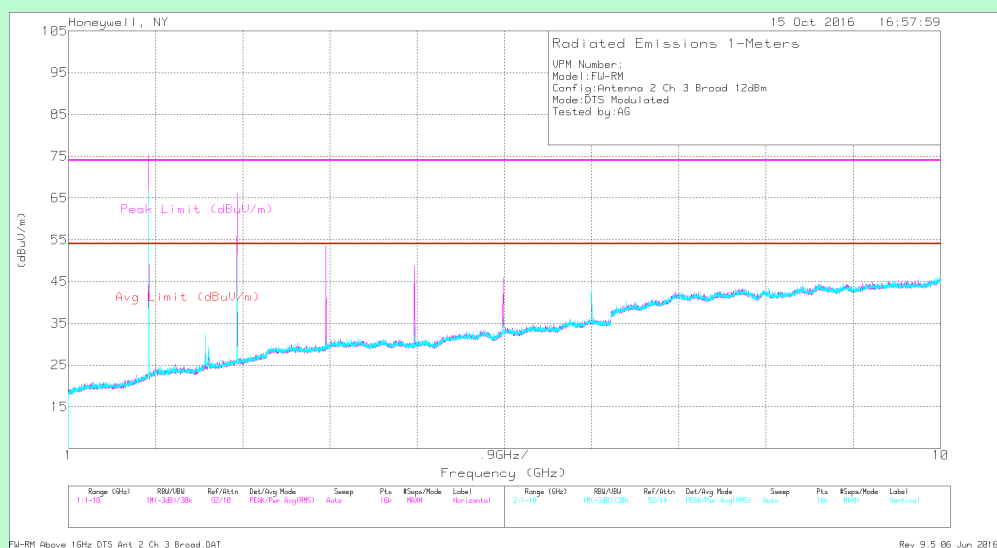

Channel 3 (914.325 MHz) – Antenna 2

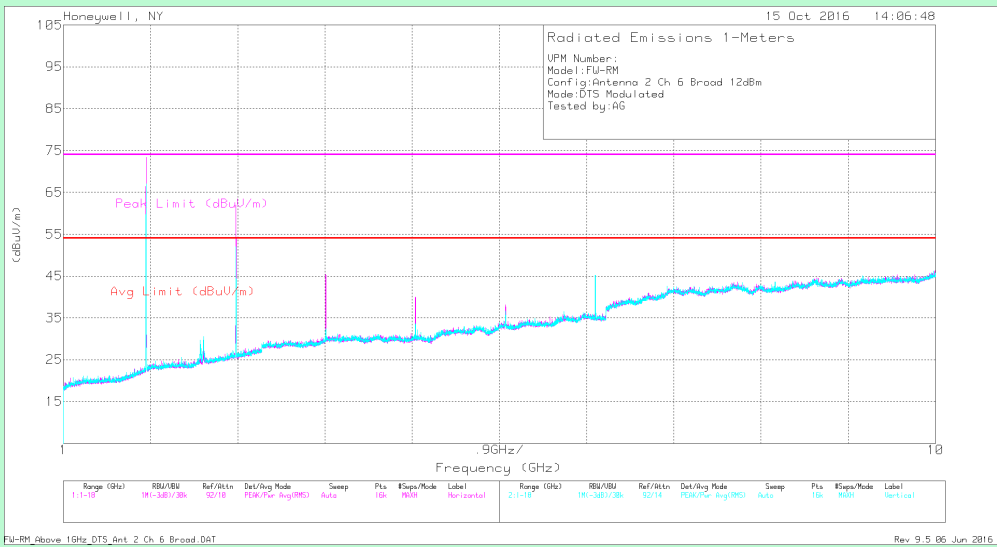

Channel 6 (927.125 MHz) – Antenna 2

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 1

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.71	51.42	PK2	29.3	-27.1	5	58.62	74	15.38	230	190	H
* 3.611	42.08	PK2	31.6	-26.8	5.4	52.28	74	21.72	318	180	H
* 4.513	40.7	PK2	32.2	-26.6	6	52.3	74	21.7	27	170	H
* 5.416	41.04	PK2	34.3	-26.7	6.4	55.04	74	18.96	329	306	H
* 8.128	40.68	PK2	37.1	-26.2	7.5	59.08	74	14.92	220	162	H
* 9.03	41.68	PK2	37.6	-25.9	7.3	60.68	74	13.32	203	212	H
* 2.709	50.71	PK2	29.3	-27.1	5	57.91	74	16.09	308	115	V
* 3.613	46.4	PK2	31.6	-26.8	5.4	56.6	74	17.4	358	334	V
* 4.514	45.76	PK2	32.2	-26.6	6	57.36	74	16.64	72	374	V
* 5.417	45.27	PK2	34.3	-26.7	6.4	59.27	74	14.73	237	103	V
* 8.127	45.55	PK2	37.1	-26.2	7.5	63.95	74	10.05	133	113	V
* 9.028	45.95	PK2	37.6	-25.9	7.3	64.95	74	9.05	336	290	V

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental-20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.805	64.64	PK2	27	-26.9	4.2	68.94	70.2	1.26	206	193	H
6.319	42.38	PK2	34.9	-26.4	7.1	57.98	70.2	12.22	95	294	H
7.221	40.94	PK2	36.3	-26.2	6.8	57.84	70.2	9.32	320	299	H
1.805	58.65	PK2	27	-26.9	4.2	62.95	70.2	7.84	219	164	V
6.319	45.28	PK2	34.9	-26.4	7.1	60.88	70.2	1.26	149	309	V
7.225	45.46	PK2	36.3	-26.2	6.8	62.36	70.2	12.22	175	247	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.708	46.25	MAv1	29.3	-27.1	5	53.45	54	0.55	230	190	H
* 3.611	29.73	MAv1	31.6	-26.8	5.4	39.93	54	14.07	318	180	H
* 4.516	28.53	MAv1	32.2	-26.6	6	40.13	54	13.87	27	170	H
* 5.419	28.87	MAv1	34.3	-26.7	6.4	42.87	54	11.13	329	306	H
* 8.126	28.48	MAv1	37.1	-26.2	7.5	46.88	54	7.12	220	162	H
* 9.027	28.89	MAv1	37.6	-25.9	7.3	47.89	54	6.11	203	212	H
* 2.708	43.61	MAv1	29.3	-27.1	5	50.81	54	3.19	308	115	V
* 3.61	34.02	MAv1	31.6	-26.8	5.4	44.22	54	9.78	358	334	V
* 4.513	33.73	MAv1	32.2	-26.6	6	45.33	54	8.67	72	374	V
* 5.417	33	MAv1	34.3	-26.7	6.4	47	54	7	237	103	V
* 8.127	33.12	MAv1	37.1	-26.2	7.5	51.52	54	2.48	133	113	V
* 9.031	33.69	MAv1	37.6	-25.9	7.3	52.69	54	1.31	336	290	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency

Pk - Peak detector

Qp - Quasi-Peak detector

Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 3

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.742	50.13	PK2	29.4	-27	4.9	57.43	74	16.57	14	136	H
* 3.656	41.75	PK2	31.8	-26.9	5.5	52.15	74	21.85	164	392	H
* 4.573	41.45	PK2	32.2	-26.7	6	52.95	74	21.05	107	320	H
* 7.314	40.45	PK2	36.7	-26.2	6.2	57.15	74	16.85	92	314	H
* 8.227	40.77	PK2	37.1	-26.1	7.3	59.07	74	14.93	137	197	H
* 9.145	41.12	PK2	37.6	-25.9	7.4	60.22	74	13.78	44	105	H
* 2.742	48.64	PK2	29.4	-27	4.9	55.94	74	18.06	265	333	V
* 3.659	46.37	PK2	31.8	-26.9	5.4	56.67	74	17.33	186	350	V
* 4.572	45.57	PK2	32.2	-26.7	6	57.07	74	16.93	256	284	V
* 7.313	45.41	PK2	36.7	-26.2	6.2	62.11	74	11.89	91	294	V
* 8.231	45.39	PK2	37.1	-26.1	7.3	63.69	74	10.31	277	281	V
* 9.144	46.22	PK2	37.6	-25.9	7.4	65.32	74	8.68	285	365	V

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental-20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.828	63.33	PK2	27.2	-26.9	4.2	67.83	82.8	14.97	206	191	H
5.484	41.47	PK2	34.4	-26.6	6.7	55.97	82.8	26.83	151	319	H
6.4	41.86	PK2	34.8	-26.2	7.1	57.56	82.8	21.36	270	267	H
1.828	56.94	PK2	27.2	-26.9	4.2	61.44	82.8	22.7	268	338	V
5.487	45.6	PK2	34.4	-26.6	6.7	60.1	82.8	20.29	224	286	V
6.402	46.81	PK2	34.8	-26.2	7.1	62.51	82.8	14.97	149	226	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.742	44.65	MAv1	29.4	-27	4.9	51.95	54	2.05	14	136	H
* 3.657	29.03	MAv1	31.8	-26.9	5.5	39.43	54	14.57	164	392	H
* 4.57	29.23	MAv1	32.2	-26.7	6	40.73	54	13.27	107	320	H
* 7.317	27.72	MAv1	36.7	-26.2	6.2	44.42	54	9.58	92	314	H
* 8.229	28.04	MAv1	37.1	-26.1	7.3	46.34	54	7.66	137	197	H
* 9.145	28.89	MAv1	37.6	-25.9	7.4	47.99	54	6.01	44	105	H
* 2.743	40.02	MAv1	29.4	-27	4.9	47.32	54	6.68	265	333	V
* 3.658	33.78	MAv1	31.8	-26.9	5.5	44.18	54	9.82	186	350	V
* 4.573	33.31	MAv1	32.2	-26.7	6	44.81	54	9.19	256	284	V
* 7.314	32.66	MAv1	36.7	-26.2	6.2	49.36	54	4.64	91	294	V
* 8.227	32.94	MAv1	37.1	-26.1	7.3	51.24	54	2.76	277	281	V
* 9.145	33.81	MAv1	37.6	-25.9	7.4	52.91	54	1.09	285	365	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency

Pk - Peak detector

Qp - Quasi-Peak detector

Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 6

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.78	47.09	PK2	29.5	-27.1	4.8	54.29	74	19.71	31	359	H
* 3.709	41.61	PK2	32	-26.9	5.6	52.31	74	21.69	136	239	H
* 4.637	41.71	PK2	32.4	-26.6	6.1	53.61	74	20.39	345	380	H
* 7.416	40.59	PK2	36.8	-26.2	7.1	58.29	74	15.71	282	239	H
* 8.344	40.81	PK2	37.3	-26.1	7.6	59.61	74	14.39	108	208	H
* 2.782	49.22	PK2	29.5	-27.1	4.9	56.52	74	17.48	223	383	V
* 3.707	41.72	PK2	32	-26.9	5.6	52.42	74	21.58	83	133	V
* 4.635	42.21	PK2	32.4	-26.6	6.1	54.11	74	19.89	137	290	V
* 7.418	40.27	PK2	36.8	-26.2	7.1	57.97	74	16.03	31	361	V
* 8.343	41	PK2	37.3	-26.1	7.6	59.8	74	14.2	301	239	V

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental-20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.854	62.28	PK2	27.5	-26.9	4.2	67.08	83.3	16.22	158	254	H
5.564	41.5	PK2	34.4	-26.4	6.7	56.2	83.3	27.1	352	291	H
6.492	41.95	PK2	34.8	-26.4	7.3	57.65	83.3	17.93	115	247	H
9.271	41	PK2	37.8	-26	7.5	60.3	83.3	27.42	225	137	H
1.853	60.57	PK2	27.5	-26.9	4.2	65.37	83.3	24.09	59	376	V
5.561	41.18	PK2	34.4	-26.4	6.7	55.88	83.3	16.22	65	279	V
6.491	43.51	PK2	34.8	-26.4	7.3	59.21	83.3	27.1	352	255	V
9.272	41.25	PK2	37.8	-26	7.5	60.55	83.3	17.93	87	383	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.782	40.04	MAV1	29.5	-27.1	4.8	47.24	54	6.76	31	359	H
* 3.708	29.51	MAV1	32	-26.9	5.6	40.21	54	13.79	136	239	H
* 4.634	29.28	MAV1	32.4	-26.6	6.1	41.18	54	12.82	345	380	H
* 7.417	28.08	MAV1	36.8	-26.2	7.1	45.78	54	8.22	282	239	H
* 8.346	28.48	MAV1	37.3	-26.1	7.6	47.28	54	6.72	108	208	H
* 2.782	43.03	MAV1	29.5	-27.1	4.8	50.23	54	3.77	223	383	V
* 3.708	29.47	MAV1	32	-26.9	5.6	40.17	54	13.83	83	133	V
* 4.635	29.5	MAV1	32.4	-26.6	6.1	41.4	54	12.6	137	290	V
* 7.417	28.25	MAV1	36.8	-26.2	7.1	45.95	54	8.05	31	361	V
* 8.344	28.77	MAV1	37.3	-26.1	7.6	47.57	54	6.43	301	239	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency


Pk - Peak detector

Qp - Quasi-Peak detector


Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient


TEST GRAPHS – 1GHz to 10GHz (ANTENNA 3)

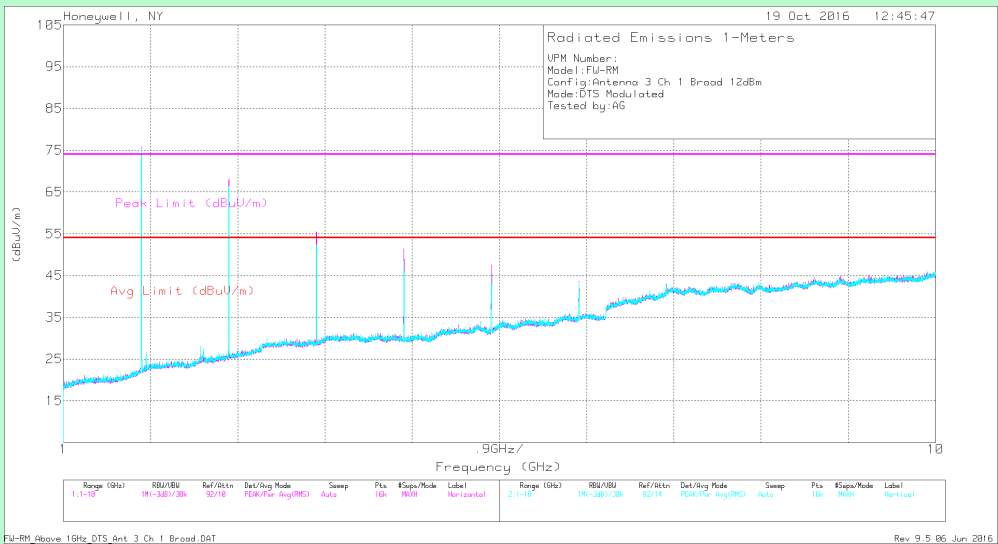

Channel 1 (902.875 MHz) – Antenna 3

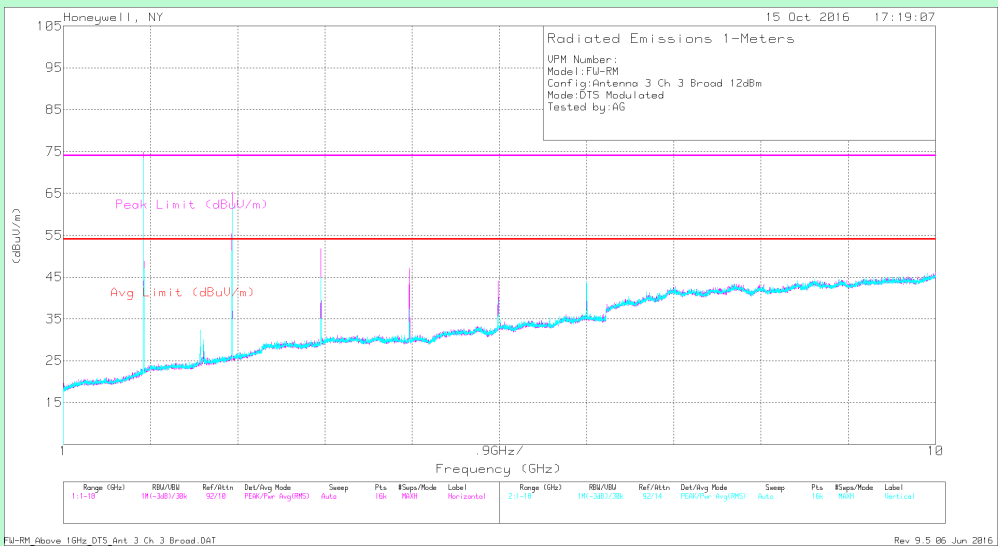

Channel 3 (914.325 MHz) – Antenna 3

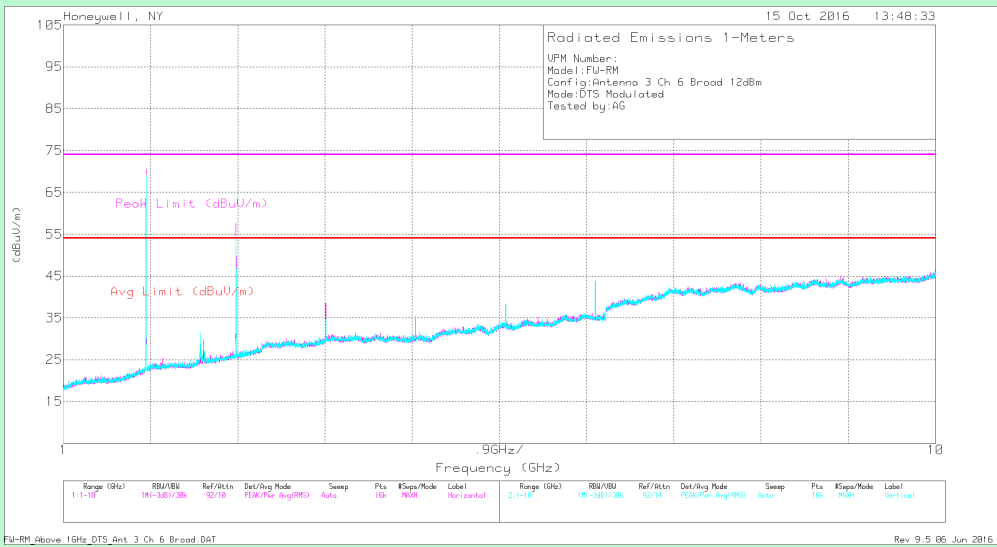

Channel 6 (927.125 MHz) – Antenna 3

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 1

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.71	50.87	PK2	29.3	-27.1	5	58.07	74	15.93	173	191	H
* 3.613	41.76	PK2	31.6	-26.8	5.4	51.96	74	22.04	185	357	H
* 4.514	41.99	PK2	32.2	-26.6	6	53.59	74	20.41	327	332	H
* 5.415	41.34	PK2	34.3	-26.7	6.4	55.34	74	18.66	348	287	H
* 8.124	41.48	PK2	37.1	-26.2	7.5	59.88	74	14.12	342	238	H
* 9.027	41.6	PK2	37.6	-25.9	7.3	60.6	74	13.4	321	114	H
* 2.708	50.7	PK2	29.3	-27.1	5	57.9	74	16.1	33	147	V
* 3.613	46.88	PK2	31.6	-26.8	5.4	57.08	74	16.92	33	147	V
* 4.516	46.2	PK2	32.2	-26.6	6	57.8	74	16.2	272	392	V
* 5.415	46.69	PK2	34.3	-26.7	6.4	60.69	74	13.31	96	307	V
* 8.127	45.63	PK2	37.1	-26.2	7.5	64.03	74	9.97	122	164	V
* 9.03	46.66	PK2	37.6	-25.9	7.3	65.66	74	8.34	134	156	V

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental-20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.805	65.64	PK2	27	-26.9	4.2	69.94	70.7	0.76	38	183	H
6.318	42.81	PK2	34.9	-26.4	7.1	58.41	70.7	12.29	111	276	H
7.222	41.43	PK2	36.3	-26.2	6.8	58.33	70.7	12.37	320	269	H
1.805	57.71	PK2	27	-26.9	4.2	62.01	70.7	8.69	264	111	V
6.321	46.8	PK2	34.9	-26.4	7.1	62.4	70.7	8.3	13	247	V
7.222	45.54	PK2	36.3	-26.2	6.8	62.44	70.7	8.26	275	235	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.708	45.65	MAv1	29.3	-27.1	5	52.85	54	1.15	173	191	H
* 3.612	29.65	MAv1	31.6	-26.8	5.4	39.85	54	14.15	185	357	H
* 4.513	30.03	MAv1	32.2	-26.6	6	41.63	54	12.37	327	332	H
* 5.416	29.29	MAv1	34.3	-26.7	6.4	43.29	54	10.71	348	287	H
* 8.124	29.36	MAv1	37.1	-26.2	7.5	47.76	54	6.24	342	238	H
* 9.031	28.85	MAv1	37.6	-25.9	7.3	47.85	54	6.15	321	114	H
* 2.708	42.62	MAv1	29.3	-27.1	5	49.82	54	4.18	33	147	V
* 3.61	33.92	MAv1	31.6	-26.8	5.4	44.12	54	9.88	33	147	V
* 4.516	33.58	MAv1	32.2	-26.6	6	45.18	54	8.82	272	392	V
* 5.419	33.67	MAv1	34.3	-26.7	6.4	47.67	54	6.33	96	307	V
* 8.125	33.17	MAv1	37.1	-26.2	7.5	51.57	54	2.43	122	164	V
* 9.03	33.68	MAv1	37.6	-25.9	7.3	52.68	54	1.32	134	156	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency

Pk - Peak detector

Qp - Quasi-Peak detector

Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 3

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.742	52.68	PK2	29.4	-27	4.9	59.98	74	14.02	337	191	H
* 3.656	42.2	PK2	31.8	-26.9	5.5	52.6	74	21.4	0	185	H
* 4.574	40.84	PK2	32.2	-26.7	6	52.34	74	21.66	226	355	H
* 7.314	40.44	PK2	36.7	-26.2	6.2	57.14	74	16.86	21	344	H
* 8.227	40.98	PK2	37.1	-26.1	7.3	59.28	74	14.72	115	265	H
* 9.142	41.64	PK2	37.6	-25.9	7.4	60.74	74	13.26	48	343	H
* 2.744	49.72	PK2	29.4	-27	4.9	57.02	74	16.98	297	274	V
* 3.659	47.06	PK2	31.8	-26.9	5.5	57.46	74	16.54	12	186	V
* 4.573	47.45	PK2	32.2	-26.7	6	58.95	74	15.05	324	102	V
* 7.316	45	PK2	36.7	-26.2	6.2	61.7	74	12.3	215	212	V
* 8.23	45.16	PK2	37.1	-26.1	7.3	63.46	74	10.54	62	169	V
* 9.144	46.35	PK2	37.6	-25.9	7.4	65.45	74	8.55	300	227	V

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental-20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.828	64.78	PK2	27.2	-26.9	4.2	69.28	85	15.72	324	188	H
5.484	42.45	PK2	34.4	-26.6	6.7	56.95	85	28.05	148	324	H
6.402	41.84	PK2	34.8	-26.2	7.1	57.54	85	27.46	255	275	H
1.829	61.28	PK2	27.3	-26.9	4.2	65.88	85	19.12	249	331	V
5.487	45.93	PK2	34.4	-26.6	6.7	60.43	85	24.57	134	303	V
6.4	46.27	PK2	34.8	-26.2	7.1	61.97	85	23.03	348	385	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.743	10.69	MAv1	29.4	-27	9	22.09	54	31.91	360	347	H
* 3.658	30.3	MAv1	31.8	-26.9	5.5	40.7	54	13.3	0	185	H
* 4.57	28.68	MAv1	32.2	-26.7	6	40.18	54	13.82	226	355	H
* 7.313	27.56	MAv1	36.7	-26.2	6.2	44.26	54	9.74	21	344	H
* 8.227	28.56	MAv1	37.1	-26.1	7.3	46.86	54	7.14	115	265	H
* 9.142	28.85	MAv1	37.6	-25.9	7.4	47.95	54	6.05	48	343	H
* 2.742	41.69	MAv1	29.4	-27	4.9	48.99	54	5.01	297	274	V
* 3.659	34.14	MAv1	31.8	-26.9	5.4	44.44	54	9.56	12	186	V
* 4.573	33.82	MAv1	32.2	-26.7	6	45.32	54	8.68	324	102	V
* 7.315	32.49	MAv1	36.7	-26.2	6.2	49.19	54	4.81	215	212	V
* 8.23	32.76	MAv1	37.1	-26.1	7.3	51.06	54	2.94	62	169	V
* 9.143	33.84	MAv1	37.6	-25.9	7.4	52.94	54	1.06	300	227	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency

Pk - Peak detector

Qp - Quasi-Peak detector

Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient

TEST RESULT – 1 GHz to 10 GHz – CHANNEL 6

PEAK DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.781	48.66	PK2	29.5	-27.1	9.1	60.16	74	13.84	86	134	H
* 3.71	34.12	PK2	32	-26.9	10.6	49.82	74	24.18	202	113	H
* 4.635	32.05	PK2	32.4	-26.6	11.8	49.65	74	24.35	151	135	H
* 7.418	31.46	PK2	36.8	-26.2	15.2	57.26	74	16.74	358	139	H
* 8.344	30.47	PK2	37.3	-26.1	16.2	57.87	74	16.13	10	171	H
* 2.78	46.26	PK2	29.5	-27.1	9.1	57.76	74	16.24	327	110	V
* 3.71	37.29	PK2	32	-26.9	10.6	52.99	74	21.01	18	133	V
* 4.635	32.35	PK2	32.4	-26.6	11.8	49.95	74	24.05	43	311	V
* 7.416	31.9	PK2	36.8	-26.2	15.2	57.7	74	16.3	110	357	V
* 8.343	31.46	PK2	37.3	-26.1	16.2	58.86	74	15.14	18	298	V
* 2.781	48.66	PK2	29.5	-27.1	9.1	60.16	74	13.84	86	134	H

PEAK DATA – NON RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Peak Limit [Fundamental-20dBc] (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.855	51.06	PK2	27.5	-26.9	7.4	59.06	84.3	25.24	273	102	H
5.561	30.07	PK2	34.4	-26.4	13.1	51.17	84.3	33.13	223	156	H
6.488	33.82	PK2	34.8	-26.4	14.2	56.42	84.3	27.88	299	271	H
9.271	29.86	PK2	37.8	-26	17.1	58.76	84.3	25.54	177	364	H
1.854	54.99	PK2	27.5	-26.9	7.4	62.99	84.3	21.31	222	120	V
5.565	32.67	PK2	34.4	-26.4	13.1	53.77	84.3	30.53	350	293	V
6.488	36.84	PK2	34.8	-26.4	14.2	59.44	84.3	24.86	0	264	V
9.271	31.74	PK2	37.8	-26	17.1	60.64	84.3	23.66	195	164	V

AVERAGE DATA – RESTRICTED BAND

Frequency (GHz)	Meter Reading (dBuV)	Det	AF [dB/m]	Preamp [dB]	SMA1 [dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.781	41.1	MAv1	29.5	-27.1	9.1	52.6	54	1.4	86	134	H
* 3.707	25.85	MAv1	32	-26.9	10.6	41.55	54	12.45	202	113	H
* 4.634	22.13	MAv1	32.4	-26.6	11.8	39.73	54	14.27	151	135	H
* 7.417	21.41	MAv1	36.8	-26.2	15.2	47.21	54	6.79	358	139	H
* 8.345	21.47	MAv1	37.3	-26.1	16.2	48.87	54	5.13	10	171	H
* 2.781	38.38	MAv1	29.5	-27.1	9.1	49.88	54	4.12	327	110	V
* 3.708	27.35	MAv1	32	-26.9	10.6	43.05	54	10.95	18	133	V
* 4.634	23.78	MAv1	32.4	-26.6	11.8	41.38	54	12.62	43	311	V
* 7.417	21.32	MAv1	36.8	-26.2	15.2	47.12	54	6.88	110	357	V
* 8.342	21.88	MAv1	37.3	-26.1	16.2	49.28	54	4.72	18	298	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates intended frequency

Pk - Peak detector

Qp - Quasi-Peak detector

Prescans performed in a pre-compliance chamber. Final measurements performed on an OATS.

Emissions shown in the plot are related to the chamber ambient

3.6 Effective Isotropic Radiated Power

EUT Nomenclature	Wireless Relay Module	Test Request No.	20294-1
Model No.	FW-RM	Serial No.	MEL-159
Test Start Date	2017-05-30	Temperature (°C)	0°C-35°C
Test End Date	2017-05-30	Humidity RH (%)	10%RH-90%RH
Tested By	Chris Locke	Pressure (mbar)	NR
Input Voltage / Freq.	3.3 Vdc		
Operating Mode	Refer Page 5 for Operating Mode Table		
Test configuration	Refer Page 5 for Test Configuration Table		
Deviation from Std.	NA		
Comment	NA		

MAXIMUM OPERATING FREQUENCY

902 MHz to 928 MHz

TEST PARAMETERS

Antenna Height	1m to 4m	Turntable Rotation	NA
Applicable Standard	ANSI C63.10 – 2013	Test Method	KDB 412172 v01r01
Equipment Class	NA	Measurement Distance	3m

TEST EQUIPMENT

Y/N	Equipment	Make	Model	Sl. No.	Cal Due Date
Y	Spectrum Analyzer	Rohde & Schwarz	FSW26	103125	2018-02-14
Y	Bilog Antenna	Sunol	JB6	A012816	2018-03-09
Y	Log Periodic Antenna	A.H.Systems	SAS-200	365TX	2018-02-02
Y	Preamplifier (Below 1GHz)	HP	8447D	2443AUF555	NA
Y	Signal Generator	Agilent	N5183A (MXG)	MY50140667	2018-06-02

Note: Switch ON /OFF the Internal Preamplifier based on carrier level and or noise floor without overloading the receiver

TEST RESULT – EIRP

ANTENNA	Frequency (MHz)	Polarity	Fundamental Target (dBuV/m)	Signal Generator Level (dBm)	EIRP (dBm)
1	902.875	H	85.17	-6.8	-6
1	902.875	V	72.46	-18.9	-18.1
1	914.325	H	82.85	-8	-7.2
1	914.325	V	74.71	-15.75	-14.95
1	927.125	H	96.05	6.4	7.2
1	927.125	V	89.05	0.1	0.9
2	902.875	H	85.26	-6.7	-5.9
2	902.875	V	75.03	-16.2	-15.4
2	914.325	H	97.4	6.6	7.4
2	914.325	V	89.2	-1.2	-0.4
2	927.125	H	97.94	8.3	9.1
2	927.125	V	86.47	-2.5	-1.7
3	902.875	H	85.83	-6.1	-5.3
3	902.875	V	78.02	-13.2	-12.4
3	914.325	H	99.58	8.8	9.6
3	914.325	V	92.29	1.9	2.7
3	927.125	H	98.83	9.2	10
3	927.125	V	80.82	-8.2	-7.4

Note: EIRP=Signal Generator Level (dBm)+ Substitute Antenna Gain(dBi)+Cable loss(dB)
Substitute Antenna Gain =5.4dBi
Cable Loss =4.6dB

TEST SETUP PHOTOGRAPH

Refer Annexure -1

EIRP Test Setup

Annexure – 1