

## TEST REPORT

Test report no.: 1-5825/13-14-06-A



Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-01

### Testing laboratory

**CETECOM ICT Services GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom.com>  
e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01. Area of Testing: Radio/Satellite Communications

### Applicant

**YASKAWA INFORMATION SYSTEMS Corporation**  
5-15 Higashi-oji-machi, Yahatanishi-ku, Kitakyushu  
806-0037 Fukuoka / JAPAN  
Fax: 0936226177  
Contact: masafumi yamashita  
e-mail: [myamasit@ysknet.co.jp](mailto:myamasit@ysknet.co.jp)  
Phone: 0936226162

### Manufacturer

**YASKAWA CONTROLS CO., LTD**  
2-13-1 Nishimiyaichi, Yukuhashi  
824-8511 Fukuoka / JAPAN

### Test standard/s

|                   |                                                                                                                                                          |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 47 CFR Part 22    | Title 47 of the Code of Federal Regulations; Chapter I; Part 22 - Public mobile services                                                                 |
| 47 CFR Part 24    | Title 47 of the Code of Federal Regulations; Chapter I; Part 24 - Personal communications services                                                       |
| RSS - 132 Issue 3 | Spectrum Management and Telecommunications Radio Standards Specification - Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz |

For further applied test standards please refer to section 3 of this test report.

### Test Item

|                    |                                                                                             |
|--------------------|---------------------------------------------------------------------------------------------|
| Kind of test item: | Communication Adapter                                                                       |
| Model name:        | GWA-3G10                                                                                    |
| FCC ID:            | AURMMLINK-3G                                                                                |
| IC:                | 11425A-MMLINK3G                                                                             |
| Frequency:         | GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz<br>UMTS: 826.4 – 846.6 MHz, 1852.4 – 1907.6 MHz |
| Technology tested: | GPRS/EDGE, UMTS                                                                             |
| Antenna:           | External antenna                                                                            |
| Power supply:      | 5.00 V DC by external power supply                                                          |
| Temperature range: | -20°C to +55°C                                                                              |



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorised:

Marco Bertolino  
Testing Manager

### Test performed:

Andreas Luckenbill  
Expert

## 1 Table of contents

|         |                                                     |    |
|---------|-----------------------------------------------------|----|
| 1       | Table of contents .....                             | 2  |
| 2       | General information .....                           | 4  |
| 2.1     | Notes and disclaimer .....                          | 4  |
| 2.2     | Application details .....                           | 4  |
| 3       | Test standard/s .....                               | 4  |
| 4       | Test environment .....                              | 5  |
| 5       | Test item .....                                     | 5  |
| 5.1     | Additional information .....                        | 5  |
| 6       | Test laboratories sub-contracted .....              | 5  |
| 7       | Summary of measurement results .....                | 6  |
| 7.1     | GSM 850 .....                                       | 6  |
| 7.2     | PCS 1900 .....                                      | 6  |
| 7.3     | UMTS band II .....                                  | 7  |
| 7.4     | UMTS band V .....                                   | 7  |
| 8       | RF measurements .....                               | 8  |
| 8.1     | Description of test setup .....                     | 8  |
| 8.1.1   | Radiated measurements .....                         | 8  |
| 8.2     | Results GSM 850 .....                               | 10 |
| 8.2.1   | RF output power .....                               | 10 |
| 8.2.2   | Frequency stability .....                           | 12 |
| 8.2.3   | Spurious emissions radiated .....                   | 13 |
| 8.2.4   | Spurious emissions conducted .....                  | 16 |
| 8.2.5   | Block edge compliance .....                         | 16 |
| 8.2.6   | Occupied bandwidth .....                            | 16 |
| 8.3     | Results PCS 1900 .....                              | 17 |
| 8.3.1   | RF output power .....                               | 17 |
| 8.3.2   | Frequency stability .....                           | 19 |
| 8.3.3   | Spurious emissions radiated .....                   | 20 |
| 8.3.4   | Spurious emissions conducted .....                  | 24 |
| 8.3.5   | Block edge compliance .....                         | 24 |
| 8.3.6   | Occupied bandwidth .....                            | 24 |
| 8.4     | Results UMTS band II .....                          | 25 |
| 8.4.1   | RF output power .....                               | 25 |
| 8.4.2   | Frequency stability .....                           | 26 |
| 8.4.3   | Spurious emissions radiated .....                   | 27 |
| 8.4.4   | Spurious emissions conducted .....                  | 31 |
| 8.4.5   | Block edge compliance .....                         | 31 |
| 8.4.6   | Occupied bandwidth .....                            | 31 |
| 8.5     | Results UMTS band V .....                           | 32 |
| 8.5.1   | RF output power .....                               | 32 |
| 8.5.2   | Frequency stability .....                           | 33 |
| 8.5.3   | Spurious emissions radiated .....                   | 34 |
| 8.5.4   | Spurious emissions conducted .....                  | 37 |
| 8.5.5   | Block edge compliance .....                         | 37 |
| 8.5.6   | Occupied bandwidth .....                            | 37 |
| 9       | Test equipment and ancillaries used for tests ..... | 38 |
| 10      | Observations .....                                  | 39 |
| Annex A | Document history .....                              | 40 |

|         |                                 |    |
|---------|---------------------------------|----|
| Annex B | Further information.....        | 40 |
| Annex C | Accreditation Certificate ..... | 41 |

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

|                                    |            |
|------------------------------------|------------|
| Date of receipt of order:          | 2013-07-30 |
| Date of receipt of test item:      | 2013-09-10 |
| Start of test:                     | 2013-09-11 |
| End of test:                       | 2013-09-12 |
| Person(s) present during the test: | -/-        |

## 3 Test standard/s

| Test standard     | Date       | Test standard description                                                                                                                                |
|-------------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 47 CFR Part 22    | 01.10.2012 | Title 47 of the Code of Federal Regulations; Chapter I; Part 22 - Public mobile services                                                                 |
| 47 CFR Part 24    | 01.10.2012 | Title 47 of the Code of Federal Regulations; Chapter I; Part 24 - Personal communications services                                                       |
| RSS - 132 Issue 3 | 01.01.2013 | Spectrum Management and Telecommunications Radio Standards Specification - Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz |
| RSS - 133 Issue 6 | 01.01.2013 | Spectrum Management and Telecommunications Policy - Radio Standards Specifications, 2 GHz Personal Communication Services                                |

#### 4 Test environment

|                            |           |                                       |
|----------------------------|-----------|---------------------------------------|
| Temperature:               | $T_{nom}$ | +22 °C during room temperature tests  |
|                            | $T_{max}$ | +55 °C during high temperature tests  |
|                            | $T_{min}$ | -20 °C during low temperature tests   |
| Relative humidity content: |           | 52 %                                  |
| Barometric pressure:       |           | not relevant for this kind of testing |
| Power supply:              | $V_{nom}$ | 5.00 V DC by external power supply    |
|                            | $V_{max}$ | 5.25 V                                |
|                            | $V_{min}$ | 4.75 V                                |

#### 5 Test item

|                      |   |                                                                                             |
|----------------------|---|---------------------------------------------------------------------------------------------|
| Kind of test item    | : | Communication Adapter                                                                       |
| Product name         | : | GWA-3G10                                                                                    |
|                      |   |                                                                                             |
| S/N serial number    | : | Rad. F01375A01390005                                                                        |
| HW hardware status   | : | 1.00                                                                                        |
| SW software status   | : | 1.00                                                                                        |
| Frequency band [MHz] | : | GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz<br>UMTS: 826.4 – 846.6 MHz, 1852.4 – 1907.6 MHz |
| Type of modulation   | : | GMSK, 8-PSK, QPSK                                                                           |
| Antenna              | : | External antenna                                                                            |
| Power supply         | : | 5.00 V DC by external power supply                                                          |
| Temperature range    | : | -20°C to +55 °C                                                                             |

##### 5.1 Additional information

Test setup- and EUT-photos are included in test report

1-5825/13-14-01\_AnnexA  
1-5825/13-14-01\_AnnexB  
1-5825/13-14-01\_AnnexC

#### 6 Test laboratories sub-contracted

None

## 7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

| TC identifier | Description                         | verdict | date       | Remark                                     |
|---------------|-------------------------------------|---------|------------|--------------------------------------------|
| RF-Testing    | CFR Part 22, 24<br>RSS 132, RSS 133 | passed  | 2014-02-17 | Tests according to manufacturer test plan! |

### 7.1 GSM 850

| Test Case                    | temperature conditions | power source voltages | Pass                                | Fail                     | NA                       | NP                                  | Remark |
|------------------------------|------------------------|-----------------------|-------------------------------------|--------------------------|--------------------------|-------------------------------------|--------|
| RF Output Power              | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-    |
| Frequency Stability          | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Spurious Emissions Radiated  | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-    |
| Spurious Emissions Conducted | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Block Edge Compliance        | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Occupied Bandwidth           | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |

**Note:** NA = Not applicable; NP = Not performed

### 7.2 PCS 1900

| Test Case                    | temperature conditions | power source voltages | Pass                                | Fail                     | NA                       | NP                                  | Remark |
|------------------------------|------------------------|-----------------------|-------------------------------------|--------------------------|--------------------------|-------------------------------------|--------|
| RF Output Power              | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-    |
| Frequency Stability          | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Spurious Emissions Radiated  | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-    |
| Spurious Emissions Conducted | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Block Edge Compliance        | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Occupied Bandwidth           | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |

**Note:** NA = Not applicable; NP = Not performed

### 7.3 UMTS band II

| Test Case                    | temperature conditions | power source voltages | Pass                                | Fail                     | NA                       | NP                                  | Remark |
|------------------------------|------------------------|-----------------------|-------------------------------------|--------------------------|--------------------------|-------------------------------------|--------|
| RF Output Power              | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-    |
| Frequency Stability          | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Spurious Emissions Radiated  | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-    |
| Spurious Emissions Conducted | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Block Edge Compliance        | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Occupied Bandwidth           | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |

**Note:** NA = Not applicable; NP = Not performed

### 7.4 UMTS band V

| Test Case                    | temperature conditions | power source voltages | Pass                                | Fail                     | NA                       | NP                                  | Remark |
|------------------------------|------------------------|-----------------------|-------------------------------------|--------------------------|--------------------------|-------------------------------------|--------|
| RF Output Power              | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-    |
| Frequency Stability          | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Spurious Emissions Radiated  | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | -/-    |
| Spurious Emissions Conducted | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Block Edge Compliance        | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |
| Occupied Bandwidth           | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | -/-    |

**Note:** NA = Not applicable; NP = Not performed

## 8 RF measurements


### 8.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

#### 8.1.1 Radiated measurements

The radiated emissions from the EUT are performed in a semi anechoic chamber. The EUT is placed on a conductive turntable and powered with nominal voltage. The signalling is performed either from outside the chamber with a signalling unit (AP or other) by air link using a signalling antenna or directly by special test software from the customer.

Semi anechoic chamber

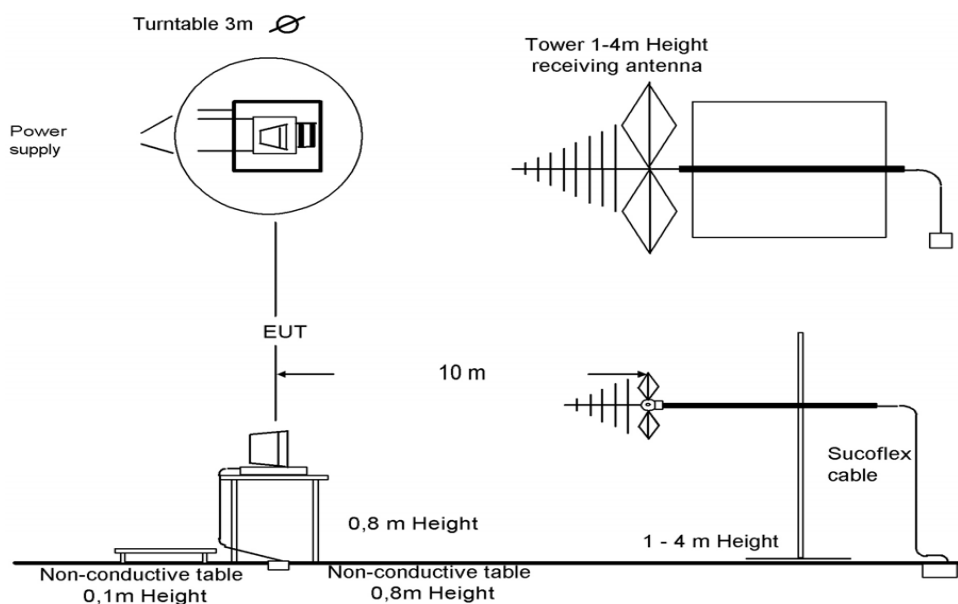

Picture 1: Diagram radiated measurements

|                 |                     |
|-----------------|---------------------|
| 9 kHz - 30 MHz: | active loop antenna |
| 30 MHz – 1 GHz: | tri-log antenna     |
| > 1 GHz:        | horn antenna        |

## 8.2 RSP100 test report cover sheet / performance test data

|                                             |          |                                                                                             |           |            |       |
|---------------------------------------------|----------|---------------------------------------------------------------------------------------------|-----------|------------|-------|
| Test Report Number                          | :        | 1-5825/13-14-06-A<br>MDE_CINTE_1107_FCCb<br>MDE_CINTE_1107_FCCc                             |           |            |       |
| Equipment Model Number                      | :        | GWA-3G10                                                                                    |           |            |       |
| Certification Number                        | :        | 11425A-MMLINK3G                                                                             |           |            |       |
| Manufacturer (complete Address)             | :        | YASKAWA CONTROLS CO., LTD<br>2-13-1 Nishimiyaichi, Yukuhashi<br>824-8511 Fukuoka / JAPAN    |           |            |       |
| Tested to radio standards specification no. | :        | RSS - 132, RSS - 133                                                                        |           |            |       |
| Open Area Test Site IC No.                  | :        | IC 3462C-1                                                                                  |           |            |       |
| Frequency Range                             | :        | GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz<br>UMTS: 826.4 – 846.6 MHz, 1852.4 – 1907.6 MHz |           |            |       |
| GPS receiver turned                         | :        | Not Available                                                                               |           |            |       |
| RF-power [dBm] (max.)                       | :        | Band                                                                                        | Conducted | ERP / EIRP | Mode  |
|                                             |          | GSM850                                                                                      | 33.6 dBm  | 31.3 dBm   | GMSK  |
|                                             |          |                                                                                             | 26.9 dBm  | 25.1 dBm   | 8-PSK |
|                                             |          | GSM1900                                                                                     | 30.7 dBm  | 27.6 dBm   | GMSK  |
|                                             |          |                                                                                             | 26.2 dBm  | 23.6 dBm   | 8-PSK |
|                                             |          | WCDMA 850                                                                                   | 23.1 dBm  | 21.0 dBm   | QPSK  |
| WCDMA 1900                                  | 23.2 dBm | 21.0 dBm                                                                                    | QPSK      |            |       |
| Occupied bandwidth (99%-BW) [kHz]           | :        | GSM850                                                                                      | 247       |            | GMSK  |
|                                             |          |                                                                                             | 247       |            | 8-PSK |
|                                             |          | GSM1900                                                                                     | 249       |            | GMSK  |
|                                             |          |                                                                                             | 251       |            | 8-PSK |
|                                             |          | WCDMA 850                                                                                   | 4148      |            | QPSK  |
|                                             |          | WCDMA 1900                                                                                  | 4148      |            | QPSK  |
| Type of modulation                          | :        | GMSK; 8-PSK; QPSK                                                                           |           |            |       |
| Emission Designator (TRC-43)                | :        | GSM850                                                                                      | 247KGXW   |            | GMSK  |
|                                             |          |                                                                                             | 247KG7W   |            | 8-PSK |
|                                             |          | GSM1900                                                                                     | 249KGXW   |            | GMSK  |
|                                             |          |                                                                                             | 251KG7W   |            | 8-PSK |
|                                             |          | WCDMA 850                                                                                   | 4M15F9W   |            | QPSK  |
|                                             |          | WCDMA 1900                                                                                  | 4M15F9W   |            | QPSK  |
| Antenna Information                         | :        | External antenna                                                                            |           |            |       |
| Transmitter Spurious (worst case) [dBm]     | :        | -58 dBm @ 1.67 GHz                                                                          |           |            |       |

### ATTESTATION:

### DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

### Laboratory Manager:

2014-02-17

Andreas Luckenbill

Date

Name

Signature

### 8.3 Results GSM 850

All GSM-band measurements are done in GSM mode only (circuit switched).

All relevant tests have been repeated using 8-PSK modulation if EDGE mode is supported. All tests were performed with one timeslot in uplink activated and one timeslot in downlink activated. For each mode the highest output power was determined and used.

#### 8.3.1 RF output power

##### Description:

This paragraph contains average power, peak output power and ERP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

##### Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

| Measurement parameters |                               |
|------------------------|-------------------------------|
| Detector:              | Peak and RMS (Power in Burst) |
| Sweep time:            | Auto                          |
| Video bandwidth:       | 1 MHz                         |
| Resolution bandwidth:  | 1 MHz                         |
| Span:                  | Zero Span                     |
| Trace-Mode:            | Max Hold                      |

##### Limits:

| FCC                                                                                                                                                               | IC      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| CFR Part 22.913<br>CFR Part 2.1046                                                                                                                                | RSS 132 |
| Nominal Peak Output Power                                                                                                                                         |         |
| +38.45 dBm<br>In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. |         |

**Results:**

| Output Power (radiated) GMSK mode |                                  |
|-----------------------------------|----------------------------------|
| Frequency (MHz)                   | Average Output Power (dBm) - ERP |
| 824.2                             | 31.3                             |
| 836.4                             | 31.1                             |
| 848.8                             | 31.0                             |
| Measurement uncertainty           | ± 2.0 dB                         |

| Output Power (radiated) 8-PSK mode |                                  |
|------------------------------------|----------------------------------|
| Frequency (MHz)                    | Average Output Power (dBm) - ERP |
| 824.2                              | 24.9                             |
| 836.4                              | 25.1                             |
| 848.8                              | 25.0                             |
| Measurement uncertainty            | ± 2.0 dB                         |

**Result:** **Passed**

### 8.3.2 Frequency stability

Not performed! Only measurements according manufacturers test plan!

### 8.3.3 Spurious emissions radiated

#### Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the GSM-850 band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load (if possible).
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- e) Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

#### Measurement:

| Measurement parameters |                                            |
|------------------------|--------------------------------------------|
| Detector:              | Peak                                       |
| Sweep time:            | 2 sec.                                     |
| Video bandwidth:       | Below 1 GHz: 100 kHz<br>Above 1 GHz: 1 MHz |
| Resolution bandwidth:  | Below 1 GHz: 100 kHz<br>Above 1 GHz: 1 MHz |
| Span:                  | 100 MHz Steps                              |
| Trace-Mode:            | Max Hold                                   |

#### Limits:

| FCC                                                      | IC      |
|----------------------------------------------------------|---------|
| CFR Part 22.917<br>CFR Part 2.1053                       | RSS 132 |
| Spurious Emissions Radiated                              |         |
| Attenuation $\geq 43 + 10\log(P)$<br>(P, Power in Watts) |         |
| -13 dBm                                                  |         |

**Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the GSM-850 band (824.2 MHz, 836.4 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

| SPURIOUS EMISSION LEVEL (dBm) |                        |                |          |                        |                |          |                        |                |
|-------------------------------|------------------------|----------------|----------|------------------------|----------------|----------|------------------------|----------------|
| Harmonic                      | Ch. 128<br>Freq. (MHz) | Level<br>[dBm] | Harmonic | Ch. 189<br>Freq. (MHz) | Level<br>[dBm] | Harmonic | Ch. 251<br>Freq. (MHz) | Level<br>[dBm] |
| 2                             | 1648.4                 | -              | 2        | 1672.8                 | -              | 2        | 1697.6                 | -              |
| 3                             | 2472.6                 | -              | 3        | 2509.2                 | -              | 3        | 2546.4                 | -              |
| 4                             | 3296.8                 | -              | 4        | 3345.6                 | -              | 4        | 3395.2                 | -              |
| 5                             | 4121.0                 | -              | 5        | 4182.0                 | -              | 5        | 4244.0                 | -              |
| 6                             | 4945.2                 | -              | 6        | 5018.4                 | -              | 6        | 5092.8                 | -              |
| 7                             | 5769.4                 | -              | 7        | 5854.8                 | -              | 7        | 5941.6                 | -              |
| 8                             | 6593.6                 | -              | 8        | 6691.2                 | -              | 8        | 6790.4                 | -              |
| 9                             | 7417.8                 | -              | 9        | 7527.6                 | -              | 9        | 7639.2                 | -              |
| 10                            | 8242.0                 | -              | 10       | 8364.0                 | -              | 10       | 8488.0                 | -              |
| Measurement uncertainty       |                        |                |          |                        | ± 3dB          |          |                        |                |


**Result:** Passed

**Plots:**

**Plot 1:** Channel 189 (Traffic mode up to 30 MHz)

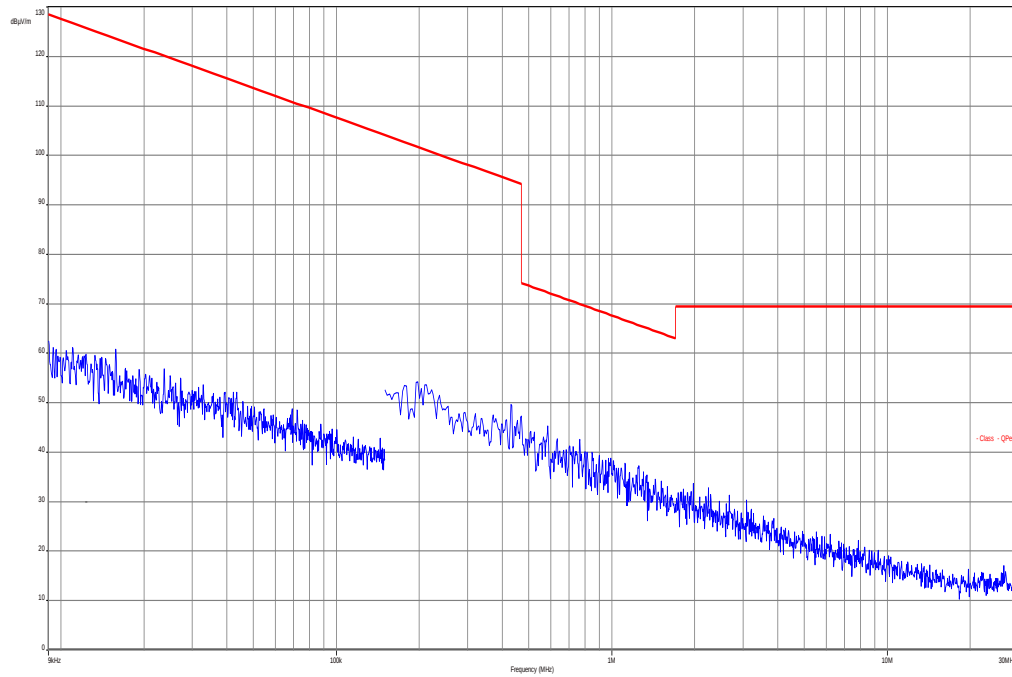

**Plot 2:** Channel 189 (30 MHz – 12.75 GHz)

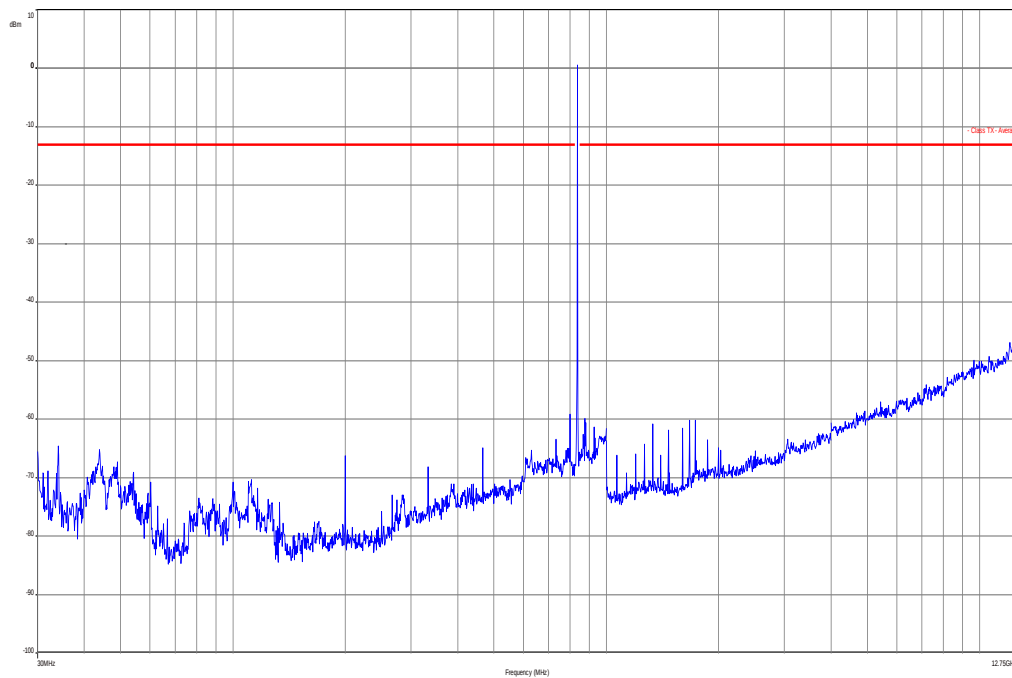

#### **8.3.4 Spurious emissions conducted**

Not performed! Only measurements according manufacturers test plan!

#### **8.3.5 Block edge compliance**

Not performed! Only measurements according manufacturers test plan!

#### **8.3.6 Occupied bandwidth**

Not performed! Only measurements according manufacturers test plan!

## 8.4 Results PCS 1900

All GSM-band measurements are done in GSM mode only (circuit switched).

All relevant tests have been repeated using 8-PSK modulation if EDGE mode is supported. All tests were performed with one timeslot in uplink activated and one timeslot in downlink activated. For each mode the highest output power was determined and used.

### 8.4.1 RF output power

#### Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

| Measurement parameters |                               |
|------------------------|-------------------------------|
| Detector:              | Peak and RMS (Power in Burst) |
| Sweep time:            | Auto                          |
| Video bandwidth:       | 1 MHz                         |
| Resolution bandwidth:  | 1 MHz                         |
| Span:                  | Zero Span                     |
| Trace-Mode:            | Max Hold                      |

#### Limits:

| FCC                                                                                                                                                               | IC      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| CFR Part 24.232<br>CFR Part 2.1046                                                                                                                                | RSS 133 |
| Nominal Peak Output Power                                                                                                                                         |         |
| +33.00 dBm<br>In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. |         |

**Results:**

| Output Power (radiated) GMSK mode |                                   |
|-----------------------------------|-----------------------------------|
| Frequency (MHz)                   | Average Output Power (dBm) - EIRP |
| 1850.2                            | 26.6                              |
| 1880.0                            | 27.6                              |
| 1909.8                            | 26.4                              |
| Measurement uncertainty           | ± 2.0 dB                          |

| Output Power (radiated) 8-PSK mode |                                   |
|------------------------------------|-----------------------------------|
| Frequency (MHz)                    | Average Output Power (dBm) - EIRP |
| 1850.2                             | 22.5                              |
| 1880.0                             | 23.6                              |
| 1909.8                             | 22.4                              |
| Measurement uncertainty            | ± 2.0 dB                          |

**Result:** **Passed**

#### 8.4.2 Frequency stability

Not performed! Only measurements according manufacturers test plan!

### 8.4.3 Spurious emissions radiated

#### Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the PCS1900 band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- The antenna output was terminated in a 50 ohm load (if possible).
- A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

#### Measurement:

| Measurement parameters |                                            |
|------------------------|--------------------------------------------|
| Detector:              | Peak                                       |
| Sweep time:            | 2 sec.                                     |
| Video bandwidth:       | Below 1 GHz: 100 kHz<br>Above 1 GHz: 1 MHz |
| Resolution bandwidth:  | Below 1 GHz: 100 kHz<br>Above 1 GHz: 1 MHz |
| Span:                  | 100 MHz Steps                              |
| Trace-Mode:            | Max Hold                                   |

#### Limits:

| FCC                                                      | IC      |
|----------------------------------------------------------|---------|
| CFR Part 24.238<br>CFR Part 2.1053                       | RSS 133 |
| Spurious Emissions Radiated                              |         |
| Attenuation $\geq 43 + 10\log(P)$<br>(P, Power in Watts) |         |
| -13 dBm                                                  |         |

**Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880.0 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.


As can be seen from this data, the emissions from the test item were within the specification limit.

| SPURIOUS EMISSION LEVEL (dBm) |                        |                |          |                        |                |          |                        |                |
|-------------------------------|------------------------|----------------|----------|------------------------|----------------|----------|------------------------|----------------|
| Harmonic                      | Ch. 512<br>Freq. (MHz) | Level<br>[dBm] | Harmonic | Ch. 661<br>Freq. (MHz) | Level<br>[dBm] | Harmonic | Ch. 810<br>Freq. (MHz) | Level<br>[dBm] |
| 2                             | 3700.4                 | -              | 2        | 3760.0                 | -              | 2        | 3819.6                 | -              |
| 3                             | 5550.6                 | -              | 3        | 5640.0                 | -              | 3        | 5729.4                 | -              |
| 4                             | 7400.8                 | -              | 4        | 7520.0                 | -              | 4        | 7639.2                 | -              |
| 5                             | 9251.0                 | -              | 5        | 9400.0                 | -              | 5        | 9549.0                 | -              |
| 6                             | 11101.2                | -              | 6        | 11280.0                | -              | 6        | 11458.8                | -              |
| 7                             | 12951.4                | -              | 7        | 13160.0                | -              | 7        | 13368.6                | -              |
| 8                             | 14801.6                | -              | 8        | 15040.0                | -              | 8        | 15278.4                | -              |
| 9                             | 16651.8                | -              | 9        | 16920.0                | -              | 9        | 17188.2                | -              |
| 10                            | 18502.0                | -              | 10       | 18800.0                | -              | 10       | 19098.0                | -              |
| Measurement uncertainty       |                        |                |          |                        | ± 3dB          |          |                        |                |


**Result:** Passed

**Plots:**

**Plot 1: Channel 661 (Traffic mode up to 30 MHz)**

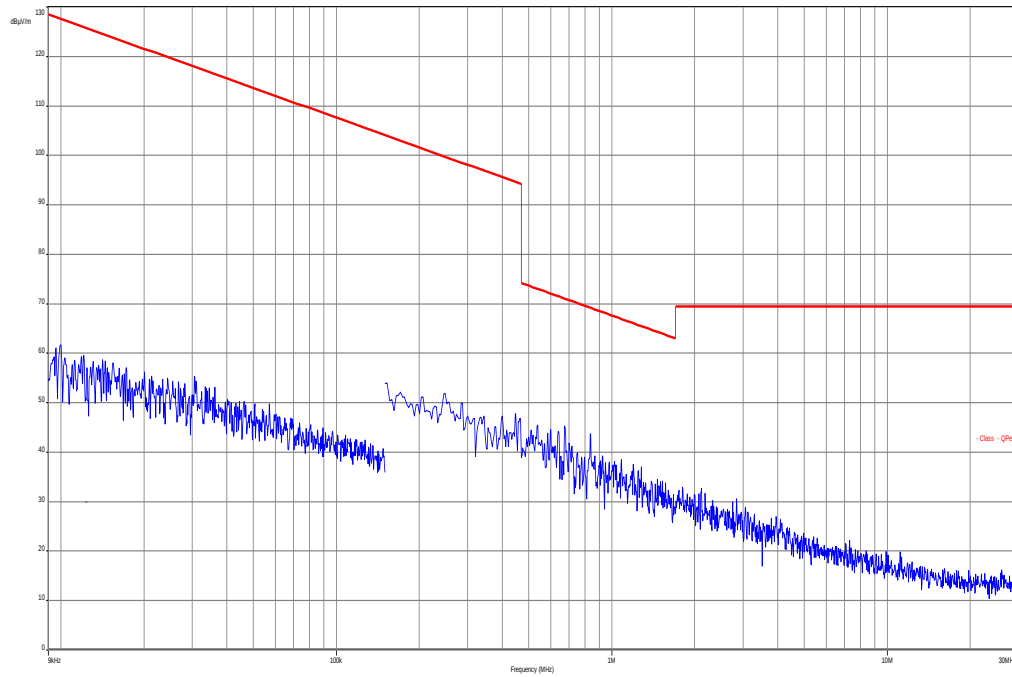


**Plot 2: Channel 661 (30 MHz – 12.75 GHz)**

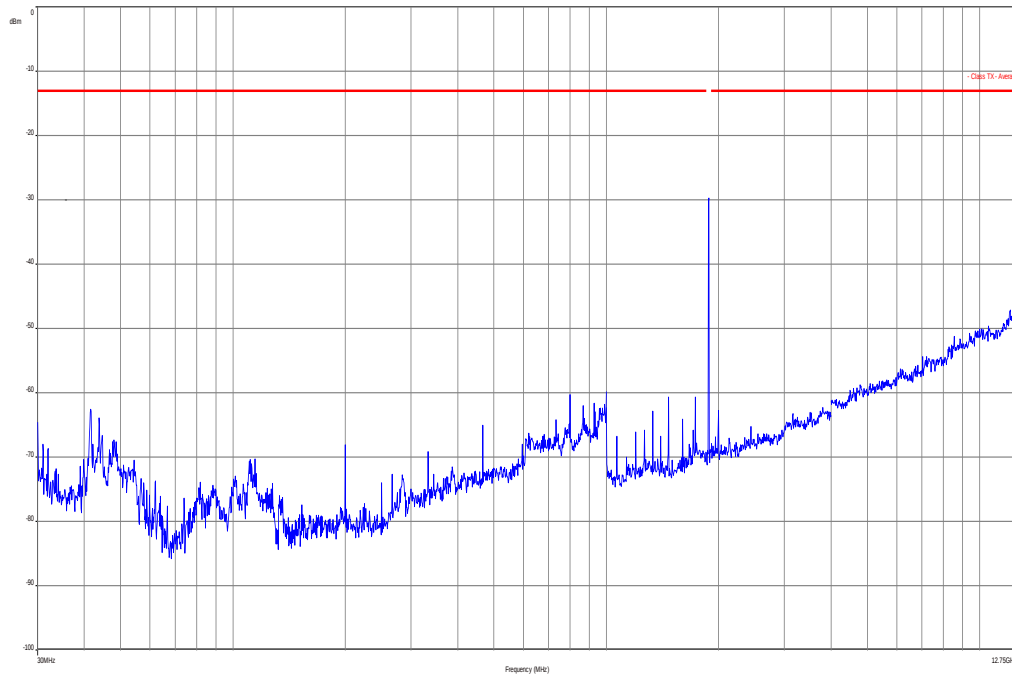


*Carrier notched with 1.9 GHz rejection filter*

Plot 3: Channel 661 (12.75 GHz - 18 GHz)

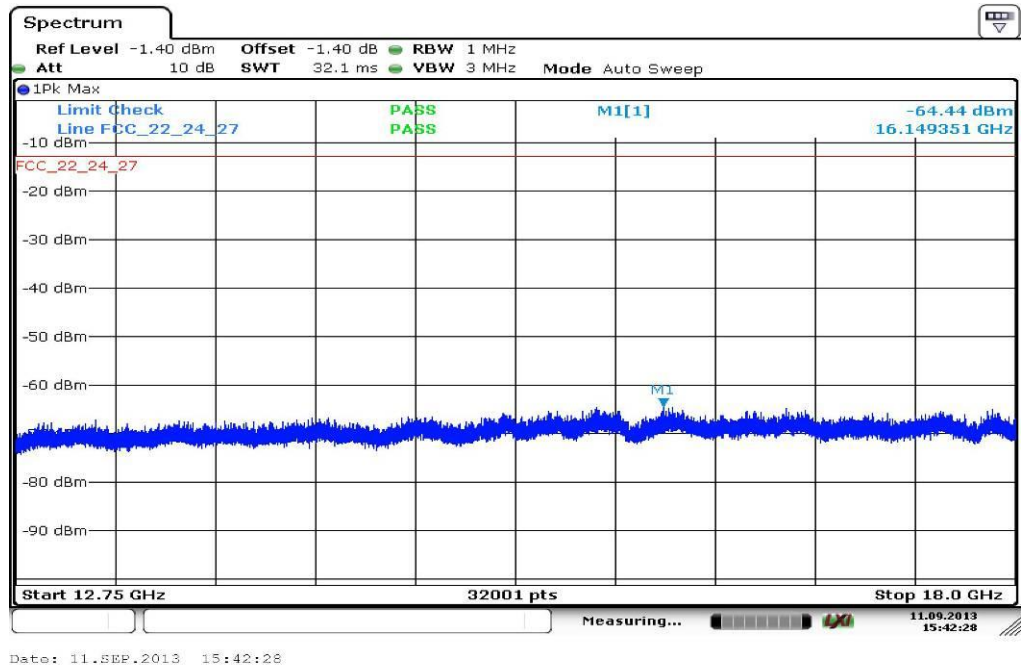

Plot 4: Channel 661 (18 GHz - 26 GHz)

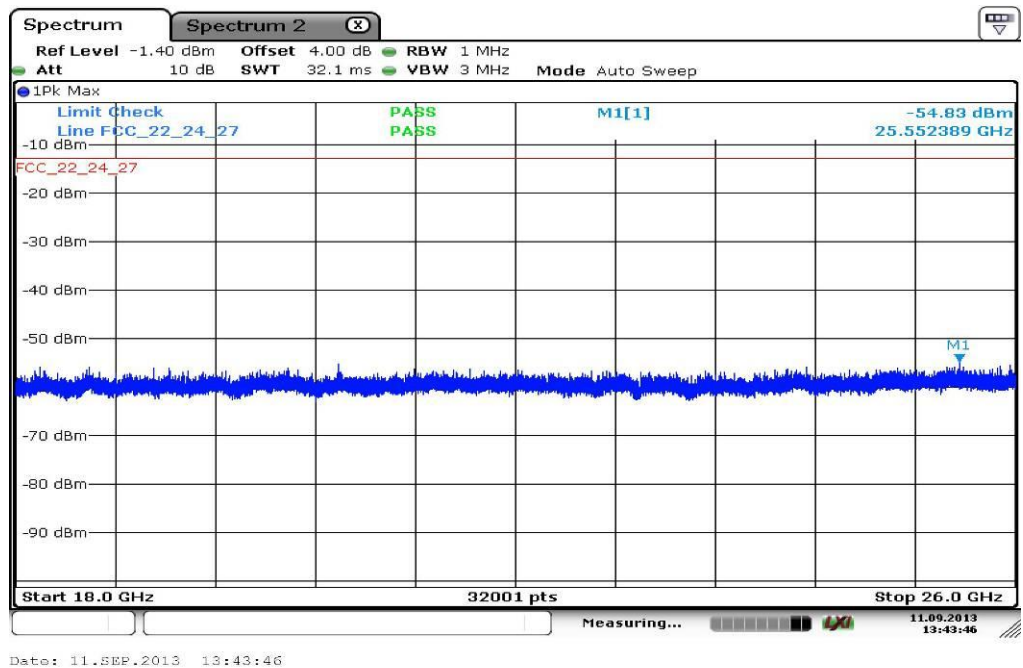

#### **8.4.4 Spurious emissions conducted**

Not performed! Only measurements according manufacturers test plan!

#### **8.4.5 Block edge compliance**

Not performed! Only measurements according manufacturers test plan!

#### **8.4.6 Occupied bandwidth**

Not performed! Only measurements according manufacturers test plan!

## 8.5 Results UMTS band II

All UMTS-band measurements are done in WCDMA mode only.

The connection was established with the following setup: WCDMA CS-RMC, Max Power (All Bit up)

### 8.5.1 RF output power

#### Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

| Measurement parameters |                               |
|------------------------|-------------------------------|
| Detector:              | Peak and RMS (Power in Burst) |
| Sweep time:            | Auto                          |
| Video bandwidth:       | 10 MHz                        |
| Resolution bandwidth:  | 10 MHz                        |
| Span:                  | Zero Span                     |
| Trace-Mode:            | Max Hold                      |

#### Limits:

| FCC                                                                                                                                                 | IC      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| CFR Part 24.232<br>CFR Part 2.1046                                                                                                                  | RSS 133 |
| Nominal Peak Output Power                                                                                                                           |         |
| +33.00 dBm                                                                                                                                          |         |
| In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. |         |

#### Results:

| Output Power (radiated) WCDMA mode |                                   |
|------------------------------------|-----------------------------------|
| Frequency (MHz)                    | Average Output Power (dBm) - EIRP |
| 1852.4                             | 21.0                              |
| 1880.0                             | 20.8                              |
| 1907.6                             | 20.6                              |
| Measurement uncertainty            | ± 2.0 dB                          |

**Result:** **Passed**

### 8.5.2 Frequency stability

Not performed! Only measurements according manufacturers test plan!

### 8.5.3 Spurious emissions radiated

#### Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the UMTS band II.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- The antenna output was terminated in a 50 ohm load (if possible).
- A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

#### Measurement:

| Measurement parameters |                                            |
|------------------------|--------------------------------------------|
| Detector:              | Peak                                       |
| Sweep time:            | 2 sec.                                     |
| Video bandwidth:       | Below 1 GHz: 100 kHz<br>Above 1 GHz: 1 MHz |
| Resolution bandwidth:  | Below 1 GHz: 100 kHz<br>Above 1 GHz: 1 MHz |
| Span:                  | 100 MHz Steps                              |
| Trace-Mode:            | Max Hold                                   |

#### Limits:

| FCC                                                      | IC      |
|----------------------------------------------------------|---------|
| CFR Part 24.238<br>CFR Part 2.1053                       | RSS 133 |
| Spurious Emissions Radiated                              |         |
| Attenuation $\geq 43 + 10\log(P)$<br>(P, Power in Watts) |         |
| -13 dBm                                                  |         |

**Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the UMTS band II (1852.4 MHz, 1880.0 MHz and 1907.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the UMTS band II into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.



All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.

As can be seen from this data, the emissions from the test item were within the specification limit.


| SPURIOUS EMISSION LEVEL (dBm) |                         |                |          |                         |                |          |                         |                |
|-------------------------------|-------------------------|----------------|----------|-------------------------|----------------|----------|-------------------------|----------------|
| Harmonic                      | Ch. 9262<br>Freq. (MHz) | Level<br>[dBm] | Harmonic | Ch. 9400<br>Freq. (MHz) | Level<br>[dBm] | Harmonic | Ch. 9538<br>Freq. (MHz) | Level<br>[dBm] |
| 2                             | 3704.8                  | -              | 2        | 3760.0                  | -              | 2        | 3815.2                  | -              |
| 3                             | 5557.2                  | -              | 3        | 5640.0                  | -              | 3        | 5722.8                  | -              |
| 4                             | 7409.6                  | -              | 4        | 7520.0                  | -              | 4        | 7630.4                  | -              |
| 5                             | 9262.0                  | -              | 5        | 9400.0                  | -              | 5        | 9538.0                  | -              |
| 6                             | 11114.4                 | -              | 6        | 11280.0                 | -              | 6        | 11445.6                 | -              |
| 7                             | 12966.8                 | -              | 7        | 13160.0                 | -              | 7        | 13353.2                 | -              |
| 8                             | 14819.2                 | -              | 8        | 15040.0                 | -              | 8        | 15260.8                 | -              |
| 9                             | 16671.6                 | -              | 9        | 16920.0                 | -              | 9        | 17168.4                 | -              |
| 10                            | 18524.0                 | -              | 10       | 18800.0                 | -              | 10       | 19076.0                 | -              |
| Measurement uncertainty       |                         |                |          |                         | ± 3dB          |          |                         |                |

**Result:** **Passed**

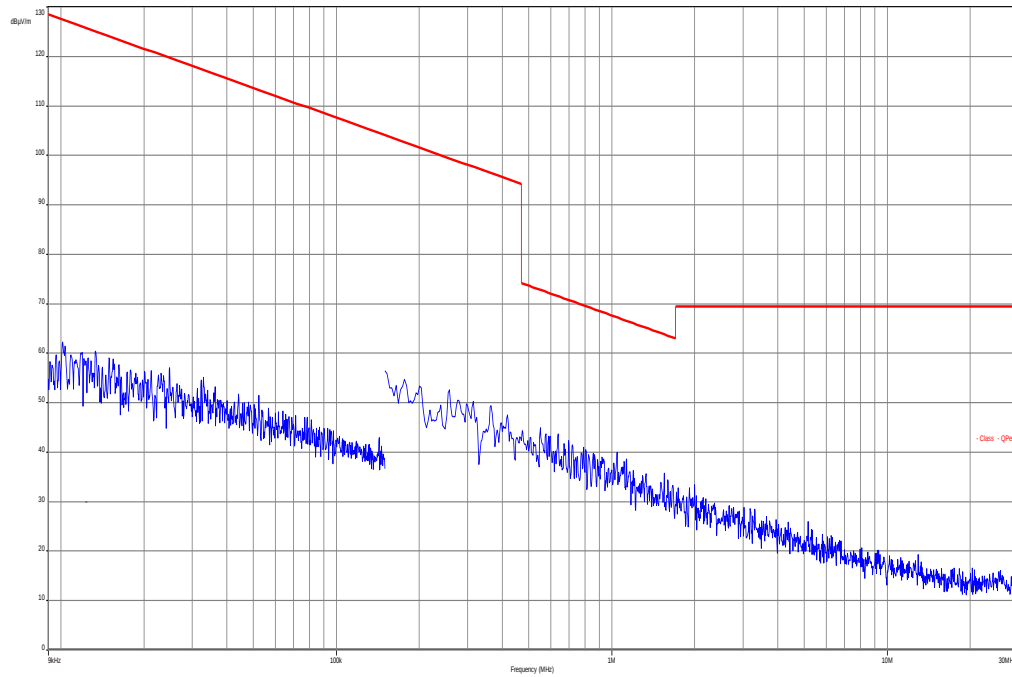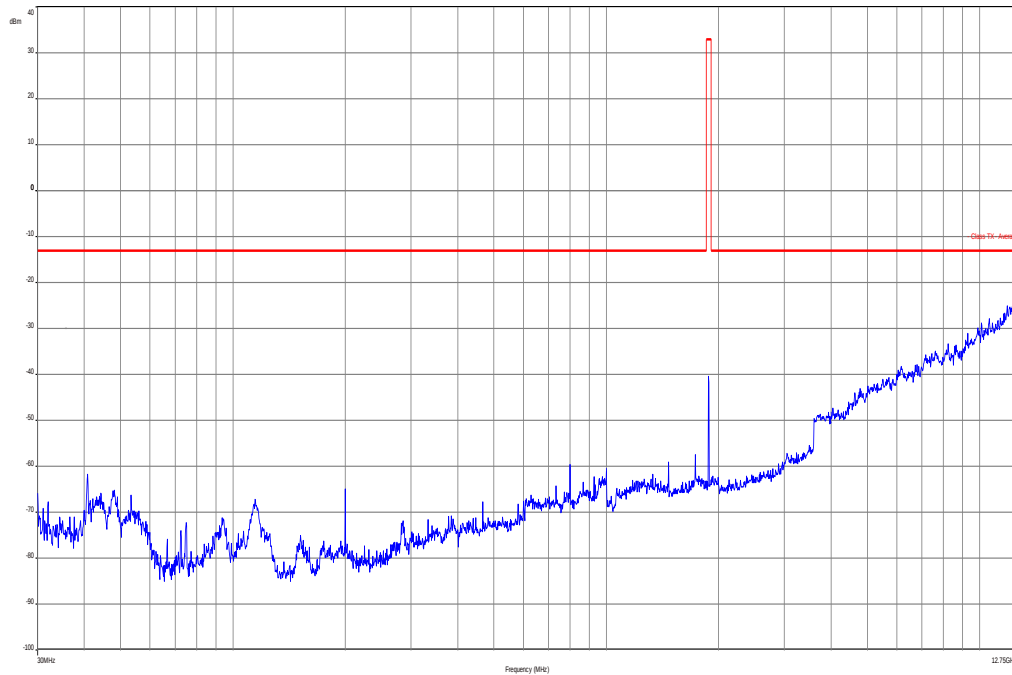
**Plots:****Plot 1: Channel 9400 (Traffic mode up to 30 MHz)****Plot 2: Channel 9400 (30 MHz – 12.75 GHz)**

*Carrier notched with 1.9 GHz rejection filter*

## Plot 3 Channel 9400 (12.75 GHz - 18 GHz)

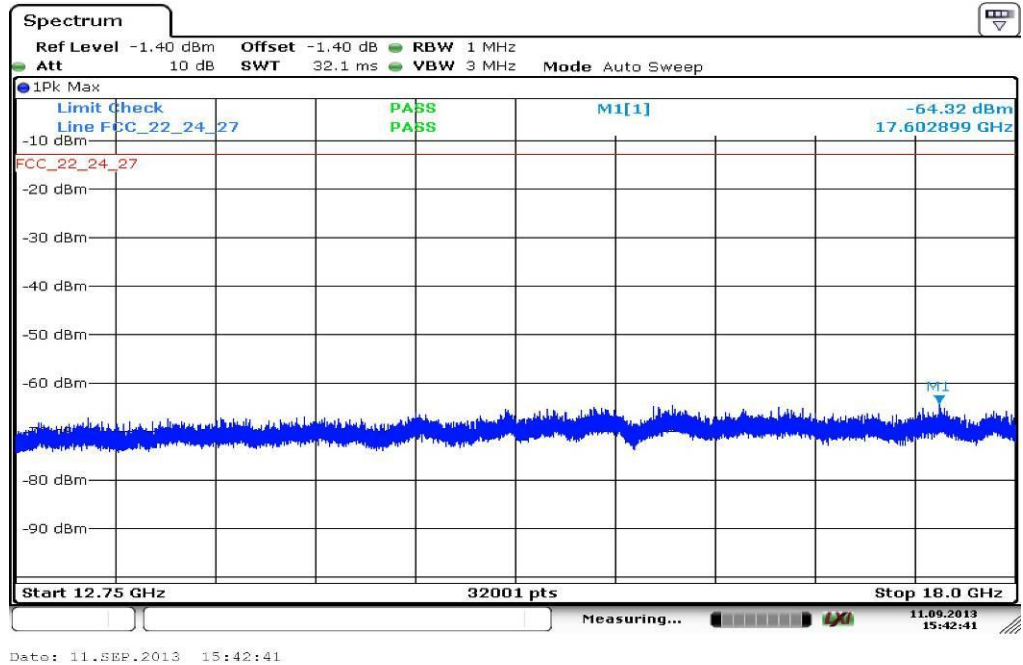

## Plot 4 Channel 9400 (18 GHz - 26 GHz)

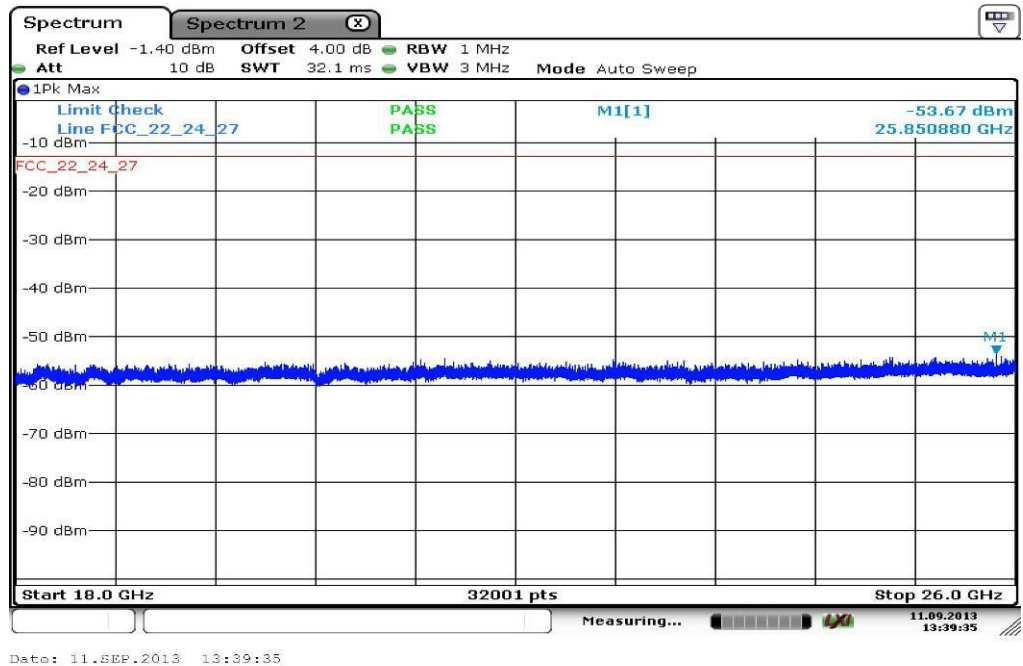

#### **8.5.4 Spurious emissions conducted**

Not performed! Only measurements according manufacturers test plan!

#### **8.5.5 Block edge compliance**

Not performed! Only measurements according manufacturers test plan!

#### **8.5.6 Occupied bandwidth**

Not performed! Only measurements according manufacturers test plan!

## 8.6 Results UMTS band V

All UMTS-band measurements are done in WCDMA mode only.

The connection was established with the following setup: WCDMA CS-RMC, Max Power (All Bit up)

### 8.6.1 RF output power

#### Description:

This paragraph contains average power, peak output power and ERP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

#### Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

| Measurement parameters |                               |
|------------------------|-------------------------------|
| Detector:              | Peak and RMS (Power in Burst) |
| Sweep time:            | Auto                          |
| Video bandwidth:       | 10 MHz                        |
| Resolution bandwidth:  | 10 MHz                        |
| Span:                  | Zero Span                     |
| Trace-Mode:            | Max Hold                      |

#### Limits:

| FCC                                                                                                                                                 | IC      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| CFR Part 22.913<br>CFR Part 2.1046                                                                                                                  | RSS 132 |
| Nominal Peak Output Power                                                                                                                           |         |
| +38.45 dBm                                                                                                                                          |         |
| In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. |         |

#### Results:

| Output Power (radiated) WCDMA mode |                                  |
|------------------------------------|----------------------------------|
| Frequency (MHz)                    | Average Output Power (dBm) - ERP |
| 826.4                              | 21.0                             |
| 836.0                              | 20.9                             |
| 846.6                              | 20.7                             |
| Measurement uncertainty            | ± 2.0 dB                         |

**Result:** **Passed**

## 8.6.2 Frequency stability

Not performed! Only measurements according manufacturers test plan!

### 8.6.3 Spurious emissions radiated

#### Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2009 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 846.6 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the UMTS band V.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- The antenna output was terminated in a 50 ohm load (if possible).
- A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters.
- Now each detected emissions were substituted by the substitution method, in accordance with the TIA/EIA 603.

#### Measurement:

| Measurement parameters |                                            |
|------------------------|--------------------------------------------|
| Detector:              | Peak                                       |
| Sweep time:            | 2 sec.                                     |
| Video bandwidth:       | Below 1 GHz: 100 kHz<br>Above 1 GHz: 1 MHz |
| Resolution bandwidth:  | Below 1 GHz: 100 kHz<br>Above 1 GHz: 1 MHz |
| Span:                  | 100 MHz Steps                              |
| Trace-Mode:            | Max Hold                                   |

#### Limits:

| FCC                                                      | IC      |
|----------------------------------------------------------|---------|
| CFR Part 22.917<br>CFR Part 2.1053                       | RSS 132 |
| Spurious Emissions Radiated                              |         |
| Attenuation $\geq 43 + 10\log(P)$<br>(P, Power in Watts) |         |
| -13 dBm                                                  |         |

**Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the UMTS band V (826.4 MHz, 836.0 MHz and 846.6 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the UMTS band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.



All measurements were done in horizontal and vertical polarization; the plots show the worst case.

The plots show only the middle channel. If spurious were detected, the lowest and highest channel were checked too. The found values are stated in the table below.

As can be seen from this data, the emissions from the test item were within the specification limit.

| SPURIOUS EMISSION LEVEL (dBm) |                         |                |          |                         |                |          |                         |                |
|-------------------------------|-------------------------|----------------|----------|-------------------------|----------------|----------|-------------------------|----------------|
| Harmonic                      | Ch. 4132<br>Freq. (MHz) | Level<br>[dBm] | Harmonic | Ch. 4180<br>Freq. (MHz) | Level<br>[dBm] | Harmonic | Ch. 4233<br>Freq. (MHz) | Level<br>[dBm] |
| 2                             | 1652.8                  | -              | 2        | 1672.0                  | -              | 2        | 1693.2                  | -              |
| 3                             | 2479.2                  | -              | 3        | 2508.0                  | -              | 3        | 2539.8                  | -              |
| 4                             | 3305.6                  | -              | 4        | 3344.0                  | -              | 4        | 3386.4                  | -              |
| 5                             | 4132.0                  | -              | 5        | 4180.0                  | -              | 5        | 4233.0                  | -              |
| 6                             | 4958.4                  | -              | 6        | 5016.0                  | -              | 6        | 5079.6                  | -              |
| 7                             | 5784.8                  | -              | 7        | 5852.0                  | -              | 7        | 5926.2                  | -              |
| 8                             | 6611.2                  | -              | 8        | 6688.0                  | -              | 8        | 6772.8                  | -              |
| 9                             | 7437.6                  | -              | 9        | 7524.0                  | -              | 9        | 7619.4                  | -              |
| 10                            | 8264.0                  | -              | 10       | 8360.0                  | -              | 10       | 8466.0                  | -              |
| Measurement uncertainty       |                         |                |          |                         | ± 3dB          |          |                         |                |

**Result:** Passed

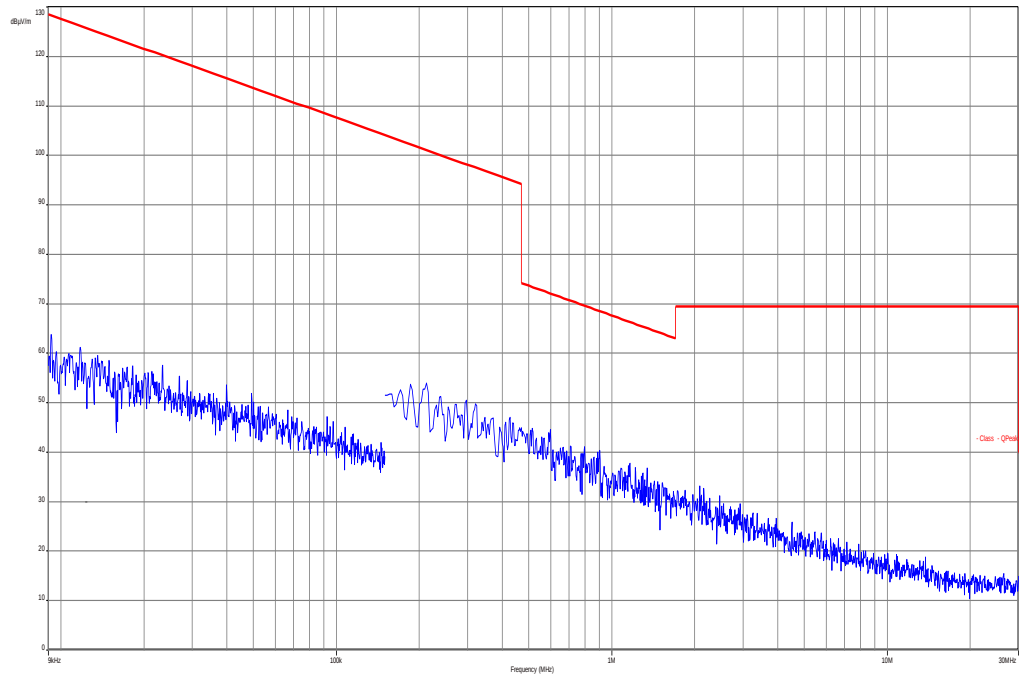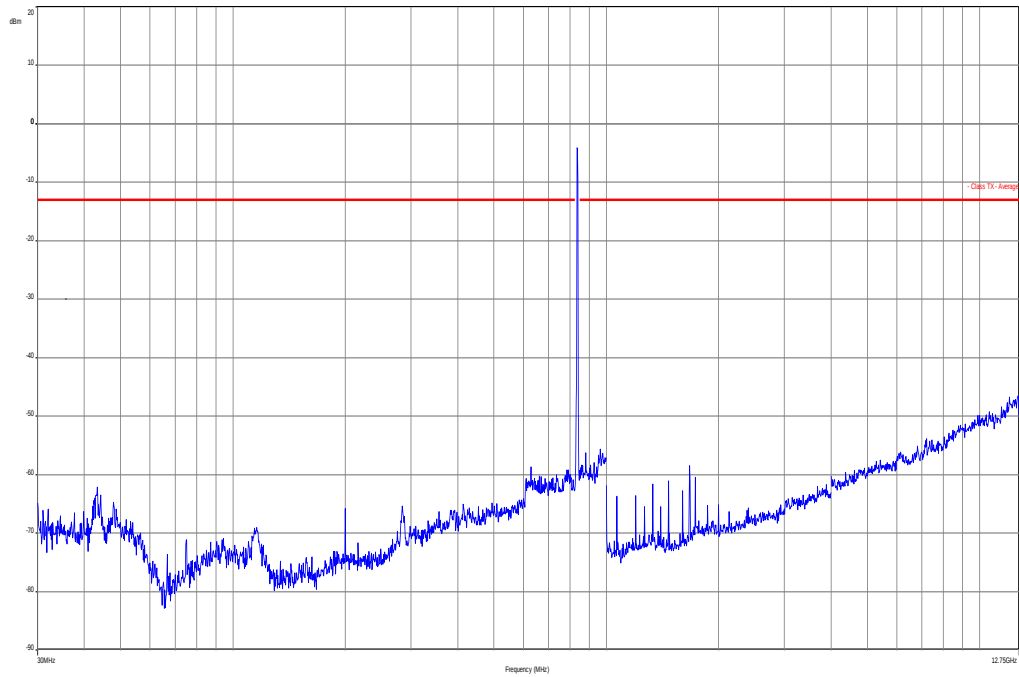**Plots:****Plot 1: Channel 4180 (Traffic mode up to 30 MHz)****Plot 2: Channel 4180 (30 MHz – 12.75 GHz)**

#### **8.6.4 Spurious emissions conducted**

Not performed! Only measurements according manufacturers test plan!

#### **8.6.5 Block edge compliance**

Not performed! Only measurements according manufacturers test plan!

#### **8.6.6 Occupied bandwidth**

Not performed! Only measurements according manufacturers test plan!

## 9 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

| No. | Lab / Item | Equipment                                      | Type                            | Manufact.            | Serial No. | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|------------------------------------------------|---------------------------------|----------------------|------------|-----------------|---------------------|------------------|------------------|
| 1   | n. a.      | Double-Ridged Waveguide Horn Antenna 1-18.0GHz | 3115                            | EMCO                 | 8812-3088  | 300001032       | vKII                | 08.05.2013       | 08.05.2015       |
| 2   | n. a.      | Anechoic chamber                               | FAC 3/5m                        | MWB / TDK            | 87400/02   | 300000996       | ev                  |                  |                  |
| 3   | n. a.      | Switch / Control Unit                          | 3488A                           | HP Meßtechnik        | *          | 300000199       | ne                  |                  |                  |
| 4   | n. a.      | Switch / Control Unit                          | 3488A                           | HP Meßtechnik        | 2719A15013 | 300001156       | ne                  |                  |                  |
| 5   | 9          | Isolating Transformer                          | MPL IEC625 Bus Regeltrennt ravo | Erfi                 | 91350      | 300001155       | ne                  |                  |                  |
| 6   | n. a.      | Three-Way Power Splitter, 50 Ohm               | 11850C                          | HP Meßtechnik        |            | 300000997       | ne                  |                  |                  |
| 7   | n. a.      | Amplifier                                      | js42-00502650-28-5a             | Parzich GMBH         | 928979     | 300003143       | ne                  |                  |                  |
| 8   | n. a.      | Band Reject filter                             | WRCG185 5/1910-1835/1925-40/8SS | Wainwright           | 7          | 300003350       | ev                  |                  |                  |
| 9   | n. a.      | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz   | VULB9163                        | Schwarzbeck          | 371        | 300003854       | vKII                | 14.10.2011       | 14.10.2014       |
| 10  | n. a.      | MXE EMI Receiver 20 Hz bis 26,5 GHz            | N9038A                          | Agilent Technologies | MY51210197 | 300004405       | k                   | 21.02.2013       | 21.02.2014       |
| 11  | n. a.      | Universal Communication Tester                 | CMU200                          | R&S                  | 103992     | 300003231       | vKII                | 21.08.2012       | 21.08.2014       |
| 12  | n. a.      | Signal Analyzer 40 GHz                         | FSV40                           | R&S                  | 101042     | 300004517       | k                   | 22.10.2012       | 22.10.2013       |
| 13  | 11b        | Microwave System Amplifier, 0.5-26.5 GHz       | 83017A                          | HP Meßtechnik        | 00419      | 300002268       | ev                  |                  |                  |
| 14  | A025       | Std. Gain Horn Antenna 12.4 to 18.0 GHz        | 639                             | Narda                |            | 300000786       | ne                  |                  |                  |
| 15  | A027       | Std. Gain Horn Antenna 18.0 to 26.5 GHz        | 638                             | Narda                |            | 300000486       | ne                  |                  |                  |

### Agenda: Kind of Calibration

k calibration / calibrated  
 ne not required (k, ev, izw, zw not required)  
 ev periodic self verification  
 Ve long-term stability recognized  
 vKII Attention: extended calibration interval  
 NKI Attention: not calibrated

EK limited calibration  
 zw cyclical maintenance (external cyclical maintenance)  
 izw internal cyclical maintenance  
 g blocked for accredited testing  
 \*) next calibration ordered / currently in progress

## 10 Observations

No observations exceeding those reported with the single test cases have been made.

**Annex A Document history**

| Version | Applied changes                                | Date of release |
|---------|------------------------------------------------|-----------------|
| 1.0     | Initial release                                | 2013-09-25      |
| -A      | IC ID changed, Model name changed, add RSP-100 | 2014-02-17      |

**Annex B Further information****Glossary**

|          |   |                                                |
|----------|---|------------------------------------------------|
| AVG      | - | Average                                        |
| DUT      | - | Device under test                              |
| EMC      | - | Electromagnetic Compatibility                  |
| EN       | - | European Standard                              |
| EUT      | - | Equipment under test                           |
| ETSI     | - | European Telecommunications Standard Institute |
| FCC      | - | Federal Communication Commission               |
| FCC ID   | - | Company Identifier at FCC                      |
| HW       | - | Hardware                                       |
| IC       | - | Industry Canada                                |
| Inv. No. | - | Inventory number                               |
| N/A      | - | Not applicable                                 |
| PP       | - | Positive peak                                  |
| QP       | - | Quasi peak                                     |
| S/N      | - | Serial number                                  |
| SW       | - | Software                                       |

## Back side of certificate



## Page 41 of 41