

FCC RADIO TEST REPORT

FCC ID: AUSCR1215A

Product : Jukebox

Trade Name : Crosley

Model Name : RD018009

Serial Model : CR-1215A

Report No. : UNIA19103016FR-01

Prepared for

Modern Marketing Concepts, Inc.

1220 E Oak, St.Louisville Kentucky United States 40204

Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang
Community, Xixiang Str, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant's name.....: Modern Marketing Concepts, Inc.
Address.....: 1220 E Oak, St.Louisville Kentucky United States 40204
Manufacture's Name.....: Modern Marketing Concepts, Inc.
Address.....: 1220 E Oak, St.Louisville Kentucky United States 40204

Product description

Product name.....: Jukebox
Trade Mark.....: Crosley
Model and/or type reference : RD018009, CR-12125A
Standards.....: FCC Rules and Regulations Part 15 Subpart C Section 15.247
 ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test.....:
Date (s) of performance of tests.....: Oct. 11 ~29, 2019
Date of Issue.....: Oct. 30, 2019
Test Result.....: Pass

Prepared by:


 Kahn yang/Editor

 Sherwin Qian/Supervisor

Reviewer:

Approved & Authorized Signer:


 Liuze/Manager

Table of Contents

Page

1. TEST SUMMARY.....	5
2. GENERAL INFORMATION.....	6
2.1 GENERAL DESCRIPTION OF EUT.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Operation of EUT during testing.....	7
2.4 DESCRIPTION OF TEST SETUP.....	7
2.5 MEASUREMENT INSTRUMENTS LIST.....	8
3. CONDUCTED EMISSIONS TEST.....	9
3.1 Conducted Power Line Emission Limit.....	9
3.2 Test Setup.....	9
3.3 Test Procedure.....	9
3.4 Test Result.....	9
4. RADIATED EMISSION TEST.....	12
4.1 Radiation Limit.....	12
4.2 Test Setup.....	12
4.3 Test Procedure.....	13
4.4 Test Result.....	13
5. BAND EDGE.....	19
5.1 Limits.....	19
5.2 Test Procedure.....	19
5.3 Test Result.....	19
6. OCCUPIED BANDWIDTH MEASUREMENT.....	22
6.1 Test Setup.....	22
6.2 Test Procedure.....	22
6.3 Measurement Equipment Used.....	22
6.4 Test Result.....	22
7. MAXIMUM PEAK OUTPUT POWER.....	27
7.1 Test Setup.....	27
7.2 Test Procedure.....	27
7.3 Limit.....	27
7.4 Test Result.....	27
8. FREQUENCY SEPARATION.....	28
8.1 Test Setup.....	28
8.2 Test Procedure.....	28
8.3 Limit.....	28

Table of Contents

Page

8.4 Test Result.....	28
9. CONDUCTED BANDEGE MEASUREMENT.....	33
9.1 Test Setup.....	33
9.2 Test Procedure.....	33
9.3 Limit.....	33
9.4 Test Result.....	33
10. SPURIOUS RF CONDUCTED EMISSION.....	37
10.1 Test Limit.....	37
10.2 Test Procedure.....	37
10.3 Test Setup.....	37
10.4 Test Result.....	37
11. NUMBER OF HOPPING FREQUENCY.....	42
11.1 Test Limit.....	42
11.2 Test Procedure.....	42
11.3 Test Setup.....	42
11.4 Test Result.....	42
12. TIME OF OCCUPANCY(DWELL TIME).....	44
12.1 Test Limit.....	44
12.2 Test Procedure.....	44
12.3 Test Setup.....	44
12.4 Test Result.....	44
13. PSEUDORANDOM FREQUENCY HPPING SEQUENCE.....	49
For 47 CFR Part 15C section 15.247 (a)(1) requirement.....	49
14. ANTENNA REQUIREMENT.....	50
15. PHOTOGRAPH OF TEST.....	51

1. TEST SUMMARY

TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	COMPLIANT
RADIATED EMISSION TEST	COMPLIANT
BAND EDGE	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT
MAXIMUM PEAK OUTPUT POWER	COMPLIANT
FREQUENCY SEPARATION	COMPLIANT
CONDUCTED BANDEGE MEASUREMENT	COMPLIANT
SPURIOUS RF CONDUCTED EMISSION	COMPLIANT
NUMBER OF HOPPING FREQUENCY	COMPLIANT
TIME OF OCCUPANCY(DWELL TIME)	COMPLIANT
ANTENNA REQUIREMENT	COMPLIANT

TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.

Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L6494

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

Designation Number: CN1227

Test Firm Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files.

MEASUREMENT UNCERTAINTY

Measurement Uncertainty	
Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Jukebox
Trade Mark	Crosley
Model Name	RD018009
Serial No.	CR-1215A
Model Difference	All products were the same except for the name of the product.
FCC ID	AUSCR1215A
Antenna Type	PCB Antenna
Antenna Gain	0dBi
Frequency Range	2402-2480MHz
Number of Channels	79 channels for BR+EDR
Modulation Type	GFSK, Pi/4 QPSK, 8DPSK for BR+EDR
Power Source	21V/3A from adapter
Adapter	
Manufacturer	SHENZHEN SOY Technology., Ltd.
M/N	SOY-2100300
Input	100-240V~ 50/60Hz Max 1.7A
Output	DC 21V/3A

Table for auxiliary equipment:

Equipment Description	Manufacturer	Model	Calibration Due Date
Notebook	Lenovo	Lenovo G475	GB14477457

2.2 Carrier Frequency of Channels

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	21	2423	42	2444	63	2465
01	2403	22	2424	43	2445	64	2466
02	2404	23	2425	44	2446	65	2467
03	2405	24	2426	45	2447	66	2468
04	2406	25	2427	46	2448	67	2469
05	2407	26	2428	47	2449	68	2470
06	2408	27	2429	48	2450	69	2471
07	2409	28	2430	49	2451	70	2472
08	2410	29	2431	50	2452	71	2473
09	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460		
17	2419	38	2440	59	2461		
18	2420	39	2441	60	2462		
19	2421	40	2442	61	2463		
20	2422	41	2443	62	2464		

2.3 Operation of EUT during testing

Operating Mode

The mode is used: Transmitting mode

Low Channel: 2402MHz


Middle Channel: 2441MHz

High Channel: 2480MHz


Test SW Version: BK3256 RF Test_V1.3

2.4 DESCRIPTION OF TEST SETUP

Operation of EUT during Conducted testing:



Operation of EUT during Radiation testing:



2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
CONDUCTED EMISSIONS TEST					
1	AMN	Schwarzbeck	NNLK8121	8121370	2020.9.6
2	AMN	ETS	3810/2	00020199	2020.9.6
3	EMI TEST RECEIVER	Rohde&Schwarz	ESCI	101210	2020.9.6
4	AAN	TESEQ	T8-Cat6	38888	2020.9.6
RADIATED EMISSION TEST					
1	Horn Antenna	Sunol	DRH-118	A101415	2020.9.6
2	BicoNLog Antenna	Sunol	JB1 Antenna	A090215	2020.9.6
3	PREAMP	HP	8449B	3008A00160	2020.9.6
4	PREAMP	HP	8447D	2944A07999	2020.9.6
5	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2020.9.6
6	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2020.9.6
7	Signal Generator	Agilent	E4421B	MY4335105	2020.9.6
8	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2020.9.6
9	MXA Signal Analyzer	Agilent	N9020A	MY51110104	2020.9.6
10	ANT Tower&Turn table Controller	Champro	EM 1000	60764	2020.9.6
11	Anechoic Chamber	Taihe Maorui	9m*6m*6m	966A0001	2020.9.6
12	Shielding Room	Taihe Maorui	6.4m*4m*3m	643A0001	2020.9.6
13	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2020.9.6
14	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2020.9.6
15	RF power divider	Anritsu	K241B	992289	2020.9.6
16	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2020.9.6
17	Biconical antenna	Schwarzbeck	VHA 9103	91032360	2020.9.6
18	Biconical antenna	Schwarzbeck	VHA 9103	91032361	2020.9.6
19	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2020.9.6
20	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2020.9.6
21	Active Receive Loop Antenna	Schwarzbeck	FMZB 1919B	00023	2020.9.6
22	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170651	2020.9.6
23	Microwave Broadband Pre-amplifier	Schwarzbeck	BBV 9721	100472	2020.9.6
24	Active Loop Antenna	Com-Power	AL-130R	10160009	2020.9.6
25	Power Meter	KEYSIGHT	N1911A	MY50520168	2020.9.6
26	Frequency Meter	VICTOR	VC2000	997406086	2020.9.6
27	DC Power Source	HYELEC	HY5020E	055161818	2020.9.6
Test software					
1	E3	Audix	6.101223a	N/A	N/A

3. CONDUCTED EMISSIONS TEST

3.1 Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage(dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 Test Setup

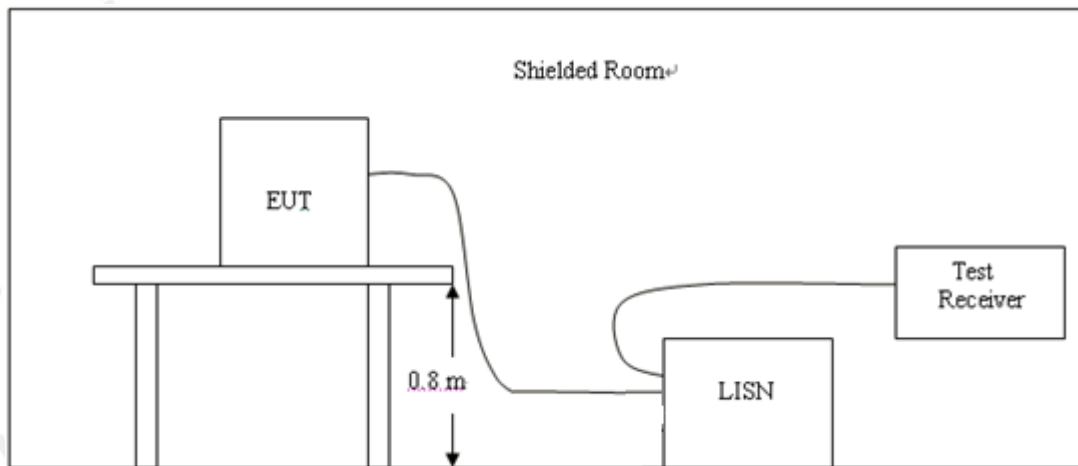

3.3 Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.


3.4 Test Result

Pass

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. All modes of Low, Middle, and High channel were tested, only the worst result of High Channel was reported as below:


Temperature:	26°C	Relative Humidity:	48%
Test Date:	Oct. 18, 2019	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode:	Transmitting mode of GFSK 2402MHz		

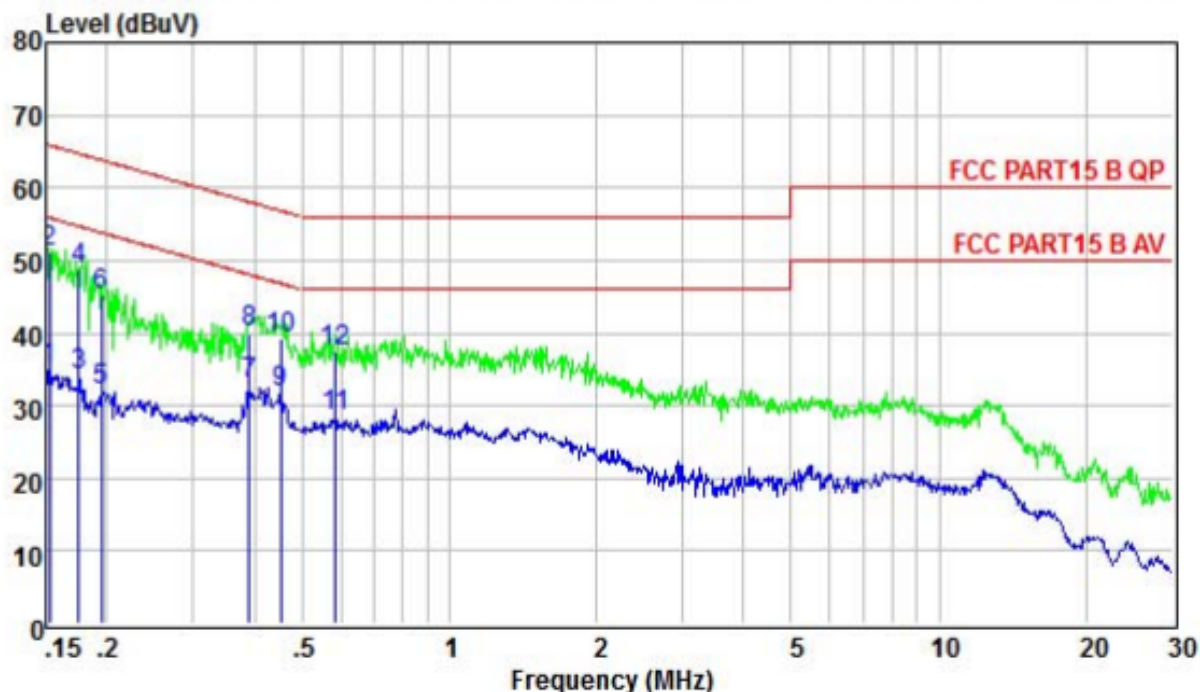

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.152	25.49	9.63	0.05	35.17	55.87	-20.70	Average
2	0.152	41.60	9.63	0.05	51.28	65.87	-14.59	QP
3	0.175	24.39	9.64	0.05	34.08	54.72	-20.64	Average
4	0.175	39.00	9.64	0.05	48.69	64.72	-16.03	QP
5	0.194	22.29	9.64	0.05	31.98	53.84	-21.86	Average
6	0.194	35.60	9.64	0.05	45.29	63.84	-18.55	QP
7	0.391	23.36	9.67	0.05	33.08	48.03	-14.95	Average
8	0.391	30.28	9.67	0.05	40.00	58.03	-18.03	QP
9	0.452	21.97	9.68	0.05	31.70	46.85	-15.15	Average
10	0.452	29.65	9.68	0.05	39.38	56.85	-17.47	QP
11	0.585	18.92	9.67	0.05	28.64	46.00	-17.36	Average
12	0.585	27.65	9.67	0.05	37.37	56.00	-18.63	QP

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

Temperature:	26°C	Relative Humidity:	48%
Test Date:	Oct. 18, 2019	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	Transmitting mode of GFSK 2402MHz		

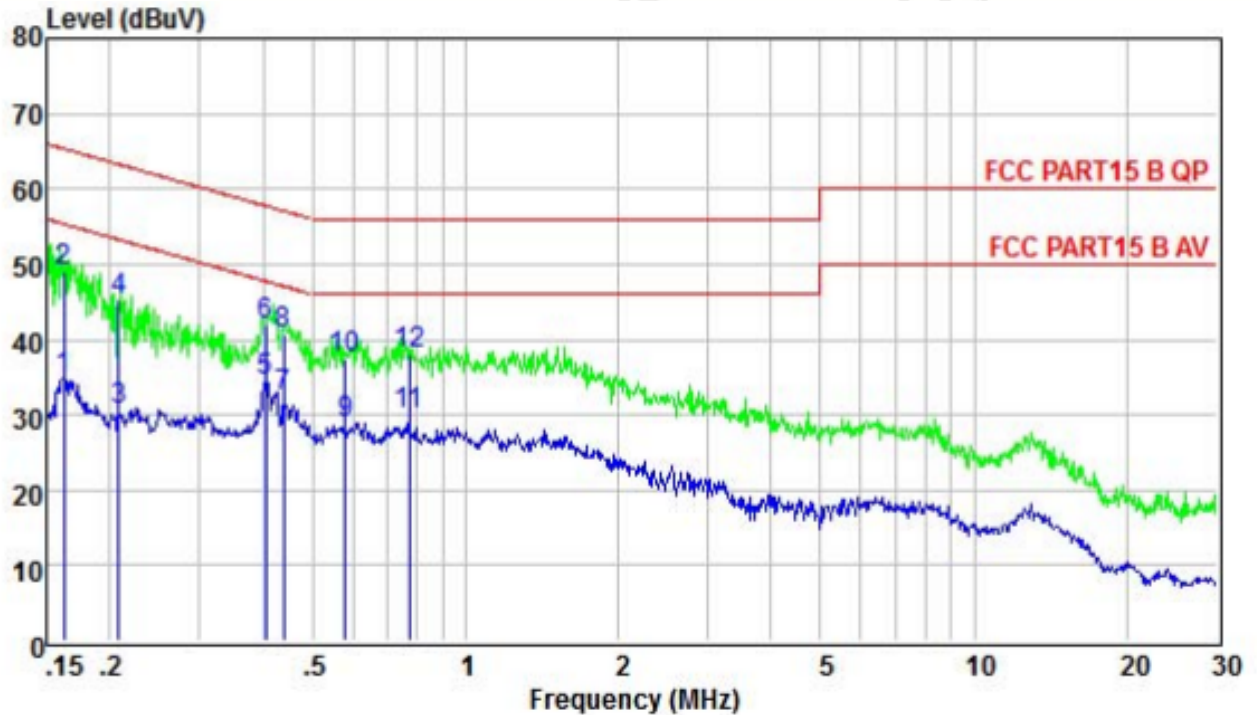

	Read Freq	LISN Level	Cable Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	25.27	9.58	0.05	34.90	55.34	-20.44	Average
2	0.162	39.37	9.58	0.05	49.00	65.34	-16.34	QP
3	0.208	20.97	9.52	0.05	30.54	53.27	-22.73	Average
4	0.208	35.71	9.52	0.05	45.28	63.27	-17.99	QP
5	0.404	24.89	9.62	0.05	34.56	47.77	-13.21	Average
6	0.404	32.33	9.62	0.05	42.00	57.77	-15.77	QP
7	0.440	22.87	9.62	0.05	32.54	47.07	-14.53	Average
8	0.440	30.96	9.62	0.05	40.63	57.07	-16.44	QP
9	0.579	19.16	9.63	0.05	28.84	46.00	-17.16	Average
10	0.579	27.81	9.63	0.05	37.49	56.00	-18.51	QP
11	0.775	20.25	9.63	0.05	29.93	46.00	-16.07	Average
12	0.775	28.53	9.63	0.05	38.21	56.00	-17.79	QP

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

4. RADIATED EMISSION TEST

4.1 Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2 Test Setup


1. Radiated Emission Test-Up Frequency Below 30MHz

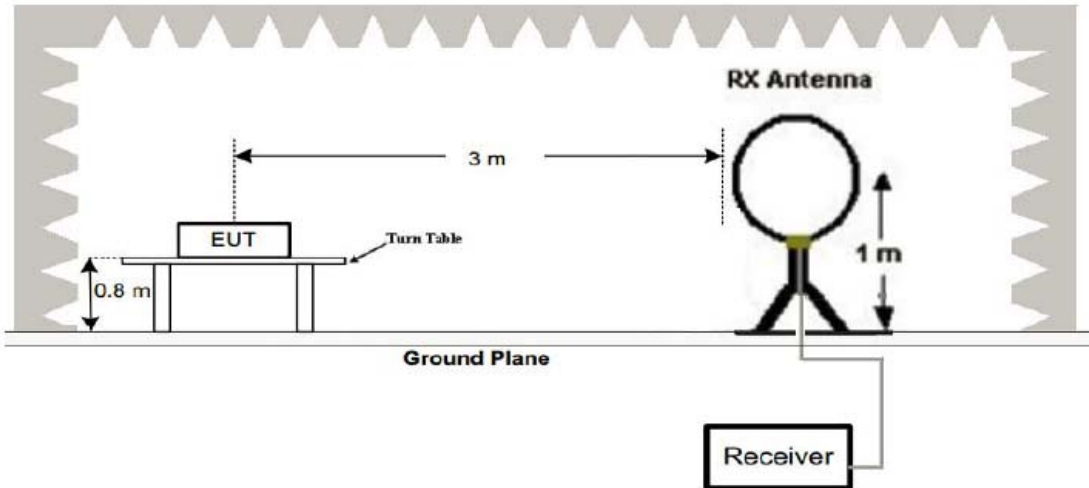

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

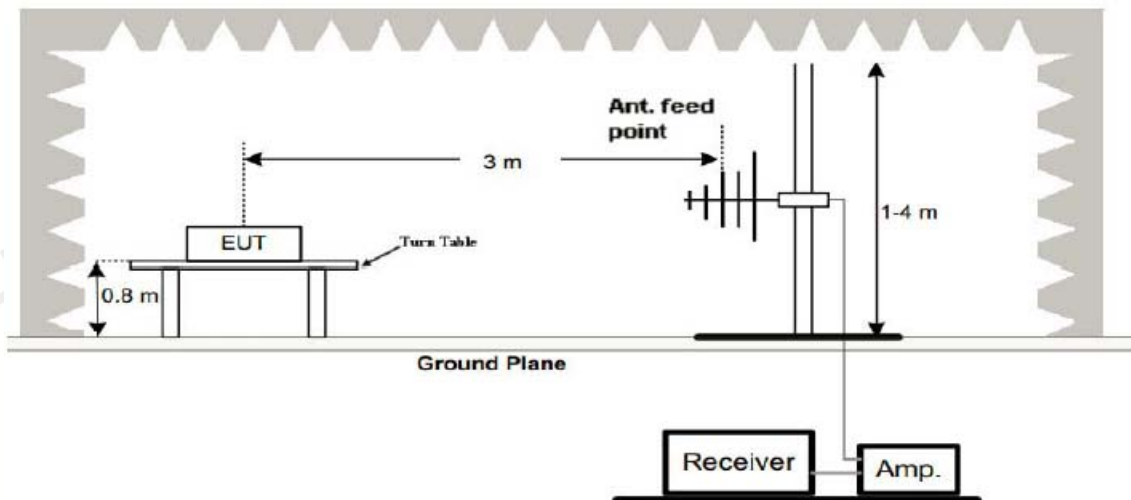

3. Radiated Emission Test-Up Frequency Above 1GHz

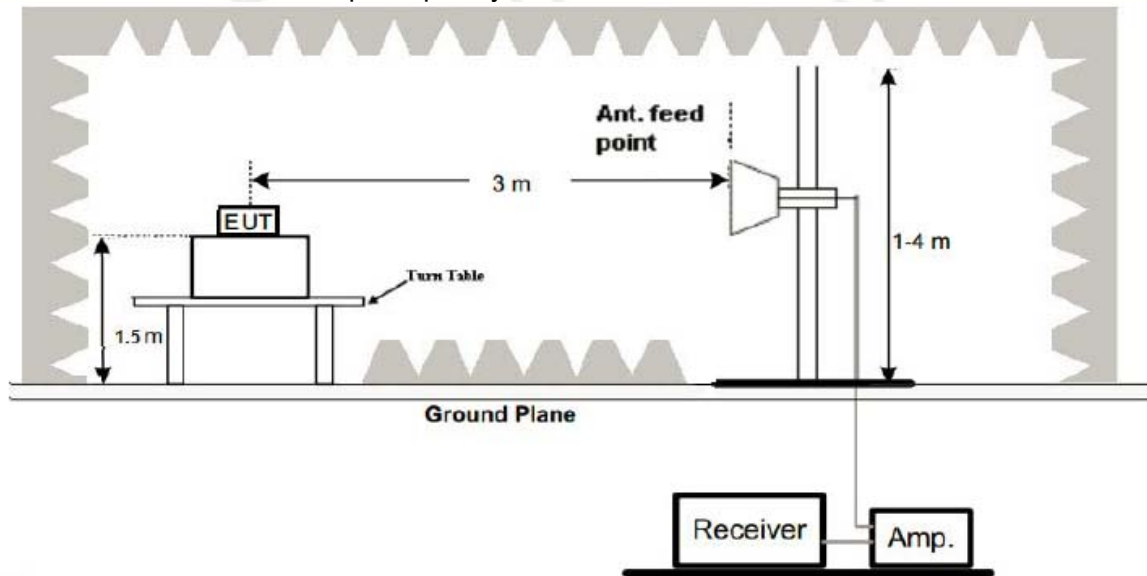

4.3 Test Procedure

- Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
- The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until the measurements for all frequencies are complete.
- The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4 Test Result


PASS

Remark:

- All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK High Channel was reported for below 1GHz test.
- For BT3.0 above 1GHz test all modes of GFSK, $\pi/4$ DQPSK, and 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 was reported.
- By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9KHz to 30MHz and not recorded in this report.

Below 1GHz Test Results:


Temperature:	22°C	Relative Humidity:	48%
Test Date:	Oct. 18, 2019	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Polarization:	Horizontal
Test Mode:	Transmitting mode of GFSK 2402MHz		

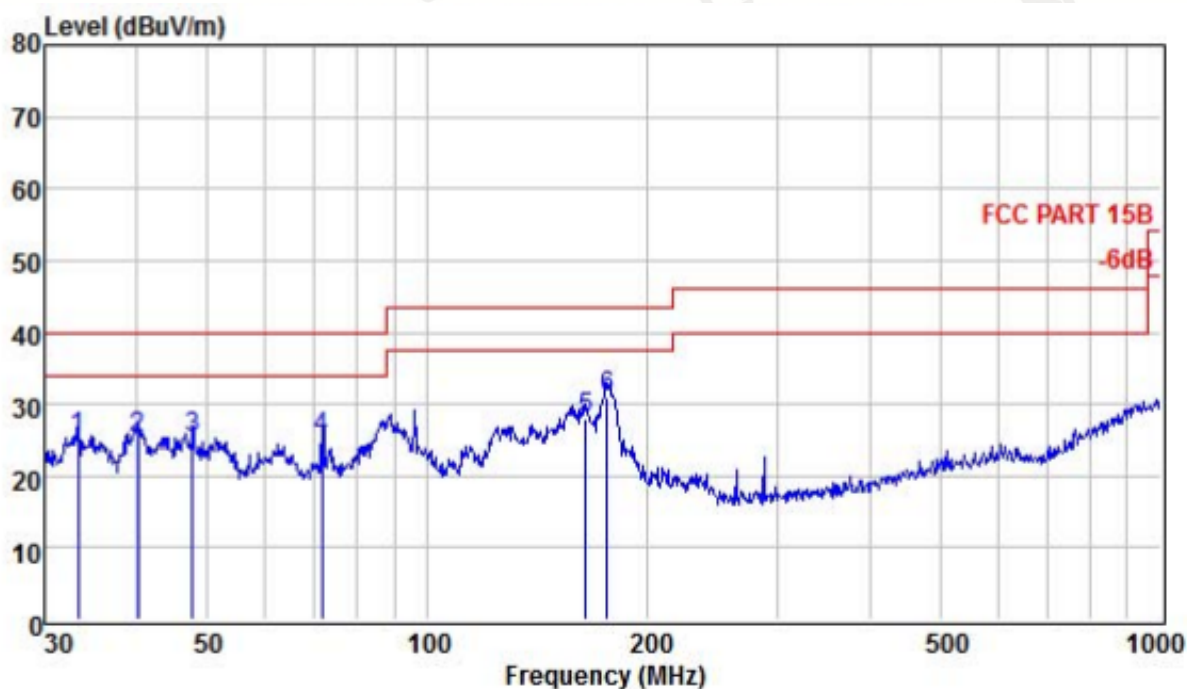

	Freq	ReadAntenna	Cable	Limit	Over	
	MHz	Level	Factor	Loss	Level	Line
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m
1	33.328	11.62	13.44	0.26	25.32	40.00
2	40.276	11.65	13.48	0.13	25.26	40.00
3	47.826	11.98	13.10	0.12	25.20	40.00
4	71.832	13.39	11.67	0.14	25.20	40.00
5	164.330	12.87	14.99	0.23	28.09	43.50
6	175.652	17.44	13.32	0.24	31.00	43.50

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
Factor = Ant. Factor + Cable Loss

Temperature:	22℃	Relative Humidity:	48%
Test Date:	Oct. 18, 2019	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Polarization:	Vertical
Test Mode:	Transmitting mode of GFSK 2402MHz		

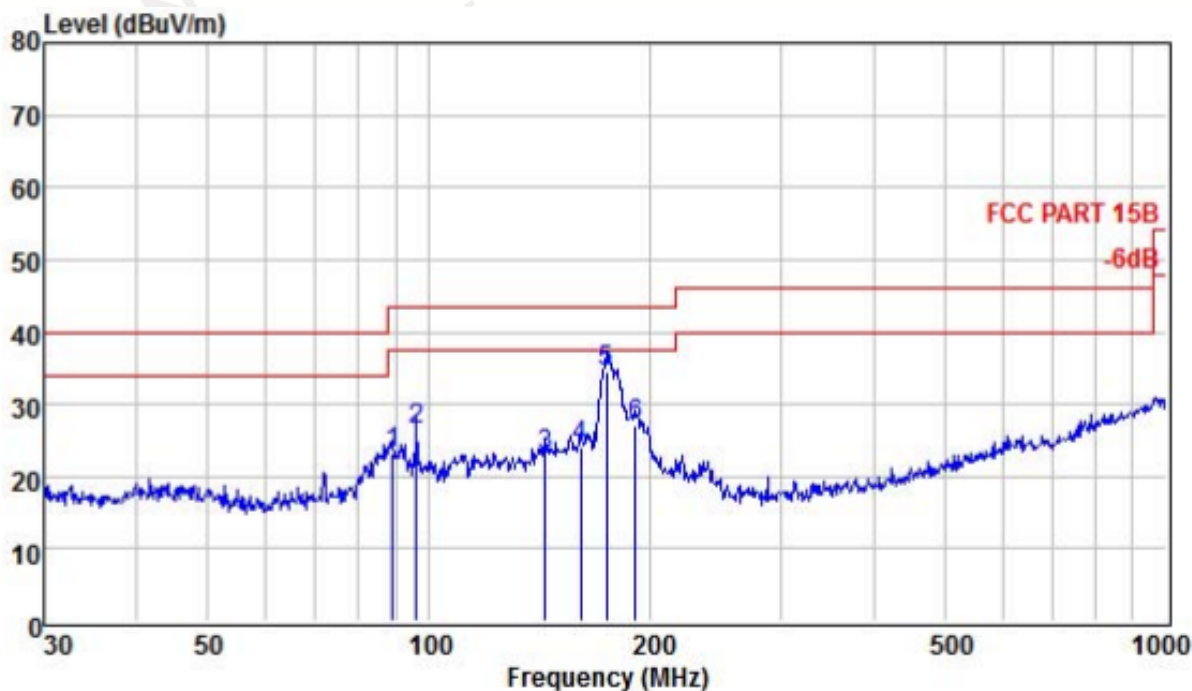

	Freq	ReadAntenna	Cable	Limit	Over	
	MHz	Level	Factor	Loss	Line	Limit
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m
1	89.276	10.50	12.44	0.16	23.10	43.50
2	96.099	14.51	11.64	0.17	26.32	43.50
3	143.830	7.34	15.31	0.23	22.88	43.50
4	160.346	8.26	15.61	0.23	24.10	43.50
5	173.814	20.66	13.58	0.24	34.48	43.50
6	190.405	14.72	12.01	0.28	27.01	43.50

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
Factor = Ant. Factor + Cable Loss

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Above 1 GHz Test Results (GFSK Worst Case):
CH Middle (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2402	103.56	-5.84	97.72	114.00	-16.28	PK
2402	83.66	-5.84	77.82	94.00	-16.18	AV
4804	60.27	-3.64	56.63	74.00	-17.37	PK
4804	50.86	-3.64	47.22	54.00	-6.78	AV
7206	61.34	-0.95	60.39	74.00	-13.61	PK
7206	48.37	-0.95	47.42	54.00	-6.58	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2402	104.22	-5.84	98.38	114.00	-15.62	PK
2402	82.35	-5.84	76.51	94.00	-17.49	AV
4804	61.49	-3.64	57.85	74.00	-16.15	PK
4804	51.27	-3.64	47.63	54.00	-6.37	AV
7206	62.53	-0.95	61.58	74.00	-12.42	PK
7206	49.69	-0.95	48.74	54.00	-5.26	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	103.86	-5.71	98.15	114.00	-15.85	PK
2441	80.29	-5.71	74.58	94.00	-19.42	AV
4882	62.53	-3.51	59.02	74.00	-14.98	PK
4882	50.27	-3.51	46.76	54.00	-7.24	AV
7323	62.83	-0.82	62.01	74.00	-11.99	PK
7323	48.62	-0.82	47.8	54.00	-6.2	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	104.59	-5.71	98.88	114.00	-15.12	PK
2441	81.63	-5.71	75.92	94.00	-18.08	AV
4882	61.27	-3.51	57.76	74.00	-16.24	PK
4882	51.82	-3.51	48.31	54.00	-5.69	AV
7323	61.33	-0.82	60.51	74.00	-13.49	PK
7323	49.26	-0.82	48.44	54.00	-5.56	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2480	104.36	-5.65	98.71	114.00	-15.29	PK
2480	81.54	-5.65	75.89	94.00	-18.11	AV
4960	61.27	-3.43	57.84	74.00	-16.16	PK
4960	50.31	-3.43	46.88	54.00	-7.12	AV
7440	60.27	-0.75	59.52	74.00	-14.48	PK
7440	49.28	-0.75	48.53	54.00	-5.47	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type
2480	105.36	-5.65	99.71	114.00	-14.29	PK
2480	80.46	-5.65	74.81	94.00	-19.19	AV
4960	62.72	-3.43	59.29	74.00	-14.71	PK
4960	51.24	-3.43	47.81	54.00	-6.19	AV
7440	61.93	-0.75	61.18	74.00	-12.82	PK
7440	48.57	-0.75	47.82	54.00	-6.18	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.

5. BAND EDGE

5.1 Limits

FCC PART 15.247 Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10kHz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBW to 300 KHz, to measure the conducted peak band edge.

5.3 Test Result

PASS

Remark: All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were tested, only the worst result of GFSK was reported as below:

Radiated Band Edge Test:

Worst case on GFSK

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	50.36	-5.81	44.55	74.00	-29.45	PK
2310	/	-5.81	/	54.00	/	AV
2390	51.69	-5.84	45.85	74.00	-28.15	PK
2390	/	-5.84	/	54.00	/	AV
2400	51.27	-5.84	45.43	74.00	-28.57	PK
2400	/	-5.84	/	54.00	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	51.96	-5.81	46.15	74.00	-27.85	PK
2310	/	-5.81	/	54.00	/	AV
2390	52.68	-5.84	46.84	74.00	-27.16	PK
2390	/	-5.84	/	54.00	/	AV
2400	51.38	-5.84	45.54	74.00	-28.46	PK
2400	/	-5.84	/	54.00	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High (2480MHz)

Horizontal :

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	51.33	-5.65	45.68	74.00	-28.32	PK
2483.5	/	-5.65	/	54.00	/	AV
2500	52.16	-5.72	46.44	74.00	-27.56	PK
2500	/	-5.72	/	54.00	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	50.28	-5.65	44.63	74.00	-29.37	PK
2483.5	/	-5.65	/	54.00	/	AV
2500	51.37	-5.72	45.65	74.00	-28.35	PK
2500	/	-5.72	/	54.00	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

6. OCCUPIED BANDWIDTH MEASUREMENT

6.1 Test Setup

Same as Radiated Emission Measurement

6.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW=100KHz, VBW=300KHz, Span=3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

6.3 Measurement Equipment Used

Same as Radiated Emission Measurement


6.4 Test Result

PASS

GFSK Modulation:

Frequency (MHz)	20dB Bandwidth (MHz)	Result
2402	1.004	PASS
2441	1.004	PASS
2480	1.002	PASS

CH: 2402MHz

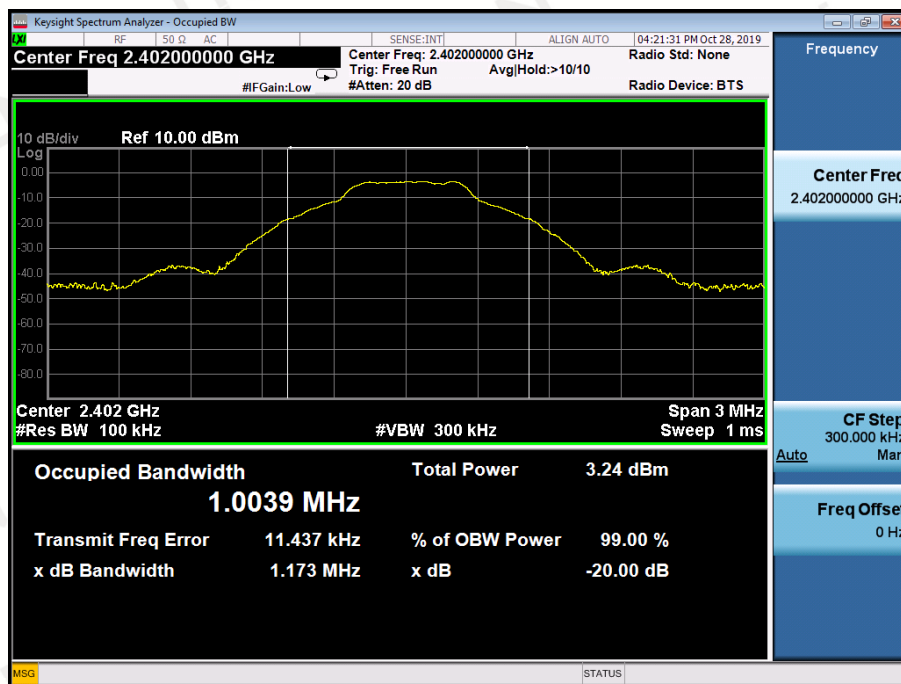

CH: 2441MHz




CH: 2480MHz




$\pi/4$ DQPSK Modulation:

Frequency (MHz)	20dB Bandwidth (MHz)	Result
2402	1.244	PASS
2441	1.245	PASS
2480	1.243	PASS


CH: 2402MHz

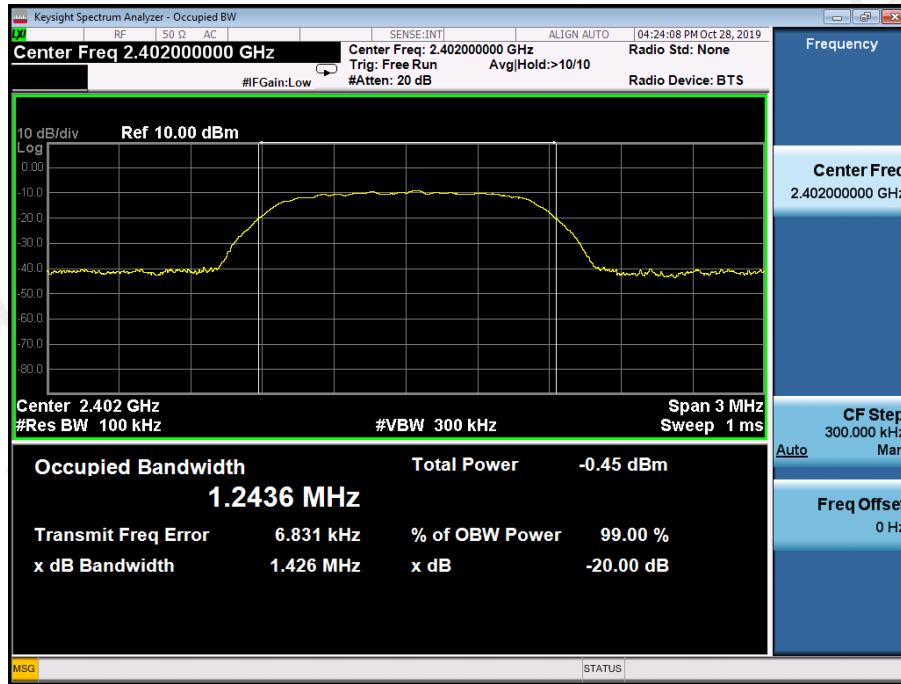

CH: 2441MHz

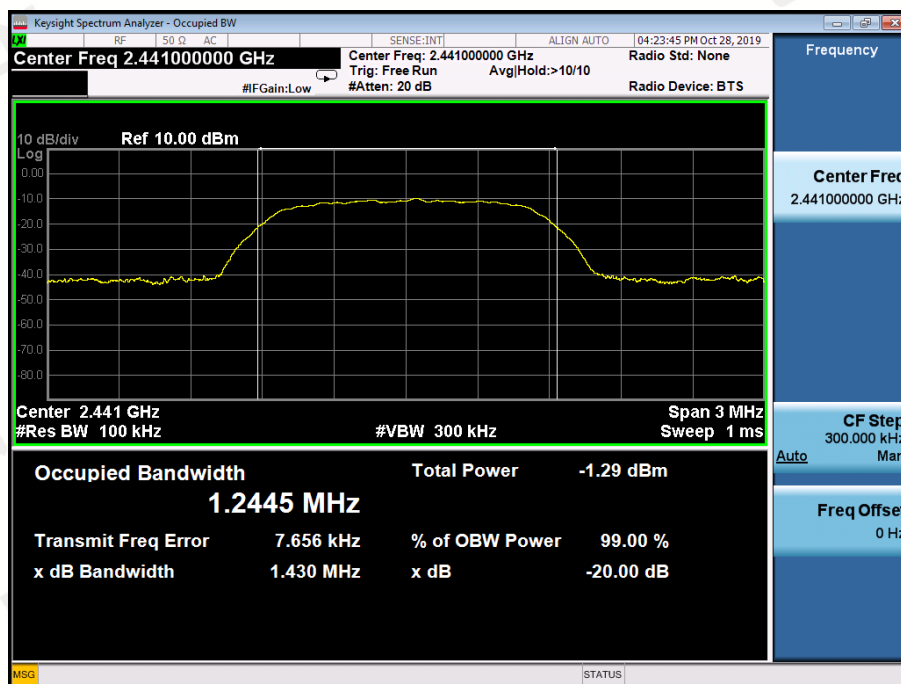


CH: 2480MHz

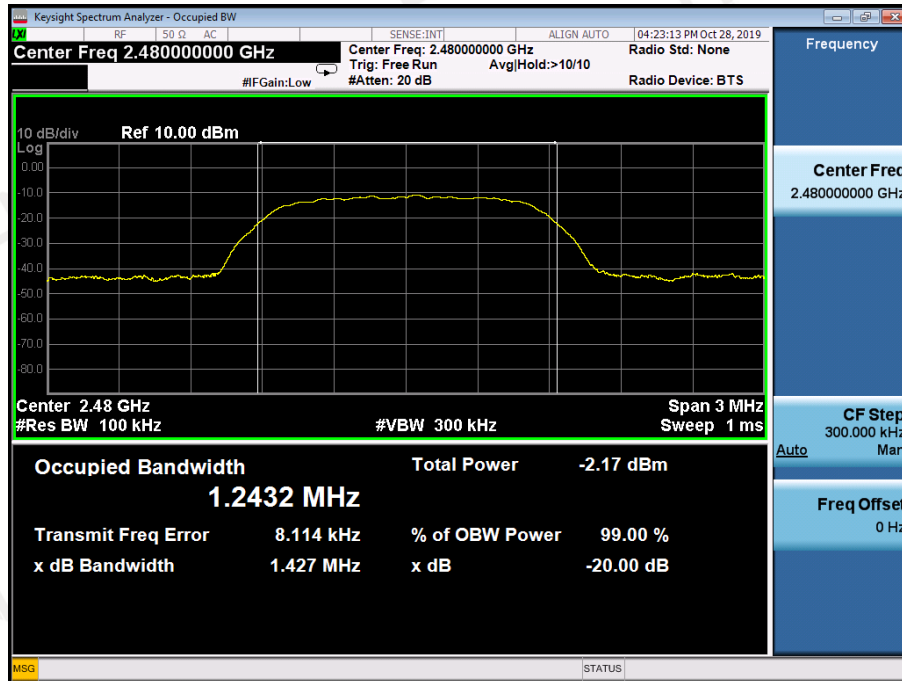


8DPSK Modulation:

Frequency (MHz)	20dB Bandwidth (MHz)	Result
2402	1.246	PASS
2441	1.247	PASS
2480	1.245	PASS


CH: 2402MHz

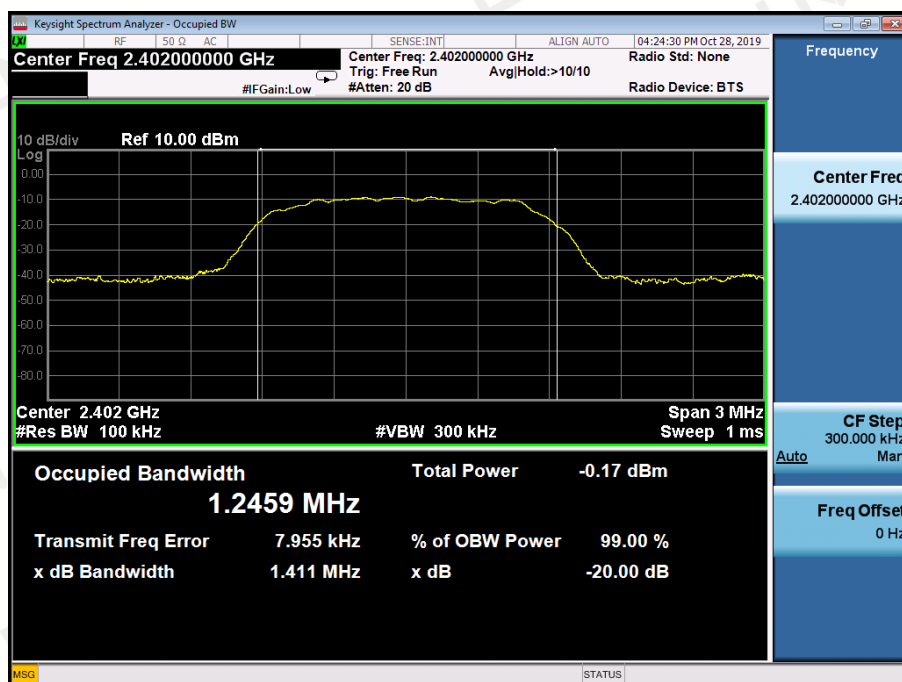

CH: 2441MHz

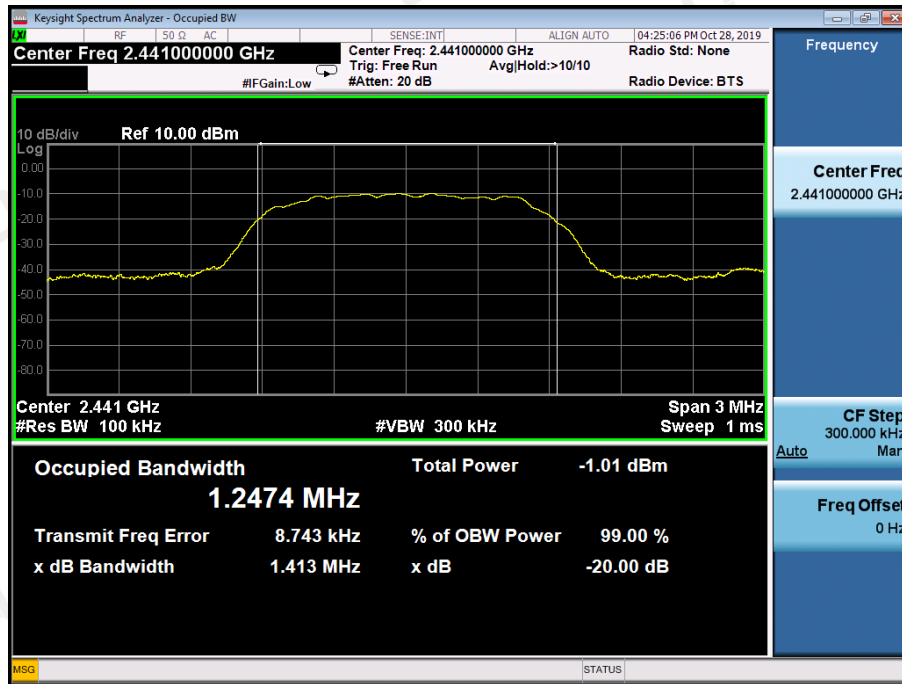

CH: 2480MHz

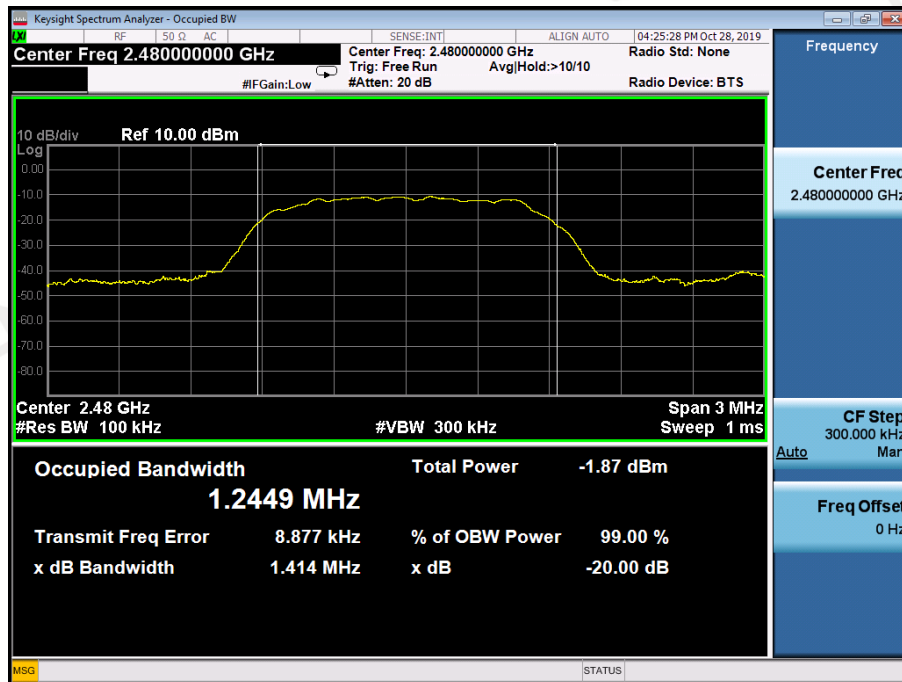

7. MAXIMUM PEAK OUTPUT POWER

7.1 Test Setup



7.2 Test Procedure

According to ANSI C63.10:2013 Maximum peak conducted output power for HFSS devices: The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple derector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

7.3 Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

7.4 Test Result

PASS

Type	Channel	Peak Output power (dBm)	Limit (dBm)	Result
GFSK	Low	-1.102	21	Pass
	Mid	-1.566		
	High	-1.896		
$\pi/4$ DQPSK	Low	-2.415	21	Pass
	Mid	-3.002		
	High	-2.861		
8DPSK	Low	-2.152	21	Pass
	Mid	-2.439		
	High	-2.974		

8. FREQUENCY SEPARATION

8.1 Test Setup



8.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz.

8.3 Limit

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $\frac{2}{3} \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

8.4 Test Result

PASS

Type/Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.000	0.669	pass
	Adjacency Channel	2403			
	Mid Channel	2441	0.998	0.669	pass
	Adjacency Channel	2442			
	High Channel	2480	1.004	0.668	pass
	Adjacency Channel	2479			

CH: 2402MHz



CH: 2441MHz




CH: 2480MHz




Type/Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.006	0.829	pass
	Adjacency Channel	2403			
	Mid Channel	2441	0.992	0.830	pass
	Adjacency Channel	2442			
	High Channel	2480	0.988	0.829	pass
	Adjacency Channel	2479			

CH: 2402MHz

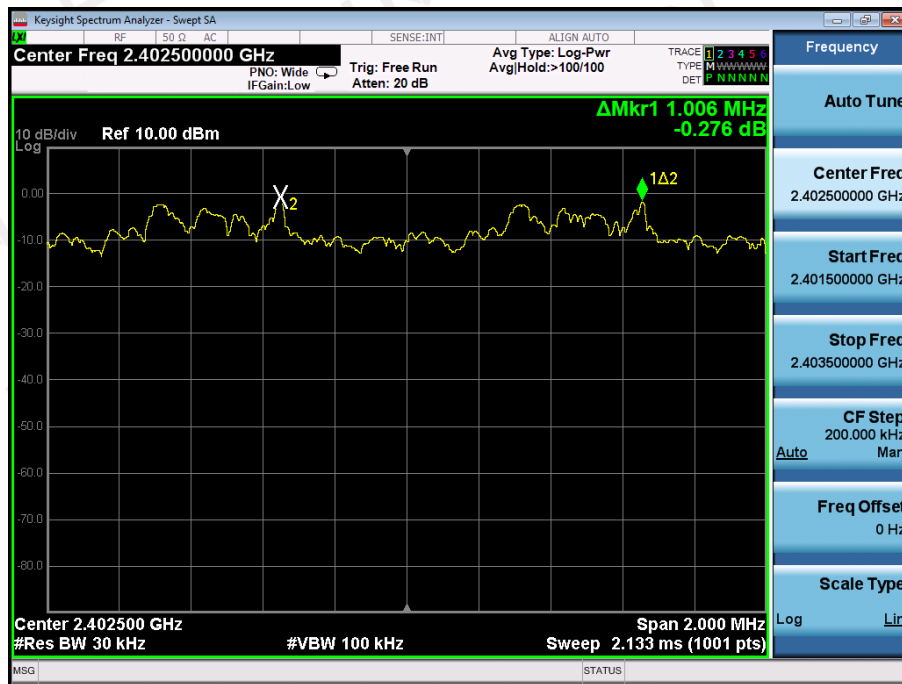

CH: 2441MHz

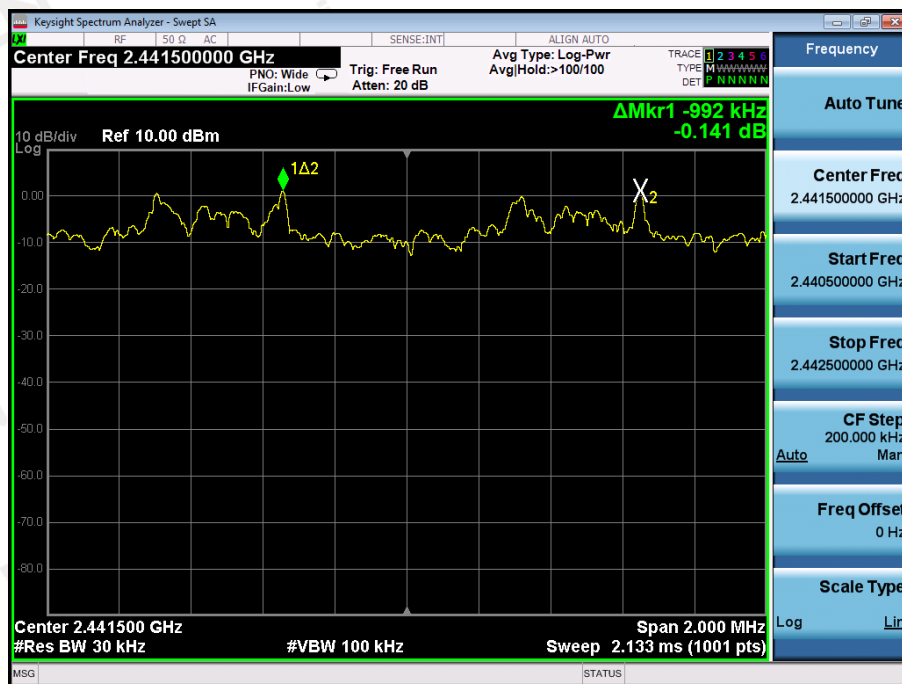


CH: 2480MHz



Type/Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation 8DPSK	Low Channel	2402	0.992	0.831	pass
	Adjacency Channel	2403			
	Mid Channel	2441	1.006	0.831	pass
	Adjacency Channel	2442			
	High Channel	2480	0.996	0.830	pass
	Adjacency Channel	2479			

CH: 2402MHz

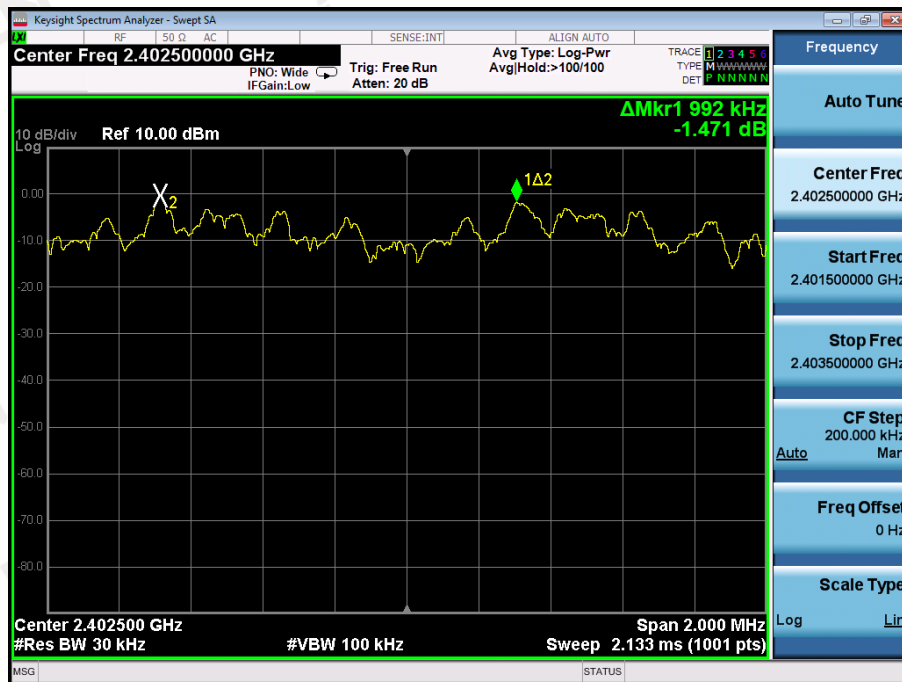

Keysight Spectrum Analyzer - Swept SA

RF 50 Ω AC SENSE:INT ALIGN: AUTO

Center Freq 2.441500000 GHz Avg Type: Log-Pwr
PNO: Wide IFGain:Low Trigr: Free Run Avg|Hold->100/100
ATTEN: 20 dB

TRACE 1 2 3 4 5 6
TYPE M W W W W W W W
DET P N N N N N

10. dB/div Ref 10.00 dBm

ΔMkr1 1.006 MHz
-0.592 dB

1Δ2

Center 2.441500 GHz Span 2.000 MHz
#Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)

MSG STATUS

Frequency Auto Tune

Center Freq 2.441500000 GHz

Start Freq 2.440500000 GHz

Stop Freq 2.442500000 GHz

CF Step 200.000 kHz
Man

Auto

Freq Offset 0 Hz

Scale Type Lin

Log

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.47950000 GHz

PNO: Wide IFGain: Low

Trig: Free Run Atten: 20 dB

Avg Type: Log-Pwr Avg|Hold->100/100

TRACE 1 2 3 4 5 6
TYPE M W W W W W W W
DET P N N N N N

10. dB/div Log

Ref 10.00 dBm

$\Delta Mkr1 -996 \text{ kHz}$
 -0.169 dB

1Δ2

X2

Center 2.479500 GHz

#Res BW 30 kHz

#VBW 100 kHz

Span 2.000 MHz

Sweep 2.133 ms (1001 pts)

Frequency

Auto Tune

Center Freq 2.479500000 GHz

Start Freq 2.478500000 GHz

Stop Freq 2.480500000 GHz

CF Step 200.000 kHz

Auto Man

Freq Offset 0 Hz

Scale Type

Log Lin

9. CONDUCTED BANDEGE MEASUREMENT

9.1 Test Setup



9.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Based on FCC Part15 C Section 15.247: RBW=100KHz, VBW=300KHz.
4. Set detected by the spectrum analyzer with peak detector.

9.3 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.


9.4 Test Result

PASS


Modulation		Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
GFSK	Non-hopping	Left Band	41.15	20	Pass
		Right Band	40.18	20	Pass
	hopping	Left Band	42.12	20	Pass
		Right Band	45.57	20	Pass
$\pi/4$ DQPSK	Non-hopping	Left Band	36.17	20	Pass
		Right Band	42.40	20	Pass
	hopping	Left Band	44.54	20	Pass
		Right Band	47.63	20	Pass
8DPSK	Non-hopping	Left Band	40.03	20	Pass
		Right Band	40.01	20	Pass
	hopping	Left Band	40.46	20	Pass
		Right Band	44.83	20	Pass

GFSK


2402MHz

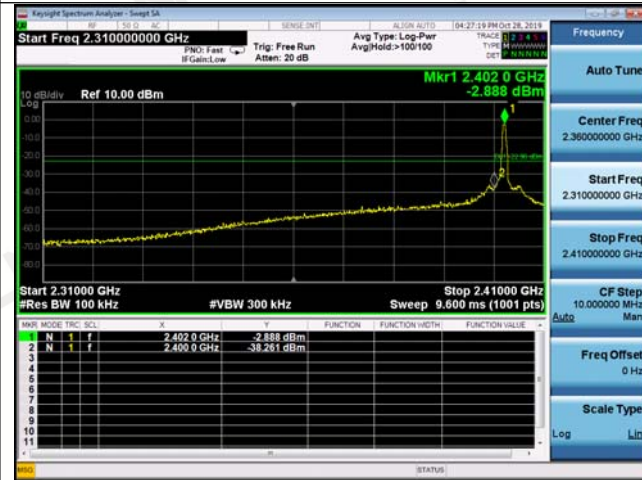


2480MHz

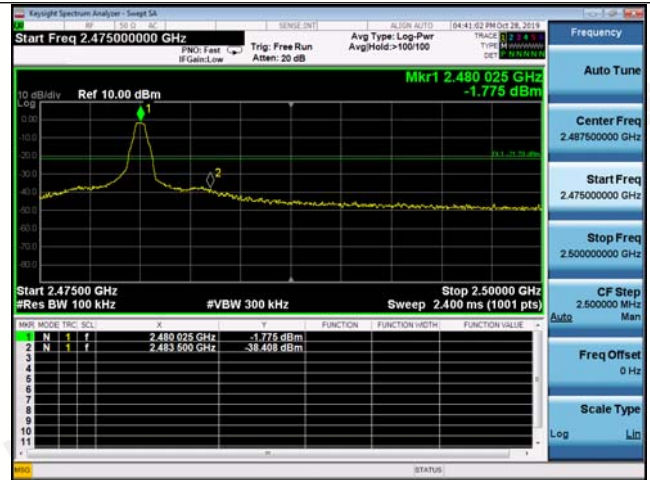

Hoping Off

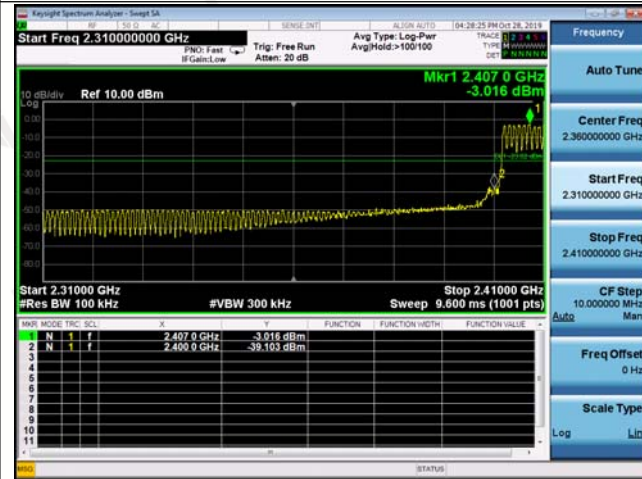

Hoping Off

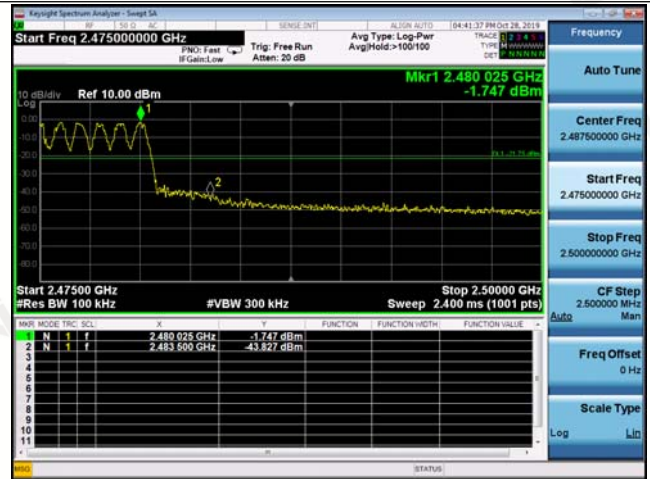

Hoping On



Hoping On



$\pi/4$ DQPSK


2402MHz




2480MHz



Hoping Off

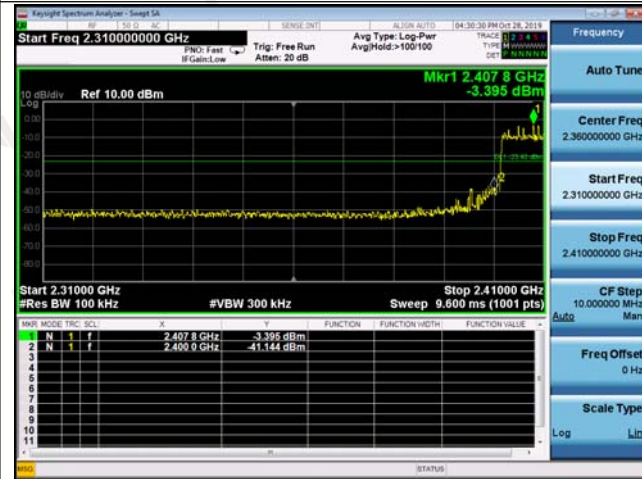

Hoping Off

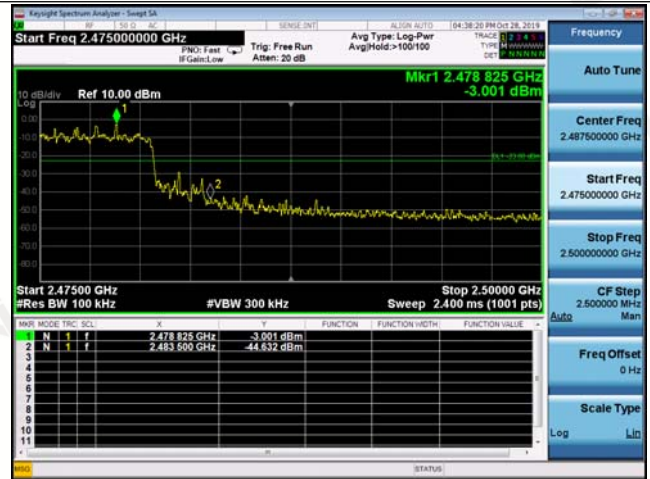

Hoping On



Hoping On



8DPSK


2402MHz




2480MHz



Hoping Off

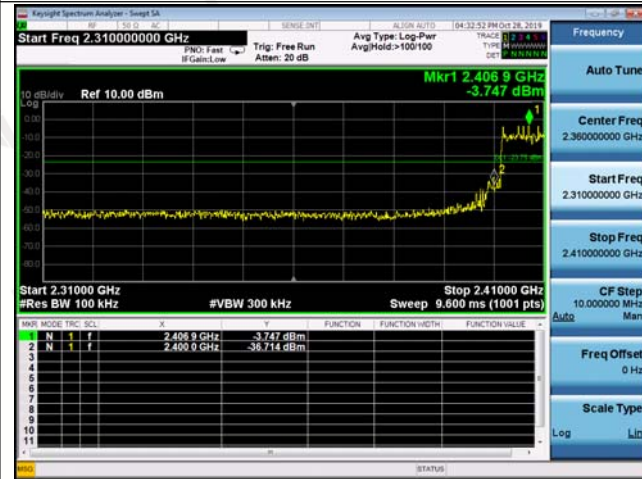

Hoping Off

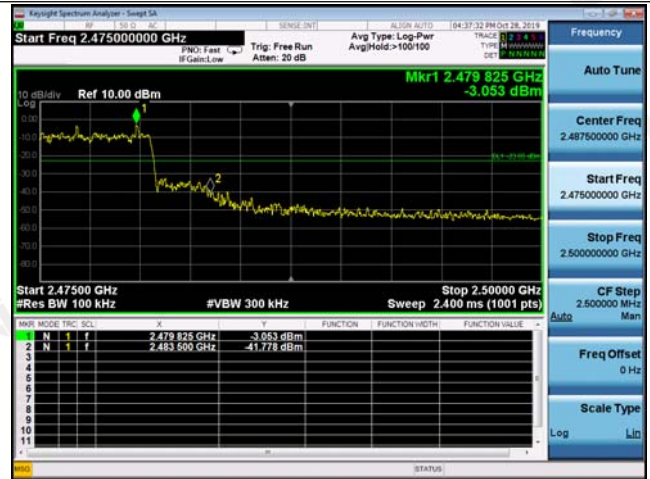

Hoping On



Hoping On



10. SPURIOUS RF CONDUCTED EMISSION


10.1 Test Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.
3. For below 30MHz, For 9KHz-150kHz, 150K-10MHz, We use the RBW 1KHz, 10KHz, So the limit need to be calculated by " $10\lg(BW1/BW2)$ ". for example For 9KHz-150kHz, RBW 1KHz, The Limit= the highest emission level-20-10log(100/1)= the highest emission level-40.

10.2 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013, For 9KHz-150kHz, Set RBW=1kHz and VBW= 3KHz; For 150KHz-10MHz, Set RBW=10kHz and VBW= 30KHz; For 10MHz-25GHz, Set RBW=100kHz and VBW= 300KHz in order to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

10.3 Test Setup

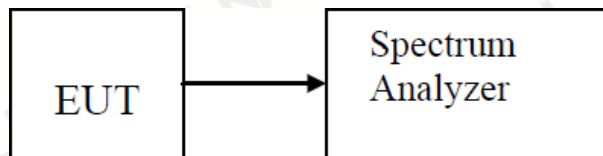


10.4 Test Result


PASS

Remark: All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were tested, only the worst result of GFSK was reported as below:


GFSK

CH: 2402MHz

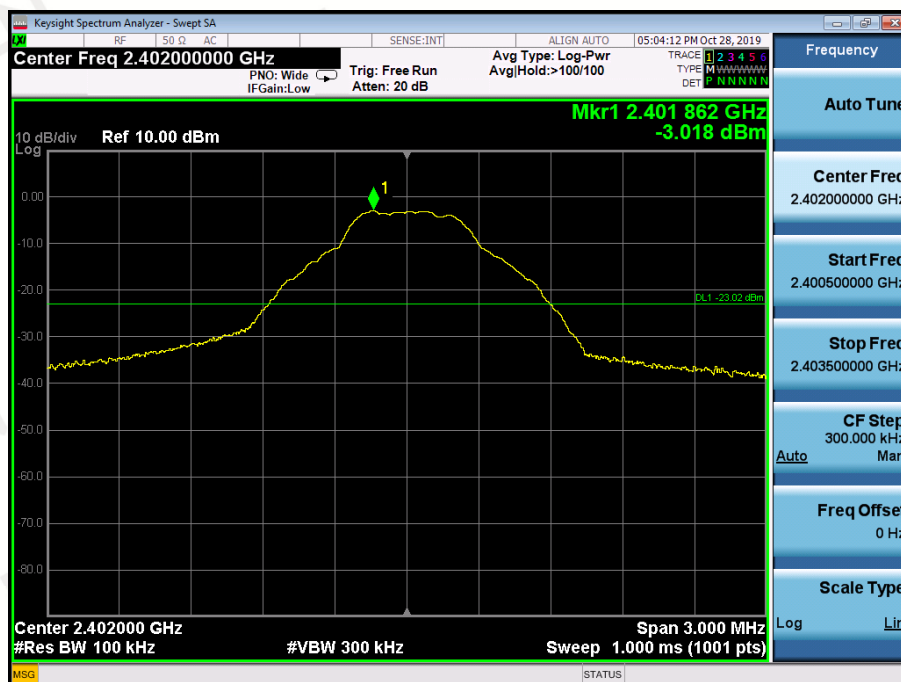

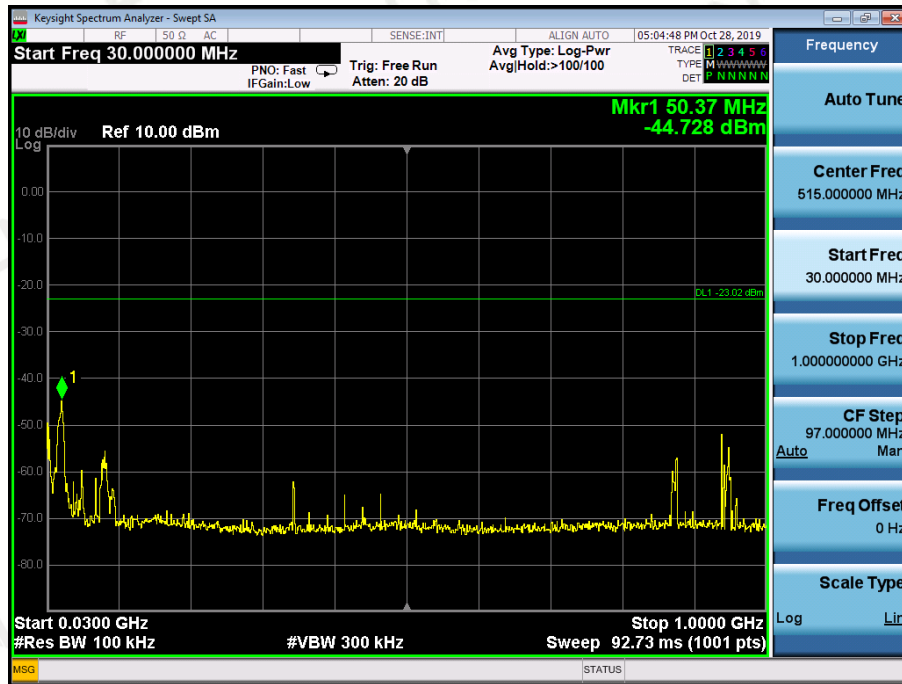



30MHz~1GHz

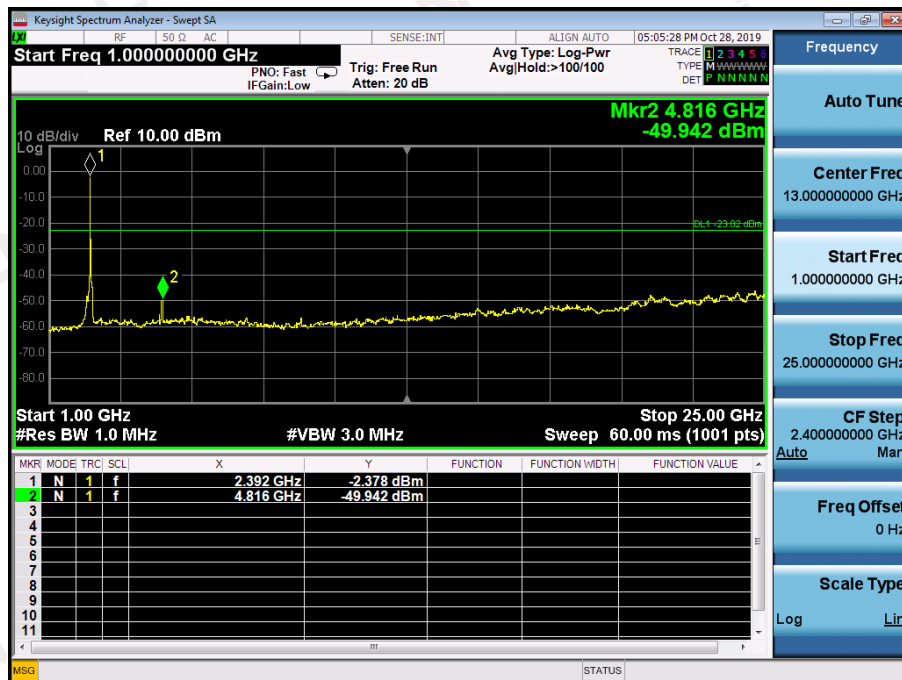


1GHz~25GHz

GFSK

CH: 2441MHz

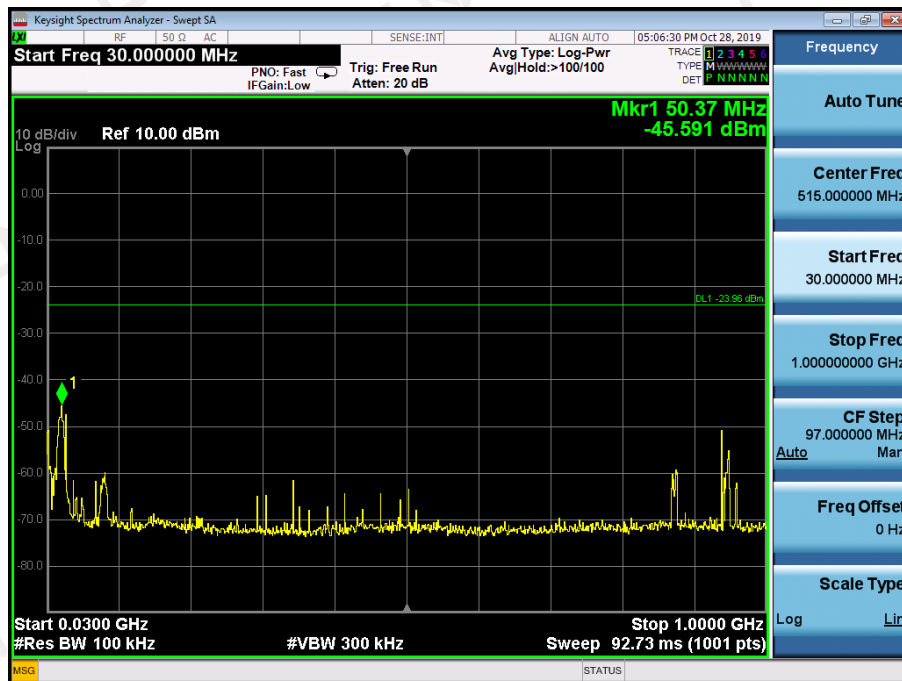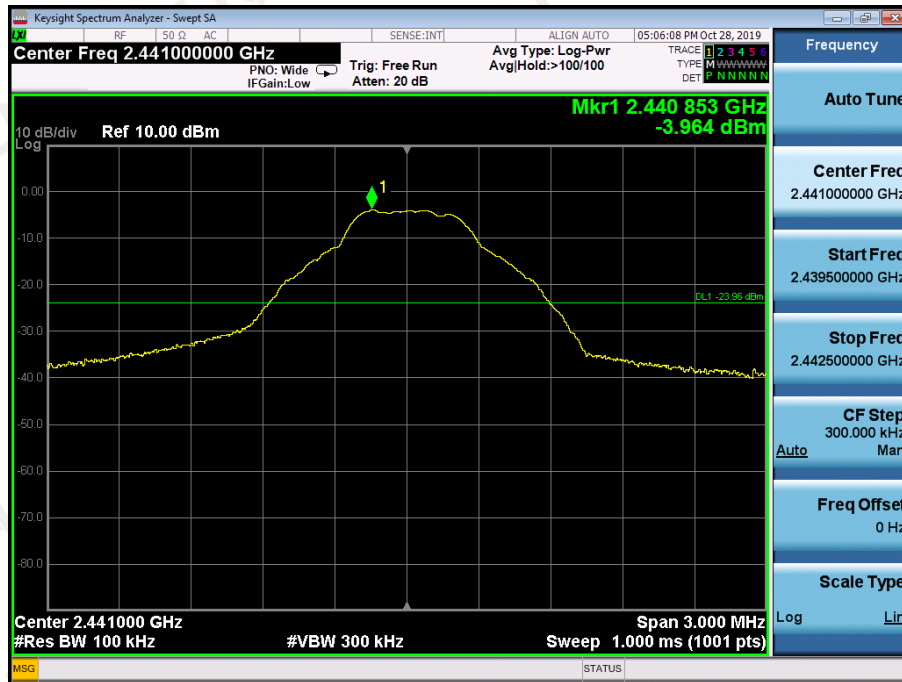


30MHz~1GHz

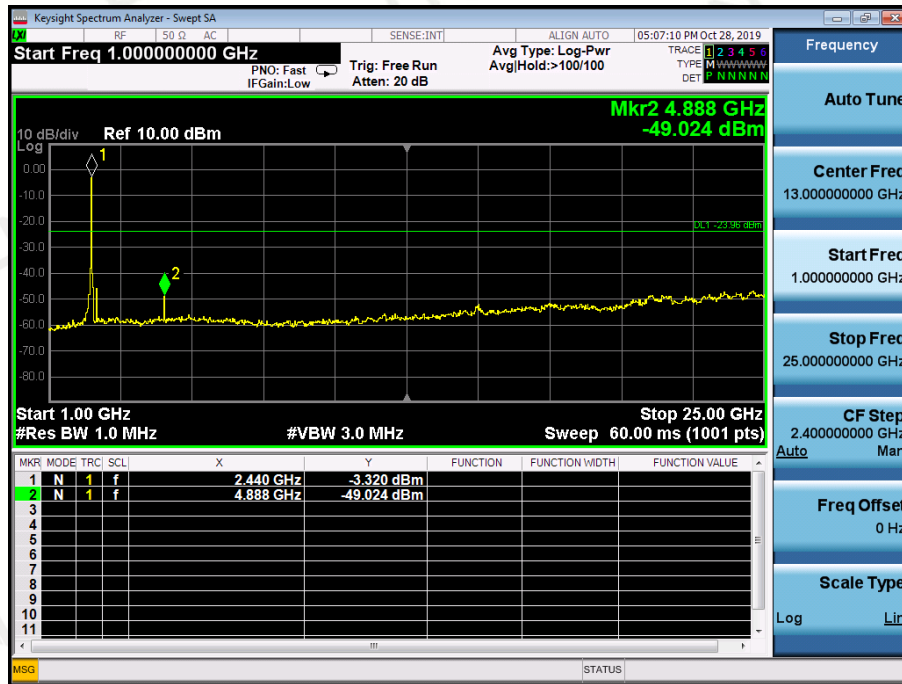


1GHz~25GHz


GFSK

CH: 2480MHz

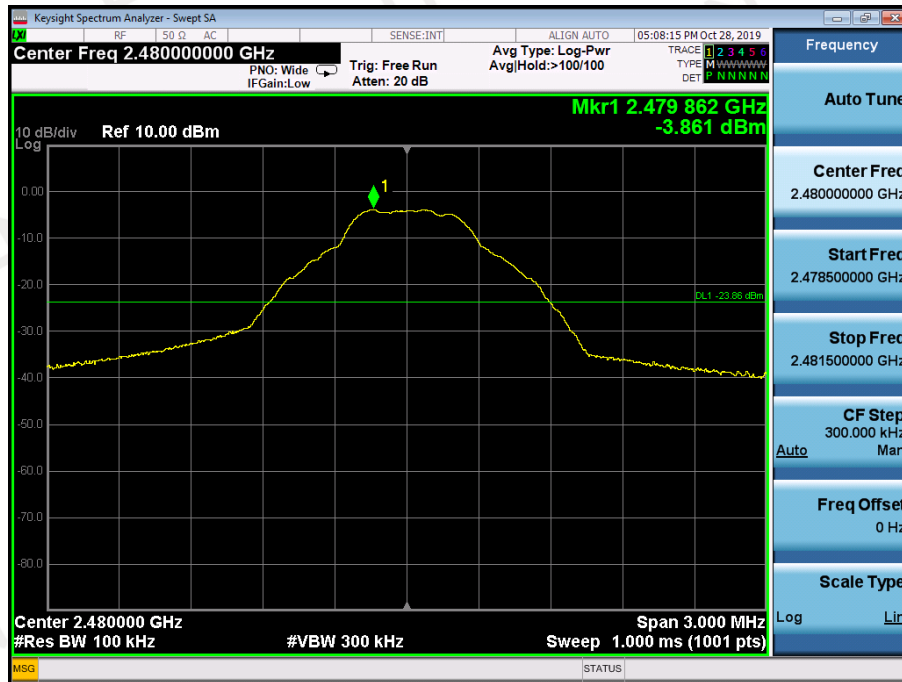

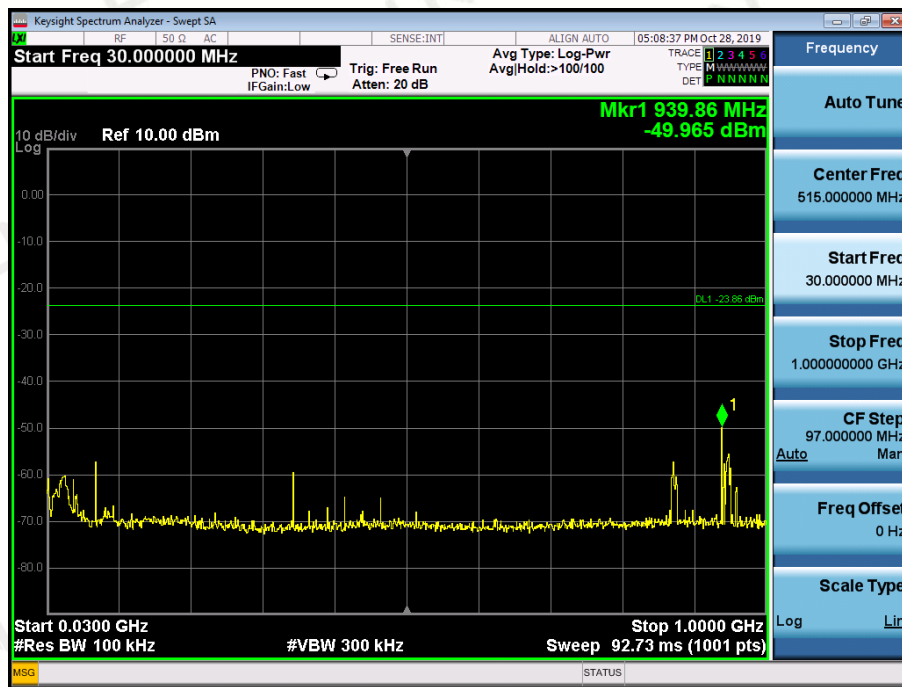

30MHz~1GHz

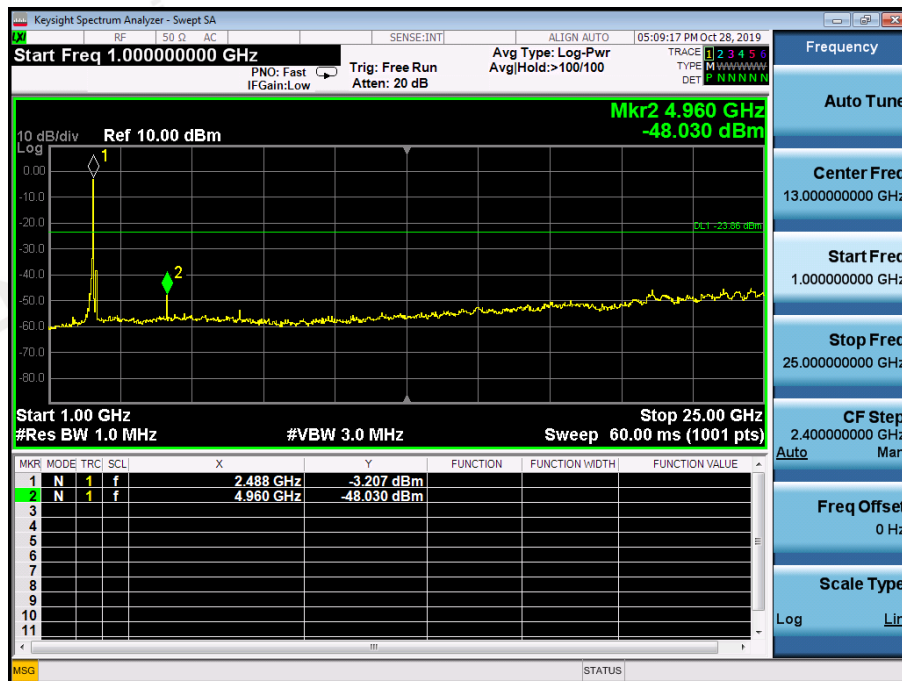

1GHz~25GHz

11. NUMBER OF HOPPING FREQUENCY


11.1 Test Limit

Frequency hopping systems in the 2400 – 2483.5MHz band shall use at least 15 channels.

11.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=1MHz and VBW=3MHz.

11.3 Test Setup

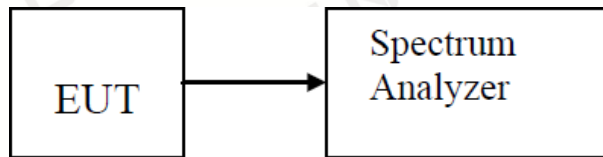


11.4 Test Result


PASS

Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		


GFSK

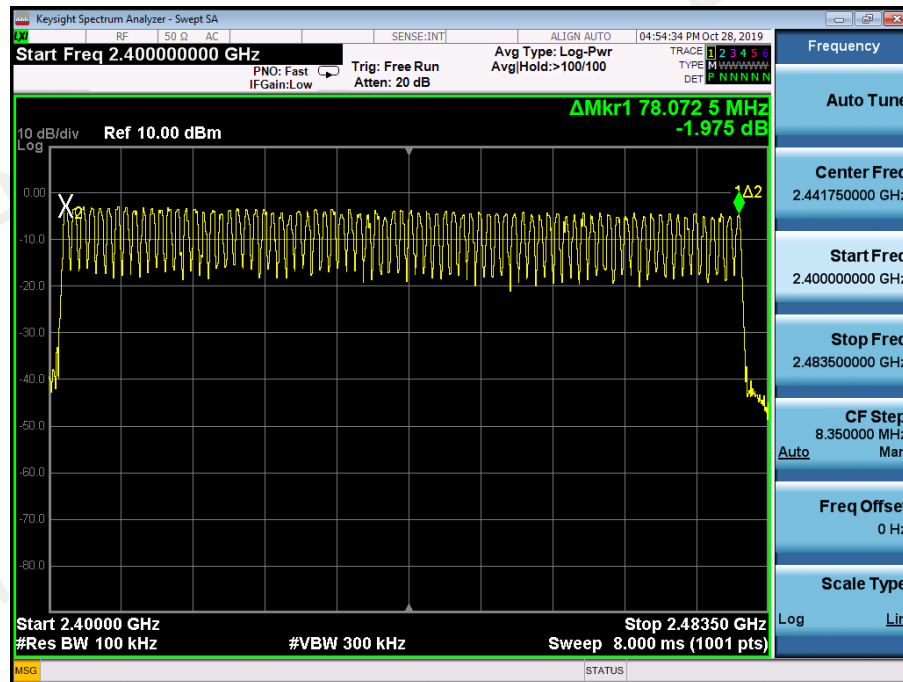

$\pi/4$ DQPSK

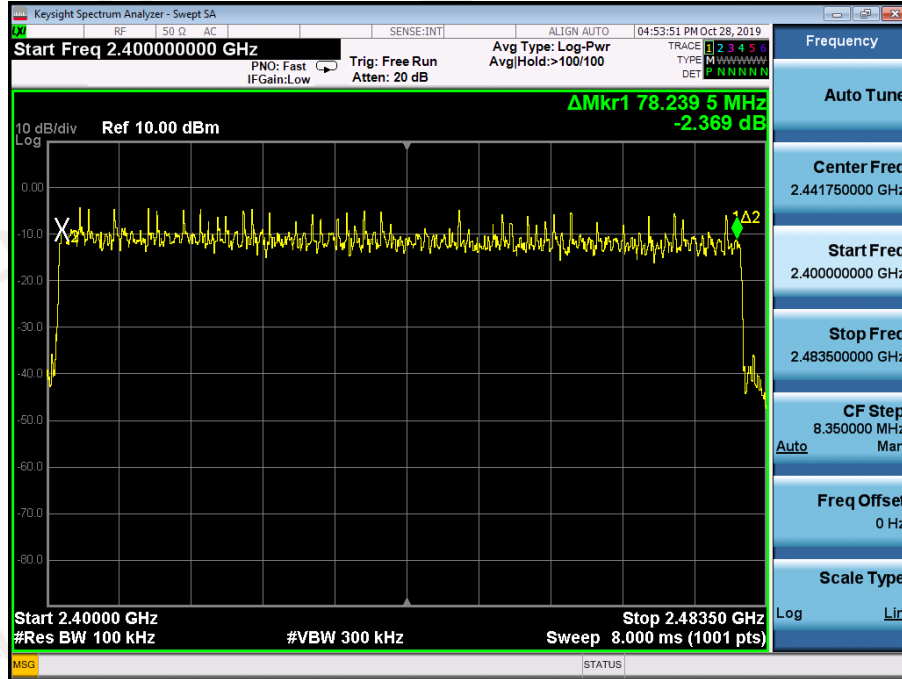

8DPSK

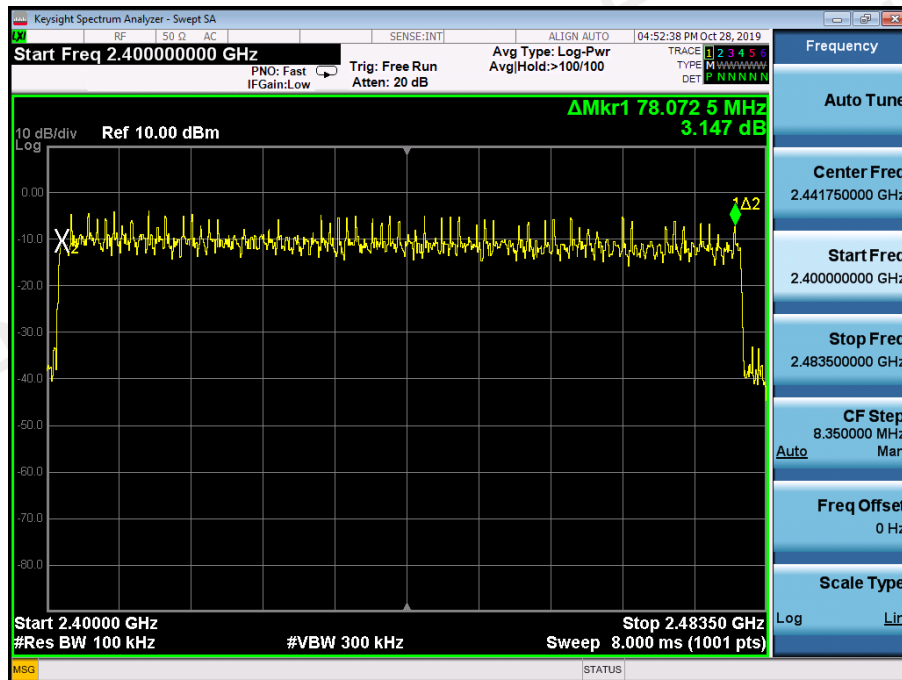

12. TIME OF OCCUPANCY(DWELL TIME)


12.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

12.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator.
Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz,Span=0Hz.

12.3 Test Setup

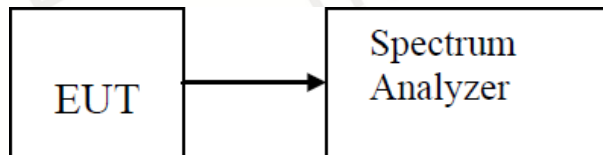


12.4 Test Result


PASS

Type	Modulation	CH	Pulse time(ms)	Dwell Time(ms)	Limit(ms)	Result
Dwell Time	GFSK	Low	2.96	315.73	400	Pass
		Mid	2.95	314.67	400	Pass
		High	2.98	317.87	400	Pass


CH: 2402MHz

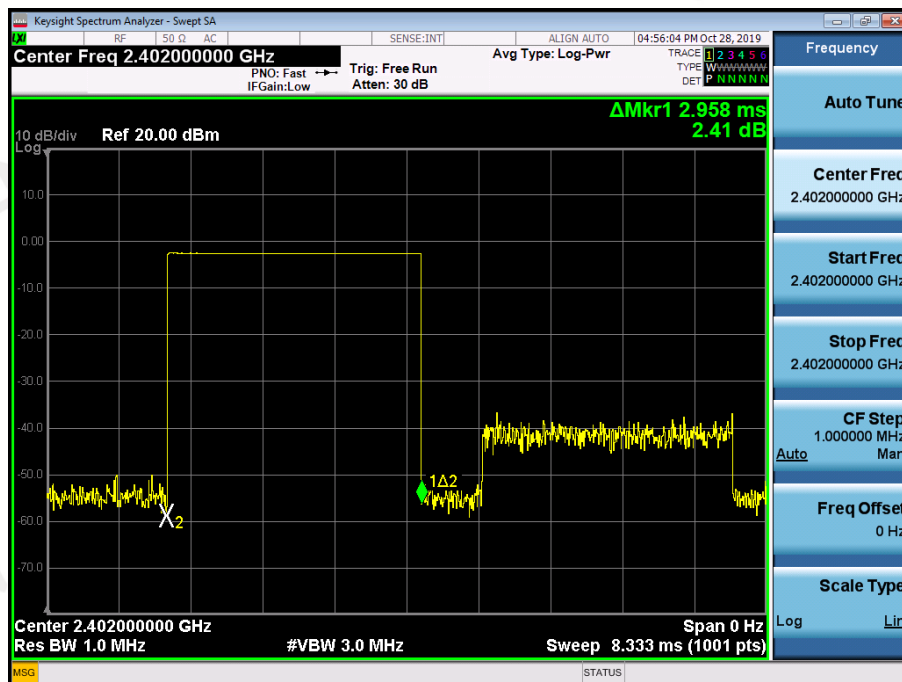

CH: 2441MHz

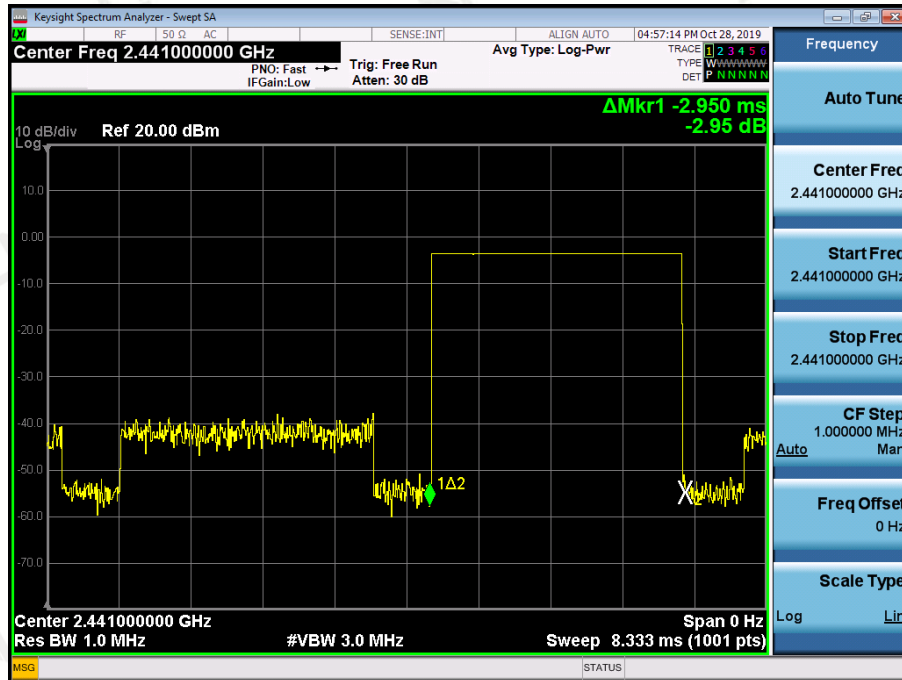


CH: 2480MHz

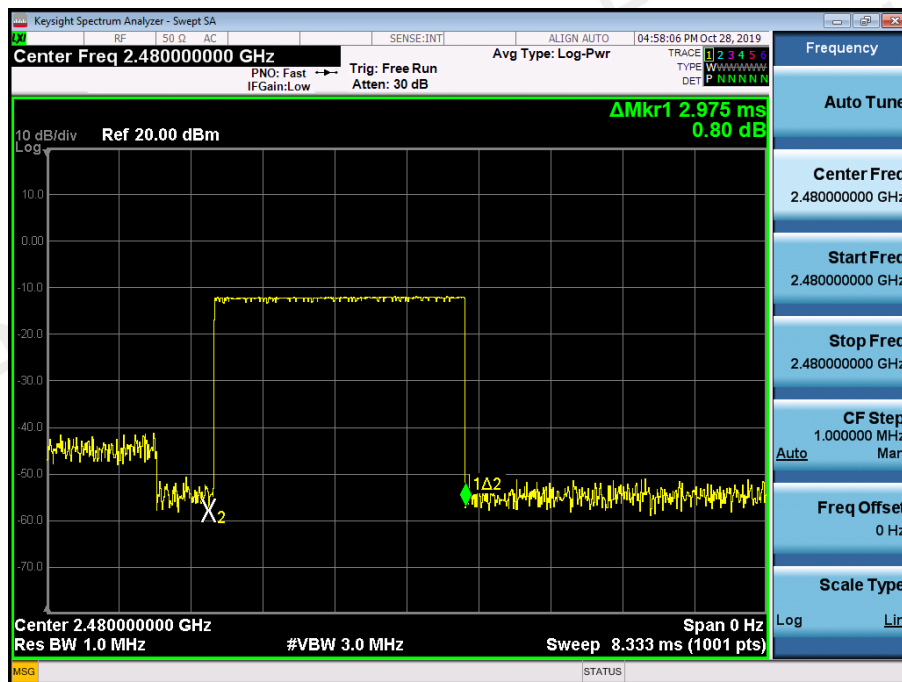


Type	Modulation	CH	Pulse time(ms)	Dwell Time(ms)	Limit(ms)	Result
Dwell Time	$\pi/4$ DQPSK	Low	2.96	315.73	400	Pass
		Mid	2.94	313.60	400	Pass
		High	2.98	317.87	400	Pass


CH: 2402MHz

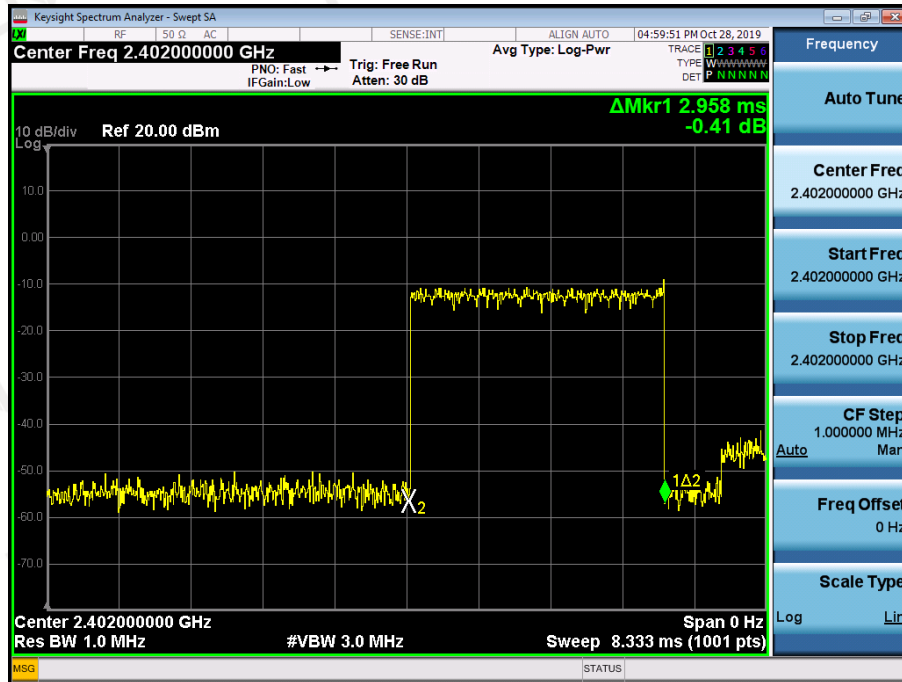

CH: 2441MHz

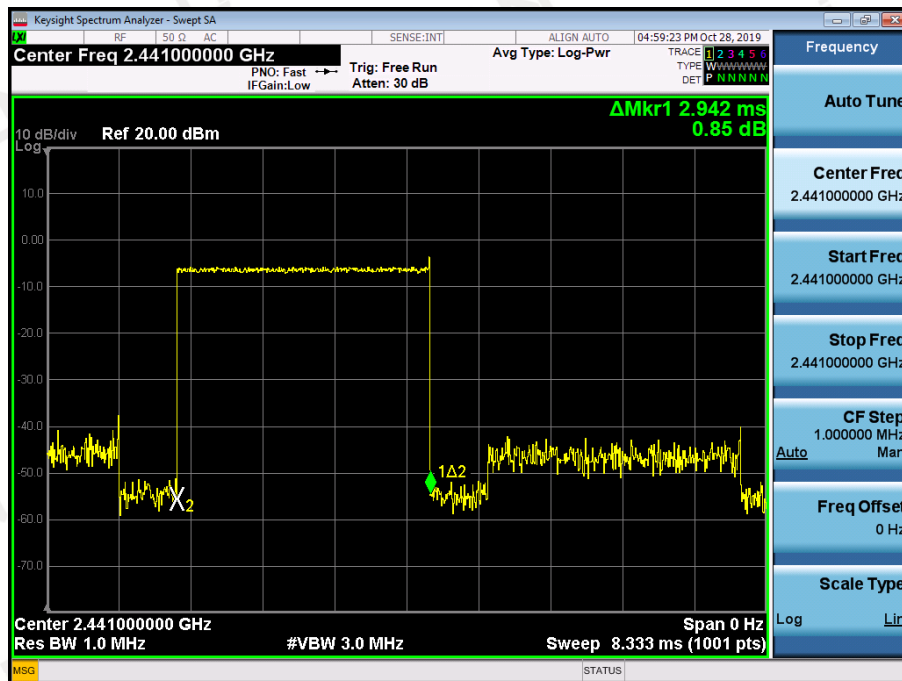


CH: 2480MHz

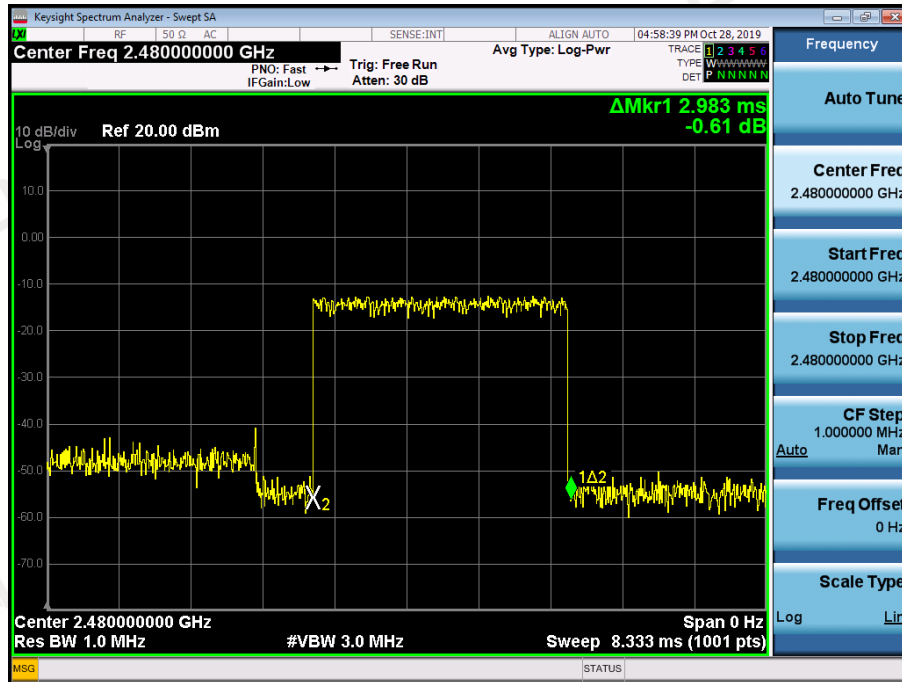


Type	Modulation	CH	Pulse time(ms)	Dwell Time(ms)	Limit(ms)	Result
Dwell Time	8DPSK	Low	2.97	316.80	400	Pass
		Mid	2.96	315.73	400	Pass
		High	2.96	315.73	400	Pass


CH: 2402MHz

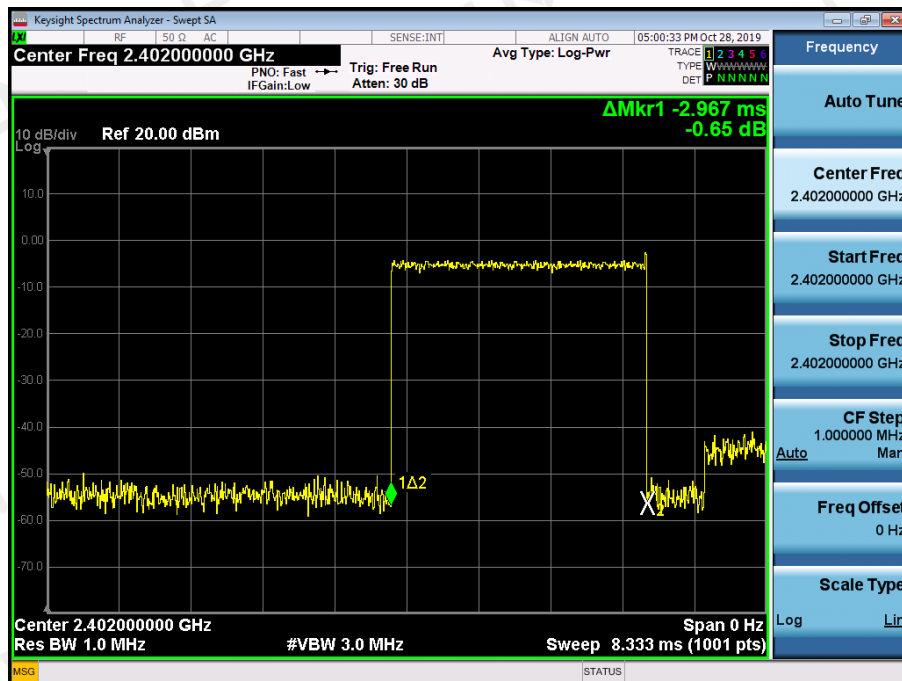

CH: 2441MHz

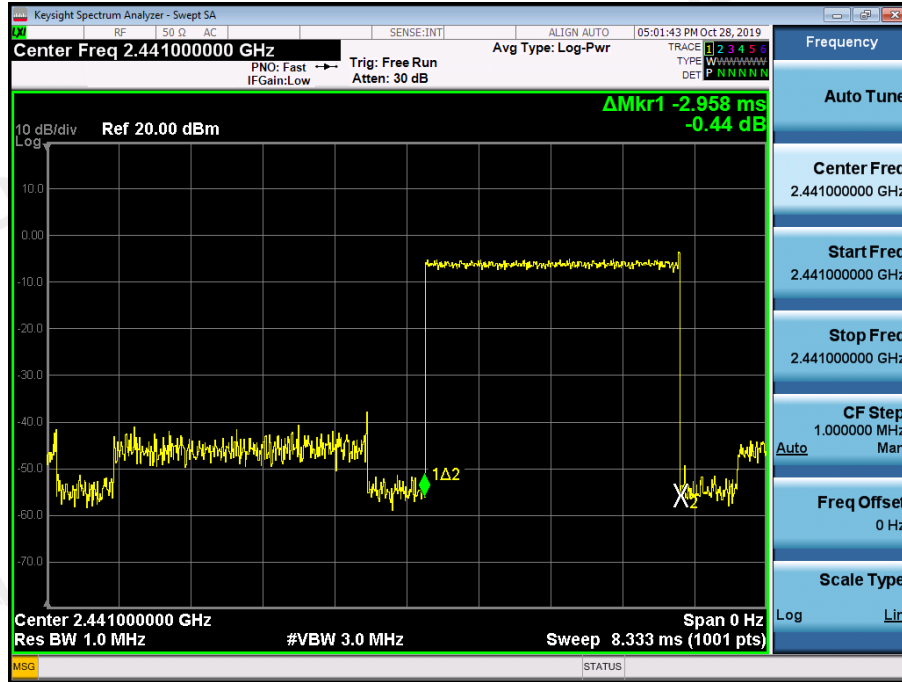

CH: 2480MHz

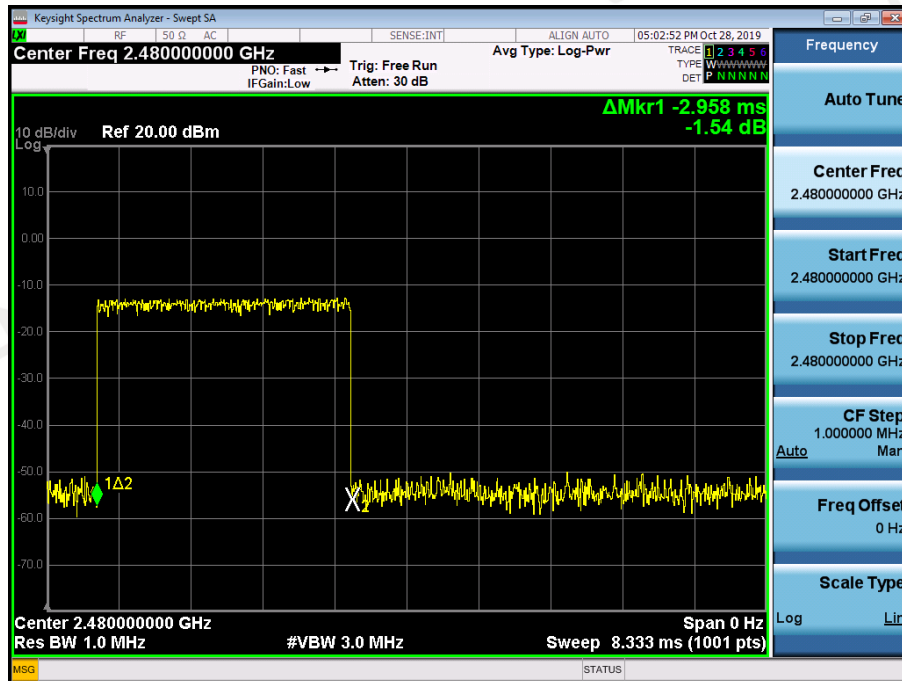

13. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE

For 47 CFR Part 15C section 15.247 (a)(1) requirement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 – 2483.5 MHz band may have hopping channel carrier frequencies

that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop

to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is

initialized with nine ones.

Number of shift register stages: 9


Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

Longest sequence of zeros: 8 (non-inverted signal)

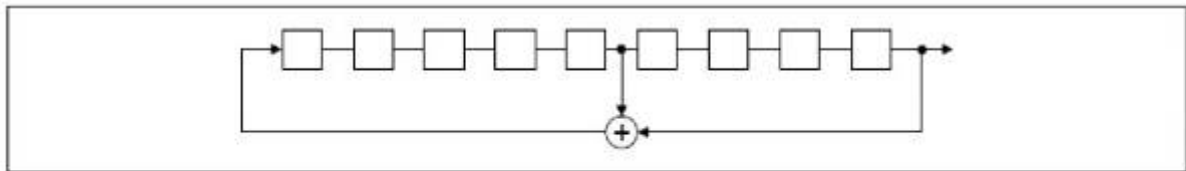

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

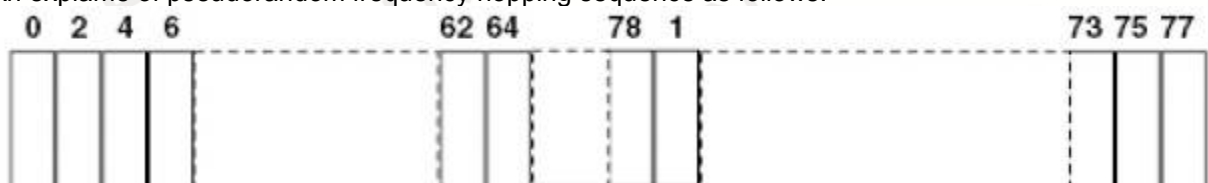

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

14. ANTENNA REQUIREMENT


Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

The antenna used in this product is an PCB Antenna, The directional gains of antenna used for transmitting is 0dBi.

ANTENNA:

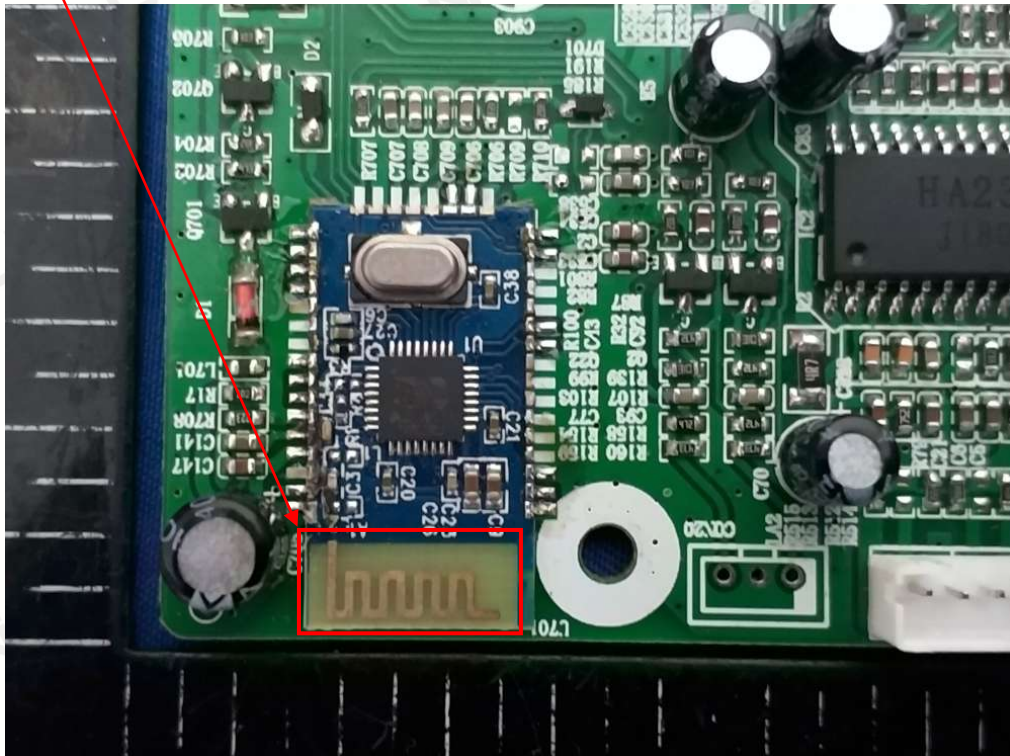

15. PHOTOGRAPH OF TEST

**Radiated Emission
(Below 1G)**



**Radiated Emission
(Above 1G)**



Conducted Emission



End of Report