



198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology

Development District, Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

Email: sgs_internet_operations@sgs.com

FEDERAL COMMUNICATIONS COMMISSION

Registration number: 282399

Report No.: GZEM120100021302

Page: 1 of 38

FCC ID: AVJ-4300R

TEST REPORT

Application No.:	GZEM1201000213RF (SGS HK NO.: 2025461/EE)
Applicant:	Bigben Interactive (HK) Ltd.
FCC ID:	AVJ-4300R
Product Name:	Parental Controller for PS3
Product Description:	USB transmitter with 2.4GHz as carrier
Model No.:	BB4300
Standards:	FCC PART 15 Subpart C: 2010 section 15.249
Date of Receipt:	2012-02-01
Date of Test:	2012-02-02 to 2012-02-13
Date of Issue:	2012-02-23
Test Result :	Pass*

* In the configuration tested, the EUT complied with the standards specified above.



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2012-02-23		Original

Authorized for issue by:			
Tested By	 (Storm Shu) / Project Engineer	2012-02-02 to 2012-02-13	Date
Prepared By	 (Storm Shu) / Project Engineer	2012-02-20	Date
Checked By	 Strong Yao/ Reviewer	2012-02-23	Date

3 Test Summary

TEST	TEST REQUIREMENT	TEST METHOD	RESULT
Field Strength of Fundamental	FCC PART 15 C section 15.249 (a)	ANSI C63.10: Clause 6.6	PASS
Field Strength of Unwanted Emissions	FCC PART 15 C section 15.249 (a) section 15.249 (d)	ANSI C63.10: Clause 6.4, 6.6 and 6.7	PASS
Band Edges	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.9.2	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9.1	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS

Remark:

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.

4 Contents

1 COVER PAGE	1
2 VERSION.....	2
3 TEST SUMMARY	3
4 CONTENTS.....	4
5 GENERAL INFORMATION	5
5.1 Client Information	5
5.2 General Description of E.U.T	5
5.3 Details of E.U.T	5
5.4 Description of Support Units	7
5.5 Other Information Requested by the Customer	9
5.6 Deviation from Standards	9
5.7 Test Location	9
6 EQUIPMENT USED DURING TEST.....	11
7 TEST RESULTS	13
7.1 E.U.T. Operation.....	13
7.2 Antenna Requirement	14
7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge	15
7.4 Occupied Bandwidth	31
7.5 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz	33
8 PHOTOGRAPHS.....	ERROR! BOOKMARK NOT DEFINED.
8.1 Radiated Emission Test Setup.....	Error! Bookmark not defined.
8.2 Conducted Emission Test Setup	Error! Bookmark not defined.
9 EUT CONSTRUCTIONAL DETAILS	ERROR! BOOKMARK NOT DEFINED.

5 General Information

5.1 Client Information

Applicant: Bigben Interactive (HK) Ltd.
Address of Applicant: Unit 1505, 148 Electric Road, North Point, Hong Kong SAR China

5.2 General Description of E.U.T.

Product Name: Parental Controller for PS3
Model No.: BB4300

5.3 Details of E.U.T.

Operating Frequency 2402MHz to 2480MHz
Type of Modulation: GFSK
Number of Channels 79
Channel Separation: 1 MHz
Antenna Type single-ended monopole PCB antenna
Antenna gain: 1 dBi
Function: The EUT is a set of equipment.
With FHSS technology, the controller and dongle will hop between 2402 MHz and 2480 MHz with 79 channels to transfer data.
Power Supply: DC 5.0V supplied by PC/PS3 USB port for Dongle
Power cord: N/A

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2413	22	2424
1	2403	12	2414	23	2425
2	2404	13	2415	24	2426
3	2405	14	2416	25	2427
4	2406	15	2417	26	2428
5	2407	16	2418	27	2429
6	2408	17	2419	28	2430
7	2409	18	2420	29	2431
8	2410	19	2421	30	2432
9	2411	20	2422	31	2433
10	2412	21	2423	32	2434

33	2435	49	2451	65	2467
34	2436	50	2452	66	2468
35	2437	51	2453	67	2469
36	2438	52	2454	68	2470
37	2439	53	2455	69	2471
38	2440	54	2456	70	2472
39	2441	55	2457	71	2473
40	2442	56	2458	72	2474
41	2443	57	2459	73	2475
42	2444	58	2460	74	2476
43	2445	59	2461	75	2477
44	2446	60	2462	76	2478
45	2447	61	2463	77	2479
46	2448	62	2464	78	2480
47	2449	63	2465		
48	2450	64	2466		

Test frequencies are the lowest channel: 0 channel(2402MHz), middle channel: 39 channel(2441MHz) and highest channel: 78 channel(2480MHz).

5.4 Description of Support Units

The EUT has been tested with a Notebook and a PS3 as associated equipment.

Description	Manufacturer	Model No.	SN/Certificate NO
Test PC 1			
Personal Computer	DELL	WORKSTATION 690	3R5592X
Monitor	SAMSUNG	225MS	CR22HVMP900646W
Mouse	DELL	MOC5UO	G1B02ZP5
Keyboard	DELL	SK-8115	CN-ODJ331-71616-7B1-109J
Test PC 2			
Personal Computer	DELL	OPTIPLEX 755	D6JF82X
Monitor	DELL	SP2208WF Pt(B)	CN-OPK573-71618-831-119U
Mouse	DELL	M-WDEL1	OT0943
Keyboard	DELL	SK-8115	CN-ODJ331-71616-7B1-109J
Test PC 3			
Personal Computer	DELL	OPTIPLEX 330	7JZ382X
Monitor	DELL	E228WFPC	CN-OPN380-64180-7CJ-1DXL
Mouse	DELL	MOC5UO	G1B02ZP5
Keyboard	CHERRY	RS 6000M	G 00005662 Q242 III
Test PC 4			
Personal Computer	DELL	OPTIPLEX 980	GXVZV2X
Monitor	DELL	P2210f	FGL-00000714011207500 -09BO02490-A
Mouse	DELL	M-WDEL1	OT0943
Keyboard	DELL	SK-8135	N/A
Test PC 5			
Personal Computer	Lenovo	M6600N	SS12594403
Monitor	HP	D8904	L0204H094
Mouse	DELL	MOC5UO	G1B02ZP5
Keyboard	DELL	SK-8135	N/A
Notebook			
NoteBook	IBM	T40	99-FBAF9 03/09
NoteBook	IBM	T60	L3-F3755
NoteBook	Lenovo	R400	L3-ABB9E

Description	Manufacturer	Model No.	SN/Certificate NO
Printer			
Printer	DELL	4470-AD1 (926B)	CN-OGH204-48734-69Q-7K78
Printer	HP	C5884A	SG78D1H18F
Other Peripheral			
DV	SONY	DCR-HC28	375383
Portable Hard disk	MSI	2.5" USB2.0 MOBILE HDD(250GB)	HKC08-J/L8022438329
Portable Hard disk	SAMSUNG	HM320JI(320GB)	S16LJD0Q543275
ROM Programmer	DASI Electronics	EMP-100A	N/A
Faxmodem	3Com U.S. Robotics	56K Faxmodem	715630-01
HP Colorado T1000e External Parallel Tape Backup System	Hewlett Packard	T1000e	US035980
GROUP PHONE SYSTEM	HB	WS824(1)	241342207120130
Fast Ethernet Switch	TP-Link	TL-SF1005D	7126101589
Fast Ethernet Switch	TP-Link	TL-SF1008D	7126001251
MIC	VoiceAO	N/A	N/A
MIC	VoiceAO	N/A	N/A
Flash Disk	Kingston	DTI/2GB	CH 092908
Flash Disk	Kingston	DTI/1GB	CH 042007
SD Memory Card	SanDisk	128MB	AK0531802339D
MiniSD Memory Card	SanDisk	1024MB	BB063010TE
MMCmobile	Richlight	1GB	MM8GH01GRMCA-9A
Headphone	COBY	CV-230	N/A
Headphone	Philips	N/A	N/A
Ipod classic	Apple	MB147CH	JQ74121YMV
Ipod nano	Apple	A1137	JQ63803RV9M
Ipod nano	Apple	A1137	5Z50163JXUY
Ipod nano	Apple	A1137	YM601DN0SZB
Ipod nano	Apple	MC688CH/A	DCYDWE22DDVX
Ipod touch	Apple	A1288	1B9070RW203
Iphone	Apple	A1203	87810HJBWH8
Iphone 3GS	Apple	A1303	579C-A1303A
Projector	Sony	VPL-CX61	5004355
PlayStation 3	Sony	CECH-3012A	4-295-267-01
Wii console	Nintendo	RVL-001(HKG)	LEA-RVL-S-KTP2-HKG
Xbox 360 Console	Microsoft	Xbox 360 Console	328731122665682000
Xbox Video Game System	Microsoft	F23-00064	111100623241005

5.5 Other Information Requested by the Customer

None.

5.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01:2006-10 and Rules of procedure IECEE 02:2006-10, and the relevant IECEE CB-Scheme Operational documents.

6 Equipment Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration
					(YYYY-MM-DD)	
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2012-09-06	2Y
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2012-11-11	1Y
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	10036	2012-06-01	1Y
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2012-06-09	1Y
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2012-10-20	1Y
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2012-11-28	1Y
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2012-11-28	1Y
EMC2026	Horn Antenna 1-18GHz	R&S	BBHA 9120D	9120D-841	2012-10-20	1Y
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2012-08-29	1Y
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2012-08-29	1Y
EMC0049	Amplifier	Agilent	8447D	2944A10862	2012-04-21	1Y
EMC0075	310N Amplifier	Sonama	310N	272683	2012-08-29	1Y
EMC0523	Active Loop Antenna	EMCO	6502	42963	2012-11-17	1Y
	Broad-Band Horn Antenna (14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONI	BBHA 9170	9170-375	2012-06-01	1Y
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2012-05-10	2Y

Conducted Emission						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration Interval
					(YYYY-MM-DD)	
EMC0306	Shielding Room	Zhong Yu	8 x 3 x 3.8 m ³	N/A	N/A	N/A
EMC0118	Two-line v-netwok	R&S	ENV216	100359	2012-08-29	1Y
EMC0102	LISN	SCHAFFNER CHASE	MN2050D/1	1421	2012-11-23	1Y
EMC2046	Artificial Mains Network (LISN)	AFJ Instruments	LT32C	S.N.32031120150	2012-05-18	1Y
EMC0506	EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	2012-11-24	1Y
EMC0107	Coaxial Cable	SGS	2m	N/A	2012-07-18	1Y
EMC0106	Voltage Probe	SGS	N/A	N/A	N/A	1Y
EMC0120	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	20550	2012-11-11	1Y
EMC0121	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	20549	2012-11-11	1Y
EMC0122	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	20548	2012-11-11	1Y



General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date (YYYY-MM-DD)	Calibration Interval
EMC0006	DMM	Fluke	73	70681569	2012-11-14	1Y
EMC0007	DMM	Fluke	73	70671122	2012-11-14	1Y

7 Test Results

7.1 E.U.T. Operation

Test Voltage:	DC 5.0V by USB Port of PS3/PC
Temperature:	20.0 -25.0 °C
Humidity:	38-50 % RH
Atmospheric Pressure:	1000 -1010 mbar
Test frequencies and frequency range:	According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

7.2 Antenna Requirement

Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to

Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna

The antenna is a single-ended monopole PCB antenna and no consideration of replacement. The best case gain of the antenna is 1 dBi.

Test result: The unit does meet the FCC requirements.

7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge

Test Requirement: FCC Part15 C section 15.249

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m @ 3m)	Field Strength of Harmonics (dB μ V/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Limits: The fundamental frequency range is in the frequency band of the EUT is 2402MHz ~ 2480MHz.

The limit for Average field strength dB μ V/m for the fundamental frequency = 94.0 dB μ V/m.

The limit for Peak field strength dB μ V/m for the fundamental frequency = 114.0 dB μ V/m.

No fundamental is allowed in the restricted bands.

The limit for average field strength dB μ V/m for the harmonics = 54.0 dB μ V/m.

The limit for peak field strength dB μ V/m for the harmonics = 74.0 dB μ V/m.

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or 54.0 dB μ V/m in 15.209. Here the limit for the other emission is 54.0 dB μ V/m.

Test Method: ANSI C63.10: Clause 6.4, 6.6 and 6.7 for Field Strength of Fundamental& Field Strength of Unwanted Emissions

ANSI C63.10: Clause 6.9.2 for Band Edge

Status Pre-test the EUT in continuous transmitting mode with setup as stand-alone in X, Y, Z three axes, found the worst case is X axes and report the data.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Frequency range 30 MHz – 25 GHz for transmitting mode.

Test instrumentation resolution bandwidth
120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 MHz – 25 GHz)

Test Procedure:

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:


For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 25 GHz emissions:


For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

Test Configuration:


1) 9 kHz to 30 MHz emissions:

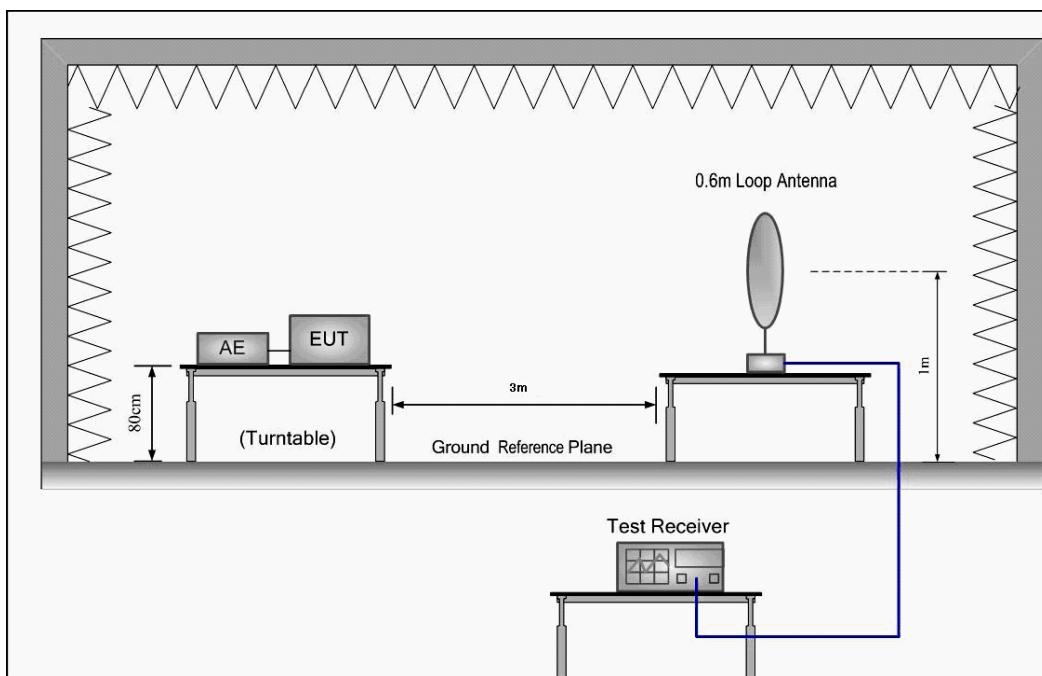

2) 30 MHz to 1 GHz emissions:

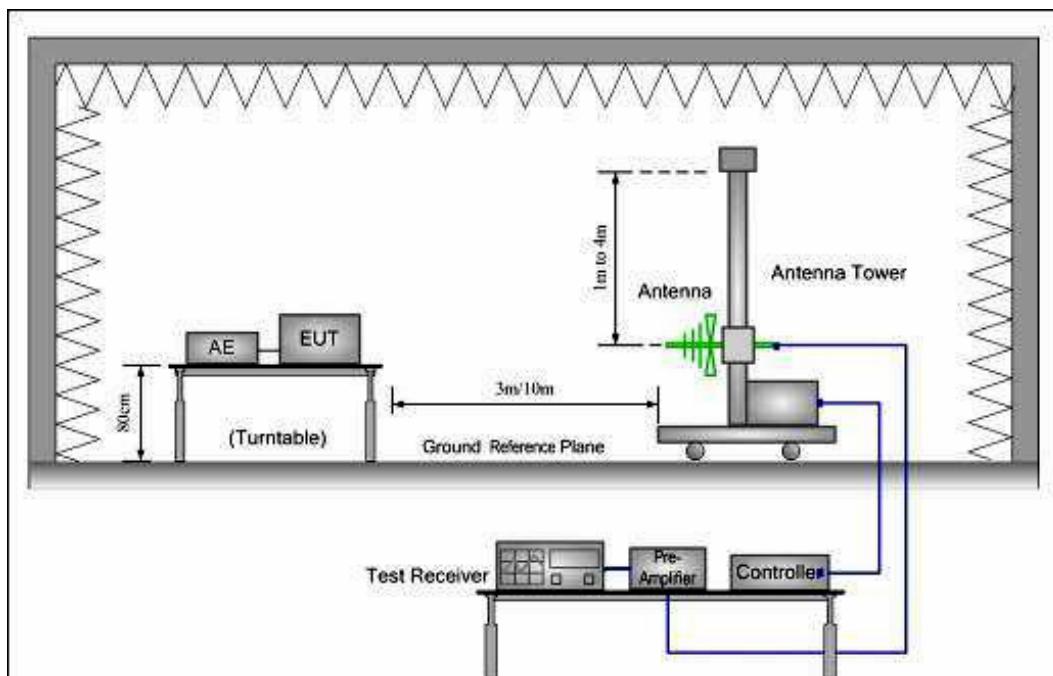

3) 1 GHz to 25 GHz emissions:

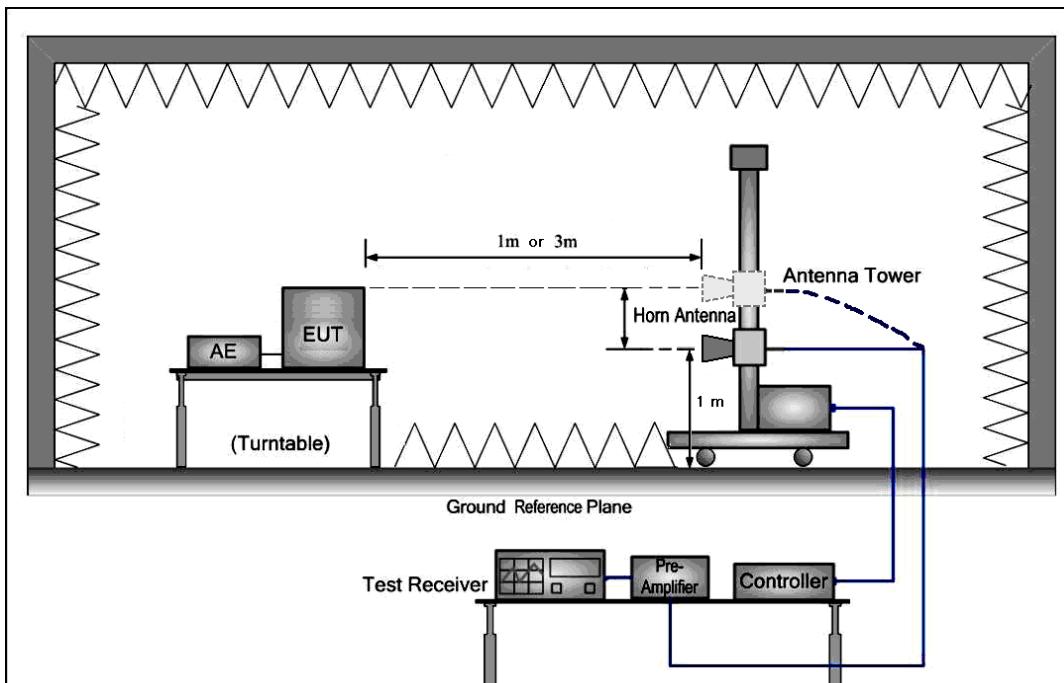

The field strength is calculated by adding the Antenna Factor, Cable Loss & Per-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor

Test at low Channel in transmitting status


9 kHz~30 MHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

Vertical:

Peak scan

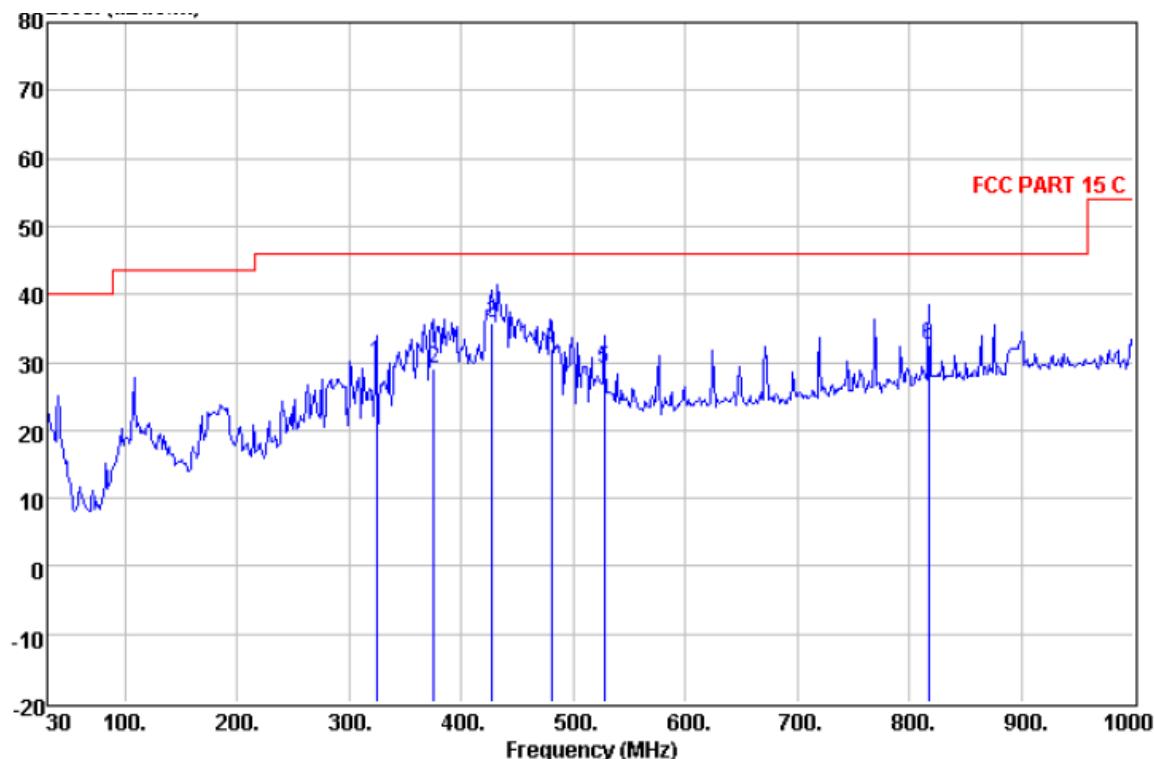
Level (dB μ V/m)

Quasi-peak measurement

Freq MHz	Read Level dB μ V	Antenna Factor	Cable Loss dB	Preamp Factor	Over Level dB	Limit dB	Line Remark
	dB/m			dB μ V/m		dB μ V/m	
323.910	41.65	13.59	1.88	27.26	29.86	-16.14	46.00 QP
375.320	39.36	15.39	2.02	27.61	29.16	-16.84	46.00 QP
427.700	45.40	16.03	2.15	27.85	35.73	-10.27	46.00 QP
480.080	40.40	17.30	2.32	27.99	32.03	-13.97	46.00 QP
527.610	36.84	17.82	2.46	28.14	28.98	-17.02	46.00 QP
817.640	36.22	20.50	3.17	27.45	32.44	-13.56	46.00 QP

Horizontal:

Peak scan

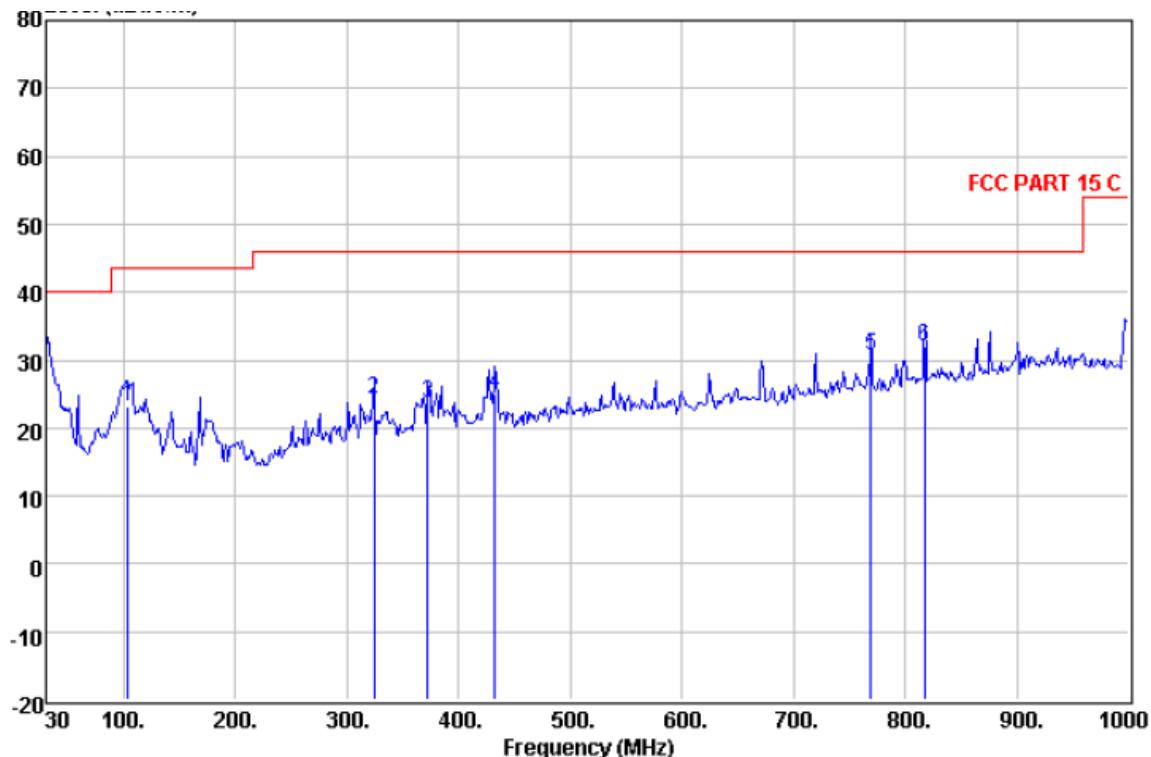Level (dB μ V/m)

Quasi-peak measurement

Freq	ReadAntenna		Cable Preamp		Over Limit	Line Remark	
	Level	Factor	Loss	Factor			
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB	dB μ V/m
103.720	38.25	11.43	1.02	27.66	23.04	-20.46	43.50 QP
323.910	36.12	13.59	1.88	27.26	24.33	-21.67	46.00 QP
372.410	34.14	15.27	2.02	27.60	23.83	-22.17	46.00 QP
432.550	34.79	16.00	2.16	27.86	25.09	-20.91	46.00 QP
769.140	35.59	19.80	2.97	27.70	30.66	-15.34	46.00 QP
817.640	35.73	20.50	3.17	27.45	31.95	-14.05	46.00 QP

1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement


Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2402.000	27.58	6.14	35.04	82.99	81.67	114.00	V
4804.000	31.35	8.98	34.30	52.17	44.40	74.00	V
5711.000	32.21	12.01	34.30	43.17	55.69	74.00	V
7206.000	36.52	12.23	34.30	42.89	57.30	74.00	V
2402.000	27.58	6.14	35.04	90.00	88.68	114.00	H
4804.000	31.35	8.98	34.30	51.13	57.34	74.00	H
5711.000	32.21	12.01	34.30	47.21	55.44	74.00	H
7206.000	36.52	12.23	34.30	42.90	57.35	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2402.000	27.58	6.14	35.04	78.89	77.57	94.00	V
4804.000	31.35	8.98	34.30	58.38	50.61	54.00	V
5711.000	32.21	12.01	34.30	33.25	45.77	54.00	V
7206.000	36.52	12.23	34.30	32.25	46.66	54.00	V
2402.000	27.58	6.14	35.04	78.09	73.80	94.00	H
4804.000	31.35	8.98	34.30	56.65	50.50	54.00	H
5711.000	32.21	12.01	34.30	37.29	45.52	54.00	H
7206.000	36.52	12.23	34.30	32.37	46.82	54.00	H

Band Edge:

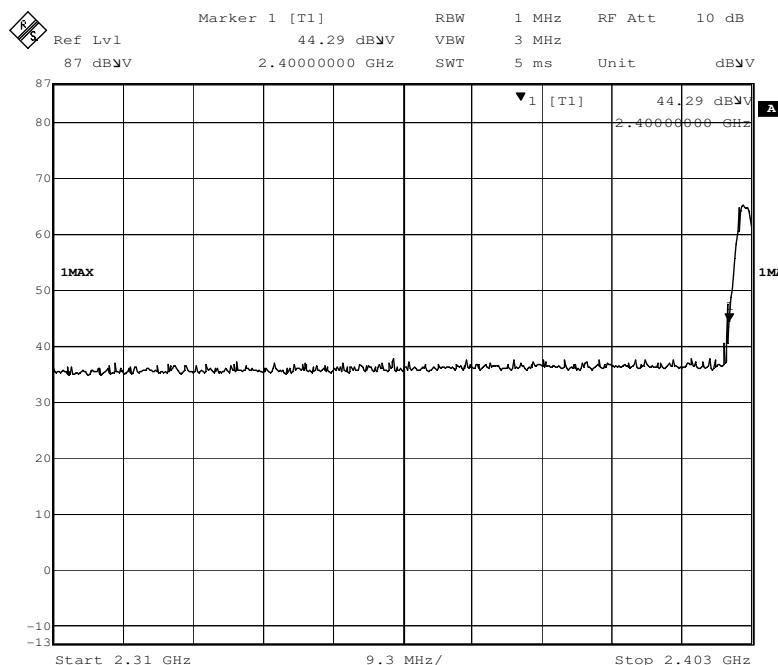

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Antenna polarization
2400.00	27.58	6.14	35.04	46.69	45.37	74.00	V
2483.50	27.56	6.27	34.96	47.21	46.08	74.00	V
2400.00	27.58	6.14	35.04	49.29	47.97	74.00	H
2483.50	27.56	6.27	34.96	48.98	47.85	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Antenna polarization
2400.00	27.58	6.14	35.04	36.72	35.40	54.00	V
2483.50	27.56	6.27	34.96	36.52	35.39	54.00	V
2400.00	27.58	6.14	35.04	34.80	33.48	54.00	H
2483.50	27.56	6.27	34.96	37.82	36.69	54.00	H

Test at middle Channel in transmitting status


9 kHz~30 MHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

Vertical:

Peak scan

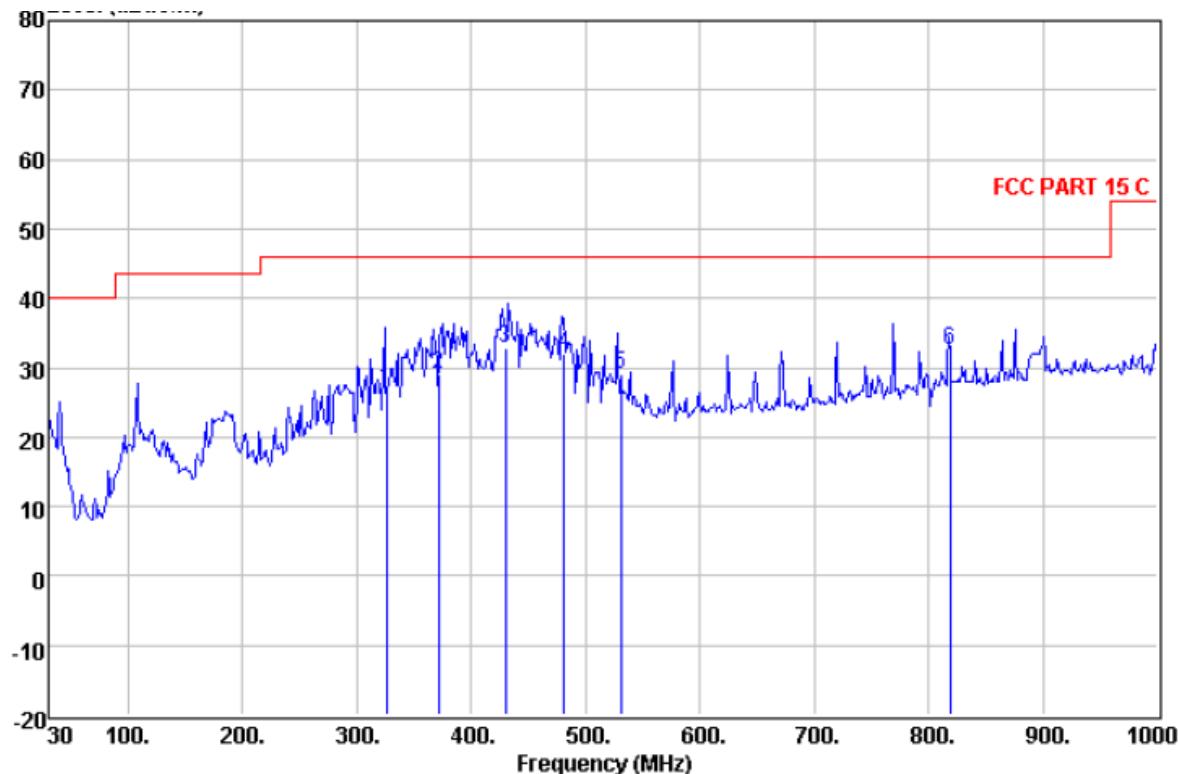
Level (dB μ V/m)

Quasi-peak measurement

Read	Antenna	Cable	Preamp	Over	Limit	
Freq	Level	Factor	Loss	Level	Limit	Line
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	Remark
325.560	38.64	13.61	1.88	27.27	26.86	-19.14 QP
371.440	39.46	15.27	2.02	27.59	29.16	-16.84 QP
430.000	42.44	16.00	2.15	27.86	32.73	-13.27 QP
481.110	40.40	17.30	2.32	27.99	32.03	-13.97 QP
531.020	36.76	17.90	2.47	28.15	28.98	-17.02 QP
818.800	36.22	20.50	3.17	27.45	32.44	-13.56 QP

Horizontal:

Peak scan

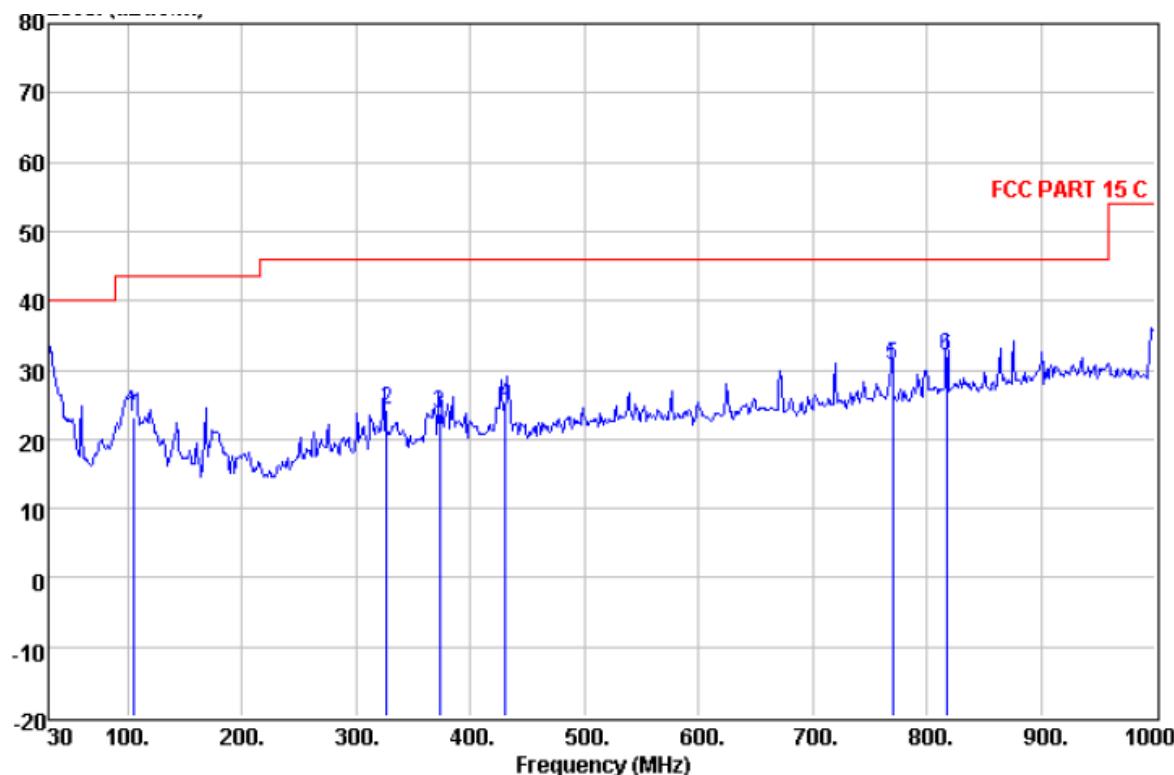Level (dB μ V/m)

Quasi-peak measurement

Freq	ReadAntenna		Cable Preamp		Over Limit	Limit	Line Remark	
	Freq	Level Factor	Loss Factor	Level	dB	dB μ V/m	dB	dB μ V/m
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB	dB μ V/m	
104.550	38.13	11.54	1.02	27.65	23.04	-20.46	43.50	QP
326.600	36.10	13.63	1.88	27.28	24.33	-21.67	46.00	QP
373.110	34.10	15.31	2.02	27.60	23.83	-22.17	46.00	QP
431.100	34.80	16.00	2.15	27.86	25.09	-20.91	46.00	QP
770.000	35.59	19.80	2.97	27.70	30.66	-15.34	46.00	QP
817.220	35.86	20.40	3.17	27.48	31.95	-14.05	46.00	QP

1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement


Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2442.000	27.57	6.20	35.01	86.14	84.90	114.00	V
4882.000	31.57	8.63	34.30	53.08	58.98	74.00	V
5494.000	32.04	11.24	34.30	47.29	56.27	74.00	V
7323.000	36.14	12.41	34.30	42.51	56.76	74.00	V
2442.000	27.57	6.20	35.01	82.64	81.40	114.00	H
4882.000	31.57	8.63	34.30	52.90	58.80	74.00	H
5494.000	32.04	11.24	34.30	44.99	55.11	74.00	H
7323.000	36.14	12.41	34.30	42.94	57.42	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2442.000	27.57	6.20	35.01	81.84	80.60	94.00	V
4882.000	31.57	8.63	34.30	44.80	50.70	54.00	V
5494.000	32.04	11.24	34.30	39.48	48.46	54.00	V
7323.000	36.14	12.41	34.30	29.62	43.87	54.00	V
2442.000	27.57	6.20	35.01	78.86	77.62	94.00	H
4882.000	31.57	8.63	34.30	44.51	50.41	54.00	H
5494.000	32.04	11.24	34.30	34.99	45.11	54.00	H
7323.000	36.14	12.41	34.30	32.82	47.30	54.00	H

Band Edge:

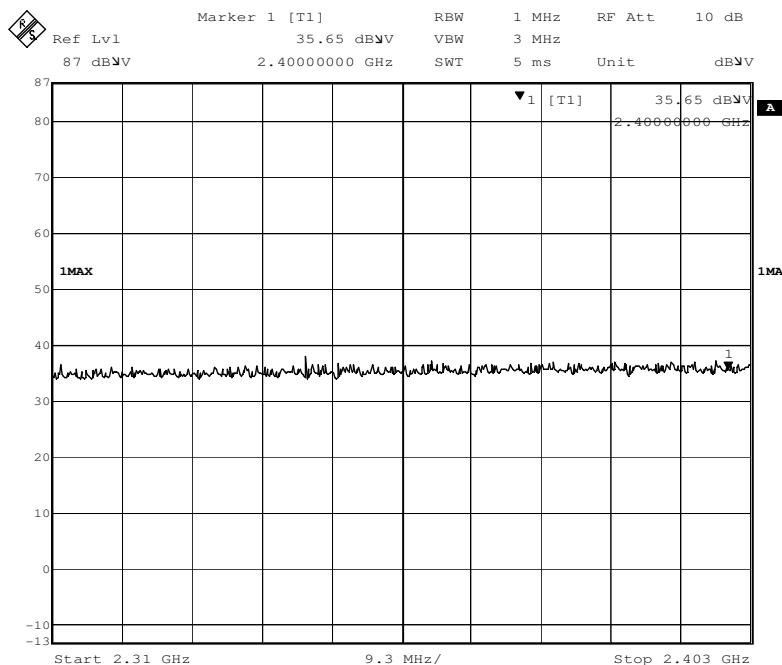

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Antenna polarization
2400.00	27.58	6.14	35.04	47.62	46.30	74.00	V
2483.50	27.56	6.27	34.96	47.92	46.79	74.00	V
2400.00	27.58	6.14	35.04	49.26	47.94	74.00	H
2483.50	27.56	6.27	34.96	48.85	47.72	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Antenna polarization
2400.00	27.58	6.14	35.04	36.71	35.39	54.00	V
2483.50	27.56	6.27	34.96	36.46	35.33	54.00	V
2400.00	27.58	6.14	35.04	34.90	33.58	54.00	H
2483.50	27.56	6.27	34.96	36.72	35.59	54.00	H

Test at high Channel in transmitting status


9 kHz~30 MHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

Vertical:

Peak scan

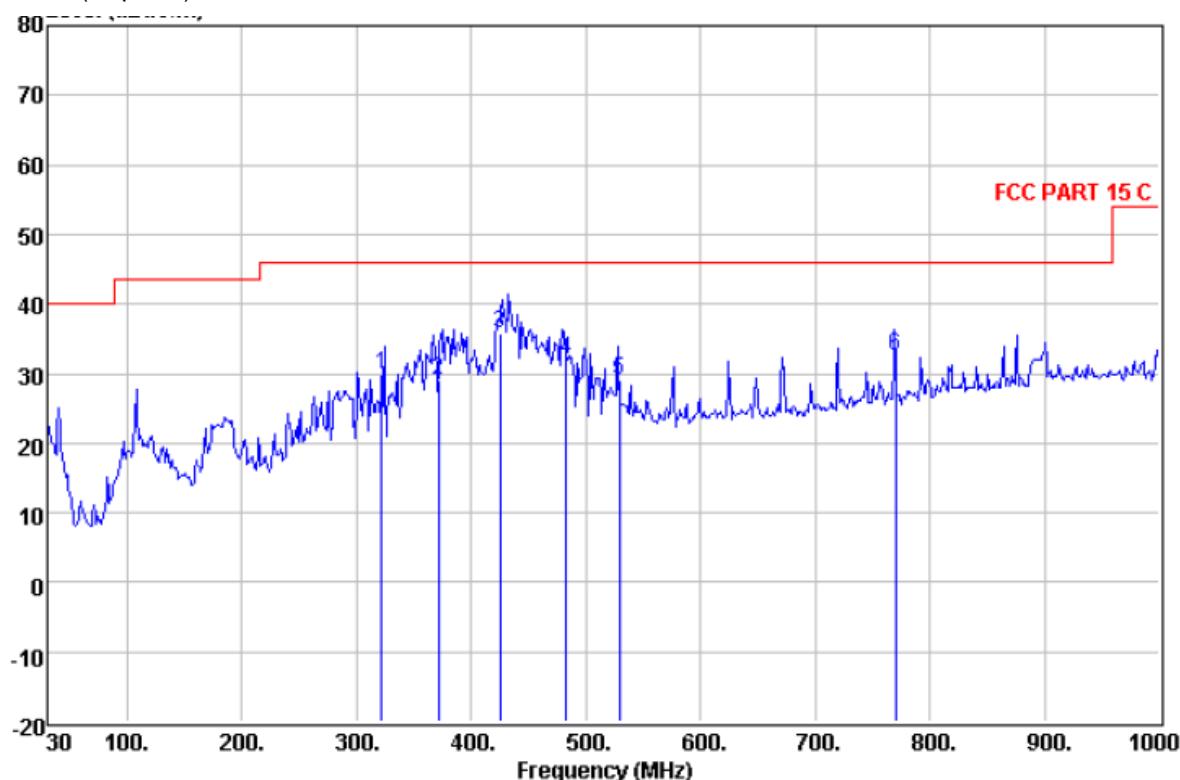
Level (dB μ V/m)

Quasi-peak measurement

Freq	Read Antenna Level	Antenna Factor	Cable Preamp		Over Limit Level	Line Limit	Remark
			Loss	Factor			
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB	dB μ V/m
321.440	41.71	13.52	1.87	27.24	29.86	-16.14	46.00 QP
371.220	39.49	15.24	2.02	27.59	29.16	-16.84	46.00 QP
425.200	45.32	16.10	2.15	27.84	35.73	-10.27	46.00 QP
483.260	40.36	17.33	2.34	28.00	32.03	-13.97	46.00 QP
528.900	36.84	17.82	2.46	28.14	28.98	-17.02	46.00 QP
769.820	37.37	19.80	2.97	27.70	32.44	-13.56	46.00 QP

Horizontal:

Peak scan

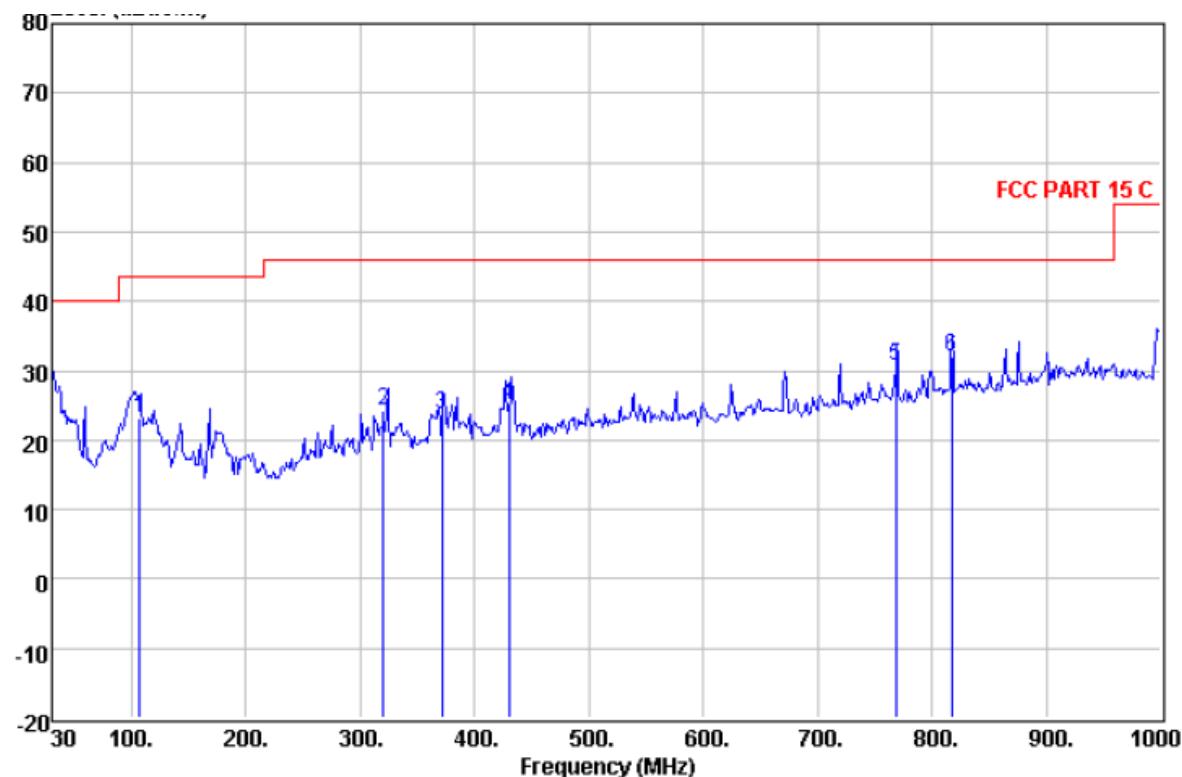Level (dB μ V/m)

Quasi-peak measurement

Freq	Read Antenna		Cable		Preamp Level	Over Limit	Limit Line	Remark
	Level	Factor	Loss	Factor				
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB	dB μ V/m	
106.600	37.94	11.71	1.03	27.64	23.04	-20.46	43.50	QP
320.080	36.19	13.50	1.87	27.23	24.33	-21.67	46.00	QP
371.290	34.16	15.24	2.02	27.59	23.83	-22.17	46.00	QP
430.040	34.80	16.00	2.15	27.86	25.09	-20.91	46.00	QP
768.200	35.59	19.80	2.97	27.70	30.66	-15.34	46.00	QP
817.299	35.86	20.40	3.17	27.48	31.95	-14.05	46.00	QP


1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.**Peak & Average Measurement****Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2480.000	27.56	6.27	34.99	82.82	81.66	114.00	V
4960.000	31.70	8.28	34.30	54.79	60.47	74.00	V
6677.000	34.45	16.23	34.30	39.91	58.08	74.00	V
7440.000	36.62	12.85	34.30	43.27	57.73	74.00	V
2480.000	27.56	6.27	34.99	77.10	75.94	114.00	H
4960.000	31.70	8.28	34.30	52.30	57.98	74.00	H
6677.000	34.45	16.23	34.30	44.40	57.78	74.00	H
7440.000	36.62	12.85	34.30	44.14	59.31	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2480.000	27.56	6.27	34.99	78.41	77.25	94.00	V
4960.000	31.70	8.28	34.30	44.41	50.09	54.00	V
6677.000	34.45	16.23	34.30	30.67	48.84	54.00	V
7440.000	36.62	12.85	34.30	31.01	45.47	54.00	V
2480.000	27.56	6.27	34.99	71.84	70.68	94.00	H
4960.000	31.70	8.28	34.30	44.42	50.10	54.00	H
6677.000	34.45	16.23	34.30	31.03	47.41	54.00	H
7440.000	36.62	12.85	34.30	34.12	49.29	54.00	H

Band Edge:

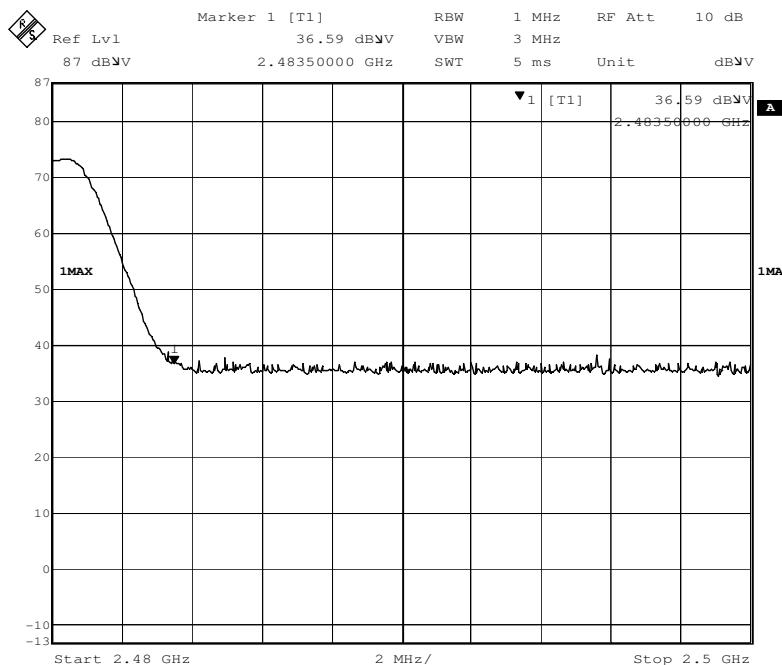

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Antenna polarization
2400.00	27.58	6.14	35.04	47.79	46.47	74.00	V
2483.50	27.56	6.27	34.96	47.55	46.42	74.00	V
2400.00	27.58	6.14	35.04	49.06	47.74	74.00	H
2483.50	27.56	6.27	34.96	47.89	46.76	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Antenna polarization
2400.00	27.58	6.14	35.04	36.72	35.40	54.00	V
2483.50	27.56	6.27	34.96	36.74	35.61	54.00	V
2400.00	27.58	6.14	35.04	34.90	33.58	54.00	H
2483.50	27.56	6.27	34.96	36.15	35.02	54.00	H

Remark:

- 1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.

- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.

7.4 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.249


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Test Method: ANSI C63.10: Clause 6.9.1


Operation within the band 2.400 to 2.4835 GHz

Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken.


1. Test in the lowest frequency 2.402 GHz

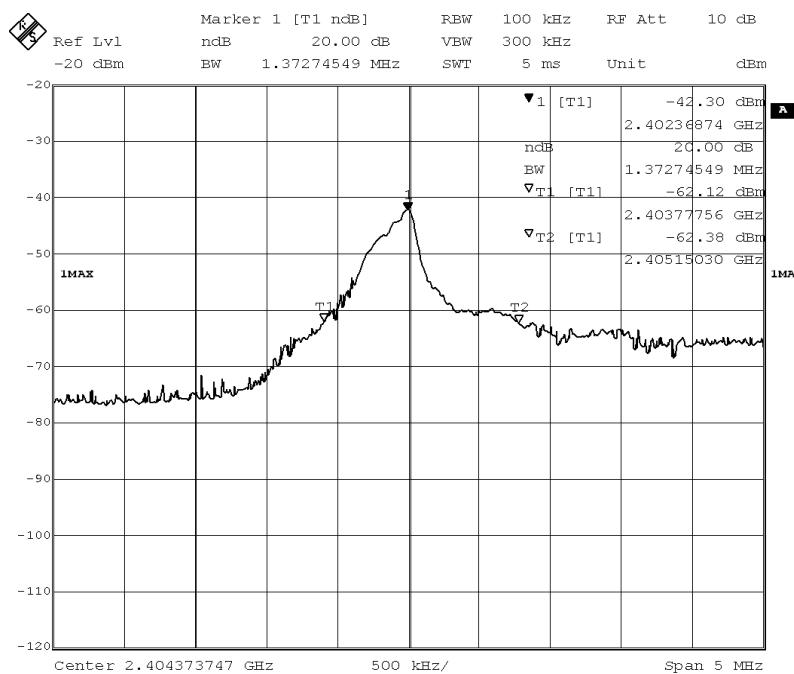

2. Test in the middle frequency 2.441 GHz

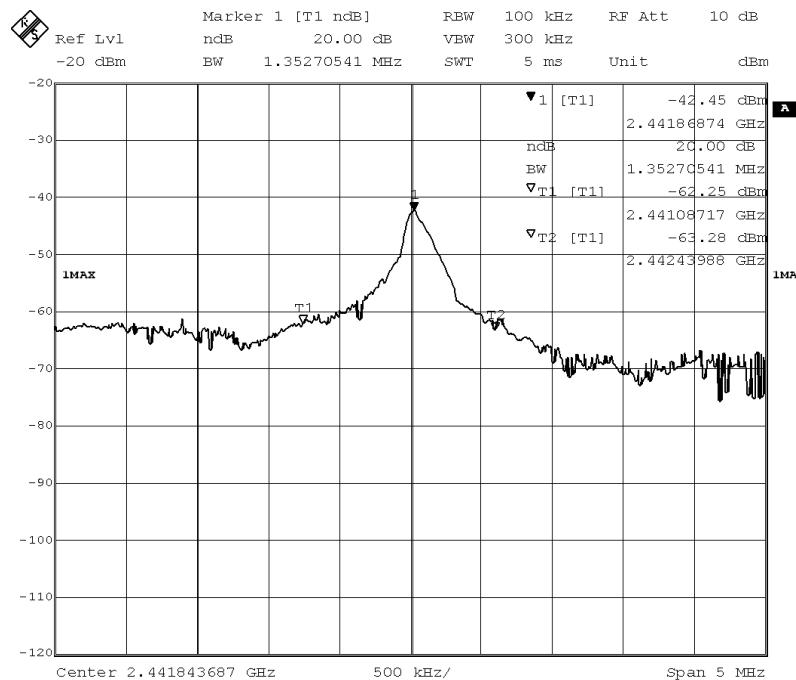

3. Test in the highest frequency 2.480 GHz

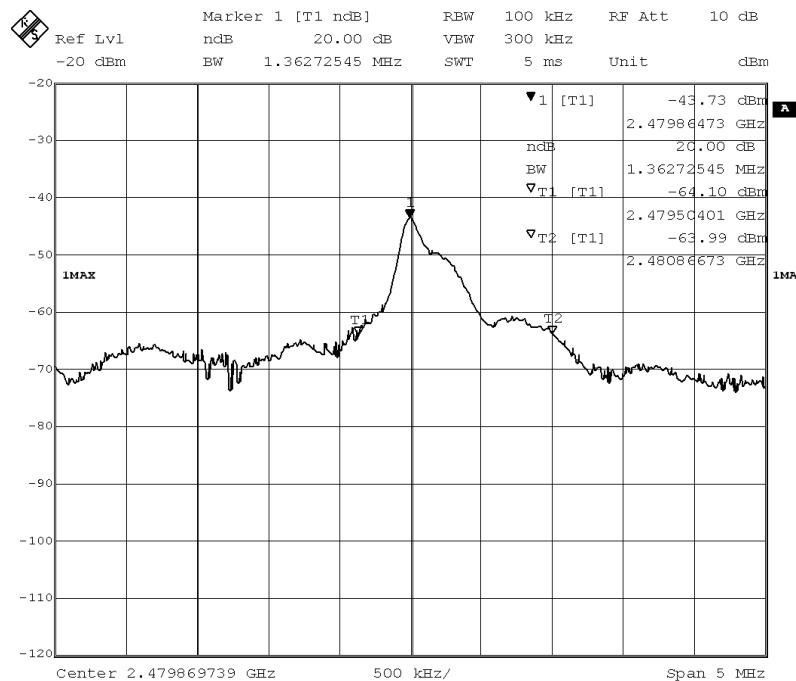

The results: The unit does meet the FCC requirements.

7.5 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

Test Requirement: FCC Part 15 C section 15.207
Test Method: ANSI C63.10: Clause 6.2
Frequency Range: 150 kHz to 30 MHz
Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)

Test Limit


Limits for conducted disturbance at the mains ports of class B

Frequency Range (MHz)	Class B Limit dB(µV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

EUT Operation: Test in normal operating mode with PS3/PC connection. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.
Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Test Configuration:

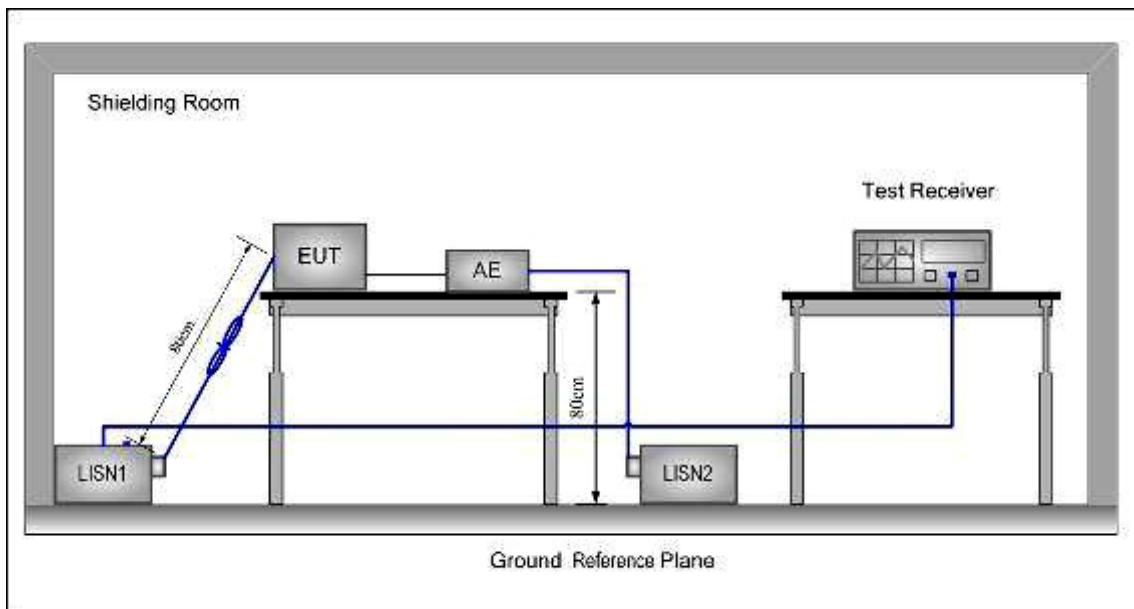

Test procedure:

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

The following Quasi-Peak and Average measurements were performed on the EUT:

For PS3 connection:


Neutral Line

Level (dB μ V)

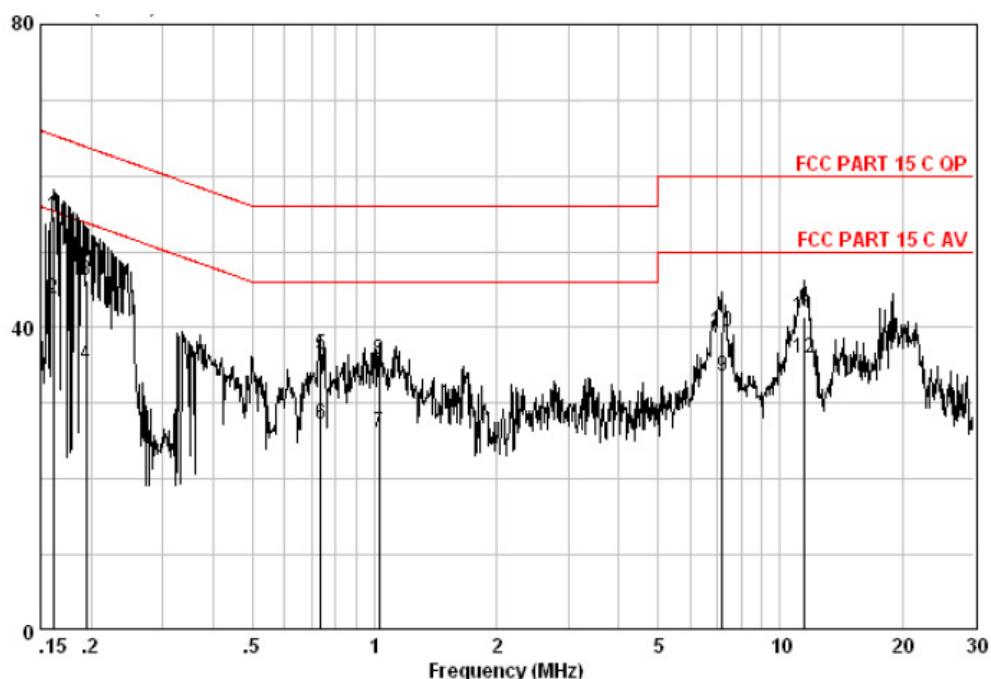

Measure data:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dB μ V	dB	dB	dB μ V	dB μ V	dB	
0.162	44.95	0.08	9.63	54.66	65.38	-10.73	QP
0.162	34.21	0.08	9.63	43.92	55.38	-11.47	AVERAGE
0.194	36.45	0.12	9.62	46.20	63.84	-17.65	QP
0.194	25.32	0.12	9.62	35.07	53.84	-18.78	AVERAGE
0.735	26.64	0.04	9.64	36.32	56.00	-19.68	QP
0.735	17.61	0.04	9.64	27.29	46.00	-18.71	AVERAGE
1.027	16.44	0.02	9.64	26.10	46.00	-19.90	AVERAGE
1.027	26.16	0.02	9.64	35.82	56.00	-20.18	QP
7.213	23.68	0.14	9.82	33.64	50.00	-16.36	AVERAGE
7.213	29.58	0.14	9.82	39.54	60.00	-20.46	QP
11.498	31.10	0.19	10.06	41.35	60.00	-18.65	QP
11.498	25.82	0.19	10.06	36.07	50.00	-13.93	AVERAGE

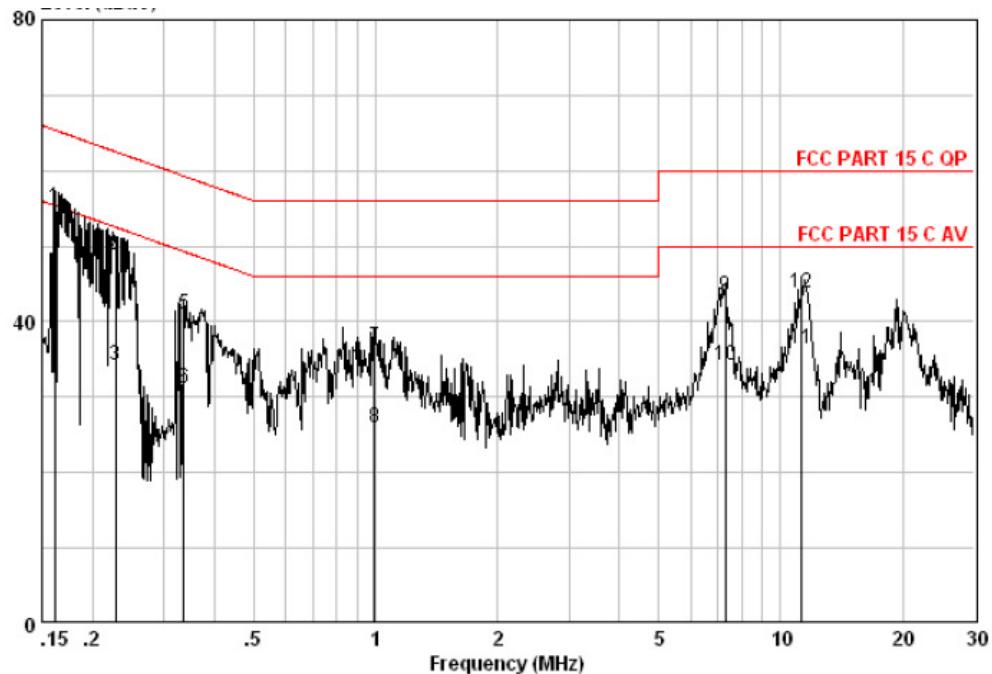
Live Line
Level (dB μ V)

Measure result:

Freq MHz	Read Level dB μ V	Cable Loss dB	LISN Factor dB	Level dB μ V	Limit Line dB μ V	Over Limit dB	Over Limit Remark
							Line QP
0.162	45.38	0.08	9.65	55.11	65.38	-10.28	QP
0.162	33.77	0.08	9.65	43.50	55.38	-11.89	AVERAGE
0.228	24.49	0.11	9.64	34.24	52.52	-18.28	AVERAGE
0.228	38.74	0.11	9.64	48.49	62.52	-14.03	QP
0.336	31.28	0.06	9.63	40.97	59.31	-18.34	QP
0.336	21.58	0.06	9.63	31.27	49.31	-18.04	AVERAGE
0.994	27.01	0.02	9.68	36.71	56.00	-19.29	QP
0.994	16.15	0.02	9.68	25.85	46.00	-20.15	AVERAGE
7.290	33.28	0.15	9.85	43.28	60.00	-16.72	QP
7.290	24.27	0.15	9.85	34.27	50.00	-15.73	AVERAGE
11.257	26.16	0.19	10.06	36.41	50.00	-13.59	AVERAGE
11.257	33.57	0.19	10.06	43.82	60.00	-16.18	QP


For PC connection:

Neutral Line

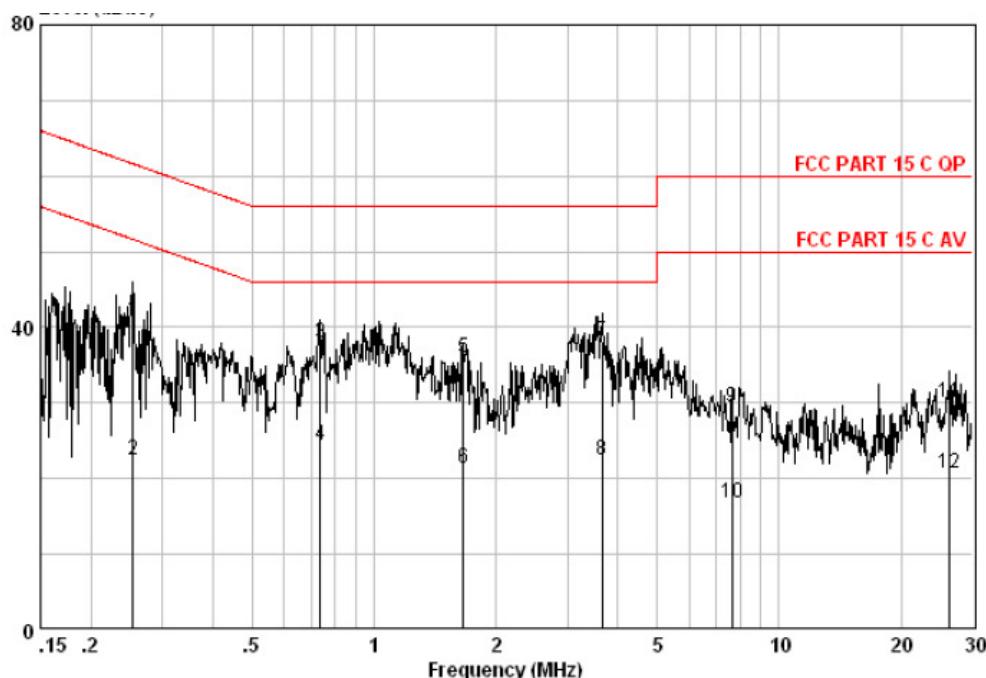Level (dB μ V)

Measure data:

Freq MHz	Read Level dB μ V	Cable Loss dB	LISN Factor dB	Level dB μ V	Limit Line dB μ V	Over Limit dB	Over Limit Remark
0.253	31.30	0.10	9.63	41.03	61.64	-20.61	QP
0.253	12.77	0.10	9.63	22.50	51.64	-29.14	AVERAGE
0.735	28.22	0.04	9.64	37.90	56.00	-18.10	QP
0.735	14.70	0.04	9.64	24.38	46.00	-21.62	AVERAGE
1.662	26.28	0.05	9.62	35.95	56.00	-20.05	QP
1.662	11.64	0.05	9.62	21.31	46.00	-24.69	AVERAGE
3.661	28.36	0.13	9.72	38.21	56.00	-17.79	QP
3.661	12.70	0.13	9.72	22.55	46.00	-23.45	AVERAGE
7.646	19.44	0.15	9.84	29.43	60.00	-30.57	QP
7.646	6.70	0.15	9.84	16.69	50.00	-33.31	AVERAGE
26.418	19.08	0.35	10.57	30.00	60.00	-30.00	QP
26.418	9.70	0.35	10.57	20.62	50.00	-29.38	AVERAGE

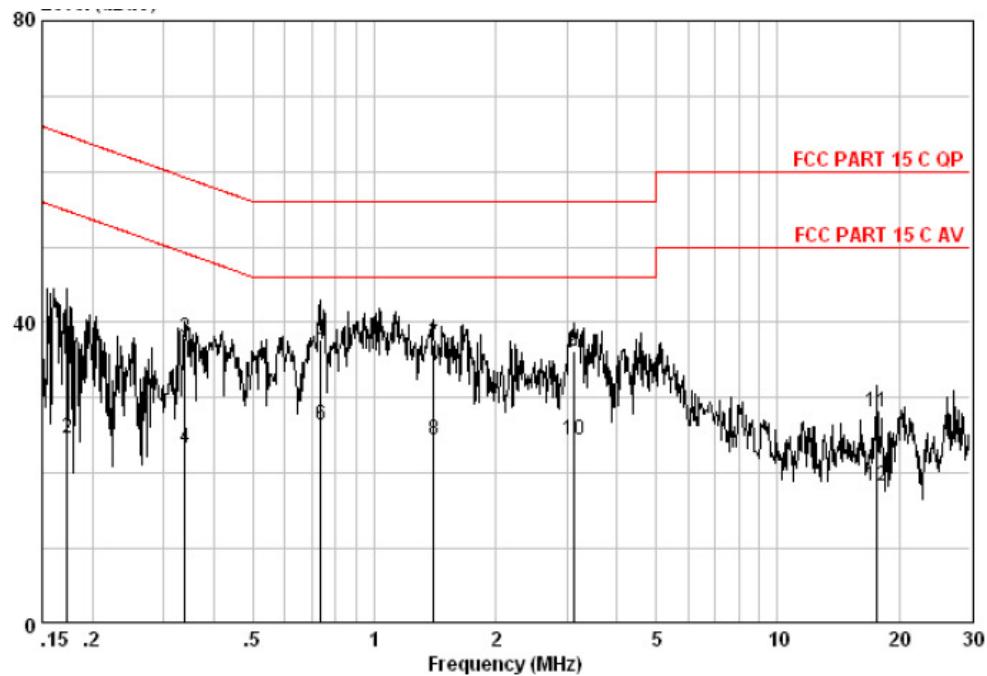Live Line
Level (dB μ V)

Measure result:

Freq MHz	Read Level dB μ V	Cable Loss dB	LISN Factor dB	Level dB μ V	Limit Line dB μ V	Over Limit dB	Remark
0.173	29.32	0.09	9.64	39.05	64.81	-25.76	QP
0.173	14.83	0.09	9.64	24.56	54.81	-30.25	AVERAGE
0.339	28.16	0.06	9.63	37.85	59.22	-21.37	QP
0.339	13.64	0.06	9.63	23.33	49.22	-25.89	AVERAGE
0.735	28.02	0.04	9.68	37.74	56.00	-18.26	QP
0.735	16.57	0.04	9.68	26.29	46.00	-19.71	AVERAGE
1.403	27.30	0.04	9.70	37.04	56.00	-18.96	QP
1.403	14.70	0.04	9.70	24.44	46.00	-21.56	AVERAGE
3.123	26.28	0.12	9.73	36.14	56.00	-19.86	QP
3.123	14.64	0.12	9.73	24.50	46.00	-21.50	AVERAGE
17.661	17.38	0.35	10.33	28.06	60.00	-31.94	QP
17.661	7.64	0.35	10.33	18.32	50.00	-31.68	AVERAGE

End of the report