
FCC Test Report

Report No.: AGC00858151102FE03

FCC ID : AXE-XL750

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Bluetooth speaker

BRAND NAME : N/A

MODEL NAME : See Page 4

CLIENT : SHENZHEN SYGAMA TECHNOLOGY CO., LTD

DATE OF ISSUE : Jan.22,2016

STANDARD(S) : FCC Part 15 Rules

TEST PROCEDURE(S)

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan.22,2016	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY 4

2. GENERAL INFORMATION 5

 2.1. PRODUCT DESCRIPTION.....5

 2.2. TABLE OF CARRIER FREQUENCYS.....5

3. MEASUREMENT UNCERTAINTY..... 6

4. DESCRIPTION OF TEST MODES..... 6

5. SYSTEM TEST CONFIGURATION 8

 5.1. CONFIGURATION OF EUT SYSTEM8

 5.2. EQUIPMENT USED IN EUT SYSTEM8

 5.3. SUMMARY OF TEST RESULTS8

6. TEST FACILITY 9

7. ALL TEST EQUIPMENT LIST 9

8. RADIATED EMISSION 11

 8.1TEST LIMIT..... 11

 8.2. MEASUREMENT PROCEDURE 12

 8.3. TEST SETUP 14

 8.4. TEST RESULT 16

9. BAND EDGE EMISSION 43

 9.1. MEASUREMENT PROCEDURE43

 9.2 TEST SETUP43

 9.3 RADIATED TEST RESULT44

10. 20DB BANDWIDTH..... 48

 10.1. MEASUREMENT PROCEDURE48

 10.2. TEST SET-UP48

 10.3. LIMITS AND MEASUREMENT RESULTS.....48

11. FCC LINE CONDUCTED EMISSION TEST 55

 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST55

 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....55

 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST56

 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....56

 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST57

APPENDIX A: PHOTOGRAPHS OF TEST SETUP 59

APPENDIX B: PHOTOGRAPHS OF EUT 61

1. VERIFICATION OF CONFORMITY

Applicant	SHENZHEN SYGAMA TECHNOLOGY CO., LTD
Address	Room818 ,Floor 8 ,Block 7 ,4TH Industrial Area of Nan Shan Road , Nanshan District, ShenZhen , China
Manufacturer	SHENZHEN SYGAMA TECHNOLOGY CO., LTD
Address	Room818 ,Floor 8 ,Block 7 ,4TH Industrial Area of Nan Shan Road , Nanshan District, ShenZhen , China
Product Designation	Bluetooth speaker
Brand Name	N/A
Test Model	IBomb Party
Series Model	XL750,IBomb XL750,NX-211,GEBOX-XL750,BLUE Retro,DIGP001, Art No.:40.543.295
Difference description	All the same except the model and color.
Date of test	Jan.18,2016 to Jan.21,2016
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.



Tested By _____
Time Huang(Huang Nanhui) Jan.22,2016



Reviewed By _____
Forrest Lei(Lei Yonggang) Jan.22,2016



Approved By _____
Solger Zhang(Zhang Hongyi) Jan.22,2016
Authorized Officer

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	-1.6dBm(Max)
Bluetooth Version	V2.1+EDR
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79
Hardware Version	DY25-AC4601B-LY8212-V39-151121
Software Version	V1.0
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Antenna Gain	0dBi
Power Supply	DC 3.7V by battery
Note: The Mini USB port only used for charging and can't be used to transfer data with PC. The standard USB port used for charging other device.	

2.2. TABLE OF CARRIER FREQUENCIES

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	BT Link without charging

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

Software Setting

FCCAssist 1.5

Parameter

MODETX

Channel0

Transmit Power10

Packet type1-DH1

HoppingOFF

Data TypesPn9

Serial PortCOM4

Send configuration

open COM4 succeed

Channel: 0Data Types: Pn9

Transmit Power : 10Packet type: 1-DH1

Send configuration information successfully

Channel: 0Data Types: Pn9

Transmit Power : 10Packet type: 1-DH1

Send configuration information successfully

Description:


1、Channel: range 0-78, corresponding frequency 2.402GHz-2.480GHZ

2、Transmit Power range 0-10, 0 is the minimum, maximum 10

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

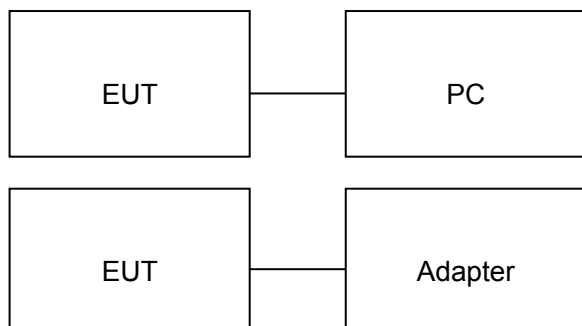

Note: Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)

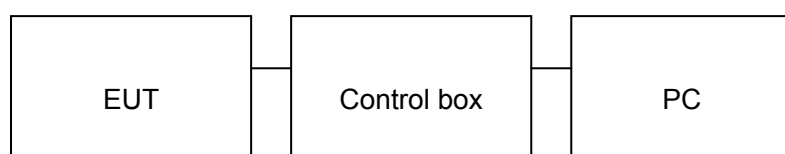

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth speaker	IBomb Party	N/A	EUT
2	Control box	N/A	N/A	A.E
3	PC	Dell	INSPIRON	A.E
4	adapter	ETPCA-050100U3W	N/A	A.E
5	Temporary Antenna Connector	T10	N/A	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	BANDWIDTH	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016
Conduction Cable	MXT	SE1	S003	June 6,2015	June 5,2016

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark:

- (1) Emission level $\text{dB } \mu \text{ V} = 20 \log \text{ Emission level } \mu \text{ V/m}$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

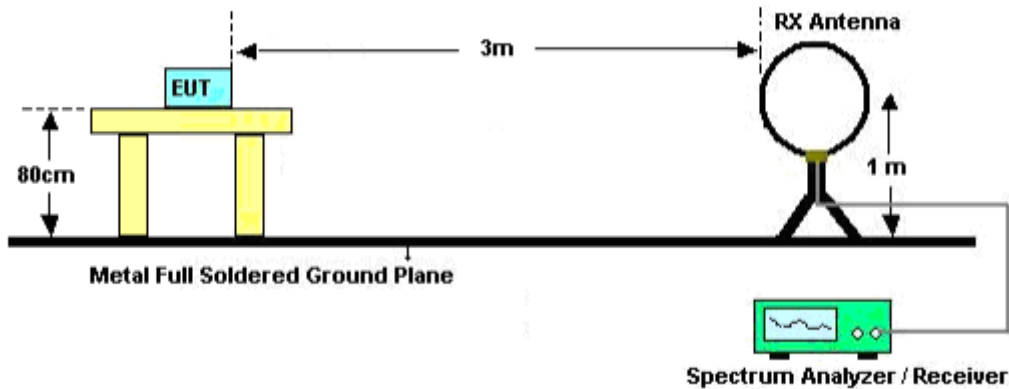

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

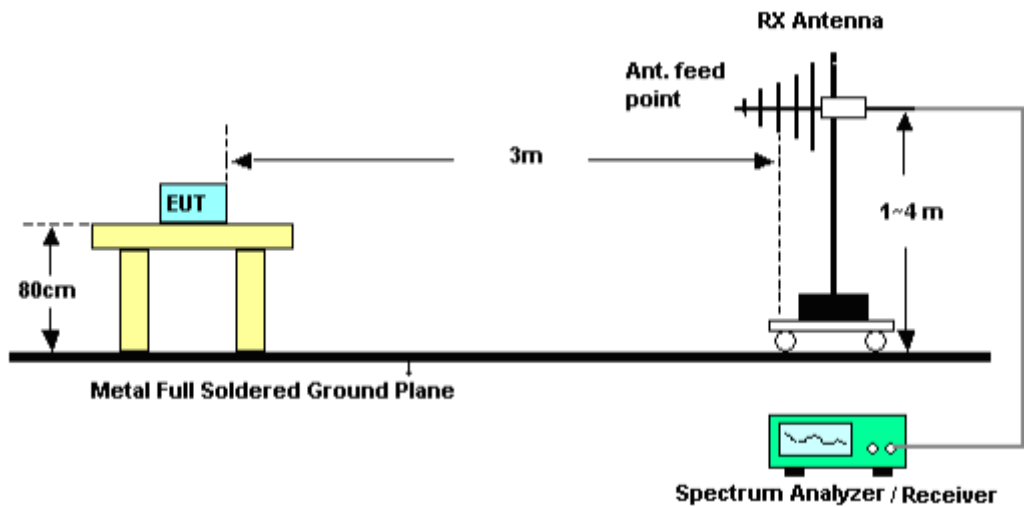

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

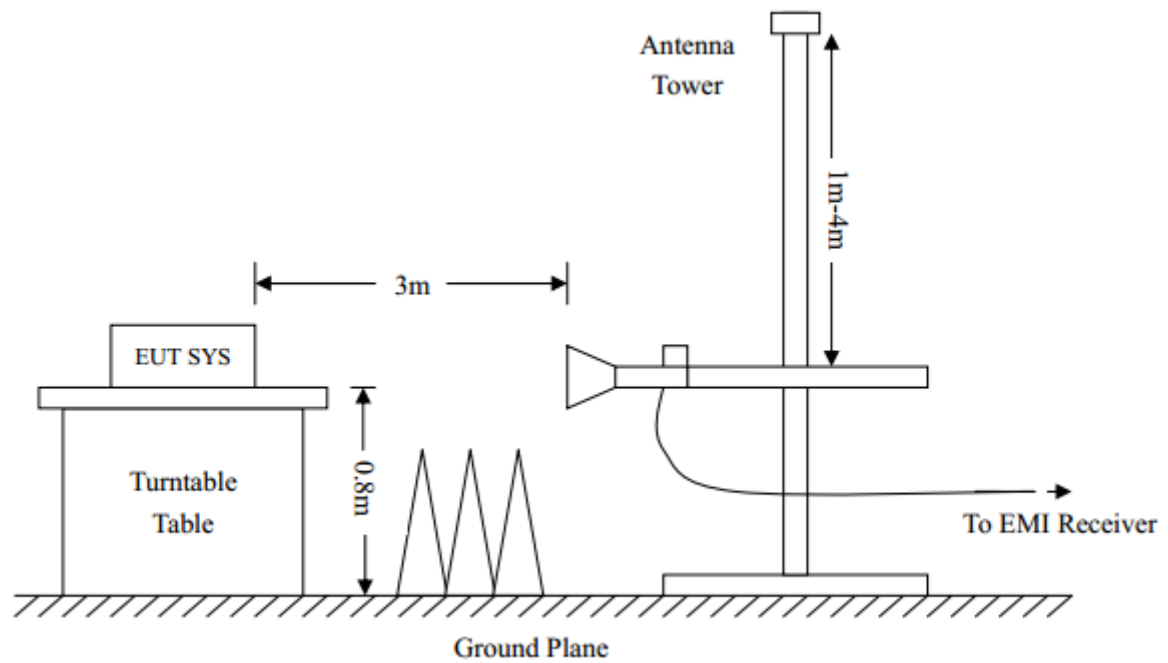

8.4. TEST RESULT


(Worst modulation :GFSK)

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

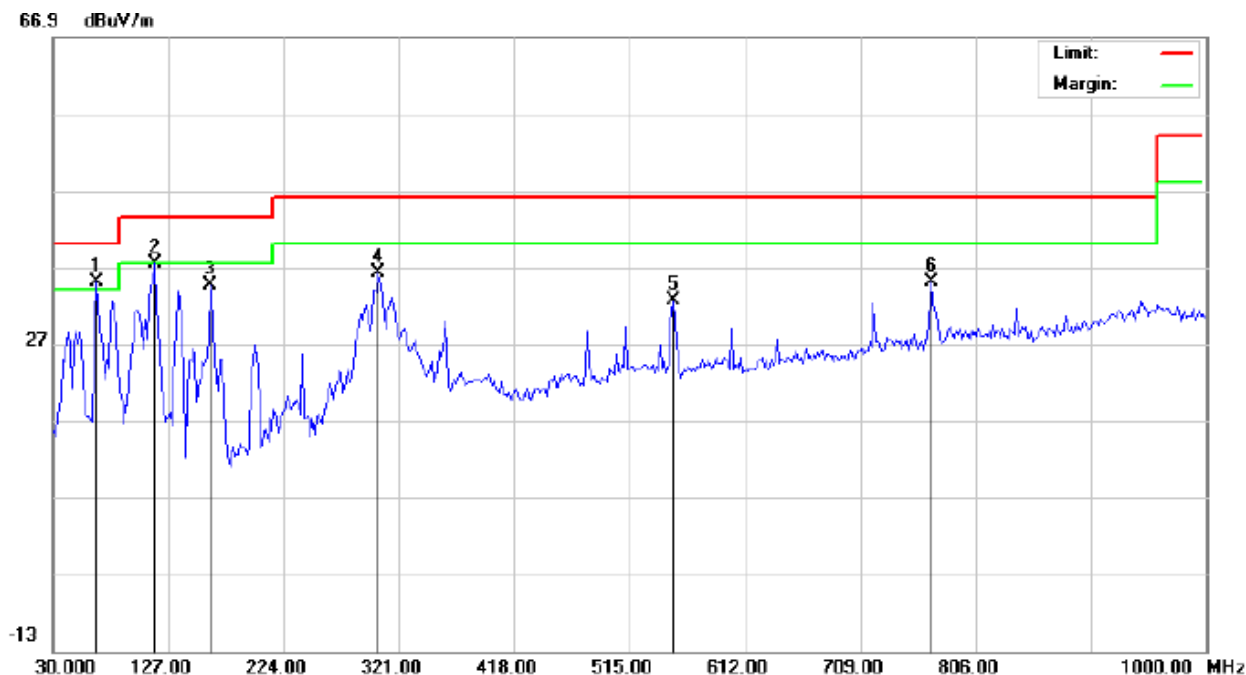

Site: Conduction

Polarization: **Horizontal**

Temperature: 23.1

Limit: FCC Class B 3M Radiation

Power:

Humidity: 54.1 %

EUT: Bluetooth Speaker

Distance:

M/N: IBomb Party


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	67.1833	27.46	7.51	34.97	40.00	-5.03	peak			
2		115.6833	30.47	6.86	37.33	43.50	-6.17	peak			
3		162.5665	24.13	10.42	34.55	43.50	-8.95	peak			
4		303.2167	20.52	15.62	36.14	46.00	-9.86	peak			
5		552.1833	10.07	22.53	32.60	46.00	-13.40	peak			
6		768.8167	8.11	26.89	35.00	46.00	-11.00	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

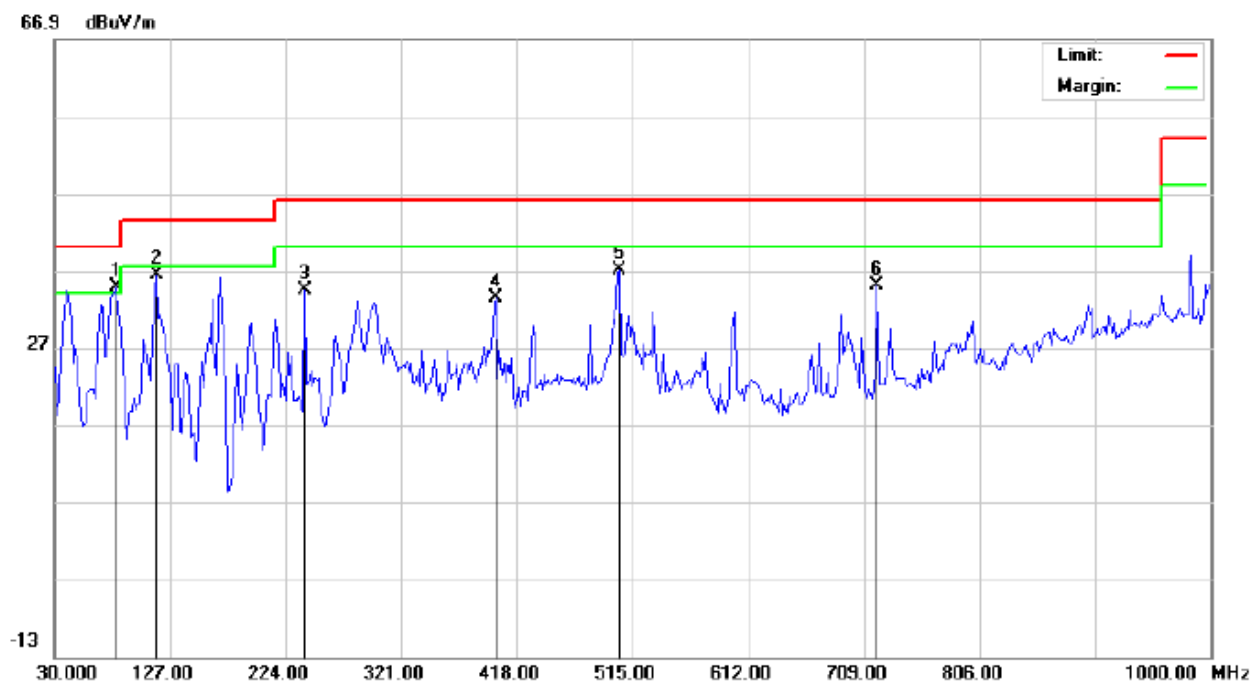

Site: Conduction Polarization: **Vertical** Temperature: 23.1
Limit: FCC Class B 3M Radiation Power: Humidity: 54.1 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: Low Channel TX
Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	81.7332	32.41	2.42	34.83	40.00	-5.17	peak			
2		115.6833	31.77	4.71	36.48	43.50	-7.02	peak			
3		240.1667	21.48	12.94	34.42	46.00	-11.58	peak			
4		400.2167	14.25	19.08	33.33	46.00	-12.67	peak			
5		503.6833	15.79	21.23	37.02	46.00	-8.98	peak			
6		720.3167	9.19	25.78	34.97	46.00	-11.03	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

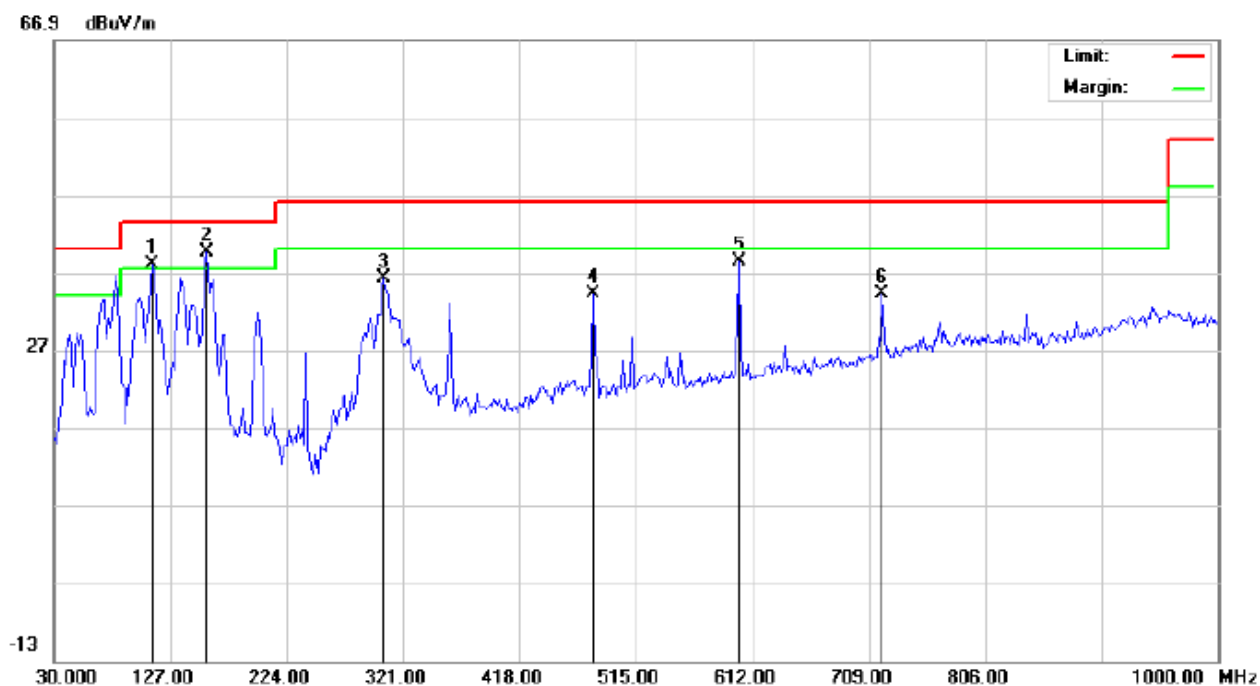

Site: Conduction

Polarization: *Horizontal*

Temperature: 23.1

Limit: FCC Class B 3M Radiation

Power:

Humidity: 54.1 %

EUT: Bluetooth Speaker

Distance:

M/N: IBomb Party


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	112.4500	30.49	7.60	38.09	43.50	-5.41	peak			
2	*	157.7167	28.80	10.89	39.69	43.50	-3.81	peak			
3		304.8333	20.56	15.73	36.29	46.00	-9.71	peak			
4		479.4333	13.24	20.91	34.15	46.00	-11.85	peak			
5		600.6833	14.69	23.73	38.42	46.00	-7.58	peak			
6		720.3167	8.50	25.78	34.28	46.00	-11.72	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

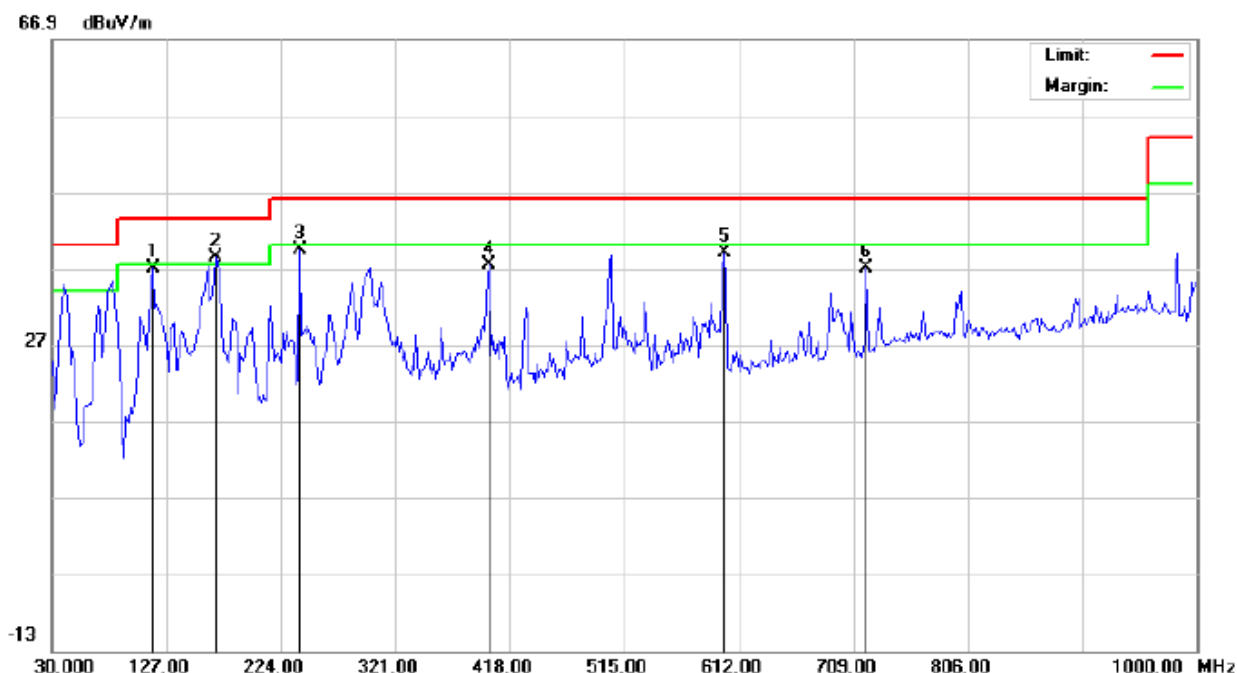

Site: Conduction Polarization: Vertical Temperature: 23.1
Limit: FCC Class B 3M Radiation Power: Humidity: 54.1 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: Middle Channel TX
Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		115.6833	32.27	4.71	36.98	43.50	-6.52	peak			
2	*	169.0331	23.73	14.76	38.49	43.50	-5.01	peak			
3		240.1667	26.48	12.94	39.42	46.00	-6.58	peak			
4		400.2167	18.25	19.08	37.33	46.00	-8.67	peak			
5		599.0667	16.30	22.73	39.03	46.00	-6.97	peak			
6		720.3167	11.19	25.78	36.97	46.00	-9.03	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

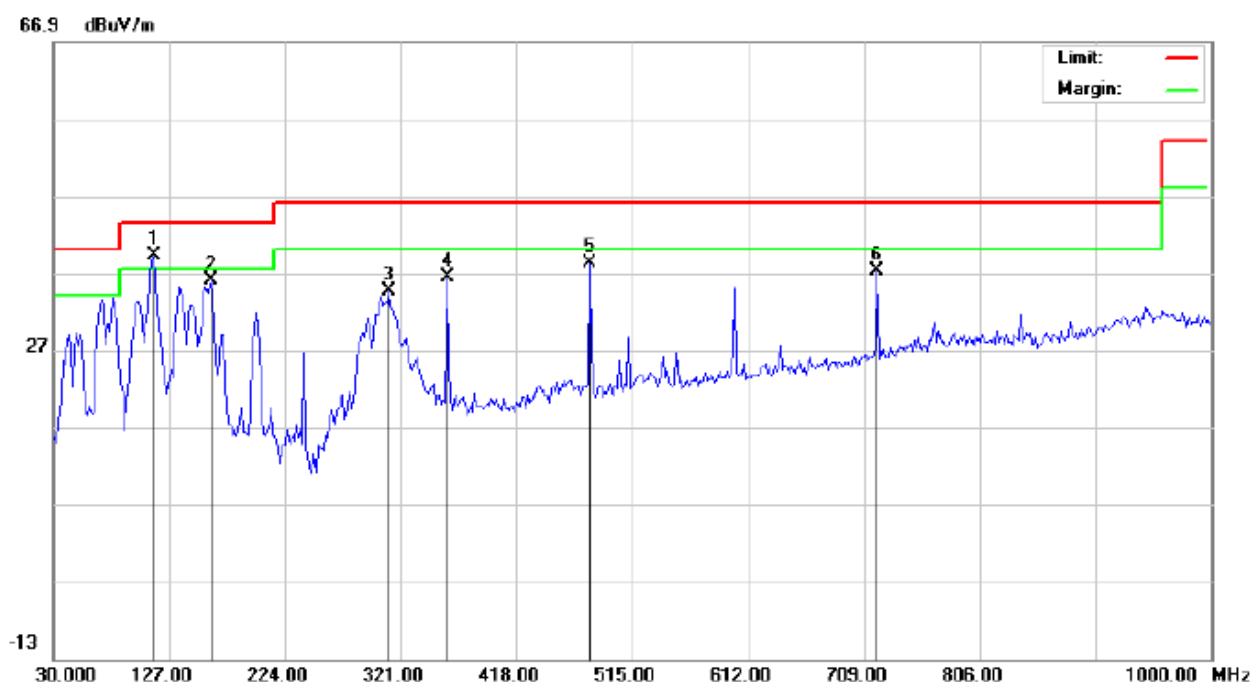

Site: Conduction

Polarization: *Horizontal*

Temperature: 23.1

Limit: FCC Class B 3M Radiation

Power:

Humidity: 54.1 %

EUT: Bluetooth Speaker

Distance:

M/N: IBomb Party


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	114.0667	32.06	7.23	39.29	43.50	-4.21	peak			
2		162.5666	25.63	10.42	36.05	43.50	-7.45	peak			
3		311.3000	18.48	16.16	34.64	46.00	-11.36	peak			
4		359.8000	17.65	18.80	36.45	46.00	-9.55	peak			
5		479.4333	17.24	20.91	38.15	46.00	-7.85	peak			
6		720.3167	11.50	25.78	37.28	46.00	-8.72	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

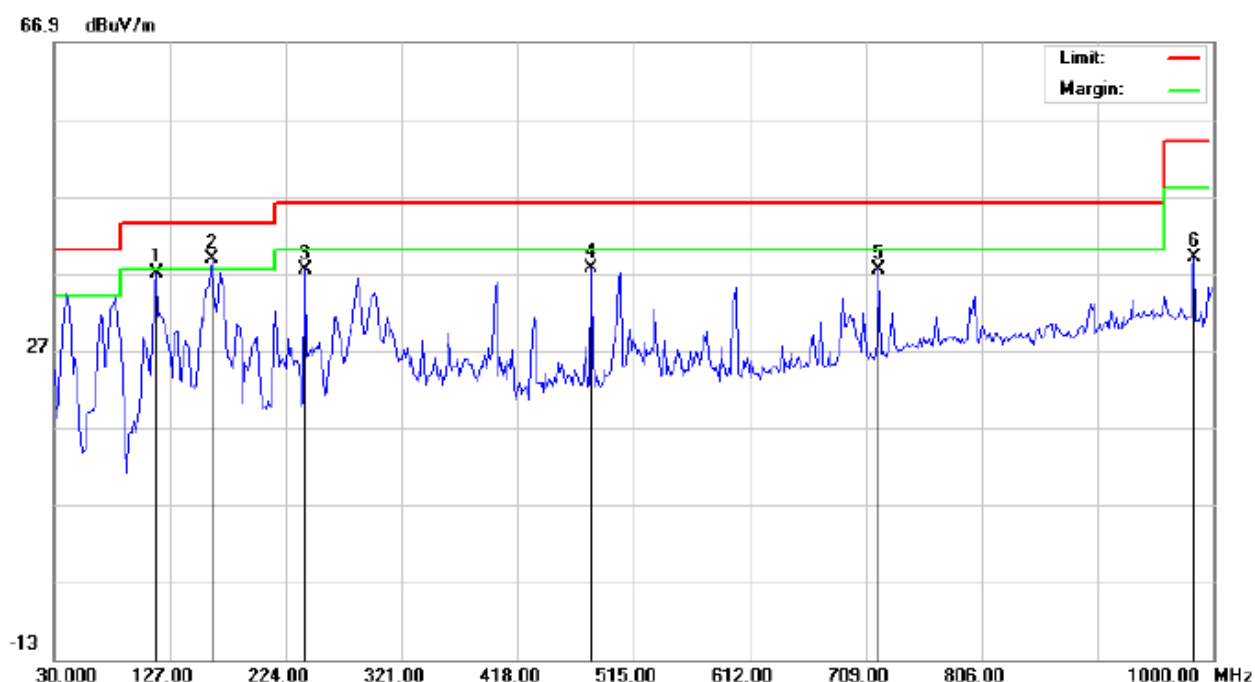

Site: Conduction Polarization: **Vertical** Temperature: 23.1
Limit: FCC Class B 3M Radiation Power: Humidity: 54.1 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		115.6833	32.27	4.71	36.98	43.50	-6.52	peak			
2	*	162.5667	23.59	15.17	38.76	43.50	-4.74	peak			
3		240.1667	24.48	12.94	37.42	46.00	-8.58	peak			
4		479.4333	16.69	20.91	37.60	46.00	-8.40	peak			
5		720.3167	11.69	25.78	37.47	46.00	-8.53	peak			
6		983.8333	9.40	29.68	39.08	54.00	-14.92	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ

FOR 1MBPS(GFSK) RESULT

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

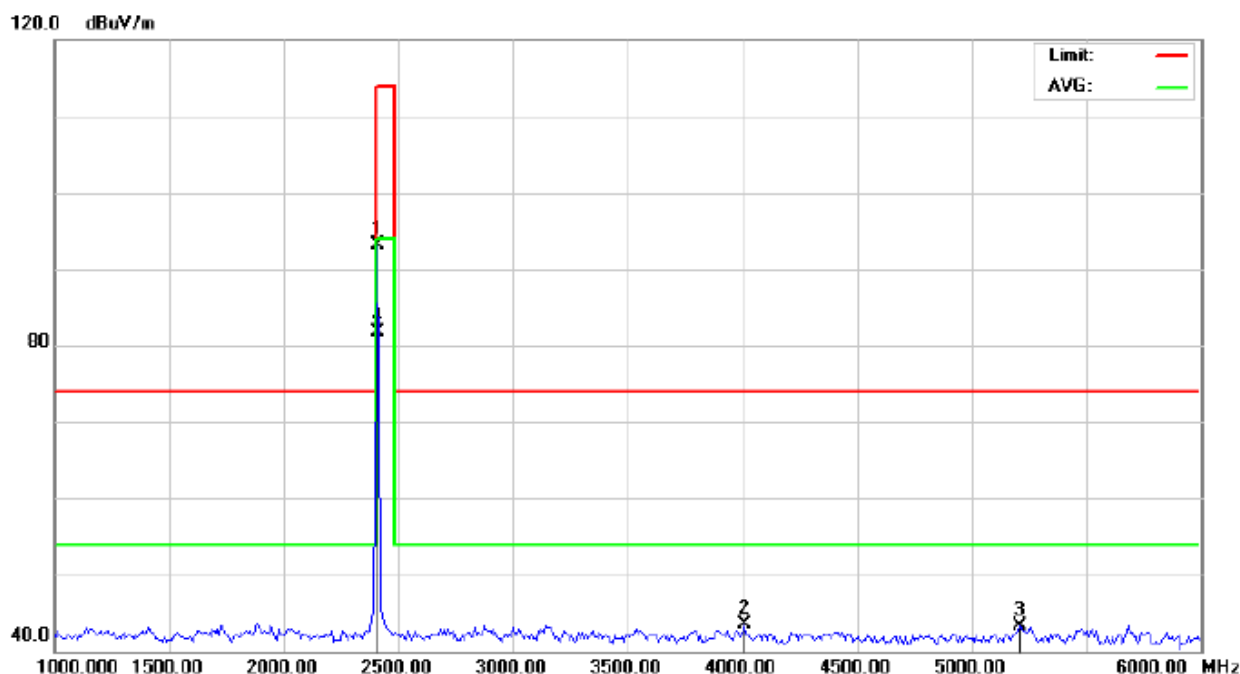


Site: Conduction Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N: IBomb Party
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	102.70	-9.68	93.02	114.00	-20.98	peak			
2		4008.333	48.19	-4.78	43.41	74.00	-30.59	peak			
3		5208.333	45.00	-1.80	43.20	74.00	-30.80	peak			
4	*	2402.000	91.31	-9.68	81.63	94.00	-12.37	AVG	100	128	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

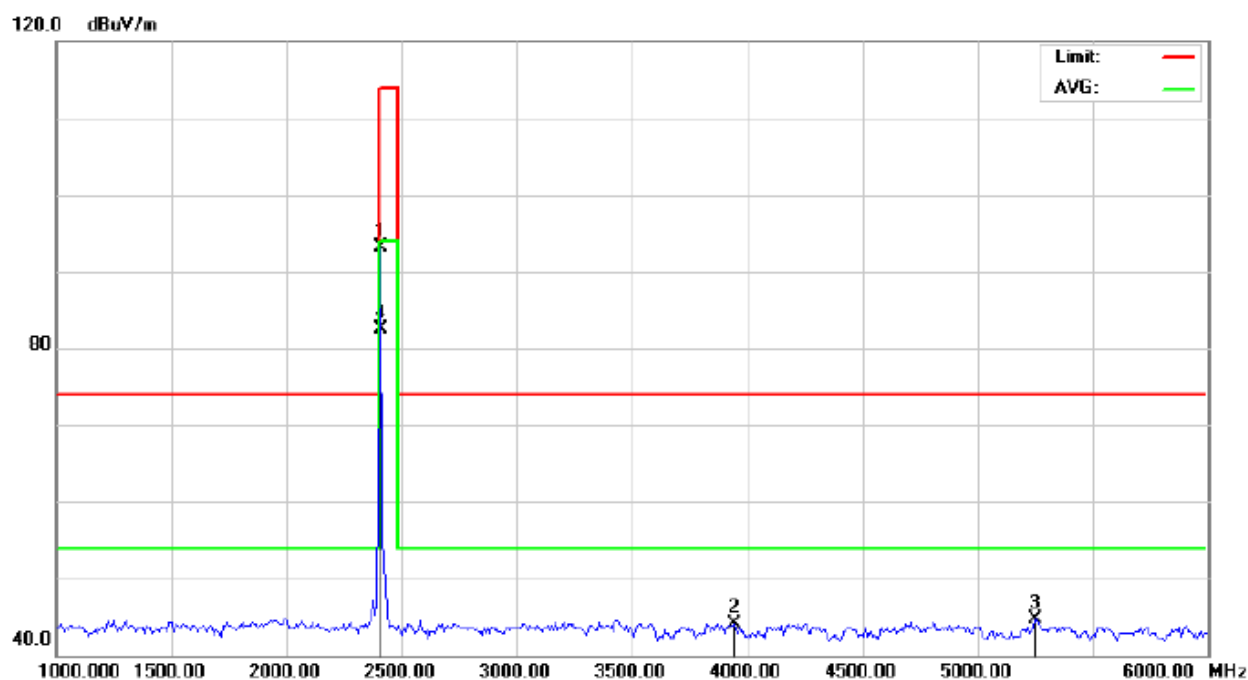


Site: Conduction Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N: IBomb Party
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	102.76	-9.68	93.08	114.00	-20.92	peak			
2		3941.667	49.36	-5.17	44.19	74.00	-29.81	peak			
3		5250.000	46.52	-1.81	44.71	74.00	-29.29	peak			
4	*	2402.000	92.09	-9.68	82.41	94.00	-11.59	AVG	100	314	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

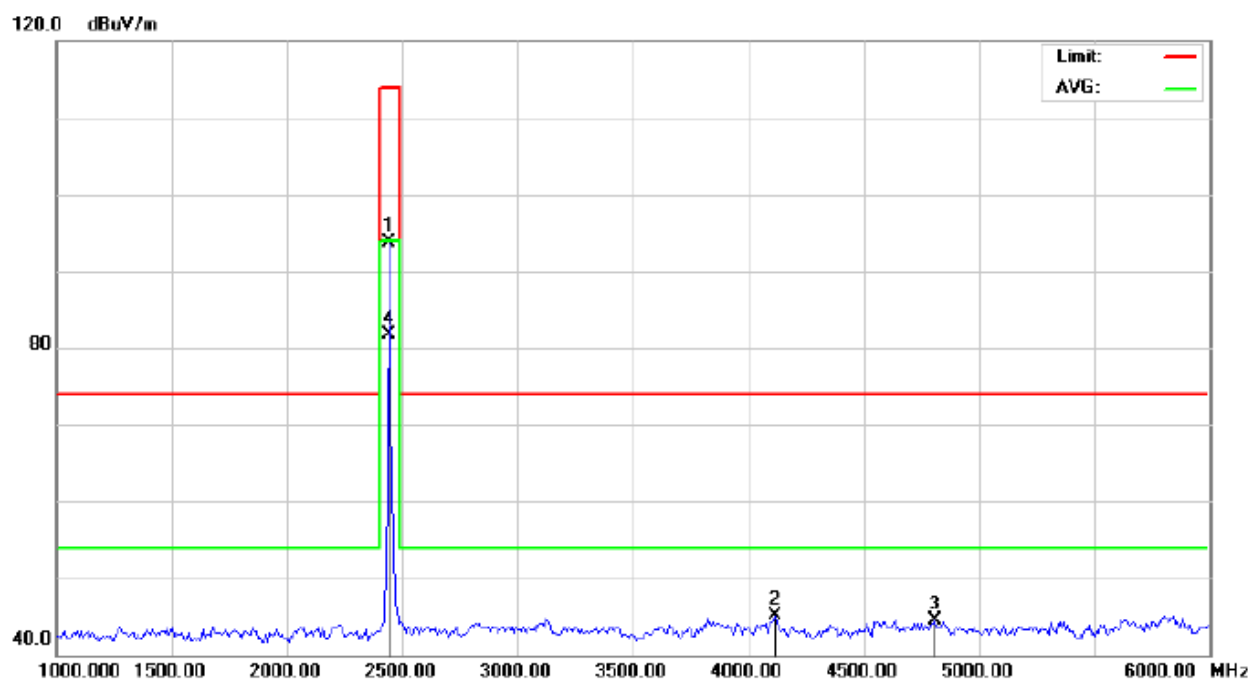


Site: Conduction Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N: IBomb Party
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	103.25	-9.63	93.62	114.00	-20.38	peak			
2		4116.667	49.50	-4.41	45.09	74.00	-28.91	peak			
3		4808.333	46.86	-2.30	44.56	74.00	-29.44	peak			
4	*	2441.000	91.42	-9.63	81.79	94.00	-12.21	AVG	100	125	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

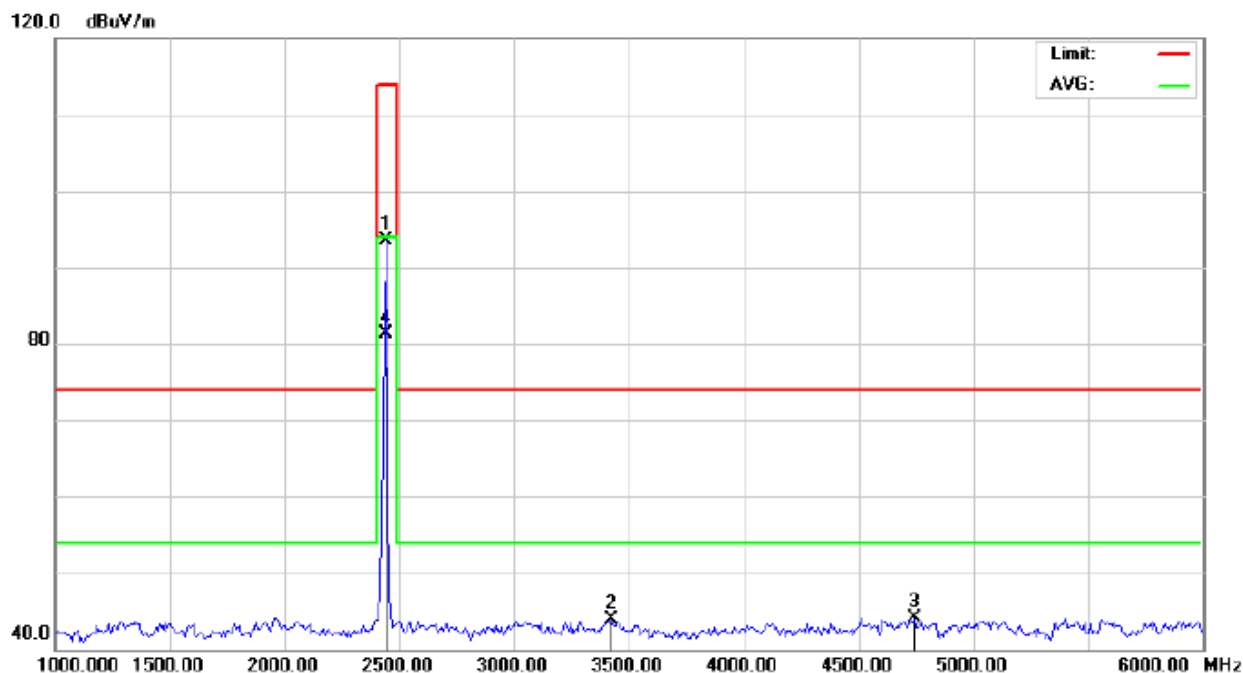


Site: Conduction Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N: IBomb Party
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	103.20	-9.63	93.57	114.00	-20.43	peak			
2		3425.000	51.95	-7.96	43.99	74.00	-30.01	peak			
3		4741.667	46.53	-2.48	44.05	74.00	-29.95	peak			
4	*	2441.000	90.98	-9.63	81.35	94.00	-12.65	AVG	100	311	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

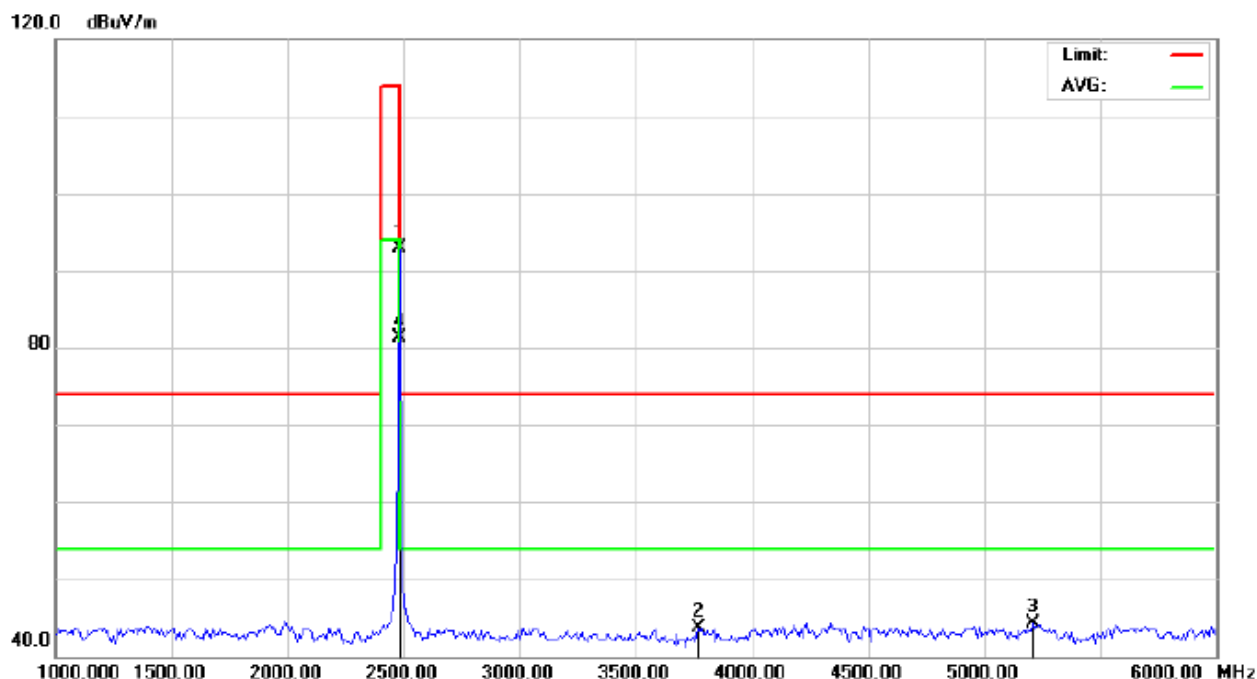


Site: Conduction Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N: IBomb Party
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	102.42	-9.59	92.83	114.00	-21.17	peak			
2		3766.667	49.91	-6.25	43.66	74.00	-30.34	peak			
3		5208.333	46.07	-1.80	44.27	74.00	-29.73	peak			
4	*	2480.000	90.91	-9.59	81.32	94.00	-12.68	AVG	100	131	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

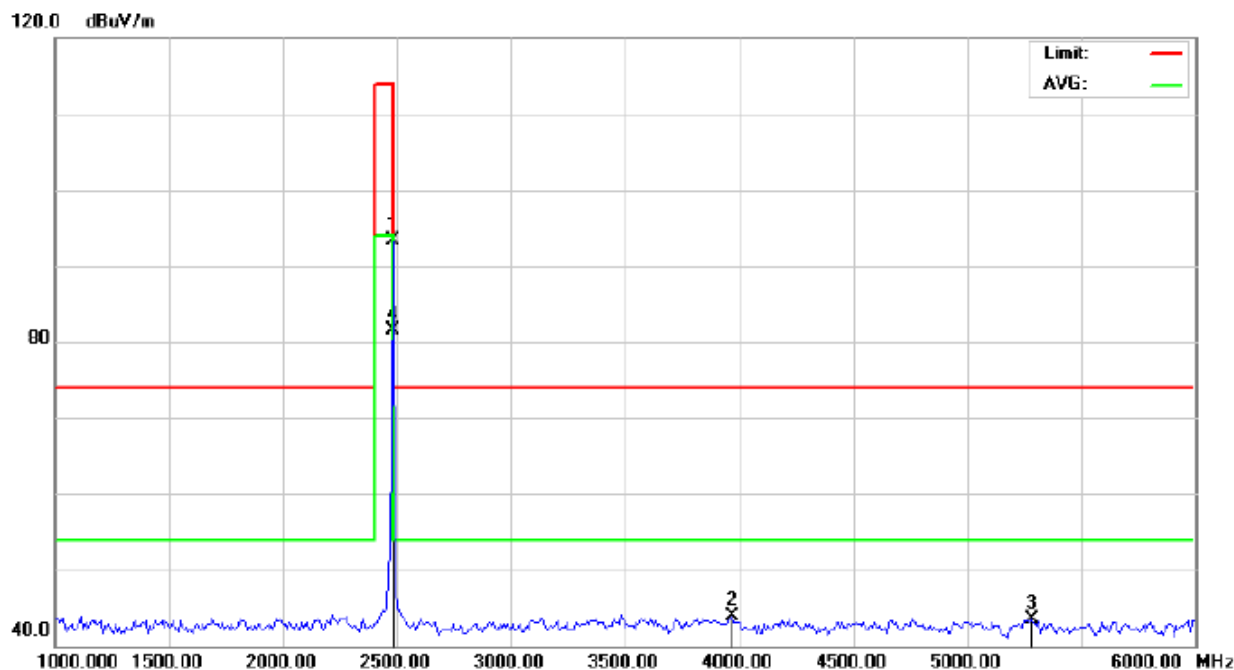

Site: Conduction Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N: IBomb Party
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	102.82	-9.59	93.23	114.00	-20.77	peak			
2		3966.667	48.91	-5.02	43.89	74.00	-30.11	peak			
3		5283.333	45.24	-1.81	43.43	74.00	-30.57	peak			
4	*	2480.000	91.07	-9.59	81.48	94.00	-12.52	AVG	100	317	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal


Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	102.70	-9.68	93.02	114	-20.98	Horizontal
2402	102.76	-9.68	93.08	114	-20.92	Vertical
2441	103.25	-9.63	93.62	114	-20.38	Horizontal
2441	103.20	-9.63	93.57	114	-20.43	Vertical
2480	102.42	-9.59	92.83	114	-21.17	Horizontal
2480	102.82	-9.59	93.23	114	-20.77	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	91.31	-9.68	81.63	94	-12.37	Horizontal
2402	92.09	-9.68	82.41	94	-11.59	Vertical
2441	91.42	-9.63	81.79	94	-12.21	Horizontal
2441	90.98	-9.63	81.35	94	-12.65	Vertical
2480	90.91	-9.59	81.32	94	-12.68	Horizontal
2480	91.07	-9.59	81.48	94	-12.52	Vertical

FOR 2MBPS(π /4-DQPSK) RESULT
RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

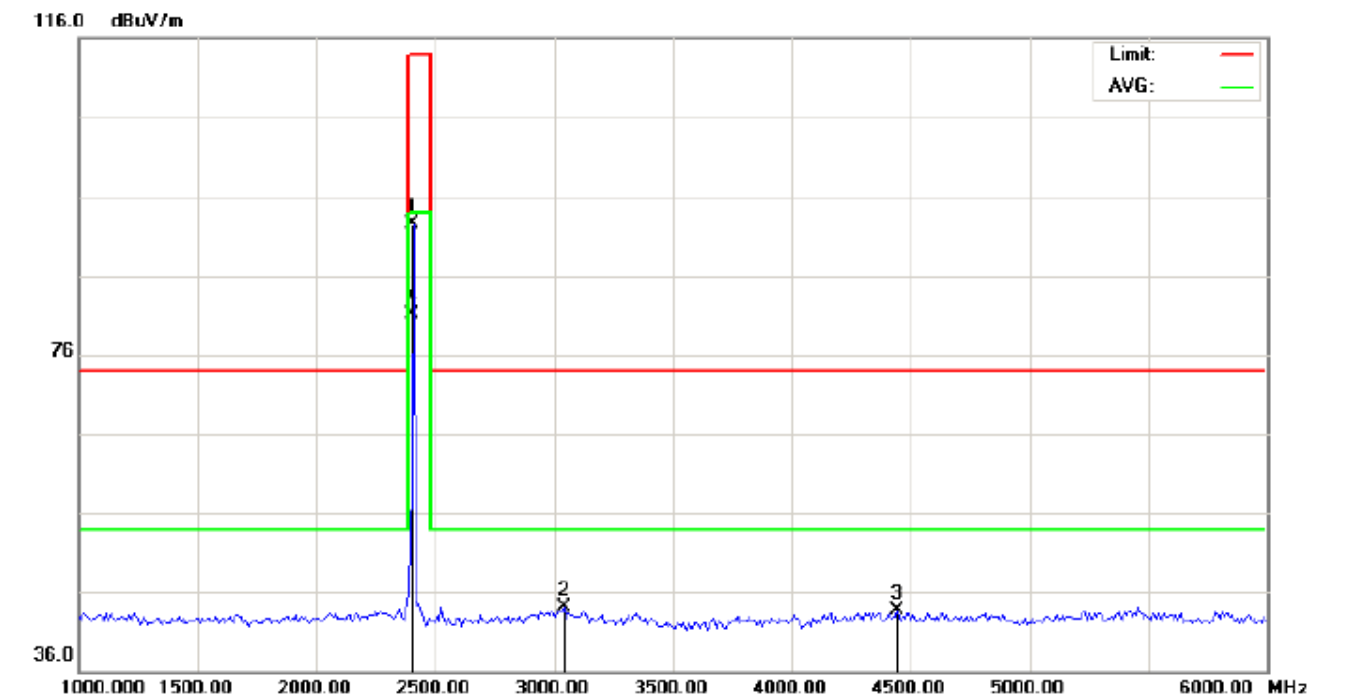


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 23.5
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-	Power:	Humidity: 55.4 %
EUT: Bluetooth Speaker	Distance:	
M/N: IBomb Party		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	102.21	-9.68	92.53	114.00	-21.47	peak			
2		3041.667	50.75	-6.58	44.17	74.00	-29.83	peak			
3		4441.667	45.91	-2.14	43.77	74.00	-30.23	peak			
4	*	2402.000	90.80	-9.68	81.12	94.00	-12.88	AVG	100	217	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

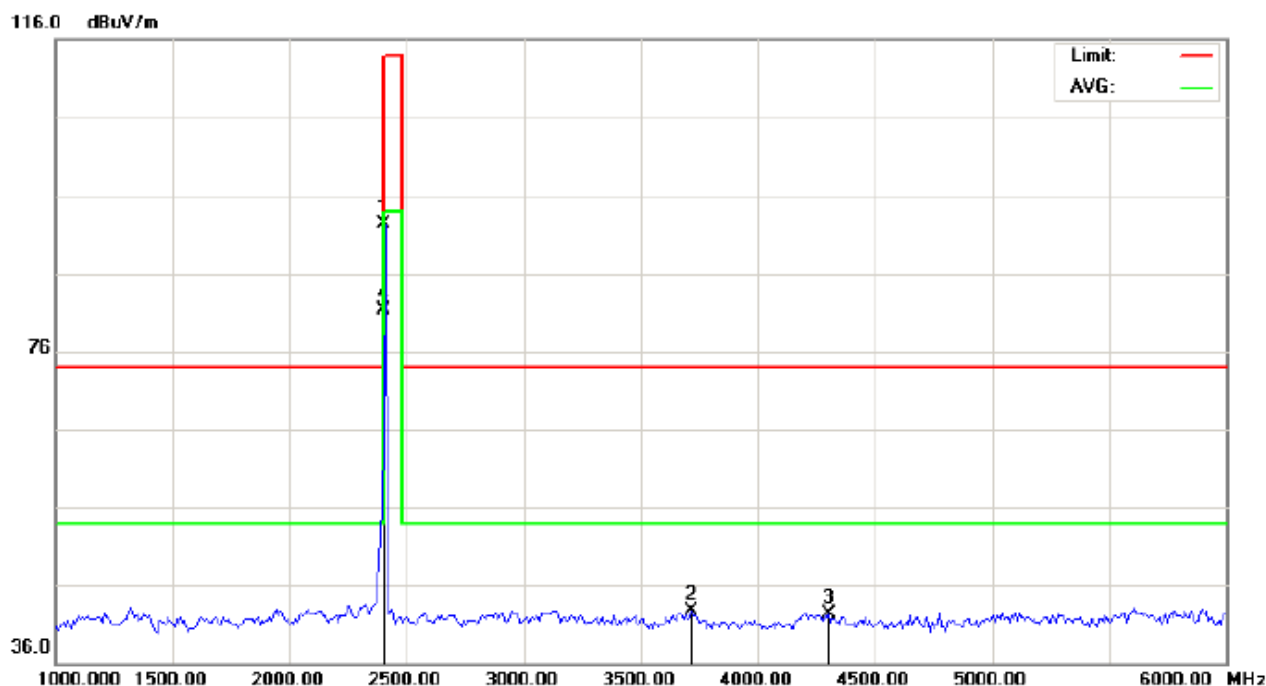


Site: site #1 Polarization: **Vertical** Temperature: 23.5
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 55.4 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	102.00	-9.68	92.32	114.00	-21.68	peak			
2		3716.667	49.20	-6.56	42.64	74.00	-31.36	peak			
3		4300.000	46.03	-3.79	42.24	74.00	-31.76	peak			
4	*	2402.000	90.92	-9.68	81.24	94.00	-12.76	AVG	100	86	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

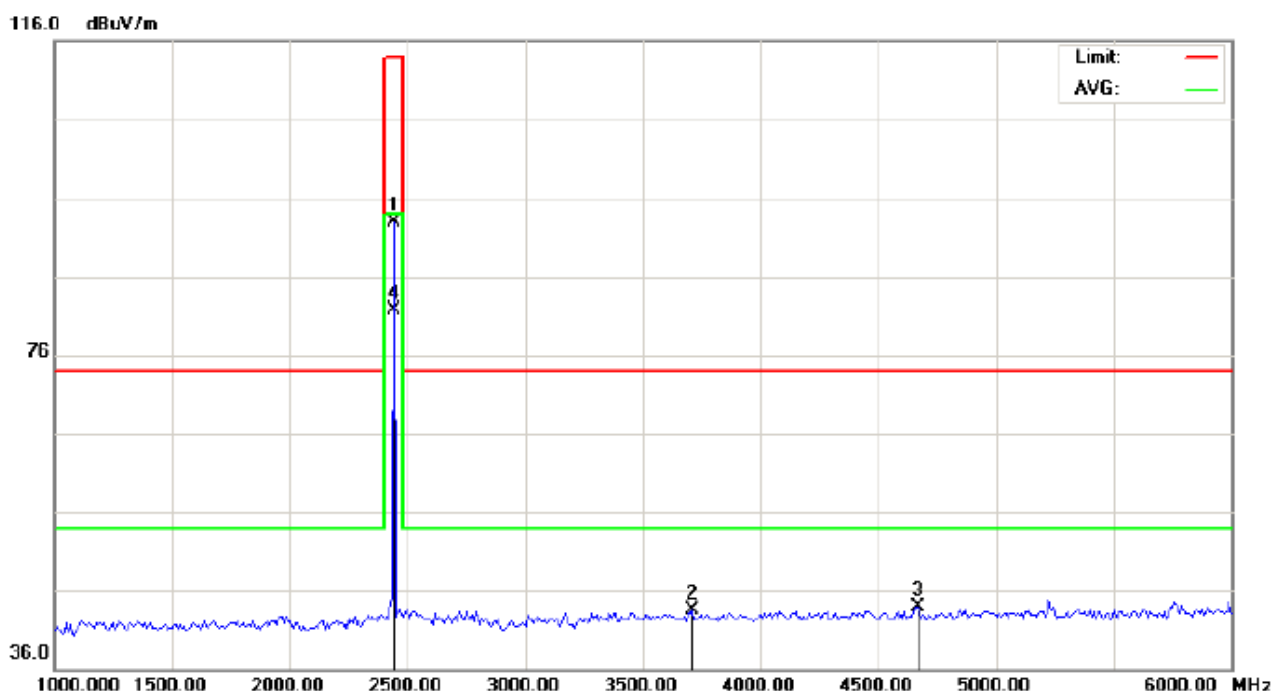


Site: site #1 Polarization: **Horizontal** Temperature: 23.5
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 55.4 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	102.44	-9.63	92.81	114.00	-21.19	peak			
2		3708.333	50.16	-6.61	43.55	74.00	-30.45	peak			
3		4666.667	46.55	-2.67	43.88	74.00	-30.12	peak			
4	*	2441.000	91.31	-9.63	81.68	94.00	-12.32	AVG	100	223	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

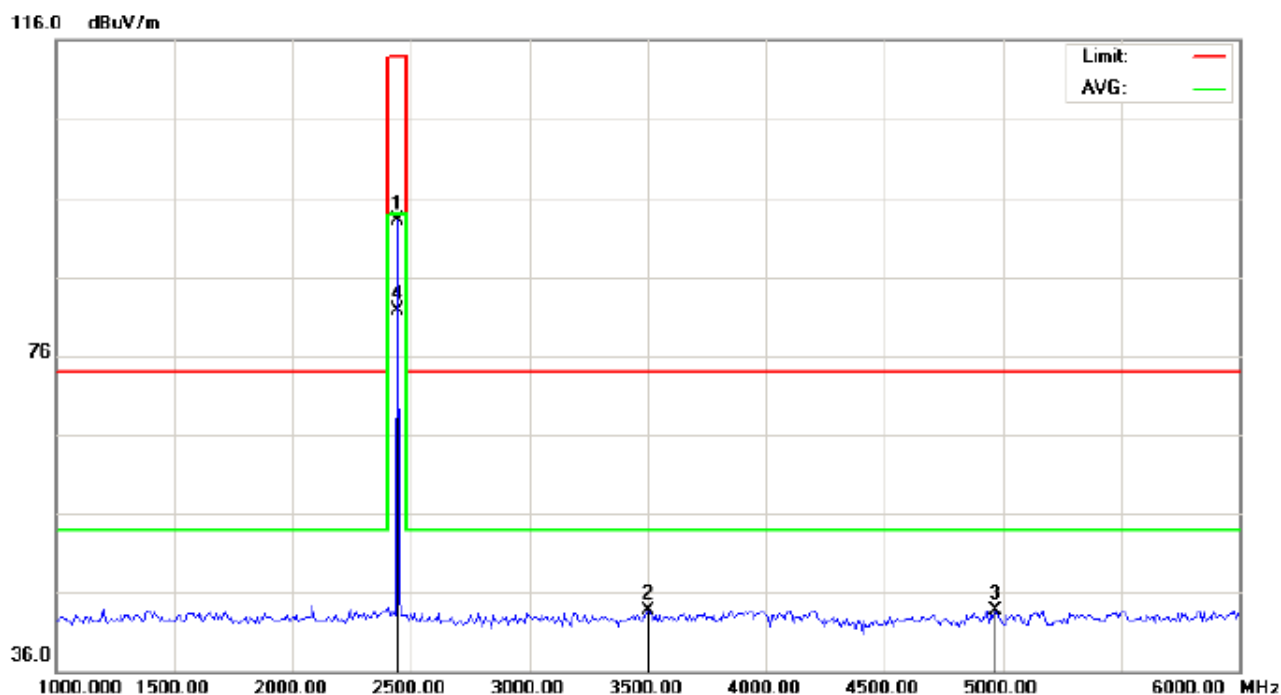


Site: site #1 Polarization: **Vertical** Temperature: 23.5
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 55.4 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	102.75	-9.63	93.12	114.00	-20.88	peak			
2		3500.000	51.50	-7.89	43.61	74.00	-30.39	peak			
3		4966.667	45.57	-1.89	43.68	74.00	-30.32	peak			
4	*	2441.000	91.39	-9.63	81.76	94.00	-12.24	AVG	100	82	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

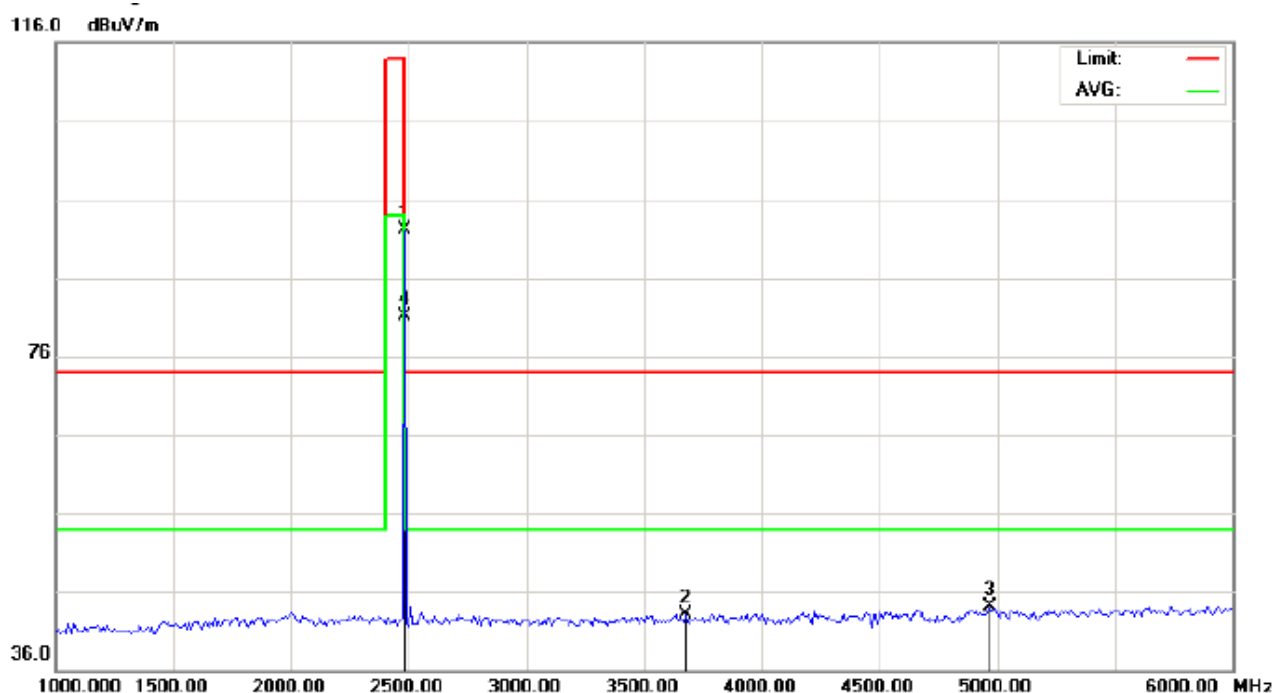


Site: site #1 Polarization: **Horizontal** Temperature: 23.5
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 55.4 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	101.75	-9.59	92.16	114.00	-21.84	peak			
2		3675.000	49.98	-6.81	43.17	74.00	-30.83	peak			
3		4966.667	45.91	-1.89	44.02	74.00	-29.98	peak			
4	*	2480.000	90.66	-9.59	81.07	94.00	-12.93	AVG	100	220	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

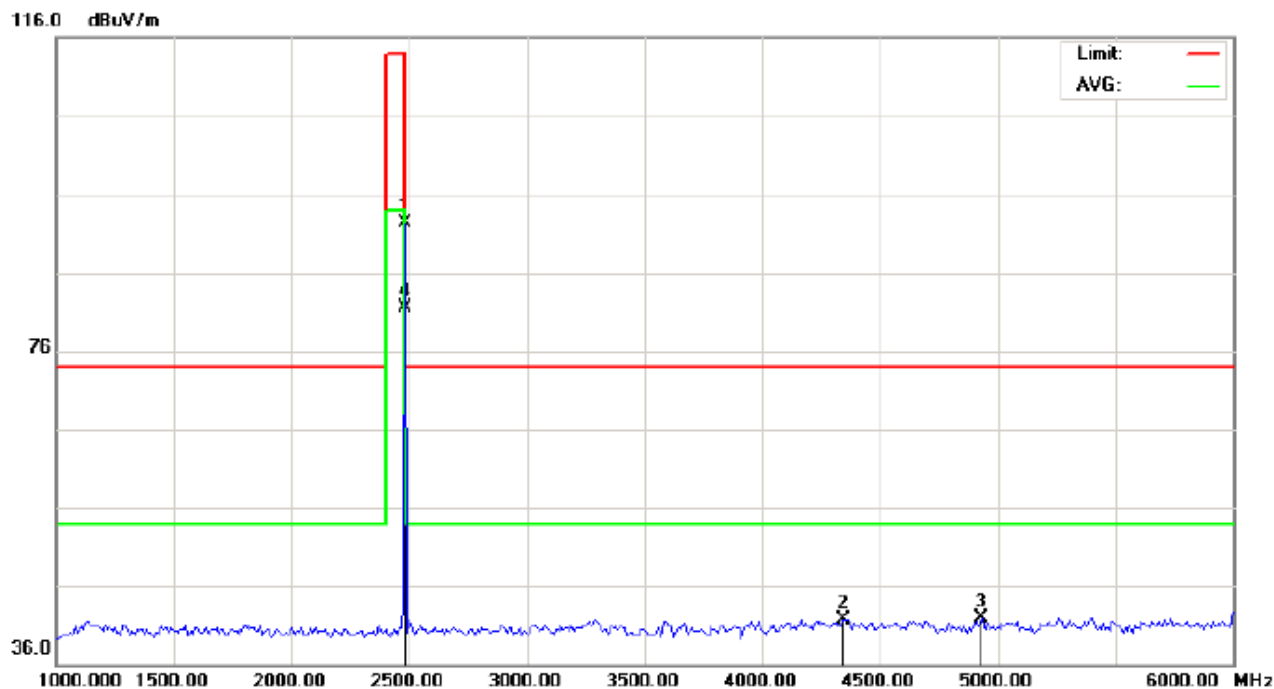

Site: site #1 Polarization: **Vertical** Temperature: 23.5
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 55.4 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	101.92	-9.59	92.33	114.00	-21.67	peak			
2		4341.667	45.39	-3.65	41.74	74.00	-32.26	peak			
3		4933.333	43.83	-1.97	41.86	74.00	-32.14	peak			
4	*	2480.000	91.12	-9.59	81.53	94.00	-12.47	AVG	100	79	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	102.21	-9.68	92.53	114	-21.47	Horizontal
2402	102.00	-9.68	92.32	114	-21.68	Vertical
2441	102.44	-9.63	92.81	114	-21.19	Horizontal
2441	102.75	-9.63	93.12	114	-20.88	Vertical
2480	101.75	-9.59	92.16	114	-21.84	Horizontal
2480	101.92	-9.59	81.53	114	-21.67	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	90.80	-9.68	81.12	94	-12.88	Horizontal
2402	90.92	-9.68	81.24	94	-12.76	Vertical
2441	91.31	-9.63	81.68	94	-12.32	Horizontal
2441	91.39	-9.63	81.76	94	-12.24	Vertical
2480	90.66	-9.59	81.07	94	-12.93	Horizontal
2480	91.12	-9.59	81.53	94	-12.47	Vertical

FOR 3Mbps(8DPSK) RESULT

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

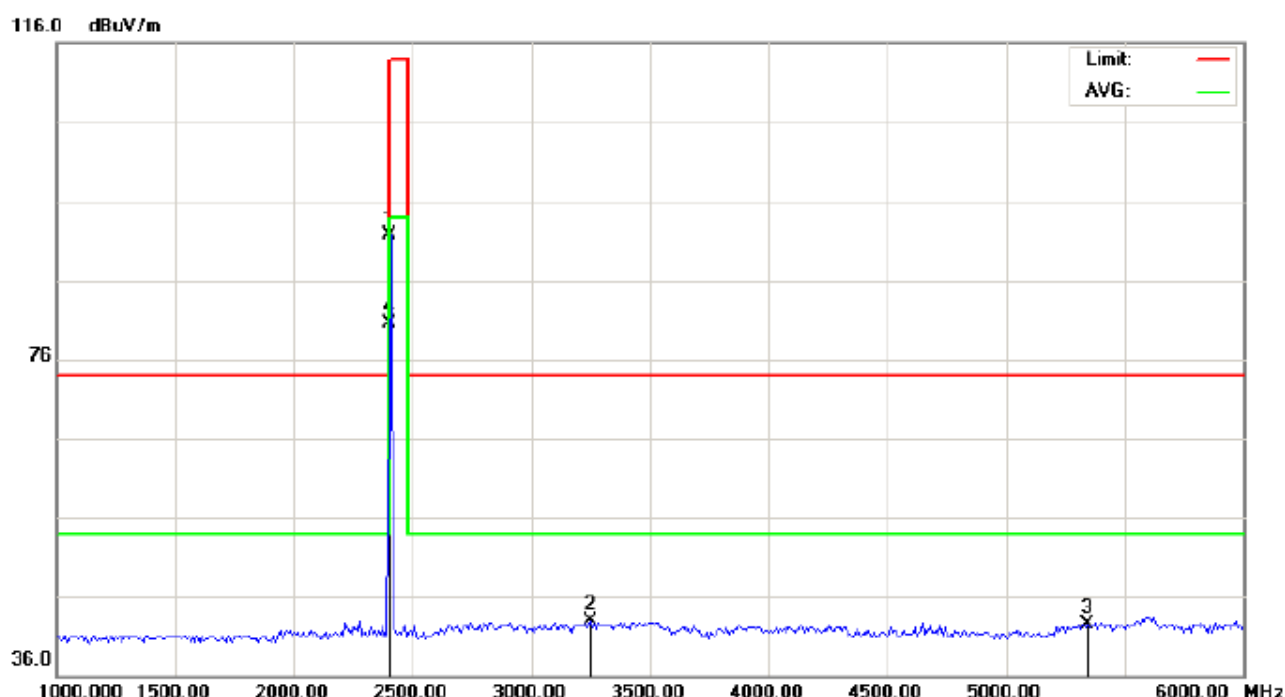


Site: site #1 Polarization: *Horizontal* Temperature: 23.5
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 55.4 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	101.46	-9.68	91.78	114.00	-22.22	peak			
2		3250.000	51.01	-8.12	42.89	74.00	-31.11	peak			
3		5341.667	44.39	-1.81	42.58	74.00	-31.42	peak			
4	*	2402.000	90.13	-9.68	80.45	94.00	-13.55	AVG	100	293	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

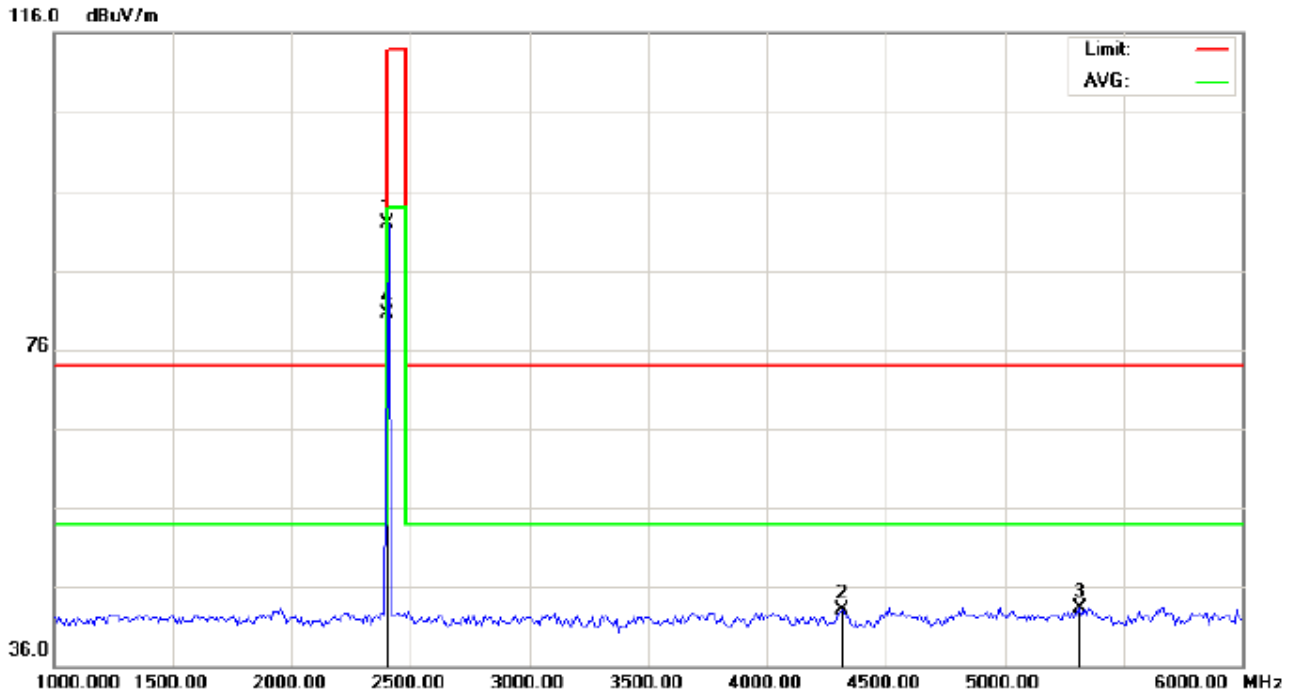

Site: site #1

Polarization: *Vertical*

Temperature: 23.5

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 55.4 %

EUT: Bluetooth Speaker

Distance:

M/N: IBomb Party


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	101.61	-9.68	91.93	114.00	-22.07	peak			
2		4316.667	46.80	-3.73	43.07	74.00	-30.93	peak			
3		5316.667	45.20	-1.81	43.39	74.00	-30.61	peak			
4	*	2402.000	90.24	-9.68	80.56	94.00	-13.44	AVG	100	119	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

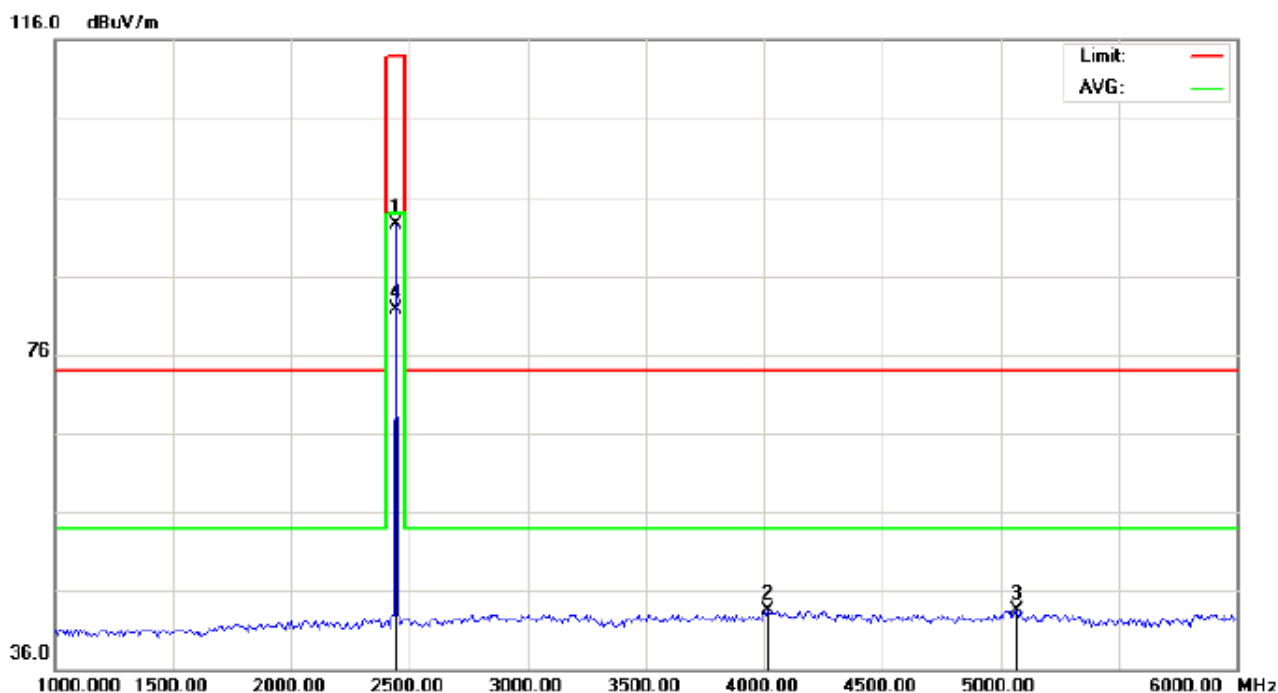


Site: site #1 Polarization: **Horizontal** Temperature: 23.5
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 55.4 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	102.17	-9.63	92.54	114.00	-21.46	peak			
2		4016.667	48.22	-4.75	43.47	74.00	-30.53	peak			
3		5066.667	45.26	-1.80	43.46	74.00	-30.54	peak			
4	*	2441.000	91.36	-9.63	81.73	94.00	-12.27	AVG	100	291	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

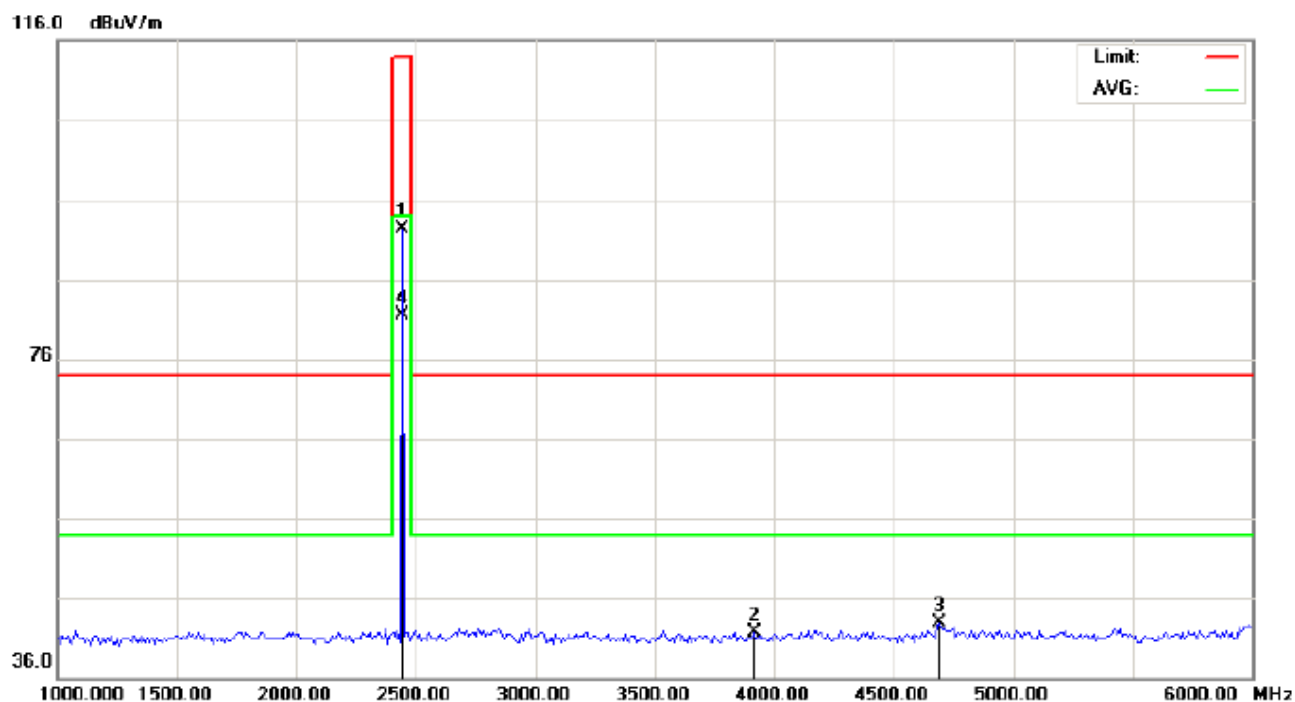


Site: site #1 Polarization: **Vertical** Temperature: 23.5
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 55.4 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	101.96	-9.63	92.33	114.00	-21.67	peak			
2		3916.667	46.98	-5.32	41.66	74.00	-32.34	peak			
3		4691.667	45.48	-2.61	42.87	74.00	-31.13	peak			
4	*	2441.000	91.22	-9.63	81.59	94.00	-12.41	AVG	100	126	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

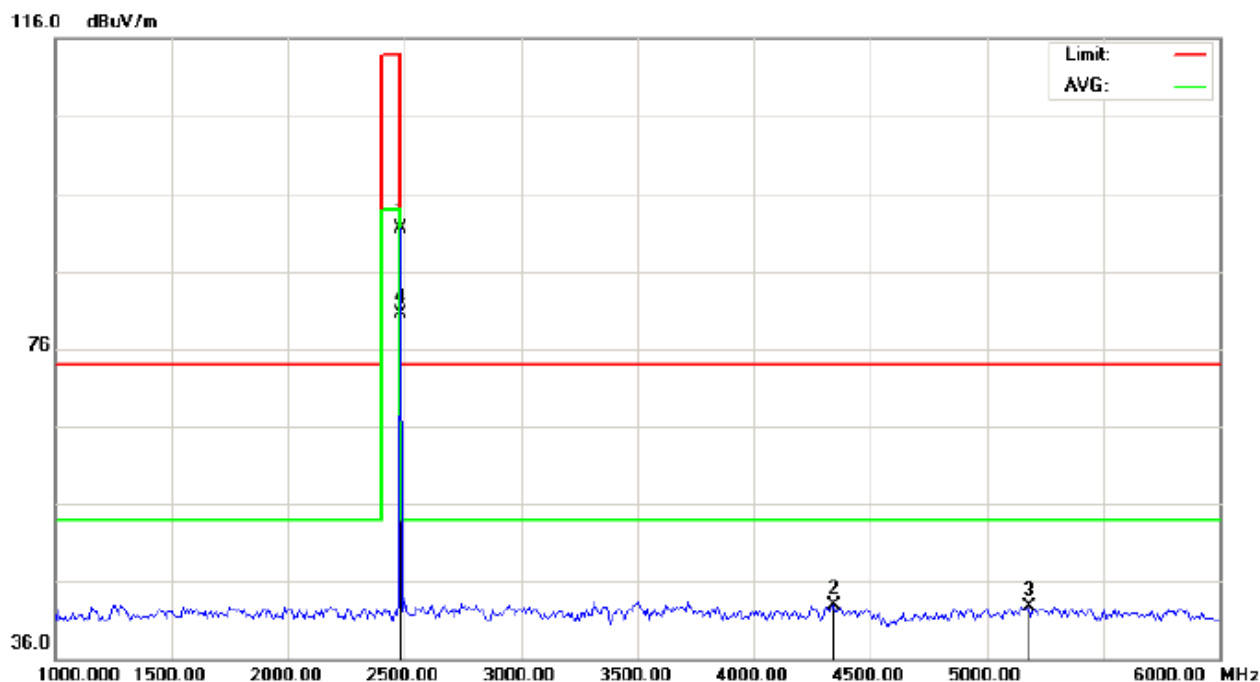


Site: site #1 Polarization: *Horizontal* Temperature: 23.5
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 55.4 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	101.01	-9.59	91.42	114.00	-22.58	peak			
2		4341.667	46.50	-3.65	42.85	74.00	-31.15	peak			
3		5183.333	44.58	-1.80	42.78	74.00	-31.22	peak			
4	*	2480.000	90.06	-9.59	80.47	94.00	-13.53	AVG	100	289	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

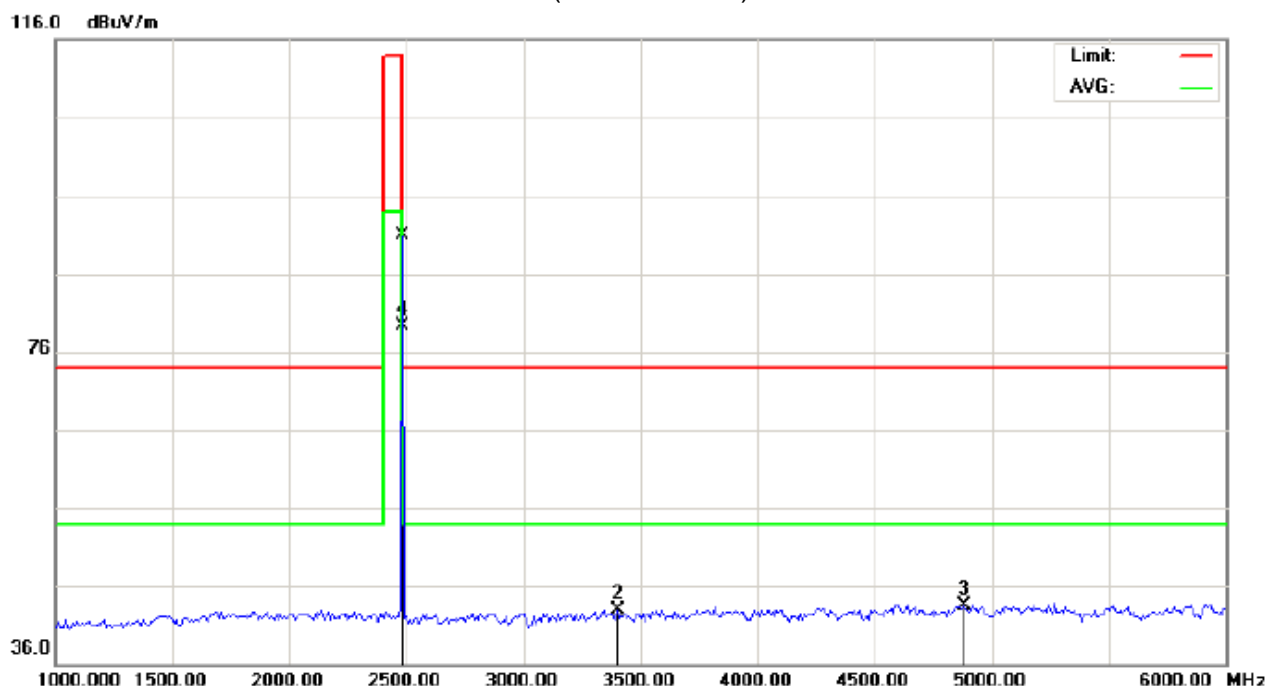

Site: site #1 Polarization: **Vertical** Temperature: 23.5
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 55.4 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	100.54	-9.59	90.95	114.00	-23.05	peak			
2		3400.000	50.95	-7.98	42.97	74.00	-31.03	peak			
3		4883.333	45.69	-2.11	43.58	74.00	-30.42	peak			
4	*	2480.000	88.82	-9.59	79.23	94.00	-14.77	AVG	100	124	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	101.46	-9.68	91.78	114	-22.22	Horizontal
2402	101.61	-9.68	91.93	114	-22.07	Vertical
2441	102.17	-9.63	92.54	114	-21.46	Horizontal
2441	101.96	-9.63	92.33	114	-21.67	Vertical
2480	101.01	-9.59	91.42	114	-22.58	Horizontal
2480	100.54	-9.59	90.95	114	-23.05	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	90.13	-9.68	80.45	94	-13.55	Horizontal
2402	90.24	-9.68	80.56	94	-13.44	Vertical
2441	91.36	-9.63	81.73	94	-12.27	Horizontal
2441	91.22	-9.63	81.59	94	-12.41	Vertical
2480	90.06	-9.59	80.47	94	-13.53	Horizontal
2480	88.82	-9.59	79.23	94	-14.77	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO

(b) AVERAGE: RBW=1.5MHz ; VBW=1/on time(1KHz) / Sweep=AUTO

9.2 TEST SETUP


RADIATED EMISSION TEST SETUP

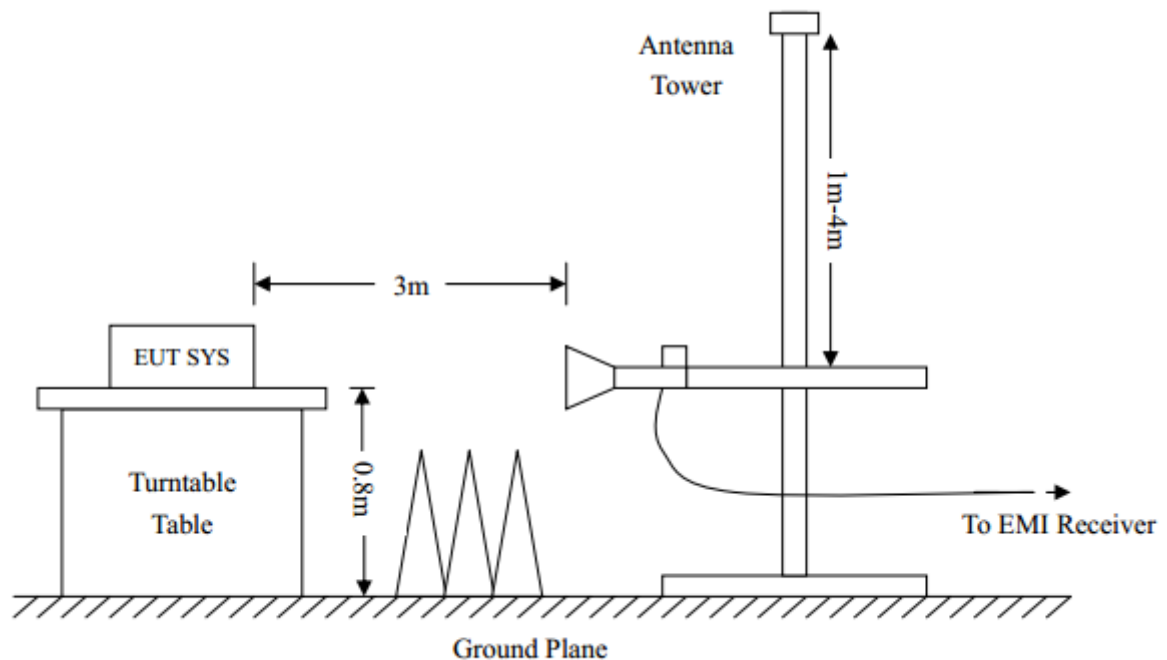

9.3 RADIATED TEST RESULT

(Worst modulation: GFSK)


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

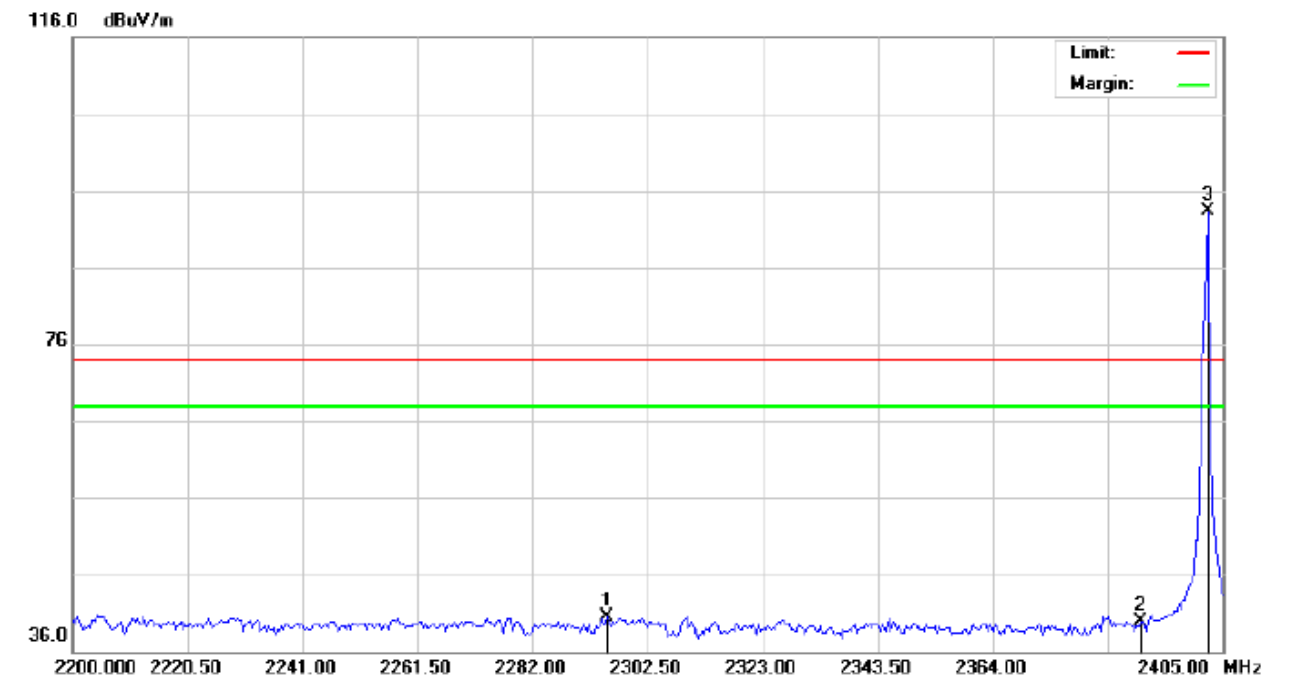

Site: Conduction	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: Bluetooth Speaker	Distance:	
M/N: IBomb Party		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2295.325	30.25	10.20	40.45	74.00	-33.55	peak			
2		2390.000	29.62	10.31	39.93	74.00	-34.07	peak			
3	*	2402.000	82.91	10.32	93.23	74.00	19.23	peak			

TEST PLOT OF BAND EDGE FOR LOW CHANNEL –Vertical

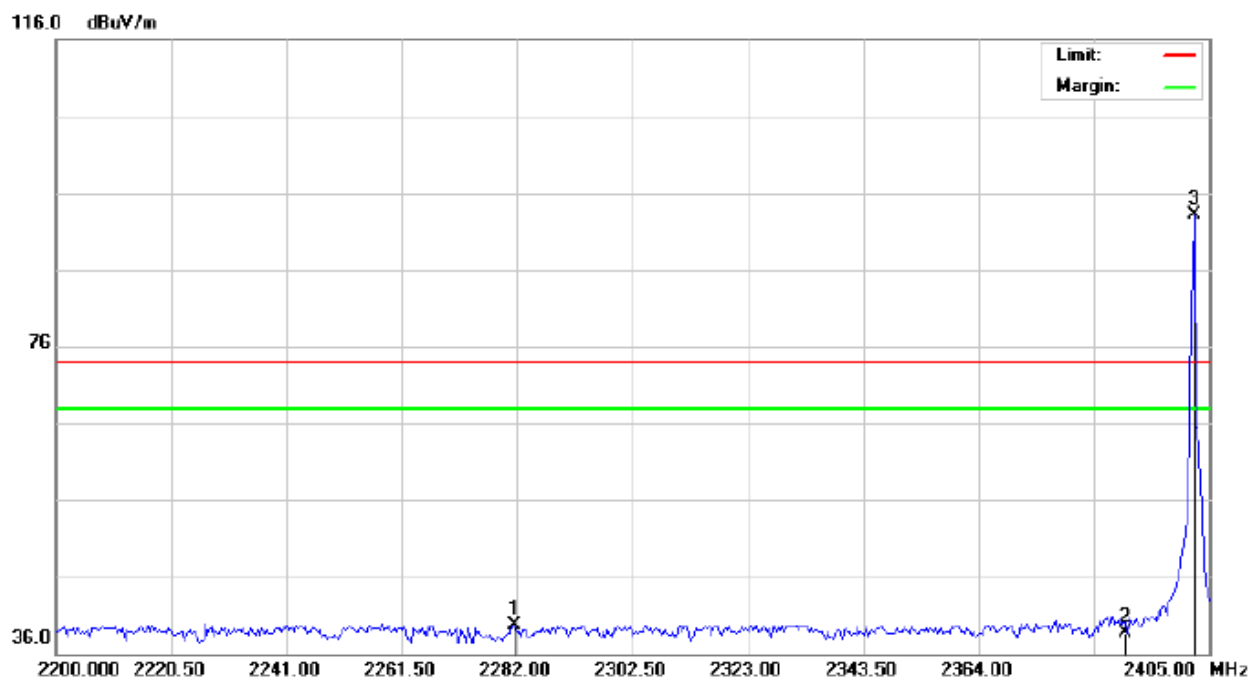

Site: Conduction

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth Speaker

Distance:


M/N: IBomb Party

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2281.658	29.55	10.19	39.74	74.00	-34.26	peak			
2		2390.000	28.35	10.31	38.66	74.00	-35.34	peak			
3	*	2402.000	82.76	10.32	93.08	74.00	19.08	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

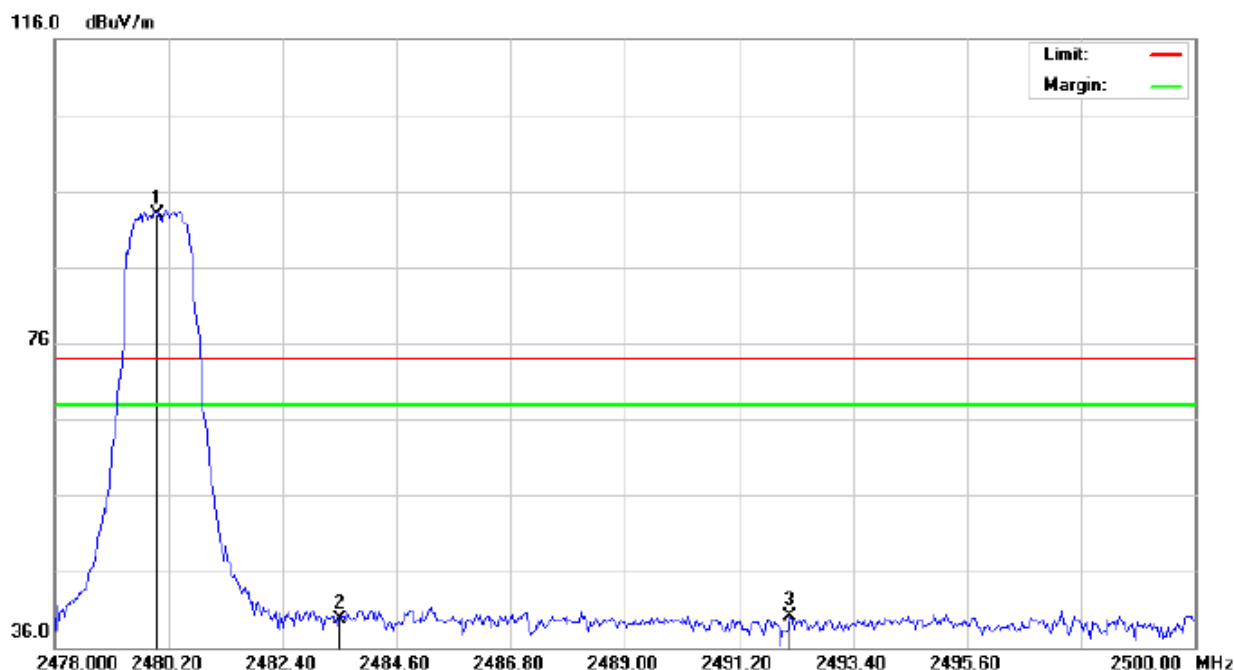

Site: Conduction Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	82.46	10.41	92.87	74.00	18.87	peak			
2		2483.500	29.25	10.41	39.66	74.00	-34.34	peak			
3		2492.190	29.74	10.42	40.16	74.00	-33.84	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

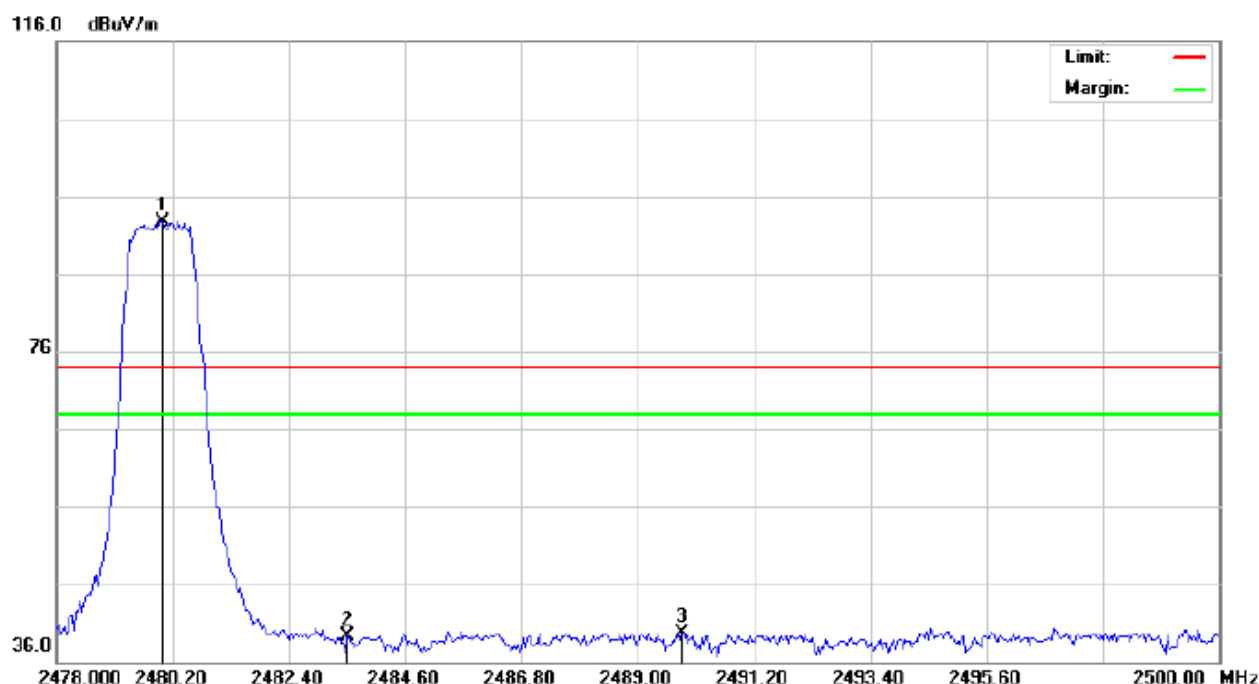

Site: Conduction Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance:
M/N: IBomb Party
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	82.35	10.41	92.76	74.00	18.76	peak			
2		2483.500	28.87	10.41	39.28	74.00	-34.72	peak			
3		2489.843	29.38	10.42	39.80	74.00	-34.20	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested,but only worst case reported.


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel
RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

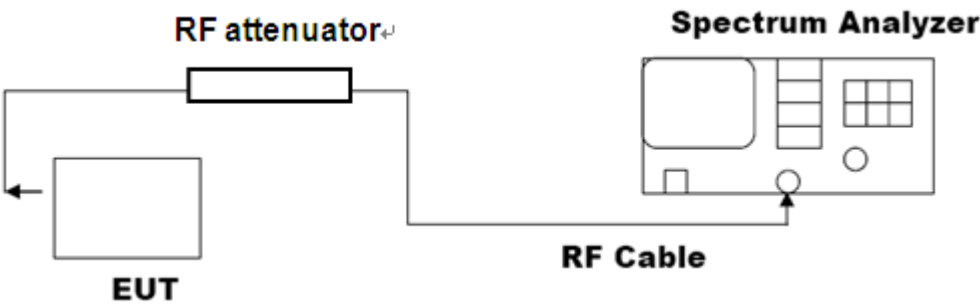


Note: The EUT has been used temporary antenna connector for testing.


10.3. LIMITS AND MEASUREMENT RESULTS

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.078	PASS
	Middle Channel	1.104	PASS
	High Channel	1.085	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

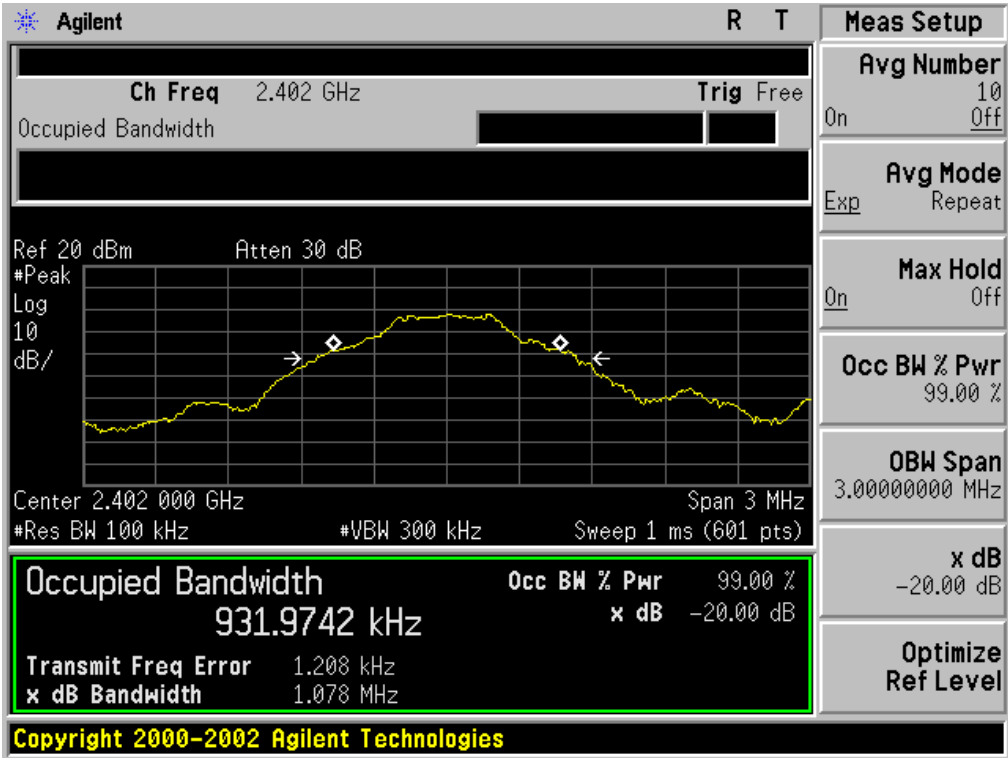

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

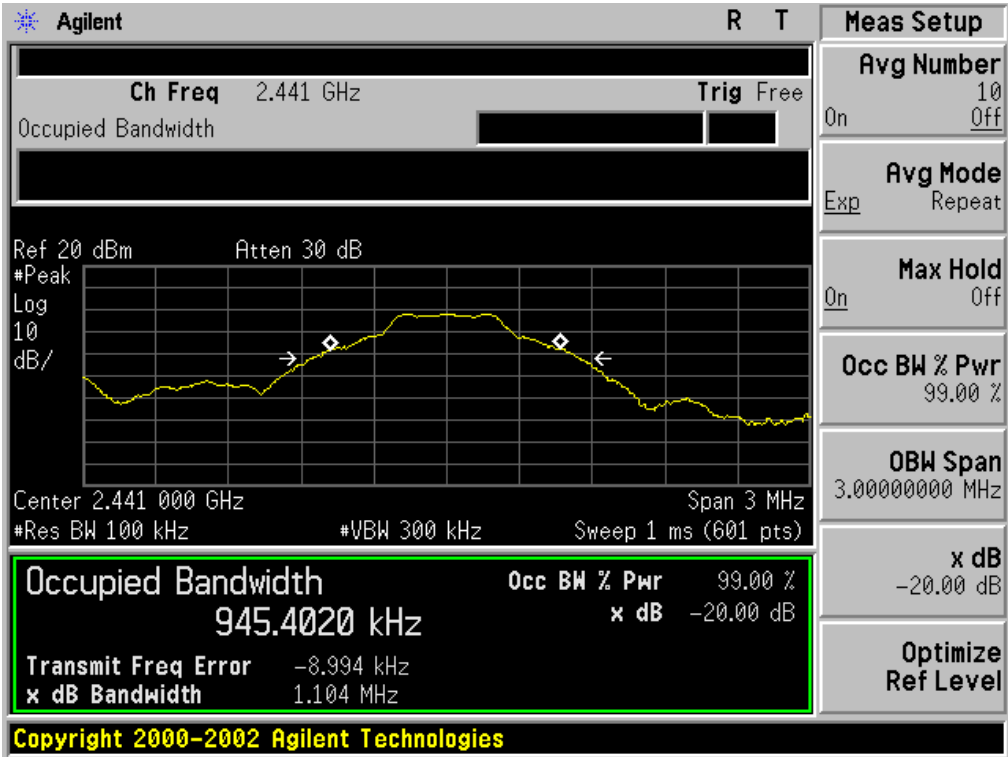

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

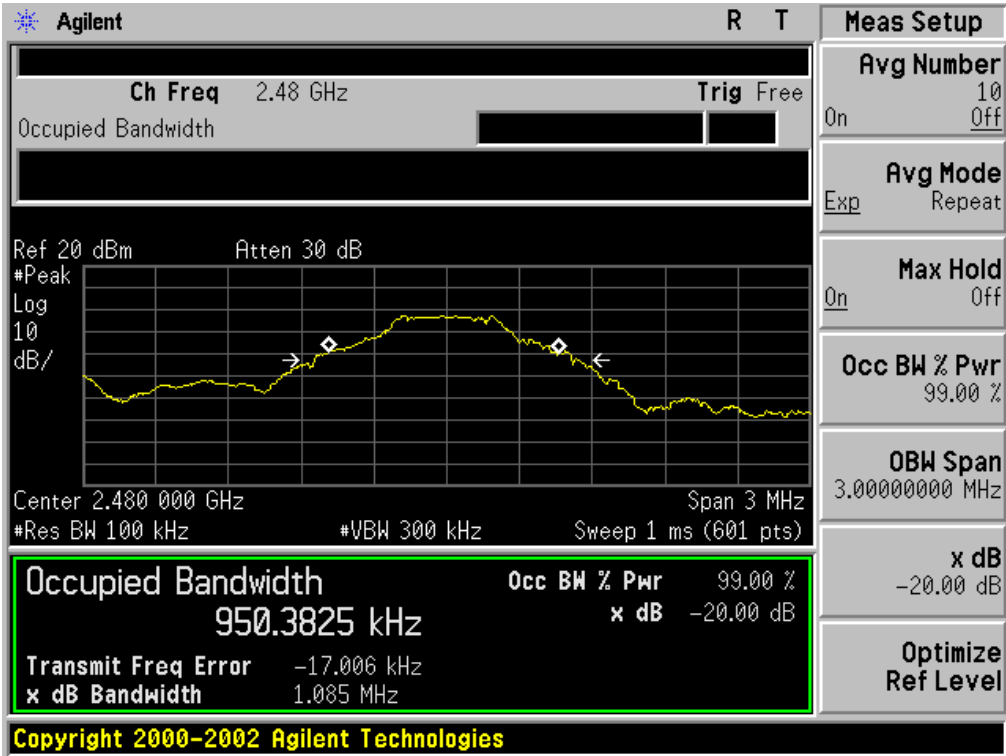


BLUETOOTH 2Mbps LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.360	PASS
	Middle Channel	1.354	PASS
	High Channel	1.360	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

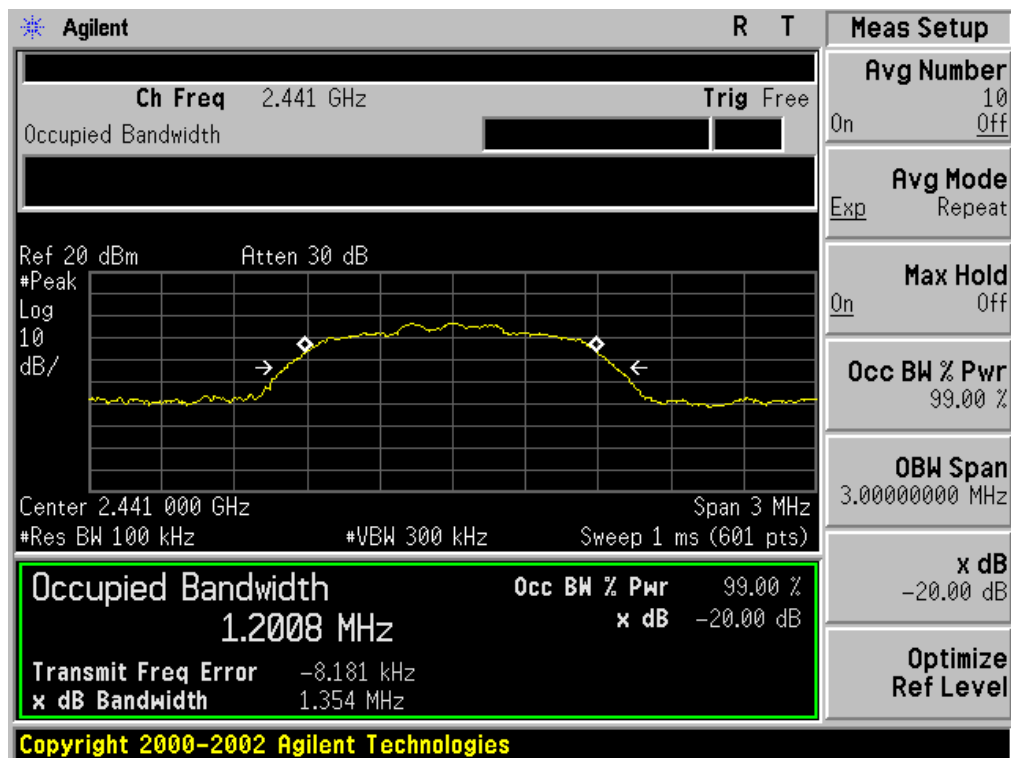


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

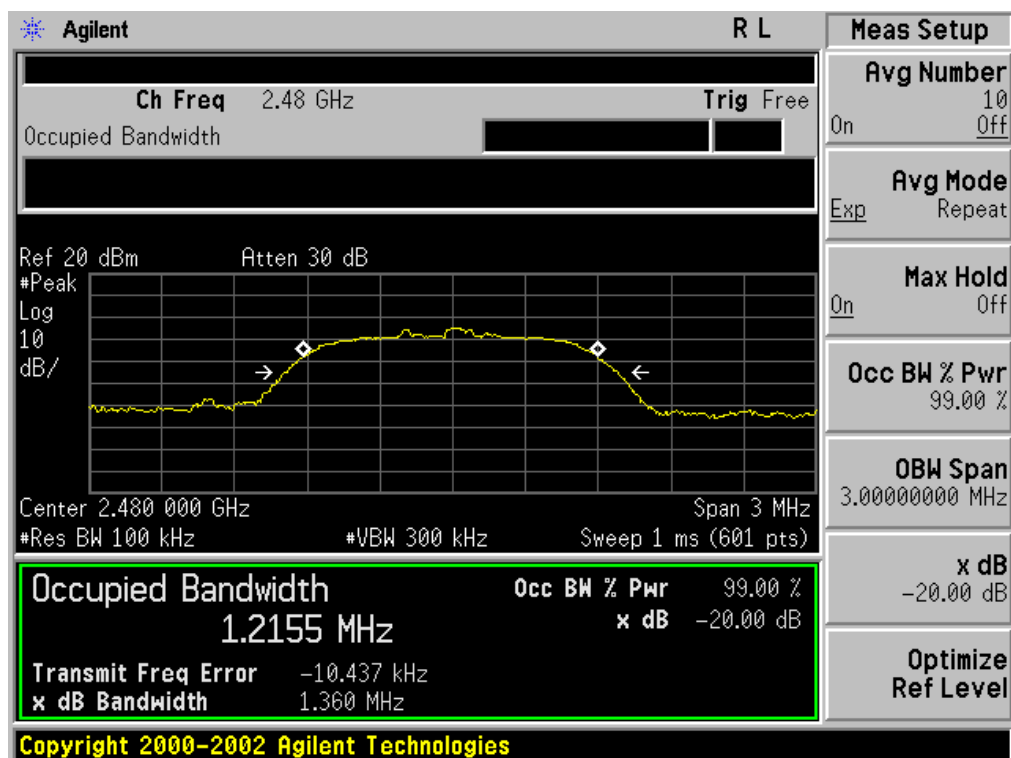


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.364	PASS
	Middle Channel	1.366	PASS
	High Channel	1.369	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

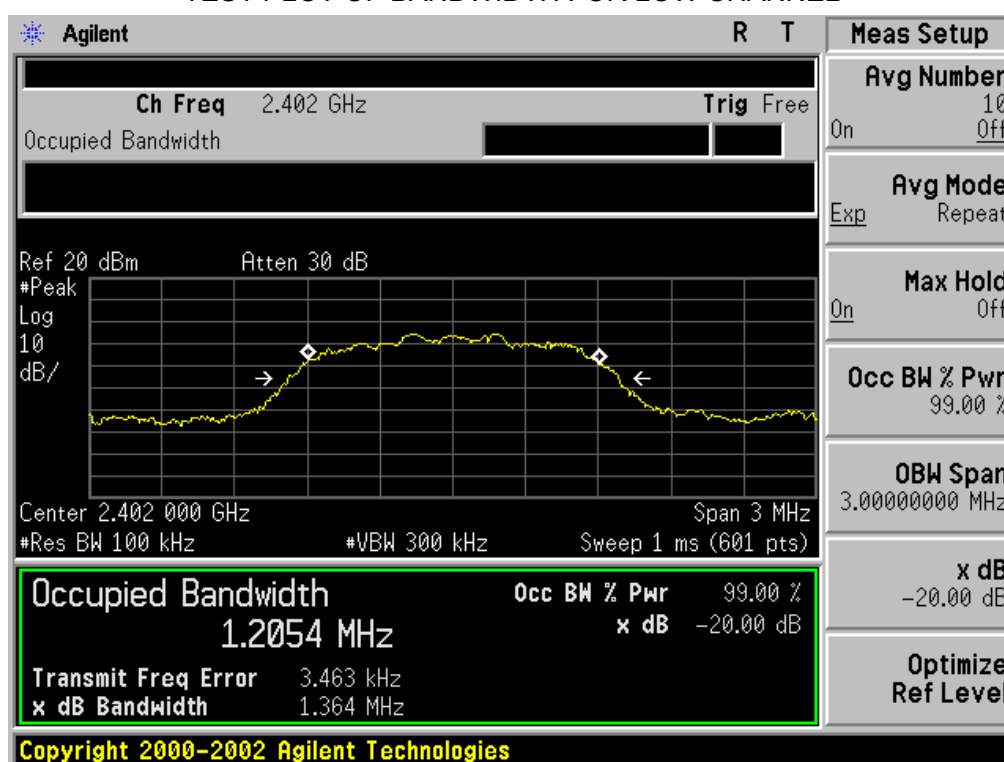

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

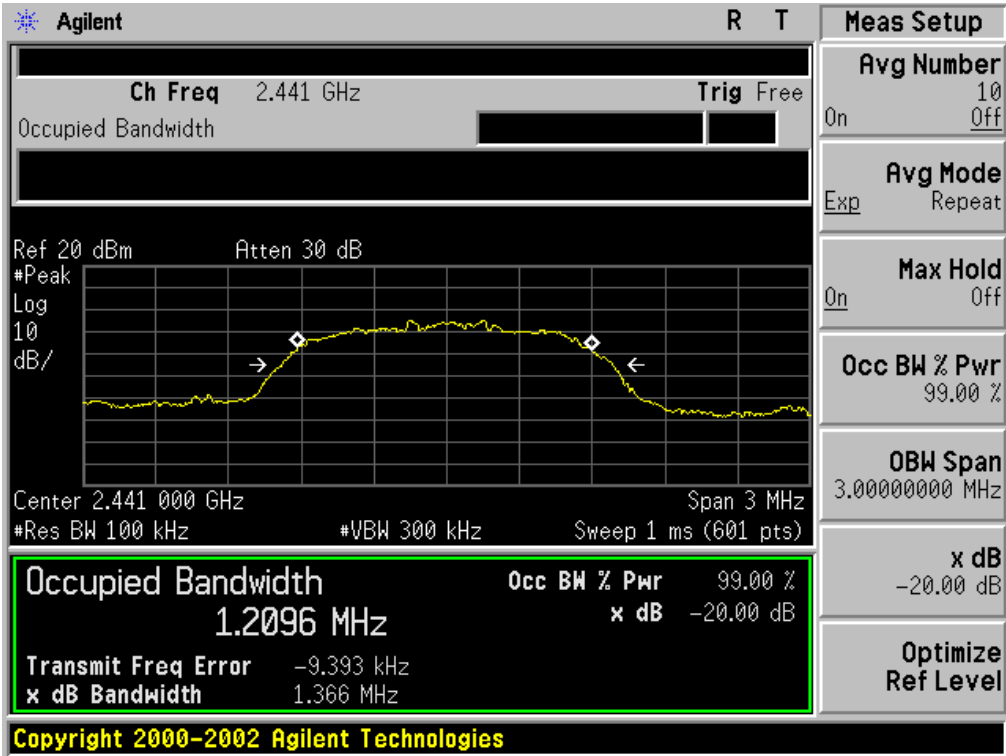

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

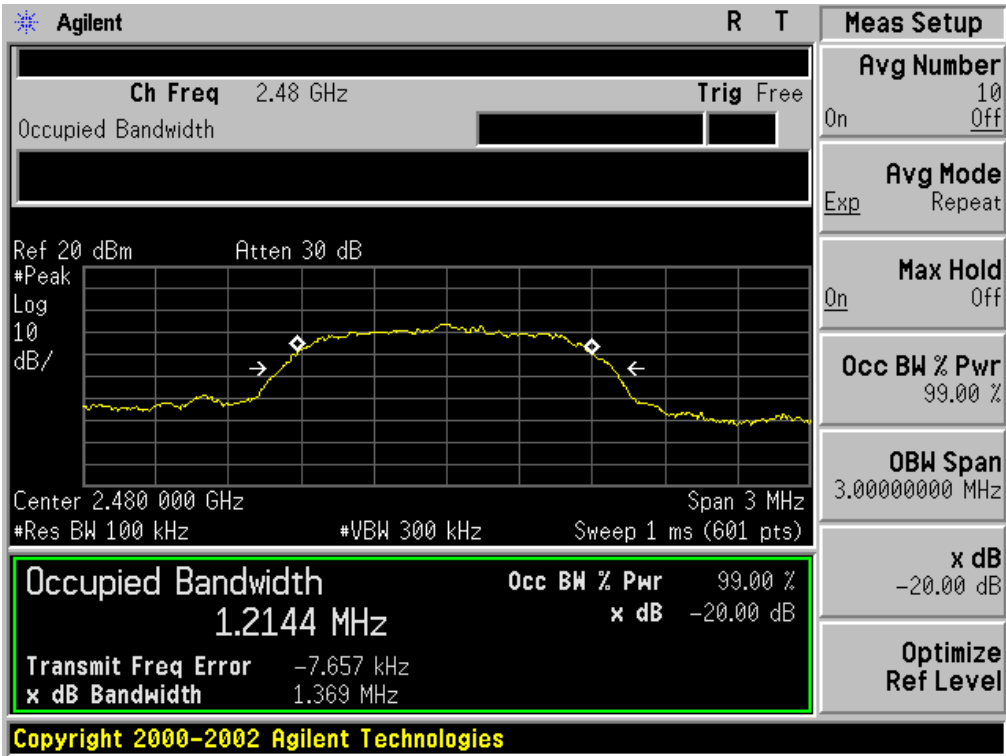

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

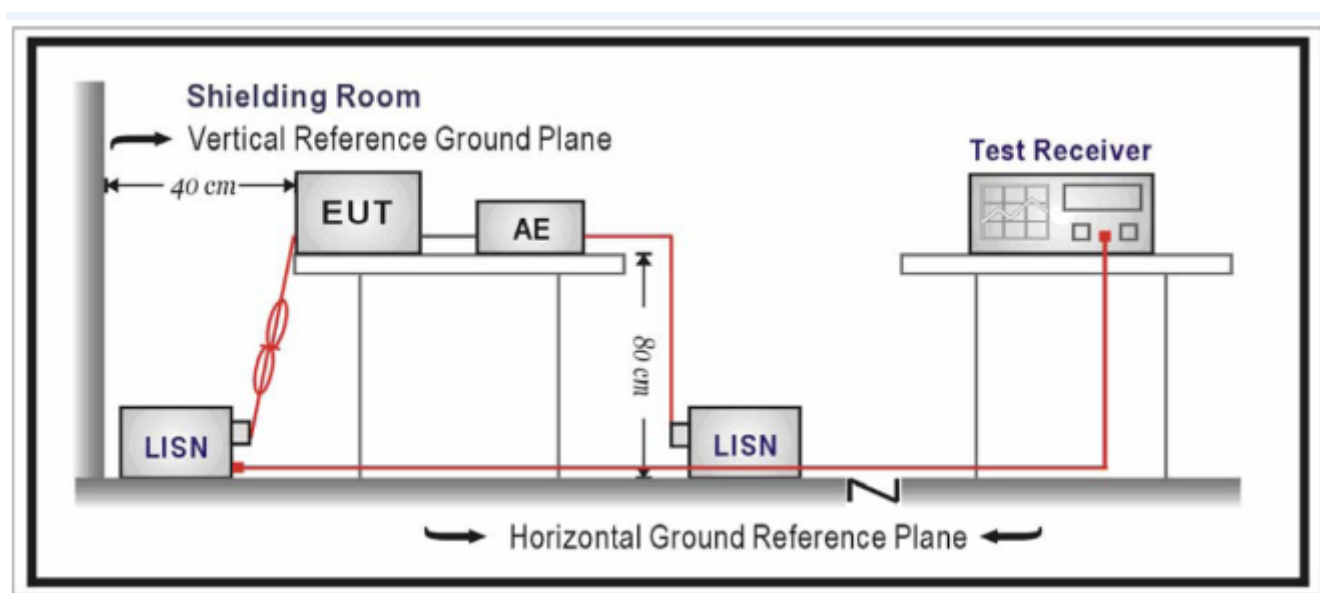

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC or by adapter which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST


Line Conducted Emission Test Line 1-L

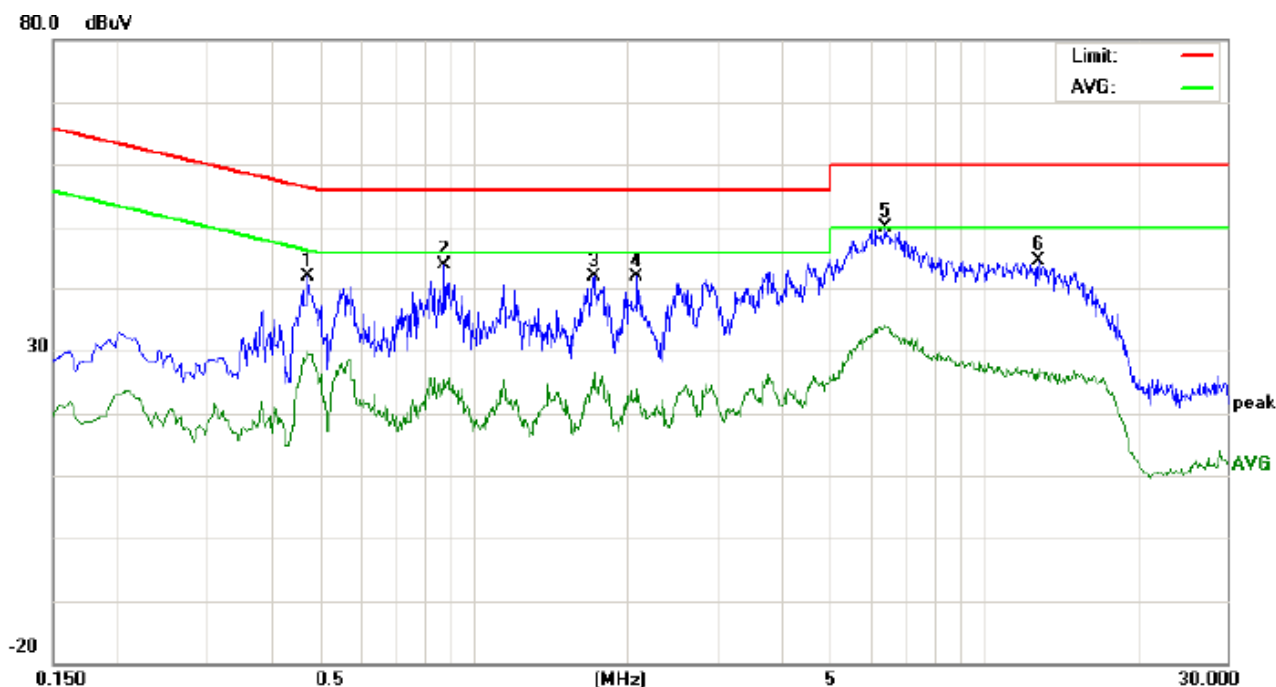

Site: Conduction Phase: **L1** Temperature: 22.5
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.1 %
EUT: Bluetooth Speaker
M/N: IBomb Party
Mode: BT Link with charging
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4740	31.44		19.43	10.38	41.82		29.81	56.44	46.44	-14.62	-16.63	P	
2	0.8780	33.40		15.10	10.38	43.78		25.48	56.00	46.00	-12.22	-20.52	P	
3	1.7180	31.51		16.19	10.31	41.82		26.50	56.00	46.00	-14.18	-19.50	P	
4	2.0980	31.66		13.50	10.26	41.92		23.76	56.00	46.00	-14.08	-22.24	P	
5	6.4420	39.70		23.73	10.30	50.00		34.03	60.00	50.00	-10.00	-15.97	P	
6	12.8260	34.56		16.96	10.14	44.70		27.10	60.00	50.00	-15.30	-22.90	P	

Line Conducted Emission Test Line 2-N

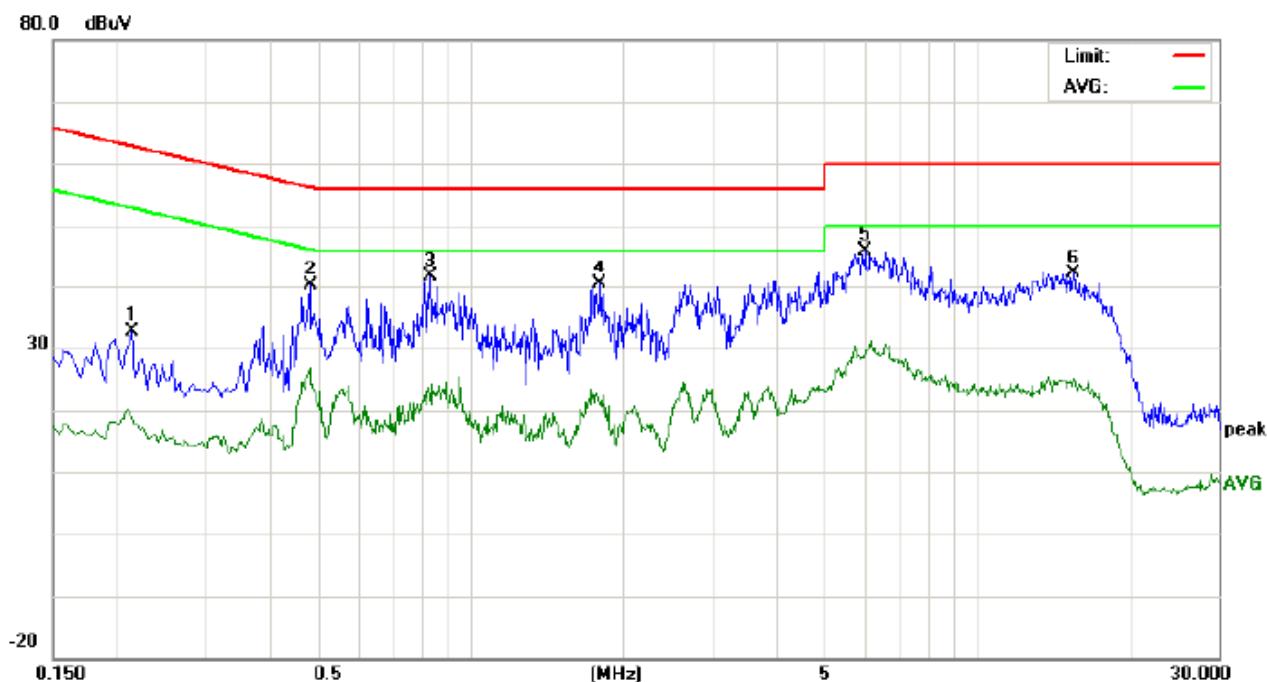

Site: Conduction

Phase: **N**

Temperature: 22.5

Limit: FCC Class B Conduction(QP)

Power:

Humidity: 56.1 %

EUT: Bluetooth Speaker

M/N: IBomb Party

Mode: BT Link with charging

Note:


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2140	22.28		8.59	10.23	32.51		18.82	63.04	53.04	-30.53	-34.22	P	
2	0.4820	29.77		16.56	10.39	40.16		26.95	56.30	46.30	-16.14	-19.35	P	
3	0.8340	31.29		11.76	10.32	41.61		22.08	56.00	46.00	-14.39	-23.92	P	
4	1.8060	30.05		10.68	10.28	40.33		20.96	56.00	46.00	-15.67	-25.04	P	
5	6.0139	35.50		19.03	10.28	45.78		29.31	60.00	50.00	-14.22	-20.69	P	
6	15.4939	32.14		14.94	10.11	42.25		25.05	60.00	50.00	-17.75	-24.95	P	


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

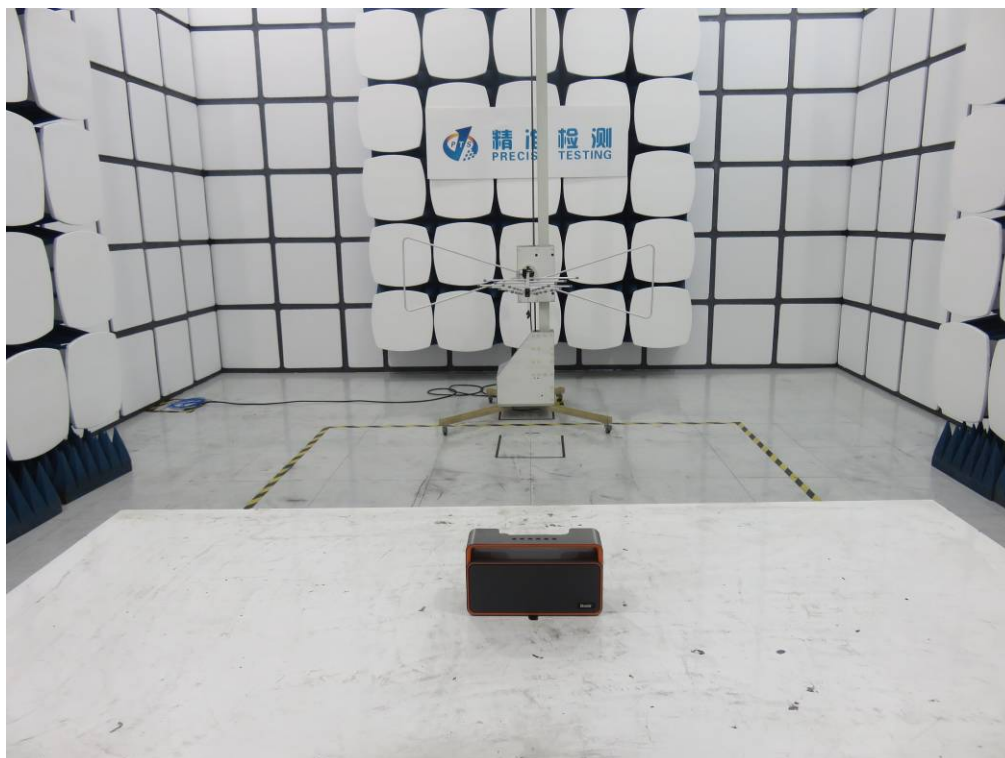

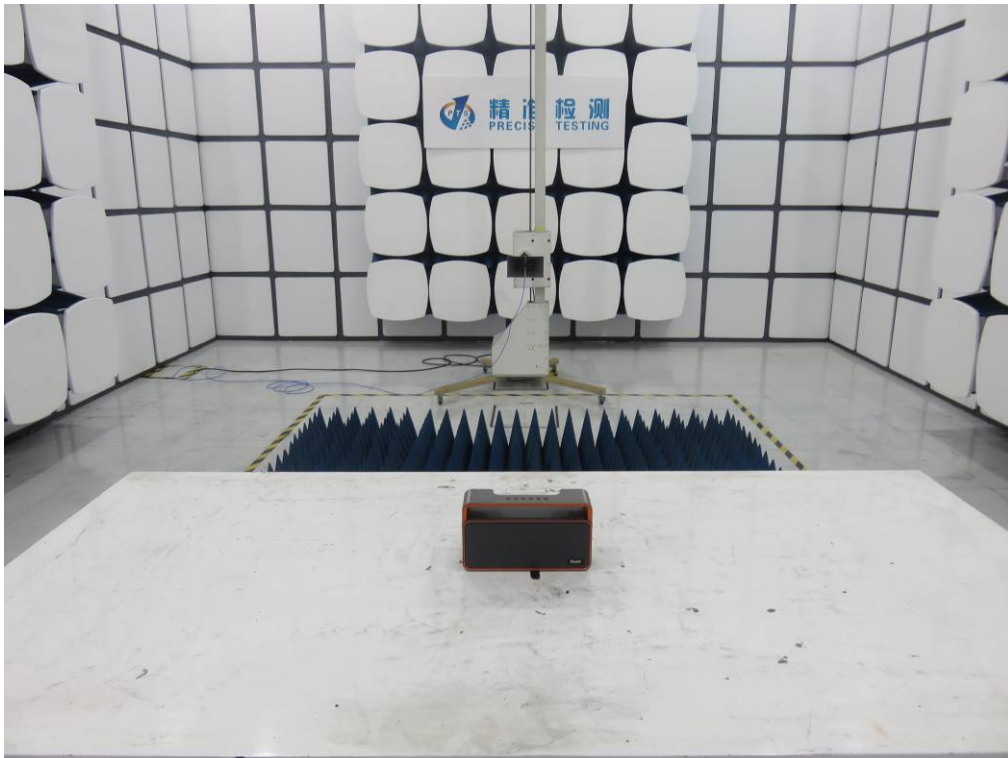

Adapter



Note: The adapter above was provided by AGC Lab for testing only

APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT




FRONT VIEW OF EUT




BACK VIEW OF EUT



LEFT VIEW OF EUT

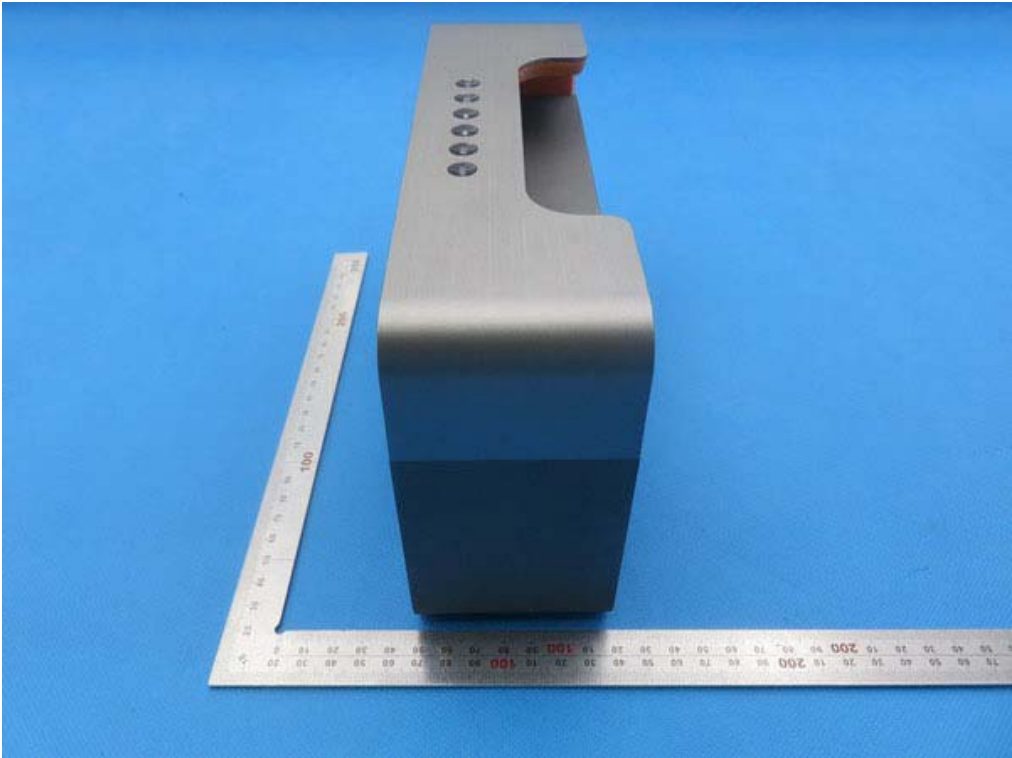


RIGHT VIEW OF EUT

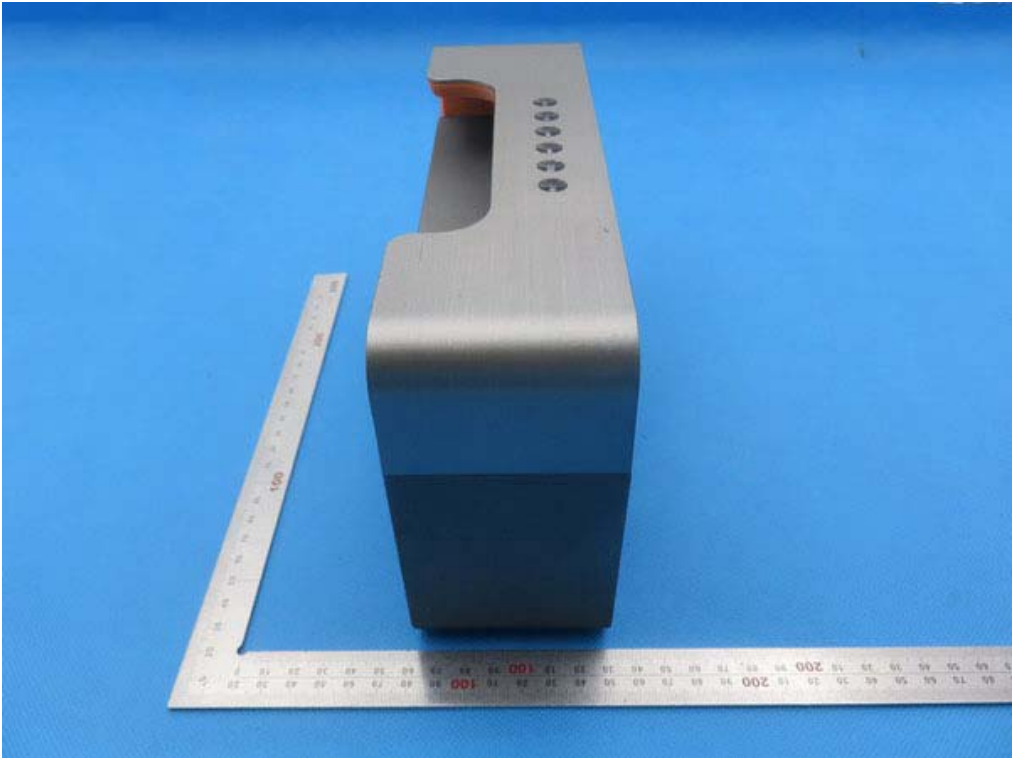


VIEW OF EUT (PORT)




VIEW OF EUT (OPEN)

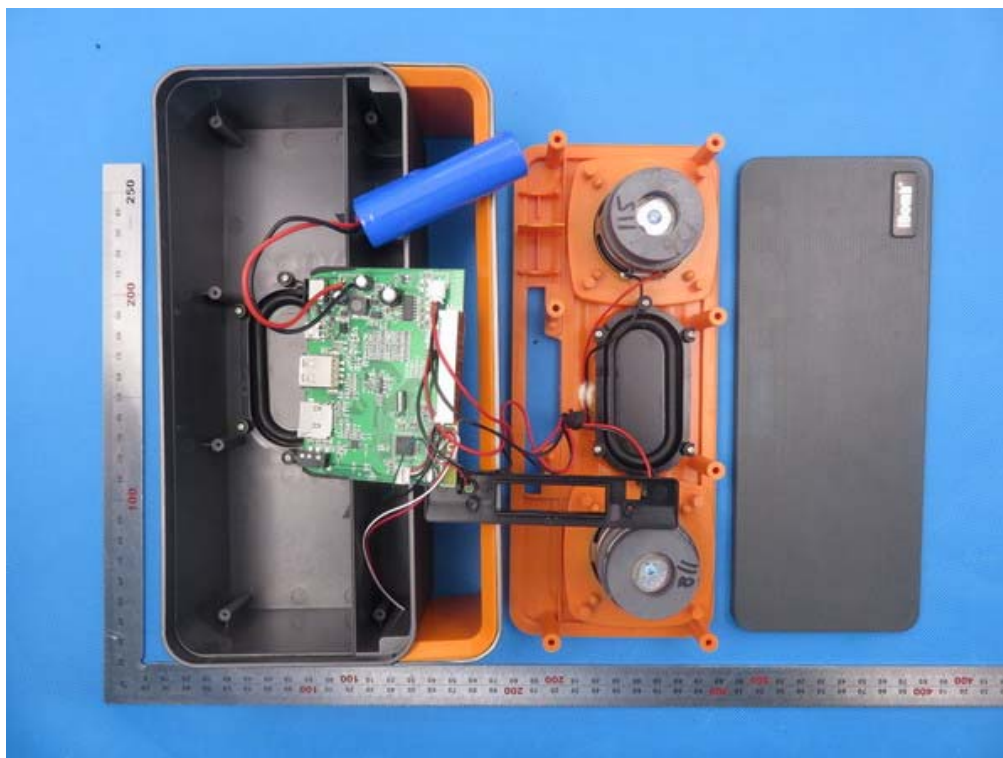


INTERNAL VIEW OF EUT-1

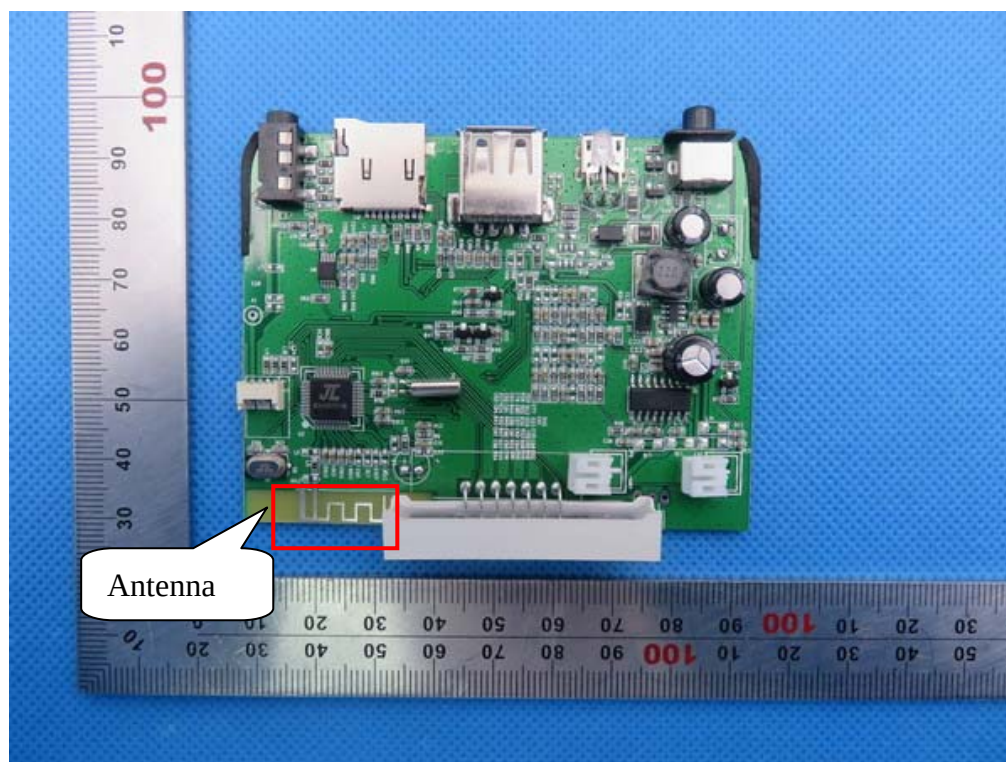

INTERNAL VIEW OF EUT-2

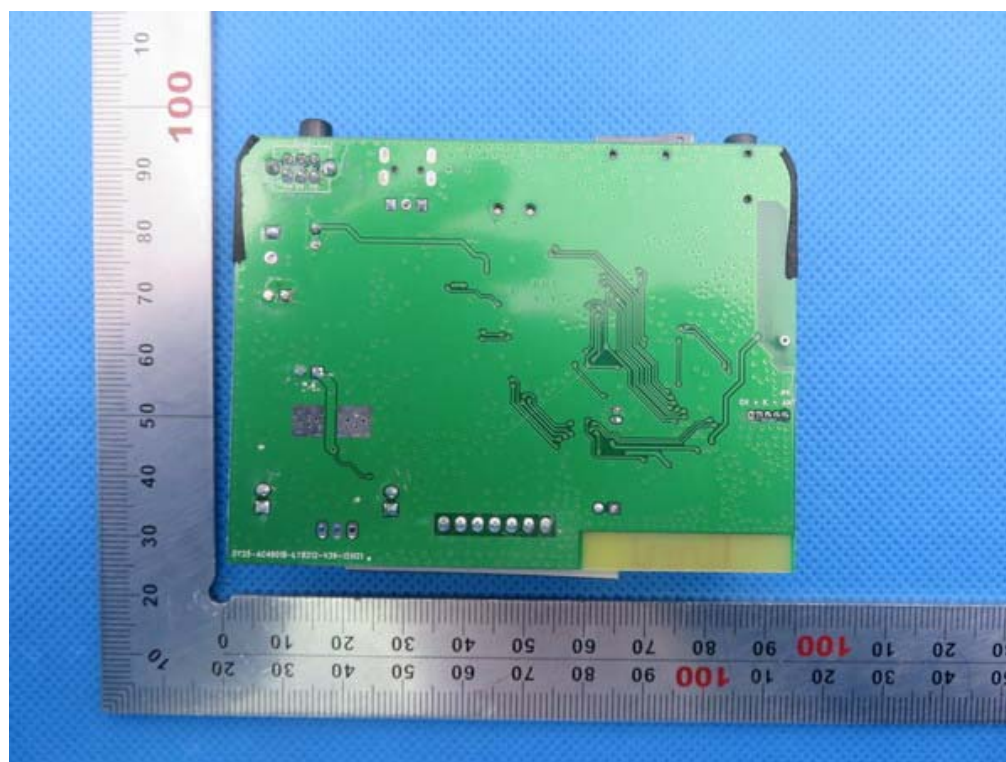

INTERNAL VIEW OF EUT-3

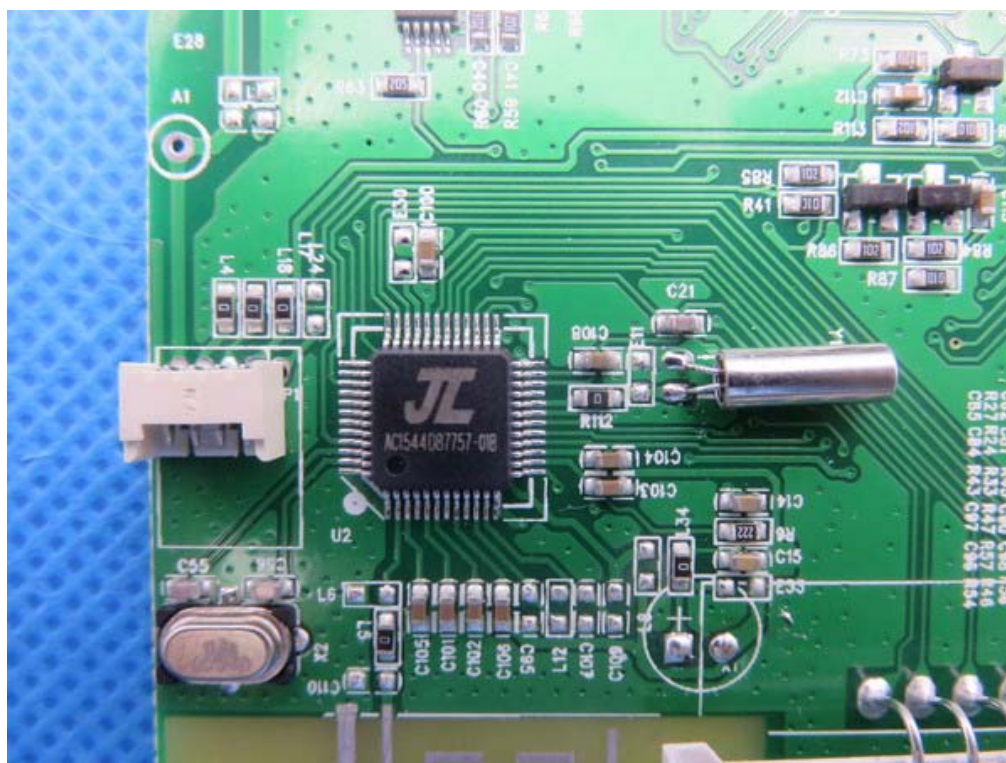

----END OF REPORT----