



849 NW STATE ROAD 45  
NEWBERRY, FL 32669 USA  
PH: 888.472.2424 OR 352.472.5500  
FAX: 352.472.2030  
EMAIL: [INFO@TIMCOENGR.COM](mailto:INFO@TIMCOENGR.COM)  
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

## FCC PART 90 UHF PORTABLE TEST REPORT

|                             |                                                                        |
|-----------------------------|------------------------------------------------------------------------|
| <b>APPLICANT</b>            | VERTEX STANDARD USA, INC.                                              |
|                             | 8000 WEST SUNRISE BLVD.<br>FT. LAUDERDALE FL 33322 USA                 |
| <b>FCC ID</b>               | AXI11274620                                                            |
| <b>MODEL NUMBER</b>         | VX-264-G6-5                                                            |
| <b>PRODUCT DESCRIPTION</b>  | UHF PORTABLE RADIO                                                     |
| <b>STANDARD APPLIED</b>     | CFR 47 Part 90                                                         |
| <b>DATE SAMPLE RECEIVED</b> | 1/6/2015                                                               |
| <b>DATE TESTED</b>          | 1/15/2015 – 1/25/2015                                                  |
| <b>REPORT ISSUE DATE</b>    | 2/11/2015                                                              |
| <b>TESTED BY</b>            | Cory Leverett                                                          |
| <b>APPROVED BY</b>          | Sid Sanders                                                            |
| <b>TEST RESULTS</b>         | <input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL |

| Report<br>Number       | Version<br>Number | Description   | Issue Date |
|------------------------|-------------------|---------------|------------|
| 35AUT15TestReport.docx | Rev.1             | Initial Issue | 2/11/2015  |

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

## Table of Contents

|                                                           |    |
|-----------------------------------------------------------|----|
| GENERAL REMARKS.....                                      | 3  |
| GENERAL INFORMATION .....                                 | 4  |
| TEST REPORT SUMMARY .....                                 | 5  |
| TEST PROCEDURE .....                                      | 6  |
| RF POWER OUTPUT .....                                     | 7  |
| MODULATION CHARACTERISTICS .....                          | 8  |
| VOICE MODULATED COMMUNICATION EQUIPMENT .....             | 10 |
| OCCUPIED BANDWIDTH.....                                   | 12 |
| UNWANTED EMISSIONS / EMISSION MASKS .....                 | 13 |
| SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED) ..... | 22 |
| FIELD STRENGTH OF SPURIOUS EMISSIONS .....                | 27 |
| FREQUENCY STABILITY.....                                  | 29 |
| TRANSIENT FREQUENCY BEHAVIOR .....                        | 30 |
| EQUIPMENT LIST .....                                      | 33 |

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

## Summary

The device under test does:

- ☒ fulfill the general approval requirements as identified in this test report  
☐ not fulfill the general approval requirements as identified in this test report

## Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, FL 32669

## Authorized Signatory Name:

Cory Leverett  
Engineering Project Manager



**Date: 2/11/2015**

[Table of Contents](#)

## GENERAL INFORMATION

### EUT Specification

|                                    |                                                                           |
|------------------------------------|---------------------------------------------------------------------------|
| <b>EUT Description</b>             | UHF PORTABLE RADIO                                                        |
| <b>FCC ID</b>                      | AXI11274620                                                               |
| <b>Model Number</b>                | VX-264-G6-5                                                               |
| <b>Operating Frequency</b>         | 403 – 470 MHz                                                             |
| <b>Test Frequencies</b>            | 406.25, 429.75, 450.25, 469.75 MHz                                        |
| <b>Type of Emission</b>            | 11K0F3E                                                                   |
| <b>Modulation</b>                  | FM Voice                                                                  |
| <b>EUT Power Source</b>            | <input type="checkbox"/> 110–120Vac/50– 60Hz                              |
|                                    | <input type="checkbox"/> DC Power 12V                                     |
|                                    | <input checked="" type="checkbox"/> Battery Operated Exclusively          |
| <b>Test Item</b>                   | <input type="checkbox"/> Prototype                                        |
|                                    | <input checked="" type="checkbox"/> Pre-Production                        |
|                                    | <input type="checkbox"/> Production                                       |
| <b>Type of Equipment</b>           | <input type="checkbox"/> Fixed                                            |
|                                    | <input type="checkbox"/> Mobile                                           |
|                                    | <input checked="" type="checkbox"/> Portable                              |
| <b>Test Conditions</b>             | The temperature was 26°C with a relative humidity of 50%.                 |
| <b>Revision History to the EUT</b> | None                                                                      |
| <b>Test Exercise</b>               | The EUT was placed in continuous transmit mode.                           |
| <b>Applicable Standards</b>        | ANSI/TIA 603-D:2010, FCC CFR 47 Part 90                                   |
| <b>Test Facility</b>               | Timco Engineering Inc.<br>849 NW State Road 45<br>Newberry, FL 32669 USA. |

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## TEST REPORT SUMMARY

| Rule Part No.                                                                                                                                  | Scope of Work                            | Status<br>Pass/Fail/NA |
|------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|------------------------|
| <a href="#">Part 2.1033(c)(8)</a> ,<br><a href="#">Part 2.1046(a)</a> , <a href="#">Part 90</a>                                                | RF Power Output                          | Pass                   |
| <a href="#">Part 2.1033(c) (4)</a><br><a href="#">Part 2.1047(a)(6)</a>                                                                        | Modulation Characteristics               | Pass                   |
| <a href="#">2.1049(c)</a> ,<br><a href="#">90.210(b)</a> , <a href="#">90.210 (c)</a><br><a href="#">90.210(d)</a> , <a href="#">90.210(e)</a> | Emission Mask and Occupied<br>Bandwidths | Pass                   |
| <a href="#">2.1051(a)</a>                                                                                                                      | Antenna Conducted Emissions              | Pass                   |
| <a href="#">2.1053</a> , <a href="#">Part 90</a>                                                                                               | Field Strength Spurious Emissions        | Pass                   |
| <a href="#">Part 2.1055</a> , <a href="#">Part 90.213</a>                                                                                      | Frequency Stability                      | Pass                   |
| <a href="#">Part 90.214</a>                                                                                                                    | Transient Frequency Behavior             | Pass                   |

[Table of Contents](#)

## TEST PROCEDURE

**Power Line Conducted Interference:** The procedure used was ANSI/TIA 603-D:2010, using a 50uH LISN. Both lines were observed with the EUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**Bandwidth 20 dB:** The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

**Power Output:** The RF power output was measured at the antenna feed point using a peak power meter.

**Antenna Conducted Emissions:** The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10<sup>th</sup> harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

**Radiation Interference:** The test procedure used was ANSI/TIA 603-D:2010, using an Rohde & Schwarz – EMI test receiver. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

[Table of Contents](#)

## RF POWER OUTPUT


**Rule Part No.:** Part 2.1046(a), Part 90

**Test Requirements:** Manufacturer's Specification

**Method of Measurement:** RF power is measured by using a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage (if battery operated), or a properly adjusted power supply (if not battery operated), and the transmitter properly adjusted the RF output measures:

For the device with a fixed or integral antenna, the RF power is measured as ERP. The substitution method was used. The RF output measures:

**Test Setup Diagram:**

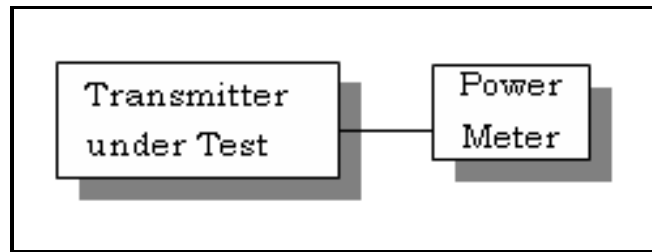

**Test Data:** RF power of the EUT can be set at 1W or 5W.

OUTPUT POWER:

| Tuned Frequency (MHz) | RF POWER (dBm) |       |
|-----------------------|----------------|-------|
|                       | HI             | LOW   |
| 406.25                | 36.5           | 29.8  |
| 429.75                | 36.6           | 30.01 |
| 450.25                | 37.01          | 30.2  |
| 469.75                | 37.07          | 30.2  |

### Part 2.1033 (C)(8) DC Input into the final amplifier

FOR LOW POWER SETTING INPUT POWER:  $(7.4V)(.6A) = 4.44$  Watts

FOR HIGH POWER SETTING INPUT POWER:  $(7.4V)(1.9A) = 14.06$  Watts

[Table of Contents](#)

## **MODULATION CHARACTERISTICS**

**Rule Part No.:** Part 2.1047(a)(b)

**Test Requirements:**

**Method of Measurement:**

**Part 2.1033(c)**

**Part 90.209**

**Part 90.207**

**Part 2.1033(c) (4)** Type of Emission: 11K0F3E

$B_n = 2M + 2DK$

$M = 3000$

$D = 2500$

$K=1$


$B_n = 2(3000) + 2(2500) = 11.0k$

[Table of Contents](#)




### Audio frequency response

The audio frequency response was measured in accordance with ANSI/TIA 603-D: 2010. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

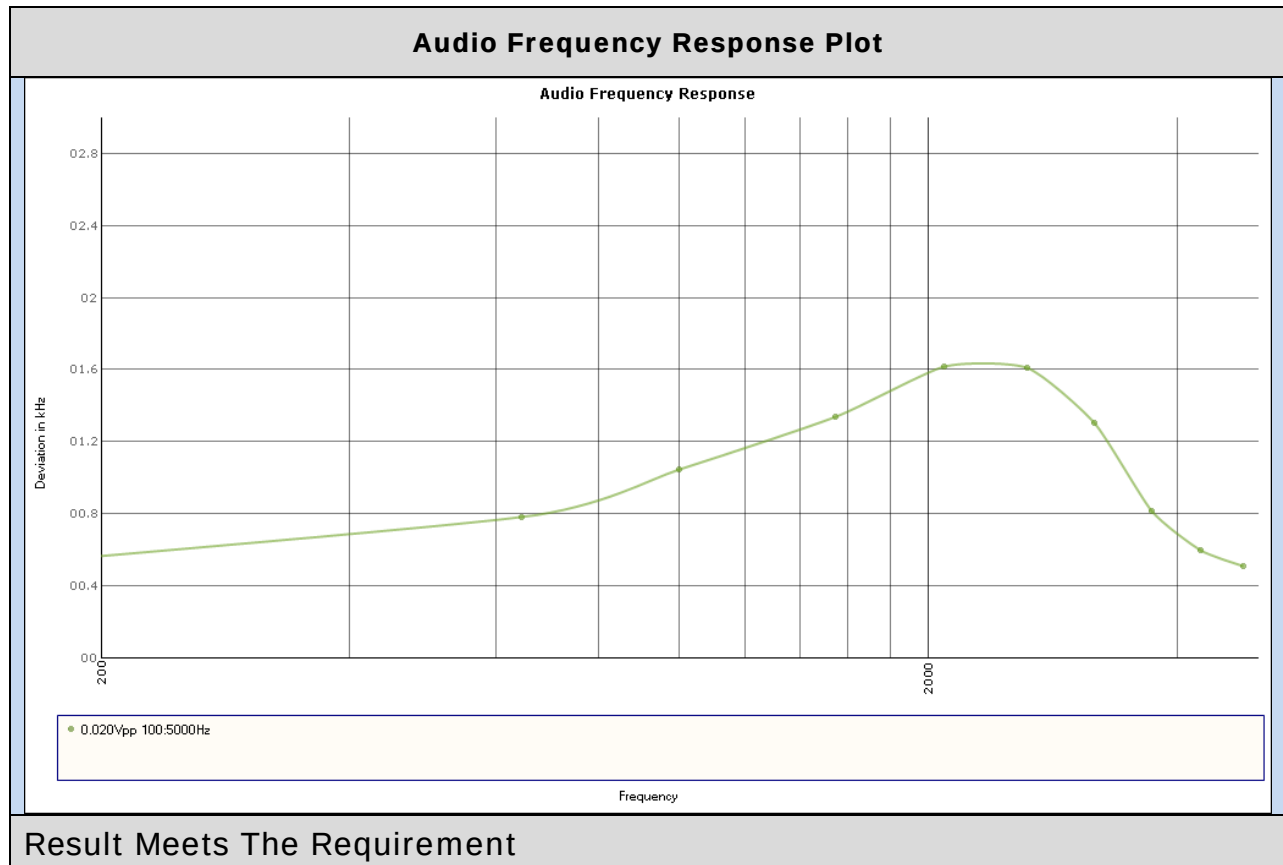

## VOICE MODULATED COMMUNICATION EQUIPMENT

**Part 2.1047(a):** For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

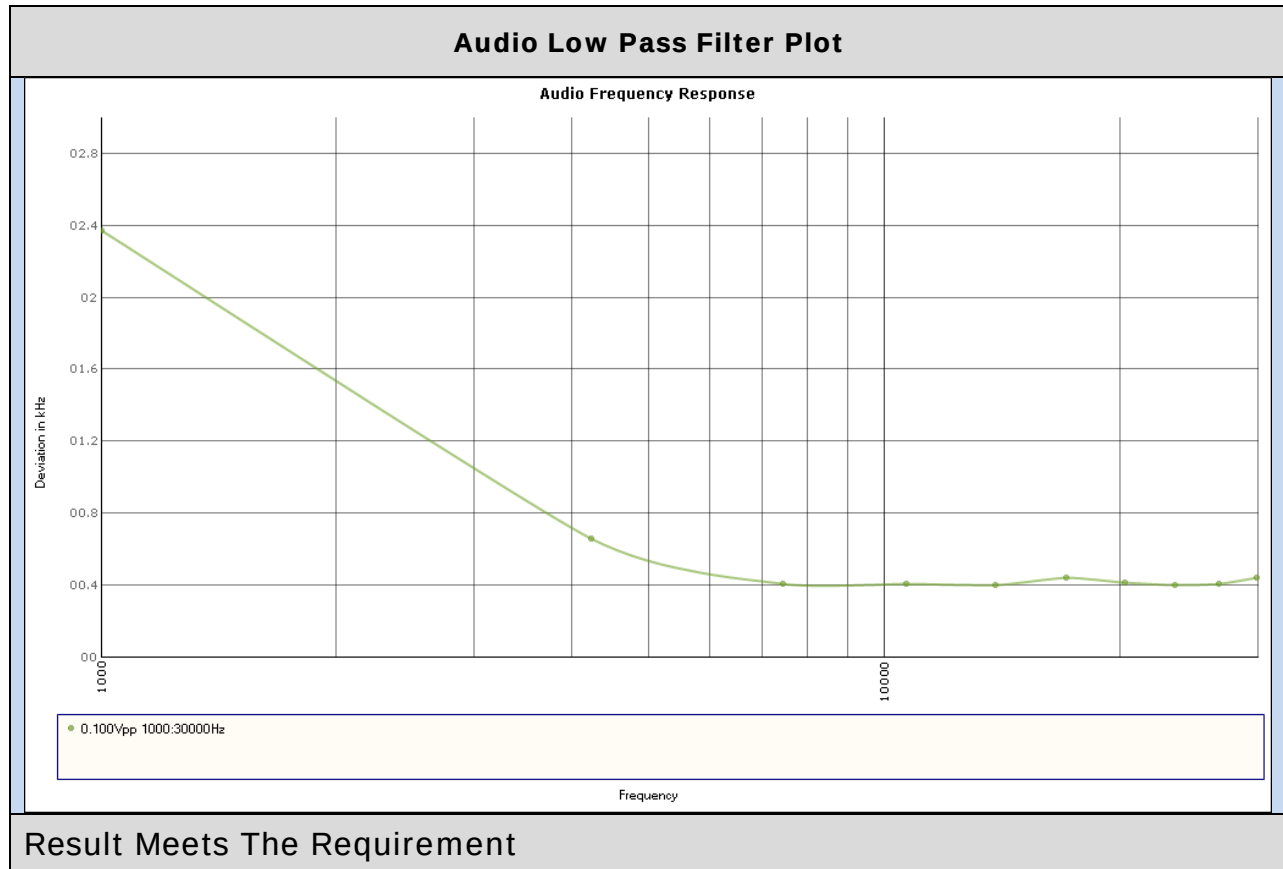

### [Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx


## AUDIO INPUT VERSUS MODULATION

**Rule Part No.:** Part 2.1047(b) & 90

### Test Requirements:

**Method of Measurement:** **Modulation cannot exceed 100%**, The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-D: 2010. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

### Test data:

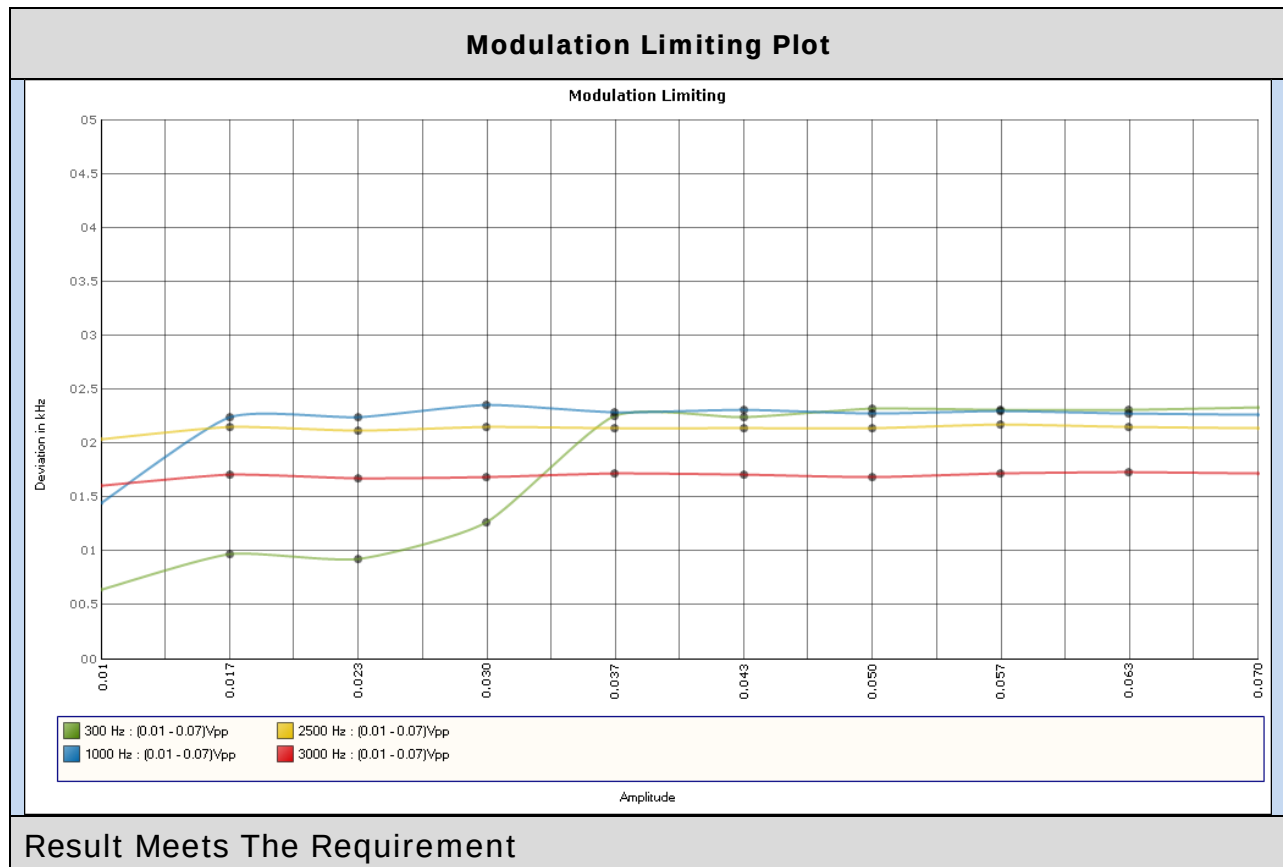

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620


Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## OCCUPIED BANDWIDTH

**Rule Part: 2.1049(c)**

**Method of Measurement: ANSI/TIA 603-D: 2010**

**Test Setup Diagram:**

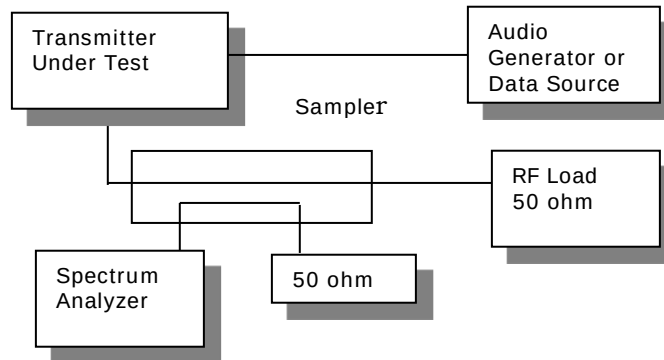

**Test Data:** 11K0F3E Occupied Bandwidth Table

| Tuned Frequency (MHz) | Measured Bandwidth (KHz) | Necessary Bandwidth (KHz) | Channel Spacing (KHz) |
|-----------------------|--------------------------|---------------------------|-----------------------|
| 406.25                | 5.2                      | 11                        | 12.5                  |
| 429.75                | 5.2                      | 11                        | 12.5                  |
| 450.25                | 5.2                      | 11                        | 12.5                  |
| 469.75                | 5.2                      | 11                        | 12.5                  |

**Notes:** See Spectrum Mask Results for Plots.

## UNWANTED EMISSIONS / EMISSION MASKS

### Rule Part: 90.210(d)


#### Emission Mask D - 12.5 kHz channel BW equipment.

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27 (f_d - 2.88 \text{ kHz})$  dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10\log(P)$  dB or 70 dB, whichever is the lesser attenuation.


#### Method of Measurement: ANSI/TIA 603-D: 2010

#### Test Setup Diagram:

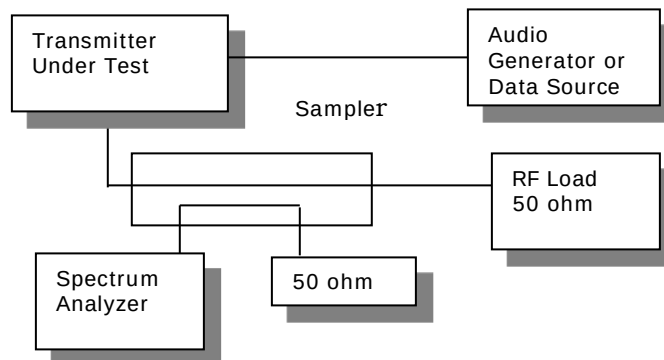

## UNWANTED EMISSIONS / EMISSION MASKS

**Test Data: 11K0F3E Mask D High Power Low End of Band**

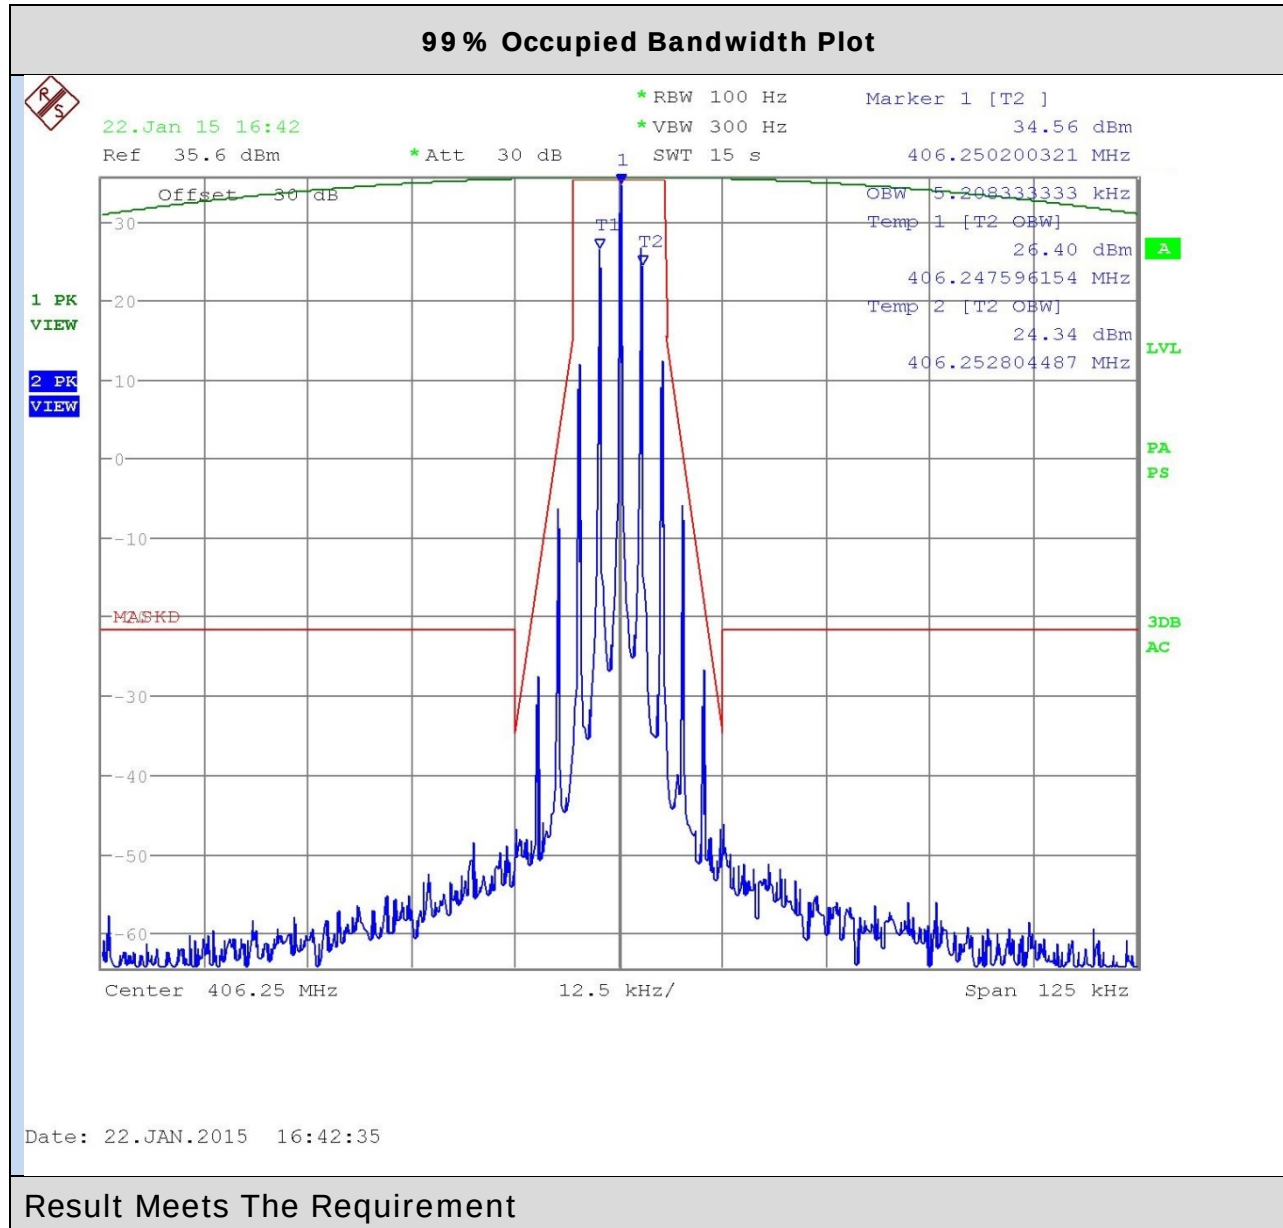

[Table of Contents](#)


Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## UNWANTED EMISSIONS / EMISSION MASKS

### Test Data: 11k0F3E High Power Middle of Band

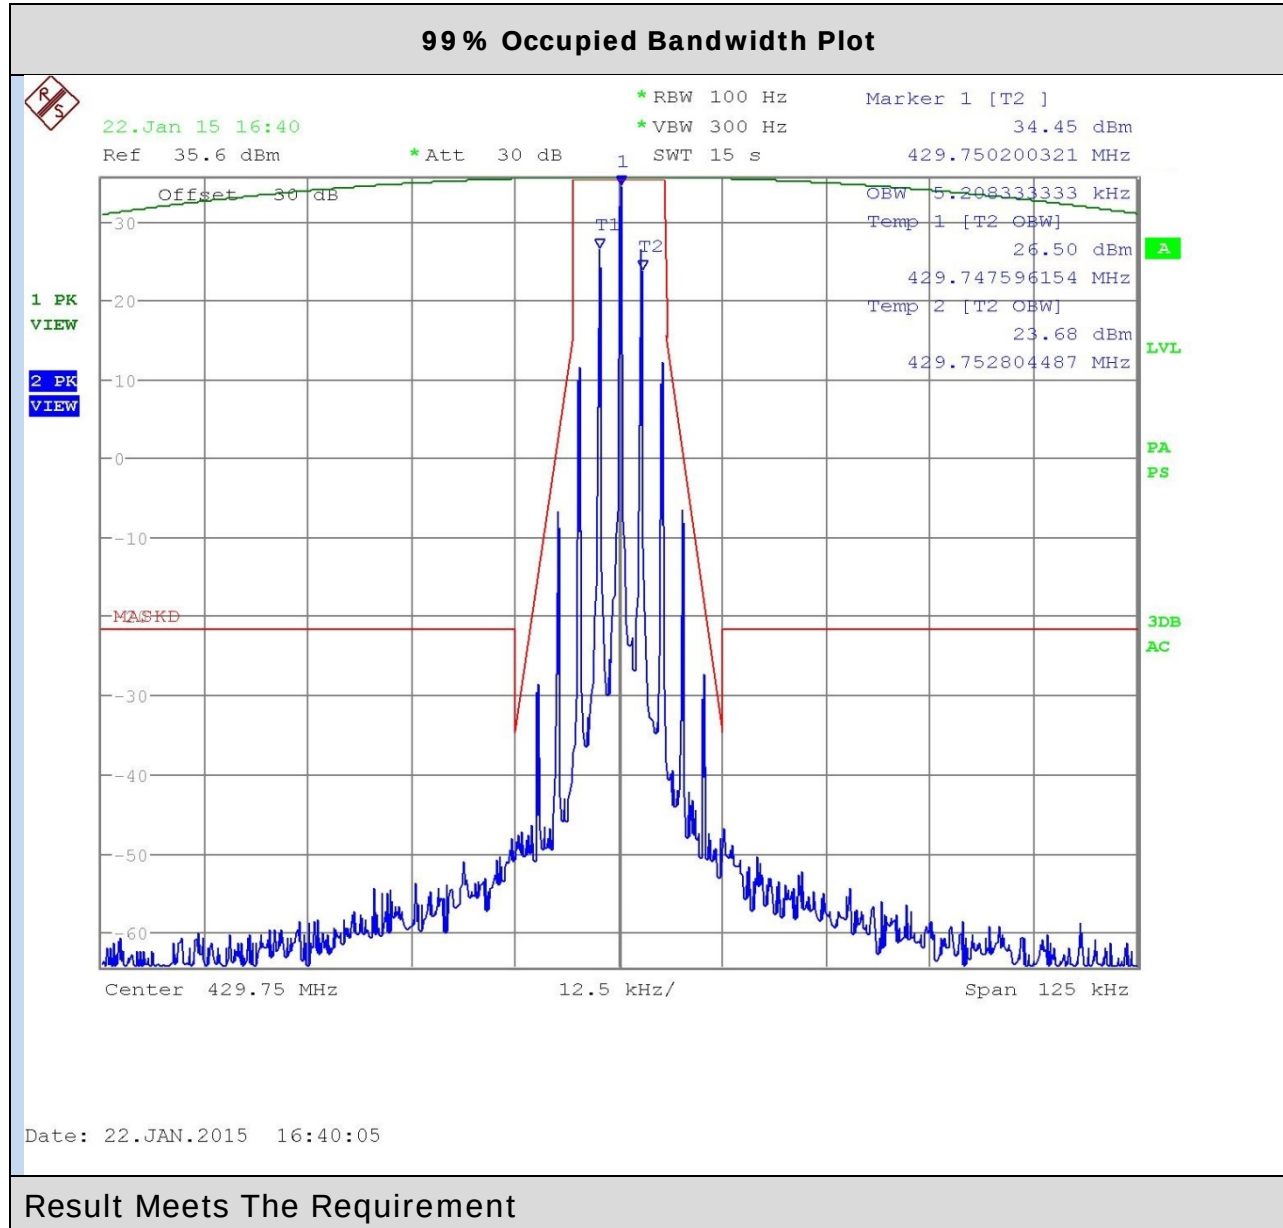

[Table of Contents](#)


Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## UNWANTED EMISSIONS / EMISSION MASKS

### Test Data: 11k0F3E High Power Middle of Band

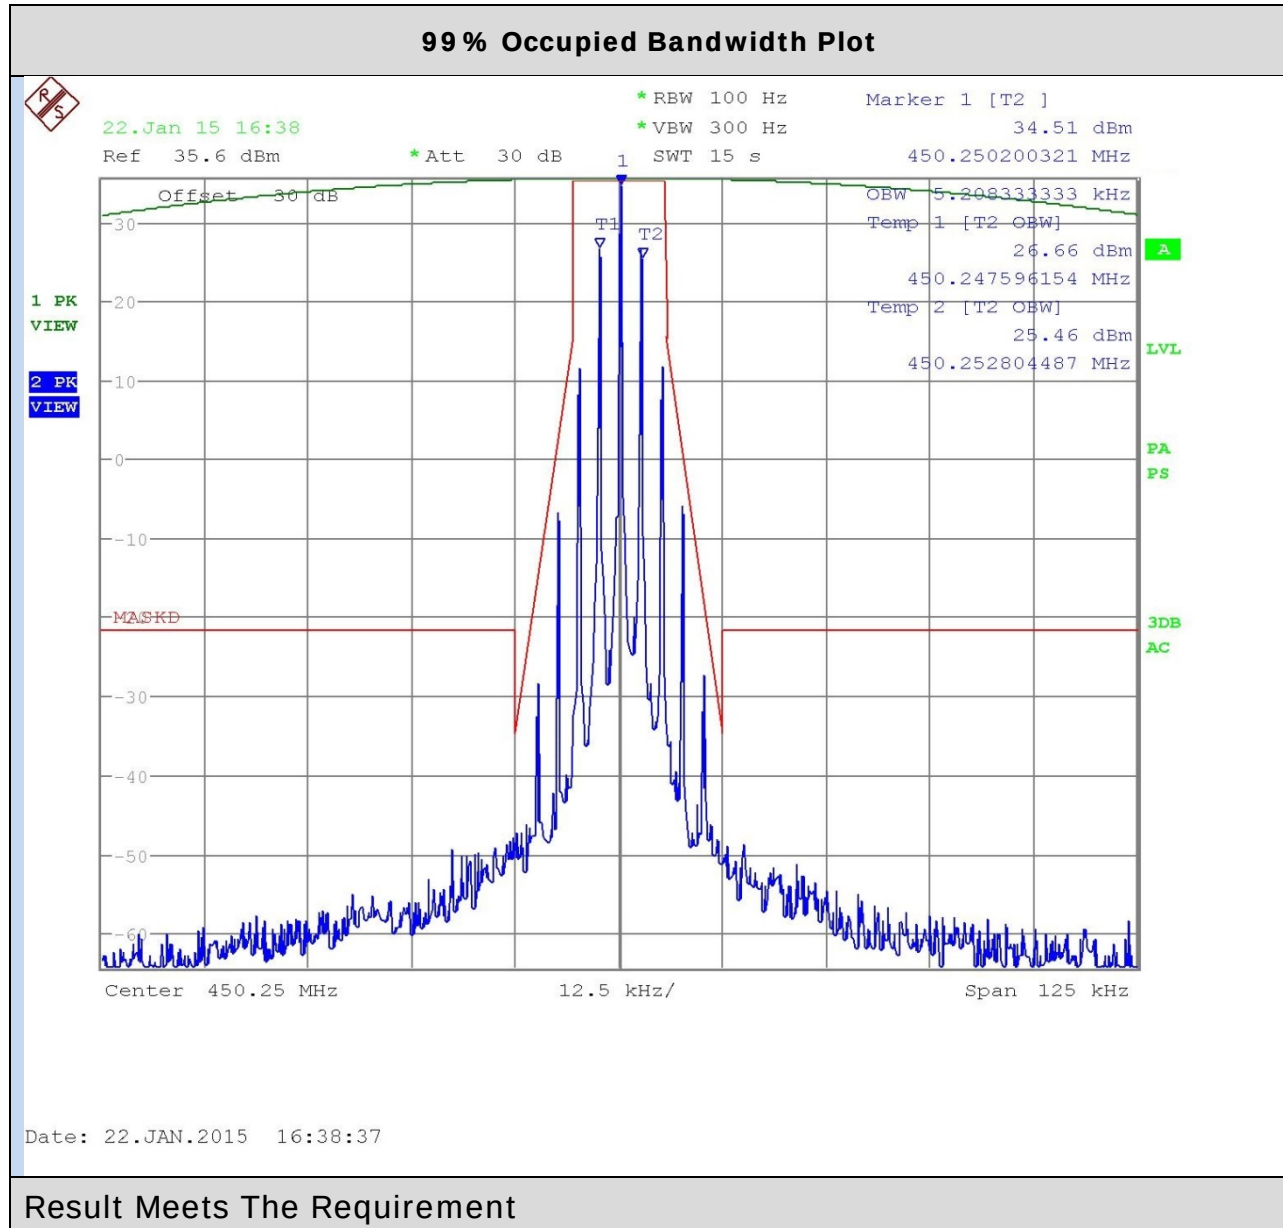

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.


FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx



## UNWANTED EMISSIONS / EMISSION MASKS

Test Data: 11k0F3E High Power High End of Band

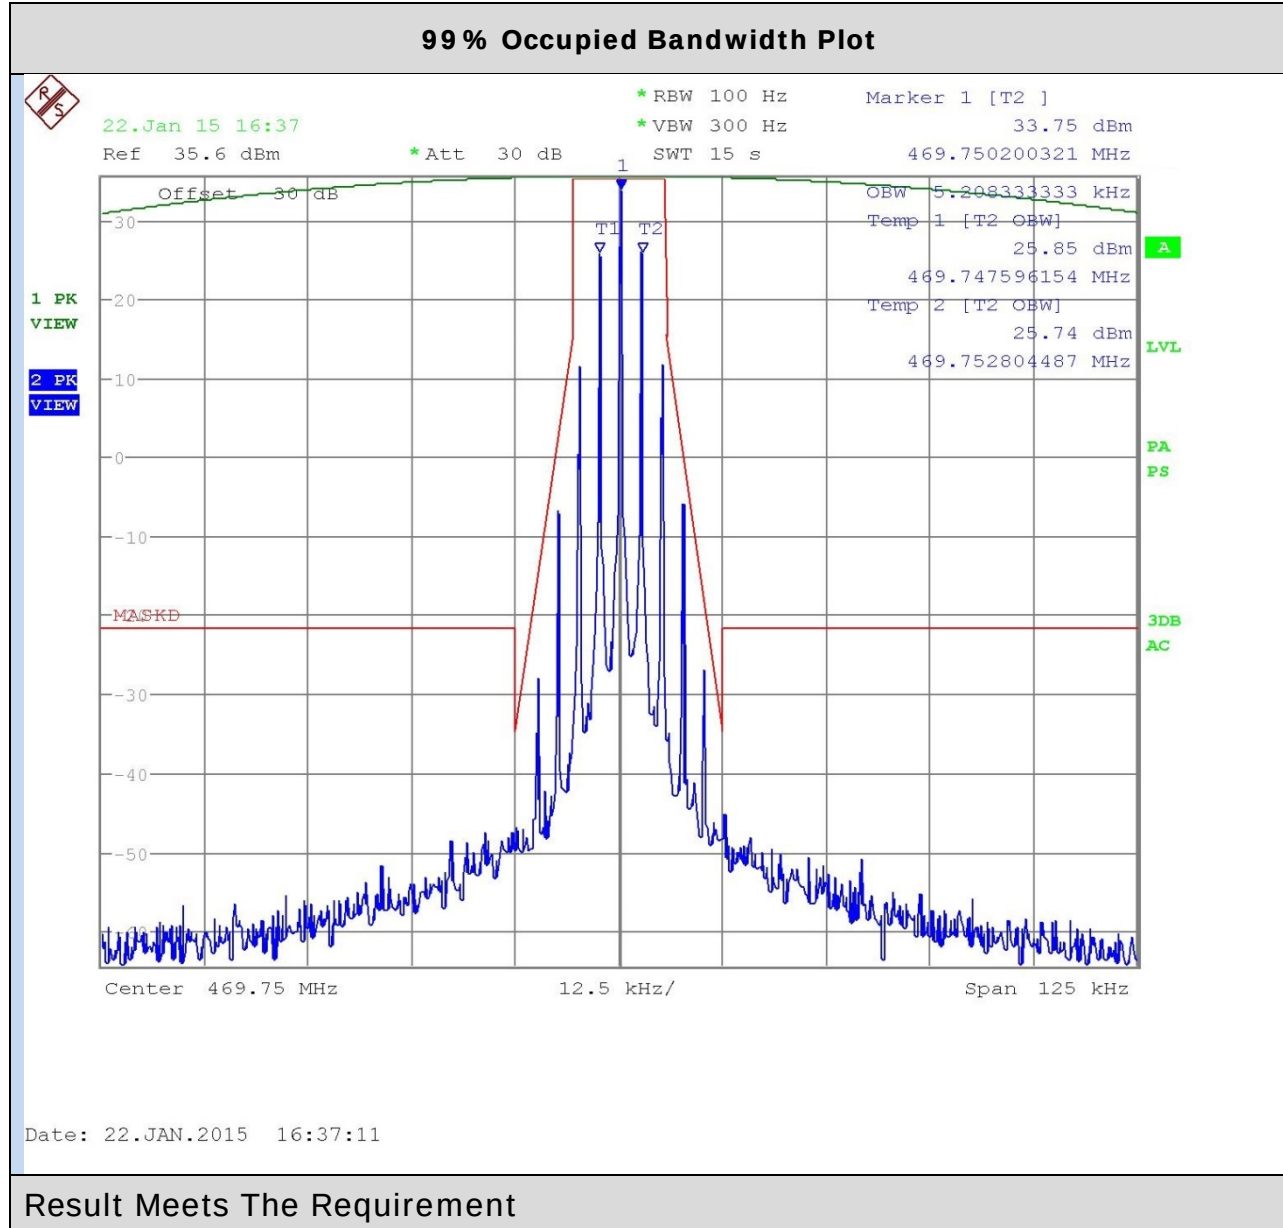

[Table of Contents](#)


Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## UNWANTED EMISSIONS / EMISSION MASKS

Test Data: 11k0F3E Low Power Low end of Band

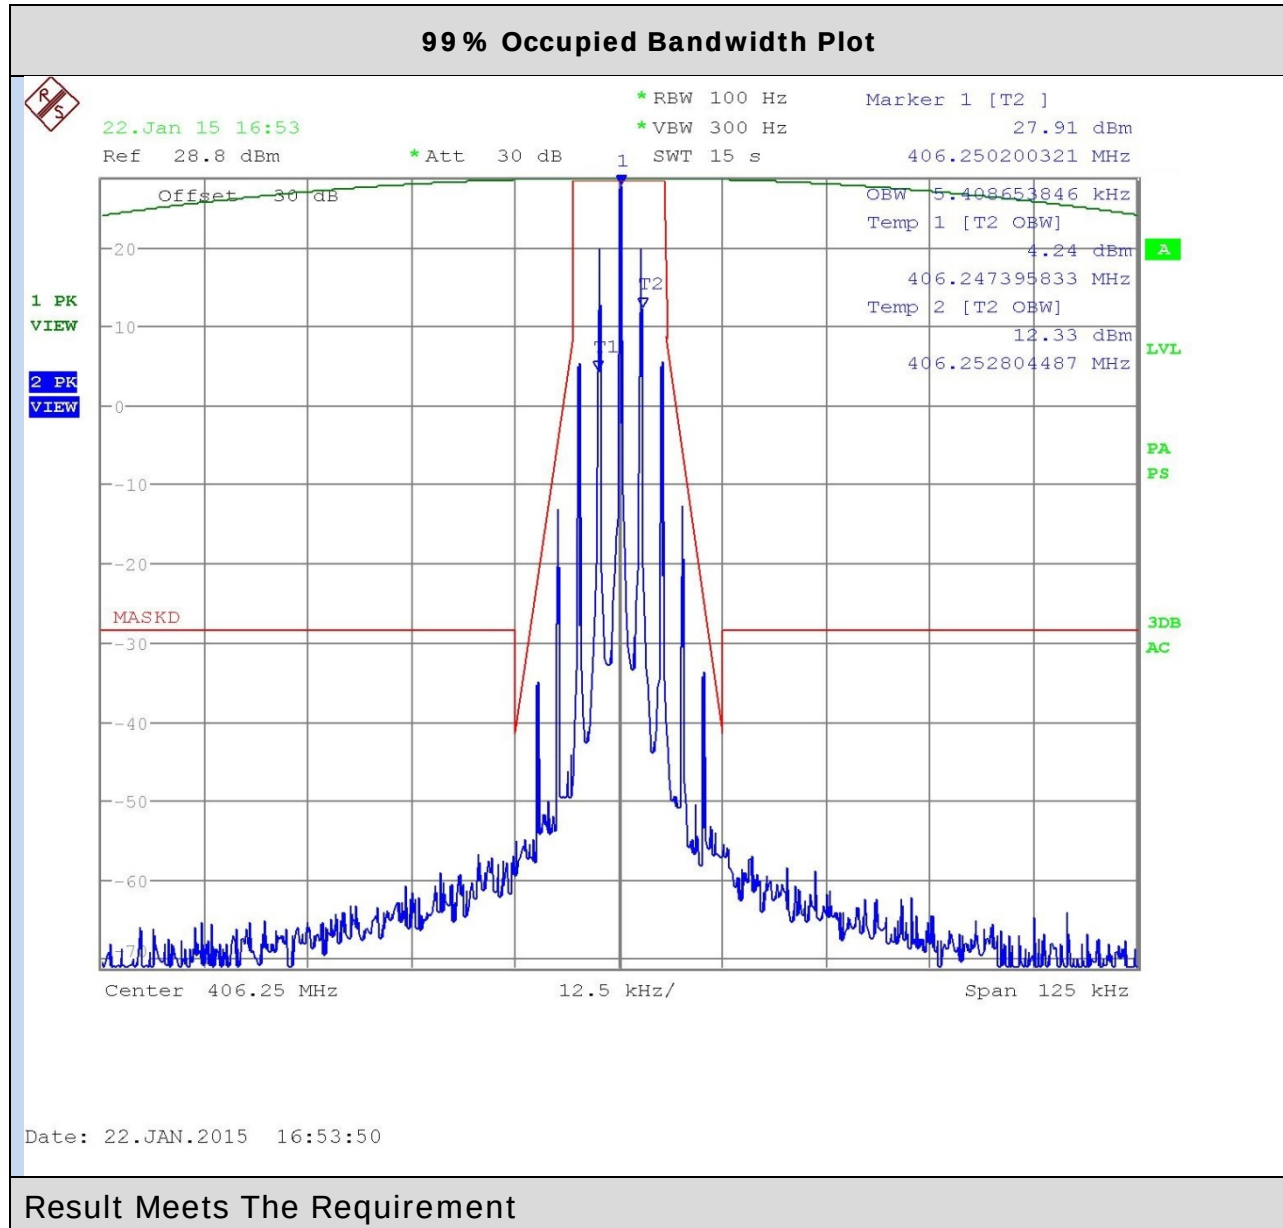

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.


FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx



## UNWANTED EMISSIONS / EMISSION MASKS

**Test Data: 11k0F3E Low Power Middle of Band**

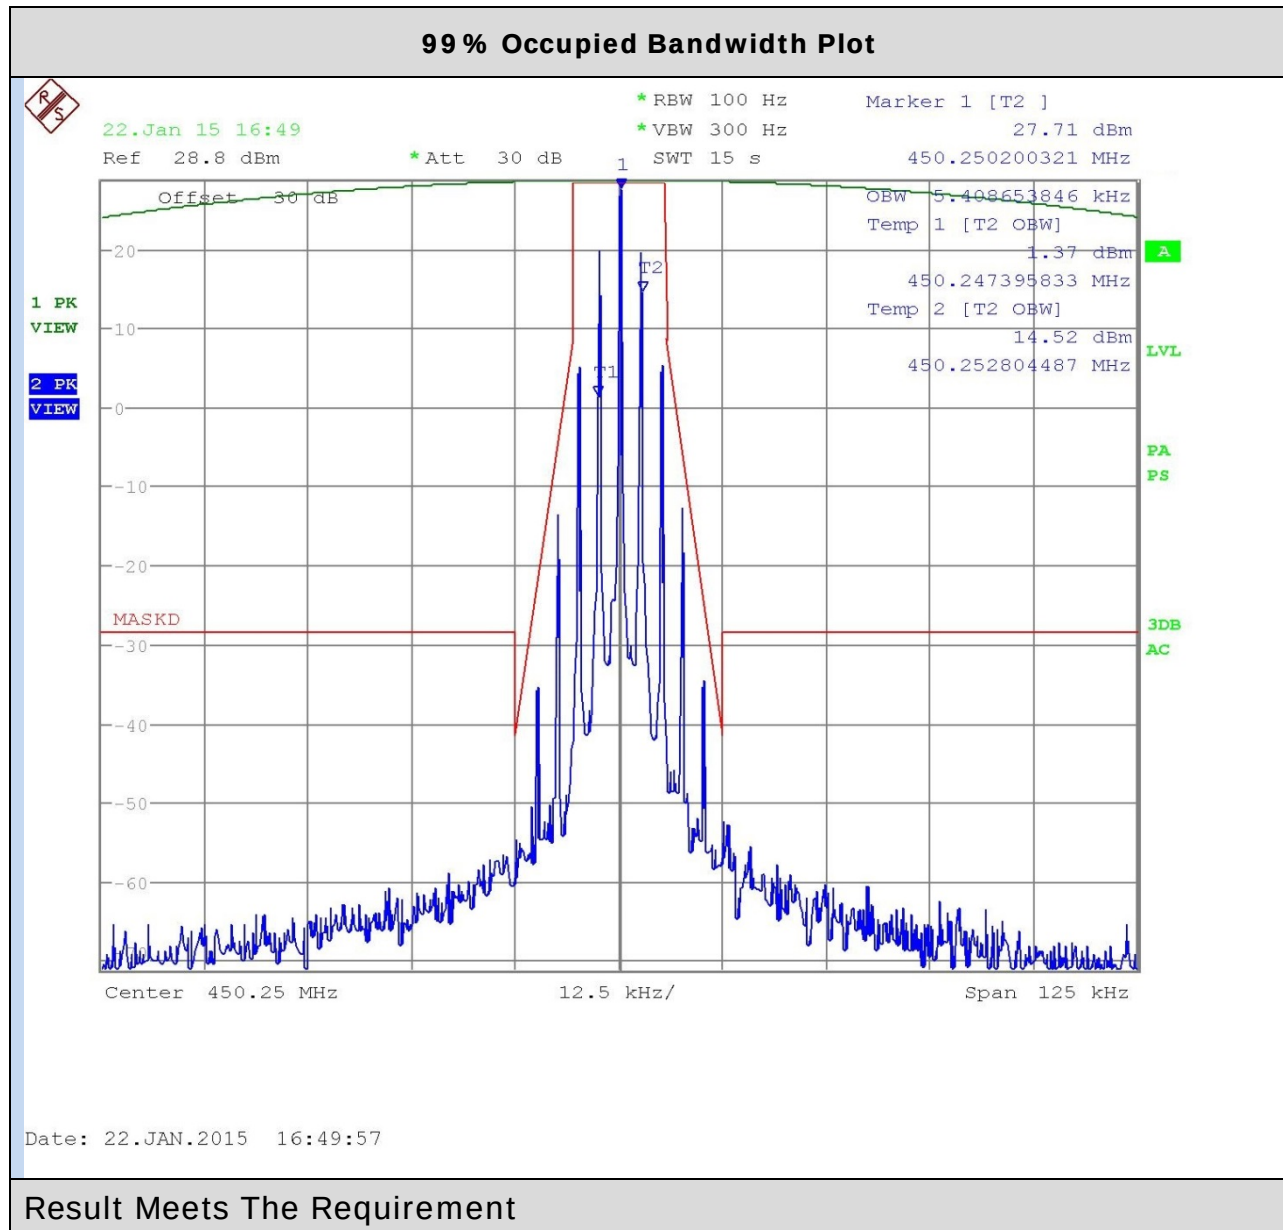

[Table of Contents](#)


Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## UNWANTED EMISSIONS / EMISSION MASKS

### 11k0F3E low Power High End of Band

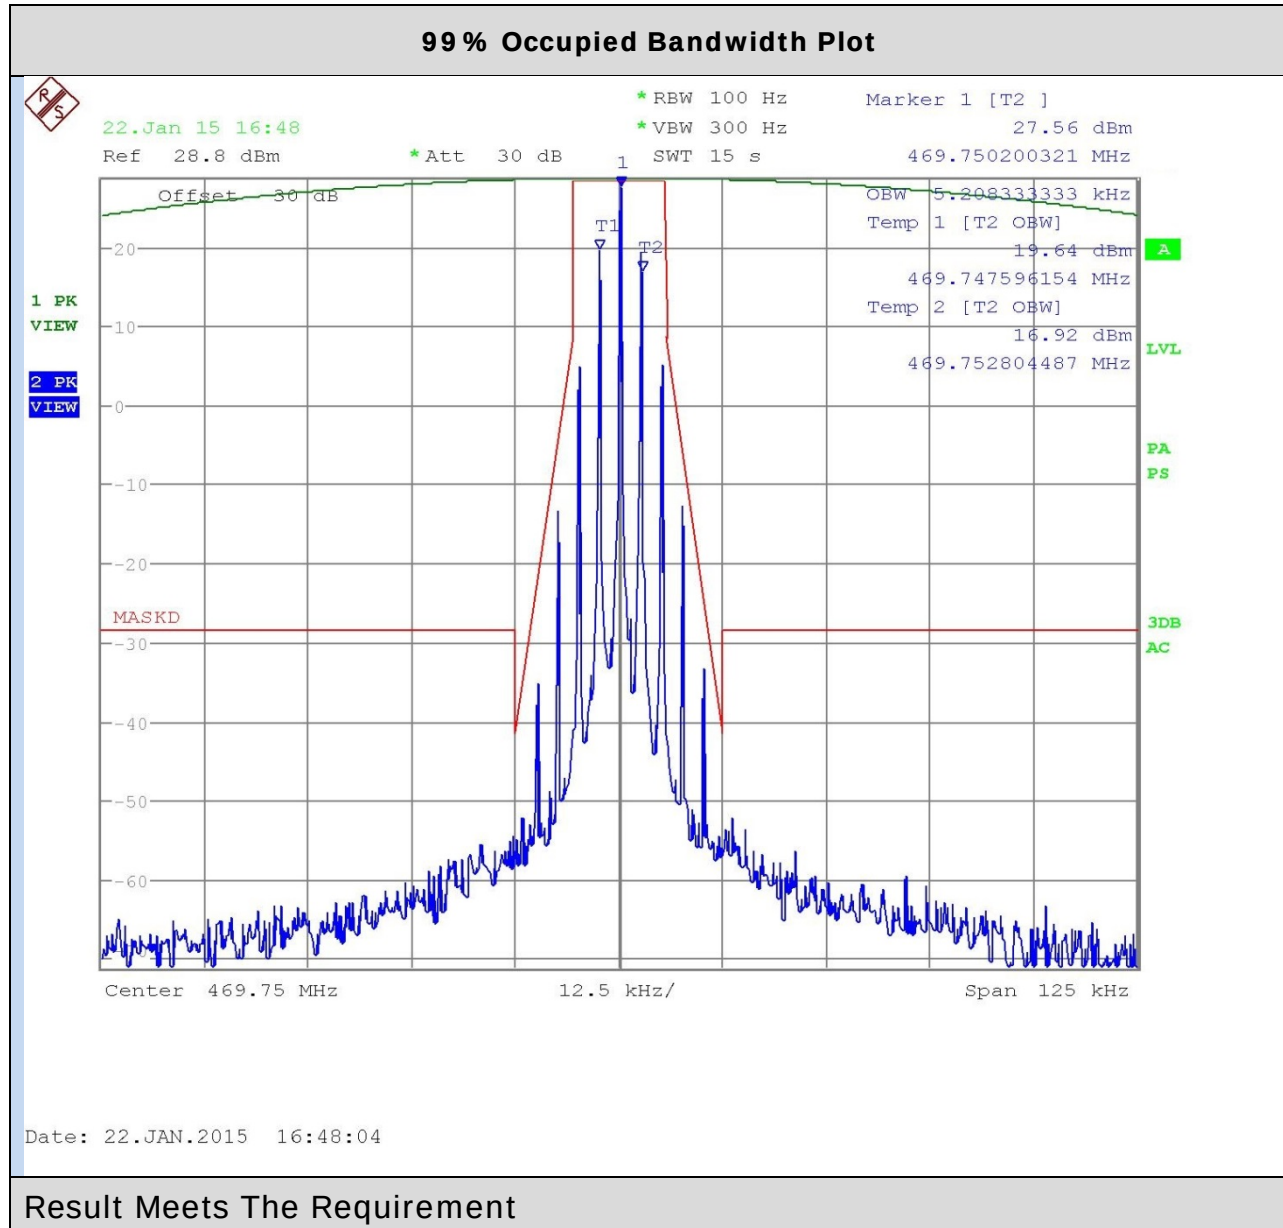

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

**Rule Part No.:** Part 2.1051(a)

### Requirements:


**6.25kHz Channel Spacing** = On any frequency removed from the center of the authorized bandwidth by more than 4.6kHz: At least  $55 + 10\log(P)$  dB or 65 dB, whichever is the lesser attenuation.

12.5 kHz Channel Spacing =  $50 + 10 \log (25.0) = 64.0$  dBc (high power)

12.5 kHz Channel Spacing =  $50 + 10 \log (5.0) = 57.0$  dBc (low power)

**Method of Measurement:** The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from the lowest frequency generated to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-D: 2010.

### Method of Measuring Conducted Spurious Emissions

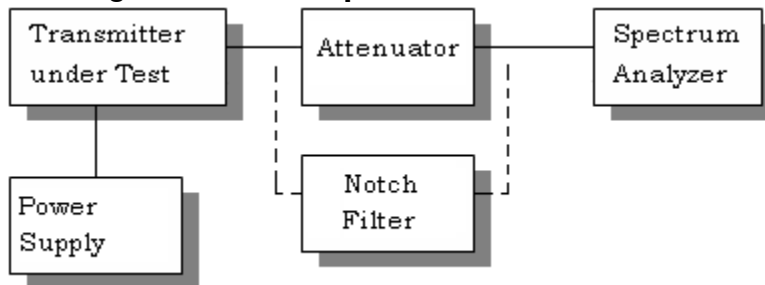

### Test Data: 11k0F3E High Power Low end of Band

|              | dBm       | Watts | Limit  |
|--------------|-----------|-------|--------|
| Power Output | 37        | 5     | 57     |
|              |           |       |        |
|              | Frequency | dBc   | Margin |
|              | 406.25    | 0     |        |
|              | 812.5     | 61.1  | 4.1    |
|              | 1218.75   | 105.6 | 48.6   |
|              | 1625      | NE    |        |
|              | 2031.25   | NE    |        |
|              | 2437.5    | NE    |        |
|              | 2843.75   | NE    |        |
|              | 3250      | NE    |        |
|              | 3656.25   | NE    |        |
|              | 4062.5    | NE    |        |

### [Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Test Data: 11k0F3E High Power Middle of Band

|              |           |       |        |
|--------------|-----------|-------|--------|
|              | dBm       | Watts | Limit  |
| Power Output | 37        | 5     | 57     |
|              |           |       |        |
|              | Frequency | dBc   | Margin |
|              | 429.75    | 0     |        |
|              | 859.5     | 75    | 18     |
|              | 1289.25   | 102.1 | 45.1   |
|              | 1719      | NE    |        |
|              | 2148.75   | NE    |        |
|              | 2578.5    | NE    |        |
|              | 3008.25   | NE    |        |
|              | 3438      | NE    |        |
|              | 3867.75   | NE    |        |
|              | 4297.5    | NE    |        |

### Test Data: 11k0F3E High Power Middle of Band

|              |           |       |        |
|--------------|-----------|-------|--------|
|              | dBm       | Watts | Limit  |
| Power Output | 37        | 5     | 57     |
|              |           |       |        |
|              | Frequency | dBc   | Margin |
|              | 450.25    | 0     |        |
|              | 900.5     | 75.1  | 18.1   |
|              | 1350.75   | 102.3 | 102.3  |
|              | 1801      | NE    |        |
|              | 2251.25   | NE    |        |
|              | 2701.5    | NE    |        |
|              | 3151.75   | NE    |        |
|              | 3602      | NE    |        |
|              | 4052.25   | NE    |        |
|              | 4502.5    | NE    |        |

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Test Data: 11k0F3E High Power High End of Band

|              |           |       |        |
|--------------|-----------|-------|--------|
|              | dBm       | Watts | Limit  |
| Power Output | 37        | 5     | 57     |
|              |           |       |        |
|              | frequency | dBc   | Margin |
|              | 469.75    | 0     |        |
|              | 939.5     | 88.6  | 31.6   |
|              | 1409.25   | 105.6 | 48.6   |
|              | 1879      | NE    |        |
|              | 2348.75   | NE    |        |
|              | 2818.5    | NE    |        |
|              | 3288.25   | NE    |        |
|              | 3758      | NE    |        |
|              | 4227.75   | NE    |        |
|              | 4697.5    | NE    |        |

### Test Data: 11k0F3E Low Power Low end of Band

|              |           |       |        |
|--------------|-----------|-------|--------|
|              | dBm       | Watts | Limit  |
| Power Output | 30        | 1     | 50     |
|              |           |       |        |
|              | Frequency | dBc   | Margin |
|              | 406.25    | 0     |        |
|              | 812.5     | 59.8  | 9.8    |
|              | 1218.75   | 107.8 | 57.8   |
|              | 1625      | NE    |        |
|              | 2031.25   | NE    |        |
|              | 2437.5    | NE    |        |
|              | 2843.75   | NE    |        |
|              | 3250      | NE    |        |
|              | 3656.25   | NE    |        |
|              | 4062.5    | NE    |        |

### [Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx



## SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Test Data: 11k0F3E Low Power Middle of Band

|              |           |       |        |
|--------------|-----------|-------|--------|
|              | dBm       | Watts | Limit  |
| Power Output | 30        | 1     | 50     |
|              |           |       |        |
|              | Frequency | dBc   | Margin |
|              | 429.25    | 0     |        |
|              | 858.5     | 71.9  | 21.9   |
|              | 1287.75   | 102.3 | 52.3   |
|              | 1717      | NE    |        |
|              | 2146.25   | NE    |        |
|              | 2575.5    | NE    |        |
|              | 3004.75   | NE    |        |
|              | 3434      | NE    |        |
|              | 3863.25   | NE    |        |
|              | 4292.5    | NE    |        |

### Test Data: 11k0F3E Low Power Middle of Band

|              |           |       |        |
|--------------|-----------|-------|--------|
|              | dBm       | Watts | Limit  |
| Power Output | 30        | 1     | 50     |
|              |           |       |        |
|              | Frequency | dBc   | Margin |
|              | 450.25    | 0     |        |
|              | 900.5     | 78.9  | 28.9   |
|              | 1350.75   | 103.6 | 53.6   |
|              | 1801      | NE    |        |
|              | 2251.25   | NE    |        |
|              | 2701.5    | NE    |        |
|              | 3151.75   | NE    |        |
|              | 3602      | NE    |        |
|              | 4052.25   | NE    |        |
|              | 4502.5    | NE    |        |

### [Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### 11k0F3E low Power High End of Band

|              | dBm       | Watts | Limit  |
|--------------|-----------|-------|--------|
| Power Output | 30        | 1     | 50     |
|              |           |       |        |
|              | Frequency | dBc   | Margin |
|              | 469.75    | 0     |        |
|              | 939.5     | 84.4  | 34.4   |
|              | 1409.25   | 103.8 | 53.8   |
|              | 1879      | NE    |        |
|              | 2348.75   | NE    |        |
|              | 2818.5    | NE    |        |
|              | 3288.25   | NE    |        |
|              | 3758      | NE    |        |
|              | 4227.75   | NE    |        |
|              | 4697.5    | NE    |        |

**RESULTS: PASS**

[Table of Contents](#)

## FIELD STRENGTH OF SPURIOUS EMISSIONS

**Rule Parts. No.:** Part 2.1053


### Requirements:

High Power = 12.5 kHz Channel Spacing =  $50 + 10\log(1) = 50$  dBc

Low Power = 12.5 KHz Channel Spacing =  $50 + 10\log(5) = 57$  dBc

**METHOD OF MEASUREMENT:** The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-D: 2010 using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

### Test Setup Diagram:

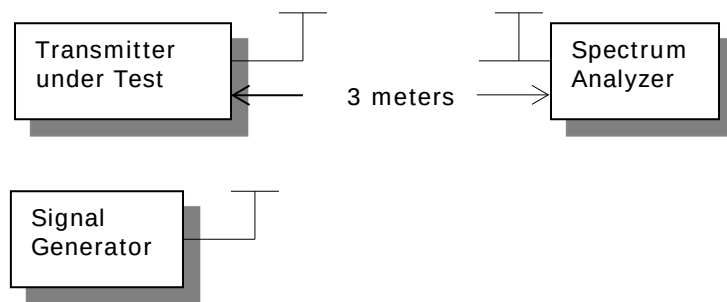

### Test Data: Low Power High End of Band

| Emission Frequency (MHz) | Power Mode    | ERP Power Output (dBm) | ERP Power Output (Watts) | FCC Requirement dB | Bandwidth - BW - kHz |
|--------------------------|---------------|------------------------|--------------------------|--------------------|----------------------|
| 469.75                   | Lo            | 30.00                  | 1.00                     | 50.00              | 12.50                |
| Emission Frequency (MHz) | Ant. Polarity | Below Carrier (dBc)    |                          | Margin             |                      |
| 939.50                   | H             | 81.90                  |                          | 31.90              |                      |
| 1,409.25                 | H             | 84.34                  |                          | 34.34              |                      |
| 1,879.00                 | H             | 97.27                  |                          | 47.27              |                      |
| 2,348.75                 | H             | 67.99                  |                          | 47.99              |                      |
| 2,818.50                 | H             | 65.88                  |                          | 45.88              |                      |
| 3,288.25                 | H             | 63.07                  |                          | 43.07              |                      |
| 3,758.00                 | H             | 60.79                  |                          | 40.79              |                      |
| 4,227.75                 | H             | 60.22                  |                          | 40.22              |                      |
| 4,697.50                 | H             | 63.53                  |                          | 43.53              |                      |

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## FIELD STRENGTH OF SPURIOUS EMISSIONS

### Test Data: High Power Low End of Band

| Emission Frequency (MHz) | Power Mode    | ERP Power Output (dBm) | ERP Power Output (Watts) | FCC Requirement dB | Bandwidth - BW - kHz |
|--------------------------|---------------|------------------------|--------------------------|--------------------|----------------------|
| 406.25                   | Hi            | 37.00                  | 5.01                     | 57.00              | 12.50                |
| Emission Frequency (MHz) | Ant. Polarity | Below Carrier (dBc)    |                          | Margin             |                      |
| 812.50                   | H             | 78.71                  |                          | 21.71              |                      |
| 1,218.75                 | H             | 106.68                 |                          | 49.68              |                      |
| 1,625.00                 | H             | 69.91                  |                          | 49.91              |                      |
| 2,031.25                 | H             | 68.14                  |                          | 48.14              |                      |
| 2,437.50                 | H             | 67.43                  |                          | 47.43              |                      |
| 2,843.75                 | H             | 65.79                  |                          | 45.79              |                      |
| 3,250.00                 | H             | 63.08                  |                          | 43.08              |                      |
| 3,656.25                 | H             | 61.68                  |                          | 41.68              |                      |
| 4,062.50                 | H             | 57.51                  |                          | 37.51              |                      |

### Test Data: High Power High End of Band

| Emission Frequency (MHz) | Power Mode    | ERP Power Output (dBm) | ERP Power Output (Watts) | FCC Requirement dB | Bandwidth - BW - kHz |
|--------------------------|---------------|------------------------|--------------------------|--------------------|----------------------|
| 469.75                   | Hi            | 37.00                  | 5.01                     | 57.00              | 12.50                |
| Emission Frequency (MHz) | Ant. Polarity | Below Carrier (dBc)    |                          | Margin             |                      |
| 939.50                   | H             | 84.70                  |                          | 27.70              |                      |
| 1,409.25                 | H             | 87.33                  |                          | 30.33              |                      |
| 1,879.00                 | H             | 88.50                  |                          | 31.50              |                      |
| 2,348.75                 | H             | 87.98                  |                          | 30.98              |                      |
| 2,818.50                 | V             | 85.91                  |                          | 28.91              |                      |
| 3,288.25                 | H             | 63.07                  |                          | 43.07              |                      |
| 3,758.00                 | H             | 60.79                  |                          | 40.79              |                      |
| 4,227.75                 | H             | 60.22                  |                          | 40.22              |                      |
| 4,697.50                 | H             | 63.53                  |                          | 43.53              |                      |

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## FREQUENCY STABILITY

**Rule Parts. No.:** Part 2.1055, Part 90.213

**Requirements:** Temperature range requirements: -30 to +50° C.  
Voltage Variation +, -15%  
±2.5 PPM

**Method of Measurements:** ANSI/TIA 603-D: 2010.

### Test Data:

| Temperature      | Frequency<br>MHz | Cycles | PPM    |
|------------------|------------------|--------|--------|
| 25°C (reference) | 450.249859       |        |        |
| -30°C            | 450.249694       | -165   | -0.366 |
| -20°C            | 450.249754       | -105   | -0.233 |
| -10°C            | 450.249798       | -61    | -0.135 |
| 0°C              | 450.249801       | -58    | -0.129 |
| 10°C             | 450.249839       | -20    | -0.044 |
| 20°C             | 450.24989        | 31     | 0.069  |
| 30°C             | 450.249902       | 43     | 0.096  |
| 40°C             | 450.249922       | 63     | 0.140  |
| 50°C             | 450.249944       | 85     | 0.189  |
|                  |                  |        |        |
| Battery Voltage  | Frequency        | Cycles | PPM    |
| -15%             | 450.249874       | 15     | 0.033  |
| 15%              | 450.249849       | -10    | -0.022 |

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx

## TRANSIENT FREQUENCY BEHAVIOR

### Part 90.214 Transient Frequency Behavior

**REQUIREMENTS:** Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time Intervals | Maximum frequency difference | All Equipment |             |
|----------------|------------------------------|---------------|-------------|
|                |                              | 150-174 MHz   | 421-512 MHz |

#### Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

|         |                |         |         |
|---------|----------------|---------|---------|
| $t_1^4$ | $\pm 25.0$ kHz | 5.0 ms  | 10.0 ms |
| $t_2$   | $\pm 12.5$ kHz | 20.0 ms | 25.0 ms |
| $t_3^4$ | $\pm 25.0$ kHz | 5.0 ms  | 10.0 ms |

#### Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

|         |                |         |         |
|---------|----------------|---------|---------|
| $t_1^4$ | $\pm 12.5$ kHz | 5.0 ms  | 10.0 ms |
| $t_2$   | $\pm 6.25$ kHz | 20.0 ms | 25.0 ms |
| $t_3^4$ | $\pm 12.5$ kHz | 5.0 ms  | 10.0 ms |


#### Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

|         |                 |         |         |
|---------|-----------------|---------|---------|
| $t_1^4$ | $\pm 6.25$ kHz  | 5.0 ms  | 10.0 ms |
| $t_2$   | $\pm 3.125$ kHz | 20.0 ms | 25.0 ms |
| $t_3^4$ | $\pm 6.25$ kHz  | 5.0 ms  | 10.0 ms |

[Table of Contents](#)

**TEST PROCEEDURE:** ANSI/TIA 603-D:2010, the levels were set as follows:


1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above, the transient frequency behavior was observed and recorded.

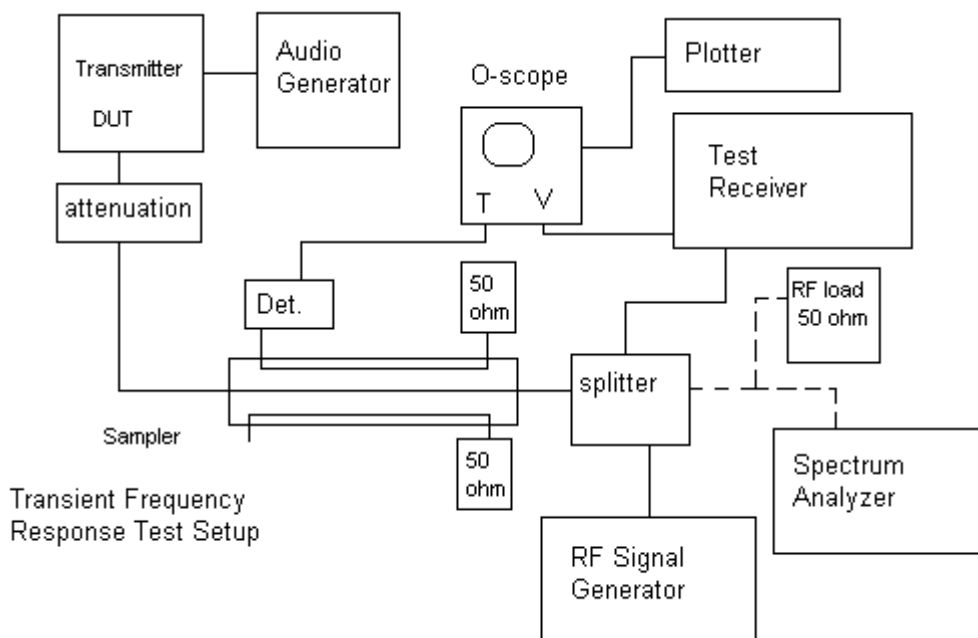


## TRANSIENT FREQUENCY BEHAVIOR

### Test Results:

#### 12.5KHz Turn On

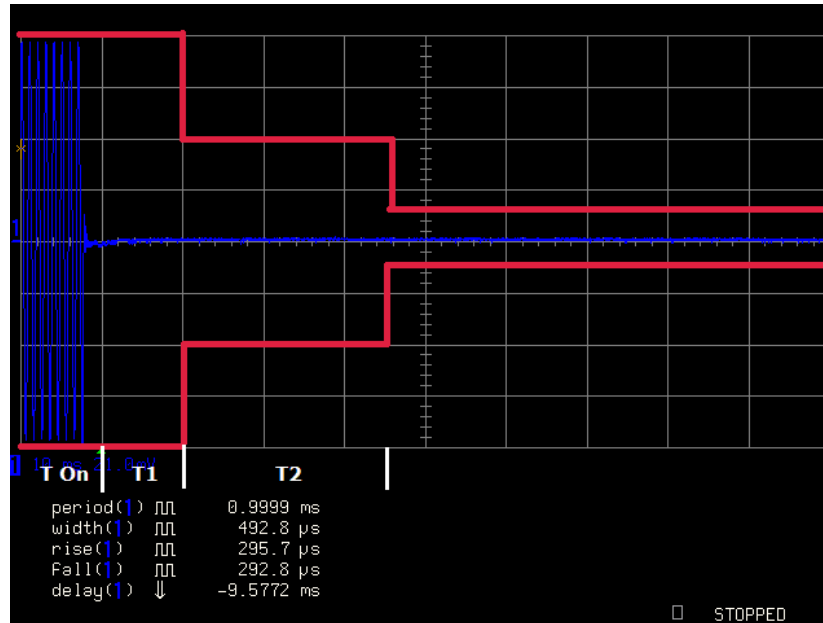

#### 12.5 KHz Turn Off

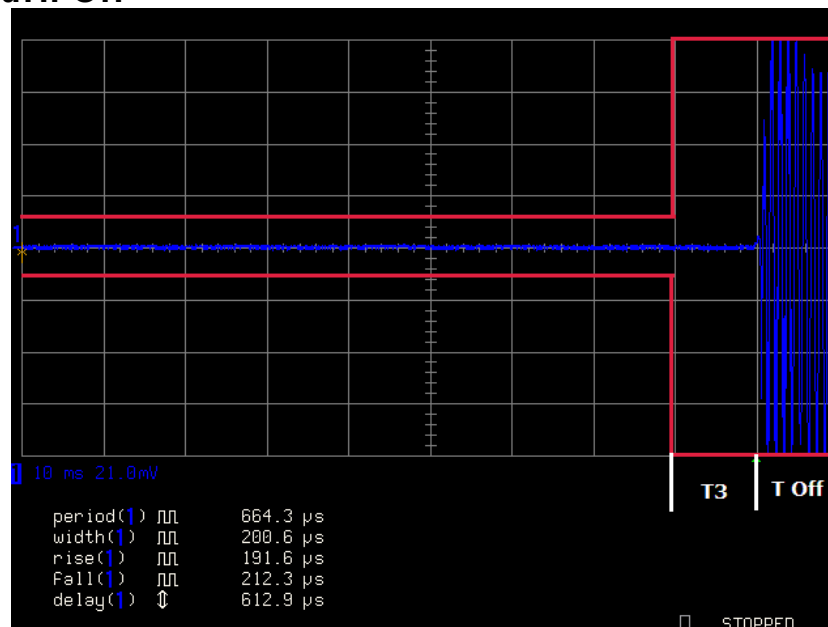

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx



## EQUIPMENT LIST

| Device                                      | Manufacturer         | Model         | Serial Number | Cal/Char Date | Due Date |
|---------------------------------------------|----------------------|---------------|---------------|---------------|----------|
| DC Power Supply                             | HP                   | 6286A         | 1744A03842    | 12/12/99      | 12/12/99 |
| Antenna: Biconnical Chamber                 | Eaton Chamber        | 94455-1       | 1057          | 06/14/13      | 06/14/15 |
| Antenna: Log-Periodic Chamber               | Eaton                | 96005         | 1243          | 05/31/13      | 05/31/15 |
| AC Voltmeter                                | HP                   | 400FL         | 2213A14728    | 06/26/13      | 06/26/15 |
| Digital Multimeter                          | Fluke                | 77            | 35053830      | 08/22/13      | 08/22/15 |
| Audio Analyzer                              | HP                   | 8903B         | 3011A13084    | 08/22/13      | 08/22/15 |
| DC Power Supply                             | HP                   | 6286A         | 2411A09414    | 12/12/99      | 12/12/99 |
| Frequency Counter Small Chamber             | HP                   | 5385A         | 3242A07460    | 06/16/13      | 06/16/15 |
| 3-Meter Semi-Anechoic Chamber               | Panashield           | N/A           | N/A           | 12/31/13      | 12/31/15 |
| Ant: Double-Ridged Horn/ETS Horn 1 Ch       | ETS-Lindgren Chamber | 3117          | 00035923      | 06/13/14      | 06/13/16 |
| Audio Analyzer                              | HP                   | 8903A         | 2336A03066    | 08/30/13      | 08/30/15 |
| Temperature Chamber Small                   | Thermotron Corp.     | S1.2 Mini Max | 25-1420-09    | 08/20/14      | 08/20/16 |
| EMI Test Receiver R & S ESIB 40 Screen Room | Rohde & Schwarz      | ESIB 40       | 100274        | 08/12/14      | 08/12/16 |
| Software: Field Strength Program            | Timco                | N/A           | Version 4.0   | 12/12/99      | 12/12/99 |
| Hygro-Thermometer                           | Extech               | 445703        | 0602          | 06/20/13      | 06/20/15 |
| 30 dB Attenuator                            | Narda                | 769-30        | 10267         | 03/15/13      | 03/15/15 |
| EMI Test Receiver R & S ESU 40 Chamber      | Rohde & Schwarz      | ESU 40        | 100320        | 03/11/14      | 03/11/16 |
| Signal Generator HP 8648C                   | HP                   | 8648C         | 3623A02898    | 08/29/13      | 08/29/15 |

[Table of Contents](#)

Applicant: VERTEX STANDARD USA, INC.

FCC ID: AXI11274620

Report: V\VERTEX STANDARD USA\35AUT15\35AUT15TestReport.docx