



Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	11a Draft n MCS8 20MHz CH 157 Ant. 5

Horizontal

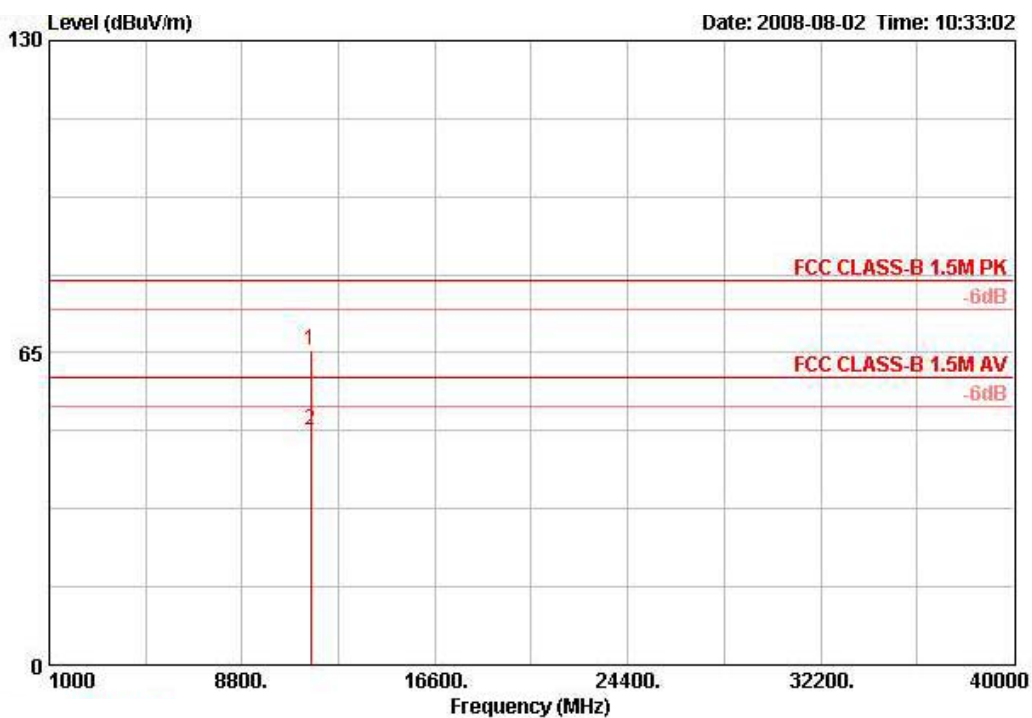

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11569.840	65.47	-14.53	80.00	56.60	38.51	5.18	34.82	PEAK	100	176	HORIZONTAL
2 @	11571.100	48.79	-11.21	60.00	39.92	38.51	5.18	34.82	AVERAGE	100	176	HORIZONTAL


Vertical

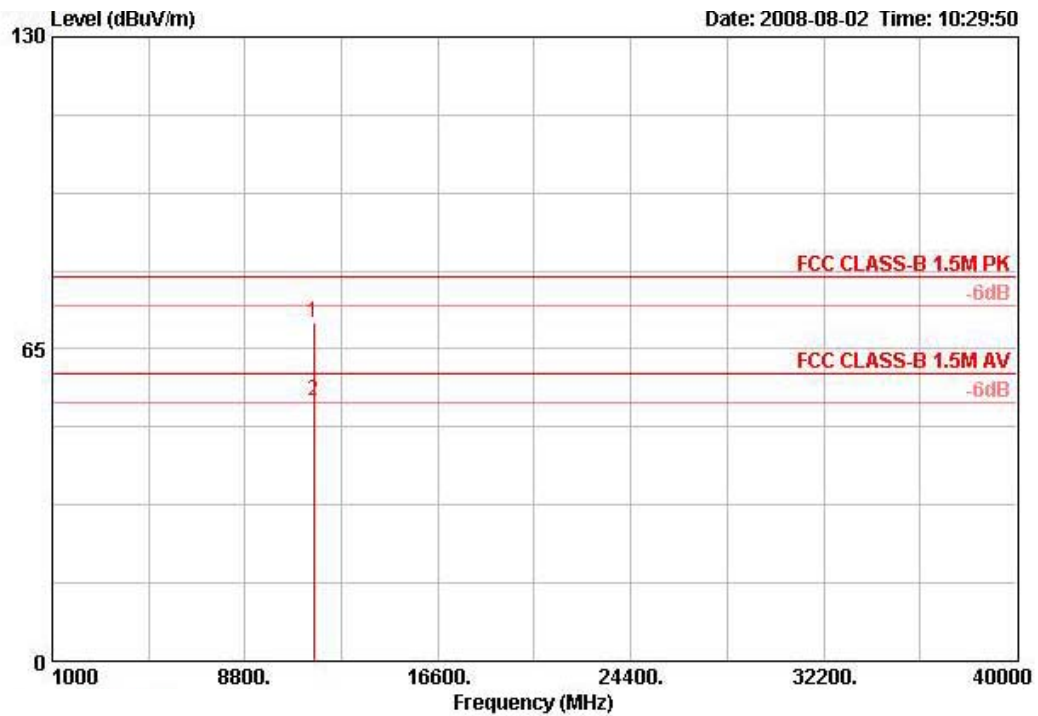

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11570.160	70.43	-9.57	80.00	61.56	38.51	5.18	34.82	PEAK	110	177	VERTICAL
2 @	11574.700	54.31	-5.69	60.00	45.44	38.51	5.18	34.82	AVERAGE	110	177	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	11a Draft n MCS8 20MHz CH 165 Ant. 5

Horizontal

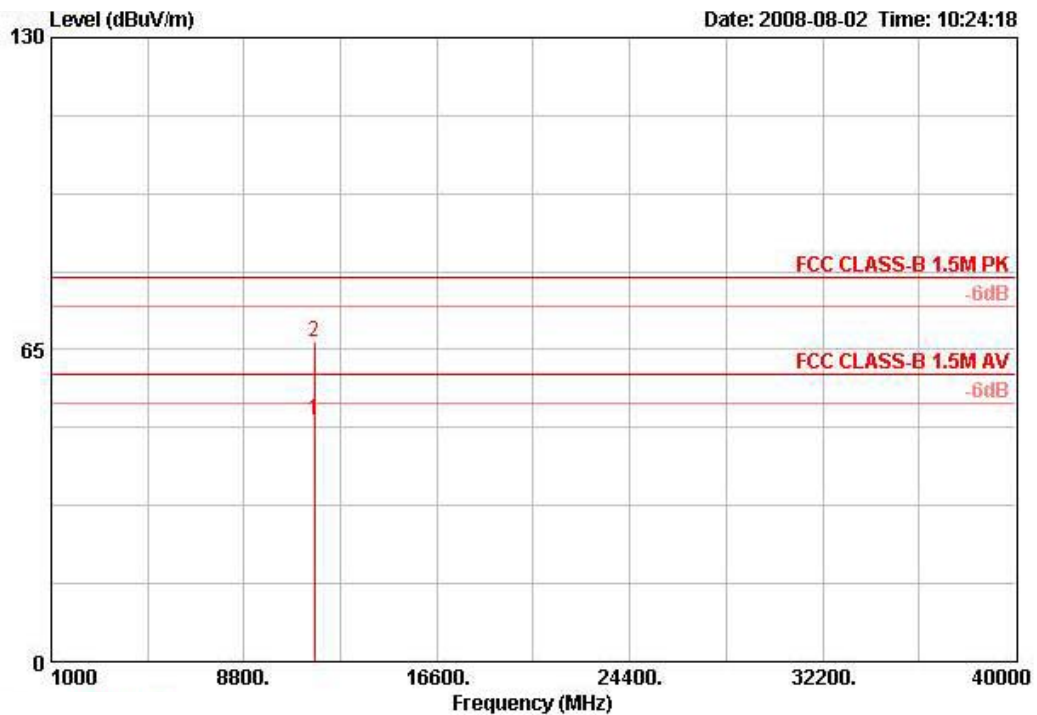

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11650.160	50.21	-9.79	60.00	41.38	38.53	5.20	34.90	AVERAGE	131	176	HORIZONTAL
2 @	11650.160	66.47	-13.53	80.00	57.64	38.53	5.20	34.90	PEAK	131	176	HORIZONTAL


Vertical

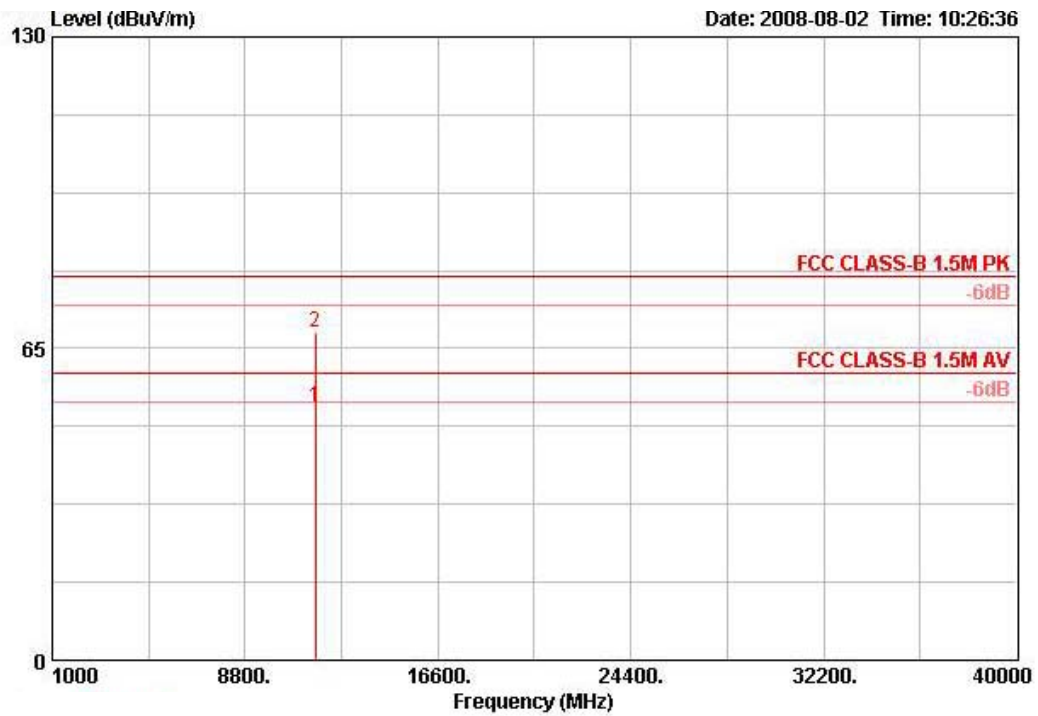

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11648.480	52.72	-7.28	60.00	43.88	38.53	5.20	34.90	AVERAGE	106	170	VERTICAL
2 @	11650.080	68.46	-11.54	80.00	59.62	38.53	5.20	34.90	PEAK	106	170	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	11a Draft n MCS8 40MHz CH 151 Ant. 5

Horizontal

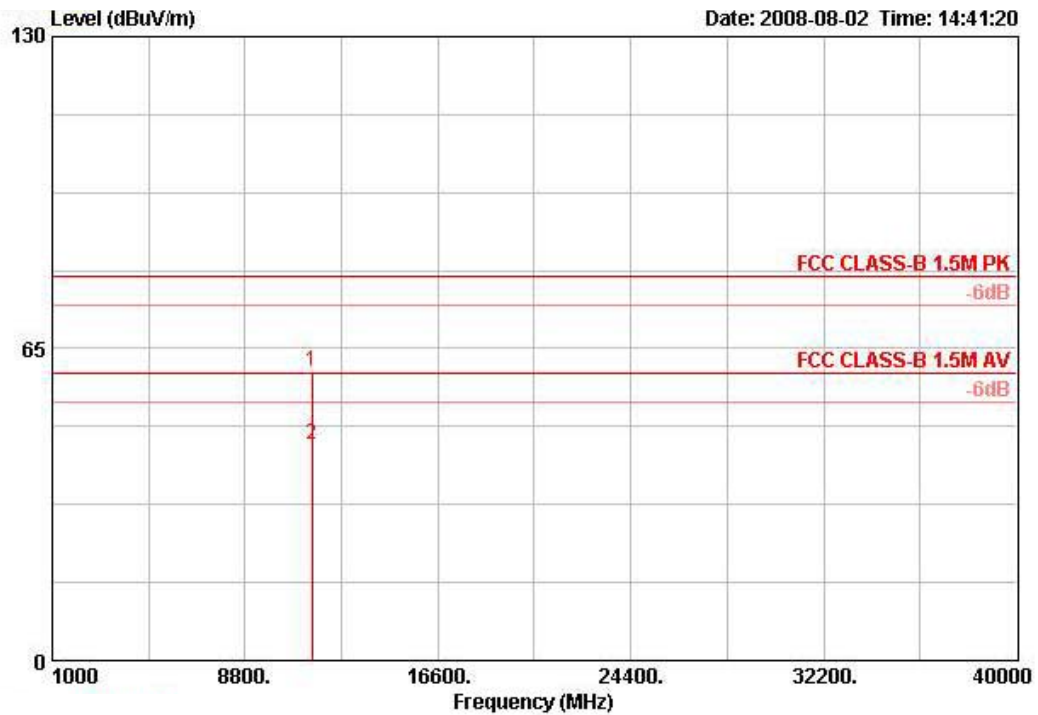

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11509.780	60.16	-19.84	80.00	51.26	38.50	5.15	34.75	PEAK	113	217	HORIZONTAL
2 @	11509.880	45.13	-14.87	60.00	36.23	38.50	5.15	34.75	AVERAGE	113	217	HORIZONTAL


Vertical

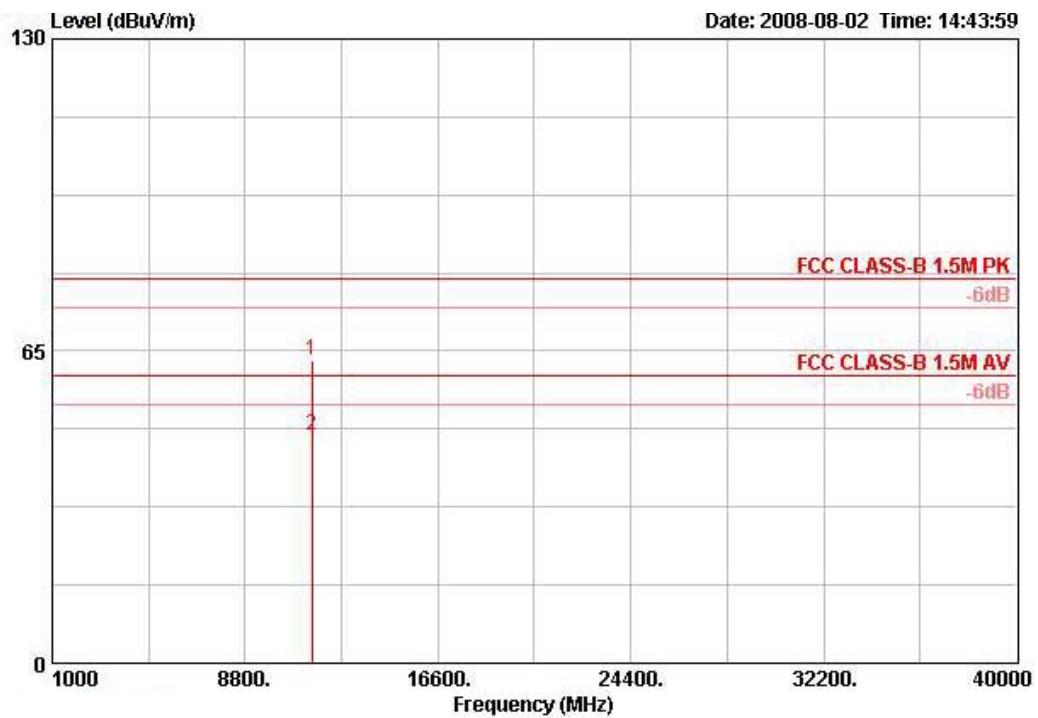

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11510.060	63.10	-16.90	80.00	54.20	38.50	5.15	34.75	PEAK	105	177	VERTICAL
2 @	11510.560	47.35	-12.65	60.00	38.45	38.50	5.15	34.75	AVERAGE	105	177	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	11a Draft n MCS8 40MHz CH 159 Ant. 5

Horizontal

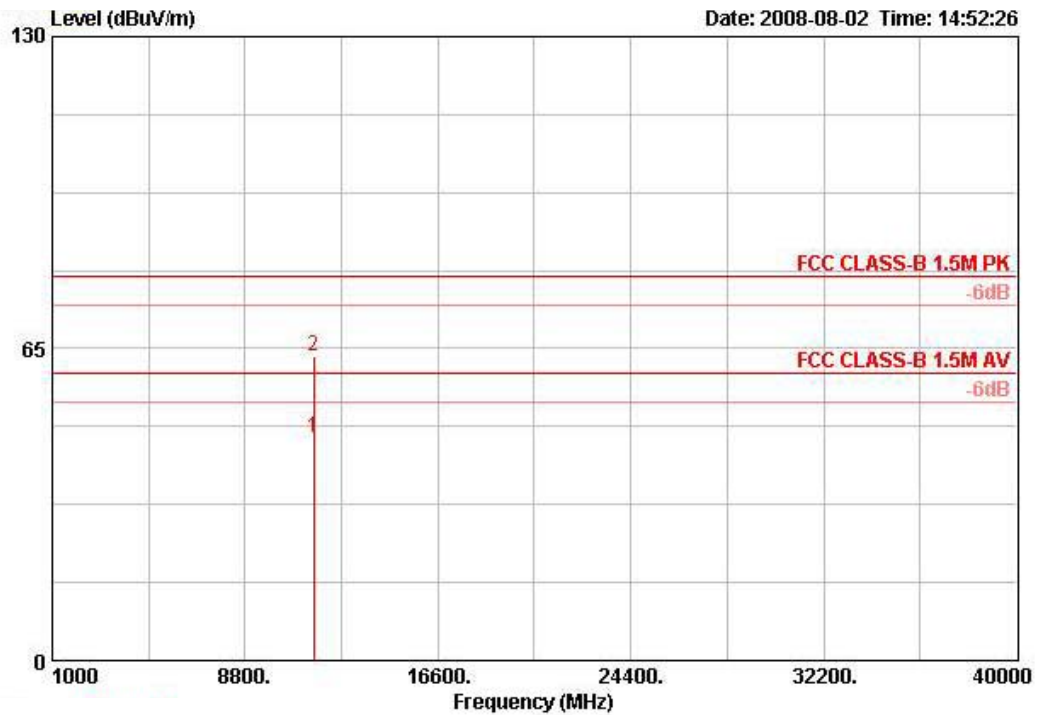

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11588.620	46.53	-13.47	60.00	37.66	38.52	5.18	34.82	AVERAGE	132	177	HORIZONTAL
2	11590.080	63.39	-16.61	80.00	54.52	38.52	5.18	34.82	PEAK	132	177	HORIZONTAL


Vertical

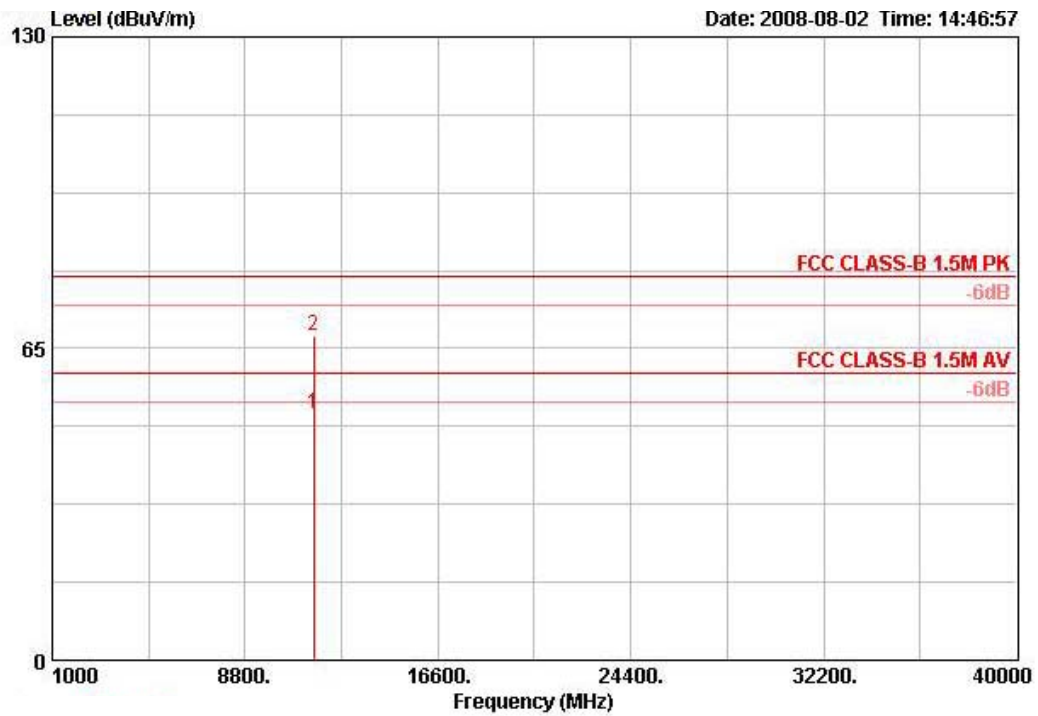

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11588.480	51.34	-8.66	60.00	42.46	38.52	5.18	34.82	AVERAGE	107	176	VERTICAL
2 @	11590.140	67.61	-12.39	80.00	58.74	38.52	5.18	34.82	PEAK	107	176	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 1 Ant. 5

Horizontal

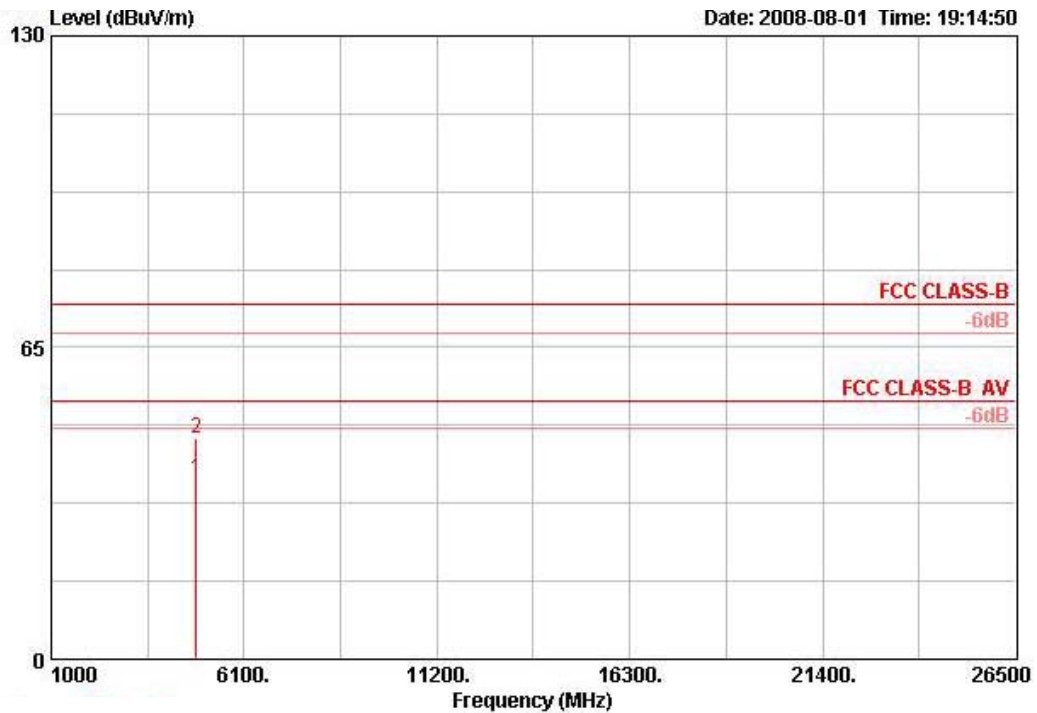

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table	
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos	Pol/Phase
			dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4823.990	37.53	-16.47	54.00	36.94	32.49	3.37	35.26	AVERAGE	100	126	HORIZONTAL
2	4824.150	46.06	-27.94	74.00	45.46	32.49	3.37	35.26	PEAK	100	126	HORIZONTAL


Vertical

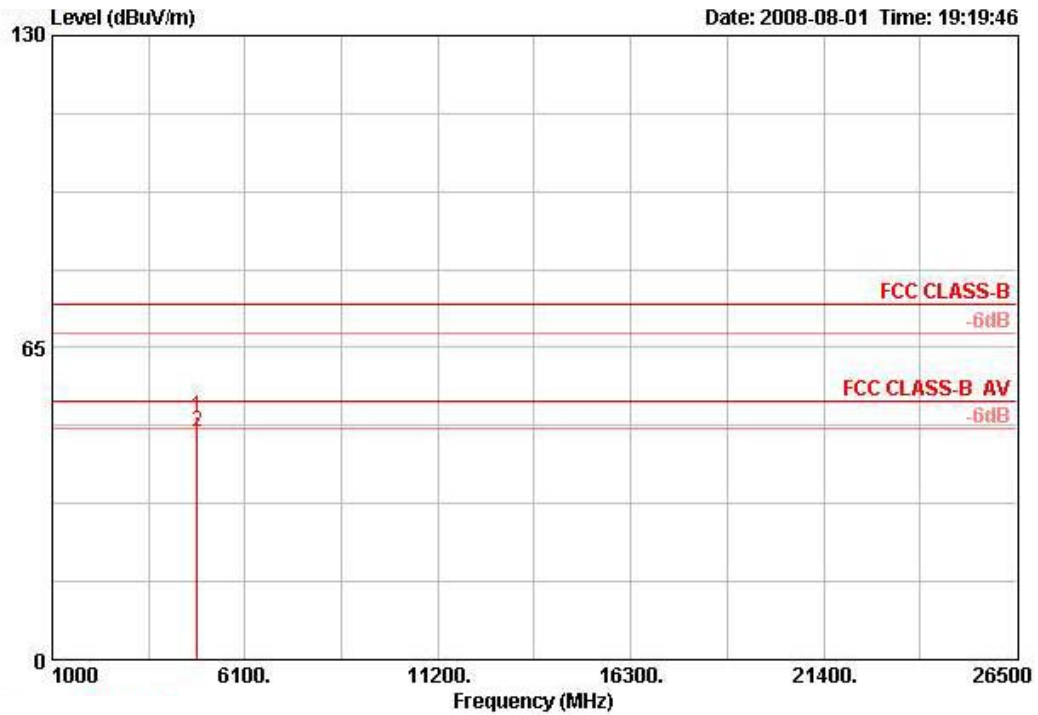

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4823.940	50.82	-23.18	74.00	50.22	32.49	3.37	35.26	PEAK	100	149	VERTICAL
2 @	4823.990	47.31	-6.69	54.00	46.71	32.49	3.37	35.26	AVERAGE	100	149	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 6 Ant. 5

Horizontal

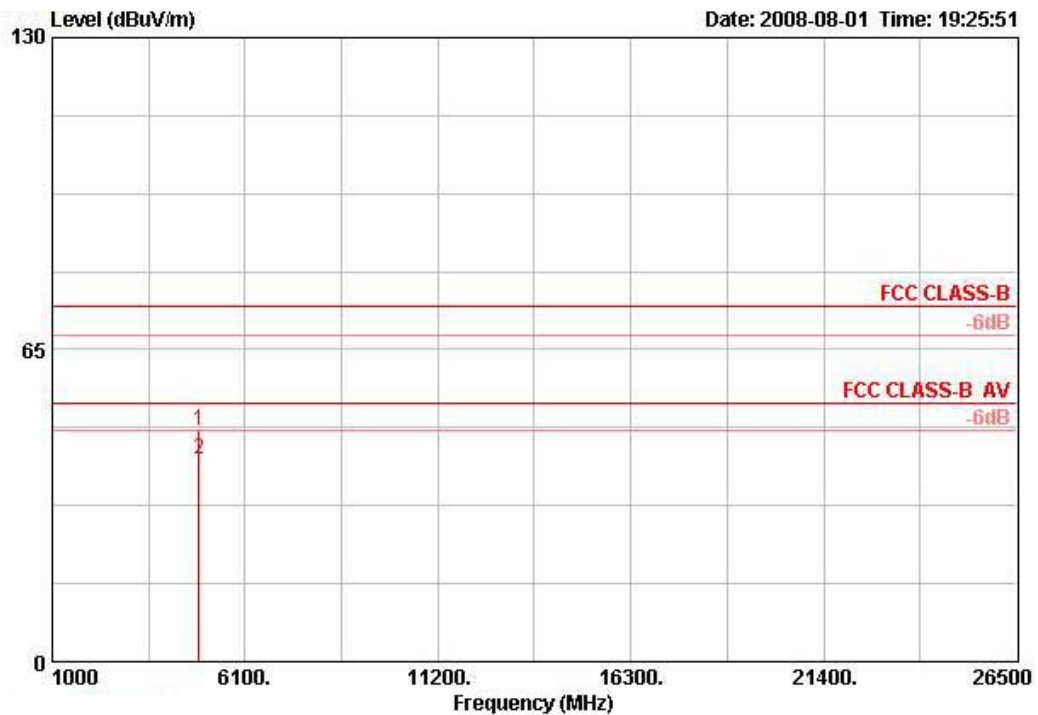

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4873.930	48.13	-25.87	74.00	47.31	32.58	3.38	35.15 PEAK	100	224	HORIZONTAL
2 @	4873.970	42.33	-11.67	54.00	41.51	32.58	3.38	35.15 AVERAGE	100	224	HORIZONTAL


Vertical

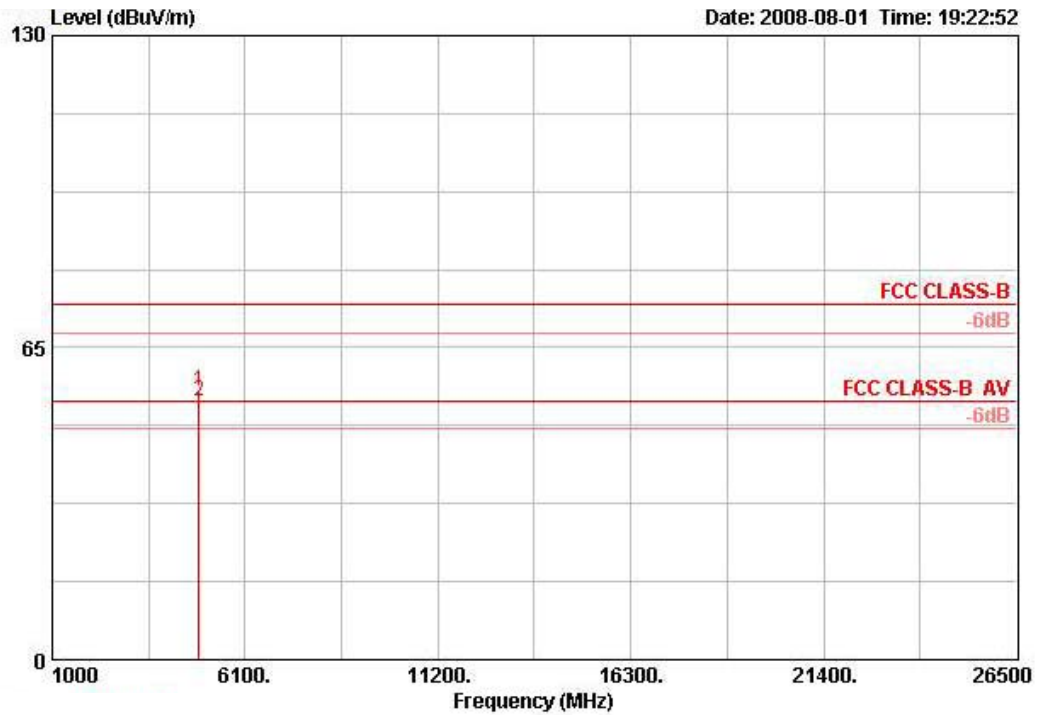

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4873.810	56.02	-17.98	74.00	55.20	32.58	3.38	35.15	PEAK	100	148	VERTICAL
2 @	4873.950	53.85	-0.15	54.00	53.03	32.58	3.38	35.15	AVERAGE	100	148	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 11 Ant. 5

Horizontal

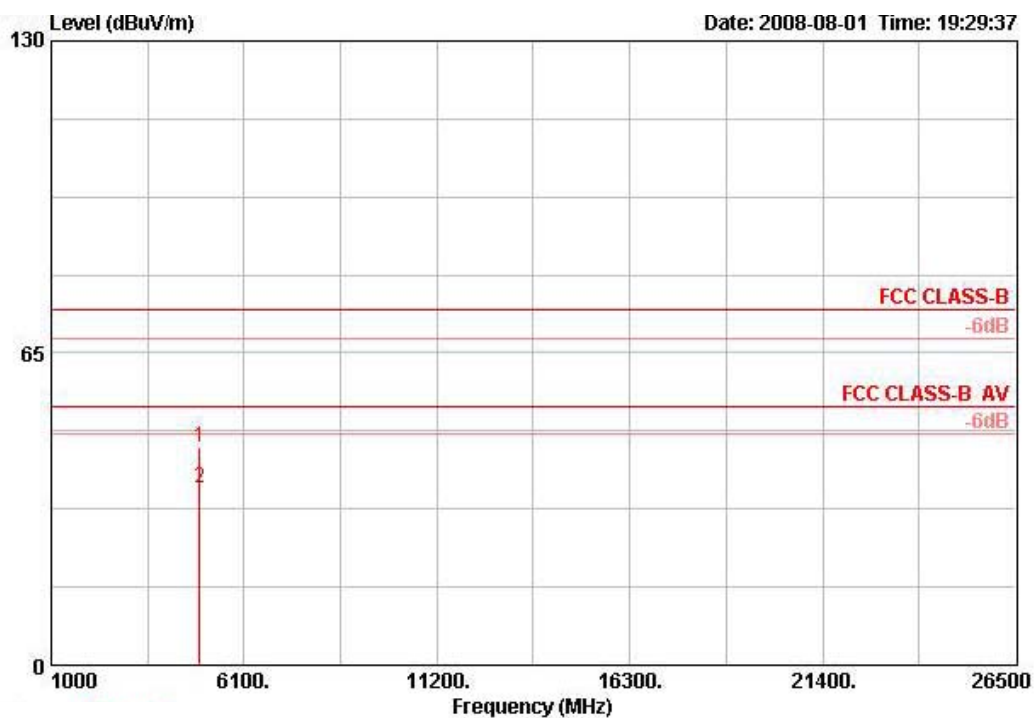

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4924.000	45.21	-28.79	74.00	44.16	32.68	3.40	35.03	102	160	HORIZONTAL
2	4924.030	36.93	-17.07	54.00	35.89	32.68	3.40	35.03	102	160	HORIZONTAL


Vertical

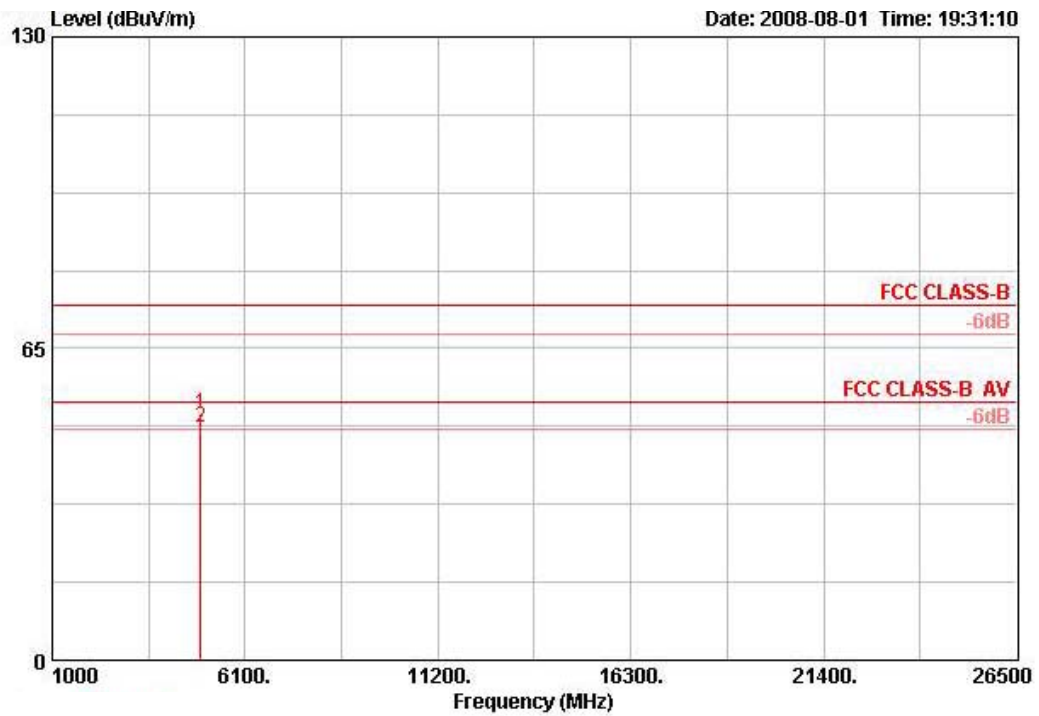

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4923.920	51.31	-22.69	74.00	50.26	32.68	3.40	35.03	PEAK	100	145	VERTICAL
2 @	4923.970	48.40	-5.60	54.00	47.36	32.68	3.40	35.03	AVERAGE	100	145	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 1 Ant. 5

Horizontal

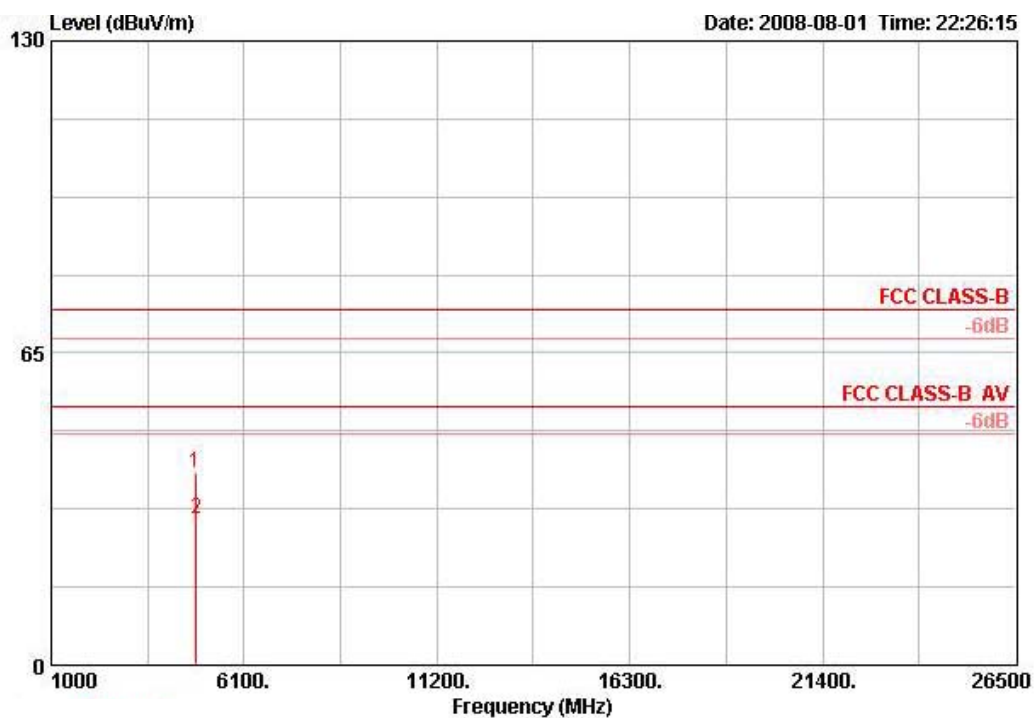

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4819.180	39.99	-34.01	74.00	39.39	32.49	3.37	35.26 PEAK	100	360	HORIZONTAL
2	4828.760	30.44	-23.56	54.00	29.84	32.49	3.37	35.26 AVERAGE	100	360	HORIZONTAL


Vertical

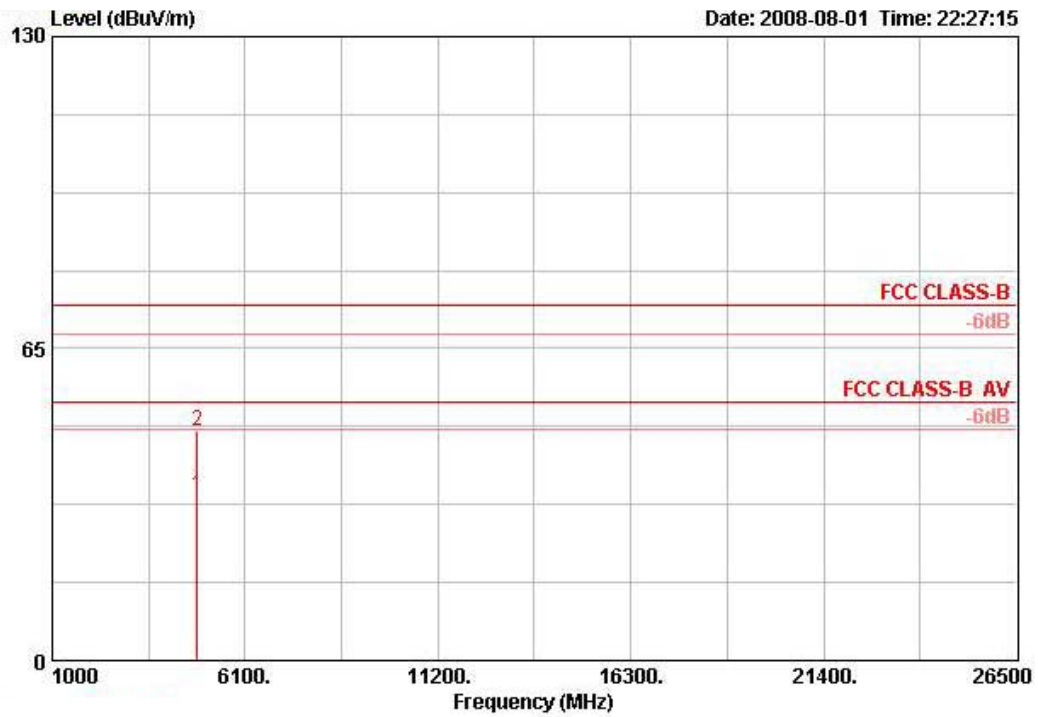

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4828.100	34.29	-19.71	54.00	33.69	32.49	3.37	35.26	AVERAGE	100	148	VERTICAL
2	4828.700	47.73	-26.27	74.00	47.14	32.49	3.37	35.26	PEAK	100	148	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 6 Ant. 5

Horizontal

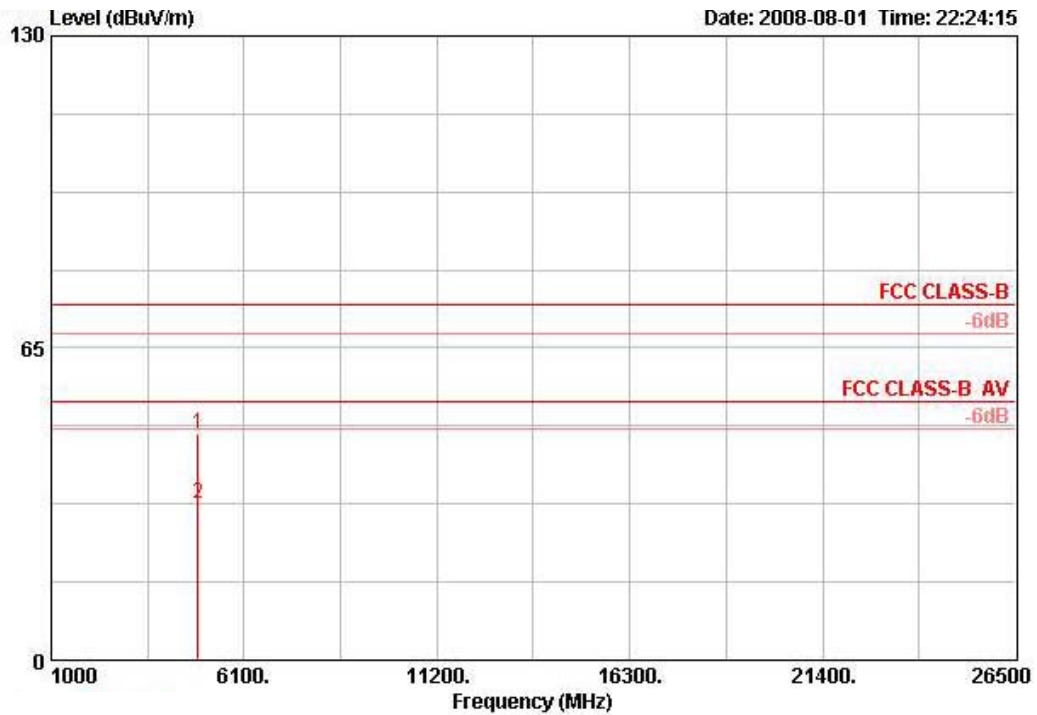

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4876.980	47.26	-26.74	74.00	46.44	32.58	3.38	35.15	100	122	HORIZONTAL
2	4877.180	32.76	-21.24	54.00	31.94	32.58	3.38	35.15	100	122	HORIZONTAL


Vertical

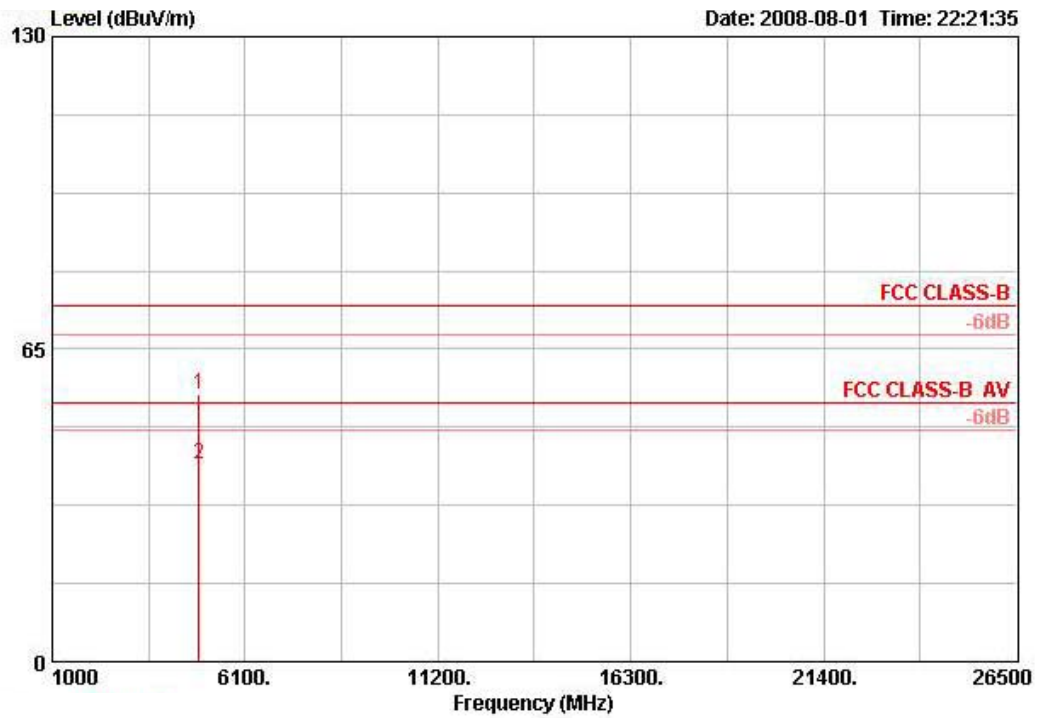

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4876.090	55.79	-18.21	74.00	54.97	32.58	3.38	35.15	PEAK	100	146	VERTICAL
2 @	4876.500	41.16	-12.84	54.00	40.34	32.58	3.38	35.15	AVERAGE	100	146	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 11 Ant. 5

Horizontal

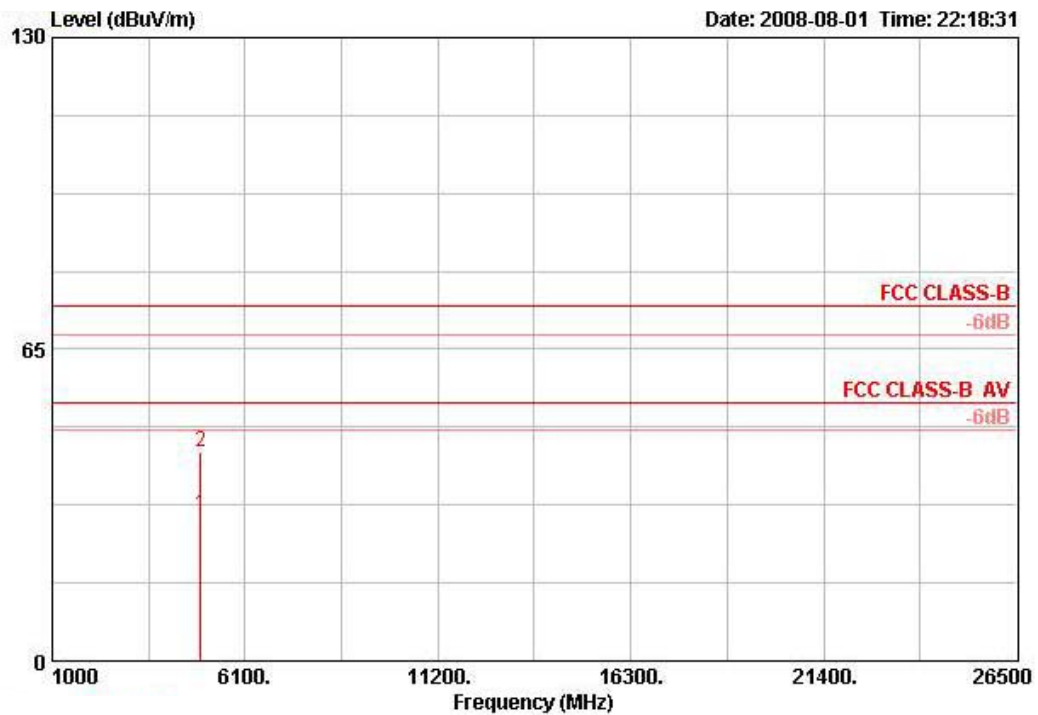

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4921.700	30.31	-23.69	54.00	29.26	32.68	3.40	35.03	AVERAGE	100	0	HORIZONTAL
2	4924.500	43.59	-30.41	74.00	42.54	32.68	3.40	35.03	PEAK	100	0	HORIZONTAL


Vertical

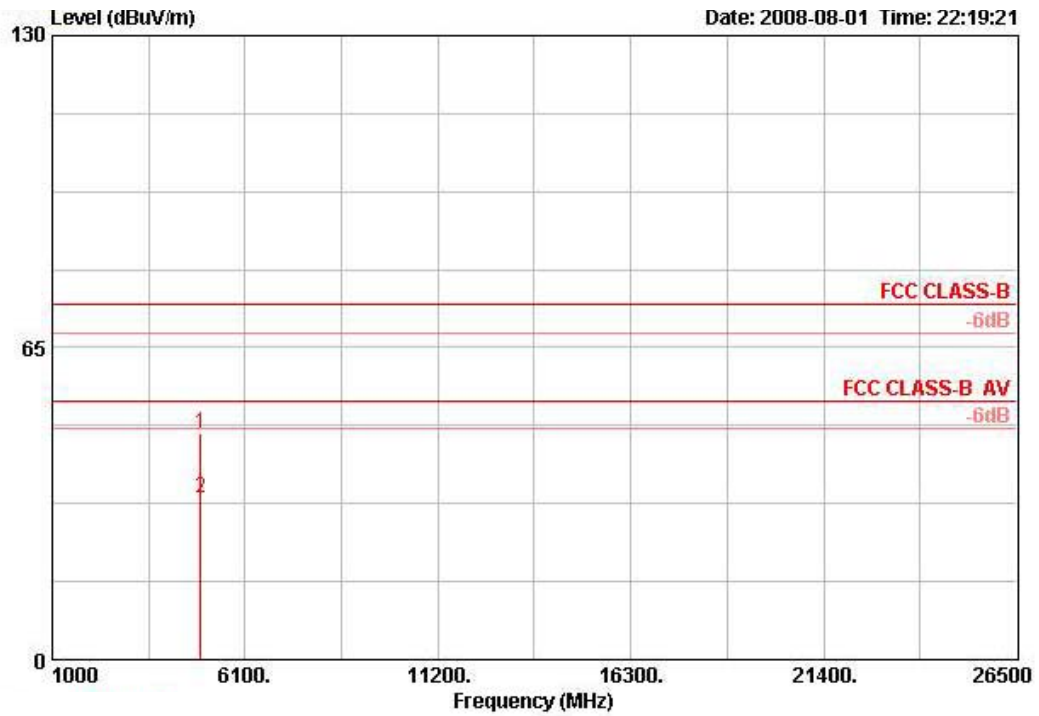

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4924.560	47.13	-26.87	74.00	46.09	32.68	3.40	35.03	PEAK	100	146	VERTICAL
2	4924.810	33.65	-20.35	54.00	32.61	32.68	3.40	35.03	AVERAGE	100	146	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a CH 149 Ant. 5

Horizontal

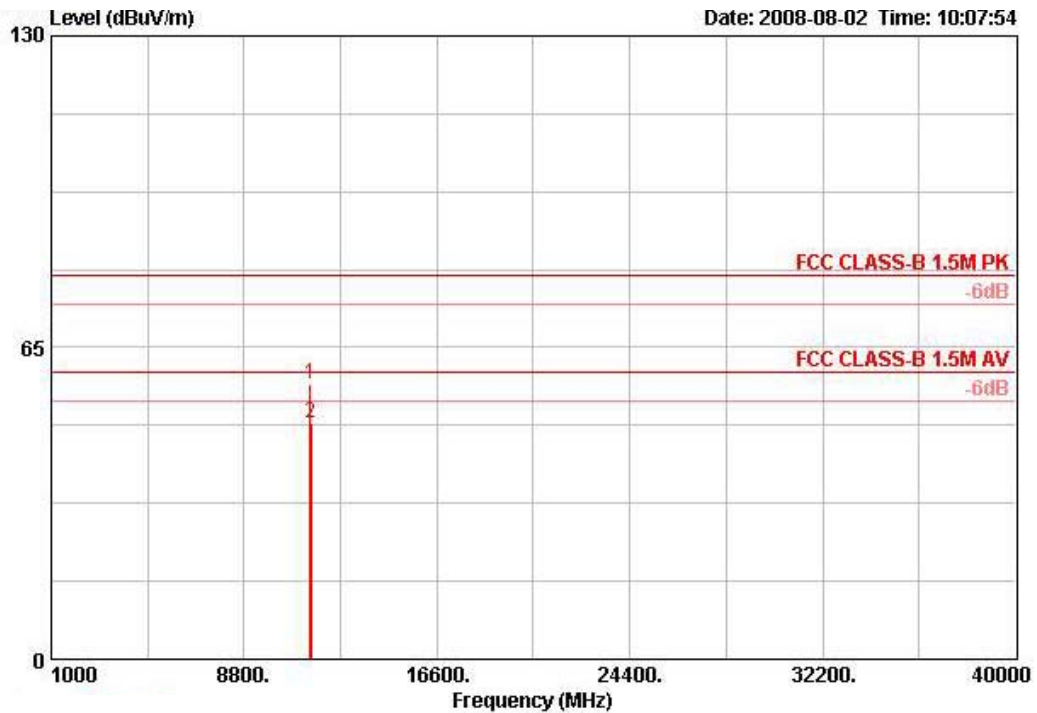

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11485.420	57.28	-22.72	80.00	48.39	38.50	5.14	34.75	PEAK	114	218	HORIZONTAL
2 @	11494.380	49.20	-10.80	60.00	40.30	38.50	5.15	34.75	AVERAGE	114	218	HORIZONTAL


Vertical

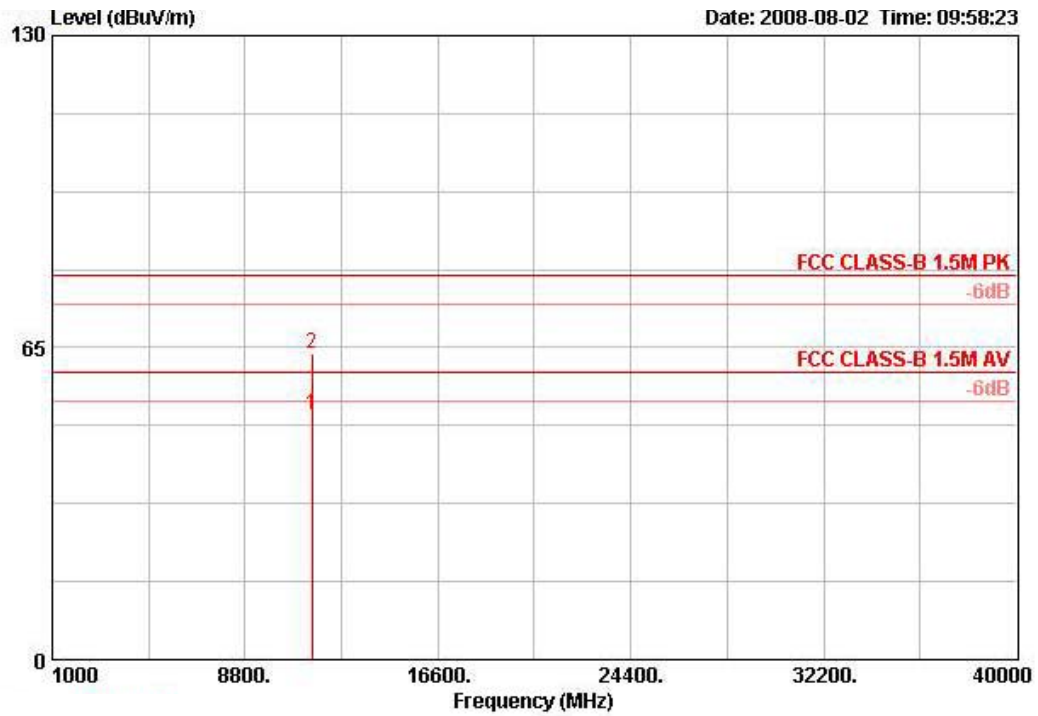

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11493.120	50.90	-9.10	60.00	42.01	38.50	5.14	34.75	AVERAGE	103	176	VERTICAL
2	11495.400	63.69	-16.31	80.00	54.79	38.50	5.15	34.75	PEAK	103	176	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a CH 157 Ant. 5

Horizontal

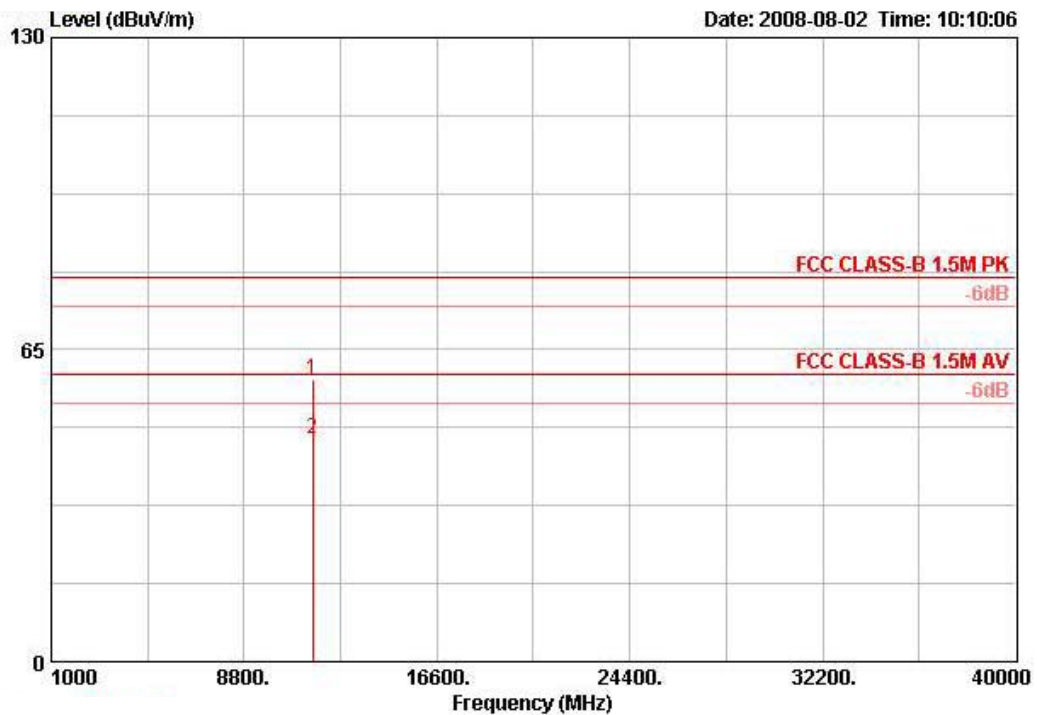

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	11573.220	58.71	-21.29	80.00	49.84	38.51	5.18	34.82 PEAK	131	180	HORIZONTAL
2 @	11573.320	46.49	-13.51	60.00	37.62	38.51	5.18	34.82 AVERAGE	131	180	HORIZONTAL


Vertical

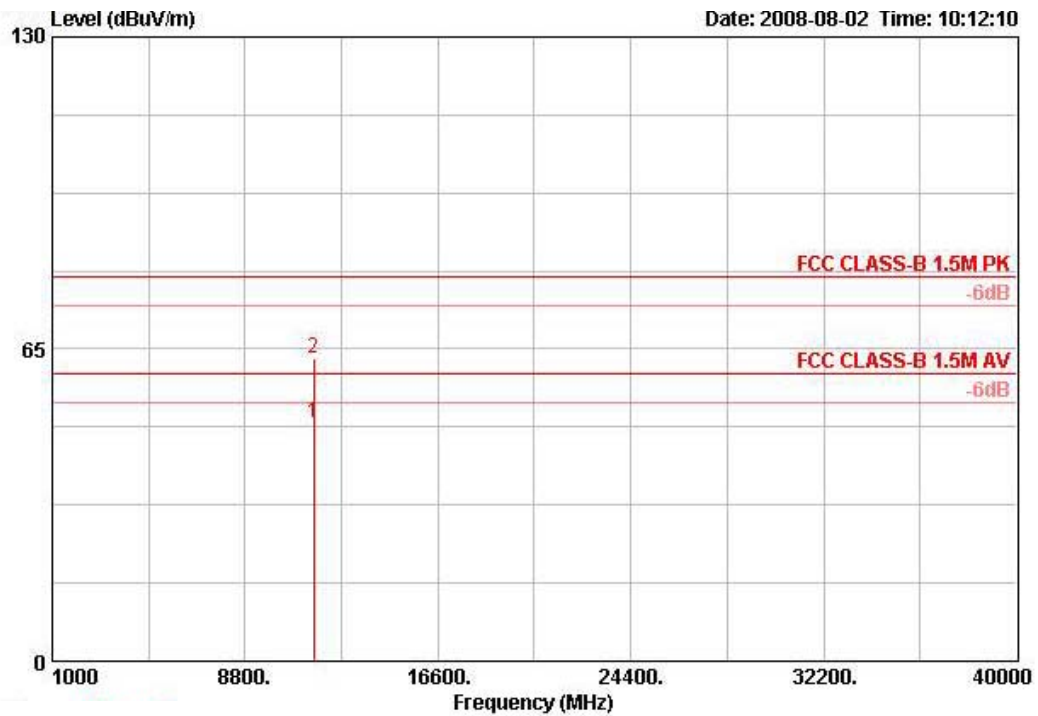

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11571.600	49.55	-10.45	60.00	40.69	38.51	5.18	34.82	AVERAGE	106	174	VERTICAL
2	11571.880	62.92	-17.08	80.00	54.05	38.51	5.18	34.82	PEAK	106	174	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a CH 165 Ant. 5

Horizontal

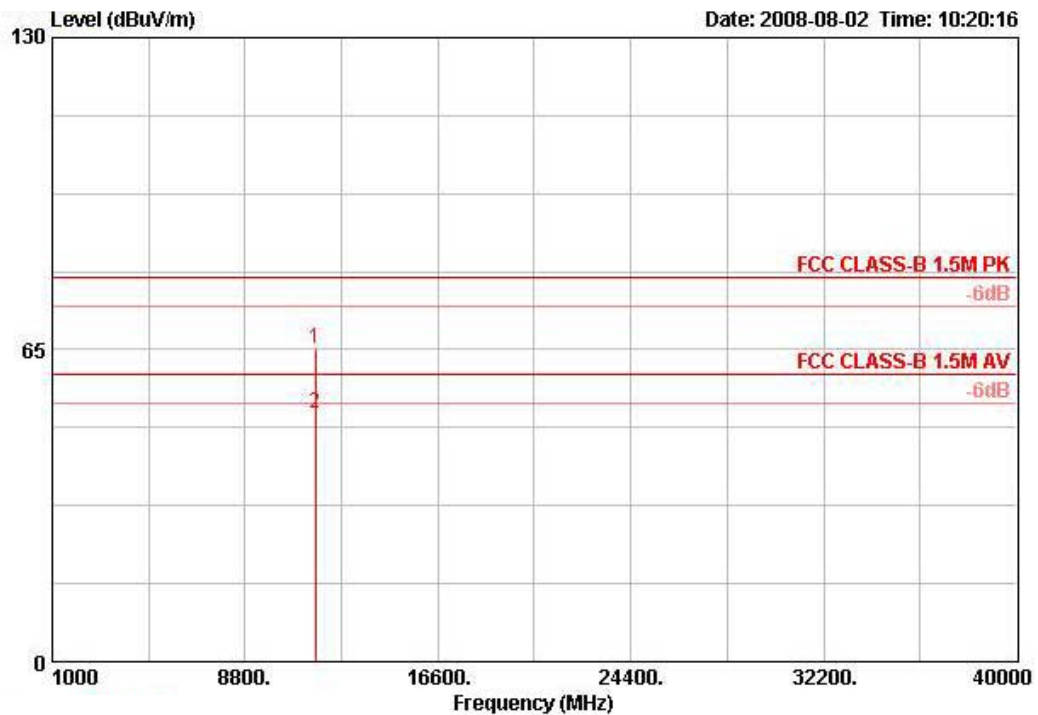

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11652.320	65.26	-14.74	80.00	56.42	38.53	5.20	34.90	PEAK	103	176	HORIZONTAL
2 @	11652.680	51.60	-8.40	60.00	42.76	38.53	5.20	34.90	AVERAGE	103	176	HORIZONTAL

Vertical

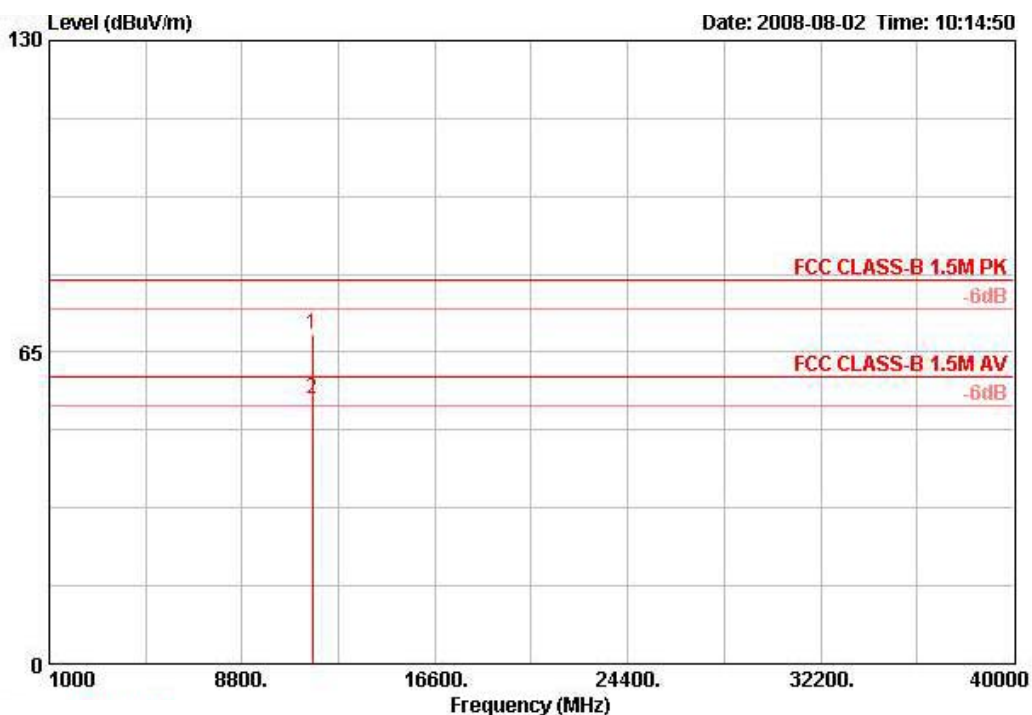

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11651.840	68.72	-11.28	80.00	59.88	38.53	5.20	34.90	PEAK	105	170	VERTICAL
2 @	11652.200	55.14	-4.86	60.00	46.30	38.53	5.20	34.90	AVERAGE	105	170	VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 1 Ant. 6

Horizontal

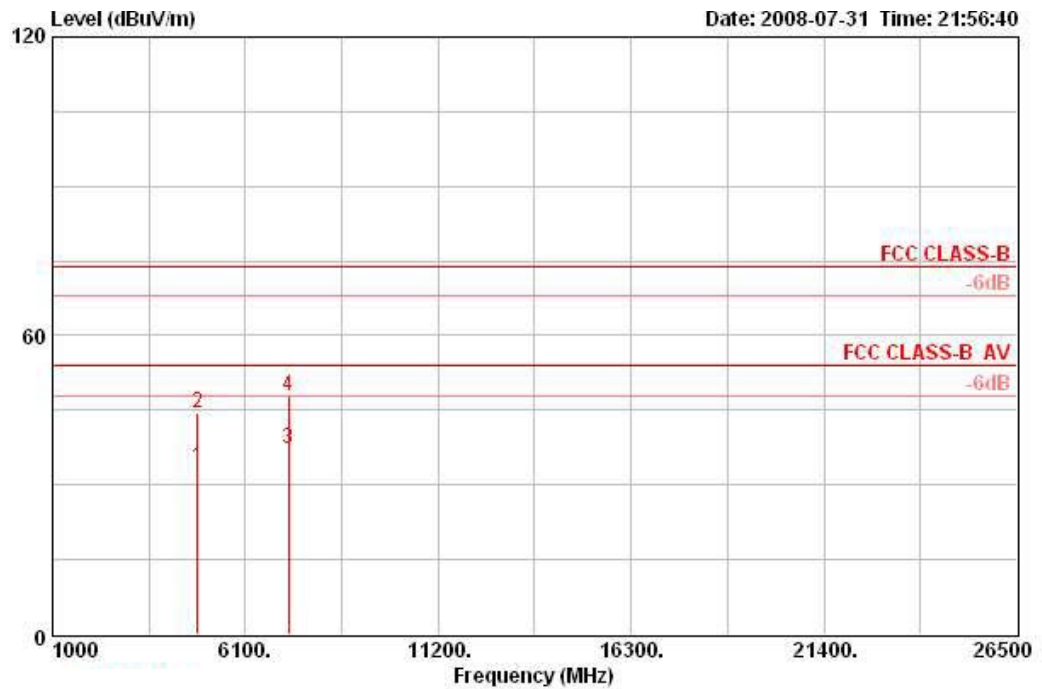

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4824.000	33.53	-20.47	54.00	29.00	33.39	35.25	6.39	AVERAGE	HORIZONTAL	186	100
2	4824.000	44.44	-29.56	74.00	39.91	33.39	35.25	6.39	PEAK	HORIZONTAL	186	100
3	7236.000	37.29	-16.71	54.00	28.75	36.39	35.80	7.96	AVERAGE	HORIZONTAL	290	100
4	7236.000	47.73	-26.27	74.00	39.19	36.39	35.80	7.96	PEAK	HORIZONTAL	290	100


Vertical

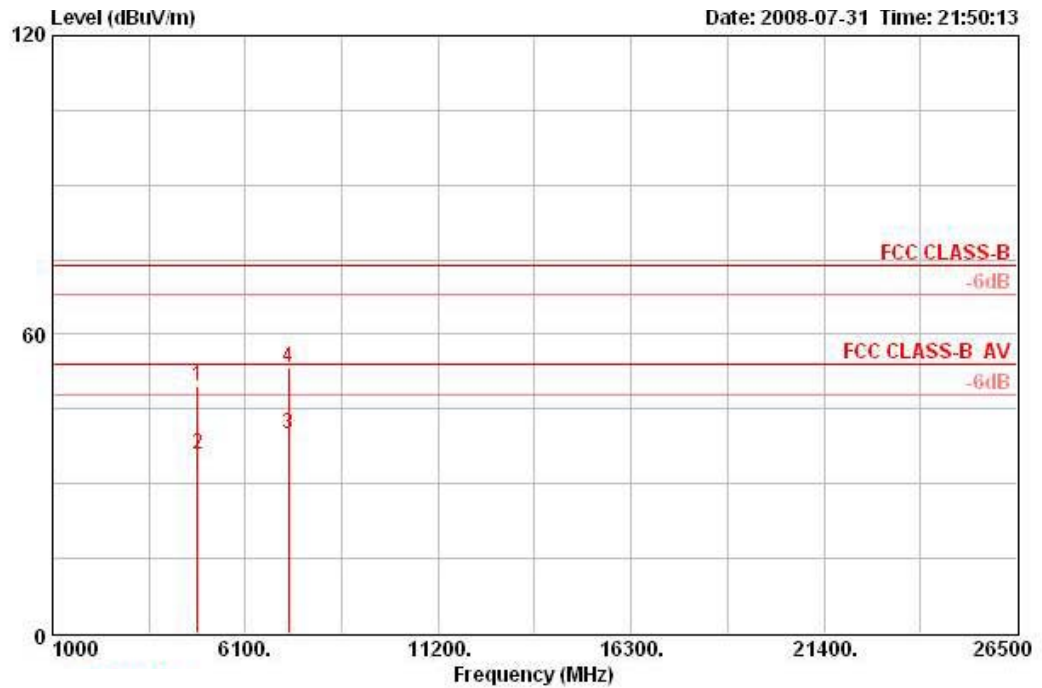

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4823.912	49.54	-24.46	74.00	45.01	33.39	35.25	6.39	PEAK	VERTICAL	360	100
2	4824.300	36.02	-17.98	54.00	31.49	33.39	35.25	6.39	AVERAGE	VERTICAL	360	100
3	7236.000	39.99	-14.01	54.00	31.44	36.39	35.80	7.96	AVERAGE	VERTICAL	163	100
4	7236.000	53.18	-20.82	74.00	44.64	36.39	35.80	7.96	PEAK	VERTICAL	163	100


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 6 Ant. 6

Horizontal

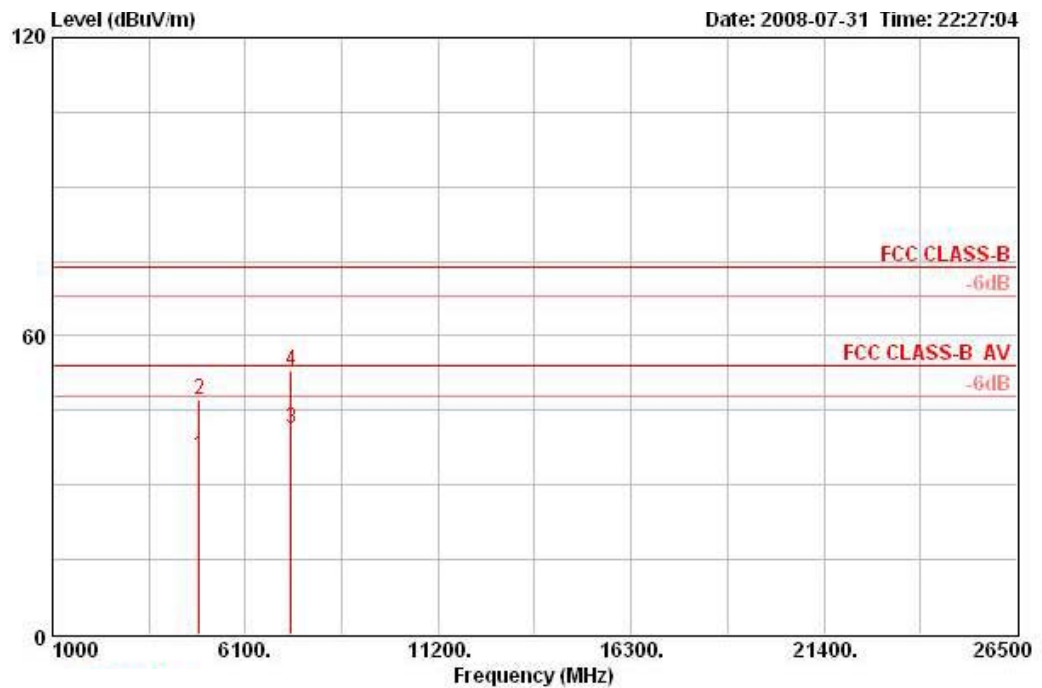

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4873.000	35.90	-18.10	54.00	31.11	33.48	35.25	6.56	AVERAGE	HORIZONTAL	40	100
2	4873.000	47.22	-26.78	74.00	42.42	33.48	35.25	6.56	PEAK	HORIZONTAL	40	100
3	7307.300	41.42	-12.58	54.00	32.71	36.50	35.78	7.99	AVERAGE	HORIZONTAL	334	173
4	7307.300	53.00	-21.00	74.00	44.28	36.50	35.78	7.99	PEAK	HORIZONTAL	334	173


Vertical

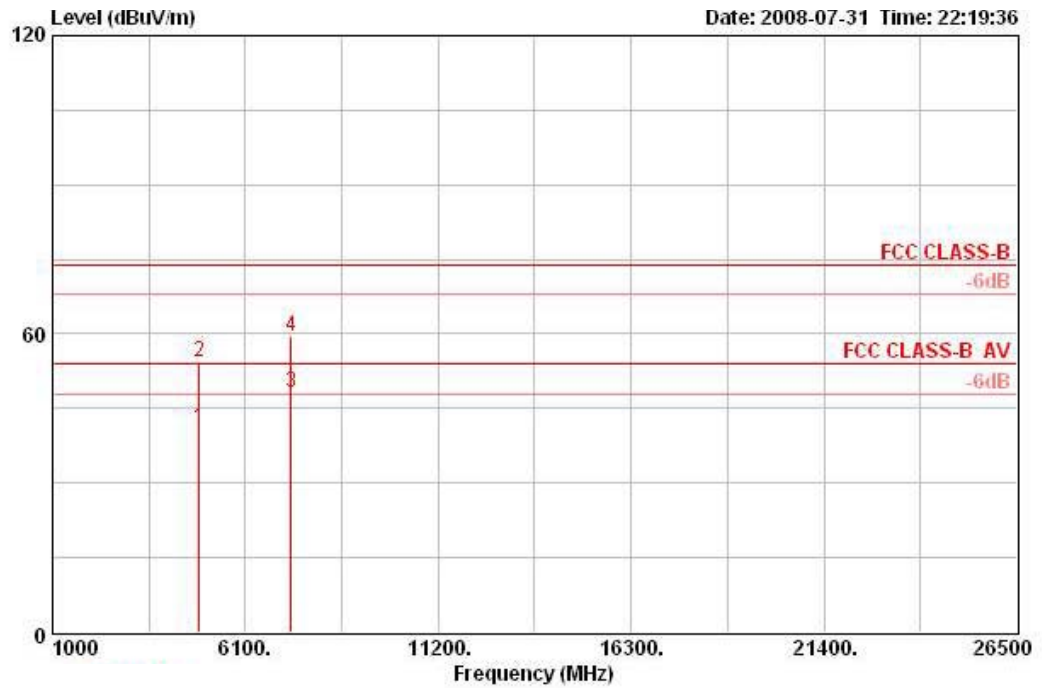

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4873.760	41.10	-12.90	54.00	36.30	33.48	35.25	6.56	AVERAGE	VERTICAL	232	100
2	4873.760	54.36	-19.64	74.00	49.56	33.48	35.25	6.56	PEAK	VERTICAL	232	100
3	7311.280	48.20	-5.80	54.00	39.46	36.50	35.77	8.01	AVERAGE	VERTICAL	213	119
4	7311.280	59.43	-14.57	74.00	50.69	36.50	35.77	8.01	PEAK	VERTICAL	213	119


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch11 Ant. 6

Horizontal

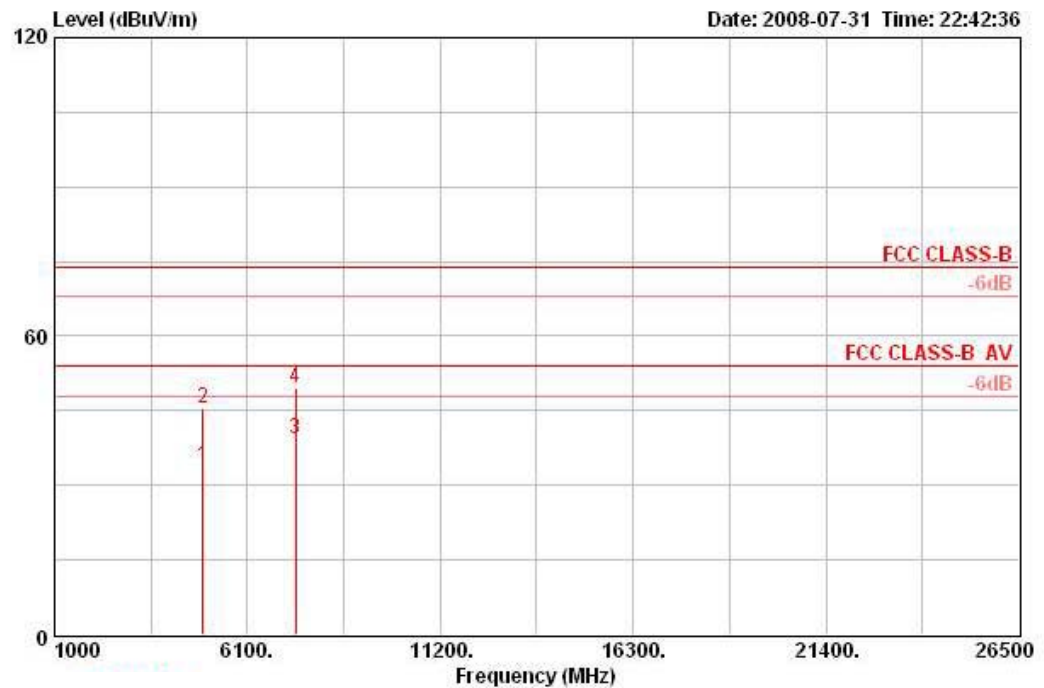

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4923.928	33.72	-20.28	54.00	28.65	33.58	35.24	6.73	AVERAGE	HORIZONTAL	161	100
2	4923.928	45.48	-28.52	74.00	40.42	33.58	35.24	6.73	PEAK	HORIZONTAL	161	100
3	7386.208	39.46	-14.54	54.00	30.53	36.63	35.75	8.05	AVERAGE	HORIZONTAL	42	100
4	7386.208	49.69	-24.31	74.00	40.76	36.63	35.75	8.05	PEAK	HORIZONTAL	42	100


Vertical

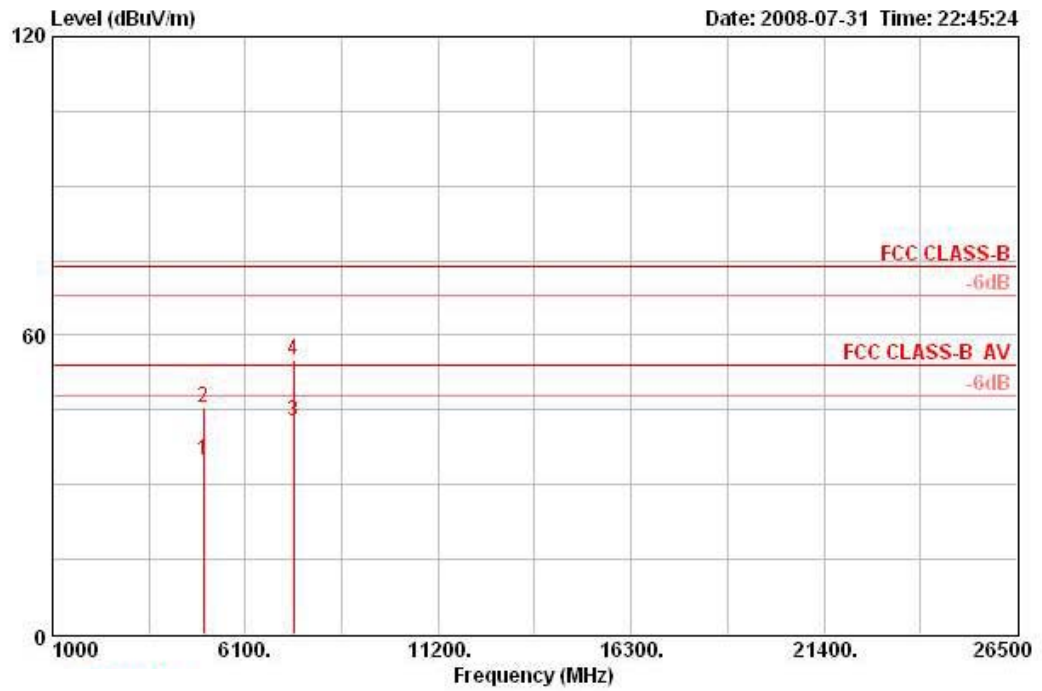

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	5000.000	34.99	-19.01	54.00	29.54	33.70	35.24	6.99	AVERAGE	VERTICAL	351	100
2	5000.000	45.35	-28.65	74.00	39.90	33.70	35.24	6.99	PEAK	VERTICAL	351	100
3	7386.220	42.76	-11.24	54.00	33.82	36.63	35.75	8.05	AVERAGE	VERTICAL	185	111
4	7386.220	55.10	-18.90	74.00	46.16	36.63	35.75	8.05	PEAK	VERTICAL	185	111


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 3 Ant. 6

Horizontal

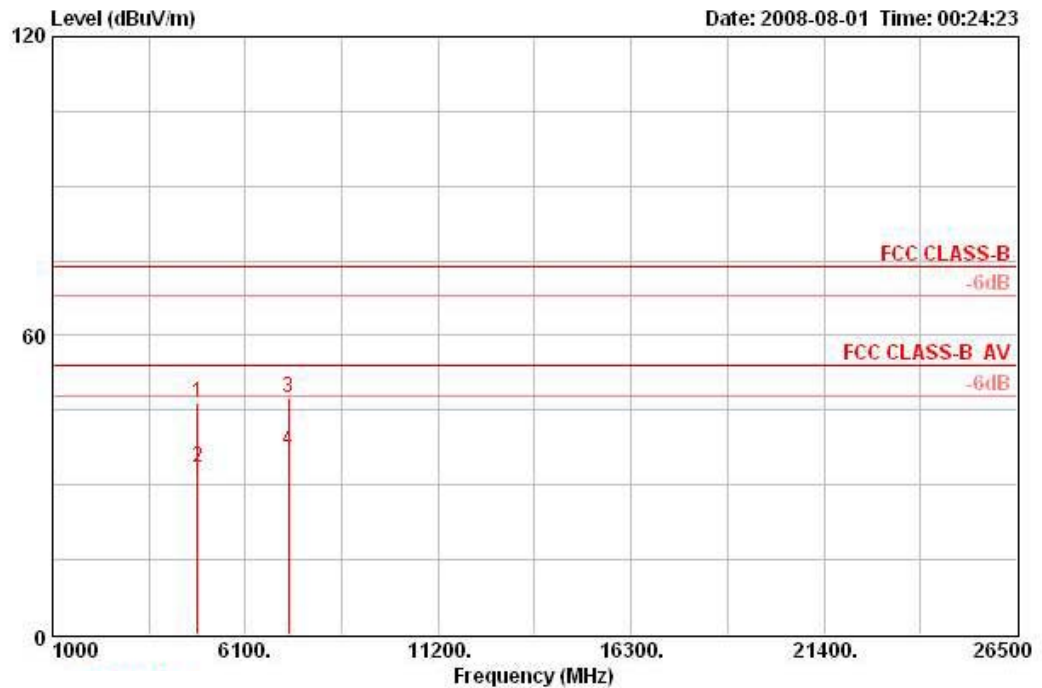

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4823.040	46.38	-7.62	54.00	41.85	33.39	35.25	6.39	AVERAGE	HORIZONTAL	217	100
2	4824.000	33.54	-20.46	54.00	29.01	33.39	35.25	6.39	Peak	HORIZONTAL	217	100
3	7236.060	47.67	-26.33	74.00	39.12	36.39	35.80	7.96	PEAK	HORIZONTAL	142	100
4	7236.060	37.09	-16.91	54.00	28.54	36.39	35.80	7.96	AVERAGE	HORIZONTAL	142	100


Vertical

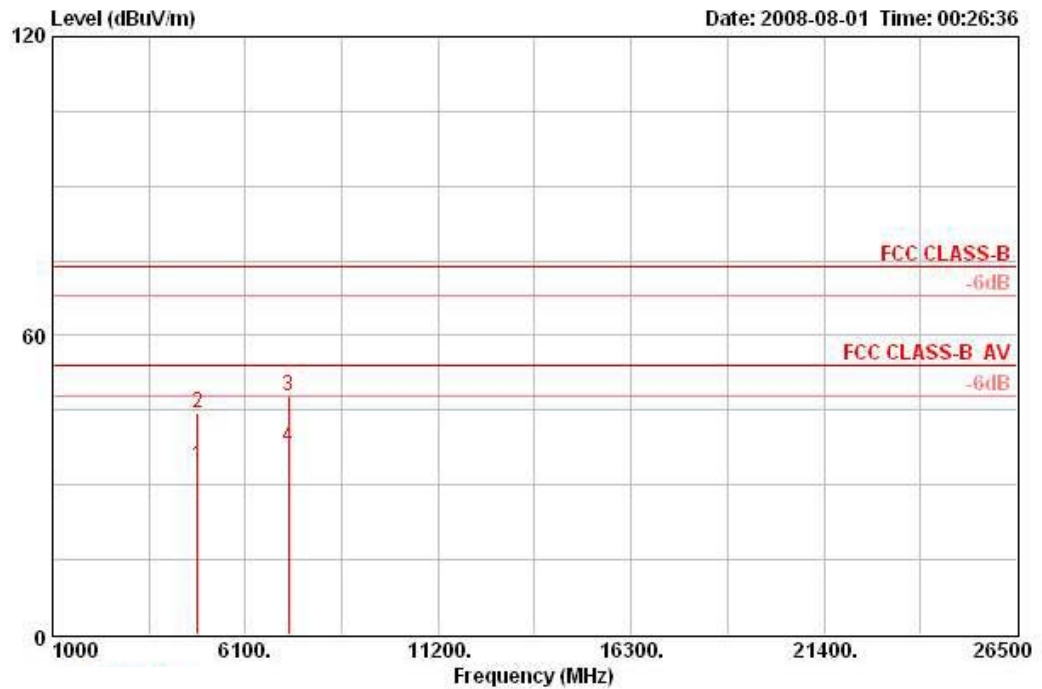

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4824.960	33.69	-20.31	54.00	29.16	33.39	35.25	6.39	AVERAGE	VERTICAL	138	100
2	4824.960	44.33	-29.67	74.00	39.80	33.39	35.25	6.39	PEAK	VERTICAL	138	100
3	7236.060	47.85	-26.15	74.00	39.30	36.39	35.80	7.96	PEAK	VERTICAL	3	100
4	7236.060	37.54	-16.46	54.00	28.99	36.39	35.80	7.96	AVERAGE	VERTICAL	3	8955


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 6 Ant. 6

Horizontal

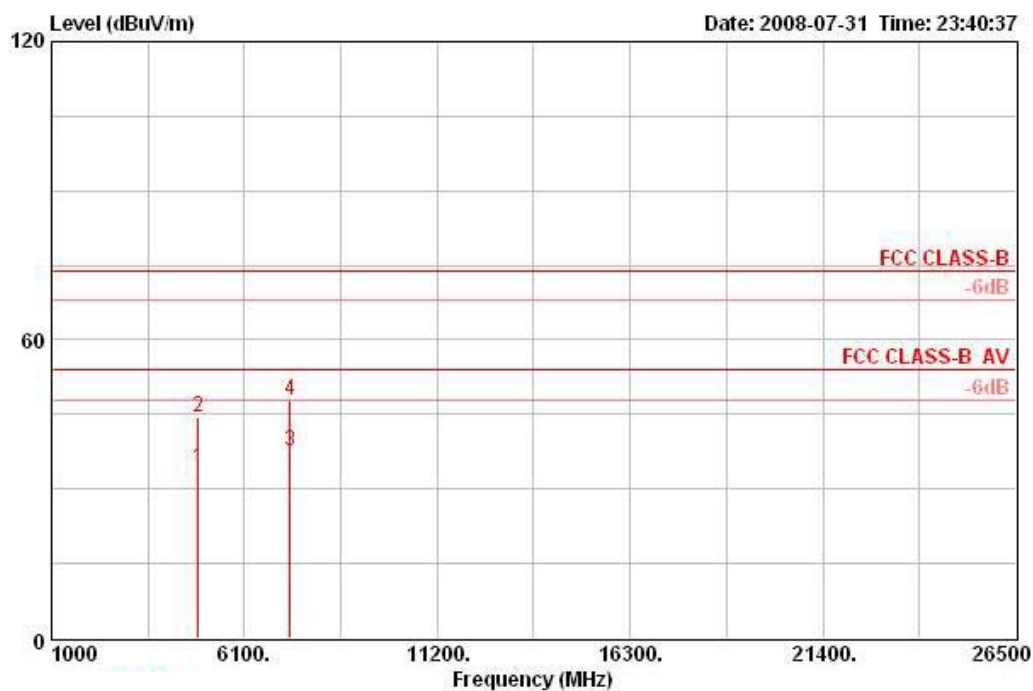

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4874.060	34.13	-19.87	54.00	29.34	33.48	35.25	6.56	AVERAGE	HORIZONTAL	96	100
2	4874.060	44.55	-29.45	74.00	39.76	33.48	35.25	6.56	PEAK	HORIZONTAL	96	100
3	7311.200	37.72	-16.28	54.00	29.01	36.50	35.78	7.99	AVERAGE	HORIZONTAL	277	100
4	7311.200	47.78	-26.22	74.00	39.06	36.50	35.78	7.99	PEAK	HORIZONTAL	277	100


Vertical

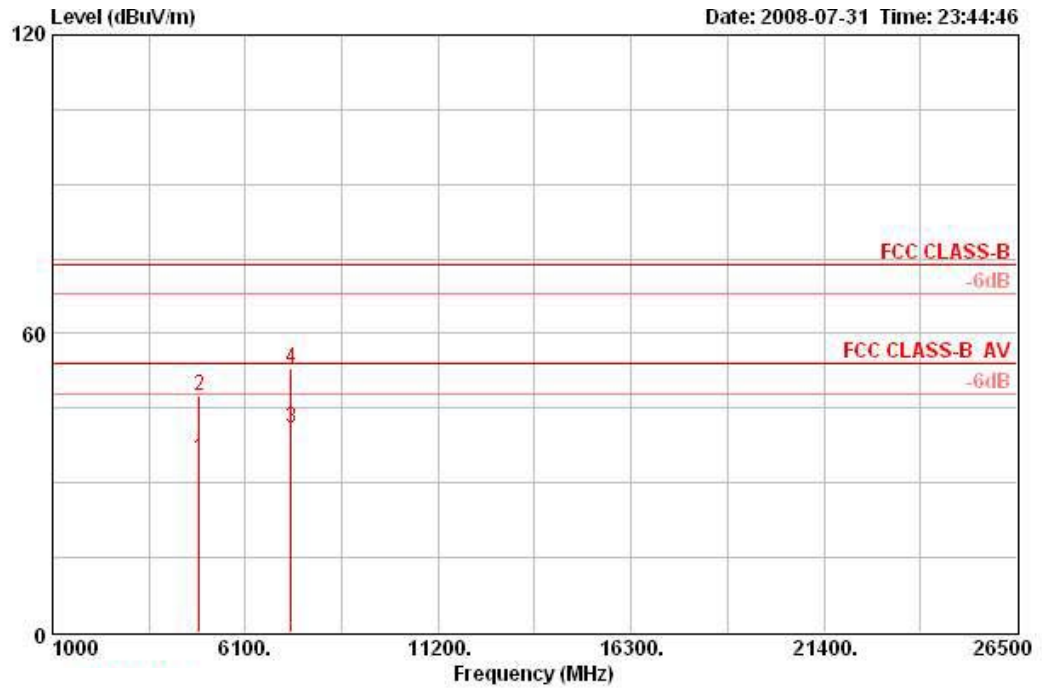

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4874.260	35.03	-18.97	54.00	30.23	33.48	35.25	6.56	AVERAGE	VERTICAL	226	115
2	4874.260	47.54	-26.46	74.00	42.74	33.48	35.25	6.56	PEAK	VERTICAL	226	115
3	7311.200	41.02	-12.98	54.00	32.31	36.50	35.78	7.99	AVERAGE	VERTICAL	163	115
4	7311.200	52.85	-21.15	74.00	44.13	36.50	35.78	7.99	PEAK	VERTICAL	163	115


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 9 Ant. 6

Horizontal

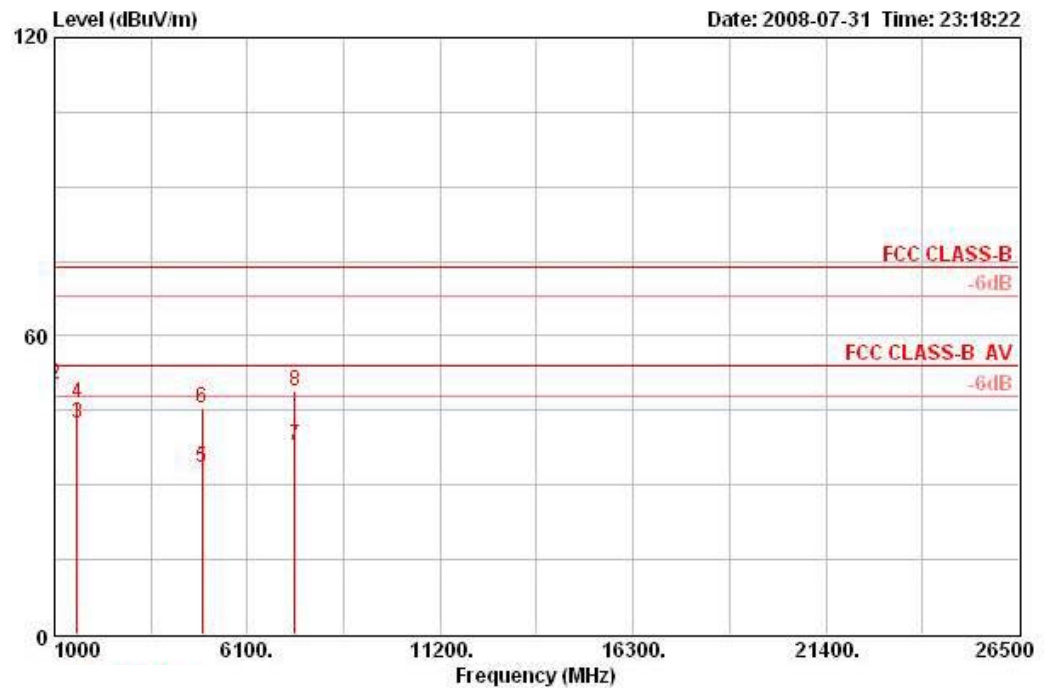

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	1000.060	44.23	-9.77	54.00	53.72	24.00	36.14	2.65	AVERAGE	HORIZONTAL	71	100
2	1000.060	50.10	-23.90	74.00	59.59	24.00	36.14	2.65	PEAK	HORIZONTAL	71	100
3	1600.000	42.33	-11.67	54.00	48.15	25.90	35.04	3.32	AVERAGE	HORIZONTAL	215	100
4	1600.000	46.52	-27.48	74.00	52.34	25.90	35.04	3.32	PEAK	HORIZONTAL	215	100
5	4904.000	33.53	-20.47	54.00	28.58	33.54	35.24	6.65	AVERAGE	HORIZONTAL	259	100
6	4904.000	45.57	-28.43	74.00	40.62	33.54	35.24	6.65	PEAK	HORIZONTAL	259	100
7	7356.460	37.81	-16.19	54.00	28.96	36.58	35.76	8.03	AVERAGE	HORIZONTAL	85	100
8	7356.460	48.77	-25.23	74.00	39.92	36.58	35.76	8.03	PEAK	HORIZONTAL	85	100


Vertical

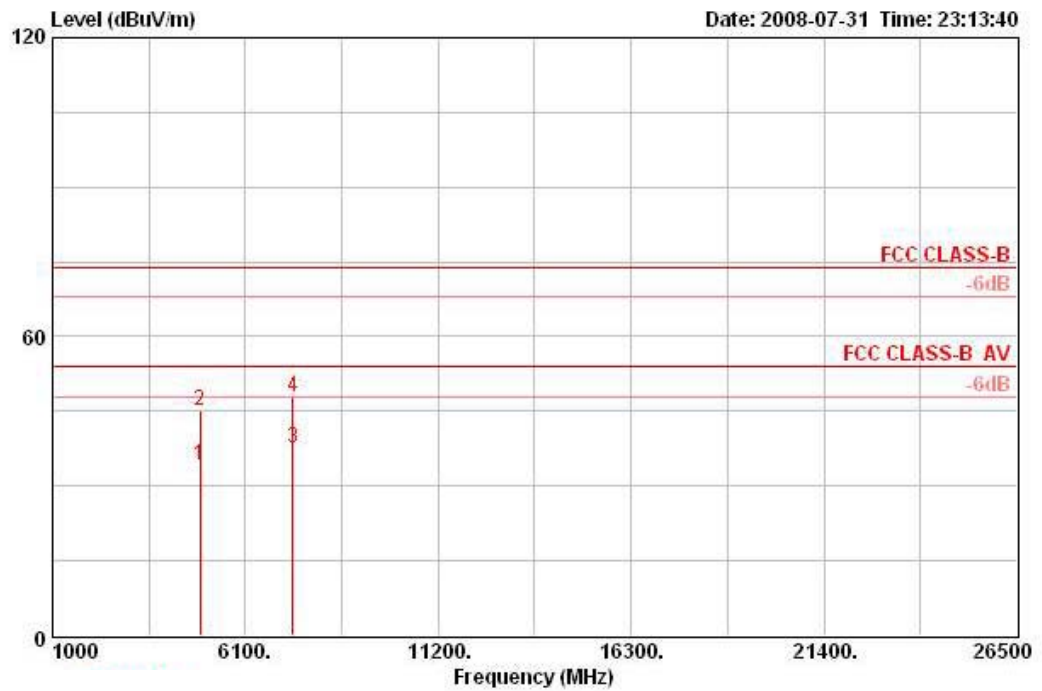

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4900.000	34.17	-19.83	54.00	29.26	33.51	35.24	6.65	AVERAGE	VERTICAL	232	100
2	4900.000	45.00	-29.00	74.00	40.08	33.51	35.24	6.65	PEAK	VERTICAL	232	100
3	7357.540	37.59	-16.41	54.00	28.74	36.58	35.76	8.03	AVERAGE	VERTICAL	74	100
4	7357.540	48.00	-26.00	74.00	39.15	36.58	35.76	8.03	PEAK	VERTICAL	74	100


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 1 Ant. 6

Horizontal

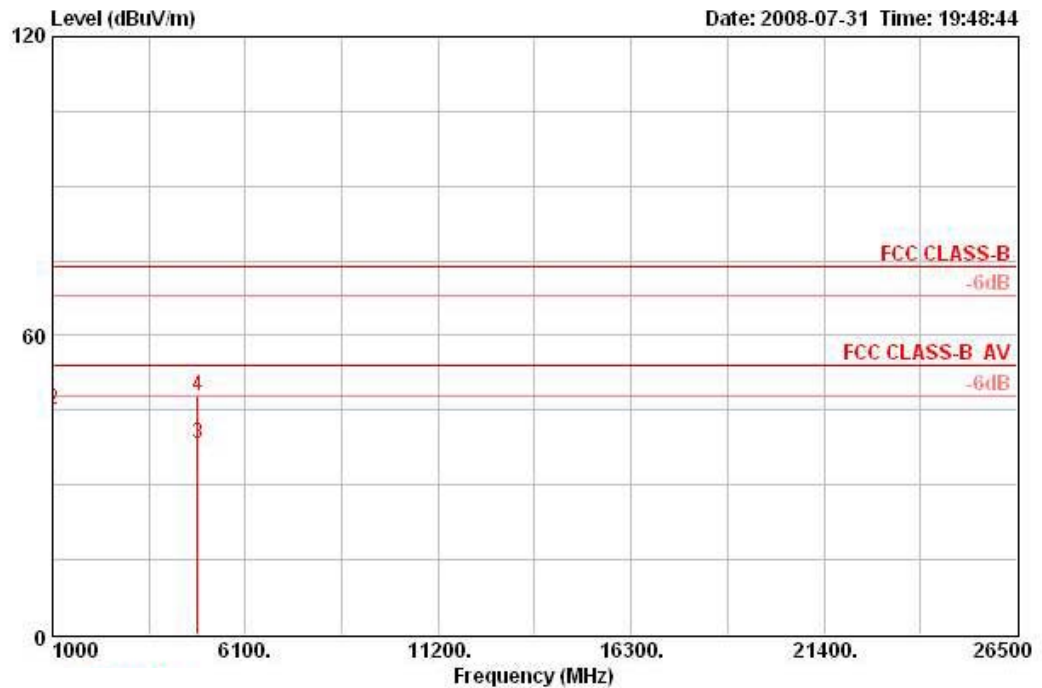

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	1000.040	49.93	-24.07	74.00	59.42	24.00	36.14	2.65	PEAK	HORIZONTAL	77	154
2	1000.040	44.98	-9.02	54.00	54.47	24.00	36.14	2.65	AVERAGE	HORIZONTAL	77	154
3	4823.960	38.45	-15.55	54.00	33.92	33.39	35.25	6.39	AVERAGE	HORIZONTAL	195	114
4	4823.960	47.81	-26.19	74.00	43.28	33.39	35.25	6.39	PEAK	HORIZONTAL	195	114


Vertical

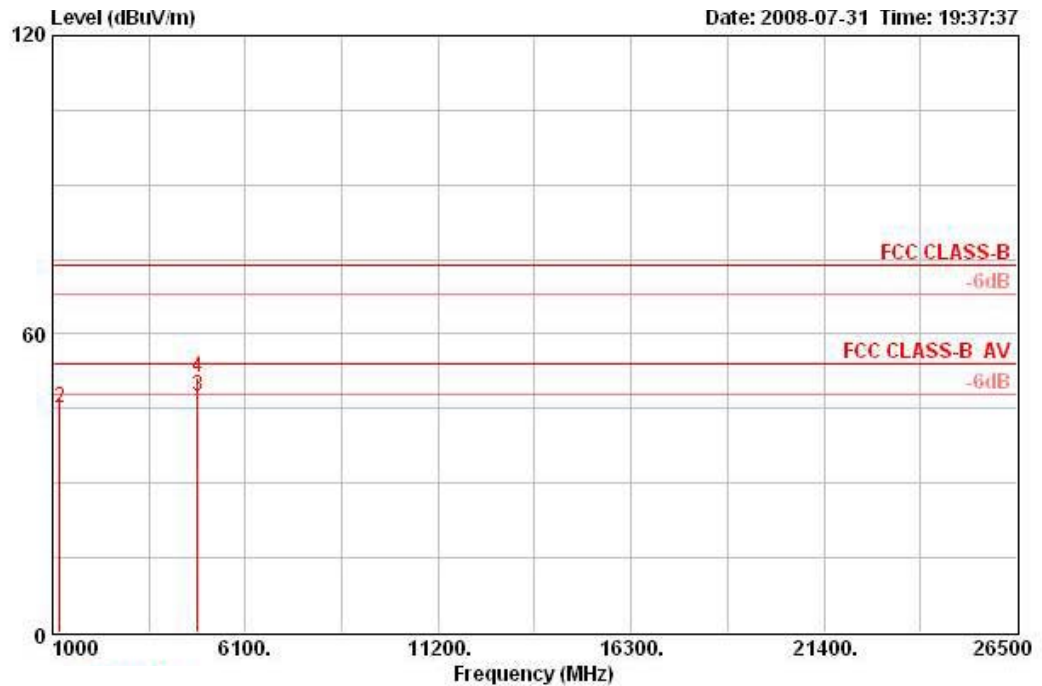

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	1200.040	42.97	-11.03	54.00	51.18	24.66	35.72	2.85	AVERAGE	VERTICAL	237	100
2	1200.040	45.13	-28.87	74.00	53.34	24.66	35.72	2.85	PEAK	VERTICAL	237	100
3	4824.000	47.53	-6.47	54.00	43.00	33.39	35.25	6.39	AVERAGE	VERTICAL	358	100
4	4824.000	51.30	-22.70	74.00	46.77	33.39	35.25	6.39	PEAK	VERTICAL	358	100


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 6 Ant. 6

Horizontal

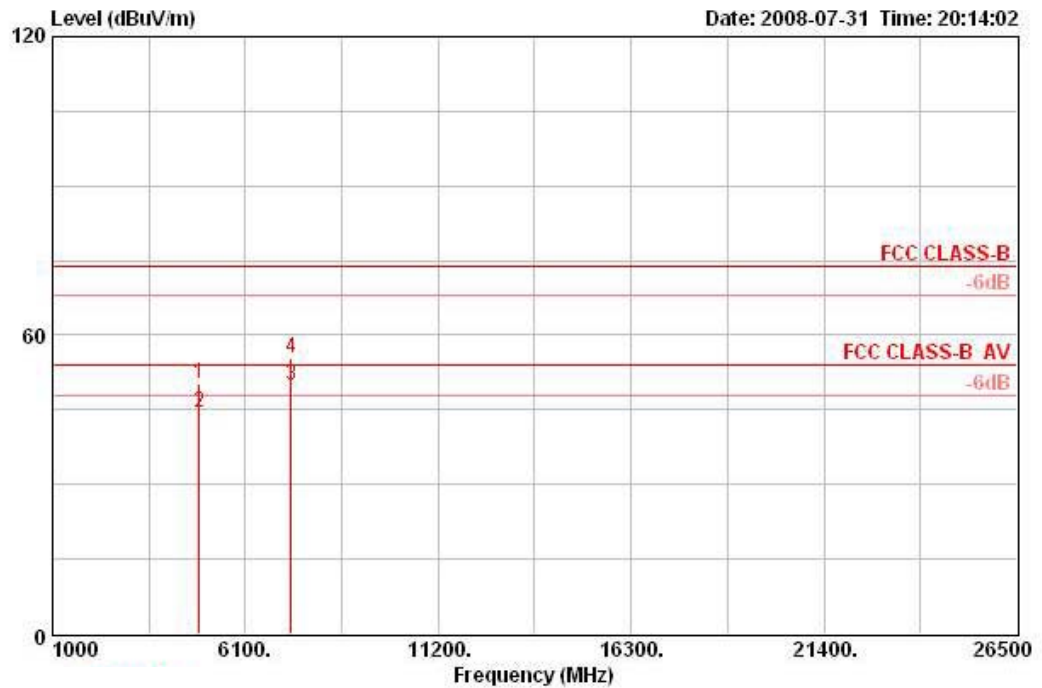

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4873.900	50.28	-23.72	74.00	45.48	33.48	35.25	6.56	PEAK	HORIZONTAL	120	100
2	4873.900	44.33	-9.67	54.00	39.53	33.48	35.25	6.56	AVERAGE	HORIZONTAL	120	100
3	7313.600	49.82	-4.18	54.00	41.08	36.50	35.77	8.01	AVERAGE	HORIZONTAL	145	166
4	7313.600	55.40	-18.60	74.00	46.66	36.50	35.77	8.01	PEAK	HORIZONTAL	145	166


Vertical

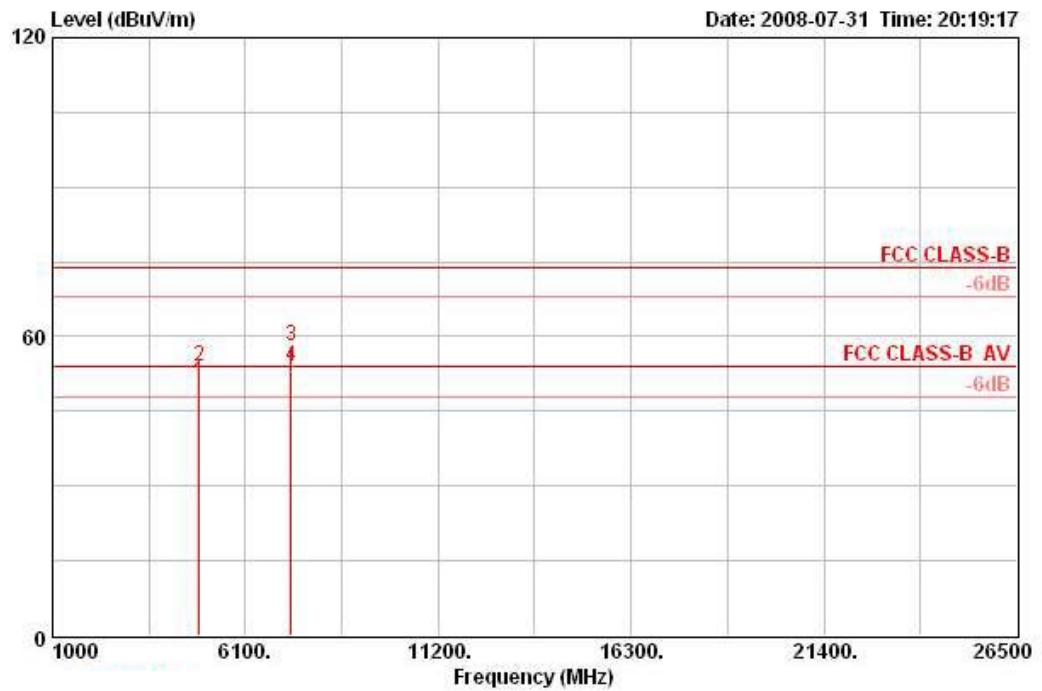

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 ☺	4873.980	51.09	-2.91	54.00	46.29	33.48	35.25	6.56	AVERAGE	VERTICAL	232	101
2	4873.980	54.03	-19.97	74.00	49.24	33.48	35.25	6.56	PEAK	VERTICAL	232	101
3	7313.500	58.09	-15.91	74.00	49.35	36.50	35.77	8.01	PEAK	VERTICAL	212	100
4 ☺	7313.800	53.87	-0.13	54.00	45.13	36.50	35.77	8.01	AVERAGE	VERTICAL	212	100


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 11 Ant. 6

Horizontal

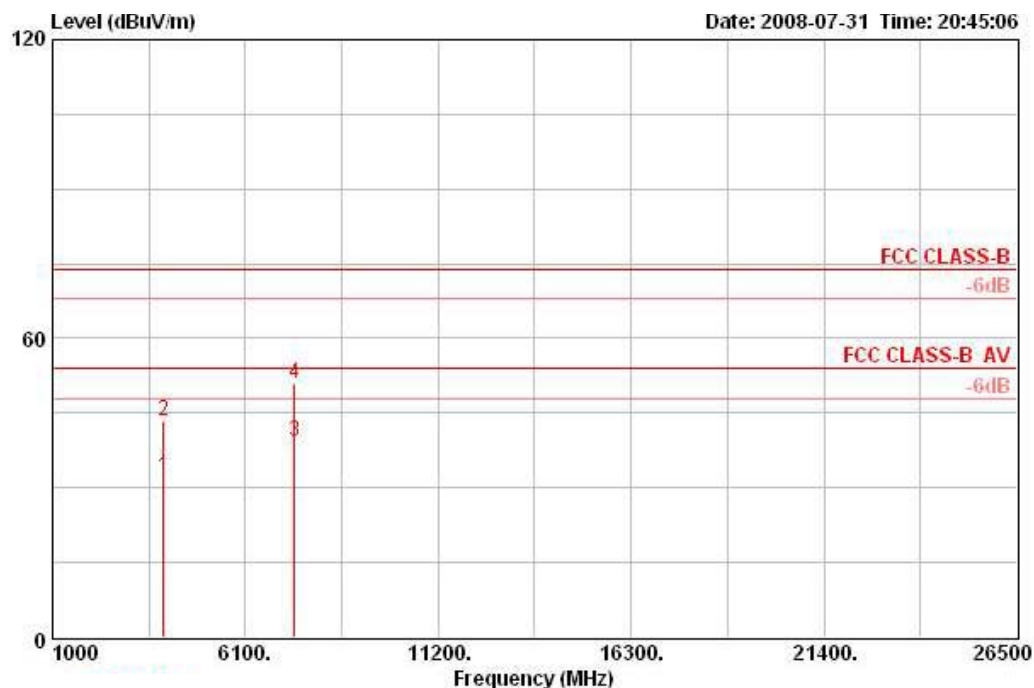

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	3924.000	32.09	-21.91	54.00	30.16	32.45	35.08	4.56	AVERAGE	HORIZONTAL	123	100
2	3924.000	43.42	-30.58	74.00	41.49	32.45	35.08	4.56	PEAK	HORIZONTAL	123	100
3	7388.800	39.27	-14.73	54.00	30.31	36.63	35.73	8.06	AVERAGE	HORIZONTAL	187	45
4	7388.800	50.97	-23.03	74.00	42.01	36.63	35.73	8.06	PEAK	HORIZONTAL	187	100


Vertical

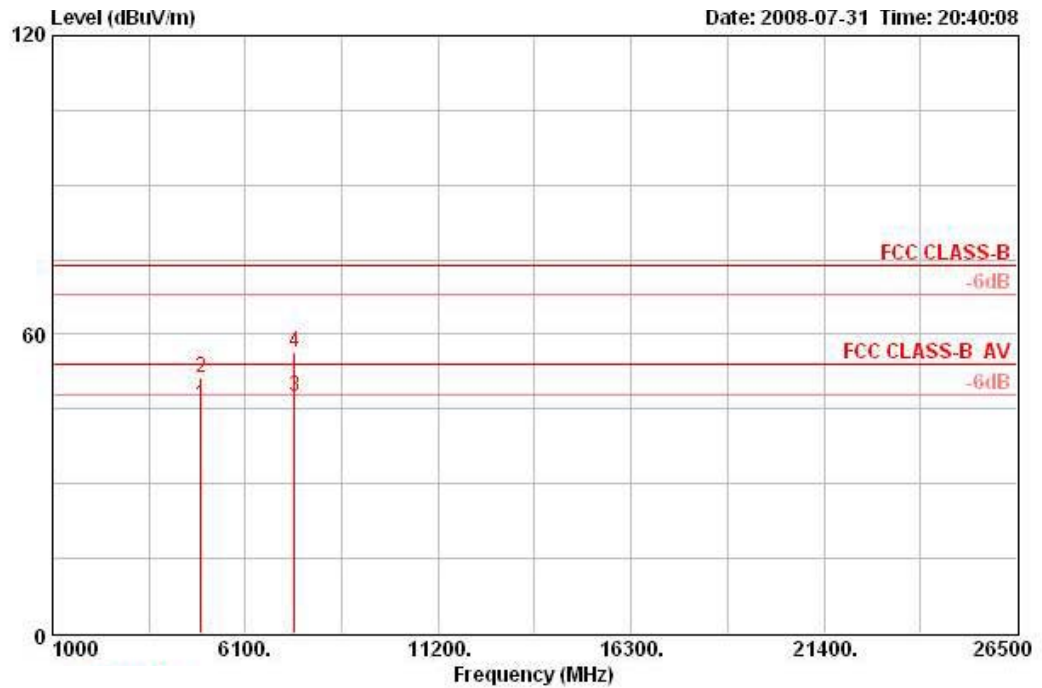

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4924.000	45.94	-8.06	54.00	40.88	33.58	35.24	6.73	AVERAGE	VERTICAL	232	100
2	4924.000	51.25	-22.75	74.00	46.18	33.58	35.24	6.73	PEAK	VERTICAL	232	100
3	7388.800	47.40	-6.60	54.00	38.44	36.63	35.73	8.06	AVERAGE	VERTICAL	221	100
4	7388.800	56.34	-17.66	74.00	47.37	36.63	35.73	8.06	PEAK	VERTICAL	221	100


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 1 Ant. 6

Horizontal

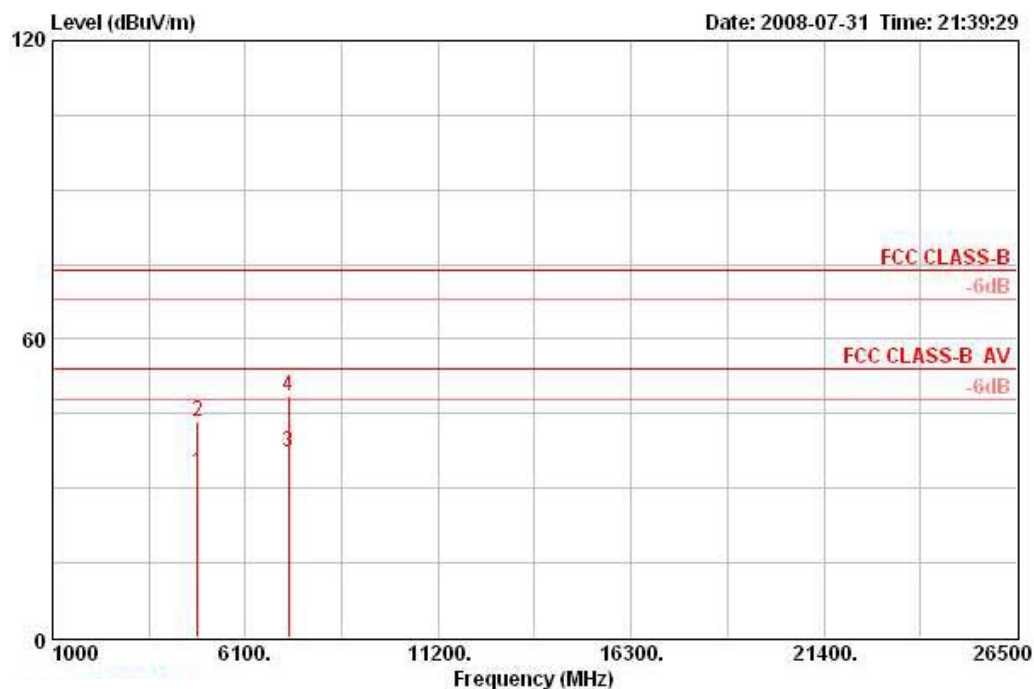

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4844.000	33.27	-20.73	54.00	28.62	33.42	35.25	6.47	AVERAGE	HORIZONTAL	79	45
2	4844.000	43.30	-30.70	74.00	38.65	33.42	35.25	6.47	PEAK	HORIZONTAL	79	100
3	7236.020	37.12	-16.88	54.00	28.57	36.39	35.80	7.96	AVERAGE	HORIZONTAL	198	100
4	7236.020	48.48	-25.52	74.00	39.93	36.39	35.80	7.96	PEAK	HORIZONTAL	198	100


Vertical

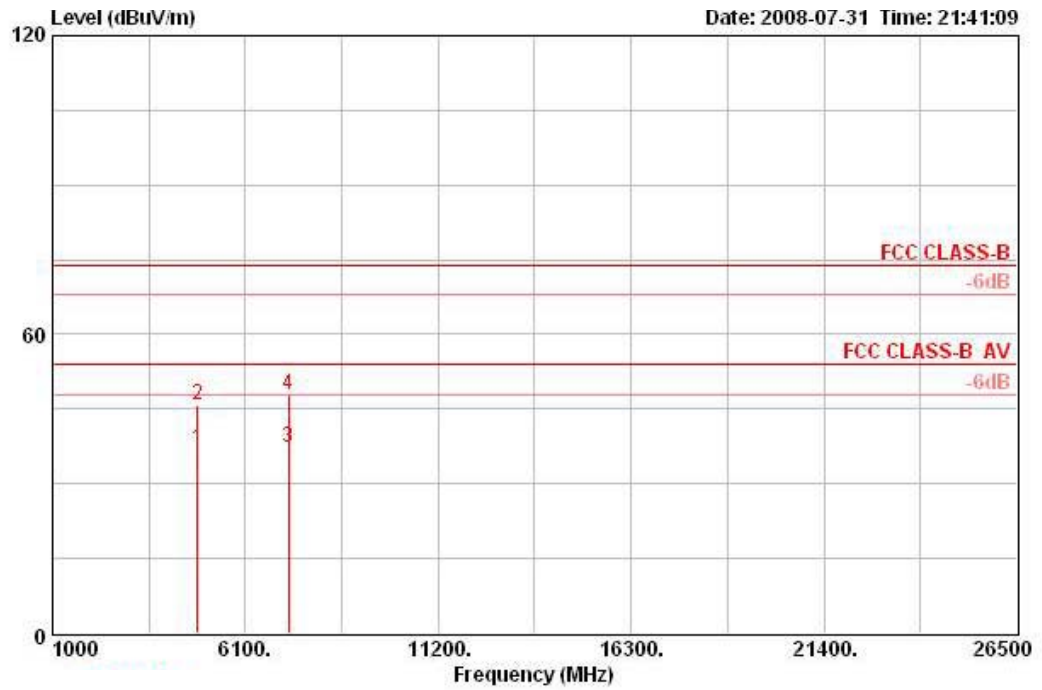

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4824.100	37.05	-16.95	54.00	32.52	33.39	35.25	6.39	AVERAGE	VERTICAL	232	100
2	4824.100	45.84	-28.16	74.00	41.31	33.39	35.25	6.39	PEAK	VERTICAL	232	100
3	7236.020	37.23	-16.77	54.00	28.68	36.39	35.80	7.96	AVERAGE	VERTICAL	296	100
4	7236.020	47.82	-26.18	74.00	39.28	36.39	35.80	7.96	PEAK	VERTICAL	296	100


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 6 Ant. 6

Horizontal

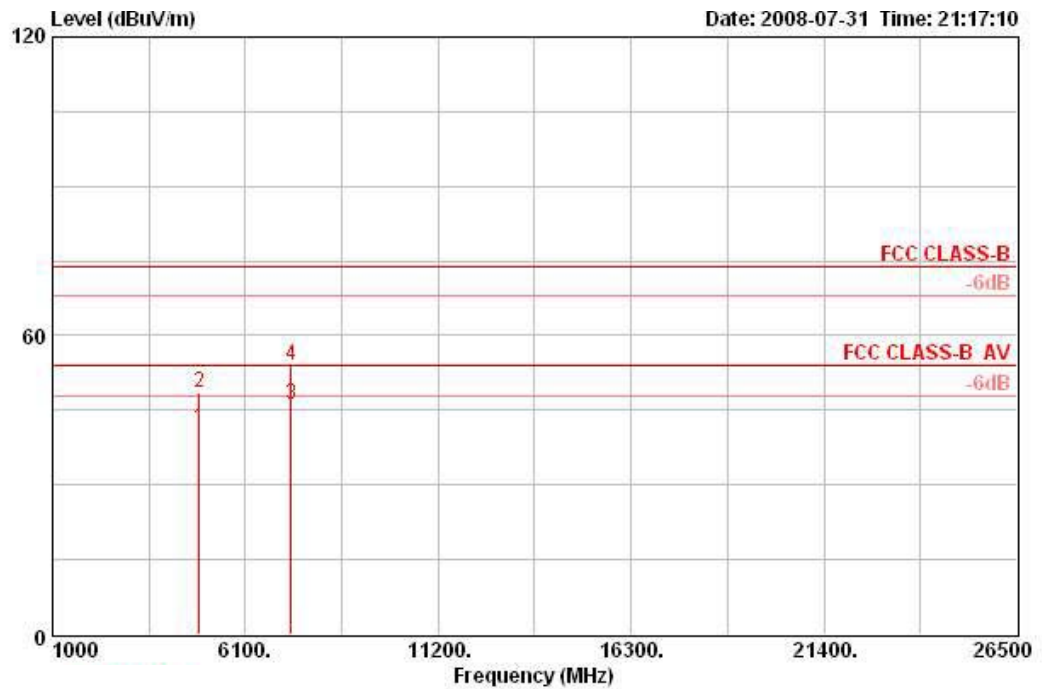

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4873.960	41.34	-12.66	54.00	36.54	33.48	35.25	6.56	AVERAGE	HORIZONTAL	169	131
2	4873.960	48.55	-25.45	74.00	43.75	33.48	35.25	6.56	PEAK	HORIZONTAL	169	131
3	7311.700	46.22	-7.78	54.00	37.48	36.50	35.77	8.01	AVERAGE	HORIZONTAL	185	172
4	7311.700	53.92	-20.08	74.00	45.18	36.50	35.77	8.01	PEAK	HORIZONTAL	185	172


Vertical

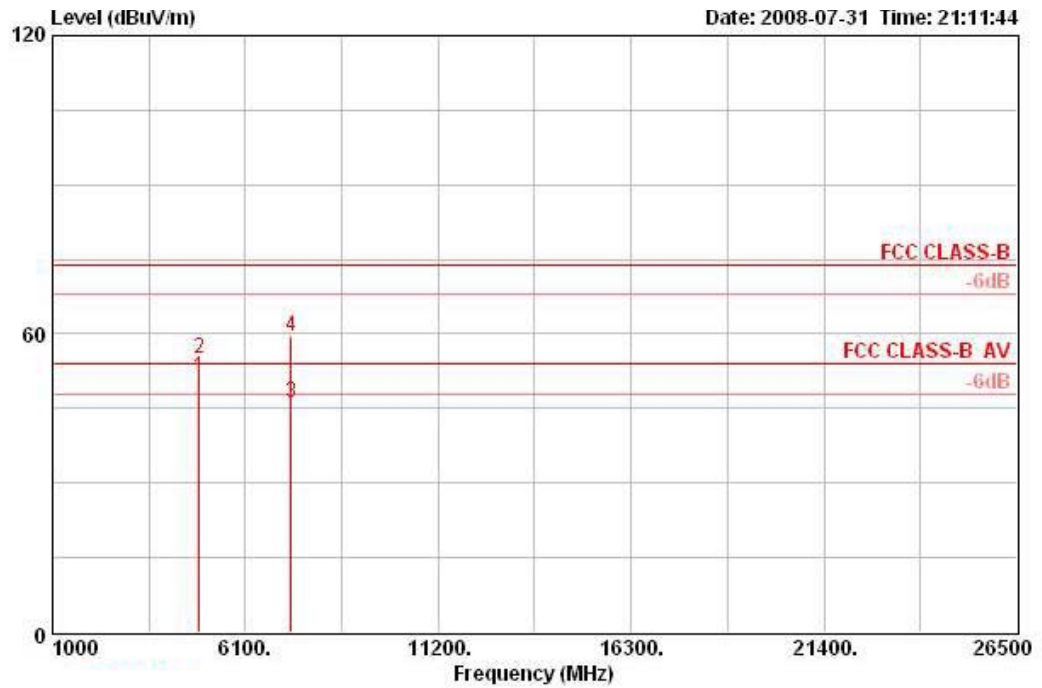

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 ☺	4873.910	51.29	-2.71	54.00	46.49	33.48	35.25	6.56	AVERAGE	VERTICAL	232	100
2	4873.910	55.14	-18.86	74.00	50.34	33.48	35.25	6.56	PEAK	VERTICAL	232	100
3 ☺	7310.200	46.11	-7.89	54.00	37.40	36.50	35.78	7.99	AVERAGE	VERTICAL	164	100
4	7310.200	59.49	-14.51	74.00	50.78	36.50	35.78	7.99	PEAK	VERTICAL	164	100


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 11 Ant. 6

Horizontal

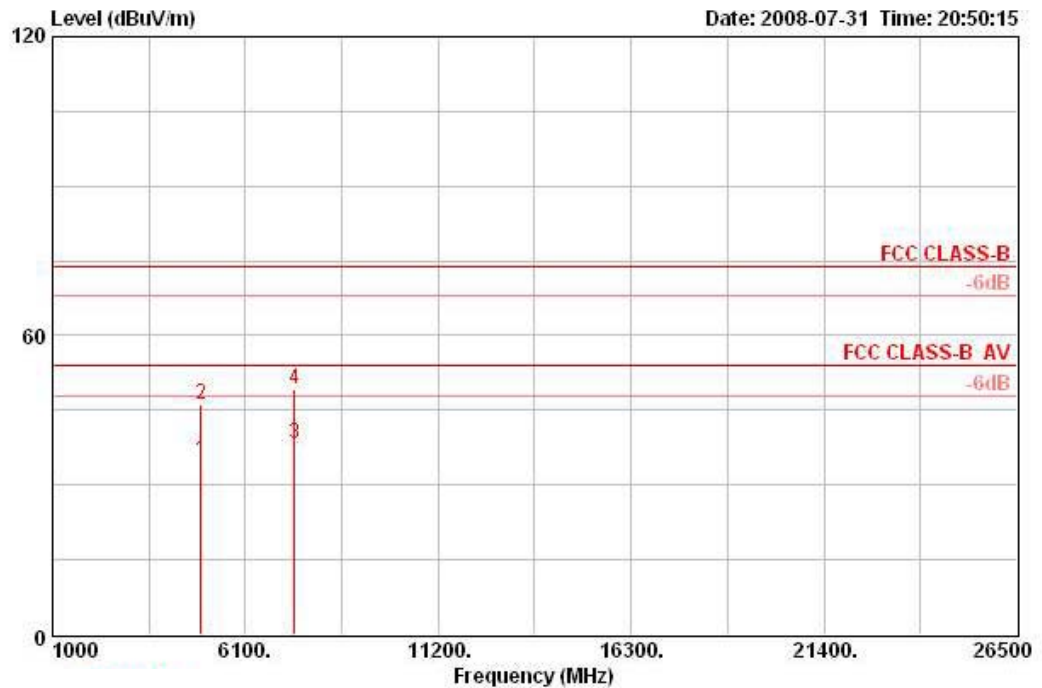

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4924.000	34.91	-19.09	54.00	29.85	33.58	35.24	6.73	AVERAGE	HORIZONTAL	244	100
2	4924.000	46.12	-27.88	74.00	41.05	33.58	35.24	6.73	PEAK	HORIZONTAL	244	100
3	7388.760	38.30	-15.70	54.00	29.34	36.63	35.73	8.06	AVERAGE	HORIZONTAL	67	100
4	7388.760	49.20	-24.80	74.00	40.24	36.63	35.73	8.06	PEAK	HORIZONTAL	67	100

Vertical

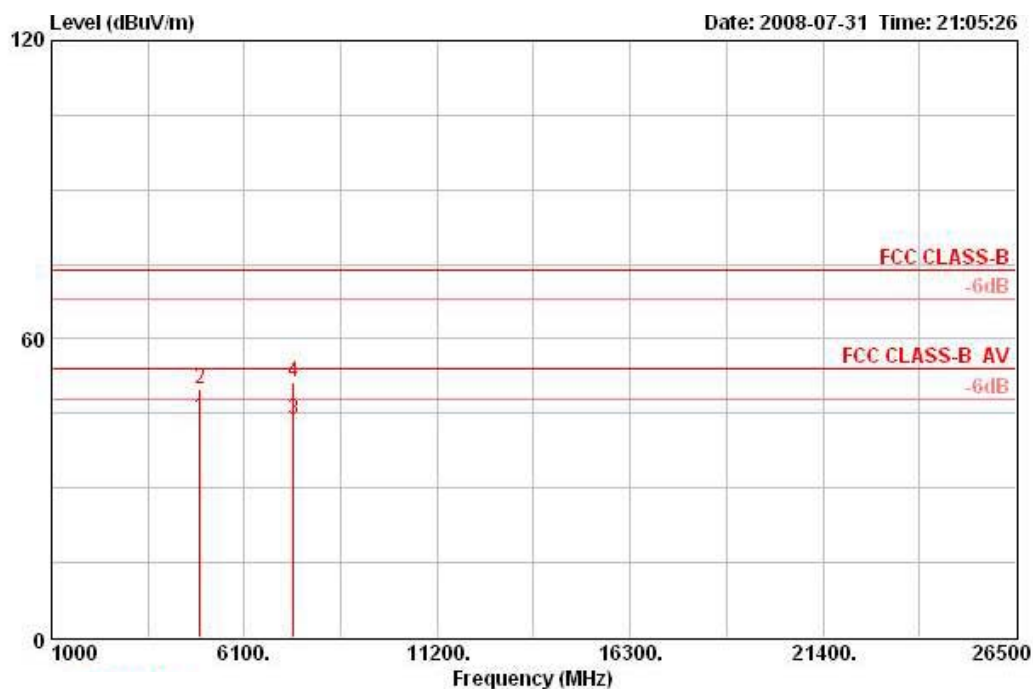

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4924.000	44.25	-9.75	54.00	39.19	33.58	35.24	6.73	AVERAGE	VERTICAL	232	100
2	4924.000	49.99	-24.01	74.00	44.92	33.58	35.24	6.73	PEAK	VERTICAL	232	100
3	7388.900	43.76	-10.24	54.00	34.79	36.63	35.73	8.06	AVERAGE	VERTICAL	184	100
4	7388.900	51.45	-22.55	74.00	42.48	36.63	35.73	8.06	PEAK	VERTICAL	184	100

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.