


MOTOROLA

 ACCREDITED
 TESTING CERT # 2518.01

DECLARATION OF COMPLIANCE SAR ASSESSMENT Part 2 of 2
Enterprise Mobility Solutions
EME Test Laboratory
 8000 West Sunrise Blvd
 Fort Lauderdale, FL. 33322.

Date of Report: 12/09/10
Report Revision: A
Report ID: SAR rpt_H98KGD9PW5AN (MNUD1002A)_
 H98KGH9PW7AN (MNUD1006A)_Rev.A
 101209_SR8455/8397/8396

Responsible Engineer: Michael Sailsman (Senior Staff Eng.)
Report Author: Michael Sailsman (Senior Staff Eng.)
Date/s Tested: 6/6/10 – 6/30/10; 8/27/10-10/27/10
Manufacturer/Location: Motorola, Schaumburg
Sector/Group/Div.: G&PS
Date submitted for test: 6/7/10 & 8/6/10
DUT Description: 136-174 MHz 1-6W 6.25kHz/12.5kHz /25kHz, Basic Top and Dual Display Models. Capable of digital and analog FM transmission. Also capable of TDMA transmission and BT
Test TX mode(s): CW (PTT); BT
Max. Power output: 6.6 Watts (VHF); not to exceed 10.0mW (BT)
Nominal Power: 6.0 Watts (VHF); 10mW(BT)
Tx Frequency Bands: 136-174 MHz (VHF); 2.402-2.480 GHz (BT)
Signaling type: FM and TDMA; FHSS(BT)
Model(s) Tested: H98KGD9PW5AN(MNUD1001A), H98KGD9PW5AN (MNUD1002A), H98KGH9PW7AN (MNUD1006A)
Model(s) Certified: H98KGD9PW5AN (MNUD1002A), H98KGH9PW7AN (MNUD1006A)
Serial Number(s): NUD1002A0052, NUD1002A0039, NUD1002A0068, NUD1006A0181
Classification: Occupational/Controlled
FCC ID: AZ489FT3829; Rule part 90 (150.8-173.4 MHz); Rule part 15 (2402-2480MHz)
IC: 109U-89FT3829

* Refer to section 15 of part 1 for highest SAR summary results.

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8 W/kg averaged over 1 gram per the requirements of 47 CFR 2.1093(d). The 10 grams result is not applicable to FCC filing.
 The test results clearly demonstrate compliance with ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz), Health Physics 74, 494-522 RF Exposure limits of 10 W/kg averaged over 10grams of contiguous tissue.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 3.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola EME Laboratory.
 I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.

Signature on file
Deanna Zakharia
EMS EME Lab Senior Resource Manager,
Laboratory Director

Approval Date: 12/09/10

Certification Date: 12/09/10

Certification No.:

Appendix D

Test System Verification Scans

The SAR result indicated on the Manufacture's Calibrated certificates for dipoles D2450V2 S/N 704, D300V2 S/N 1001 and D300V2 S/N 1002 were not used due to the following:

-- The IEEE1528-2003 and the FCC OET-65 Supplement C, System Verification section recommends that the measured 1-g SAR should be within 10% of the expected target values specified for the specific phantom and RF source used in the system verification measurement.

-- SPEAG calibration certificate indicates that the allowed tolerance for these dipoles are higher than +/- 10% (e.g. up to 3.15 +/-18.1% at k=2 for the D300V2 S/N 1001, 3.08 +/- 17% at k=2 for the D300V2 S/N 1002 and 52.9 +/- 17.0% at k=2 for D2450V2 S/N 704).

-- The allowed tolerances for the probes are also higher than +/- 10% (e.g. 13.3.0% and 14.4% k=2 at 300 MHz and 11% k=2 at 2450MHz for the probes being used to assess this product).

Due to probe, dipole and system tolerances noted above, the lab averages dipole results across multiple probes to establish a set of averaged targets for each dipole using the following procedure:

- The System Validation was conducted per IEEE1528-2003 and IEC62209-2 Edition 1.0 2010-03 standards using the simulated head tissue and multiple probes that are available and applicable for the dipole under test to verify the System Validation. Results for this dipole are within the measurement system uncertainty of the reference SAR values indicated within IEC62209-2 Edition 1.0 2010-03 when using flat phantom with 2mm thickness is used. These results then are averaged and used as the target for the daily system performance check when the simulated head tissue is used.
- The dipole targets for the body are set immediately following the same process noted above. Since there is no standard referencing the SAR values for the System Validation using the simulated body tissue, the compliant System Validation results using the simulated head tissue are used to justify the use of the System Validation results using the simulated body tissue due to the same setup except for the simulated tissue type.

The targets set in this report were conducted following the above process.

Note that the targets set for the tested dipoles, when using the simulated head tissue, meets the requirement for the system validation per IEEE1528-2003, IEC62209-2 Edition 1.0 2010-03 standards, and the difference between these results and the results from the manufacture's dipole calibration certificates are up to -12.06% for 300 MHz dipole S/N 1001, -14.29% for 300 MHz dipole S/N 1002 and -7.52% for 2450 MHz dipole which are well within the measurement uncertainty of the measurement system at k=2.

To assess the isotropic characteristics of the measurement probe, a probe rotation was performed using the "Rotation (1D)" function in the DASY software with a measured isotropy tolerance of +/- 0.5dB.

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 6/6/2010 5:10:08 AM

Robot# / Run#: DASY4-FL-1 / HvH-SYSP-300H-100606-01
Phantom# / Tissue Temp.: OVAL1016 / 21.3 (C)
Dipole Model# / Serial#: D300V2 / 1001
TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.77 mW/g (1g)
Adjusted SAR (1W): 2.85 mW/g (1g)
Percent from Target (+/-): 2.8 % (1g)
Rotation (1D): 0.17 dB

Note:
Prior to recording the reported SAR values below, the measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported: 0.712 mW/g (1g); 0.477 mW/g (10g)



Comments:

Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(6.68, 6.68, 6.68)
Electronics: DAE3 Sn374, Calibrated: 4/15/2010
Duty Cycle: 1:1, Medium parameters used: f = 300 MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 45.7$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 29.3 V/m; Power Drift = -0.000501 dB
Peak SAR (extrapolated) = 1.10 W/kg
SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.476 mW/g
Maximum value of SAR (measured) = 0.759 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 29.3 V/m; Power Drift = -0.000501 dB
Motorola Fast SAR: SAR(1 g) = 0.715 mW/g; SAR(10 g) = 0.518 mW/g
Maximum value of SAR (interpolated) = 0.759 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 0.753 mW/g

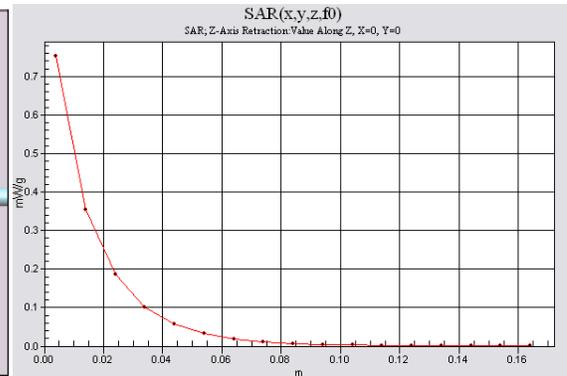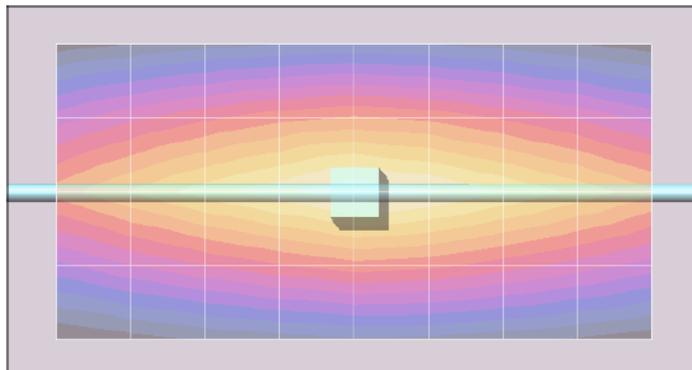

Motorola Enterprise Mobility Solutions EME Laboratory

Date/Time: 6/7/2010 11:44:48 AM

Robot# / Run#: DASY4-FL-1 / HvH-SYSP-300B-100607-01
 Phantom# / Tissue Temp.: OVAL1022 / 21.4 (C)
 Dipole Model# / Serial#: D300V2 / 1001
 TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.48 mW/g (1g)
 Adjusted SAR (1W): 2.66 mW/g (1g)
 Percent from Target (+/-): 7.1 % (1g)
 Rotation (1D): 0.18 dB

Note:
 Prior to recording the reported SAR values below, the measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported: 0.664 mW/g (1g); 0.447 mW/g (10g)



Comments:

Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(6.9, 6.9, 6.9)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 300$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 55.8$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 27.5 V/m; Power Drift = -0.00978 dB
 Peak SAR (extrapolated) = 1.03 W/kg
 SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.447 mW/g
 Maximum value of SAR (measured) = 0.708 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 27.5 V/m; Power Drift = -0.00978 dB
 Motorola Fast SAR: SAR(1 g) = 0.668 mW/g; SAR(10 g) = 0.484 mW/g
 Maximum value of SAR (interpolated) = 0.708 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 0.706 mW/g

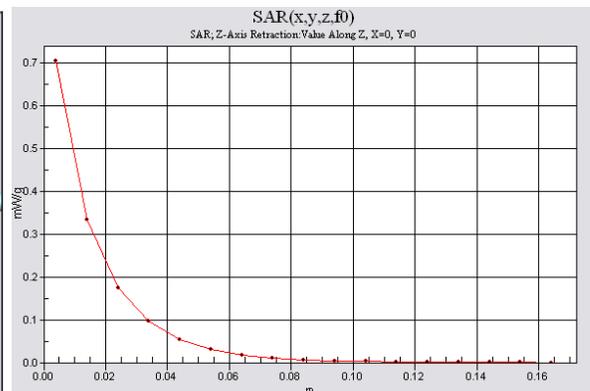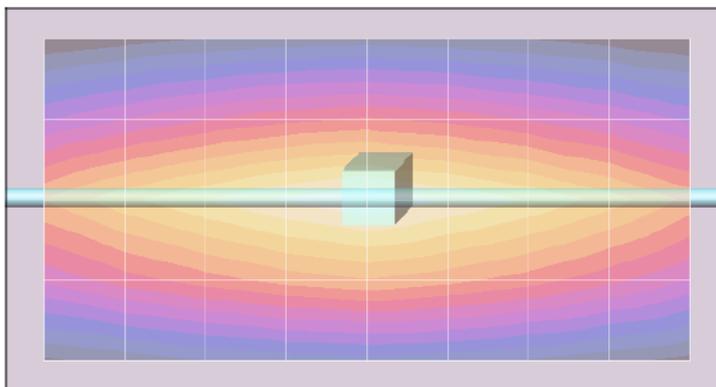

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 6/9/2010 10:16:20 AM

Robot# / Run#: DASY4-FL-1 / HvH-SYSP-300B-100609-01
Phantom# / Tissue Temp.: OVAL1022 / 20.5 (C)
Dipole Model# / Serial#: D300V2 / 1001
TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.48 mW/g (1g)
Adjusted SAR (1W): 2.68 mW/g (1g)
Percent from Target (+/-): 8.2 % (1g)
Rotation (1D): 0.18 dB

Note:
Prior to recording the reported SAR values below, the measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported: 0.671 mW/g (1g); 0.453 mW/g (10g)

Comments:

Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(6.9, 6.9, 6.9)
Electronics: DAE3 Sn374, Calibrated: 4/15/2010
Duty Cycle: 1:1, Medium parameters used: f = 300 MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 56.5$; $\rho = 1000$ kg/m³



System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.00855 dB
Peak SAR (extrapolated) = 1.04 W/kg
SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.453 mW/g
Maximum value of SAR (measured) = 0.717 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 27.7 V/m; Power Drift = 0.00855 dB
Motorola Fast SAR: SAR(1 g) = 0.675 mW/g; SAR(10 g) = 0.489 mW/g
Maximum value of SAR (interpolated) = 0.715 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 0.717 mW/g

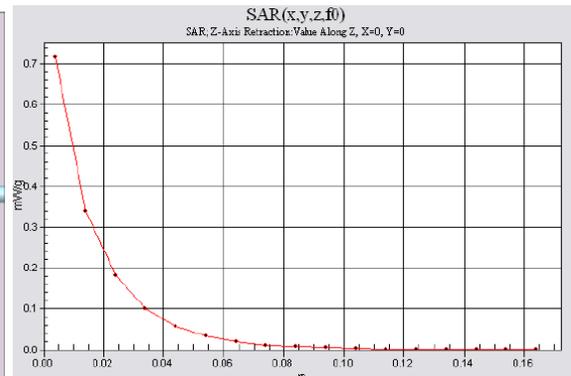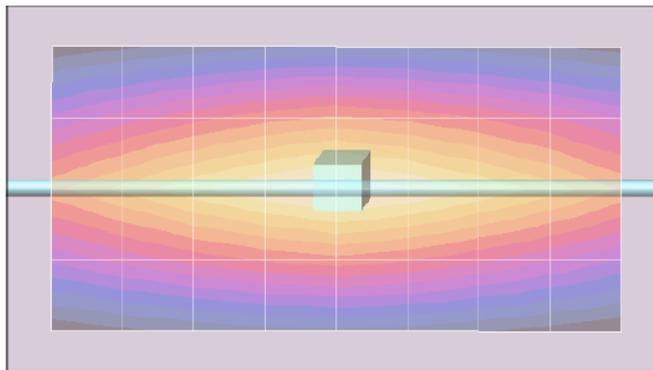

Motorola Enterprise Mobility Solutions EME Laboratory

Date/Time: 6/26/2010 5:12:01 AM

Robot# / Run#: DASY4-FL-1 / HvH-SYSP-300B-100626-01
 Phantom# / Tissue Temp.: OVAL1022 / 21.7 (C)
 Dipole Model# / Serial#: D300V2 / 1002
 TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.67 mW/g (1g)
 Adjusted SAR (1W): 2.56 mW/g (1g)
 Percent from Target (+/-): 4.3 % (1g)
 Rotation (1D): 0.083 dB

Note:
 Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.639 mW/g (1g); 0.433 mW/g (10g)

Comments:

Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(6.9, 6.9, 6.9)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 300$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 55.8$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 26.9 V/m; Power Drift = -0.00556 dB
 Peak SAR (extrapolated) = 0.981 W/kg
 SAR(1 g) = 0.639 mW/g; SAR(10 g) = 0.433 mW/g
 Maximum value of SAR (measured) = 0.681 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 26.9 V/m; Power Drift = -0.00556 dB
 Motorola Fast SAR: SAR(1 g) = 0.640 mW/g; SAR(10 g) = 0.464 mW/g
 Maximum value of SAR (interpolated) = 0.678 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.681 mW/g

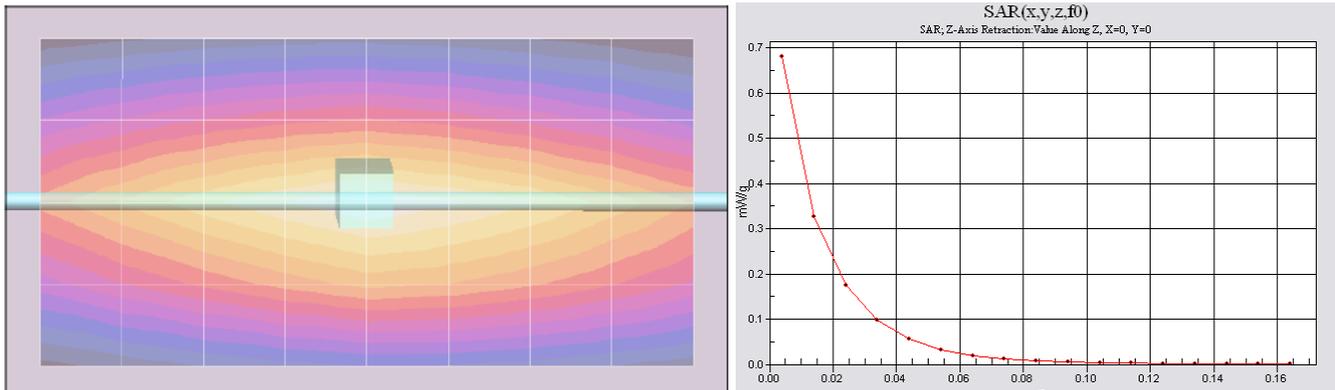

Motorola Enterprise Mobility Solutions EME Laboratory

Date/Time: 6/27/2010 5:14:26 AM

Robot# / Run#: DASY4-FL-1 / HvH-SYSP-300B-100627-01
 Phantom# / Tissue Temp.: OVAL1022 / 21.5 (C)
 Dipole Model# / Serial#: D300V2 / 1002
 TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.67 mW/g (1g)
 Adjusted SAR (1W): 2.50 mW/g (1g)
 Percent from Target (+/-): 6.5 % (1g)
 Rotation (1D): 0.085 dB

Note:
 Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.624 mW/g (1g); 0.425 mW/g (10g)

Comments:

Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(6.9, 6.9, 6.9)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010

Duty Cycle: 1:1, Medium parameters used: $f = 300$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 26.8 V/m; Power Drift = 0.00068 dB
 Peak SAR (extrapolated) = 0.953 W/kg
 SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.425 mW/g
 Maximum value of SAR (measured) = 0.664 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 26.8 V/m; Power Drift = 0.00068 dB
 Motorola Fast SAR: SAR(1 g) = 0.628 mW/g; SAR(10 g) = 0.455 mW/g
 Maximum value of SAR (interpolated) = 0.665 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.666 mW/g

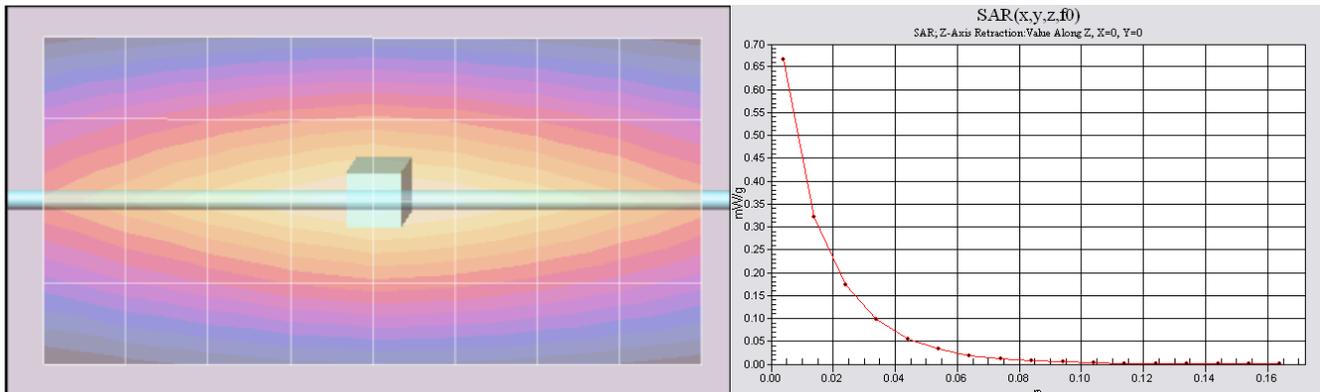

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 6/28/2010 12:42:40 PM

Robot# / Run#: DASY4-FL-1 / HvH-SYSP-300B-100628-01
 Phantom# / Tissue Temp.: OVAL1022 / 20.6 (C)
 Dipole Model# / Serial#: D300V2 / 1002
 TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.67 mW/g (1g)
 Adjusted SAR (1W): 2.52 mW/g (1g)
 Percent from Target (+/-): 5.5 % (1g)
 Rotation (1D): 0.081 dB

Note:
 Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.631 mW/g (1g); 0.430 mW/g (10g)


Comments:

Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(6.9, 6.9, 6.9)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 300$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 27.0 V/m; Power Drift = 0.00263 dB
 Peak SAR (extrapolated) = 0.963 W/kg
 SAR(1 g) = 0.631 mW/g; SAR(10 g) = 0.430 mW/g
 Maximum value of SAR (measured) = 0.672 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 27.0 V/m; Power Drift = 0.00263 dB
 Motorola Fast SAR: SAR(1 g) = 0.635 mW/g; SAR(10 g) = 0.460 mW/g
 Maximum value of SAR (interpolated) = 0.673 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 0.673 mW/g

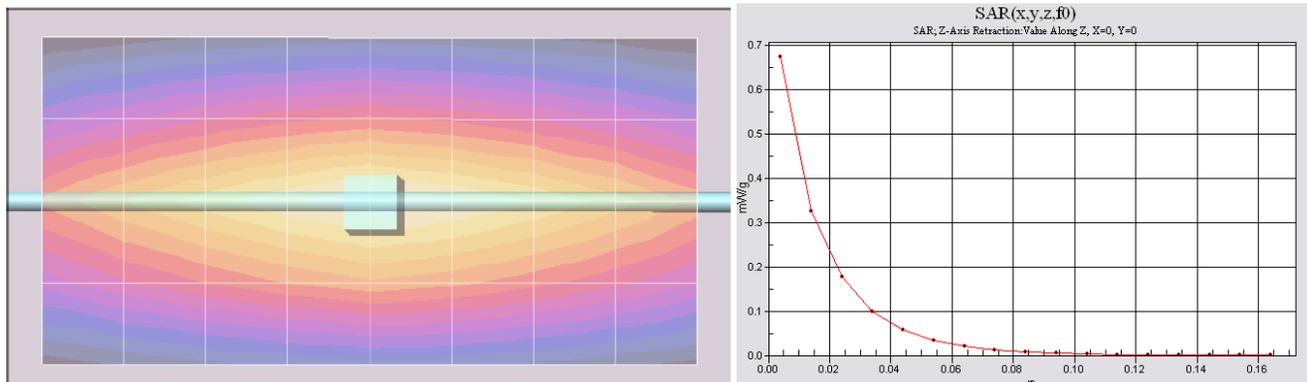

Motorola Enterprise Mobility Solutions EME Laboratory

Date/Time: 6/29/2010 12:23:57 PM

Robot# / Run#: DASY4-FL-1 / HvH-SYSP-300B-100629-01
 Phantom# / Tissue Temp.: OVAL1022 / 21.7 (C)
 Dipole Model# / Serial#: D300V2 / 1002
 TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.67 mW/g (1g)
 Adjusted SAR (1W): 2.53 mW/g (1g)
 Percent from Target (+/-): 5.3 % (1g)
 Rotation (1D): 0.079 dB

Note:
 Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.


Reported SAR: 0.632 mW/g (1g); 0.429 mW/g (10g)

Comments:
 Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(6.9, 6.9, 6.9)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 300$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 55.6$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 26.8 V/m; Power Drift = -0.00593 dB
 Peak SAR (extrapolated) = 0.969 W/kg
 SAR(1 g) = 0.632 mW/g; SAR(10 g) = 0.429 mW/g
 Maximum value of SAR (measured) = 0.673 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 26.8 V/m; Power Drift = -0.00593 dB
 Motorola Fast SAR: SAR(1 g) = 0.637 mW/g; SAR(10 g) = 0.462 mW/g
 Maximum value of SAR (interpolated) = 0.675 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 0.672 mW/g

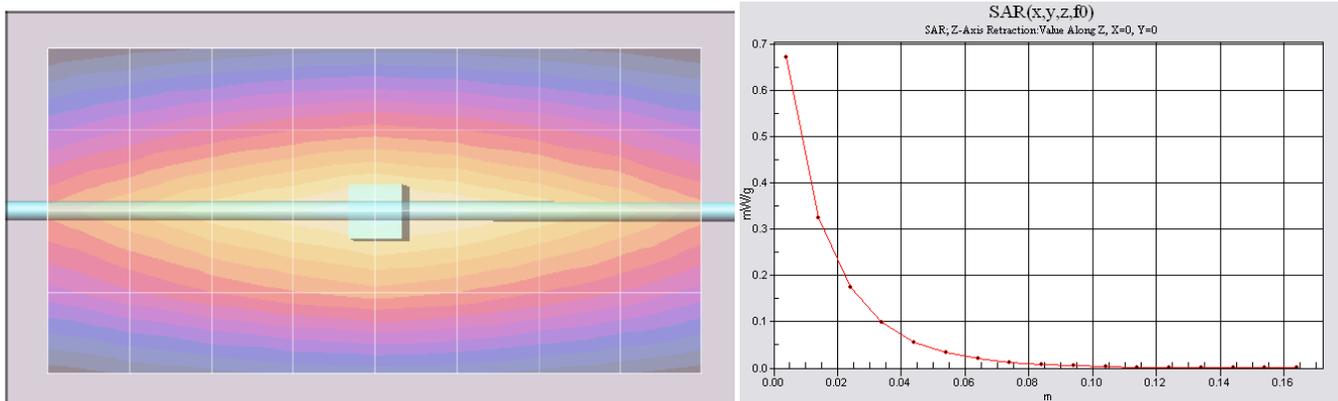

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 8/29/2010 12:19:32 PM

Robot# / Run#: DASY4-FL-2 / MeC-SYSP-2450B-100829-01
Phantom# / Tissue Temp.: OVAL1019 / 20.8 (C)
Dipole Model# / Serial#: D2450V2 / 704
TX Freq. / Start power: 2450 (MHz) / 50 (mW)

Target SAR (1W): 55.27 mW/g (1g)
Adjusted SAR (1W): 56.20 mW/g (1g)
Percent from Target (+/-): 1.7 % (1g)
Rotation (1D): 0.054 dB

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 2.81 mW/g (1g); 1.32 mW/g (10g)

Comments:

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(4.18, 4.18, 4.18)
Electronics: DAE4 Sn729, Calibrated: 3/10/2010

Duty Cycle: 1:1, Medium parameters used: f = 2450 MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm



Reference Value = 40.3 V/m; Power Drift = -0.0183 dB
Peak SAR (extrapolated) = 5.62 W/kg
SAR(1 g) = 2.81 mW/g; SAR(10 g) = 1.32 mW/g
Maximum value of SAR (measured) = 3.14 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 40.3 V/m; Power Drift = -0.0183 dB
Motorola Fast SAR: SAR(1 g) = 2.76 mW/g; SAR(10 g) = 1.18 mW/g
Maximum value of SAR (interpolated) = 3.37 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 3.20 mW/g

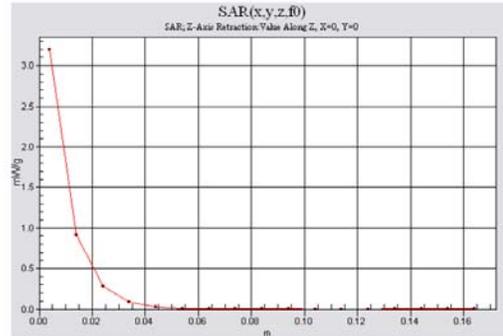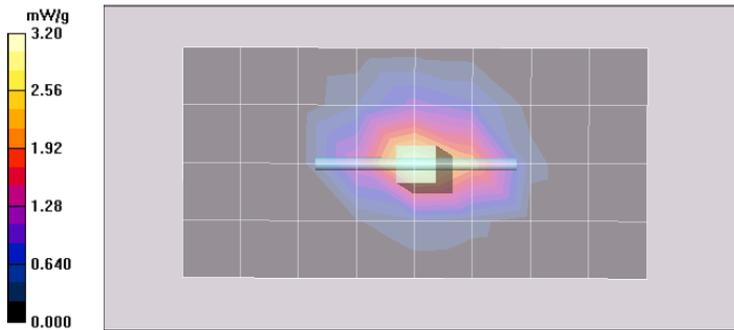

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 6/30/2010 9:07:48 AM

Robot# / Run#: DASY4-FL-1 / HvH-SYSP-300B-100630-01
Phantom# / Tissue Temp.: OVAL1022 / 21.6 (C)
Dipole Model# / Serial#: D300V2 / 1002
TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.67 mW/g (1g)
Adjusted SAR (1W): 2.49 mW/g (1g)
Percent from Target (+/-): 6.7 % (1g)
Rotation (1D): 0.083 dB

Note:
Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.623 mW/g (1g); 0.424 mW/g (10g)

Comments:

Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(6.9, 6.9, 6.9)
Electronics: DAE3 Sn374, Calibrated: 4/15/2010
Duty Cycle: 1:1, Medium parameters used: $f = 300$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm



Reference Value = 26.8 V/m; Power Drift = 0.00191 dB
Peak SAR (extrapolated) = 0.949 W/kg
SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.424 mW/g
Maximum value of SAR (measured) = 0.662 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 26.8 V/m; Power Drift = 0.00191 dB
Motorola Fast SAR: SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.455 mW/g
Maximum value of SAR (interpolated) = 0.662 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.663 mW/g

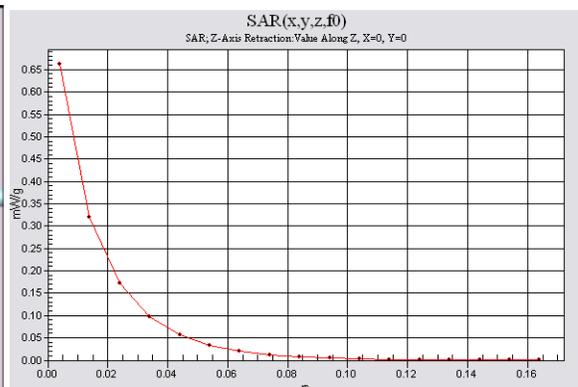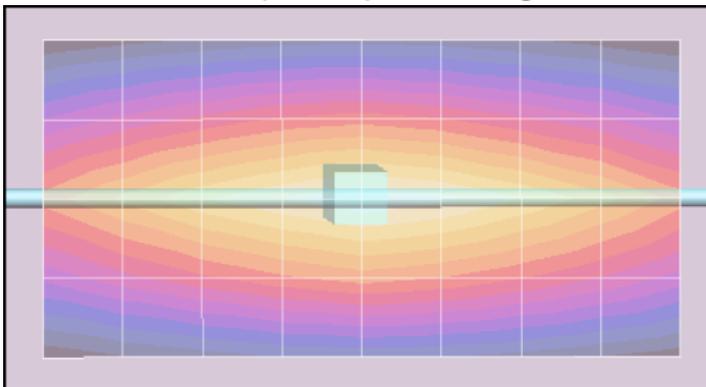

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 8/31/2010 8:42:09 AM

Robot# / Run#: DASY4-FL-2 / JsT-SYSP-2450H-100831-01
Phantom# / Tissue Temp.: OVAL1022 / 19.9 (C)
Dipole Model# / Serial#: D2450V2 / 704
TX Freq. / Start power: 2450 (MHz) / 30 (mW)

Target SAR (1W): 57.20 mW/g (1g)
Adjusted SAR (1W): 55.67 mW/g (1g)
Percent from Target (+/-): 2.7% (1g)
Rotation (1D): 0.029 dB

Note:
Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 1.67 mW/g (1g); 0.776 mW/g (10g)

Comments:

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(4.42, 4.42, 4.42)
Electronics: DAE4 Sn729, Calibrated: 3/10/2010
Duty Cycle: 1:1, Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 37.3$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 32.8 V/m; Power Drift = 0.0127 dB
Peak SAR (extrapolated) = 3.44 W/kg
SAR(1 g) = 1.67 mW/g; SAR(10 g) = 0.776 mW/g
Maximum value of SAR (measured) = 1.86 mW/g

System Performance Check/Dipole Area Scan 2 (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.90 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 1.93 mW/g

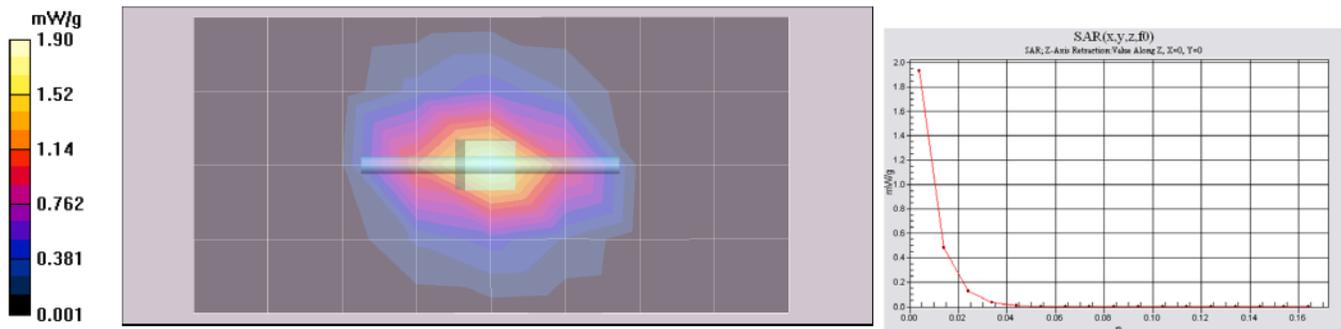

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 10/2/2010 9:06:30 AM

Robot# / Run#: DASY4-FL-2 / MeC-SYSP-300B-101002-02
Phantom# / Tissue Temp.: OVAL1022 / 21.5 (C)
Dipole Model# / Serial#: D300V2 / 1001
TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.53 mW/g (1g)
Adjusted SAR (1W): 2.48 mW/g (1g)
Percent from Target (+/-): 2.0 % (1g)
Rotation (1D): 0.038 dB

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.620 mW/g (1g); 0.414 mW/g (10g)



Comments:

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.1, 7.1, 7.1)
Electronics: DAE3 Sn374, Calibrated: 4/15/2010
Duty Cycle: 1:1, Medium parameters used: f = 300 MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 56.8$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 27.0 V/m; Power Drift = 0.00781 dB
Peak SAR (extrapolated) = 0.946 W/kg
SAR(1 g) = 0.613 mW/g; SAR(10 g) = 0.412 mW/g
Maximum value of SAR (measured) = 0.655 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 27.0 V/m; Power Drift = 0.00781 dB
Motorola Fast SAR: SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.446 mW/g
Maximum value of SAR (interpolated) = 0.654 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 0.650 mW/g

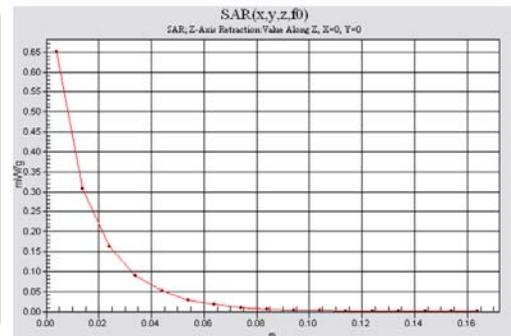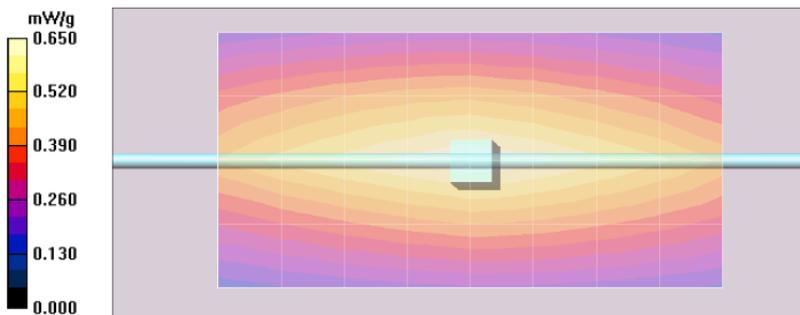

Motorola Enterprise Mobility Solutions EME Laboratory

Date/Time: 10/3/2010 11:21:56 AM

Robot# / Run#: DASY4-FL-2 / MeC-SYSP-300B-101003-01
 Phantom# / Tissue Temp.: OVAL1022 / 21.0 (C)
 Dipole Model# / Serial#: D300V2 / 1001
 TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.53 mW/g (1g)
 Adjusted SAR (1W): 2.51 mW/g (1g)
 Percent from Target (+/-): 0.9 % (1g)
 Rotation (1D): 0.041 dB

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.624 mW/g (1g); 0.423 mW/g (10g)


Comments:

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.1, 7.1, 7.1)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: f = 300 MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 57.6$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 27.0 V/m; Power Drift = -0.0663 dB
 Peak SAR (extrapolated) = 0.959 W/kg
 SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.423 mW/g
 Maximum value of SAR (measured) = 0.664 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 27.0 V/m; Power Drift = -0.0663 dB
 Motorola Fast SAR: SAR(1 g) = 0.627 mW/g; SAR(10 g) = 0.456 mW/g
 Maximum value of SAR (interpolated) = 0.661 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 0.657 mW/g

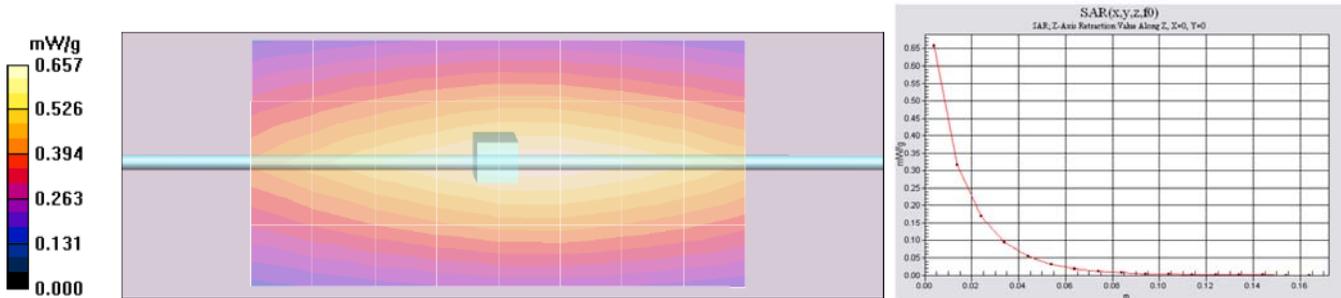

Motorola Enterprise Mobility Solutions EME Laboratory

Date/Time: 10/3/2010 2:40:34 PM

Robot# / Run#: DASY4-FL-2 / MeC-SYSP-2450B-101003-05
 Phantom# / Tissue Temp.: OVAL1018 / 20.6 (C)
 Dipole Model# / Serial#: D2450V2 / 704
 TX Freq. / Start power: 2450 (MHz) / 50 (mW)

Target SAR (1W): 55.27 mW/g (1g)
 Adjusted SAR (1W): 54.80 mW/g (1g)
 Percent from Target (+/-): 0.9 % (1g)
 Rotation (1D): 0.11 dB

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 2.74 mW/g (1g); 1.27 mW/g (10g)

Comments:

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(4.18, 4.18, 4.18)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 40.1 V/m; Power Drift = 0.0237 dB

Peak SAR (extrapolated) = 5.63 W/kg

SAR(1 g) = 2.73 mW/g; SAR(10 g) = 1.27 mW/g

Maximum value of SAR (measured) = 3.09 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm



Reference Value = 40.1 V/m; Power Drift = 0.0237 dB

Motorola Fast SAR: SAR(1 g) = 2.69 mW/g; SAR(10 g) = 1.14 mW/g

Maximum value of SAR (interpolated) = 3.21 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 3.15 mW/g

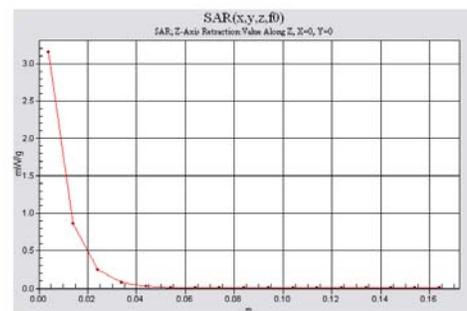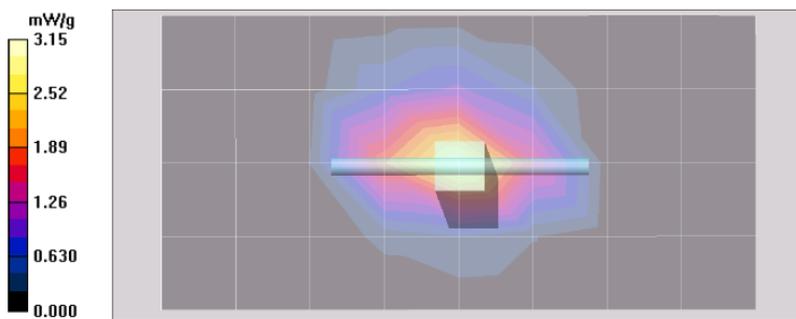

Motorola Enterprise Mobility Solutions EME Laboratory

Date/Time: 10/7/2010 8:08:00 AM

Robot# / Run#: DASY4-FL-2 / JsT-SYSP-300B-101007-03
 Phantom# / Tissue Temp.: OVAL1022 / 20.9 (C)
 Dipole Model# / Serial#: D300V2 / 1001
 TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.53 mW/g (1g)
 Adjusted SAR (1W): 2.51 mW/g (1g)
 Percent from Target (+/-): 0.9 % (1g)
 Rotation (1D): 0.053 dB

Note:
 Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.627 mW/g (1g); 0.423 mW/g (10g)

Comments:

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.1, 7.1, 7.1)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010

Duty Cycle: 1:1, Medium parameters used: f = 300 MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 57.1$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.0 V/m; Power Drift = 0.00157 dB

Peak SAR (extrapolated) = 0.959 W/kg

SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.422 mW/g



Maximum value of SAR (measured) = 0.666 mW/g

System Performance Check/Dipole Area Scan 2 (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.667 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.665 mW/g

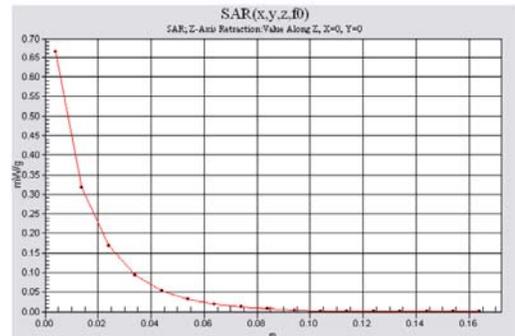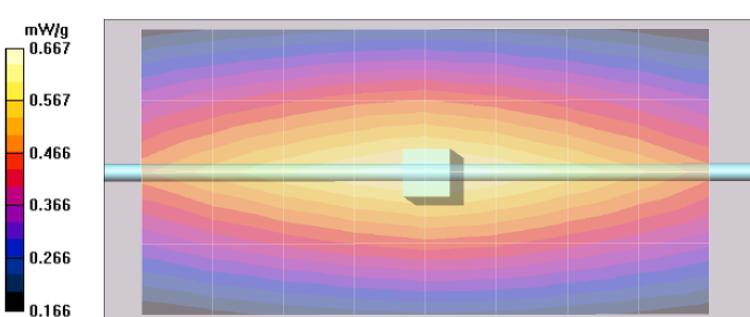

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 10/24/2010 2:02:44 PM

Robot# / Run#: DASY4-FL-3 / MeC-SYSP-300H-101024-01
 Phantom# / Tissue Temp.: OVAL1018 / 21.1 (C)
 Dipole Model# / Serial#: D300V2 / 1001
 TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.62 mW/g (1g)
 Adjusted SAR (1W): 2.58 mW/g (1g)
 Percent from Target (+/-): 1.5 % (1g)
 Rotation (1D): 0.059 dB

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.645 mW/g (1g); 0.433 mW/g (10g)


Comments:

Probe: ES3DV3 - SN3163, Calibrated: 4/23/2010, ConvF(7.2, 7.2, 7.2)
 Electronics: DAE4 Sn850, Calibrated: 8/18/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 300$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 46$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 28.0 V/m; Power Drift = 0.180 dB
 Peak SAR (extrapolated) = 0.995 W/kg
 SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.431 mW/g
 Maximum value of SAR (measured) = 0.684 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 28.0 V/m; Power Drift = 0.180 dB
Motorola Fast SAR: SAR(1 g) = 0.645 mW/g; SAR(10 g) = 0.466 mW/g
 Maximum value of SAR (interpolated) = 0.684 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 0.699 mW/g

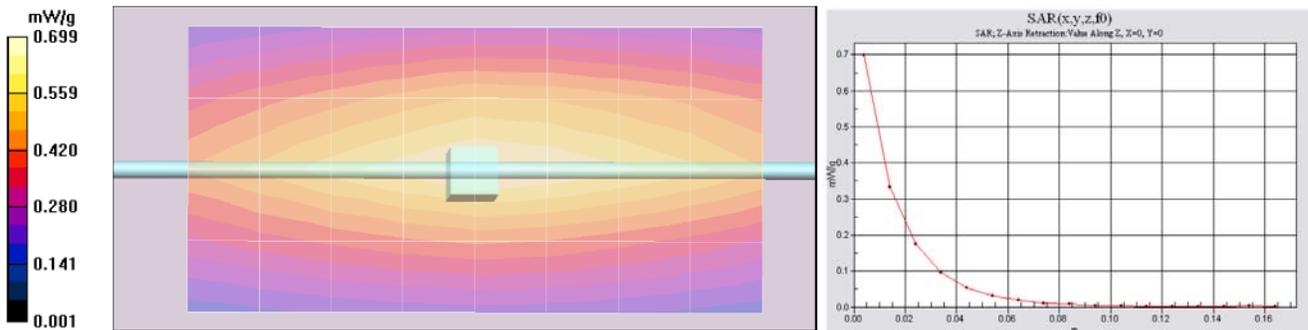

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 10/25/2010 7:29:58 PM

Robot# / Run#: DASY4-FL-2 / MeC-SYSP-300B-101025-09
 Phantom# / Tissue Temp.: OVAL1022 / 21.3 (C)
 Dipole Model# / Serial#: D300V2 / 1001
 TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.53 mW/g (1g)
 Adjusted SAR (1W): 2.62 mW/g (1g)
 Percent from Target (+/-): 3.7 % (1g)
 Rotation (1D): 0.081 dB

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.656 mW/g (1g); 0.441 mW/g (10g)

Comments:

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.1, 7.1, 7.1)

Electronics: DAE4 Sn729, Calibrated: 9/24/2010

Duty Cycle: 1:1, Medium parameters used: f = 300 MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 56.8$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.4 V/m; Power Drift = -0.00521 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.656 mW/g; SAR(10 g) = 0.441 mW/g

Maximum value of SAR (measured) = 0.697 mW/g

System Performance Check/Dipole Area Scan 2 (41x81x1): Measurement grid: dx=15mm, dy=15mm



Reference Value = 27.4 V/m; Power Drift = -0.00521 dB

Motorola Fast SAR: SAR(1 g) = 0.656 mW/g; SAR(10 g) = 0.474 mW/g

Maximum value of SAR (interpolated) = 0.696 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.698 mW/g

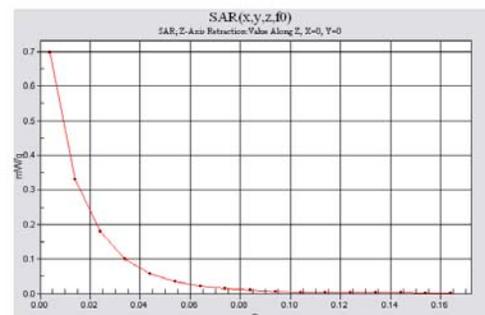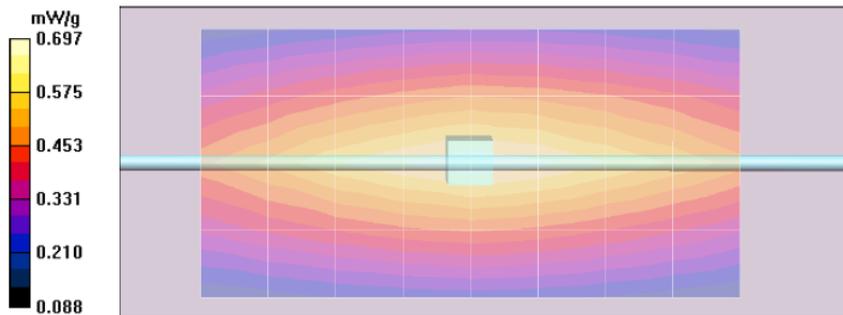

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 10/26/2010 6:00:27 AM

Robot# / Run#: DASY4-FL-2 / ErC-SYSP-300B-101026-01
Phantom# / Tissue Temp.: OVAL1022 / 20.9 (C)
Dipole Model# / Serial#: D300V2 / 1001
TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.53 mW/g (1g)
Adjusted SAR (1W): 2.48 mW/g (1g)
Percent from Target (+/-): 1.8 % (1g)
Rotation (1D): 0.037 dB

Note:
Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.621 mW/g (1g); 0.416 mW/g (10g)



Comments:

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.1, 7.1, 7.1)
Electronics: DAE4 Sn729, Calibrated: 9/24/2010
Duty Cycle: 1:1, Medium parameters used: $f = 300 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 26.9 V/m; Power Drift = 0.0118 dB
Peak SAR (extrapolated) = 0.951 W/kg
SAR(1 g) = 0.614 mW/g; SAR(10 g) = 0.414 mW/g
Maximum value of SAR (measured) = 0.655 mW/g

System Performance Check/Dipole Area Scan 2 (5x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.660 mW/g

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 0.661 mW/g

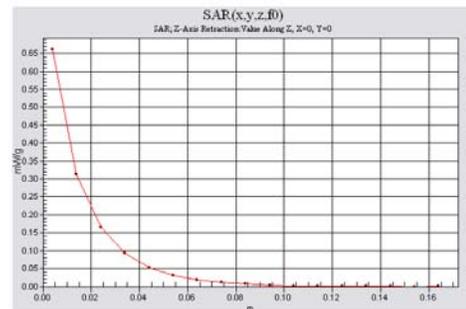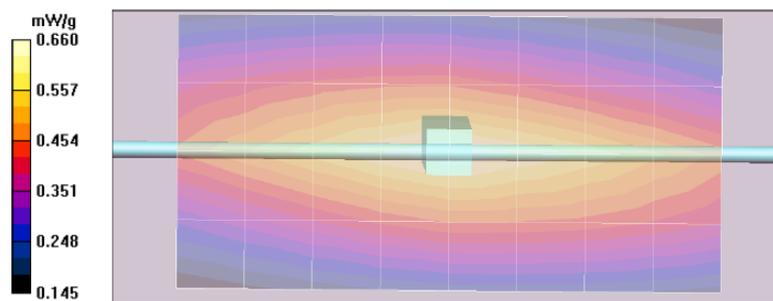

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 10/27/2010 6:53:21 AM

Robot# / Run#: DASY4-FL-2 / JsT-SYSP-300B-101027-01
Phantom# / Tissue Temp.: OVAL1022 / 21.1 (C)
Dipole Model# / Serial#: D300V2 / 1001
TX Freq. / Start power: 300 (MHz) / 250 (mW)

Target SAR (1W): 2.53 mW/g (1g)
Adjusted SAR (1W): 2.57 mW/g (1g)
Percent from Target (+/-): 1.7 % (1g)
Rotation (1D): 0.075 dB

Note:
Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.643 mW/g (1g); 0.429 mW/g (10g)

Comments:

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.1, 7.1, 7.1)
Electronics: DAE4 Sn729, Calibrated: 9/24/2010

Duty Cycle: 1:1, Medium parameters used: $f = 300$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 56$; $\rho = 1000$ kg/m³

System Performance Check/0-Degree Cube (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.2 V/m; Power Drift = 0.0657 dB

Peak SAR (extrapolated) = 1.02 W/kg


SAR(1 g) = 0.638 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 0.678 mW/g

System Performance Check/Dipole Area Scan 2 (5x9x1): Measurement grid: dx=15mm, dy=15mm

System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.675 mW/g

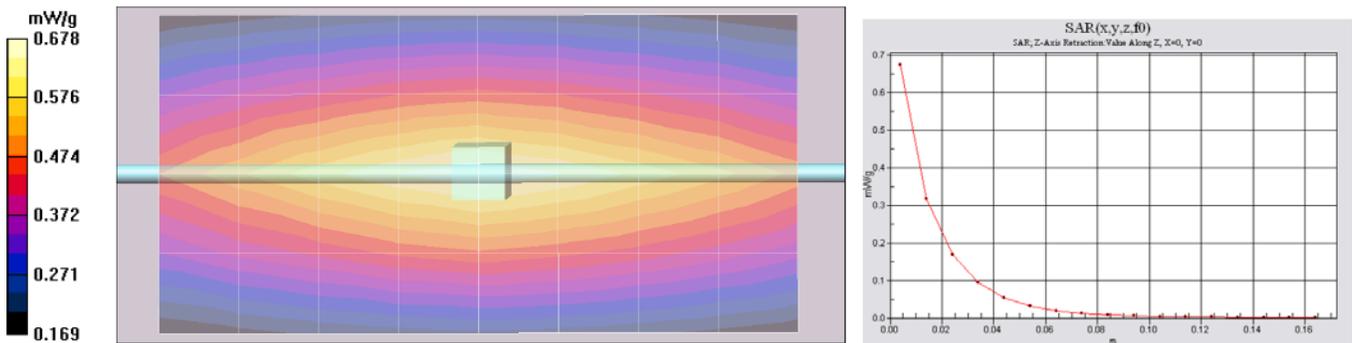

DIPOLE SAR TARGET - HEAD

Date: 12/29/09 Frequency (MHz): 300
 Lab Location: FL08-G&PS Mixture Type: IEEE Head
 DAE Serial #: 401 Ambient Temp.(°C): 21.9

Tissue Characteristics
 Permittivity: 47.4 Phantom Type/SN: OVAL1020
 Conductivity: 0.91 Distance (mm): 15
 Tissue Temp.(°C): 20.9

Reference Source: Dipole Power to Dipole: 250 mW
 Reference SN: 1001

Target 1g-SAR Value (mW/g, normalized to 1.0 W):
2.85

Difference from Target
-2.69% (1g-SAR)

New Target:
Average 1g-SAR Value (mW/g): **2.77**

Passes K=2

Percent Difference From Target (MUST be within k=2 Uncertainty):

Probe SN #s	1g-SAR (Cube)	Diff from Ave	Robot
3163	2.75	-0.8%	R3
3147	2.75	-0.8%	R3
3185	2.82	1.7%	R3
Average 2.7733		New Measured SAR Value	

(normalized to 1.0 W)

Test performed by: Ed Church Initial: EC

DIPOLE SAR TARGET - BODY

Date: 12/29/09 Frequency (MHz): 300
 Lab Location: FL08-G&PS Mixture Type: Body
 DAE Serial #: 401 Ambient Temp.(°C): 22

Tissue Characteristics

Permittivity: 58.0 Phantom Type/SN: OVAL1022
 Conductivity: 0.91 Distance (mm): 15
 Tissue Temp.(°C): 20.7

Reference Source: Dipole Power to Dipole: 250 mW
 Reference SN: 1001

New Target:

Average Measured SAR Value: 2.48 mW/g(1g avg.),

Probe SN #s	1-G Cube	Diff from Ave	Robot
3185	2.46	-0.8%	R3
3147	2.48	0.0%	R3
3163	2.50	0.8%	R3
Average		New Measured SAR Value	

(normalized to 1.0 W)

Test performed by: Ed Church Initial: EIC

DIPOLE SAR TARGET - HEAD

Date: 04/09/10 Frequency (MHz): 300
 Lab Location: FL08-G&PS Mixture Type: IEEE Head
 DAE Serial #: 729 Ambient Temp.(°C): 22

Tissue Characteristics
 Permittivity: 44.9 Phantom Type/SN: OVAL1021
 Conductivity: 0.84 Distance (mm): 15
 Tissue Temp.(°C): 21.8

Reference Source: Dipole Power to Dipole: 250 mW
 Reference SN: 1002

Target 1g-SAR Value (mW/g, normalized to 1.0 W):

2.85

Difference from Target

-7.49% (1g-SAR)

New Target:

Average 1g-SAR Value (mW/g): **2.64**

Passes K=2

Percent Difference From Target (MUST be within k=2 Uncertainty):

Probe SN #s	1g-SAR (Cube)	Diff from Ave	Robot
3006	2.56	-2.9%	R2
3147	2.53	-4.0%	R2
1547	2.82	7.0%	R2
Average 2.6367		New Measured SAR Value	

(normalized to 1.0 W)

Test performed by: Ed Church Initial: EC

DIPOLE SAR TARGET - BODY

Date: 04/09/10 Frequency (MHz): 300
 Lab Location: FL08-G&PS Mixture Type: Body
 DAE Serial #: 729 Ambient Temp.(°C): 22

Tissue Characteristics

Permittivity: 55.8 Phantom Type/SN: OVAL1022
 Conductivity: 0.95 Distance (mm): 15
 Tissue Temp.(°C): 21.9

Reference Source: Dipole Power to Dipole: 250 mW
 Reference SN: 1002

New Target:

Average Measured SAR Value: 2.67 mW/g(1g avg.),

Probe SN #s	1-G Cube	Diff from Ave	Robot
1547	2.87	7.5%	R2
3147	2.50	-6.4%	R2
3006	2.64	-1.1%	R2
Average		New Measured SAR Value	

(normalized to 1.0 W)

Test performed by: Ed Church Initial: EC

DIPOLE SAR TARGET - HEAD

Date: 08/06/10 Frequency (MHz): 300
 Lab Location: FL08-G&PS Mixture Type: IEEE Head
 DAE Serial #: 401 Ambient Temp.(°C): 21.6

Tissue Characteristics
 Permittivity: 46.7 Phantom Type/SN: OVAL1011
 Conductivity: 0.83 Distance (mm): 15
 Tissue Temp.(°C): 21.3

Reference Source: Dipole Power to Dipole: 250 mW
 Reference SN: 1001

Target 1g-SAR Value (mW/g, normalized to 1.0 W):
2.85

Difference from Target
-7.95% (1g-SAR)

New Target:
Average 1g-SAR Value (mW/g): **2.62**

Passes K=2

Percent Difference From Target (MUST be within k=2 Uncertainty):

Probe SN #s	1g-SAR (Cube)	Diff from Ave	Robot
3185	2.58	-1.7%	R1
3163	2.44	-7.0%	R1
1547	2.85	8.6%	R1
Average 2.6233		New Measured SAR Value	

(normalized to 1.0 W)

Test performed by: Ed Church Initial: ERC

DIPOLE SAR TARGET - BODY

Date: 08/06/10 Frequency (MHz): 300
 Lab Location: FL08-EMS Mixture Type: Body
 DAE Serial #: 401 Ambient Temp.(°C): 21.6

Tissue Characteristics

Permittivity: 57.8 Phantom Type/SN: OVAL1016
 Conductivity: 0.88 Distance (mm): 15
 Tissue Temp.(°C): 21.3

Reference Source: Dipole Power to Dipole: 250 mW
 Reference SN: 1001

New Target:

Average Measured SAR Value: 2.53 mW/g(1g avg.),

Probe SN #s	1-G Cube	Diff from Ave	Robot
1547	2.76	8.9%	R1
3163	2.39	-5.7%	R1
3185	2.45	-3.3%	R1
Average		New Measured SAR Value	

(normalized to 1.0 W)

Test performed by: Ed Church Initial: EC

DIPOLE SAR TARGET - HEAD

Date: 12/28/09 Frequency (MHz): 2450
 Lab Location: FL08-G&PS Mixture Type: IEEE Head
 DAE Serial #: 363 Ambient Temp.(°C): 21.8

Tissue Characteristics
 Permittivity: 36.6 Phantom Type/SN: DUAL1003 SIDE B
 Conductivity: 1.87 Distance (mm): 10
 Tissue Temp.(°C): 21.3

Reference Source: Dipole Power to Dipole: 50 mW
 Reference SN: 704

Target 1g-SAR Value (mW/g, normalized to 1.0 W):

52.4

Difference from Target

9.16% (1g-SAR)

New Target:

Average 1g-SAR Value (mW/g):	57.20
------------------------------	--------------

Passes K=2

Percent Difference From Target (MUST be within k=2 Uncertainty):

Probe SN #s	1g-SAR (Cube)	Diff from Ave	Robot
3147	58.20	1.7%	R2
3163	56.80	-0.7%	R2
3185	56.60	-1.0%	R2
Average 57.2000		New Measured SAR Value	

(normalized to 1.0 W)

Test performed by: C. Miller Initial:

DIPOLE SAR TARGET - BODY

Date: 12/28/09 Frequency (MHz): 2450
 Lab Location: FL08-G&PS Mixture Type: Body
 DAE Serial #: 363 Ambient Temp.(°C): 21.9

Tissue Characteristics

Permittivity: 51.2 Phantom Type/SN: DUAL1003 SIDE A
 Conductivity: 2.02 Distance (mm): 10
 Tissue Temp.(°C): 20.9

Reference Source: Dipole Power to Dipole: 50 mW
 Reference SN: 704

New Target:

Average Measured SAR Value: 55.27 mW/g(1g avg.),

Probe SN #s	1-G Cube	Diff from Ave	Robot
3147	58.20	5.3%	R2
3163	54.80	-0.8%	R2
3185	52.80	-4.5%	R2
Average		New Measured SAR Value	

(normalized to 1.0 W)

Test performed by: C. Miller Initial: 

Appendix E
FCC Part 90 (150.8 – 173.4 MHz)
DUT Scans (Shortened Scan and Highest SAR configurations)

**Shortened Scan Result
(Section 13.10, Table 23)**

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 6/30/2010 3:21:43 PM

Robot# / Run#: DASY4-FL-1 / HvH-Ab-100630-04
Phantom# / Tissue Temp.: OVAL1022 / 20.8 (C)
DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
Antenna / TX Freq.: NAR6593A / 150.8000 (MHz)
Battery: PMNN4403A
Carry Acc. / Cable Acc.: NTN8266B / RMN5058A
Start Power: 6.74 (W)

Note:

Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 3.61 mW/g (1g); 1.81 mW/g (10g)

Comments: Shorten scan.

Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.4, 7.4, 7.4)

Electronics: DAE3 Sn374, Calibrated: 4/15/2010

Duty Cycle: 1:1, Medium parameters used: $f = 155$ MHz; $\sigma = 0.81$ mho/m; $\epsilon_r = 60$; $\rho = 1000$ kg/m³

Ab Scan/1-Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 45.0 V/m; Power Drift = -0.419 dB

Motorola Fast SAR: SAR(1 g) = 2.82 mW/g; SAR(10 g) = 1.77 mW/g

Maximum value of SAR (interpolated) = 3.27 mW/g

Ab Scan/2-Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm

Reference Value = 45.0 V/m; Power Drift = -0.487 dB

Peak SAR (extrapolated) = 3.32 W/kg

Motorola Fast SAR: SAR(1 g) = 3.01 mW/g; SAR(10 g) = 1.86 mW/g

Maximum value of SAR (interpolated) = 3.32 mW/g

Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 45.4 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 10.3 W/kg


SAR(1 g) = 3.61 mW/g; SAR(10 g) = 1.81 mW/g

Maximum value of SAR (measured) = 3.63 mW/g

Shortened scan reflect highest SAR producing configuration; approximate run time 7 minutes. Representative full scan run time was 28 minutes

“Shortened” scan max calculated SAR using SAR drift: 1-g Avg. = 1.88 mW/g; 10-g Avg. = 0.94 mW/g

Zoom scan max calculated SAR using SAR drift (see part 1 section 13.12): 1-g Avg. = 1.96 mW/g; 10-g Avg. = 0.98 mW/g

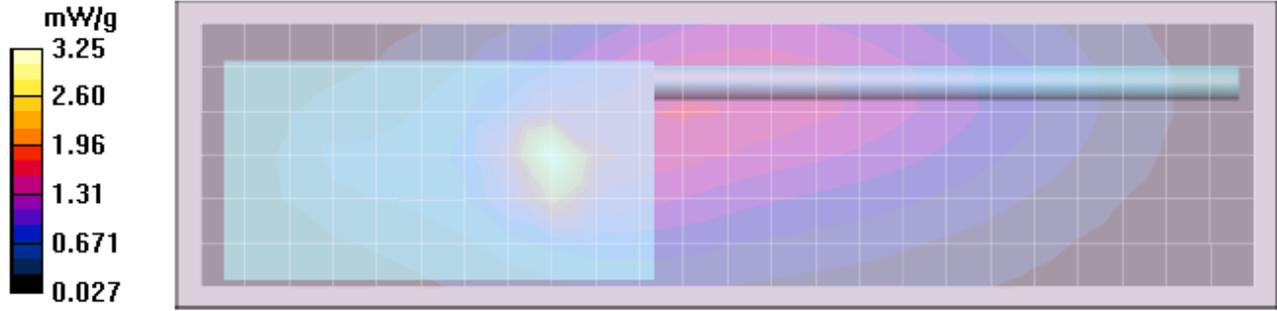

Body - Highest SAR Configuration Result
(Section 13.9, Table 22)
Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 10/27/2010 5:18:16 PM

Robot# / Run#: DASY4-FL-2 / MeC-Ab-101027-09
 Phantom# / Tissue Temp.: OVAL1022 / 21.2 (C)
 DUT Model# / Serial#: H98KGH9PW7AN / NUD1006A0181
 Antenna / TX Freq.: NAR6593A / 150.8000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: HLN6875A with PMLN5709A (SLA dated 9/8/10) / None
 Start Power: 6.71 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 4.31 mW/g (1g); 1.75 mW/g (10g)


Comments: Full Scan.

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.7, 7.7, 7.7)
 Electronics: DAE4 Sn729, Calibrated: 9/24/2010
 Duty Cycle: 1:1, Medium parameters used: f = 155 MHz; $\sigma = 0.79$ mho/m; $\epsilon_r = 60.6$; $\rho = 1000$ kg/m³

Ab Scan/1-Area Scan (61x251x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 30.3 V/m; Power Drift = -0.367 dB
Motorola Fast SAR: SAR(1 g) = 4.05 mW/g; SAR(10 g) = 2.24 mW/g
 Maximum value of SAR (interpolated) = 5.38 mW/g

Ab Scan/3-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 30.3 V/m; Power Drift = -0.675 dB
 Peak SAR (extrapolated) = 15.0 W/kg
SAR(1 g) = 4.31 mW/g; SAR(10 g) = 1.75 mW/g
 Maximum value of SAR (measured) = 4.78 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 4.86 mW/g

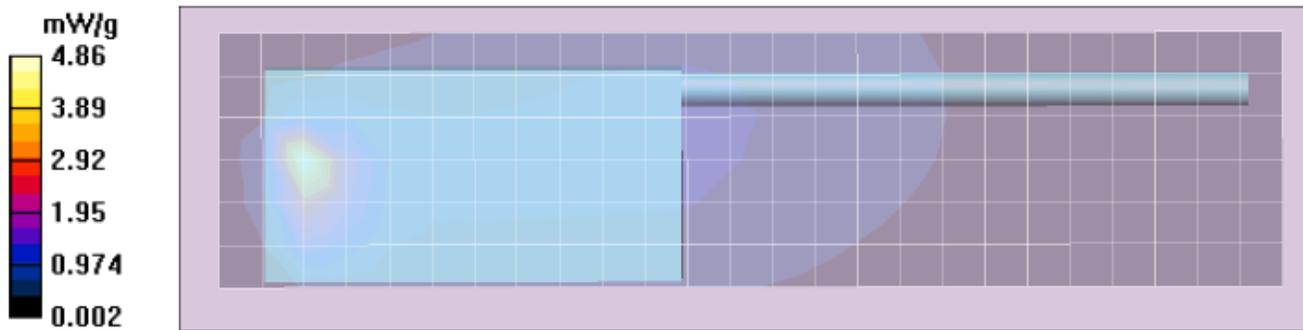

Face - Highest SAR Configuration Result
(Section 13.6, Table 17)
Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 6/6/2010 12:47:39 PM

Robot# / Run#: DASY4-FL-1 / HvH-Face-100606-11
 Phantom# / Tissue Temp.: OVAL1016 / 21.5 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 173.4000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: None / None
 Start Power: 6.78 (W)

Note:
 Prior to recording the reported SAR values below, the measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported: 1.354 mW/g (1g); 1.041 mW/g (10g)

Comments: Full scan. Front facing phantom.


Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.7, 7.7, 7.7)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 168$ MHz; $\sigma = 0.76$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Face Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 41.4 V/m; Power Drift = -0.189 dB
 Peak SAR (extrapolated) = 1.80 W/kg
 SAR(1 g) = 1.35 mW/g; SAR(10 g) = 1.04 mW/g
 Maximum value of SAR (measured) = 1.41 mW/g

Face Scan/Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 41.4 V/m; Power Drift = -0.0586 dB
Motorola Fast SAR: SAR(1 g) = 1.38 mW/g; SAR(10 g) = 1.05 mW/g
 Maximum value of SAR (interpolated) = 1.44 mW/g

Face Scan/Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm
 Reference Value = 41.4 V/m; Power Drift = -0.0761 dB
 Peak SAR (extrapolated) = 1.43 W/kg
Motorola Fast SAR: SAR(1 g) = 1.37 mW/g; SAR(10 g) = 1.04 mW/g
 Maximum value of SAR (interpolated) = 1.43 mW/g

Face Scan/Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 1.39 mW/g

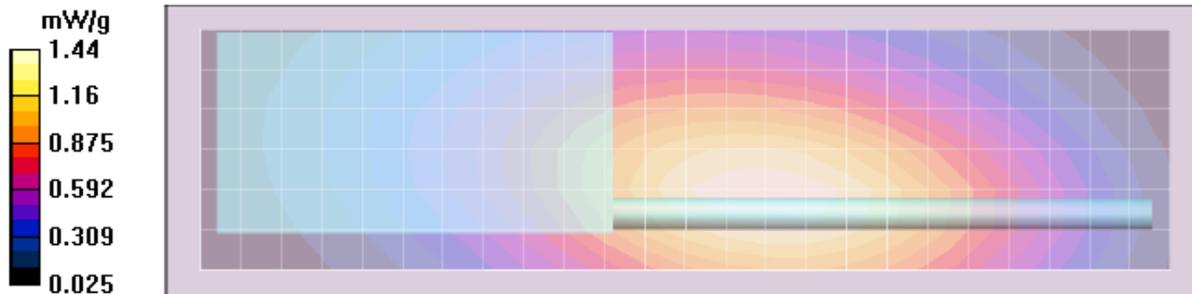

Appendix F
DUT Scans - FCC Part 90 (150.8 – 173.4 MHz)

Section 1.0

**Assessments at the Body VHF band (CW mode) - Belt clip NTN8266B and offered audio accessories
(Section 13.1 Table 12)**

Motorola Enterprise Mobility Solutions EME Laboratory

Date/Time: 6/29/2010 1:45:07 PM

Robot# / Run#: DASY4-FL-1 / HvH-Ab-100629-03
 Phantom# / Tissue Temp.: OVAL1022 / 21.3 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 155.0000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: NTN8266B / RMN5058A
 Start Power: 6.73 (W)

Note:
 Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 3.20 mW/g (1g); 1.60 mW/g (10g)

Comments: Full scan.


Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.4, 7.4, 7.4)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 155 \text{ MHz}$; $\sigma = 0.82 \text{ mho/m}$; $\epsilon_r = 60.1$; $\rho = 1000 \text{ kg/m}^3$

Ab Scan/1-Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 44.1 V/m; Power Drift = -0.121 dB
Motorola Fast SAR: SAR(1 g) = 2.84 mW/g; SAR(10 g) = 1.73 mW/g
 Maximum value of SAR (interpolated) = 3.33 mW/g

Ab Scan/2-Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm
 Reference Value = 44.1 V/m; Power Drift = -0.148 dB
 Peak SAR (extrapolated) = 3.45 W/kg
Motorola Fast SAR: SAR(1 g) = 3.1 mW/g; SAR(10 g) = 1.9 mW/g
 Maximum value of SAR (interpolated) = 3.45 mW/g

Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 44.1 V/m; Power Drift = -0.204 dB
 Peak SAR (extrapolated) = 9.07 W/kg
SAR(1 g) = 3.2 mW/g; SAR(10 g) = 1.6 mW/g
 Maximum value of SAR (measured) = 3.25 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 3.19 mW/g

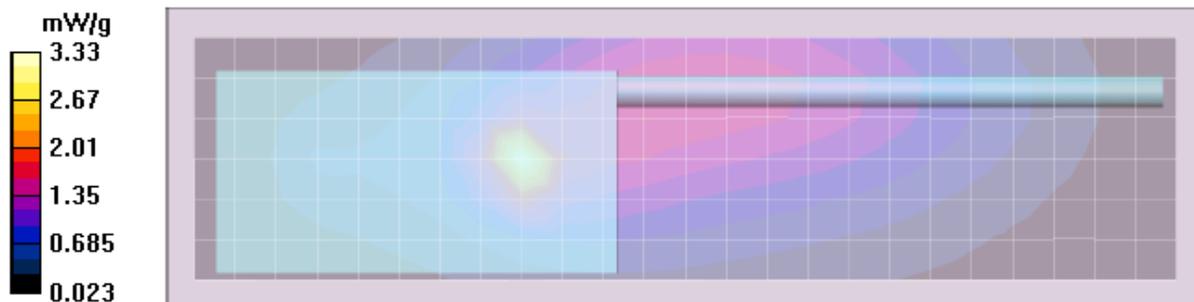

Section 2.0

**Assessments at the Body VHF band (CW mode) - Belt clip HLN6875A and offered audio accessories
(Section 13.2 Table 13)**

Motorola Enterprise Mobility Solutions EME Laboratory

Date/Time: 6/9/2010 1:39:20 PM

Robot# / Run#: DASY4-FL-1 / HvH-Ab-100609-06
 Phantom# / Tissue Temp.: OVAL1022 / 20.7 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 155.0000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: HLN6875A / HMN4104A
 Start Power: 6.73 (W)

Note:
 Prior to recording the reported SAR values below, the measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported: 1.80 mW/g (1g); 0.791 mW/g (10g)

Comments: Full scan. DUT rolled, battery not touching phantom

Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.4, 7.4, 7.4)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010


Duty Cycle: 1:1, Medium parameters used: $f = 155$ MHz; $\sigma = 0.82$ mho/m; $\epsilon_r = 62.2$; $\rho = 1000$ kg/m³

Ab Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 30.8 V/m; Power Drift = -0.408 dB
 Peak SAR (extrapolated) = 5.87 W/kg
 SAR(1 g) = 1.8 mW/g; SAR(10 g) = 0.790 mW/g
 Maximum value of SAR (measured) = 1.83 mW/g

Ab Scan/Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 30.8 V/m; Power Drift = -0.254 dB
 Motorola Fast SAR: SAR(1 g) = 1.39 mW/g; SAR(10 g) = 0.927 mW/g
 Maximum value of SAR (interpolated) = 1.62 mW/g

Ab Scan/Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm
 Reference Value = 30.8 V/m; Power Drift = -0.295 dB
 Peak SAR (extrapolated) = 2.12 W/kg
 Motorola Fast SAR: SAR(1 g) = 1.76 mW/g; SAR(10 g) = 1.01 mW/g
 Maximum value of SAR (interpolated) = 2.12 mW/g

Ab Scan/Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 1.99 mW/g

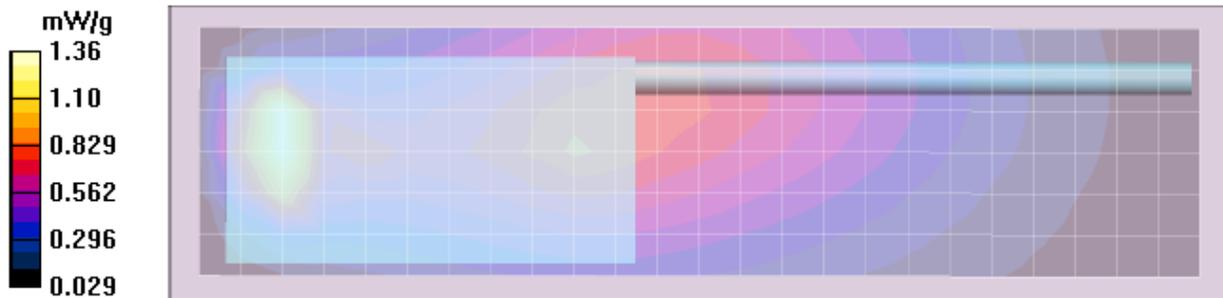

Section 3.0
Assessments at the Body VHF band (CW mode) – Other Frequency Channels
(Section 13.3 Table 14)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 6/26/2010 6:19:52 PM

Robot# / Run#: DASY4-FL-1 / MeC-Ab-100626-17
 Phantom# / Tissue Temp.: OVAL1022 / 21.3 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 150.8000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: NTN8266B / RMN5058A
 Start Power: 6.73 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 3.37 mW/g (1g); 1.69 mW/g (10g)


Comments: Full scan.
 Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.4, 7.4, 7.4)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 155$ MHz; $\sigma = 0.83$ mho/m; $\epsilon_r = 60.4$; $\rho = 1000$ kg/m³

Ab Scan/1-Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 45.3 V/m; Power Drift = -0.444 dB
Motorola Fast SAR: SAR(1 g) = 3.31 mW/g; SAR(10 g) = 2.01 mW/g
 Maximum value of SAR (interpolated) = 3.96 mW/g

Ab Scan/2-Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm
 Reference Value = 45.3 V/m; Power Drift = -0.513 dB
 Peak SAR (extrapolated) = 3.61 W/kg
Motorola Fast SAR: SAR(1 g) = 3.34 mW/g; SAR(10 g) = 2.08 mW/g
 Maximum value of SAR (interpolated) = 3.61 mW/g

Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 45.3 V/m; Power Drift = -0.665 dB
 Peak SAR (extrapolated) = 9.27 W/kg
SAR(1 g) = 3.37 mW/g; SAR(10 g) = 1.69 mW/g
 Maximum value of SAR (measured) = 3.45 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 3.38 mW/g

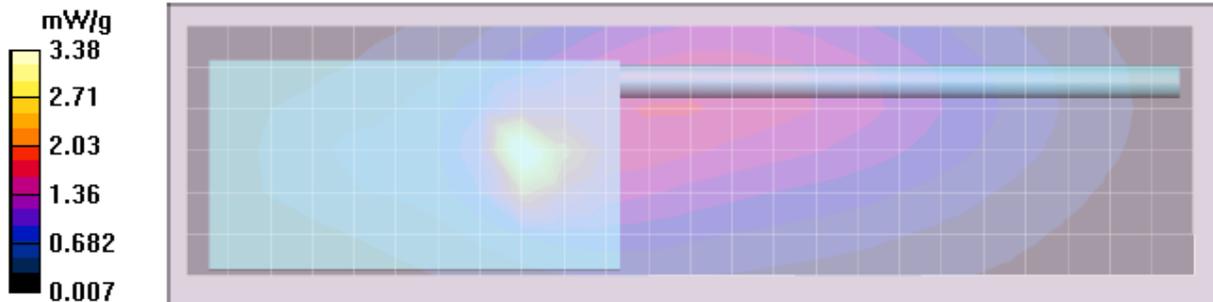

Section 4.0
Assessments at 2.5cm without body worn accessory VHF band (CW Mode)
(Section 13.4 Table 15)
Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 6/29/2010 9:41:41 PM

Robot# / Run#: DASY4-FL-1 / MeC-Ab-100629-11
 Phantom# / Tissue Temp.: OVAL1022 / 21.1 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 150.8000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: None / RMN5058A
 Start Power: 6.70 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 1.62 mW/g (1g); 1.24 mW/g (10g)

Comments: Full scan, Back of DUT antenna @ 2.5 cm. from phantom.


Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.4, 7.4, 7.4)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: f = 155 MHz; $\sigma = 0.82$ mho/m; $\epsilon_r = 60.1$; $\rho = 1000$ kg/m³

Ab Scan/1-Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 47.9 V/m; Power Drift = -0.430 dB
Motorola Fast SAR: SAR(1 g) = 1.72 mW/g; SAR(10 g) = 1.31 mW/g
 Maximum value of SAR (interpolated) = 1.80 mW/g

Ab Scan/2-Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm
 Reference Value = 47.9 V/m; Power Drift = -0.493 dB
 Peak SAR (extrapolated) = 1.76 W/kg
Motorola Fast SAR: SAR(1 g) = 1.68 mW/g; SAR(10 g) = 1.27 mW/g
 Maximum value of SAR (interpolated) = 1.76 mW/g

Ab Scan/3-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 47.9 V/m; Power Drift = -0.764 dB
 Peak SAR (extrapolated) = 2.20 W/kg
SAR(1 g) = 1.62 mW/g; SAR(10 g) = 1.24 mW/g
 Maximum value of SAR (measured) = 1.68 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 1.63 mW/g

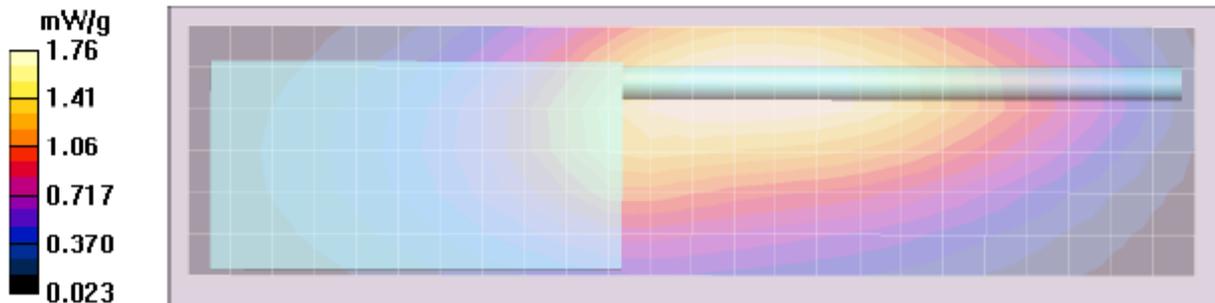

Section 5.0
Assessments at the Face VHF band (CW mode)
(Section 13.5 Table 16)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 6/6/2010 7:15:20 AM

Robot# / Run#: DASY4-FL-1 / HvH-Face-100606-04
 Phantom# / Tissue Temp.: OVAL1016 / 21.3 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 167.7000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: None / None
 Start Power: 6.65 (W)

Note:
 Prior to recording the reported SAR values below, the measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported: 1.104 mW/g (1g); 0.845 mW/g (10g)

Comments: Full scan. Front facing phantom.


Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.7, 7.7, 7.7)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 168$ MHz; $\sigma = 0.76$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Face Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 37.1 V/m; Power Drift = -0.150 dB
 Peak SAR (extrapolated) = 1.47 W/kg
 SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.844 mW/g
 Maximum value of SAR (measured) = 1.15 mW/g

Face Scan/Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 37.1 V/m; Power Drift = -0.112 dB
 Motorola Fast SAR: SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.848 mW/g
 Maximum value of SAR (interpolated) = 1.17 mW/g

Face Scan/Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm
 Reference Value = 37.1 V/m; Power Drift = -0.116 dB
 Peak SAR (extrapolated) = 1.14 W/kg
 Motorola Fast SAR: SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.827 mW/g
 Maximum value of SAR (interpolated) = 1.14 mW/g

Face Scan/Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 1.14 mW/g

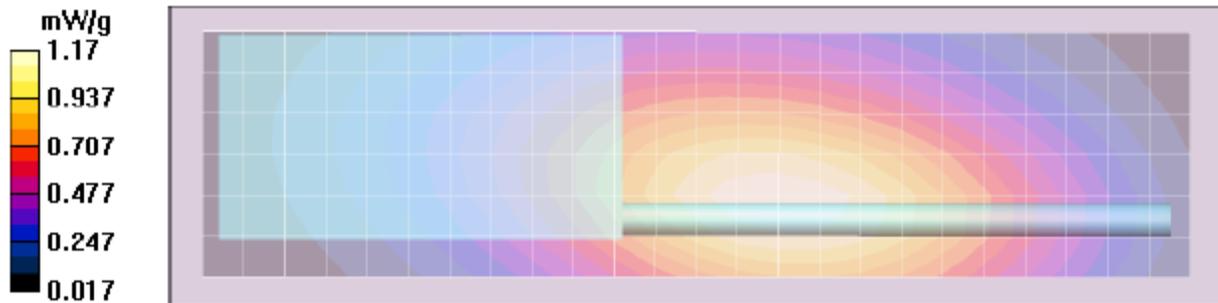

Section 6.0
Assessments at the Face VHF band (CW mode) – Other Frequency Channels
(Section 13.6 Table 17)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 6/6/2010 12:47:39 PM

Robot# / Run#: DASY4-FL-1 / HvH-Face-100606-11
 Phantom# / Tissue Temp.: OVAL1016 / 21.5 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 173.4000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: None / None
 Start Power: 6.78 (W)

Note:
 Prior to recording the reported SAR values below, the measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported: 1.354 mW/g (1g); 1.041 mW/g (10g)

Comments: Full scan. Front facing phantom.


Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.7, 7.7, 7.7)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 168$ MHz; $\sigma = 0.76$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Face Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 41.4 V/m; Power Drift = -0.189 dB
 Peak SAR (extrapolated) = 1.80 W/kg
 SAR(1 g) = 1.35 mW/g; SAR(10 g) = 1.04 mW/g
 Maximum value of SAR (measured) = 1.41 mW/g

Face Scan/Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 41.4 V/m; Power Drift = -0.0586 dB
 Motorola Fast SAR: SAR(1 g) = 1.38 mW/g; SAR(10 g) = 1.05 mW/g
 Maximum value of SAR (interpolated) = 1.44 mW/g

Face Scan/Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm
 Reference Value = 41.4 V/m; Power Drift = -0.0761 dB
 Peak SAR (extrapolated) = 1.43 W/kg
 Motorola Fast SAR: SAR(1 g) = 1.37 mW/g; SAR(10 g) = 1.04 mW/g
 Maximum value of SAR (interpolated) = 1.43 mW/g

Face Scan/Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 1.39 mW/g

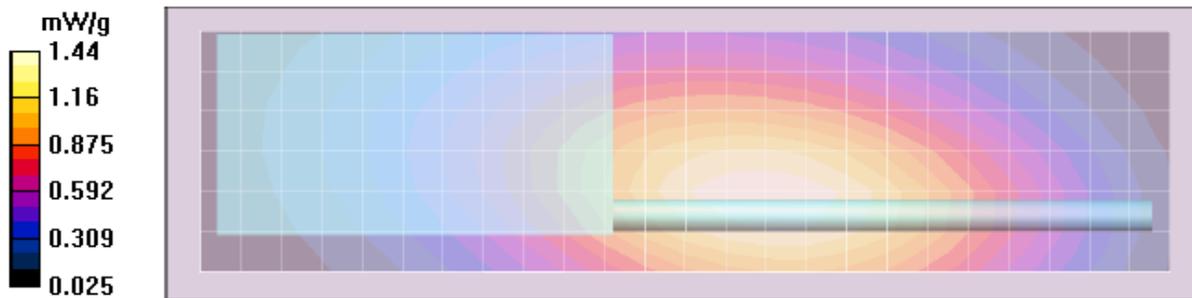

**Section 7.0
Assessments at the Body Bluetooth
(Section 13.7 Table 18)**

**Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 10/3/2010 3:20:44 PM**

Robot# / Run#: DASY4-FL-2 / MeC-Ab-101003-06
 Phantom# / Tissue Temp.: OVAL1018 / 20.7 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0068
 Antenna / TX Freq.: NAR6593A / 2402.0000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: NTN8266B / None
 Start Power: 0.00924 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.00207 mW/g (1g); 0.000798 mW/g (10g)

Comments: Full Scan.


Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(4.18, 4.18, 4.18)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010

Duty Cycle: 1:1, Medium parameters used: f = 2441 MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ab Scan/1-Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 0.529 V/m; Power Drift = -2.34 dB
Motorola Fast SAR: SAR(1 g) = 0.00103 mW/g; SAR(10 g) = 0.000313 mW/g
 Maximum value of SAR (interpolated) = 0.003 mW/g

Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 0.529 V/m; Power Drift = -0.737 dB
 Peak SAR (extrapolated) = 0.009 W/kg
SAR(1 g) = 0.00206 mW/g; SAR(10 g) = 0.000796 mW/g
 Maximum value of SAR (measured) = 0.003 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 0.001 mW/g

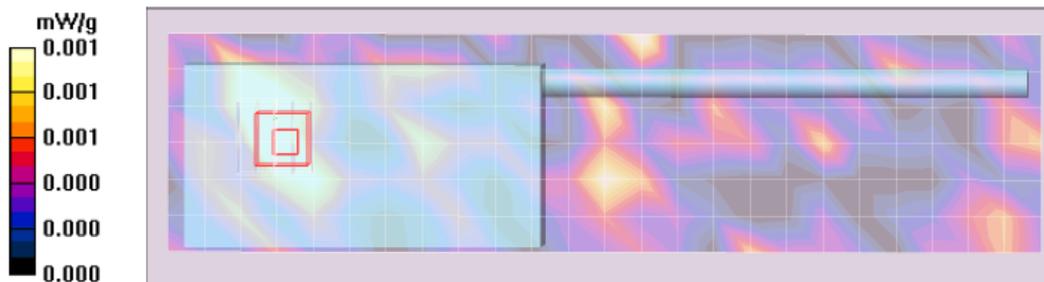

**Section 8.0
Assessments at the Face Bluetooth
(Section 13.8 Table 19)**

**Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 8/30/2010 11:53:09 PM**

Robot# / Run#: DASY4-FL-2 / MeC-Face-100830-13
 Phantom# / Tissue Temp.: OVAL1022 / 20.4 (C)
 DUT Model# / Serial#: H98KGH9PW7AN / NUD1006A0181
 Antenna / TX Freq.: NAR6593A / 2441.0000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: None / None
 Start Power: 0.00758 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 0.0211 mW/g (1g); 0.0124 mW/g (10g)

Comments: Full Scan ; Front of DUT facing phantom.

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(4.42, 4.42, 4.42)
 Electronics: DAE4 Sn729, Calibrated: 3/10/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 2441$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 37.3$; $\rho = 1000$ kg/m³


Face Scan/1-Area Scan (71x241x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.69 V/m; Power Drift = -1.34 dB
Motorola Fast SAR: SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.011 mW/g
 Maximum value of SAR (interpolated) = 0.022 mW/g

Face Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 2.69 V/m; Power Drift = -1.67 dB
 Peak SAR (extrapolated) = 0.037 W/kg
SAR(1 g) = 0.0211 mW/g; SAR(10 g) = 0.0124 mW/g
 Maximum value of SAR (measured) = 0.023 mW/g

Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

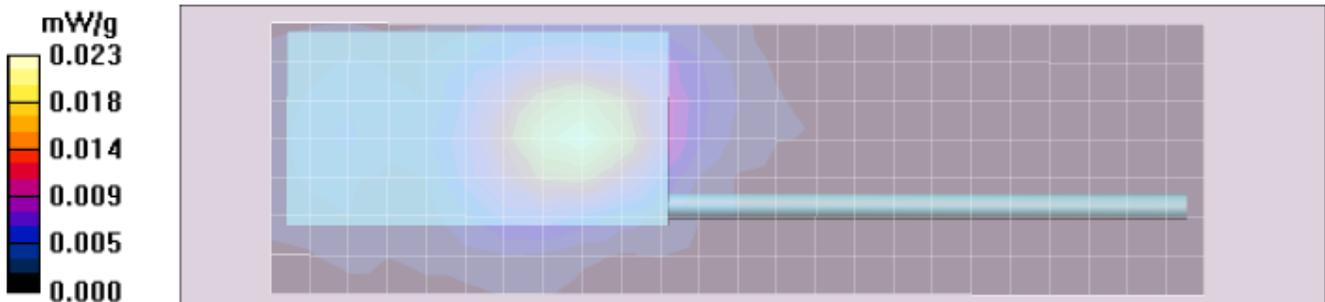

Section 9.0
Assessments at the Body VHF band with belt clip NTN8266B without audio accessory
(Section 13.9 Table 20)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 10/2/2010 4:18:21 PM

Robot# / Run#: DASY4-FL-2 / MeC-Ab-101002-06
 Phantom# / Tissue Temp.: OVAL1022 / 21.2 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0068
 Antenna / TX Freq.: NAR6593A / 150.8000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: NTN8266B / None
 Start Power: 6.61 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 2.55 mW/g (1g); 1.34 mW/g (10g)

Comments: Full Scan.

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.7, 7.7, 7.7)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010

Duty Cycle: 1:1, Medium parameters used: f = 155 MHz; $\sigma = 0.78$ mho/m; $\epsilon_r = 61.8$; $\rho = 1000$ kg/m³

Ab Scan/1-Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 42.2 V/m; Power Drift = -0.150 dB

Motorola Fast SAR: SAR(1 g) = 2.26 mW/g; SAR(10 g) = 1.46 mW/g

Maximum value of SAR (interpolated) = 2.55 mW/g

Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 42.2 V/m; Power Drift = -0.241 dB


Peak SAR (extrapolated) = 6.59 W/kg

SAR(1 g) = 2.54 mW/g; SAR(10 g) = 1.34 mW/g

Maximum value of SAR (measured) = 2.54 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 2.51 mW/g

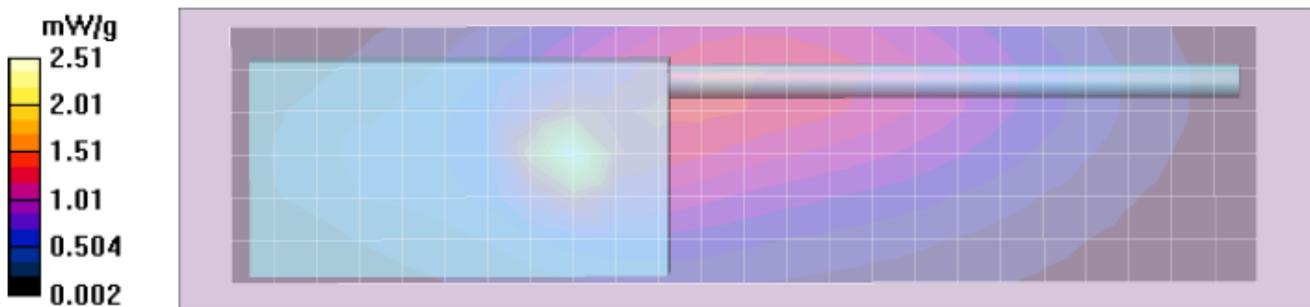

Section 10.0
Assessments at the Body VHF band with belt clip HLN6875A without audio accessory
(Section 13.10 Table 21)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 10/25/2010 11:24:51 PM

Robot# / Run#: DASY4-FL-2 / MeC-Ab-101025-13
 Phantom# / Tissue Temp.: OVAL1022 / 21.0 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0068
 Antenna / TX Freq.: NAR6593A / 150.8000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: HLN6875A / None
 Start Power: 6.71 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 3.98 mW/g (1g); 1.54 mW/g (10g)


Comments: Full Scan; Rolled battery contacts towards robot.

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.7, 7.7, 7.7)
 Electronics: DAE4 Sn729, Calibrated: 9/24/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 155 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 61.2$; $\rho = 1000 \text{ kg/m}^3$

Ab Scan/1-Area Scan (61x251x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 38.2 V/m; Power Drift = -0.521 dB
Motorola Fast SAR: SAR(1 g) = 3.64 mW/g; SAR(10 g) = 1.95 mW/g
 Maximum value of SAR (interpolated) = 5.01 mW/g

Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 38.2 V/m; Power Drift = -0.633 dB
 Peak SAR (extrapolated) = 15.6 W/kg
SAR(1 g) = 3.98 mW/g; SAR(10 g) = 1.54 mW/g
 Maximum value of SAR (measured) = 4.73 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 4.59 mW/g

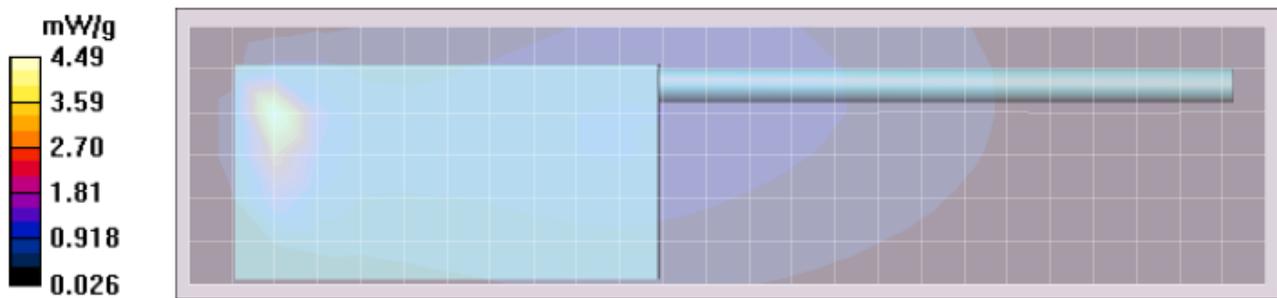

Section 11.0
Assessments at the Body VHF band with belt clip HLN6875A and carry holder PMLN5709A
without audio accessory
(Section 13.11 Table 22)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 10/27/2010 5:18:16 PM

Robot# / Run#: DASY4-FL-2 / MeC-Ab-101027-09
 Phantom# / Tissue Temp.: OVAL1022 / 21.2 (C)
 DUT Model# / Serial#: H98KGH9PW7AN / NUD1006A0181
 Antenna / TX Freq.: NAR6593A / 150.8000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: HLN6875A with PMLN5709A (SLA dated 9/8/10) / None
 Start Power: 6.71 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 4.31 mW/g (1g); 1.75 mW/g (10g)

Comments: Full Scan.

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.7, 7.7, 7.7)
 Electronics: DAE4 Sn729, Calibrated: 9/24/2010

Duty Cycle: 1:1, Medium parameters used: $f = 155 \text{ MHz}$; $\sigma = 0.79 \text{ mho/m}$; $\epsilon_r = 60.6$; $\rho = 1000 \text{ kg/m}^3$

Ab Scan/1-Area Scan (61x251x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 30.3 V/m; Power Drift = -0.367 dB
Motorola Fast SAR: SAR(1 g) = 4.05 mW/g; SAR(10 g) = 2.24 mW/g
 Maximum value of SAR (interpolated) = 5.38 mW/g

Ab Scan/3-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 30.3 V/m; Power Drift = -0.675 dB
 Peak SAR (extrapolated) = 15.0 W/kg
SAR(1 g) = 4.31 mW/g; SAR(10 g) = 1.75 mW/g
 Maximum value of SAR (measured) = 4.78 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 4.86 mW/g



APPENDIX G
DUT Scans (136 – 174 MHz)

Data enclosed for this appendix is not applicable for FCC part 90

(Note: sections 7 & 8 from part 1 of 2 of the report reflect Bluetooth band data and therefore are not included in this appendix.
Herein section 6 is followed by section 9. See appendix F for Bluetooth data from sections 7 & 8.)

Section 1.0
Assessments at the Body VHF band (CW mode) - Belt clip NTN8266B, and offered audio accessories
(Section 13.1 Table 12)

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 6/29/2010 1:07:14 PM

Robot# / Run#: DASY4-FL-1 / HvH-Ab-100629-02
 Phantom# / Tissue Temp.: OVAL1022 / 21.3 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 142.3000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: NTN8266B / RMN5058A
 Start Power: 6.67 (W)

Note:

Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 4.94 mW/g (1g); 2.37 mW/g (10g)

Comments: Full scan.

Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.4, 7.4, 7.4)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010

Duty Cycle: 1:1, Medium parameters used: $f = 142 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 60.8$; $\rho = 1000 \text{ kg/m}^3$

Ab Scan/1-Area Scan (61x241x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Reference Value = 52.0 V/m; Power Drift = -0.341 dB

Motorola Fast SAR: SAR(1 g) = 4.31 mW/g; SAR(10 g) = 2.63 mW/g

Maximum value of SAR (interpolated) = 5.03 mW/g

Ab Scan/2-Volume 2D Scan (41x41x1): Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=1\text{mm}$

Reference Value = 52.0 V/m; Power Drift = -0.393 dB

Peak SAR (extrapolated) = 5.59 W/kg

Motorola Fast SAR: SAR(1 g) = 4.85 mW/g; SAR(10 g) = 2.87 mW/g

Maximum value of SAR (interpolated) = 5.59 mW/g

Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.0 V/m; Power Drift = -0.481 dB


Peak SAR (extrapolated) = 15.1 W/kg

SAR(1 g) = 4.94 mW/g; SAR(10 g) = 2.37 mW/g

Maximum value of SAR (measured) = 4.72 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=10\text{mm}$

Maximum value of SAR (measured) = 4.85 mW/g

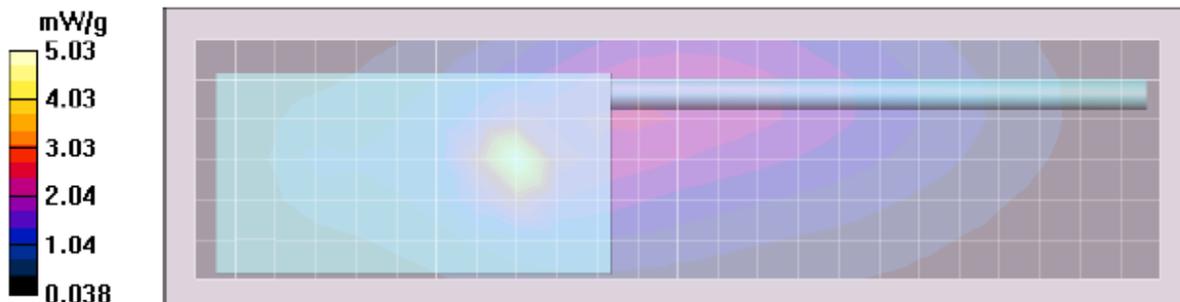

Section 2.0
Assessments at the Body VHF band (CW mode) - Belt clip HLN6875A, and offered audio accessories
(Section 13.2 Table 13)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 6/29/2010 6:09:30 PM

Robot# / Run#: DASY4-FL-1 / MeC-Ab-100629-08
 Phantom# / Tissue Temp.: OVAL1022 / 21.3 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 142.3000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: HLN6875A / RMN5058A
 Start Power: 6.70 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 3.86 mW/g (1g); 1.73 mW/g (10g)

Comments: Full scan.
 Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.4, 7.4, 7.4)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 142 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 60.8$; $\rho = 1000 \text{ kg/m}^3$


Ab Scan/1-Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 41.0 V/m; Power Drift = -0.273 dB
Motorola Fast SAR: SAR(1 g) = 3.25 mW/g; SAR(10 g) = 2.13 mW/g
 Maximum value of SAR (interpolated) = 3.60 mW/g

Ab Scan/2-Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm
 Reference Value = 41.0 V/m; Power Drift = -0.323 dB
 Peak SAR (extrapolated) = 4.75 W/kg
Motorola Fast SAR: SAR(1 g) = 3.93 mW/g; SAR(10 g) = 2.25 mW/g

Warning: Maximum averaged SAR over 10 g is located on the boundary of the measurement cube. This cube might not incorporate the absolute averaged SAR. Please consider a refinement of the Area Scan measurement.
 Maximum value of SAR (interpolated) = 4.75 mW/g

Ab Scan/3-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 41.0 V/m; Power Drift = -0.490 dB
 Peak SAR (extrapolated) = 11.9 W/kg
SAR(1 g) = 3.86 mW/g; SAR(10 g) = 1.73 mW/g
 Maximum value of SAR (measured) = 3.84 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 4.25 mW/g

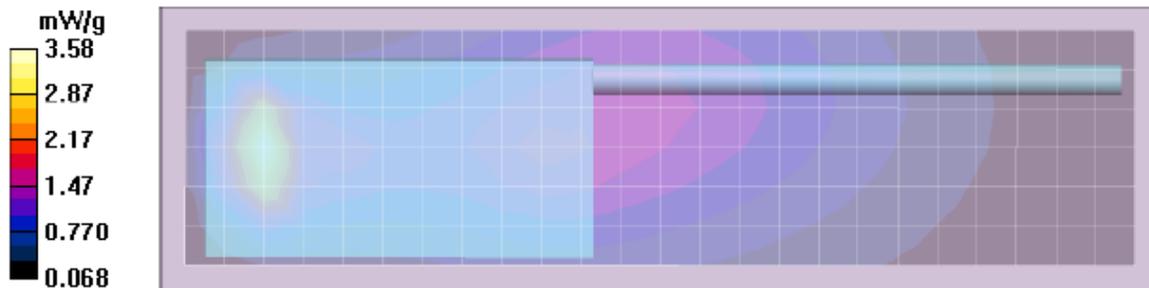

Section 3.0
Assessments at the Body VHF band (CW mode) – Other Frequency Channels
(Section 13.3 Table 14)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 6/28/2010 3:18:52 PM

Robot# / Run#: DASY4-FL-1 / HvH-Ab-100628-03
 Phantom# / Tissue Temp.: OVAL1022 / 20.1 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 136.0000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: NTN8266B / RMN5058A
 Start Power: 6.67 (W)

Note:
 Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 8.94 mW/g (1g); 4.30 mW/g (10g)

Comments: Full scan.


Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.4, 7.4, 7.4)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: f = 142 MHz; $\sigma = 0.8$ mho/m; $\epsilon_r = 61$; $\rho = 1000$ kg/m³

Ab Scan/1-Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 65.4 V/m; Power Drift = -0.0952 dB
 Motorola Fast SAR: SAR(1 g) = 7.39 mW/g; SAR(10 g) = 4.61 mW/g
 Maximum value of SAR (interpolated) = 8.54 mW/g

Ab Scan/2-Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm
 Reference Value = 65.4 V/m; Power Drift = -0.103 dB
 Peak SAR (extrapolated) = 9.81 W/kg
 Motorola Fast SAR: SAR(1 g) = 8.6 mW/g; SAR(10 g) = 5.17 mW/g
 Maximum value of SAR (interpolated) = 9.81 mW/g

Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 65.4 V/m; Power Drift = -0.133 dB
 Peak SAR (extrapolated) = 27.3 W/kg
 SAR(1 g) = 8.94 mW/g; SAR(10 g) = 4.3 mW/g
 Maximum value of SAR (measured) = 8.57 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 9.21 mW/g

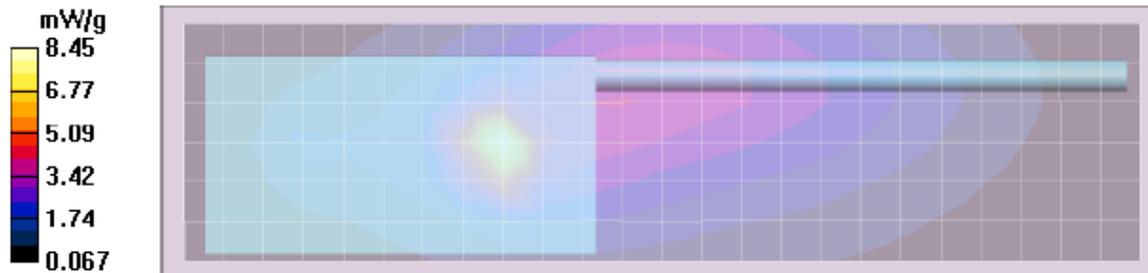

Section 4.0
Assessments at 2.5cm without body worn accessory VHF band (CW Mode)
(Section 13.4 Table 15)

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 6/29/2010 10:36:11 PM

Robot# / Run#: DASY4-FL-1 / MeC-Ab-100629-12
 Phantom# / Tissue Temp.: OVAL1022 / 21.0 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 136.0000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: None / RMN5058A
 Start Power: 6.72 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 3.66 mW/g (1g); 2.80 mW/g (10g)

Comments: Full scan, Back of DUT antenna @ 2.5 cm. from phantom.

Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.4, 7.4, 7.4)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010


Duty Cycle: 1:1, Medium parameters used: f = 142 MHz; $\sigma = 0.81$ mho/m; $\epsilon_r = 60.8$; $\rho = 1000$ kg/m³

Ab Scan/1-Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 69.5 V/m; Power Drift = -0.138 dB
Motorola Fast SAR: SAR(1 g) = 3.69 mW/g; SAR(10 g) = 2.81 mW/g
 Maximum value of SAR (interpolated) = 3.86 mW/g

Ab Scan/2-Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm
 Reference Value = 69.5 V/m; Power Drift = -0.154 dB
 Peak SAR (extrapolated) = 3.87 W/kg
Motorola Fast SAR: SAR(1 g) = 3.69 mW/g; SAR(10 g) = 2.79 mW/g
 Maximum value of SAR (interpolated) = 3.87 mW/g

Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 69.5 V/m; Power Drift = -0.178 dB
 Peak SAR (extrapolated) = 4.97 W/kg
SAR(1 g) = 3.66 mW/g; SAR(10 g) = 2.8 mW/g
 Maximum value of SAR (measured) = 3.81 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 3.79 mW/g

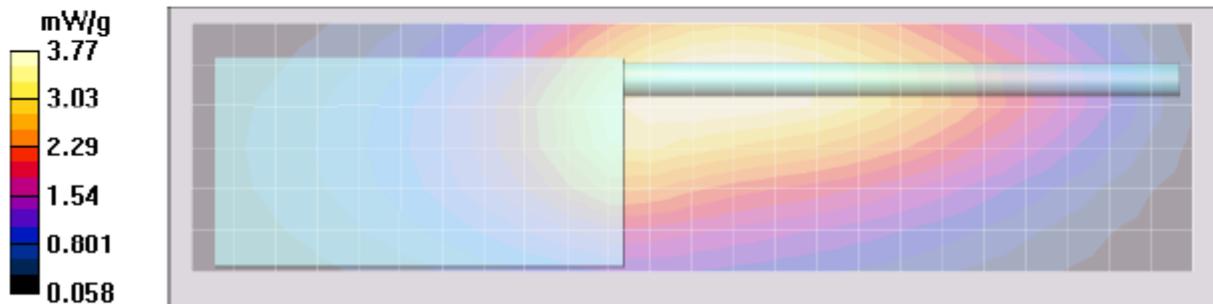

Section 5.0
Assessments at the Face VHF band (CW mode)
(Section 13.5 Table 16)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 6/6/2010 5:47:33 AM

Robot# / Run#: DASY4-FL-1 / HvH-Face-100606-02
 Phantom# / Tissue Temp.: OVAL1016 / 21.3 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0052
 Antenna / TX Freq.: NAR6593A / 142.3000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: None / None
 Start Power: 6.67 (W)

Note:
 Prior to recording the reported SAR values below, the measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported: 1.618 mW/g (1g); 1.252 mW/g (10g)


Comments: Full scan. Front facing phantom.
 Probe: ES3DV3 - SN3185, Calibrated: 11/23/2009, ConvF(7.7, 7.7, 7.7)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: f = 142 MHz; $\sigma = 0.74$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Face Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 49.7 V/m; Power Drift = -0.643 dB
 Peak SAR (extrapolated) = 2.13 W/kg
 SAR(1 g) = 1.61 mW/g; SAR(10 g) = 1.25 mW/g
 Maximum value of SAR (measured) = 1.67 mW/g

Face Scan/Area Scan (61x24x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 49.7 V/m; Power Drift = -0.425 dB
 Motorola Fast SAR: SAR(1 g) = 1.73 mW/g; SAR(10 g) = 1.32 mW/g
 Maximum value of SAR (interpolated) = 1.81 mW/g

Face Scan/Volume 2D Scan (41x41x1): Measurement grid: dx=7.5mm, dy=7.5mm, dz=1mm
 Reference Value = 49.7 V/m; Power Drift = -0.472 dB
 Peak SAR (extrapolated) = 1.73 W/kg
 Motorola Fast SAR: SAR(1 g) = 1.65 mW/g; SAR(10 g) = 1.26 mW/g
 Maximum value of SAR (interpolated) = 1.73 mW/g

Face Scan/Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 1.64 mW/g

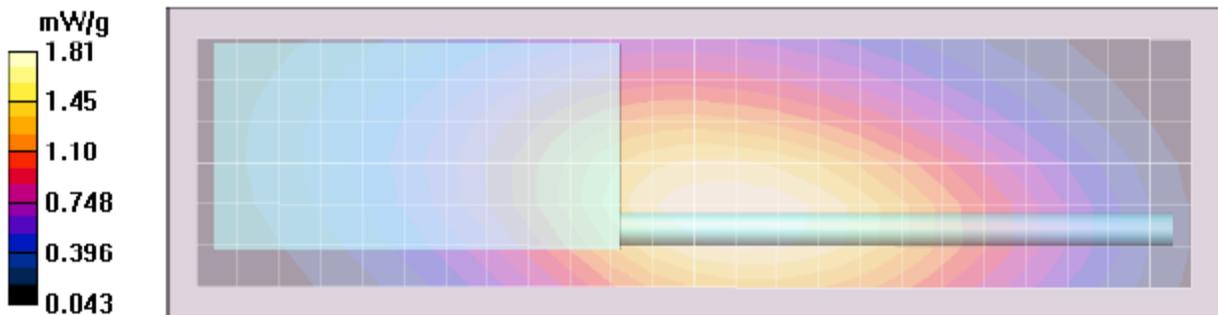

Section 6.0
Assessments at the Face VHF band (CW mode) – Other Frequency Channels
(Section 13.6 Table 17)

Motorola Enterprise Mobility Solutions EME Laboratory
Date/Time: 10/24/2010 2:36:10 PM

Robot# / Run#: DASY4-FL-3 / MeC-Face-101024-02
 Phantom# / Tissue Temp.: OVAL1018 / 21.1 (C)
 DUT Model# / Serial#: H98KGH9PW7AN / NUD1006A0181
 Antenna / TX Freq.: NAR6593A / 136.0000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: None / None
 Start Power: 6.60 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 2.69 mW/g (1g); 2.10 mW/g (10g)


Comments: Full Scan ; Front of DUT facing phantom.

Probe: ES3DV3 - SN3163, Calibrated: 4/23/2010, ConvF(8.1, 8.1, 8.1)
 Electronics: DAE4 Sn850, Calibrated: 8/18/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 142 \text{ MHz}$; $\sigma = 0.73 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$

Face Scan/1-Area Scan (71x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 61.8 V/m; Power Drift = -0.288 dB
Motorola Fast SAR: SAR(1 g) = 2.72 mW/g; SAR(10 g) = 2.08 mW/g
 Maximum value of SAR (interpolated) = 2.85 mW/g

Face Scan/3-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 61.8 V/m; Power Drift = -0.348 dB
 Peak SAR (extrapolated) = 3.56 W/kg
SAR(1 g) = 2.67 mW/g; SAR(10 g) = 2.09 mW/g
 Maximum value of SAR (measured) = 2.78 mW/g

Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 2.79 mW/g

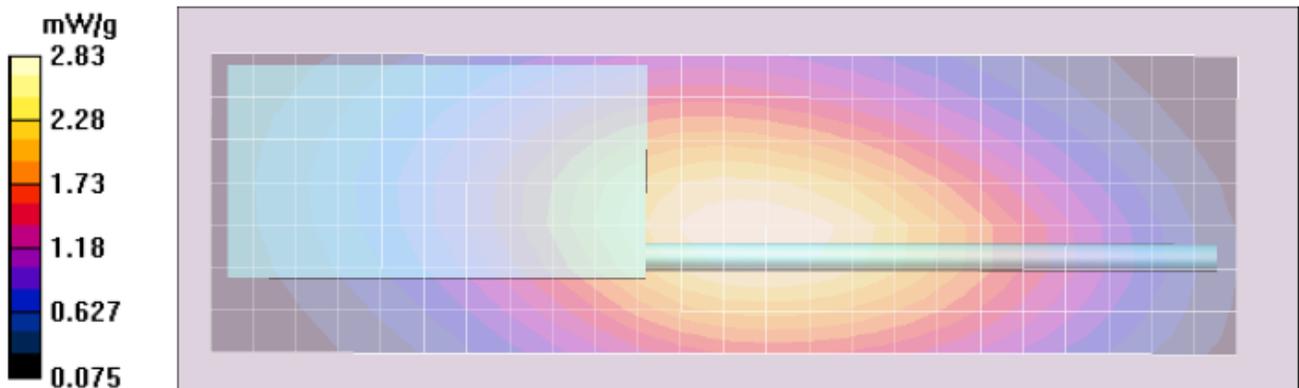

Section 9.0
Assessments at the Body VHF band with belt clip NTN8266B without audio accessory
(Section 13.9 Table 20)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 10/7/2010 9:57:46 AM

Robot# / Run#: DASY4-FL-2 / JsT-Ab-101007-05
 Phantom# / Tissue Temp.: OVAL1022 / 21.1 (C)
 DUT Model# / Serial#: H98KGD9PW5AN (MNUD1002A) / NUD1002A0068
 Antenna / TX Freq.: NAR6593A / 136.0000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: NTN8266B / None
 Start Power: 6.59 (W)

Note:
 Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 6.27 mW/g (1g); 3.21 mW/g (10g)


Comments: Full Scan

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.7, 7.7, 7.7)
 Electronics: DAE3 Sn374, Calibrated: 4/15/2010
 Duty Cycle: 1:1, Medium parameters used: f = 142 MHz; $\sigma = 0.79$ mho/m; $\epsilon_r = 62.4$; $\rho = 1000$ kg/m³

Ab Scan/1-Area Scan (61x241x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 60.4 V/m; Power Drift = -0.0775 dB
Motorola Fast SAR: SAR(1 g) = 5.47 mW/g; SAR(10 g) = 3.49 mW/g
 Maximum value of SAR (interpolated) = 6.23 mW/g

Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 60.4 V/m; Power Drift = -0.0949 dB
 Peak SAR (extrapolated) = 17.1 W/kg
SAR(1 g) = 6.26 mW/g; SAR(10 g) = 3.21 mW/g
 Maximum value of SAR (measured) = 6.22 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 6.37 mW/g

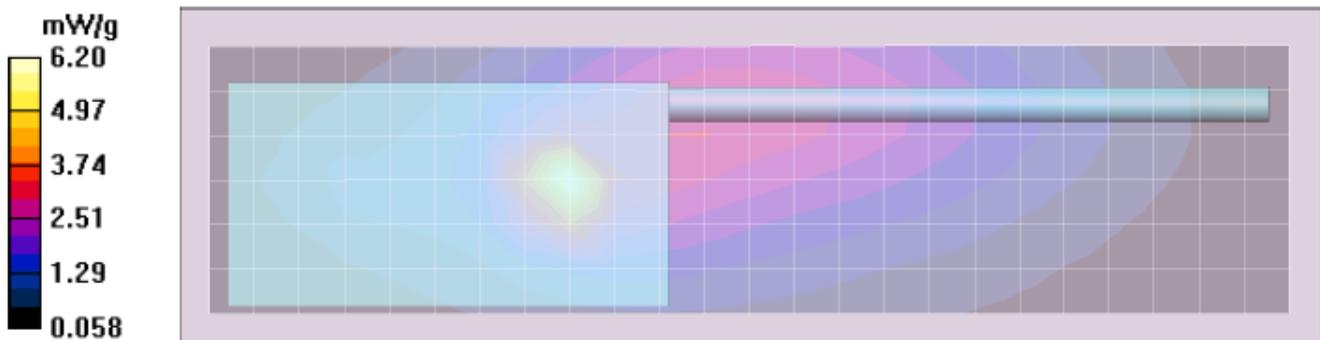

Section 10.0
Assessments at the Body VHF band with belt clip HLN6875A without audio accessory
(Section 13.10 Table 21)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 10/25/2010 10:48:44 PM

Robot# / Run#: DASY4-FL-2 / MeC-Ab-101025-12
 Phantom# / Tissue Temp.: OVAL1022 / 21.2 (C)
 DUT Model# / Serial#: H98KGD9PW5AN / NUD1002A0068
 Antenna / TX Freq.: NAR6593A / 136.0000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: HLN6875A / None
 Start Power: 6.63 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 9.17 mW/g (1g); 3.75 mW/g (10g)


Comments: Full Scan; Rolled battery contacts towards robot.

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.7, 7.7, 7.7)
 Electronics: DAE4 Sn729, Calibrated: 9/24/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 142 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 61.6$; $\rho = 1000 \text{ kg/m}^3$

Ab Scan/1-Area Scan (61x251x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 54.7 V/m; Power Drift = -0.390 dB
Motorola Fast SAR: SAR(1 g) = 7.91 mW/g; SAR(10 g) = 4.5 mW/g
 Maximum value of SAR (interpolated) = 10.1 mW/g

Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 54.7 V/m; Power Drift = -0.474 dB
 Peak SAR (extrapolated) = 33.7 W/kg
SAR(1 g) = 9.17 mW/g; SAR(10 g) = 3.75 mW/g
 Maximum value of SAR (measured) = 9.25 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 10.6 mW/g

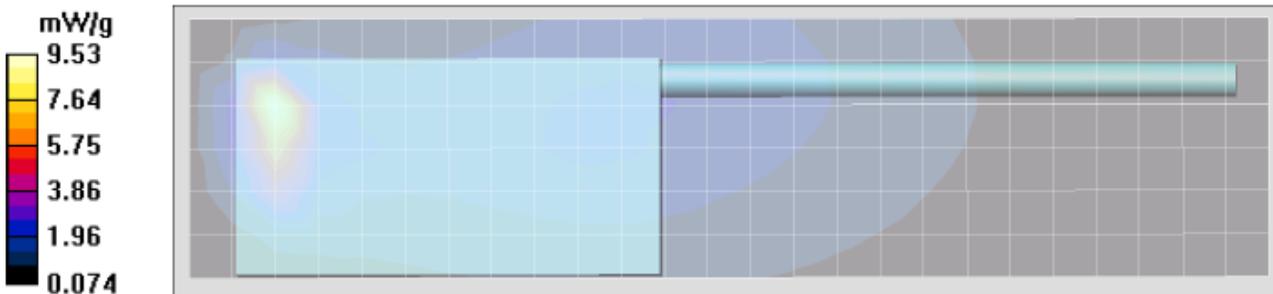

Section 11.0
Assessments at the Body VHF band with belt clip HLN6875A and carry holder PMLN5709A
without audio accessory
(Section 13.11 Table 22)

Motorola Enterprise Mobility Solutions EME Laboratory
 Date/Time: 10/26/2010 11:36:38 PM

Robot# / Run#: DASY4-FL-2 / MeC-Ab-101026-09
 Phantom# / Tissue Temp.: OVAL1022 / 20.7 (C)
 DUT Model# / Serial#: H98KGH9PW7AN / NUD1006A0181
 Antenna / TX Freq.: NAR6593A / 136.0000 (MHz)
 Battery: PMNN4403A
 Carry Acc. / Cable Acc.: HLN6875A with PMLN5709A (SLA dated 9/8/10) / None
 Start Power: 6.65 (W)

Note: Prior to recording the Reported SAR values below, the Measured SAR values were corrected for tissue frequencies from 136 MHz to 3 GHz.

Reported SAR: 9.90 mW/g (1g); 4.36 mW/g (10g)

Comments: Full Scan.

Probe: ES3DV3 - SN3147, Calibrated: 2/18/2010, ConvF(7.7, 7.7, 7.7)
 Electronics: DAE4 Sn729, Calibrated: 9/24/2010
 Duty Cycle: 1:1, Medium parameters used: $f = 142$ MHz; $\sigma = 0.77$ mho/m; $\epsilon_r = 60.9$; $\rho = 1000$ kg/m³

Ab Scan/1-Area Scan (61x251x1): Measurement grid: dx=15mm, dy=15mm
 Reference Value = 53.6 V/m; Power Drift = -0.257 dB
Motorola Fast SAR: SAR(1 g) = 6.91 mW/g; SAR(10 g) = 4.72 mW/g
 Maximum value of SAR (interpolated) = 7.89 mW/g

Ab Scan/3-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 53.6 V/m; Power Drift = -0.352 dB
 Peak SAR (extrapolated) = 32.8 W/kg
SAR(1 g) = 9.85 mW/g; SAR(10 g) = 4.36 mW/g
 Maximum value of SAR (measured) = 10.0 mW/g

Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 11.9 mW/g




APPENDIX H DUT Supplementary Data (Power slump)

Model # H98KGD9PW5AN
Serial # NUD1002A0052

Battery: PMNN4403A
Frequency: 136.00 MHz
Date: 6/30/2010

Transmit Mode: CW
Audio Accessory: RMN5058A

TX TIME (minutes)	Measured Power Watts
	PMNN4403A
0.0	6.66
1.0	6.74
2.0	6.76
3.0	6.77
4.0	6.77
5.0	6.78
6.0	6.79
7.0	6.79
8.0	6.79
9.0	6.80
10.0	6.80
11.0	6.80
12.0	6.80
13.0	6.80
14.0	6.80
15.0	6.80
16.0	6.80
17.0	6.80
18.0	6.80
19.0	6.80
20.0	6.80
21.0	6.79
22.0	6.79
23.0	6.79
24.0	6.79
25.0	6.78
26.0	6.78
27.0	6.78
28.0	6.78
29.0	6.77
30.0	6.77
31.0	6.77
32.0	6.77
33.0	6.76
34.0	6.76
35.0	6.76
36.0	6.75
37.0	6.75
38.0	6.75
39.0	6.74
40.0	6.74

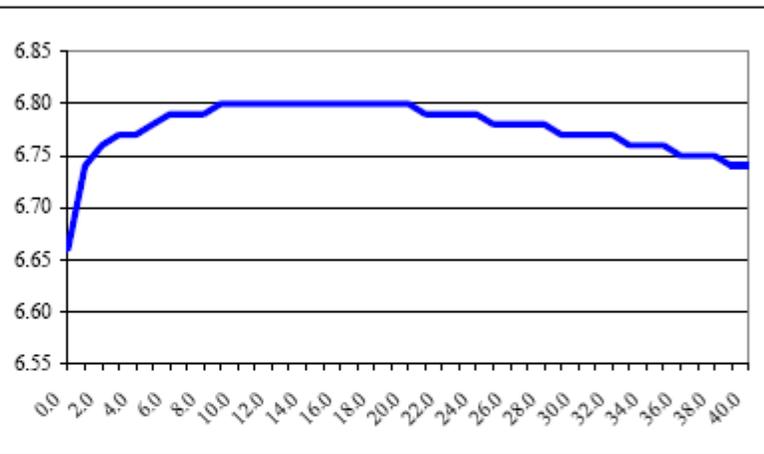

Appendix I
DUT Test Position Photos

Photos available in Exhibit 7B

Appendix J
DUT and Body worn Accessory Photos

Photos available in Exhibit 7B