



DECLARATION OF COMPLIANCE SAR ASSESSMENT

Motorola Solutions Inc. EME Test Laboratory Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.	Date of Report: 01/02/2025 Report Revision: A
--	--

Responsible Engineer: Report Author: Test Location: Date/s Tested: Manufacturer: Manufacturer Location: DUT Description: Test TX mode(s): Max. Power output: Tx Frequency Bands: Signaling type: Model(s) Tested: Model(s) Certified: (HVIN/PMN) Serial Number(s): Classification: Applicant Name: Applicant Address: Firmware Version (FVIN): FCC ID: FCC Test Firm Registration Number:	Alfred Hoe Kean Loon (Senior EME Engineer) Alfred Hoe Kean Loon (Senior EME Engineer) Penang EME Laboratory 12/09/2024 - 12/10/2024 Motorola Solutions Malaysia Sdn Bhd. Plot 2A, Medan Bayan Lepas Mukim, 12 SWD, 11900 Bayan Lepas, Penang, Malaysia RMM2050 2W MURS 5CH NO FREQ KNOB (BRUS) CW (PTT) Refer table 3 Refer table 3 Refer table 3 RMM2050BHLAA Refer 1.0 Introduction 0245AX4522 General Population/Uncontrolled Environment Motorola Solutions Inc. Plot 2A, Medan Bayan Lepas Mukim, 12 SWD, 11900 Bayan Lepas, Penang, Malaysia R02.02 AZ489FT3858 This report contains results that are immaterial for FCC equipment approval, which are clearly identified. 823256
---	---

The test results clearly demonstrate compliance with General Population/Uncontrolled Environment RF Exposure limits of 1.6 W/kg averaged over 1 gram per the requirements of FCC 47 CFR § 2.1093.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report (no deviation from standard methods). This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc EME Laboratory. I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. The results and statements contained in this report pertain only to the device(s) evaluated.

Saw Sun Hock (Approval Signatory)
Approved Date: 01/02/2025

Contents:

1.0 Introduction..... 4

2.0 FCC SAR Summary 4

3.0 Abbreviations / Definitions 5

4.0 Referenced Standards and Guidelines 6

5.0 SAR Limits 6

6.0 Description of Device Under Test (DUT) 7

7.0 Optional Accessories and Test Criteria 8

 7.1 Antenna 8

 7.2 Batteries 8

 7.3 Body worn Accessory 8

 7.4 Audio Accessories 9

8.0 Description of Test System..... 10

 8.1 Descriptions of Robotics/Probes/Readout Electronics 10

 8.2 Description of Phantom(s) 11

 8.3 Description of Simulated Tissue 11

9.0 Additional Test Equipment..... 12

10.0 SAR Measurement System Validation and Verification..... 12

 10.1 System Validation 12

 10.2 System Verification 13

 10.3 Equivalent Tissue Test Results 13

11.0 Environmental Test Conditions 14

12.0 DUT Test Setup and Methodology 14

 12.1 Measurements..... 14

 12.2 DUT Configuration(s)..... 15

 12.3 DUT Positioning Procedures..... 16

 12.3.1 Body 16

 12.3.2 Head..... 16

12.3.3 Face 16

12.4 DUT Test Channels 16

12.5 SAR Result Scaling Methodology..... 17

12.6 DUT Test Plan..... 17

13.0 DUT Test Data..... 18

13.1 LMR assessments at the Body for 151.82-154.6MHz band 18

13.2 LMR assessments at the Face for 151.82-154.6MHz band 19

13.3 Shortened Scan Assessment 20

14.0 Results Summary 20

15.0 Variability Assessment 21

16.0 System Uncertainty 21

APPENDICES

- A Measurement Uncertainty Budget
- B Probe Calibration Certificates
- C Dipole Calibration Certificates
- D System Verification Check Scans
- E DUT Scans
- F Shorten Scan of Highest SAR Configuration
- G DUT Test Position Photos
- H DUT, Body worn and audio accessories Photos

Report Revision History

Date	Revision	Comments
01/02/2025	A	Initial release

1.0 Introduction

This report details the utilization, test setup, test equipment, and test results of the Specific Absorption Rate (SAR) measurements performed at the Motorola Solutions Inc. EME Test Laboratory for handheld portable model number RMM2050BHLAA. This device is classified as General Population/Uncontrolled Environment and model certified is listed as below:

Models	Hardware Version ID Number (HVIN)	Product Marketing Name (PMN)	Description
RMM2050BHLAA	RMM2050BHLAA	RMM2050	RMM2050 2W MURS 5CH NO FREQ KNOB (BRUS)

2.0 FCC SAR Summary

Table 1

Equipment Class	Frequency band (MHz)	Max Calc at Body (W/kg)	Max Calc at Face (W/kg)
		1g-SAR	1g-SAR
TNF	151.82-154.6MHz (LMR)	0.46	0.27

3.0 Abbreviations / Definitions

CNR:	Calibration Not Required
CW:	Continuous Wave
DUT:	Device Under Test
EME:	Electromagnetic Energy
FM:	Frequency Modulation
LMR:	Land Mobile Radio
NA:	Not Applicable
PTT:	Push to Talk
SAR:	Specific Absorption Rate
TNF:	Licensed Non-Broadcast Transmitter Held to Face

Audio accessories: These accessories allow communication while the DUT is worn on the body.

Body worn accessories: These accessories allow the DUT to be worn on the body of the user.

Maximum Power: Defined as the upper limit of the production line final test station

4.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields”, OET Bulletin 65, FCC, Washington, D.C.: 1997.
- Institute of Electrical and Electronics Engineers (IEEE) C95.1-2019
- Ministry of Health (Canada) Safety Code 6 (2015), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz
- RSS-102 (Issue 6) – Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands)
- ANATEL, Brazil Regulatory Authority, Resolution No 700 of September 28, 2018 "Approves the Regulation on the Assessment of Human Exposure to Electric, Magnetic and Electromagnetic Fields Associated with the Operation of Radio communication Transmitting Stations.
- IEC/IEEE 62209-1528-2020- Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
- FCC KDB – 643646 D01 SAR Test for PTT Radios v01r03
- FCC KDB – 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB – 865664 D02 RF Exposure Reporting v01r02
- FCC KDB – 447498 D01 General RF Exposure Guidance v06

5.0 SAR Limits

Table 2

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average - ANSI - (averaged over the whole body)	0.08	0.4
Spatial Peak - ANSI - (averaged over any 1-g of tissue)	1.6	8.0
Spatial Peak – ICNIRP/ANSI - (hands/wrists/feet/ankles averaged over 10-g)	4.0	20.0
Spatial Peak - ICNIRP - (Head and Trunk 10-g)	2.0	10.0

6.0 Description of Device Under Test (DUT)

This portable device operates in the LMR bands using frequency modulation (FM) signals incorporating traditional simplex two-way radio transmission protocol.

The model represented under this filing utilizes a fixed antenna and is capable of transmitting in the 151.82-154.6MHz band. The nominal output powers are 1.8W with maximum output powers of 2.0W as defined by upper limit of the production line final test station.

The LMR bands in this device operate in a half duplex system. A half duplex system only allows the user to transmit or receive. This device cannot transmit and receive simultaneously. The user must stop transmitting in order to receive a signal or listen for a response, regardless of PTT button or use of voice activated audio accessories. This type of operation, along with the RF safety booklet, which instructs the user to transmit no more than 50% of the time, justifies the use of 50% duty factor for this device.

Table 3 below summarizes the technologies, bands, maximum duty cycles and maximum output powers. Maximum output powers are defined as upper limit of the production line final test station.

Table 3

Technology	Transmit Band (MHz)	Transmission	Duty Cycle (%)	Conducted (Average Detector) Maximum Power (W)
LMR	151.82-154.6	FM	50*	2.00

Note - * includes 50% PTT operation

The intended operating positions are “at the face” with the DUT at least 2.5 cm from the mouth, and “at the body” by means of the offered body worn accessories. Body worn audio and PTT operation is accomplished by means of optional remote accessories that are connected to the radio.

7.0 Optional Accessories and Test Criteria

This device is offered with optional accessories. All accessories were individually evaluated during the test plan creation to determine if testing was required per the guidelines outlined in “SAR Test Reduction Considerations for Occupational PTT Radios” FCC KDB 643646 to assess compliance of this device. The following sections identify the test criteria and details for each accessory category. Refer to Exhibit 7B for antenna separation distances.

7.1 Antenna

Table 4

Antenna No.	Antenna Models	Description	Selected for test	Tested
1	Non Removable	150.8-170MHz, ¼ wave, 3dBi	Yes	Yes

7.2 Batteries

Table 5

Battery No.	Battery Models	Description	Selected for test	Tested	Comments
1	PMNN4453A	RM/RVA/XT High Cap BATT LIION-3000	Yes	Yes	Default battery for face testing
2	PMNN4434A	RM/RVA/XT STD BATT LIION-2100	Yes	Yes	Default battery for body testing

7.3 Body worn Accessory

Table 6

Body worn No.	Body worn Models	Description	Selected for test	Tested	Comments
1	PMLN6455A	RMX Series Holster	Yes	Yes	

7.4 Audio Accessories

NOTE for Table 7 – Always recommend list default audio in first one (Audio No. 1)

Table 7

Audio No.	Audio Acc. Models	Description	Selected for test	Tested	Comments
1	HKLN4606A	ACCESSORY KIT,REMOTE SPEAKER MIC, W/PTT, SLIM PLUG, PVC FREE	Yes	Yes	Default Audio
2	HKLN4601A	ACCESSORY KIT,DUAL PIN SURVEILLANCE W/PTT, SLIM PLUG, PVC FREE	Yes	No*	
3	HKLN4604A	ACCESSORY KIT,SWIVEL EARPIECE, W/PTT, SLIM PLUG, PVC FREE	Yes	No*	
4	HKLN4605A	ACCESSORY KIT,EARBUD W/PTT, MIC, SLIM PLUG,PVC FREE	Yes	No*	
5	HKLN4599A	AUDIO ACCESSORY- HEADSET,EARPIECE W/PTT, MIC, SLIM PLUG, PVC FREE	Yes	No*	
6	HKLN4599B	AUDIO ACCESSORY- HEADSET,EARPIECE W/PTT, MIC, SLIM PLUG, PVC FREE	Yes	No*	
7	HCSN4000D	(56517) Earpiece w/ PTT Mic	Yes	No*	
8	HCSN4001C	(56518) Earpiece w/Boom Mic	Yes	No*	
9	HMN9030A	Remote Speaker Mic	Yes	No*	
10	HMN9038A	(53865) Headset W/swivel Boom Mic	Yes	No*	
11	HMN9039E	(53863) Earpiece w/Boom Mic	Yes	No*	
12	NTN9159F	(53815) Lightweight Headset	Yes	No*	
13	RMN5114A	Light Weight Temple Transducer Headset	Yes	No*	
14	HKLN4477B	Earpiece Surveillance Mic	No	No	By similarity to HKLN4601A
15	HMN9025D	(53866) Earbud w/PTT Mic	No	No	By similarity to HKLN4605A
16	HMN9026D	(53862) Remote Spk Mic	No	No	By similarity to HKLN4606A
17	RLN5714B	Earpiece w/Inline Mic	No	No	By similarity to HCSN4000D
18	RLN6423A	(52730) Swivel Earpiece	No	No	By similarity to HCSN4000D

Note - * Intended for test. Per KDB provision tests not required

8.0 Description of Test System

DASY5™ Test System



8.1 Descriptions of Robotics/Probes/Readout Electronics

Table 8

Dosimetric System type	System version	DAE type	Probe Type
Schmid & Partner Engineering AG SPEAG DASY 5	52.10.4.1527	DAE4	EX3DV4 (E-Field)

The DASY5™ system is operated per the instructions in the DASY5™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess SAR compliance was calibrated according to ISO/IEC 17025 A2LA guidelines. Section 9.0 presents additional test equipment information. Appendices B and C present the applicable calibration certificates.

8.2 Description of Phantom(s)

Table 9

Phantom Type	Phantom(s) Used	Material Parameters	Phantom Dimensions LxWxD(mm)	Material Thickness (mm)	Support Structure Material	Loss Tangent (wood)
Triple Flat	NA	200MHz -6GHz; Er = 3-5, Loss Tangent = ≤0.05	280x175x175	2mm +/- 0.2mm	Wood	< 0.05
SAM	NA	300MHz -6GHz; Er = < 5, Loss Tangent = ≤0.05	Human Model			
Oval Flat	√	300MHz -6GHz; Er = 4+/- 1, Loss Tangent = ≤0.05	600x400x190			

8.3 Description of Simulated Tissue

The sugar based simulate tissue is produced by placing the correct measured amount of De-ionized water into a large container. Each of the dried ingredients are weighed and added to the water carefully to avoid clumping. If the solution has a high sugar concentration the water is pre-heated to aid in dissolving the ingredients. The solution is mixed thoroughly, covered, and allowed to sit overnight prior to use.

The simulated tissue mixture was mixed based on the Simulated Tissue Composition indicated in Table 10. During the daily testing of this product, the applicable mixture was used to measure the Di-electric parameters at each of the tested frequencies to verify that the Di-electric parameters were within the tolerance of the tissue specifications.

Simulated Tissue Composition (percent by mass)

Table 10

Ingredients	150MHz
	Head
Sugar	55.4
Diacetin	NA
De ionized-Water	38.35
Salt	5.15
HEC	1
Bact.	0.1

9.0 Additional Test Equipment

The Table below lists additional test equipment used during the SAR assessment.

Table 11

Equipment Type	Model Number	Serial Number	Calibration Date	Calibration Due Date
SPEAG PROBE	EX3DV4	7511	07/23/24	07/23/27
SPEAG DAE	DAE4	1294	12/08/23	12/08/26
POWER AMPLIFIER	10W1000C	312859	CNR	CNR
SIGNAL GENERATOR (VECTOR ESG 250KHZ-6GHZ)	E4438C	MY45091093	08/17/24	08/17/25
BI-DIRECTIONAL COUPLER	3020A	41935	08/20/24	08/20/25
POWER METER	E4419B	MY45103725	07/18/24	07/18/25
POWER SENSOR	E4412A	MY61060011	04/29/24	04/29/25
POWER METER	E4416A	MY50001037	09/06/24	09/06/25
POWER SENSOR	E9301B	MY41495733	09/12/24	09/12/25
DATA LOGGER	DSB	16398050	09/07/24	09/07/25
NETWORK ANALYZER	E5071B	MY42403147	06/06/24	06/06/25
THERMOMETER	HH202A	35881	01/17/24	01/17/25
TEMPERATURE PROBE	80PK-22	05032017	12/28/23	12/28/24
DIELECTRIC ASSESSMENT KIT	DAK-12	1069	04/08/24	04/08/25
SPEAG DIPOLE	CLA150	4016	01/06/23	01/06/26
POWER SENSOR	E9301B	MY55210006	02/01/24	02/01/25
POWER METER	E4418B	GB40206480	01/15/24	01/15/25

10.0 SAR Measurement System Validation and Verification

DASY output files of the probe/dipole calibration certificates and system verification test results are included in appendices B, C & D respectively.

10.1 System Validation

The SAR measurement system was validated according to procedures in KDB 865664. The validation status summary Table is below.

Table 12

Dates	Probe Calibration Point	Probe SN	Measured Tissue Parameters		Validation			
			σ	ϵ_r	Sensitivity	Linearity	Isotropy	
CW								
09/25/2024	Head	150	7511	0.77	49.92	Pass	Pass	Pass

10.2 System Verification

System verification checks were conducted each day during the SAR assessment. The results are normalized to 1W. Appendix D includes DASY plots (bolded) with the largest deviation from the qualified source SAR target for each dipole. The Table below summarizes the daily system check results used for the SAR assessment.

Table 13

Probe Serial #	Tissue Type	Dipole Kit / Serial #	Ref SAR @ 1W (W/kg)	System Check Results Measured (W/kg)	System Check Test Results when normalized to 1W (W/kg)	Tested Date	Deviation (%)
7511	IEEE/IEC Head	SPEAG CLA150-4016	3.77 ± 10%	3.68	3.68	12/09/2024@	-2.4

Note: '@' indicates that system verification check covers next test day

10.3 Equivalent Tissue Test Results

Simulated tissue prepared for SAR measurements is measured daily and within 24 hours prior to actual SAR testing to verify that the tissue is within +/- 5% of target parameters at the center of the transmit band. This measurement is done using the applicable equipment indicated in section 9.0. The Table below summarizes the measured tissue parameters used for the SAR assessment.

Table 14

Frequency (MHz)	Tissue Type	Conductivity Target (S/m)	Dielectric Constant Target	Conductivity Meas. (S/m)	Dielectric Constant Meas.	Tested Date
150.0000	IEEE/IEC Head	0.76 (0.71-0.80)	52.3 (49.7-54.9)	0.795	49.820	12/09/2024@
151.9400		0.76 (0.72-0.80)	52.2 (49.6-54.8)	0.796	49.739	12/09/2024@

Note: '@' indicates that system verification check covers next test day

11.0 Environmental Test Conditions

The EME Laboratory’s ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within +/- 2°C of the temperature at which the dielectric properties were determined. The liquid depth within the phantom used for measurements was at least 15cm. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The Table below presents the range and average environmental conditions during the SAR tests reported herein:

Table 15

	Target	Measured
Ambient Temperature	18 – 25 °C	Range: 19.9 – 22.9°C Avg. 21.6 °C
Tissue Temperature	18 – 25 °C	Range: 20.8-21.5°C Avg. 21.1°C

Relative humidity target range is a recommended target

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the SAR scans are repeated.

12.0 DUT Test Setup and Methodology

12.1 Measurements

SAR measurements were performed using the DASY system described in section 8.0 using zoom scans. Oval flat phantoms filled with applicable simulated tissue were used for body and face testing.

The Table below includes the step sizes and resolution of area and zoom scans per KDB 865664 requirements.

Table 16

Description		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: ΔxArea, ΔyArea		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: ΔxZoom, ΔyZoom		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: ΔzZoom(n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

12.2 DUT Configuration(s)

The DUT is a portable device operational at the body and face as described in section 6.0 while using the applicable accessories listed in section 7.0. All accessories listed in section 7.0 of this report were considered when implementing the guidelines specified in KDB 643646.

12.3 DUT Positioning Procedures

The positioning of the device for each body location is described below and illustrated in Appendix G.

12.3.1 Body

The DUT was positioned in normal use configuration against the phantom with the offered body worn accessory as well as with and without the offered audio accessories as applicable.

12.3.2 Head

Not applicable.

12.3.3 Face

The DUT was positioned with its' front and back sides separated 2.5cm from the phantom.

12.4 DUT Test Channels

The number of test channels was determined by using the following IEEE 1528 equation. The use of this equation produces the same or more test channels compared to the FCC KDB 447498 number of test channels formula.

$$N_c = 2 * \text{roundup}[10 * (f_{\text{high}} - f_{\text{low}}) / f_c] + 1$$

Where

N_c = Number of channels

F_{high} = Upper channel

F_{low} = Lower channel

F_c = Center channel

12.5 SAR Result Scaling Methodology

The calculated 1-gram averaged SAR results indicated as “Max Calc. 1g-SAR” in the data Tables is determined by scaling the measured SAR to account for power leveling variations and drift. Appendix F includes a shortened scan to justify SAR scaling for drift. For this device the “Max Calc. 1g-SAR” are scaled using the following formula:

$$Max_Calc = SAR_meas \cdot 10^{\frac{-Drift}{10}} \cdot \frac{P_max}{P_int} \cdot DC$$

P_max = Maximum Power (W)

P_int = Initial Power (W)

Drift = DASY drift results (dB)

SAR_meas = Measured 1-g Avg. SAR (W/kg)

DC = Transmission mode duty cycle in % where applicable
50% duty cycle is applied for PTT operation

Note: for conservative results, the following are applied:

If P_int > P_max, then P_max/P_int = 1.

Drift = 1 for positive drift

Additional SAR scaling was applied using the methodologies outlined in FCC KDB 865664 using tissue sensitivity values. SAR was scaled for conditions where the tissue permittivity was measured above the nominal target and for tissue conductivity that was measured below the nominal target. Negative or reduced SAR scaling is not permitted.

12.6 DUT Test Plan

The guidelines and requirements outlined in section 4.0 were used to assess compliance of this device. All modes of operation identified in section 6.0 were considered during the development of the test plan. All tests were performed in CW modes and 50% duty cycle was applied to PTT configurations in the final results.

13.0 DUT Test Data

13.1 LMR assessments at the Body for 151.82-154.6MHz band

Battery PMNN4434A was selected as the default battery for assessments at the Body because it is the thinnest and lower capacity (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (151.82-154.6MHz) which are listed in Table 17. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios).

Table 17

Test Freq (MHz)	Power (W)
151.9400	1.74

Assessments at the Body with Body worn PMLN6455A

DUT assessment with offered antennas, default battery and, the above mentioned body worn accessory per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 17 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 18

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#
Fixed	PMNN4434A	PMLN6455A	HKLN4606A	151.9400	1.74	-0.85	0.64	0.45	EMR-AB-241209-03
Assessment of Additional Batteries									
Fixed	PMNN4453A	PMLN6455A	HKLN4606A	151.9400	1.75	-0.26	0.72	0.43	EMR-AB-241209-05

Assessment at the Body with other audio accessories

Assessment per “KDB 643646 Body SAR Test Consideration for Audio Accessories without Built-in Antenna; Sec 1, A. when overall < 4.0 W/kg, SAR tested for others audio accessory is not necessary.” This was applicable to all remaining accessories.

13.2 LMR assessments at the Face for 151.82-154.6MHz band

Battery PMNN4453A was selected as the default battery for assessments at the Face because it has the highest capacity (refer to Exhibit 7B for battery illustration). The default battery was used during conducted power measurements for all test channels within FCC allocated frequency range (151.82-154.6MHz) which are listed in Table 19. The channel with the highest conducted power will be identified as the default channel per KDB 643646 (SAR Test for PTT Radios).

Table 19

Test Freq (MHz)	Power (W)
151.9400	1.75

DUT assessment with offered antennas, default battery with front of DUT positioned 2.5cm facing phantom per KDB 643646. Optional batteries were tested per the requirements of KDB 643646. Refer to Table 19 for highest output power channel. SAR plots of the highest results per Table (bolded) are presented in Appendix E.

Table 20

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#
Fixed	PMNN4453A	None @ front	None	151.9400	1.75	-0.44	0.43	0.27	BL-FACE-241209-10
Assessment of Additional Batteries									
Fixed	PMNN4434A	None @ front	None	151.9400	1.74	-0.74	0.39	0.27	BL-FACE-241209-11

13.3 Shortened Scan Assessment

A “shortened” scan using the highest SAR configuration overall from above was performed to validate the SAR drift of the full DASY5™ coarse and zoom scans. Note that the shortened scan represents the zoom scan performance result; this is obtained by first running a coarse scan to find the peak area and then, using a newly charged battery, a zoom scan only was performed. The results of the shortened cube scan presented in Appendix D demonstrate that the scaling methodology used to determine the calculated SAR results presented herein are valid. The SAR result from the Table below is provided in Appendix F.

Table 21

Antenna	Battery	Carry Accessory	Cable Accessory	Test Freq (MHz)	Init Pwr (W)	SAR Drift (dB)	Meas. 1g-SAR (W/kg)	Max Calc. 1g-SAR (W/kg)	Run#
Fixed	PMNN4434A	PMLN6455A	HKLN4606A	151.9400	1.74	-0.30	0.75	0.46	BL-AB-241209-13

14.0 Results Summary

Based on the test guidelines from section 4.0 and satisfying frequencies within FCC bands, the highest Operational Maximum Calculated 1-gram average SAR values found for this filing:

Table 23

Designator	Frequency band (MHz)	Max Calc at Body (W/kg)	Max Calc at Face (W/kg)
		1g-SAR	1g-SAR
FCC US			
LMR	151.82-154.6	0.46	0.27

All results are scaled to the maximum output power.

The test results clearly demonstrate compliance with FCC General Population/Uncontrolled Environment RF Exposure limits of 1.6 W/kg averaged over 1 gram per the requirements of FCC 47 CFR § 2.1093.

15.0 Variability Assessment

Per the guidelines in KDB 865664 SAR variability assessment is not required because SAR results are below 0.8W/kg (General Population)

16.0 System Uncertainty

A system uncertainty analysis is not required for this report per KDB 865664 because the highest report SAR value for General Population exposure is less than 1.5W/kg.

Per the guidelines of ISO/IEC 17025 a reported system uncertainty is required and therefore measurement uncertainty budget is included in Appendix A.

Appendix A
Measurement Uncertainty Budget

Uncertainty Budget for System Validation (dipole & flat phantom), for 4 MHz to 300 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	$\frac{e}{f(d,k)}$	<i>f</i>	<i>g</i>	$\frac{h = c \times f / e}{1 g}$	$\frac{i = c \times g / e}{10 g}$
Uncertainty Component	IEEE 1528 section (2020)	Tol. (± %)	Prob Dist	Div. ^a _{q_i}	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	<i>u_i</i> (±%)	<i>u_i</i> (±%)
Measurement System								
Probe Calibration	8.4.1.1	13.3	N	2.00	1	1	6.7	6.7
Probe Calibration Drift	8.4.1.2	1.7	R	1.73	1	1	1.0	1.0
Probe linearity and detection limit	8.4.1.3	4.7	R	1.73	1	1	2.7	2.7
Broadband signal	8.4.1.4	0.0	R	1.73	1	1	0.0	0.0
Probe isotropy	8.4.1.5	4.7	R	1.73	1	1	2.7	2.7
Other probe and data acquisition errors	8.4.1.6	0.8	N	1.00	1	1	0.8	0.8
RF ambient and noise	8.4.1.7	0.6	N	1.00	1	1	0.6	0.6
Probe positioning errors	8.4.1.8	0.006 mm	N	1.00	0.04	0.04	0.1	0.1
Data processing errors	8.4.1.9	0.6	N	1.00	1	1	0.6	0.6
Phantom and Device								
Measurement of phantom conductivity(σ)	8.4.2.1	2.5	N	1.00	0.78	0.71	2.0	1.8
Temperature effects (medium)	8.4.2.2	5.4	R	1.73	0.78	0.71	2.4	2.2
Shell permittivity	8.4.2.3	14	R	1.73	0	0	0.0	0.0
Distance between the radiating element of the DUT and the phantom medium	8.4.2.4	1	N	1.00	2	2	2.0	2.0
Effect of operating mode on probe sensitivity	8.4.2.7	0	R	1.73	1	1	0.0	0.0
Time-average SAR	8.4.2.8	0	R	1.73	1	1	0.0	0.0
Validation antenna uncertainty (validation measurement only)	8.4.2.10	3.2	N	1.00	1	1	3.2	3.2
Uncertainty in accepted power (validation measurement only)	8.4.2.11	2	N	1.00	1	1	2.0	2.0
Corrections to the SAR result (if applied)								
Phantom deviation from target (ϵ', σ)	8.4.3.1	1.9	N	1.00	1	0.84	1.9	1.6
Combined Standard Uncertainty			RSS				9.6	9.5
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				19.3	19.0

Uncertainty Budget for Device Under Test, for 4 MHz to 300 MHz

Input quantity Xi (source of uncertainty)	IEEE 1528 section (2020)	Tol. (± %)	Prob Dist	Div. ^a _{q_i}	c _i (1 g)	c _i (10 g)	1 g u _i (±%)	10 g u _i (±%)
Measurement System								
Probe Calibration	8.4.1.1	13.3	N (k = 2)	2.00	1	1	6.7	6.7
Probe Calibration Drift	8.4.1.2	1.7	R	1.73	1	1	1.0	1.0
Probe linearity and detection limit	8.4.1.3	4.7	R	1.73	1	1	2.7	2.7
Broadband signal	8.4.1.4	0.6	R	1.73	1	1	0.3	0.3
Probe isotropy	8.4.1.5	7.6	R	1.73	1	1	4.4	4.4
Other probe and data acquisition errors	8.4.1.6	0.8	N	1.00	1	1	0.8	0.8
RF ambient and noise	8.4.1.7	1.8	N	1.00	1	1	1.8	1.8
Probe positioning errors	8.4.1.8	0.006 mm	N	1.00	0.04	0.04	0.1	0.1
Data processing errors	8.4.1.9	1.2	N	1.00	1	1	1.2	1.2
Phantom and Device								
Measurement of phantom conductivity(σ)	8.4.2.1	2.5	N	1.00	0.78	0.71	2.0	1.8
Temperature effects (medium)	8.4.2.2	5.4	R	1.73	0.78	0.71	2.4	2.2
Shell permittivity	8.4.2.3	14	R	1.73	0	0	0.0	0.0
Distance between the radiating element of the DUT and the phantom medium	8.4.2.4	2	N	1.00	2	2	4.0	4.0
Repeatability of positioning the DUT or source against the phantom	8.4.2.5	2.8	N	1.00	1	1	2.8	2.8
Device holder effects	8.4.2.6	4.55	N	1.00	1	1	4.6	4.6
Effect of operating mode on probe sensitivity	8.4.2.7	2.4	R	1.73	1	1	1.4	1.4
Time-average SAR	8.4.2.8	1.7	R	1.73	1	1	1.0	1.0
Variation in SAR due to drift in output of DUT	8.4.2.9	5	R	1.73	1	1	2.9	2.9
Validation antenna uncertainty (validation measurement only)	8.4.2.10	0	N	1.00	1	1	0.0	0.0
Uncertainty in accepted power (validation measurement only)	8.4.2.11	0	N	1.00	1	1	0.0	0.0
Corrections to the SAR result (if applied)								
Phantom deviation from target (ε',σ)	8.4.3.1	1.9	N	1.00	1	0.84	1.9	1.6
SAR scaling	8.4.3.2	0	R	1.73	1	1	0.0	0.0
Combined Standard Uncertainty			RSS				12.1	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				24.2	24.0

Appendix D

System Verification Check Scans

Motorola Solutions, Inc. EME Laboratory

Date/Time: 12/9/2024 12:29:22 AM

Robot#: DASY5-PG-2 | Run#: BL-SYSP-150H-241209-01
 Dipole Model# CLA150
 Phantom#: ELI4 1028
 Tissue Temp: 20.8 (C)
 Serial#: 4016
 Test Freq: 150 (MHz)
 Start Power: 1000 (mW)
 Rotation (1D): 0.15 dB
 Adjusted SAR (1W): 3.68 mW/g (1g)

Comments:

Communication System Band: CLA150, Communication System UID: 0, Duty Cycle: 1:1,
 Medium parameters used: $f = 150$ MHz; $\sigma = 0.795$ S/m; $\epsilon_r = 49.82$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7511, Calibrated: 7/23/2024, Frequency: 150 MHz, ConvF(12.04, 12.04, 12.04) @ 150 MHz
 Electronics: DAE4 Sn1294, Calibrated: 2/22/2022

Below 2 GHz-Rev.3/System Performance Check/Dipole Area Scan 2 (81x81x1):


Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Reference Value = 86.09 V/m; Power Drift = -0.08 dB
Fast SAR: SAR(1 g) = 4.31 W/kg; SAR(10 g) = 3.1 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 5.47 W/kg

Below 2 GHz-Rev.3/System Performance Check/0-Degree Cube (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 86.09 V/m; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 6.83 W/kg
SAR(1 g) = 3.68 W/kg; SAR(10 g) = 2.4 W/kg (SAR corrected for target medium)
 Smallest distance from peaks to all points 3 dB below = 16.5 mm
 Ratio of SAR at M2 to SAR at M1 = 57.4%
 Maximum value of SAR (measured) = 5.55 W/kg

Below 2 GHz-Rev.3/System Performance Check/Z-Axis Retraction (1x1x17): Measurement

grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 5.90 W/kg

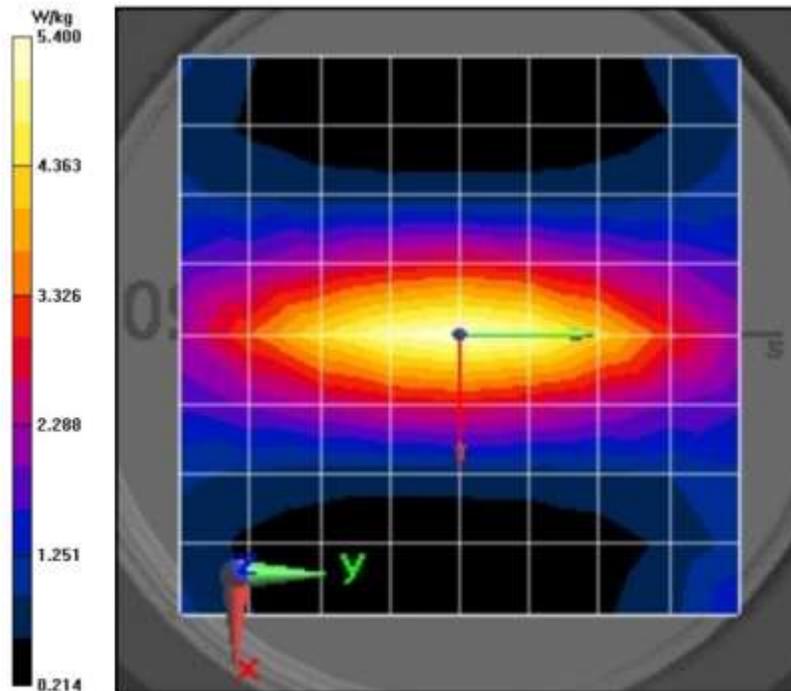

Appendix E

DUT Scans

FCC Body Assessments at LMR VHF

Table 18

Motorola Solutions, Inc. EME Laboratory

Date/Time: 12/9/2024 10:55:38 AM

Robot#: DASY5-PG-2 | Run#: EMR-AB-241209-03
 Model#: PMUD3256C
 Phantom#: ELI4 1028
 Tissue Temp: 21.5 (C)
 Serial#: 0245AX4522
 Antenna: Fixed Antenna
 Test Freq: 151.9400 (MHz)
 Battery: PMNN4434A
 Carry Acc: PMLN6455A
 Audio Acc: HKLN4606A
 Start Power: 1.74 (W)


Comments:

Communication System Band: Solomon VHF, Communication System UID: 0, Duty Cycle: 1:1,
 Medium parameters used: $f = 151.94$ MHz; $\sigma = 0.796$ S/m; $\epsilon_r = 49.739$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7511, Calibrated: 7/23/2024, Frequency: 151.94 MHz, ConvF(12.04, 12.04, 12.04) @ 151.94 MHz
 Electronics: DAE4 Sn1294, Calibrated: 2/22/2022

Below 2 GHz-Rev.3/Ab Scan/1-Area Scan (51x151x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Reference Value = 26.64 V/m; Power Drift = -0.68 dB
Fast SAR: SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.595 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 1.21 W/kg

Below 2 GHz-Rev.3/Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 26.64 V/m; Power Drift = -0.85 dB
 Peak SAR (extrapolated) = 1.87 W/kg
SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.364 W/kg (SAR corrected for target medium)
 Smallest distance from peaks to all points 3 dB below = 10.1 mm
 Ratio of SAR at M2 to SAR at M1 = 36.9%
 Maximum value of SAR (measured) = 1.14 W/kg

Below 2 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm
 Maximum value of SAR (measured) = 1.21 W/kg

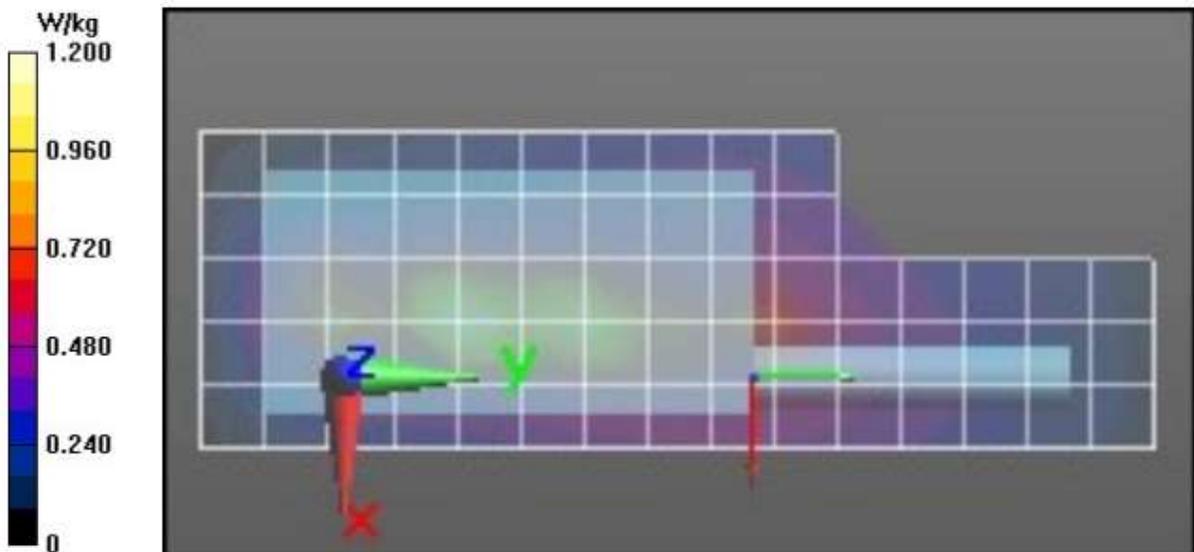

FCC Face Assessments at LMR VHF

Table 20

Motorola Solutions, Inc. EME Laboratory

Date/Time: 12/9/2024 6:56:13 PM

Robot#: DASY5-PG-2 | Run#: BL-FACE-241209-10
 Model#: PMUD3256C
 Phantom#: ELI4 1028
 Tissue Temp: 21.6 (C)
 Serial#: 0245AX4522
 Antenna: Fixed Antenna
 Test Freq: 151.9400 (MHz)
 Battery: PMNN4453A
 Carry Acc: @ front
 Audio Acc: N/A
 Start Power: 1.75 (W)

Comments:

Communication System Band: Solomon VHF, Communication System UID: 0, Duty Cycle: 1:1,
 Medium parameters used: $f = 151.94$ MHz; $\sigma = 0.796$ S/m; $\epsilon_r = 49.739$; $\rho = 1000$ kg/m³
 Probe: EX3DV4 - SN7511, Calibrated: 7/23/2024, Frequency: 151.94 MHz, ConvF(12.04, 12.04, 12.04) @ 151.94 MHz
 Electronics: DAE4 Sn1294, Calibrated: 2/22/2022

Below 2 GHz-Rev.3/Face Scan/1-Area Scan (51x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm


Reference Value = 27.71 V/m; Power Drift = -0.26 dB
Fast SAR: SAR(1 g) = 0.538 W/kg; SAR(10 g) = 0.406 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 0.643 W/kg

Below 2 GHz-Rev.3/Face Scan/3-Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.71 V/m; Power Drift = -0.44 dB
 Peak SAR (extrapolated) = 0.802 W/kg
SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.306 W/kg (SAR corrected for target medium)
 Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
 Ratio of SAR at M2 to SAR at M1 = 54.3%
 Maximum value of SAR (measured) = 0.609 W/kg

Below 2 GHz-Rev.3/Face Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.557 W/kg

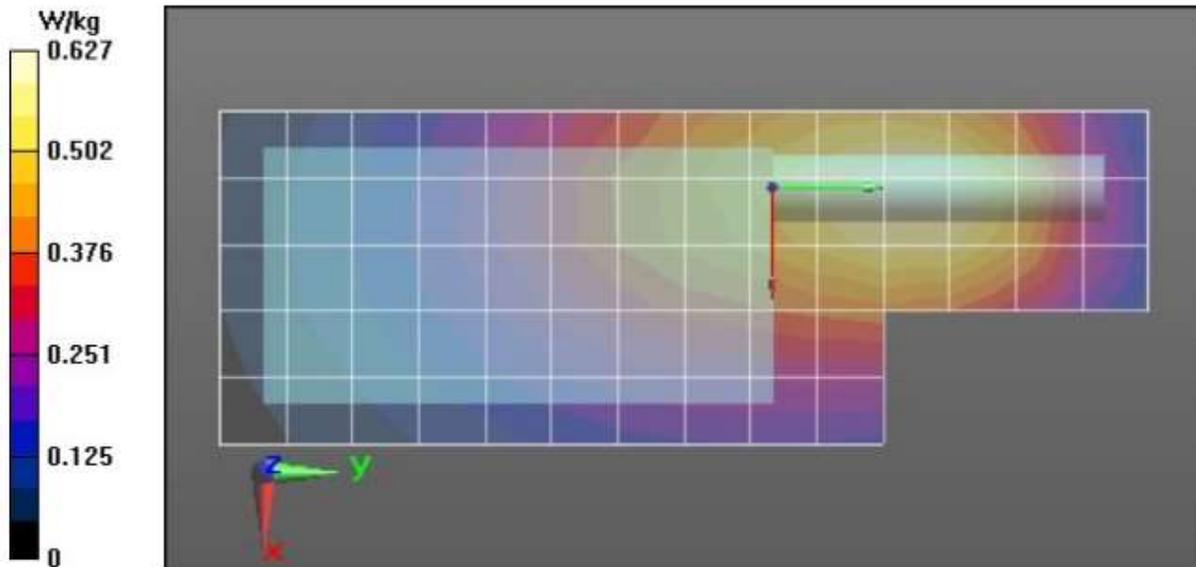

Appendix F
Shorten Scan of Highest SAR Configuration

Shortened Scan

Table 22

Motorola Solutions, Inc. EME Laboratory

Date/Time: 12/9/2024 8:37:45 PM

Robot#: DASY5-PG-2 | Run#: BL-AB-241209-13
 Model#: PMUD3256C
 Phantom#: ELI4 1028
 Tissue Temp: 21.6 (C)
 Serial#: 0245AX4522
 Antenna: Fixed Antenna
 Test Freq: 151.9400 (MHz)
 Battery: PMNN4434A
 Carry Acc: PMLN6455A
 Audio Acc: HKLN4606A
 Start Power: 1.74 (W)

Comments: Shorten Scan

Communication System Band: Solomon VHF, Communication System UID: 0, Duty Cycle: 1:1,
 Medium parameters used: $f = 151.94 \text{ MHz}$; $\sigma = 0.796 \text{ S/m}$; $\epsilon_r = 49.739$; $\rho = 1000 \text{ kg/m}^3$
 Probe: EX3DV4 - SN7511, Calibrated: 7/23/2024, Frequency: 151.94 MHz, ConvF(12.04, 12.04, 12.04) @ 151.94 MHz
 Electronics: DAE4 Sn1294, Calibrated: 2/22/2022

Below 2 GHz-Rev.3/Ab Scan/1-Area Scan (51x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 27.72 V/m; Power Drift = -0.49 dB
Fast SAR: SAR(1 g) = 0.798 W/kg; SAR(10 g) = 0.570 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 0.980 W/kg

Below 2 GHz-Rev.3/Ab Scan/2-Volume 2D Scan (41x41x1): Interpolated grid: dx=0.7500 mm, dy=0.7500 mm, dz=1.000 mm


Reference Value = 27.72 V/m; Power Drift = -0.62 dB
Fast SAR: SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.581 W/kg (SAR corrected for target medium)
 Maximum value of SAR (interpolated) = 1.09 W/kg

Below 2 GHz-Rev.3/Ab Scan/3-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 28.54 V/m; Power Drift = -0.30 dB
 Peak SAR (extrapolated) = 1.68 W/kg
SAR(1 g) = 0.754 W/kg; SAR(10 g) = 0.482 W/kg (SAR corrected for target medium)
 Smallest distance from peaks to all points 3 dB below = 16.2 mm
 Ratio of SAR at M2 to SAR at M1 = 47.8%
 Maximum value of SAR (measured) = 1.19 W/kg

Below 2 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 1.02 W/kg

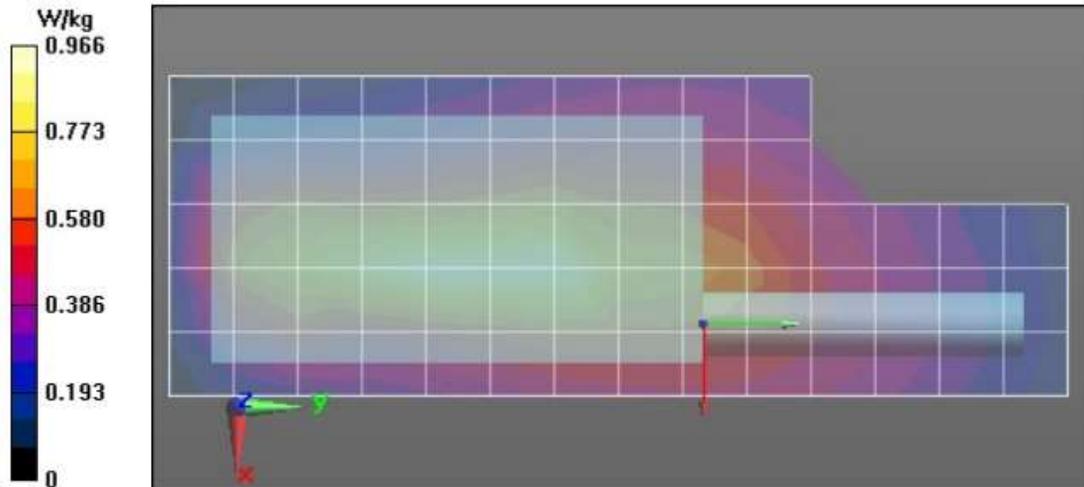

Shortened scan reflect highest SAR producing configurations and is compared to full scan

Scan Description	Referenced Table	Test Time (min.)	SAR 1g (W/kg)
Shorten scan (zoom)	21	9	0.46
Full scan (area & zoom)	18	22	0.45

Appendix G

DUT Test Position Photos

Photos available in Exhibit 7B

Appendix H

DUT, Body worn and audio accessories Photos

Photos available in Exhibit 7B