

EXHIBIT 6

INDEX OF SUBMITTED MEASURED DATA

This exhibit contains the measured data for this equipment as follows:

EXHIBIT 6F (Revised) – Conducted Spurious Emissions (12 Tables):

- 6F-1: Hi-Power Harmonic of Carrier 403.0125 MHz, 25 kHz Channel Spacing
- 6F-2: Hi-Power Harmonic of Carrier 436.0125 MHz, 25 kHz Channel Spacing
- 6F-3: Hi-Power Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing
- 6F-4: Lo-Power Harmonic of Carrier 403.0125 MHz, 25 kHz Channel Spacing
- 6F-5: Lo-Power Harmonic of Carrier 436.0125 MHz, 25 kHz Channel Spacing
- 6F-6: Lo-Power Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing
- 6F-7: Hi-Power Harmonic of Carrier 403.0125 MHz, 12.5 kHz Channel Spacing
- 6F-8: Hi-Power Harmonic of Carrier 436.0125 MHz, 12.5 kHz Channel Spacing
- 6F-9: Hi-Power Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing
- 6F-10: Lo-Power Harmonic of Carrier 403.0125 MHz, 12.5 kHz Channel Spacing
- 6F-11: Lo-Power Harmonic of Carrier 436.0125 MHz, 12.5 kHz Channel Spacing
- 6F-12: Lo-Power Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing

EXHIBIT 6G (Revised) – Radiated Spurious Emissions (12 Graphs):

- 6G-1: Hi-Power, 403.025 MHz, 25 kHz Channel Spacing
- 6G-2: Hi-Power, 436.025 MHz, 25 kHz Channel Spacing
- 6G-3: Hi-Power, 469.975 MHz, 25 kHz Channel Spacing
- 6G-4: Lo-Power, 403.025 MHz, 25 kHz Channel Spacing
- 6G-5: Lo-Power, 436.025 MHz, 25 kHz Channel Spacing
- 6G-6: Lo-Power, 469.975 MHz, 25 kHz Channel Spacing
- 6G-7: Hi-Power, 403.025 MHz, 12.5 kHz Channel Spacing
- 6G-8: Hi-Power, 436.025 MHz, 12.5 kHz Channel Spacing
- 6G-9: Hi-Power, 469.975 MHz, 12.5 kHz Channel Spacing
- 6G-10: Lo-Power, 403.025 MHz, 12.5 kHz Channel Spacing
- 6G-11: Lo-Power, 436.025 MHz, 12.5 kHz Channel Spacing
- 6G-12: Lo-Power, 469.975 MHz, 12.5 kHz Channel Spacing

EXHIBIT 6I – Transient Frequency Behavior (8 Graphs)

- 6I-1-1: 2.5ppm, 1 Watt, 12.5 kHz Key-Up Attack Time
- 6I-1-2: 2.5ppm, 1 Watt, 12.5 kHz De-Key Decay Time
- 6I-1-3: 2.5ppm, 1 Watt, 25 kHz Key-Up Attack Time
- 6I-1-4: 2.5ppm, 1 Watt, 25 kHz De-Key Decay Time
- 6I-1-5: 2.5ppm, 4 Watts, 12.5 kHz Key-Up Attack Time
- 6I-1-6: 2.5ppm, 4 Watts, 12.5 kHz De-Key Decay Time
- 6I-1-7: 2.5ppm, 4 Watts, 25 kHz Key-Up Attack Time
- 6I-1-8: 2.5ppm, 4 Watts, 25 kHz De-Key Decay Time

EXHIBIT 6F (Revised)
Transmitter Conducted Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

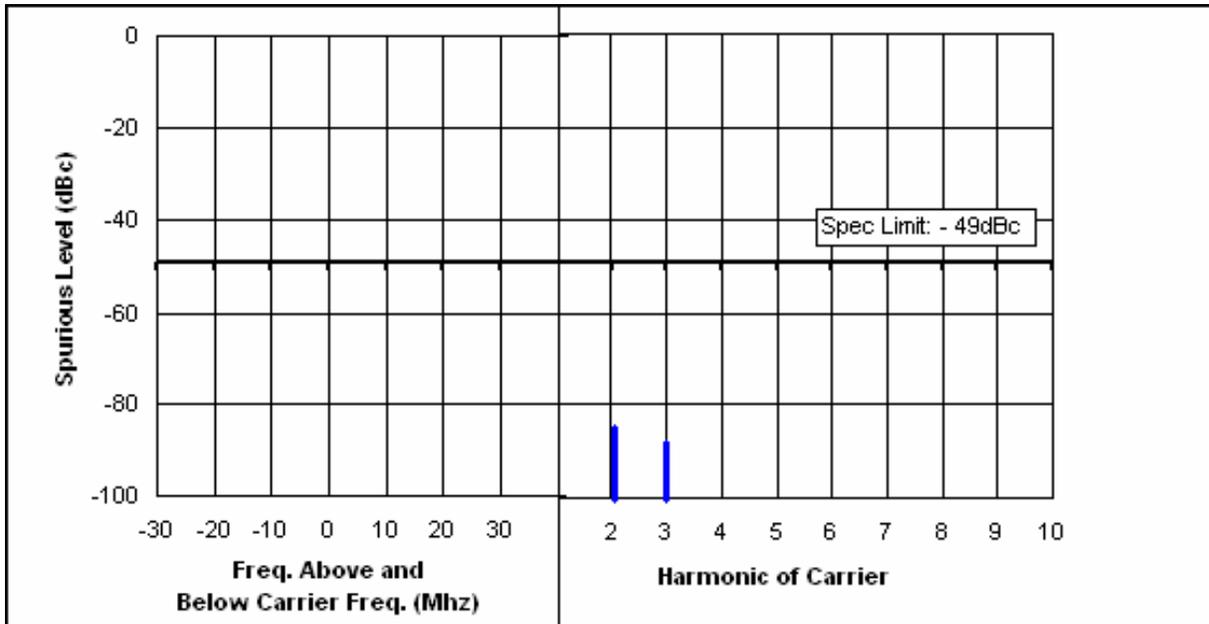


Table 6F-1: Hi-Power Harmonic of Carrier 403.0125 MHz, 25 kHz Channel Spacing

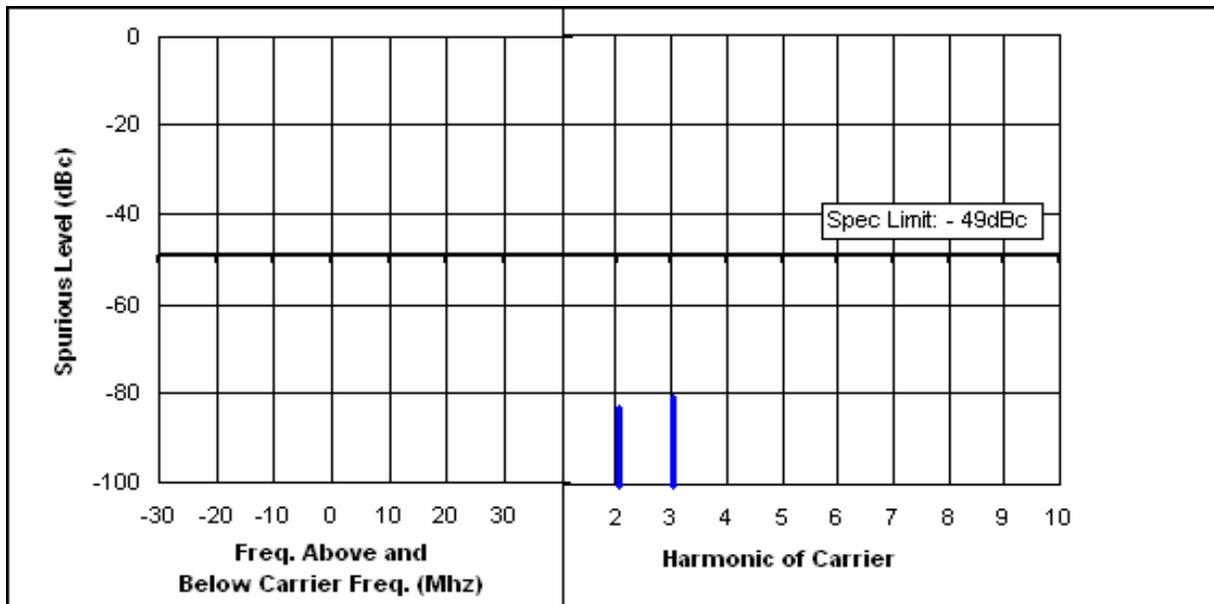


Table 6F-2: Hi-Power Harmonic of Carrier 436.0125 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

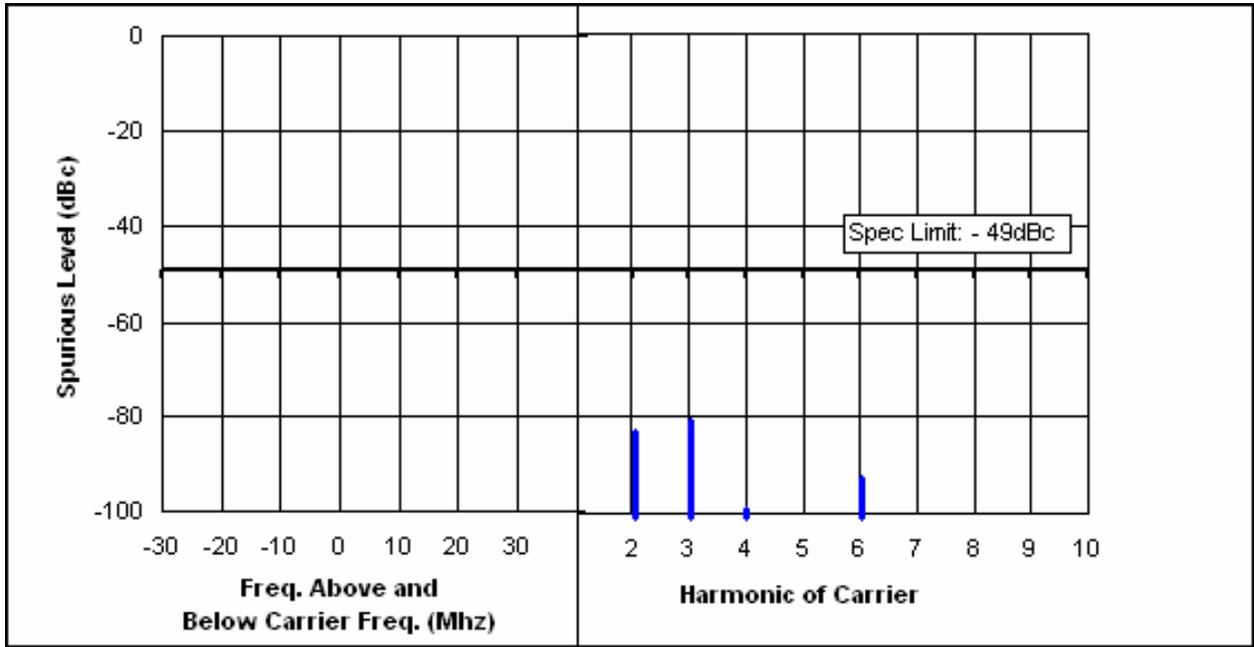


Table 6F-3: Hi-Power Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing

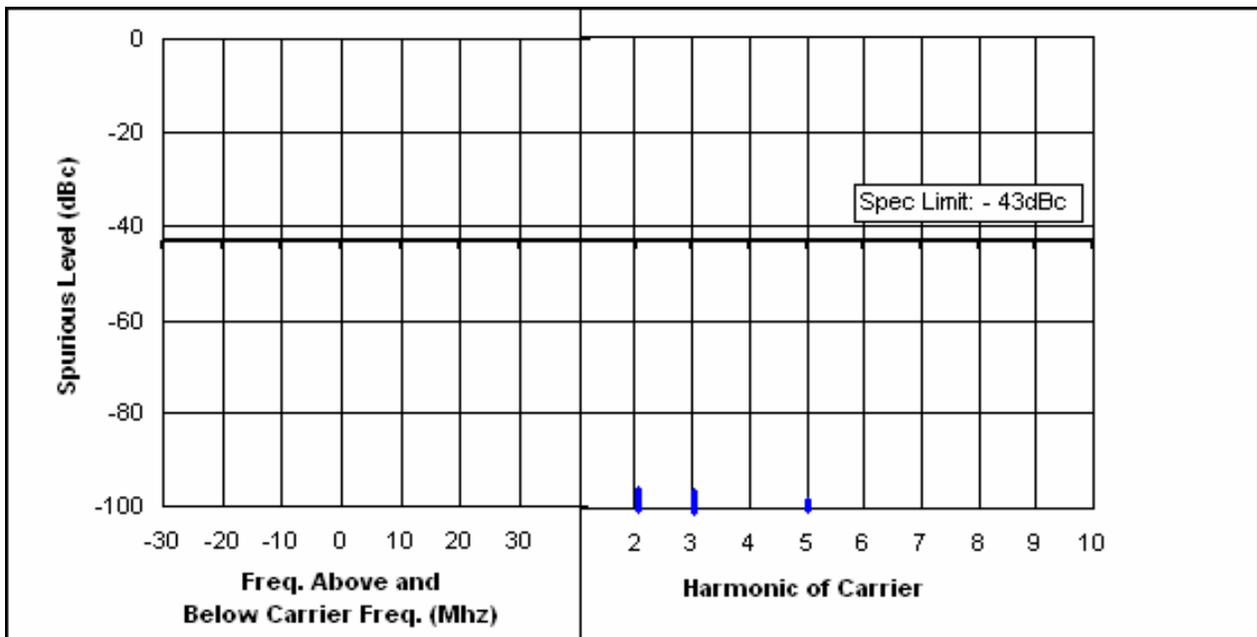


Table 6F-4: Lo-Power Harmonic of Carrier 403.0125 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

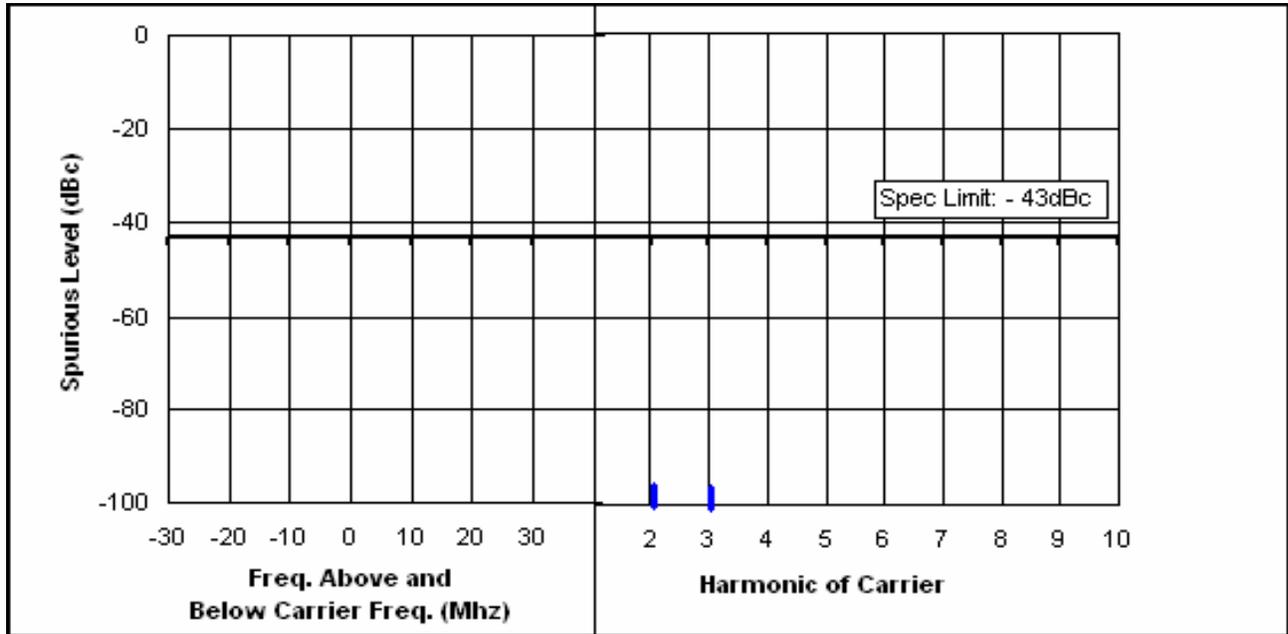


Table 6F-5: Lo-Power Harmonic of Carrier 436.0125 MHz, 25 kHz Channel Spacing

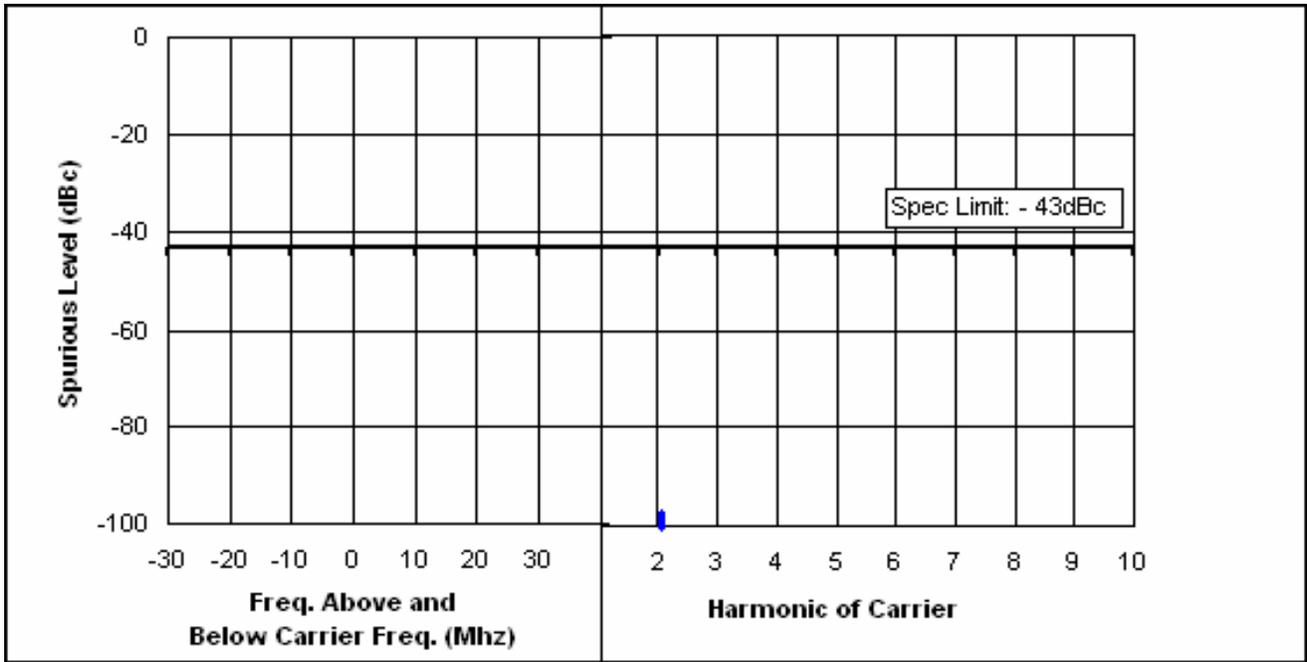


Table 6F-6: Lo-Power Harmonic of Carrier 469.9875 MHz, 25 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

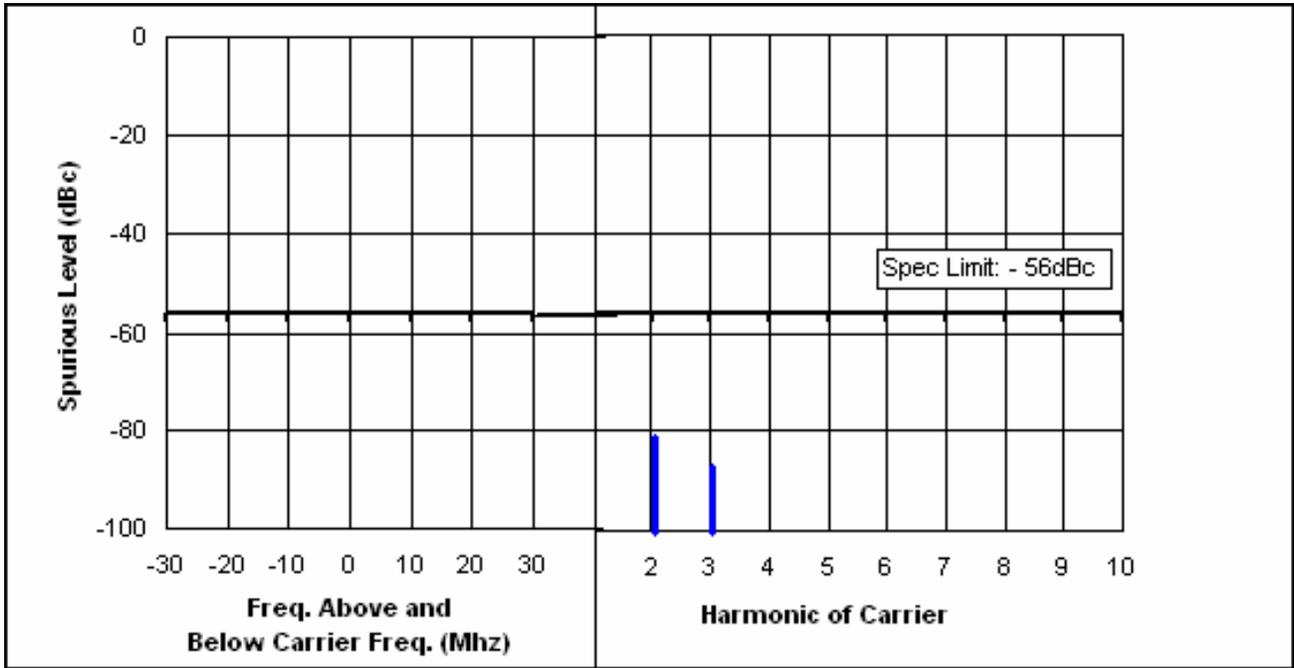


Table 6F-7: Hi-Power Harmonic of Carrier 403.0125 MHz, 12.5 kHz Channel Spacing

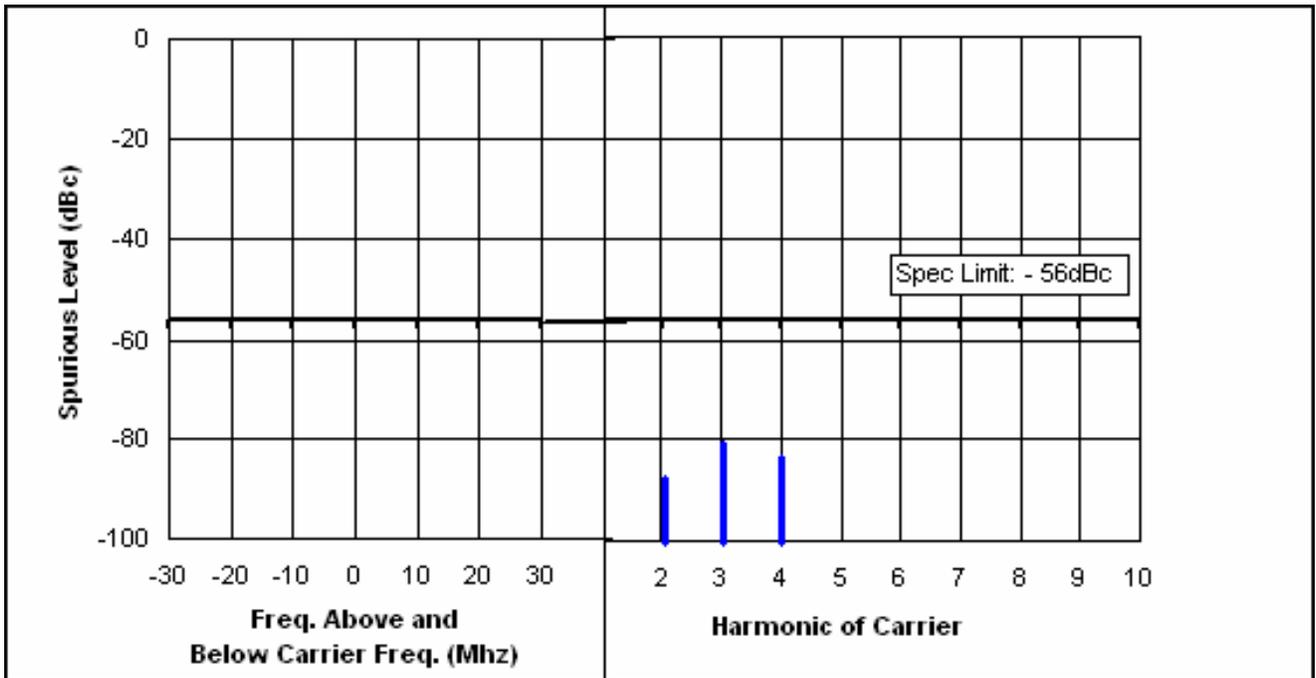


Table 6F-8: Hi-Power Harmonic of Carrier 436.0125 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

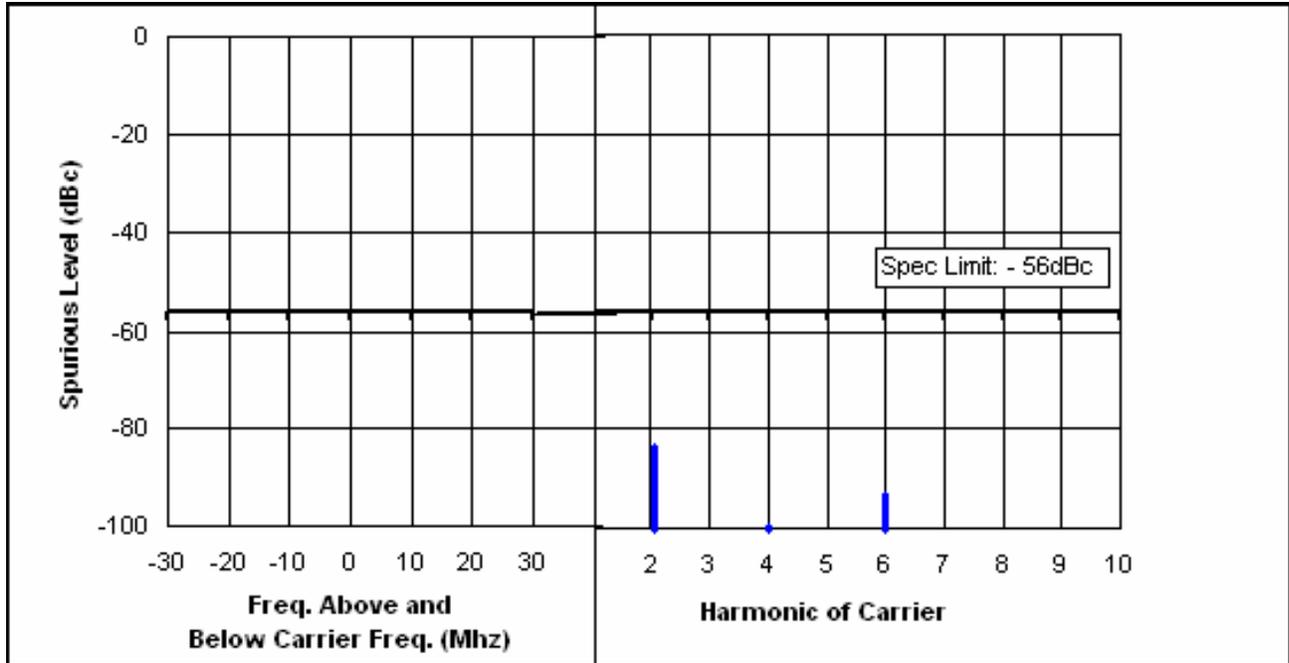


Table 6F-9: Hi-Power Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing

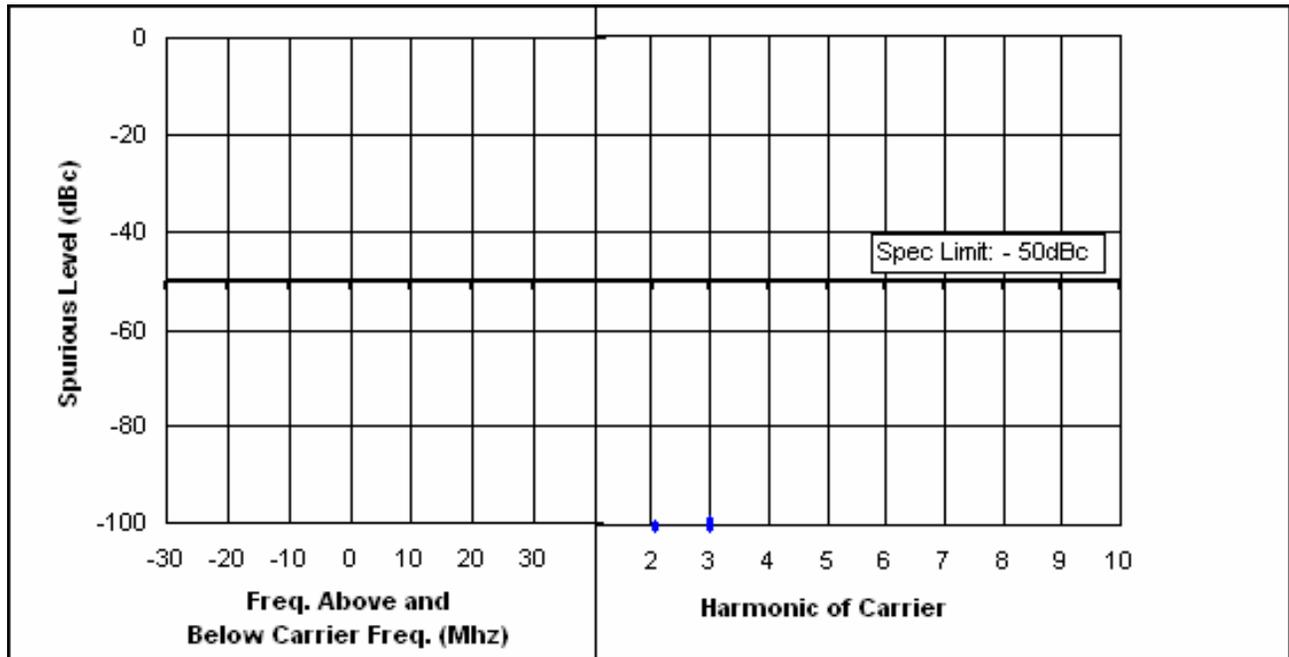


Table 6F-10: Lo-Power Harmonic of Carrier 403.0125 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

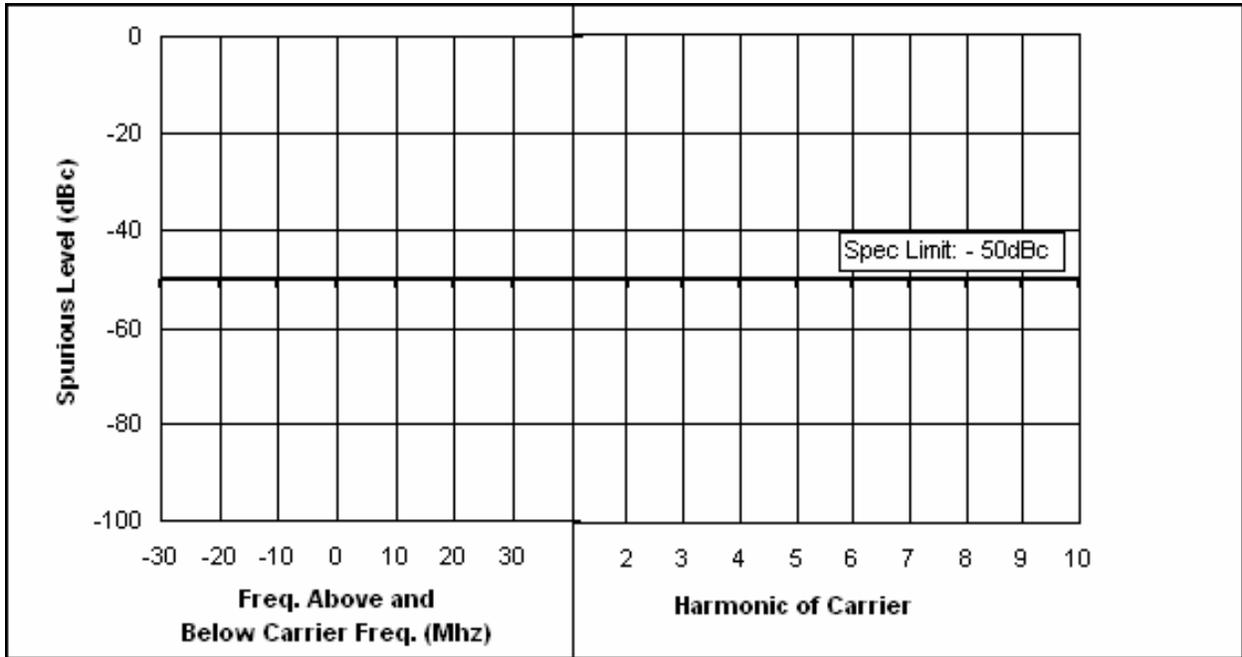


Table 6F-11: Lo-Power Harmonic of Carrier 436.0125 MHz, 12.5 kHz Channel Spacing

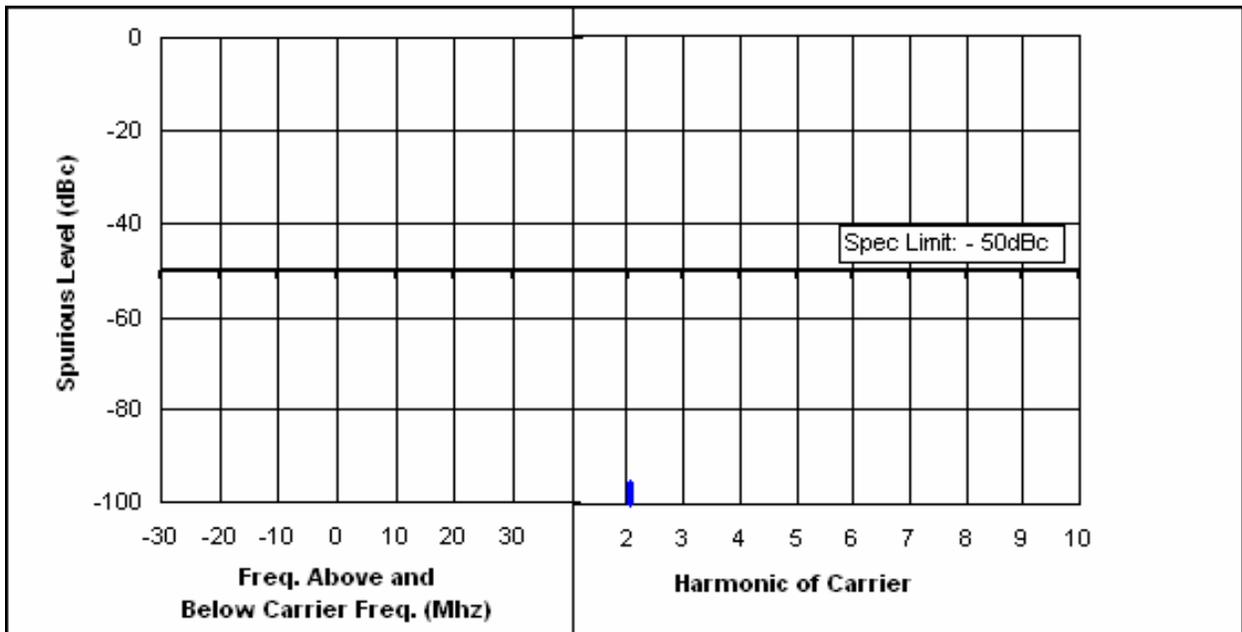


Table 6F-12: Lo-Power Harmonic of Carrier 469.9875 MHz, 12.5 kHz Channel Spacing

Note: Spurs which are not shown is 50dB below the specification limits.

Exhibit 6-G (Revised)

Transmitter Radiated Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 4 Watts

403.025 MHz

Channel Spacing 25kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
806.0500	-13	-40.12	-59.60
1209.0750	-13	-49.07	-51.49
1612.1000	-13	-60.10	-52.09
2015.1250	-13	-58.61	-60.33
2418.1500	-13	*	*
2821.1750	-13	-63.97	-60.79
3224.2000	-13	-60.79	-52.07
3627.2250	-13	-58.68	-54.08
4030.2500	-13	-59.99	-56.95

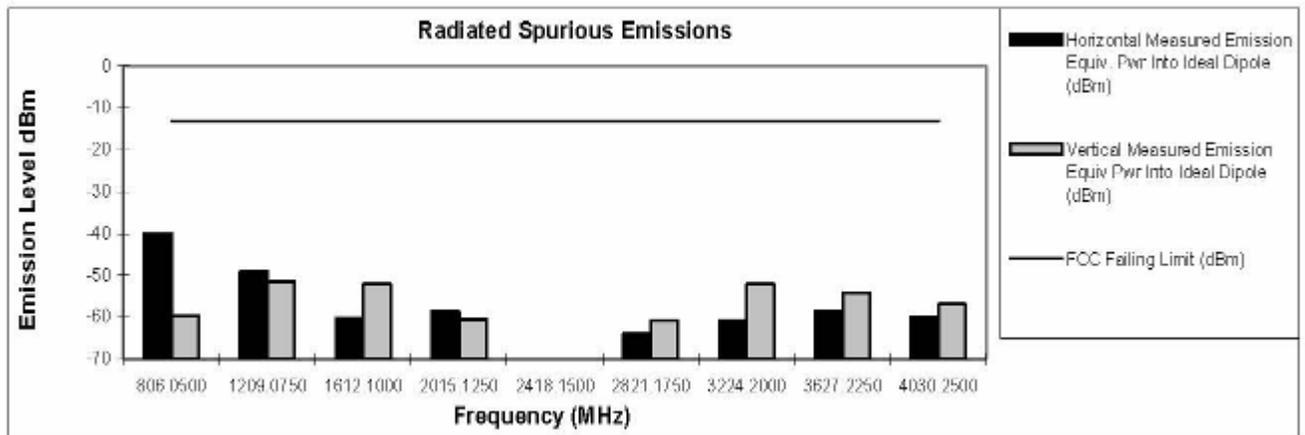

6G-1: Hi-Power, 403.025 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 4 Watts

436.025 MHz

Channel Spacing 25kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
872.0500	-13	*	*
1308.0750	-13	-55.99	-45.24
1744.1000	-13	-59.81	-54.86
2180.1250	-13	-59.48	-58.71
2616.1500	-13	-62.78	-59.57
3052.1750	-13	-61.95	*
3488.2000	-13	-60.27	-56.23
3924.2250	-13	-60.78	-55.87
4360.2500	-13	*	*

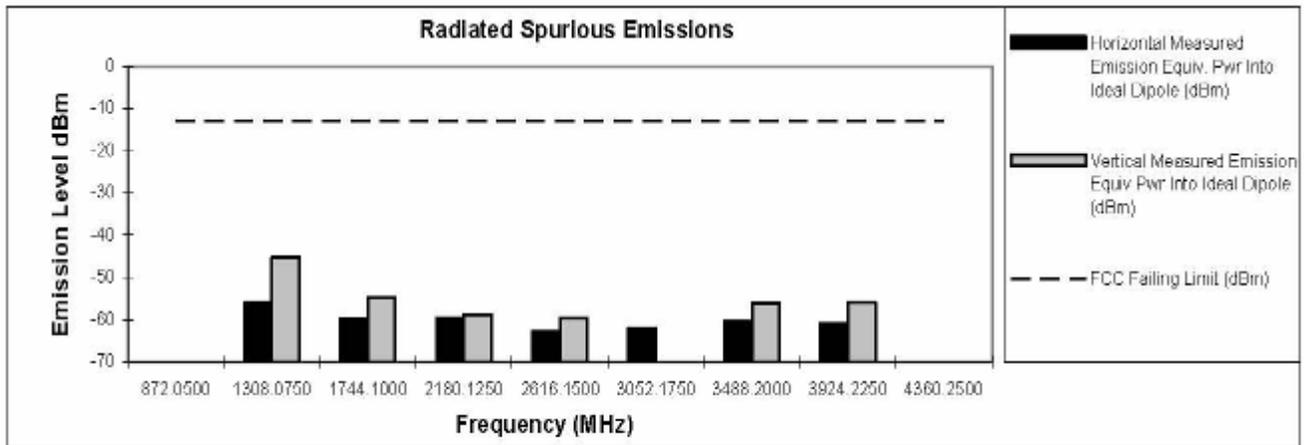

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

6G-2: Hi-Power, 436.025 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 4 Watts

469.975 MHz

Channel Spacing 25kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9500	-13	-57.71	-32.98
1409.9250	-13	-52.24	-45.30
1879.9000	-13	-60.91	-59.18
2349.8750	-13	-56.61	-57.84
2819.8500	-13	-64.45	-59.82
3289.8250	-13	-62.21	*
3759.8000	-13	-61.99	-57.13
4229.7750	-13	*	*
4699.7500	-13	*	*

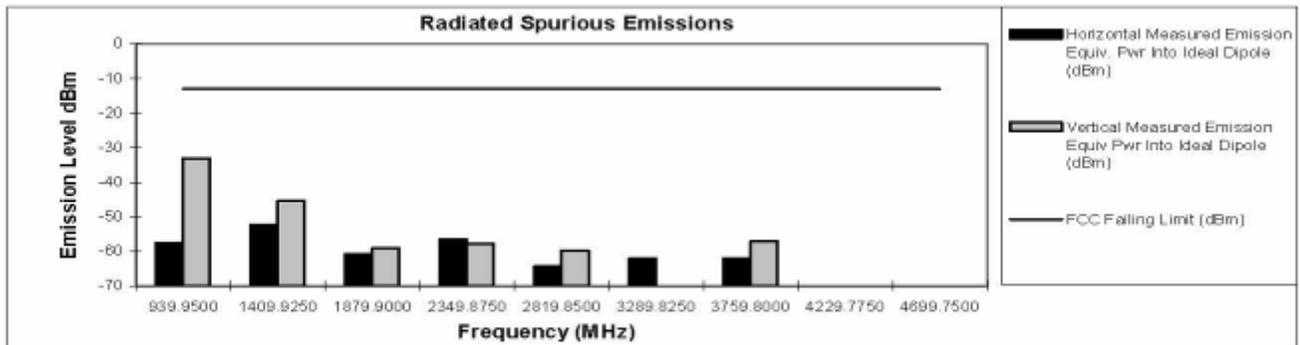

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

6G-3: Hi-Power, 469.975 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 1 Watts

403.025 MHz

Channel Spacing 25kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
806.0500	-13	-67.38	-68.64
1209.0750	-13	-70.64	-64.15
1612.1000	-13	-69.47	-58.34
2015.1250	-13	-67.46	-59.51
2418.1500	-13	*	*
2821.1750	-13	*	*
3224.2000	-13	*	*
3627.2250	-13	*	*
4030.2500	-13	*	*

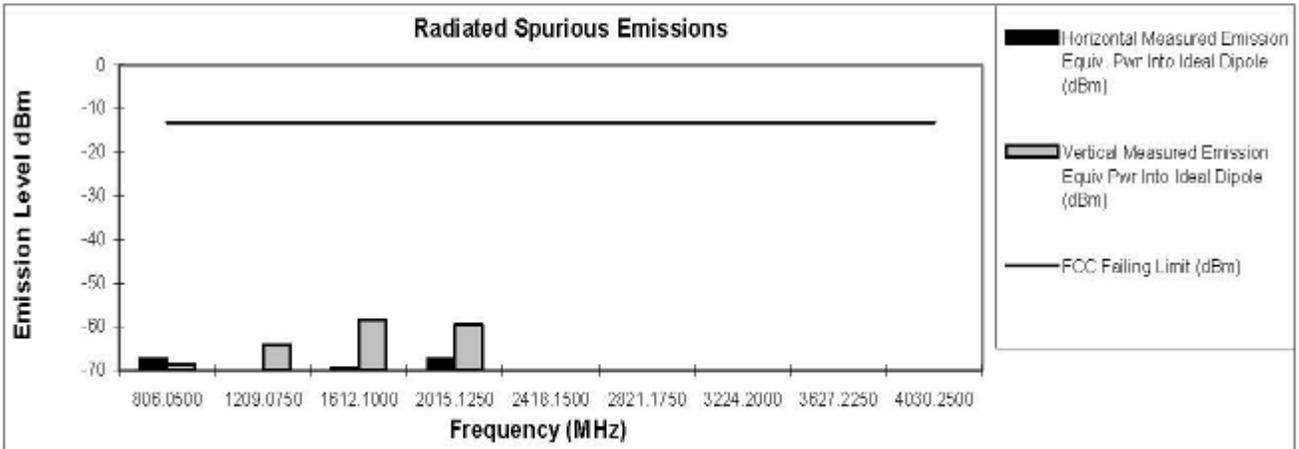

6G-4: Lo-Power, 403.025 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 1 Watts

436.025 MHz

Channel Spacing 25kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
872.0500	-13	*	*
1308.0750	-13	-61.78	-51.74
1744.1000	-13	-63.41	-57.81
2180.1250	-13	*	-65.36
2616.1500	-13	*	*
3052.1750	-13	*	*
3488.2000	-13	-61.05	-56.61
3924.2250	-13	*	*
4360.2500	-13	*	*

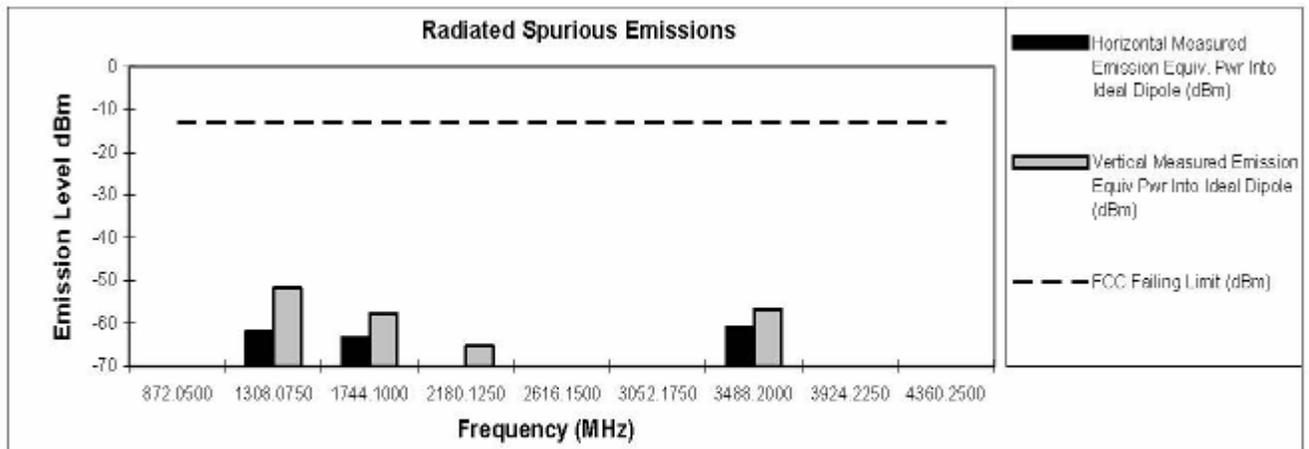

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

6G-5: Lo-Power, 436.025 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 1 Watts

469.975 MHz

Channel Spacing 25kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9500	-13	-60.16	-34.61
1409.9250	-13	-68.99	-62.36
1879.9000	-13	-58.55	-59.68
2349.8750	-13	*	-63.46
2819.8500	-13	*	*
3289.8250	-13	*	*
3759.8000	-13	-60.77	-57.45
4229.7750	-13	*	*
4699.7500	-13	*	*

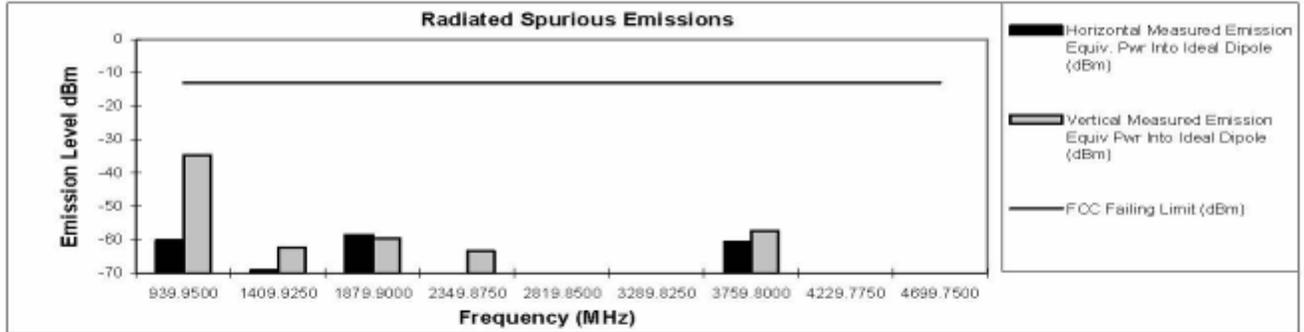

* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

6G-6: Lo-Power, 469.975 MHz, 25 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 4 Watts

403.025 MHz

Channel Spacing 12.5kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
806.0500	-20	-41.91	-43.36
1209.0750	-20	-52.05	-54.81
1612.1000	-20	-61.59	-51.89
2015.1250	-20	*	-58.94
2418.1500	-20	-54.88	*
2821.1750	-20	-60.56	-59.54
3224.2000	-20	-56.07	-46.79
3627.2250	-20	-51.77	-46.46
4030.2500	-20	-56.16	-53.46

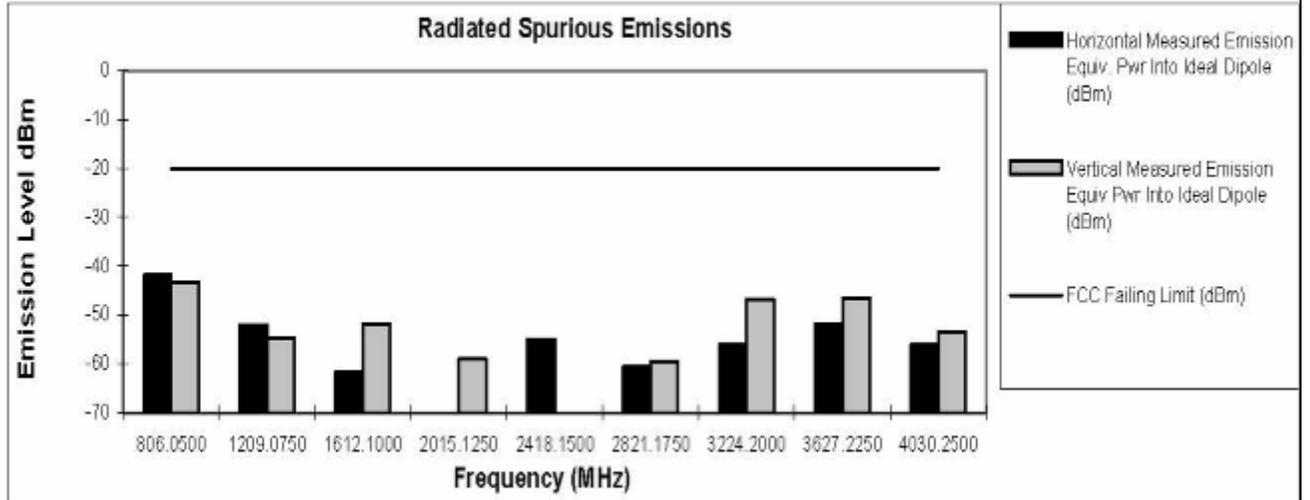

6G-7: Hi-Power, 403.025 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 4 Watts

436.025 MHz

Channel Spacing 12.5kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
872.0500	-20	*	*
1308.0750	-20	-55.82	-46.24
1744.1000	-20	-59.30	-54.89
2180.1250	-20	-48.74	-50.11
2616.1500	-20	-63.16	-56.49
3052.1750	-20	-59.90	-54.29
3488.2000	-20	-59.44	-55.75
3924.2250	-20	-58.92	-55.75
4360.2500	-20	-61.76	*

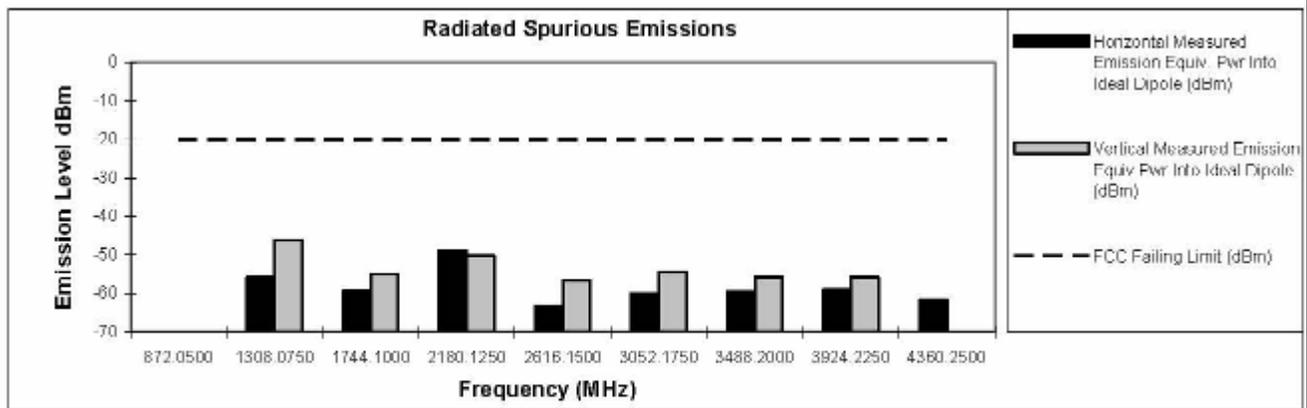

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

6G-8: Hi-Power, 436.025 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 4 Watts

469.975 MHz

Channel Spacing 12.5kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9500	-20	-59.33	-35.43
1409.9250	-20	-52.49	-46.66
1879.9000	-20	-56.55	-58.92
2349.8750	-20	-58.86	-61.91
2819.8500	-20	-61.30	-60.72
3289.8250	-20	-61.23	-58.94
3759.8000	-20	-64.50	-60.72
4229.7750	-20	*	*
4699.7500	-20	*	*

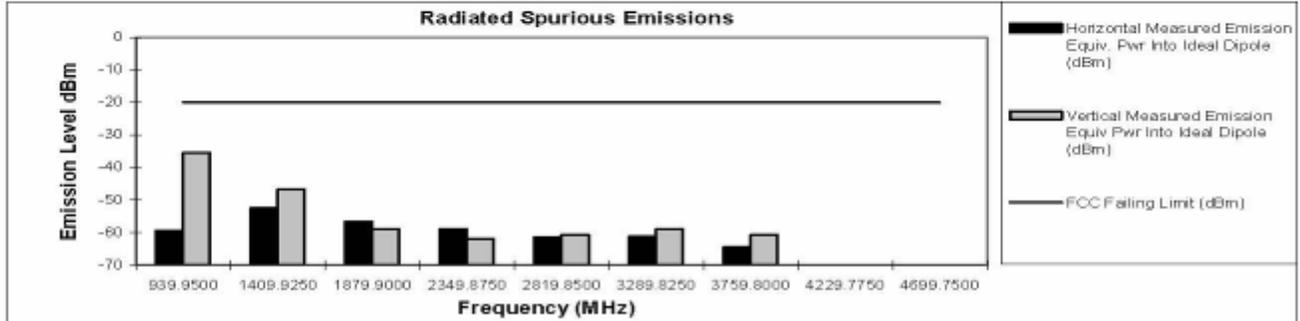

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

6G-9: Hi-Power, 469.975 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 1 Watts

403.025 MHz

Channel Spacing 12.5kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
806.0500	-20	-50.62	-48.01
1209.0750	-20	-68.44	-54.32
1612.1000	-20	-66.26	-58.53
2015.1250	-20	-68.14	-60.63
2418.1500	-20	-54.39	-58.33
2821.1750	-20	-66.94	*
3224.2000	-20	*	*
3627.2250	-20	*	*
4030.2500	-20	*	*

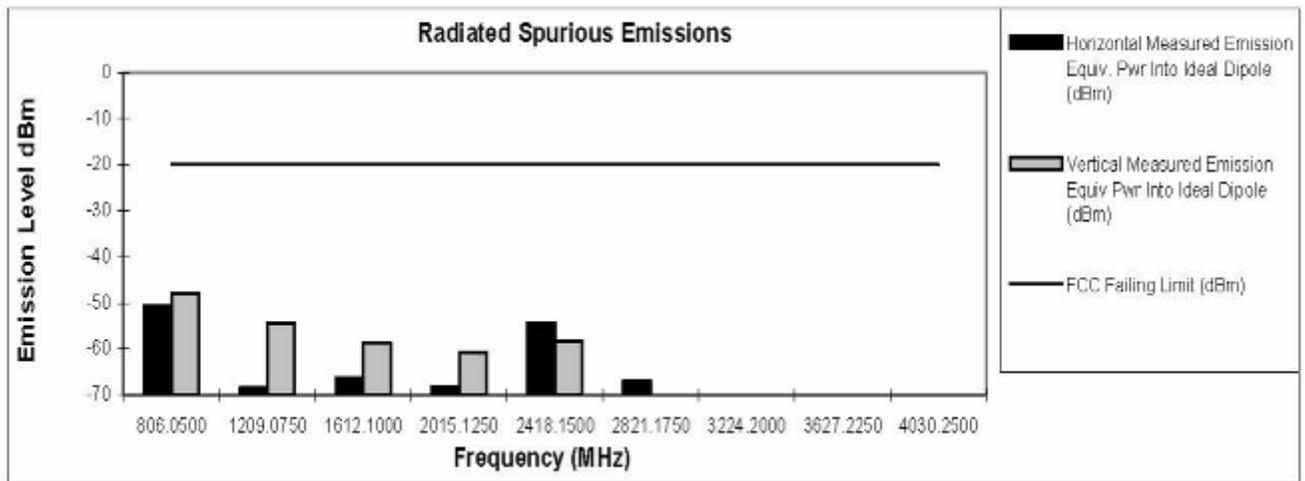

6G-10: Lo-Power, 403.025 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 1 Watts

436.025 MHz

Channel Spacing 12.5kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
872.0500	-20	*	*
1308.0750	-20	-51.33	-34.88
1744.1000	-20	-65.99	-56.53
2180.1250	-20	*	-65.12
2616.1500	-20	-65.37	-61.55
3052.1750	-20	*	*
3488.2000	-20	-60.58	-57.17
3924.2250	-20	*	*
4360.2500	-20	*	*

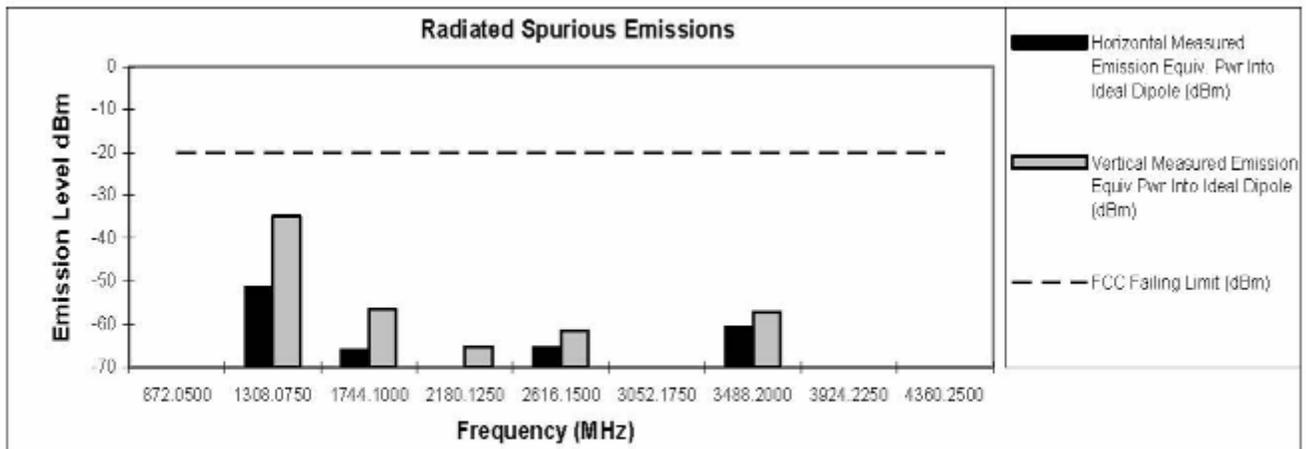

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

6G-11: Lo-Power, 436.025 MHz, 12.5 kHz Channel Spacing


Transmit Radiated Spurious Emissions: EX600 Minnow EPP

Tx Power: 1 Watts

469.975 MHz


Channel Spacing 12.5kHz | S/N WHMHQ002

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9500	-20	*	*
1409.9250	-20	-48.34	-33.69
1879.9000	-20	-60.00	-59.36
2349.8750	-20	*	-64.40
2819.8500	-20	*	*
3289.8250	-20	*	*
3759.8000	-20	-60.88	-58.54
4229.7750	-20	*	*
4699.7500	-20	*	*

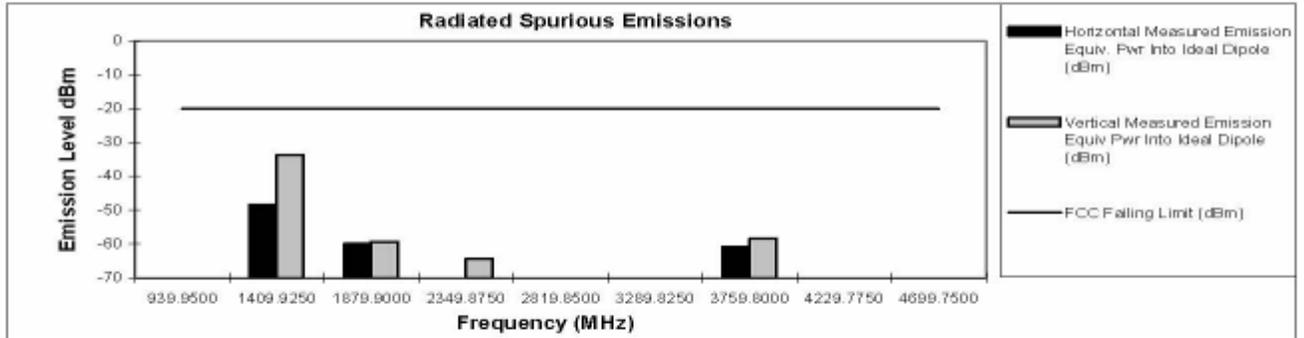


* Indicates the spurious emission could not be detected due to noise limitations or ambients.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.


Exhibit 6I
Transient Frequency Behavior (FCC Rules Part 90.214)

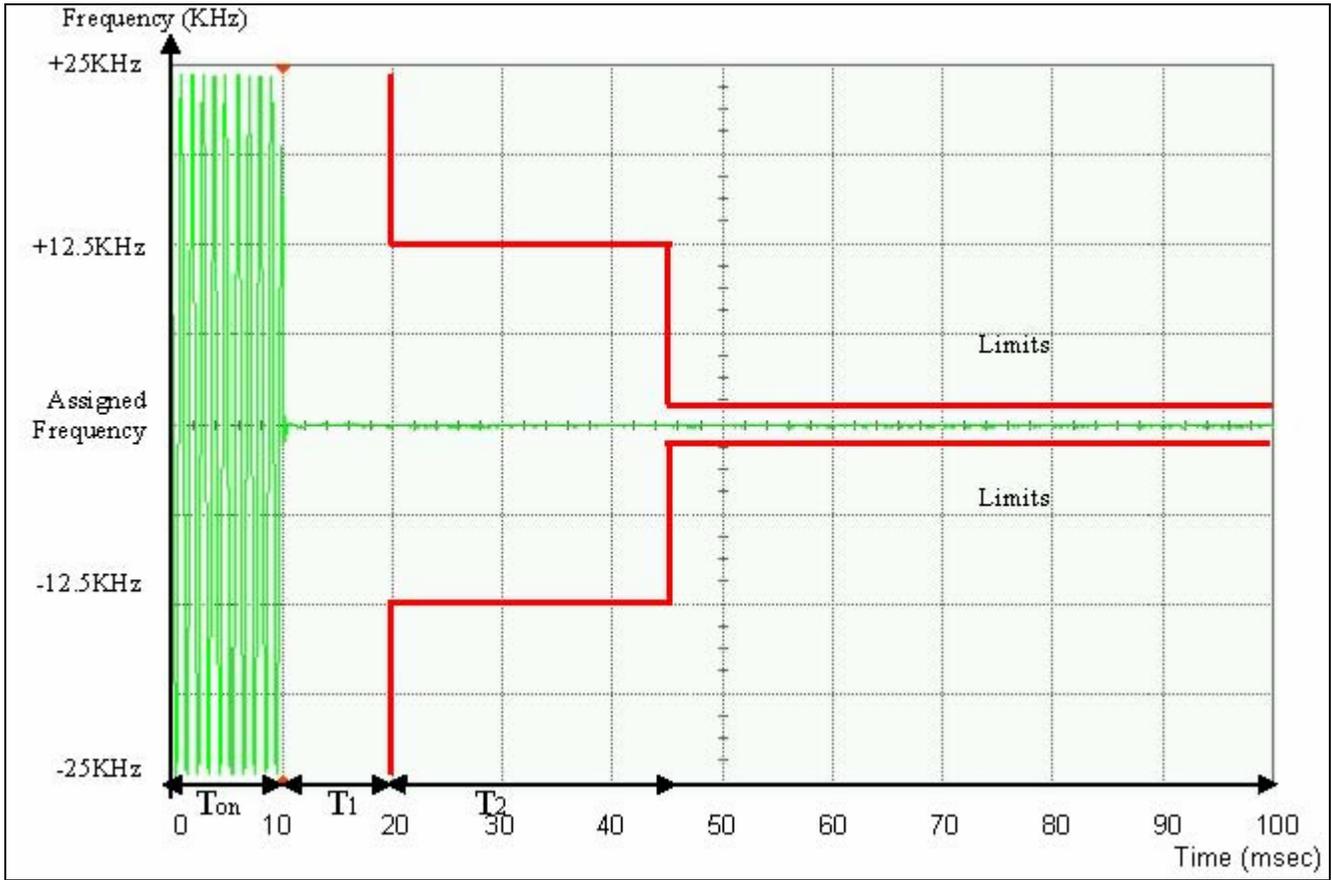


6I-1-1: 2.5ppm, 1 Watt, 12.5 kHz Key-Up Attack Time

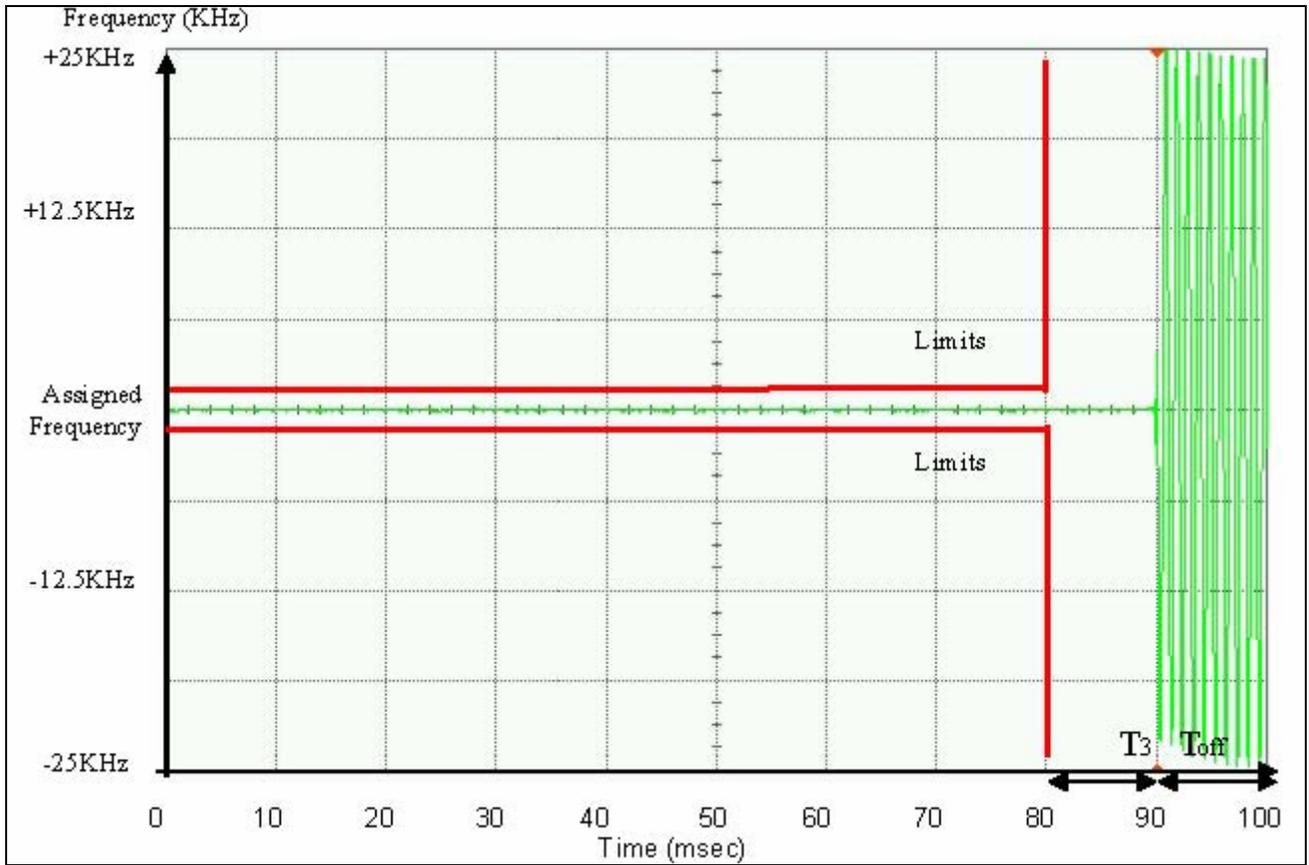


6I-1-2: 2.5ppm, 1 Watt, 12.5 kHz De-Key Decay Time

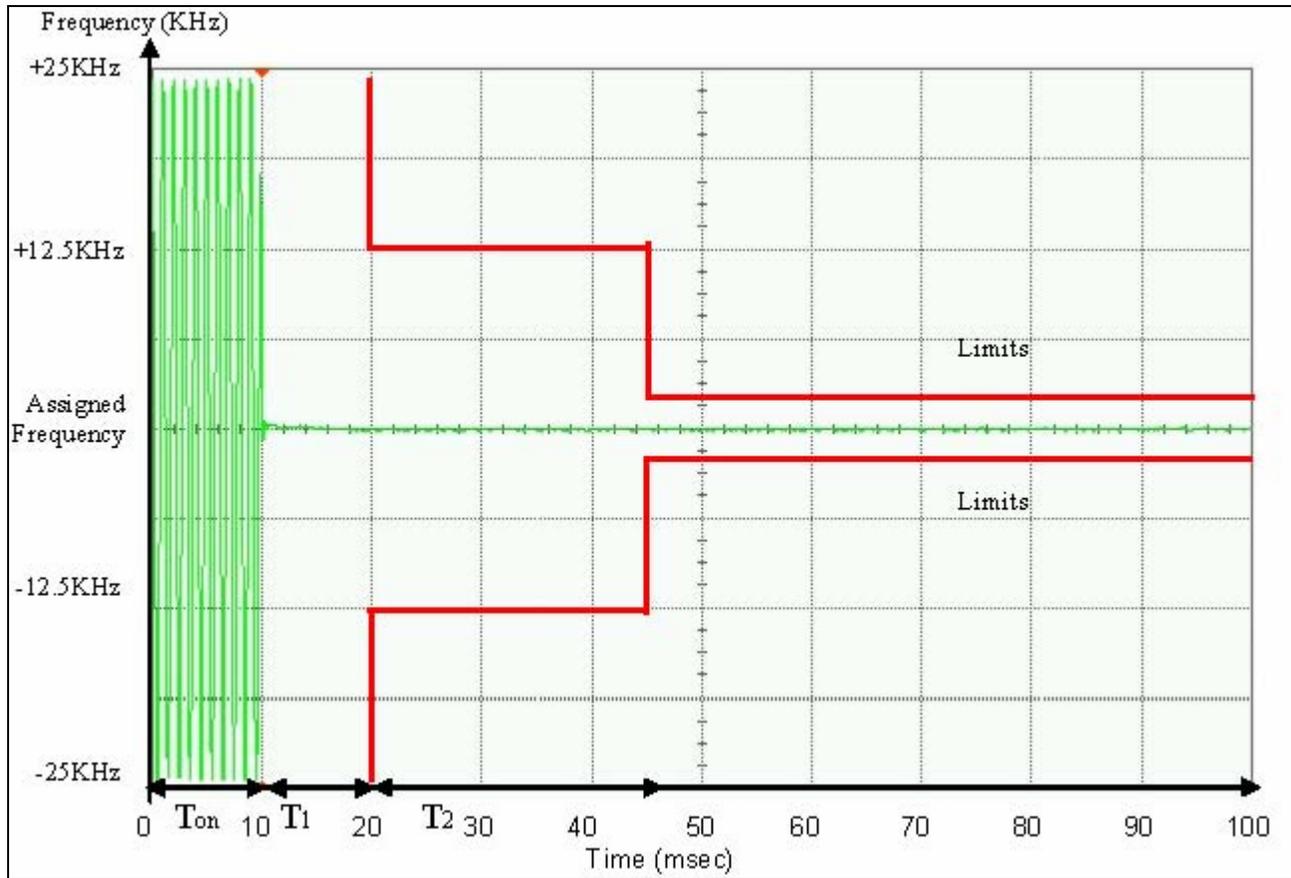


6I-1-3: 2.5ppm, 1 Watt, 25 kHz Key-Up Attack Time

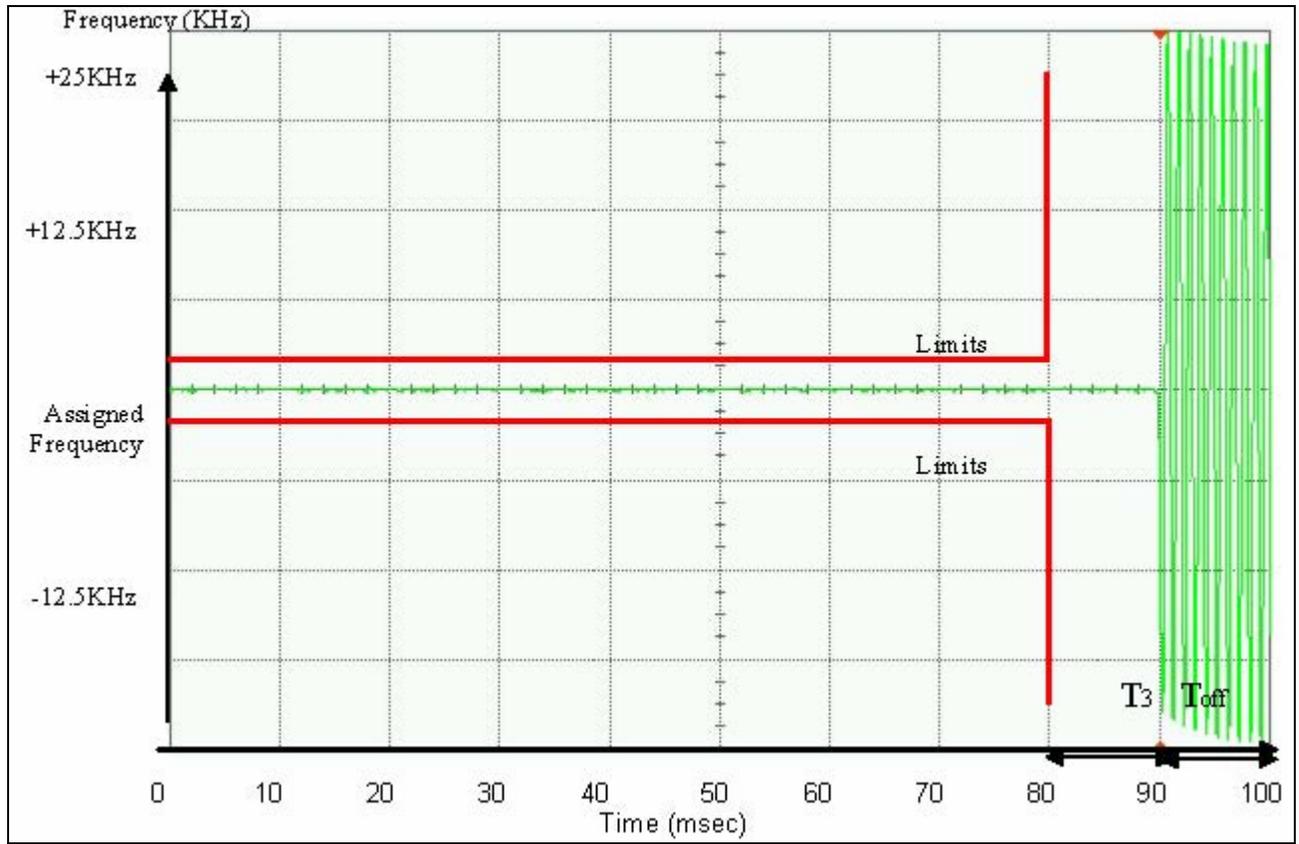


6I-1-4: 2.5ppm, 1 Watt, 25 kHz De-Key Decay Time

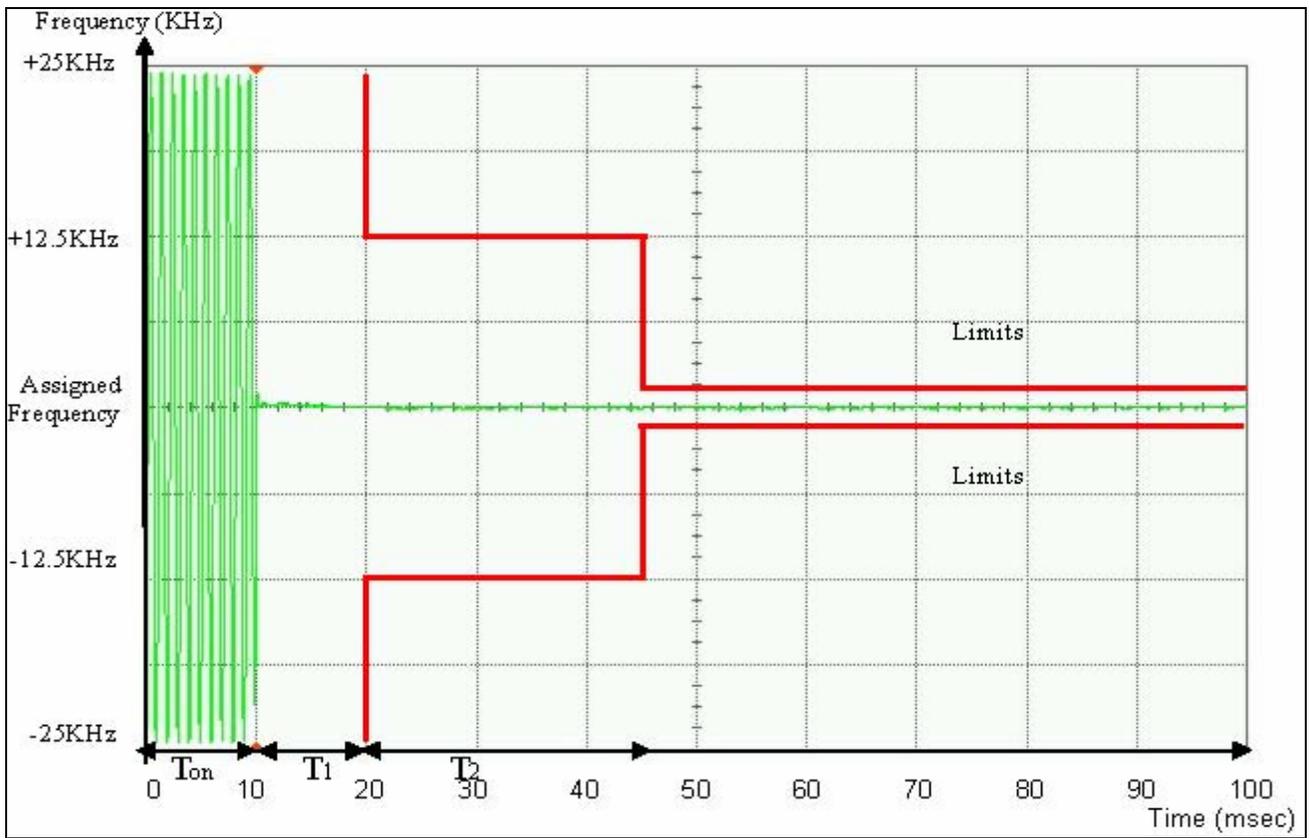


6I-1-5: 2.5ppm, 4 Watts, 12.5 kHz Key-Up Attack Time

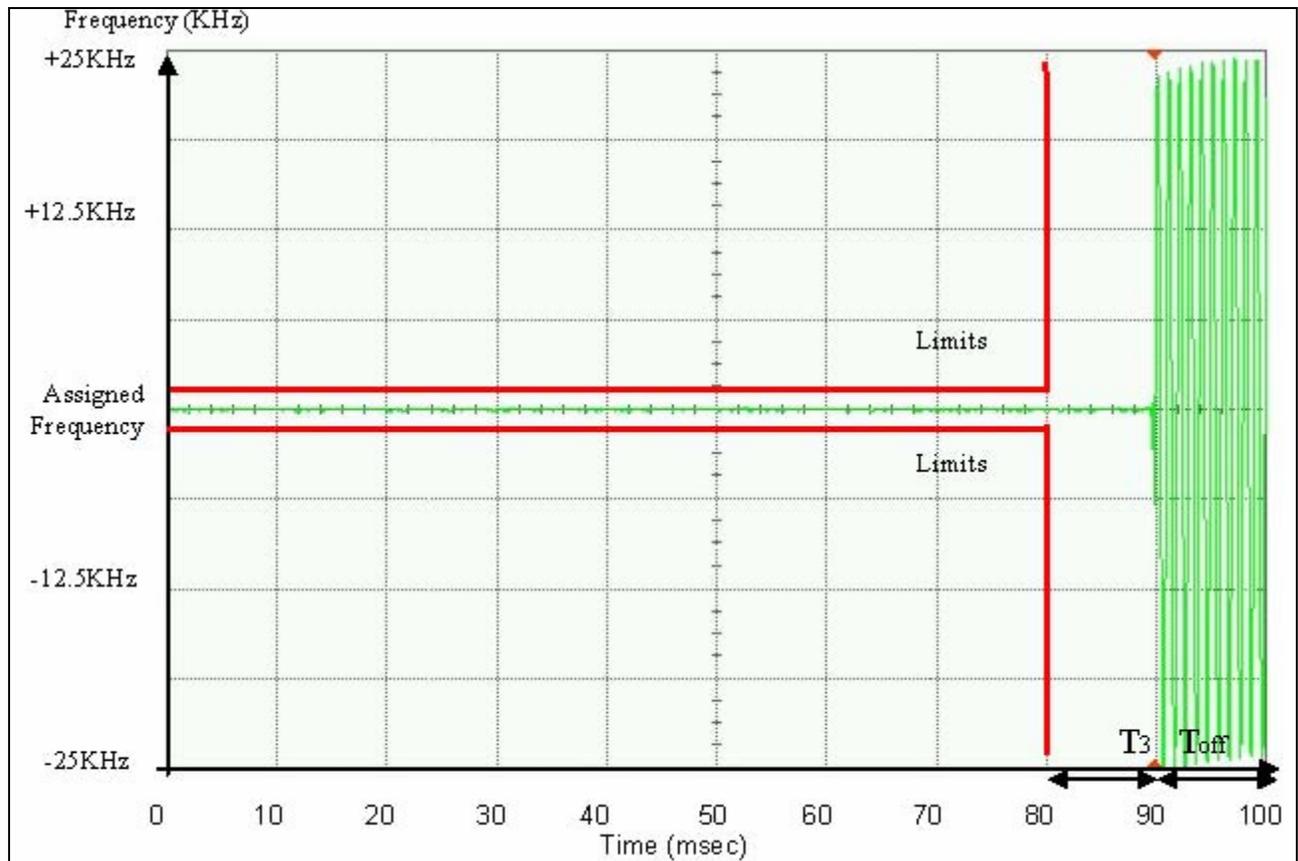

6I-1-6: 2.5ppm, 4 Watts, 12.5 kHz De-Key Decay Time

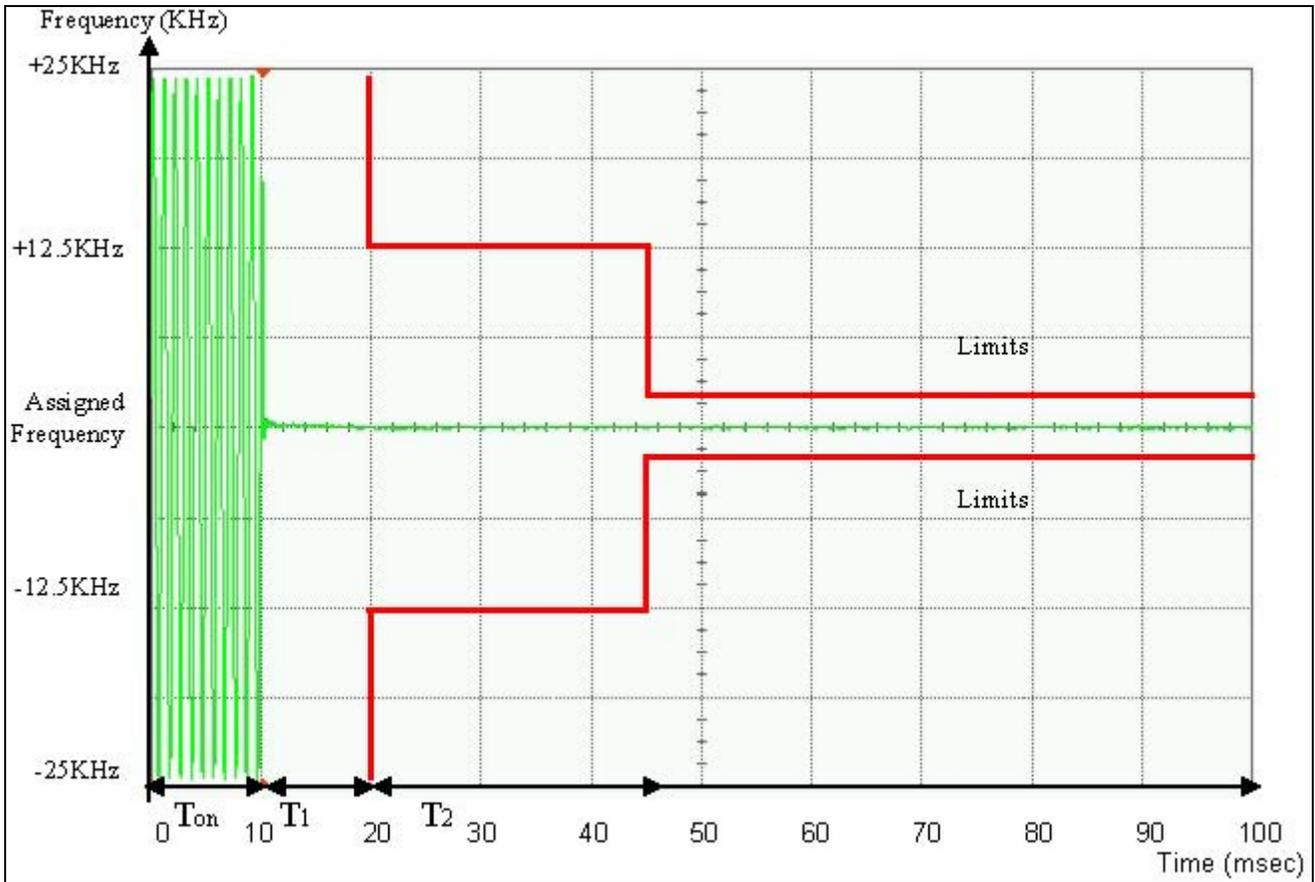

6I-1-7: 2.5ppm, 4 Watts, 25 kHz Key-Up Attack Time

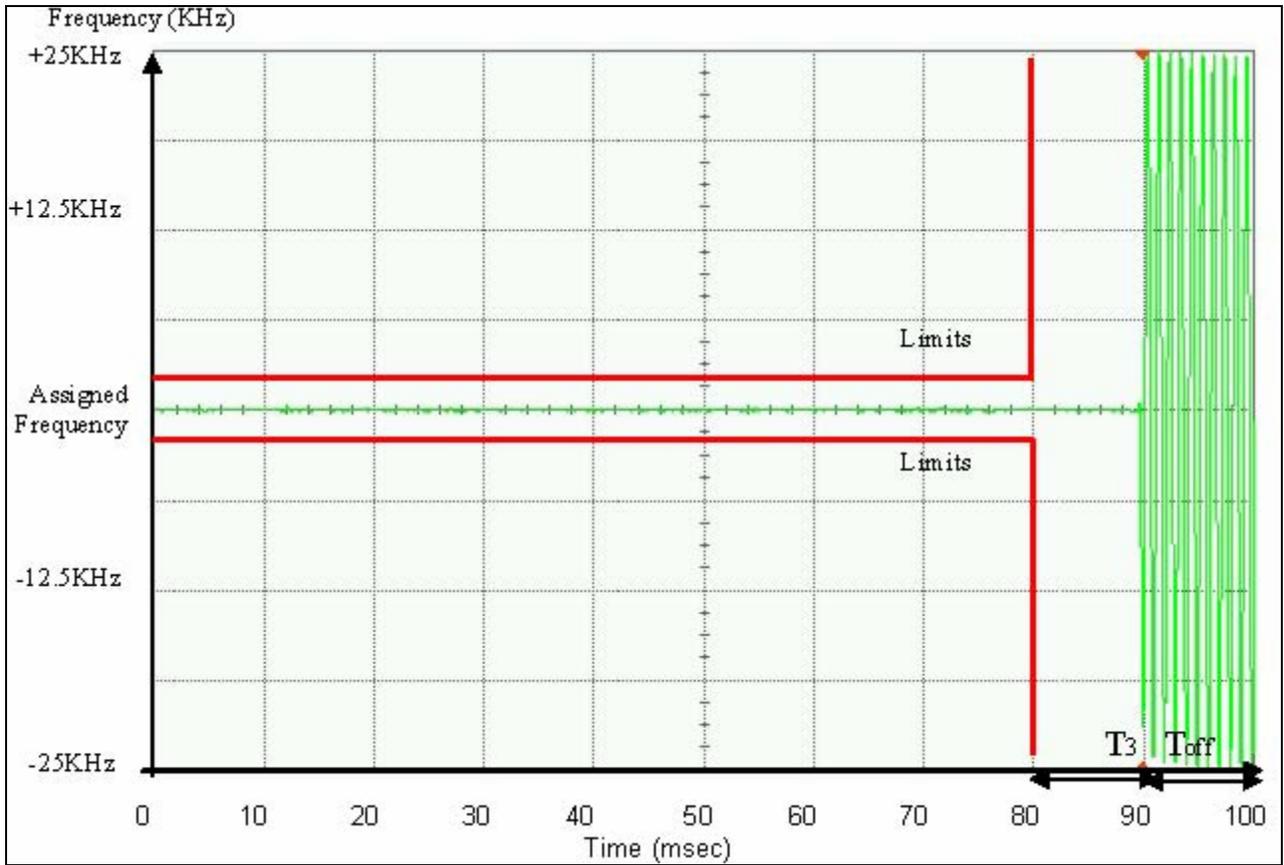

6I-1-8: 2.5ppm, 4 Watts, 25 kHz De-Key Decay Time