



**MOTOROLA**



**CGISS EME Test Laboratory**

8000 West Sunrise Blvd  
Fort Lauderdale, FL. 33322

**S.A.R. EME Compliance Test Report**

**Part 1 of 2**

**Date of Report:** August 12, 2004  
**Report Revision:** Rev. O  
**Manufacturer:** Motorola  
**Product Description:** XTS Portable UHF digital; 450-520MHz, 5.0 watts nominal  
**FCC ID:** **AZ489FT4866**  
**Device Model:** H46SDC9PW5AN

**Test Period:** 7/8/04 - 7/15/04 & 7/26/04  
**EME Tech:** Ed Church  
**Responsible Eng:** Deanna Zakharia (Elect. Principle Staff Eng.)  
**Author:** Michael Sailsman (Global EME Regulatory Affairs Liaison)

**Note: Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 2.0 of this report.**

Signature on File

8/12/04

\_\_\_\_\_  
Ken Enger  
Senior Resource Manager, Laboratory Director, CGISS EME Lab

\_\_\_\_\_  
Date Approved

**Note: This report shall not be reproduced without written approval from an officially designated representative of the Motorola EME Laboratory.**

# TABLE OF CONTENTS

## Part 1 of 2

- 1.0 Introduction
- 2.0 Reference Standards and Guidelines
- 3.0 Description of Test Sample
  - 3.1 Test Signal
  - 3.2 Test Output Power
- 4.0 Description of Test Equipment
  - 4.1 Description of S.A.R Measurement System
  - 4.2 Description of Phantom
    - 4.2.1 Flat Phantom
    - 4.2.2 SAM phantom
  - 4.3 Simulated Tissue Properties
    - 4.3.1 Type of Simulated Tissue
    - 4.3.2 Simulated Tissue Composition (System Performance)
  - 4.4 Test conditions
- 5.0 Probe Scan Procedures
  - 5.1 Shortened scan rationale
  - 5.2 Description of Test Procedure
  - 5.3 Device Test Positions
    - 5.3.1 Body
    - 5.3.2 Head
    - 5.3.3 Face
  - 5.4 Test Position Photographs
- 6.0 Measurement Uncertainty
- 7.0 S.A.R. Test Results
  - 7.1 S.A.R. Data
  - 7.2 Peak S.A.R. location
  - 7.3 Highest S.A.R. results calculation methodology
- 8.0 Conclusion

## Part 2 of 2

- Appendix A: Power Slump Data/Shortened scan
- Appendix B: Data Results
- Appendix C: Dipole System Performance Check Results
- Appendix D: Calibration Certificates
- Appendix E: Illustration of Body-worn Accessories
- Appendix F: Accessories and options test status and separation distances

## REVISION HISTORY

Date	Revision	Comments
8/12/04	O	Release of Pilot results

## 1.0 Introduction

This report details the utilization, test setup, test equipment, and test results of the Specific Absorption Rate (S.A.R.) measurements performed at the CGISS EME Test Lab for model number H46SDC9PW5AN, FCC ID: AZ489FT4866.

The applicable exposure environment is Occupational/Controlled.

## 2.0 Reference Standards and Guidelines

This product is designed to comply with the following national and international standards and guidelines.

- United States Federal Communications Commission, Code of Federal Regulations; 47CFR part 2 sub-part J
- IEEE 1528, 2003 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques"
- American National Standards Institute (ANSI) / Institute of Electrical and Electronic Engineers (IEEE) C95. 1-1992
- Institute of Electrical and Electronic Engineers (IEEE) C95.1-1999 Edition
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6. Limits of Human Exposure to Terminal frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz, 1999
- Australian Communications Authority Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003
- ANATEL, Brazil Regulatory Authority, Resolution No. 303 of July 2, 2002 "Regulation of the limitation of exposure to electrical, magnetic, and electromagnetic fields in the radio frequency range between 9KHz and 300 GHz." and "Attachment to resolution # 303 from July 2, 2002"

### 3.0 Description of Test Sample



FCC ID: AZ489FT4866 is capable of APCO 25 (C4FM) digital voice frequency modulated PTT device. The intended operating positions are “at the face” with the DUT 1 to 2 inches from the mouth, and “at the body” by means of the offered body-worn accessories. Audio and PTT operation while the radio is at the body is accomplished by means of optional remote accessories that connect to the radio. The maximum transmit duty cycle is a conservative 50% and is controlled by the user via the PTT function. This device will be marketed to and used by employees solely for work-related operations, such as public safety agencies, e.g. police, fire and emergency medical. User training is the responsibility of these agencies, which can be expected to employ the usage instructions, safety information and operational cautions set forth in the user's manual, instructional sessions or other means. Motorola also makes available to its customers training classes on the proper use of two-way radios and wireless data devices.

FCC ID: AZ489FT4866 is capable of operating in the 450-520 MHz band. The nominal conducted output power is 5 watts and the maximum conducted output power is 6.0 watts. The stated maximum output powers are as defined by the upper limit of the production line final test station.

FCC ID: AZ489FT4866 is offered with the following options and accessories:

<b>Antenna</b>	<b>Description</b>
NAE6549AR	¼ wave Whip antenna; 380-520 MHz; 13.3 cm; -5.15 dBi
NAE6547AR	¼ wave Helical antenna; 435-470 MHz; 7.8 cm; -8.0 dBi
NAE6548AR	¼ wave Helical antenna; 470-520 MHz; 7.1 cm; -8.0 dBi

### **Batteries**

NTN9857A	1800 mAh NiMH Ultra-Hi capacity FM Intrinsically Safe
NTN9816A	1525 mAh NiCad high capacity FM Intrinsically Safe
NTN9815A	1525 mAh NiCad high capacity
NTN9858AR	1800 mAh NiMH Ultra-high capacity
NTN9857B	1800 mAh NiMH Ultra-Hi capacity FM Intrinsically Safe
NTN9816B	1525 mAh NiCad high capacity FM Intrinsically Safe
NTN9815B	1525 mAh NiCad high capacity
NTN9858B	1800 mAh NiMH Ultra-high capacity

### **Body-worn Accessories**

NNTN4115A	Bonded case 3 inch loop with swivel
NNTN4116A	Bonded case 2.5 inch loop with swivel
NNTN4117A	Bonded case 3 inch belt loop
HLN9844A	1.5 inch belt clip
HLN6853A	2.25 inch belt clip
TDN9675A	Wrist strap for carrying only
NLN6349A	Shoulder strap for carrying only
NTN5243A	Shoulder strap for carrying only

### **Applicable Audio accessories**

BDN6676D	Jedi Adapter 3.5mm w/PTT switch
BDN6671B	PTT & VOX Interface Module
BDN6708B	PTT Interface Module
BDN6673B	Headset adapter cable
NMN6193C	Remote Speaker Microphone
BDN6665A	Earpiece w/ extra loud earphone (exceeds OSHA limits)
BDN6666A	Earpiece w/ Volume Control
BDN6667A	Earpiece, Mic & PTT Combo
BDN6668A	Earpiece, Mic & PTT Separate
BDN6780A	Earbud Single w/ Mic & PTT
NTN1624A	Commport w/ Palm PTT NTN8819A & NKN6510A
BDN6677A	Standard Ear Microphone 95dB (Black)
BDN6678A	Standard Ear Microphone 95dB (Beige)
BDN6635C	Heavy-duty Boom Mic Headset w/ Vox

BDN6636C	Heavy-duty Throat Mic Headset w/ Vox
NMN6245A	Light Weight Headset
NMN6259A	Med. Weight Dual Headset w/ NC Mic
NMN1020A	Safety Helmet Headset
RMN4049A	Temple Transducer
NMN6191C	RSM Noise Canceling Includes: 6.0' coiled cord assembly, 3.5mm ear jack, swivel clip, quick disconnect
NNTN4285A	Remote speaker microphone adapter
BDN6664A	Earpiece with standard earpiece BEIGE
BDN6726A	Earpiece with standard earpiece BLACK
BDN6727A	Earpiece with extra loud earphone BLACK (exceeds OSHA limits)
BDN6728A	Earpiece with volume control BLACK
BDN6729A	Earpiece, Mic and PTT combined BLACK
BDN6730A	Earpiece, Mic and PTT separate BLACK
BDN6669A	Earpiece, Mic and PTT combined with extra loud earpiece BEIGE (exceeds OSHA limits)
BDN6731A	Earpiece, Mic and PTT combined with extra loud earpiece BLACK (exceeds OSHA limits)
BDN6670A	Earpiece, Mic and PTT separate with extra loud earpiece BEIGE (exceeds OSHA limits)
BDN6732A	Earpiece, Mic and PTT separate with extra loud earpiece BLACK (exceeds OSHA limits)
BDN6781A	Earbud, single, receive only, black
NTN1625A	Commport ear mic, with PTT for noise levels up to 100 dB (ship w/ BDN6676 adapter)
NTN1663A	Commport ear mic, with Ring PTT for noise levels up to 100 dB (ship w/ BDN6676 adapter)
NTN1736A	Commport ear mic, with Snap-On Side PTT for noise levels up to 100 dB (ship w/ BDN6676 adapter)
BDN6641A	Ear mic, high noise level up to 105dB, Black (must order interface module)
BDN6645A	Noise-Canceling Boom Mic Headset with PTT on earcup (ship w/BDN6673B adaptor)
NMN6246B	Ultralite Headset w/Boom Microphone
NMN6258A	Over the Head Headset w/ In Line PTT
ZMN6031A	SPKR MIC 3 PIECE
ZMN6032A	SPKR MIC 2 PIECE
ZMN6038A	SPKR MIC 2 PC XL
ZMN6039A	SPKR MIC 3 PC XL
BDN6719A	Ear pad w/3.5mm threaded plug

**Other applicable options:**

0180300E83	Remote Push-To-Talk Body Switch
NTN8613A	Surveillance accessory adapter
NTN7660C	Tilt/man down switch

### 3.1 Test Signal

#### Test Signal mode:

Test Mode	<input checked="" type="checkbox"/>	Base Station	<input type="checkbox"/>	Simulator	<input type="checkbox"/>
-----------	-------------------------------------	--------------	--------------------------	-----------	--------------------------

#### Transmission Mode:

CW	<input checked="" type="checkbox"/>
Native Transmission	<input type="checkbox"/>
TDMA:	<input type="checkbox"/>
Other:	<input type="checkbox"/>

### 3.2 Test Output Power

A table of the characteristic power slump versus time is provided in Appendix A for the worst case tested battery.

## 4.0 Description of Test Equipment

### 4.1 Descriptions of S.A.R. Measurement System

The laboratory utilizes a Dosimetric Assessment System (DASY3™) S.A.R. measurement system manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. The test system consists of a Stäubli RX90L robot with an ET3DV6 E-Field probe. Please reference the SPEAG user manual and application notes for detailed probe, robot, and S.A.R. computational procedures.

The S.A.R. measurements were conducted with probe model/serial number ET3DV6R/SN1545. The system performance check was conducted daily and within 24 hours prior to testing. DASY output files of the system performance test results and the probe/dipole calibration certificates are included in appendices C and D respectively. The table below summarizes the system performance check results normalized to 1W.

Probe Serial #	Tissue Type	Probe Cal Date	Dipole Kit / Serial #	System Perf. 1-g S.A.R. Result when normalized to 1W (mW/g)	Reference 1-g S.A.R @ 1W (mW/g)	Test Date(s)
1545	FCC Body	8/28/03	D450V2/1002	4.565 +/- 0.115	4.71 +/- 10%	7/8/04-7/26/04 5 test days
1545	IEEE Head	8/28/03	D450V2/1002	4.670 +/- 0.000	4.73 +/- 10%	7/12/04-7/13/04

Note: System performance results reflects the median performance +/- 1/2 of the test date(s) performance ranges

The DASY3™ system is operated per the instructions in the DASY3™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess S.A.R. EME compliance was calibrated according to 17025 A2LA guidelines.

## 4.2 Description of Phantom

### 4.2.1 Flat Phantom

A rectangular shaped box made of high-density polyethylene (HDPE) with a dielectric constant of 2.26 and a loss tangent of less than 0.00031. The phantom used for this assessment at body and face were mounted on wooden supporting structures having loss tangents of < 0.05. The structure used has a 68.58 cm x 20.32 cm opening at its center to allow positioning the DUT to the phantom's surface. The flat phantom dimensions are L = 80cm, W = 30cm, H = 20cm, Surface Thickness = 0.2cm.

### 4.2.2 SAM Phantom

NA

## 4.3 Simulated Tissue Properties

### 4.3.1 Type of Simulated Tissue

The simulated tissues used are compliant to that specified in FCC Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)

Simulated Tissue	Body Position
FCC Body	Torso
IEEE Head	Head/Face

### 4.3.2 Simulated Tissue Composition (System Performance)

	Tissue Ingredients (%)					
	450MHz		NA		NA	
	Head	Body	Head	Body	Head	Body
Sugar	56.0	46.5	NA	NA	NA	NA
DGBE (Glycol)	NA	NA	NA	NA	NA	NA
De ionized -Water	39.1	50.53	NA	NA	NA	NA
Salt	3.8	1.87	NA	NA	NA	NA
HEC	1	1	NA	NA	NA	NA
Bact.	0.1	0.1	NA	NA	NA	NA

**Characterization of Simulated tissue materials and ambient conditions:**

Simulated tissue prepared for S.A.R. measurements is measured daily and within 24 hours prior to actual S.A.R. testing to verify that the tissue is within 5% of target parameters at the center of the transmit band. This measurement is done using the Agilent (HP) probe kit model 85070C and a HP8753D Network Analyzer.

**Tested Tissue Target Parameters**

FCC Body				
Frequency (MHz)	Di-electric Constant Target	Di-electric Constant Meas. (Range)	Conductivity Target S/m	Conductivity Meas. (Range) S/m
450	56.7	54.9-56.4	0.94	0.90-0.95
485	56.6	54.3-55.9	0.94	0.94-0.98

IEEE Head				
Frequency (MHz)	Di-electric Constant Target	Di-electric Constant Meas. (Range)	Conductivity Target S/m	Conductivity Meas. (Range) S/m
450	43.5	43.2-43.6	0.87	0.84-0.85
485	43.3	42.6-42.9	0.87	0.87-0.88

**4.4 Test conditions**

The EME Laboratory ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within +/- 2°C of the temperature at which the dielectric properties were determined. The liquid depth in the phantom used for measurements was 15cm +/- 0.5cm. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The table below presents the range and average environmental conditions during the S.A.R. tests reported herein:

	Target	Measured
<b>Ambient Temperature</b>	20 - 25 °C	Range: 20.7-26.6°C Avg. 21.99°C
<b>Relative Humidity</b>	30 - 70 %	Range: 47.3-62.0% Avg. 51.31%
<b>Tissue Temperature</b>	NA	Range: 20.0-20.7°C Avg. 20.39 °C

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the S.A.R scans are repeated. However, the lab environment is sufficiently protected such that no S.A.R. impacting interference has been experienced to date.

## **5.0 Probe Scan Procedures**

The E-field probe first scans a coarse grid over a large area inside the phantom in order to locate the interpolated maximum S.A.R. distribution. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The subsequent scan can directly use this position as reference for the cube evaluations.

### **5.1 Shortened scan rationale**

APPENDIX A presents relevant shortened S.A.R. cube scan to assess the validity of the calculated results presented herein. The results of the shortened cube scans demonstrate that the scaling methodology used to determine the calculated S.A.R. results presented herein are valid.

### **5.2 Device test positions**

Reference Figure 1 for the device orientation and position which exhibited the highest S.A.R. performance.

#### **5.2.1 Body**

The DUT was positioned such that the body worn accessory was centered against the flat phantom with the applicable audio accessory attachments. The DUT was positioned with its' front, and back separated 2.5cm from the flat phantom.

#### **5.2.2 Head**

NA

#### **5.2.3 Face**

The DUT was placed with its front housing separated 2.5 cm from the flat phantom

### **5.3 Description of Test Procedure**

All options and accessories listed in section 3.0 were considered in order to develop the S.A.R. test plan for this product. S.A.R. measurements were performed using a flat phantom to assess performance at the body and in front of the face in CW mode.

### **Assessments at the body (450-520MHz)** [\[Page 19&20 of 22; Table 1\]](#)

The DUT was assessed at the center frequency of the offered antenna model NAE6547AR, in CW mode, using each of the offered battery models, along with belt clip model HLN9844A, and RSM model NMN6191C. The DUT was then assessed at the band edges using the worst case battery from above.

The DUT was assessed across the transmit band of each of the other offered antennas using the worst case battery from above, with belt clip model HLN9844A, and RSM model NMN6191C.

The DUT was assessed using the worst case configuration from above, in CW mode, with each of the other offered body worn accessories.

The DUT was assessed using the worst case configuration from above, in CW mode with each of the offered audio accessories attached and allowed to hang from the device during the assessment.

The DUT was assessed using the worst case configuration from above with the DUT 's back and front housing separated 2.5 cm from the flat phantom.

### **Assessments at the face (450-520MHz)** [\[Page 21 of 22; Table 2\]](#)

The DUT was assessed at the center frequency of the offered antenna model NAE6547AR, in CW mode, with the front housing separated 2.5 cm from the phantom, using each of the offered batteries. The DUT was then assessed at the band edges using the worst case battery from above.

The DUT was assessed across the transmit band of each of the other offered antennas, in CW mode, with the front housing separated 2.5 cm from the phantom, using the worst case battery from above.

The DUT was assessed using the worst case configuration from above, in CW mode, with the front housing separated 2.5 cm from the phantom, along with each of the applicable (no PTT features; receive only) offered audio accessories.

### **Shortened scan assessment at the Body** [\[Appendix A\]](#)

A "shortened" scan assessment was done using the test configuration from above that produced the highest S.A.R. results overall at the body.

### **Shortened scan assessment at the Face** [\[Appendix A\]](#)

A "shortened" scan assessment was done using the test configuration from above that produced the highest S.A.R. results overall at the face.

## 5.4 Test Position Photographs

**Figure 1. Highest SAR Test Position. Assessment @ the body w/ antenna model NAE6548AR.  
DUT with belt clip model HLN9844A against the phantom with attached audio accessory BDN6671B  
Same position used with all other applicable audio accessories attached**



**Figure 2. Assessment @ the body w/ antenna model NAE6548AR.  
DUT with belt clip accessory model HLN6853A against the phantom,  
with attached audio accessory NMN6191C**



**Figure 3. Assessment @ body w/ antenna model NAE6548AR.  
DUT with carry case accessory model NNTN4115A against the phantom  
with attached audio accessory model NMN6191C.**



**Figure 4. Assessment @ the body w/ antenna model NAE6548AR.  
DUT with carry case accessory model NNTN4116A against the phantom  
with attached audio accessory model NMN6191C**



**Figure 5. Assessment @ the body w/ antenna model NAE6548AR.  
DUT with carry case accessory model NNTN4117A against the phantom  
with attached audio accessory model NMN6191C**



**Figure 6. Assessment @ the body with antenna NAE6548AR.  
DUT with back separated 2.5cm from the phantom  
with attached audio accessory model BDN6671**




**Figure 7. Assessment @ the body with antenna NAE6548AR.  
DUT with front separated 2.5cm from the phantom  
with attached audio accessory model BDN6671**



**Figure 8. Assessment @ the face w/ antenna model NAE6548AR.  
DUT with front housing separated 2.5cm from the phantom  
Same position used for attached audio accessories**



**Figure 9: Robot Test System (Flat Phantom used for body and face)**

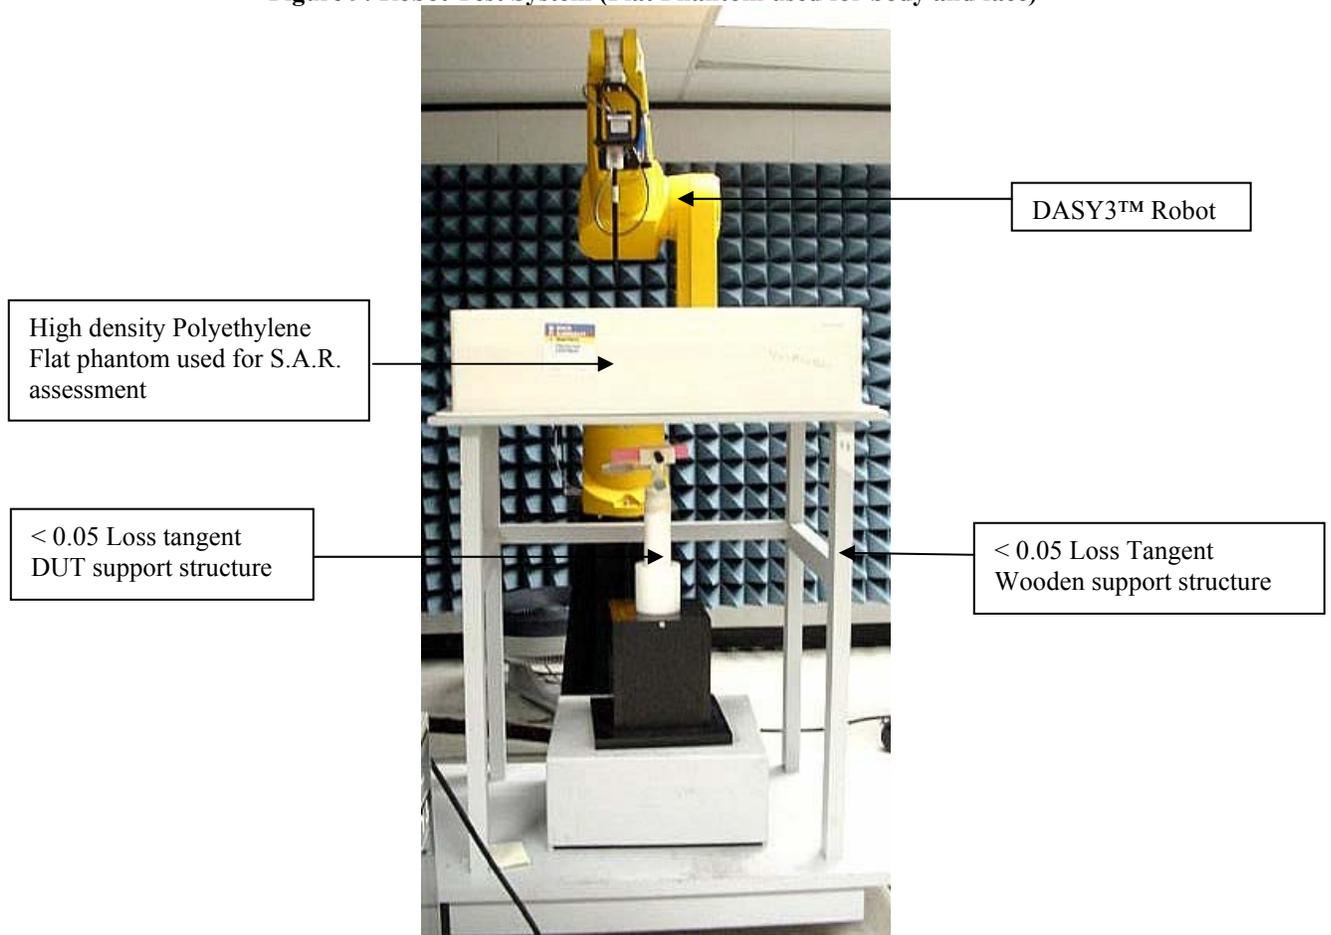

## 6.0 Measurement Uncertainty

**Table 1: Uncertainty Budget for Device Under Test: 75 – 3000 MHz**

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = cxf/e</i>	<i>i = cxg/e</i>	<i>k</i>
<b>Uncertainty Component</b>									
<b>Measurement System</b>									
Probe Calibration	E.2.1	4.8	N	1.00	1	1	4.8	4.8	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1.0	N	1.00	1	1	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	E.2.8	1.3	R	1.73	1	1	0.8	0.8	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	1.0	R	1.73	1	1	0.6	0.6	∞
Probe Positioning w.r.t Phantom	E.6.3	4.0	R	1.73	1	1	2.3	2.3	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
<b>Test sample Related</b>									
Test Sample Positioning	E.4.2	3.4	N	1.00	1	1	3.4	3.4	29
Device Holder Uncertainty	E.4.1	3.8	N	1.00	1	1	3.8	3.8	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	6.5	N	1.00	0.64	0.43	4.2	2.8	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	4.0	N	1.00	0.6	0.49	2.4	2.0	∞
<b>Combined Standard Uncertainty</b>			RSS				12	11	601
<b>Expanded Uncertainty (95% CONFIDENCE LEVEL)</b>			<i>k</i> =2				23	22	

**Table 2: Uncertainty Budget for System Check: 75 – 3000 MHz**

a	b	c	d	e = f(d,k)	f	g	h =	i =	k
							c x f / e	c x g / e	
Uncertainty Component	IEEE 1528 section	Tol.	Prob.	Div.	c <sub>i</sub>	c <sub>i</sub>	1 g	10 g	v <sub>i</sub>
		(± %)	Dist.		(1 g)	(10 g)	u <sub>i</sub>	u <sub>i</sub>	
<b>Measurement System</b>									
Probe Calibration	E.2.1	4.8	N	1.00	1	1	4.8	4.8	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1.0	N	1.00	1	1	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	E.2.8	1.3	R	1.73	1	1	0.8	0.8	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t. Phantom Max. SAR Evaluation (ext., int., avg.)	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
<b>Dipole</b>									
Dipole Axis to Liquid Distance	8.E.4.2	2.0	R	1.73	1	1	1.2	1.2	∞
Input Power and SAR Drift Measurement	8.6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	6.0	R	1.73	0.64	0.43	2.2	1.5	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	6.0	R	1.73	0.6	0.49	2.1	1.7	∞
<b>Combined Standard Uncertainty</b>			RSS				9	8	99999
<b>Expanded Uncertainty (95% CONFIDENCE LEVEL)</b>			k=2				17	17	

Notes for Tables 1 and 2

- a) Column headings a-k are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) c<sub>i</sub> - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) u<sub>i</sub> – SAR uncertainty
- h) v<sub>i</sub> - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty.

## 7.0 S.A.R. Test Results

All S.A.R. results obtained by the tests described in Section 5.0 are listed in section 7.1 below. The bolded result indicates the highest observed S.A.R. performances for each body location. DASY3™ S.A.R. measurement scans are provided in APPENDIX B for the highest observed S.A.R. performances.

Note that the device for this filing exhibits large power slumping and therefore required the use of two fully charged batteries; one for the coarse measurements and one for the cube, drift, and Z axis measurements. Drift results presented herein reflect power slump during the cube measurement only.

Appendix A presents shortened S.A.R. cube scans to assess the validity of the calculated results presented herein. The results of the shortened cube scans presented in Appendix A demonstrate that the scaling methodology used to determine the calculated S.A.R. results presented herein are valid.

## 7.1 S.A.R. data

**Table 1**

DUT assessment at the body; CW mode; 450-520 MHz												
Run Number/ SN	Antenna model	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Meas. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
<b>Assessment at center frequency of antenna model NAE6547AR w/ each of the offered batteries; assessment at band edges with worst case configuration; along with RSM model NMN6191C</b>												
EC-Ab-R2-040708-10/407TDY1001	NAE6547AR	462.225	NTN9857B	Against phantom	HLN9844A	NMN6191C	5.75	-1.24	7.39	5.270	5.13	3.66
DZ-Ab-R2-040709-02/407TDY1001	NAE6547AR	462.225	NTN9858B	Against phantom	HLN9844A	NMN6191C	5.48	-0.65	6.77	4.710	4.31	3.0
DZ-Ab-R2-040709-03/407TDY1001	NAE6547AR	462.225	NTN9815B	Against phantom	HLN9844A	NMN6191C	5.61	-1.16	6.45	4.550	4.51	3.18
DZ-Ab-R2-040709-04/407TDY1001	NAE6547AR	462.225	NTN9816B	Against phantom	HLN9844A	NMN6191C	5.62	-1.18	6.39	4.420	4.48	3.10
EC-Ab-R2-040709-05/407TDY1001	NAE6547AR	450.225	NTN9857B	Against phantom	HLN9844A	NMN6191C	5.85	-0.19	7.99	5.600	4.28	3.00
EC-Ab-R2-040709-06/407TDY1001	NAE6547AR	469.985	NTN9857B	Against phantom	HLN9844A	NMN6191C	5.88	-1.75	6.46	4.580	4.93	3.50
<b>Assessment of offered antenna model NAE6548AR across the transmit band using the worst case configuration from above</b>												
EC-Ab-R2-040709-07/407TDY1001	NAE6548AR	470.225	NTN9857B	Against phantom	HLN9844A	NMN6191C	5.99	-0.49	10.10	7.340	5.66	4.12
EC-Ab-R2-040709-09/407TDY1001	NAE6548AR	491.225	NTN9857B	Against phantom	HLN9844A	NMN6191C	5.90	-1.05	8.170	5.860	5.29	3.80
EC-Ab-R2-040709-10/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	NMN6191C	5.72	-0.92	9.670	7.000	6.27	4.54
<b>Assessment of offered antenna model NAE6549AR across the transmit band using the worst case configuration from above</b>												
EC-Ab-R2-040709-11/407TDY1001	NAE6549AR	470.225	NTN9857B	Against phantom	HLN9844A	NMN6191C	5.72	-0.42	8.140	5.930	4.70	3.43
EC-Ab-R2-040709-13/407TDY1001	NAE6549AR	485.225	NTN9857B	Against phantom	HLN9844A	NMN6191C	5.99	-0.33	7.680	5.600	4.15	3.03
EC-Ab-R2-040709-14/407TDY1001	NAE6549AR	519.985	NTN9857B	Against phantom	HLN9844A	NMN6191C	5.92	-0.46	8.400	6.110	4.73	3.44

**Table 1 (continued)**

DUT assessment at the body; CW mode; 450-520 MHz												
Run Number/ SN	Antenna model	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	S.A.R. Drift (dB)	Meas. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
<b>Assessment of other body worn accessories with worst case configuration from above</b>												
EC-Ab-R2-040709-15/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN6853A	NMN6191C	5.80	-0.48	8.860	6.460	5.12	3.73
EC-Ab-R2-040709-17/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	NNTN4115A	NMN6191C	5.75	-0.98	3.820	2.820	2.50	1.84
EC-Ab-R2-040713-11/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	NNTN4116A	NMN6191C	5.710	-0.93	2.860	2.120	1.86	1.38
EC-Ab-R2-040713-12/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	NNTN4117A	NMN6191C	5.75	-0.88	3.120	2.320	1.99	1.48
<b>Assessment of other audio accessories with worst case configuration from above.</b>												
EC-Ab-R2-040713-13/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	BDN6671B tested w/ BDN6641A	5.72	-0.93	9.860	7.120	<b>6.41</b>	4.63
EC-Ab-R2-040713-14/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	BDN6645A w/ BDN6673B	5.79	-0.59	10.100	7.060	6.00	4.19
EC-Ab-R2-040714-02/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	BDN6729A w/ BDN6676D	5.86	-0.74	9.480	6.860	5.76	4.16
EC-Ab-R2-040714-03/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	BDN6730A w/ BDN6676D	5.80	-0.67	8.290	6.020	5.00	3.63
EC-Ab-R2-040714-04/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	NMN6245A w/ BDN6676D	5.78	-0.72	8.800	6.390	5.39	3.92
EC-Ab-R2-040714-05/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	NMN6246B w/ BDN6676D	5.87	-0.64	9.040	6.560	5.35	3.89
EC-Ab-R2-040714-06/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	NMN6258A	5.92	-0.64	9.380	6.800	5.51	3.99
EC-Ab-R2-040714-07/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	RMN4049A	5.89	-0.80	9.510	6.470	5.82	3.96
EC-Ab-R2-040714-08/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	NMN1020A	5.74	-0.55	8.840	6.400	5.24	3.80
EC-Ab-R2-040726-03/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	NTN1625A	5.82	-0.50	7.760	5.560	4.49	3.22
EC-Ab-R2-040726-05/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	ZMN6032A NTN8613A	5.90	-0.64	9.890	7.120	5.83	4.20
EC-Ab-R2-040726-06/407TDY1001	NAE6548AR	511.985	NTN9857B	Against phantom	HLN9844A	ZMN6031A NTN8613A	5.89	-0.69	9.170	6.660	5.48	3.98
<b>Assessment at 2.5 cm separation from phantom</b>												
EC-Ab-R2-040714-12/407TDY1001	NAE6548AR	511.985	NTN9857B	DUT Back 2.5cm	None	BDN6671B w/ BDN6641A	5.72	-0.85	4.61	3.41	2.94	2.18
EC-Ab-R2-040714-13/407TDY1001	NAE6548AR	511.985	NTN9857B	DUT Front 2.5cm	None	BDN6671B w/ BDN6641A	5.76	-1.23	3.78	2.69	2.61	1.86

**Table 2**

<b>DUT assessment at the Face; 2.5cm separation; 450-520 MHz</b>												
<b>Run Number/ SN</b>	<b>Antenna model</b>	<b>Freq. (MHz)</b>	<b>Battery</b>	<b>Test position</b>	<b>Carry Case</b>	<b>Additional attachments</b>	<b>Initial Power (W)</b>	<b>S.A.R. Drift (dB)</b>	<b>Meas. 1g-S.A.R. (mW/g)</b>	<b>Meas. 10g-S.A.R. (mW/g)</b>	<b>Max Calc. 1g-S.A.R. (mW/g)</b>	<b>Max Calc. 10g-S.A.R. (mW/g)</b>
<b>Assessment at center frequency of antenna model NAE6547AR w/ each of the offered batteries; assessment at band edges with worst case configuration</b>												
DZ-Face-R2-040712-02/407TDY1001	NAE6547AR	462.225	NTN9857B	DUT front 2.5cm	None	None	5.61	-0.83	5.95	4.38	3.85	2.84
DZ-Face-R2-040712-03/407TDY1001	NAE6547AR	462.225	NTN9858B	DUT front 2.5cm	None	None	5.38	-0.28	6.01	4.45	3.57	2.65
DZ-Face-R2-040712-04/407TDY1001	NAE6547AR	462.225	NTN9815B	DUT front 2.5cm	None	None	5.65	-0.87	5.91	4.37	3.83	2.84
DZ-Face-R2-040712-05/407TDY1001	NAE6547AR	462.225	NTN9816B	DUT front 2.5cm	None	None	5.63	-0.92	5.73	4.20	3.77	2.77
DZ-Face-R2-040712-06/407TDY1001	NAE6547AR	450.225	NTN9857B	DUT front 2.5cm	None	None	5.47	-0.28	6.46	4.80	3.78	2.81
DZ-Face-R2-040712-07/407TDY1001	NAE6547AR	469.985	NTN9857B	DUT front 2.5cm	None	None	5.71	-1.76	4.88	3.53	3.85	2.78
<b>Assessment across the transmit band of antenna model NAE6548A with worst case battery from above</b>												
EC-Face-R2-040712-09/407TDY1001	NAE6548AR	470.225	NTN9857B	DUT front 2.5cm	None	None	5.92	-0.83	7.09	5.25	4.35	3.22
EC-Face-R2-040712-10/407TDY1001	NAE6548AR	491.225	NTN9857B	DUT front 2.5cm	None	None	5.80	-0.44	7.93	5.88	4.54	3.37
EC-Face-R2-040712-11/407TDY1001	NAE6548AR	511.985	NTN9857B	DUT front 2.5cm	None	None	5.83	-1.08	6.14	4.54	4.05	3.00
<b>Assessment across the transmit band of antenna model NAE6549A with worst case battery from above</b>												
EC-Face-R2-040712-12/407TDY1001	NAE6549AR	470.225	NTN9857B	DUT front 2.5cm	None	None	5.990	-0.55	5.22	3.87	2.97	2.20
EC-Face-R2-040712-13/407TDY1001	NAE6549AR	485.225	NTN9857B	DUT front 2.5cm	None	None	5.790	-1.81	4.86	3.56	3.82	2.80
EC-Face-R2-040712-14/407TDY1001	NAE6549AR	519.985	NTN9857B	DUT front 2.5cm	None	None	5.720	-1.54	4.43	3.23	3.31	2.42
<b>Assessment of other offered audio accessories with worst case test configuration from above</b>												
EC-Face-R2-040713-04/407TDY1001	NAE6548AR	491.225	NTN9857B	DUT front 2.5cm	None	BDN6665A	5.770	-0.51	6.02	4.46	3.52	2.61
EC-Face-R2-040713-05/407TDY1001	NAE6548AR	491.225	NTN9857B	DUT front 2.5cm	None	BDN6666A	5.810	-0.28	5.22	3.88	2.88	2.14
EC-Face-R2-040713-06/407TDY1001	NAE6548AR	491.225	NTN9857B	DUT front 2.5cm	None	BDN6781A	5.730	-0.39	6.11	4.54	3.50	2.60

## 7.2 Peak S.A.R. location

Refer to APPENDIX B for detailed S.A.R. scan distributions.

## 7.3 Highest S.A.R. results calculation methodology

The calculated maximum 1-gram and 10-gram averaged S.A.R. results reported herein are determined by scaling the measured S.A.R. to account for power leveling variations and power slump. For this device the Maximum Calculated 1-gram and 10-gram averaged peak S.A.R. is calculated using the following formula:

$$\text{Max. Calc. 1-g Avg. SAR} = ((\text{S.A.R. meas.} / (10^{(\text{Pdrift}/10)})) * (\text{Pmax}/\text{Pint})) * \text{DC\%}$$

$P_{\text{max}}$  = Maximum Power (W)

$P_{\text{int}}$  = Initial Power (W)

Pdrift = DASY drift results (dB)

SAR<sub>meas.</sub> = Measured 1 gram averaged peak S.A.R. (mW/g)

DC % = Transmission mode duty cycle in % where applicable

Note that the use of the above formula should consider the relationship between the initial power, max power, and drift.

## 8.0 Conclusion

The highest Operational Maximum Calculated 1-gram and 10-gram average S.A.R. values found for FCC ID: AZ489FT4866 model H46SDC9PW5AN.

**At the Body:**      **1-g Avg. = 6.41 mW/g; 10-g Avg. = 4.63 mW/g**

**At the Face:**      **1-g Avg. = 4.54 mW/g; 10-g Avg. = 3.37 mW/g**

These test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of **8.0mW/g** per the requirements of 47 CFR 2.1093(d)