




FCC ID: AZ489FT4884
DECLARATION OF COMPLIANCE SAR ASSESSMENT Part 1 of 2

Government & Public Safety
EME Test Laboratory
Motorola Technology Sdn Bhd (455657-H)
Customer Solution Center
Plot 2, Bayan Lepas Technoplex Industrial Park,
Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.

Date of Report: 4/30/08
Report Revision: 0
Report ID: SAR rpt_PMUE3090AANAA_Rev O_080430
 SR6208

Responsible Engineer: PeiLoo Tey (Sr. EME Engineer)
Date/s Tested: 3/21/08~3/31/08
Manufacturer/Location: Motorola – Penang
Sector/Group/Div.: G&PS
Date submitted for test: 3/14/08
DUT Description: XPR 6300 450-512MHz 4W 32CH, PLAIN W/O GPS
Test TX mode(s): CW
Max. Power output: 4.8W
Nominal Power: 4.0W
Tx Frequency Bands: 450-512MHz
Signaling type: FM
Model(s) Tested: PMUE3090AANAA
Model(s) Certified: PMUE3090AANAA
Serial Number(s): 977TUA0003
Classification: Occupational/Controlled
Rule Part(s): 90



Approved Accessories:

Antenna(s):
 PMAE4049A (450-527MHz, Whip, ¼ wave, 1.9dBd); PMAE4050A (450-495MHz, GPS Fld Mnp, ¼ wave, 1.9dBd); PMAE4051A (495-527MHz, GPS Fld Mnp, ¼ wave, 0.8dBd); PMAE4052A (450-495MHz, GPS Stubby, ¼ wave, 1.3dBd); PMAE4048A (495-527MHz, GPS Stubby, ¼ wave, 1.4dBd)

Battery(ies):
 PMNN4077B (LI-ION 2200mAH IMPRES Battery LTD); PMNN4066A (Impres LI-ION 1500mAH Submersible (IP57) Battery); PMNN4069A (Impres LI-ION 1400mAH Submersible (IP57) Intrinsically Safe (FM) Battery); PMNN4065A (NiMH 1300mAH Submersible (IP57) Battery)

Body worn accessory(ies):
 PMLN5024A (Nylon carry case w/ 3-inch Fixed Belt Loop for Non-Display radio); PMLN5025A (Soft leather carry case w/ 2.5-inch Swivel Belt Loop for Non-Display radio); PMLN5026A (Soft leather carry case w/ 3-inch Swivel Belt Loop for Non-Display radio); PMLN5027A (Soft leather carry case w/ 3-inch Fixed Belt Loop for Non-Display radio); PMLN5028A (Hard Leather carry case w/ 2.5-inch Swivel Belt Loop for Non-Display radio); PMLN5029A (Hard Leather carry case w/ 3-inch Swivel Belt Loop for Non-Display radio); PMLN5030A (Hard Leather carry case w/ 3-inch Fixed Belt Loop for Non-Display radio); PMLN4651A (2-inch Belt Clip); PMLN4652A (2.5-inch Belt Clip); HLN9985B (Waterproof bag); RLN4570A (Break-A-way Chest pack); RLN4815A (Universal RadioPak & Utility Case (Fanny Pack)); HLN6602A (Universal Chest Pack); 4280384F89 (Universal RadioPak Extension Belt); 4200865599 (1.75-inch black Leather Belt); NTN5243A (Shoulder Strap (attaches to D-rings on carry case)); 1505596Z02 (Replacement Strap for RLN4570 & HLN6602 Chest Pack)

Audio/Data cable accessory(ies):
 See section 3.0 for list of approved audio accessories.

Max. Calc. : 1-g Avg. SAR: 6.74W/kg (Body); 10-g Avg. SAR: 4.95W/kg (Body)
Max. Calc. : 1-g Avg. SAR: 3.92W/kg (Face); 10-g Avg. SAR: 2.90W/kg (Face)

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of **8W/kg** per the requirements of 47 CFR 2.1093(d).

The test results clearly demonstrate compliance with ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300GHz), Health Physics 74, 494-522 RF Exposure limits of **10W/kg** averaged over 10grams of contiguous tissue.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 2.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola EME Laboratory.

I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements.
 This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004
 The results and statements contained in this report pertain only to the device(s) evaluated.

Signature on file - Deanna Zakharia
Deanna Zakharia G&PS EME Lab Senior Resource Manager,
Laboratory Director,

Certification Date: 5/1/2008

Certification No.: L1080425P

Approval Date: 5/1/2008

Part 1 of 2

1.0 Introduction and Overview..... 3

2.0 Referenced Standards and Guidelines..... 3

 2.1 SAR Limits..... 4

3.0 Description of Device Under Test (DUT)..... 4

4.0 Description of Test System 5

 4.1 Description of Robotics/Probes/Readout Electronics..... 5

 4.2 Description of Phantom(s)..... 6

 4.2.1 Flat Phantom..... 6

 4.2.2 SAM Phantom..... 6

 4.2.3 Elliptical Phantom..... 6

 4.3 Description of Equivalent Tissues 6

5.0 Additional Test Equipment..... 7

6.0 SAR Measurement System Verification..... 7

 6.1 Equivalent Tissue Test results 7

 6.2 System Check Test results 8

7.0 DUT Test Strategy and Methodology 8

 7.1 DUT Configuration(s) 8

 7.2 Device Positioning Procedures 9

 7.2.1 Body 10

 7.2.2 Head 10

 7.2.3 Face 10

8.0 Environmental Test Conditions..... 10

9.0 Test Results Summary..... 10

 9.1 Highest SAR results calculation methodology 16

10.0 Conclusion..... 16

APPENDICES

A Measurement Uncertainty 17

B Probe Calibration Certificates 20

Part 2 of 2

C Dipole Calibration Certificates..... 2

D Test System Verification Scans..... 9

E DUT Scans (Shortened Scans and Highest SAR configurations) 19

F DUT Supplementary Data (e.g. Power Slump) 23

G DUT Test Position Photos.....24

H DUT and Body-worn Accessory Photos 25

I DUT Antenna Separation Distances and Offered Accessory Test Status 26

Report Revision History

Date	Revision	Comments
4/30/08	O	Initial release

1.0 Introduction and Overview

This report details the utilization, test setup, test equipment, and test results of the Specific Absorption Rate (SAR) measurements performed at the G&PS EME Test Lab for the model number PMUE3090AANAA of FCC ID: AZ489FT4884. The results herein reflect initial test results.

The test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of 8W/kg per the requirements of 47 CFR 2.1093(d) and ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300GHz) RF Exposure limits of 10W/kg averaged over 10grams of contiguous tissue. The results also adhere to the 8W/kg averaged over 1 gram of tissue as stipulated in ANSI C95.1-2005.

2.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- IEC62209-1(2005) Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)
- United States Federal Communications Commission, Code of Federal Regulations; Rule Part 47CFR § 2.1093 sub-part J:1999
- Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- IEEE 1528, 2003 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques"
- American National Standards Institute (ANSI) / Institute of Electrical and Electronic Engineers (IEEE) C95. 1-1992
- Institute of Electrical and Electronic Engineers (IEEE) C95.1-2005 Edition
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6. Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz, 1999
- Australian Communications Authority Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003
- ANATEL, Brazil Regulatory Authority, Resolution No. 303 of July 2, 2002 "Regulation of the limitation of exposure to electrical, magnetic, and electromagnetic fields in the radio frequency range between 9KHz and 300 GHz." and "Attachment to resolution # 303 from July 2, 2002"

2.1 SAR Limits

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average - ANSI - (averaged over the whole body)	0.08	0.4
Spatial Peak - ANSI - (averaged over any 1-g of tissue)	1.60	8.0
Spatial Peak - ICNIRP/ANSI - (hands/wrists/feet/ankles averaged over 10-g)	4.0	20.0
Localized SAR - ICNIRP - (Head and Trunk 10-g)	2.0	10.0

3.0 Description of Device Under Test (DUT)

FCC ID: AZ489FT4884, operates using frequency modulation (FM) incorporating traditional simplex two-way radio transmission protocol. The radio model PMUE3090AANAA utilizes removable antennas and is capable of transmitting in the 450-512 MHz band. The nominal output power is 4.0 Watts with maximum output powers of 4.8 Watts as defined by upper limit of the production line final test station. The intended operating positions are “at the face” with the DUT 1 to 2 inches from the mouth, and “at the body” by means of the offered body-worn accessories. Body-worn audio and PTT operation is accomplished by means of optional remote accessories that connect to the radio.

This device will be marketed to and used by employees solely for occupational operations, such as public safety agencies, e.g. police, fire and emergency medical. User training is the responsibility of the agencies, which can be expected to employ the usage instructions, safety information and operational cautions set forth in the user’s manual, instruction sessions or other means. Motorola also makes available to its customers training classes on the proper use of the two-way radios.

FCC ID: AZ489FT4884 is offered with the options and accessories listed on the coversheet of this report as well as the additional accessories listed below.

Audio Accessories:

- PMMN4024A Remote Speaker Mic
- PMMN4025A Remote Speaker Mic w/ Enhanced Audio
- PMMN4040A Remote Speaker Mic, Submersible (IP57)
- PMMN4050A IMPRES Remote Speaker Microphone, Noise Canceling
- RLN5878A Receive Only Surveillance Kit, Black (Single Wire)
- RLN5879A Receive Only Surveillance Kit, Beige (Single Wire)
- PMLN4620A D-Shell Receive Only Earpiece (3.5mm)
- RLN4941A Receive-Only Earpiece
- WAD4190B Over-the-Ear Receiver
- AARLN4885B Receive Only Ear Bud Only
- RMN5058A Core Lightweight Headset w/PTT & VOX
- PMLN5102A Core Ultra-Lite Headset
- RLN5880A 2-Wire Surveillance w/ Enhanced Audio, Black
- RLN5881A 2-Wire Surveillance w/ Enhanced Audio, Beige

PMLN5096A	Core Earset-D-Shell
PMLN5101A	IMPRES Temple Transducer
RLN5882A	2-Wire Surveillance kit w/Clear, Comfortable Acoustic Tube, Black w/ Enhanced Audio
RLN5883A	2-Wire Surveillance kit w/Clear, Comfortable Acoustic Tube, Beige w/ Enhanced Audio
RLN5886A	Surveillance Low Noise Kit
RLN5887A	Surveillance High Noise Kit
PMLN5097A	IMPRES 3 Wire LTD Surveillance –Black
PMLN5106A	IMPRES 3 Wire LTD Surveillance –Beige
PMLN5111A	Ext Noise 3 Wire Surveillance Black
PMLN5112A	Ext Noise 3 Wire Surveillance Beige
RLN4295A	Small clip epaulet strap
PMMN4046A	IMPRES Speaker Microphone with Volume, IP57

4.0 Description of Test System



4.1 Descriptions of Robotics/probes/Readout Electronics

The laboratory utilizes a Dosimetric Assessment System (DASY4™) SAR measurement system Version 4.7 build 55 manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. The test system consists of a Stäubli RX90L robot, DAE4, and ES3DV3 E-Field probes. Please reference the SPEAG user manual and application notes for detailed probe, robot, and SAR computational procedures. Section 5.0 presents relevant test equipment information. Appendices B and C present the applicable calibration certificates. The E-field probe first scans a coarse grid over a large area inside the phantom in order to locate the interpolated maximum SAR distribution. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The subsequent scan can directly use this position as reference for the cube evaluations.

4.2 Description of Phantom(s)

4.2.1 Rectangular Flat Phantom

Phantom ID	Phantom Material	Phantom Dimensions (cm)	Support structure opening dimensions (cm)	Support structure material	Loss Tangent (wood)
Flat	High Density Polyethylene (HDPE)	80x30x20x0.2	68.58x20.32	Wood	< 0.05

4.2.2 SAM Phantom

Not Applicable

4.2.3 Elliptical Flat Phantom

Not Applicable

4.3 Description of Equivalent tissues

Type of Simulated Tissue

The simulated tissue used is compliant to that specified in FCC Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01) and IEEE 1528, 2003 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques"; and also compliant to that specified in IEC62209-1 (2005) and adopted by CENELEC as EN62209-1 (2006).

The sugar based simulate tissue is produced by placing the correct measured amount of De-ionized water into a large container. Each of the dried ingredients are weighed and added to the water carefully to avoid clumping. If the solution has a high sugar concentration the water is pre-heated to aid in dissolving the ingredients. For Diacetin and similar type simulates, sugar and HEC ingredients are not needed. The solution is mixed thoroughly, covered, and allowed to sit overnight prior to use.

Simulated Tissue Composition

% of listed ingredients	450MHz	
	Head	Body
Sugar	56	46.5
Diacetin	NA	NA
De ionized -Water	39.1	50.53
Salt	3.8	1.87
HEC	1.0	1.0
Bact.	0.1	0.1

Reference section 6.1 for target parameters

5.0 Additional Test Equipment

Equipment Type	Model Number	Serial Number	Calibration Due Date
Power Meter	E4418B	MY45100532	10/25/2009
Power Sensor	8481B	MY41091170	8/13/2008
Power Meter	E4418B	MY45100911	7/3/2008
Power Sensor	8481B	SG41090258	7/2/2008
Power Meter	E4418B	MY45100739	7/3/2008
Power Sensor	8481B	MY41091243	7/2/2008
Signal Generator	E4438C	MY45091014	8/11/2008
Amplifier	10W1000C	312858	CNR
NARDA Bi-Directional Coupler	3020A	41935	9/11/2008
Tissue Station			
Network Analyzer (HP)	E5071B	MY42403147	8/11/2008
Dielectric Probe Kit (HP)	85070E	MY44300183	CNR
Dipole			
SPEAG Dipole	D450V3	1054	12/15/2009

6.0 SAR Measurement System Verification

The SAR measurements were conducted with probe model/serial number ES3DV3/SN3096. The system performance check was conducted daily and within 24 hours prior to testing. DASYS output files of the probe/dipole calibration certificates and system performance test results are included in appendices B, C, D respectively. The table below summarizes the system performance check results normalized to 1W.

Dipole validation scans at the head from SPEAG are provided in APPENDIX D. The G&PS EME lab validated the dipole to the applicable IEEE system performance targets. Within the same day system validation was performed using FCC body tissue parameters to generate the system performance target values for body at the applicable frequency. The results of the G&PS EME system performance validation are provided herein.

6.1 Equivalent Tissue Test Results

Simulated tissue prepared for SAR measurements is measured daily and within 24 hours prior to actual SAR testing to verify that the tissue is within +/- 5% of target parameters at the center of the transmit band. This measurement is done using the applicable equipment indicated in section 5.0.

**Target versus Actual tissue parameters
(3/21/08, 3/24/08-3/28/08, 3/31/08)**

FCC Body				
Frequency (MHz)	Di-electric Constant Target	Di-electric Constant Meas. (Range)	Conductivity Target S/m	Conductivity Meas. (Range) S/m
450	56.7	55.9-56.2	0.94	0.91-0.92
481	56.6	55.1-55.6	0.94	0.93-0.94

IEEE Head				
Frequency (MHz)	Di-electric Constant Target	Di-electric Constant Meas. (Range)	Conductivity Target S/m	Conductivity Meas. (Range) S/m
450	43.5	43.4-44.8	0.87	0.83-0.88
481	43.3	43.9-44.1	0.87	0.89-0.90

6.2 System Check Test Results

Probe Serial #	Tissue Type	Probe Cal Date	Dipole Kit / Serial #	System Perf. Result when normalized to 1W (mW/g)	Reference SAR @ 1W (mW/g)	Test Date(s)
3096	FCC Body	12/19/08	SPEAG D450V3 /1054	4.33 +/- 0.07	4.30 +/- 10%	3/21/08, 3/24/08, 3/26/08-3/27/08, 3/31/08 5 test days
3096	IEEE/IE C Head	12/19/08	SPEAG D450V3 /1054	4.54 +/- 0.12	4.62 +/- 10%	3/25/08 & 3/28/08 2 test days

Note: See APPENDIX D for an explanation of the reference SAR targets stated above.
 (System performance results reflects the median performance +/- ½ of the test date(s) performance ranges)

The DASY4™ system is operated per the instructions in the DASY4™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess EME SAR compliance was calibrated according to 17025 A2LA guidelines.

7.0 DUT Test Strategy and Methodology

7.1 DUT Configuration(s)

The DUT is a portable device with FM transmission signaling operational at the body, and face using the offered accessories. The device is placed in the test positions presented in Appendix G.

Test Plan

All options and accessories listed on the cover page of this report were considered in order to develop the SAR test plan for this product. SAR measurements were performed using a rectangular flat phantom with the applicable simulated tissue to assess performance at the body and face respectively using the relevant transmission modes.

Note that a coarse-to-cube approximation methodology was utilized to determine the worst-case SAR performance configuration for each applicable body location. The test configurations that produced the highest SAR results for each body position using the coarse-to-cube approximation methodology were assessed using the full DASY4™ coarse and 5x5x7 zoom scans.

Assessments at the Body (CW mode) [Pages 11, 12, 13, 14 of 31; Tables 1]

- Assessment of each offered antennas at their respective center frequencies per range.
- Assessment of each offered batteries with the worst case antenna from above.
- Assessment of the offered body worn accessories with the worst case configuration from above.
- Assessment of the offered audio accessories with the worst case configuration from above.
- Assessment of each offered antenna's frequency band edges using the worst case configuration tested at with and without the audio accessory attached to radio.
- Assessment of the shoulder strap NTN5243A with the applicable worst case from above.

Assessments at the Body 2.5cm[Page 14 of 31; Tables 1]

- Assessment with the DUT's back facing phantom and the radio's antenna at 2.5cm from the phantom, without the body worn accessory, using the highest test configuration for each antenna from the applicable Body assessment above.
- Assessment with the DUT's front separated 2.5cm from the phantom without a body worn accessory using the highest test configuration from the body assessment above.

Assessments at the Face (CW mode)] [Page 15 of 31; Table 2]

- Assessment of the offered antennas using the battery PMNN4077B at their respective center frequencies per range.
- Assessment of the offered batteries using the highest test configuration from the above.
- Assessment of the relevant offered audio accessory using the highest test configuration from the above.
- Assessment across the band of each offered antennas using the highest test configuration from the above.

Shortened scan assessment [Page 14 of 31]

- A "shortened" scan was performed using the offered battery and test configuration that produced the highest SAR results overall. Note that the shortened scan is obtained by first running a coarse scan to find the peak area and then, using a newly charged battery, a cube scan only was performed. The shortened scan represents the cube scan performance results.

7.2 Device Positioning Procedures

Reference Appendix G for photos of the DUT tested positions.

7.2.1 Body

The DUT was positioned in normal use configuration against the phantom with the offered body worn accessory.
 The DUT was positioned with its' front and back sides separated 2.5cm from the phantom.

7.2.2 Head

Not Applicable.

7.2.3 Face

The DUT was positioned with its' front side separated 2.5cm from the phantom.

8.0 Environmental Test Conditions

The EME Laboratory ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within +/- 2°C of the temperature at which the dielectric properties were determined. The liquid depth within the phantom used for measurements was 15cm +/- 0.5cm. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The table below presents the range and average environmental conditions during the SAR tests reported herein:

	Target	Measured
Ambient Temperature	20 - 25 °C	Range: 21.9-23.1 °C Avg. 22.45 °C
Relative Humidity	30 - 70 %	Range: 41.9-51.0% Avg. 45.29%
Tissue Temperature	NA	Range: 21.1-22.0 °C Avg. 21.49 °C

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the SAR scans are repeated.

9.0 Test Results Summary

All SAR results obtained by the tests described in Section 7.1 are listed below. As noted in section 7.1, a coarse-to-cube approximation methodology, was utilized to ascertain the worst case test configuration for each body location per band (in bold with *). The worst case test configurations observed for each body location were assessed using the full DASY4™ coarse and 5x5x7 zoom methodology and they are summarized in the worst case table below. The associated SAR plots are provided in APPENDIX E. Appendix E also presents shortened SAR cube scans to assess the validity of the calculated results presented herein. Note: The results of the shortened cube scans presented in Appendix E demonstrate that the scaling methodology used to determine the calculated SAR results presented herein are valid.

Table 1

Assessments at Body												
Run Number/ SN	Antenna Pos.	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessment of offered antennas												
CcC-AB-080321-02/ 977TUA0003	PMAE4049A	481.000	PMNN4077B	Against phantom	PMLN4651A	PMMN4024A	4.91	-0.379	6.23	4.55	3.40	2.48
CcC-AB-080321-03/ 977TUA0003	PMAE4050A	472.500	PMNN4077B	Against phantom	PMLN4651A	PMMN4024A	4.80	-0.341	6.32	4.61	3.42	2.49
CcC-AB-080321-04/ 977TUA0003	PMAE4052A	472.500	PMNN4077B	Against phantom	PMLN4651A	PMMN4024A	4.83	-0.514	5.22	3.80	2.94	2.14
CcC-AB-080321-05/ 977TUA0003	PMAE4048A	512.000	PMNN4077B	Against phantom	PMLN4651A	PMMN4024A	4.94	-0.629	5.11	3.72	2.95	2.15
CcC-AB-080321-06/ 977TUA0003	PMAE4051A	512.000	PMNN4077B	Against phantom	PMLN4651A	PMMN4024A	4.95	-0.592	6.60	4.81	3.78	2.76
Assessment of offered battery with the worst case configuration from above												
CcC-AB-080321-07/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN4651A	PMMN4024A	4.79	-0.671	7.88	5.74	4.61	3.36
CcC-AB-080321-08/ 977TUA0003	PMAE4051A	512.000	PMNN4065A	Against phantom	PMLN4651A	PMMN4024A	4.71	-0.504	7.42	5.42	4.25	3.10
CcC-AB-080321-09/ 977TUA0003	PMAE4051A	512.000	PMNN4069A	Against phantom	PMLN4651A	PMMN4024A	4.56	-0.557	6.64	4.84	3.97	2.90
Assessment of offered carry accessories with the worst case configuration from above												
CcC-AB-080321-10/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN4652A	PMMN4024A	4.80	-0.605	7.33	5.33	4.21	3.06
CcC-AB-080321-11/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5024A	PMMN4024A	4.77	-0.658	5.47	4.02	3.20	2.35
CcC-AB-080321-12/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5025A	PMMN4024A	4.82	-0.533	1.86	1.38	1.05	0.78
Vee-AB-080321-13/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5026A	PMMN4024A	4.83	-0.580	2.14	1.58	1.22	0.90
Vee-AB-080321-14/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5027A	PMMN4024A	4.83	-0.581	5.56	4.08	3.18	2.33
Vee-AB-080321-15/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5028A	PMMN4024A	4.81	-0.556	1.78	1.32	1.01	0.75
Vee-AB-080321-16/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5029A	PMMN4024A	4.74	-0.598	1.93	1.43	1.12	0.83
Vee-AB-080321-17/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5030A	PMMN4024A	4.81	-0.543	4.21	3.09	2.39	1.75
CcC-AB-080324-02/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	PMMN4024A	4.80	-0.581	10.60	7.71	6.06	4.41
CcC-AB-080324-03/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4815A	PMMN4024A	4.81	-0.582	5.25	3.86	3.00	2.21
CcC-AB-080324-04/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	HLN6602A	PMMN4024A	4.75	-0.554	9.85	7.22	5.65	4.14
*CcC-AB-080324-05/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	None	4.82	-0.569	12.00	8.78	6.84	5.00
Assessment of offered audio accessories with the worst case configuration from above												
CcC-AB-080324-06/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	PMMN4050A	4.83	-0.600	10.60	7.71	6.09	4.43
CcC-AB-080324-07/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	PMMN4050A tested w/ AARLN4885B	4.76	-0.531	9.84	7.18	5.61	4.09
CcC-AB-080324-08/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	PMMN4040A	4.80	-0.603	10.00	7.33	5.74	4.21
CcC-AB-080324-09/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	RMN5058A	4.77	-0.594	9.81	7.16	5.66	4.13
CcC-AB-080324-10/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	PMLN5096A	4.78	-0.603	10.90	7.94	6.29	4.58

Table1 (continued)

Assessment at Body												
Run Number/ SN	Antenna	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessment of offered audio accessories with the worst case configuration from above												
CcC-AB-080324-11/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	PMLN5097A	4.82	-0.477	11.40	8.32	6.36	4.64
CcC-AB-080324-12/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	PMLN5101A	4.84	-0.471	10.20	7.47	5.68	4.16
Vee-AB-080324-13/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	PMLN5102A	4.71	-0.562	11.30	8.22	6.55	4.77
Vee-AB-080324-14/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.82	-0.536	11.60	8.46	6.56	4.79
Vee-AB-080324-15/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	RLN58880A	4.81	-0.508	11.00	8.04	6.18	4.52
Vee-AB-080324-18/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	RLN4570A	RLN5882A	4.81	-0.494	11.10	8.11	6.22	4.54
Assessment across the freq. band for each offered antenna w/ the worst case carry case tested with and without audio accessory from above												
Vee-AB-080325-02/ 977TUA0003	PMAE4049A	450.000	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.70	-0.329	9.92	7.25	5.46	3.99
Vee-AB-080325-03/ 977TUA0003	PMAE4049A	481.000	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.75	-0.301	10.20	7.43	5.52	4.02
CcC-AB-080325-04/ 977TUA0003	PMAE4049A	512.000	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.78	-0.563	10.60	7.70	6.06	4.40
CcC-AB-080325-05/ 977TUA0003	PMAE4049A	512.000	PMNN4066A	Against phantom	RLN4570A	None	4.80	-0.53	11.40	8.28	6.44	4.68
CcC-AB-080325-06/ 977TUA0003	PMAE4050A	450.000	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.70	-.347	10.80	7.90	5.97	4.37
CcC-AB-080325-07/ 977TUA0003	PMAE4050A	472.500	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.66	-.342	9.72	7.11	5.42	3.96
CcC-AB-080325-08/ 977TUA0003	PMAE4050A	495.000	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.79	-0.423	10.30	7.51	5.69	4.15
CcC-AB-080325-09/ 977TUA0003	PMAE4050A	450.000	PMNN4066A	Against phantom	RLN4570A	None	4.68	-0.343	12.10	8.86	6.72	4.92
CcC-AB-080325-10/ 977TUA0003	PMAE4051A	495.000	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.83	-0.426	10.70	7.84	5.90	4.32
CcC-AB-080325-11/ 977TUA0003	PMAE4051A	503.500	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.84	-0.531	10.90	8.00	6.16	4.52
CcC-AB-080325-12/ 977TUA0003	PMAE4052A	450.000	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.68	-0.433	10.70	7.82	6.06	4.43
CcC-AB-080325-13/ 977TUA0003	PMAE4052A	472.500	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.70	-0.498	8.24	6.02	4.72	3.45
CcC-AB-080325-14/ 977TUA0003	PMAE4052A	495.000	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.80	-0.553	7.91	5.78	4.49	3.28
CcC-AB-080325-15/ 977TUA0003	PMAE4052A	450.000	PMNN4066A	Against phantom	RLN4570A	None	4.68	-0.426	11.40	8.37	6.45	4.73
CcC-AB-080326-02/ 977TUA0003	PMAE4048A	495.000	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.79	-0.439	9.45	6.89	5.24	3.82
CcC-AB-080326-03/ 977TUA0003	PMAE4048A	503.500	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.81	-0.611	9.56	6.97	5.50	4.01

Table1 (continued)

Assessment at Body												
Run Number/ SN	Antenna	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessment of band edges for each of the offered antenna w/ the worst case carry case tested with and without audio accessory from above												
CcC-AB-080326-04/ 977TUA0003	PMAE4048A	512.000	PMNN4066A	Against phantom	RLN4570A	PMLN5111A	4.76	-0.743	9.71	7.08	5.81	4.24
CcC-AB-080326-05/ 977TUA0003	PMAE4048A	512.000	PMNN4066A	Against phantom	RLN4570A	None	4.84	-0.744	10.50	7.66	6.23	4.55
Shoulder Strap Assessment using the highest test configuration from data above with the applicable carry cases												
CcC-AB-080326-06/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5024 A/NTN5243 A; fixed belt loop; PTT side against phantom	PMLN5111A	4.78	-0.226	9.41	6.43	4.98	3.40
CcC-AB-080326-07/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5024 A/NTN5243 A; fixed belt loop; Acc'y side against phantom	PMLN5111A	4.79	-0.495	8.47	6.14	4.76	3.45
CcC-AB-080326-08/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5025 A/NTN5243 A; w/o belt loop; PTT side against phantom	PMLN5111A	4.84	-0.141	8.88	6.20	4.59	3.20
CcC-AB-080326-09/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5025 A/NTN5243 A; w/o belt loop; Acc'y side against phantom	PMLN5111A	4.79	-0.402	8.07	5.85	4.44	3.22
CcC-AB-080326-10/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5025 A/NTN5243 A; w/o belt loop; back of DUT against phantom	PMLN5111A	4.85	-0.432	5.16	3.81	2.85	2.10
CcC-AB-080326-11/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5027 A/NTN5243 A; fixed belt loop; PTT side against phantom	PMLN5111A	4.83	-0.219	9.63	6.86	5.06	3.61
Vee-AB-080326-12/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5027 A/NTN5243 A; fixed belt loop; Acc'y side against phantom	PMLN5111A	4.73	-0.354	8.44	6.10	4.65	3.36
Vee-AB-080326-13/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5028 A/NTN5243 A; w/o belt loop; PTT side against phantom	PMLN5111A	4.76	-0.167	9.23	6.52	4.84	3.42
Vee-AB-080326-14/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom	PMLN5028 A/NTN5243 A; w/o belt loop; Acc'y side against phantom	PMLN5111A	4.83	-0.366	8.78	6.35	4.78	3.45

Table1 (continued)

Assessment at Body													
Run Number/ SN	Antenna	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)	
Shoulder Strap Assessment using the highest test configuration from data above with the applicable carry cases													
Vee-AB-080326-15/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom		PMLN5028 A/NTN5243 A; w/o belt loop; back of DUT against phantom	PMLN5111A	4.84	-0.364	5.83	4.27	3.17	2.32
Vee-AB-080326-16/ 77TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom		PMLN5030 A/NTN5243 A; fixed belt loop; PTT side against phantom	PMLN5111A	4.86	-0.153	8.72	6.12	4.52	3.17
Vee-AB-080326-17/ 77TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom		PMLN5030 A/NTN5243 A; fixed belt loop; Acc'y side against phantom	PMLN5111A	4.88	-0.372	8.54	6.17	4.65	3.36
Assessment at 2.5cm													
CcC-AB-080327-02/ 977TUA0003	PMAE4052A	450.000	PMNN4066A	DUT Back - Antenna at 2.5cm	None		PMLN5111A	4.70	-0.295	7.53	5.53	4.12	3.02
CcC-AB-080327-04/ 977TUA0003	PMAE4052A	450.000	PMNN4066A	DUT Front - radio at 2.5cm	None		PMLN5111A	4.69	-0.191	3.65	2.69	1.95	1.44
CcC-AB-080327-05/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	DUT Back - Antenna at 2.5cm	None		PMLN5111A	4.84	-0.450	7.46	5.47	4.14	3.03
CcC-AB-080327-07/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	DUT Front - radio at 2.5cm	None		PMLN5111A	4.77	-0.358	4.36	3.21	2.38	1.75
CcC-AB-080327-08/ 977TUA0003	PMAE4049A	512.000	PMNN4066A	DUT Back - Antenna at 2.5cm	None		PMLN5111A	4.76	-0.456	7.17	5.25	4.02	2.94
CcC-AB-080327-10/ 977TUA0003	PMAE4049A	512.000	PMNN4066A	DUT Front - radio at 2.5cm	None		PMLN5111A	4.79	-0.394	4.15	3.06	2.28	1.68
* Worst case configuration per body location from above (including shortened scan) –using the DASY 4 full coarse and 5x5x7 cube scan measurements.													
CcC-AB-080331-02/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom		RLN4570A	None	4.82	-0.714	11.30	8.36	6.66	4.93
Shorten Scan													
CcC-AB-080331-04/ 977TUA0003	PMAE4051A	512.000	PMNN4066A	Against phantom		RLN4570A	None	4.78	-0.379	12.30	9.04	6.74	4.95

Table 2

Assessment at Face												
Run Number/ SN	Antenna	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessment of offered antennas												
CcC-FACE-080327-11/ 977TUA0003	PMAE4049A	481.000	PMNN4077B	Front 2.5cm	None	None	4.86	-0.361	6.33	4.67	3.44	2.54
*Vee-FACE-080327-12/ 977TUA0003	PMAE4050A	472.500	PMNN4077B	Front 2.5cm	None	None	4.83	-0.516	6.87	5.08	3.87	2.86
Vee-FACE-080327-13/ 977TUA0003	PMAE4052A	472.500	PMNN4077B	Front 2.5cm	None	None	4.82	-0.710	5.63	4.15	3.31	2.44
Vee-FACE-080327-14/ 977TUA0003	PMAE4048A	512.000	PMNN4077B	Front 2.5cm	None	None	4.97	-0.890	5.24	3.86	3.22	2.37
Vee-FACE-080327-15/ 977TUA0003	PMAE4051A	512.000	PMNN4077B	Front 2.5cm	None	None	4.97	-0.741	6.10	4.50	3.62	2.67
Assessment of offered batteries												
Vee-FACE-080327-16/ 977TUA0003	PMAE4050A	472.500	PMNN4066A	Front 2.5cm	None	None	4.73	-0.572	6.44	4.76	3.73	2.76
Vee-FACE-080327-17/ 977TUA0003	PMAE4050A	472.500	PMNN4065A	Front 2.5cm	None	None	4.84	-0.625	6.39	4.71	3.69	2.72
Vee-FACE-080327-18/ 977TUA0003	PMAE4050A	472.500	PMNN4069A	Front 2.5cm	None	None	4.42	-0.550	6.10	4.50	3.76	2.77
Assessment of audio accessory												
CcC-FACE-080328-02/ 977TUA0003	PMAE4050A	472.500	PMNN4077B	Front 2.5cm	None	RLN5878A	4.79	-0.264	5.26	3.88	2.80	2.07
Assessment across the band of each antenna w/ WC configuration from face test above												
CcC-FACE-080328-03/ 977TUA0003	PMAE4049A	450.000	PMNN4077B	Front 2.5cm	None	None	4.80	-0.103	5.08	3.76	2.60	1.93
CcC-FACE-080328-04/ 977TUA0003	PMAE4049A	512.000	PMNN4077B	Front 2.5cm	None	None	4.88	-0.632	5.60	4.12	3.24	2.38
CcC-FACE-080328-05/ 977TUA0003	PMAE4050A	450.000	PMNN4077B	Front 2.5cm	None	None	4.75	-0.199	6.79	5.02	3.59	2.66
CcC-FACE-080328-06/ 977TUA0003	PMAE4050A	495.000	PMNN4077B	Front 2.5cm	None	None	4.83	-0.537	6.46	4.76	3.66	2.69
CcC-FACE-080328-07/ 977TUA0003	PMAE4051A	495.000	PMNN4077B	Front 2.5cm	None	None	4.90	-0.580	6.68	4.92	3.82	2.81
CcC-FACE-080328-08/ 977TUA0003	PMAE4051A	503.500	PMNN4077B	Front 2.5cm	None	None	4.91	-0.652	6.57	4.85	3.82	2.82
CcC-FACE-080328-09/ 977TUA0003	PMAE4052A	450.000	PMNN4077B	Front 2.5cm	None	None	4.77	0.00956	6.12	4.53	3.08	2.28
CcC-FACE-080328-10/ 977TUA0003	PMAE4052A	495.000	PMNN4077B	Front 2.5cm	None	None	4.80	-0.804	4.90	3.61	2.95	2.17
CcC-FACE-080328-11/ 977TUA0003	PMAE4048A	495.000	PMNN4077B	Front 2.5cm	None	None	4.89	-0.561	5.74	4.23	3.27	2.41
CcC-FACE-080328-12/ 977TUA0003	PMAE4048A	503.500	PMNN4077B	Front 2.5cm	None	None	4.92	-0.717	5.58	4.11	3.29	2.42
* Worst case configuration per face location from above –using the DASY 4 full coarse and 5x5x7 cube scan measurements.												
Vee-FACE-080328-13/ 977TUA0003	PMAE4050A	472.500	PMNN4077B	Front 2.5cm	None	None	4.82	-0.686	6.70	4.96	3.92	2.90

9.1 Highest SAR results calculation methodology

The calculated maximum 1-gram and 10-gram averaged SAR results reported herein for the full DASYS™ coarse and 5x5x7 cube measurements are determined by scaling the measured SAR to account for power leveling variations and power slump. For this device the Maximum Calculated 1-gram and 10-gram averaged peak SAR is calculated using the following formula:

$$\text{Max. Calc. 1-g/10-g Avg. SAR} = ((\text{SAR meas.} / (10^{(\text{Pdrift}/10)})) * (\text{Pmax}/\text{Pint})) * \text{DC}\%$$

P_{max} = Maximum Power (W)

P_{int} = Initial Power (W)

Pdrift = DASYS drift results (dB) - (for conservative results positive drifts are not accounted for)

SAR_{meas.} = Measured 1-g/10-g Avg. SAR (mW/g)

DC % = Transmission mode duty cycle in % where applicable

50% duty cycle is applied for PTT operation.

10.0 Conclusion

The highest Operational Maximum Calculated 1-gram and 10-gram average SAR values found for FCC ID: AZ489FT4884 model PMUE3090AANAA.

Max. Calc. : 1-g Avg. SAR: 6.74 W/kg (Body); 10-g Avg. SAR: 4.95 W/kg (Body)

Max. Calc. : 1-g Avg. SAR: 3.92 W/kg (Face); 10-g Avg. SAR: 2.90 W/kg (Face)

The test results clearly demonstrate compliance with FCC Occupational /Controlled RF Exposure limits of 8.0W/kg per the requirements of 47 CFR 2.1093(d).

The test results clearly demonstrate compliance with ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300GHz), Health Physics 74, 494-522 RF Exposure limits of 10.0W/kg averaged over 10grams of contiguous tissue. The results also adhere to the 8.0 W/kg averaged over 1 gram of tissue as stipulated in ANSI C95.1-2005.

APPENDIX A
Measurement Uncertainty

Table 1: Uncertainty Budget for Device Under Test: 30 – 3000 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty			RSS				11	11	411
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k=2</i>				22	22	

FCD-0558, Rev. 6

Table 2: Uncertainty Budget for System Validation: 30 – 3000 MHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	$e = f(d,k)$	<i>f</i>	<i>g</i>	$h = c \times f / e$	$i = c \times g / e$	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob. Dist.	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
	Measurement System								
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	0.0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t. Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Dipole									
Dipole Axis to Liquid Distance	⁸ E.4.2	2.0	R	1.73	1	1	1.2	1.2	∞
Input Power and SAR Drift Measurement	8, 6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	R	1.73	0.64	0.43	1.2	0.8	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	R	1.73	0.6	0.49	0.6	0.5	∞
Combined Standard Uncertainty			RSS				9	9	99999
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				18	17	

FCD-0558, Rev. 6

Notes for Tables 1 and 2

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) *c_i* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) *u_i* – SAR uncertainty
- h) *v_i* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty.

Appendix B
Probe Calibration Certificates

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MY (Precision)**

Certificate No: **ES3-3096_Dec07**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3096**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v5 and QA CAL-14.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **December 19, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: December 19, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 SN:3096

December 19, 2007

Probe ES3DV3

SN:3096

Manufactured:	July 12, 2005
Last calibrated:	October 16, 2006
Recalibrated:	December 19, 2007

Calibrated for DASY Systems


(Note: non-compatible with DASY2 system!)

ES3DV3 SN:3096

December 19, 2007

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)



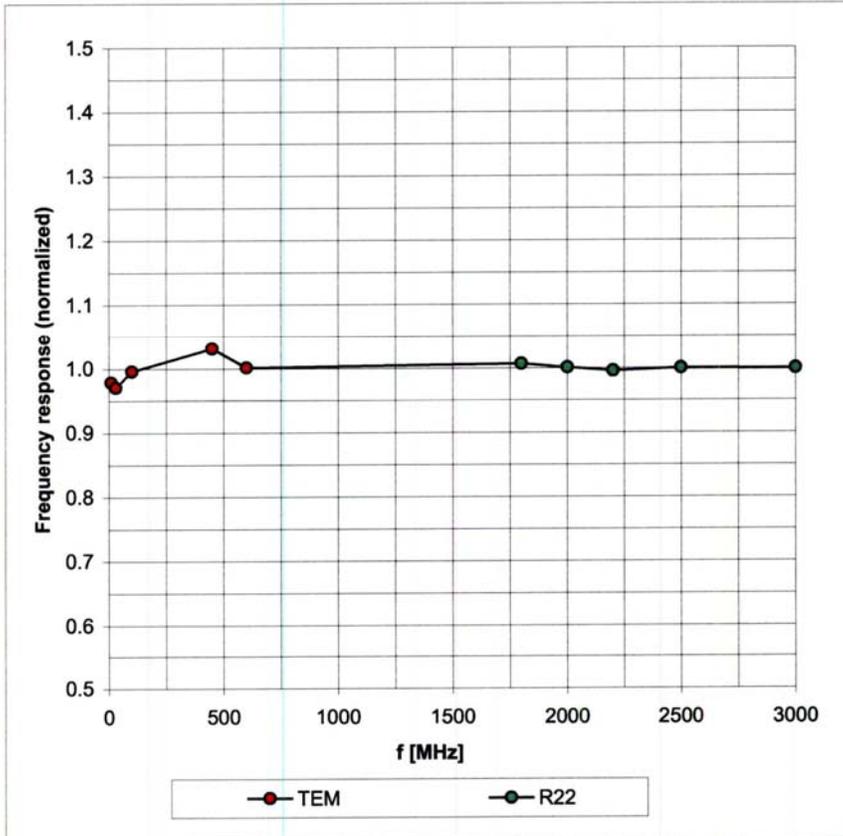


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

ES3DV3 SN:3096

December 19, 2007

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

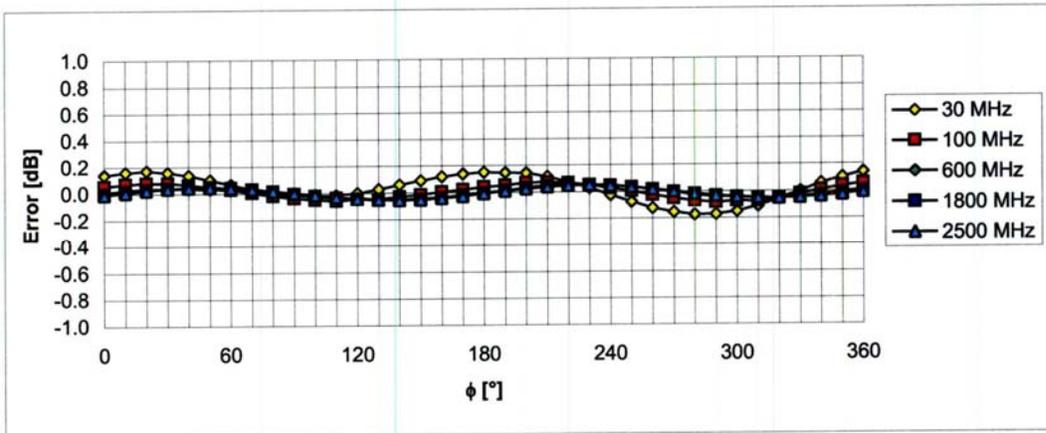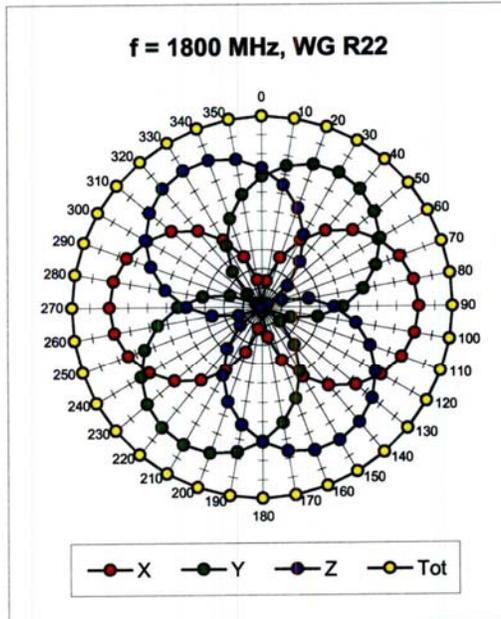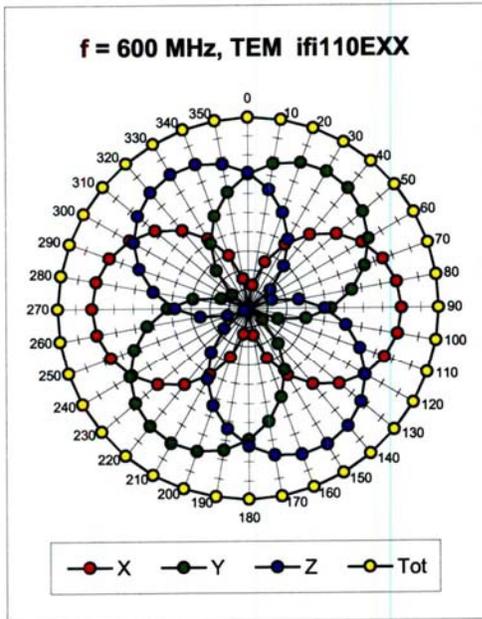


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

ES3DV3 SN:3096

December 19, 2007

Dynamic Range $f(SAR_{head})$ (Waveguide R22, $f = 1800$ MHz)


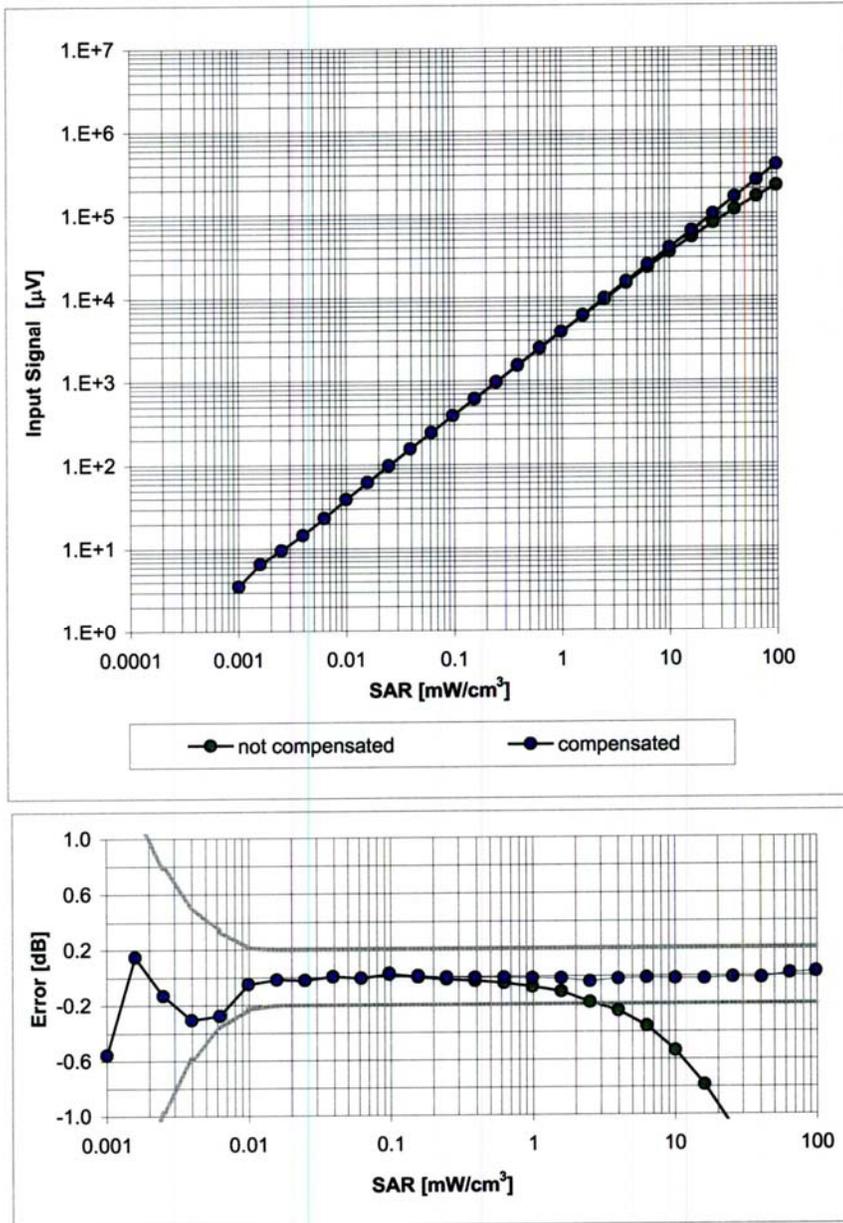


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ES3DV3 SN:3096

December 19, 2007

Conversion Factor Assessment

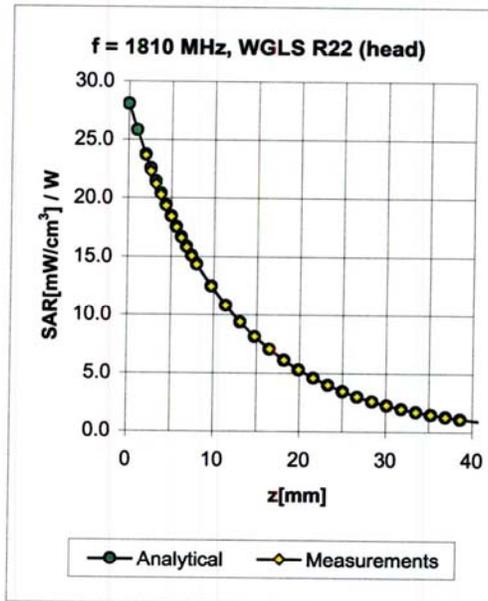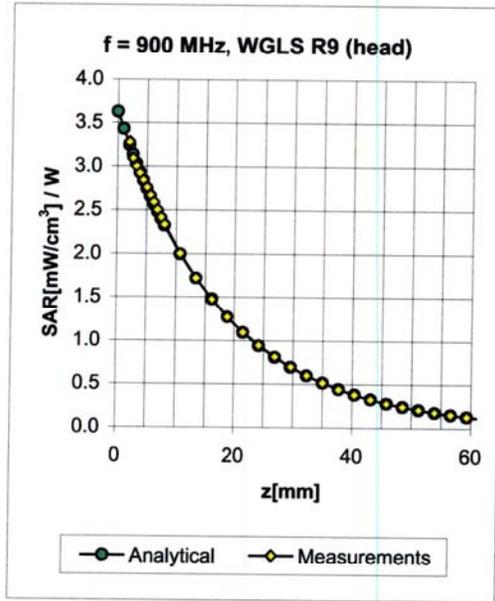

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.31	1.44	6.16 ± 13.3% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.90	1.23	5.98 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.83	1.25	4.86 ± 11.0% (k=2)
2300	± 50 / ± 100	Head	39.4 ± 5%	1.71 ± 5%	0.86	1.10	4.56 ± 11.8% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.87	1.14	4.36 ± 11.8% (k=2)
2600	± 50 / ± 100	Head	39.0 ± 5%	1.96 ± 5%	0.68	1.32	4.25 ± 11.8% (k=2)
3500	± 50 / ± 100	Head	37.9 ± 5%	2.91 ± 5%	0.80	1.30	4.05 ± 13.1% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.24	1.41	6.56 ± 13.3% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.90	1.20	5.75 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.95	1.15	4.70 ± 11.0% (k=2)
2300	± 50 / ± 100	Body	52.8 ± 5%	1.85 ± 5%	0.79	1.29	4.21 ± 11.8% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.71	1.39	3.99 ± 11.8% (k=2)
2600	± 50 / ± 100	Body	52.5 ± 5%	2.16 ± 5%	0.74	1.27	3.80 ± 11.8% (k=2)
3500	± 50 / ± 100	Body	51.3 ± 5%	3.31 ± 5%	0.80	1.40	3.41 ± 13.1% (k=2)


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3096

December 19, 2007

Deviation from Isotropy in HSL

Error (ϕ, ϑ), $f = 900$ MHz

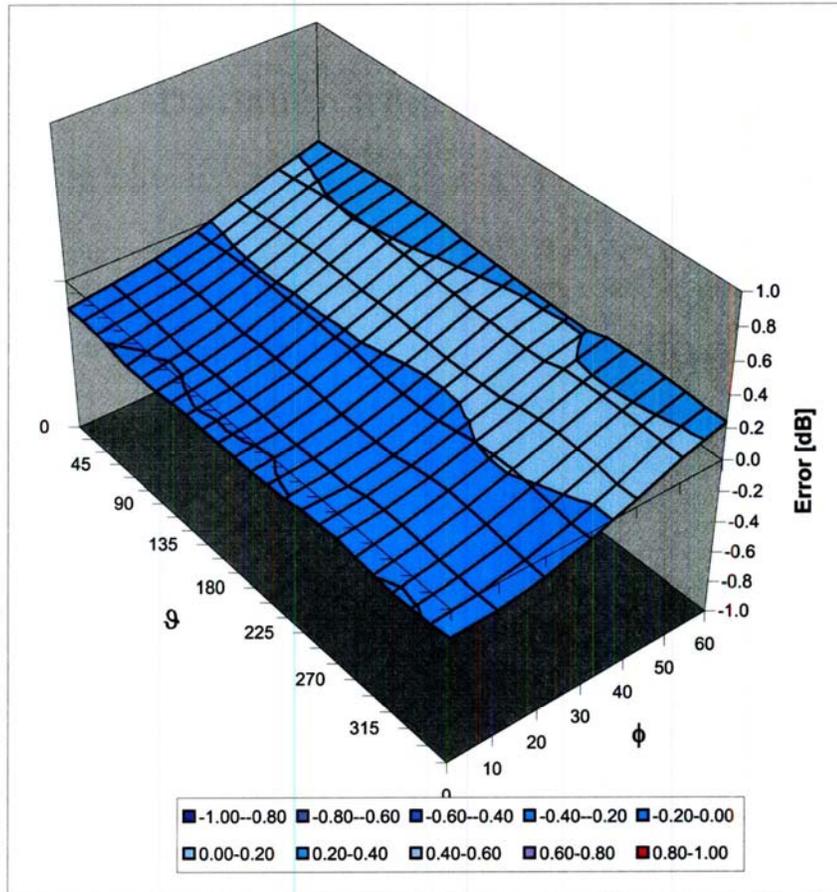

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Schmid & Partner Engineering AG


s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, http://www.speag.com

Additional Conversion Factors for Dosimetric E-Field Probe

Type:	ES3DV3
Serial Number:	3096
Place of Assessment:	Zurich
Date of Assessment:	December 20, 2007
Probe Calibration Date:	December 19, 2007

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1810 MHz.

Assessed by: 

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Dosimetric E-Field Probe ES3DV3 SN:3096

Conversion factor (\pm standard deviation)

150 MHz	<i>ConvF</i>	8.1 \pm 10%	$\epsilon_r = 52.3$ $\sigma = 0.76$ mho/m (head tissue)
250 MHz	<i>ConvF</i>	7.4 \pm 10%	$\epsilon_r = 47.6$ $\sigma = 0.83$ mho/m (head tissue)
300 MHz	<i>ConvF</i>	7.3 \pm 9%	$\epsilon_r = 45.3$ $\sigma = 0.87$ mho/m (head tissue)
750 MHz	<i>ConvF</i>	6.2 \pm 7%	$\epsilon_r = 41.9$ $\sigma = 0.89$ mho/m (head tissue)
150 MHz	<i>ConvF</i>	7.9 \pm 10%	$\epsilon_r = 61.9$ $\sigma = 0.80$ mho/m (body tissue)
250 MHz	<i>ConvF</i>	7.4 \pm 10%	$\epsilon_r = 59.4$ $\sigma = 0.88$ mho/m (body tissue)
300 MHz	<i>ConvF</i>	7.3 \pm 9%	$\epsilon_r = 58.2$ $\sigma = 0.92$ mho/m (body tissue)
750 MHz	<i>ConvF</i>	6.0 \pm 7%	$\epsilon_r = 55.5$ $\sigma = 0.96$ mho/m (body tissue)

Important Note:
For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.
Please see also Section 4.7 of the DASY4 Manual.