

**Exhibit 7B: SAR Test Report Photographs**

Motorola Solutions Inc
EME Test Laboratory
8000 West Sunrise Blvd
Fort Lauderdale, FL. 33322



A handwritten signature in blue ink that reads 'Deanna Zakharia'.

Deanna Zakharia
EMS EME Lab Senior Resource Manager,
Laboratory Director

Approval Date: 9/8/2011

Report Revision History

Date	Revision	Comments
9/8/11	O	Initial release

1.0 Highest SAR Test Position per body location

1.1 Body


DUT w/ antenna FAF5259A with offered battery NNTN8128A and body worn accessory PMLN7008A against the phantom. No audio attached. Same position was used for the other offered antenna (see table below), battery and audios.



Antenna kit #	Separation Distances (mm)		
	@ bottom surface of the DUT	@ antenna's base	@ antenna's tip
FAF5259A	6	29	37
PMAE4065A	6	29	43

1.2 Face

DUT w/ front side separated 2.5cm from phantom with antenna PMAE4065A and battery NNTN8129A
 Same position used for the other offered antenna (see table below) and battery

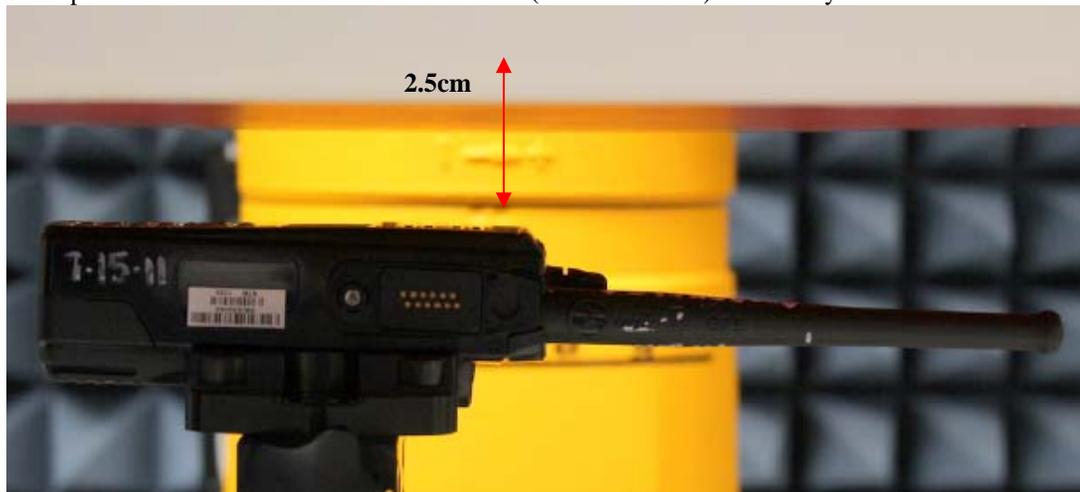

Antenna kit #	Separation Distances (mm)		
	@ bottom surface of the DUT	@ antenna's base	@ antenna's tip
FAF5259A	25	43	47
PMAE4065A	25	43	54

1.3 Head

Not applicable.

1.4 Hand

Not applicable.

2.0 Other SAR tested positions at the body

2.1 Body worn

DUT w/ antenna FAF5259A, battery NNTN8128A, audio HMN4104B and body worn PMLN4651A against the phantom. Same position used for the other offered antenna (see table below) and battery.



Antenna kit #	Separation Distances (mm)		
	@ bottom surface of the DUT	@ antenna's base	@ antenna's tip
FAF5259A	6	28	39
PMAE4065A	6	28	45

DUT w/ antenna FAF5259A battery NNTN8128A, audio cable HMN4104B, and body worn PMLN5950A against the phantom. Same position used for the other offered antenna (see table below), battery and carry strap.



Antenna kit #	Separation Distances (mm)		
	@ bottom surface of the DUT	@ antenna's base	@ antenna's tip
FAF5259A	6	81	116
PMAE4065A	6	84	140

DUT w/ antenna FAF5259A, battery NNTN8128A, audio cable HMN4104B, and body worn PMLN5950A without belt loop against the phantom and attached carry strap NTN5243A. Same position used for the other offered antenna (see table below) and battery.



Antenna kit #	Separation Distances (mm)		
	@ bottom surface of the DUT	@ antenna's base	@ antenna's tip
FAF5259A	0	50	70
PMAE4065A	0	50	88

2.2 Front Side against phantom

Not applicable.

2.3 Back side against phantom

Not applicable.

2.4 Front 2.5cm separation

Not applicable

2.5 Antenna 2.5cm separation

Not applicable

2.6 Back 2.5cm separation

Not applicable

3.0 Other SAR tested positions at the face**3.1 Back of DUT at 2.5cm separation**

Not Applicable

4.0 Other SAR tested positions at the head**4.1 Left ear touch**

Not applicable.

4.2 Left ear tilt

Not applicable.

4.3 Right ear touch

Not applicable.

4.4 Right ear tilt

Not applicable.

5.0 Other SAR tested positions at the hand**5.1 Left side**

Not applicable.

5.2 Right side

Not applicable.

5.3 Top side

Not applicable.

5.4 Bottom side

Not applicable.

5.5 Back side

Not applicable.

6.0 DUT and Accessory Photos

The purpose of these photos is to illustrate the offered accessories. Refer to Part 1 of 2 section 7.0 for more details.

6.1 Antenna dimension and photo:

Antenna Kit #	Physical Length (mm)	Electrical Length
FAF5259A	93	¼ wave
PMAE4065A	150	¼ wave



Left-right: FAF5259A, PMAE4065A

6.2 Body worn accessories



DUT Back View
Belt clip PMLN4651A



DUT Side View
Belt clip PMLN4651A



DUT Back View
Belt Clip PMLN7008A



DUT Side View
Belt Clip PMLN7008A



DUT Back View
Carry case PMLN5950A



DUT Side View
Carry case PMLN5950A



DUT Front View
Carry case PMLN5950A



Carry strap NTN5243A
with body worn
PMLN5950A

6.3 Battery accessories:



Side view Left – right:
NNTN8128A, NNTN8129A



Front view Left – right:
NNTN8128A, NNTN8129A

6.4 Audio accessories:



RMN5058A Core L/W
headset



PMLN5275C Core H/D
Headset



PMLN5111A Plus 3 wire
– Black – One
programmable button



PMLN5101A IMPRES
Temple transducer



**HMN4104B IMPRES
Display Submersible
RSM w/ jack & CH
selector**



**RLN5882A Plus 2-wire with
translucent tube - Black - One
programmable button**



**PMMN4062A Large
Plus Noise cancelling
RSM IP55 3.5mm jack**



**PMMN4065A Standard
large IP57 RSM**



**PMMN4024A
Core RSM**



**ZMN6031A SPKR MIC
3 PIECE**



**ZMN6032A SPKR MIC
2 PIECE**



**BDN6731A Earpiece,
Mic and PTT combined
with extra loud earpiece
Black**



**BDN6732A Earpiece,
Mic and PTT separate
with extra loud earpiece
Black**



**BDN6780A Ear bud
single w/ Mic & PTT**



**NNTN7869A
Surveillance/key loader
accessory adapter**




**BDN6783A
Headset/earpiece audio
accessory adapter**

6.5 DUT Dimensions

	Height (mm)	Width (mm)	Depth (mm)
Radio only (w/o battery)	130	63/52	32/31
Radio with battery NNTN8128A	130	63/52	35/40

The following figure reflects the location of the device's dimensions.

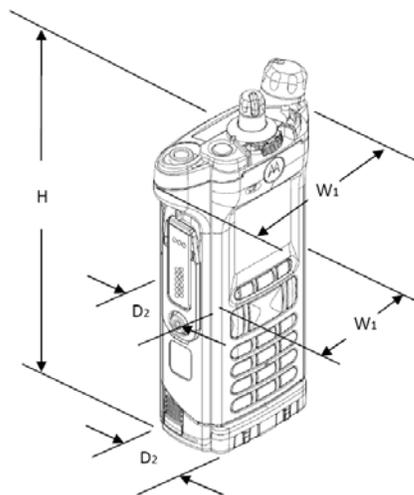

Note: H = Height; W = Width; D = Depth

$W1 = (\text{Width @ Top}) / (\text{Width @ PTT})$

$D2 = (\text{Depth @ Bottom}) / (\text{Depth @ PTT})$