



# PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road · Columbia, MD 21045 · U.S.A.

TEL (410) 290-6652 · FAX (410) 290-6654

<http://www.pctestlab.com>



## PRECOMPLIANCE TESTING FCC Part 22/ 24 Certification

MOTOROLA, INC.  
8000 West Sunrise Boulevard  
Plantation, FL 33322-9947

Dates of Tests: February 25-26, 2004  
Test Report S/N: 22/24.240217123-R1.AZ4  
Test Site: PCTEST Lab, Columbia MD

FCC ID

**AZ489FT5829**

APPLICANT


**MOTOROLA, Inc.**

|                         |                                                                     |
|-------------------------|---------------------------------------------------------------------|
| Classification:         | Licensed Portable Transmitter Held to Ear (PCE)                     |
| FCC Rule Part(s):       | §24(E), §22.901(d); §2                                              |
| EUT Type:               | Dual-Band GSM Phone                                                 |
| Model:                  | H77UBH6JA5AA                                                        |
| Tx Frequency Range:     | 824.20 – 848.80MHz (GSM850) / 1850.20 – 1909.80MHz (GSM1900)        |
| Rx Frequency Range:     | 869.20 – 893.80MHz (GSM850) / 1930.20 – 1989.80MHz (GSM1900)        |
| Max. RF Output Power:   | 1.876 W ERP GSM850 (32.733 dBm) / 1.889 W EIRP GSM1900 (32.751 dBm) |
| Emission Designator(s): | 250KGXW (GSM850), 247KGXW (GSM1900)                                 |
| Test Device Serial No.  | Identical Prototype [S/N: 1]                                        |

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. If the EUT contains any additional embedded transmitters, then those transmitters were active during all tests.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

  
Alfred Cirwithian  
Vice President Engineering



|                                           |                                                                                                            |                              |                        |                                 |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST® PT. 22/24 REPORT                  |  FCC Measurement Report |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                        | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 1 of 25                    |

## TABLE OF CONTENTS

---

**ATTACHMENT A: COVER LETTER(S)**

**ATTACHMENT B: ATTESTATION STATEMENT(S)**

**ATTACHMENT C: TEST REPORT**

|                                                |              |
|------------------------------------------------|--------------|
| <b>1.1 SCOPE</b>                               | <b>3</b>     |
| <b>2.1 INTRODUCTION</b>                        | <b>4</b>     |
| <b>3.1 INSERTS</b>                             | <b>5</b>     |
| <b>4.1 DESCRIPTION OF TESTS</b>                | <b>6-9</b>   |
| <b>5.1 EFFECTIVE RADIATED POWER OUTPUT</b>     | <b>10</b>    |
| <b>6.1 EQUIVALENT ISOTROPIC RADIATED POWER</b> | <b>11</b>    |
| <b>7.1 RADIATED MEASUREMENTS</b>               | <b>12-17</b> |
| <b>8.1 FREQUENCY STABILITY</b>                 | <b>18-21</b> |
| <b>9.1 PLOTS OF EMISSIONS</b>                  | <b>22</b>    |
| <b>10.1 LIST OF TEST EQUIPMENT</b>             | <b>23</b>    |
| <b>11.1 SAMPLE CALCULATIONS</b>                | <b>24</b>    |
| <b>12.1 CONCLUSION</b>                         | <b>25</b>    |

**ATTACHMENT D: TEST PLOTS**

**ATTACHMENT E: FCC ID LABEL / LOCATION**

**ATTACHMENT F: TEST SETUP PHOTOGRAPHS**

**ATTACHMENT G: EXTERNAL PHOTOGRAPHS**

**ATTACHMENT H: INTERNAL PHOTOGRAPHS**

**ATTACHMENT I: BLOCK DIAGRAM(S)**


**ATTACHMENT J: SCHEMATIC DIAGRAM(S)**

**ATTACHMENT K: OPERATIONAL / CIRCUIT DESCRIPTION**


**ATTACHMENT L: PARTS LIST/TUNE UP PROCEDURE**

**ATTACHMENT M: USER'S MANUAL**

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 2 of 25                    |



# MEASUREMENT REPORT



## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.


## §2.1033 General Information

**Applicant Name:** MOTOROLA INC.  
**Address:** 8000 West Sunrise Boulevard  
Plantation, FL 33322-9947

- Model: H77UBH6JA5AA
- Quantity: Quantity production is planned
- Emission Designators: 250KGXW (GSM850), 247KGXW (GSM1900)
- Tx Freq. Range: 824.20 – 848.80 MHz (GSM850)/1850.20 – 1909.80 MHz (GSM1900)
- Rx Freq. Range: 869.20 – 893.80 MHz (GSM850)/1930.20 – 1989.80 MHz (GSM1900)
- Max. Power Rating: 1.876 W ERP GSM850 (32.733 dBm)/  
1.889 W EIRP GSM1900 (32.751 dBm)
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: Dual-Band GSM Phone
- Modulation(s): GSM
- Frequency Tolerance:  $\pm 0.00025\%$  (2.5 ppm)
- FCC Rule Part(s): § 24(E), §22.901(d)
- Dates of Tests: February 25-26, 2004
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.
- Test Report S/N: 22/24.240217123-R1.AZ4

|                                            |                                                                                                                   |                              |                        |                                 |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                    |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1.AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 3 of 25                    |

## 2.1 INTRODUCTION

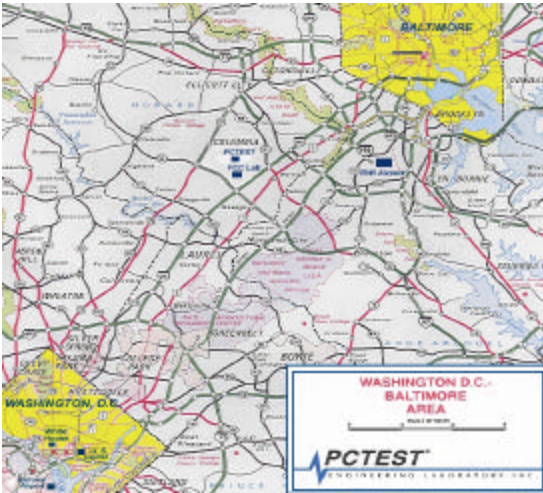


**Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.**

These measurement tests were conducted at **PCTEST Engineering Laboratory, Inc.** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

### Measurement Procedure

The radiated and spurious measurements were made outdoors at a 3-meter test range (see Figure2). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

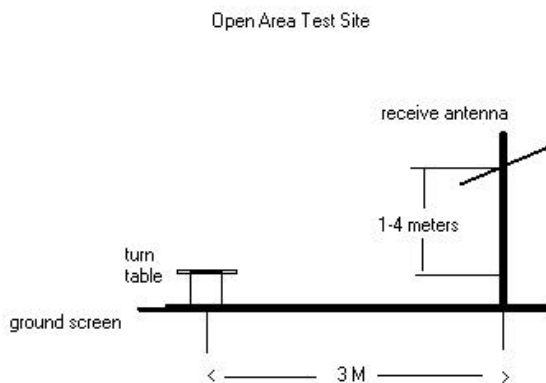

**Figure 2. Diagram of 3-meter outdoor test range**

|                                           |                                     |                              |                        |                                 |
|-------------------------------------------|-------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |                                     | FCC Measurement Report       |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004 | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 4 of 25                    |

## 3.1 INSERTS

---

### **Function of Active Devices (Confidential)**

The Function of active devices are shown in Attachment K.

### **Block & Schematic Diagrams (Confidential)**

The block diagrams are shown in Attachment I, and the schematic diagrams are shown in Attachment J.

### **Operating Instructions**

The instruction manual is shown in Attachment M.

### **Parts List & Tune-Up Procedure (Confidential)**

The parts list & tune-up procedure is shown in Attachment L.

### **Description of Freq. Stabilization Circuit (Confidential)**

The description of frequency stabilization circuit is shown in Attachment K.

### **Description for Suppression of Spurious Radiation, for Limiting Modulation, and Harmonic Suppresion Circuits (Confidential)**

The description of suppression stabilization circuits is shown in Attachment K.


|                                                  |                                            |                                                                                                                   |                               |                                        |
|--------------------------------------------------|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------|
| <b>PCTEST PT. 22/24 REPORT</b>                   |                                            |  <b>FCC Measurement Report</b> |                               | <b>Reviewed By:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>22/24.240217123-R1AZ4 | <b>Test Dates:</b><br>February 25-26, 2004 | <b>Phone Type:</b><br>Dual-Band GSM                                                                               | <b>FCC ID:</b><br>AZ489FT5829 | Page 5 of 25                           |

## 4.1 DESCRIPTION OF TESTS (CONTINUED)

### 4.5 Occupied Bandwidth Emission Limits

- On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

### 4.6 Cellular - Base Frequency Blocks

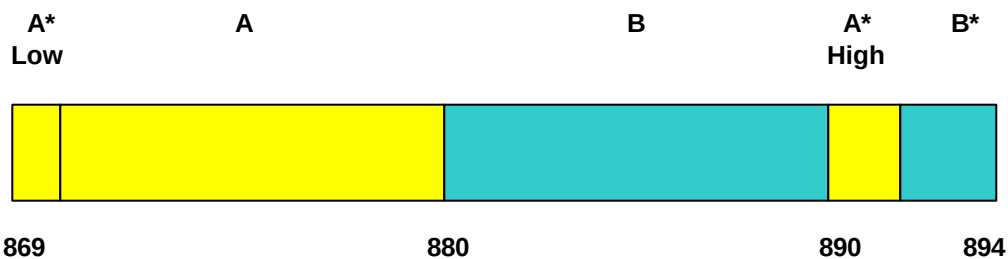


**BLOCK 1:** 869 – 880 MHz (A\* Low + A)

**BLOCK 3:** 890 – 891.5 MHz (A\* High)

**BLOCK 2:** 880 – 890 MHz (B)

**BLOCK 4:** 891.5 – 894 MHz (B\*)

### 4.7 Cellular - Mobile Frequency Blocks

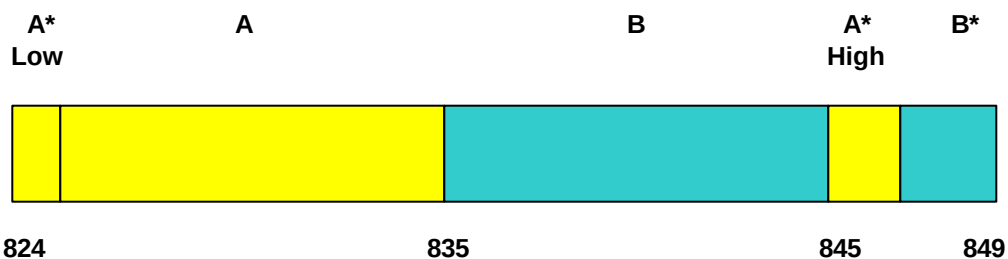

**BLOCK 1:** 824 – 835 MHz (A\* Low + A)

**BLOCK 3:** 845 – 846.5 MHz (A\* High)


**BLOCK 2:** 835 – 845 MHz (B)

**BLOCK 4:** 846.5 – 849 MHz (B\*)

|                                           |                                     |                              |                        |                                 |
|-------------------------------------------|-------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |                                     | FCC Measurement Report       |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004 | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 6 of 25                    |

## 4.1 DESCRIPTION OF TESTS (CONTINUED)

### 4.8 PCS - Base Frequency Blocks

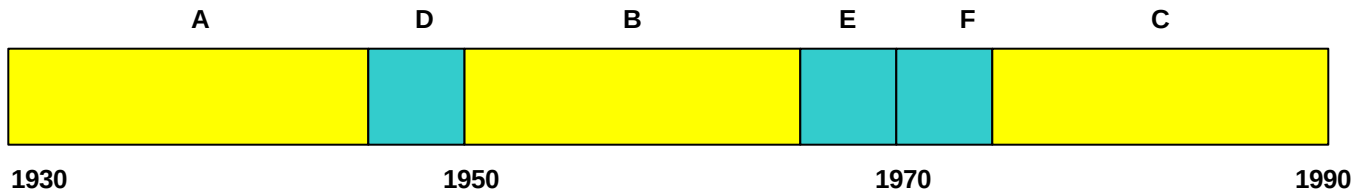

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)


BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

### 4.9 PCS - Mobile Frequency Blocks

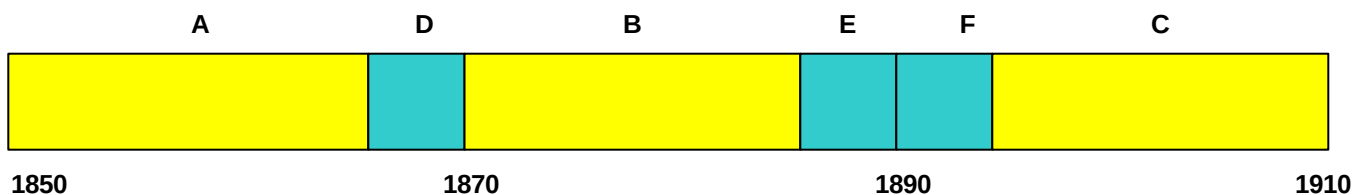

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 7 of 25                    |

## 4.1 DESCRIPTION OF TESTS (CONTINUED)

### 4.10 Occupied Bandwidth

The audio signal generator is adjusted to 1kHz. The output level is set to  $\pm 6$ kHz deviation. With the level constant, the frequency is set to 2500Hz. Then the audio signal level is increased by 16dB. The occupied bandwidth data is obtained for the SAT (Supervisory Audio Tone), ST (Signaling Tone), WBD (Wideband data), and DTMF (Dual Tone Multi Frequencies). The results are shown on the attached graphs.

Specified Limits:

- On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45kHz, the sideband is at least 26dB below the carrier.
- On any frequency removed from the assigned carrier frequency by more than 45 kHz, up to and including 90kHz, the sideband is at least 45dB below the carrier.
- On any frequency removed from the assigned carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60dB below the carrier or  $40 + \log_{10}$  (mean power output in Watts) dB, whichever is the smaller attenuation.

### 4.11 Spurious and Harmonic Emissions at Antenna Terminal

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to 10 GHz. The transmitter is modulated with a 2500Hz tone at a level of 16dB greater than that required to provided 50% modulation.

At the input terminals of the spectrum analyzer, an isolator (RF circulator with on port terminated with 50 ohms) and an 870 MHz to 890 MHz bandpass filter is connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The rejection of the bandpass filter to signals in the 825 – 845 MHz range is adequate to limit the transmit energy from the test transceiver which appears to a level which will allow the analyzer to measure signals less than  $-90$ dBm. Calibration of the test receiver is performed in the 870 – 890 MHz range to insure accuracy to allow variation in the bandpass filter insertion loss to be calibrated.

### 4.12 Frequencies

At the input terminals of the spectrum analyzer, an isolator (RF pad) and an high-pass filter are connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The high-pass filter (signals below 1.6 GHz) is to limit the fundamental frequency from interfering with the measurement of low-level spurious and harmonic emissions and to ensure that the preamplifier is not saturated.

### 4.13 Radiation Spurious and Harmonic Emissions

Radiation and harmonic emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

## 5.0 Frequency Stability/Temperature Variation.

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 8 of 25                    |



The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +60°C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

*Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025$  ( $\pm 2.5$  ppm) of the center frequency.*

**Time Period and Procedure:**

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (22°C to 25°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at -30°C (usually 14-16 hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

**NOTE: The EUT is tested down to the battery endpoint.**

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 9 of 25                    |

## 5.1 Test Data

### 5.3 Effective Radiated Power Output

#### A. POWER: (GSM **Mode**)

| Freq. Tuned<br>(MHz) | REF.<br>LEVEL<br>(dBm) | POL<br>(H/V) | ERP<br>(W) | ERP<br>(dBm) | BATTERY  |
|----------------------|------------------------|--------------|------------|--------------|----------|
| 824.20               | -8.600                 | V            | 1.850      | 32.673       | Standard |
| 836.60               | -8.900                 | V            | 1.792      | 32.533       | Standard |
| 848.00               | -9.400                 | V            | 1.653      | 32.183       | Standard |
| 824.20               | -8.700                 | V            | 1.876      | 32.733       | Extended |

Note: Standard and extended batteries are options for this phone

#### **NOTES:**

Effective Radiated Power Output Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 10 of 25                   |

## 6.1 Test Data

### 6.2 Equivalent Isotropic Radiated Power (E.I.R.P.)

#### Radiated measurements at 3 meters

Supply Voltage: 3.7 VDC

Modulation: PCS GSM

| FREQ.<br>(MHz) | REF.<br>LEVEL<br>(dBm) | POL<br>(H/V) | Azimuth<br>(o angle) | EIRP<br>(dBm) | EIRP<br>(W) | Battery  |
|----------------|------------------------|--------------|----------------------|---------------|-------------|----------|
| 1850.20        | -10.800                | V            | 180                  | 32.281        | 1.695       | Standard |
| 1880.00        | -10.500                | V            | 180                  | 32.751        | 1.889       | Standard |
| 1909.8         | -10.700                | V            | 180                  | 32.721        | 1.876       | Standard |
| 1880.00        | -10.600                | V            | 180                  | 32.651        | 1.846       | Extended |

Note: Standard and extended batteries are options for this phone

#### NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 11 of 25                   |

## 7.1 Test Data

### 7.2 CELLULAR GSM Radiated Measurements

#### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.20 MHz  
 CHANNEL: 128 (Low)  
 MEASURED OUTPUT POWER: 32.733 dBm = 1.876 W  
 MODULATION SIGNAL: GSM (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  45.73 dBc

| FREQ.<br>(MHz) | LEVEL @<br>ANTENNA<br>TERMINALS<br>(dBm) | SUBSTITUTE<br>ANTENNA<br>GAIN<br>(dBd) | CORRECT<br>GENERATOR<br>LEVEL<br>(dBm) | POL<br>(H/V) | (dBc) |
|----------------|------------------------------------------|----------------------------------------|----------------------------------------|--------------|-------|
| 1648.40        | -26.88                                   | 6.10                                   | -20.78                                 | V            | 53.5  |
| 2472.60        | -36.08                                   | 6.70                                   | -29.38                                 | V            | 62.1  |
| 3296.80        | -43.18                                   | 6.80                                   | -36.38                                 | V            | 69.1  |
| 4121.00        | -67.18                                   | 6.50                                   | -60.68                                 | V            | 93.4  |
| 4945.20        | -84.38                                   | 7.00                                   | -77.38                                 | V            | 110.1 |

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 12 of 25                   |

## 7.1 Test Data (Continued)

### 7.3 CELLULAR GSM Radiated Measurements

#### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 190 (Mid)  
 MEASURED OUTPUT POWER: 32.733 dBm = 1.876 W  
 MODULATION SIGNAL: GSM (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  45.73 dBc

| FREQ.<br>(MHz) | LEVEL @<br>ANTENNA<br>TERMINALS<br>(dBm) | SUBSTITUTE<br>ANTENNA<br>GAIN<br>(dBd) | CORRECT<br>GENERATOR<br>LEVEL<br>(dBm) | POL<br>(H/V) | (dBc) |
|----------------|------------------------------------------|----------------------------------------|----------------------------------------|--------------|-------|
| 1673.20        | -29.08                                   | 6.10                                   | -22.98                                 | V            | 55.7  |
| 2509.80        | -36.58                                   | 6.70                                   | -29.88                                 | V            | 62.6  |
| 3346.40        | -43.38                                   | 6.80                                   | -36.58                                 | V            | 69.3  |
| 4183.00        | -66.28                                   | 6.50                                   | -59.78                                 | V            | 92.5  |
| 5019.60        | -83.78                                   | 7.00                                   | -76.78                                 | V            | 109.5 |

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 13 of 25                   |

## 7.1 Test Data (Continued)

### 7.4 CELLULAR GSM Radiated Measurements

#### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.80 MHz  
 CHANNEL: 251 (High)  
 MEASURED OUTPUT POWER: 32.733 dBm = 1.876 W  
 MODULATION SIGNAL: GSM (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  45.73 dBc

| FREQ.<br>(MHz) | LEVEL @<br>ANTENNA<br>TERMINALS<br>(dBm) | SUBSTITUTE<br>ANTENNA<br>GAIN<br>(dBd) | CORRECT<br>GENERATOR<br>LEVEL<br>(dBm) | POL<br>(H/V) | (dBc) |
|----------------|------------------------------------------|----------------------------------------|----------------------------------------|--------------|-------|
| 1697.60        | -35.68                                   | 6.10                                   | -29.58                                 | V            | 62.3  |
| 2546.40        | -37.78                                   | 6.70                                   | -31.08                                 | V            | 63.8  |
| 3395.20        | -41.48                                   | 6.80                                   | -34.68                                 | V            | 67.4  |
| 4244.00        | -65.68                                   | 6.50                                   | -59.18                                 | V            | 91.9  |
| 5092.80        | -83.98                                   | 7.00                                   | -76.98                                 | V            | 109.7 |

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 14 of 25                   |

## 7.1 Test Data (Continued)

### 7.5 PCS GSM Radiated Measurements

#### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1850.20 MHz  
 CHANNEL: 512 (Low)  
 MEASURED OUTPUT POWER: 32.751 dBm = 1.889 W  
 MODULATION SIGNAL: GSM (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  45.76 dBc

| FREQ.<br>(MHz) | LEVEL @<br>ANTENNA<br>TERMINALS<br>(dBm) | SUBSTITUTE<br>ANTENNA<br>GAIN<br>(dBi) | CORRECT<br>GENERATOR<br>LEVEL<br>(dBm) | POL<br>(H/V) | (dBc) |
|----------------|------------------------------------------|----------------------------------------|----------------------------------------|--------------|-------|
| 3700.40        | -51.13                                   | 8.70                                   | -42.43                                 | V            | 75.2  |
| 5550.60        | -58.93                                   | 9.70                                   | -49.23                                 | V            | 82.0  |
| 7400.80        | -72.43                                   | 9.90                                   | -62.53                                 | V            | 95.3  |
| 9251.00        | -77.43                                   | 11.40                                  | -66.03                                 | V            | 98.8  |
| 11101.20       | -77.33                                   | 12.10                                  | -65.23                                 | V            | 98.0  |

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 15 of 25                   |

## 7.1 Test Data (Continued)

### 7.6 PCS GSM Radiated Measurements

#### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 661 (Mid)  
 MEASURED OUTPUT POWER: 32.751 dBm = 1.889 W  
 MODULATION SIGNAL: GSM (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  45.76 dBc

| FREQ.<br>(MHz) | LEVEL @<br>ANTENNA<br>TERMINALS<br>(dBm) | SUBSTITUTE<br>ANTENNA<br>GAIN<br>(dBi) | CORRECT<br>GENERATOR<br>LEVEL<br>(dBm) | POL<br>(H/V) | (dBc) |
|----------------|------------------------------------------|----------------------------------------|----------------------------------------|--------------|-------|
| 3760.00        | -50.03                                   | 8.70                                   | -41.33                                 | V            | 74.1  |
| 5640.00        | -59.03                                   | 9.70                                   | -49.33                                 | V            | 82.1  |
| 7520.00        | -72.53                                   | 9.90                                   | -62.63                                 | V            | 95.4  |
| 9400.00        | -73.23                                   | 11.40                                  | -61.83                                 | V            | 94.6  |
| 11280.00       | -77.13                                   | 12.10                                  | -65.03                                 | V            | 97.8  |

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 16 of 25                   |



## 7.1 Test Data (Continued)

### 7.7 PCS GSM Radiated Measurements

#### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1909.80 MHz  
 CHANNEL: 810 (High)  
 MEASURED OUTPUT POWER: 32.751 dBm = 1.889 W  
 MODULATION SIGNAL: GSM (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  45.76 dBc

| FREQ.<br>(MHz) | LEVEL @<br>ANTENNA<br>TERMINALS<br>(dBm) | SUBSTITUTE<br>ANTENNA<br>GAIN<br>(dBi) | CORRECT<br>GENERATOR<br>LEVEL<br>(dBm) | POL<br>(H/V) | (dBc) |
|----------------|------------------------------------------|----------------------------------------|----------------------------------------|--------------|-------|
| 3819.60        | -50.23                                   | 8.70                                   | -41.53                                 | V            | 74.3  |
| 5729.40        | -60.03                                   | 9.70                                   | -50.33                                 | V            | 83.1  |
| 7639.20        | -73.23                                   | 9.90                                   | -63.33                                 | V            | 96.1  |
| 9549.00        | -76.93                                   | 11.40                                  | -65.53                                 | V            | 98.3  |
| 11458.80       | -76.93                                   | 12.10                                  | -64.83                                 | V            | 97.6  |

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 17 of 25                   |

## 8.1 Test Data

### § 2.995 FREQUENCY STABILITY (GSM 850)

OPERATING FREQUENCY: 836,600,007 Hz

CHANNEL: 190

REFERENCE VOLTAGE: 3.7 VDC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

| VOLTAGE<br>(%) | POWER<br>(VDC) | TEMP<br>(°C) | FREQ.<br>(Hz) | Deviation<br>(%) |
|----------------|----------------|--------------|---------------|------------------|
| 100 %          | 3.70           | + 20 (Ref)   | 836,600,007   | 0.000000         |
| 100 %          |                | - 30         | 836,600,066   | -0.000007        |
| 100 %          |                | - 20         | 836,600,049   | -0.000005        |
| 100 %          |                | - 10         | 836,599,982   | 0.000003         |
| 100 %          |                | 0            | 836,599,990   | 0.000002         |
| 100 %          |                | + 10         | 836,599,974   | 0.000004         |
| 100 %          |                | + 20         | 836,599,999   | 0.000001         |
| 100 %          |                | + 25         | 836,599,957   | 0.000006         |
| 100 %          |                | + 30         | 836,599,932   | 0.000009         |
| 100 %          |                | + 40         | 836,599,972   | 0.000004         |
| 100 %          |                | + 50         | 836,599,963   | 0.000005         |
| 100 %          |                | + 60         | 836,599,955   | 0.000006         |
| 85 %           | 3.15           | + 20         | 836,600,007   | 0.000000         |
| 115 %          | 4.26           | + 20         | 836,600,007   | 0.000000         |
| BATT. ENDPOINT | 3.12           | + 20         | 836,600,007   | 0.000000         |

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 18 of 25                   |

## 8.1 Test Data

### § 2.995 FREQUENCY STABILITY (GSM 850)

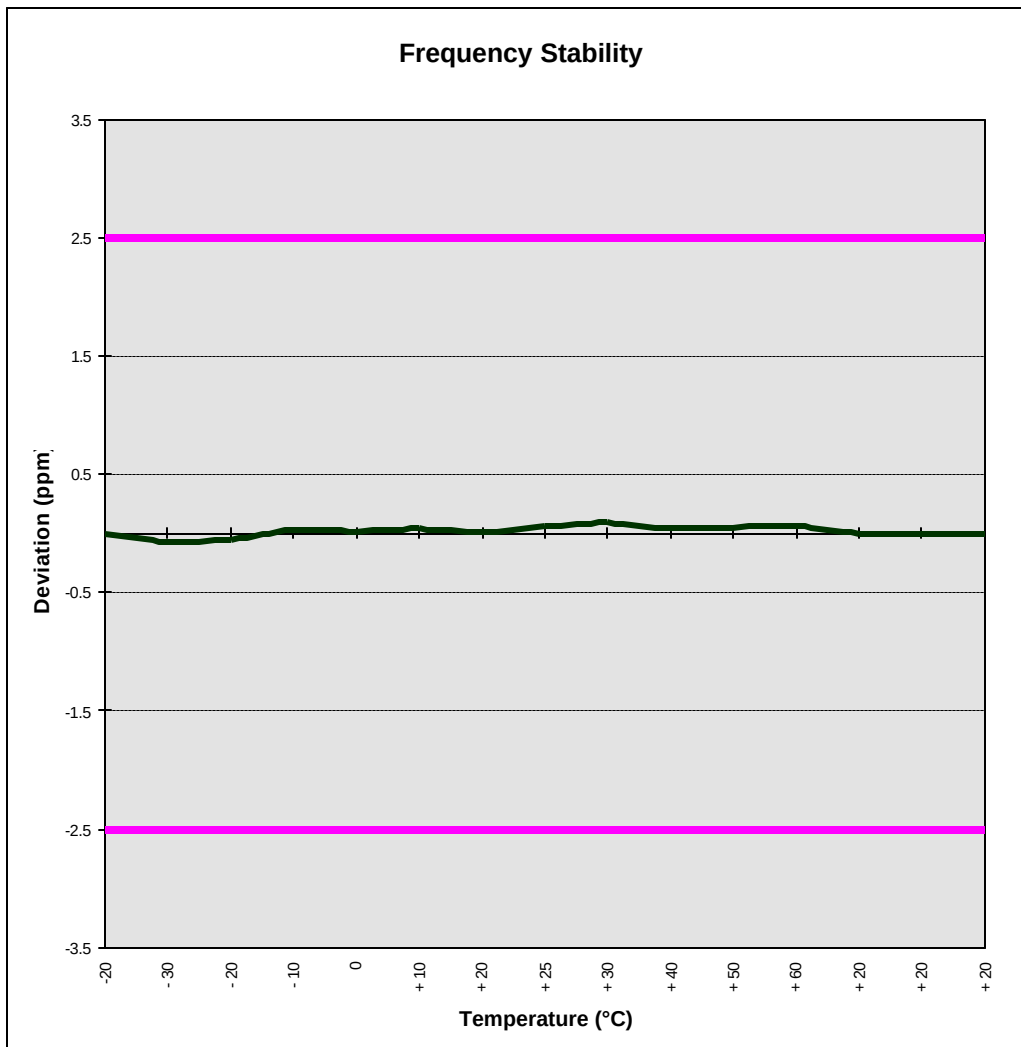

|                                           |                                                                                        |                              |                        |                                 |
|-------------------------------------------|----------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   | <div style="display: flex; align-items: center;"> <b>FCC Measurement Report</b> </div> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                    | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 19 of 25                   |

## 8.1 Test Data (Continued)

### 7.2 § 24.135 FREQUENCY STABILITY (PCS GSM)

OPERATING FREQUENCY: 1,880,000,003 Hz

CHANNEL: 661

REFERENCE VOLTAGE: 3.7 VAC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

GSM PCS CV260 10/1/2003


Motorola

| VOLTAGE<br>(%) | POWER<br>VAC | TEMP<br>(°C) | FREQ.<br>(Hz) | Deviation<br>(%) |
|----------------|--------------|--------------|---------------|------------------|
| 100 %          | 3.70         | + 20 (Ref)   | 1,880,000,003 | 0.000000         |
| 100 %          |              | - 30         | 1,880,000,059 | -0.000003        |
| 100 %          |              | - 20         | 1,879,999,982 | 0.000001         |
| 100 %          |              | - 10         | 1,879,999,984 | 0.000001         |
| 100 %          |              | 0            | 1,879,999,853 | 0.000008         |
| 100 %          |              | + 10         | 1,879,999,947 | 0.000003         |
| 100 %          |              | + 20         | 1,880,000,003 | 0.000000         |
| 100 %          |              | + 25         | 1,879,999,984 | 0.000001         |
| 100 %          |              | + 30         | 1,879,999,988 | 0.000001         |
| 100 %          |              | + 40         | 1,880,000,022 | -0.000001        |
| 100 %          |              | + 50         | 1,880,000,026 | -0.000001        |
| 100 %          |              | + 60         | 1,880,000,022 | -0.000001        |
| 85 %           | 3.15         | + 20         | 1,880,000,003 | 0.000000         |
| 115 %          | 4.26         | + 20         | 1,880,000,003 | 0.000000         |
| BATT. ENDPOINT | 3.10         | + 20         | 1,880,000,003 | 0.000000         |

|                                           |                                     |                              |                        |                                 |
|-------------------------------------------|-------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   | FCC Measurement Report              |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004 | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 20 of 25                   |

## 8.1 Test Data (Continued)

### 7.3 § 24.135 FREQUENCY STABILITY (PCS GSM)

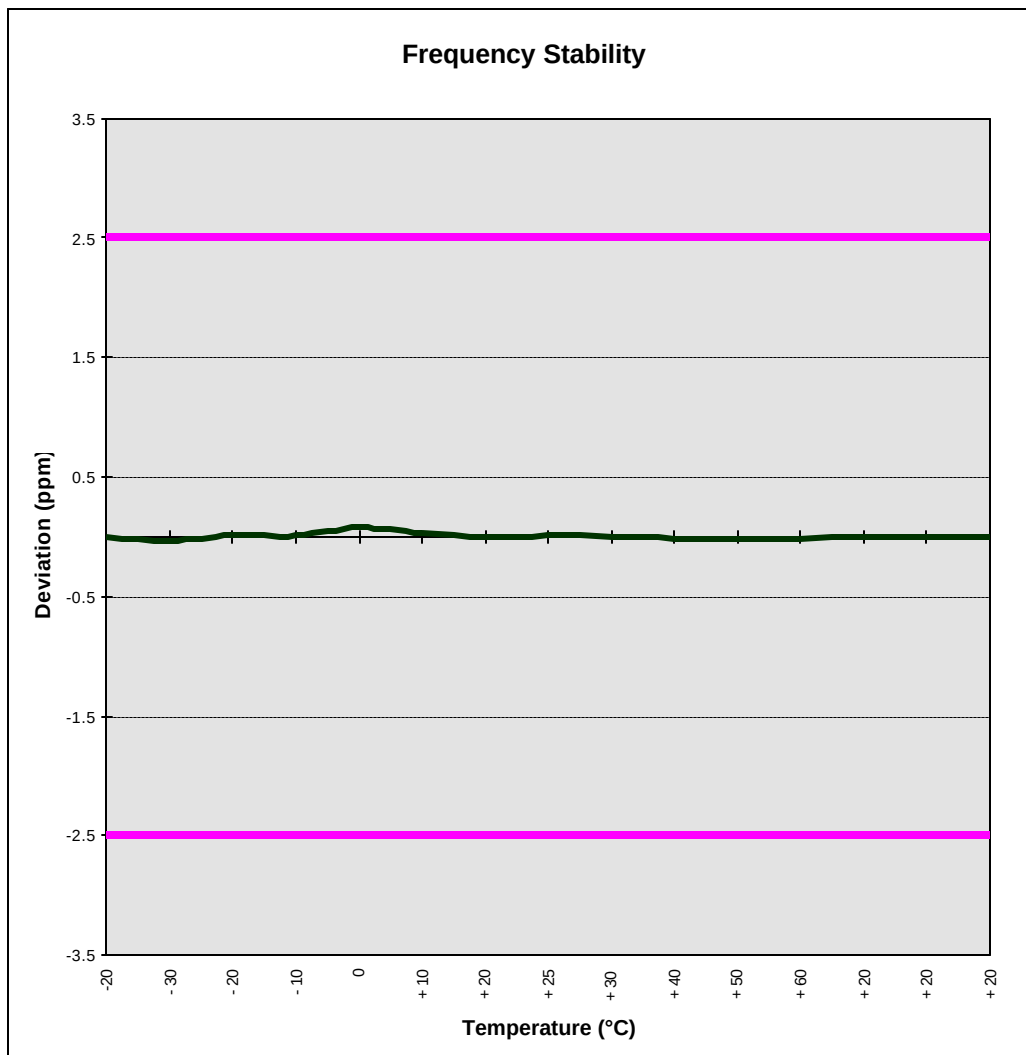

|                                           |                                                                                        |                              |                        |                                 |
|-------------------------------------------|----------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   | <div style="display: flex; align-items: center;"> <b>FCC Measurement Report</b> </div> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                    | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 21 of 25                   |

## 9.1 PLOT(S) OF EMISSIONS

---

(SEE ATTACHMENT D)

|                                           |                                     |                                                                                                                   |                        |                                 |
|-------------------------------------------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |                                     |  <b>FCC Measurement Report</b> |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004 | Phone Type:<br>Dual-Band GSM                                                                                      | FCC ID:<br>AZ489FT5829 | Page 22 of 25                   |

## 10.1 TEST EQUIPMENT

| Type                              | Model                                                      | Cal. Due Date    | S/N                    |
|-----------------------------------|------------------------------------------------------------|------------------|------------------------|
| Microwave Spectrum Analyzer       | HP 8566B (100Hz-22GHz)                                     | 08/15/04         | 3638A08713             |
| Microwave Spectrum Analyzer       | HP 8566B (100Hz-22GHz)                                     | 04/17/04         | 2542A11898             |
| Spectrum Analyzer/Tracking Gen.   | HP 8591A (100Hz-1.8GHz)                                    | 08/10/04         | 3144A02458             |
| Signal Generator*                 | HP 8640B (500Hz-1GHz)                                      | 06/03/04         | 2232A19558             |
| Signal Generator*                 | HP 8640B (500Hz-1GHz)                                      | 06/03/04         | 1851A09816             |
| Signal Generator*                 | Rohde & Schwarz (0.1-1000MHz)                              | 09/11/04         | 894215/012             |
| Ailtech/Eaton Receiver            | NM 37/57A-SL (30-1000MHz)                                  | 04/12/04         | 0792-03271             |
| Ailtech/Eaton Receiver            | NM 37/57A (30-1000MHz)                                     | 03/11/04         | 0805-03334             |
| Ailtech/Eaton Receiver            | NM17/27A (0.1-32MHz)                                       | 09/17/04         | 0608-03241             |
| Quasi-Peak Adapter                | HP 85650A                                                  | 08/15/04         | 2043A00301             |
| Ailtech/Eaton Adapter             | CCA-7 CISPR/ANSI QP Adapter                                | 03/11/04         | 0194-04082             |
| Gigatronics Universal Power Meter | 8657A                                                      |                  | 1835256                |
| Gigatronics Power Sensor          | 80701A (0.05-18GHz)                                        |                  | 1833460                |
| Signal Generator                  | HP 8648D (9kHz-4GHz)                                       |                  | 3613A00315             |
| Amplifier Research                | 5SiG4 (5W, 800MHz-4.2GHz)                                  |                  | 22322                  |
| Network Analyzer                  | HP 8753E (30kHz-3GHz)                                      |                  | JP38020182             |
| Audio Analyzer                    | HP 8903B                                                   |                  | 3011A09025             |
| Modulation Analyzer               | HP 8901A                                                   |                  | 2432A03467             |
| Power Meter                       | HP 437B                                                    |                  | 3125U24437             |
| Power Sensor                      | HP 8482H (30μW-3W)                                         |                  | 2237A02084             |
| Harmonic/Flicker Test System      | HP 6841A (IEC 555-2/3)                                     |                  | 3531A00115             |
| Broadband Amplifier (2)           | HP 8447D                                                   |                  | 1145A00470, 1937A03348 |
| Broadband Amplifier               | HP 8447F                                                   |                  | 2443A03784             |
| Horn Antenna                      | EMCO Model 3115 (1-18GHz)                                  |                  | 9704-5182              |
| Horn Antenna                      | EMCO Model 3115 (1-18GHz)                                  |                  | 9205-3874              |
| Horn Antenna                      | EMCO Model 3116 (18-40GHz)                                 |                  | 9203-2178              |
| Biconical Antenna (4)             | Eaton 94455/Eaton 94455-1/Singer 94455-1/Compliance Design | 1295, 1332, 0355 |                        |
| Log-Spiral Antenna (3)            | Ailtech/Eaton 93490-1                                      | 0608, 1103, 1104 |                        |
| Roberts Dipoles                   | Compliance Design (1 set)                                  |                  |                        |
| Ailtech Dipoles                   | DM-105A (1 set)                                            |                  | 33448-111              |
| EMCO LISN (6)                     | 3816/2                                                     |                  | 1079                   |
| Microwave Preamplifier 40dB Gain  | HP 83017A (0.5-26.5GHz)                                    |                  | 3123A00181             |
| Microwave Cables                  | MicroCoax (1.0-26.5GHz)                                    |                  |                        |
| Ailtech/Eaton Receiver            | NM37/57A-SL                                                |                  | 0792-03271             |
| Spectrum Analyzer                 | HP 8594A                                                   |                  | 3051A00187             |
| Spectrum Analyzer (2)             | HP 8591A                                                   |                  | 3034A01395, 3108A02053 |
| Microwave Survey Meter            | Holaday Model 1501 (2.450GHz)                              |                  | 80931                  |
| Digital Thermometer               | Extech Instruments 421305                                  |                  | 426966                 |
| Attenuator                        | HP 8495A (0-70dB) DC-4GHz                                  |                  |                        |
| Bi-Directional Coax Coupler       | Narda 3020A (50-1000MHz)                                   |                  |                        |
| Shielded Screen Room              | RF Lindgren Model 26-2/2-0                                 |                  | 6710 (PCT270)          |
| Shielded Semi-Anechoic Chamber    | Ray Proof Model S81                                        |                  | R2437 (PCT278)         |
| Environmental Chamber             | Associated Systems Model 1025 (Temperature/Humidity)       |                  | PCT285                 |

\* Calibration traceable to the National Institute of Standards and Technology (NIST).

|                                           |                                                                                                                   |                              |                        |                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------|---------------------------------|
| PCTEST PT. 22/24 REPORT                   |  <b>FCC Measurement Report</b> |                              |                        | Reviewed By:<br>Quality Manager |
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004                                                                               | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 23 of 25                   |

## 11.1 SAMPLE CALCULATIONS

### A. Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 KHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

Emission Designator = 247KGXW

GSM BW = 247 KHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

Emission Designator = 250KGXW

Emission Designator = 247KGXW

The transceiver transmits a Gaussian Minimal Shift Keying (GMSK) modulated carrier having a BT product of 0.3. The bandwidth of a GMSK modulated carrier having a BT of 0.3 is 250 kHz. This result is **250K** for the first four characters of the emissions designator.

GMSK is the same Minimal Shift Keying (MSK) except that the NRZ data has been filtered prior to modulation. As a result, GMSK, like MSK can generally be thought of as a frequency shift keying (FSK), of Offset Quadrature Phase Shift Keying (OQPSK), and can be modulated and demodulated using either of these techniques. Motorola's transceiver is based off of the OQPSK technique, which is a type of phase modulation. This corresponds to **G**, for Types of Modulation.

The transceiver uses a digital signal representing sampled, quantized voice or other audio information or command data to modulate the main carrier in a Time Division Multiple Access (TDMA) fashion. This corresponds to **X** for nature of modulating signals. The symbol 1 excludes time-division multiplex, and the other choices for digital modulating signals either state "Two or more channels containing quantized or digital information" or "Composite system with one or more channels containing quantized or digital information, together with one or more channels containing analogue information".

The information transmitted is a combination of command data and telephony (sampled quantized voice or other audio signals). This corresponds to **W** for Types of Information Transmitted, defined as "Combination of above" which would be the combination of symbol D, "Data transmission, telemetry, telecommand" and the symbol E, "Telephony (including sound broadcasting)".

### B. Spurious Radiated Emission - PCS Band

#### Example: Channel 512 PCS Mode 2<sup>nd</sup> Harmonic (3700.40 MHz)

The receive analyzer reading at 3 meters with the EUT on the turntable was -98.6 dBm. The gain of the substituted antenna is 8.7 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -98.6 dBm on the receive analyzer. So 8.7 dB is added to the signal generator reading of -51.13 dBm yielding -42.43 dBm. The fundamental EIRP was 32.751 dBm so this harmonic was 32.751 dBm - (-42.43) = 75.2 dBc

| PCTEST PT. 22/24 REPORT                   |                                     | FCC Measurement Report       |                        | Reviewed By:<br>Quality Manager |
|-------------------------------------------|-------------------------------------|------------------------------|------------------------|---------------------------------|
| Test Report S/N:<br>22/24.240217123-R1AZ4 | Test Dates:<br>February 25-26, 2004 | Phone Type:<br>Dual-Band GSM | FCC ID:<br>AZ489FT5829 | Page 24 of 25                   |



## 12.1 CONCLUSION

---

The data collected shows that the **MOTOROLA, Inc. Dual-Band GSM Phone FCC ID: AZ489FT5829** complies with all the requirements of Parts 2, 15B, 22, and 24 of the FCC rules.

|                                                  |                                            |                                                                                                                   |                               |                                        |
|--------------------------------------------------|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------|
| <b>PCTEST PT. 22/24 REPORT</b>                   |                                            |  <b>FCC Measurement Report</b> |                               | <b>Reviewed By:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>22/24.240217123-R1AZ4 | <b>Test Dates:</b><br>February 25-26, 2004 | <b>Phone Type:</b><br>Dual-Band GSM                                                                               | <b>FCC ID:</b><br>AZ489FT5829 | Page 25 of 25                          |