

Exhibit 15. Receiver Radiated and Power line Conducted Voltage Data -- Pursuant 47 CFR 15.109, 15.207

15.1 Spurious Radiation -- Pursuant 47 CFR 15.109a

In accordance with 47 CFR 15.109 (f), the radiated field strengths were tested with the integral antenna of the radio in the extended position. The antenna is an integral part of the transceiver that does not permit the user to utilize an alternate antenna.

Field Strength limits: The field strength from unintentional radiators at a distance of 10 meters shall not exceed the following values:

Frequency of voltage (MHz)	Field strength (uV/m)	Field strength (dBuV/m)
30 – 88	100	29.5
88 – 216	150	33.1
216 – 960	200	35.6
Above 960	500	43.5

Table 15-1: Field Strength limits

***NOTE:** An asterisk (*) Indicates the measured field strength was less than 23.5 dBuV/m or could not be detected due to noise limitations or ambients.*

Motorola Inc.


FCC ID:AZ489FT5845

Receiver Radiated Spurious Emissions : i415

851.0625 MHz

Channel Spacing 25KHZ | S/N 364VFEPLDX


Frequency (MHz)	FCC Maximum Emission Limit (dBuV/m)	Horizontal Measured Electric Field Intensity (dBuV/m)	Vertical Measured Electric Field Intensity (dBuV/m)
1702.13	43.5	*	24.19
3404.2500	43.5	*	*
5106.3750	43.5	*	*

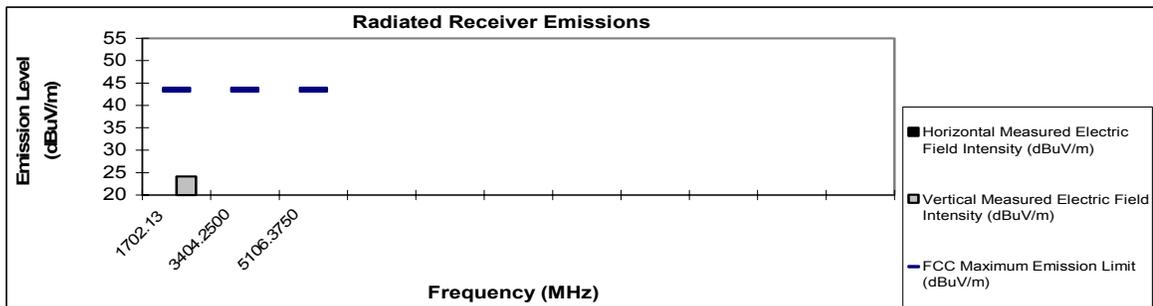

858.5625 MHz

Channel Spacing 25KHZ | S/N 364VFEPLDX

Frequency (MHz)	FCC Maximum Emission Limit (dBuV/m)	Horizontal Measured Electric Field Intensity (dBuV/m)	Vertical Measured Electric Field Intensity (dBuV/m)
1717.1250	43.5	22.02	23.98
3434.2500	43.5	*	*
5151.3750	43.5	*	*

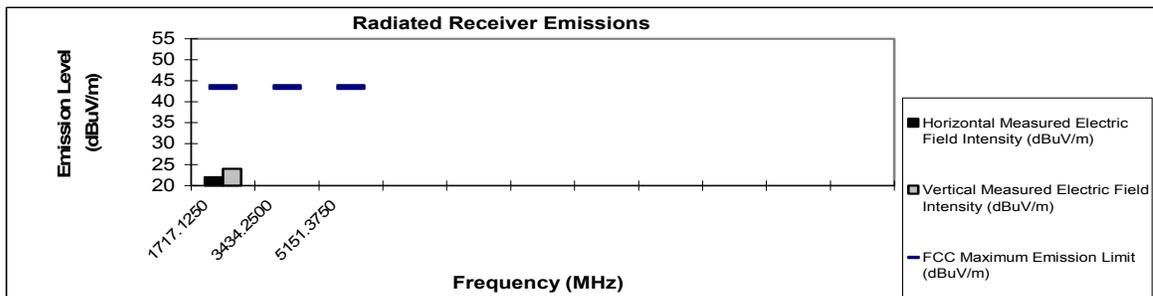

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

Motorola Plantation EMC Lab – Test Performed by: Frank Baader
 FCC Registration: 91932 / Industry Canada: IC3679

May 31, 2005

Figure 15-1a: 800 MHz band - Receiver Radiated Emissions

Motorola Inc.


FCC ID:AZ489FT5845

Receiver Radiated Spurious Emissions : i415

865.9875 MHz

Channel Spacing 25KHZ | S/N 364VFEPLDX


Frequency (MHz)	FCC Maximum Emission Limit (dBuV/m)	Horizontal Measured Electric Field Intensity (dBuV/m)	Vertical Measured Electric Field Intensity (dBuV/m)
1731.98	43.5	*	23.95
3463.95	43.5	*	*
5195.93	43.5	*	*

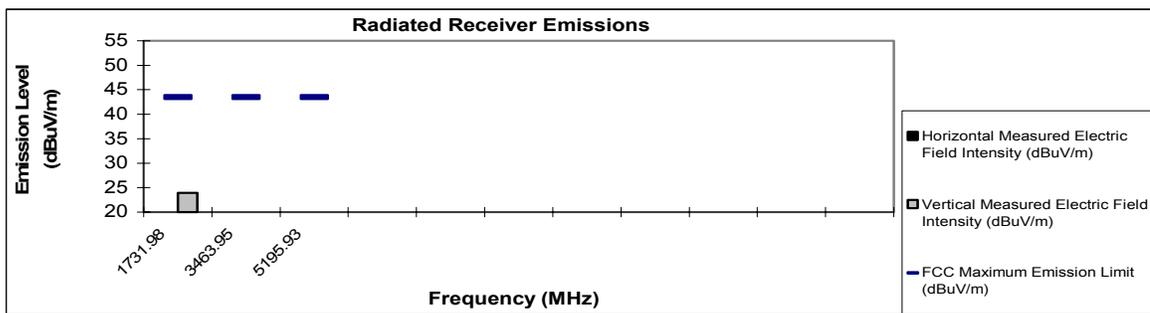

869.9875 MHz

Channel Spacing 25KHZ | S/N 364VFEPLDX

Frequency (MHz)	FCC Maximum Emission Limit (dBuV/m)	Horizontal Measured Electric Field Intensity (dBuV/m)	Vertical Measured Electric Field Intensity (dBuV/m)
1739.98	43.5	*	24.04
3479.95	43.5	*	*
5219.93	43.5	*	*

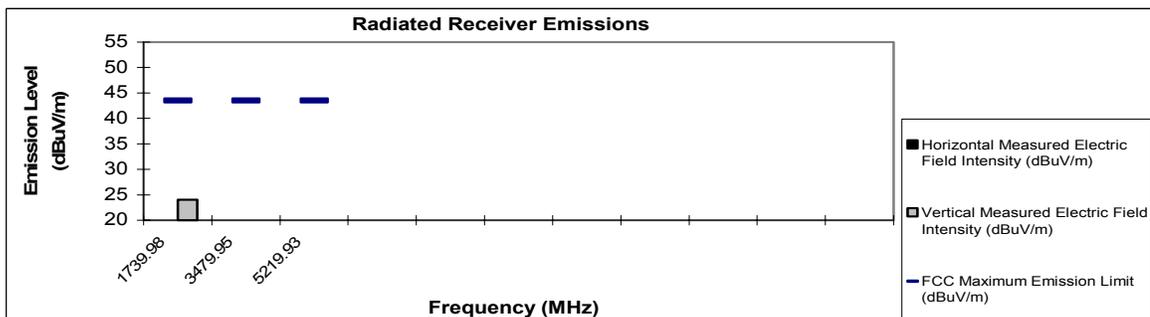

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

Motorola Plantation EMC Lab – Test Performed by: Frank Baader
 FCC Registration: 91932 / Industry Canada: IC3679

May 31, 2005

Figure 15-1b: 800 MHz Band - Receiver Radiated Emissions

Motorola Inc.


FCC ID:AZ489FT5845

Receiver Radiated Spurious Emissions : i415

935.01875 MHz

Channel Spacing 25KHZ | S/N 364VFEPLDX


Frequency (MHz)	FCC Maximum Emission Limit (dBuV/m)	Horizontal Measured Electric Field Intensity (dBuV/m)	Vertical Measured Electric Field Intensity (dBuV/m)
1870.04	43.5	*	23.80
3740.0750	43.5	32.71	*
5610.1125	43.5	*	*

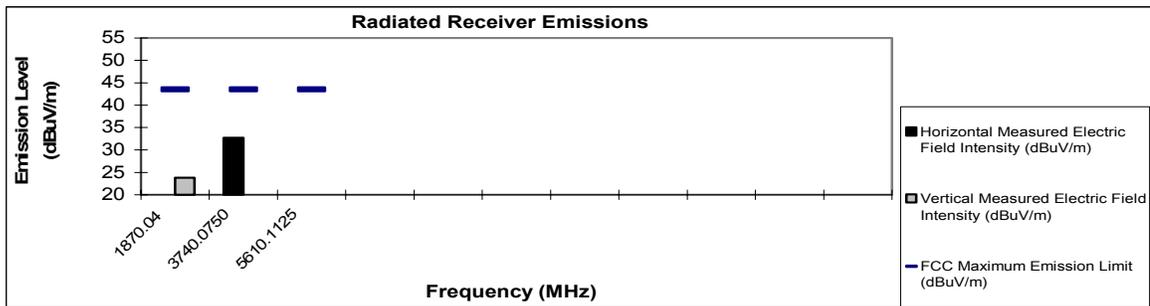

939.98125 MHz

Channel Spacing 25KHZ | S/N 364VFEPLDX

Frequency (MHz)	FCC Maximum Emission Limit (dBuV/m)	Horizontal Measured Electric Field Intensity (dBuV/m)	Vertical Measured Electric Field Intensity (dBuV/m)
1879.9625	43.5	*	23.75
3759.9250	43.5	32.62	*
5639.8875	43.5	*	*

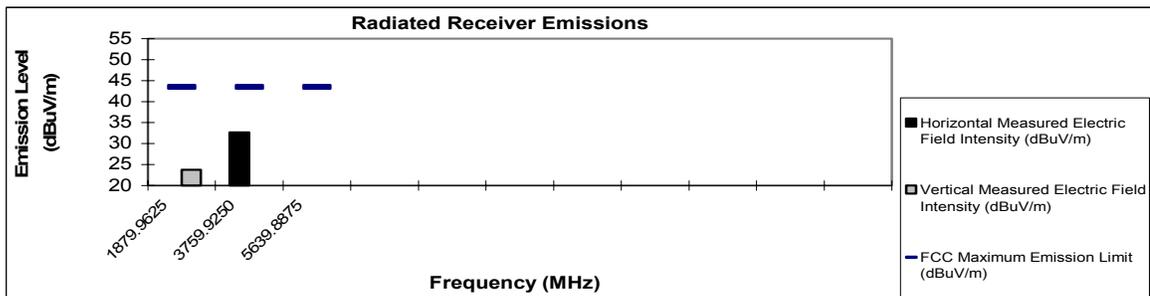

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

Motorola Plantation EMC Lab – Test Performed by: Frank Baader
 FCC Registration: 91932 / Industry Canada: IC3679

May 31, 2005

Figure 15-2: 900 MHz band - Receiver Radiated Emissions

15.2 Conducted Spurious Voltage Data -- Pursuant 47 CFR 15.207

Conducted voltage limits:

-Per 47 CFR 15.207

This radio product can receive while resting in a battery charger that is connected to the AC power line. Figure 15-1 demonstrates compliance with the cited limit.

The figure contains two measurement traces in addition to the two applicable limit lines (pink and red traces), the higher being applicable to measurements utilizing a quasi-peak detector and the lower being applicable to measurements utilizing an average detector.

For the phase line, six local voltage maxima in Figure 15-1 were re-measured with the quasi-peak and average detector. The quasi-peak detector readings, the average detector readings and the relevant limits are tabulated in the Table 15-2. Note that the readings with either type of detector are lower than the respective limits, thus indicating full compliance.

For the neutral line, six local voltage maxima in Figure 15-1 were re-measured with the quasi-peak and average detector. The quasi-peak detector readings, the average detector readings and the relevant limits are tabulated in the Table 15-3. Note that the readings with either type of detector are lower than the respective limits, thus indicating full compliance.

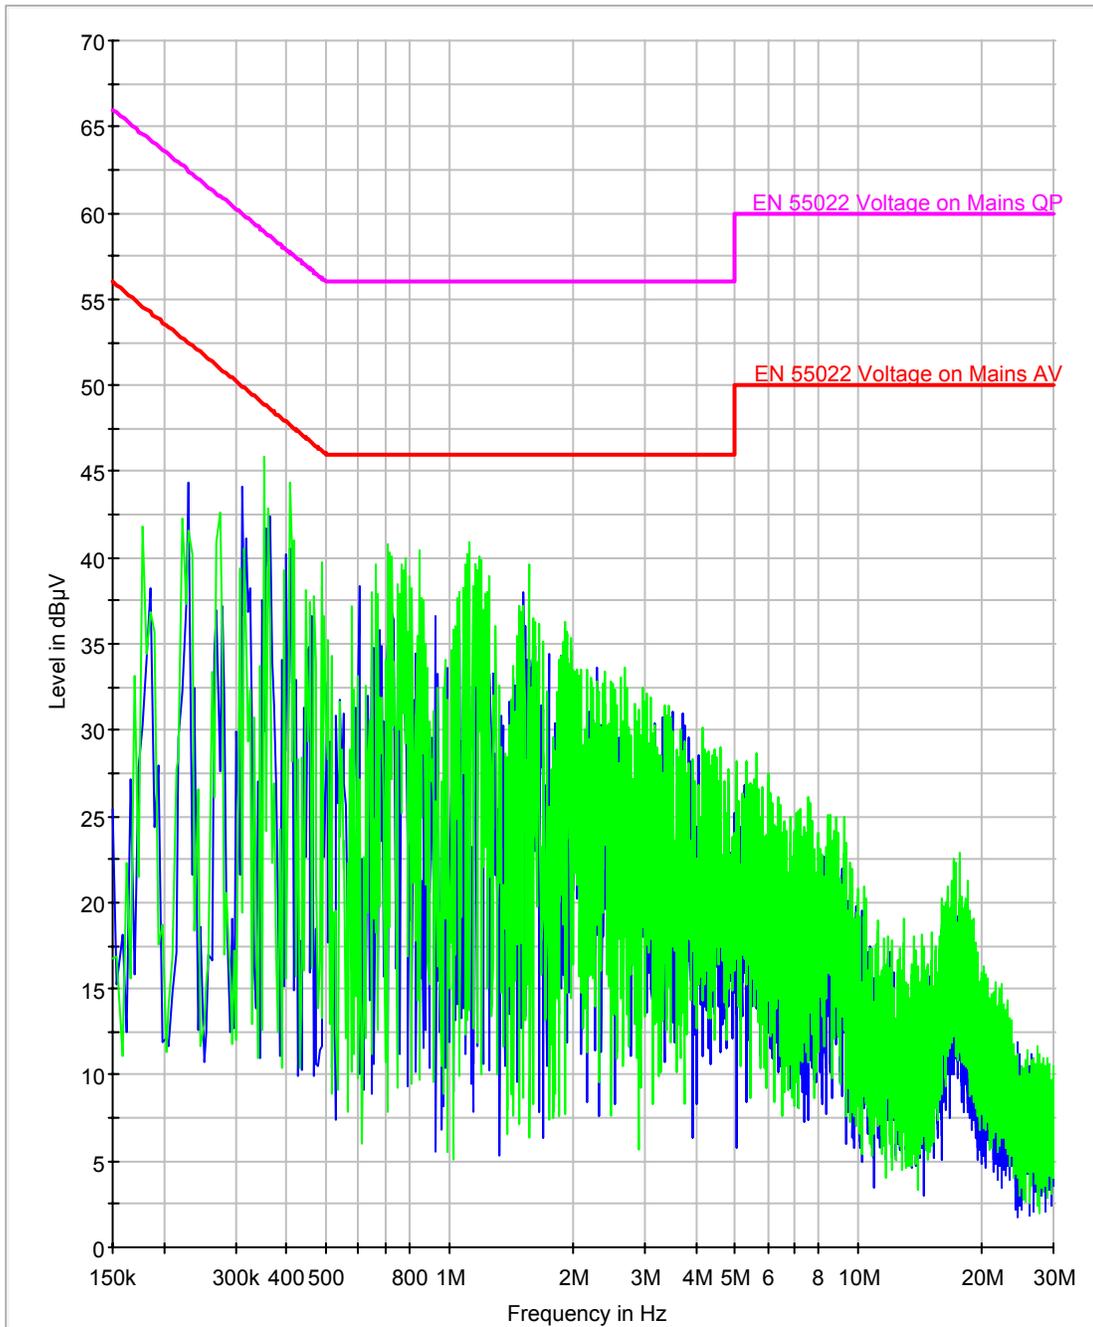


Figure 15-1: Phase Line Voltage (Blue) and Neutral Line Voltage (Green) with peak and average detector (Radio in receive mode at 851.0625 MHz)

Frequency (MHz)	Quasi-Peak (dBuV)	Average (dBuV)	Quasi-Peak Limit (dBuV)	Average Limit (dBuV)
0.2300	41.00	35.30	63.70	53.70
0.2740	40.50	35.60	62.44	52.44
0.3100	40.30	28.20	61.40	51.40
0.3540	40.50	27.60	60.14	50.14
0.3620	40.70	34.20	59.91	49.91
0.4060	38.60	31.30	58.64	48.64

Table 15-2: Phase Line Voltage Data -Quasi-peak and Average (Radio in receive mode at 851.0625 MHz)

Frequency (MHz)	Quasi-Peak (dBuV)	Average (dBuV)	Quasi-Peak Limit (dBuV)	Average Limit (dBuV)
0.2300	42.30	35.60	63.70	53.70
0.2740	41.60	35.50	62.44	52.44
0.3100	44.70	33.00	61.40	51.40
0.3540	44.60	32.60	60.14	50.14
0.3620	42.30	34.80	59.91	49.91
0.4060	41.00	33.10	58.64	48.64

Table 15-3: Neutral Line Voltage Data -Quasi-peak and Average (Radio in receive mode at 851.0625 MHz)