



MOTOROLA



TESTING CERT # 2518.01

**FCC ID: AZ489FT5856
DECLARATION OF COMPLIANCE SAR ASSESSMENT Part 1 of 2**

Government & Public Safety
EME Test Laboratory
8000 West Sunrise Blvd
Fort Lauderdale, FL. 33322

Date of Report: 10/17/08
Report Revision: A
Report ID: Armadillo_SR6709_081017

Responsible Engineer: K. Uong (Principal Staff EME Eng.)
Report Author: K. Uong (Principal Staff EME Eng.)
Date/s Tested: 9/5/08 – 9/11/08
Manufacturer/Location: Fox Conn., China
Sector/Group/Div.: MCIL Israel
Date submitted for test: 9/1/08
DUT Description: iDEN/WiDEN, MOTOtalk, BT and GPS.
Test TX mode(s): iDEN: 1:6, 1:3; WiDEN:236:310; MOTOtalk: 114:120;
Max. Power output: 1.1W pulsed average (iDEN/WiDEN); 0.891 W (MOTOtalk); 2.5mW (Bluetooth)
Nominal Power: 1.0 W Pulse Average (iDEN/WiDEN); 0.85 W (MOTOtalk); 1 mW (Bluetooth)
806-825, 896-902 MHz (iDEN/WiDEN); 902-928 MHz (MOTOtalk); 2.402-2.480
GHz (Bluetooth)
Tx Frequency Bands:
Signaling type: iDEN: 1:6, 1:3, 81:120; WiDEN: 236:310; MOTOtalk: 114:120; BT:FHSS
Model(s) Tested: H06XCN6JS9AN
Model(s) Certified: H06XCN6JS9AN
Serial Number(s): 589VJQ001R, 589VJQ0010
Classification: General Population/Uncontrolled Environment
Rule Part(s): 15 and 90

DUT Photo
(Refer to Exhibit 7B)

Approved Accessories:

Antenna(s):
8587526V08 (Removable 806-928MHz , 1/4 wave Stubby, 1.1dBi – 2.7dBi gain)
8587526V33 (Removable 806-928MHz, 1/4 wave Whip, 3.2dBi – 4.4dBi gain)
On board antenna (Printed PIFA 2,400 – 2,500MHz, 1/4 wave, 3.3dBi gain)

Battery(ies):
PMNN4087A Dual cell battery, 1000 mAh

Body worn accessory(ies):
FHN7163A Holster

Audio/Data cable accessory(ies):
RMN5115A Noise Canceling Remote Speaker Microphone; AARMN4019A Medium Weight Headset Over-The-Head W/PTT; NNTN7166A Headphones; RMN4048A Temple Transducer Headset; AARLN4885B Headphones; RMN5048B High Tier Temple Transducer Headset; PMLN5235A UC to USB data cable.

Max. Calc. : 1-g Avg. SAR: 1.381 W/kg (Body); 10-g Avg. SAR: 0.954 W/kg (Body)
Max. Calc. : 1-g Avg. SAR: 0.685 W/kg (Face); 10-g Avg. SAR: 0.500 W/kg (Face)
Max. Calc. : 1-g Avg. SAR: 1.544 W/kg (Head); 10-g Avg. SAR: 1.050 W/kg (Head)

The test results clearly demonstrate compliance with FCC General Population/Uncontrolled RF Exposure limits of 1.6W/kg per the requirements of 47 CFR 2.1093(d).
The test results clearly demonstrate compliance with ICNIRP (1998) Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300GHz), Health Physics 74, 494-522 RF Exposure limits of 2W/kg averaged over 10grams of contiguous tissue.

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 2.0 of this report. This report shall not be reproduced without written approval from an officially designated representative of the Motorola EME Laboratory.

I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. This reporting format is consistent with the suggested guidelines of the TIA TSB-150 December 2004. The results and statements contained in this report pertain only to the device(s) evaluated.

Signature on file –Deanna Zakharia
**Deanna Zakharia G&PS EME Lab Senior Resource Manager,
Laboratory Director**

Approval Date: 10/17/08

Certification Date: 9/18/08

Certification No.: L1080948P

Part 1 of 2

1.0 Introduction and Overview..... 3
 2.0 Referenced Standards and Guidelines 3
 2.1 SAR Limits 4
 3.0 Description of Device Under Test (DUT) 4
 4.0 Description of Test System 5
 4.1 Description of Robotics/Probes/Readout Electronics 5
 4.2 Description of Phantom(s)..... 5
 4.2.1 Flat Phantom..... 5
 4.2.2 SAM Phantom 6
 4.2.3 Elliptical Phantom..... 6
 4.3 Description of Equivalent Tissues 6
 5.0 Additional Test Equipment..... 7
 6.0 SAR Measurement System Verification..... 7
 6.1 Equivalent Tissue Test results 7
 6.2 System Check Test results 8
 7.0 DUT Test Strategy and Methodology 8
 7.1 DUT Configuration(s) 8
 7.2 Device Positioning Procedures 11
 7.2.1 Body 11
 7.2.2 Head 11
 7.2.3 Face 11
 8.0 Environmental Test Conditions 12
 9.0 Test Results Summary 12
 9.1 Highest SAR results calculation methodology 19
 10.0 Conclusion..... 19

APPENDICES

A Measurement Uncertainty 20
 B Probe Calibration Certificates 23

Part 2 of 2

C Dipole Calibration Certificates..... 2
 D Test System Verification Scans..... 9
 E DUT Scans (Shortened Scans and Highest SAR configurations) 19
 F DUT Supplementary Data (e.g. Power Slump) 26
 G DUT Test Position Photos 27
 H DUT and Body-worn Accessory Photos 28
 I DUT Antenna Separation Distances and Offered Accessory Test Status 29

Report Revision History

Date	Revision	Comments
9/18/08	O	Initial release
10/17/08	A	To correct the FCC ID indicated on the cover page and the reference SAR target for System Check test results section.

1.0 Introduction and Overview

This report details the utilization, test setup, test equipment, and test results of the Specific Absorption Rate (SAR) measurements performed at the G&PS EME Test Lab for the model number H06XCN6JS9AN FCC ID: AZ489FT5856. The results herein reflect initial test results.

2.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- IEC62209-1(2005) Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)
- United States Federal Communications Commission, Code of Federal Regulations; Rule Part 47CFR § 2.1093 sub-part J:1999
- Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- IEEE 1528, 2003 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques"
- American National Standards Institute (ANSI) / Institute of Electrical and Electronic Engineers (IEEE) C95. 1-1992
- Institute of Electrical and Electronic Engineers (IEEE) C95.1-2005 Edition
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6. Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz, 1999
- Australian Communications Authority Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2003
- ANATEL, Brazil Regulatory Authority, Resolution No. 303 of July 2, 2002 "Regulation of the limitation of exposure to electrical, magnetic, and electromagnetic fields in the radio frequency range between 9KHz and 300 GHz." and "Attachment to resolution # 303 from July 2, 2002"

2.1 SAR Limits

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average - ANSI - (averaged over the whole body)	0.08	0.4
Spatial Peak - ANSI - (averaged over any 1-g of tissue)	1.60	8.0
Spatial Peak - ICNIRP/ANSI - (hands/wrists/feet/ankles averaged over 10-g)	4.0	20.0
Localized SAR - ICNIRP - (Head and Trunk 10-g)	2.0	10.0

3.0 Description of Device Under Test (DUT)

FCC ID: AZ489FT5856 model H06XCN6JS9AN operates using a digital multi-service data capable devices that employs time division multiplexing transmission technology. The iDEN transmissions employ time division multiplexing with the following maximum duty cycles: 16.667% (1:6) for Voice in iDEN Dispatch (i.e. PTT) mode, 33.3% (1:3) for Voice in interconnect (i.e. Phone) mode, 95% (114:120) for voice in MOTOTalk Dispatch mode, and 76.1% (236:310) for data mode WiDEN transmission. iDEN Voice modes employ modulation scheme of M16-QAM. MOTOTalk, which is a Part 15 service, employs Frequency Hopping Spread Spectrum technology signal using 8FSK modulation, in the 900 MHz ISM band. iDEN Data mode possible modulations are QPSK, M16-QAM, or M64-QAM with possible bandwidth of 25, 50, 75 and 100KHz. WiDEN 25KHz has maximum duty cycle between all WiDEN schemes, of 76.1%. Interconnect (Voice), iDEN Dispatch, and Data modes are available in both the 800 and 900 MHz bands. iDEN voice and data are supported in the extended 901-902 MHz band as well. MOTOTalk operation is in the 902-927MHz band. Data modes operation is possible with and without connection to an external data device (via a data cable). This device also incorporates a Class 2 Bluetooth device which is a Frequency Hopping Spread Spectrum (FHSS) technology. The Bluetooth radio modem is used to wireless link audio accessories. The maximum actual transmission duty cycle is imposed by the Bluetooth standard: for single-slot operation the Bluetooth device transmits 366 microsec out of 625 microsec. Simultaneous operation is possible by BT with iDEN/WiDEN/MOTOTalk. No simultaneous operation between iDEN, WiDEN or MOTOTalk is possible. This device is also GPS capable.

This device will be marketed to and used by the general population. This device may be used while held against the head in voice mode, in front of the face in PTT mode, and against the body in phone, dispatch, MOTOTalk, Data, and WiDEN modes.

FCC ID: AZ489FT5856 is capable of operating in the 806-825 MHz and 896-902MHz bands for iDEN and WiDEN modes, and operates in 902-928MHz for MOTOTalk mode. The rated conducted power is 1.0 watts pulsed averaged in 806-825MHz and 896-902MHz bands and 0.85 watts in the MOTOTalk band. The maximum conducted output power is 1.10 watts pulsed average and 0.891 watts respectively as defined by the upper limit of the production line final test station.

FCC ID: AZ489FT5856 is offered with the options and accessories listed on the coversheet.

Test Output Power

A table of the characteristic power slump versus time is provided in Appendix F.

4.0 Description of Test System



4.1 Descriptions of Robotics/probes/Readout Electronics

The laboratory utilizes a Dosimetric Assessment System (DASY4™) SAR measurement system Version 4.7 build 71 manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. The test system consists of a Stäubli RX90L robot, DAE3V1, and ET3DV6 E-Field probes. Please reference the SPEAG user manual and application notes for detailed probe, robot, and SAR computational procedures. Section 5.0 presents relevant test equipment information. Appendices B and C present the applicable calibration certificates. The E-field probe first scans a coarse grid over a large area inside the phantom in order to locate the interpolated maximum SAR distribution. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The subsequent scan can directly use this position as reference for the cube evaluations.

4.2 Description of Phantom(s)

4.2.1 Rectangular Flat Phantom

Phantom ID	Phantom Material	Phantom Dimensions (cm)	Support structure opening dimensions (cm)	Support structure material	Loss Tangent (wood)
N/A	High Density Polyethylene (HDPE)	N/A	N/A	Wood	< 0.05

4.2.2 SAM Phantom

Phantom ID	Material Parameters	Material Thickness (mm)	Support structure material	Loss Tangent (wood)
SAMTP1234	200MHz -3GHz; Er = <5, Loss Tangent = 0.05	2mm +/- 0.2mm	Wood	< 0.05

4.2.3 Elliptical Flat Phantom

Phantom ID	Material Parameters	Material Thickness (mm)	Support structure material	Loss Tangent (wood)
1021	300MHz -6GHz; Er = 4+/- 1, Loss Tangent = <0.05	2mm +/- 0.2mm	Wood	< 0.05

4.3 Description of Equivalent tissues

Type of Simulated Tissue

The simulated tissue used is compliant to that specified in FCC Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01) and IEEE 1528, 2003 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques". The simulated tissue used is also compliant to that specified in IEC62209-1 (2005) and adopted by CENELEC as EN62209-1 (2006).

The sugar based simulate tissue is produced by placing the correct measured amount of De-ionized water into a large container. Each of the dried ingredients are weighed and added to the water carefully to avoid clumping. If the solution has a high sugar concentration the water is pre-heated to aid in dissolving the ingredients. For Diacetin and similar type simulates, sugar and HEC ingredients are not needed. The solution is mixed thoroughly, covered, and allowed to sit overnight prior to use.

Simulated Tissue Composition

% of listed ingredients	900MHz	
	Head	Body
Sugar	56.5	44.9
Diacetin	NA	NA
De ionized -Water	40.95	53.06
Salt	1.45	0.94
HEC	1.0	1
Bact.	0.1	0.1

Reference section 6.1 for target parameters

5.0 Additional Test Equipment

Equipment Type	Model Number	Serial Number	Calibration Due Date
Power Meter (Agilent)	E4419B	MY40330364	7/16/2009
Power Meter (HP)	E4418B	US39251152	3/24/2009
E-Series Avg. Power Sensor	E9301B	MY41495593	2/14/2009
E-Series Avg. Power Sensor	E9301B	MY41495594	2/14/2009
Power Sensor (Agilent)	8482B	3318A06774	2/26/2009
Bi-Directional Coupler	3020A	40295	6/9/2010
Bi-Directional Coupler	3022	77115	3/20/2010
Signal Generator (Agilent)	E4438C	MY42082269	7/8/2010
AMP (ComTech PST)	AR88258-10	N1R1A00-1015	CNR
Temperature Recording Equipment			
Dickson Temperature	TM125	1195889	6/18/2009
Omega Digital Thermometer	HH202A	18801	3/26/2009
Omega Digital Thermometer	HH202A	18812	4/25/2009
Tissue Station			
Agilent PNA-L Network Analyzer	N5230A	MY45001092	5/22/2010
Dielectric Probe Kit (HP)	85070C	US99360076	CNR
Dipole			
Speag Dipole	D900V2	84	3/17/2010

6.0 SAR Measurement System Verification

The SAR measurements were conducted with probe model/serial number ET3DV6/SN1384. The system performance check was conducted daily and within 24 hours prior to testing. DASY output files of the probe/dipole calibration certificates and system performance test results are included in appendices B, C, D respectively. The table below summarizes the system performance check results normalized to 1W.

Dipole validation scans at the head from SPEAG are provided in APPENDIX D. The G&PS EME lab validated the dipole to the applicable IEEE system performance targets. Within the same day system validation was performed using FCC body tissue parameters to generate the system performance target values for body at the applicable frequency. The results of the G&PS EME system performance validation are provided herein.

6.1 Equivalent Tissue Test Results

Simulated tissue prepared for SAR measurements is measured daily and within 24 hours prior to actual SAR testing to verify that the tissue is within +/- 5% of target parameters at the center of the transmit band. This measurement is done using the applicable equipment indicated in section 5.0.

Tissue Target Tolerances

FCC Body		
Frequency (MHz)	Di-electric Constant	Conductivity S/m
815.5	55.3 +/- 5%	0.97 +/- 5%
900/899	55.0 +/- 5%	1.05 +/- 5%
915	55.0 +/- 5%	1.06 +/- 5%

IEC Head		
Frequency (MHz)	Di-electric Constant Target	Conductivity Target S/m
815.5	41.6 +/- 5%	0.90 +/- 5%
900/899	41.5 +/- 5%	0.97 +/- 5%
915	41.5 +/- 5%	0.98 +/- 5%

6.2 System Check Test Results

Probe Serial #	Tissue Type	Probe Cal Date	Dipole Kit / Serial #	Reference SAR Target Tolerances @ 1W (mW/g)
1384	IEEE Head	5/19/2008	SPEAG D900V2 /084	11.27 +/- 10%
1384	FCC Body	5/19/2008	SPEAG D900V2 /084	11.75 +/- 10%

Note: See APPENDIX D for an explanation of the reference SAR targets stated above.

The DASY4™ system is operated per the instructions in the DASY4™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess EME SAR compliance was calibrated according to 17025 A2LA guidelines.

7.0 DUT Test Strategy and Methodology

7.1 DUT Configuration(s)

The DUT is a portable device with iDEN, WiDEN, and MOTOTalk (FHSS 8FSK) transmission signaling operational at the body, head, and face using the offered accessories. The device is placed in the test positions presented in Appendix G.

Test Plan

All options and accessories listed on the cover page of this report were considered in order to develop the SAR test plan for this product. SAR measurements were performed using an elliptical and a SAM phantom with the applicable simulated tissue to assess performance at the body, head, and face respectively using the relevant transmission modes.

Note that a coarse-to-cube approximation methodology was utilized to determine the worst-case SAR performance configuration for each applicable body location. The test configurations that produced the highest SAR results for each body position using the coarse-to-cube approximation methodology were assessed using the full DASY4™ coarse and 5x5x7 zoom scans.

Per FCC TCB workshop (February 2008) and FCC OET draft 648474 (April 2008) “SAR Evaluation Considerations for handsets with multiple Transmitters and Antennas”, SAR measurements were not performed for the BlueTooth band due to the maximum output power for BlueTooth is 2.5mW and the separation distance between the BlueTooth antenna and the other antenna is 102mm.

Assessments at the Head: 806-825MHz Band (iDEN phone 1:3 mode)

(Page 13 of 34; Tables 1)

- For each of the antennas, assessment at the center of the 806-825MHz band, with the offered battery, using applicable test configurations at the left ear.
- For each of the antennas, assessment across the 806-825MHz band, using the worst case from above.
- For each of the antennas, assessment at the center of the 806-825MHz band, with the offered battery, using applicable test configurations at the right ear.
- For each of the antennas, assessment across the 806-825MHz band, using the worst case from above.

Assessments at the Face: 806-825MHz Band (iDEN dispatch 1:6 mode)

(Page 13 of 34; Tables 1)

- Assessment at the center of the 806-825MHz band, in the iDEN Dispatch (1:6) transmission mode, using the offered battery and antennas.

Assessments at the Body: 806-825MHz band (WiDEN/iDEN modes)

(Page 14 of 34; Tables 2)

- Assessment at the center of the 806-825MHz band, in the 231:310 (WiDEN) transmission mode, using the offered battery, antennas and applicable body-worn accessories.
- Assessment of the offered data cable options using the worst case configuration from above.
- Assessment of the offered audio cable options, in the 1:3 (iDEN phone) transmission mode, using the worse case configuration from above.

- Assessment across the 806-825MHz band for each of the offered antennas, using the overall worst case from above.
- Assessment using the overall worst case test configuration for each of the antennas from above with the back and front housing of the DUT separated 2.5cm from the phantom.

Assessments at the Head: 896-902MHz Band (iDEN phone 1:3 mode)

(Page 15 of 34; Tables 3)

- For each of the antennas, assessment at the center of the 896-902MHz band using the offered battery and applicable test configurations at the left ear to assess each of the offered antennas.
- For each of the antennas, assessment across the 896-902MHz band, using the worst case from above.
- For each of the antennas, assessment at the center of the 896-902MHz band, with the offered battery, using applicable test configurations at the right ear.
- For each of the antennas, assessment across the 896-902MHz band, using the worst case from above.

Assessments at the Face: 896-902MHz Band (iDEN dispatch 1:6 mode)

(Page 15 of 34; Tables 3)

- Assessment at the center of the 896-902MHz band using the offered battery and antennas.

Assessments at the Body: 896-902MHz band (WiDEN/iDEN modes)

(Page 16 of 34; Tables 4)

- Assessment at the center of the 896-902MHz band, in the 231:310 (WiDEN) transmission mode, using the offered battery, antennas and applicable body-worn accessories.
- Assessment of the offered data cable options using the worst case configuration from above.
- Assessment of the offered audio cable options, in the 1:3 (iDEN phone) transmission mode, using the worse case configuration from above.
- Assessment across the 896-902MHz band for each of the offered antennas, using the overall worst case from above.
- Assessment using the overall worst case test configuration for each of the antennas from above with the back side of the DUT facing the phantom and its' radio housing/antenna separated 2.5cm from the phantom, and with the front side of DUT separated 2.5cm from the phantom.

Assessments at the Face: 902-928MHz band (MOTOTalk 114:120 mode)
(Page 17 of 34; Tables 5)

- Assessment across the 902-928MHz band using the offered battery and antennas.

Assessments at the Body: 902-928MHz band (MOTOTalk 114:120 mode)
(Page 17, 18 of 34; Tables 6)

- Assessment at the center of the 902-928MHz band using the offered battery, antennas and applicable body-worn accessories.
- Assessment of the offered audio cables using the worse case configuration from above.
- Assessment across the 902-928MHz band for each of the offered antennas, using the overall worst case from above.
- Assessment using the overall worst case test configuration for each of the antennas from above with the back and front housing of the DUT separated 2.5cm from the phantom.

Shortened scan assessment (Page 18 of 34; Table 7)

- A “shortened” scan was performed using the offered battery and test configuration that produced the highest SAR results overall. Note that the shortened scan is obtained by first running a coarse scan to find the peak area and then, using a newly charged battery, a cube scan only was performed. The shortened scan represents the cube scan performance results.

7.2 Device Positioning Procedures

Reference Appendix G for photos of the DUT tested positions.

7.2.1 Body

The DUT was positioned in normal use configuration against the phantom with the offered body worn accessory.

The DUT was positioned with its’ back side facing the phantom and its’ radio housing/antenna separated 2.5cm from the phantom, and with its’ front side separated 2.5cm from the phantom.

7.2.2 Head

The DUT was placed against the right and left heads of the SAM phantom in the cheek touch and tilt positions.

7.2.3 Face

The DUT was positioned with its’ front side separated 2.5cm from the phantom.

8.0 Environmental Test Conditions

The EME Laboratory ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within +/- 2°C of the temperature at which the dielectric properties were determined. The liquid depth within the phantom used for measurements was at least 15cm. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The table below presents the range and average environmental conditions during the SAR tests reported herein:

	Target	Measured
Ambient Temperature	20 - 25 °C	Range: 20.3-21.7°C Avg. 21.10°C
Relative Humidity	30 - 70 %	Range: 51.2-63.4% Avg. 57.1%
Tissue Temperature	NA	Range: 18.0-19.9°C Avg. 18.77 °C

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the SAR scans are repeated.

9.0 Test Results Summary

All SAR results obtained by the tests described in Section 7.1 are listed below. As noted in section 7.1, a coarse-to-cube approximation methodology, was utilized to ascertain the worst case test configuration for each body location per band (in bold with *). The worst case test configurations observed for each body location were assessed using the full DASY4™ coarse and 5x5x7 zoom methodology and they are summarized in the worst case table below. The associated SAR plots are provided in APPENDIX E. Appendix E also presents shortened SAR cube scans to assess the validity of the calculated results presented herein. Note: The results of the shortened cube scans presented in Appendix E demonstrate that the scaling methodology used to determine the calculated SAR results presented herein are valid.

Table 1

Assessments at the Head/Face: 806-825MHz band												
Run Number/ SN	Antenna Pos.	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessments at the Left Ear for the antenna 8587526V08 (Phone mode 1:3)												
HvH-Lear-080906-02/ 589VJQ001R	8587526V08	815.5	PMNN4087A	Touch	None	None	1.09	-0.0541	1.0800	0.7670	1.104	0.784
HvH-Lear-080906-03/ 589VJQ001R	8587526V08	815.5	PMNN4087A	Tilt	None	None	1.09	-0.133	1.0400	0.7210	1.082	0.750
HvH-Lear-080906-04/ 589VJQ001R	8587526V08	806.0125	PMNN4087A	Touch	None	None	1.07	0.1	1.0400	0.7380	1.069	0.759
HvH-Lear-080906-05/ 589VJQ001R	8587526V08	824.9875	PMNN4087A	Touch	None	None	1.1	0.0327	1.0600	0.7540	1.060	0.754
Assessments at the Right Ear for the antenna 8587526V08 (Phone mode 1:3)												
MeC-Rear-080906-35/ 589VJQ001R	8587526V08	815.5	PMNN4087A	Touch	None	None	1.07	-0.0159	1.0300	0.8070	1.063	0.833
HvH-Rear-080906-18/ 589VJQ001R	8587526V08	815.5	PMNN4087A	Tilt	None	None	1.09	-0.0957	1.0100	0.6890	1.042	0.711
MeC-Rear-080906-19/ 589VJQ001R	8587526V08	806.0125	PMNN4087A	Touch	None	None	1.08	0.351	1.0400	0.7430	1.059	0.757
MeC-Rear-080906-20/ 589VJQ001R	8587526V08	824.9875	PMNN4087A	Touch	None	None	1.12	0.274	1.1000	0.7830	1.100	0.783
Assessments at the Left Ear for the antenna 8587526V33 (Phone mode 1:3)												
HvH-Lear-080906-06/ 589VJQ001R	8587526V33	815.5	PMNN4087A	Touch	None	None	1.09	-0.0984	0.9820	0.6940	1.014	0.716
HvH-Lear-080906-07/ 589VJQ001R	8587526V33	815.5	PMNN4087A	Tilt	None	None	1.09	-0.0555	1.4500	0.9950	1.482	1.017
HvH-Lear-080906-08/ 589VJQ001R	8587526V33	806.0125	PMNN4087A	Tilt	None	None	1.08	-0.0892	1.3300	0.9170	1.383	0.953
*HvH-Lear-080905-07/ 589VJQ001R	8587526V33	824.9875	PMNN4087A	Tilt	None	None	1.09	-0.0609	1.4800	1.0200	1.515	1.044
Assessments at the Right Ear for the antenna 8587526V33 (Phone mode 1:3)												
MeC-Rear-080906-21/ 589VJQ001R	8587526V33	815.5	PMNN4087A	Touch	None	None	1.07	0.0786	0.8060	0.5760	0.829	0.592
MeC-Rear-080906-22/ 589VJQ001R	8587526V33	815.5	PMNN4087A	Tilt	None	None	1.08	0.122	1.2500	0.8670	1.273	0.883
MeC-Rear-080906-23/ 589VJQ001R	8587526V33	806.0125	PMNN4087A	Tilt	None	None	1.09	0.0866	1.1700	0.8100	1.181	0.817
MeC-Rear-080906-24/ 589VJQ001R	8587526V33	824.9875	PMNN4087A	Tilt	None	None	1.11	0.109	1.2200	0.8430	1.220	0.843
Assessments at the Face (Dispatch mode 1:6)												
HvH-Face-080907-02/ 589VJQ001R	8587526V08	815.5	PMNN4087A	Radio's Front @2.5cm	None	None	1.08	0.0236	0.1730	0.1230	0.088	0.063
HvH-Face-080907-03/ 589VJQ001R	8587526V33	815.5	PMNN4087A	Radio's Front @2.5cm	None	None	1.08	0.86	0.2780	0.2000	0.142	0.102

Table 2

Assessments at the Body: 806-825MHz band												
Run Number/ SN	Antenna Pos.	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Antennas assessment at the Body (WiDEN mode 236:310)												
HvH-Ab-080907-17/ 589VJQ001R	8587526V08	815.5	PMNN4087A	Against phantom	FHN7163A	None	1.06	-0.113	0.6310	0.4490	0.682	0.485
HvH-Ab-080907-18/ 589VJQ001R	8587526V33	815.5	PMNN4087A	Against phantom	FHN7163A	None	1.07	0.0318	1.1900	0.8590	1.241	0.896
Data cables assessments at the Body (WiDEN mode 236:310)												
HvH-Ab-080907-19/ 589VJQ001R	8587526V33	815.5	PMNN4087A	Against phantom	FHN7163A	PMLN5235 A	1.08	-0.0371	0.9050	0.6460	0.943	0.673
Audio cables assessment at the Body (iDEN phone mode 1:3)												
JsT-Ab-080908-02/ 589VJQ001R	8587526V33	815.5	PMNN4087A	Against phantom	FHN7163A	RMN4048A	1.08	-0.0332	0.4440	0.3170	0.456	0.325
JsT-Ab-080908-03/ 589VJQ001R	8587526V33	815.5	PMNN4087A	Against phantom	FHN7163A	RMN4019A	1.09	-0.139	0.3930	0.2810	0.410	0.293
JsT-Ab-080908-04/ 589VJQ001R	8587526V33	815.5	PMNN4087A	Against phantom	FHN7163A	RMN5048B	1.09	-0.0278	0.4730	0.3380	0.480	0.343
JsT-Ab-080908-05/ 589VJQ001R	8587526V33	815.5	PMNN4087A	Against phantom	FHN7163A	RMN5115A w/ AARLN488 5B	1.09	-0.0848	0.1990	0.1420	0.102	0.073
Band edges assessment at the Body for antenna 8587526V08 (WiDEN mode 236:310)												
JsT-Ab-080908-06/ 589VJQ001R	8587526V08	806.0125	PMNN4087A	Against phantom	FHN7163A	None	1.05	-0.0111	0.6180	0.4430	0.659	0.472
JsT-Ab-080908-07/ 589VJQ001R	8587526V08	824.9875	PMNN4087A	Against phantom	FHN7163A	None	1.08	-0.19	0.6320	0.4490	0.682	0.485
Band edges assessment at the Body for antenna 8587526V33 (WiDEN mode 236:310)												
JsT-Ab-080908-08/ 589VJQ001R	8587526V33	806.0125	PMNN4087A	Against phantom	FHN7163A	None	1.06	-0.0436	1.2500	0.8930	1.329	0.950
JsT-Ab-080908-09/ 589VJQ001R	8587526V33	824.9875	PMNN4087A	Against phantom	FHN7163A	None	1.09	-0.281	1.1900	0.8510	1.300	0.930
2.5cm assessments at the Body for antenna 8587526V08 (WiDEN mode 236:310)												
JsT-Ab-080908-11/ 589VJQ001R	8587526V08	824.9875	PMNN4087A	Radio's back @ 2.5cm	None	None	1.09	-0.181	0.4980	0.3570	0.532	0.381
JsT-Ab-080908-12/ 589VJQ001R	8587526V08	824.9875	PMNN4087A	Radio's front @ 2.5cm	None	None	1.1	-0.194	0.6610	0.4710	0.701	0.500
2.5cm assessments at the Body for antenna 8587526V33 (WiDEN mode 236:310)												
JsT-Ab-080908-14/ 589VJQ001R	8587526V33	806.0125	PMNN4087A	Radio's back @ 2.5cm	None	None	1.06	0.0144	1.0400	0.7480	1.095	0.788
JsT-Ab-080908-15/ 589VJQ001R	8587526V33	806.0125	PMNN4087A	Radio's front @ 2.5cm	None	None	1.07	0.0546	1.1500	0.8170	1.200	0.852

Table 3

Assessments at the Head/Face: 896-902MHz band												
Run Number/ SN	Antenna Pos.	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessments at the Left Ear for the antenna 8587526V08 (Phone mode 1:3)												
HvH-Lear-080906-09/ 589VJQ001R	8587526V08	898.99375	PMNN4087A	Touch	None	None	1.06	-0.0859	0.7880	0.5560	0.834	0.589
HvH-Lear-080906-10/ 589VJQ001R	8587526V08	898.99375	PMNN4087A	Tilt	None	None	1.06	-0.0917	0.9930	0.6860	1.052	0.727
HvH-Lear-080906-11/ 589VJQ001R	8587526V08	896.00625	PMNN4087A	Tilt	None	None	1.12	-0.512	1.0700	0.7410	1.204	0.834
HvH-Lear-080906-12/ 589VJQ001R	8587526V08	901.98125	PMNN4087A	Tilt	None	None	1.04	-0.118	1.0200	0.7030	1.109	0.764
Assessments at the Right Ear for the antenna 8587526V08 (Phone mode 1:3)												
MeC-Rear-080906-29/ 589VJQ001R	8587526V08	898.99375	PMNN4087A	Touch	None	None	1.09	-0.0141	0.8110	0.5720	0.821	0.579
MeC-Rear-080906-30/ 589VJQ001R	8587526V08	898.99375	PMNN4087A	Tilt	None	None	1.1	-0.148	0.9430	0.6380	0.976	0.660
MeC-Rear-080906-31/ 589VJQ001R	8587526V08	896.00625	PMNN4087A	Tilt	None	None	1.08	-0.0963	0.9910	0.6730	1.032	0.701
MeC-Rear-080906-32/ 589VJQ001R	8587526V08	901.98125	PMNN4087A	Tilt	None	None	1.11	-0.185	0.9640	0.6520	1.006	0.680
Assessments at the Left Ear for the antenna 8587526V33 (Phone mode 1:3)												
HvH-Lear-080906-13/ 589VJQ001R	8587526V33	898.99375	PMNN4087A	Touch	None	None	1.08	0.0105	1.0300	0.7240	1.049	0.737
HvH-Lear-080906-14/ 589VJQ001R	8587526V33	898.99375	PMNN4087A	Tilt	None	None	1.07	-0.0441	1.2900	0.8830	1.340	0.917
*HvH-Lear-080906-15/ 589VJQ001R	8587526V33	896.00625	PMNN4087A	Tilt	None	None	1.13	-0.072	1.5200	1.0200	1.545	1.037
HvH-Lear-080906-16/ 589VJQ001R	8587526V33	901.98125	PMNN4087A	Tilt	None	None	1.04	-0.0551	1.4100	0.9500	1.510	1.018
Assessments at the Right Ear for the antenna 8587526V033 (Phone mode 1:3)												
MeC-Rear-080906-25/ 589VJQ001R	8587526V33	898.99375	PMNN4087A	Touch	None	None	1.08	0.0956	0.5160	0.3600	0.526	0.367
MeC-Rear-080906-26/ 589VJQ001R	8587526V33	898.99375	PMNN4087A	Tilt	None	None	1.09	0.0797	1.0700	0.7260	1.080	0.733
MeC-Rear-080906-27/ 589VJQ001R	8587526V33	896.00625	PMNN4087A	Tilt	None	None	1.08	0.0697	1.1200	0.7590	1.141	0.773
MeC-Rear-080906-28/ 589VJQ001R	8587526V33	901.98125	PMNN4087A	Tilt	None	None	1.1	0.112	1.0100	0.6850	1.010	0.685
Assessments at the Face (Dispatch mode 1:6)												
HvH-Face-080907-04/ 589VJQ001R	8587526V08	898.99375	PMNN4087A	Radio's Front @2.5cm	None	None	1.07	-0.0264	0.2410	0.1700	0.125	0.088
HvH-Face-080907-05/ 589VJQ001R	8587526V33	898.99375	PMNN4087A	Radio's Front @2.5cm	None	None	1.07	0.0444	0.2560	0.1820	0.132	0.094

Table 4

Assessments at the Body: 896-902MHz band												
Run Number/ SN	Antenna Pos.	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Antennas assessment at the Body (WiDEN mode 236:310)												
CM-Ab-080908-28/ 589VJQ001R	8587526V08	898.99375	PMNN4087A	Against phantom	FHN7163A	None	1.06	-0.32	0.7980	0.5670	0.905	0.643
CM-Ab-080908-19/ 589VJQ001R	8587526V33	898.99375	PMNN4087A	Against phantom	FHN7163A	None	1.06	0.0676	0.8960	0.6280	0.943	0.661
Data cable assessments at the Body (WiDEN mode 236:310)												
CM-Ab-080908- 20/589VJQ001R	8587526V33	898.99375	PMNN4087A	Against phantom	FHN7163A	PMLN5235 A	1.06	-0.0159	0.6890	0.4900	0.728	0.518
Audio cables assessment at the Body (WiDEN Phone mode 1:3)												
CM-Ab-080908-23/ 589VJQ001R	8587526V33	898.99375	PMNN4087A	Against phantom	FHN7163A	RMN4048A	1.1	-0.0469	0.2740	0.1940	0.277	0.196
CM-Ab-080908-24/ 589VJQ001R	8587526V33	898.99375	PMNN4087A	Against phantom	FHN7163A	RMN4019A	1.09	-0.131	0.2890	0.2050	0.301	0.213
CM-Ab-080908-25/ 589VJQ001R	8587526V33	898.99375	PMNN4087A	Against phantom	FHN7163A	RMN5048B	1.1	-0.734	0.3190	0.2260	0.378	0.268
CM-Ab-080908-26/ 589VJQ001R	8587526V33	898.99375	PMNN4087A	Against phantom	FHN7163A	RMN5115A w/ AARLN488 5B	1.09	0.00865	0.1360	0.0963	0.069	0.049
Band edges assessment at the Body for antenna 8587526V08 (WiDEN mode 236:310)												
CM-Ab-080908-27/ 589VJQ001R	8587526V08	896.00625	PMNN4087A	Against phantom	FHN7163A	None	1.1	-0.236	0.8490	0.6000	0.910	0.643
CM-Ab-080908-29/ 589VJQ001R	8587526V08	901.98125	PMNN4087A	Against phantom	FHN7163A	None	1.01	-0.406	0.7410	0.5260	0.899	0.638
Band edges assessment at the Body for antenna 8587526V33 (WiDEN mode 236:310)												
CM-Ab-080908-30/ 589VJQ001R	8587526V33	896.00625	PMNN4087A	Against phantom	FHN7163A	None	1.09	-0.0812	0.9520	0.6710	0.993	0.700
Full Scan JsT-Ab- 080909-02/ 589VJQ001R	8587526V33	901.98125	PMNN4087A	Against phantom	FHN7163A	None	1.1	-0.532	0.8580	0.6220	0.984	0.713
2.5cm assessments at the Body for antenna 8587526V08 (WiDEN mode 236:310)												
JsT-Ab-080909-04/ 589VJQ001R	8587526V08	896.00625	PMNN4087A	Radio's back @ 2.5cm	None	None	1.11	-0.243	0.6980	0.4940	0.749	0.530
JsT-Ab-080909-05/ 589VJQ001R	8587526V08	896.00625	PMNN4087A	Radio's front @ 2.5cm	None	None	1.11	-0.144	0.8020	0.5750	0.841	0.603
2.5cm assessments at the Body for antenna 8587526V33 (WiDEN mode 236:310)												
JsT-Ab-080909-07/ 589VJQ001R	8587526V33	896.00625	PMNN4087A	Radio's back, ant @ 2.5cm	None	None	1.12	-0.103	1.2800	0.8920	1.330	0.927
*JsT-Ab-080910-03/ 589VJQ0010	8587526V33	896.00625	PMNN4087A	Radio's back, ant @ 2.5cm	None	None	1.07	0.00453	1.2900	0.8910	1.346	0.929
JsT-Ab-080909-06/ 589VJQ001R	8587526V33	896.00625	PMNN4087A	Radio's front @ 2.5cm	None	None	1.12	-0.0171	0.9440	0.6670	0.962	0.679

Table 5

Assessments at the Face: 902-928MHz												
Run Number/ SN	Antenna Pos.	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Assessments at the Face for the antenna 8587526V08 (MOTOTalk mode 114:120)												
HvH-Face-080907-06/ 589VJQ001R	8587526V08	915.525	PMNN4087A	Radio's front @ 2.5cm	None	None	0.887	0.874	1.0000	0.7120	0.502	0.358
HvH-Face-080907-07/ 589VJQ001R	8587526V08	902.525	PMNN4087A	Radio's front @ 2.5cm	None	None	0.922	-0.165	1.1400	0.8090	0.592	0.420
HvH-Face-080907-08/ 589VJQ001R	8587526V08	927.475	PMNN4087A	Radio's front @ 2.5cm	None	None	0.88	-0.519	0.7540	0.5340	0.430	0.305
Assessments at the Face for the antenna 8587526V33 (MOTOTalk mode 114:120)												
HvH-Face-080907-09/ 589VJQ001R	8587526V33	915.525	PMNN4087A	Radio's front @ 2.5cm	None	None	0.91	0.0308	1.3200	0.9380	0.660	0.469
*HvH-Face-080907-10/ 589VJQ001R	8587526V33	902.525	PMNN4087A	Radio's front @ 2.5cm	None	None	0.928	0.12	1.3200	0.9420	0.660	0.471
HvH-Face-080907-11/ 589VJQ001R	8587526V33	927.475	PMNN4087A	Radio's front @ 2.5cm	None	None	0.884	0.0727	1.1500	0.8170	0.580	0.412

Table 6

Assessments at the Body 902-928MHz band												
Run Number/ SN	Antenna Pos.	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Antennas assessment at the Body (MOTOTalk mode 114:120)												
JsT-Ab-080909-09/ 589VJQ001R	8587526V08	915.525	PMNN4087A	Against phantom	FHN7163A	RMN5115A w/ AARLN488 5B	0.903	-0.277	0.5400	0.3820	0.288	0.204
JsT-Ab-080909-10/ 589VJQ001R	8587526V33	915.525	PMNN4087A	Against phantom	FHN7163A	RMN5115A w/ AARLN488 5B	0.907	-0.0154	0.6340	0.4470	0.318	0.224
Audio cables assessment at the Body (MOTOTalk mode 114:120)												
JsT-Ab-080909-11/ 589VJQ001R	8587526V33	915.525	PMNN4087A	Against phantom	FHN7163A	RMN4019A	0.9	-0.233	0.7360	0.5210	0.388	0.275
JsT-Ab-080909-12/ 589VJQ001R	8587526V33	915.525	PMNN4087A	Against phantom	FHN7163A	RMN4048A	0.916	-0.0564	0.5740	0.4070	0.291	0.206
CM-Ab-080909-13/ 589VJQ001R	8587526V33	915.525	PMNN4087A	Against phantom	FHN7163A	RMN5048B	0.908	-0.078	0.6460	0.4570	0.329	0.233

Table 6 (continue)

Assessments at the Body 902-928MHz band												
Run Number/ SN	Antenna Pos.	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g- SAR (mW/g)	Meas. 10g- SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Across the band assessment at the Body for antenna 8587526V08 (MOTOTalk mode 114:120)												
CM-Ab-080909-14/589VJQ001R	8587526V08	902.525	PMNN4087A	Against phantom	FHN7163A	RMN4019A	0.928	-0.273	0.6710	0.4740	0.357	0.252
CM-Ab-080909-15/589VJQ001R	8587526V08	915.525	PMNN4087A	Against phantom	FHN7163A	RMN4019A	0.916	-0.333	0.5560	0.3930	0.300	0.212
CM-Ab-080909-16/589VJQ001R	8587526V08	927.475	PMNN4087A	Against phantom	FHN7163A	RMN4019A	0.915	-0.636	0.4020	0.2840	0.233	0.164
Across the band assessment at the Body for antenna 8587526V33 (MOTOTalk mode 114:120)												
CM-Ab-080909-17/589VJQ001R	8587526V33	902.525	PMNN4087A	Against phantom	FHN7163A	RMN4019A	0.925	-0.0459	0.6920	0.4890	0.350	0.247
CM-Ab-080909-18/589VJQ001R	8587526V33	927.475	PMNN4087A	Against phantom	FHN7163A	RMN4019A	0.915	0.0188	0.4710	0.3320	0.236	0.166
2.5cm assessments at the Body for antenna 8587526V08 (MOTOTalk mode 114:120)												
CM-Ab-080909-20/589VJQ001R	8587526V08	902.525	PMNN4087A	Radio's back @ 2.5cm	None	RMN4019A	0.925	-0.226	0.6970	0.4960	0.367	0.261
CM-Ab-080909-21/589VJQ001R	8587526V08	902.525	PMNN4087A	Radio's front @ 2.5cm	None	RMN4019A	0.921	-0.087	0.7580	0.5380	0.387	0.274
2.5cm assessments at the Body for antenna 8587526V33 (MOTOTalk mode 114:120)												
CM-Ab-080909-22/589VJQ001R	8587526V33	915.525	PMNN4087A	Radio's back, ant @ 2.5cm	None	RMN4019A	0.91	0.0348	1.3500	0.9300	0.675	0.465
JsT-Ab-080910-04/589VJQ0010	8587526V33	915.525	PMNN4087A	Radio's back, ant @ 2.5cm	None	RMN4019A	0.929	0.0986	1.4300	0.9870	0.715	0.494
JsT-Ab-080910-02/589VJQ001R	8587526V33	915.525	PMNN4087A	Radio's front @ 2.5cm	None	RMN4019A	0.881	0.0998	0.6940	0.4910	0.351	0.248

Table 7

*Worst case configuration per body location from above (including shortened scan) –using the DASY 4 full coarse and 5x5x7 cube scan measurements.												
Run Number/ SN	Antenna Pos.	Freq. (MHz)	Battery	Test position	Carry Case	Additional attachments	Initial Power (W)	SAR Drift (dB)	Meas. 1g-SAR (mW/g)	Meas. 10g-SAR (mW/g)	Max Calc. 1g-SAR (mW/g)	Max Calc. 10g-SAR (mW/g)
Full scan CM-Lear-080910-20/589VJQ001R	8587526V33	824.9875	PMNN4087A	Tilt	None	None	1.09	0.00447	1.5300	1.0400	1.544	1.050
Full Scan MeC-Lear-080906-37/589VJQ001R	8587526V33	896.00625	PMNN4087A	Tilt	None	None	1.08	-0.0976	1.3400	0.9000	1.396	0.938
Full scan JsT-Ab-080910-06/589VJQ0010	8587526V33	896.00625	PMNN4087A	Radio's back, ant @ 2.5cm	None	None	1.1	-0.234	1.2900	0.8910	1.381	0.954
Full Scan HvH-Face-080907-15/589VJQ001R	8587526V33	902.525	PMNN4087A	Radio's front @ 2.5cm	None	None	0.911	1.42	1.3700	0.9990	0.685	0.500
Shorten scan JsT-Lear-080911-02/589VJQ001R	8587526V33	824.9875	PMNN4087A	Tilt	None	None	1.09	-0.00097	1.5100	1.0200	1.524	1.030
Shorten scan JsT-Lear-080910-08/589VJQ001R	8587526V33	896.00625	PMNN4087A	Tilt	None	None	1.13	-0.0173	1.46	0.978	1.466	0.982

9.1 Highest SAR results calculation methodology

The calculated maximum 1-gram and 10-gram averaged SAR results reported herein for the full DASYS™ coarse and 5x5x7 cube measurements are determined by scaling the measured SAR to account for power leveling variations and power slump. For this device the Maximum Calculated 1-gram and 10-gram averaged peak SAR is calculated using the following formula:

$$\text{Max. Calc. 1-g/10-g Avg. SAR} = ((\text{SAR meas.} / (10^{(\text{Pdrift}/10)})) * (\text{Pmax}/\text{Pint})) * \text{DC}\%$$

P_{max} = Maximum Power (W)

P_{int} = Initial Power (W)

Pdrift = DASYS drift results (dB) - (for conservative results positive drifts are not accounted for)

SAR_{meas.} = Measured 1-g/10-g Avg. SAR (mW/g)

DC % = Transmission mode duty cycle in % where applicable

50% duty cycle is applied for PTT operation.

10.0 Conclusion

The highest Operational Maximum Calculated 1-gram and 10-gram average SAR values found for FCC ID: AZ489FT5856 models H06XCN6JS9AN.

Max. Calc. : 1-g Avg. SAR: 1.381 W/kg (Body); 10-g Avg. SAR: 0.954 W/kg (Body)

Max. Calc. : 1-g Avg. SAR: 0.685 W/kg (Face); 10-g Avg. SAR: 0.500 W/kg (Face)

Max. Calc. : 1-g Avg. SAR: 1.544 W/kg (Head); 10-g Avg. SAR: 1.050 W/kg (Head)

The test results clearly demonstrate compliance with FCC General Population/Uncontrolled RF Exposure limits of **1.6 W/kg** per the requirements of 47 CFR 2.1093(d).

Appendix A

Measurement Uncertainty

Uncertainty Budget for Device Under Test, for 30 MHz to 3 GHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	$e = f(d,k)$	<i>f</i>	<i>g</i>	$h = c \times f / e$	$i = c \times g / e$	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (\pm %)	Prob. Dist.	Div.	c_i (1 g)	c_i (10 g)	1 g u_i (\pm %)	10 g u_i (\pm %)	v_i
Measurement System									
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty			RSS				11	11	411
Expanded Uncertainty (95% CONFIDENCE LEVEL)			$k=2$				22	22	

FCD-0558, Rev.6

- a) Column headings *a-k* are given for reference.
- b) Tol. - tolerance in influence quantity.
- c) Prob. Dist. – Probability distribution
- d) N, R - normal, rectangular probability distributions
- e) Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- f) c_i - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- g) u_i – SAR uncertainty
- h) v_i - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty.

Uncertainty Budget for System Validation (dipole & flat phantom) for 30 MHz to 3 GHz

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob. Dist.	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Spherical Isotropy	E.2.2	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	0.0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t. Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Dipole									
Dipole Axis to Liquid Distance	8. E.4.2	2.0	R	1.73	1	1	1.2	1.2	∞
Input Power and SAR Drift Measurement	8. 6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	R	1.73	0.64	0.43	1.2	0.8	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	R	1.73	0.6	0.49	0.6	0.5	∞
Combined Standard Uncertainty			RSS				9	9	99999
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				18	17	

FCD-0558, Rev.6

Appendix B
Probe Calibration Certificates

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola CGISS**

Certificate No: **ET3-1384_May08**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1384**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v5 and QA CAL-23.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **May 19, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41498087	1-Apr-08 (No. 217-00788)	Apr-09
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 660	3-Sep-07 (No. DAE4-660_Sep07)	Sep-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: May 20, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 SN:1384

May 19, 2008

Probe ET3DV6

SN:1384

Manufactured:	August 16, 1999
Last calibrated:	May 29, 2007
Recalibrated:	May 19, 2008

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1384

May 19, 2008

DASY - Parameters of Probe: ET3DV6 SN:1384

Sensitivity in Free Space ^A			Diode Compression ^B	
NormX	1.79 ± 10.1%	$\mu V/(V/m)^2$	DCP X	90 mV
NormY	1.84 ± 10.1%	$\mu V/(V/m)^2$	DCP Y	90 mV
NormZ	2.02 ± 10.1%	$\mu V/(V/m)^2$	DCP Z	90 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL	900 MHz	Typical SAR gradient: 5 % per mm		
	Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
	SAR _{be} [%]	Without Correction Algorithm	12.3	7.4
	SAR _{be} [%]	With Correction Algorithm	0.6	0.2
TSL	1810 MHz	Typical SAR gradient: 10 % per mm		
	Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
	SAR _{be} [%]	Without Correction Algorithm	11.7	7.0
	SAR _{be} [%]	With Correction Algorithm	0.7	0.4

Sensor Offset

Probe Tip to Sensor Center	2.7 mm
Optical Surface Detection	non-functional

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter: uncertainty not required.

ET3DV6 SN:1384

May 19, 2008

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)


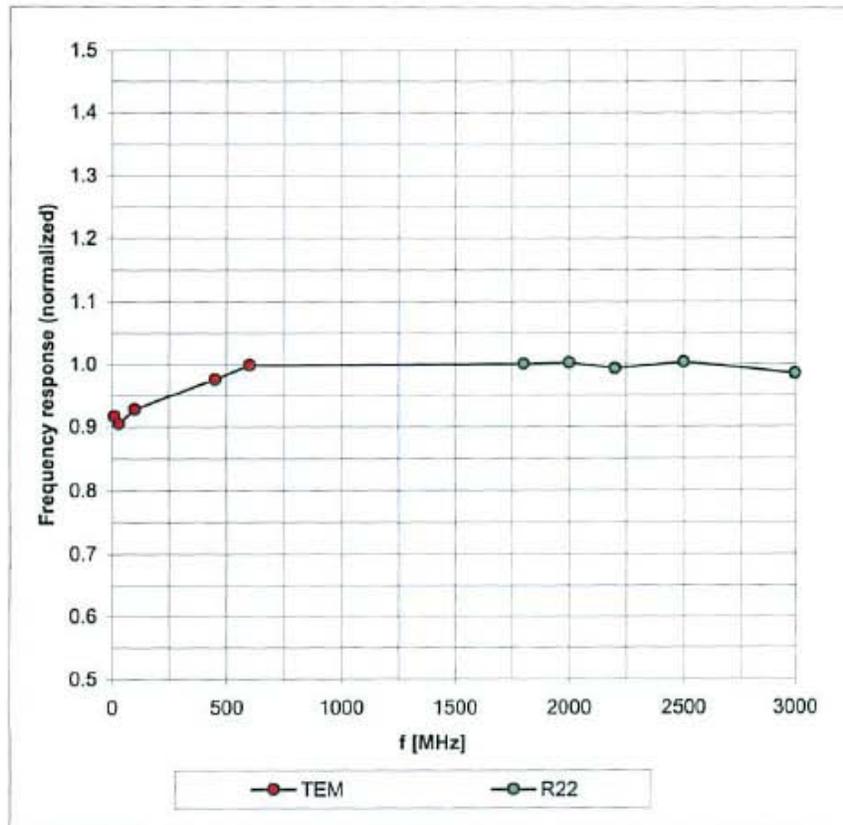


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

ET3DV6 SN:1384

May 19, 2008

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

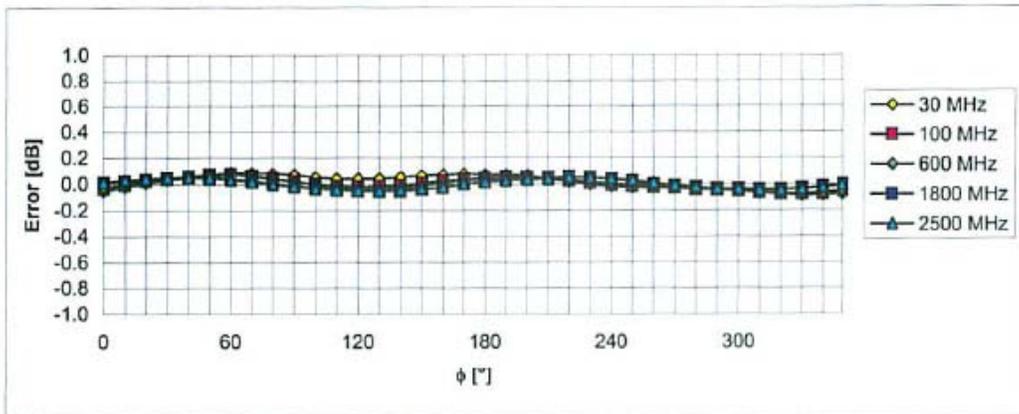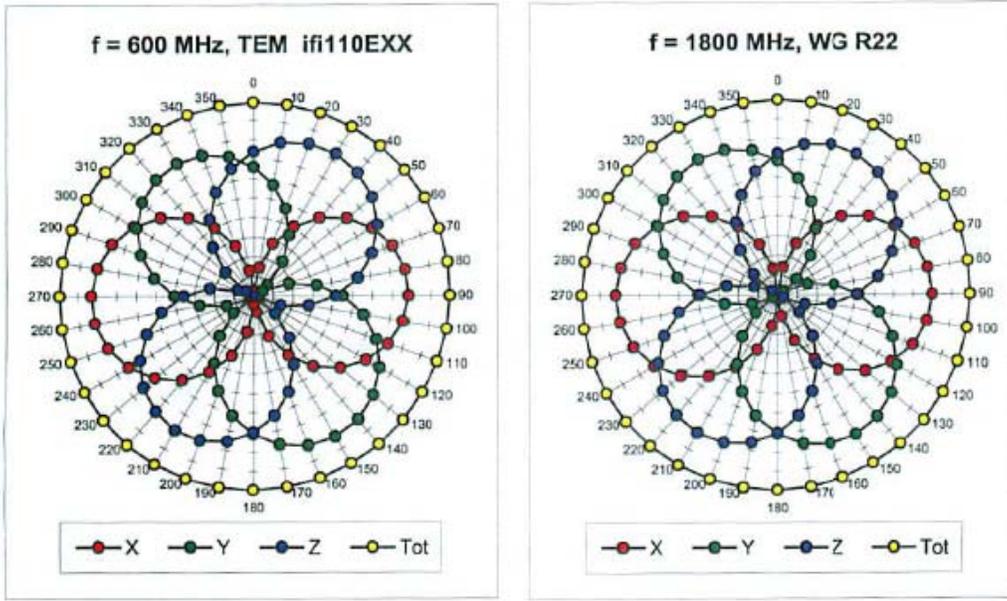


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

ET3DV6 SN:1384

May 19, 2008

Dynamic Range $f(SAR_{head})$ (Waveguide R22, $f = 1800$ MHz)

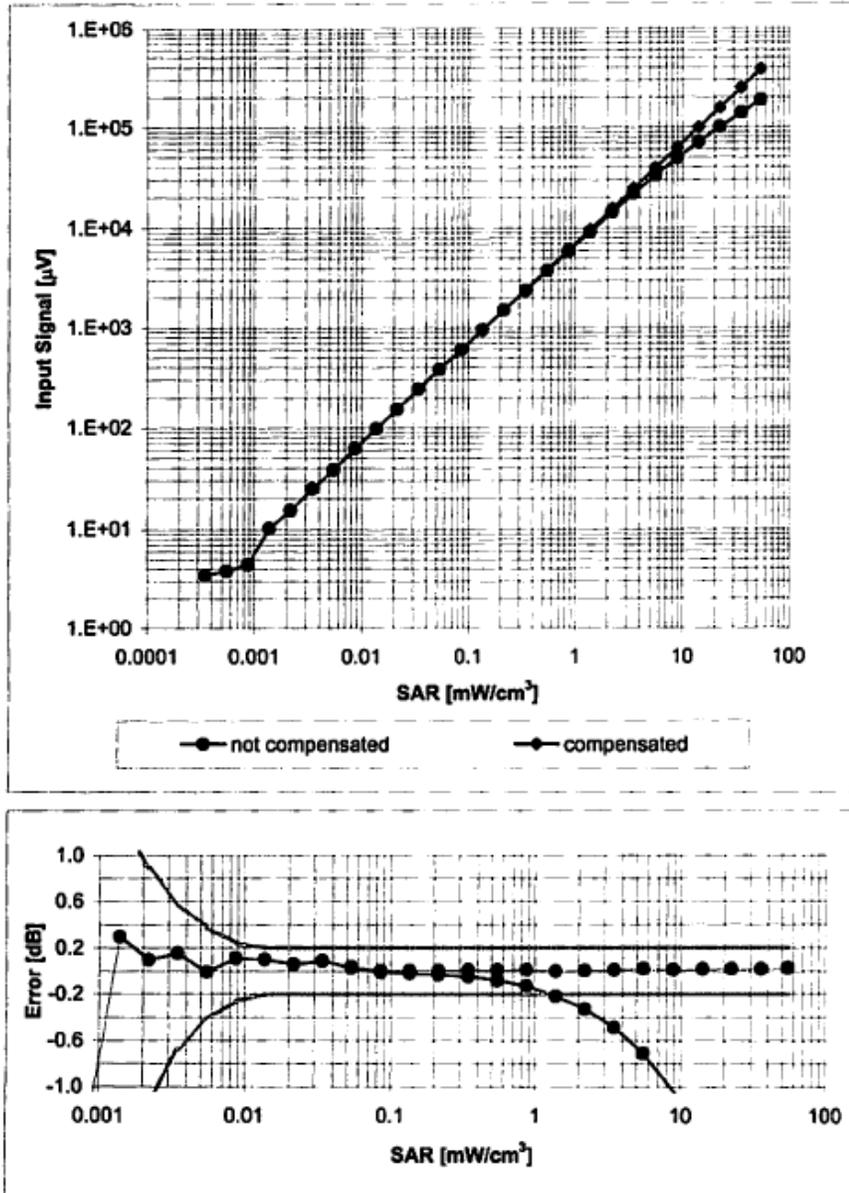


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ET3DV6 SN:1384

May 19, 2008

Conversion Factor Assessment

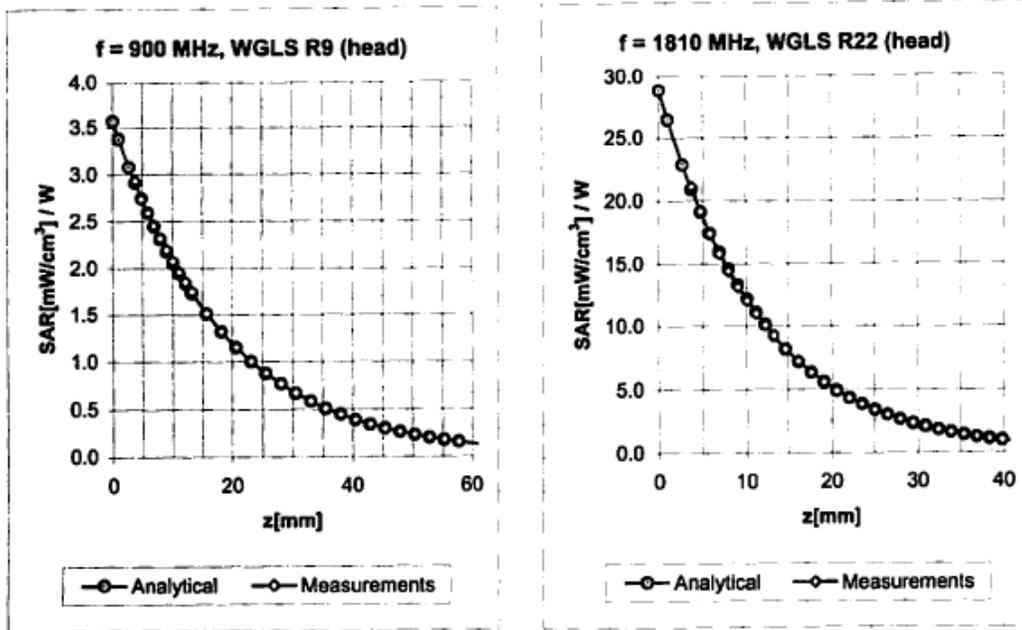

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.39	1.95	7.08 ± 13.3% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.35	3.01	6.00 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.55	2.50	5.15 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.60	2.40	4.95 ± 11.0% (k=2)
2300	± 50 / ± 100	Head	39.4 ± 5%	1.71 ± 5%	0.53	2.30	4.79 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.47	2.30	4.55 ± 11.0% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.32	2.00	7.46 ± 13.3% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.31	3.17	5.86 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.55	2.50	4.70 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.60	2.40	4.63 ± 11.0% (k=2)
2300	± 50 / ± 100	Body	52.8 ± 5%	1.85 ± 5%	0.60	2.30	4.21 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.50	2.30	4.04 ± 11.0% (k=2)


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1384

May 19, 2008

Deviation from Isotropy in HSL

Error (ϕ, ϑ), $f = 900$ MHz

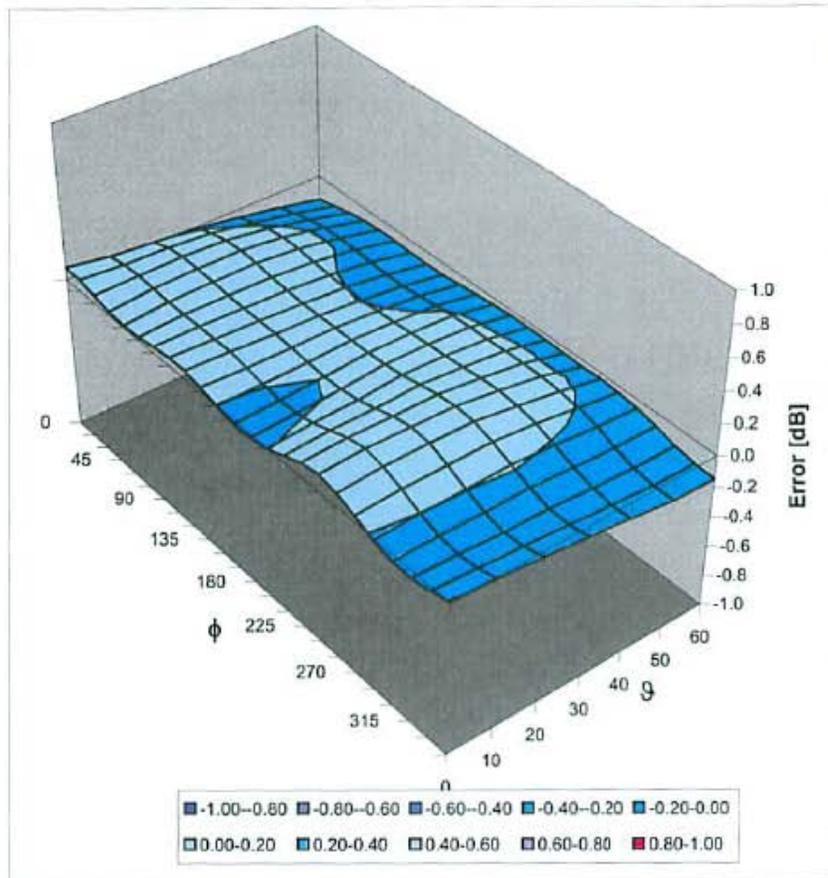

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Additional Conversion Factors for Dosimetric E-Field Probe

Type:	ET3DV6
Serial Number:	1384
Place of Assessment:	Zurich
Date of Assessment:	May 23, 2008
Probe Calibration Date:	May 19, 2008

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1810 MHz.

Assessed by: 

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Dosimetric E-Field Probe ET3DV6 SN:1384

Conversion factor (\pm standard deviation)

150 MHz	<i>C_{conv}</i>	8.2 \pm 10%	$\epsilon_r = 52.3$ $\sigma = 0.76$ mho/m (head tissue)
250 MHz	<i>C_{conv}</i>	7.4 \pm 10%	$\epsilon_r = 47.6$ $\sigma = 0.83$ mho/m (head tissue)
300 MHz	<i>C_{conv}</i>	7.3 \pm 9%	$\epsilon_r = 45.3$ $\sigma = 0.87$ mho/m (head tissue)
750 MHz	<i>C_{conv}</i>	6.3 \pm 7%	$\epsilon_r = 41.9$ $\sigma = 0.89$ mho/m (head tissue)
150 MHz	<i>C_{conv}</i>	7.9 \pm 10%	$\epsilon_r = 61.9$ $\sigma = 0.80$ mho/m (body tissue)
250 MHz	<i>C_{conv}</i>	7.5 \pm 10%	$\epsilon_r = 59.4$ $\sigma = 0.88$ mho/m (body tissue)
300 MHz	<i>C_{conv}</i>	7.3 \pm 9%	$\epsilon_r = 58.2$ $\sigma = 0.92$ mho/m (body tissue)
750 MHz	<i>C_{conv}</i>	6.1 \pm 7%	$\epsilon_r = 55.5$ $\sigma = 0.96$ mho/m (body tissue)

Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.

Please see also Section 4.7 of the DASY4 Manual.