



Exhibit 7B: SAR Test Report Photographs

Motorola Solutions Inc
EME Test Laboratory
8000 West Sunrise Blvd
Fort Lauderdale, FL. 33322



A handwritten signature in black ink that reads 'Deanna Zakharia'.

Deanna Zakharia
EMS EME Lab Senior Resource Manager,
Laboratory Director

Approval Date: 10/17/2012

Report Revision History

| Date | Revision | Comments |
|-------------|-----------------|-----------------|
| 10/16/2012 | 0 | Initial release |

1.0 Highest SAR Test Position per body location

1.1 Body

DUT w/antenna NAR6595A, battery NNTN8129B and body worn PMLN7008A against the phantom with no audio accessory attached. Same position used for the other applicable offered antennas, battery and with audio accessory HMN4104B attached.



| Antenna kit # | Separation Distances (mm) | | |
|---------------|-----------------------------|------------------|-----------------|
| | @ bottom surface of the DUT | @ antenna's base | @ antenna's tip |
| NAR6595A | 7 | *29-34 | *43-48 |
| NAF5085A | 7 | 44 | 57 |

(*) Depending on battery

1.2 Face

Not applicable

1.3 Head

Not applicable.

1.4 Hand

Not applicable.

2.0 Other SAR tested positions at the body

2.1 Body worn

DUT w/antenna NAR6595A battery NNTN8128B, audio HMN4104B and body worn PMLN4651A against the phantom. Same position used for the other applicable offered battery.



| Antenna kit # | Separation Distances (mm) | | |
|---------------|-----------------------------|------------------|-----------------|
| | @ bottom surface of the DUT | @ antenna's base | @ antenna's tip |
| NAR6595A | 7 | *28-34 | *41-46 |
| NAF5085A | 7 | 28 | 54 |

(*) Depending on battery

DUT w/antenna NAR6595A battery NNTN8305A, audio HMN4104B and body worn PMLN6327A against the phantom.



| Antenna kit # | Separation Distances (mm) | | |
|---------------|-----------------------------|------------------|-----------------|
| | @ bottom surface of the DUT | @ antenna's base | @ antenna's tip |
| NAR6595A | 15 | 35 | 39 |
| NAF5085A | 15 | 37 | 47 |

2.2 Front Side against phantom
Not applicable.

2.3 Back side against phantom
Not applicable.

2.4 Front 2.5cm separation
Not applicable

2.5 Antenna 2.5cm separation
Not applicable

2.6 Back 2.5cm separation
Not applicable

3.0 Other SAR tested positions at the face

3.1 Back of DUT at 2.5cm separation
Not applicable

3.2 Front of DUT at 2.5cm separation
Not applicable

4.0 Other SAR tested positions at the head

4.1 Left ear touch
Not applicable.

4.2 Left ear tilt
Not applicable.

4.3 Right ear touch
Not applicable.

4.4 Right ear tilt
Not applicable.

5.0 Other SAR tested positions at the hand

5.1 Left side
Not applicable.

5.2 Right side
Not applicable.

5.3 Top side
Not applicable.

5.4 Bottom side
Not applicable.

5.5 Back side
Not applicable.

6.0 DUT and Accessory Photos


The purpose of these photos is to illustrate the offered accessories. Refer to Part 1 of 2, section 7.0 for additional details on the offered accessories.

6.1 Antenna dimension and photo(s):

| Antenna Kit # | Physical Length (mm) | Electrical Length |
|---------------|----------------------|-------------------|
| NAF5085A | 200 | ¼ wave |
| NAR6595A | 100 | ¼ wave |



Simultaneous antennas separation distance

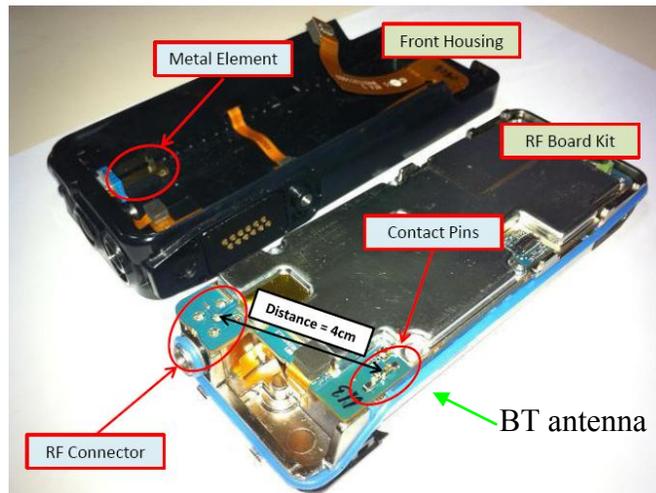

6.2 Body worn accessories



DUT Back View
Belt clip
PMLN4651A



DUT Side View
Belt clip
PMLN4651A



DUT Back View
PMLN7008A



DUT Side View
PMLN7008A



DUT Back View
Carry holder
PMLN6325A



DUT Side View
Carry holder
PMLN6325A



DUT Front View
Carry holder
PMLN6325A

6.3 Battery accessories:



Left – Right; front and side views: NNTN8128B, NNTN8129A



Left-Right; Back, front and side views: NNTN8305A

6.4 Audio accessories:



HMN4104B



NTN2574B

6.5 DUT Dimensions

| | Height (mm) | Width (mm) | Depth (mm) |
|------------------------------|-------------|------------|------------|
| Radio only (w/o battery) | 140 | 60 | 25 |
| Radio with battery NNTN8128B | 140 | 60 | 33 |
| Radio with battery NNTN8129A | 140 | 60 | 40 |
| Radio with battery NNTN8305A | 140 | 60 | 25 |

For illustration purposes the following figure reflects the location of the device’s dimensions.



Note: H = Height; W = Width; D = Depth

$W1 = (\text{Width @ Top}) / (\text{Width @ PTT})$

$D2 = (\text{Depth @ Bottom}) / (\text{Depth @ PTT})$