



Exhibit 7B: SAR Test Report Photographs

Motorola Solutions Inc
EME Test Laboratory
8000 West Sunrise Blvd
Fort Lauderdale, FL. 33322



A handwritten signature in black ink that reads 'Deanna Zakharia'.

Deanna Zakharia
EMS EME Lab Senior Resource Manager,
Laboratory Director

Approval Date: 12/18/2012

Report Revision History

Date	Revision	Comments
9/27/2012	O	Initial release
10/16/2012	A	Removed non applicable test position information
11/01/2012	B	PCII to include covert application results
12/17/2012	C	PCII amended report

1.0 Highest SAR Test Position per body location

1.1 Body

DUT w/ antenna PMAF4006A with offered battery NNTN8129A against the phantom (Device back surface or battery) and no audio cable attached. Same position used for the other applicable offered battery and applicable audio accessories.



Antenna kit #	Separation Distances (mm)		
	@ bottom surface of the DUT	@ antenna's base	@ antenna's tip
PMAF4006A	0	*7-20	*11

(*) Depending on battery

1.2 Face

Not applicable

1.3 Head

Not applicable.

1.4 Hand

Not applicable.

2.0 Other SAR tested positions at the body

2.1 Body worn

Not applicable.

2.2 Front Side against phantom

Not applicable.

2.3 Back side against phantom

Not applicable.

2.4 Front 2.5cm separation

Not applicable

2.5 Antenna 2.5cm separation

Not applicable

2.6 Back 2.5cm separation
Not applicable

3.0 Other SAR tested positions at the face

3.1 Back of DUT at 2.5cm separation
Not applicable

3.2 Front of DUT at 2.5cm separation
Not applicable

4.0 Other SAR tested positions at the head

4.1 Left ear touch
Not applicable.

4.2 Left ear tilt
Not applicable.

4.3 Right ear touch
Not applicable.

4.4 Right ear tilt
Not applicable.

5.0 Other SAR tested positions at the hand

5.1 Left side
Not applicable.

5.2 Right side
Not applicable.

5.3 Top side
Not applicable.

5.4 Bottom side
Not applicable.

5.5 Back side
Not applicable.

6.0 DUT and Accessory Photos

The purpose of these photos is to illustrate the offered accessories. Refer to Part 1 of 2, section 7.0 for additional details on the offered accessories.


6.1 Antenna dimension and photo(s):

Antenna Kit #	Physical Length (mm)	Electrical Length
PMAF4006A	400	1/2 wave



PMAF4006A

Simultaneous antennas separation distance

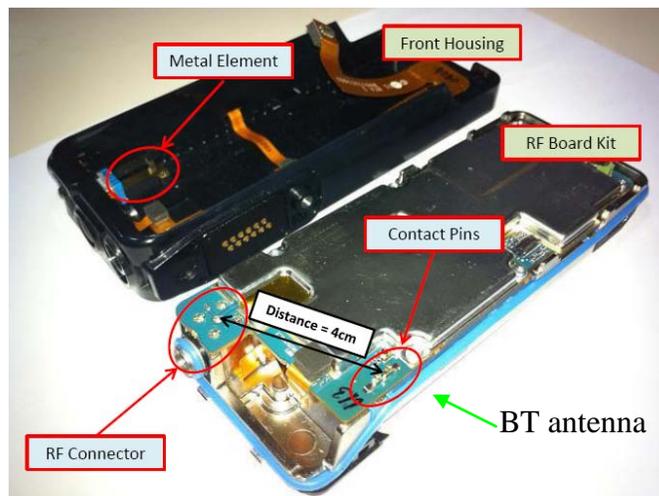

6.2 Body worn accessories

Not Applicable

6.3 Battery accessories:



Left – Right; front and side views: NNTN8128B, NNTN8129A



Left-Right; Back, front and side views: NNTN8305A

6.4 Audio accessories:



Left – Right: PMLN5275B, PMLN5111A




Left – Right: HMN4104B, RMN5116A



Left – Right: Remote Speaker Microphone (RSM) PMMN4062A, PMMN4065A and PMMN4024A



Left – Right: PMLN5101A, RLN5882A/RLN5883, RMN5058A



RLN5880A



PMLN5102A



PMMN4040A



PMMN4046A/PMMN4050A



PMLN5096A



PMLN5097A



PMLN5653A



RLN4922A



BDN6667A/BDN6729A



BDN6669A/BDN6731A



BDN6668A/BDN6730A



BDN6783A



NTN2574B

6.5 DUT Dimensions

	Height (mm)	Width (mm)	Depth (mm)
Radio only (w/o battery)	140	60	25
Radio with battery NNTN8128B	140	60	33
Radio with battery NNTN8129A	140	60	40
Radio with battery NNTN8305A	140	60	25

For illustration purposes the following figure reflects the location of the device’s dimensions.



Note: H = Height; W = Width; D = Depth

$$W1 = (\text{Width @ Top}) / (\text{Width @ PTT})$$

$$D2 = (\text{Depth @ Bottom}) / (\text{Depth @ PTT})$$