


PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road • Columbia, MD 28145 • U.S.A.

TEL (481) 290-6652 • FAX (481) 290-6654

<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE

SYMBOL TECHNOLOGIES INC.
1 Symbol Plaza
Holtsville, NY 11742-1300
Attn: Sandy Mazzola, Regulatory Engineer
cc: Dean La Rosa, Senior Design Engineer

Dates of Tests: Sept. 20-21, 2001
Report S/N: 15.210820493.H9P
Test Site: PCTEST Lab, Columbia MD U.S.A.

FCC ID

H9PCRS1

APPLICANT

SYMBOL TECHNOLOGIES INC.

FCC Rule Part(s): § 15.247; ANSI C-63.4 (1992)
Classification: Spread Spectrum Transceiver (BLUETOOTH)
Method/System: HYBRID System
Equipment Type: BLUETOOTH Transceiver & Wireless Ring Scanner
Max Output Power: 0.001 Watts
Frequency Range: 2402 — 2480 MHz
Trade/Model No(s): SYMBOL - CRS1-10000-00

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63-4.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President




NVLAP[®]
LAB CODE 100431-0


TABLE OF CONTENTS

ATTACHMENT A – COVER LETTER	
ATTACHMENT B – ATTESTATION STATEMENTS	
ATTACHMENT C – TEST REPORT	
SCOPE	1
INTRODUCTION (SITE DESCRIPTION)	2
PRODUCT INFORMATION	3
DESCRIPTION OF TESTS	
A. CONDUCTED EMISSIONS	4
B. RADIATED EMISSIONS	5
C. RESTRICTED BANDS	6
D. ANTENNA REQUIREMENT	7
E. OCCUPIED BANDWIDTH	8
F. MAXIMUM PEAK POWER OUTPUT	9
G. POWER DENSITY	10
RADIATED MEASUREMENTS (FUNDAMENTAL & HARMONICS)	11-13
FREQUENCY MEASUREMENTS (SPURIOUS)	14
PROCESSING GAIN	15-31
LIST OF TEST EQUIPMENT	32
CONCLUSION	33
ATTACHMENT D - TEST PLOTS	
ATTACHMENT E - FCC ID LABEL & LOCATION	
ATTACHMENT F - BLOCK DIAGRAM(S)	
ATTACHMENT G - SCHEMATIC(S)	
ATTACHMENT H - OPERATIONAL DESCRIPTION	
ATTACHMENT I - PHOTOGRAPHS OF TEST SET-UP	
ATTACHMENT J - EUT PHOTOGRAPHS	
ATTACHMENT K - USER'S MANUAL	
ATTACHMENT L - SAR MEASUREMENT REPORT	
ATTACHMENT M - SAR TEST DATA	
ATTACHMENT N - SAR TEST SETUP PHOTOGRAPHS	

MEASUREMENT REPORT

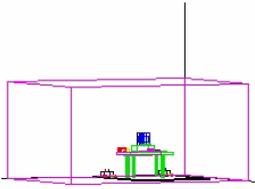

Scope - Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

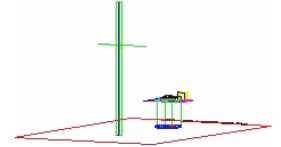

§2.983(a) General Information

Applicant Name:	SYMBOL TECHNOLOGIES INC.
Address:	1 Symbol Plaza Holtsville, NY 11742-1300
Attention:	Sandy Mazzola, Regulatory Engineer cc: Dean La Rosa, Senior Design Engineer

- FCC ID: **H9PCRS1**
- Class: Spread Spectrum Transceiver (Hybrid)
- Type: BLUETOOTH Transceiver & Wireless Ring Scanner
- Freq. Range: **2402 — 2480** MHz
- Method/System: Direct Sequence System (DSS)
- Model No(s): **CRS1-10000-00**
- Max. RF Output Power: 0.001 W
- Rule Part(s): § 15.247
- Dates of Tests: Sept. 20-21, 2001
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.
- Test Report S/N: 15. 210820493.H9P

INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz (ANSI C63.4-1992) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum Systems" were used in the measurement of **SYMBOL Spread Spectrum Wireless BLUETOOTH Transceiver & wireless ring scanner**.

These measurement tests were conducted at **PCTEST Engineering Laboratory, Inc.** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 28145. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

PCTEST Location

The map at right shows the location of the PCTEST Lab, its proximity to the FCC Lab, the Columbia vicinity area, the Baltimore-Washington International (BWI) airport, and the city of Baltimore, and the Washington, D.C. area. (see Figure1).

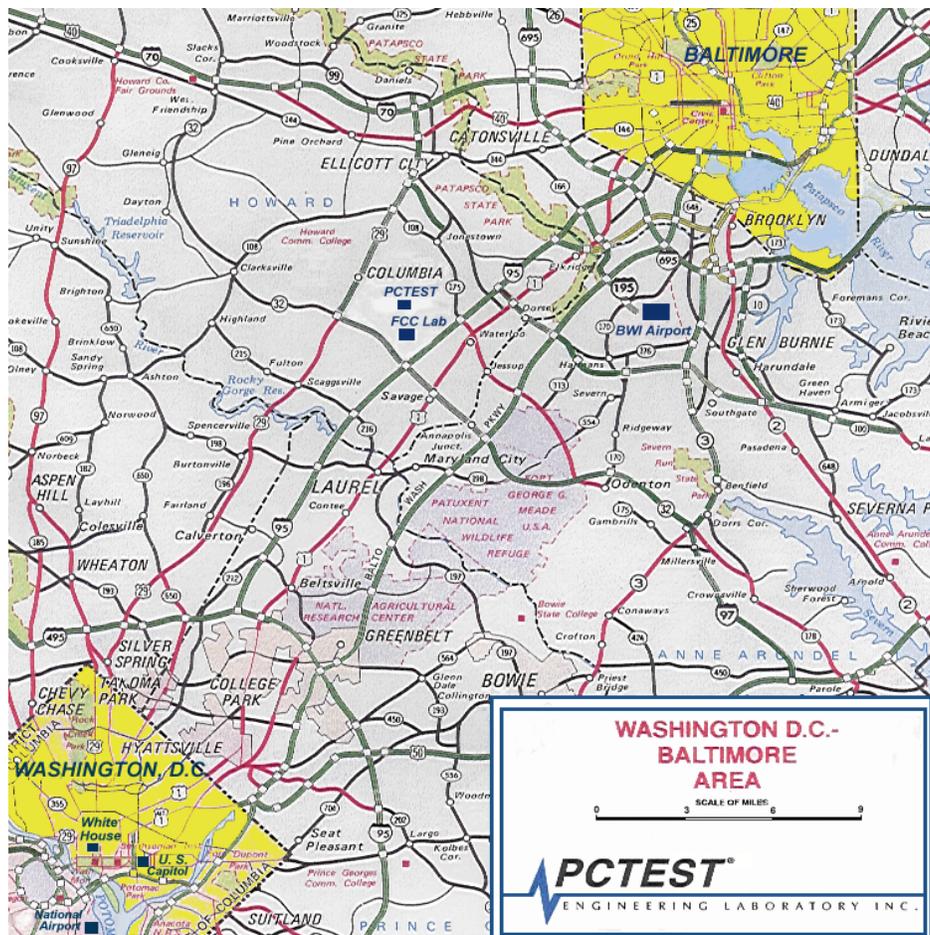


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

PRODUCT INFORMATION

Equipment Description:

The Equipment under test (EUT) is the **SYMBOL TECHNOLOGIES INC. CRS1-10000-00** wireless Ring Scanner using spread spectrum direct sequence and time division duplex techniques.

Frequency Range:	2402 – 2480 MHz
Modulation:	CCK, DBPSK, DQPSK
Max RF Output Power:	0.001 Watts
Antenna:	Polarization Linear
Power Consumption:	100mA
Power Supply:	3.6 VDC
Dimensions (W x H x D):	70 x 50 x 30 mm

Description of Tests

Conducted Emissions

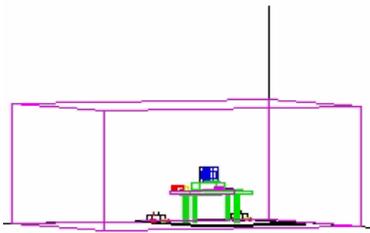


Figure 4. Shielded Enclosure
Line-Conducted Test Facility

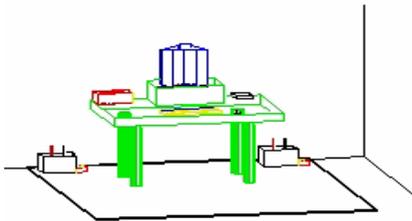


Figure 2. Line Conducted
Emission Test Set-Up

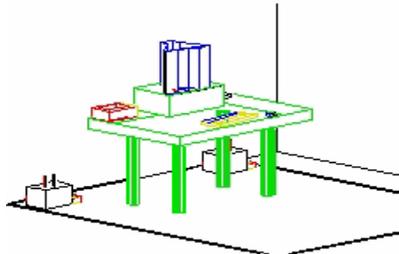


Figure 3. Wooden Table &
Bonded LISNs

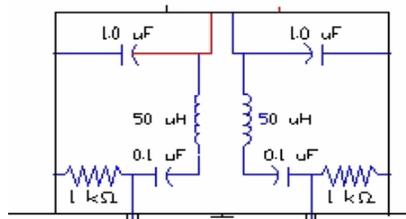


Figure 5. LISN Schematic
Diagram

The line-conducted facility is located inside a 16'x20'x81' shielded enclosure. It is manufactured by Ray Proof Series 81 (see Figure 2). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m. x 1.5m. wooden table 80cm. high is placed 40cm. away from the vertical wall and 1.5m away from the side wall of the shielded room (see Figure 3). Solar Electronics and EMCO Model 3725/2 (81kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 4). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filters (810dB 14kHz-81GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the Solar LISN. LISN schematic diagram is shown in Figure 5. All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450kHz to 30MHz with 20 msec. sweep time. The frequency producing the maximum level was reexamined using EMI/ Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode. The bandwidth of the receiver was set to 81 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Appendix C. Each EME reported was calibrated using the HP8640B signal generator.

Description of tests (Continued)

Radiated Emissions

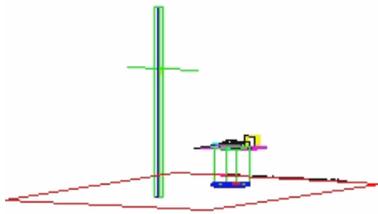


Figure 6. 3-Meter Test Site

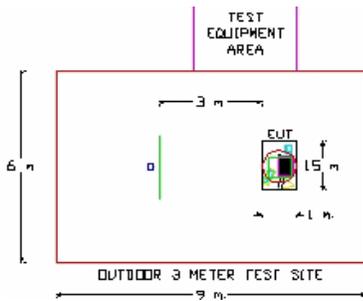


Figure 7. Dimensions of Outdoor Test Site

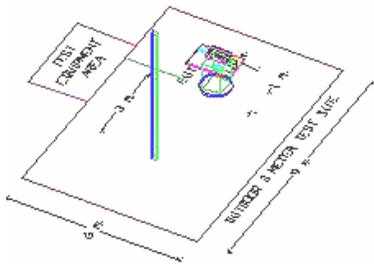


Figure 8. Turntable and System Setup

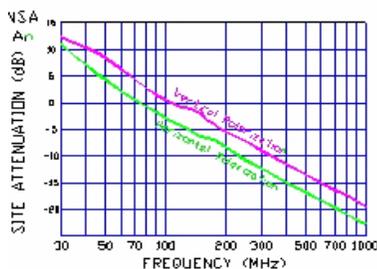


Figure 9. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using biconical antenna and from 200 to 8100 MHz using log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antenna (see Figure 6). The test equipment was placed on a wooden and plastic bench situated on a 1.5 x 2 meter area adjacent to the measurement area (see Figure 7). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 810kHz or 1 MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 8). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Appendix C. Each EME reported was calibrated using the HP8640B signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 9.

§ 15.205 Restricted Bands

Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operation. The EUT was tested from 9kHz and up to the tenth harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average measurements was used using RBW 1 MHz – VBW 81Hz and linearly polarized horn antennas. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequency, data sequence, and the carrier modulation must not exceed the limits show in Table 2 per 15.209.

Frequency (MHz)	F/S (UV/m)	Meas. Dist. (Meters)
0.009-0.490	2400/F (kHz)	300
0.490-1.705	24000/F (kHz)	30
1.705-30.00	30	30
30.0-88.0	810	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

Tab. 2. Radiated Emission Limits Per 15.209

Test Equipment

HP 8566B	Spectrum Analyzer 810Hz-22GHz
HP83017A	Microwave Analyzer 40dB Gain (0.5 – 26.5 GHz)
HP 3784A	Digital Transmission Analyzer
Gigatronics	POWER METER MODEL 8651A
EMCO 3115	Horn Antenna (1 – 18GHz)
HP 8495A	20dB Attenuator (DC-40GHz) 0-70dB
HP 8493B	81dB Attenuator
MicroCoax Cables	Low Loss Microwave Cables (1-26.5 GHz)
CDI Dipoles	Dipole Antennas (30 – 8100 MHz)

§ 15.203 Antenna Requirement

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

CONCLUSION

The **SYMBOL CRS1-10000-00** complies with the requirement of §15.203. The antenna is a **permanently attached antenna**.

§ 15.247(a)(2) – Direct Sequence Bandwidth

Minimum Standard – 6dB bandwidth for direct sequence systems must be at least 500Hz (0.5 MHz).

Res. Bandwidth = 810 kHz (5dB/div)
Vid. BW = 810 kHz
Span = 30 MHz
Ref. Level -37 dBm
Sweep 81.0ms
Attenuator 0 dB ext. pad
6dB Bandwidth – Mkr Delta (6dB down from peak)
(see attached spectrum plots)

FREQUENCY (MHz)	Channel	6dB Bandwidth (MHz)
2402	01	.510
2442	41	.522
2482	81	.526

Table 3. 6dB Bandwidth measurements

REMARKS:

PASS

§ 15.247(b) Maximum Peak Output Power

Minimum Standard – The maximum peak output power of the transmitter shall not exceed 1 watt.

Res. Bandwidth = 3 MHz (7dB/div)
Vid. BW= 3 MHz
Span= 10 MHz
Ref. Level 0 mW
Sweep 5 ms sec
Attenuator 3 dB ext. pad

Max. Power Peak + Atten = dBm \Rightarrow Watts

FREQUENCY (MHz)	Channel	Power Output Conducted (dBm)	Power Output Radiated (mW)
2402	01	0.0	1.0
2442	41	0.0	1.0
2482	81	0.0	1.0

Table 4. Output Power Measurements

Notes:

The Power Output measurements were taken with a Peak reading Power Meter.

REMARKS:

PASS

§ 15.247(c) Power Density

Minimum Standard – The transmitted power density averaged over any 1 second interval shall not be greater than 8dBm in any 3kHz bandwidth within these bands.

Res. Bandwidth = 3 kHz (81dB/div)
Vid. BW = 3 kHz
Span = 300 kHz
Ref. Level -40 dBm
Sweep 1000 sec

Peak + Atten = dBm \Rightarrow (Limit < 8dBm)

FREQ (MHz)	Channel	Power Density (dBm)
2402	01	-12.38
2442	41	-14.13
2482	81	-13.62

Table 5. Output Power Density Data.

REMARKS:

PASS

RADIATED Measurements (Fundamental & Harmonics)

Operating Frequency: 2402 MHz
 Distance of Measurements: 3 meters
 Channel: 01

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2402.0	- 43.0	31.3	H	Peak	58277.4	95.3	n/a
4804.0	- 89.0	44.4	H	Peak	1318.3	62.4	- 32.8
7206.0	- 101.4	49.7	H	Peak	582.1	55.3	- 39.9
9608.0	- 121.2	53.7	H	Peak	94.4	39.5	- 55.7
12010.0	- 129.5	57.2	H	Peak	54.3	34.7	- 60.5
14412.0	< - 132						

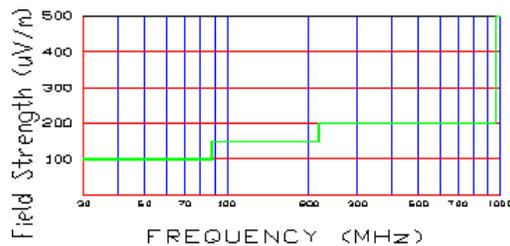


Figure 10. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 μ V/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 810kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 81 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 81th harmonic and the worst-case emissions are reported.
8. < - 132 are below the analyzer floor level.

RADIATED Measurements (Fundamental & Harmonics) (Cont.)

Operating Frequency: 2442 MHz
 Distance of Measurements: 3 meters
 Channel: 41

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2442.0	- 43.3	31.5	H	Peak	57411.7	95.2	n/a
4884.0	- 89.2	44.7	H	Peak	1333.5	62.5	- 32.7
7326.0	- 102.0	49.9	H	Peak	555.9	54.9	- 40.3
9768.0	- 120.7	54.0	H	Peak	103.5	40.3	- 54.9
12210.0	- 128.5	57.4	H	Peak	62.4	35.9	- 59.3
14652.0	< - 132						

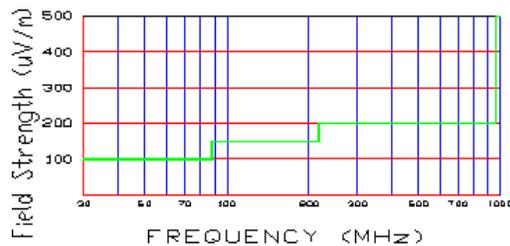


Figure 11. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 810kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 81 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 81th harmonic and the worst-case emissions are reported.
8. < - 132 are below the analyzer floor level.

RADIATED Measurements (Fundamental & Harmonics) (Cont.)

Operating Frequency: 2482 MHz
 Distance of Measurements: 3 meters
 Channel: 81

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2482.0	- 43.0	31.7	H	Peak	60603.8	95.7	N/a
4964.0	- 87.9	45.0	H	Peak	1603.3	64.1	- 31.1
7446.0	- 100.6	50.1	H	Peak	668.3	56.5	- 38.7
9928.0	- 119.0	54.2	H	Peak	128.8	42.2	- 53.0
12410.0	- 126.8	57.7	H	Peak	78.5	37.9	- 57.3
14892.0	< - 132						

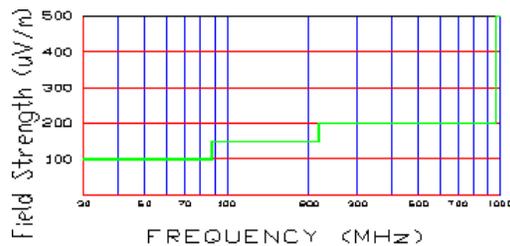


Figure 12. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 810kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 81 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 81th harmonic and the worst-case emissions are reported.
8. < - 132 are below the analyzer floor level.

RADIATED Measurements (Spurious)

Operating Frequency: 2412 – 2483.5 MHz

Distance of Measurements: 3 meters

FREQ. (MHz)	Level* (dBm)	AFCL** (dB)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (μ V/m)	Margin*** (dB)
66.6	- 83.0	5.8	H	2.8	0	31.0	- 10.2
83.0	- 91.0	7.8	H	2.6	190	15.5	- 16.2
200.0	- 91.5	16.5	H	1.4	190	39.9	-11.5
230.0	- 88.2	17.9	H	1.4	90	68.2	- 9.3
420.0	- 104.0	24.2	V	1.3	80	22.9	- 18.8
618.0	- 104.0	28.5	H	1.2	30	37.4	- 14.6

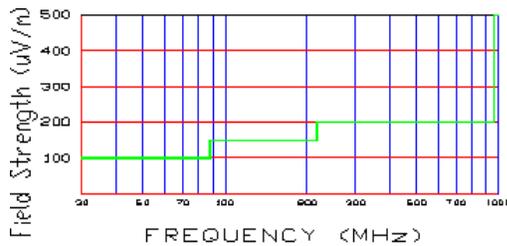


Figure 13. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All emissions were investigated and the worst case emissions are reported
2. For hand-held devices, the EUT is rotated through three orthogonal axis to determine which configuration produces the maximum emissions.
3. The EUT is supplied with the minimal AC voltage or/and a new/fully recharged battery.
4. The EUT was tested up to the 81th harmonic (24 GHz) and no significant emission was found.