



MOTOROLA



MFRL EME Test Laboratory
8000 West Sunrise Blvd
Fort Lauderdale, FL. 33322

S.A.R. EME Compliance Test Report
Part 2 of 2

Attention: FCC
Date of Report: February 5, 2003
Report Revision: Rev. O
Manufacturer: Motorola South - ARAD
Product Description: Data Terminal w/ GPRS: 1.8W EGSM, 0.8W DCS1800 & PCS1900; TDMA: 1:8 duty cycle, GMSK modulation; WLAN: 100mW, Direct Spread Spectrum; Bluetooth: 1mW, Frequency Hopping Spread Spectrum (FHSS)
FCC ID: AZ489FT7003
Device Model: F4415A (VA00016AC, VA00024AD)

Test Period: 12/10/02 – 2/04/03

Test Engineer: Andy Gessner (EME Technician)

Author: Michael Sailsman
EME Regulatory Affairs

Note: Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 2.0 of this report.

Signature on file

C.K. Chou
Motorola Chief EME Scientist

Signature on file

Ken Enger
Senior Resource Manager, Product Safety and EME Director

2/5/03

Date Approved

Note: This report shall not be reproduced without written approval from an officially designated representative of the Motorola EME Laboratory.

APPENDIX A

Power Slump Data/Shortened Scan

DUT Power versus time data (FNN5105A battery)

HDT600 with GPRS g18, WLAN S24 and Bluetooth
Power Measurements for EME
Model F4415A

Initial Power Measurements E-GSM S/N 296SCQ0210 g18 IMEI 350030950093586				E-GSM Power Slump @ 902.4 MHz (Ch. 62)		
Frequency (MHz)	Power (W)	% off max of 2.0 watts	Power (dBm)	Time (min)	Power (W)	Power (dBm)
880.2000	1.980	-1.0%	32.97	0	1.942	32.88
902.4000	1.960	-2.0%	32.92	1	1.942	32.88
914.8000	1.970	-1.5%	32.94	2	1.939	32.88
				3	1.939	32.88
				4	1.943	32.88
				5	1.937	32.87
				6	1.943	32.88
				7	1.940	32.88
				8	1.939	32.88
				9	1.939	32.87
				10	1.943	32.88
				11	1.935	32.87
				12	1.932	32.86
				13	1.940	32.88
				14	1.940	32.88
				15	1.937	32.87
				16	1.938	32.87
				17	1.938	32.87
				18	1.940	32.88
				19	1.937	32.87
				20	1.936	32.87
				21	1.936	32.87
				22	1.935	32.87
				23	1.937	32.87
				24	1.935	32.87
				25	1.944	32.89
				26	1.937	32.87
				27	1.933	32.86
				28	1.938	32.87
				29	1.940	32.88
				30	1.937	32.87
				31	1.940	32.88
				32	1.934	32.87
				33	1.938	32.87
				34	1.938	32.87
				35	1.933	32.86
				36	1.933	32.86
				37	1.939	32.88
				38	1.937	32.87
				39	1.935	32.87
				40	1.937	32.87

Power output measured with:
HP438A Power Meter, with:
HP8482H Power Sensor.
Calibration date: 13.10.02
Data recorded with:
HP34970 Data Acquisition
Calibration date: 24.12.01

Test Mode: TDMA
Maximum duty cycle: 12.5%

HDT600 with GPRS g18, WLAN S24 and Bluetooth
Power Measurements for EME
Model F4415A

Initial Power Measurements PCS1900 S/N 296SCQ0210 g18 IMEI 350030950093586				PCS1900 Power Slump @ 1880.0 MHz (Ch. 661)		
Frequency (MHz)	Power (W)	% off max of 1.0 watts	Power (dBm)	Time (min)	Power (W)	Power (dBm)
1850.2000	1.023	2.3%	30.10	0	1.008	30.04
1880.0000	1.016	1.6%	30.07	1	1.007	30.03
1909.8000	0.990	-1.0%	29.96	2	1.004	30.02
				3	1.014	30.06
				4	1.006	30.02
				5	1.008	30.03
				6	1.010	30.04
				7	1.006	30.03
				8	1.001	30.00
				9	1.009	30.04
				10	1.006	30.02
				11	1.008	30.03
				12	1.008	30.04
				13	1.003	30.01
				14	1.001	30.00
				15	1.004	30.02
				16	1.004	30.02
				17	1.009	30.04
				18	1.007	30.03
				19	1.006	30.03
				20	1.005	30.02
				21	1.010	30.05
				22	1.005	30.02
				23	1.006	30.03
				24	1.006	30.03
				25	1.005	30.02
				26	1.008	30.03
				27	1.007	30.03
				28	1.001	30.01
				29	1.007	30.03
				30	1.009	30.04
				31	1.008	30.04
				32	1.005	30.02
				33	1.004	30.02
				34	1.008	30.04
				35	1.008	30.04
				36	1.006	30.03
				37	1.005	30.02
				38	1.008	30.03
				39	1.007	30.03
				40	1.008	30.03

Power output measured with:
HP438A Power Meter, with:
HP8482H Power Sensor.
Calibration date: 13.10.02
Data recorded with:
HP34970 Data Acquisition
Calibration date: 24.12.01

Test Mode: TDMA
Maximum duty cycle: 12.5%

HDT600 with GPRS g18, WLAN S24 and Bluetooth
 Power Measurements for EME
 Model F4415A

Initial Power Measurements DCS1800 S/N 296SCQ0210 g18 IMEI 350030950093586				DCS1800 Power Slump @ 1747.4 MHz (Ch. 698)		
Frequency (MHz)	Power (W)	% off max of 1.0 watts	Power (W)	Time (min)	Power (W)	Power (dBm)
1710.2000	0.985	-1.5%	29.93	0	1.037	30.16
1747.4000	1.045	4.5%	30.19	1	1.032	30.14
1784.8000	0.976	-2.4%	29.89	2	1.033	30.14
				3	1.034	30.14
				4	1.036	30.15
				5	1.035	30.15
				6	1.031	30.13
				7	1.034	30.14
				8	1.036	30.16
				9	1.032	30.14
				10	1.034	30.15
				11	1.032	30.14
				12	1.030	30.13
				13	1.033	30.14
				14	1.033	30.14
				15	1.036	30.15
				16	1.033	30.14
				17	1.033	30.14
				18	1.036	30.15
				19	1.027	30.12
				20	1.032	30.14
				21	1.034	30.15
				22	1.027	30.12
				23	1.031	30.13
				24	1.031	30.13
				25	1.029	30.12
				26	1.038	30.16
				27	1.034	30.15
				28	1.034	30.15
				29	1.032	30.14
				30	1.028	30.12
				31	1.030	30.13
				32	1.032	30.14
				33	1.031	30.13
				34	1.033	30.14
				35	1.028	30.12
				36	1.039	30.17
				37	1.038	30.16
				38	1.035	30.15
				39	1.034	30.15
				40	1.030	30.13

Power output measured with:
 HP438A Power Meter, with:
 HP8482H Power Sensor.
 Calibration date: 13.10.02
 Data recorded with:
 HP34970 Data Acquisition
 Calibration date: 24.12.01

Test Mode: TDMA
 Maximum duty cycle: 12.5%

HDT600 with GPRS g18, WLAN S24 and Bluetooth
 Power Measurements for EME
 Model F4415A

Initial Power Measurements WLAN S/N 296SCQ0210 S24 S/N 00A0F8343AA2				WLAN Power Slump @ 2.437 GHz		
Frequency (GHz)	Power (mW)	% off max of 160 milliwatts	Power (dBm)		Power (mW)	Power (dBm)
2.4120	143.0	-10.6%	21.55	0	151.6	21.81
2.4370	156.0	-2.5%	21.93	1	149.4	21.74
2.4620	165.0	3.1%	22.17	2	149.5	21.75
				3	149.1	21.73
				4	148.6	21.72
				5	148.7	21.72
				6	147.8	21.70
				7	148.0	21.70
				8	148.0	21.70
				9	147.8	21.70
				10	148.1	21.71
				11	147.5	21.69
				12	148.2	21.71
				13	147.4	21.69
				14	147.5	21.69
				15	147.2	21.68
				16	147.6	21.69
				17	147.7	21.69
				18	146.8	21.67
				19	147.3	21.68
				20	147.1	21.68
				21	147.0	21.67
				22	147.2	21.68
				23	146.8	21.67
				24	146.8	21.67
				25	146.7	21.66
				26	146.9	21.67
				27	146.9	21.67
				28	146.8	21.67
				29	146.9	21.67
				30	146.8	21.67
				31	146.8	21.67
				32	146.4	21.65
				33	146.6	21.66
				34	146.3	21.65
				35	146.5	21.66
				36	146.3	21.65
				37	146.4	21.66
				38	145.7	21.63
				39	145.8	21.64
				40	146.3	21.65

Power output measured with:
 HP438A Power Meter, with:
 HP8482H Power Sensor.
 Calibration date: 13.10.02
 Data recorded with:
 HP34970 Data Acquisition
 Calibration date: 24.12.01

Test Mode: CW

HDT600 with GPRS g18, WLAN S24 and Bluetooth
 Power Measurements for EME
 Model F4415A

Initial Power Measurements Bluetooth S/N 296SCQ0210				Bluetooth Power Slump @ 2.44 GHz		
Frequency (GHz)	Power (mW)	% off max of 1.15 milliwatts	Power (dBm)	Time (min)	Power (mW)	Power (dBm)
2.4020	0.724	-37.0%	-1.40	0	0.847	-0.72
2.4400	0.852	-25.9%	-0.70	1	0.839	-0.76
2.4800	0.955	-17.0%	-0.20	2	0.842	-0.75
				3	0.834	-0.79
				4	0.833	-0.79
				5	0.829	-0.81
				6	0.832	-0.80
				7	0.827	-0.82
				8	0.822	-0.85
				9	0.819	-0.87
				10	0.824	-0.84
				11	0.821	-0.85
				12	0.827	-0.82
				13	0.822	-0.85
				14	0.821	-0.86
				15	0.815	-0.89
				16	0.820	-0.86
				17	0.824	-0.84
				18	0.818	-0.87
				19	0.824	-0.84
				20	0.823	-0.85
				21	0.822	-0.85
				22	0.819	-0.87
				23	0.820	-0.86
				24	0.818	-0.87
				25	0.823	-0.84
				26	0.821	-0.86
				27	0.820	-0.86
				28	0.823	-0.84
				29	0.820	-0.86
				30	0.816	-0.88
				31	0.814	-0.89
				32	0.810	-0.92
				33	0.814	-0.89
				34	0.816	-0.88
				35	0.816	-0.88
				36	0.815	-0.89
				37	0.812	-0.90
				38	0.822	-0.85
				39	0.818	-0.87
				40	0.826	-0.83

Power output measured with:
 HP438A Power Meter, with:
 HP8482H Power Sensor.
 Calibration date: 13.10.02
 Data recorded with:
 HP34970 Data Acquisition
 Calibration date: 24.12.01

Test Mode: CW

Shortened Scan Results

FCC ID: AZ489FT7003; Test Date: 1/03/03

MFRL EME Laboratory

RUN NUMBER: 030103-01

MODEL NUMBER: F4415A SERIAL NUMBER: 296SCQ0210

TX FREQ: 902.4MHz

- Accessories -

Antenna: FAF5211A internal

Battery Kit: FNN5105A

Carry: None

Audio Acc. None

Shortened scan reflect highest S.A.R. producing configuration; Run time 10 minutes.

Representative “normal” scan run time was 16 minutes

“Shortened” scan max. calc. S.A.R. = 0.87mW/g

“Normal” scan max. calc. S.A.R. = 0.82 mW/g (see section 7.1 run # 021210-01)


Back facing phantom

MFRL TEST Phantom; Device Section; Position: (90°,90°);

Probe: ET3DV6R A2LA - SN1418; ConvF(5.60,5.60,5.60); Probe cal date: 5/21/02; Crest factor: 8.0; Body 900MHz: $\sigma = 1.04$ mho/m $\epsilon = 54.7$ $\rho = 1.04$ g/cm³; PROBE CALIBRATION DATE:020521

Cube 5x5x7: SAR (1g): 0.844 mW/g, SAR (10g): 0.587 mW/g, (Worst-case extrapolation)

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

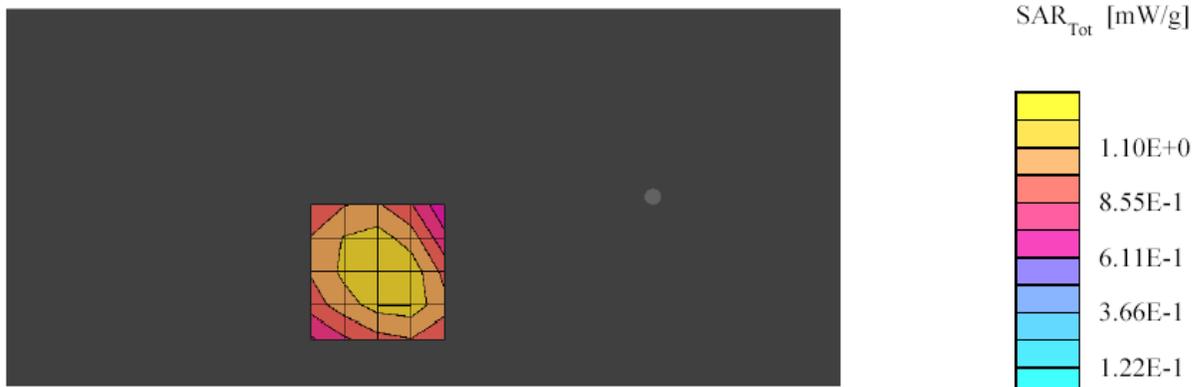

APPENDIX B
Data Results

FCC ID: AZ489FT7003; Test Date: 12/10/02

MFRL EME Laboratory

RUN NUMBER: 021210-01

MODEL NUMBER: F4415A SERIAL NUMBER: 296SCQ0210

TX FREQ: 902.4MHz

Antenna: FAF5211A internal

Battery Kit: FNN5105A

Carry: None

Audio Acc. None

DUT Back facing phantom



MFRL TEST Phantom; Device Section; Position: (90°,90°);

Probe: ET3DV6R A2LA - SN1418; ConvF(5.60,5.60,5.60); Probe cal date: 5/21/02; Crest factor: 8.0; Body 900MHz: $\sigma = 1.04$ mho/m $\epsilon = 55.1$ $\rho = 1.04$ g/cm³; PROBE CALIBRATION DATE:020521

Cube 5x5x7: SAR (1g): 0.797 mW/g, SAR (10g): 0.553 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0; Max at 63.0, 130.5, 4.7

Power drift: -0.00

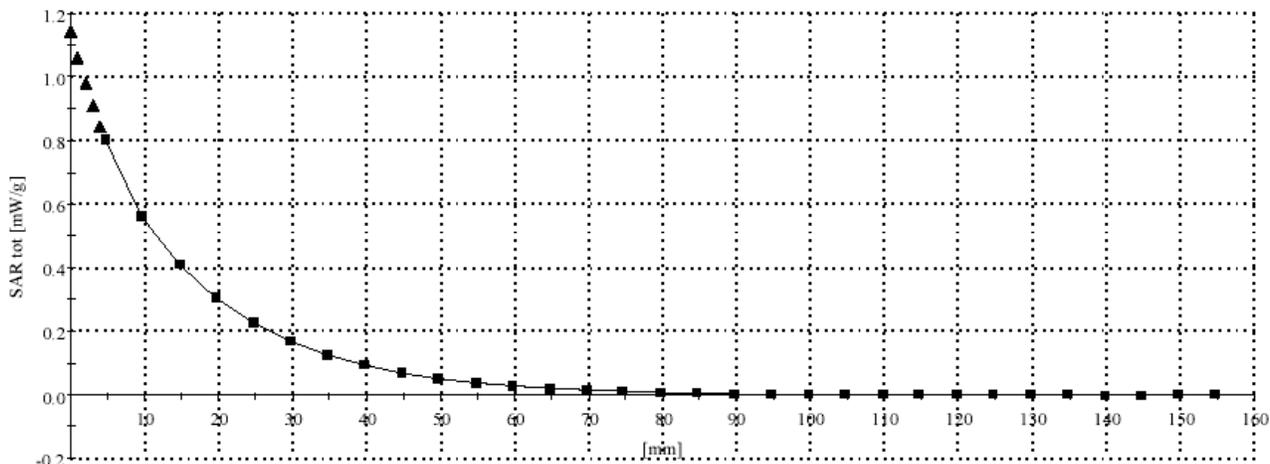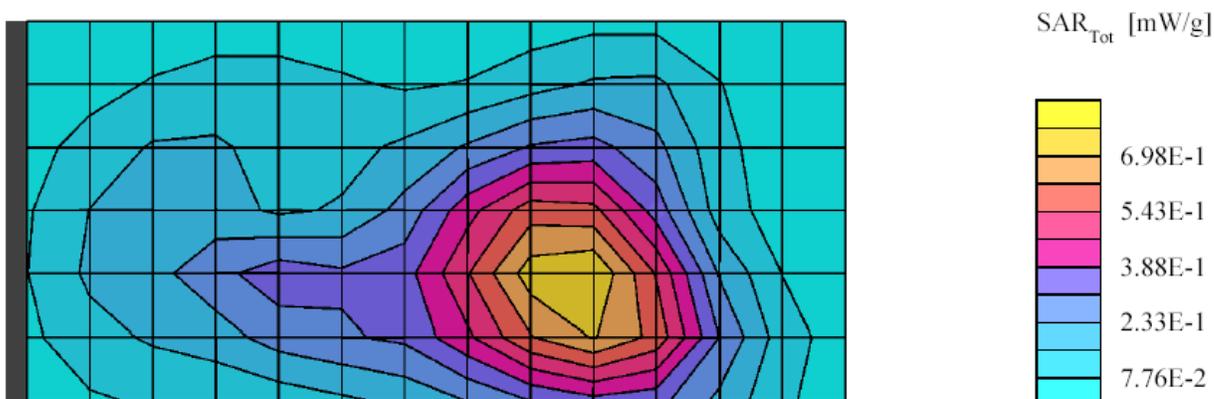

FCC ID: AZ489FT7003; Test Date: 2/04/03

MFRL EME Laboratory

RUN NUMBER: 030204-03

MODEL NUMBER: F4415A SERIAL NUMBER: 296SCQ0210

TX FREQ: 1850MHz

Antenna: FAF5211A internal

Battery Kit: FNN5105A

Carry: None

Audio Acc. None

DUT backside towards phantom



MFRL TEST Phantom; Device Section; Position: (90°,90°);

Probe: ET3DV6R A2LA - SN1418; ConvF(4.30,4.30,4.30); Probe cal date: 5/21/02; Crest factor: 8.0; Body 1880MHz: $\sigma = 1.59$ mho/m $\epsilon = 53.5$ $\rho = 1.04$ g/cm³; PROBE CALIBRATION DATE:020521

Cube 7x7x7: SAR (1g): 0.359 mW/g, SAR (10g): 0.230 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0; Max at 39.0, 111.0, 4.7

Power drift: -0.04

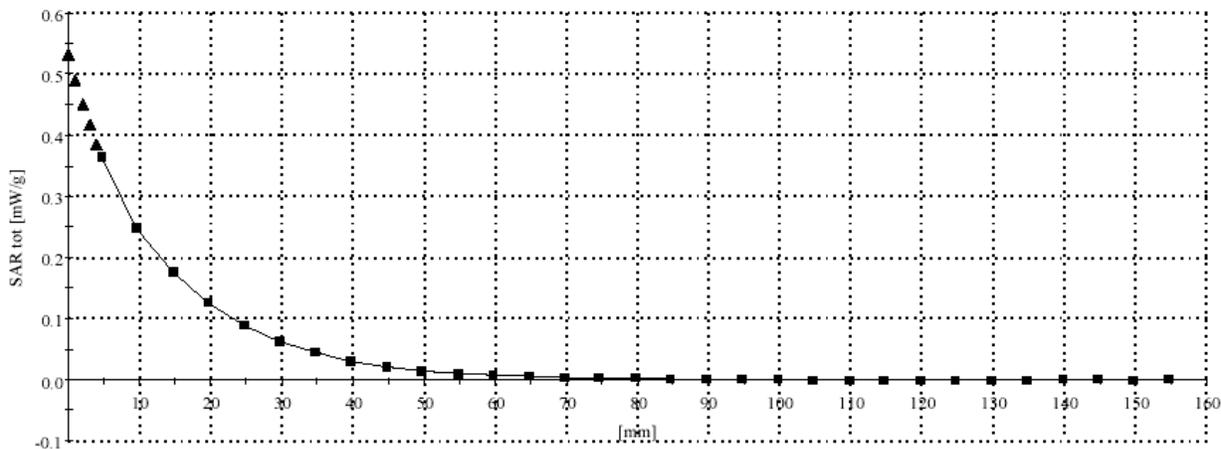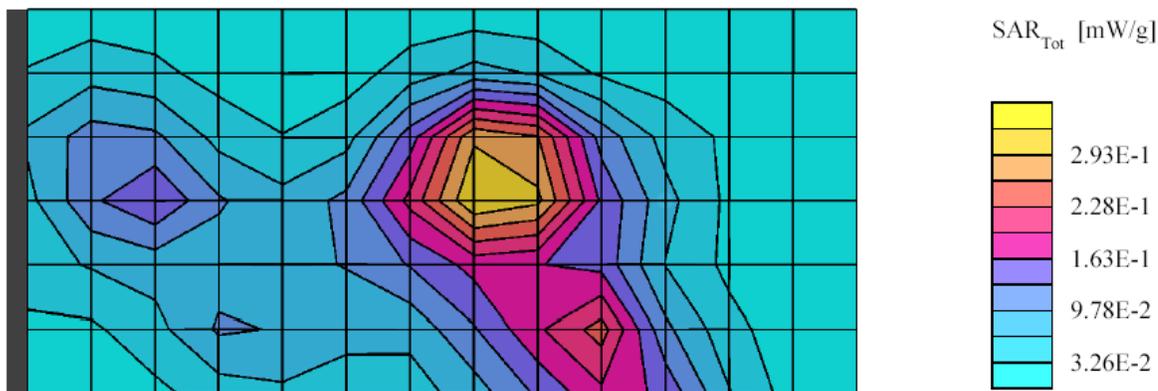

FCC ID: AZ489FT7003; Test Date: 2/04/03

MFRL EME Laboratory

RUN NUMBER: 030204-01

MODEL NUMBER: F4415A SERIAL NUMBER: 296SCQ0210

TX FREQ: 1710.2MHz

Antenna: FAF5211A internal

Battery Kit: FNN5105A

Carry Case: None

Audio Acc. None

DUT Back against phantom



MFRL TEST Phantom; Device Section; Position: (90°,90°);

Probe: ET3DV6R A2LA - SN1418; ConvF(4.50,4.50,4.50); Probe cal date: 5/21/02; Crest factor: 8.0; Body 1880MHz: $\sigma = 1.43$ mho/m $\epsilon = 53.9$ $\rho = 1.04$ g/cm³; PROBE CALIBRATION DATE:020521

Cube 7x7x7; SAR (1g): 0.357 mW/g, SAR (10g): 0.231 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0; Max at 39.0, 112.5, 4.7

Power drift: -0.02

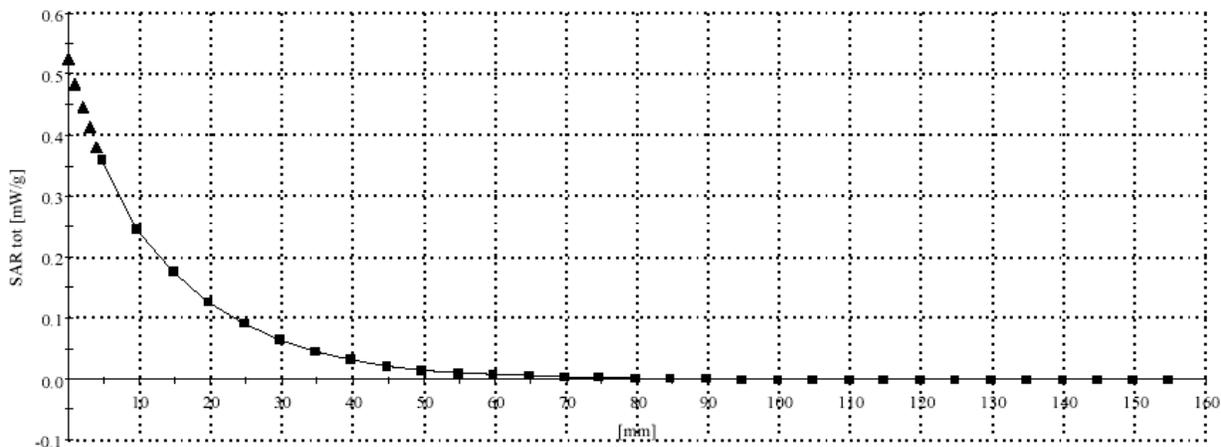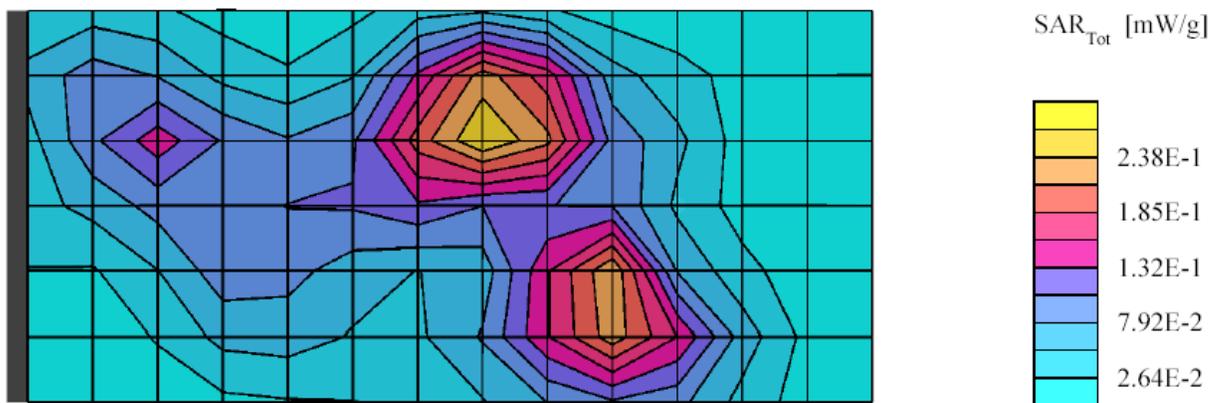

FCC ID: AZ489FT7003; Test Date: 12/26/02

MFRL EME Laboratory

RUN NUMBER: 021226-01

MODEL NUMBER: F4415A SERIAL NUMBER: 296SCQ0210

TX FREQ: 2.437GHz

Antenna: FAF5213A internal

Battery Kit: FNN5105A

Carry: None

Audio Acc. None

DUT Back against phantom



MFRL TEST Phantom; Device Section; Position: (90°,90°);

Probe: ET3DV6R A2LA - SN1418; ConvF(3.60,3.60,3.60); Probe cal date: 5/21/02; Crest factor: 1.0; Body 2450MHz: $\sigma = 1.99$ mho/m $\epsilon = 53.8$ $\rho = 1.04$ g/cm³; PROBE CALIBRATION DATE:020421

Cube 5x5x7: SAR (1g): 0.394 mW/g, SAR (10g): 0.220 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0; Max at 48.0, 162.0, 4.7

Power drift: -0.02

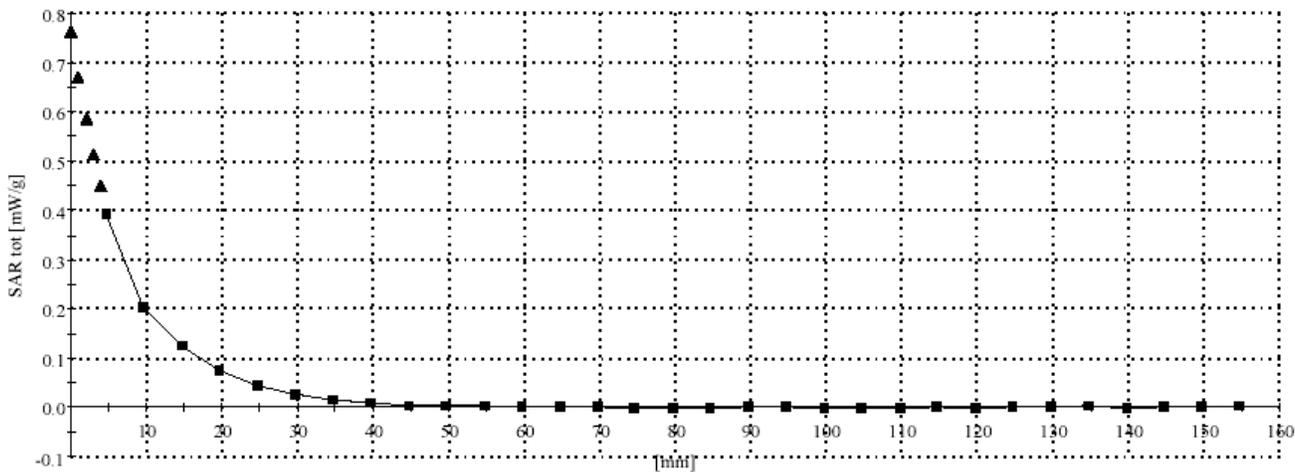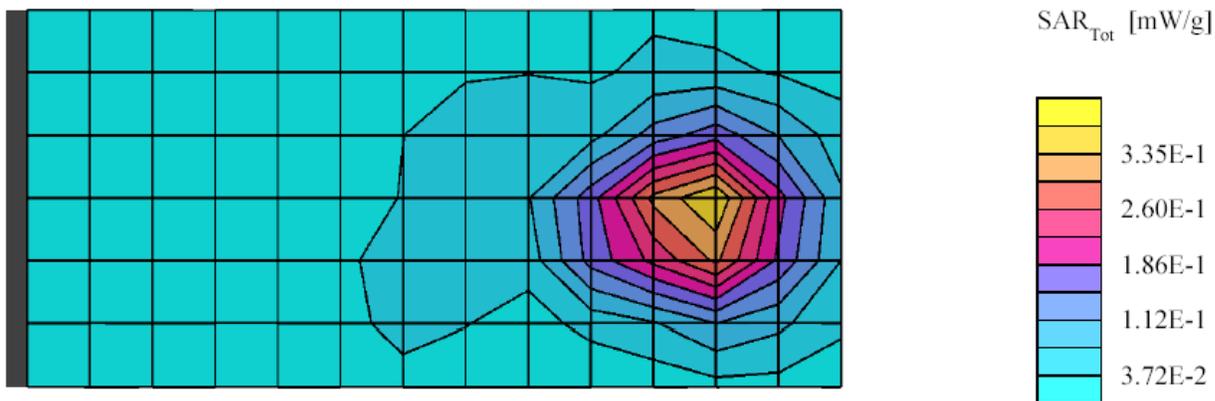

APPENDIX C

Dipole System Performance Check Results

SPEAG 900 MHz Dipole; Model D900V2, SN 158; Test Date:12/10/02

MFRL EME Lab

Run #: Sys Perf-R1-021210

TX Freq: 900 MHz

Start Power; 250mW

Target SAR normalized to 1W= 11.2W/Kg


Calculated SAR @ 1W including drift = 11.2w/kg

MFRL TEST 900MHz; 900MHz Device

Probe: ET3DV6R A2LA - SN1418;Probe Cal Date: 5/21/02ConvF(5.60,5.60,5.60); Crest factor: 1.0; Body 900MHz: $\sigma = 1.04$ mho/m $\epsilon = 55.1$ $\rho = 1.04$ g/cm³; probe calibration date: 020521

Cubes (2): Peak: 4.34 mW/g ± 0.05 dB, SAR (1g): 2.80 mW/g ± 0.04 dB, SAR (10g): 1.80 mW/g ± 0.03 dB, (Worst-case extrapolation) Penetration depth: 12.4 (11.3, 13.8) [mm]

Power drift: -0.01 dB

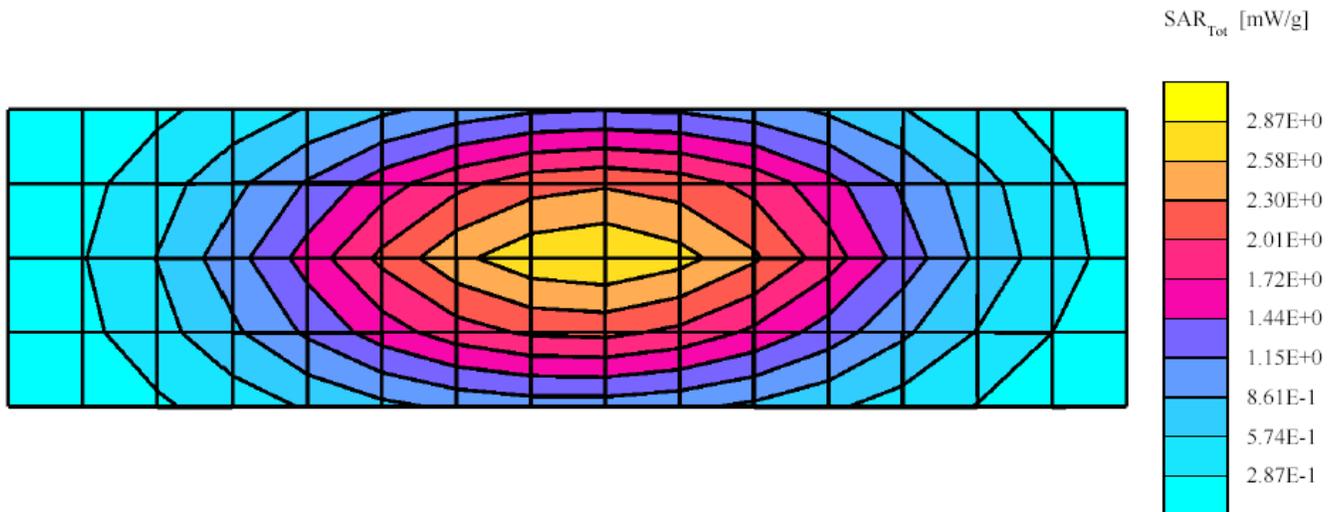

SPEAG 900 MHz Dipole; Model D900V2, SN 158; Test Date: 12/13/02

Motorola CGISS EME Lab

Run #: Sys Perf-R1-021213

TX Freq: 900 MHz

Start Power; 250mW

Target SAR normalized to 1W = 11.2W/Kg


Calculated SAR @ 1W including drift = 11.21 w/kg

MFRL TEST 900MHz; Probe: ET3DV6R A2LA - SN1418; Probe Cal Date: 5/21/02 ConvF(5.60,5.60,5.60); Crest factor: 1.0;

Body 900MHz: $\sigma = 1.04$ mho/m $\epsilon = 55.1$ $\rho = 1.04$ g/cm³; PROBE CAL DATE: 020521

Cubes (2): Peak: 4.33 mW/g ± 0.04 dB, SAR (1g): 2.79 mW/g ± 0.03 dB, SAR (10g): 1.80 mW/g ± 0.03 dB, (Worst-case extrapolation) Penetration depth: 12.4 (11.3, 13.9) [mm]

Power drift: -0.02 dB

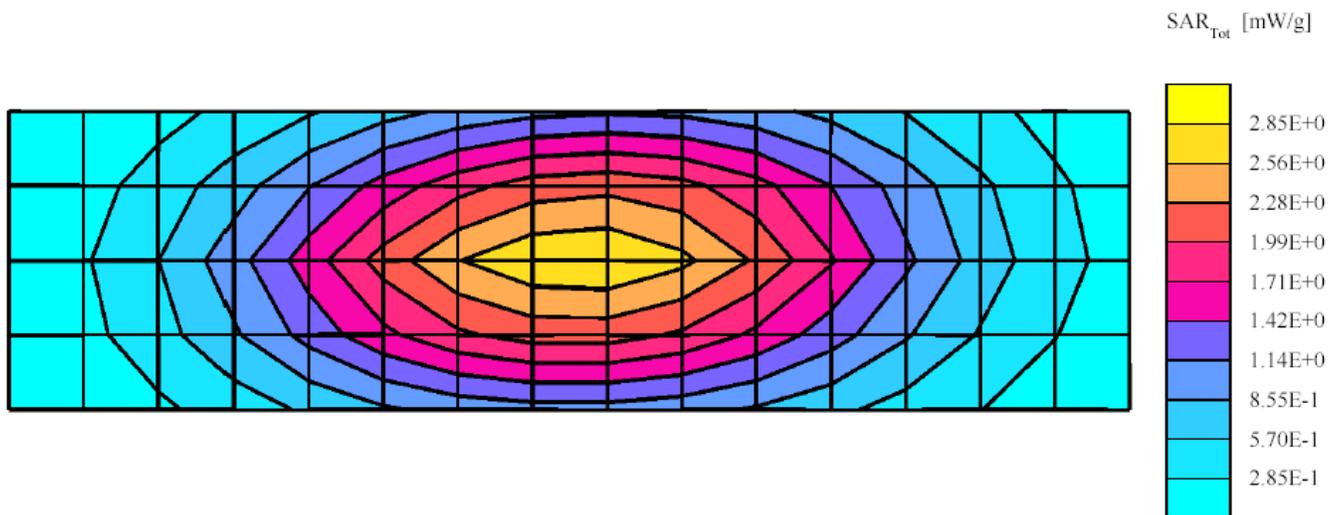

SPEAG 900 MHz Dipole; Model D900V2, SN 158; Test Date:12/14/02

Motorola CGISS EME Lab

Run #: Sys Perf-R1-021214

TX Freq: 900MHz

Start Power; 250mW

Target SAR normalized to 1W= 11.2W/Kg


Calculated SAR @ 1W = 11.04w/kg

MFRL TEST 900MHz;

Probe: ET3DV6R A2LA - SN1418;Probe Cal Date: 5/21/02ConvF(5.60,5.60,5.60); Crest factor: 1.0; Body 900MHz: $\sigma = 1.03$ mho/m $\epsilon_r = 54.8$ $\rho = 1.04$ g/cm³; probe cal date: 020521

Cubes (2): Peak: 4.31 mW/g ± 0.01 dB, SAR (1g): 2.78 mW/g ± 0.01 dB, SAR (10g): 1.79 mW/g ± 0.02 dB, (Worst-case extrapolation) Penetration depth: 12.4 (11.3, 13.8) [mm]

Power drift: 0.03 dB

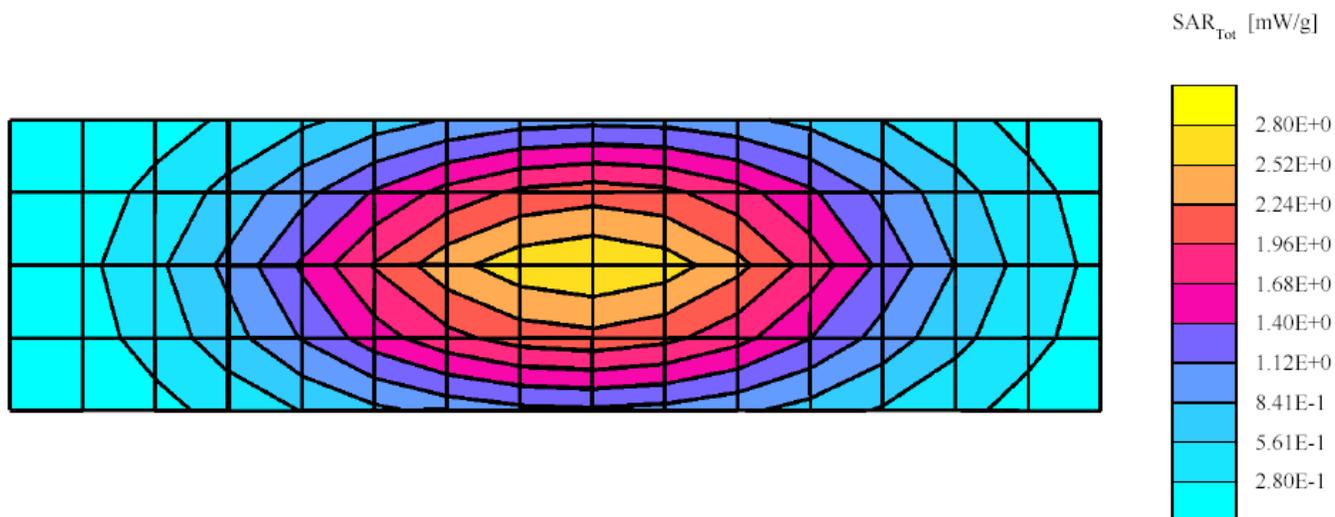

SPEAG 1800 MHz Dipole; Model D1800V2, SN 2d043; Test Date:12/19/02

MFRL EME Lab

Run #: Sys Perf-R1-021219

TX Freq: 1880 MHz

Start Power; 250mW

Target SAR normalized to 1W= 40W/kg


Calculated SAR @ 1W including drift = 38.57 W/kg

MFRL TEST 180MHz; Probe: ET3DV6R A2LA - SN1418;Probe Cal Date: 5/21/02ConvF(4.50,4.50,4.50); Crest factor: 1.0;

Body 1880MHz: $\sigma = 1.50$ mho/m $\epsilon = 53.4$ $\rho = 1.04$ g/cm³; PROBE CALIBRATION DATE:020521

Cubes (2): Peak: 17.4 mW/g \pm 0.02 dB, SAR (1g): 9.62 mW/g \pm 0.01 dB, SAR (10g): 5.11 mW/g \pm 0.00 dB, (Worst-case extrapolation) Penetration depth: 9.0 (8.4, 10.2) [mm]

Power drift: -0.01 dB

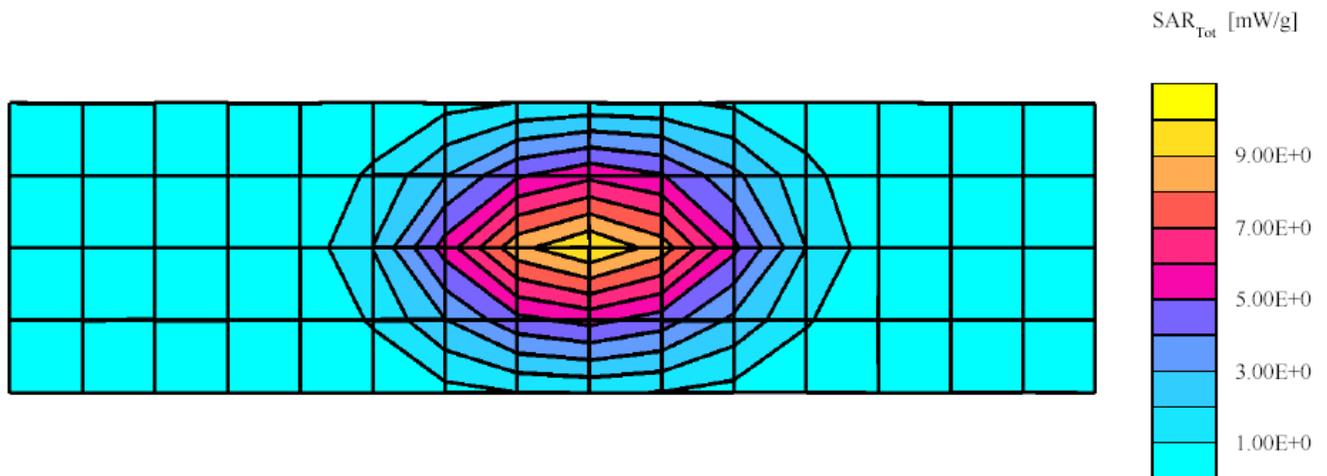

SPEAG 1800 MHz Dipole; Model D1800V2, SN 2d043; Test Date:12/20/02

MFRL EME Lab

Run #: Sys Perf-R1-021220

TX Freq: 1880 MHz

Start Power; 250mW

Target SAR normalized to 1W= 40W/kg

Calculated SAR @ 1W = 38.5W/kg


MFRL TEST 1800 MHz; Probe: ET3DV6R A2LA - SN1418;Probe Cal Date: 5/21/02ConvF(4.40,4.40,4.40); Crest factor: 1.0;

Body 1880MHz: $\sigma = 1.50$ mho/m $\epsilon = 53.5$ $\rho = 1.04$ g/cm³; PROBE CALIBRATION DATE:020521

Cubes (2): Peak: 17.9 mW/g ± 0.00 dB, SAR (1g): 9.86 mW/g ± 0.01 dB, SAR (10g): 5.22 mW/g ± 0.01 dB, (Worst-case extrapolation) Penetration depth: 9.0 (8.3, 10.2) [mm]

Power drift: -0.00 dB

SAR_{Tot} [mW/g]

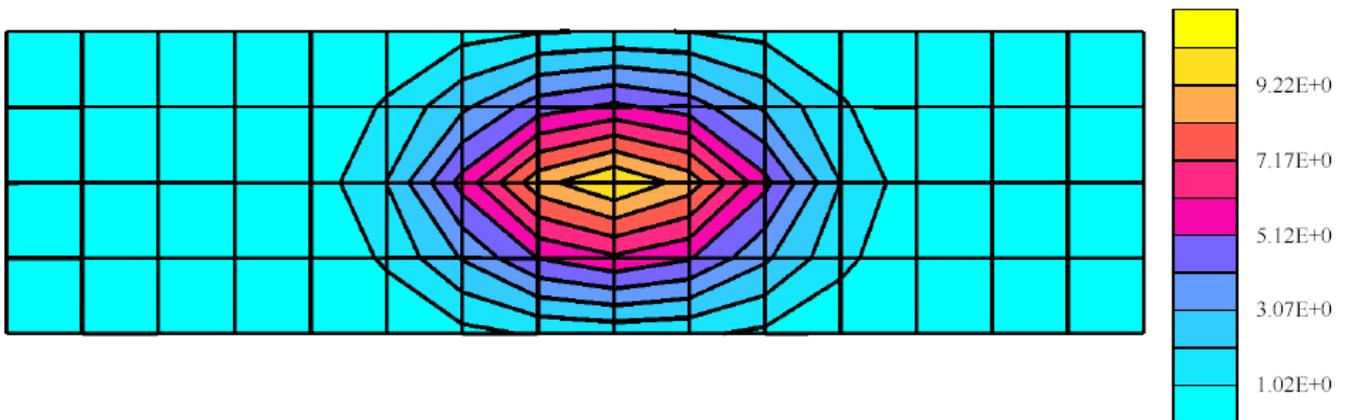

SPEAG 900 MHz Dipole; Model D900V2, SN 158; Test Date:12/20/02

MFRL EME Lab

Run #: Sys Perf-R1-021220

TX Freq: 900 MHz

Start Power; 250mW

Target SAR normalized to 1W= 11.2W/kg


Calculated SAR @ 1W including drift = 11.09 W/kg

MFRL TEST 900MHz; Probe: ET3DV6R A2LA - SN1418;Probe Cal Date: 5/21/02ConvF(5.60,5.60,5.60); Crest factor: 1.0;

Body 900MHz: $\sigma = 1.03$ mho/m $\epsilon = 54.7$ $\rho = 1.04$ g/cm³; PROBE CAL DATE: 020521

Cubes (2): Peak: 4.27 mW/g \pm 0.04 dB, SAR (1g): 2.76 mW/g \pm 0.03 dB, SAR (10g): 1.77 mW/g \pm 0.03 dB, (Worst-case extrapolation) Penetration depth: 12.4 (11.4, 13.9) [mm]

Power drift: -0.02 dB

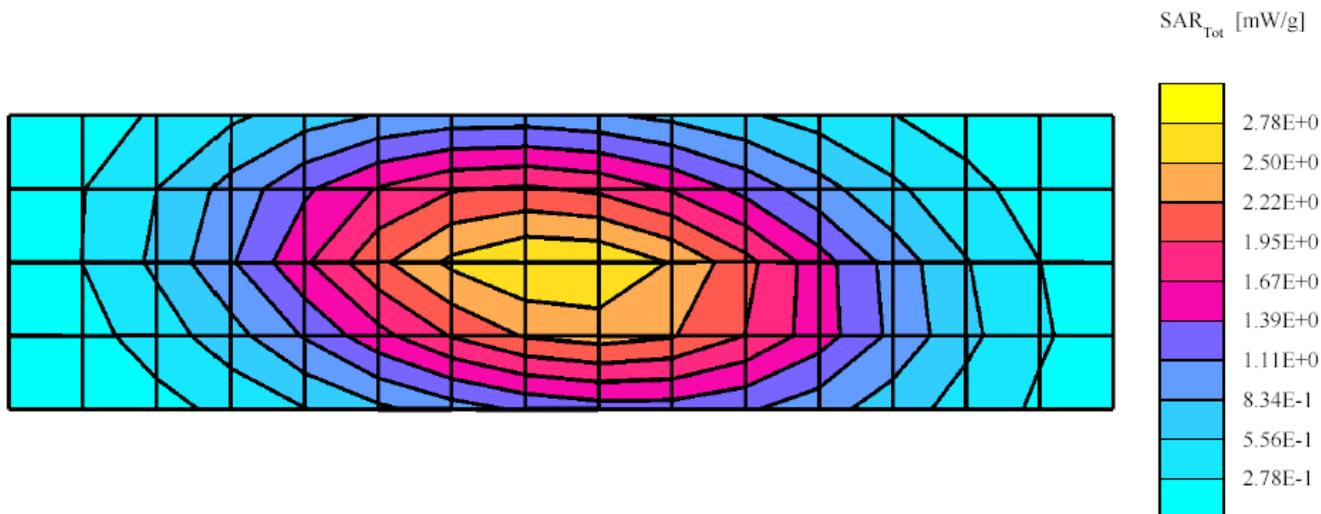

SPEAG 1800 MHz Dipole; Model D1800V2, SN 2d043; Test Date:12/21/02

MFRL EME Lab

Run #: Sys Perf-R1-021221

TX Freq: 1880 MHz

Start Power; 250mW

Target SAR normalized to 1W= 40W/Kg


Calculated SAR @ 1W including drift = 38.65 w/kg

MFRL TEST 1800MHz; Probe: ET3DV6R A2LA - SN1418;Probe Cal Date: 5/21/02ConvF(4.40,4.40,4.40); Crest factor: 1.0;

Body 1800MHz: $\sigma = 1.48$ mho/m $\epsilon = 53.1$ $\rho = 1.04$ g/cm³; PROBE CALIBRATION DATE: 020521

Cubes (2): Peak: 17.3 mW/g \pm 0.05 dB, SAR (1g): 9.64 mW/g \pm 0.01 dB, SAR (10g): 5.15 mW/g \pm 0.02 dB, (Worst-case extrapolation) Penetration depth: 9.0 (8.3, 10.3) [mm]

Power drift: -0.01 dB

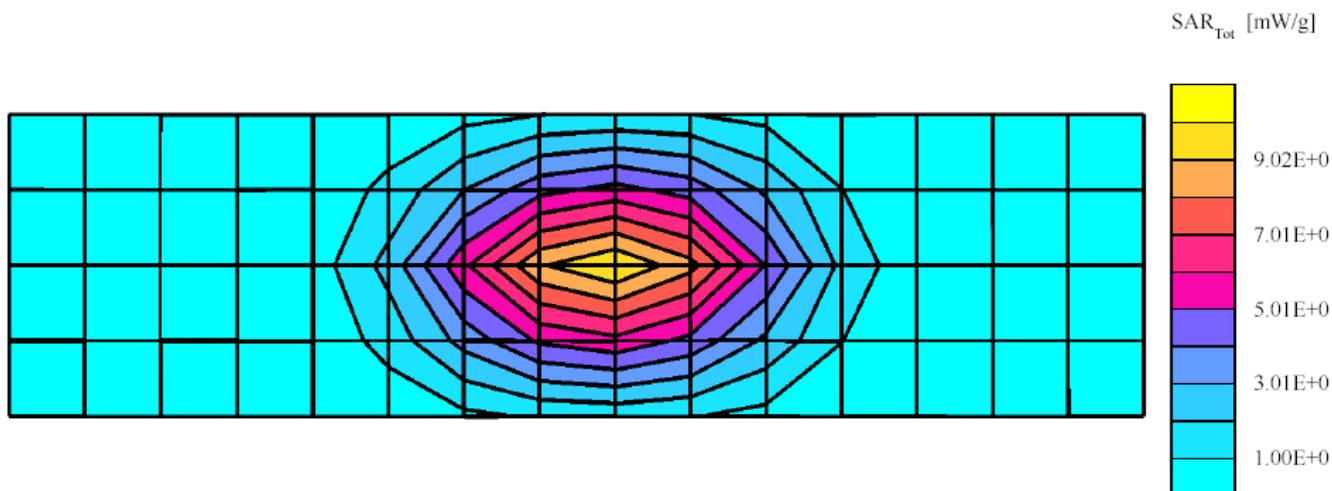

SPEAG 2450 MHz Dipole; Model D2450V2, SN 703; Test Date:12/26/02

MFRL EME Lab

Run #: Sys Perf-R1-021226

TX Freq: 2450MHz

Start Power; 250mW

Target SAR normalized to 1W= 56.4W/kg


Calculated SAR @ 1W including drift = 60.14W/kg

MFRL TEST 2450MHz; Probe: ET3DV6R A2LA - SN1418;Probe Cal Date: 5/21/02ConvF(3.60,3.60,3.60); Crest factor: 1.0;

Body 2450MHz: $\sigma = 1.99$ mho/m $\epsilon = 53.8$ $\rho = 1.04$ g/cm³; PROBE CAL DATE: 020423

Cubes (2): Peak: 29.8 mW/g \pm 0.01 dB, SAR (1g): 15.0 mW/g \pm 0.01 dB, SAR (10g): 7.06 mW/g \pm 0.01 dB, (Worst-case extrapolation) Penetration depth: 7.4 (7.1, 8.4) [mm]

Power drift: -0.01 dB

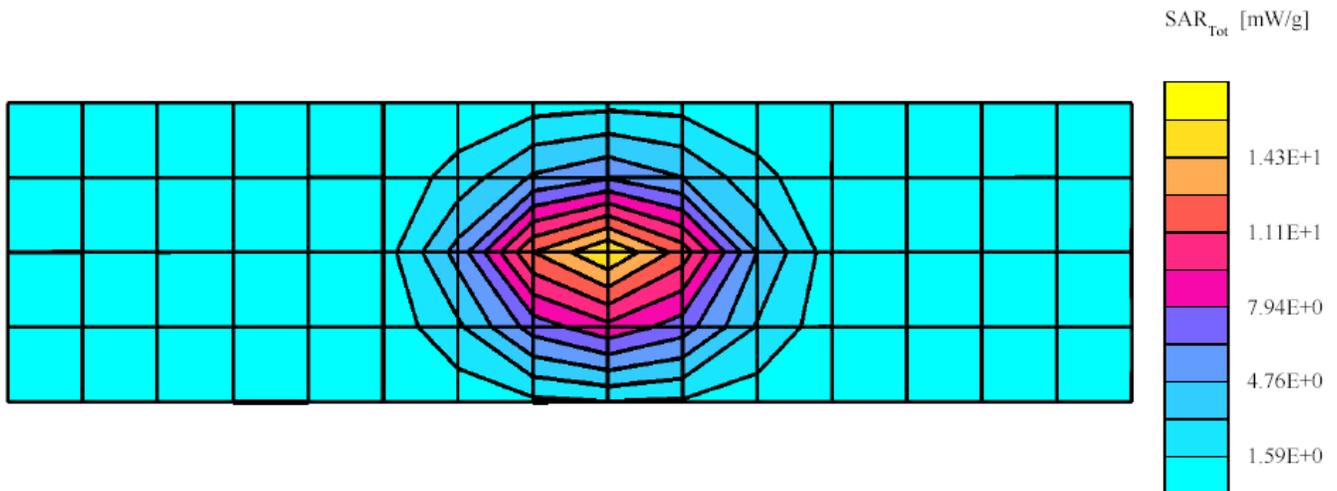

SPEAG 2450 MHz Dipole; Model D2450V2, SN 703; Test Date:12/27/02

MFRL EME Lab

Run #: Sys Perf-R1-021227

TX Freq: 2450MHz

Start Power; 250mW

Target SAR normalized to 1W= 56.4W/kg

Calculated SAR @ 1W = 60.4W/kg


MFRL TEST 2450MHz; Probe: ET3DV6R A2LA - SN1418;Probe Cal Date: 5/21/02ConvF(3.60,3.60,3.60); Crest factor: 1.0;

Body 2450MHz: $\sigma = 2.03$ mho/m $\epsilon = 53.6$ $\rho = 1.04$ g/cm³; PROBE CAL DATE: 020423

Cubes (2): Peak: 29.9 mW/g ± 0.04 dB, SAR (1g): 15.1 mW/g ± 0.03 dB, SAR (10g): 7.07 mW/g ± 0.01 dB, (Worst-case extrapolation) Penetration depth: 7.4 (7.0, 8.3) [mm]

Power drift: 0.00 dB

SAR_{Tot} [mW/g]

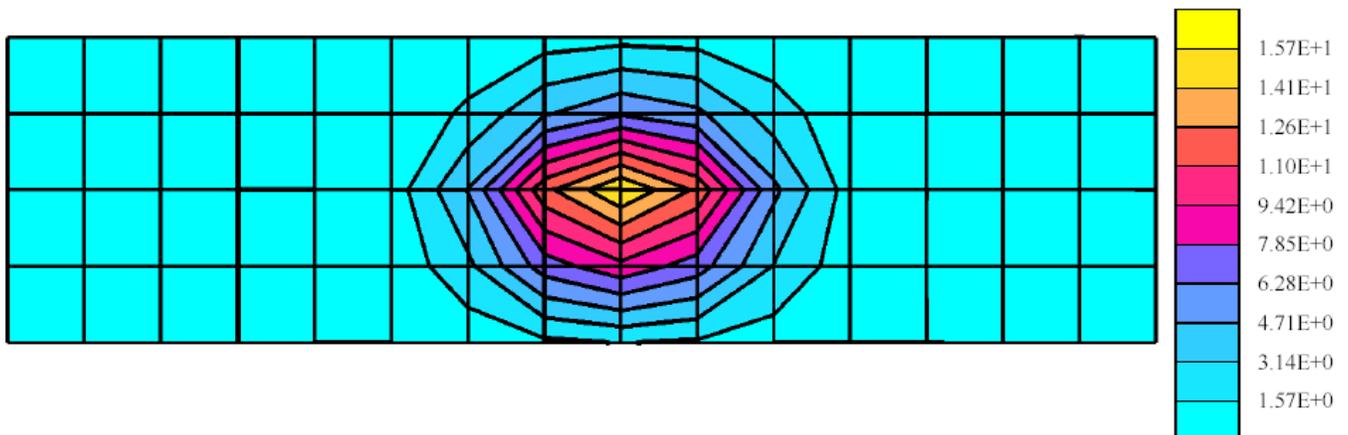

SPEAG 900 MHz Dipole; Model D900V2, SN 158; Test Date:1/03/03

MFRL EME Lab

Run #: Sys Perf-R1-030103

TX Freq: 900MHz

Start Power; 250mW

Target SAR normalized to 1W= 11.2W/kg


Calculated SAR @ 1W including drift = 11.27W/kg

MFRL TEST 900MHz; Device Probe: ET3DV6R A2LA - SN1418;Probe Cal Date: 5/21/02ConvF(5.60,5.60,5.60); Crest factor: 1.0; Body 900MHz: $\sigma = 1.03$ mho/m $\epsilon = 54.7$ $\rho = 1.04$ g/cm³; PROBE CAL DATE: 020521

Cubes (2): Peak: 4.35 mW/g \pm 0.01 dB, SAR (1g): 2.81 mW/g \pm 0.02 dB, SAR (10g): 1.80 mW/g \pm 0.03 dB, (Worst-case extrapolation) Penetration depth: 12.4 (11.4, 13.8) [mm]

Power drift: -0.01 dB

SAR_{Tot} [mW/g]

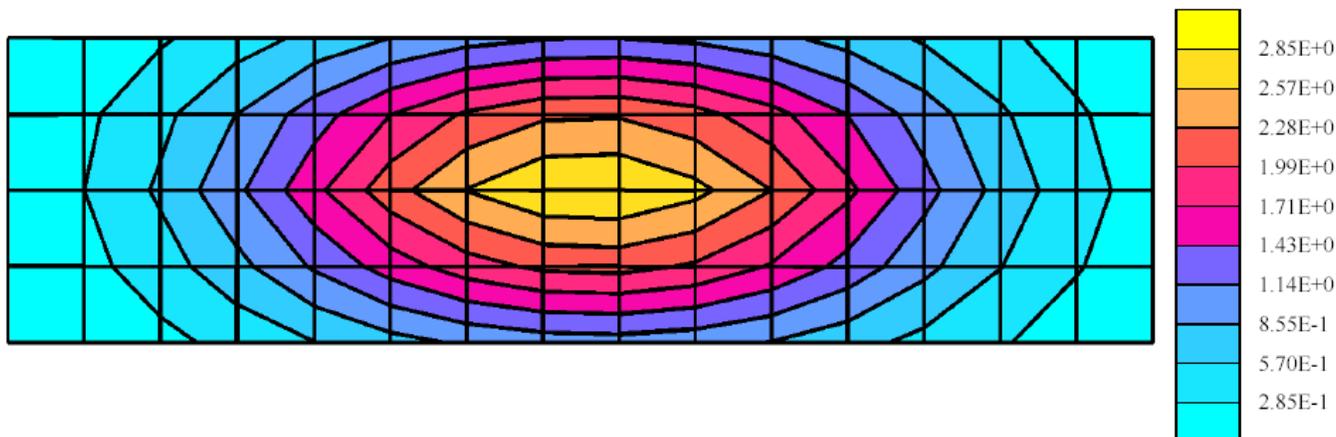

SPEAG 900 MHz Dipole; Model D900V2, SN 158; Test Date:1/29/03

MFRL EME Lab

Run #: Sys Perf-R1-030129

TX Freq: 900MHz

Start Power; 250mW

Target SAR normalized to 1W= 11.2W/Kg


Measured SAR @ 1W including drift = 10.53w/kg

MFRL 900; Probe: ET3DV6R A2LA - SN1418;Probe Cal Date: 5/21/02ConvF(5.70,5.70,5.70); Crest factor: 1.0; Body

900MHz: $\sigma = 1.02$ mho/m $\epsilon_r = 56.9$ $\rho = 1.04$ g/cm³; PROBE CAL DATE: 020521

Cubes (2): Peak: 4.04 mW/g ± 0.02 dB, SAR (1g): 2.62 mW/g ± 0.03 dB, SAR (10g): 1.69 mW/g ± 0.03 dB, (Worst-case extrapolation) Penetration depth: 12.5 (11.4, 13.8) [mm]

Power drift: -0.02 dB

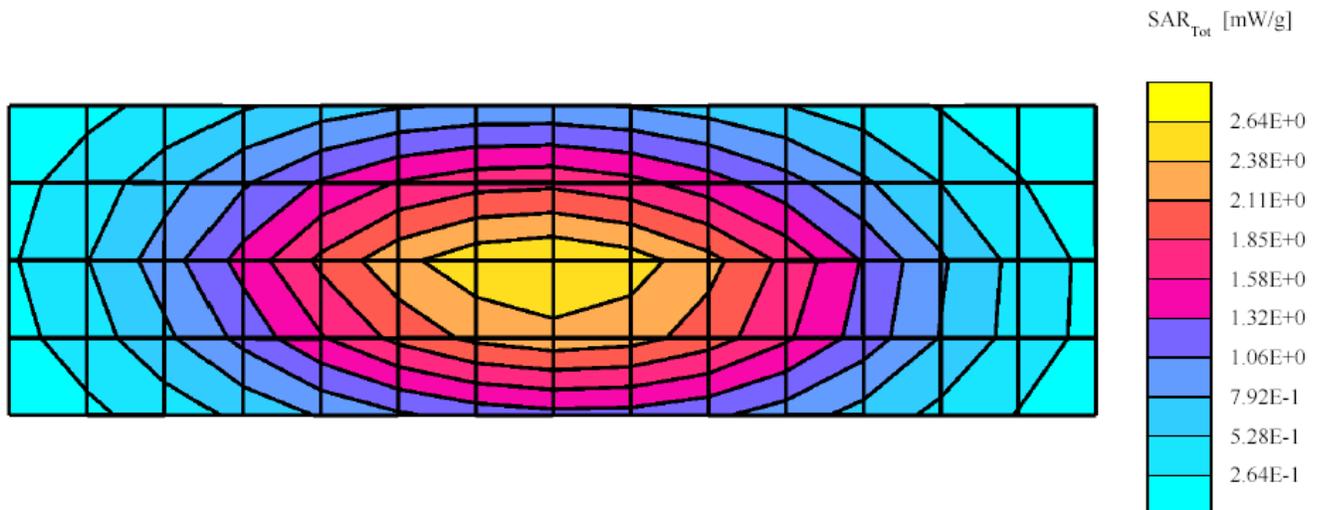

SPEAG 1800 MHz Dipole; Model D1800V2, SN 2d043; Test Date:2/4/03

MFRL EME Lab

Run #: 030204

TX Freq: 1880MHz

Start Power; 250mW


Target SAR normalized to 1W= 40W/Kg

Actual SAR @ 1W including drift = 40.68w/kg

Probe: ET3DV6R A2LA - SN1418;Probe Cal Date: 5/21/02ConvF(4.40,4.40,4.40); Crest factor: 1.0; Body 1880MHz: $\sigma = 1.49$ mho/m $\epsilon = 53.8$ $\rho = 1.04$ g/cm³; PROBE CALIBRATION DATE: 020521

Cubes (2): Peak: 36.3 mW/g ± 0.08 dB, SAR (1g): 20.2 mW/g ± 0.04 dB, SAR (10g): 10.8 mW/g ± 0.01 dB, (Worst-case extrapolation) Penetration depth: 8.9 (8.3, 10.1) [mm]

Power drift: -0.03 dB

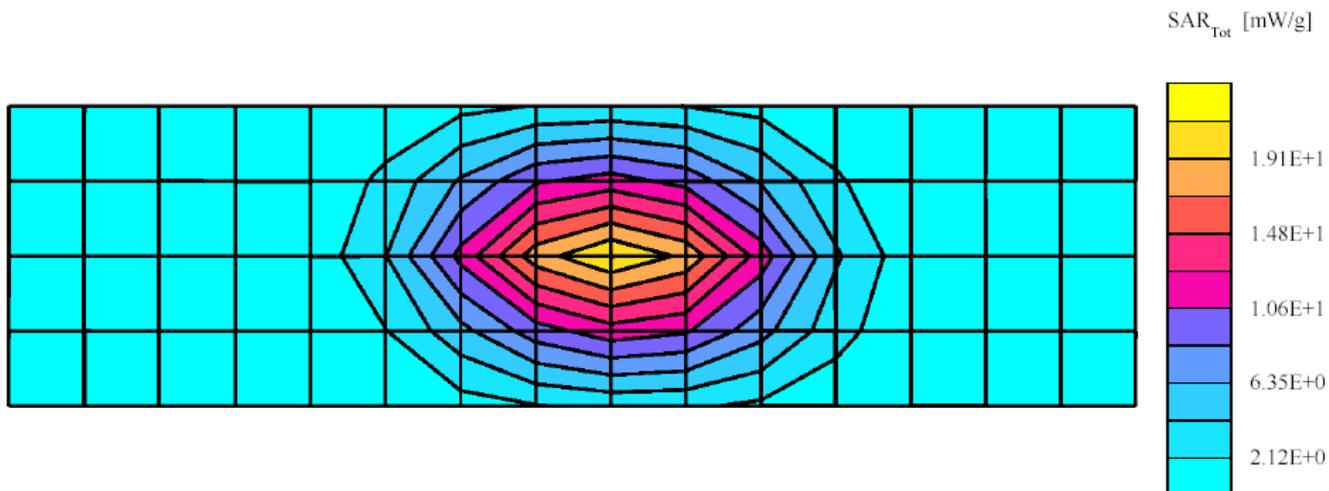

APPENDIX D
Calibration Certificates

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate


Dosimetric E-Field Probe

Type:	ET3DV6R
	1418
Place of Calibration	Zurich
Date of Calibration	May 21, 2002
Calibration Interval	12 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by 

Approved by 

DASY3 - Parameters of Probe: ET3DV6R SN:1418**Sensitivity in Free Space**

NormX	2.27 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	2.12 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	2.35 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	95
DCP Y	95
DCP Z	95

Sensitivity in Tissue Simulating Liquid

Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\%$ mho/m
Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\%$ mho/m
	ConvF X	5.8 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	5.8 $\pm 9.5\%$ (k=2)	Alpha 0.49
	ConvF Z	5.8 $\pm 9.5\%$ (k=2)	Depth 2.19
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
Head	1900 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\%$ mho/m
	ConvF X	4.8 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	4.8 $\pm 9.5\%$ (k=2)	Alpha 0.60
	ConvF Z	4.8 $\pm 9.5\%$ (k=2)	Depth 2.24

Boundary Effect

Head	900 MHz	Typical SAR gradient: 5 % per mm	
	Probe Tip to Boundary	1 mm	2 mm
	SAR _{be} [%] Without Correction Algorithm	10.3	5.5
	SAR _{be} [%] With Correction Algorithm	0.3	0.5
Head	1800 MHz	Typical SAR gradient: 10 % per mm	
	Probe Tip to Boundary	1 mm	2 mm
	SAR _{be} [%] Without Correction Algorithm	12.9	8.2
	SAR _{be} [%] With Correction Algorithm	0.1	0.2

Sensor Offset

Probe Tip to Sensor Center	2.7	mm
----------------------------	------------	----

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Additional Conversion Factors for Dosimetric E-Field Probe

Type

ET3DV6R

Serial Number

1418

Place of Assessment

Zurich

Date of Summary


May 23, 2002

Probe Calibration Date

May 21, 2002

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by



Dosimetric E-Field Probe ET3DV6R SN:1418

Conversion factor (\pm standard deviation)

150 MHz	ConvF	8.1 \pm 8%	$\epsilon_r = 52.3 \pm 5\%$ $\sigma = 0.76 \pm 5\%$ mho/m (head tissue)
300 MHz	ConvF	7.0 \pm 8%	$\epsilon_r = 45.3 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
368 MHz	ConvF	6.8 \pm 8%	$\epsilon_r = 44.5 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
450 MHz	ConvF	6.6 \pm 8%	$\epsilon_r = 43.5 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
1750 MHz	ConvF	4.9 \pm 8%	$\epsilon_r = 40.0 \pm 5\%$ $\sigma = 1.37 \pm 5\%$ mho/m (head tissue)
1900 MHz	ConvF	4.6 \pm 8%	$\epsilon_r = 40.0 \pm 5\%$ $\sigma = 1.40 \pm 5\%$ mho/m (head tissue)
2000 MHz	ConvF	4.6 \pm 8%	$\epsilon_r = 37.0 \pm 5\%$ $\sigma = 1.40 \pm 5\%$ mho/m (head tissue)
2450 MHz	ConvF	4.2 \pm 8%	$\epsilon_r = 32.0 \pm 5\%$ $\sigma = 1.80 \pm 5\%$ mho/m (head tissue)

Dosimetric E-Field Probe ET3DV6R SN:1418

Conversion factor (\pm standard deviation)

35 MHz	ConvF	8.0 \pm 15%	$\epsilon_r = 78.0 \pm 5\%$ $\sigma = 0.65 \pm 5\%$ mho/m (body tissue)
75 MHz	ConvF	7.9 \pm 10%	$\epsilon_r = 70.0 \pm 5\%$ $\sigma = 0.70 \pm 5\%$ mho/m (body tissue)
150 MHz	ConvF	7.7 \pm 8%	$\epsilon_r = 61.9 \pm 5\%$ $\sigma = 0.80 \pm 5\%$ mho/m (body tissue)
300 MHz	ConvF	7.1 \pm 8%	$\epsilon_r = 58.2 \pm 5\%$ $\sigma = 0.92 \pm 5\%$ mho/m (body tissue)
368 MHz	ConvF	6.9 \pm 8%	$\epsilon_r = 57.5 \pm 5\%$ $\sigma = 0.93 \pm 5\%$ mho/m (body tissue)
450 MHz	ConvF	6.8 \pm 8%	$\epsilon_r = 56.7 \pm 5\%$ $\sigma = 0.94 \pm 5\%$ mho/m (body tissue)
835 MHz	ConvF	5.7 \pm 8%	$\epsilon_r = 55.2 \pm 5\%$ $\sigma = 0.97 \pm 5\%$ mho/m (body tissue)
900 MHz	ConvF	5.6 \pm 8%	$\epsilon_r = 55.0 \pm 5\%$ $\sigma = 1.05 \pm 5\%$ mho/m (body tissue)
925 MHz	ConvF	5.6 \pm 8%	$\epsilon_r = 55.0 \pm 5\%$ $\sigma = 1.06 \pm 5\%$ mho/m (body tissue)
1500 MHz	ConvF	4.8 \pm 8%	$\epsilon_r = 53.9 \pm 5\%$ $\sigma = 1.33 \pm 5\%$ mho/m (body tissue)

Dosimetric E-Field Probe ET3DV6R SN:1418

Conversion factor (\pm standard deviation)

1750 MHz	ConvF	4.5 \pm 8%	$\epsilon_r = 53.4 \pm 5\%$ $\sigma = 1.49 \pm 5\%$ mho/m (body tissue)
1800 MHz	ConvF	4.4 \pm 8%	$\epsilon_r = 53.3 \pm 5\%$ $\sigma = 1.52 \pm 5\%$ mho/m (body tissue)
1900 MHz	ConvF	4.3 \pm 8%	$\epsilon_r = 53.3 \pm 5\%$ $\sigma = 1.52 \pm 5\%$ mho/m (body tissue)
2000 MHz	ConvF	4.1 \pm 8%	$\epsilon_r = 53.3 \pm 5\%$ $\sigma = 1.52 \pm 5\%$ mho/m (body tissue)
2450 MHz	ConvF	3.6 \pm 8%	$\epsilon_r = 52.7 \pm 5\%$ $\sigma = 1.95 \pm 5\%$ mho/m (body tissue)

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

900 MHz System Validation Dipole

Type:

D900V2

Serial Number:

158

Place of Calibration:

Zurich

Date of Calibration:

August 2, 2002


Calibration Interval:

24 months


Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:



Approved by:



1. Measurement Conditions

The measurements were performed in the flat section of the new SAM twin phantom filled with head simulating solution of the following electrical parameters at 900 MHz:

Relative Dielectricity	41.7	± 5%
Conductivity	0.97 mho/m	± 5%

The DASY3 System (Software version 3.1d) with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 6.5 at 900 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 20mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging. The dipole input power (forward power) was 250mW ± 3 %. The results are normalized to 1W input power.

2.1. SAR Measurement with DASY3 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the worst-case extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	11.2 mW/g
averaged over 10 cm ³ (10 g) of tissue:	7.08 mW/g

2.2 SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	10.5 mW/g
averaged over 10 cm ³ (10 g) of tissue:	6.76 mW/g

3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay: **1.394 ns** (one direction)
Transmission factor: **0.991** (voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 900 MHz: **Re{Z} = 49.4 Ω**

Im {Z} = -5.1 Ω

Return Loss at 900 MHz **-25.7 dB**

4. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

5. Design

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

6. Power Test

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Validation Dipole D900V2 SN:158, d=15 mm

Frequency: 900 MHz; Antenna Input Power: 250 [mW]


MM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0

Probe: ET3DV6 - SN1507; ConvF(6.50,6.50,6.50) at 900 MHz, IEEE 1528 900 MHz: $\sigma = 0.97$ mho/m $\epsilon_r = 41.7$ $\rho = 1.00$ g/cm³

Losses (2): Peak: 4.41 mW/g ± 0.03 dB, SAR (1g): 2.79 mW/g ± 0.02 dB, SAR (10g): 1.77 mW/g ± 0.01 dB, (Worst-case extrapolation)

Penetration depth: 11.6 (10.7, 12.9) [mm]

Drift: -0.02 dB

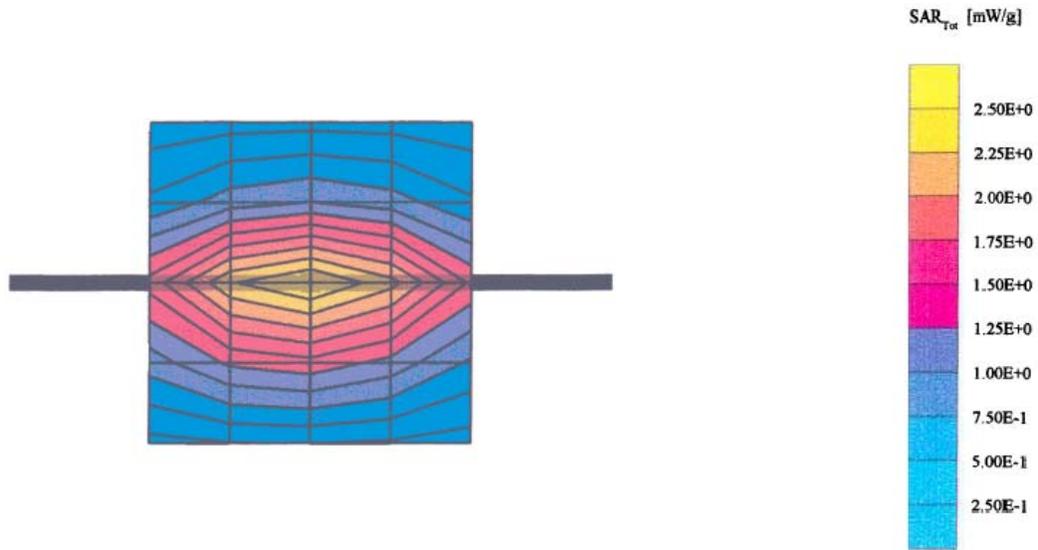

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

1800 MHz System Validation Dipole

Type:

D1800V2

Serial Number:

2d043

Place of Calibration:

Zurich

Date of Calibration:

June 13, 2002

Calibration Interval:

24 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

D. Velleo

Approved by:

Alan Kötter

1. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with head simulating glycol solution of the following electrical parameters at 1800 MHz:

Relative Dielectricity	38.9	$\pm 5\%$
Conductivity	1.35 mho/m	$\pm 5\%$

The DASY3 System (Software version 3.1d) with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 5.3 at 1800 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 20mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW $\pm 3\%$. The results are normalized to 1W input power.

2.1. SAR Measurement with DASY3 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the worst-case extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	40.0 mW/g
averaged over 10 cm ³ (10 g) of tissue:	21.0 mW/g

2.2 SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	36.8 mW/g
averaged over 10 cm ³ (10 g) of tissue:	19.8 mW/g

Validation Dipole D1800V2 SN:2d043, d = 10 mm

Frequency: 1800 MHz; Antenna Input Power: 250 [mW]


Phantom: Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0

Probe: ET3DV6 - SN1507; ConvF(5.30,5.30,5.30) at 1800 MHz; IEEE1528 1800 MHz: $\sigma = 1.35 \text{ mho/m}$, $\epsilon_r = 38.9$, $\rho = 1.00 \text{ g/cm}^3$


Losses (2): Peak: 18.4 mW/g $\pm 0.00 \text{ dB}$, SAR (1g): 9.99 mW/g $\pm 0.02 \text{ dB}$, SAR (10g): 5.26 mW/g $\pm 0.02 \text{ dB}$, (Worst-case extrapolation)

Penetration depth: 8.4 (8.0, 9.2) [mm]

Drift: 0.01 dB



SAR_{Tot} [mW/g]

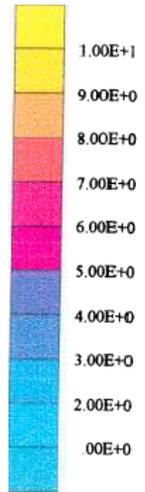

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79


Calibration Certificate

2450 MHz System Validation Dipole

Type	D2450V2
Serial Number:	703
Place of Calibration:	Zurich
Date of Calibration:	June 19, 2002
Calibration Interval	24 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:	
Approved by	

1. Measurement Conditions

The measurements were performed in the flat section of the new SAM twin phantom filled with head simulating solution of the following electrical parameters at 2450 MHz:

Relative permittivity	38.3	$\pm 5\%$
Conductivity	1.90 mho/m	$\pm 10\%$

The DASY3 System (Software version 3.1d) with a dosimetric E-field probe ET3DV6 (SN:1507, conversion factor 5.0 at 2450 MHz) was used for the measurements.

The dipole feedpoint was positioned below the center marking and oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 20mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW $\pm 3\%$. The results are normalized to 1W input power.

2.1. SAR Measurement with DASY3 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the worst-case extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	56.4 mW/g
averaged over 10 cm ³ (10 g) of tissue:	26.1 mW/g

2.2 SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm ³ (1 g) of tissue:	53.2 mW/g
averaged over 10 cm ³ (10 g) of tissue:	24.9 mW/g

Validation Dipole D2450V2 SN703, d = 10 mm

Frequency: 2450 MHz; Antenna Input Power: 250 [mW]


M Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0

Model: ET3DV6 - SN1507; ConvF(5.00,5.00,5.00) at 2450 MHz; IEEE1528 2450 MHz: $\sigma = 1.90$ mho/m $\epsilon_r = 38.3$ $\rho = 1.00$ g/cm³


Results (2): Peak: 28.8 mW/g ± 0.04 dB, SAR (1g): 14.1 mW/g ± 0.02 dB, SAR (10g): 6.52 mW/g ± 0.01 dB, (Worst-case extrapolation)

Retraction depth: 6.5 (6.4, 7.0) [mm]

Measurement drift: -0.00 dB

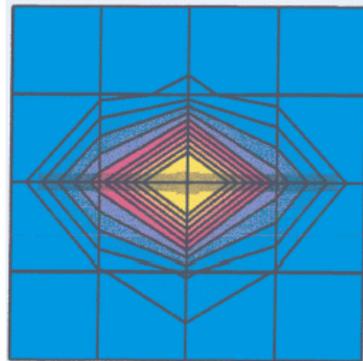

SAR_{tot} [mW/g]

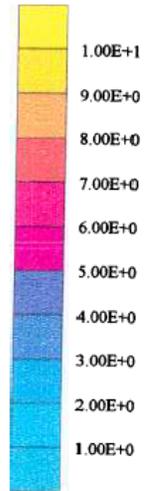

APPENDIX E
Illustration of Body-Worn Accessories

The purpose of this appendix is to illustrate the body-worn carry accessories for FCC ID: AZ489FT7003. The sample that was used in the following photos represents the product used to obtain the results presented herein and was used in this section to demonstrate the different body-worn accessories.



Photo 1.
Model FHN6394A
Back View

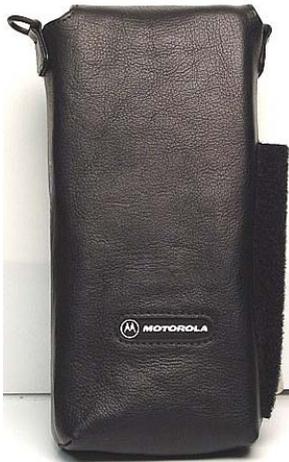


Photo 2.
Model FHN6394A
Front View



Photo 3.
Model FHN6394A
Side View



Photo 4.
Model FHN6395A
Back View



Photo 5.
Model FHN6395A
Front View



Photo 6.
Model FHN6395A
Side View



Photo 7.
Model FHN6396A
Back View



Photo 8.
Model FHN6396A
Front View



Photo 9.
Model FHN6396A
Side View



Photo 10.
Model FHN6396A w/ attached shoulder strap
Side View

Appendix F
Accessories and options test status and separation distances

The following table summarizes the body spacing distance provided by each of the body-worn accessories:

Carry Case Model	Tested ?	Separation distances between device and phantom surface. Range (mm)	Comments
FHN6394A	Yes	11 - 40	NA
FHN6396A	Yes	12 - 16	NA
FHN6395A	No	11 - 40	Similar to FHN6394A; w/ opening for the display and keypad