

Exhibit 6a. Part 24 Measured Data -- Pursuant 47 CFR. 2.1041

6a.1 PCS Frequency Stability -- Pursuant 47 CFR 2.1055a (1) & 2.1055(d) 2

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

Frequency Stability				
Mode:	CDMA 1900	Operating Frequency:	1880.0 MHz	
Channel:	600	Deviation Limit (PPM):	0.08ppm (+/-150Hz)	
Temperature	Frequency Error	Frequency Error	Voltage	Voltage
C	HZ	(PPM)	(%)	(VDC)
-30 C	12.40	0.007	100%	4.20
-20 C	9.70	0.005	100%	4.20
-10 C	-9.00	-0.005	100%	4.20
0 C	-11.50	-0.006	100%	4.20
10 C	-8.70	-0.005	100%	4.20
20 C	-11.70	-0.006	100%	4.20
30 C	-6.40	-0.003	100%	4.20
40 C	9.60	0.005	100%	4.20
50 C	-13.10	-0.007	100%	4.20
60 C	-7.70	-0.004	100%	4.20
20 C	17.00	0.009	Battery Endpoint	3.20

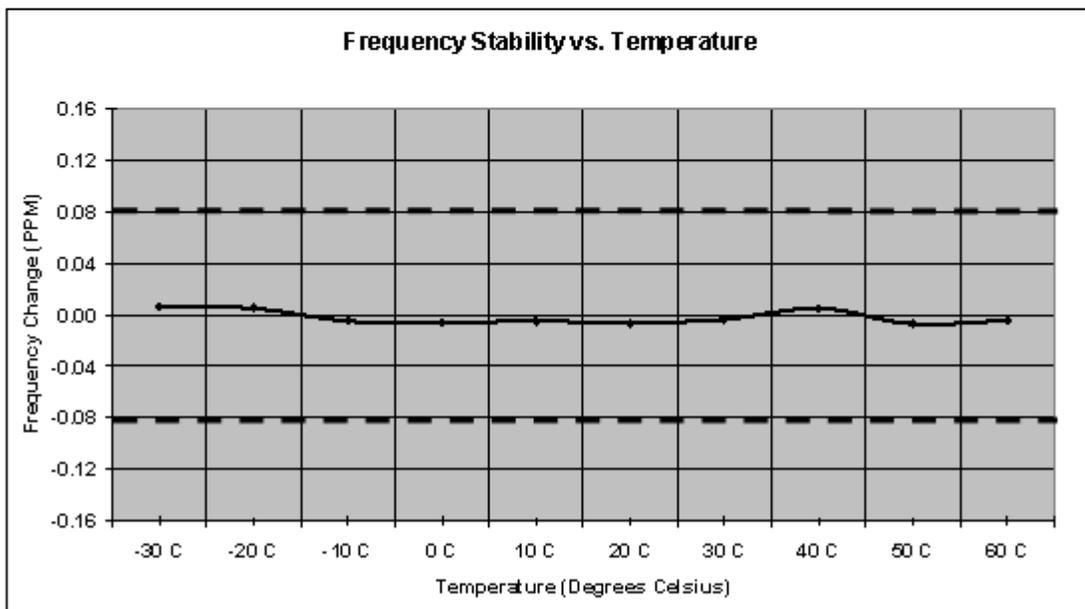


Table 6a-5.1. Transmitter Frequency Stability vs. Temperature in 1900 MHz Band