



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE (SAR EVALUATION)

Applicant Name:

Motorola, Inc.
8000 West Sunrise Blvd.
Ft Lauderdale, FL 33322
United States

Date of Testing:

02/14/2007 - 02/16/2007

Additional Test Dates:

07/10/2007

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.:

0705170480.AZ4-R2

FCC ID:

AZ489FT7030

APPLICANT:

MOTOROLA, INC.

EUT Type:

GPRS/EDGE Handheld with Bluetooth and WLAN

Application Type:

Certification

FCC Rule Part(s):

§2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]

FCC Classification:

Licensed Transmitter Held to Ear (PCE)

Model(s):

F4705A

Tx Frequency:

824.20 - 848.80 MHz (Cellular GSM)

1850.20 - 1909.80 MHz (GSM PCS)

2402 - 2480 MHz (Bluetooth)

2412 - 2462 MHz (WLAN)

Max. RF Conducted Power:

33 dBm GSM / 30 dBm PCS

31 dBm GSM EDGE / 30 dBm GSM PCS EDGE

16 dBm WLAN-b / 15 dBm WLAN-g / 3 dBm Bluetooth

Max. SAR Measurement:

0.0763 W/kg GSM850 Head SAR / 0.167 W/kg GSM850 Body SAR

0.1967 W/kg GSM1900 Head SAR / 0.367 W/kg GSM1900 Body SAR

0.0043 W/kg Bluetooth Body SAR / 0.072 W/kg WLAN Body SAR

Test Device Serial No.:

Final Pilot [S/N: 629SHA4506]

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-2005 and has been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001) and IEEE Std. 1528-2003.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

NOTE: This revised Test Report supersedes and replaces the previously-issued test report (S/N: 0705170480.AZ4-R1) on the same subject EUT for the same type of testing as indicated.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Randy Ortanez
President



FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 1 of 26

TABLE OF CONTENTS

1	INTRODUCTION	3
2	TEST SITE LOCATION.....	4
3	EUT DESCRIPTION	5
4	SAR MEASUREMENT SETUP	6
5	DASY E-FIELD PROBE SYSTEM.....	8
6	PROBE CALIBRATION PROCESS.....	9
7	PHANTOM AND EQUIVALENT TISSUES	10
8	DOSIMETRIC ASSESSMENT & PHANTOM SPECS.....	11
9	DEFINITION OF REFERENCE POINTS	12
10	TEST CONFIGURATION POSITIONS.....	13
11	ANSI/IEEE C95.1-2005 RF EXPOSURE LIMITS.....	15
12	MEASUREMENT UNCERTAINTIES.....	16
13	SYSTEM VERIFICATION	17
14	SAR DATA SUMMARY.....	18
15	EQUIPMENT LIST.....	23
16	CONCLUSION.....	24
17	REFERENCES.....	25

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT	
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN	Reviewed by: Quality Manager
			Page 2 of 26

1 INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.[1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-2005 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. (c) 2005 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.[2] The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave[3] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

1.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 1-1).

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

Figure 1-1
SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m^3)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 3 of 26

2 TEST SITE LOCATION

2.1 INTRODUCTION

The map at the right shows the location of the PCTEST LABORATORY in Columbia, Maryland. It is in proximity to the FCC Laboratory, the Baltimore-Washington International (BWI) airport, the city of Baltimore and Washington, DC (See Figure 2).



Figure 2-1
Map of the Greater Baltimore and Metropolitan Washington, D.C. area

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49' 38" W longitude. The facility is 1.5 miles north of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on January 27, 2006 and Industry Canada.

2.2 Test Facility / Accreditations:

Measurements were performed at an independent accredited PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing-Aid Compatibility (HAC), CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and all Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS and CDMA, and EvDO mobile phones.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO Data, CDMA 1xRTT Data.

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 4 of 26

3 EUT DESCRIPTION

FCC ID: AZ489FT7030, radio model F4705A is a HC700-G handheld computer. This device incorporates a GSM/GPRS/EDGE radio modem (GSM850, PCS1900), a Bluetooth radio modem used for any application in which data exchanged with an external Bluetooth, and a WLAN radio module used to connect the device to a LAN via an Access Point (using CSMA/CA access protocol).

GSM/GPRS/EDGE radio modem (GSM850, PCS1900): maximum duty cycle is 25% using TDMA 2:8. The GSM/GPRS/EDGE radio modem is used for packet switching data applications. Enabling the radio modem to transmit its data information only in the allocated slot 2 out of 8 is done by using Time Division Multiple Access (TDMA). Bluetooth radio modem uses Frequency Hopping Spread Spectrum (FHSS). The maximum actual transmission duty cycle is imposed by the Bluetooth standard: for single-slot operation the Bluetooth device transmits 366 microsec out of 625 microsec. The WLAN modem operates in the ISM band using Direct Sequence Spread Spectrum (DSSS) and works in compliance with the IEEE 802.11b/g standard.

The device has co-located transmitters and can simultaneously transmit with GSM850/Bluetooth, PCS1900/Bluetooth and WLAN/Bluetooth.

The intended operating user positions are at the side of head, body-worn by means of the offered body-worn accessory, 2.5cm in front of the face, and handheld.

This device will be marketed to and used by the general population. This device may be used while held against the head in voice modes (GSM850 and PCS1900 only), in front of the face, against the body in phone, data modes with offered body-worn accessories, and against the hand in data modes.

The radio model F4705A is capable of operating in the GSM850: 824.2-848.8MHz, PCS1900: 1850.2-1909.8MHz; BT: 2.402-2.48GHz; WLAN: 2412-2462MHz bands.

The rated maximum conducted power outputs are 33 dBm for GSM850; 30 dBm for PCS1900; 31 dBm for EDGE850; 30 dBm for EDGE1900; 3 dBm for Bluetooth; 16 dBm for WLAN 802.11b; 15 dBm for WLAN 802.11g.

The radio model F4705A is offered with the options and accessories included in this report.

The DUT is electrically identical to FCC ID: AZ489FT7027 (Model: F4708A), with the exception of a software change to enable EDGE. F4708A SAR data is reported for F4705A, and is supported by a manufacturer equivalency declaration.

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 5 of 26

4 SAR MEASUREMENT SETUP

4.1 Robotic System

Measurements are performed using the DASY4 automated dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Pentium 4 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Figure 3-1).

4.2 System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Gateway Pentium 4 2.53 GHz computer with Windows XP system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

4.3 System Electronics

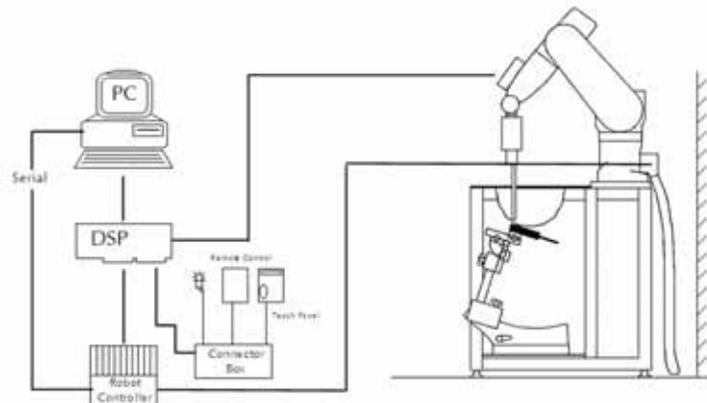


Figure 4-1
SAR Measurement System Setup

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [7].

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 6 of 26

4.4 Automated Test System Specifications

Positioner

Robot: Stäubli Unimation Corp. Robot RX60L
 Repeatability: 0.02 mm
 No. of Axes: 6

Data Acquisition Electronic System (DAE)

Cell Controller

Processor: Pentium 4
 Clock Speed: 2.53 GHz
 Operating System: Windows XP Professional

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter & control logic
 Software: DASY4, SEMCAD software
 Connecting Lines: Optical Downlink for data and status info
 Optical upload for commands and clock

PC Interface Card

Function: 166MHz low power Pentium MMX 32MB chipdisk
 Link to DAE
 16-bit A/D converter for surface detection system
 Two Serial & Ethernet link to robotics
 Direct emergency stop output for robot

Phantom

Type: SAM Twin Phantom (V4.0)
 Shell Material: Composite
 Thickness: 2.0 ± 0.2 mm



Figure 4-2
DASY4 SAR Measurement System

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 7 of 26

5.1 Probe Measurement System



Figure 5-1
SAR System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration [7] (see Figure 5-3) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach

and looks for the maximum using a 2nd order fitting (see Figure 5-1). The approach is stopped at reaching the maximum.

5.2 Probe Specifications

Model:	ES3DV3, EX3DV4
Frequency Range:	10 MHz – 6.0 GHz (EX3DV4) 10 MHz – 4 GHz (ES3DV3)
Calibration:	In brain and muscle simulating tissue at Frequencies from 835 up to 5800MHz
Linearity:	± 0.2 dB (30 MHz to 6 GHz) for EX3DV4 ± 0.2 dB (30 MHz to 4 GHz) for ES3DV3
Dynamic Range:	10 mW/kg – 100 W/kg
Probe Length:	330 mm
Probe Tip Length:	20 mm
Body Diameter:	12 mm
Tip Diameter:	2.5 mm (3.9mm for ES3DV3)
Tip-Center:	1 mm (2.0 mm for ES3DV3)
Application:	SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields



Figure 5-2
Near-Field Probe




Figure 5-3
Triangular Probe
Configuration

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 8 of 26

6

PROBE CALIBRATION PROCESS

6.1 Dosimetric Assessment Procedure

Each E-Probe/Probe amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

6.2 Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

6.3 Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

- Δt = exposure time (30 seconds),
- C = heat capacity of tissue (brain or muscle),
- ΔT = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

- σ = simulated tissue conductivity,
- ρ = Tissue density (1.25 g/cm³ for brain tissue)

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;




Figure 6-1 E-Field and Temperature measurements at 900MHz [7]

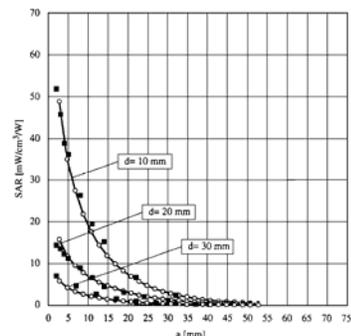


Figure 6-2 E-Field and temperature measurements at 1.9GHz [7]

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 9 of 26

7 PHANTOM AND EQUIVALENT TISSUES

7.1 SAM Phantoms



Figure 6-1
SAM Phantoms

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [11][12]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 5.1)

7.2 Brain & Muscle Simulating Mixture Characterization



Figure 6-2
Head Simulated

The brain and muscle mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution (see Table 7-1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table. Other head and body tissue parameters that have not been specified in IEEE-1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Hartsgrove [13]. (See Table 6-1)

Table 7-1
Composition of the Brain & Muscle Tissue Equivalent Matter

Frequency (MHz)	300			450			635			900			1450			1800			1900			1950			2000			2100			2450			3000		
Recipe #	1	1	3	1	1	2	3	1	1	2	3	1	1	2	3	1	2	3	1	2	4	1	1	2	2	3	2	1	1	2	2	3	2			
Ingredient: (% by weight)																																				
1,3-Propanediol								64.81																												
Bactericide	0.19	0.19	0.50	0.10	0.10		0.50											0.50												0.50						
Diacetic			48.90					49.20										49.43													49.75					
DGEE								45.41	47.00	13.84	44.92							44.94	13.84	45.00	50.00	50.00	7.99	7.99						7.99						
HEC	0.98	0.98		1.00	1.00																															
NaCl	5.95	3.95	1.70	1.45	1.48	0.79	1.10	0.67	0.36	0.35	0.18	0.64	0.18	0.35														0.16	0.16		0.16					
Sucrose	55.32	56.32			57.00	56.50																														
Triton X-100														30.45							30.45							19.97	19.97		19.97					
Water	37.56	38.56	48.90	40.45	40.92	34.40	49.20	53.80	52.64	55.36	54.90	49.43	54.90	55.36	55.00	50.00	50.00	71.88	71.88	49.75	71.88									71.88						
Measured dielectric parameters:																																				
ϵ'_p	46.00	43.4	44.3	41.6	41.2	41.8	42.7	40.9	39.3	41	40.4	39.2	39.9	41	40.1	37	36.8	41.1	40.3	39.2	37.9															
σ (S/m)	0.86	0.87	0.9	0.9	0.98	0.97	0.99	1.21	1.39	1.38	1.4	1.4	1.42	1.38	1.41	1.4	1.51	1.57	1.88	1.82	2.46															
Temp. (°C)	22	22	20	22	22	22	20	22	22	21	22	20	21	21	20	22	22	20	20	20	20	20														
Target dielectric parameters (Table 2)																																				
ϵ'_p	45.30	43.50	41.5		41.50		40.5							40.0				39.80		39.2	38.5															
σ (S/m)	0.87	0.87	0.9		0.97		1.2							1.4				1.49		1.8	2.4															

NOTE—Multiple columns for any single frequency are optional recipes. Recipe 6, reference: 1 (Kanda et al. [885]), 2 (Vignone [B143]), 3 (Pyman and Gabriel [B119]), 4 (Fukunaga et al. [B50]).

*The formulas containing Triton X-100 and corresponding measured parameters are under review and verification.

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 10 of 26

8.1 Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed point was measured and used as a reference value.
2. The SAR distribution at the exposed side of the head was measured at a distance of 3.0mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm x 15mm.
3. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32mm x 32mm x 30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see Figure 7-1):
 - a. The data at the surface was extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm [15]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions) [15][16]. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 1, was re-measured. If the value changed by more than 5%, the evaluation is repeated.




Figure 8-1
Sample SAR Area Scan

8.2 Specific Anthropomorphic Mannequin (SAM) Specifications

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Figure 7-2). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimized reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.



Figure 8-2
SAM Twin Phantom Shell

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 11 of 26

9.1 EAR REFERENCE POINT

Figure 8-1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 8-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 8-2). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 9-1
Close-Up Side view of ERP

9.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 8-3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at it’s top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 9-2
Front, back and side view of SAM Twin Phantom

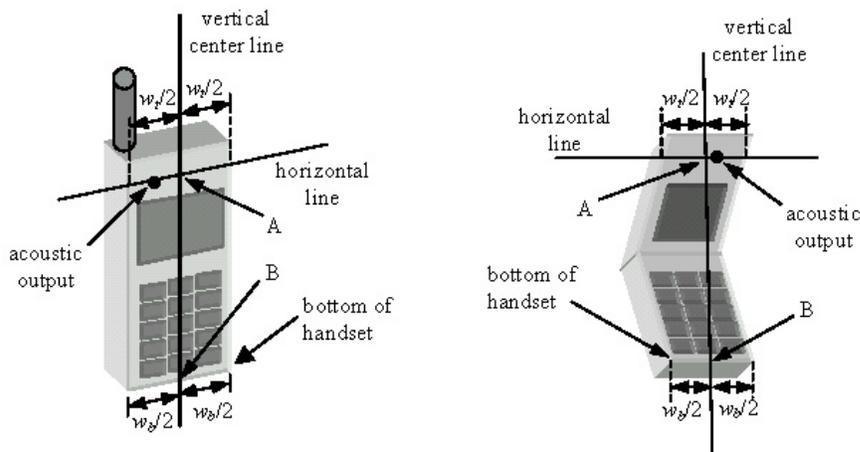


Figure 9-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 12 of 26

10 TEST CONFIGURATION POSITIONS

10.1 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 10-1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). See Figure 9-2)




Figure 10-2 Side view w/ relevant markings

10.2 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 13 of 26

position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 9-3).



Figure 10-3 Front, Side and Top View of Ear/15° Tilt Position




Figure 10-4 Side view w/ relevant markings



Figure 10-5 Body SAR Sample Photo (Not Actual EUT)

10.3 Body Holster /Belt Clip Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9-5). A device with a headset output is tested with a headset connected to the device.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in brain fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 14 of 26

11 ANSI/IEEE C95.1-2005 RF EXPOSURE LIMITS

11.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

11.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 11-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-2005

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

1 The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

2 The Spatial Average value of the SAR averaged over the whole body.

3 The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 15 of 26

12 MEASUREMENT UNCERTAINTIES

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k	
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i	
Measurement System										
Probe Calibration	E.2.1	6.6	N	1	1.0	1.0	6.6	6.6	∞	
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞	
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞	
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞	
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞	
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞	
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞	
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞	
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞	
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞	
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞	
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞	
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞	
Test Sample Related										
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287	
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞	
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞	
Phantom & Tissue Parameters										
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞	
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞	
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6	
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞	
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6	
Combined Standard Uncertainty (k=1)							RSS	12.4	12.0	299
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.7	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 16 of 26

13 SYSTEM VERIFICATION

13.1 Tissue Verification

**Table 13-1
Measured Tissue Properties**


Calibrated Date:	02/14/07		02/14/07		02/15/07		02/15/07		02/16/07		02/16/07	
	835H		835M		1900H		1900M		2450H		2450M	
	Target	Measured										
Dielectric Constant	41.5	40.9	55.2	53.8	40.0	39.2	53.3	53.7	39.2	40.1	52.70	52.23
Conductivity	0.90	0.90	0.97	0.97	1.40	1.42	1.52	1.54	1.80	1.82	1.95	1.91
Calibrated Date:	07/10/07		07/10/07		07/10/07		07/10/07					
	835H		835M		1900H		1900M					
	Target	Measured										
Dielectric Constant	41.5	42.0	55.2	55.1	40.0	40.7	53.3	54.1				
Conductivity	0.90	0.93	0.97	0.98	1.40	1.42	1.52	1.59				

13.2 Test System Verification

Prior to assessment, the system is verified to $\pm 10\%$ of the specifications at 835 MHz, 1900 MHz and 2450 MHz by using the system validation kit(s). (Graphic Plots Attached)

**Table 13-2
System Verification Results**

System Verification TARGET & MEASURED							
Date:	Amb. Temp (°C)	Liquid Temp(°C)	Input Power (W)	Tissue Frequency (Mhz)	Targeted SAR _{1g} (mW)	Measured SAR _{1g} (mW)	Deviation (%)
02/14/07	22.8	21.3	0.250	835	2.25	2.33	3.4%
02/15/07	23.2	21.1	0.100	1900	3.75	3.94	5.1%
02/16/07	22.9	20.8	0.100	2450	5.40	5.59	3.5%
07/10/07	23.6	21.5	0.250	835	2.25	2.33	3.4%
07/10/07	23.6	21.3	0.100	1900	3.77	4.10	8.8%

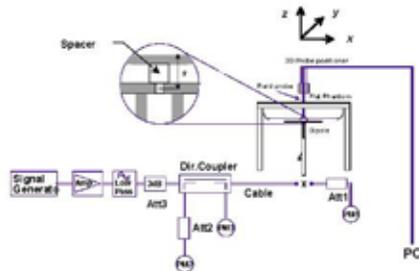

**Figure 13-1
System Verification Setup Diagram**



**Figure 13-2
System Verification Setup Photo**

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 17 of 26

14 SAR DATA SUMMARY

14.1 Cellular Band Head SAR Results

MEASUREMENT RESULTS												
FREQUENCY		Mode	Power[dBm]		Battery	Memory	Bluetooth (MHz)	Position	Side	SAR (W/kg)	Drift (dB)	Extrapol. SAR (W/kg)
MHz	Ch.		Start	End								
836.60	190	GSM	32.86	32.77	FNN7826A	no	off	Touch	Right	0.0748	-0.088	0.0763
836.60	190	GSM	32.86	32.80	FNN7826A	yes	2441	Touch	Right	0.0747	-0.059	0.0757
836.60	190	GSM	32.86	32.86	FNN7826A	no	off	Tilt	Right	0.0615	0.004	0.0614
836.60	190	GSM	32.86	33.09	FNN7826A	no	off	Touch	Left	0.0675	0.233	0.064
836.60	190	GSM	32.86	33.01	FNN7826A	yes	2441	Touch	Left	0.0653	0.152	0.0631
836.60	190	GSM	32.86	32.99	FNN7826A	no	off	Tilt	Left	0.0563	0.126	0.0547
ANSI / IEEE C95.1 2005 - SAFETY LIMIT							Brain					
Spatial Peak							1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population							averaged over 1 gram					

Table 14-1
850 Band Head SAR Summary

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. GSM mode does not simultaneously transmit with WLAN. GSM mode can be simultaneously transmitted with Bluetooth and is indicated in the above test data
4. Bluetooth power is at maximum power (DH5 packet type with alternating bits) with no hopping
5. Batteries are fully charged for all readings. Standard batteries were investigated.
6. Tissue parameters and temperatures are listed on the SAR plots.
7. Liquid tissue depth is 15.1 cm. \pm 0.1.
8. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN	Page 18 of 26	

14.2 PCS Band Head SAR Results

MEASUREMENT RESULTS												
FREQUENCY		Mode	Power[dBm]		Battery	Memory	Bluetooth (MHz)	Device Test Position	Side	SAR (W/kg)	Drift (dB)	SAR
MHz	Ch.		Start	End								(W/kg)
1880.00	661	GSM	29.54	29.53	FNN7826A	no	off	Touch	Right	0.140	-0.010	0.1403
1880.00	661	GSM	29.54	29.68	FNN7826A	yes	2441	Touch	Right	0.122	0.138	0.1182
1880.00	661	GSM	29.54	29.60	FNN7826A	no	off	Tilt	Right	0.133	0.063	0.1311
1880.00	661	GSM	29.54	29.46	FNN7826A	no	off	Touch	Left	0.193	-0.083	0.1967
1880.00	661	GSM	29.54	29.59	FNN7826A	yes	2441	Touch	Left	0.189	0.050	0.1868
1880.00	661	GSM	29.54	29.60	FNN7826A	no	off	Tilt	Left	0.131	0.058	0.1293
ANSI / IEEE C95.1 2005 - SAFETY LIMIT							Brain					
Spatial Peak							1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population							averaged over 1 gram					

Table 14-2
PCS Band Head SAR Summary

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. GSM mode does not simultaneously transmit with WLAN. GSM mode can be simultaneously transmitted with Bluetooth and is indicated in the above test data
4. Bluetooth power is at maximum power (DH5 packet type with alternating bits) with no hopping
5. Batteries are fully charged for all readings. Standard batteries were investigated.
6. Tissue parameters and temperatures are listed on the SAR plots.
7. Liquid tissue depth is 15.1 cm. \pm 0.1.
8. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 19 of 26

14.3 Body SAR Results

MEASUREMENT RESULTS												
FREQUENCY		Mode	Power[dBm]		Battery	Memory	Bluetooth	Device Test Position	Antenna Position	SAR (W/kg)	Drift (dB)	Extrap. SAR (W/kg)
MHz	Ch.		Start	End								
836.60	190	GPRS	32.86	33.01	FNN7826A	no	off	with Holster	Internal	0.128	0.146	0.1238
836.60	190	GPRS	32.86	32.97	FNN7826A	yes	2441	with Holster	Internal	0.117	0.109	0.1141
836.60	190	GPRS	32.86	33.00	FNN7826A	no	off	2.5cm - Front	Internal	0.0521	0.141	0.0504
836.60	190	GPRS	32.86	32.74	FNN7826A	no	off	2.5cm - Back	Internal	0.155	-0.124	0.1595
836.60	190	GPRS	32.86	32.68	FNN7826A	yes	2441	2.5cm - Back	Internal	0.147	-0.179	0.1532
1880.00	661	GPRS	29.54	29.39	FNN7826A	no	off	with Holster	Internal	0.088	-0.147	0.091
1880.00	661	GPRS	29.54	29.70	FNN7826A	yes	2441	with Holster	Internal	0.078	0.164	0.0749
1880.00	661	GPRS	29.54	29.67	FNN7826A	no	off	2.5cm - Front	Internal	0.0605	0.126	0.0588
1880.00	661	GPRS	29.54	29.69	FNN7826A	no	off	2.5cm - Back	Internal	0.353	0.149	0.3411
1880.00	661	GPRS	29.54	29.74	FNN7826A	yes	2441	2.5cm - Back	Internal	0.329	0.196	0.3145
2441.00	39	BT	3.01	2.82	FNN7826A	no	on	with Holster	Internal	0.004	-0.194	0.0042
2441.00	39	BT	3.01	3.16	FNN7826A	no	on	2.5cm - Front	Internal	0.0024	0.146	0.0023
2441.00	39	BT	3.01	2.84	FNN7826A	yes	on	2.5cm - Back	Internal	0.0042	-0.173	0.0043
2412.00	1	DSSS	15.43	15.27	FNN7826A	no	off	with Holster	Internal	0.065	-0.161	0.0675
2437.00	6	DSSS	15.94	15.97	FNN7826A	no	off	with Holster	Internal	0.072	0.032	0.0715
2462.00	11	DSSS	15.81	15.98	FNN7826A	no	off	with Holster	Internal	0.0613	0.172	0.0589
2437.00	6	DSSS	15.94	16.11	FNN7826A	yes	2441	with Holster	Internal	0.0598	0.169	0.0575
2437.00	6	DSSS	15.94	16.08	FNN7826A	no	off	2.5cm - Front	Internal	0.044	0.136	0.0426
2437.00	6	DSSS	15.94	16.11	FNN7826A	no	off	2.5cm - Back	Internal	0.0546	0.165	0.0526
ANSI / IEEE C95.1 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Muscle 1.6 W/kg (mW/g) averaged over 1 gram				

**Table 14-3
850/1900/WLAN/Bluetooth Test Data Summary**

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. Batteries are fully charged for all readings. Standard batteries were investigated.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth is 15.1 cm. ± 0.1.
5. Body Holster used is P/N FTN6839A only.
6. GPRS mode does not simultaneously transmit with WLAN. GPRS mode can be simultaneously transmitted with Bluetooth and is indicated in the above test data
7. Bluetooth power is at maximum power (DH5 packet type with alternating bits) with no hopping
8. Device was tested using the supplied body-holster and a fixed spacing.
9. GPRS was tested with 2 Transmitting time slots active
10. WLAN IEEE 802.11b mode was tested with the worst-case data rate at 1 Mbps.

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN	Page 20 of 26	

14.4 EDGE Body SAR Results

MEASUREMENT RESULTS												
FREQUENCY		Mode	Power[dBm]		Battery	Memory	Bluetooth	Device Test Position	Antenna Position	SAR (W/kg)	Drift (dB)	Extrap. SAR (W/kg)
MHz	Ch.		Start	End								
836.60	190	EDGE	31.06	31.18	FNN7826A	no	off	with Holster	Internal	0.119	0.116	0.1159
836.60	190	EDGE	31.06	31.23	FNN7826A	yes	2441	with Holster	Internal	0.114	0.167	0.1097
836.60	190	EDGE	31.06	31.19	FNN7826A	no	off	2.5cm - Front	Internal	0.167	0.134	0.1619
836.60	190	EDGE	31.06	31.25	FNN7826A	yes	2441	2.5cm - Back	Internal	0.159	0.192	0.1521
836.60	190	EDGE	31.06	31.17	FNN7826A	no	off	2.5cm - Back	Internal	0.074	0.108	0.0723
1880.00	661	EDGE	29.96	30.11	FNN7826A	no	off	with Holster	Internal	0.097	0.146	0.0941
1880.00	661	EDGE	29.96	30.09	FNN7826A	yes	2441	with Holster	Internal	0.086	0.126	0.835
1880.00	661	EDGE	29.96	30.15	FNN7826A	no	off	2.5cm - Front	Internal	0.367	0.186	0.3516
1880.00	661	EDGE	29.96	30.11	FNN7826A	yes	2441	2.5cm - Back	Internal	0.341	0.154	0.3291
1880.00	661	EDGE	29.96	30.14	FNN7826A	no	off	2.5cm - Back	Internal	0.082	0.183	0.0785
ANSI / IEEE C95.1 2005 - SAFETY LIMIT								Muscle				
Spatial Peak								1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population								averaged over 1 gram				

Table 14-4
850/1900 EDGE Test Data Summary

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. Batteries are fully charged for all readings. Standard batteries were investigated.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth is 15.1 cm. \pm 0.1.
5. Body Holster used is P/N FTN6839A only.
6. GPRS mode does not simultaneously transmit with WLAN. GPRS mode can be simultaneously transmitted with Bluetooth and is indicated in the above test data
7. Bluetooth power is at maximum power (DH5 packet type with alternating bits) with no hopping
8. Device was tested using the supplied body-holster and a fixed spacing.
9. EDGE was tested with 2 Transmitting time slots active

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN	Page 21 of 26	

14.5 Face SAR Results

MEASUREMENT RESULTS												
FREQUENCY		Mode	C_Power[dBm]		Battery	Memory	Bluetooth (MHz)	Spacing (cm)	Antenna Position	SAR (W/kg)	Drift (dB)	SAR (W/kg)
MHz	Ch.		Start	End								
836.60	190	GSM	32.86	32.63	FNN7826A	no	off	2.5	Internal	0.0427	-0.231	0.0450
836.60	190	GSM	32.86	32.86	FNN7826A	yes	2441	2.5	Internal	0.0416	-0.003	0.0416
1880.00	661	GSM	29.54	29.58	FNN7826A	no	off	2.5	Internal	0.0321	0.045	0.0318
1880.00	661	GSM	29.54	29.72	FNN7826A	yes	2441	2.5	Internal	0.0254	0.176	0.0244
2441.00	39	FHSS	3.01	3.18	FNN7826A	no	on	2.5	Internal	0.0034	0.165	0.0033
2441.00	39	FHSS	3.01	3.16	FNN7826A	yes	on	2.5	Internal	0.0032	0.149	0.0031
2412.00	1	DSSS	15.43	15.62	FNN7826A	no	off	2.5	Int.	0.0476	0.192	0.0455
2437.00	6	DSSS	15.94	16.12	FNN7826A	no	off	2.5	Int.	0.0571	0.176	0.0548
2462.00	11	DSSS	15.81	15.92	FNN7826A	no	off	2.5	Int.	0.0434	0.114	0.0423
2437.00	6	DSSS	15.94	16.14	FNN7826A	yes	2441	2.5	Int.	0.0559	0.195	0.0534
ANSI / IEEE C95.1 2005 - SAFETY LIMIT							Brain					
Spatial Peak							1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population							averaged over 1 gram					

Table 14-5
850/1900/Bluetooth/WLAN Test Data Summary for Face SAR

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Batteries are fully charged for all readings. Standard batteries were investigated.
4. GSM/GPRS mode does not simultaneously transmit with WLAN. GSM/GPRS mode can be simultaneously transmitted with Bluetooth and is indicated in the above test data
5. Bluetooth power is at maximum power (DH5 packet type with alternating bits) with no hopping
6. Tissue parameters and temperatures are listed on the SAR plots.
7. Liquid tissue depth is 15.1 cm. \pm 0.1.
8. WLAN IEEE 802.11b mode was tested with the worst-case data rate at 1 Mbps.
9. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN	Page 22 of 26	

15 EQUIPMENT LIST

Manufacturer	Model / Equipment	Calibration Date	Cal Interval	Calibration Due	Serial No.
Agilent	8753E (30kHz-6GHz) Network Analyzer	5/25/2006	Annual	5/25/2007	JP38020182
Agilent	N4010A Wireless Connectivity Test Set	6/11/2006	Annual	6/11/2007	GB46170464
Agilent	E5515C Wireless Communications Test Set	7/27/2006	Annual	7/27/2007	GB41450275
Agilent	E5515C Wireless Communications Test Set	10/6/2006	Annual	10/6/2007	GB43193972
Agilent	8648D (9kHz-4GHz) Signal Generator	10/1/2006	Annual	10/1/2007	3613A00315
Agilent	E5515C Wireless Communications Test Set	10/26/2006	Biennial	10/25/2008	GB46310798
Gigatronics	8657A Universal Power Meter	4/7/2006	Annual	4/7/2007	8650319
Gigatronics	80701A (0.05-18GHz) Power Sensor	4/11/2006	Annual	4/11/2007	1833460
Rohde & Schwarz	NRVS Power Meter	6/1/2005	Biennial	6/1/2007	835360/079
Rohde & Schwarz	NRV-Z53 Power Sensor	6/1/2005	Biennial	6/1/2007	846076/007
Rohde & Schwarz	CMU200 Base Station Simulator	11/8/2006	Annual	11/8/2007	107826
Rohde & Schwarz	CMU200 Base Station Simulator	7/26/2006	Annual	7/26/2007	833855/010
Rohde & Schwarz	CMU200 Base Station Simulator	4/20/2006	Annual	4/20/2007	836371/079
SPEAG	D1900V2 1900 MHz SAR Dipole	1/23/2007	Biennial	1/22/2009	502
SPEAG	D835V2 835MHz SAR Dipole	8/24/2005	Biennial	8/24/2007	4d026
SPEAG	D5GHzV2 5 GHz SAR Dipole	10/5/2005	Biennial	10/5/2007	1007
SPEAG	EX3DV4 SAR Probe	1/22/2007	Annual	1/22/2008	3550
SPEAG	DAE4	6/1/2006	Annual	6/1/2007	704
SPEAG	EX3DV4 SAR Probe	7/14/2006	Annual	7/14/2007	3589
SPEAG	DAE4	9/4/2006	Annual	9/4/2007	665
SPEAG	EX3DV4 SAR Probe	11/23/2006	Annual	11/23/2007	3561
SPEAG	ES3DV2 SAR Probe	9/20/2006	Annual	9/20/2007	3022
SPEAG	DAE3	10/16/2006	Annual	10/16/2007	455
SPEAG	DAE4	1/23/2007	Annual	1/23/2008	649
SPEAG	D2600V2 2600MHz SAR Dipole	1/5/2007	Annual	1/5/2008	1004
VWR	61161-274 Alarm Digital Thermometer	8/19/2006	Annual	8/19/2007	51280556
SPEAG	D835V2 835MHz SAR Dipole	1/8/2007	Biennial	1/7/2009	4d047
SPEAG	D1900V2 1900MHz SAR Dipole	1/23/2007	Biennial	1/22/2009	5d080
SPEAG	D2450V2 2450MHz SAR Dipole	1/17/2007	Biennial	1/16/2009	797
SPEAG	D5GHzV2 5GHz SAR Dipole	1/24/2007	Biennial	1/23/2009	1057

**Table 15-1
Equipment List**

Notes:

The E-field probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Validation measurement is performed by PCTEST prior to SAR evaluation. The brain simulating material is calibrated by PCTEST using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 23 of 26

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 24 of 26

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, April 2006.
- [3] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, July 2001.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Receptions in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN		Page 25 of 26

[17] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.

[18] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

[19] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

[20] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

[21] FCC SAR Measurement Procedures for 3G Devices, June 2006

[22] SAR Measurement procedures for IEEE 802.11a/b/g rev 1.1, Oct 2006

[23] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.

[24] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002

FCC ID: AZ489FT7030		SAR MEASUREMENT REPORT		Reviewed by: Quality Manager
SAR Filename: 0705170480.AZ4-R2	Test Dates: 02/14/2007 - 02/16/2007 & 07/10/2007	EUT Type: GPRS/EDGE Handheld with Bluetooth and WLAN	Page 26 of 26	

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 32.86 dBm


Communication System: GSM850 Motorola; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium: 835 Brain ($\sigma = 0.90$ mho/m, $\epsilon_r = 40.91$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 02-14-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(7.94, 7.94, 7.94); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Touch, Mid ch, Battery FNN7826A, Antenna Internal

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.01 V/m; Power Drift = -0.088 dB
Peak SAR (extrapolated) = 0.105 W/kg
SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.051 mW/g

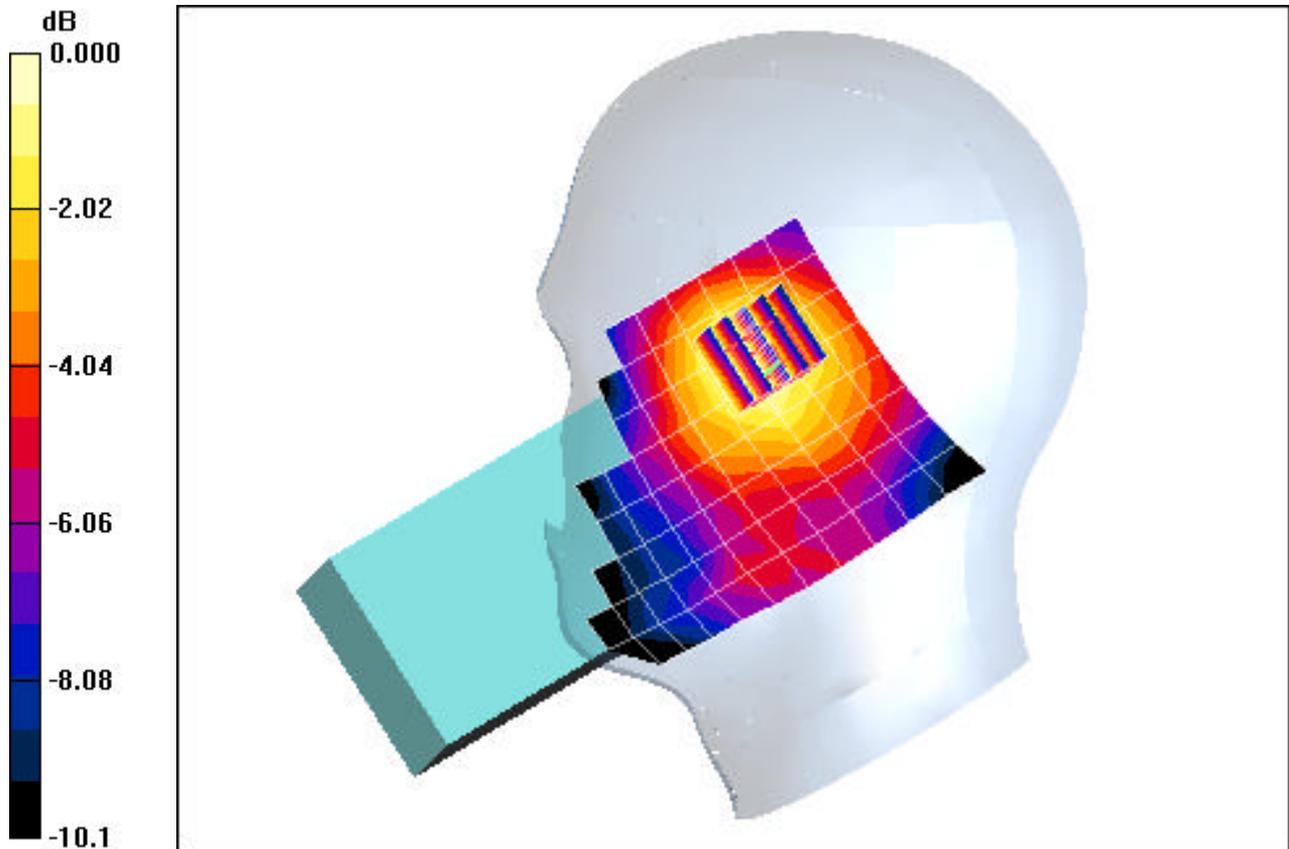

0 dB = 0.086mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 32.86 dBm


Communication System: GSM850 Motorola; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium: 835 Brain ($\sigma = 0.90$ mho/m, $\epsilon_r = 40.91$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 02-14-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(7.94, 7.94, 7.94); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilt, Mid ch, Battery FNN7826A, Antenna Internal

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.19 V/m; Power Drift = 0.004 dB
Peak SAR (extrapolated) = 0.087 W/kg
SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.042 mW/g

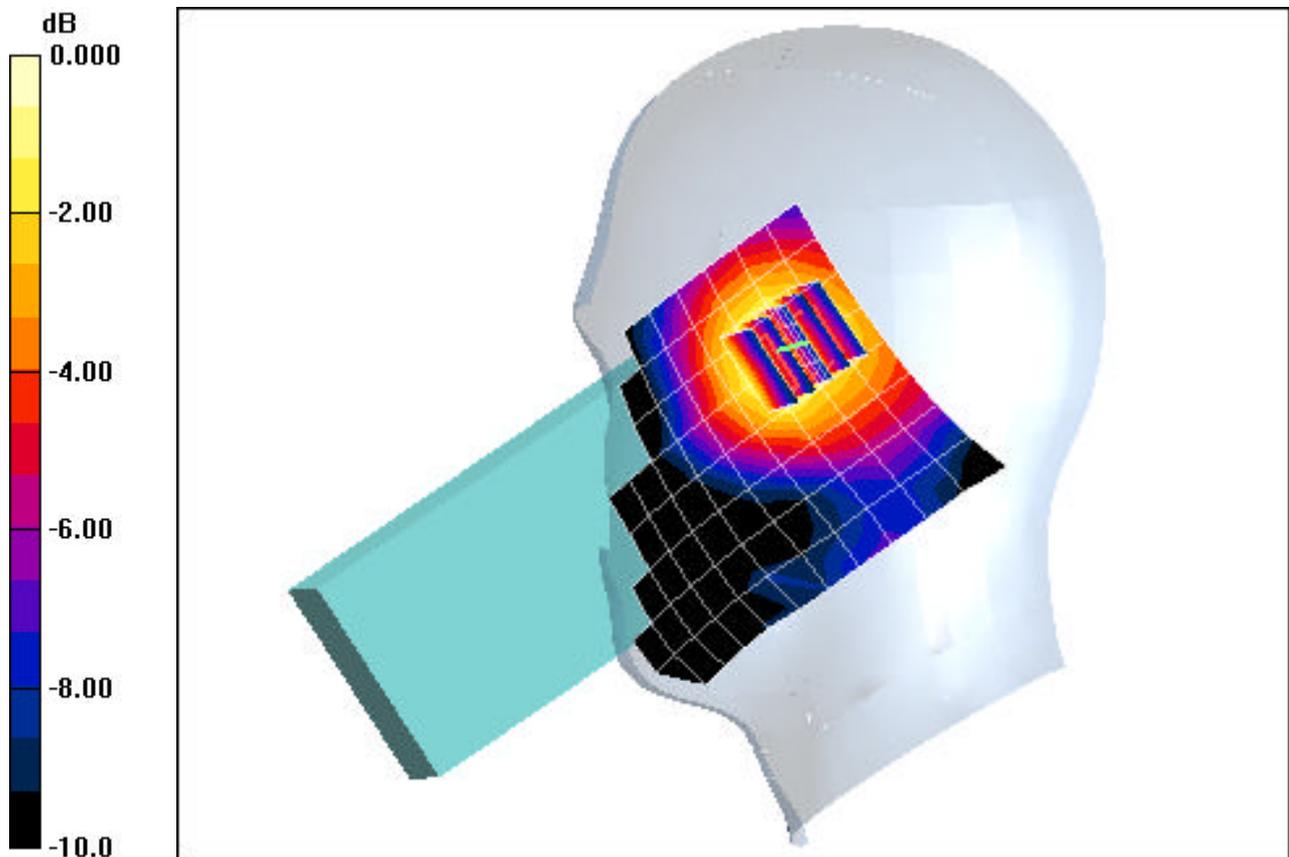

0 dB = 0.070mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 32.86 dBm**


Communication System: GSM850 Motorola; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium: 835 Brain ($\sigma = 0.90$ mho/m, $\epsilon_r = 40.91$, $\rho = 1000$ kg/m³)
Phantom section: Left Section

Test Date: 02-14-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(7.94, 7.94, 7.94); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Touch, Mid ch, Battery FNN7826A, Antenna Internal

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.47 V/m; Power Drift = 0.233 dB
Peak SAR (extrapolated) = 0.093 W/kg
SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.049 mW/g

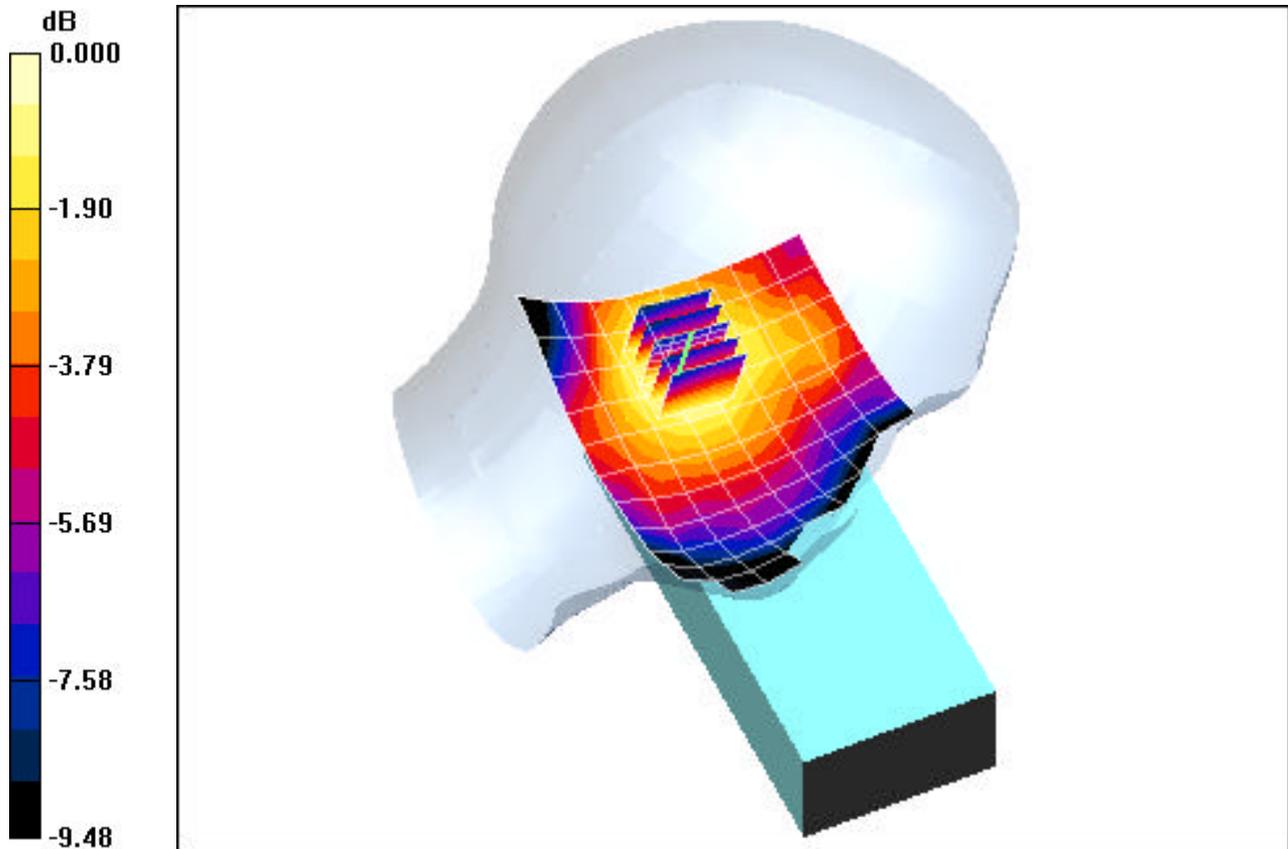

0 dB = 0.077mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN:629SHA4506; Conducted Power: 32.86 dBm**


Communication System: GSM850 Motorola; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium: 835 Brain ($\sigma = 0.90$ mho/m, $\epsilon_r = 40.91$, $\rho = 1000$ kg/m³)
Phantom section: Left Section

Test Date: 02-14-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(7.94, 7.94, 7.94); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilt, Mid ch, Battery FNN7826A, Antenna Internal

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.56 V/m; Power Drift = 0.126 dB
Peak SAR (extrapolated) = 0.077 W/kg
SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.039 mW/g

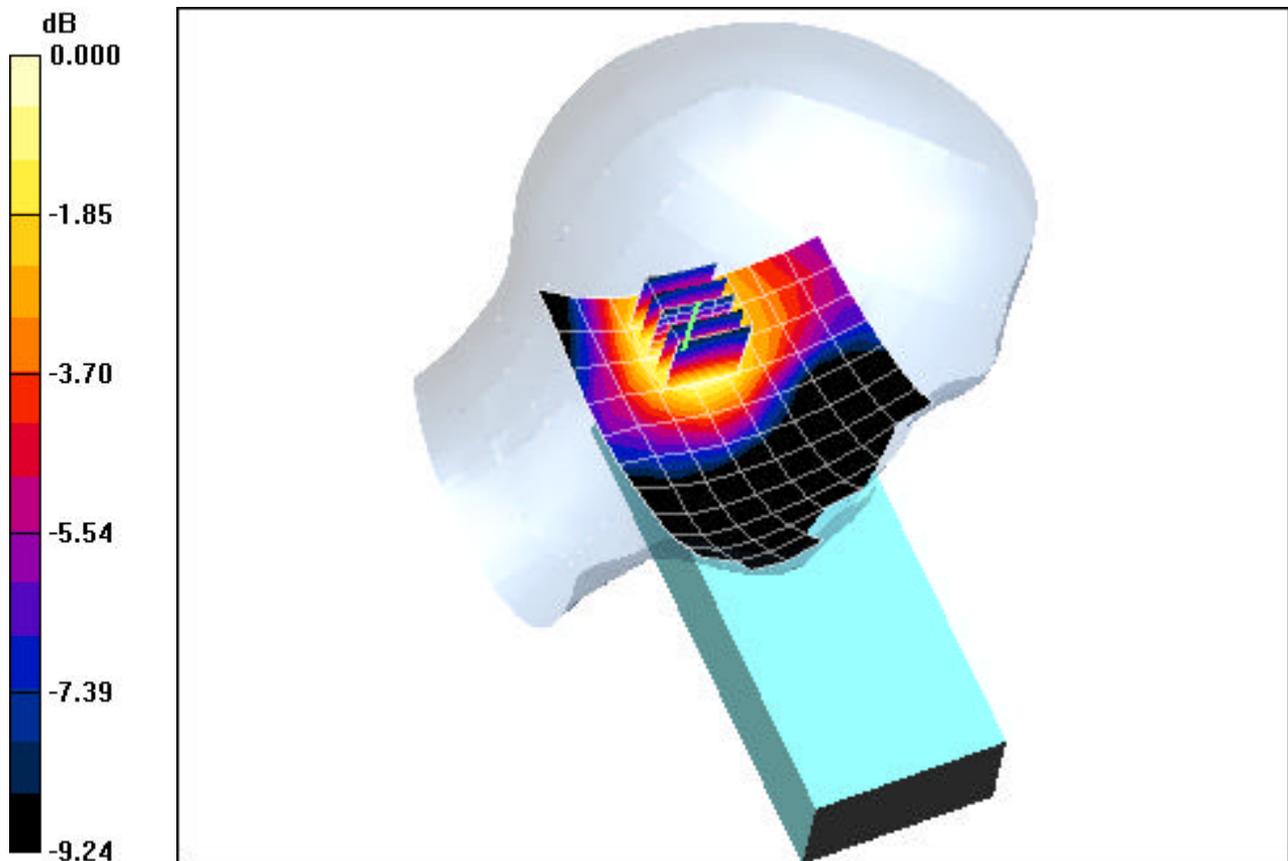

0 dB = 0.063mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 29.54 dBm

Communication System: GSM1900 Motorola; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: 1900 Brain ($\sigma = 1.42$ mho/m, $\epsilon_r = 39.23$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 02-15-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3561; ConvF(6.99, 6.99, 6.99); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Touch, Mid ch, Battery FNN7826A, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.70 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.083 mW/g

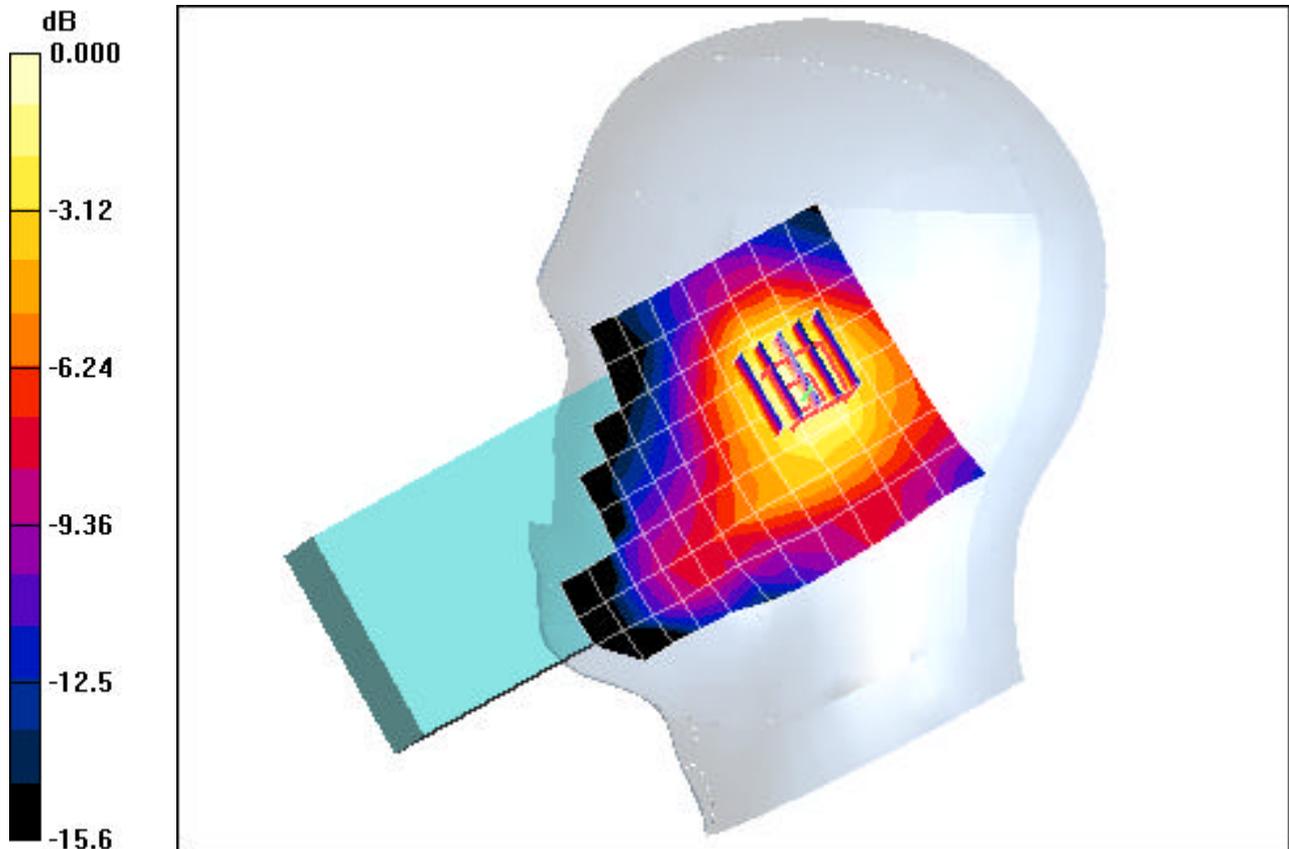

0 dB = 0.175mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 29.54 dBm**

Communication System: GSM1900 Motorola; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: 1900 Brain ($\sigma = 1.42$ mho/m, $\epsilon_r = 39.23$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 02-15-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3561; ConvF(6.99, 6.99, 6.99); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilt, Mid ch, Battery FNN7826A , Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.37 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.080 mW/g

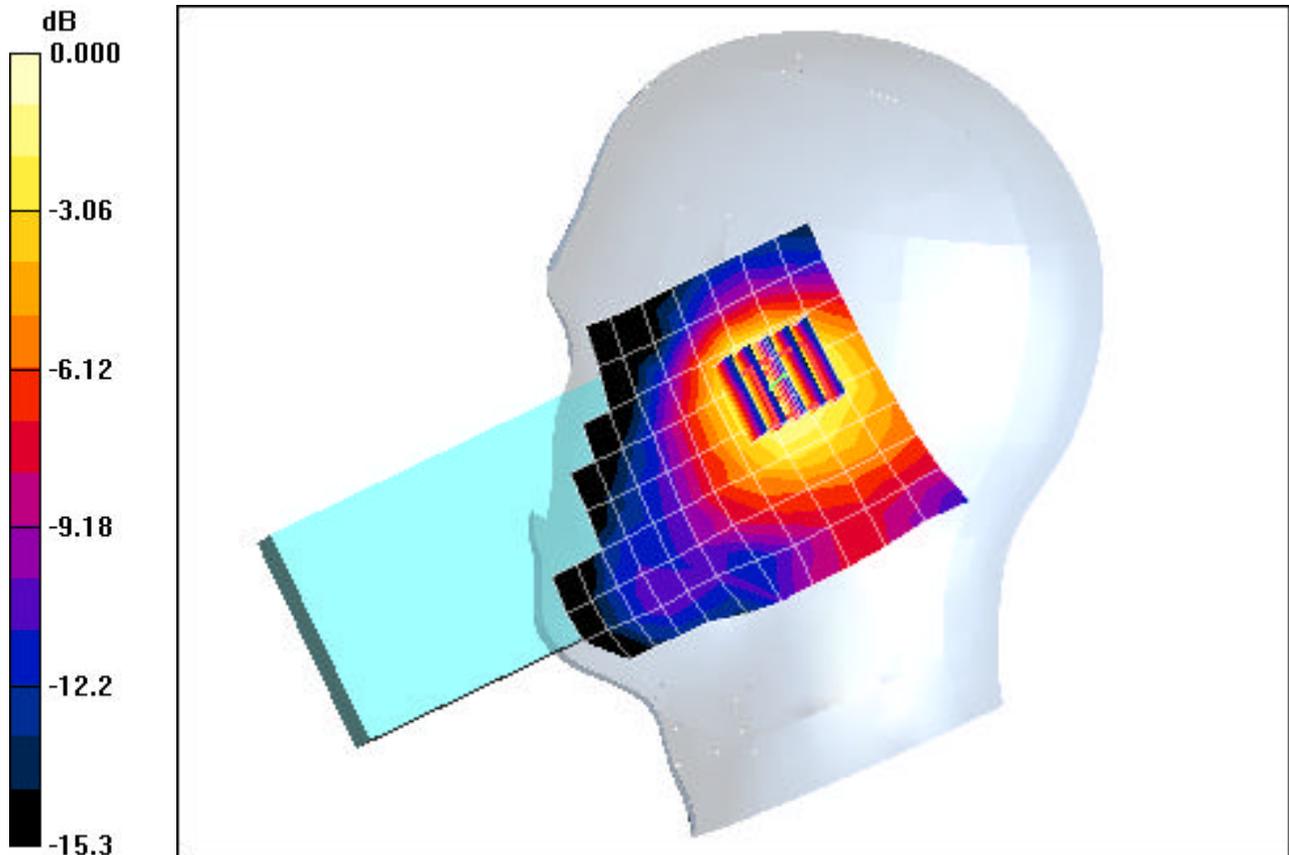

0 dB = 0.163mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 29.54 dBm


Communication System: GSM1900 Motorola; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: 1900 Brain ($\sigma = 1.42$ mho/m, $\epsilon_r = 39.23$, $\rho = 1000$ kg/m³)
Phantom section: Left Section

Test Date: 02-15-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3561; ConvF(6.99, 6.99, 6.99); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Touch, Mid ch, Battery FNN7826A, Antenna Internal

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.57 V/m; Power Drift = -0.083 dB
Peak SAR (extrapolated) = 0.316 W/kg
SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.113 mW/g

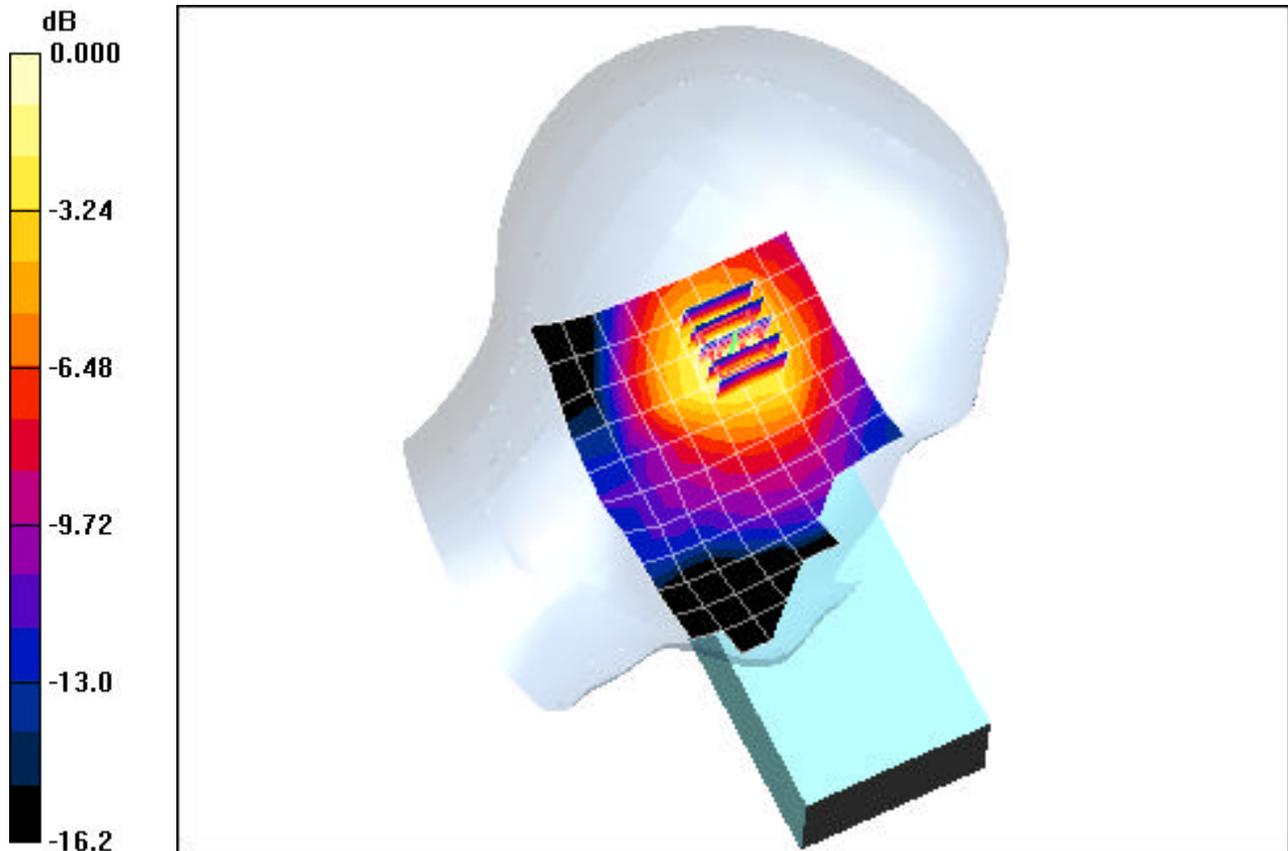

0 dB = 0.234mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 29.54 dBm

Communication System: GSM1900 Motorola; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: 1900 Brain ($\sigma = 1.42$ mho/m, $\epsilon_r = 39.23$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

Test Date: 02-15-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3561; ConvF(6.99, 6.99, 6.99); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilt, Mid ch, Battery FNN7826A, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.51 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.080 mW/g

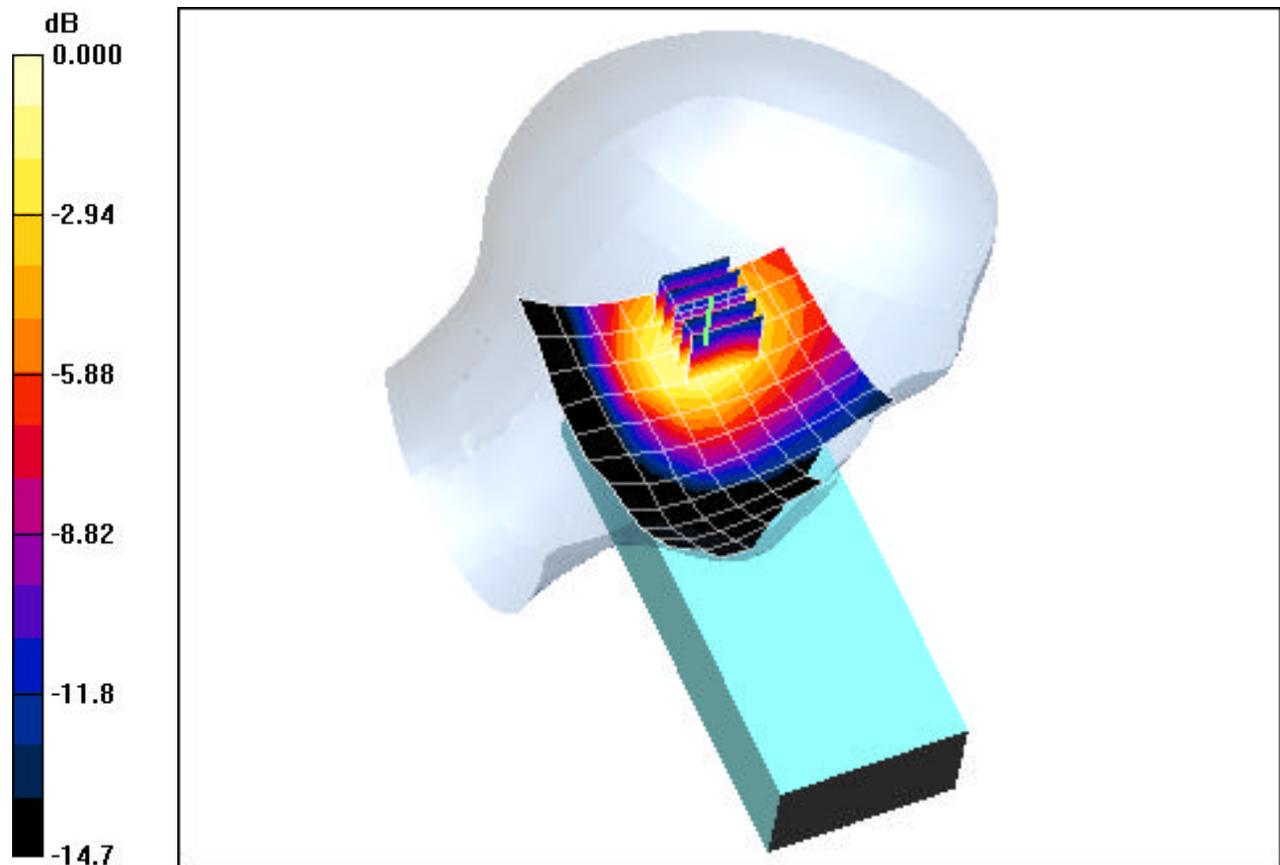

0 dB = 0.156mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 32.86 dBm**

Communication System: GSM850 GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: 835 Muscle ($\sigma = 0.97$ mho/m, $\epsilon_r = 53.81$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 2.5 cm from DUT to Flat Phantom

Test Date: 02-14-2007; Ambient Temp: 23.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.92, 7.92, 7.92); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body, No Holster, Mid.ch, Battery FNN7826A, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.92 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.111 mW/g

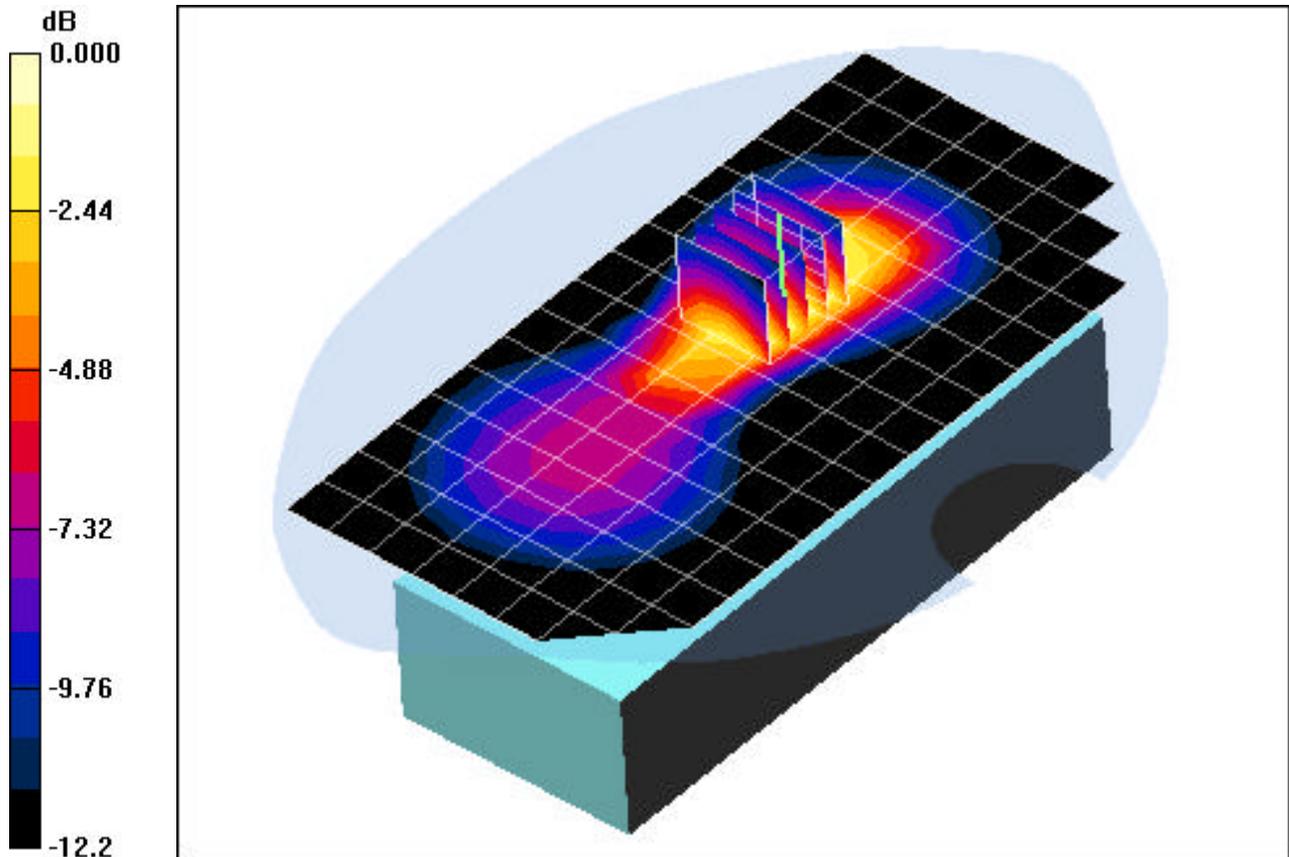

0 dB = 0.174mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506 Conducted Power: 32.86 dBm**

Communication System: GSM850 Motorola; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: 835 Brain ($\sigma = 0.90$ mho/m, $\epsilon_r = 40.91$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 2.5cm from DUT to Flat Phantom

Test Date: 02-14-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(7.94, 7.94, 7.94); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Face, Mid.ch, Battery FNN7826A, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.04 V/m; Power Drift = -0.231 dB

Peak SAR (extrapolated) = 0.056 W/kg

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.032 mW/g

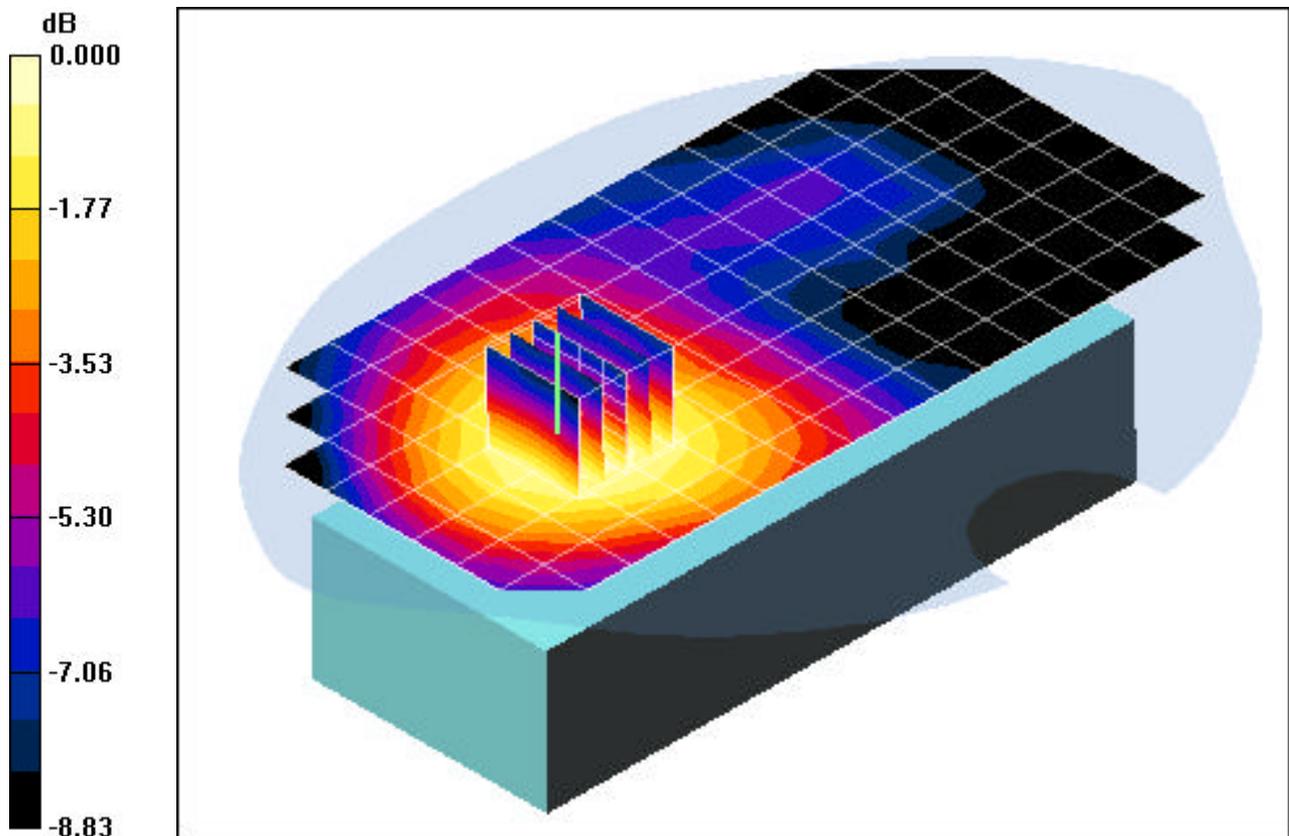

0 dB = 0.048mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 29.54 dBm

Communication System: GSM1900 GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Muscle ($\sigma = 1.54$ mho/m, $\epsilon_r = 53.72$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 2.5 cm from DUT to Flat Phantom

Test Date: 02-15-2007; Ambient Temp: 22.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.47, 6.47, 6.47); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body, No Holster, Mid.ch, Battery FNN7826A, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.77 V/m; Power Drift = 0.149 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.164 mW/g

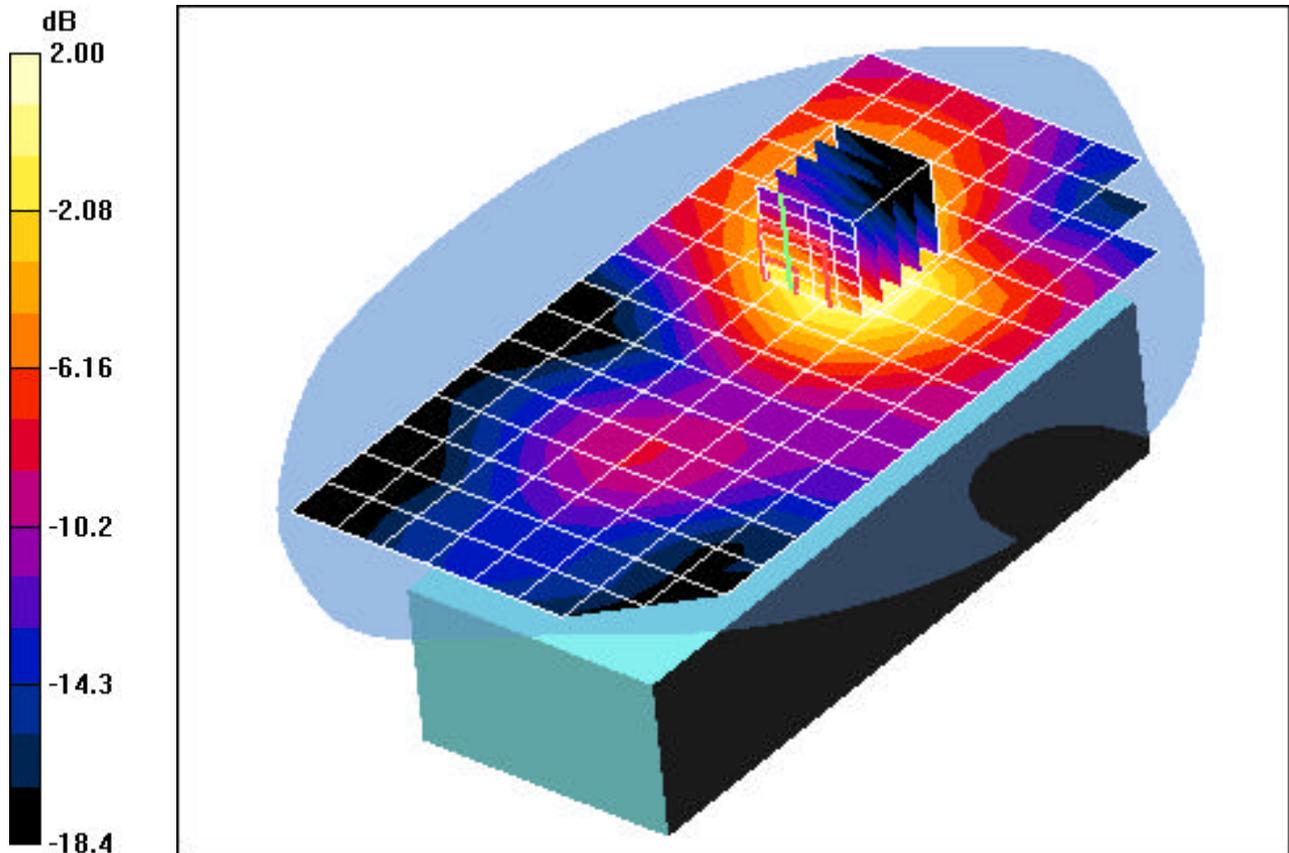

0 dB = 0.501mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 29.54 dBm**

Communication System: GSM1900 Motorola; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: 1900 Brain ($\sigma = 1.42$ mho/m, $\epsilon_r = 39.23$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section: Space: 2.5cm from DUT to Flat Phantom

Test Date: 02-15-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3561; ConvF(6.99, 6.99, 6.99); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Face, Mid.ch, Battery FNN7826A, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.80 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.052 W/kg

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.020 mW/g

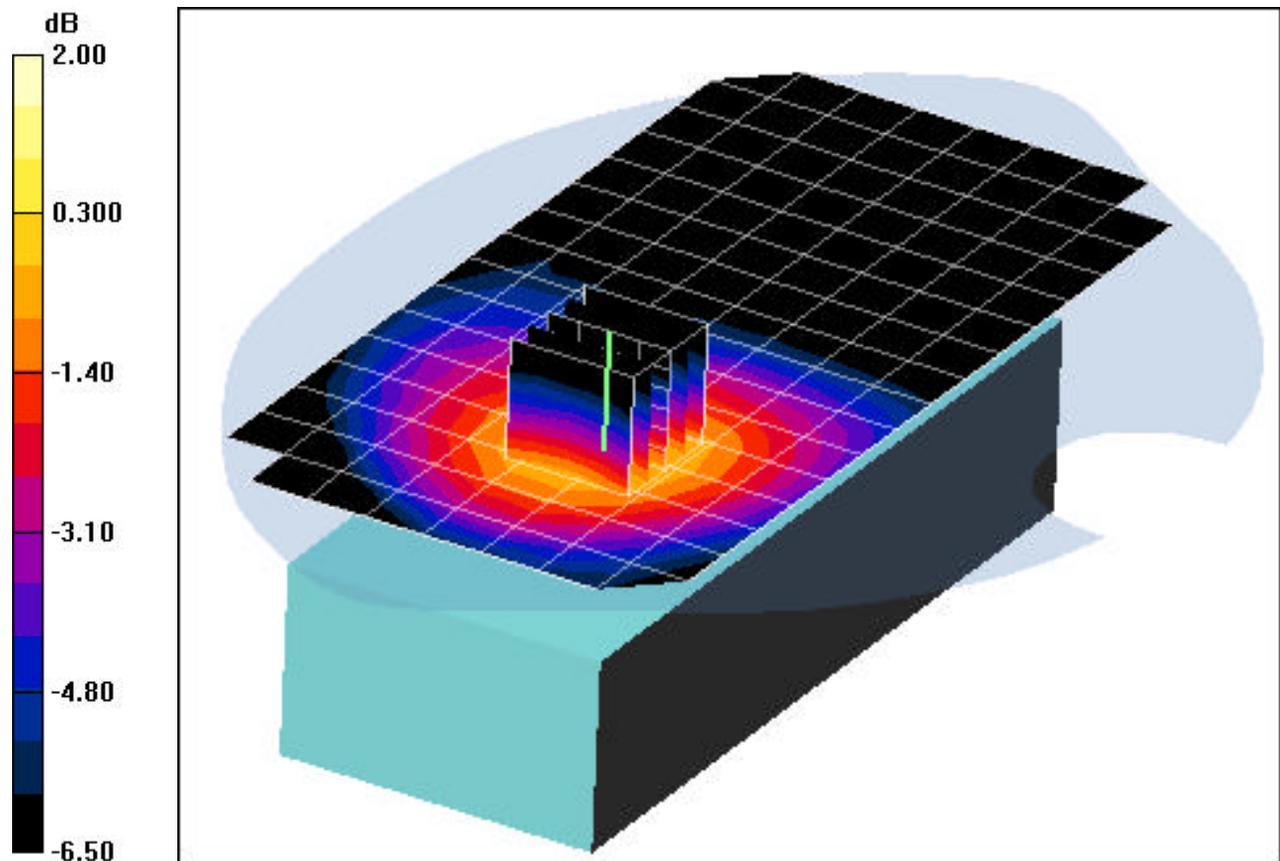

0 dB = 0.039mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 3.01 dBm

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Muscle ($\sigma = 1.91$ mho/m, $\epsilon_r = 52.23$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 2.5 cm from DUT to Flat Phantom

Test Date: 02-16-2007; Ambient Temp: 23.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(6.33, 6.33, 6.33); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body, No Holster, Mid.ch, Battery FNN7826A, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.23 V/m; Power Drift = -0.173 dB

Peak SAR (extrapolated) = 0.009 W/kg

SAR(1 g) = 0.00416 mW/g; SAR(10 g) = 0.00225 mW/g

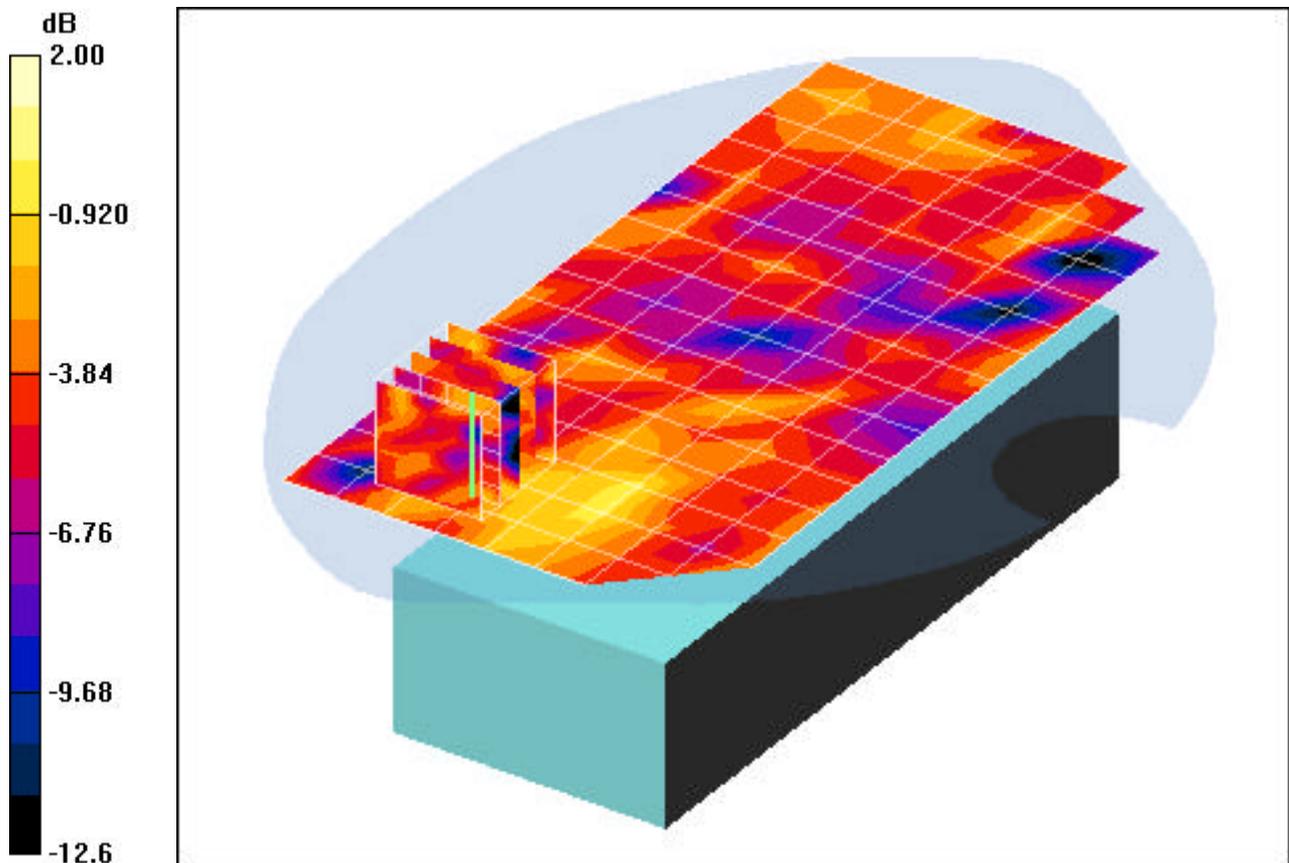

0 dB = 0.006mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Motorola F4708A; Type: GSM Dual Band w/WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 3.01 dBm**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1
Medium: 2450 Brain ($\sigma = 1.82 \text{ mho/m}$, $\epsilon_r = 40.14$, $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section; Space: 2.5cm from DUT to Flat Phantom

Test Date: 02-16-2007; Ambient Temp: 22.9°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Face, Mid.ch, Battery FNN7826A , Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.803 V/m; Power Drift = 0.149 dB

Peak SAR (extrapolated) = 0.008 W/kg

SAR(1 g) = 0.00338 mW/g; SAR(10 g) = 0.00253 mW/g

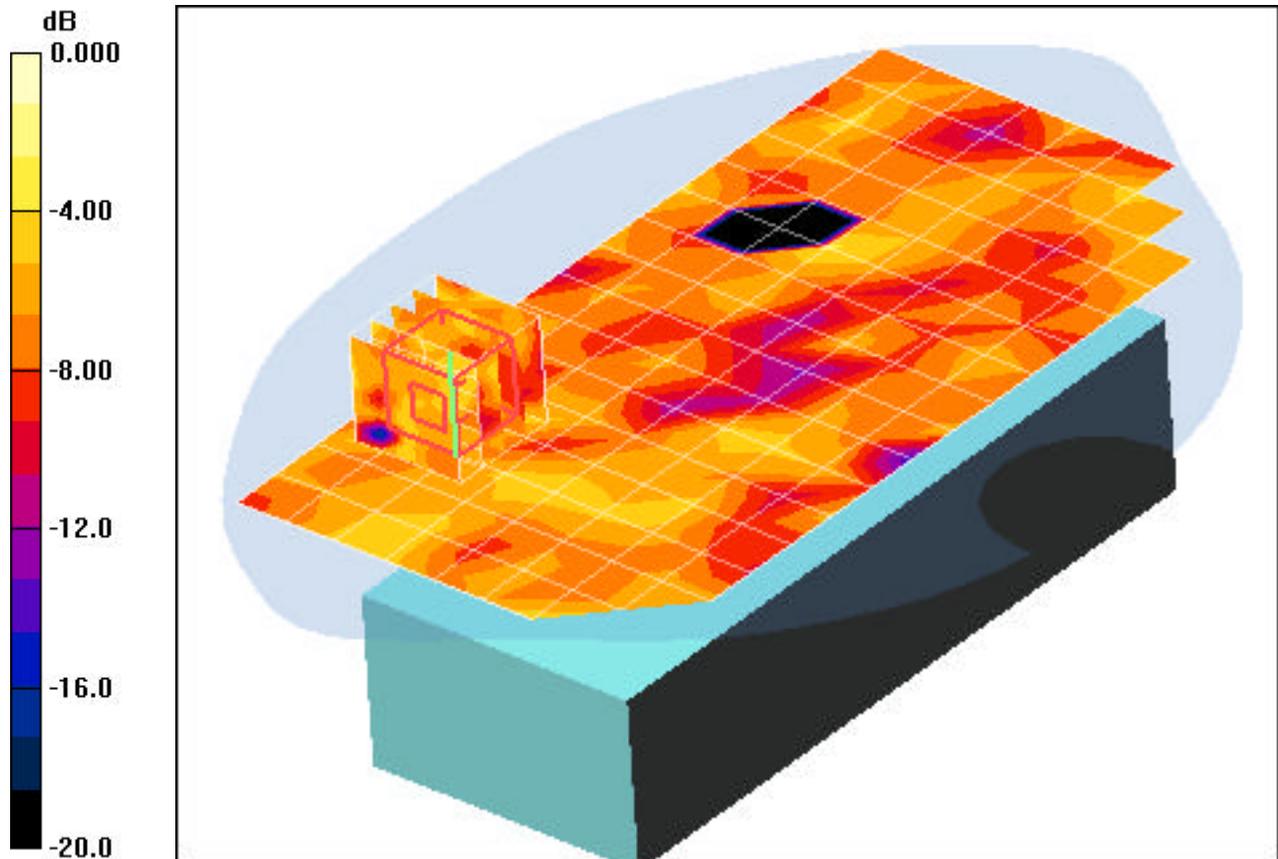

0 dB = 0.010mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 15.94 dBm


Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: 2450 Muscle ($\sigma = 1.91$ mho/m, $\epsilon_r = 52.23$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 02-16-2007; Ambient Temp: 23.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(6.33, 6.33, 6.33); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body w/ Holster, Mid.ch, Battery FNN7826A, Antenna Internal, 1Mbps

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.93 V/m; Power Drift = 0.032 dB
Peak SAR (extrapolated) = 0.110 W/kg
SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.036 mW/g

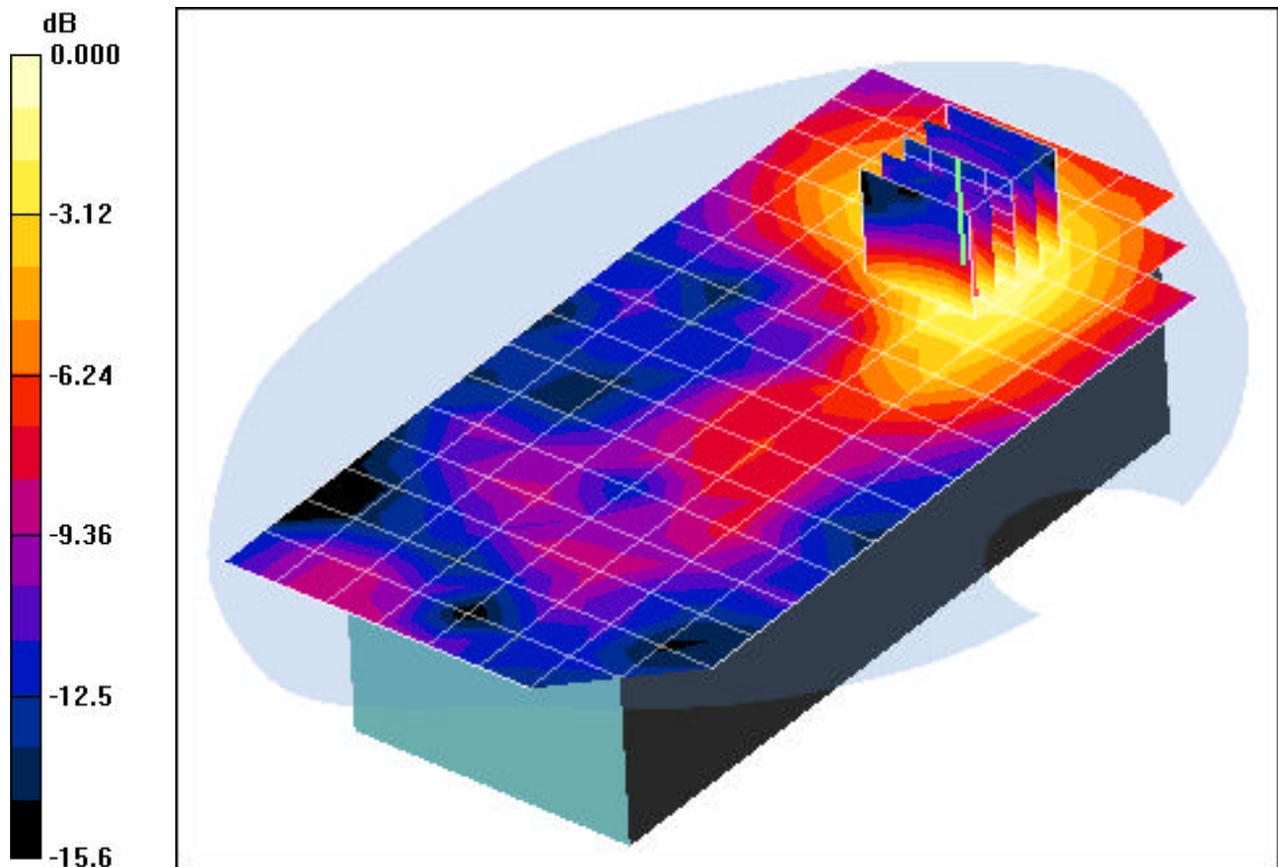

0 dB = 0.093mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: F4705A; Type: GSM/EGPRS Dual Band w/ WLAN and Bluetooth Handheld Computer
SN: 629SHGP777**

Communication System: GSM850 EGPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium: 835 Muscle ($\sigma = 0.98$ mho/m, $\epsilon_r = 55.12$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 07-10-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body, 2.5cm Space, Backside, Mid.ch, FNN7826A Battery, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.58 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.125 mW/g

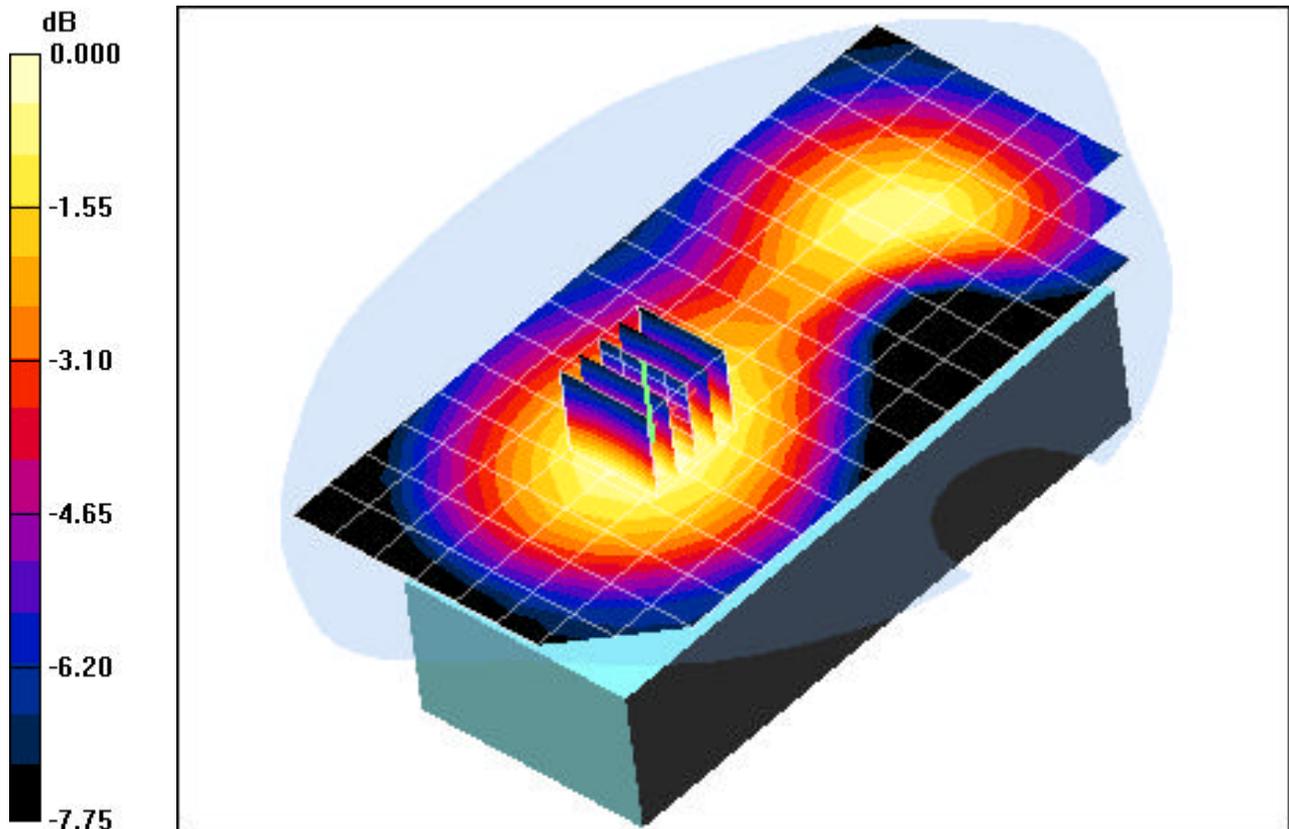

PCTEST ENGINEERING LABORATORY, INC.

**DUT: F4705A; Type: GSM/EGPRS Dual Band w/ WLAN and Bluetooth Handheld Computer
SN: 629SHGP777**

Communication System: GSM1900 EGPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15
Medium: 1900 Muscle ($\sigma = 1.59$ mho/m, $\epsilon_r = 54.12$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 07-10-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn455; Calibrated: 10/16/2006
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body 2.5cm space, Backside, Mid.ch, FNN7826A Battery, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.18 V/m; Power Drift = 0.186 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.367 mW/g; SAR(10 g) = 0.230 mW/g

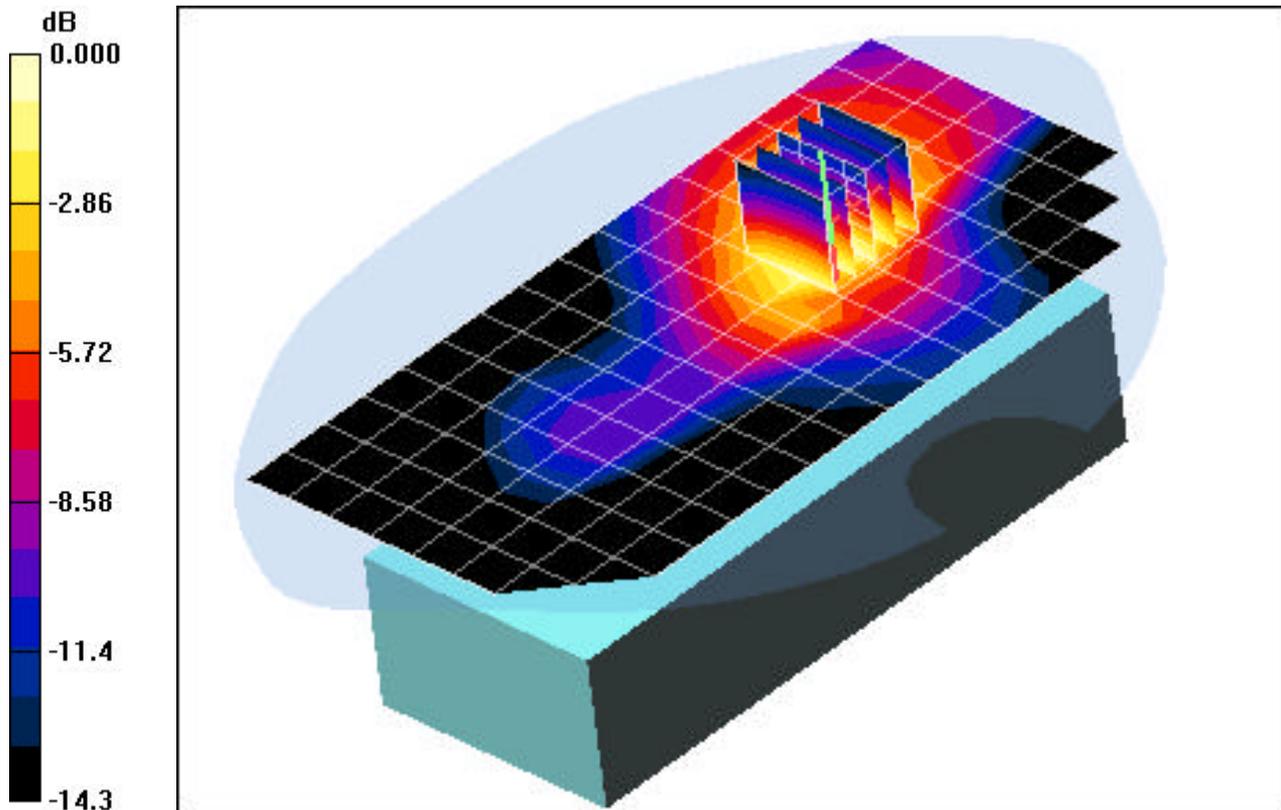

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 15.94 dBm


Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: 2450 Brain ($\sigma = 1.82$ mho/m, $\epsilon_r = 40.14$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 2.5cm from DUT to Flat Phantom

Test Date: 02-16-2007; Ambient Temp: 22.9°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Face, Mid.ch, Battery FNN7826A, Antenna Internal, 1Mbps

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.52 V/m; Power Drift = 0.176 dB
Peak SAR (extrapolated) = 0.100 W/kg
SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.034 mW/g

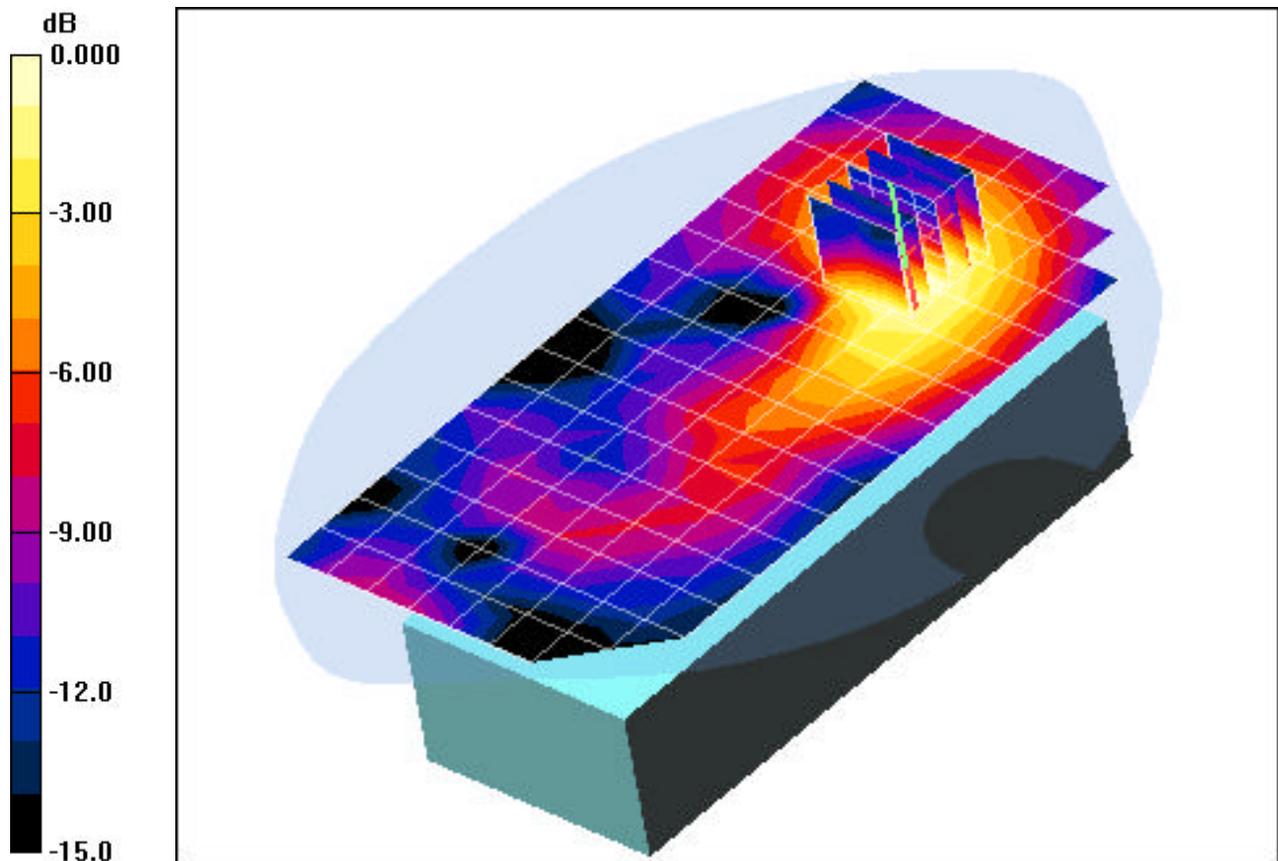

0 dB = 0.069mW/g

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 32.86 dBm


Communication System: GSM850 Motorola; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium: 835 Brain ($\sigma = 0.90$ mho/m, $\epsilon_r = 40.91$, $\rho = 1000$ kg/m³)
Phantom section: Right Section

Test Date: 02-14-2007; Ambient Temp: 22.8°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(7.94, 7.94, 7.94); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Touch, Mid ch, Battery FNN7826A, Antenna Internal

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.01 V/m; Power Drift = -0.088 dB
Peak SAR (extrapolated) = 0.105 W/kg
SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.051 mW/g

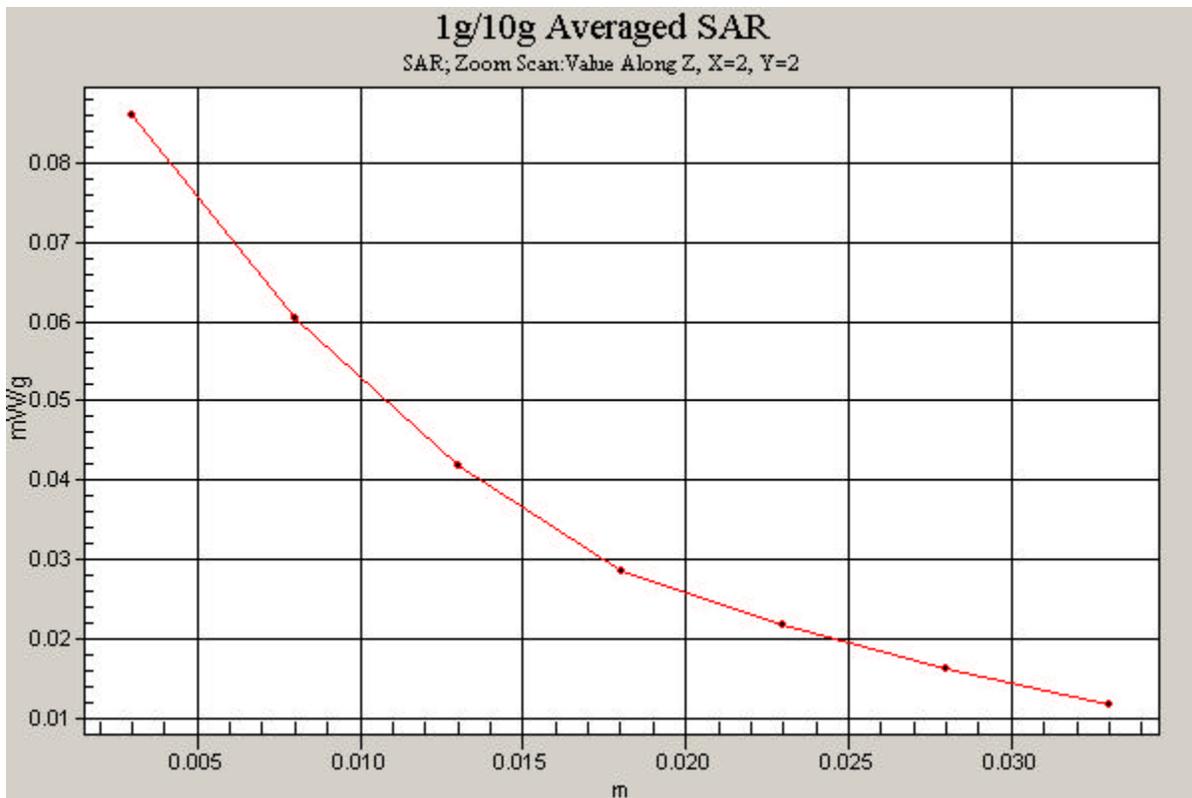

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 32.86 dBm

Communication System: GSM850 GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: 835 Muscle ($\sigma = 0.97$ mho/m, $\epsilon_r = 53.81$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 2.5 cm from DUT to Flat Phantom

Test Date: 02-14-2007; Ambient Temp: 23.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.92, 7.92, 7.92); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body, No Holster, Mid.ch, Battery FNN7826A, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.92 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.111 mW/g

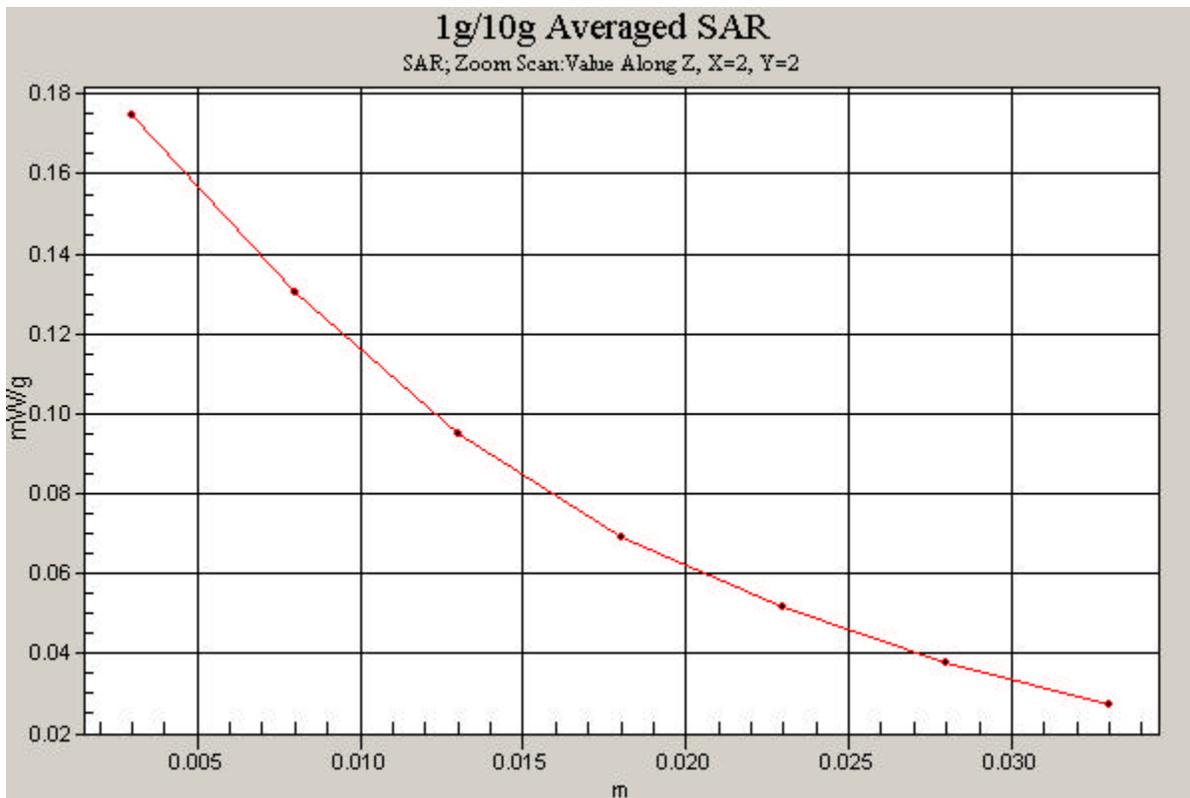

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 29.54 dBm


Communication System: GSM1900 Motorola; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: 1900 Brain ($\sigma = 1.42$ mho/m, $\epsilon_r = 39.23$, $\rho = 1000$ kg/m³)
Phantom section: Left Section

Test Date: 02-15-2007; Ambient Temp: 23.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3561; ConvF(6.99, 6.99, 6.99); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Touch, Mid ch, Battery FNN7826A, Antenna Internal

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.57 V/m; Power Drift = -0.083 dB
Peak SAR (extrapolated) = 0.316 W/kg
SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.113 mW/g

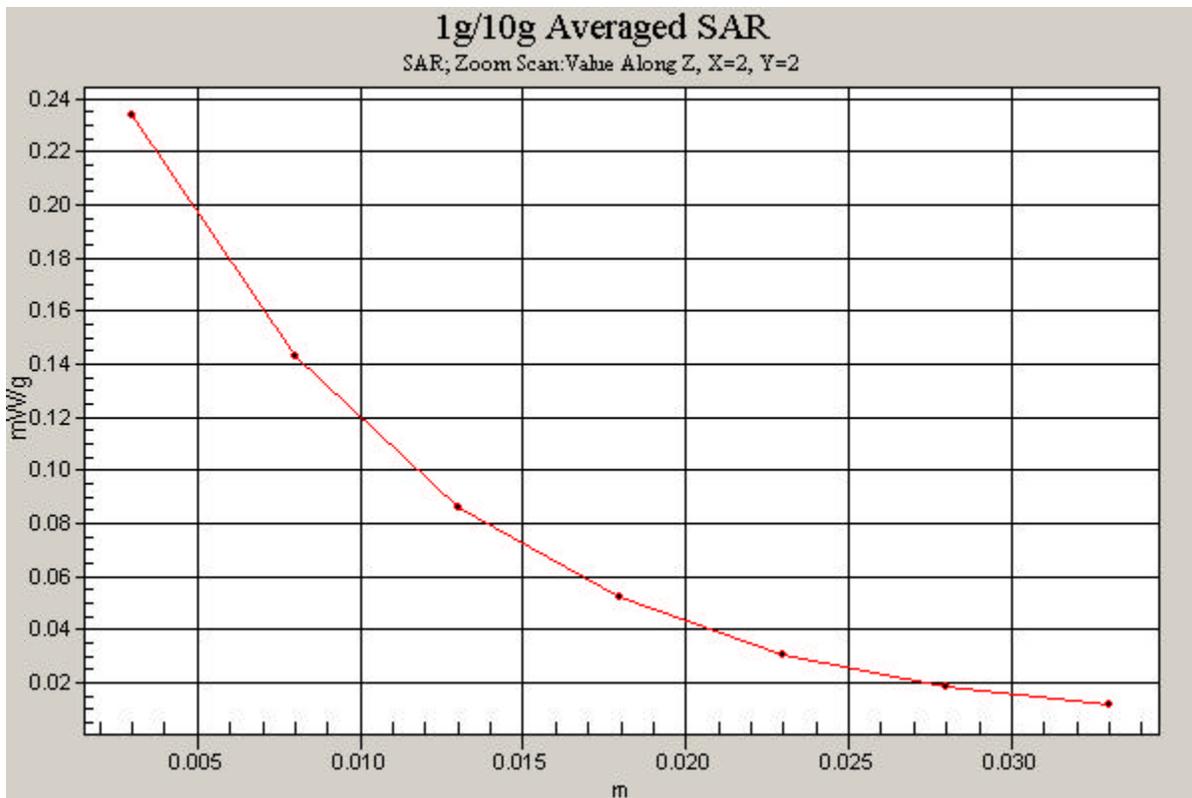

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 29.54 dBm

Communication System: GSM1900 GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15
Medium: 1900 Muscle ($\sigma = 1.54$ mho/m, $\epsilon_r = 53.72$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section; Space: 2.5cm from DUT to Flat Phantom

Test Date: 02-15-2007; Ambient Temp: 22.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.47, 6.47, 6.47); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Main; Type: SAM 4.0; Serial: TP:1197

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body, No Holster, Mid.ch, Battery FNN7826A, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.77 V/m; Power Drift = 0.149 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.164 mW/g

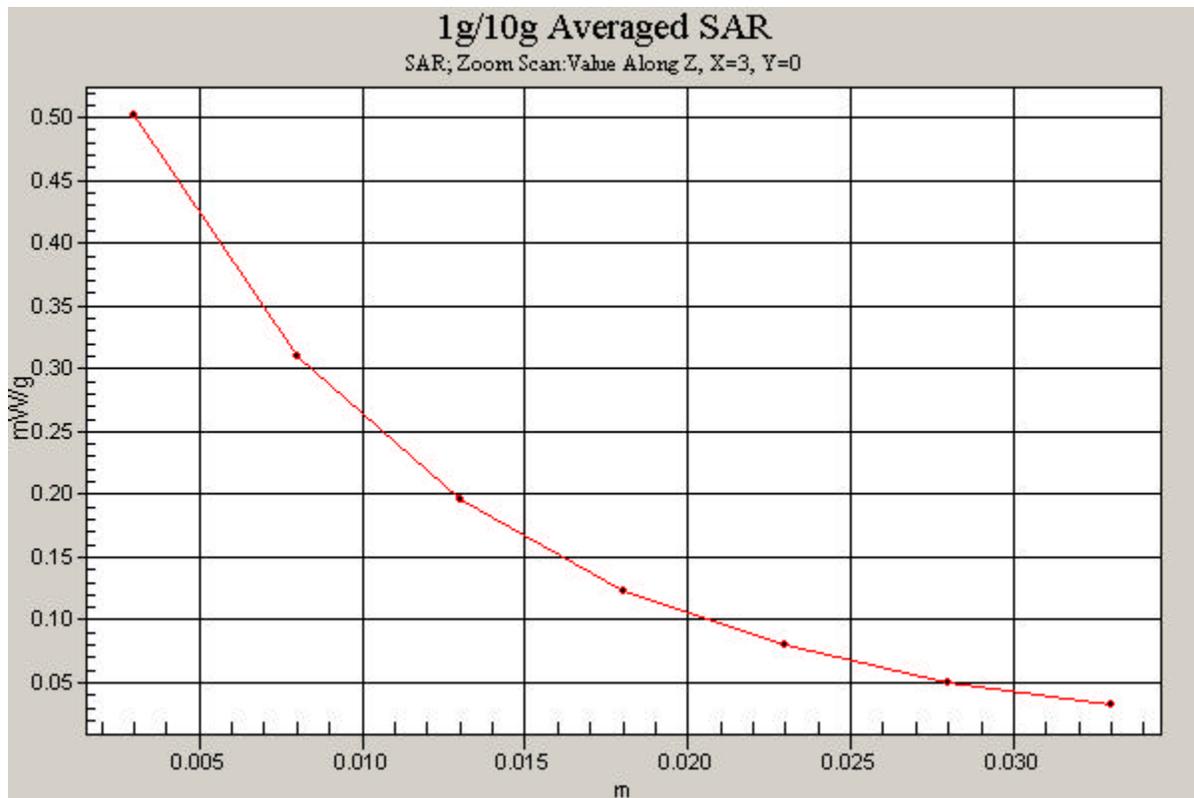

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 15.94 dBm**

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Brain ($\sigma = 1.82$ mho/m, $\epsilon_r = 40.14$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section; Space: 2.5cm from DUT to Flat Phantom

Test Date: 02-16-2007; Ambient Temp: 22.9°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN3561; ConvF(6.32, 6.32, 6.32); Calibrated: 11/23/2006

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 1/23/2007

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Face, Mid.ch, Battery FNN7826A, Antenna Internal, 1Mbps


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.52 V/m; Power Drift = 0.176 dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.034 mW/g

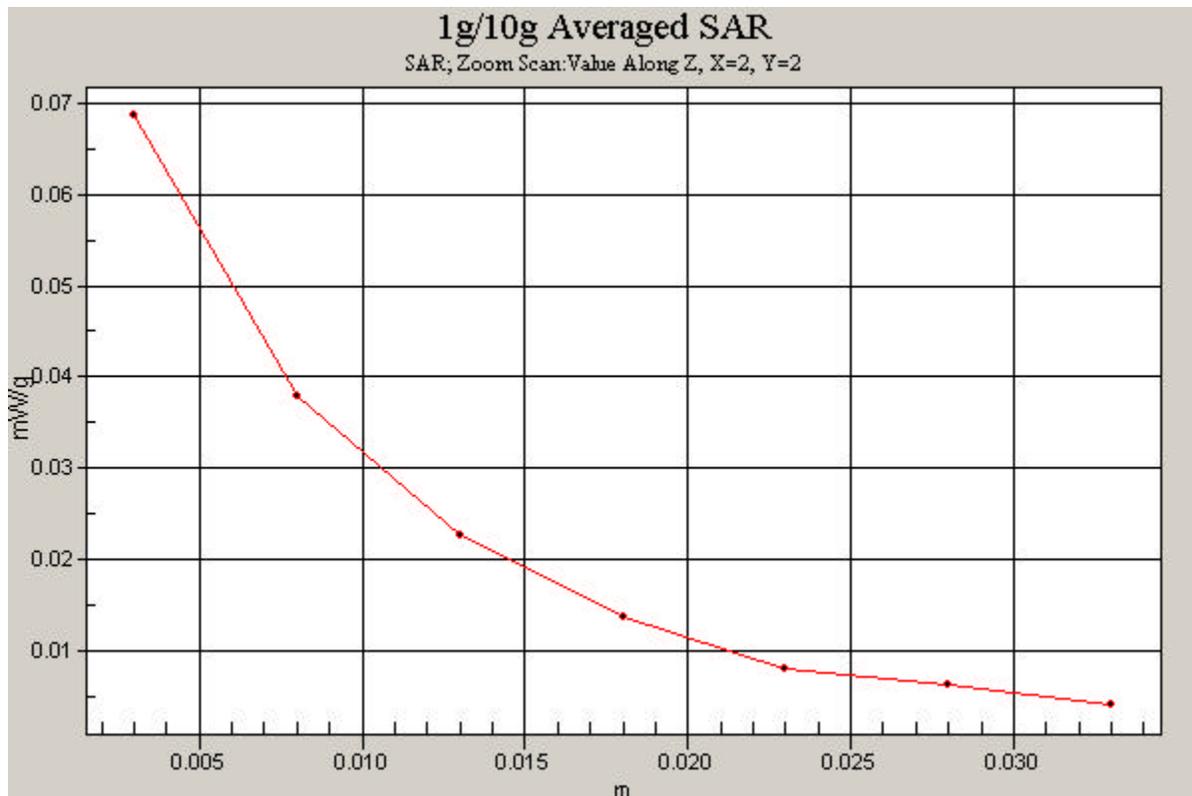

PCTEST ENGINEERING LABORATORY, INC.

DUT: Motorola F4708A; Type: GSM Dual Band w/ WLAN + Bluetooth Handheld Computer
SN: 629SHA4506; Conducted Power: 15.94 dBm


Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: 2450 Muscle ($\sigma = 1.91$ mho/m, $\epsilon_r = 52.23$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 02-16-2007; Ambient Temp: 23.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3561; ConvF(6.33, 6.33, 6.33); Calibrated: 11/23/2006
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn649; Calibrated: 1/23/2007
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP:1357
Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body, w/ Holster, Mid.ch, Battery FNN7826A, Antenna Internal, 1Mbps

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.93 V/m; Power Drift = 0.032 dB
Peak SAR (extrapolated) = 0.110 W/kg
SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.036 mW/g

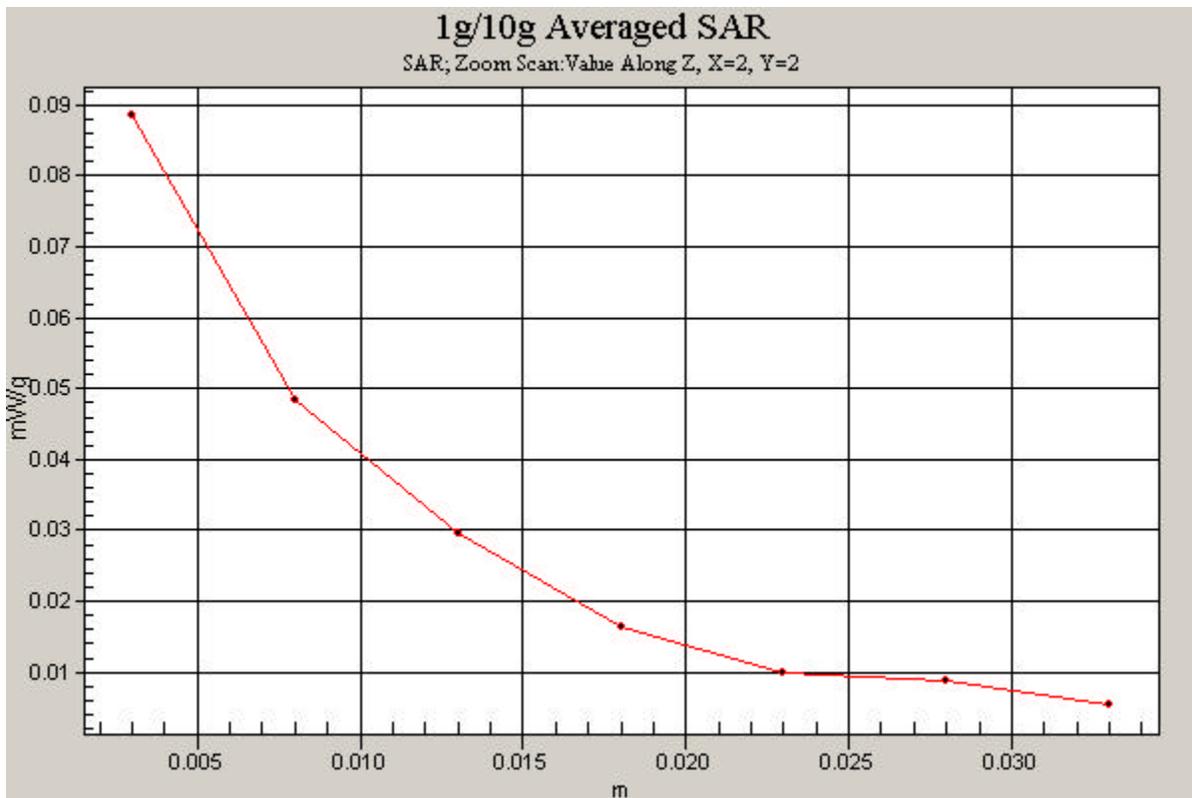

PCTEST ENGINEERING LABORATORY, INC.

**DUT: F4705A; Type: GSM/EGPRS Dual Band w/ WLAN and Bluetooth Handheld Computer
SN: 629SHGP777**

Communication System: GSM850 EGPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium: 835 Muscle ($\sigma = 0.98$ mho/m, $\epsilon_r = 55.12$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 07-10-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3589; ConvF(8.3, 8.3, 8.3); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body, 2.5cm Space, Backside, Mid.ch, FNN7826A Battery, Antenna Internal


Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.58 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.125 mW/g

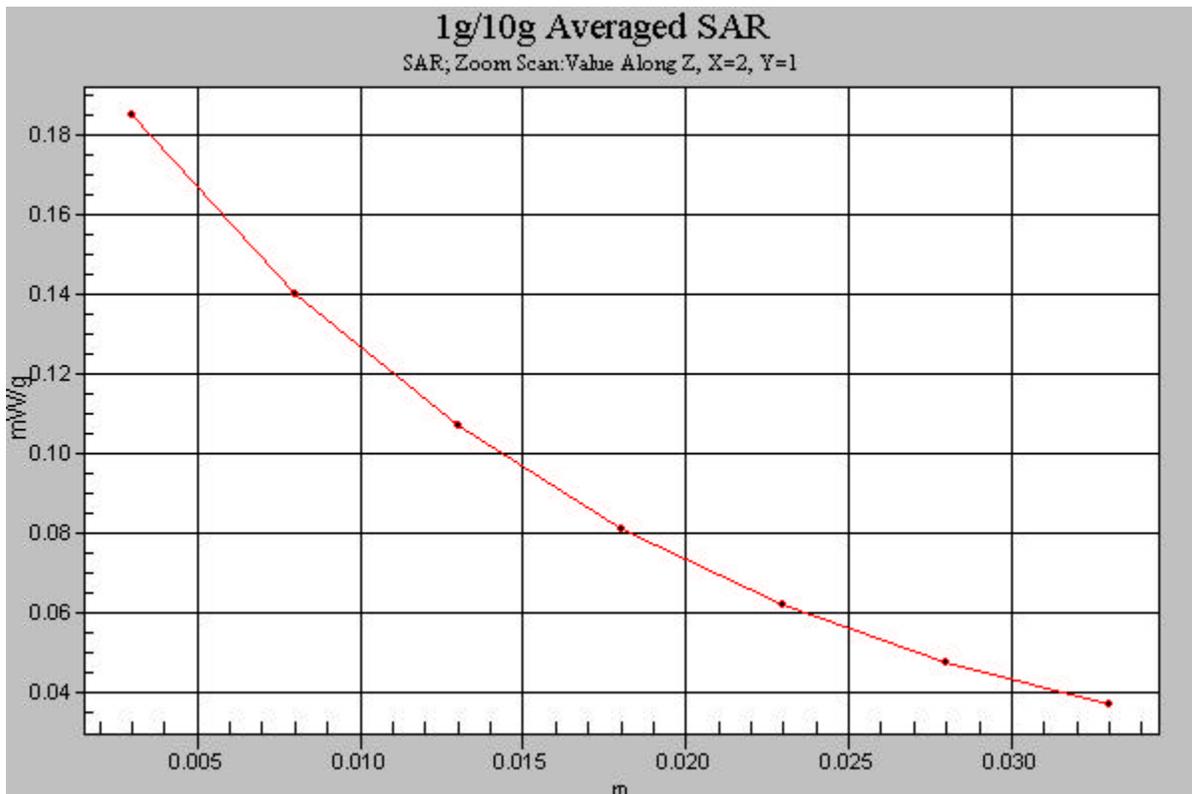

PCTEST ENGINEERING LABORATORY, INC.

**DUT: F4705A; Type: GSM/EGPRS Dual Band w/ WLAN and Bluetooth Handheld Computer
SN: 629SHGP777**

Communication System: GSM1900 EGPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15
Medium: 1900 Muscle ($\sigma = 1.59$ mho/m, $\epsilon_r = 54.12$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

Test Date: 07-10-2007; Ambient Temp: 23.6°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3589; ConvF(6.79, 6.79, 6.79); Calibrated: 5/28/2007

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/16/2006

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Body 2.5cm space, Backside, Mid.ch, FNN7826A Battery, Antenna Internal

Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.18 V/m; Power Drift = 0.186 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.367 mW/g; SAR(10 g) = 0.230 mW/g

