



Electromagnetic Compatibility Test Report

Test Report No: MOT 280110

Issued on: January 28, 2010

Product Name

EWP3100 Semi Rugged VoWLAN Phone

**Tested According to
FCC 47 CFR, Part 15, Subparts E
IC RSS-210**

**Tests Performed for
Motorola Inc.**

One Motorola Plaza, Holtsville, N.Y 11742, USA

QualiTech EMC Laboratory, ECI Telecom

30 Hasivim Street,
Petah-Tikva, 49517, Israel
Tel: +972-3-926 8443
Fax: +972-3-928 7490



ELECTRICAL TESTING
CERT #1633.01

The information contained herein is the property of QualiTech, EMC Lab and is supplied without liability for errors or omissions.

*The copyright for this document vests in QualiTech, EMC Lab.
All rights reserved.*

This Test Report may not be reproduced, by any method, without the written permission of the QualiTech, EMC Lab.

If and when such permission is granted, the report must be reproduced only in the full format.

Test Personnel



Tests Performed By: -----

Rami Nataf

Sergey Kapustin

Report Prepared By: -----


Bina Talkar

Report Reviewed By: -----


Y. Zucker
QA and Lab. Manager
QualiTech EMC Laboratory

Test Report details:

Test commencement date: 10.01.2010
Test completion date: 13.01.2010
Customer's representative: Eli Basri
Issued on: 28.01.2010

Assessment information:

This report contains an assessment of the EUT against Electromagnetic Compatibility based upon tests carried out on the samples submitted. The results contained in this report relate only to the items tested. Manufactured products will not necessarily give identical results due to production and measurement tolerances. QualiTech, EMC Lab does not assume responsibility for any conclusion and generalization drawn from the test results with regards to other specimens or samples of type of the equipment represented by test item.

The EUT was set up and exercised using the configuration, modes of operation and arrangements defined in this report only.

Modifications:

Modifications made to the EUT

None

Modifications made to the Test Standard

None

Summary of Compliance Status

WLAN 802.11a

Test Spec. Clause	Test Case	Remarks
47 CFR §15.403(h)(i) & RSS-210 A9.2(1)	Emission Bandwidth (26dB BW)	Comply
47 CFR §15.407 (a) (1), (2), (3) & RSS-210A9.2(1)	Maximum Conducted Output Power, 5180-5250 MHz, 5.25–5.35 GHz and 5.47–5.725 GHz	Comply
47 CFR §15.407 (a) (1), (2), (3), (5) & RSS-210A9.2(1)	Peak Power Spectral Density	Comply
47 CFR §15.407 (a) (6)	Peak Excursion	Comply
47 CFR §15.407 (b) (1),(2),(3),(4) & §15.407 (b)(6) & RSS-210A3.3(1)	Conducted Spurious Emissions	Comply
47 CFR §15.407 (b) (7) & RSS-210A3.3(1)	Spurious Radiated Emissions, Restricted Bands	Comply
47 CFR §15.407(g)	Frequency Stability	Comply
47 CFR §15.203 & RSS - Gen. Section 7.1.4	Antenna Connector Requirements	Comply
47 CFR §15.407(h)(2)(i)(B) & §15.407(h)(2)(iii) and FCC 06-96 & RSS-210 Annex 9.	Dynamic Frequency Selection (DFS)	Comply
47 CFR §15.407(b)(6) & §15.107/207, ICES-003 RSS-GEN section 7.2.3.2	Power line Emission measurements	Comply

Table of Contents

1. GENERAL DESCRIPTION	6
2. METHOD OF MEASUREMENTS	7
2.1. Conducted RF Measurements:	7
2.2. Radiated Emissions Measurements in the restricted bands:	7
2.3. Radiated Emission measurements:.....	7
2.4. Worst Case Results:	8
2.5. DFS Response Requirements measurements, Client Device:	8
2.6. Power Line Emission measurements:.....	9
3. TEST FACILITY & UNCERTAINTY OF MEASUREMENT	10
3.1. Accreditation/ Registration reference:	10
3.2. Test Facility description	10
3.3. Uncertainty of Measurement:	11
4. WLAN 802.11A: REPORT OF MEASUREMENTS AND EXAMINATIONS	12
4.1. Emission Bandwidth (26dB BW)	12
4.2. Maximum Conducted Output Power, 5180-5250 MHz, 5.25–5.35 GHz and 5.47–5.725 GHz	20
4.3. Peak Power Spectral Density	22
4.4. Peak Excursion	30
4.5. Conducted Spurious Emissions.....	38
4.6. Spurious Radiated Emissions, Restricted Bands.....	57
4.7. Frequency Stability	103
4.8. Antenna Connector Requirements	117
4.9. Dynamic Frequency Selection (DFS).....	118
4.10. Power Line Emissions measurements	122
5. APPENDIX	126

1. General Description

Description of the EUT system/test Item:

Product name: EWP3100 Semi Rugged VoWLAN Phone

Model: EWP3100

FCC ID: AZ489FT7038

IC: 109U-89FT7038

Description:

The EUT is a Smartphone which provides mobile voice and data communications over wireless network to users inside an enterprise.

The Smartphone includes: Smartphone with voice recognition for hands-free dialing, Walkie-talkie call button for dispatch and PTT calls (including private talk groups), two way SMS and Instant Text Messaging, Email, Contacts, Calendar, Tasks etc, including viewing mail attachments and many other built-in tools. Also includes access to enterprise applications, standard mobile internet browser, and the ability to pair with Bluetooth headsets and other Bluetooth devices such as personal computers.

Voice is transmitted/received through WLAN in digital fashion only, using Voice-over-IP protocols. The phone has no other wide area (WAN) voice transceivers, hence the term "Single mode".

The Single Mode VoWLAN solution is intended to leverage unlicensed WiFi spectrum, WLAN infrastructure, and existing telephony infrastructure to provide wireless services, including voice, within an enterprise campus.

It is capable of operating in the unlicensed 2.4 GHz band using 802.11b/g protocols or in applicable 5 GHz bands using the 802.11a protocol.

The EUT also contains a Bluetooth technology for short range interfaces and 3.2Mp auto-focus camera.

Maximum Conducted Output Power:

78.34mW (6Mbps) for WLAN 802.11a Middle and Upper Bands

38.63mW (6Mbps) for WLAN 802.11a Lower Band

Frequency range:

802.11a: 5.15-5.350, 5.470-5.825 GHz

Transmit Data rate:

Protocol	Rate [Mbps]							
802.11a	6	9	12	18	24	36	48	54

Type of Modulation:

Protocol	Modulation
802.11a	OFDM (64QAM, 16QAM, QPSK, BPSK)

Antenna Specification:

Type: WLAN a/b/g: Integral (on board) PIFA Dual Band

Gain: 802.11a: 3.2dBi max, free space.

2. Method of Measurements

2.1. Conducted RF Measurements:

The RF output of the transmitter under test was directly connected to the input of the Spectrum analyzer through a specialized antenna connector provided by the manufacturer, and an attenuator as specified. The external attenuator and cable loss were added to the reading. Worst-case results of the various modulation modes (where applicable) were reported.

For PSD, emission peak was zoomed within the pass band with spectrum analyzer's settings as reported (Sweep time=Span/3kHz). Transmitter outputs transmitting simultaneously were aggregated through a combiner.

For Maximum Conducted Output Power, the spectrum analyzer was set for free ran, and 100 traces were averaged in power averaging mode. The transmitter was continuously transmitting, at a duty cycle of about 99%, and power was integrated across a bandwidth of the 26dB EBW of the signal, using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges. Alternatively, Peak Output Power was measured using a Peak Power Meter.

For spurious emissions measurement, the spectrum from 9 KHz to 40GHz was investigated with the transmitter set to the lowest, middle and highest channel frequencies.

For frequency stability, the 26dB Emission Bandwidth measurement was performed under extreme conditions with the DUT tuned to the band-edge channel. Worst case results were compared with the band-edge.

2.2. Radiated Emissions Measurements in the restricted bands:

For radiated emissions, which fall in the restricted bands the spectrum from 1MHz to 25GHz was investigated following the guidelines in ANSI C63.4-2003, with the transmitter set to the lowest, middle and highest channel frequencies. Measurements were performed with peak detector and repeated averaged with VBW=10Hz. Only Peak detection plots are presented.

2.3. Radiated Emission measurements:

Measurements were performed at a 3-meter measurement distance in the semi-anechoic chamber in order to evaluate the radiated electromagnetic interference characteristics of the EUT. The EUT was placed on a non-metallic table/support, 0.8m above the turntable, was configured, arranged and operated in a manner consistent with typical application and load conditions. The test program of exercising the equipment ensured that various parts of the EUT were exercised to permit detection of all EUT disturbances.

An appropriate antenna depending upon the frequency range, per ANSI C63.4-2003 clause 4.1.5 was used. While the turntable was being rotated, the height of the antenna was varied from 1 to 4m for the frequency range of 30MHz to 1GHz. The highest radiated emission was detected by manipulating the system cables to the worst-case position. This process was repeated for both antenna polarizations. The spectrum up to 40GHz was investigated for spurious emissions, using a band-reject filter where appropriate.

The amplitudes of worst-case emission were measured with the detector modes and resolution bandwidths over various frequency ranges according to the requirements of ANSI C63.4-2003 clause 4.2.

2.4. Worst Case Results:

Worst case result is determined as the channel with the highest output power. Pre-scan has been conducted to determine the worst-case. Worst-case results of various modulation modes/data rates were determined as the modulation with the highest output power, and that was reported.

2.5. DFS Response Requirements measurements, Client Device:

Radar Waveform Calibration: the following equipment setup was used to generate and calibrate the radiated radar waveform. The Spectrum Analyzer was set to span zero at a selected radar frequency, 3kHz RBW and VBW, and Peak detection.




Test Procedure:

The IP master device was operated upon start-up and performed a Channel Availability Check and continued normal operation on the selected channel, transmitting MPEG Test File to the client. The selected channel frequency was also set as the RF frequency of the Radar Signal Generation devices. A burst of 25 pulses was generated for a minimum of 30 trials (Radar Type 2) pre-calibrated at appropriate levels above the threshold level to ensure “Radar detection” by the Master device. The Spectrum Analyzer was used as a monitor to verify that the Client EUT has vacated the channel within the Channel Move Time and to verify the Channel Closing Transmission Time do not exceed 200ms starting at the beginning of the Channel Move Time plus any additional intermittent control signals up to an aggregate of 60ms, during the remaining of the 10seconds period.

For “30 Minute Non-Occupancy”, Associated Test: The client was associated with the master and after master detection of radar pulse, the client moved with the master to the next chosen channel, and while streaming the MPEG test file, the vacated channel was monitored to verify that the DUT does not resume any transmission on this channel. The spectrum analyzer was running in max hold on the center of the vacated channel for more than 30 minutes. The 30 minute observation started immediately following the 10 second channel move time.

For “30 Minute Non-Occupancy”, Non - Associated Test: The client device was powered on and the master device was powered off, and a scan was taken across all channels. The spectrum analyzer was running in max hold and sweep time of 20ms. Sweeping was left for a period of more than 30 minutes to verify that the client is not employing active scanning and not transmitting on any channel without being associated with the master device.

Radiated Setup: EUT is a client and Radar test Waveform is injected into the Master.

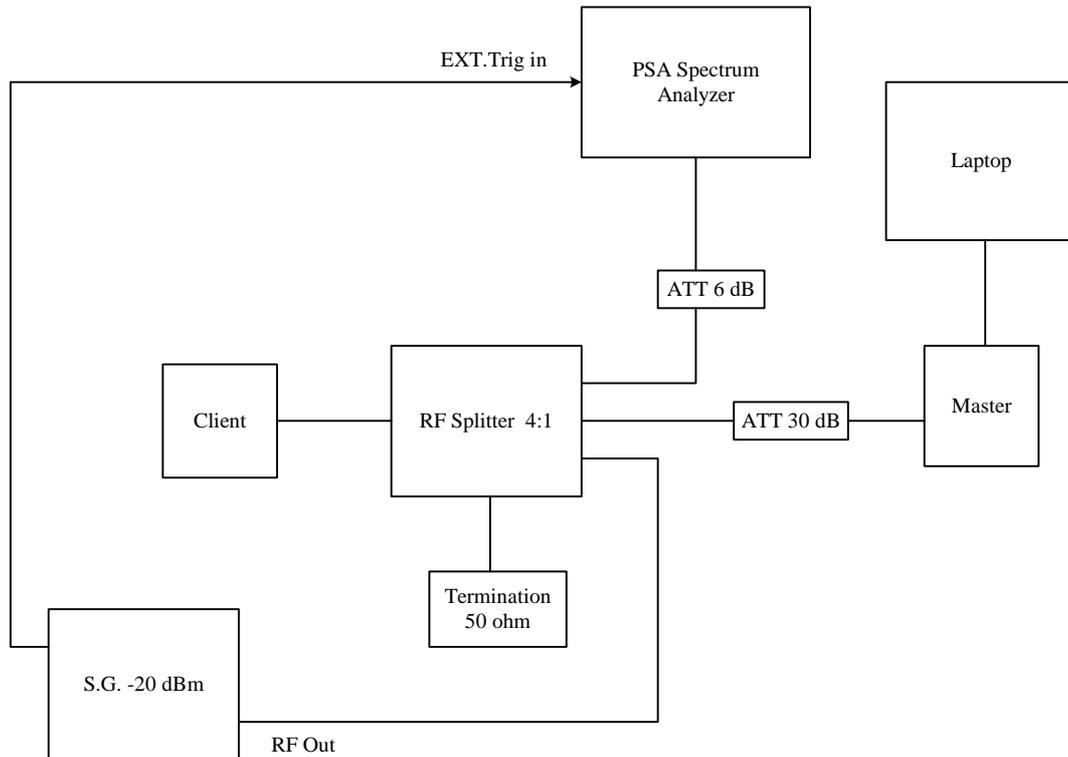

2.6. Power Line Emission measurements:

The EUT was placed on a non-conductive table/support 80 cm above the reference ground plane. The EUT was configured in accordance with ANSI C63.4-2003 using a 50 μ H/50 ohm LISN.

Compliance with the provisions was based on the measurements of the radio frequency voltage between each line and the ground at the power terminal.

The EUT was operated in receive mode and then with both DSS and DTS transmitters operating alternately and the worst case results were presented.

3. Test Facility & Uncertainty of Measurement

3.1. Accreditation/ Registration reference:

- A2LA Certificate Number: 1633.01

3.2. Test Facility description

The tests were performed at the EMC Laboratory, QualiTech Division, ECI Telecom Group

Address: 30, Hasivim St., Petah Tikva, Israel.
Tel: 972-3-926-8443

3m Anechoic Chamber:

The 3m-screened chamber is used in two configurations: the semi-anechoic configuration for Radiated Emission measurements and the full-anechoic configuration for Radiated Immunity tests.

Semi Anechoic Configuration:

Measurement distance	3m
Chamber dimensions	9.5m x 6.5m x 5.2m
Antenna height	1 - 4m
Shielding Effectiveness	Magnetic field ≥ 80 dB at 15 kHz ≥ 90 dB at 100 kHz Electric field > 120 dB from 1MHz to 1GHz > 110 dB from 1GHz to 10GHz
Absorbing material	Ferrite tiles on the walls and ceiling Frankonia hybrid absorbing material in selected positions on the walls
Normalized Site Attenuation measured at 5 positions	± 3.49 dB, 30MHz to 1GHz
Transmission Loss measured at 5 positions, at 1.5m height	± 3 dB, 1GHz to 18GHz

Full-Anechoic Configuration:

Measurement distance	3m
Chamber dimensions	7m x 4m x 3m
Antenna height	1.55m at Horizontal & Vertical polarizations
Shielding Effectiveness	Magnetic field ≥ 80 dB at 15 kHz ≥ 90 dB at 100 kHz Electric field > 120 dB from 1MHz to 1GHz > 110 dB from 1GHz to 10GHz
Absorbing material	Ferrite tiles on the walls and ceiling Frankonia hybrid absorbing material in selected positions on the walls and floor
Field Uniformity to EN61000-4-3	± 3 dB 80MHz to 18GHz

3.3. Uncertainty of Measurement:

Test Name	Test Method & Range	Uncertainty	
		Combined std. Uc(y) [dB]	Expanded U [dB]
Radiated Emission	30MHz÷230MHz, Horiz. polar.	1.8	3.6
	30MHz÷230MHz, Ver. polar.	2.0	3.9
	230MHz÷1000MHz, Horiz. polar.	1.5	3.0
	230MHz÷1000MHz, Vert. polar.	1.5	3.0
Conducted Emission	9 kHz÷150 kHz	1.4	2.8
	150 kHz÷30MHz	1.1	2.2

4. WLAN 802.11a: Report of Measurements and Examinations

4.1. Emission Bandwidth (26dB BW)

Reference document:	47 CFR §15.403 (h) (i)		
Test Requirements:	For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.		
Test setup:	See sec 2.1	Pass	
Method of testing:	Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 100kHz, VBW: 300kHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.1.1 - Plot 4.1.12	

Test results:

5150-5250 MHz

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth [kHz]	Ref Plots
802.11a Mode			
5180	54	18500	4.1.1
5200	54	20000	4.1.2
5240	54	18875	4.1.3

5250-5350 MHz

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth [kHz]	Ref Plot
802.11a Mode			
5260	54	19375	4.1.4
5300	54	20375	4.1.5
5320	54	19250	4.1.6


5470-5725 MHz

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth [kHz]	Ref Plot
802.11a Mode			
5500	54	19250	4.1.7
5600	54	19375	4.1.8
5700	54	19000	4.1.9


5725-5825 MHz

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth [kHz]	Ref Plot
802.11a Mode			
5745	54	18750	4.1.10
5785	54	19250	4.1.11
5805	54	19250	4.1.12


5150-5250 MHz
Plot 4.1.1

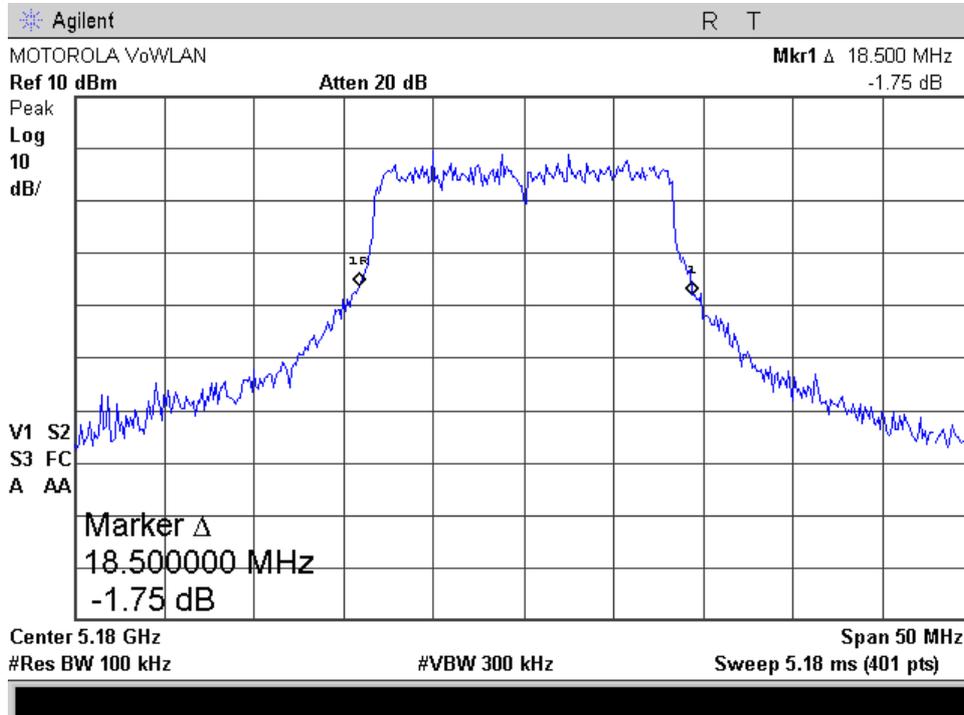


Plot 4.1.2

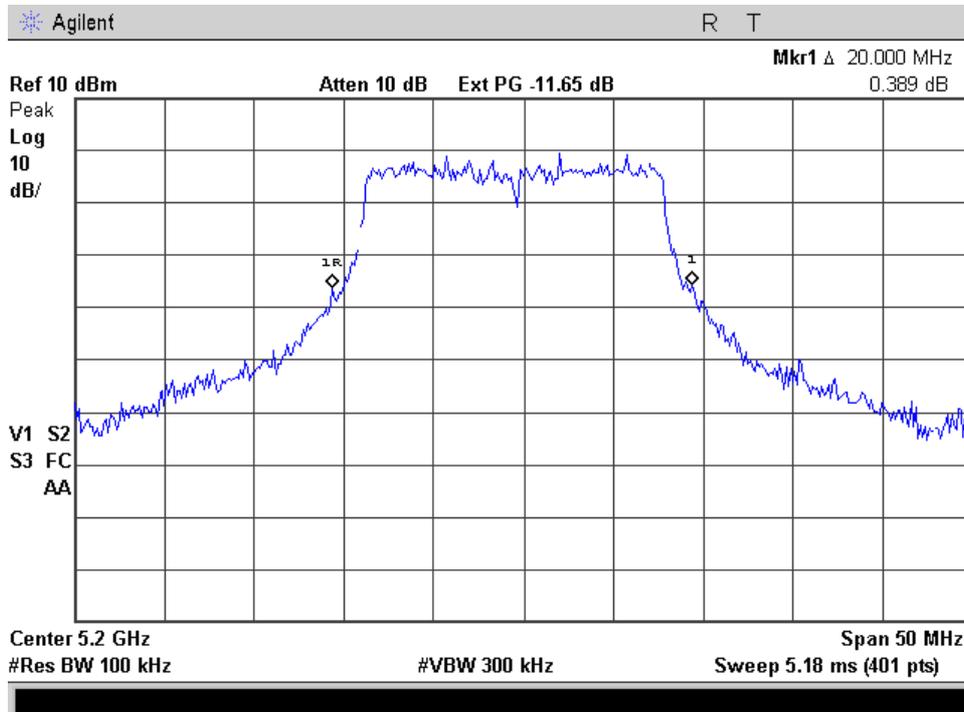


Plot 4.1.3

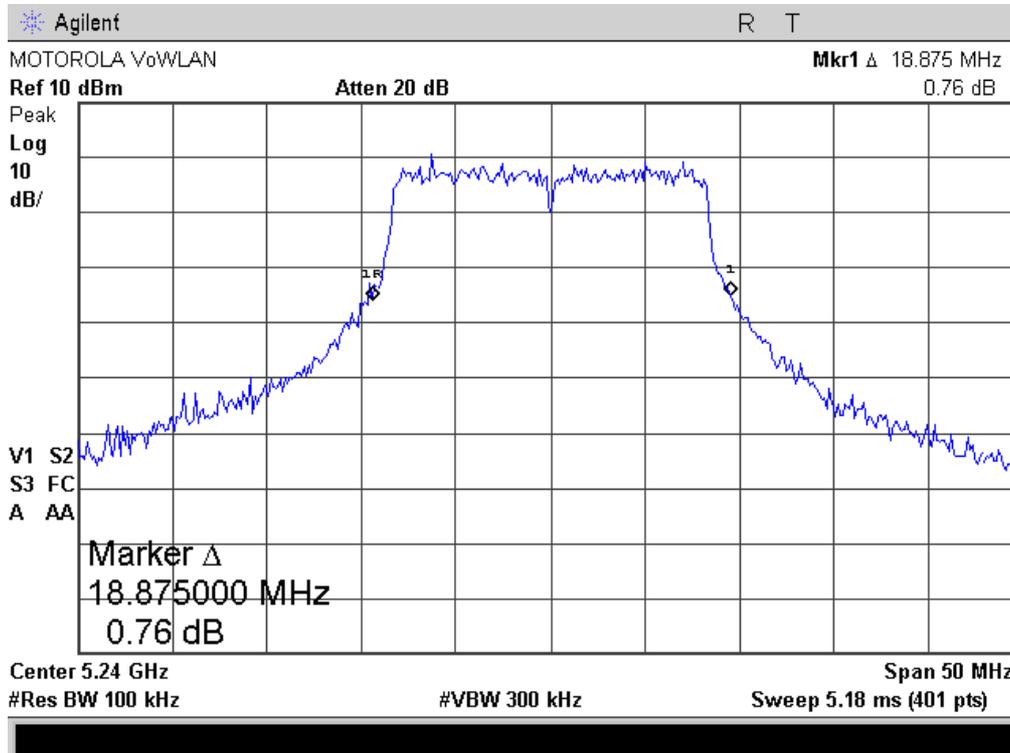


5250-5350 MHz
Plot 4.1.4

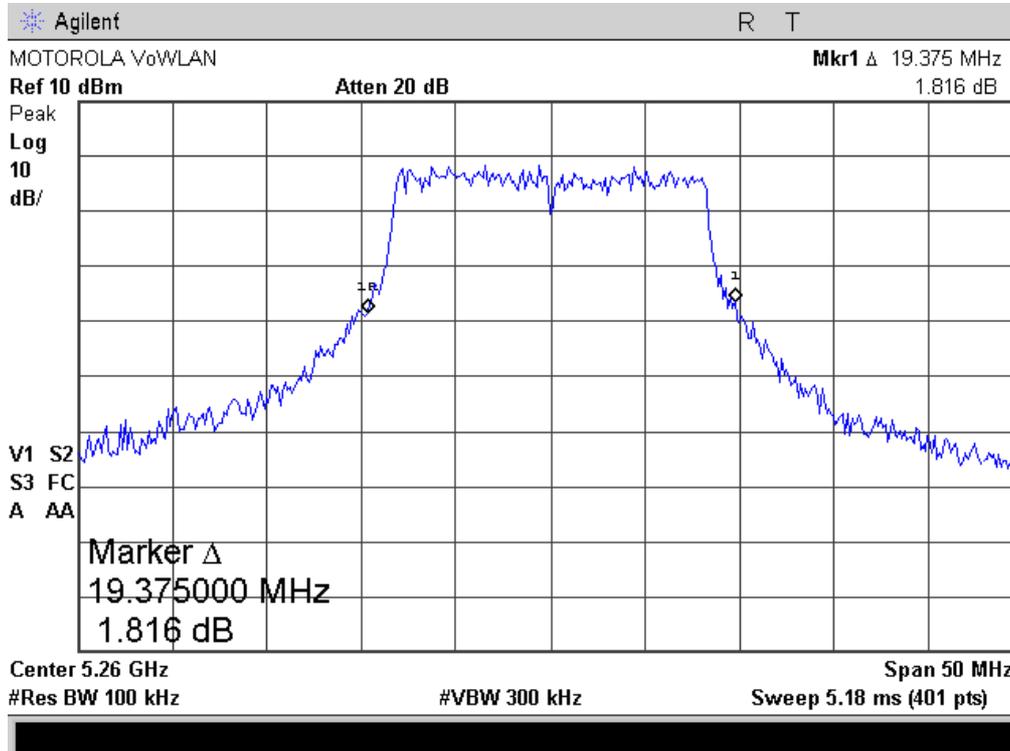


Plot 4.1.5

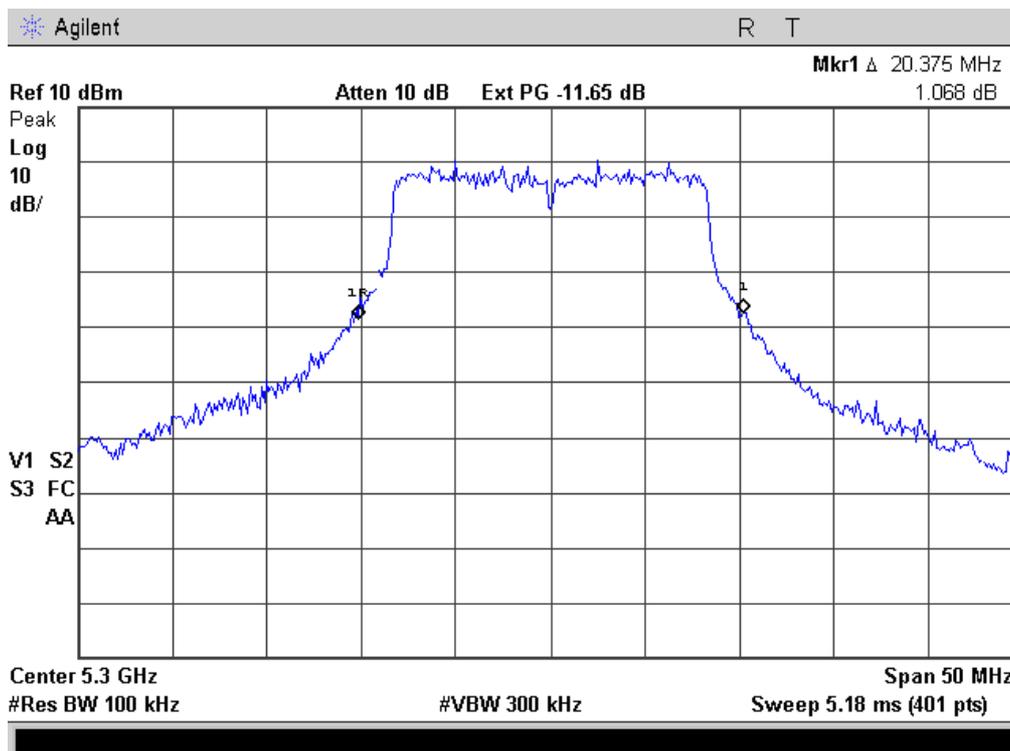


Plot 4.1.6

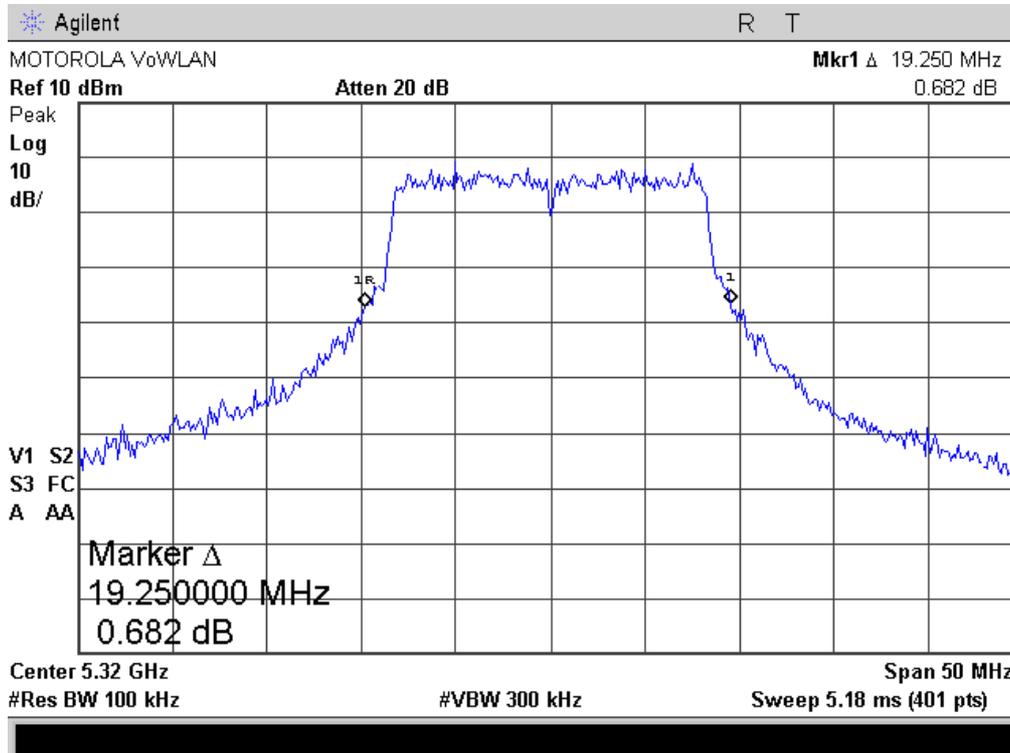


5470-5725 MHz
Plot 4.1.7

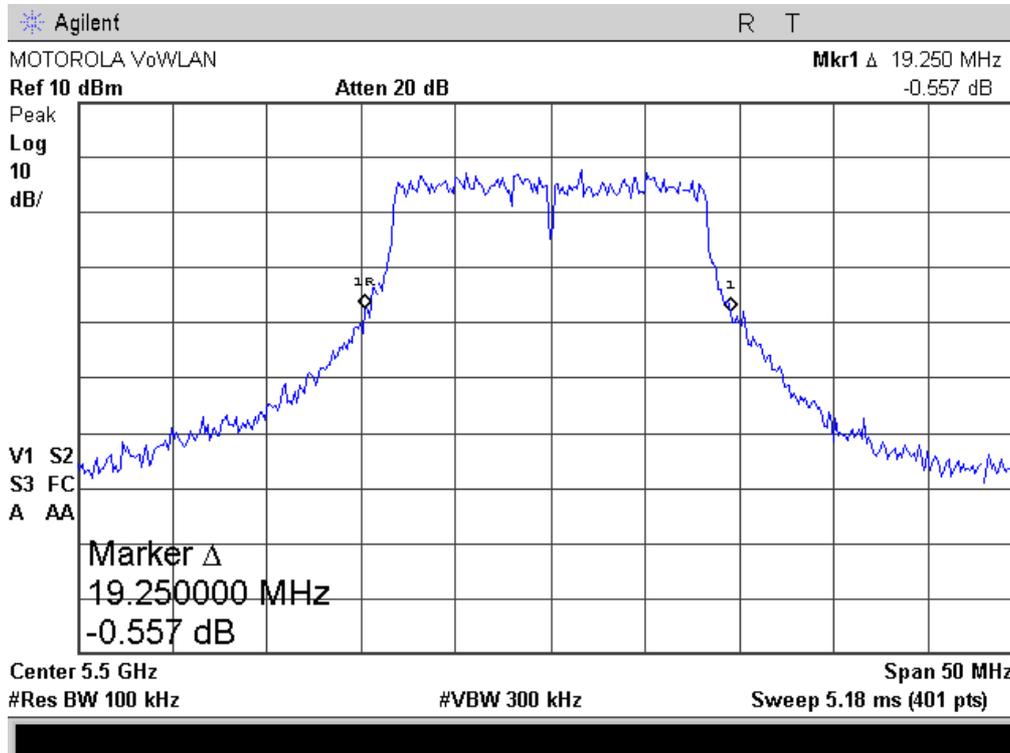


Plot 4.1.8

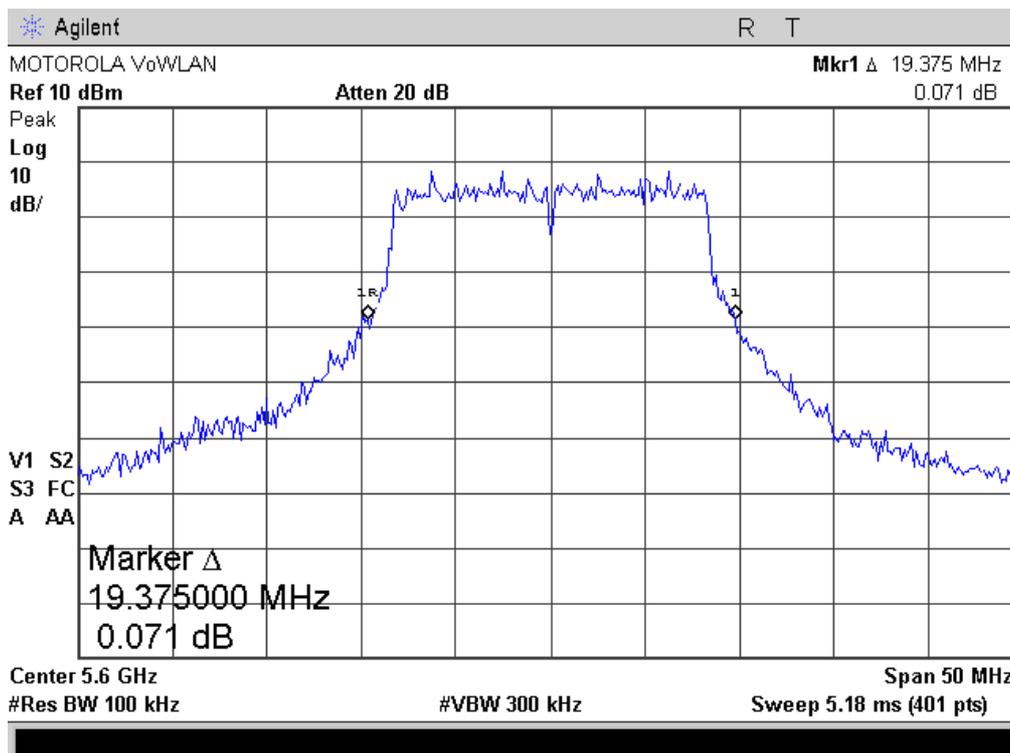


Plot 4.1.9

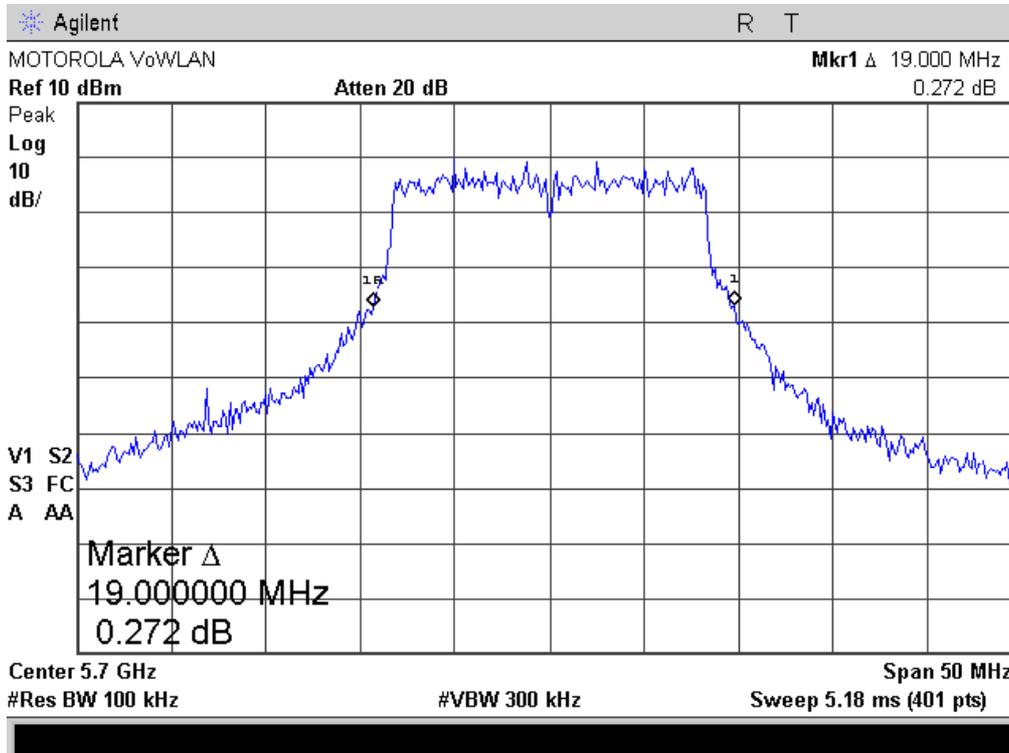


5725-5825 MHz
Plot 4.1.10

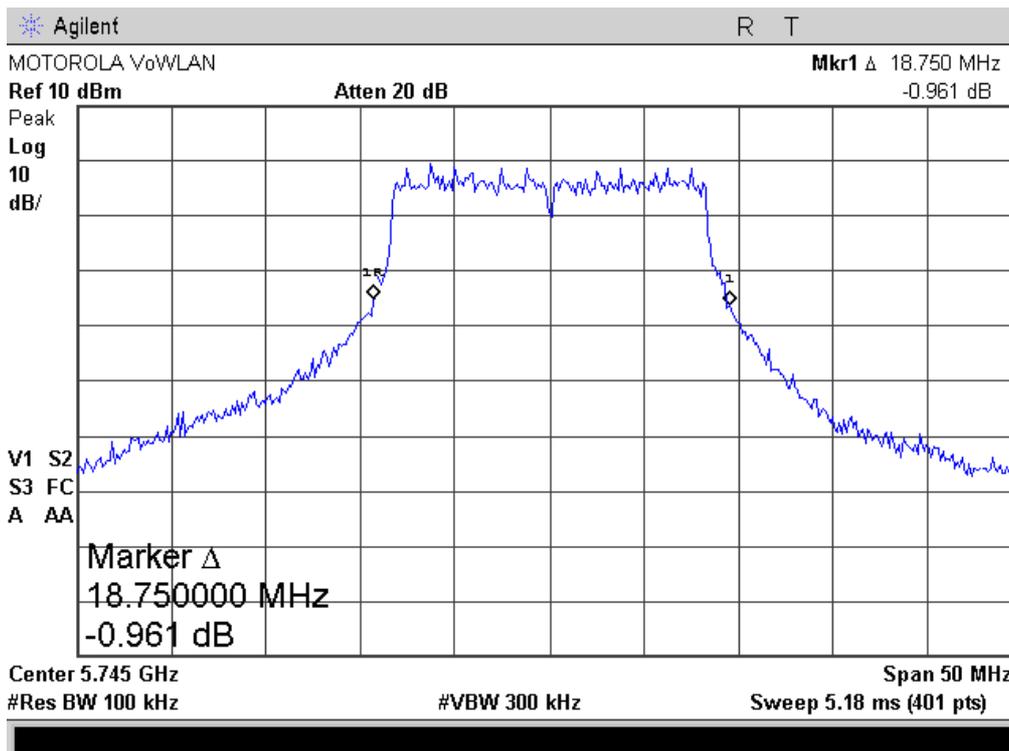

Plot 4.1.11

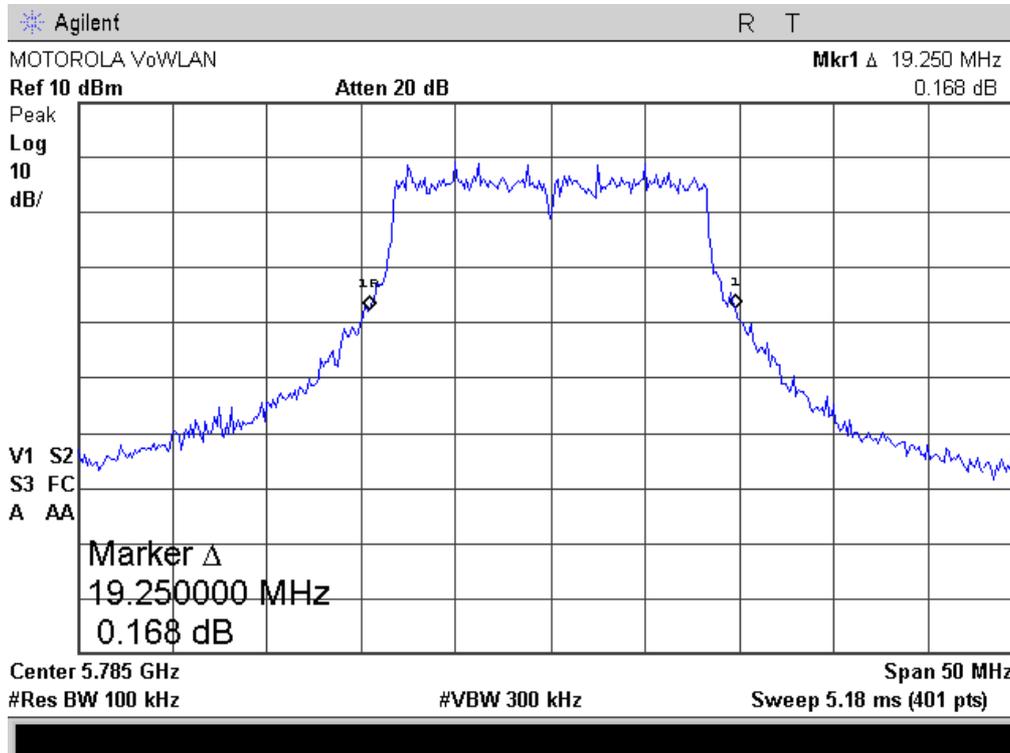

Plot 4.1.12

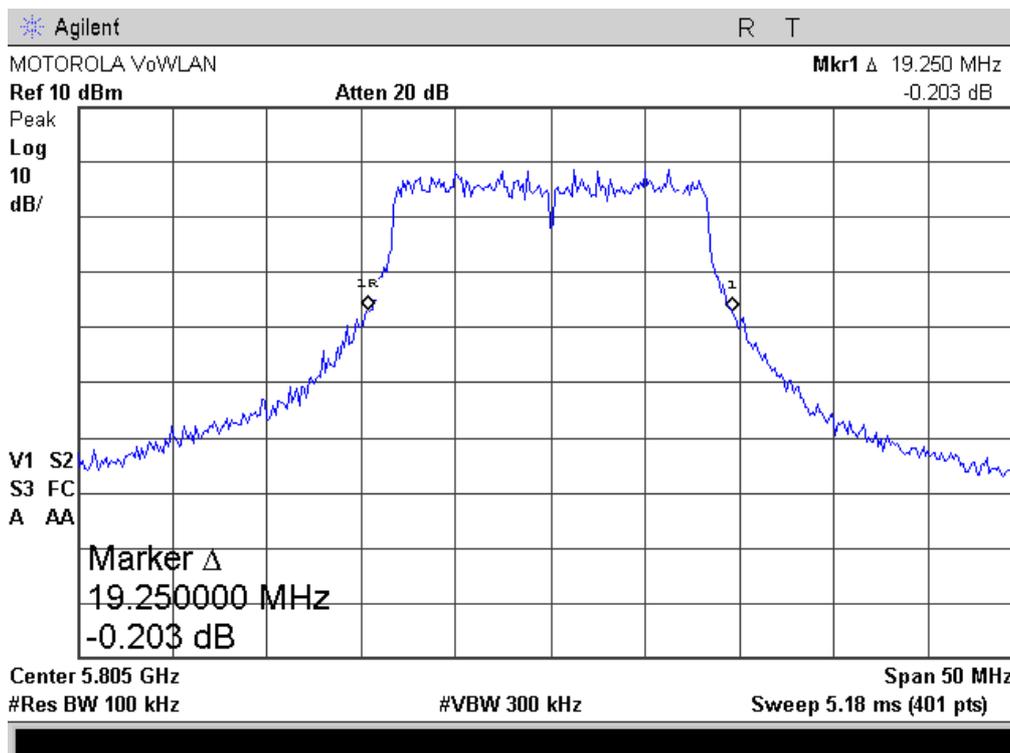

4.2. Maximum Conducted Output Power, 5180-5250 MHz, 5.25–5.35 GHz and 5.47–5.725 GHz

Reference document:	47 CFR §15.407 (a) (1), (2), (3)		
Test Requirements:	<p>(1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26-dB,emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used,</p> <p>(2) For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (3) For the band 5.725–5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W or 17 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 17 dBm in any 1–MHz band both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>		
Test setup:	See sec 2.1	Pass	
Method of testing:	Conducted, Power meter		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 1MHz, VBW: 3MHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	-	

Test results:

5150-5250MHz Band:

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth (B) [MHz]	4 + 10Log B [dBm]	Measured Peak Power [dBm]	AVG Output power* [dBm]	Power Limit [dBm]	Margin [dB]
802.11a Mode							
5180	6	18500	16.67	15.54	12.54	16.67	-1.13
5200	6	20000	16.67	15.87	12.87	17.01	-1.14
5240	6	18875	16.76	15.36	12.36	16.76	-1.40

*Calculated (50% duty cycle), for reporting purposes only.

5250-5350MHz Band:

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth (B) [MHz]	11 + 10Log B [dBm]	Measured Peak Power [dBm]	AVG Output power* [dBm]	Power Limit [dBm]	Margin [dB]
802.11a Mode							
5260	6	19375	23.87	18.76	15.76	23.87	-5.11
5300	6	20375	24.09	18.82	15.82	24.09	-5.27
5320	6	19250	23.84	18.47	15.47	23.84	-5.37

*Calculated (50% duty cycle), for reporting purposes only.

5470-5725 MHz Band:

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth (B) [MHz]	11 + 10Log B [dBm]	Measured Peak Power [dBm]	AVG Output power* [dBm]	Power Limit [dBm]	Margin [dB]
802.11a Mode							
5500	6	19250	23.84	18.32	15.32	23.84	-5.52
5580	6	20375	24.09	18.93	15.93	24.09	-5.16
5600	6	19375	23.87	18.45	15.45	23.87	-5.42
5700	6	19000	23.79	18.65	15.65	23.79	-5.14

*Calculated (50% duty cycle), for reporting purposes only.

5725-5825 MHz Band:

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth (B) [MHz]	17 + 10Log B [dBm]	Measured Peak Power [dBm]	AVG Output power* [dBm]	Power Limit [dBm]	Margin [dB]
802.11a Mode							
5745	6	18750	29.73	18.78	15.78	29.73	-10.95
5765	6	19375	29.87	18.94	15.94	29.87	-10.93
5785	6	19250	29.84	18.67	15.67	29.84	-11.17
5805	6	19250	29.84	18.61	15.61	29.84	-11.23

*Calculated (50% duty cycle), for reporting purposes only.

4.3. Peak Power Spectral Density

Reference document:	47 CFR §15.407 (a) (1), (2), (3), (5)		
Test Requirements:	For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.		
Test setup:	See sec 2.1	Pass	
Method of testing:	Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 1MHz , VBW: 3MHz , Sweep Time: Auto		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.3.1 - Plot 4.3.12	

Test Results

5150-5250MHz Band:

Frequency [MHz]	Data Rate [Mbps]	PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	Margin [dB]	Ref Plot
802.11a Mode					
5180	6	1.0	4	-3.0	4.3.1
5200	6	1.0	4	-3.0	4.3.2
5240	6	1.1	4	-2.9	4.3.3

5250-5350MHz Band:

Frequency [MHz]	Data Rate [Mbps]	PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	Margin [dB]	Ref Plot
802.11a Mode					
5260	6	4.5	11	-6.5	4.3.4
5300	6	5.3	11	-5.7	4.3.5
5320	6	4.8	11	-6.2	4.3.6


5470-5725 MHz Band:

Frequency [MHz]	Data Rate [Mbps]	PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	Margin [dB]	Ref Plot
802.11a Mode					
5500	6	4.2	11	-6.8	4.3.7
5600	6	5.3	11	-5.7	4.3.8
5700	6	5.1	11	-5.9	4.3.9


5725-5825 MHz Band:

Frequency [MHz]	Data Rate [Mbps]	PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	Margin [dB]	Ref Plot
802.11a Mode					
5745	6	4.8	17	-12.2	4.3.10
5785	6	5.1	17	-11.9	4.3.11
5805	6	4.9	17	-12.1	4.3.12


802.11a Mode
Plot 4.3.1

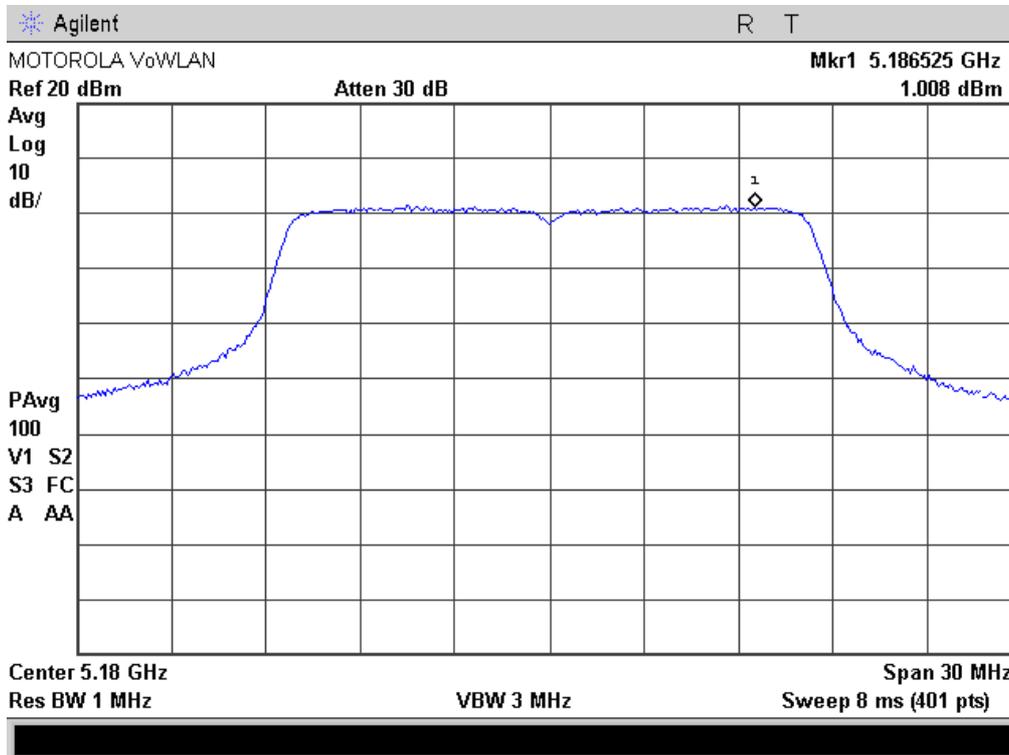


Plot 4.3.2

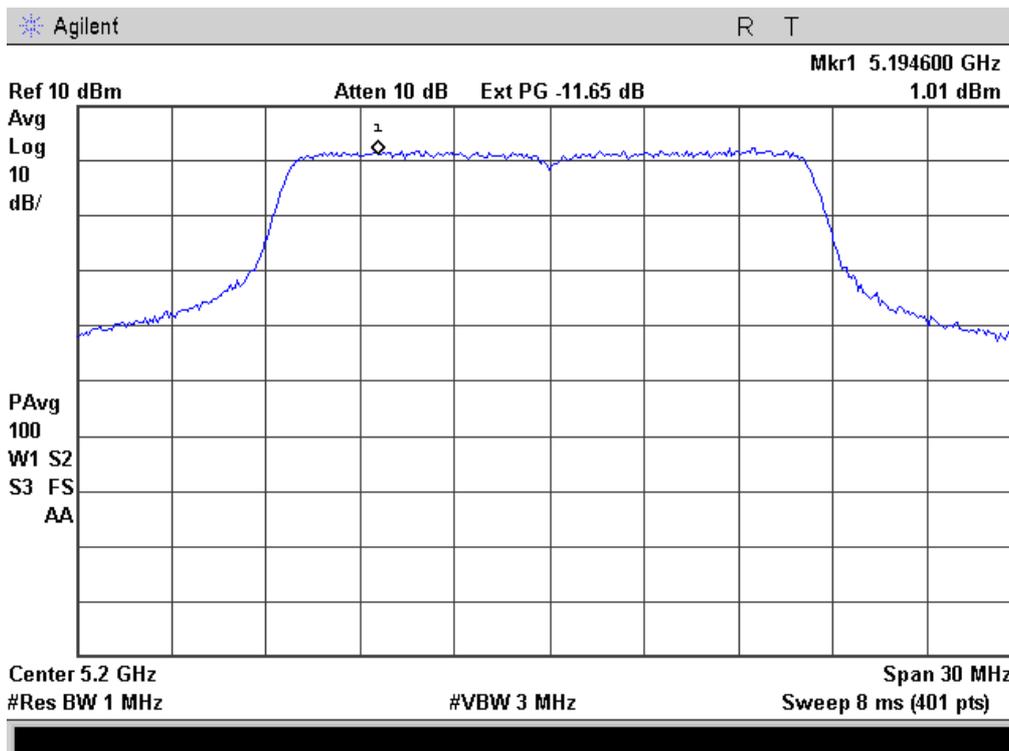


Plot 4.3.3

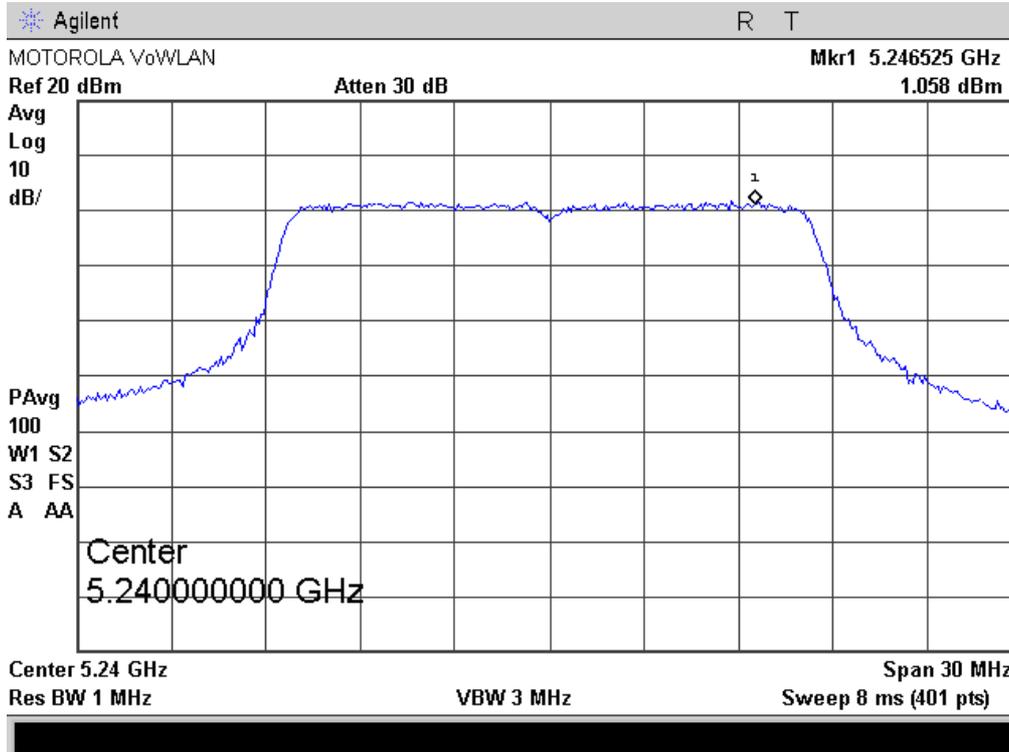


Plot 4.3.4

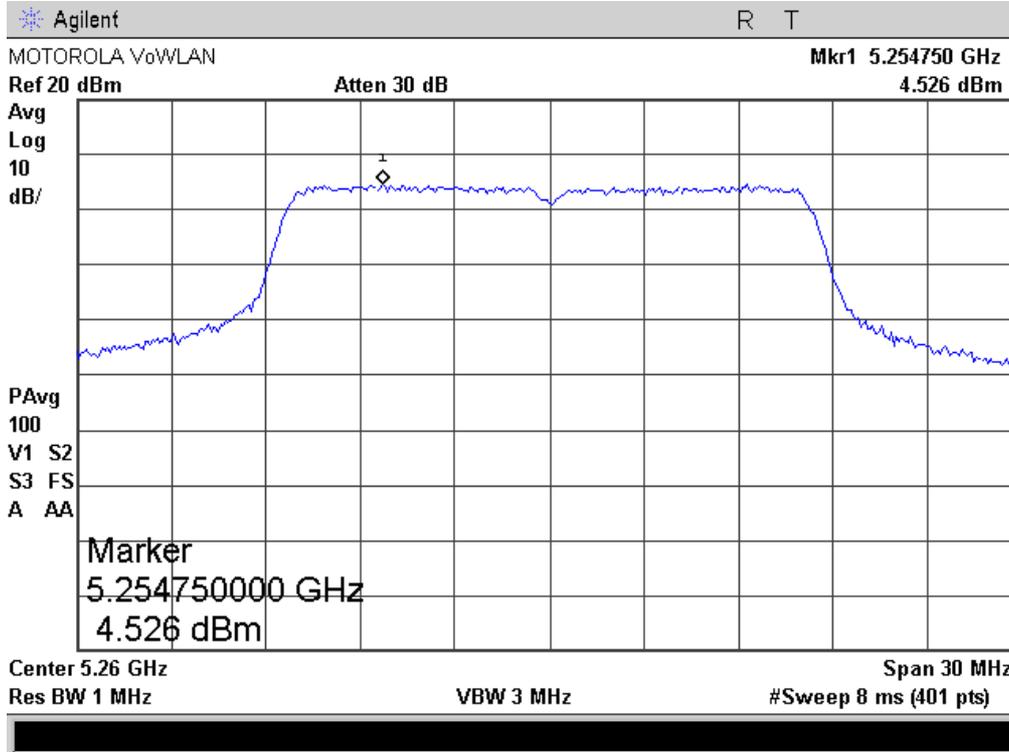


Plot 4.3.5

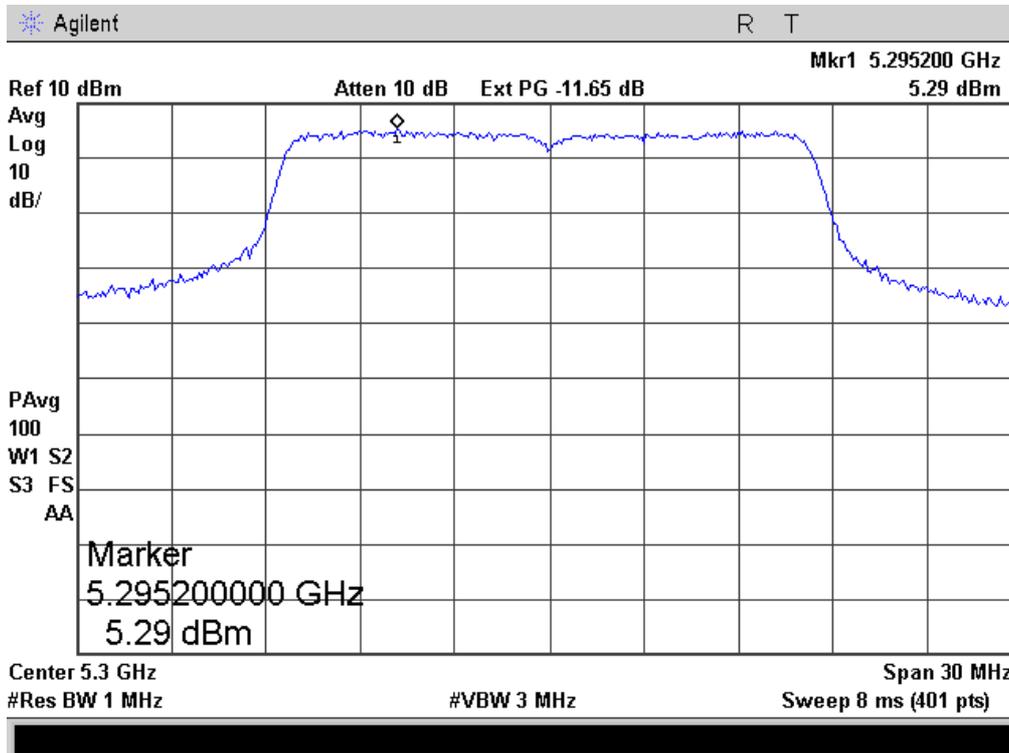


Plot 4.3.6

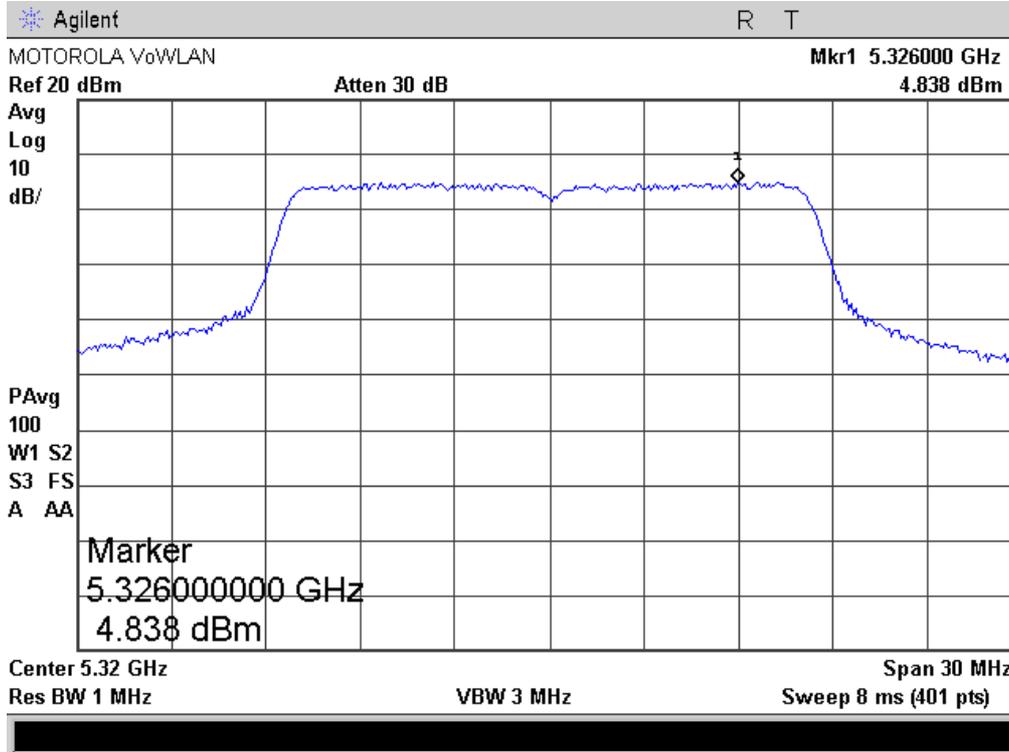


Plot 4.3.7

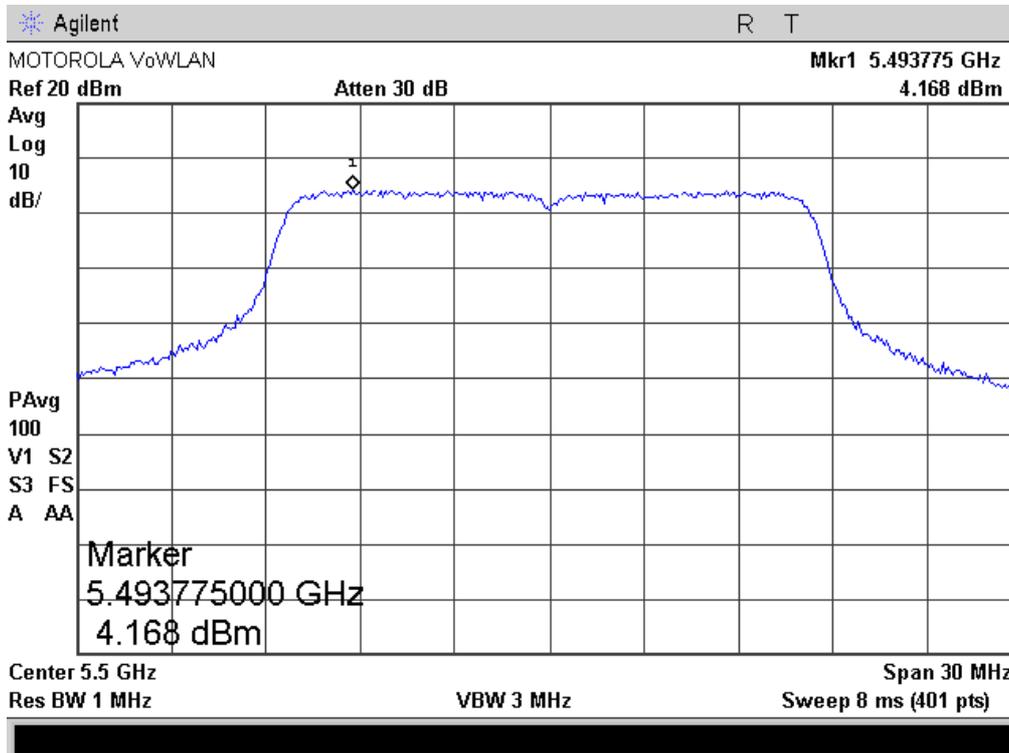


Plot 4.3.8

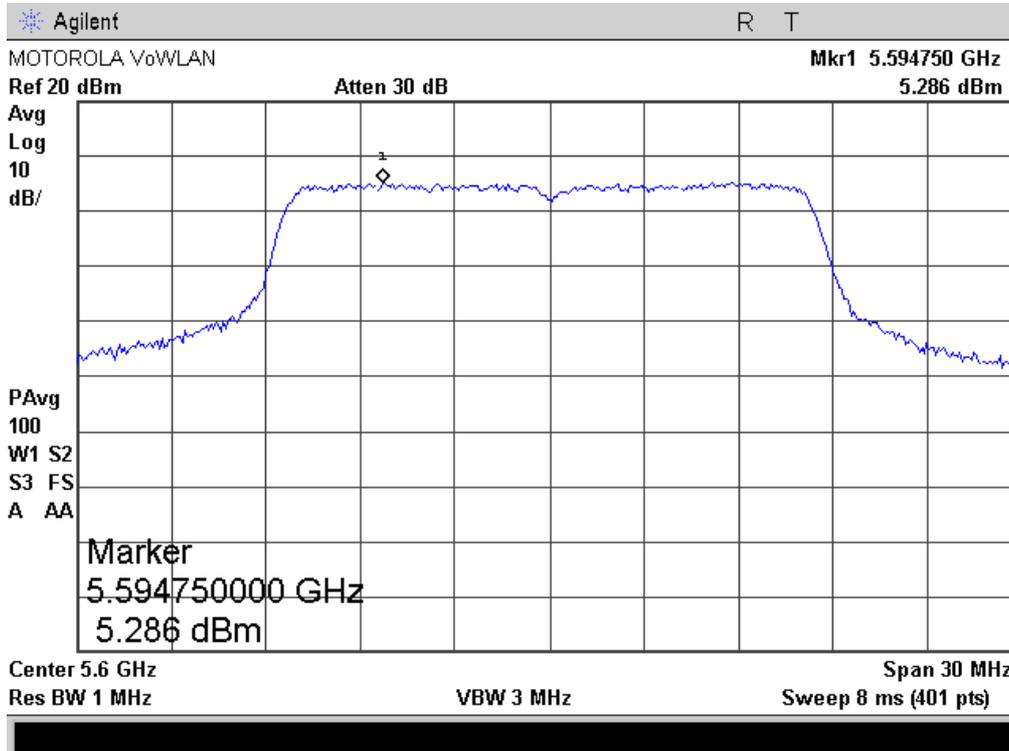


Plot 4.3.9

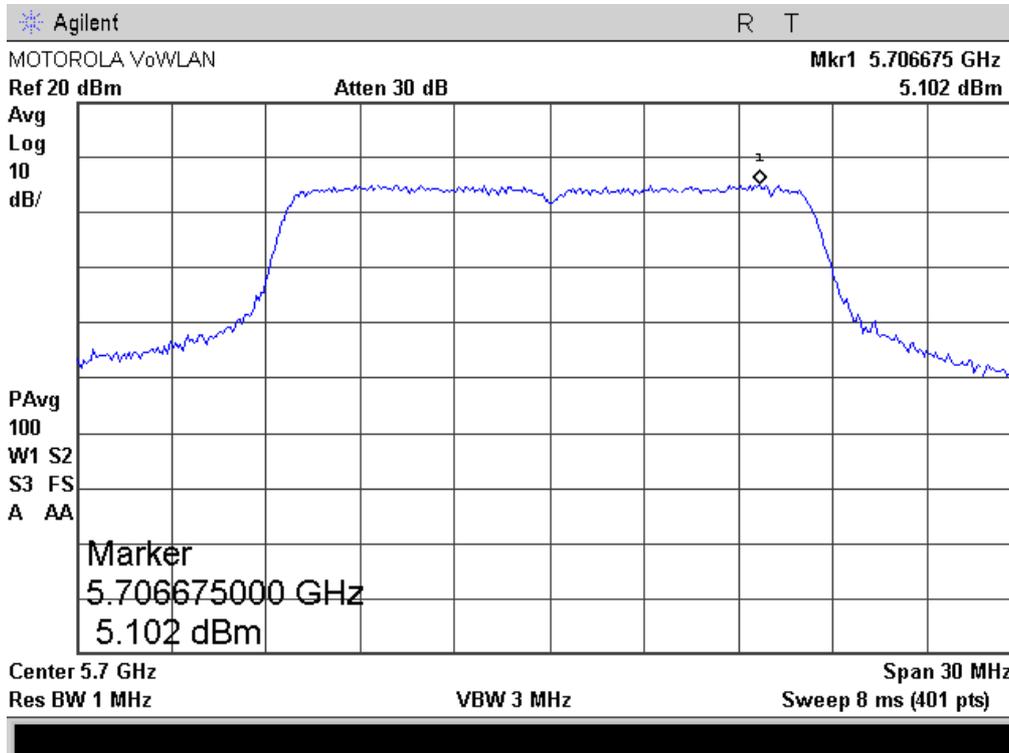


Plot 4.3.10

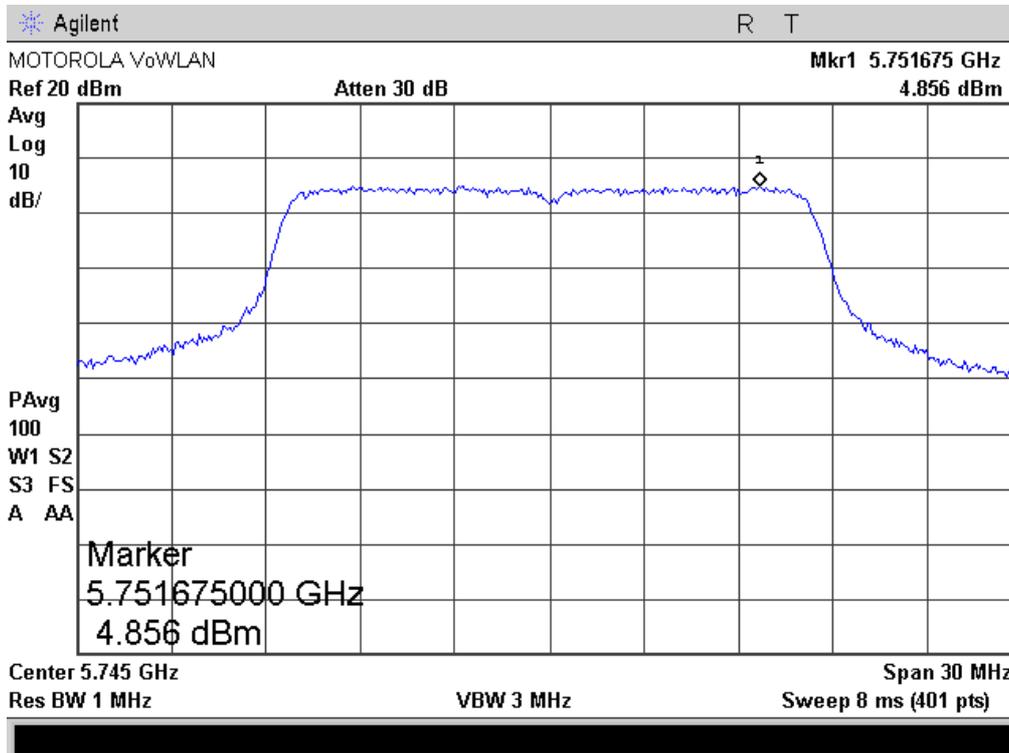

Plot 4.3.11

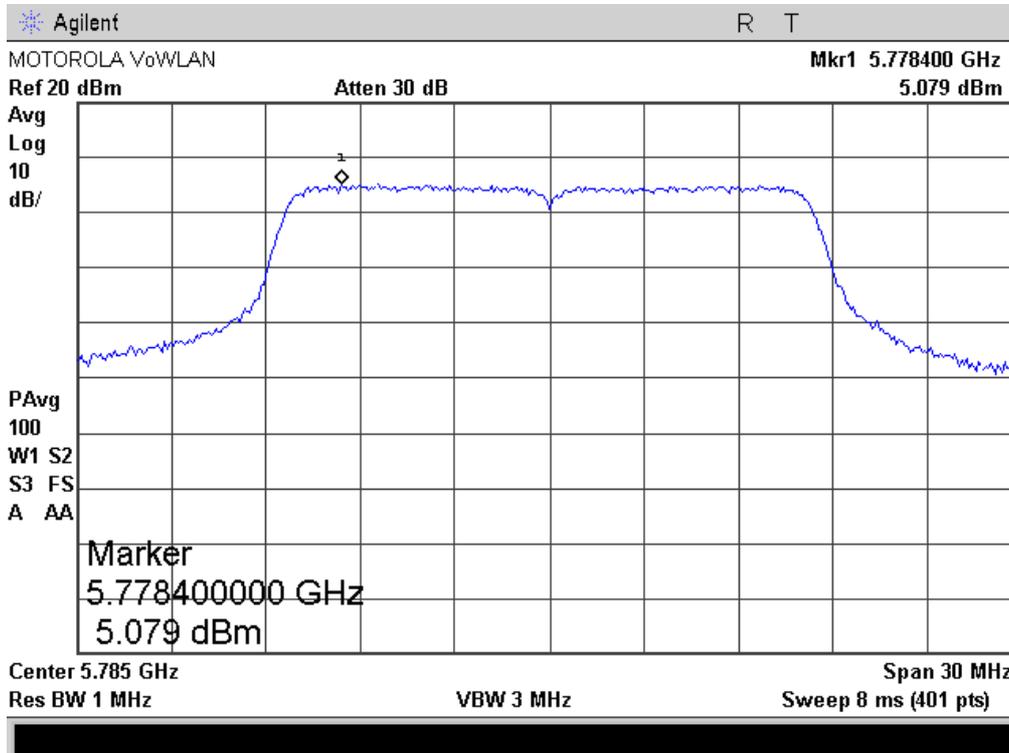

Plot 4.3.12

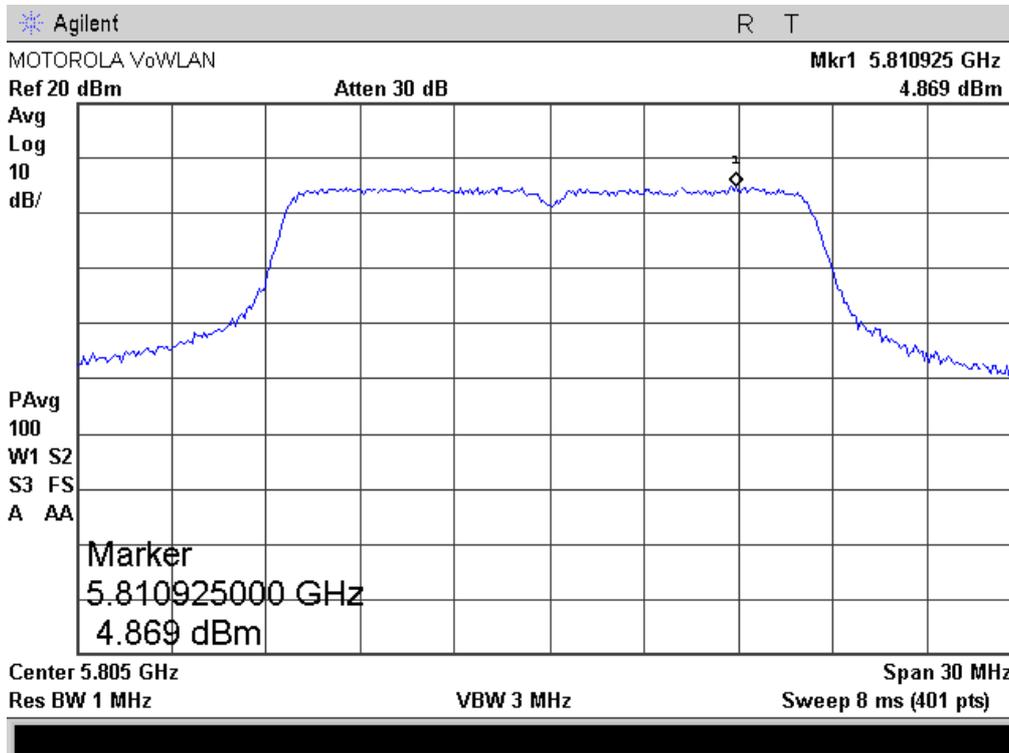

4.4. Peak Excursion

Reference document:	47 CFR §15.407 (a) (6)		
Test Requirements:	The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.		
Test setup:	See sec 2.1,	Pass	
Method of testing:	Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	Trace 1:RBW: 1MHz , VBW: 3MHz , Peak Max Hold, Sweep Time: Auto, Trace 2: RBW: 1MHz , VBW: 30kHz , Peak Max Hold, Sweep Time: Auto		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.4.1 - 4.4.12	

Test Results:

5150-5250 MHz:

Frequency [MHz]	Data Rate [Mbps]	Peak Excursion [dB]	Limit [dB]	Margin [dB]	Ref Plots
802.11a Mode					
5180	6	8.0	13	-5.0	4.4.1
5200	6	6.5	13	-6.5	4.4.2
5240	6	8.5	13	-4.5	4.4.3

5250-5350 MHz

Frequency [MHz]	Data Rate [Mbps]	Peak Excursion [dB]	Limit [dB]	Margin [dB]	Ref Plot
802.11a Mode					
5260	6	6.0	13	-7.0	4.4.4
5300	6	6.7	13	-6.3	4.4.5
5320	6	8.3	13	-4.7	4.4.6


5470-5725 MHz

Frequency [MHz]	Data Rate [Mbps]	Peak Excursion [dB]	Limit [dB]	Margin [dB]	Ref Plot
802.11a Mode					
5500	6	6.2	13	-6.8	4.4.7
5600	6	8.0	13	-5.0	4.4.8
5700	6	6.8	13	-6.2	4.4.9


5725-5805 MHz

Frequency [MHz]	Data Rate [Mbps]	Peak Excursion [dB]	Limit [dB]	Margin [dB]	Ref Plot
802.11a Mode					
5745	6	5.4	13	-7.6	4.4.10
5785	6	7.8	13	-5.2	4.4.11
5805	6	8.0	13	-5.0	4.4.12


Plot 4.4.1

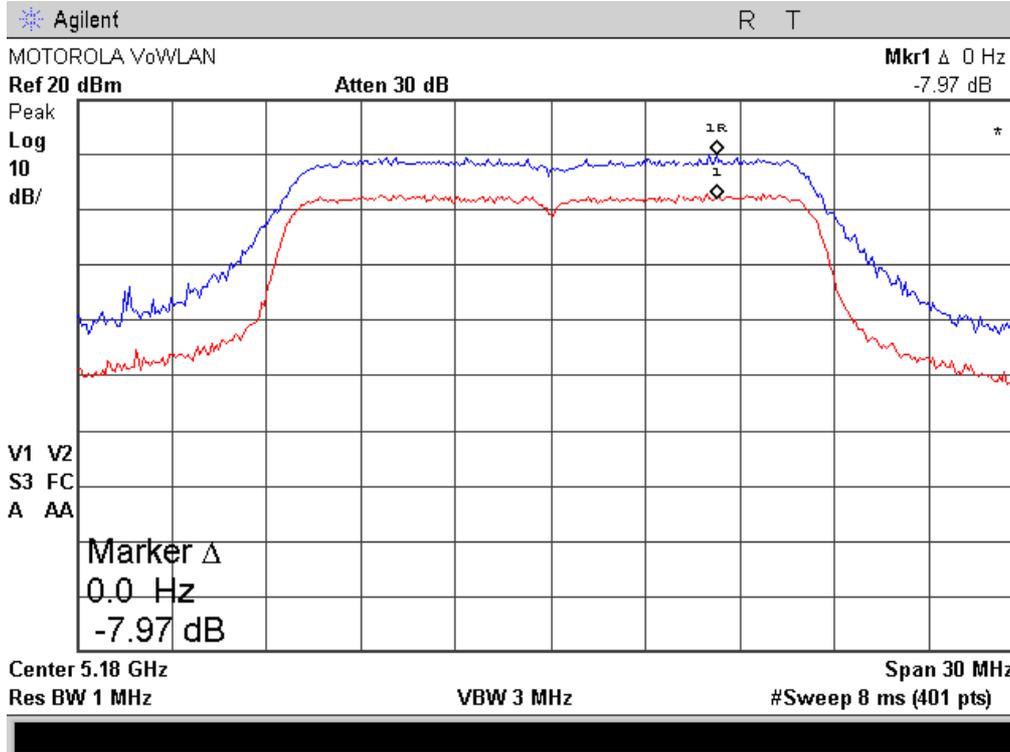


Plot 4.4.2

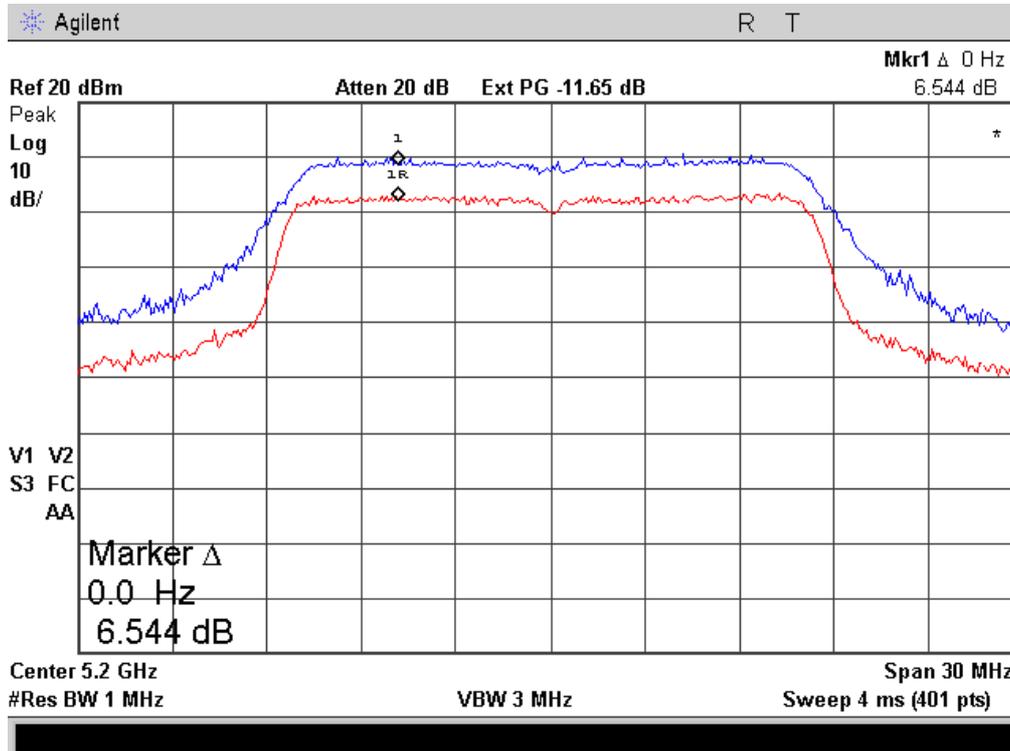


Plot 4.4.3

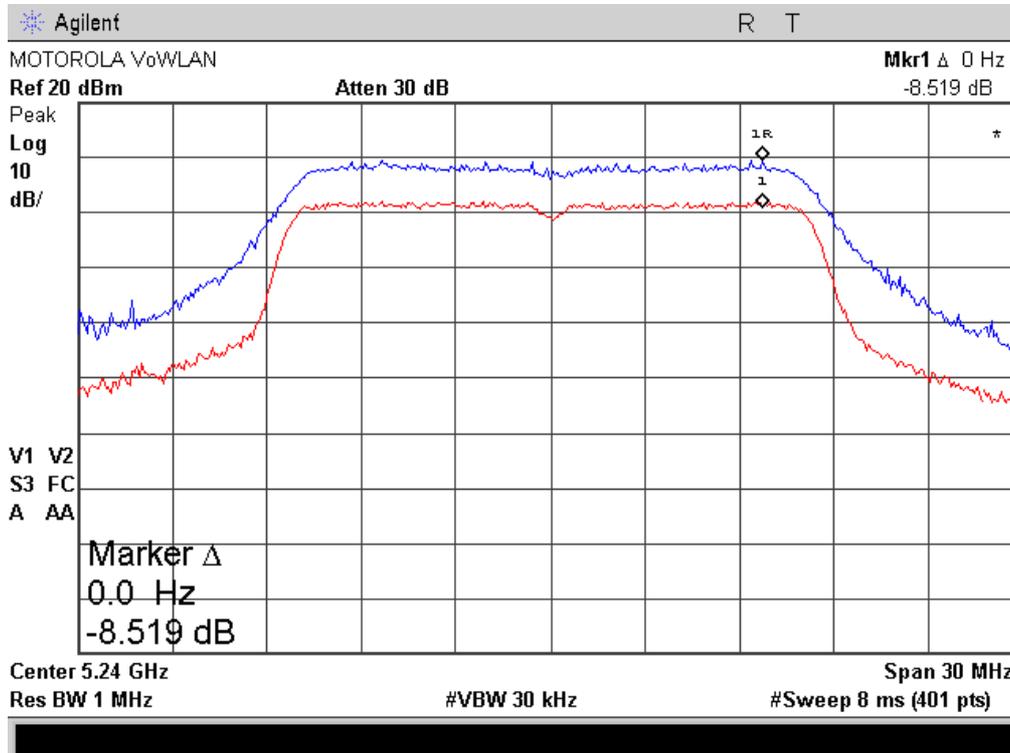


Plot 4.4.4

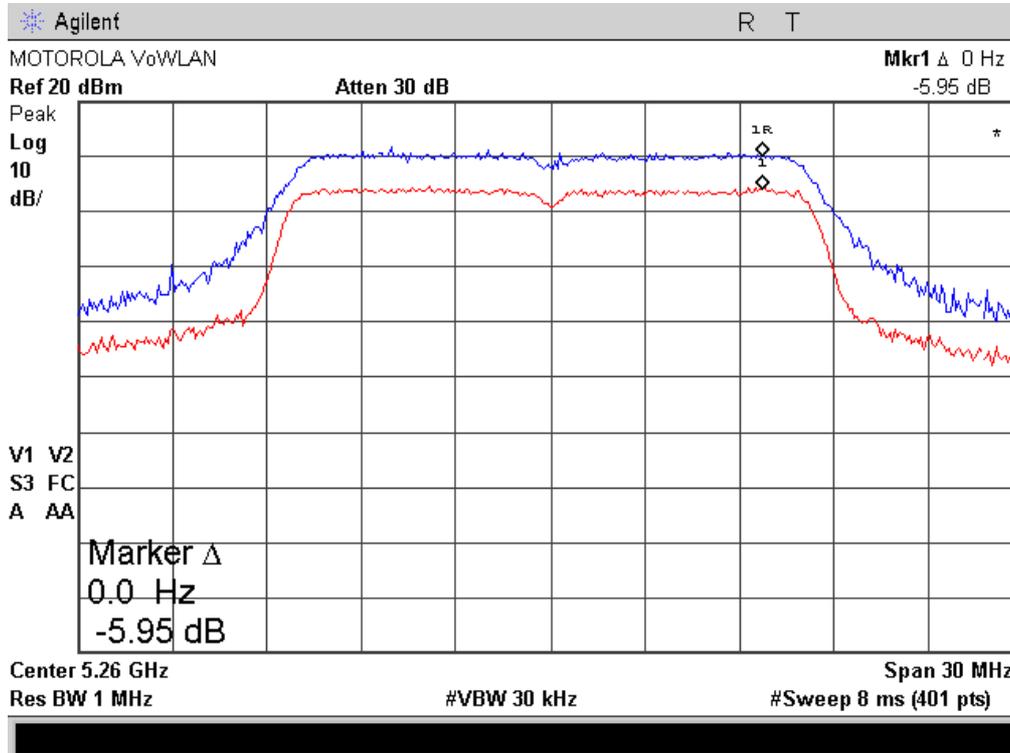


Plot 4.4.5

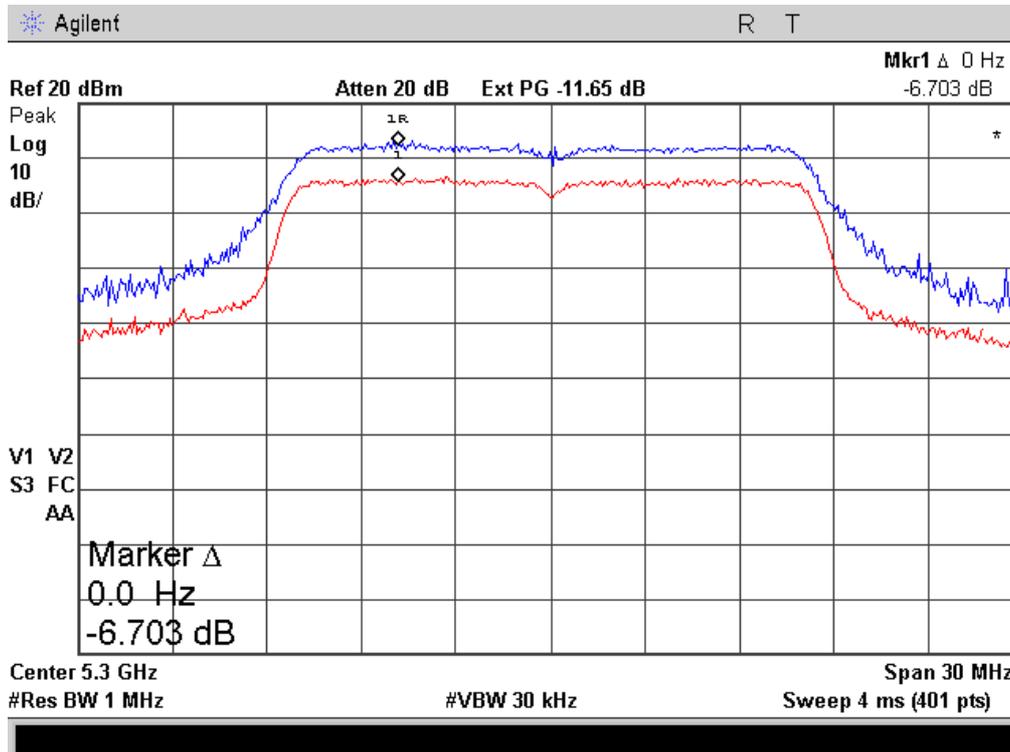


Plot 4.4.6

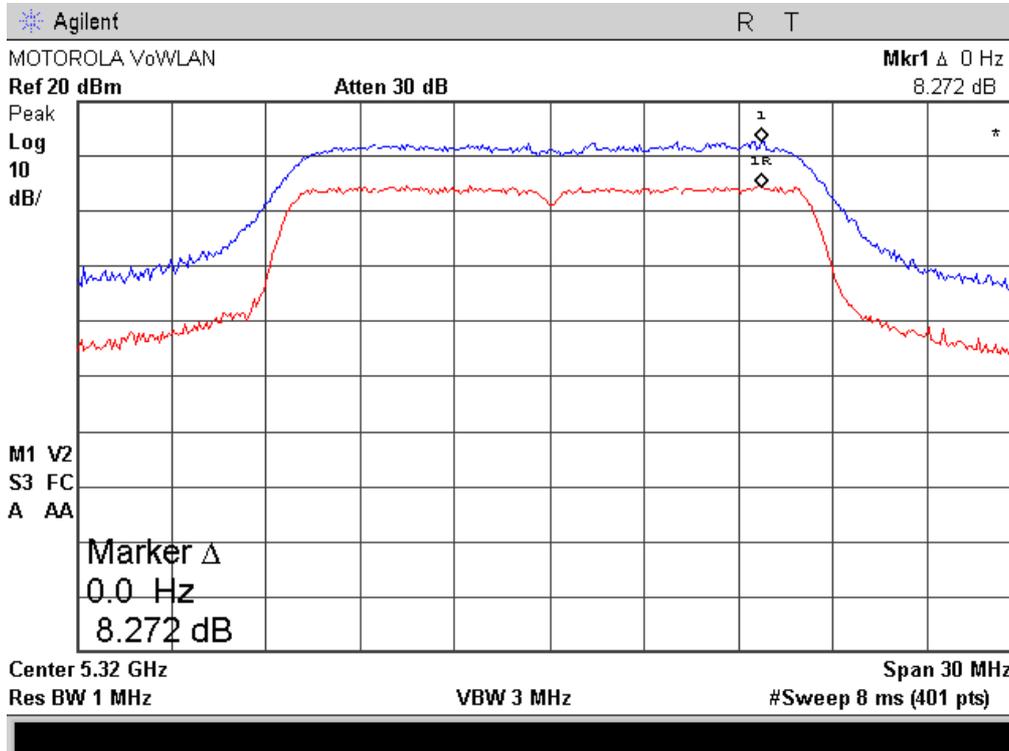


Plot 4.4.7

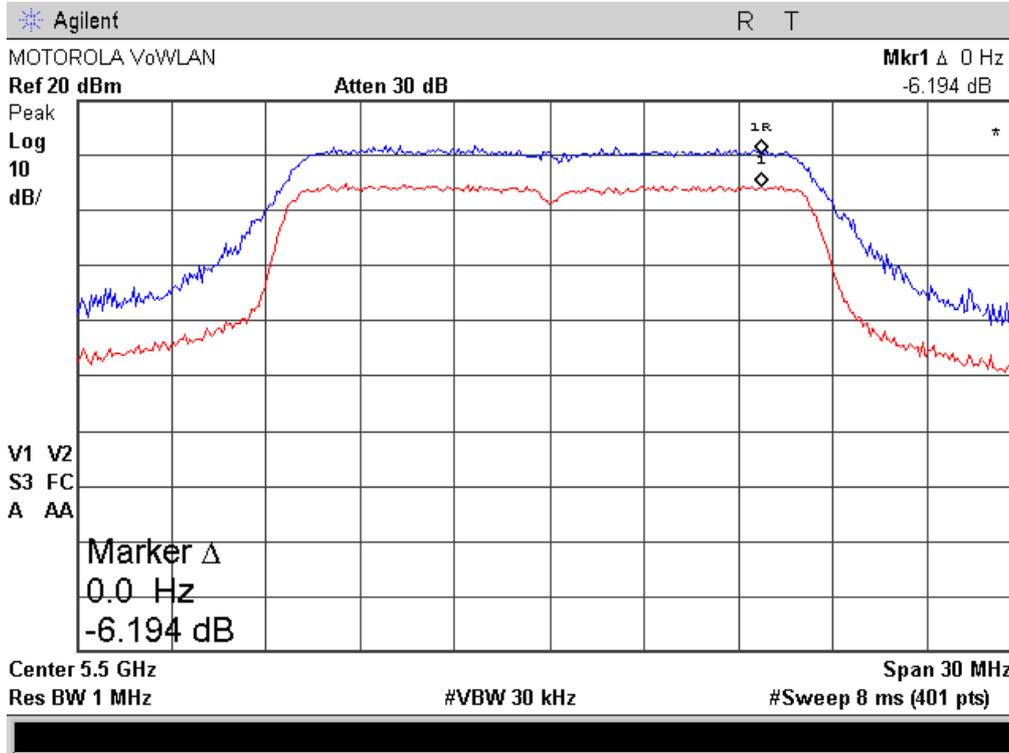


Plot 4.4.8

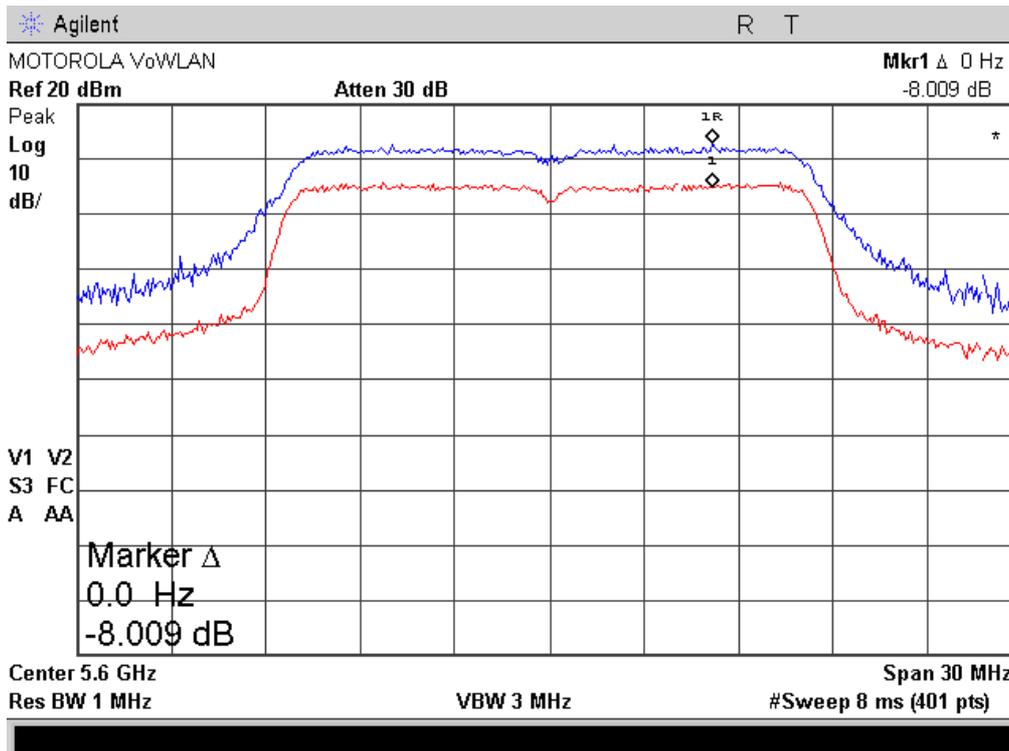


Plot 4.4.9

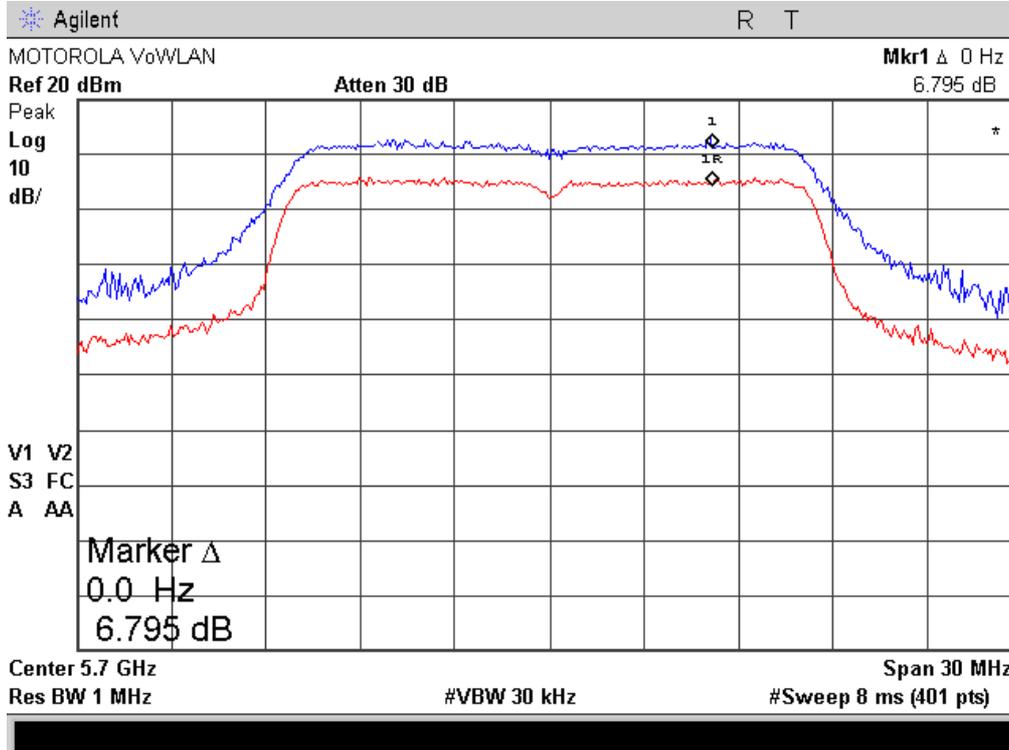


Plot 4.4.10

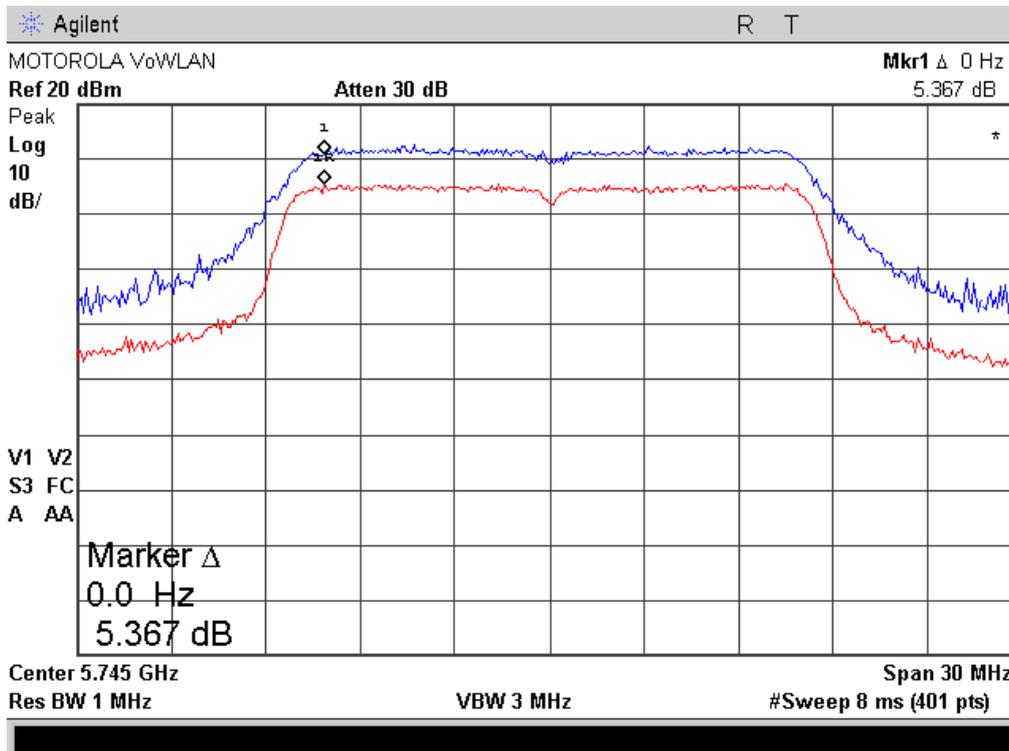

Plot 4.4.11

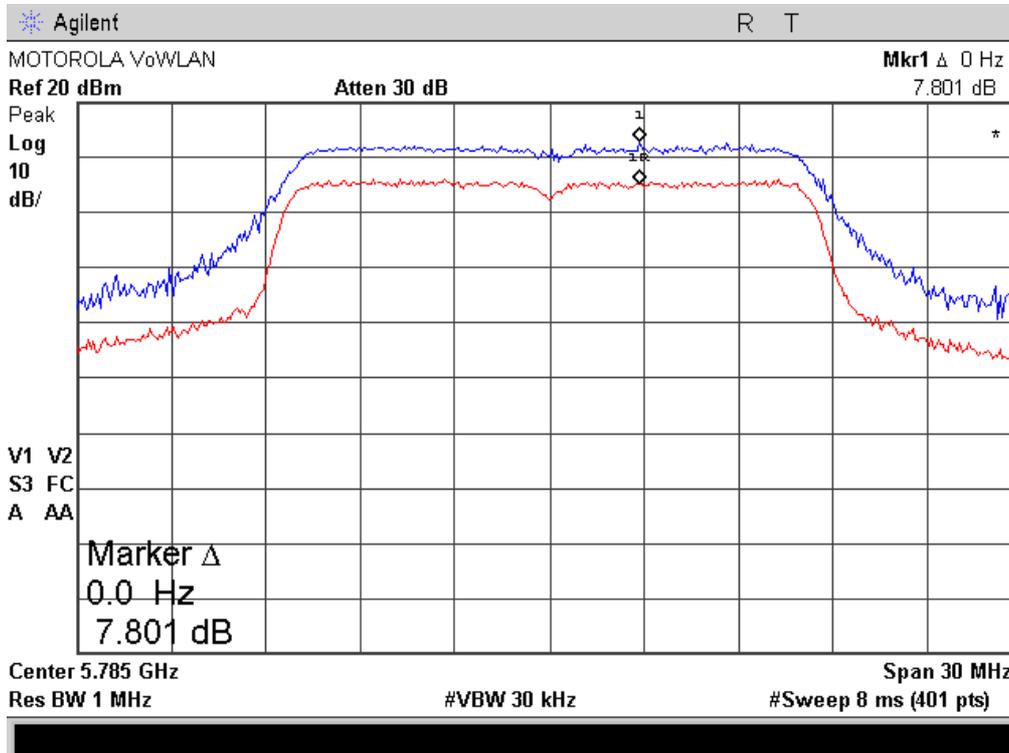

Plot 4.4.12

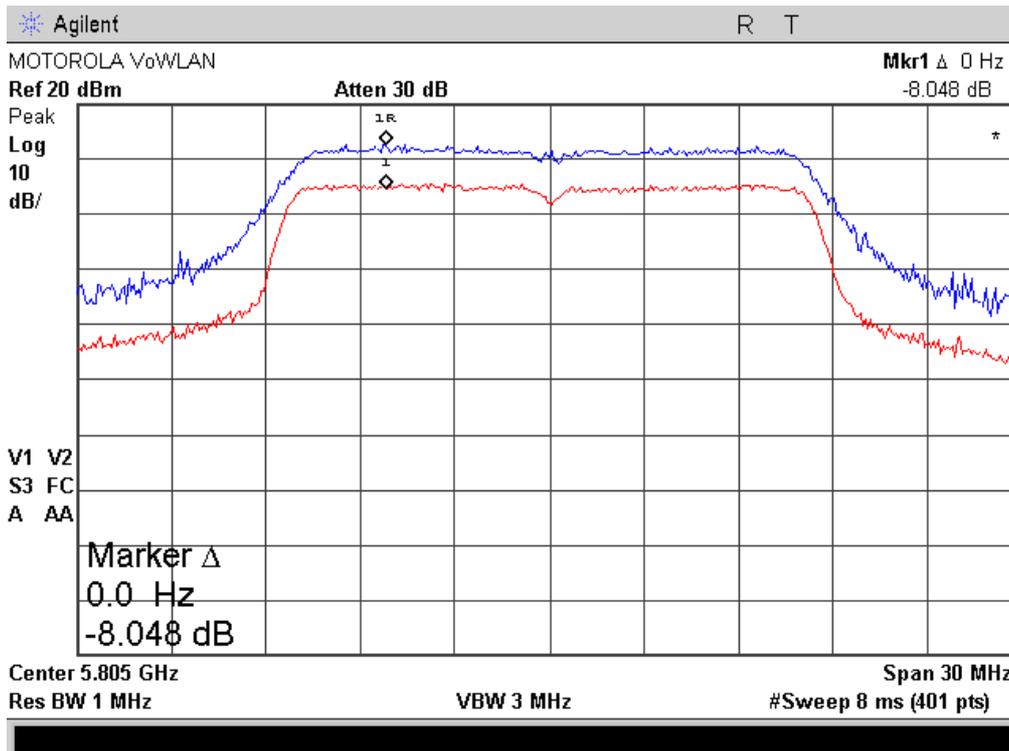

4.5. Conducted Spurious Emissions

Reference document:	47 CFR §15.407 (b) (1),(2),(3),(4) & §15.407 (b)(6)		
Test Requirements:	<p>The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:</p> <p>For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p> <p>For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p> <p>For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p> <p>For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.</p> <p>Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Sec. 15.209.</p>		
Test setup:	See sec 2.1	Pass	
Method of testing:	Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 1 MHz, VBW ≥1 MHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.5.1- Plot 4.5.34	

Test results:

5150-5250 MHz: Spurious

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Reference Plots	Margin [dB]	Result
802.11a Mode								
5180	54	3.2	All emission ay least 15 dB below limit		-27	4.5.1 - 4.5.2	>15	Comply
5220	54					4.5.3 - 4.5.4		Comply
5240	54					4.5.5 - 4.5.6		Comply

5250-5350 MHz: Spurious

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Reference Plots	Margin [dB]	Result
802.11a Mode								
5260	54	3.1	All emission ay least 15 dB below limit		-27	4.5.7 - 4.5.8	>15	Comply
5300	54					4.5.9 - 4.5.10		Comply
5320	54					4.5.11 - 4.5.12		Comply

5470-5725 MHz: Spurious

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Reference Plots	Margin [dB]	Result
802.11a Mode								
5500	54	0.7	All emission ay least 15 dB below limit		-27	4.5.13 - 4.5.14	>15	Comply
5600	54	0.7				4.5.15 - 4.5.16		Comply
5700	54	1.9				4.5.17 - 4.5.18		Comply

5725-5825 MHz: Spurious

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Reference Plots	Margin [dB]	Result
802.11a Mode								
5745	54	1.9	All emission ay least 15 dB below limit		-27	4.5.19 - 4.5.20	>15	Comply
5785	54	1.9				4.5.21 - 4.5.22		Comply
5805	54	1.5				4.5.23 - 4.5.24		Comply

5150-5250 MHz: Band edge

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Reference Plots	Margin [dB]	Result
802.11a Mode								
5150	54	3.2	-36.9	-33.7	-27	4.5.25	-6.7	Comply
5350	54	3.1	-46.2	-43.1	-27	4.5.26	-16.1	Comply

5250-5350 MHz: Band edge

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Reference Plots	Margin [dB]	Result
802.11a Mode								
5150	54	3.2	-42.3	-39.1	-27	4.5.27	-12.1	Comply
5350	54	3.1	-35.1	-32	-27	4.5.28	-5	Comply


5470-5725 MHz: Band edge

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Reference Plots	Margin [dB]	Result
802.11a Mode								
5470	54	0.7	-36.0	-35.3	-27	4.5.29	-8.3	Comply
5725	54	1.9	-37.5	-35.6	-27	4.5.30	-8.6	Comply


5725-5825 MHz: Band edge

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Reference Plots	Margin [dB]	Result
802.11a Mode								
5725	54	1.9	-20.6	-18.7	-17	4.5.31	-1.7	Comply
5715	54	1.9	-30.9	-29	-27	4.5.32	-2	Comply
5825	54	1.5	-25.1	-23.6	-17	4.5.33	-6.6	Comply
5835	54	1.5	-36.7	-35.2	-27	4.5.34	-8.2	Comply


**Spurious
Plot 4.5.1**

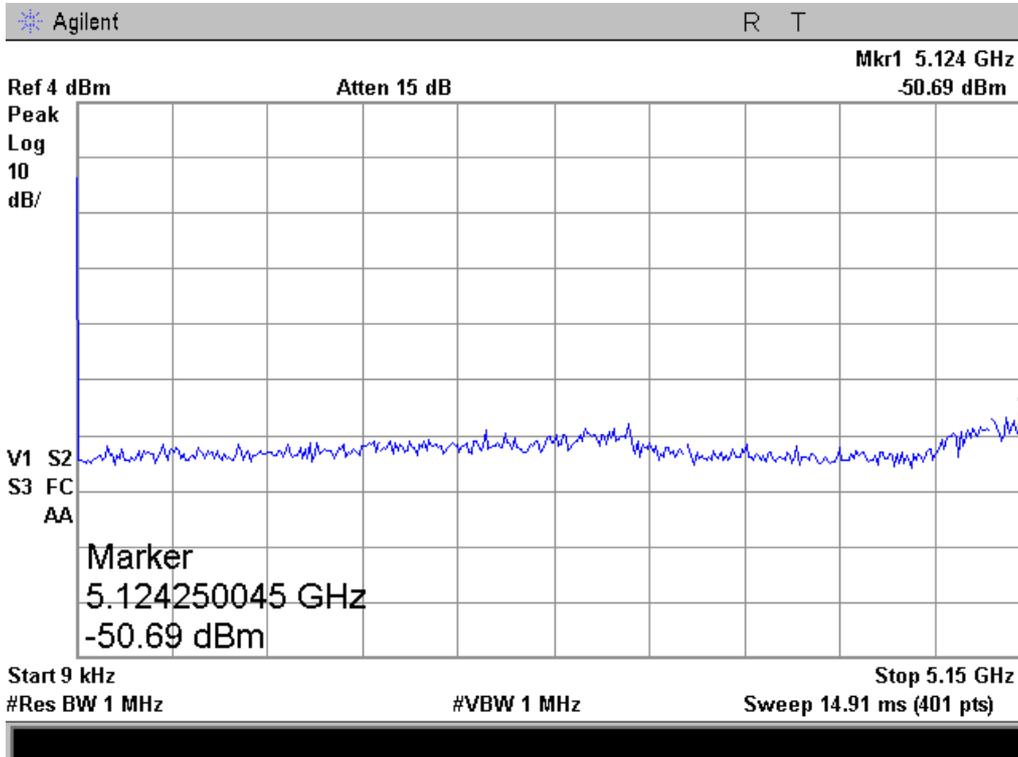


Plot 4.5.2

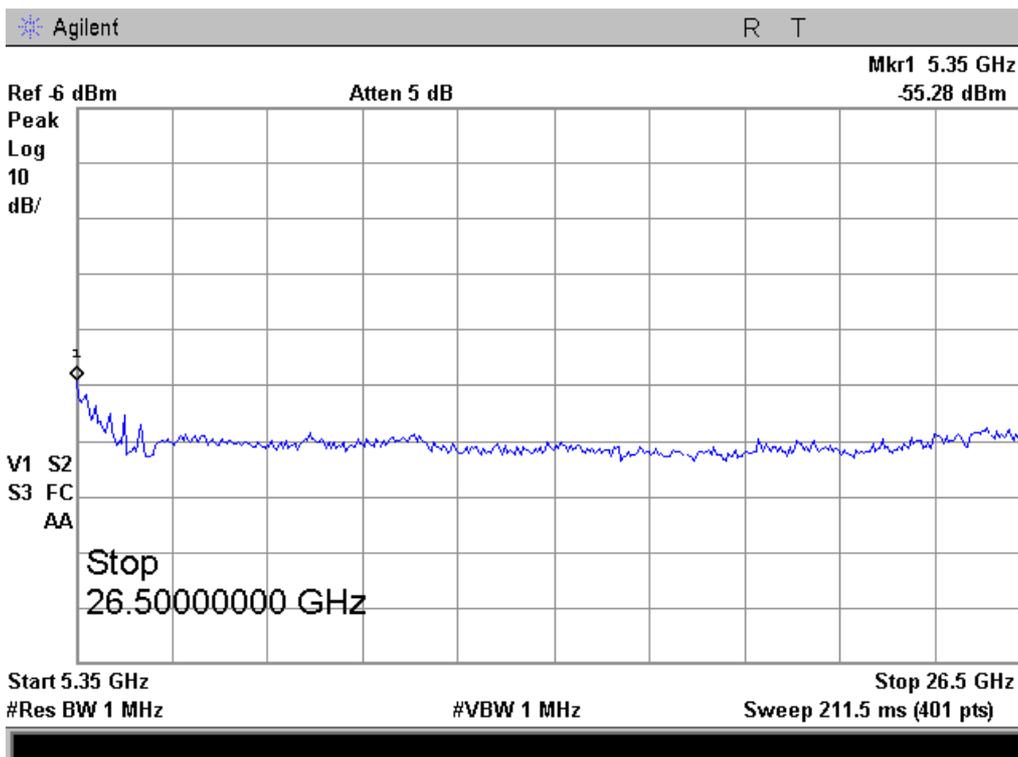


Plot 4.5.3

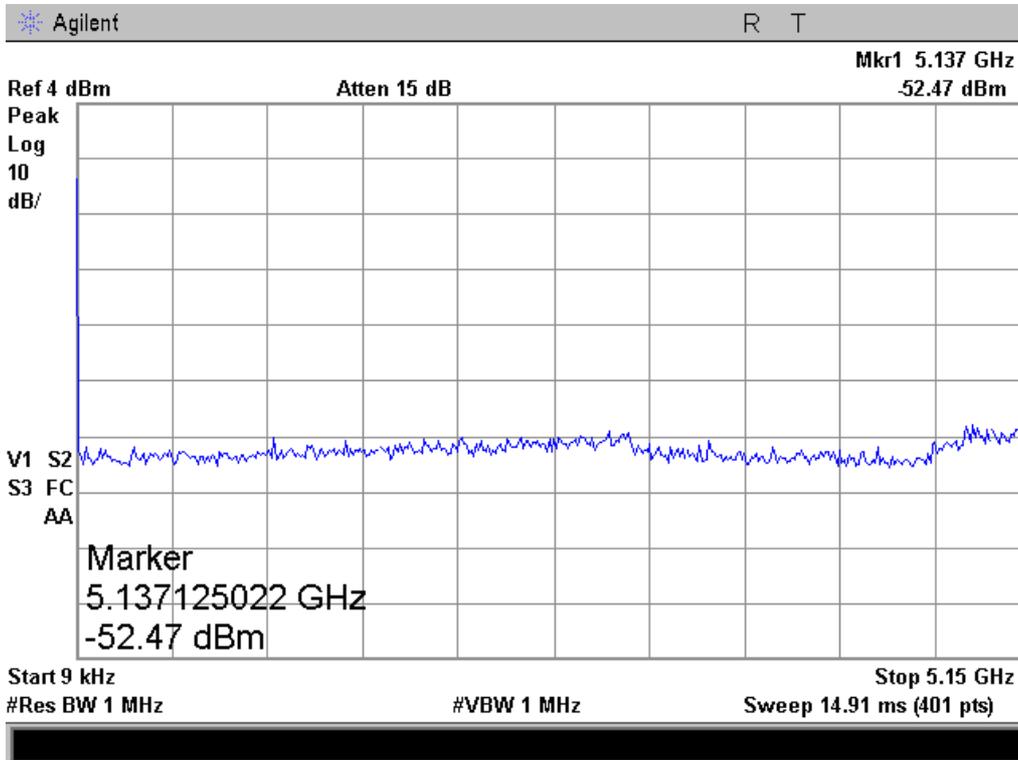


Plot 4.5.4

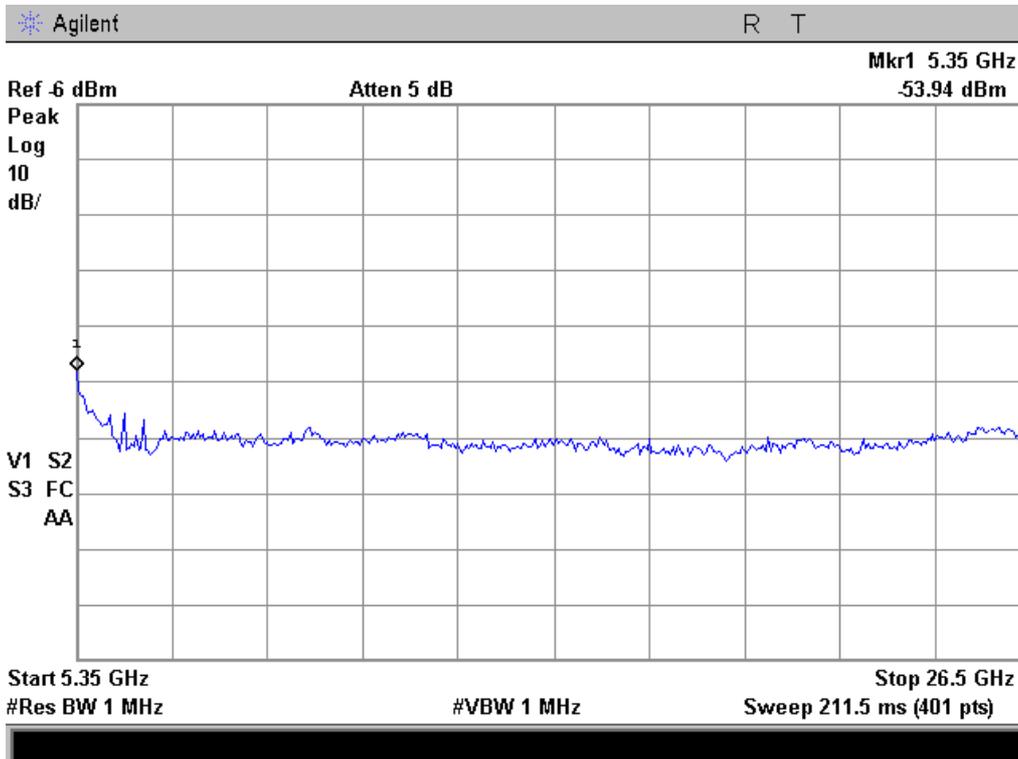


Plot 4.5.5

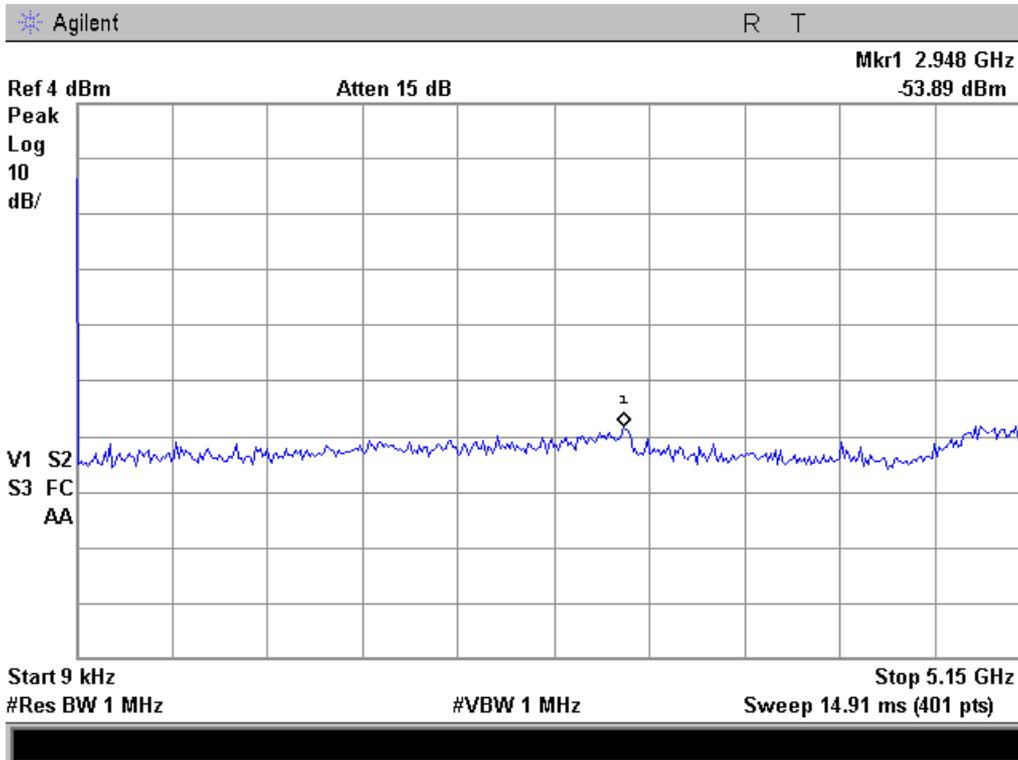


Plot 4.5.6

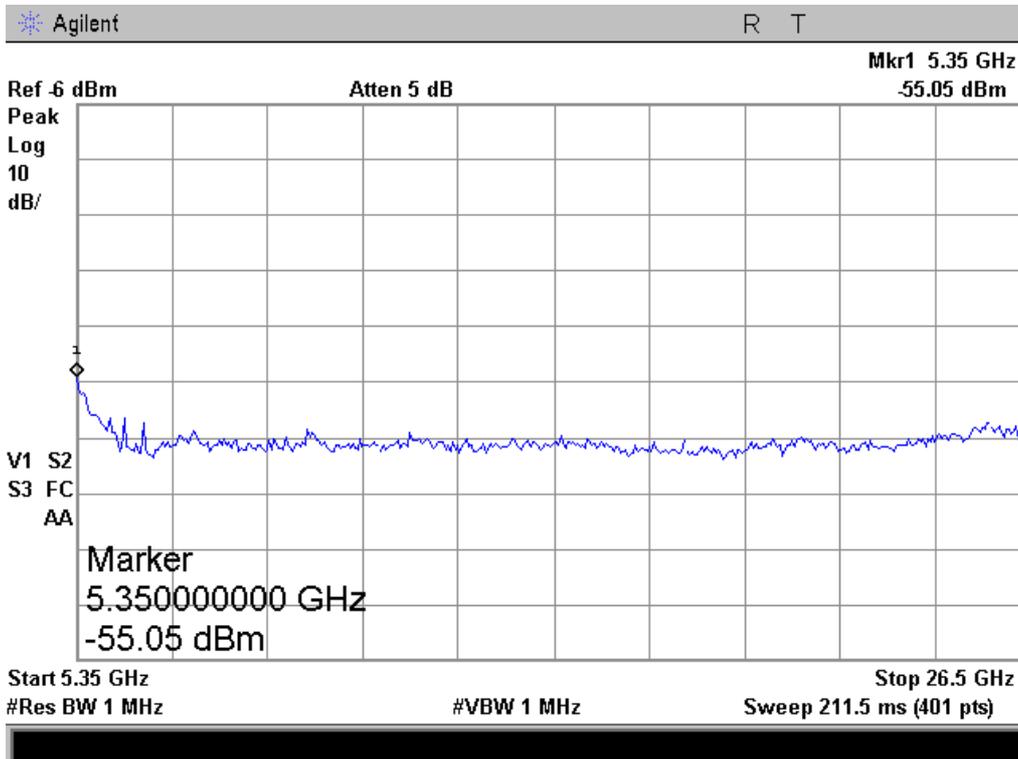


Plot 4.5.7

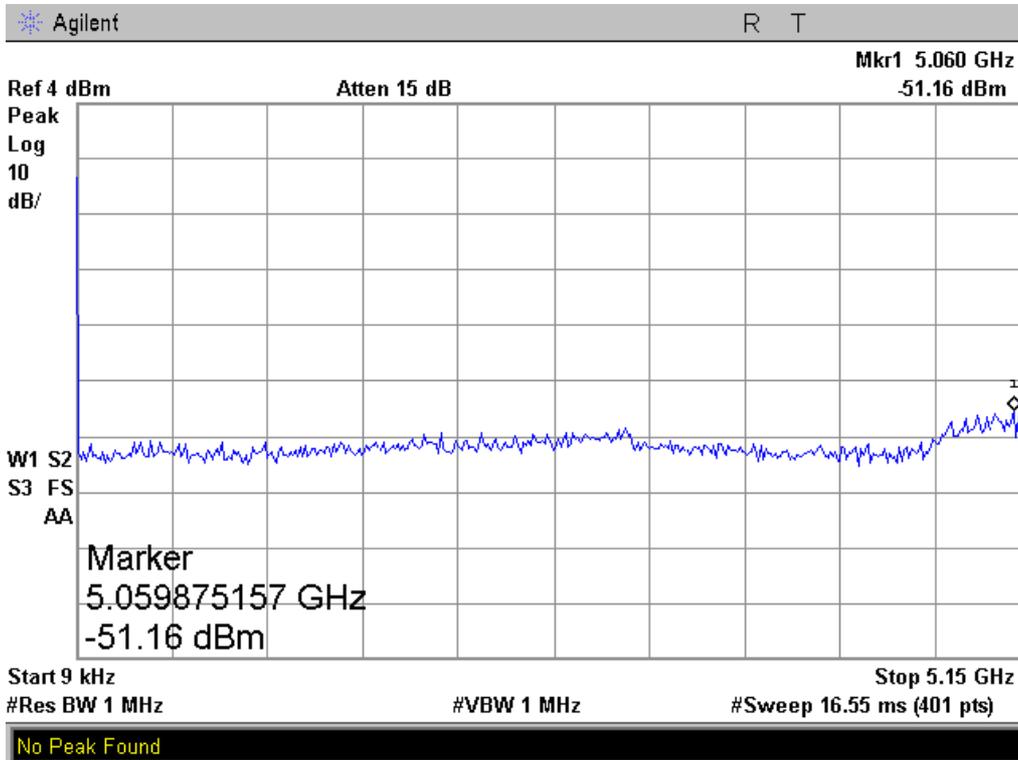


Plot 4.5.8

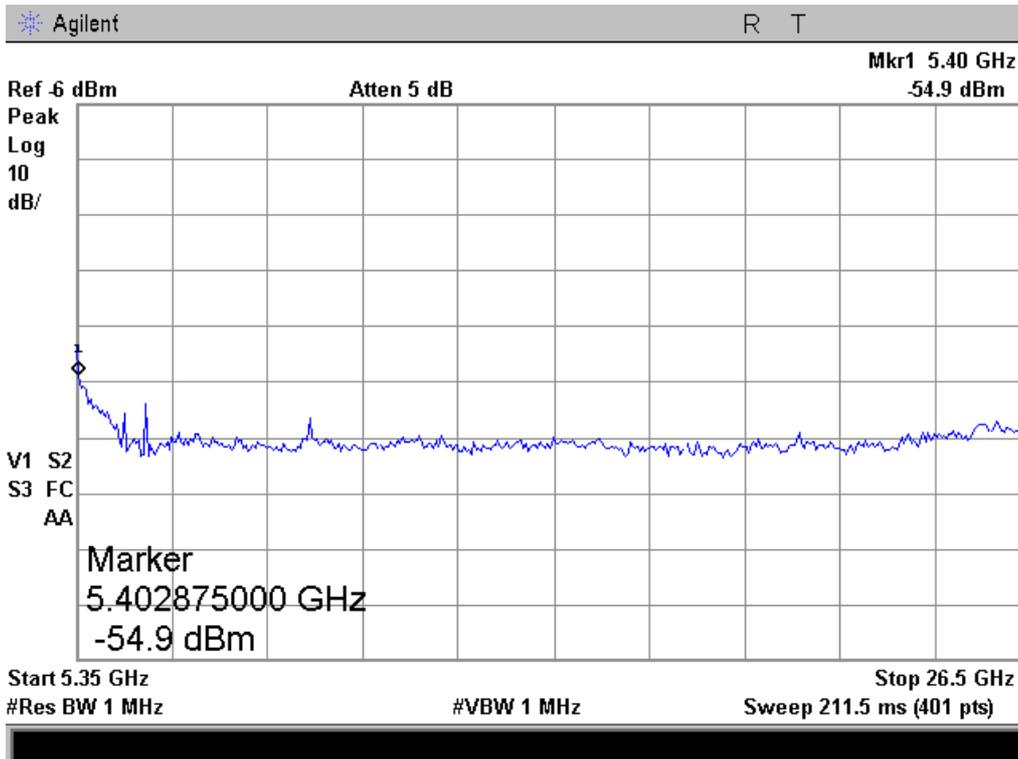


Plot 4.5.9

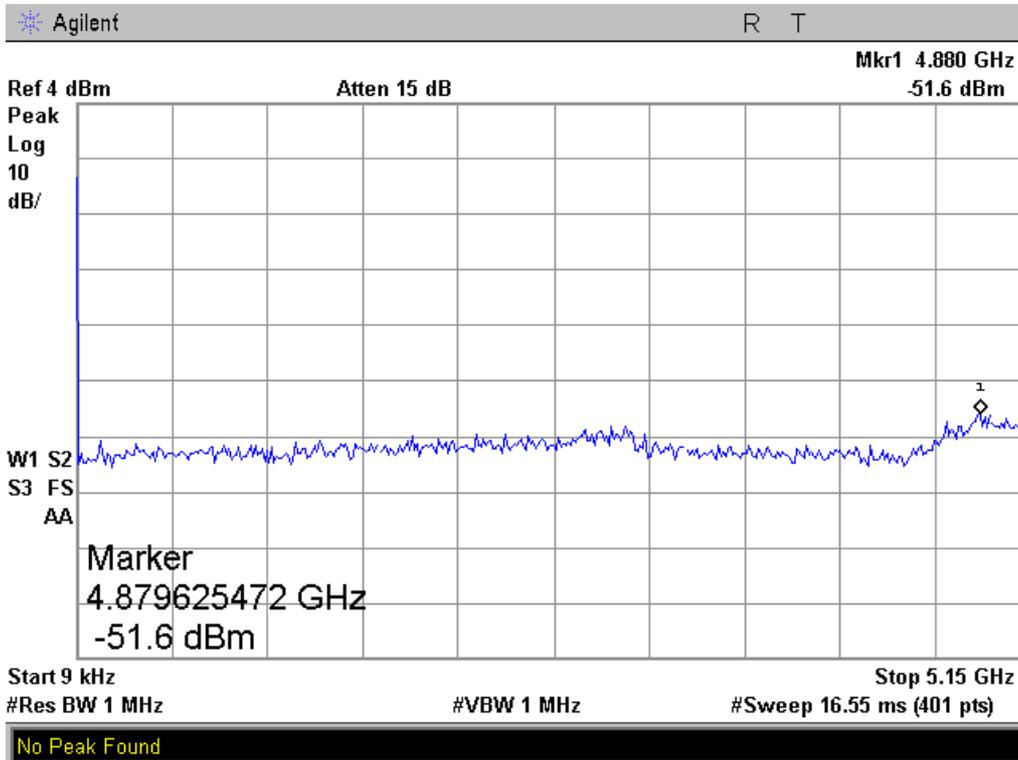


Plot 4.5.10

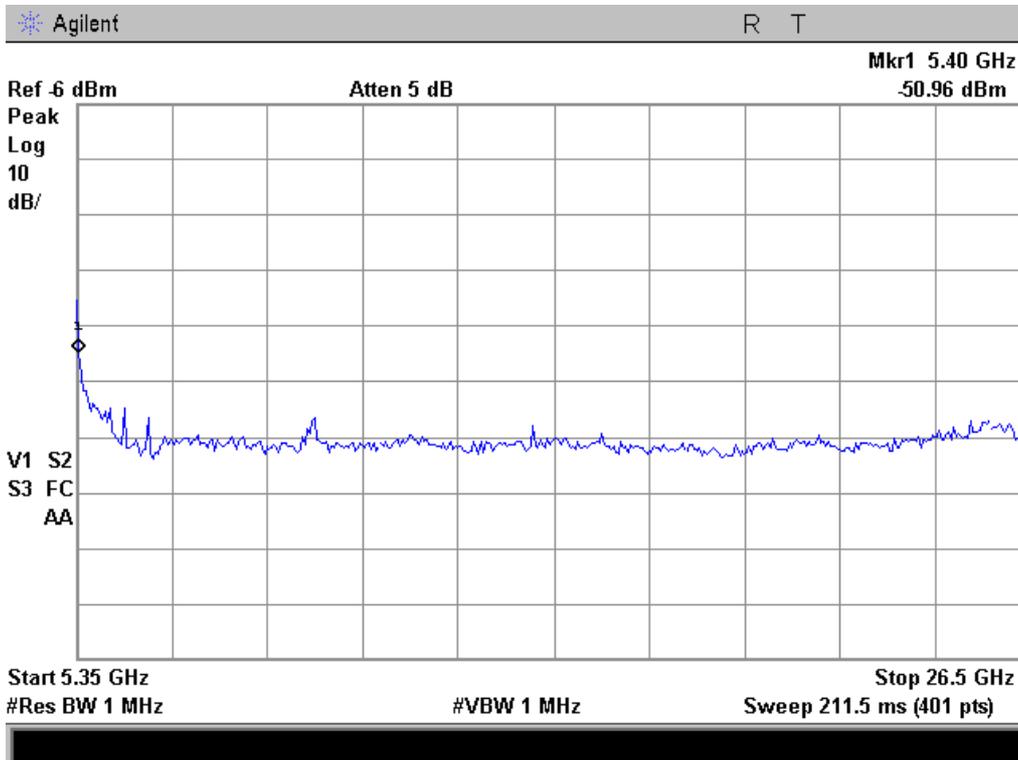


Plot 4.5.11

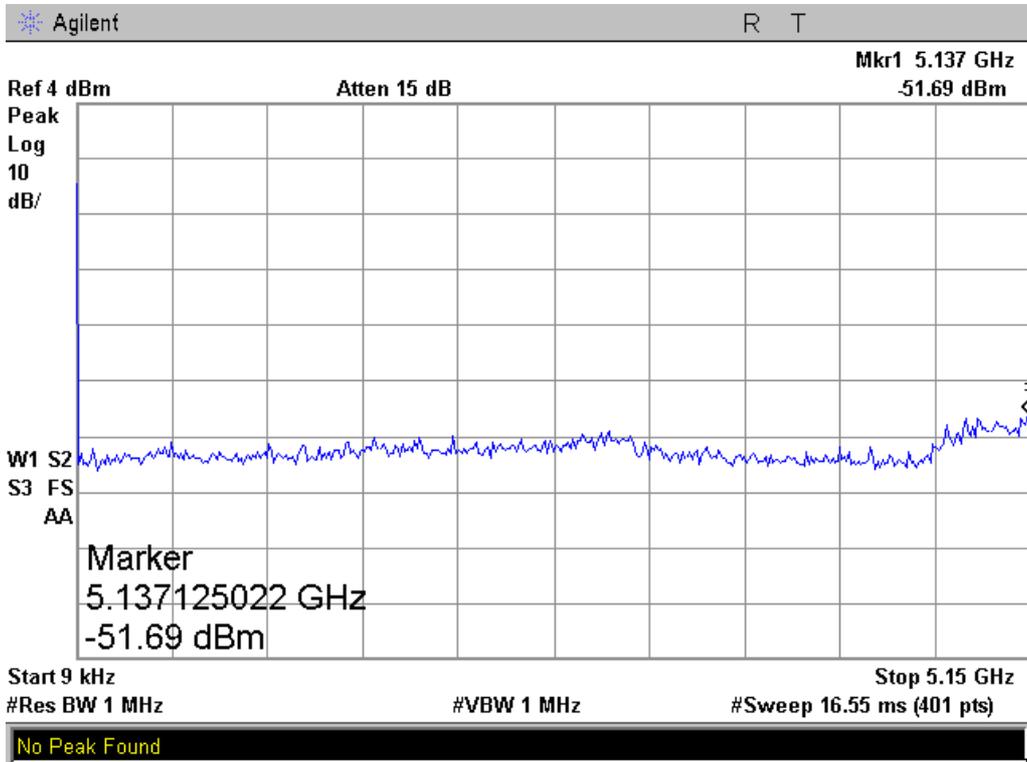


Plot 4.5.12

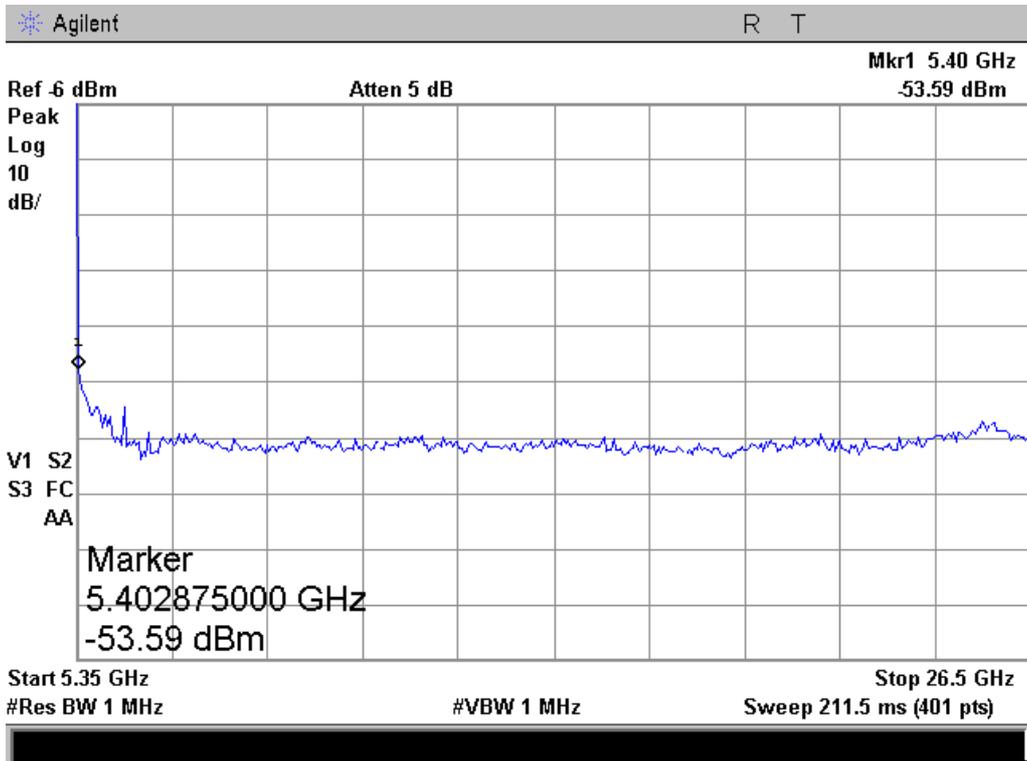


Plot 4.5.13

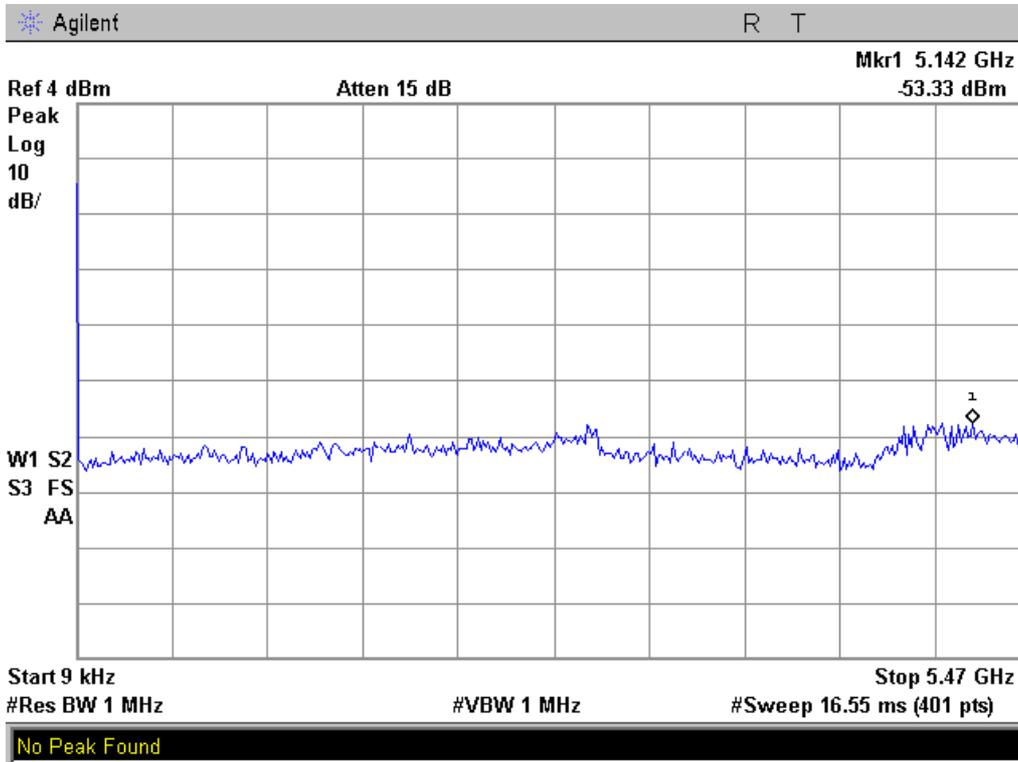


Plot 4.5.14

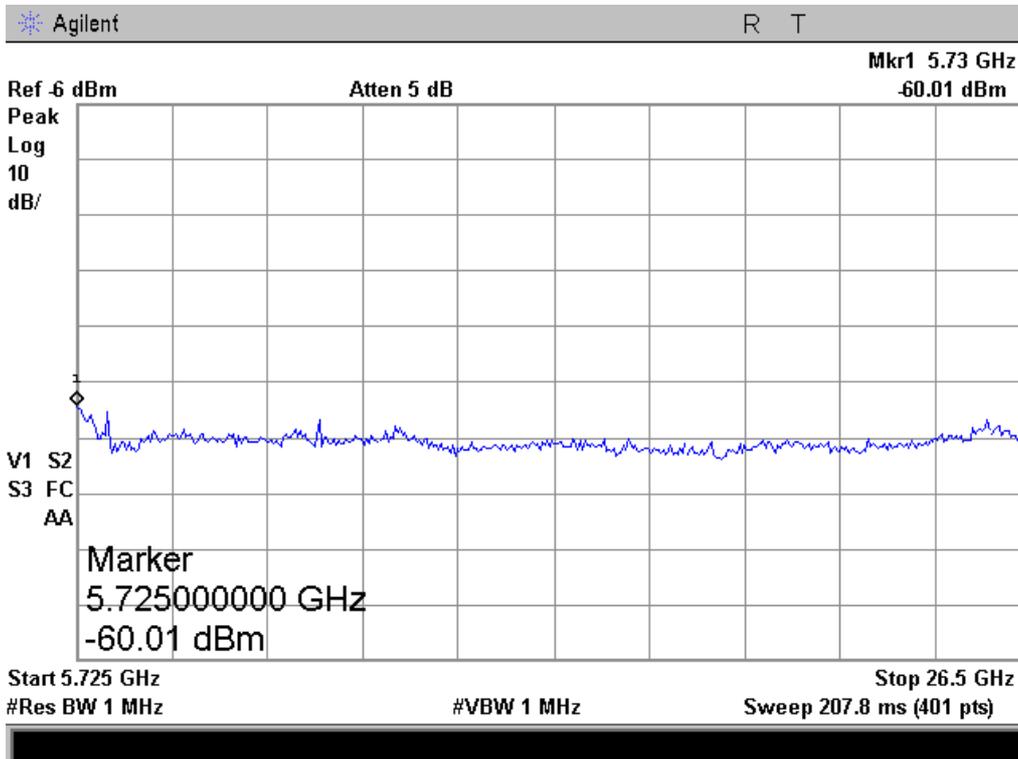


Plot 4.5.15

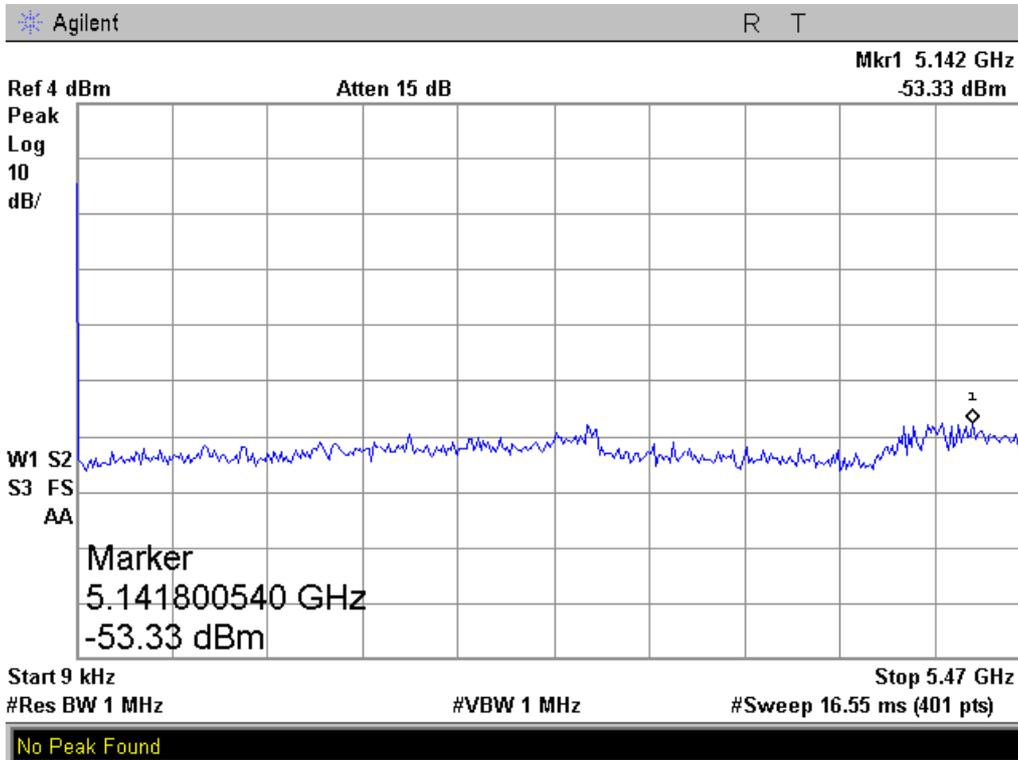


Plot 4.5.16

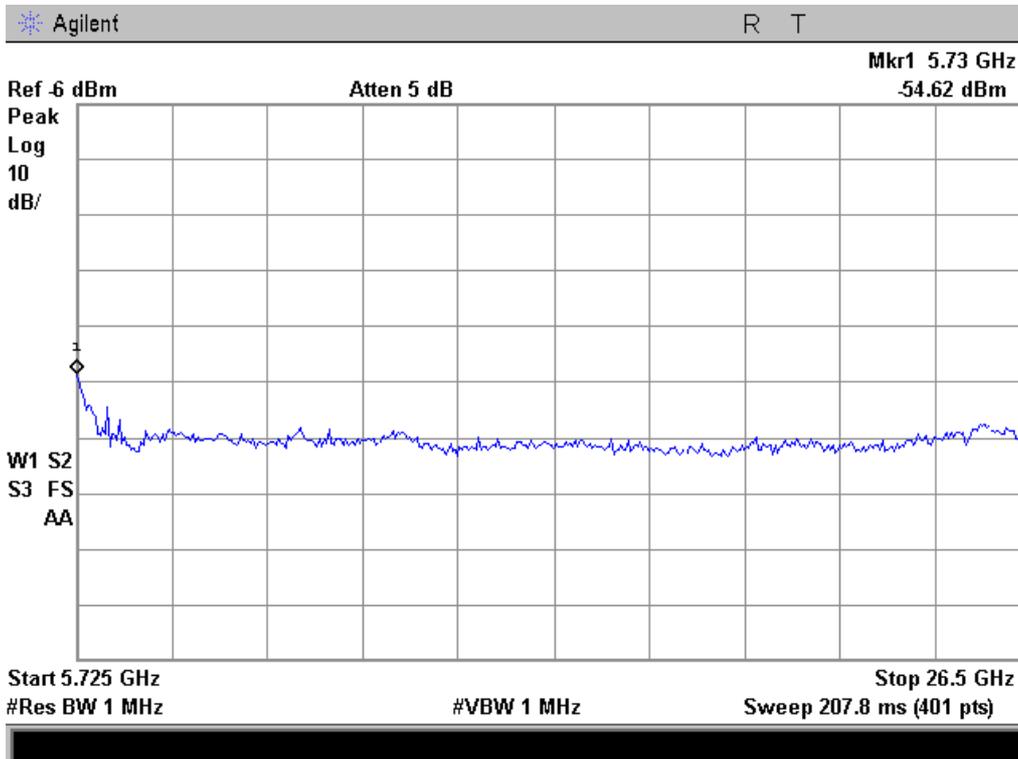


Plot 4.5.17

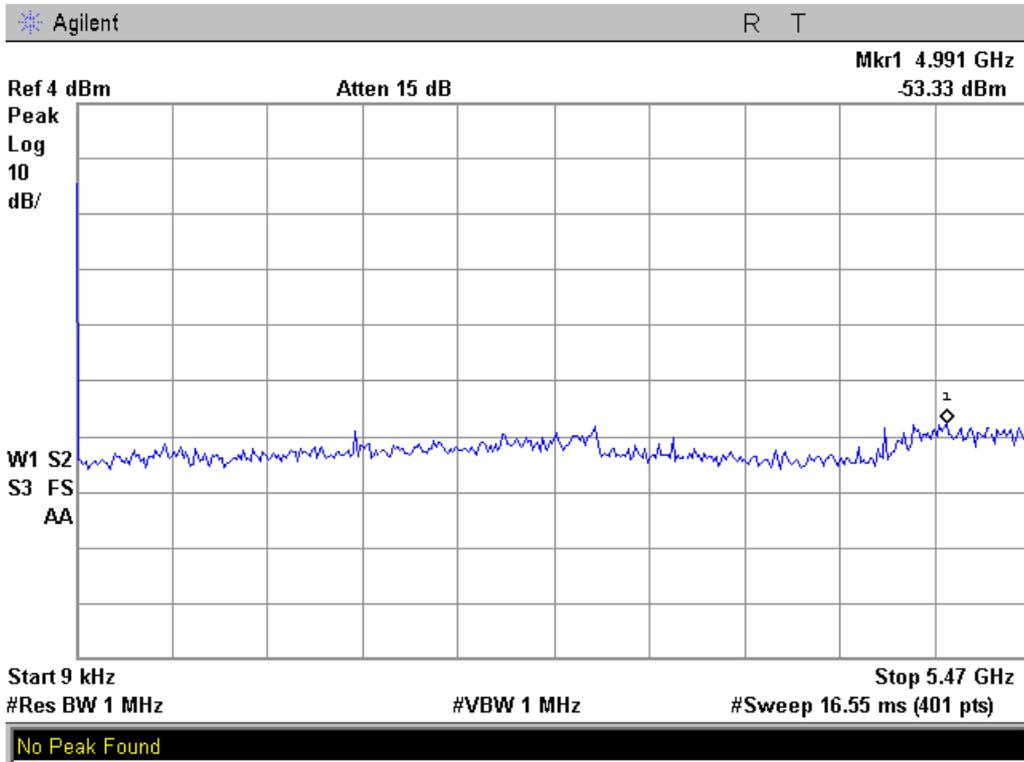


Plot 4.5.18

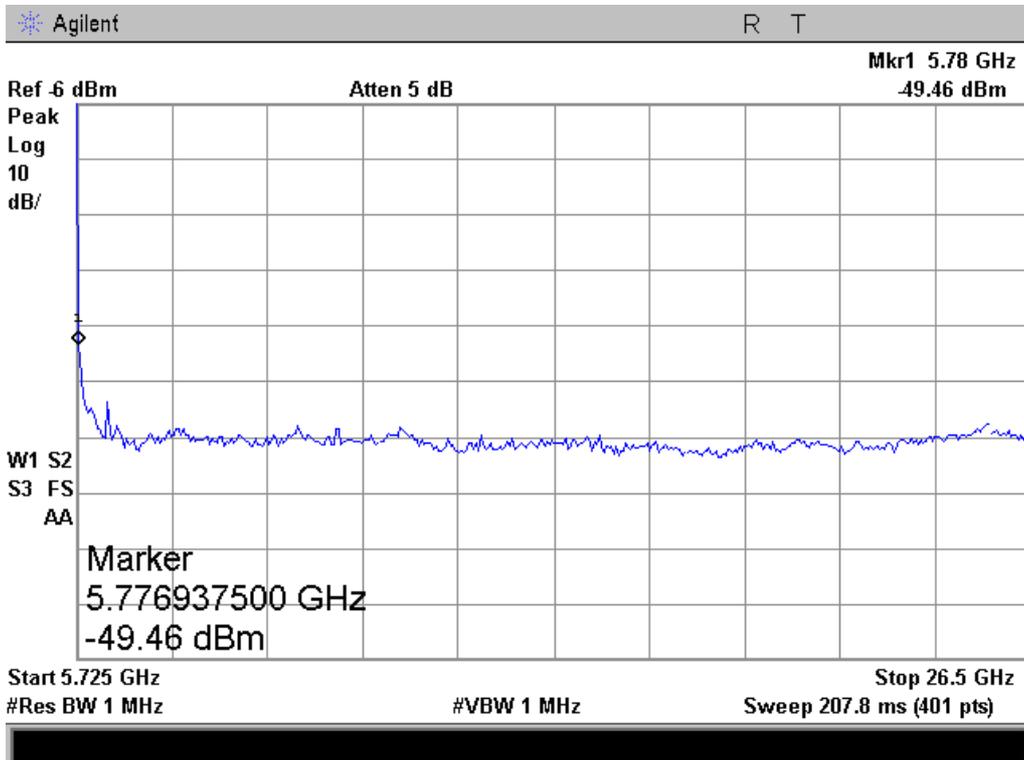


Plot 4.5.19

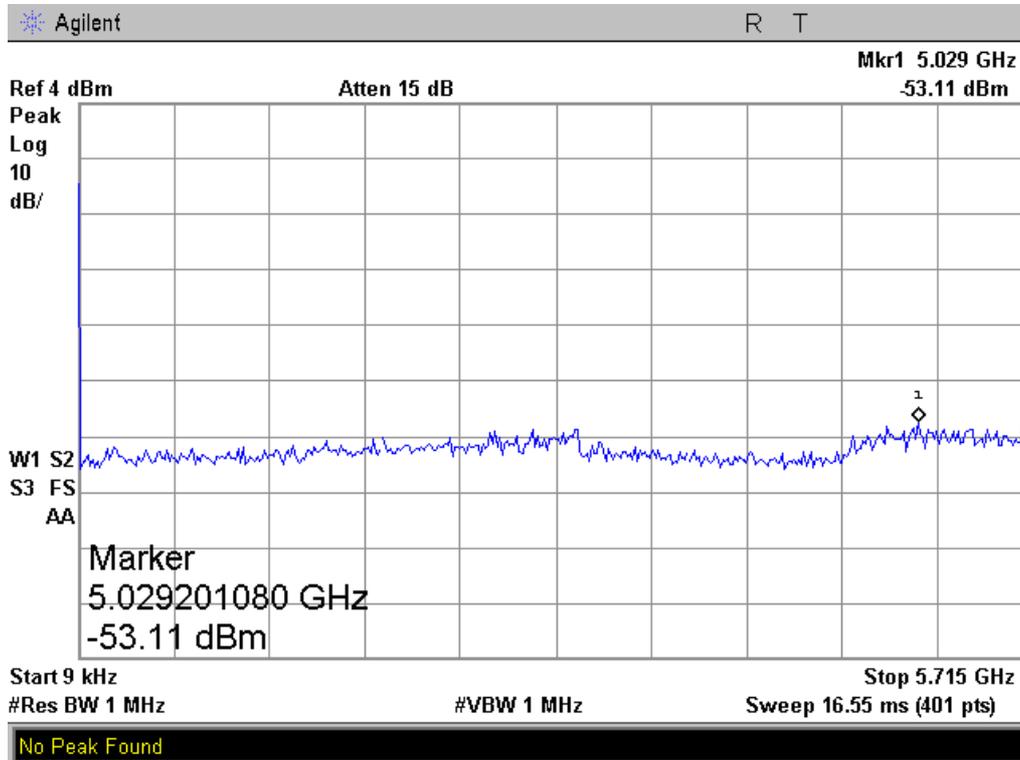


Plot 4.5.20

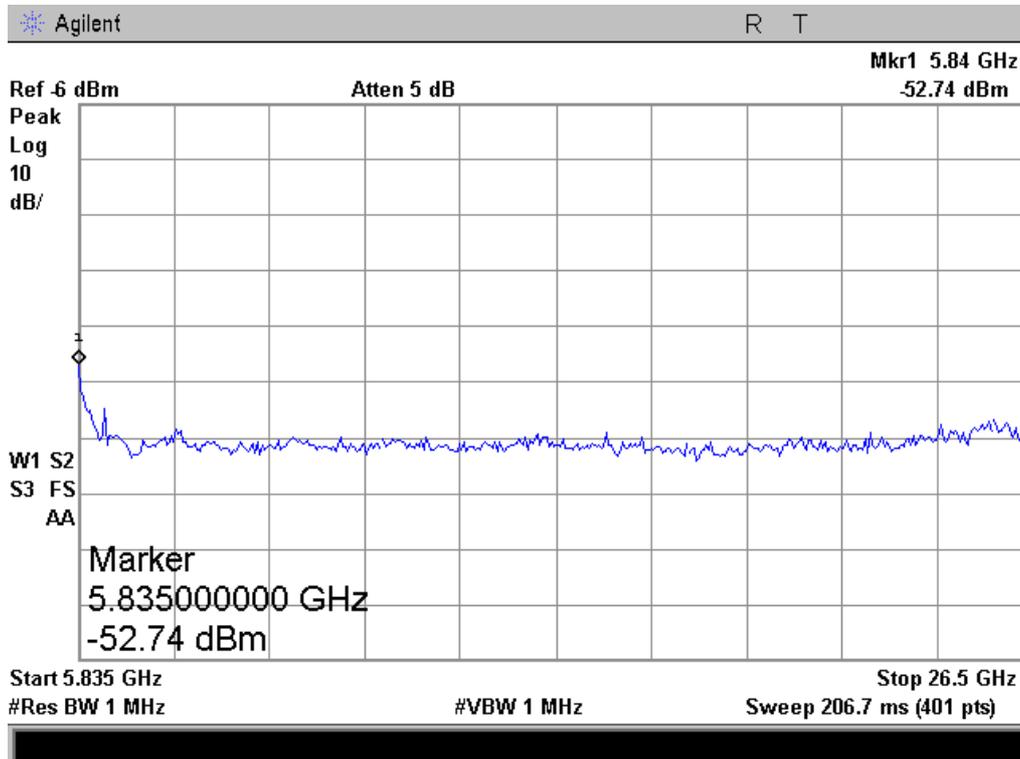


Plot 4.5.21

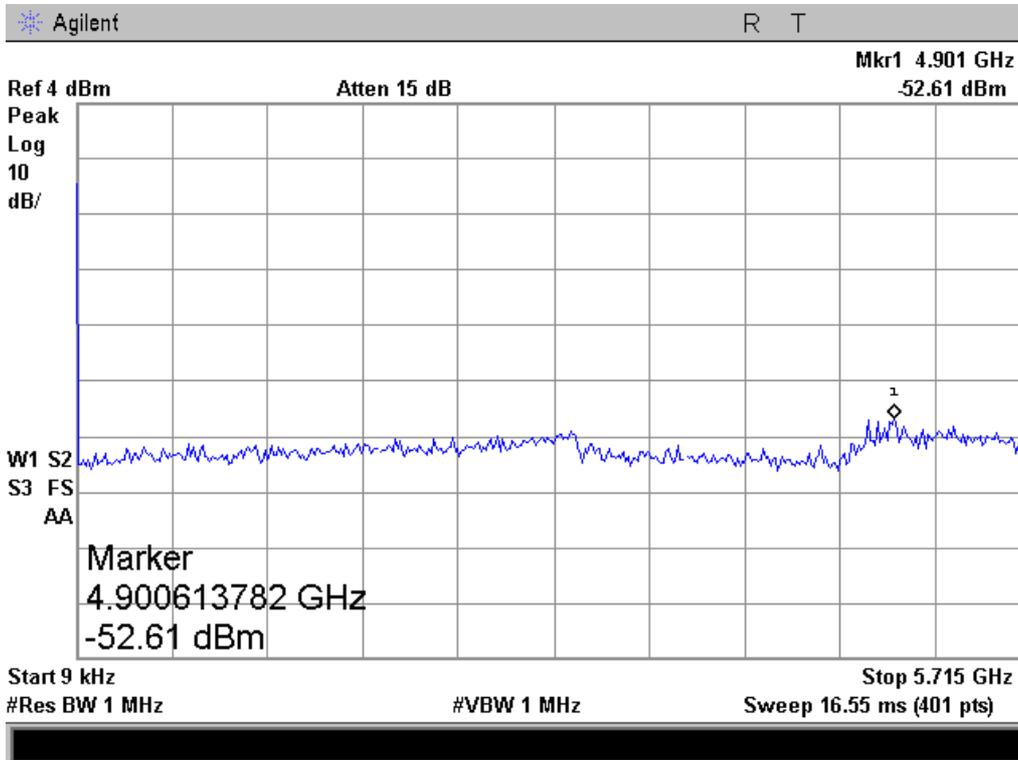


Plot 4.5.22

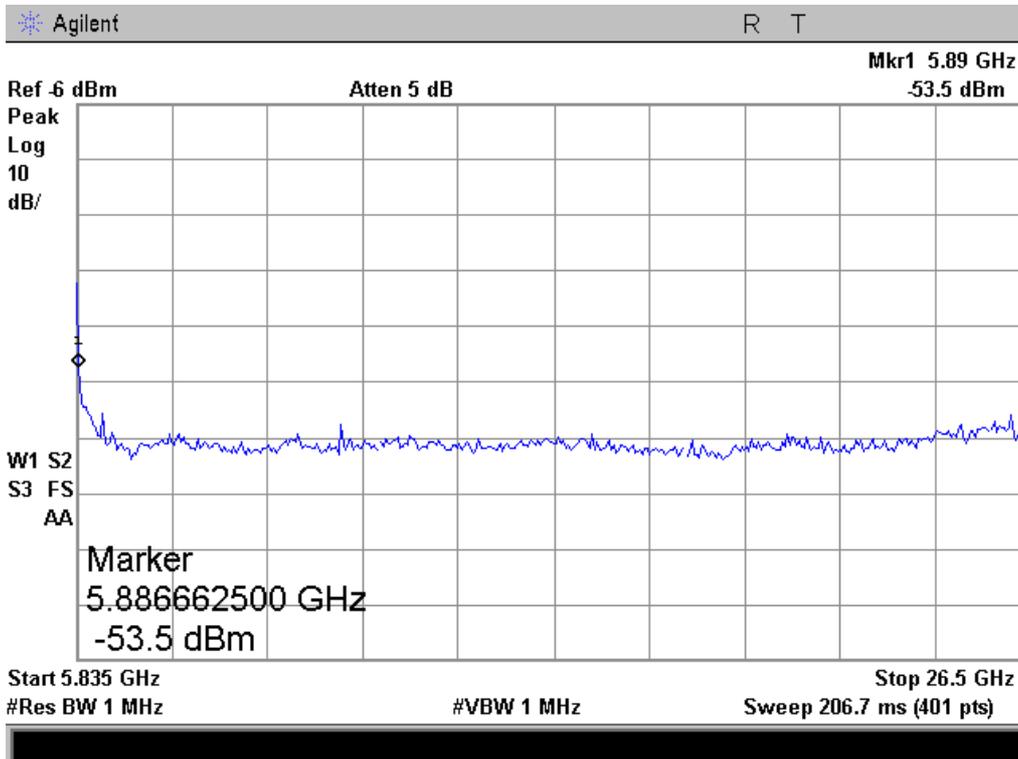


Plot 4.5.23

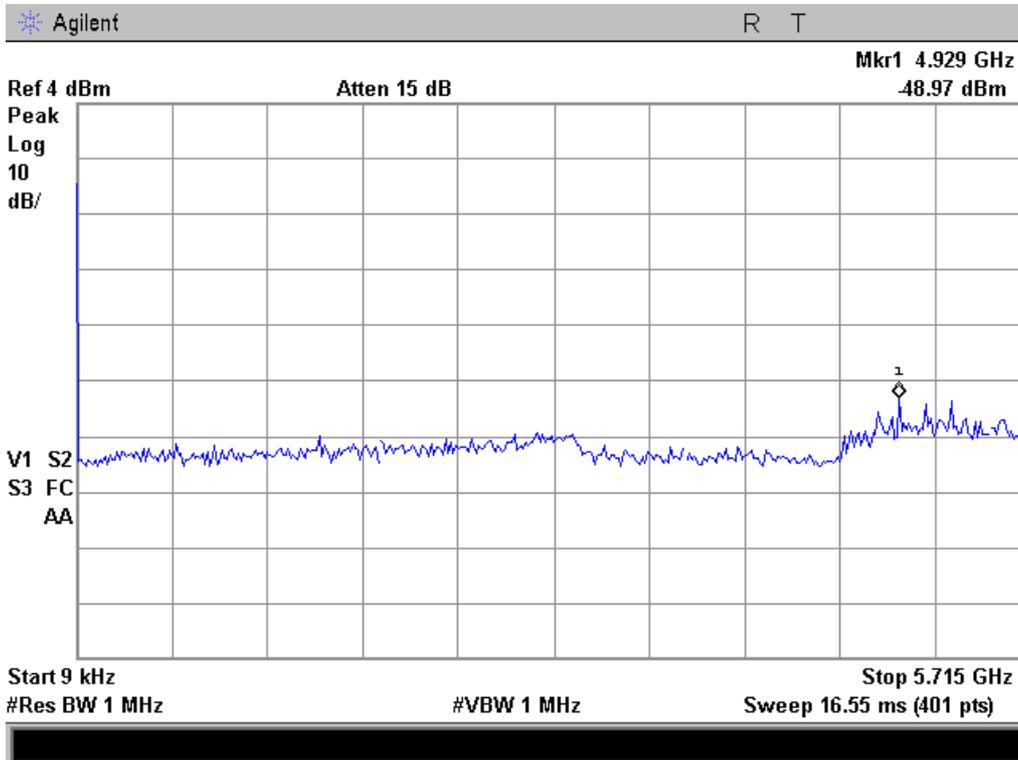


Plot 4.5.24

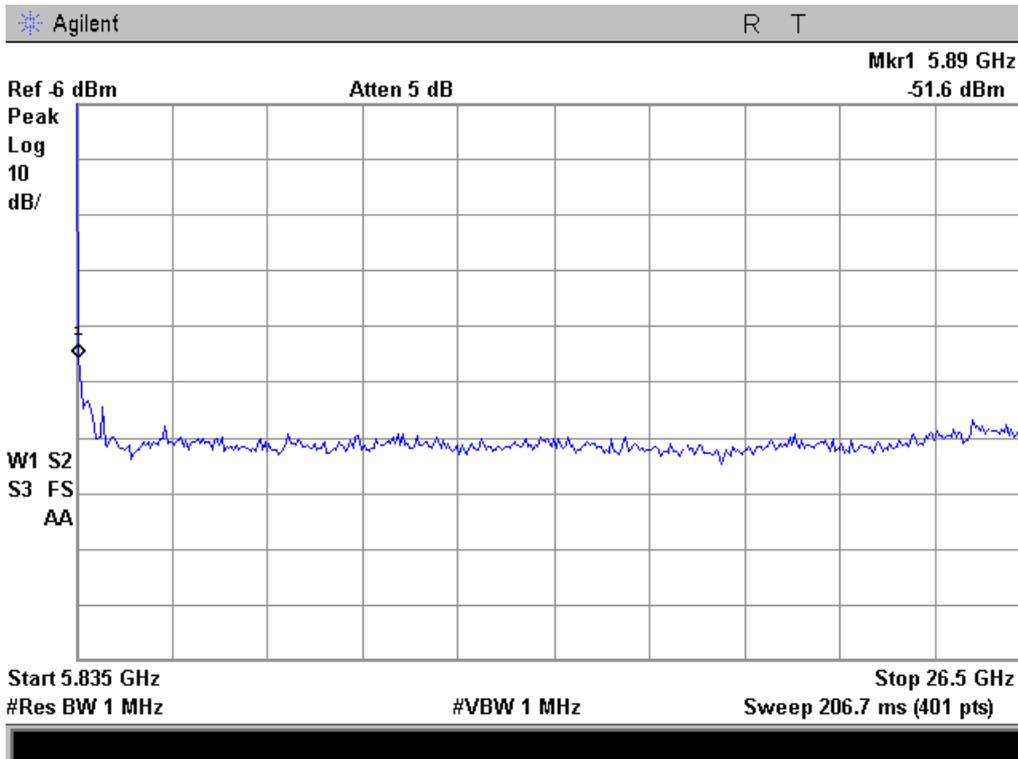


Band Edge
Plot 4.5.25

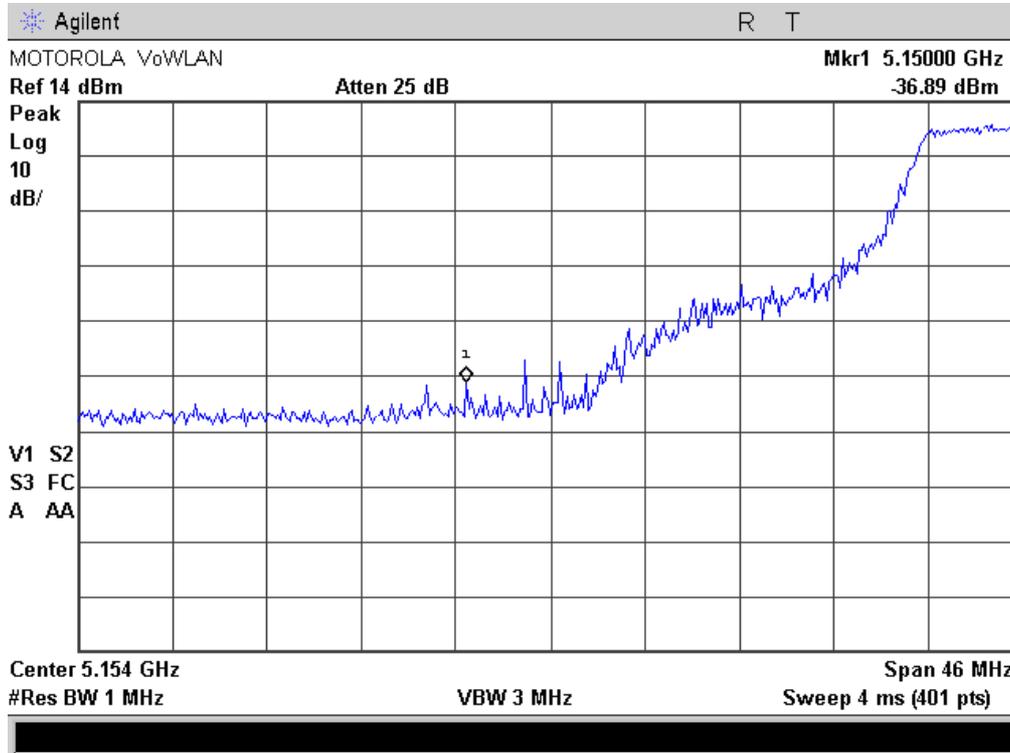


Plot 4.5.26

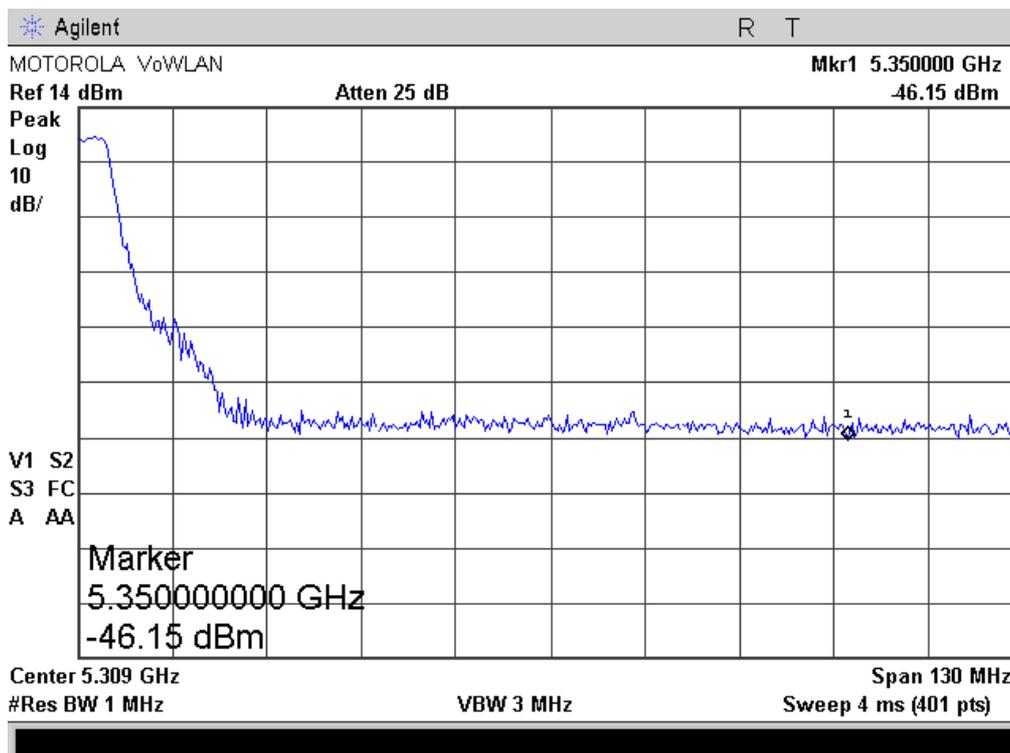


Plot 4.5.27

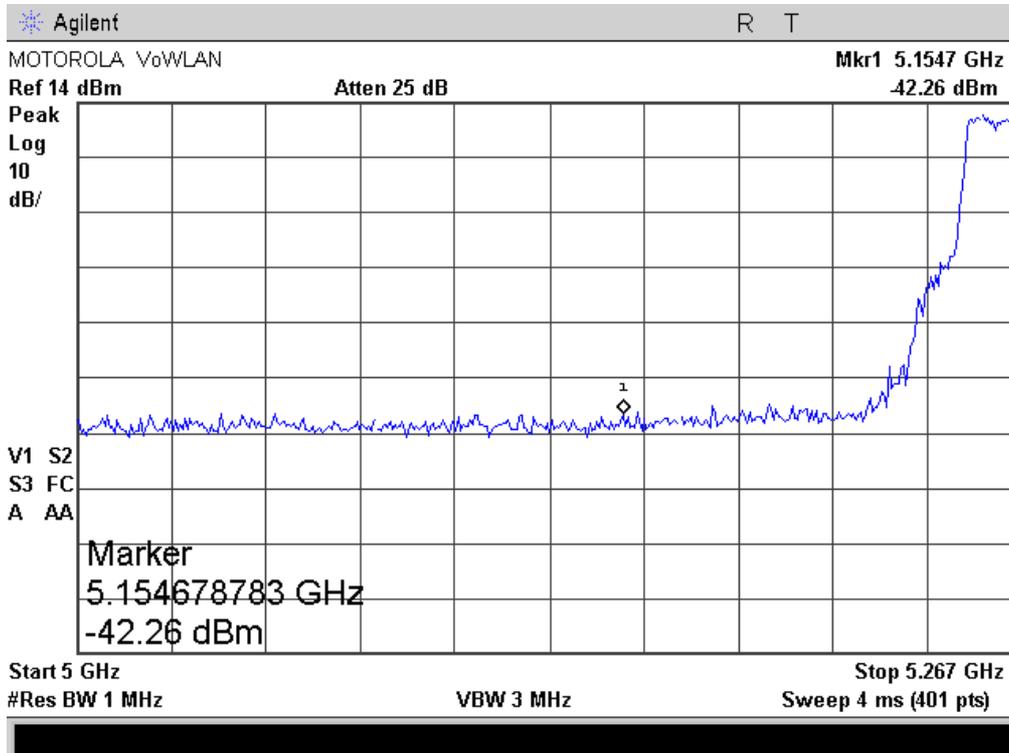


Plot 4.5.28

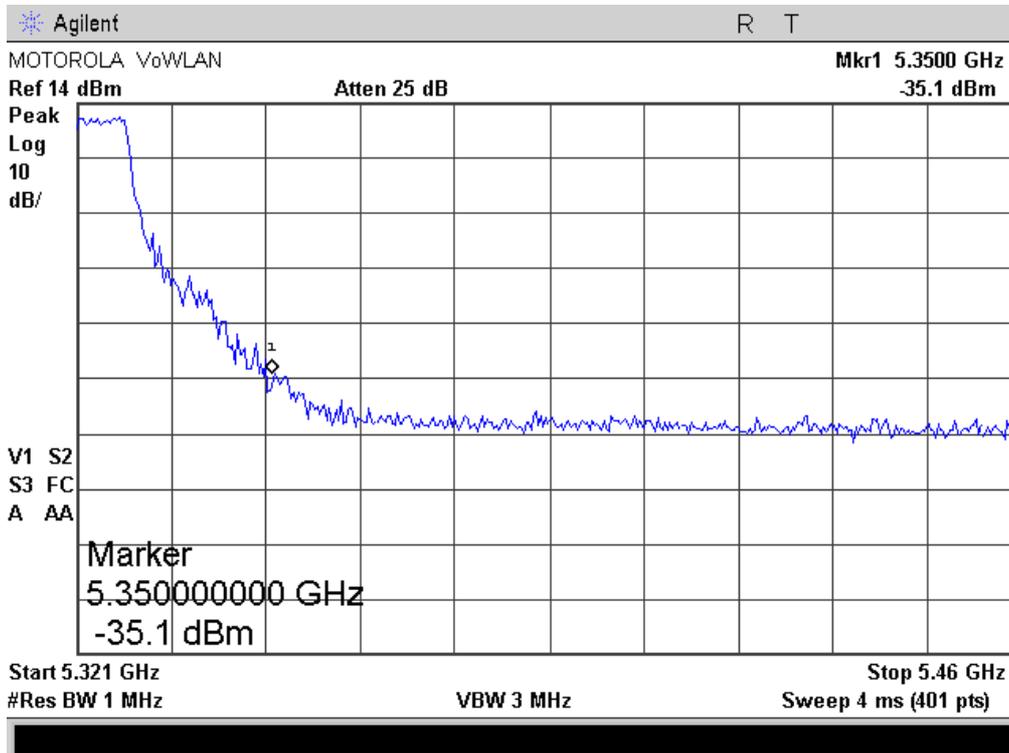


Plot 4.5.29

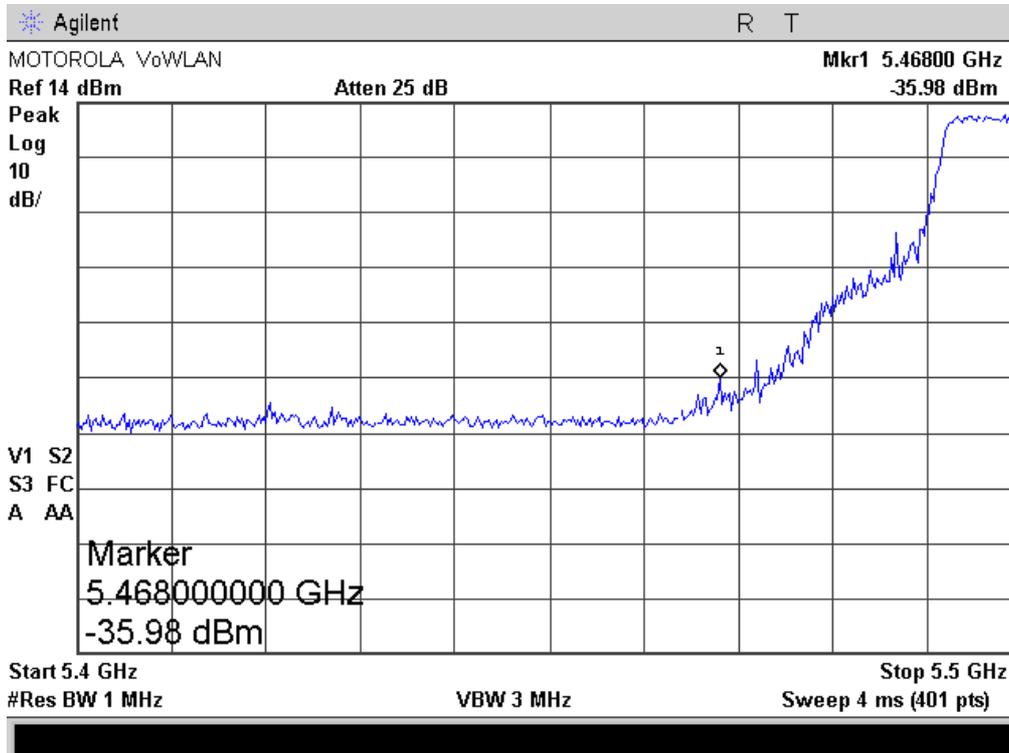


Plot 4.5.30

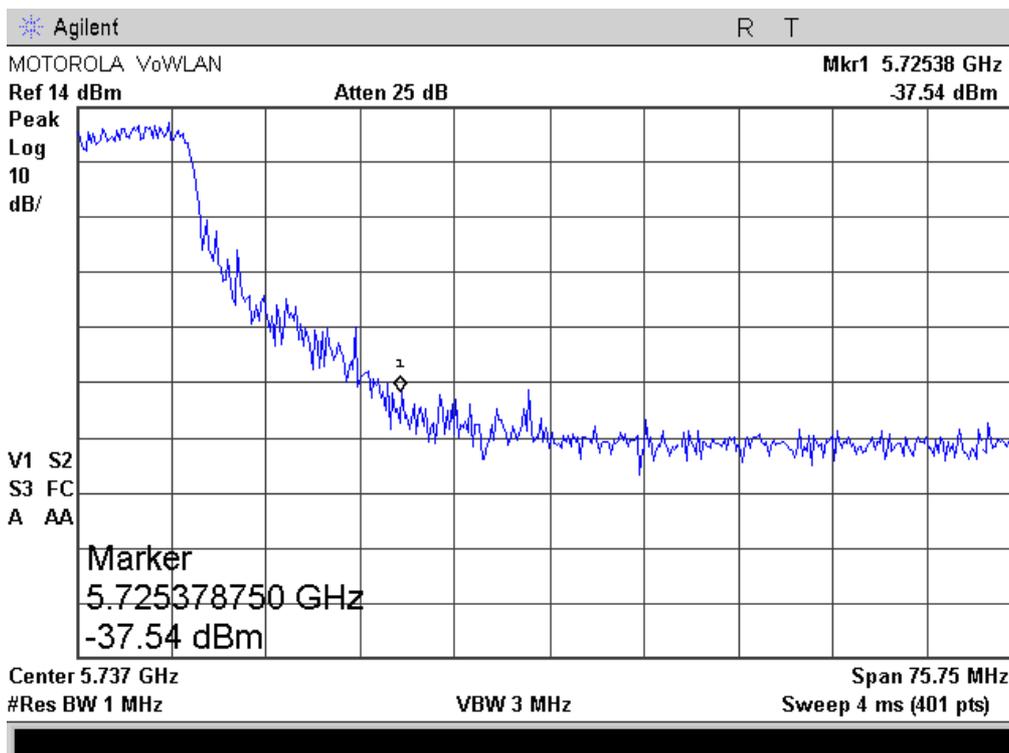


Plot 4.5.31

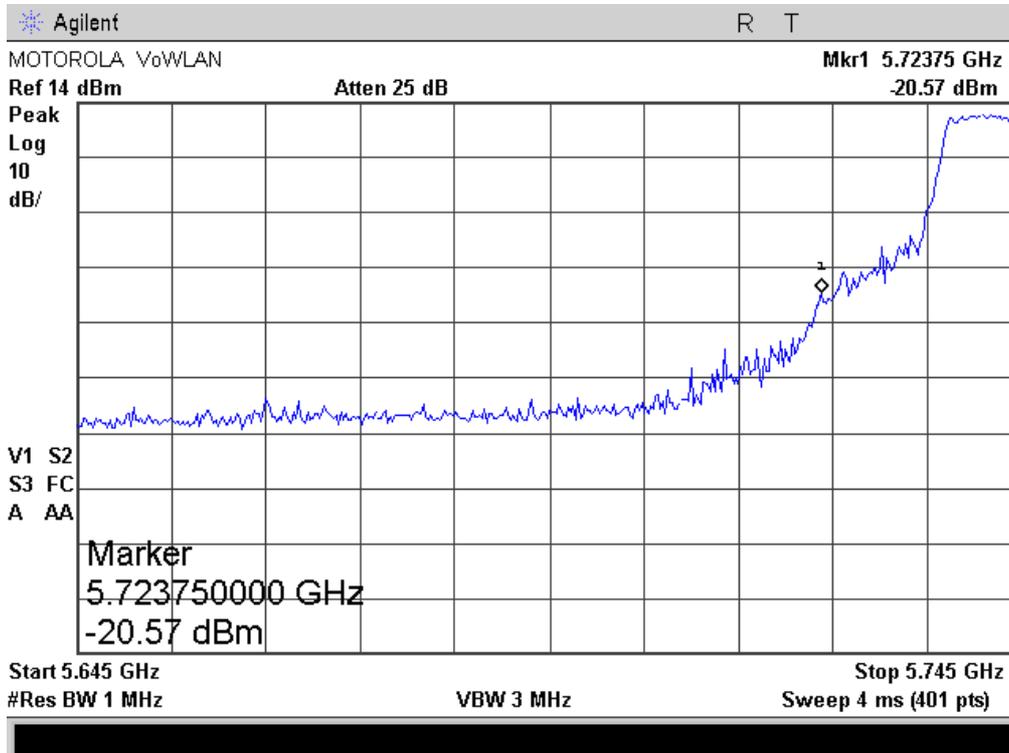


Plot 4.5.32

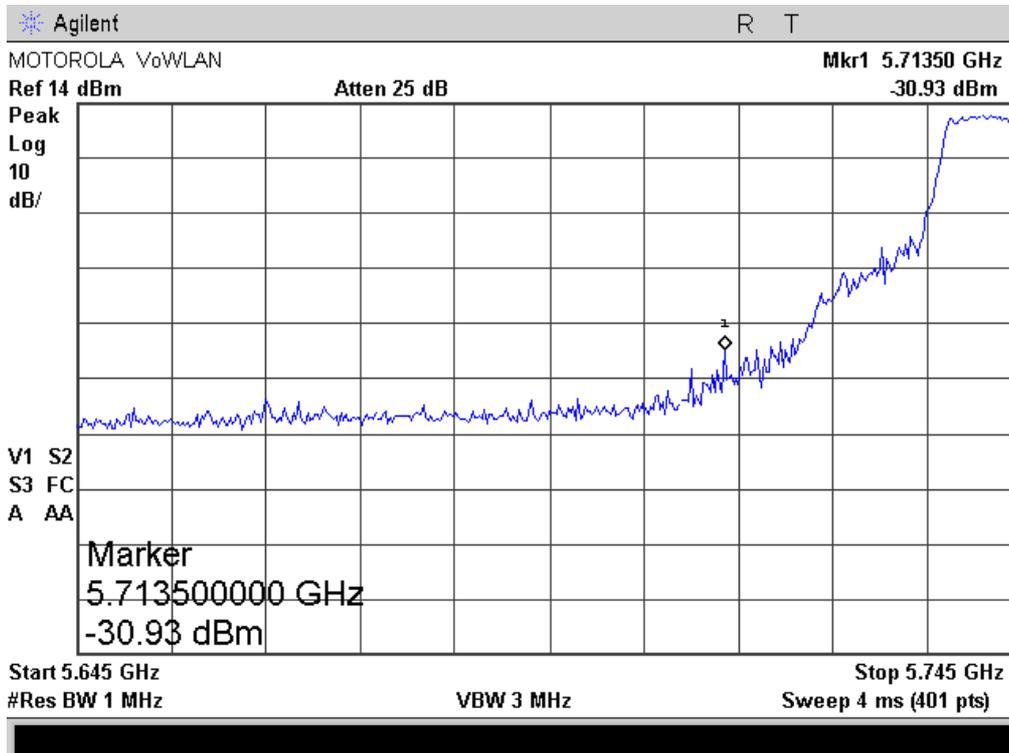

Plot 4.5.33

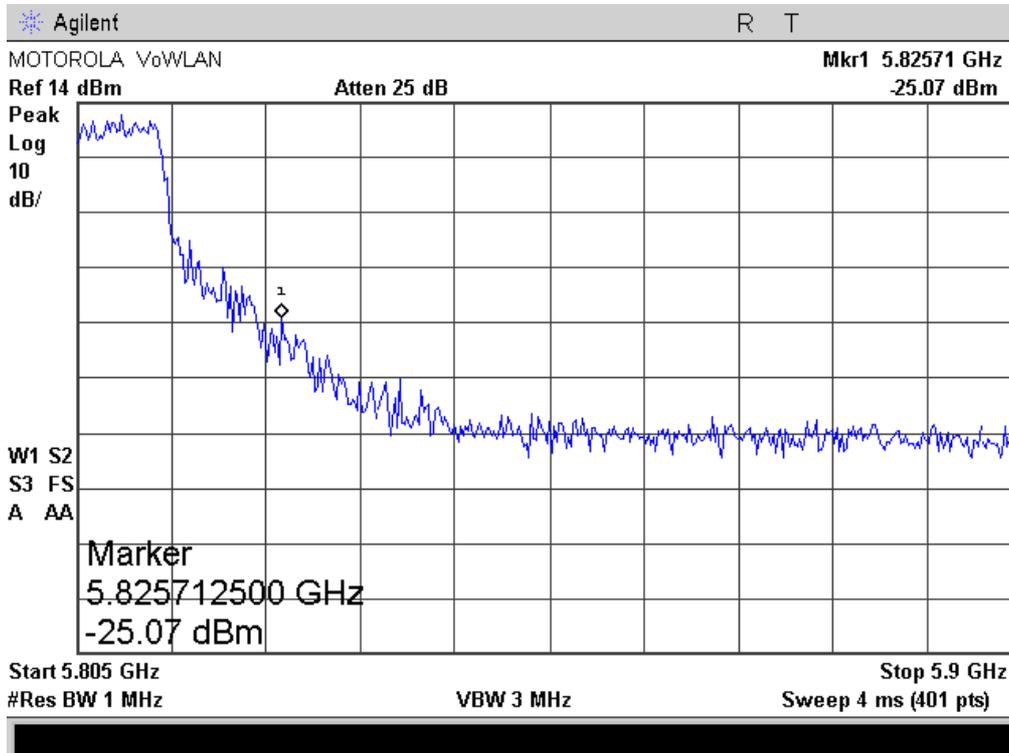

Plot 4.5.34

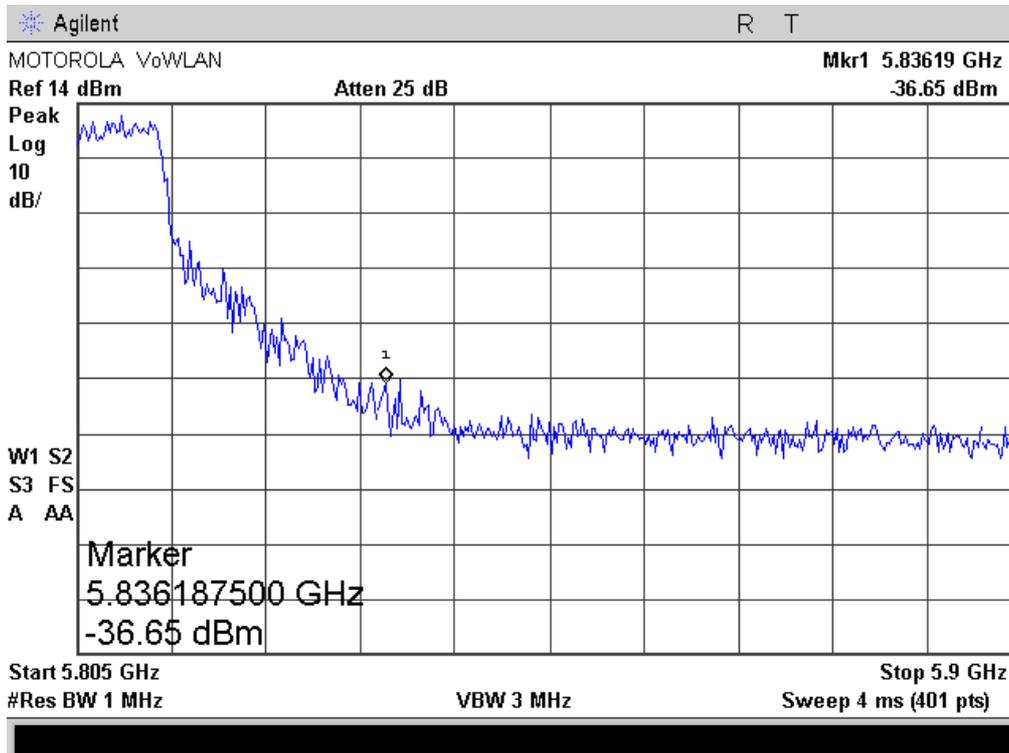

4.6. Spurious Radiated Emissions, Restricted Bands

Reference document:	47 CFR §15.407 (b) (7)		
Test Requirements:	The provisions of Sec. 15.205 apply to intentional radiators operating under this section.		
Test setup:	See sec 2.2, with High Pass Filter	Pass	
Method of testing:	Radiated		
Operating conditions:	Under normal test conditions		
S.A. Settings:	f >1GHz: Peak: RBW= 1MHz, VBW= 3MHz, Average: VBW= 10 Hz f <1GHz: RBW: 120kHz, VBW: 300kHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.6.1- Plot 4.6.76	

Test results:

All measurements were performed in horizontal and vertical polarizations; the results show the worst case.

Frequency [MHz]	Data Rate [Mbps]	Emission Frequency [MHz]	Detector Type	Polarization H/V	Emission Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]
WLAN 802.11a, Band - 4.5 GHz -5.15 GHz							
5180	54	5145.10	Peak	H	57.39	74	-16.61
5180	54	5094.8	Avg	H	40.30	54	-13.7
WLAN 802.11a, Band - 5.35 GHz -5.46 GHz							
5320	54	5373.9	Peak	H	54.10	74	-19.9
5320	54	5399.5	Avg	H	37.49	54	-16.51
5500	54	5386.6	Peak	H	52.93	74	-21.07
5500	54	5419.6	Avg	H	36.78	54	-17.22
WLAN 802.11a, Other Bands							
5600	54	4960	Peak	H	52.2	74	-21.8
5600	54	4960	Avg	H	40.3	54	-13.7

Note: Spurious Emission [dBμV/m] = measured [dBμV] + Correction-factor [dB (1/m)]

Correction Factor = Antenna factor + Cable Loss

Test results below 1GHz:

All measurements were done in horizontal and vertical polarizations; the results show the worst case for all frequencies.


Emission Frequency [MHz]	Detector Type	Polarization H/V	Emission Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
31.62	QP	V	30.7	40	-9.3

5180 MHz
Horizontal & Vertical Polarization
Plot 4.6.1

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.636 GHz
43.88 dB μ V/m

LOG REF 105.0 dB μ V/m

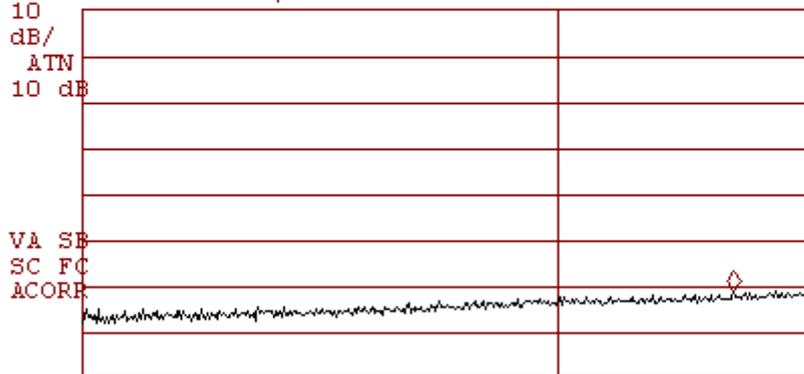


START 1.000 GHz STOP 2.900 GHz
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 43.9 msec

Horizontal & Vertical Polarization
Plot 4.6.2

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.446 GHz
51.78 dB μ V/m

LOG REF 105.0 dB μ V/m

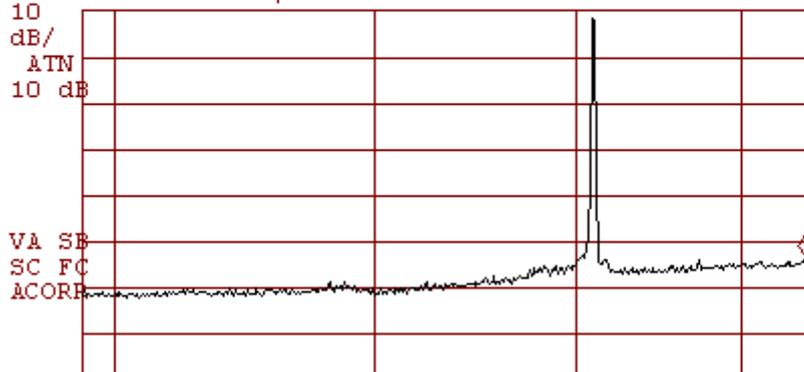


START 2.900 GHz STOP 6.500 GHz
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 72.0 msec

Horizontal & Vertical Polarization
Plot 4.6.3

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.6774 GHz
51.91 dB_μV/m

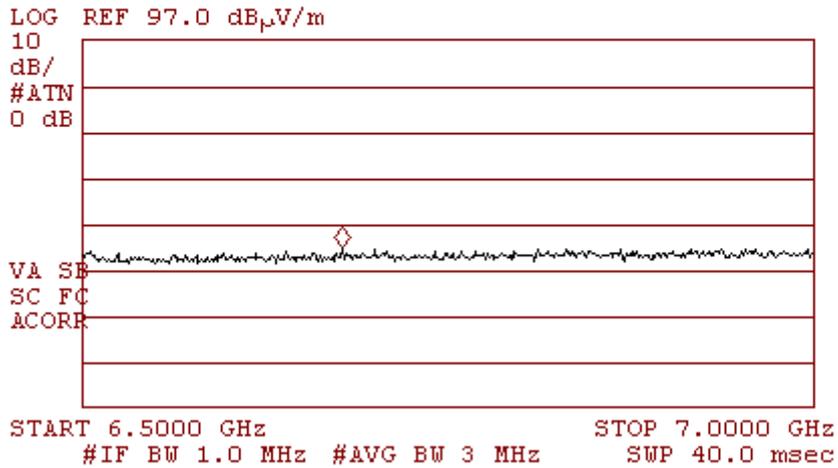


Horizontal & Vertical Polarization
Plot 4.6.4

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 10.82 GHz
53.50 dB_μV/m

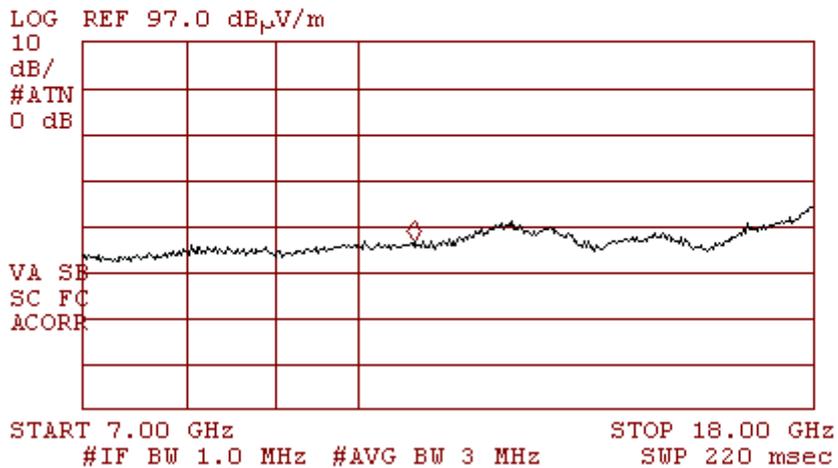


Horizontal & Vertical Polarization
Plot 4.6.5

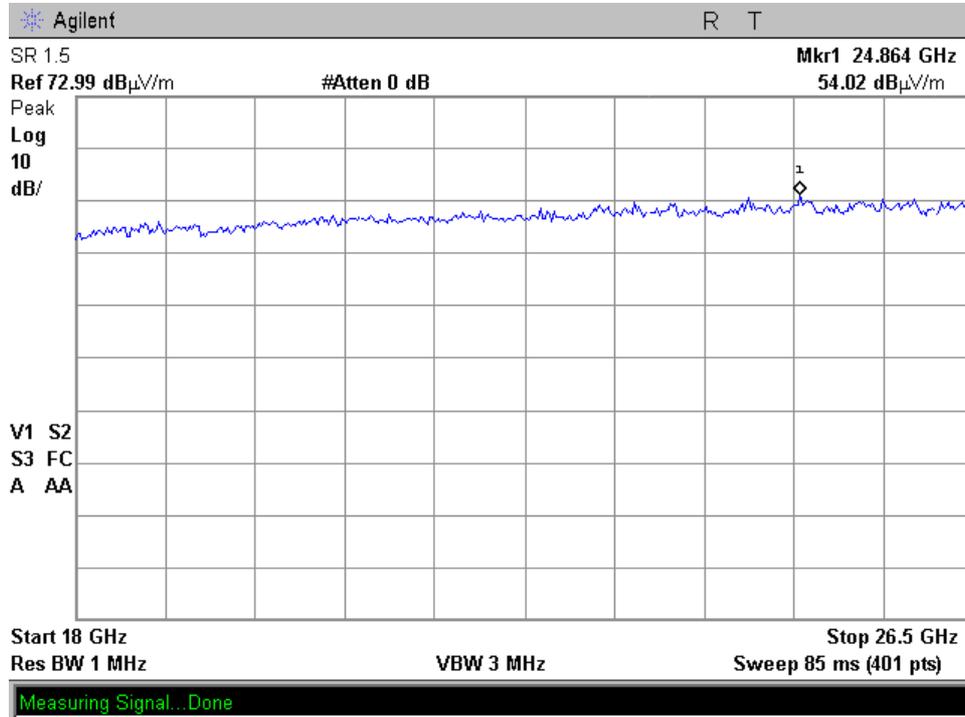

5200 MHz
Horizontal & Vertical Polarization
Plot 4.6.6

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.756 GHz
44.40 dB μ V/m

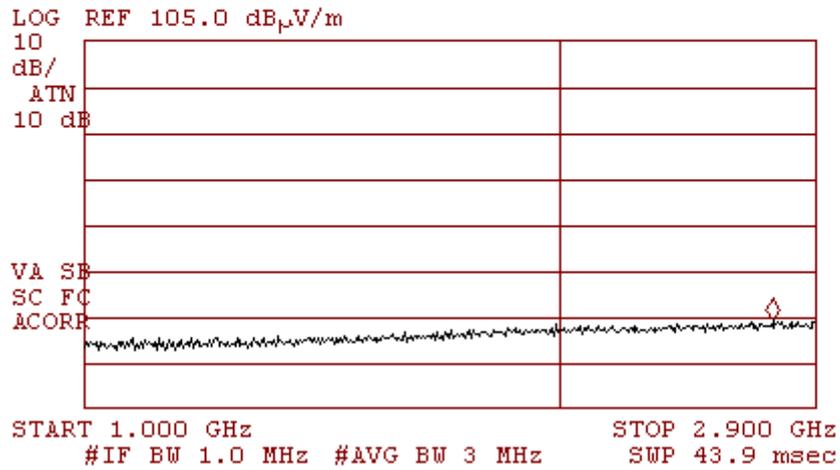

Horizontal & Vertical Polarization
Plot 4.6.7

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.381 GHz
51.56 dB μ V/m

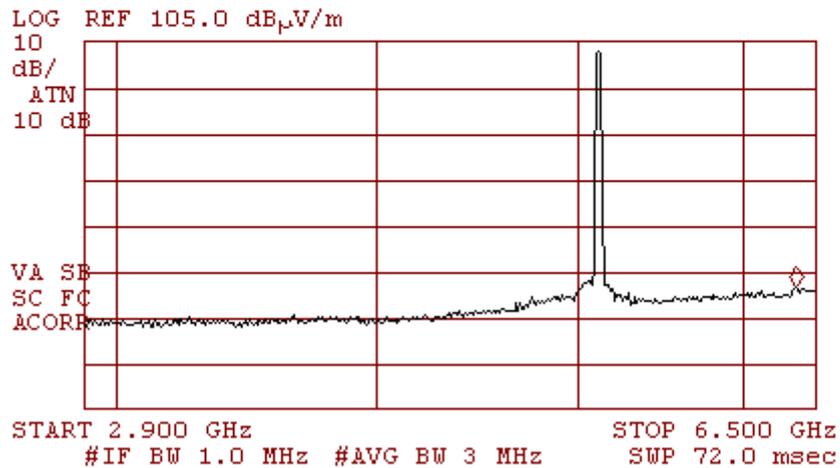

Horizontal & Vertical Polarization
Plot 4.6.8

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.9900 GHz
52.48 dB μ V/m

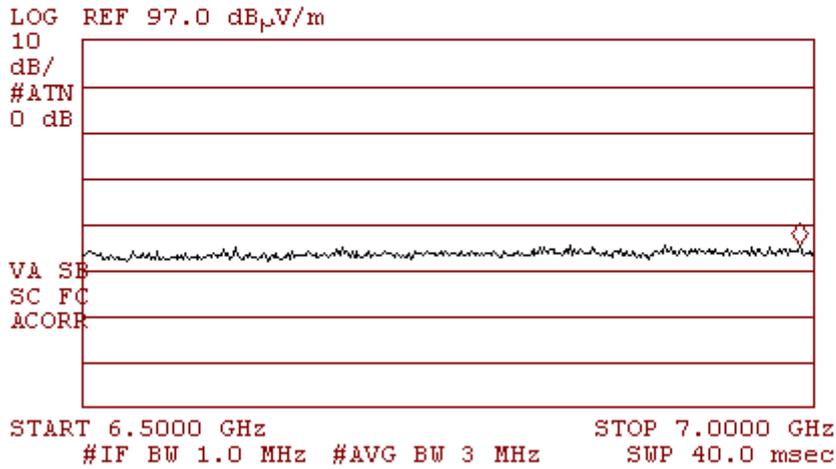

Horizontal & Vertical Polarization
Plot 4.6.9

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 15.14 GHz
54.90 dB μ V/m

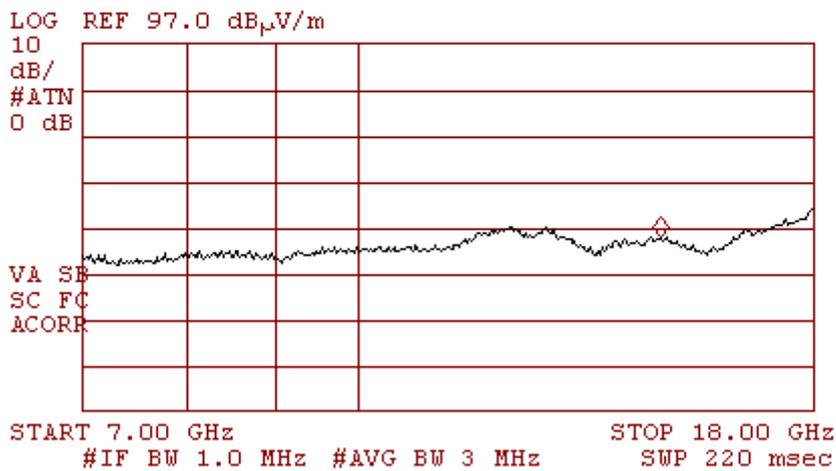


Horizontal & Vertical Polarization
Plot 4.6.10



5240 MHz
Horizontal & Vertical Polarization
Plot 4.6.11

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.792 GHz
44.09 dB μ V/m

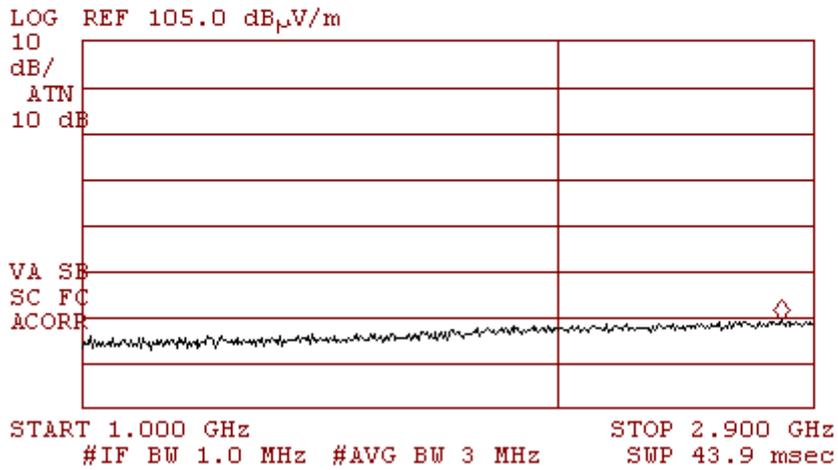

Horizontal & Vertical Polarization
Plot 4.6.12

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.435 GHz
51.24 dB μ V/m

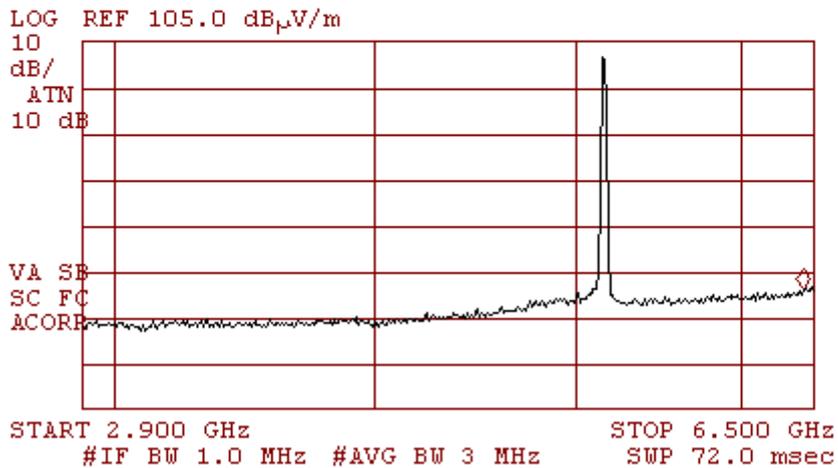

Horizontal & Vertical Polarization
Plot 4.6.13

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.8150 GHz
52.89 dB μ V/m

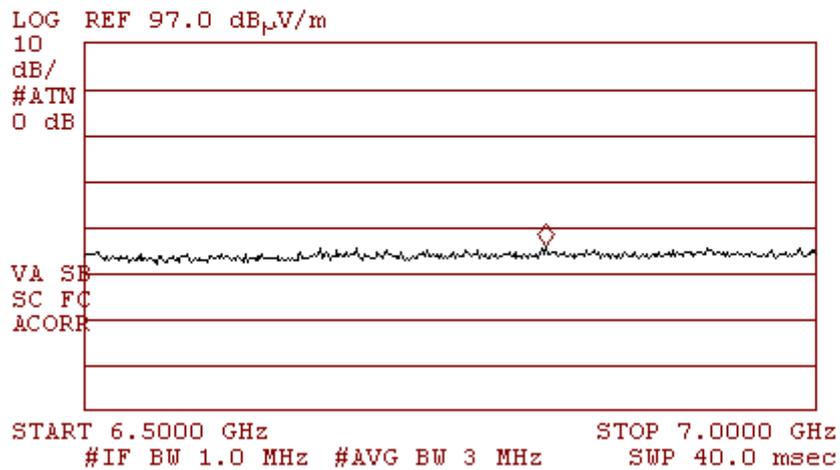


Horizontal & Vertical Polarization
Plot 4.6.14

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 9.11 GHz
52.15 dB μ V/m

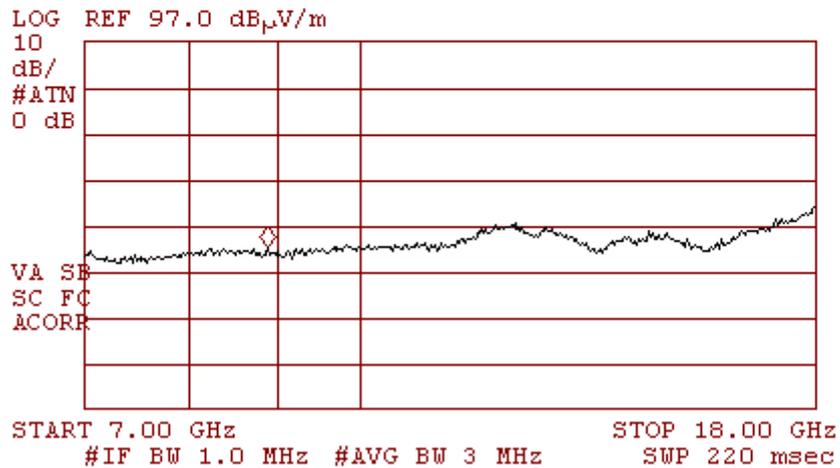


Horizontal & Vertical Polarization
Plot 4.6.15

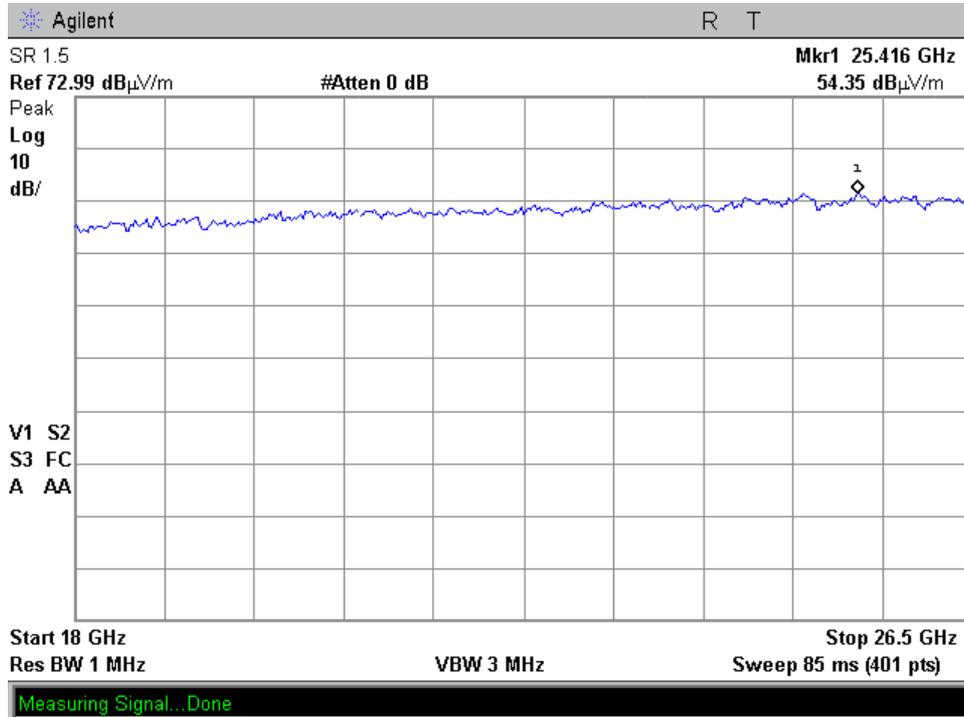

5260 MHz
Horizontal & Vertical Polarization
Plot 4.6.16

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.846 GHz
44.01 dB μ V/m

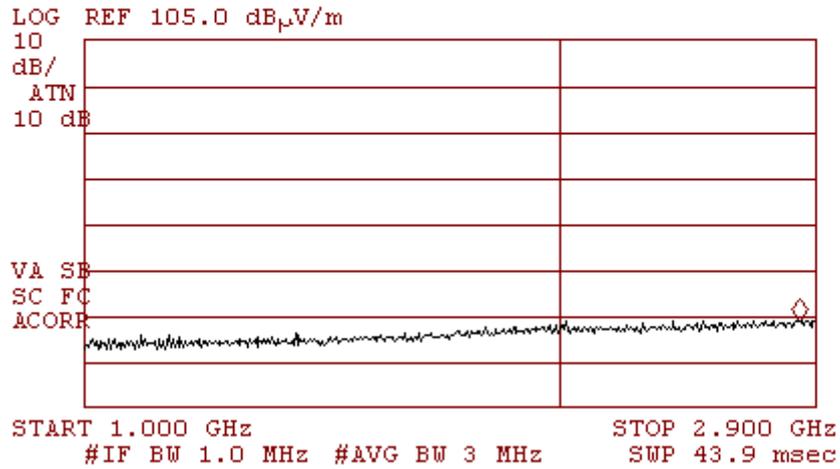

Horizontal & Vertical Polarization
Plot 4.6.17

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.381 GHz
51.46 dB μ V/m

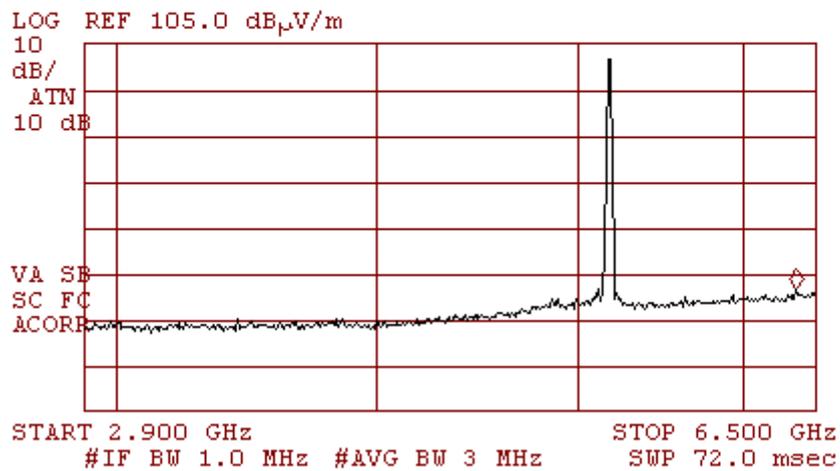

Horizontal & Vertical Polarization
Plot 4.6.18

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.9350 GHz
52.19 dB μ V/m

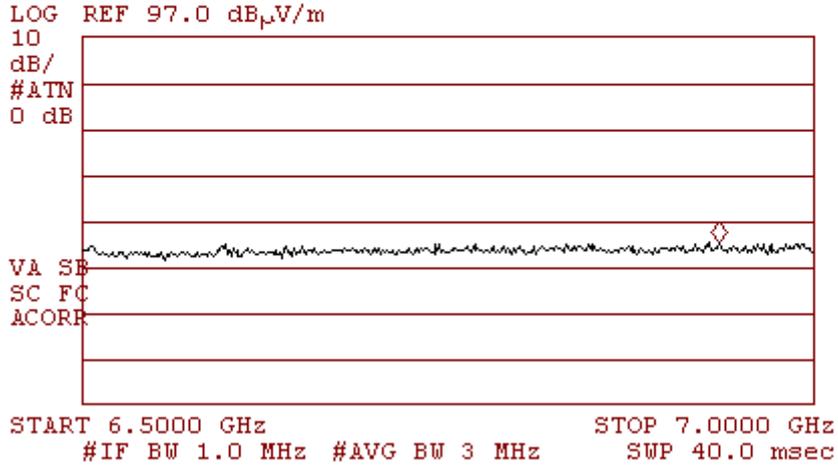


Horizontal & Vertical Polarization
Plot 4.6.19

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 9.97 GHz
52.98 dB μ V/m

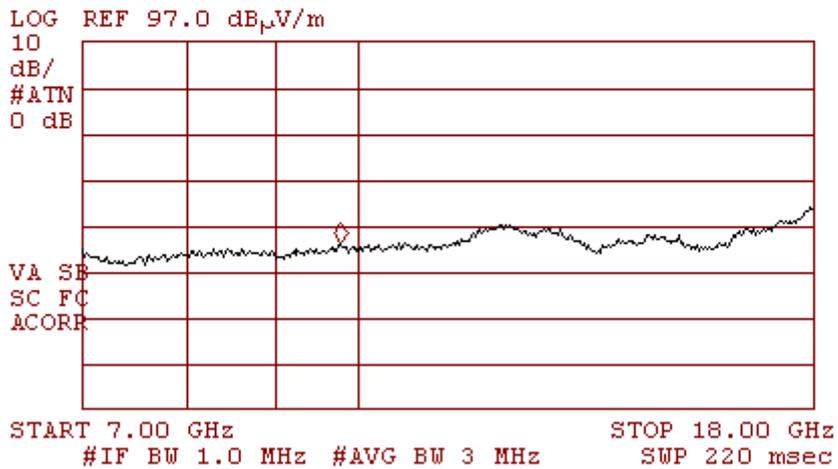


Horizontal & Vertical Polarization
Plot 4.6.20

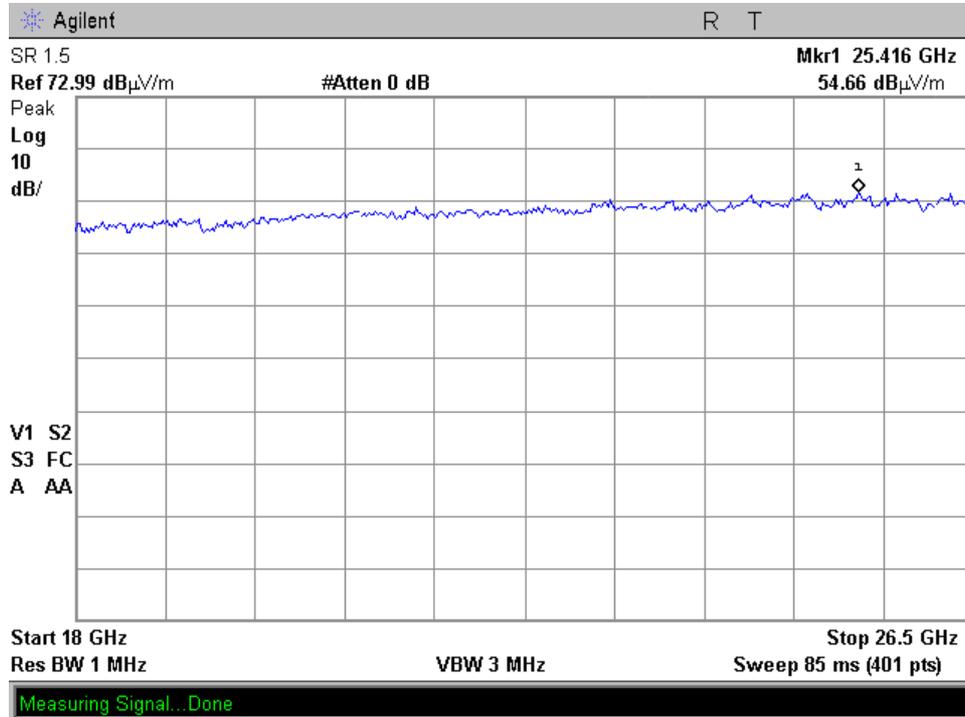

5300 MHz
Horizontal & Vertical Polarization
Plot 4.6.21

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.816 GHz
44.75 dB μ V/m

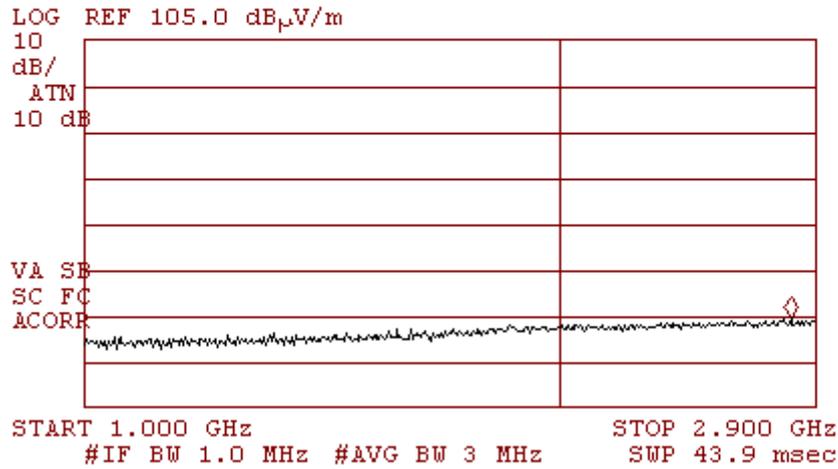

Horizontal & Vertical Polarization
Plot 4.6.22

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.435 GHz
50.98 dB μ V/m

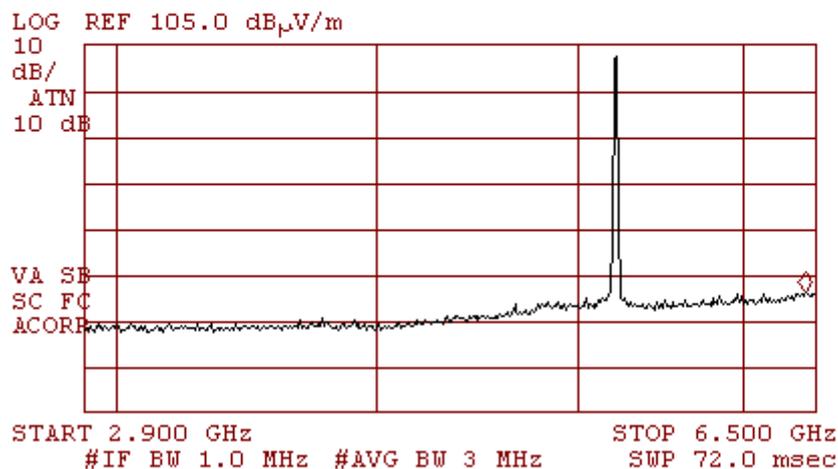

Horizontal & Vertical Polarization
Plot 4.6.23

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.7587 GHz
52.72 dB μ V/m

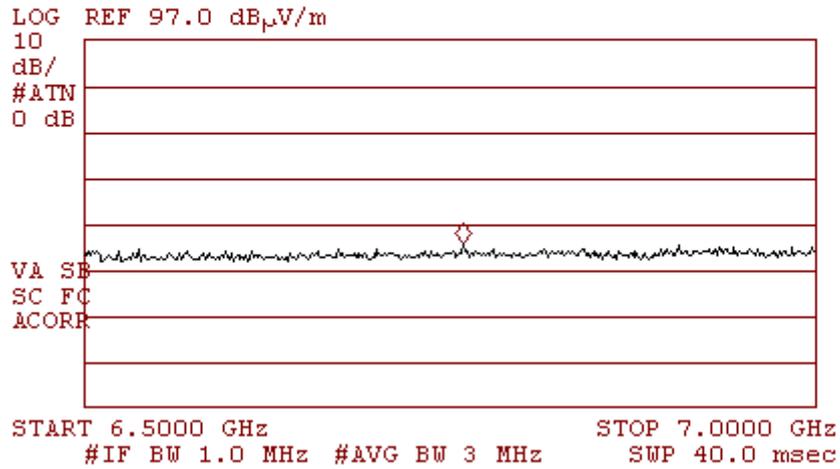


Horizontal & Vertical Polarization
Plot 4.6.24

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 9.57 GHz
51.44 dB μ V/m

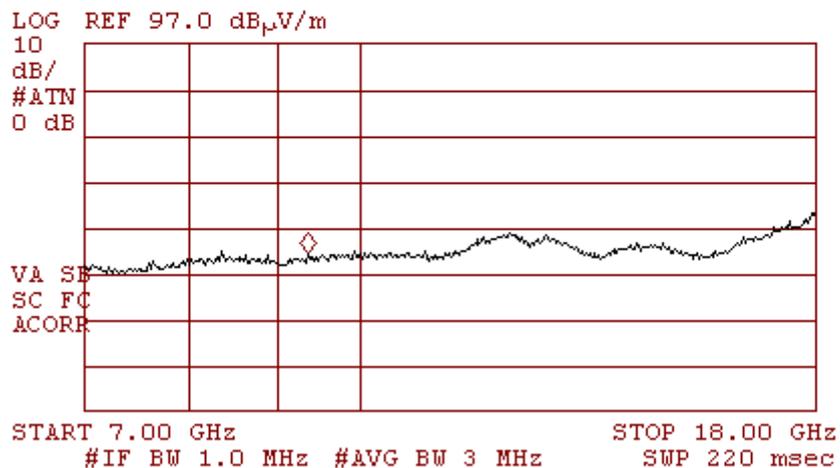


Horizontal & Vertical Polarization
Plot 4.6.25

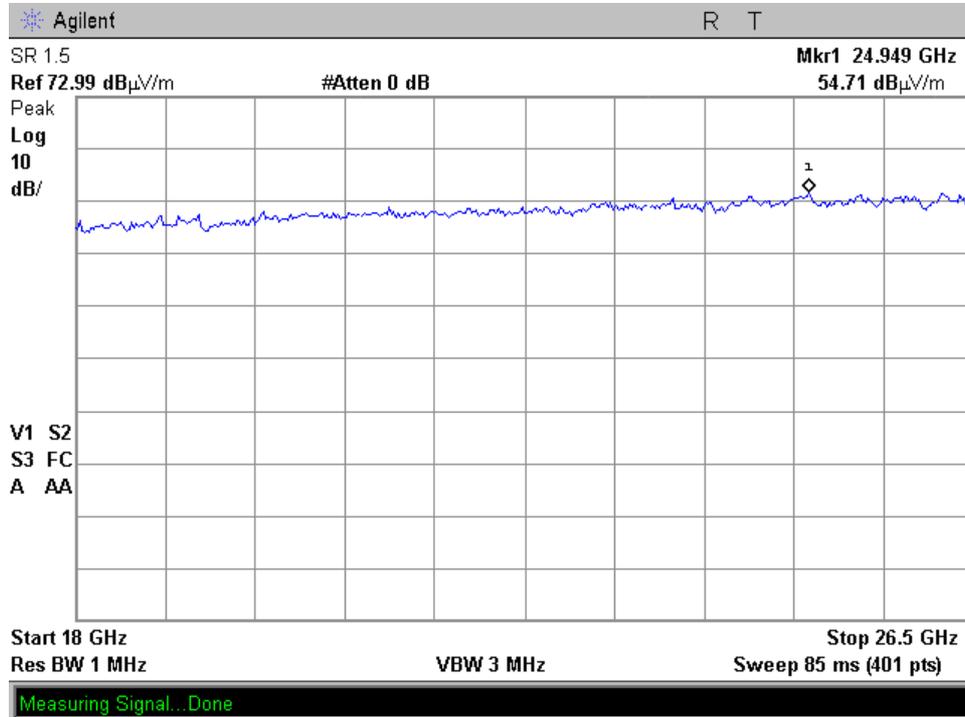

5320 MHz
Horizontal & Vertical Polarization
Plot 4.6.26

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.894 GHz
45.11 dB μ V/m

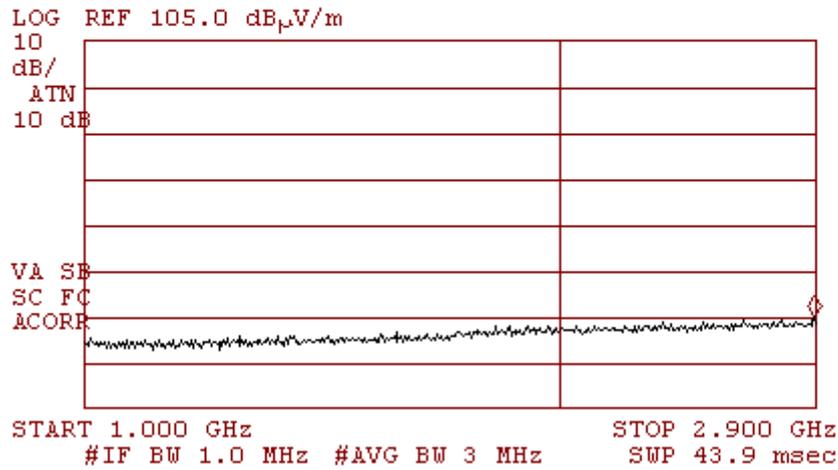

Horizontal & Vertical Polarization
Plot 4.6.27

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.435 GHz
51.62 dB μ V/m

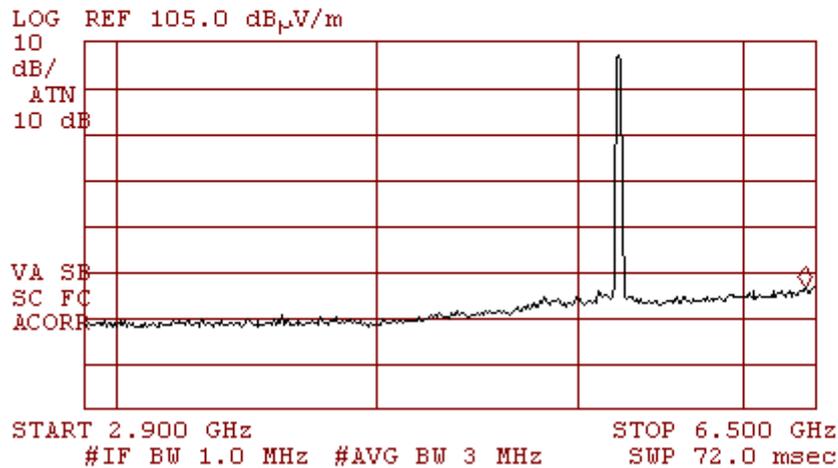

Horizontal & Vertical Polarization
Plot 4.6.28

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.9125 GHz
52.69 dB μ V/m

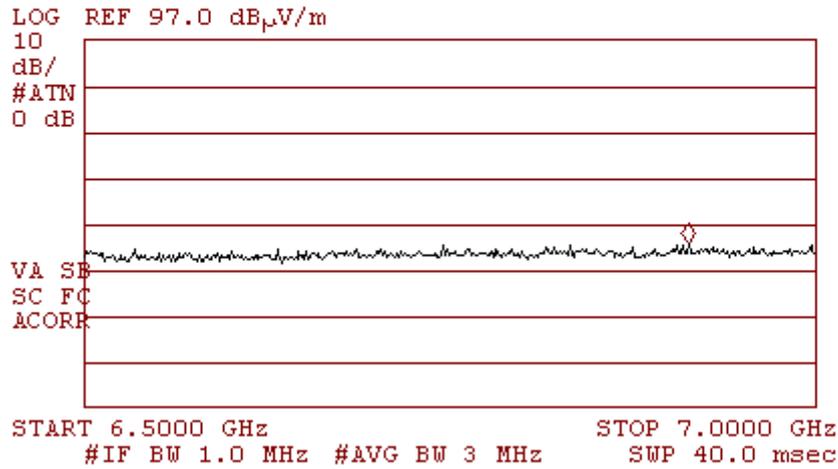


Horizontal & Vertical Polarization
Plot 4.6.29

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 8.77 GHz
52.06 dB μ V/m

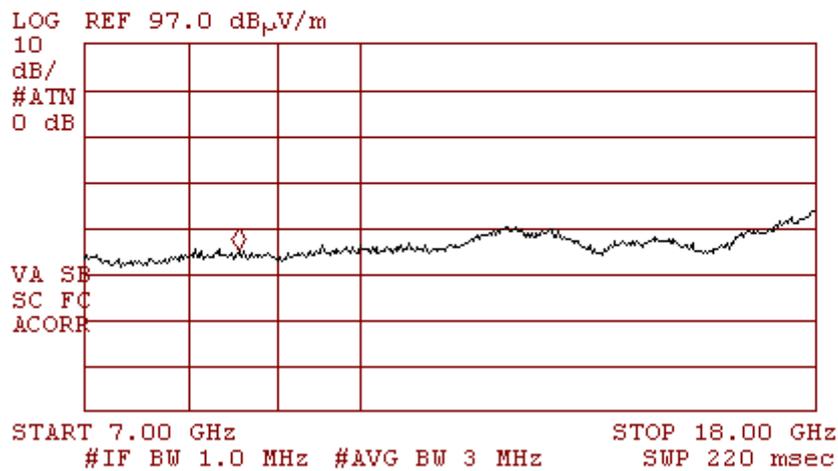


Horizontal & Vertical Polarization
Plot 4.6.30

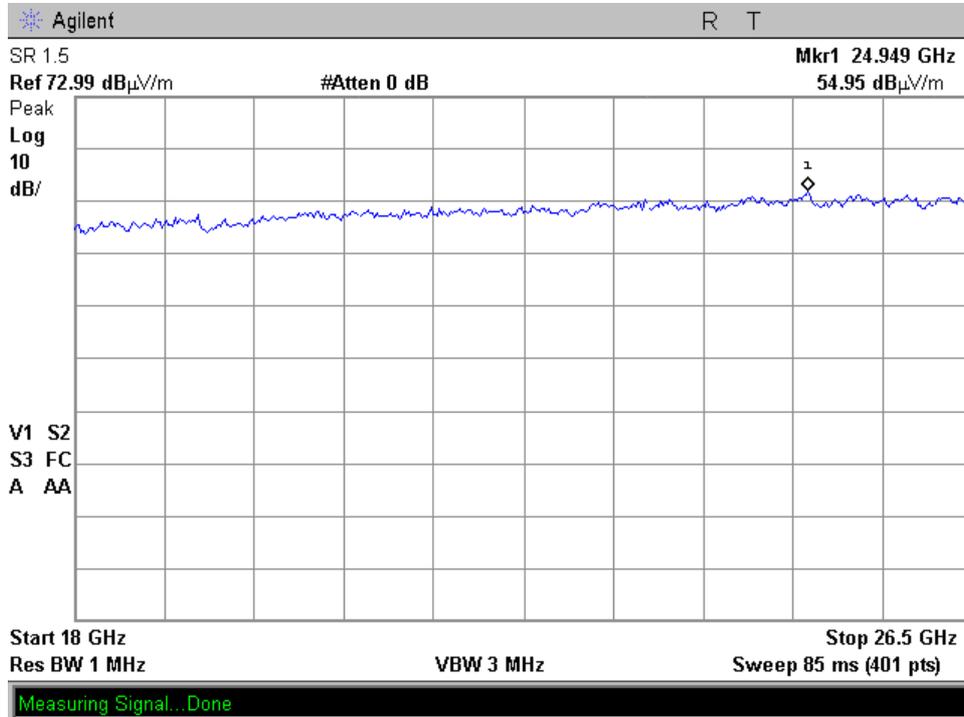

5500 MHz
Horizontal & Vertical Polarization
Plot 4.6.31

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.696 GHz
44.39 dB μ V/m

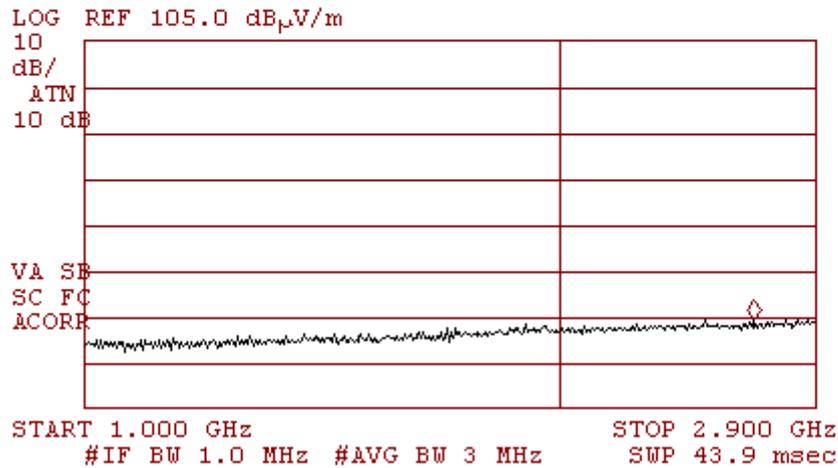

Horizontal & Vertical Polarization
Plot 4.6.32

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.219 GHz
51.40 dB μ V/m

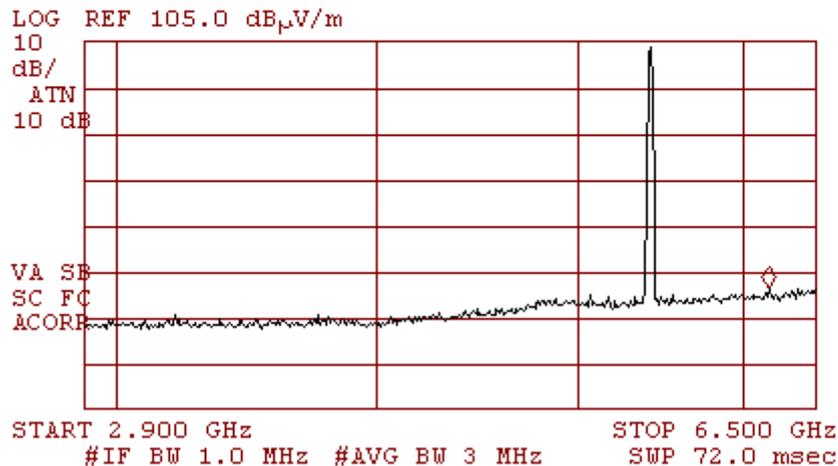

Horizontal & Vertical Polarization
Plot 4.6.33

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.6799 GHz
52.28 dB μ V/m

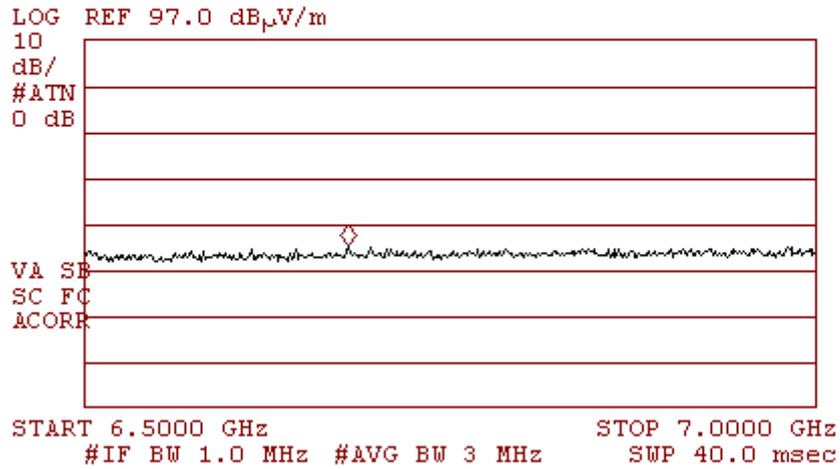


Horizontal & Vertical Polarization
Plot 4.6.34

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 9.57 GHz
53.74 dB μ V/m

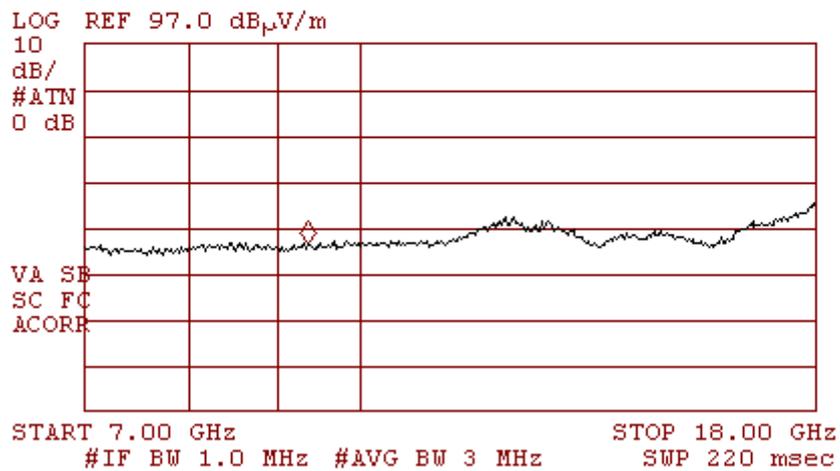

Horizontal & Vertical Polarization
Plot 4.6.35

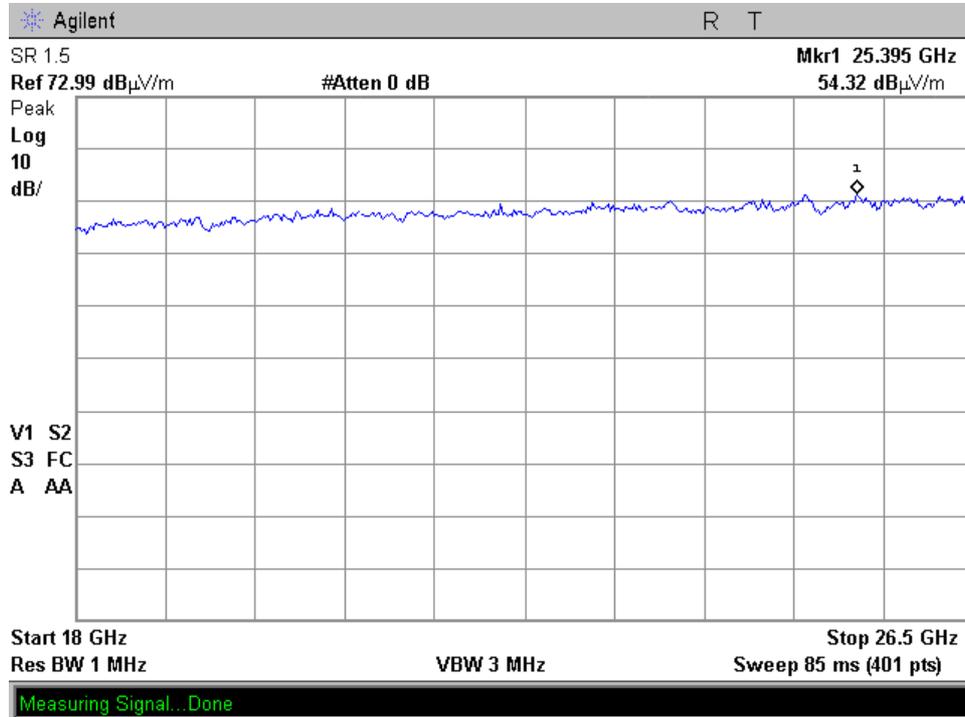


5600 MHz
Horizontal & Vertical Polarization
Plot 4.6.36

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 1.987 GHz
44.47 dB μ V/m

LOG REF 105.0 dB μ V/m

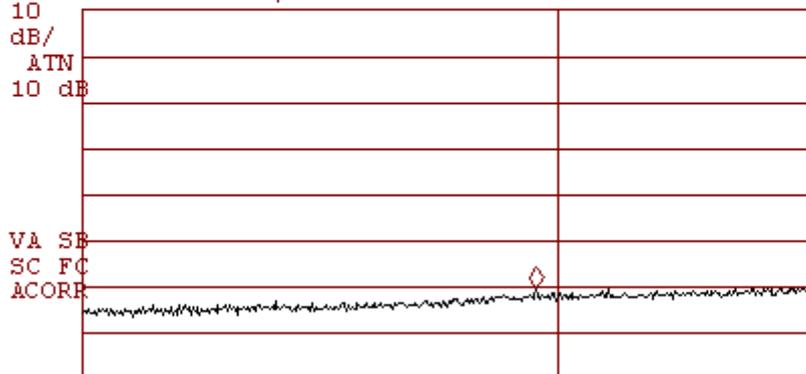


START 1.000 GHz STOP 2.900 GHz
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 43.9 msec

Horizontal & Vertical Polarization
Plot 4.6.37

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 4.974 GHz
51.98 dB μ V/m

LOG REF 105.0 dB μ V/m

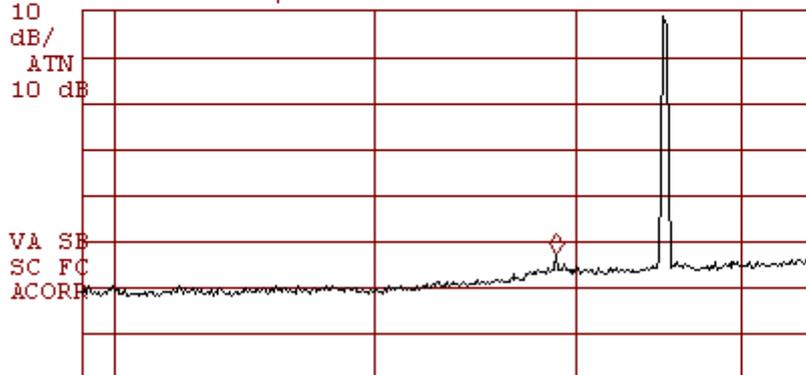


START 2.900 GHz STOP 6.500 GHz
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 72.0 msec

Horizontal & Vertical Polarization
Plot 4.6.38

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.9650 GHz
52.02 dB μ V/m

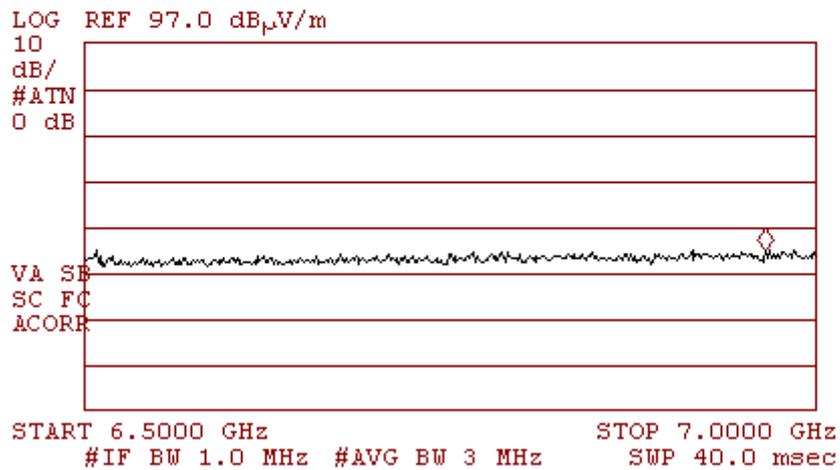


Horizontal & Vertical Polarization
Plot 4.6.39

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 9.34 GHz
52.70 dB μ V/m

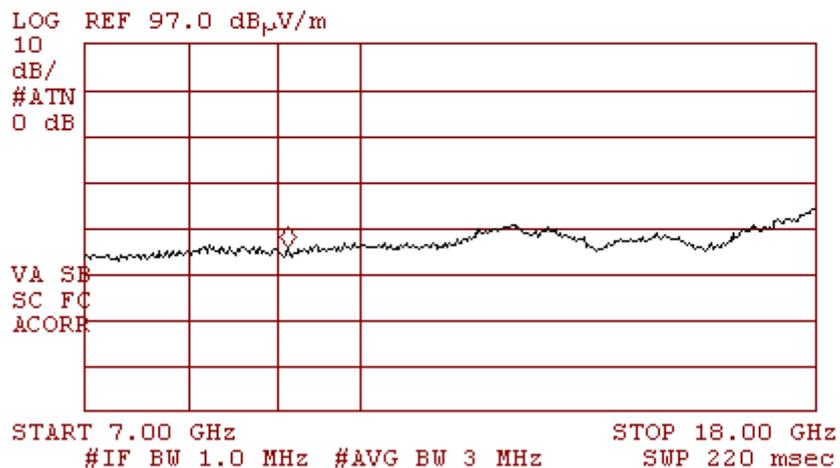


Horizontal & Vertical Polarization
Plot 4.6.40

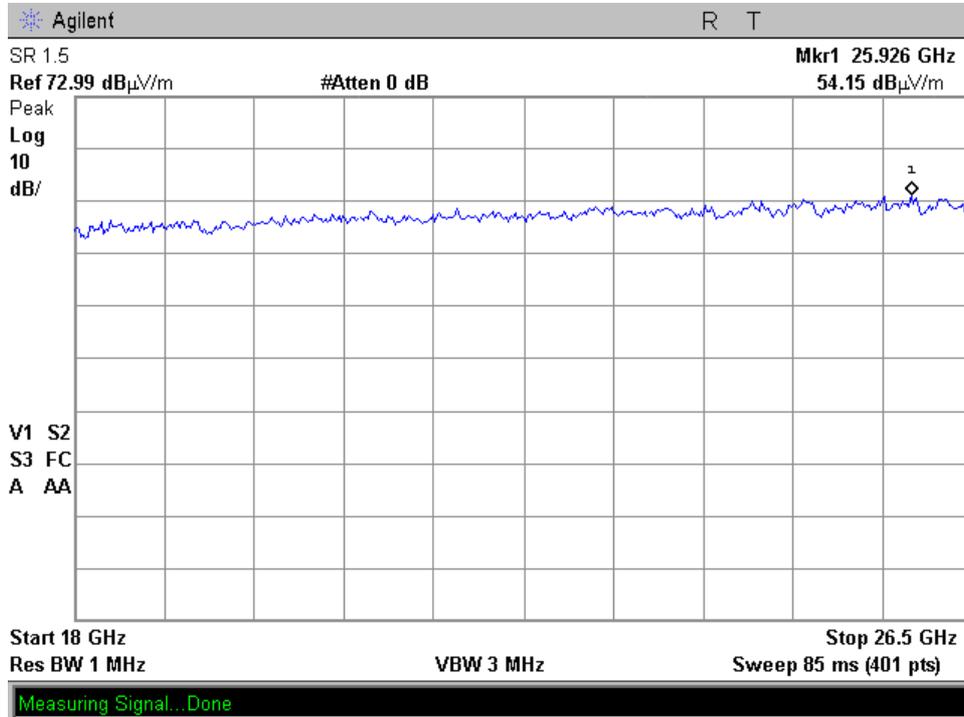

5700 MHz
Horizontal & Vertical Polarization
Plot 4.6.41

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.480 GHz
44.67 dB μ V/m

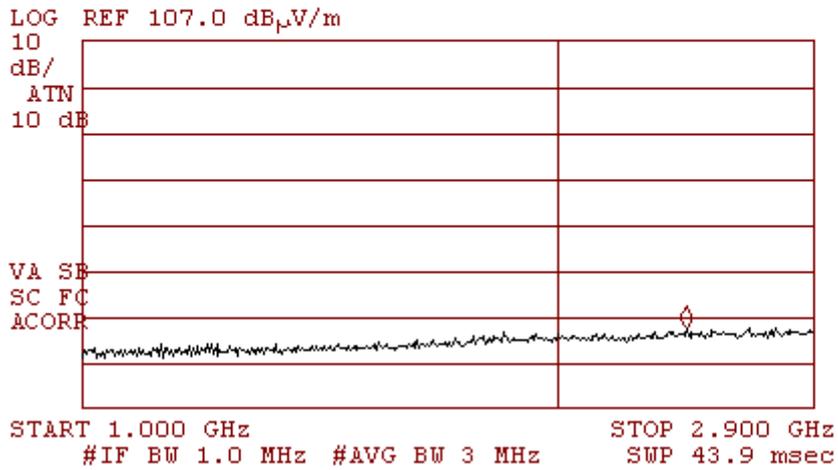

Horizontal & Vertical Polarization
Plot 4.6.42

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.413 GHz
52.36 dB μ V/m

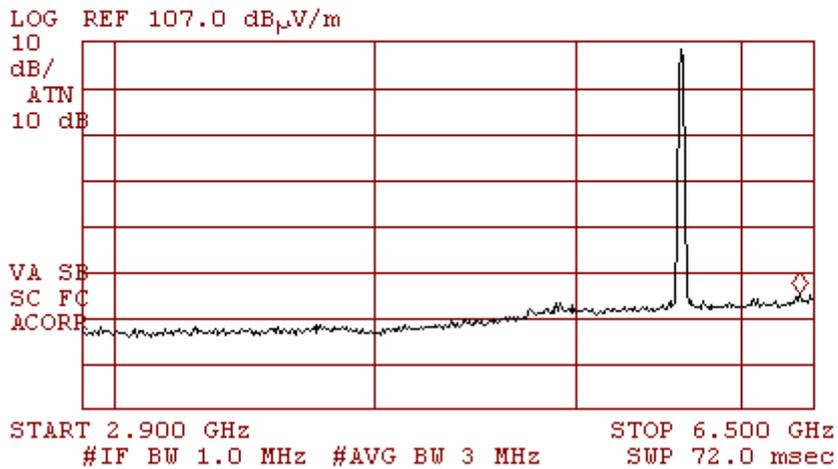

Horizontal & Vertical Polarization
Plot 4.6.43

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.9900 GHz
52.45 dB μ V/m

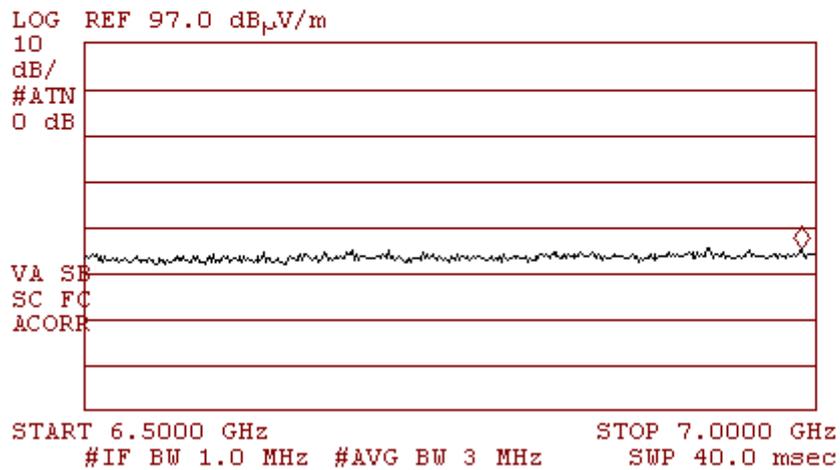


Horizontal & Vertical Polarization
Plot 4.6.44

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 10.10 GHz
52.85 dB μ V/m

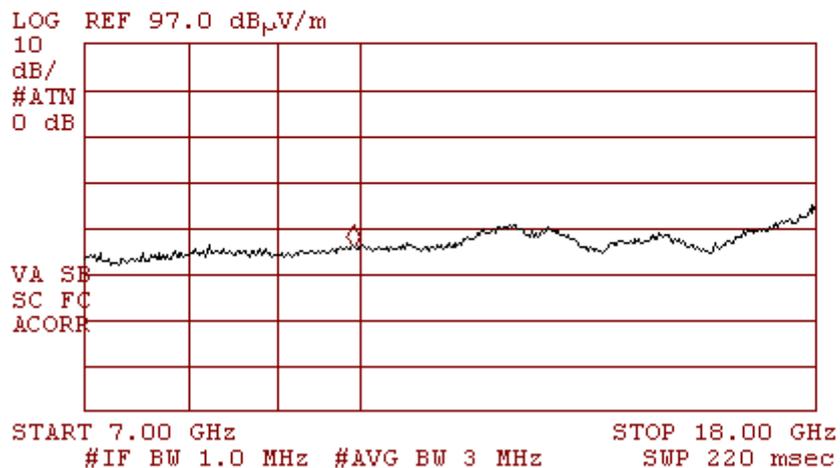

Horizontal & Vertical Polarization
Plot 4.6.45

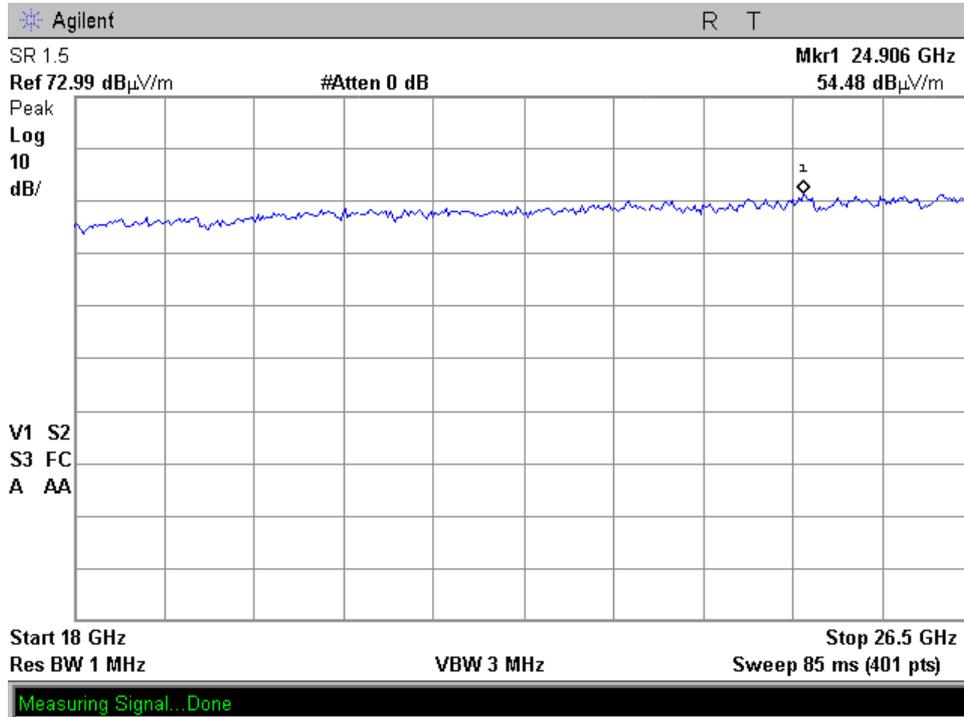


5745 MHz
Horizontal & Vertical Polarization
Plot 4.6.46

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.738 GHz
44.16 dB μ V/m

LOG REF 105.0 dB μ V/m

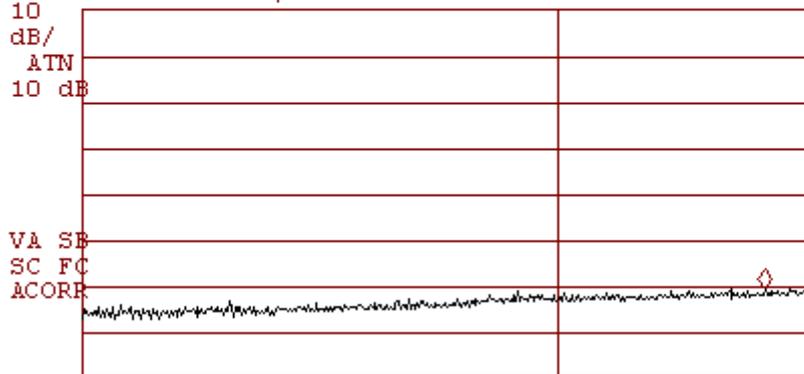


START 1.000 GHz STOP 2.900 GHz
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 43.9 msec

Horizontal & Vertical Polarization
Plot 4.6.47

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.468 GHz
50.71 dB μ V/m

LOG REF 107.0 dB μ V/m

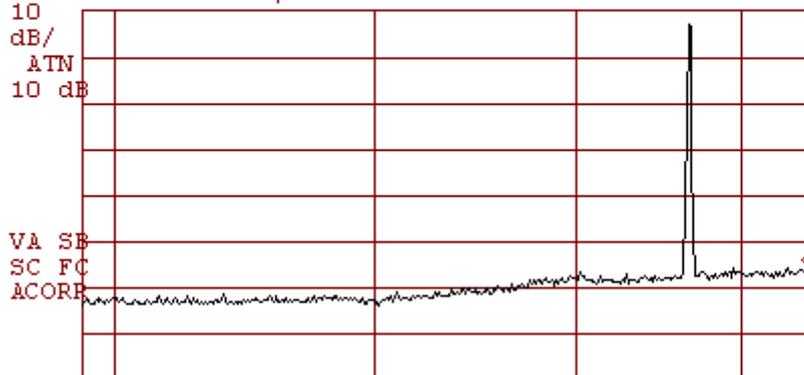


START 2.900 GHz STOP 6.500 GHz
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 72.0 msec

Horizontal & Vertical Polarization
Plot 4.6.48

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.8762 GHz
52.61 dB μ V/m

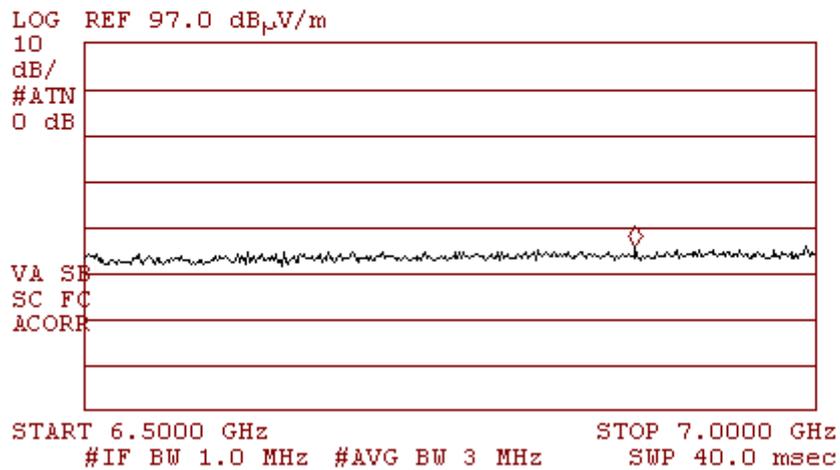

Horizontal & Vertical Polarization
Plot 4.6.49

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 10.86 GHz
53.18 dB μ V/m

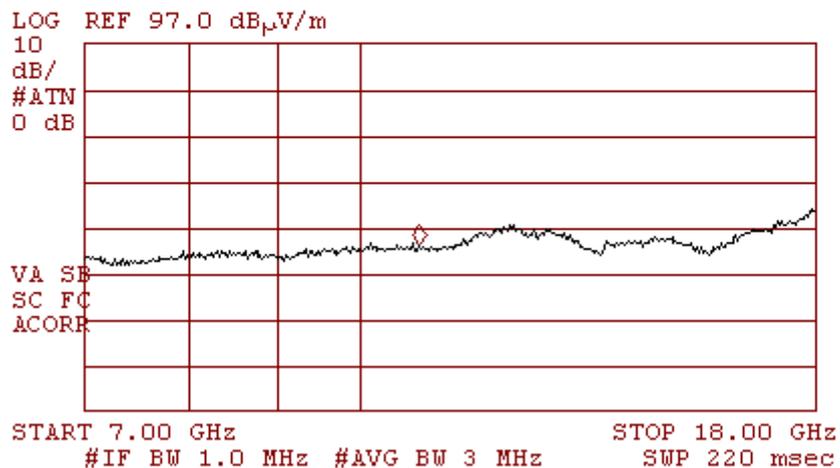

Horizontal & Vertical Polarization
Plot 4.6.50




5785 MHz
Horizontal & Vertical Polarization
Plot 4.6.51

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.816 GHz
45.03 dB μ V/m

LOG REF 105.0 dB μ V/m

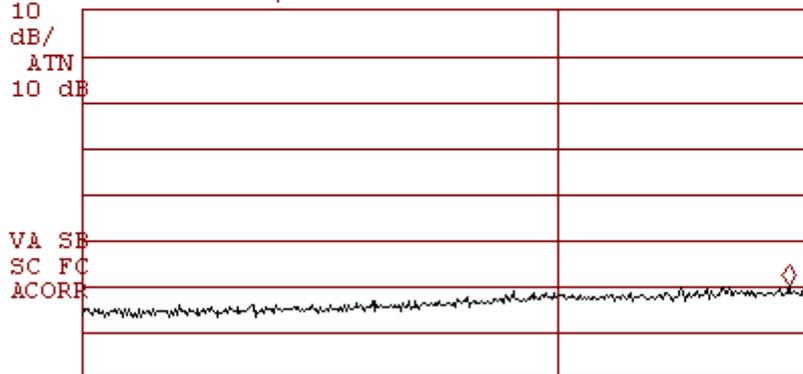


START 1.000 GHz STOP 2.900 GHz
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 43.9 msec

Horizontal & Vertical Polarization
Plot 4.6.52

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.413 GHz
51.89 dB μ V/m

LOG REF 107.0 dB μ V/m

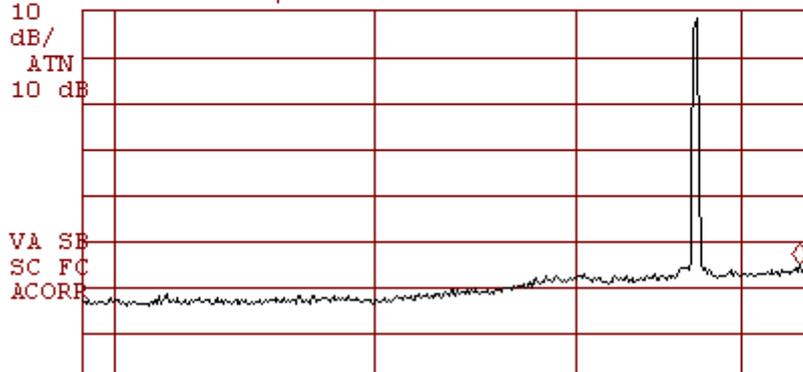


START 2.900 GHz STOP 6.500 GHz
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 72.0 msec

Horizontal & Vertical Polarization
Plot 4.6.53

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.9275 GHz
52.87 dB μ V/m

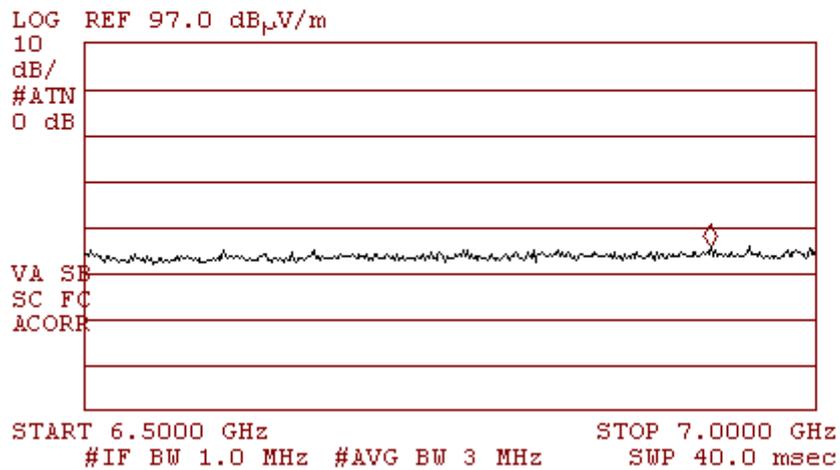


Horizontal & Vertical Polarization
Plot 4.6.54

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 9.93 GHz
52.66 dB μ V/m

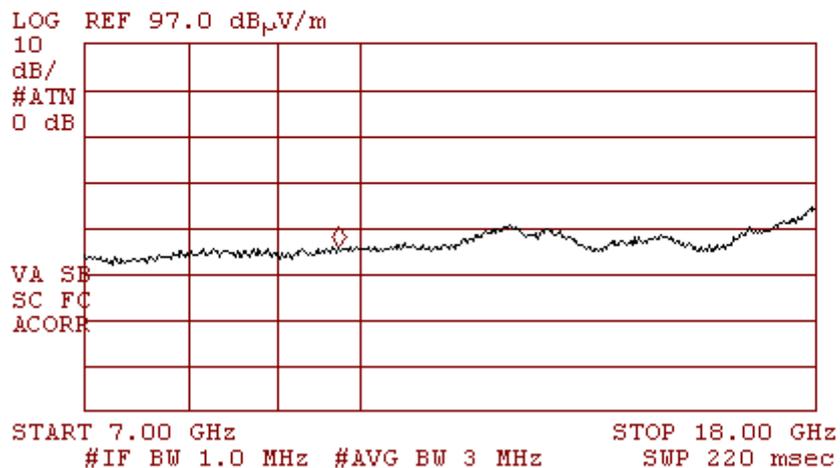

Horizontal & Vertical Polarization
Plot 4.6.55

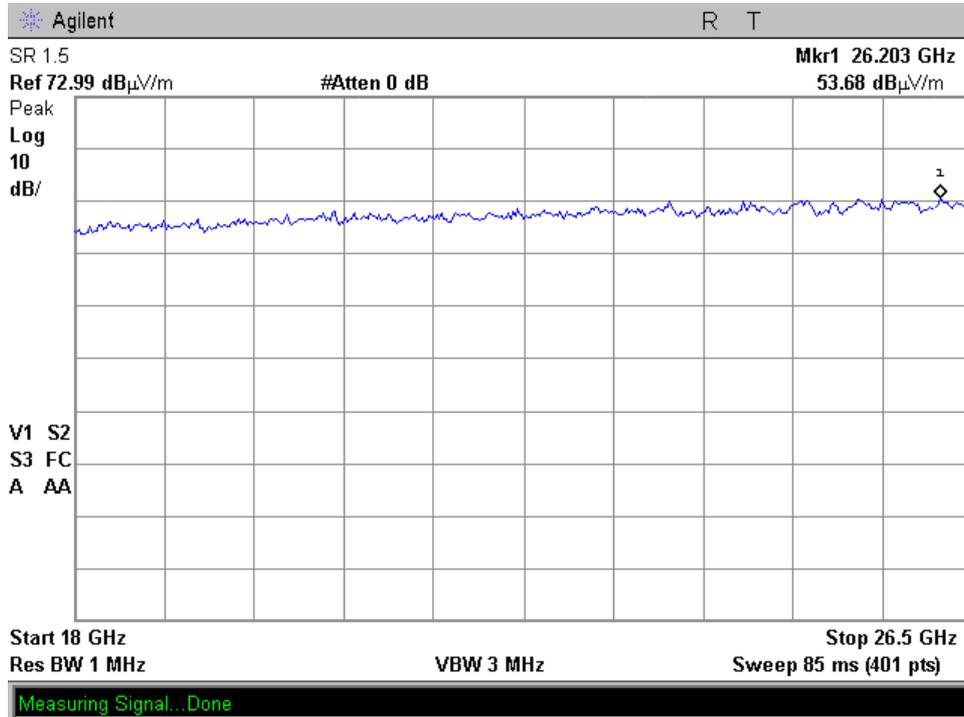


5805 MHz
Horizontal & Vertical Polarization
Plot 4.6.56

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.816 GHz
44.20 dB μ V/m

LOG REF 105.0 dB μ V/m

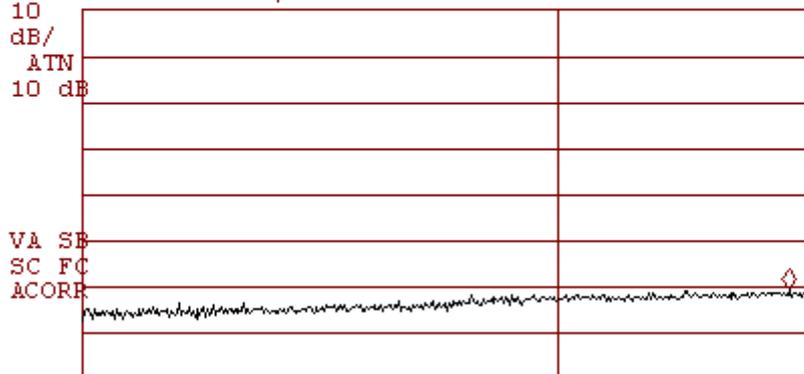


START 1.000 GHz STOP 2.900 GHz
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 43.9 msec

Horizontal & Vertical Polarization
Plot 4.6.57

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.446 GHz
51.24 dB μ V/m

LOG REF 107.0 dB μ V/m

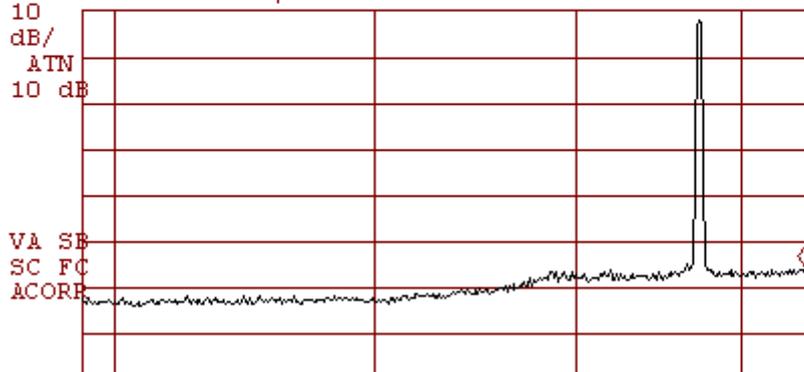


START 2.900 GHz STOP 6.500 GHz
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 72.0 msec

Horizontal & Vertical Polarization
Plot 4.6.58

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 6.9250 GHz
52.74 dB_μV/m

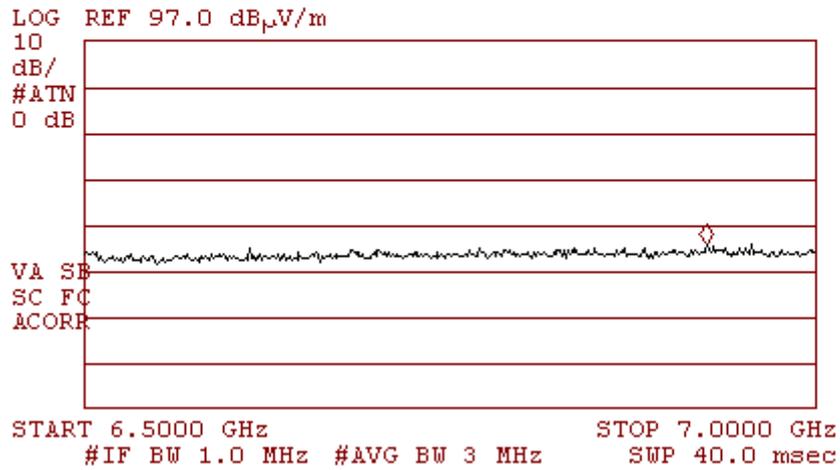


Horizontal & Vertical Polarization
Plot 4.6.59

SR 1.5

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 10.08 GHz
52.76 dB_μV/m

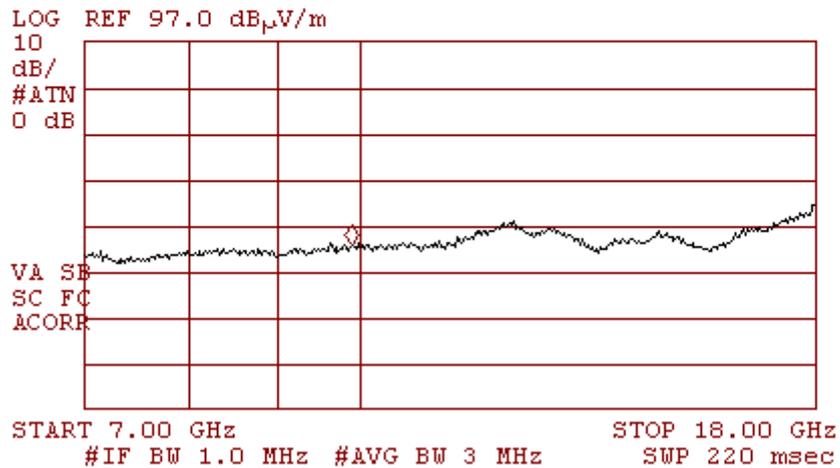


Horizontal & Vertical Polarization
Plot 4.6.60

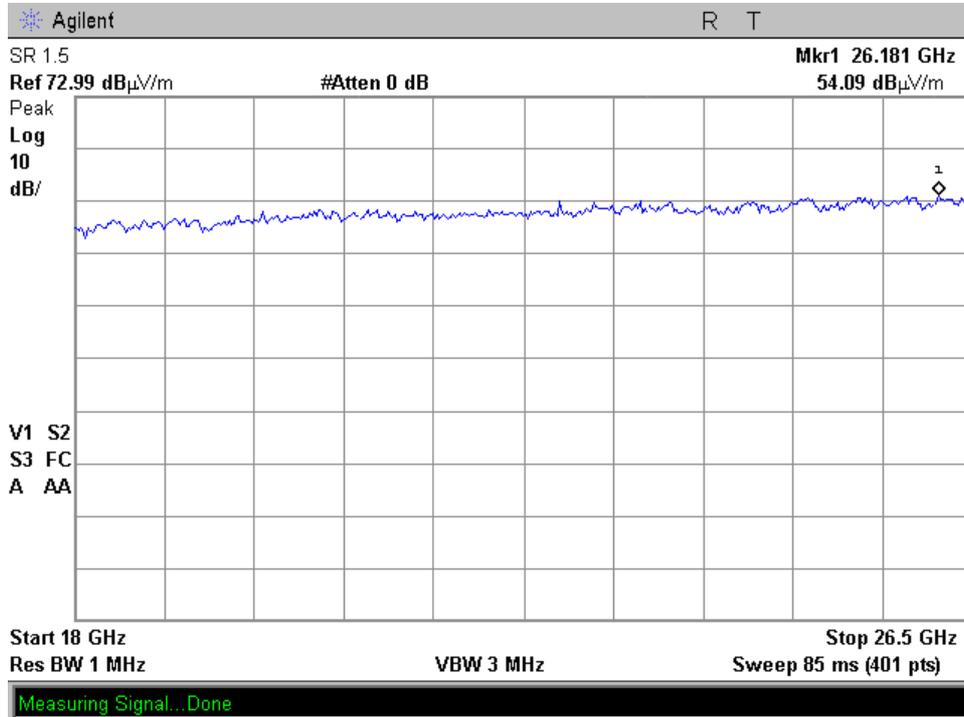

Restricted Band (4.5-5.15 GHz)
5180 MHz
Horizontal Polarization
Peak
Plot 4.6.61

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.1451 GHz
55.20 dB μ V/m

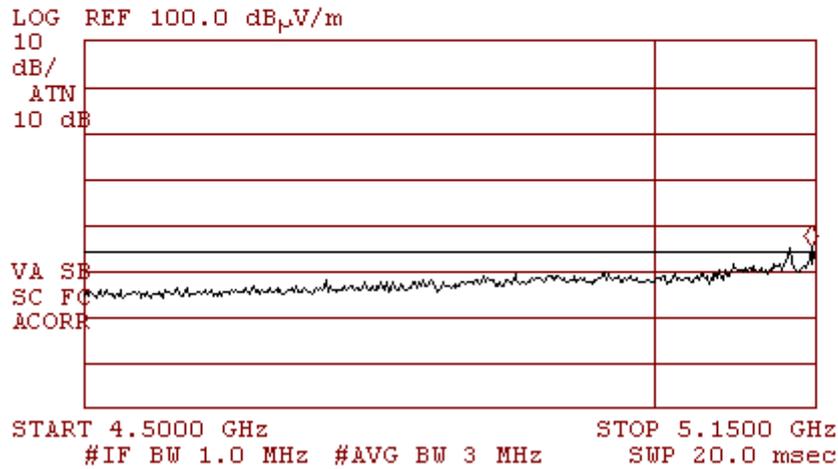

Horizontal Polarization
Average
Plot 4.6.62

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.0948 GHz
40.30 dB μ V/m

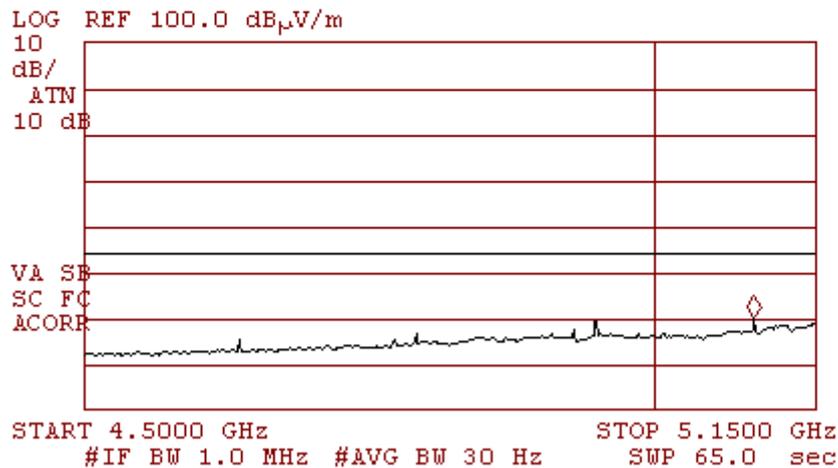

**Vertical Polarization
Peak
Plot 4.6.63**

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.1484 GHz
52.88 dB μ V/m

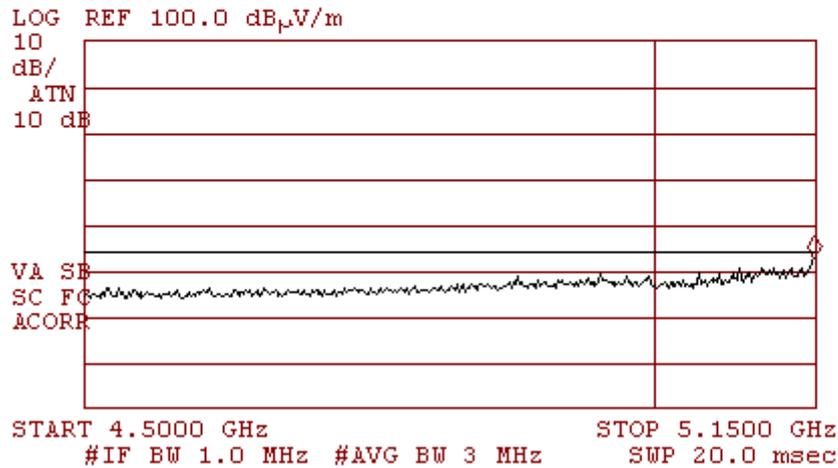

**Vertical Polarization
Average
Plot 4.6.64**

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.0948 GHz
39.19 dB μ V/m

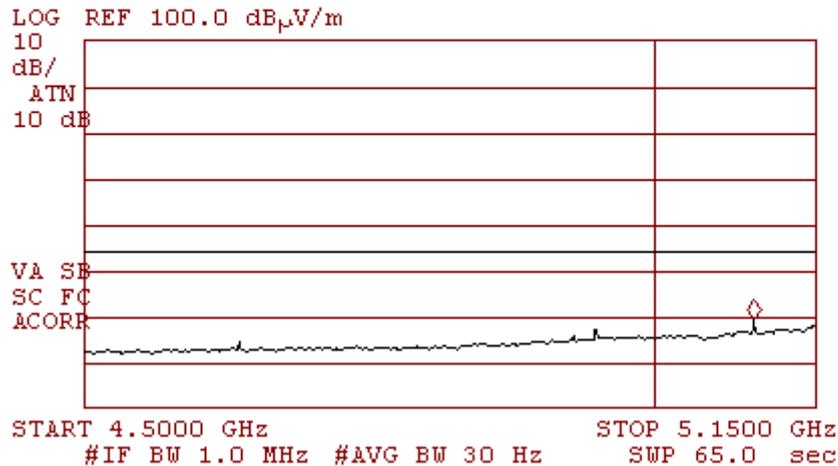

Restricted Band (5.35-5.46 GHz)
5320 MHz
Horizontal Polarization
Peak
Plot 4.6.65

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.3739 GHz
51.78 dB μ V/m

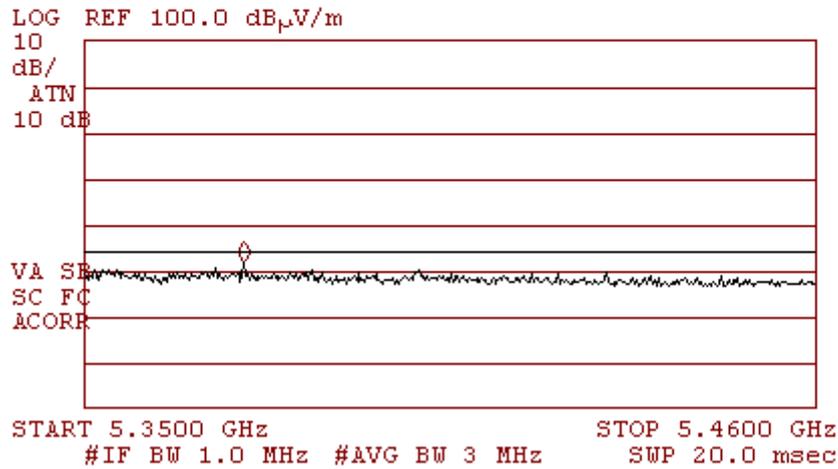

Horizontal Polarization
Average
Plot 4.6.66

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.3995 GHz
37.49 dB μ V/m

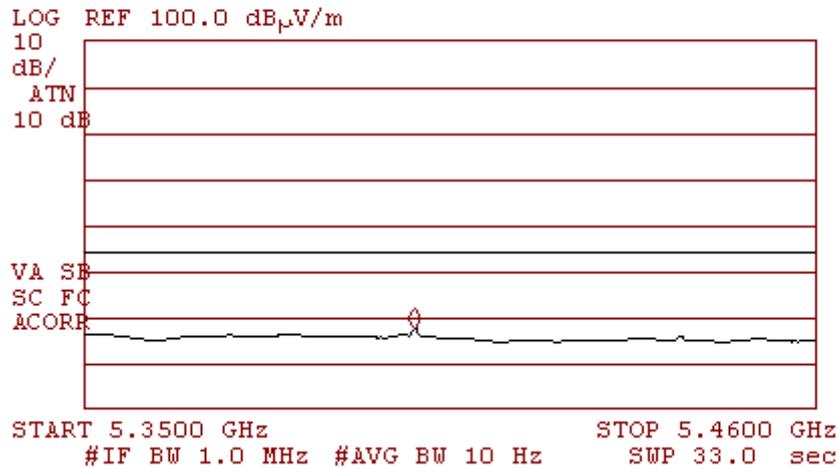

**Vertical Polarization
Peak
Plot 4.6.67**

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.3657 GHz
48.84 dB μ V/m

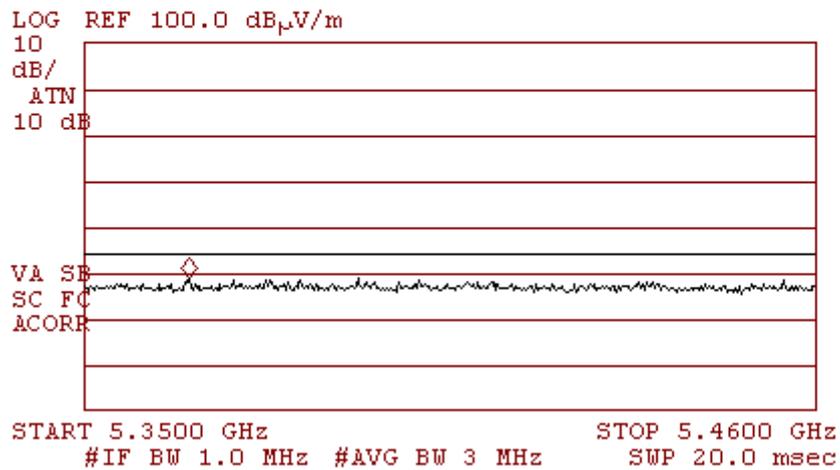

**Vertical Polarization
Average
Plot 4.6.68**

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.3995 GHz
34.92 dB μ V/m

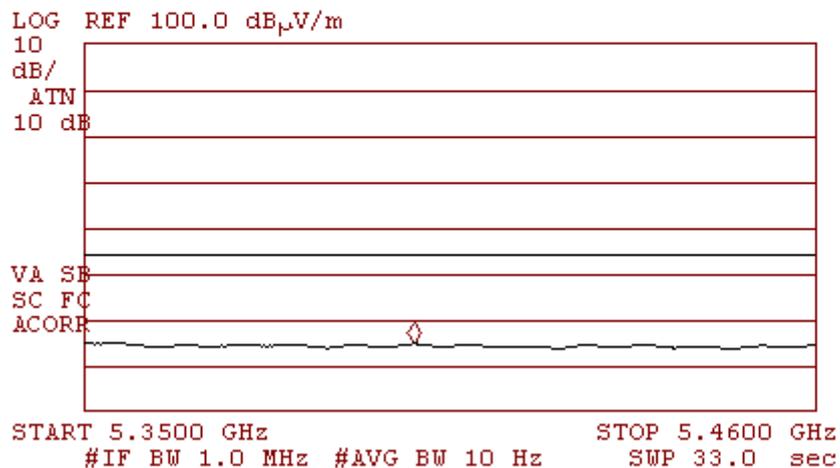

Restricted Band (5.35-5.46 GHz)
5500 MHz
Horizontal Polarization
Peak
Plot 4.6.69

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.3866 GHz
50.18 dB μ V/m

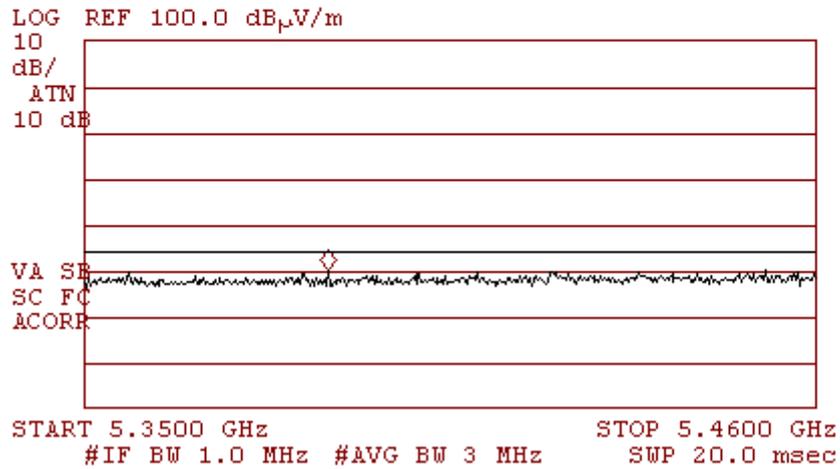

Horizontal Polarization
Average
Plot 4.6.70

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.4196 GHz
36.78 dB μ V/m

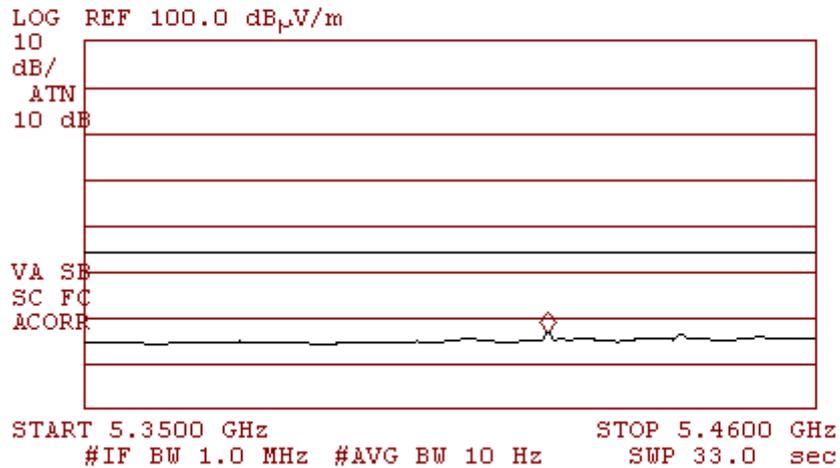

Vertical Polarization
Peak
Plot 4.6.71

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.4342 GHz
48.96 dB μ V/m

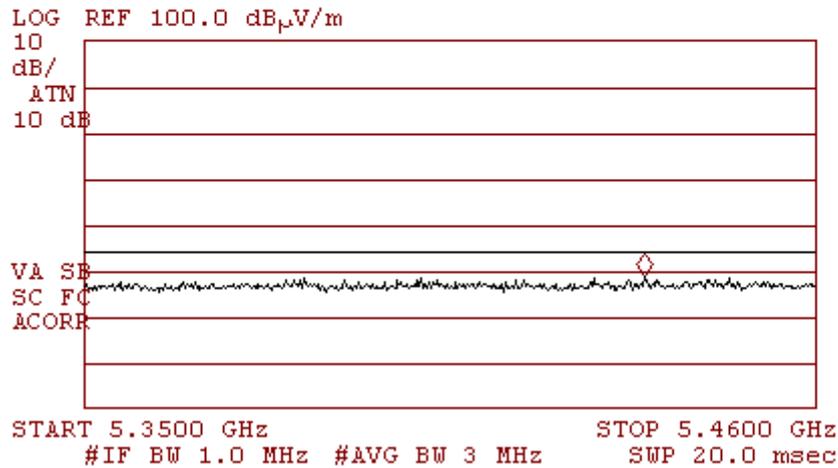


Vertical Polarization
Average
Plot 4.6.72

SR 1.5


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 5.4072 GHz
34.61 dB μ V/m

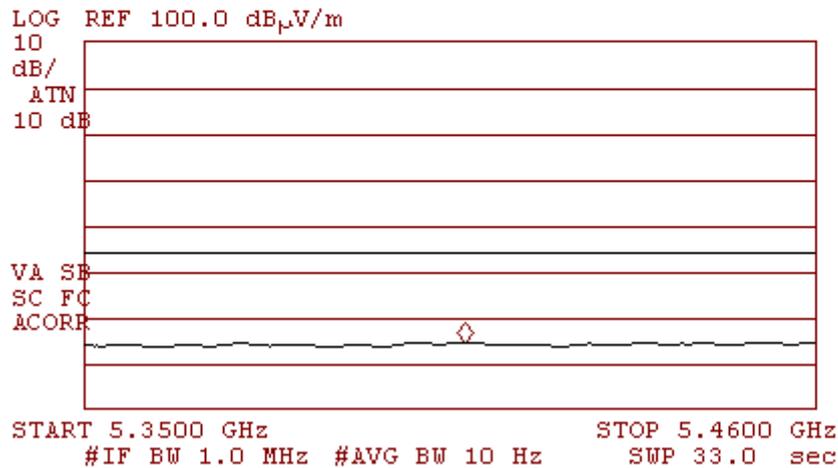


Radiated Spurious Emissions Below 1 GHz
Worst case for all modes and all frequencies
Horizontal Polarization
Plot 4.6.73

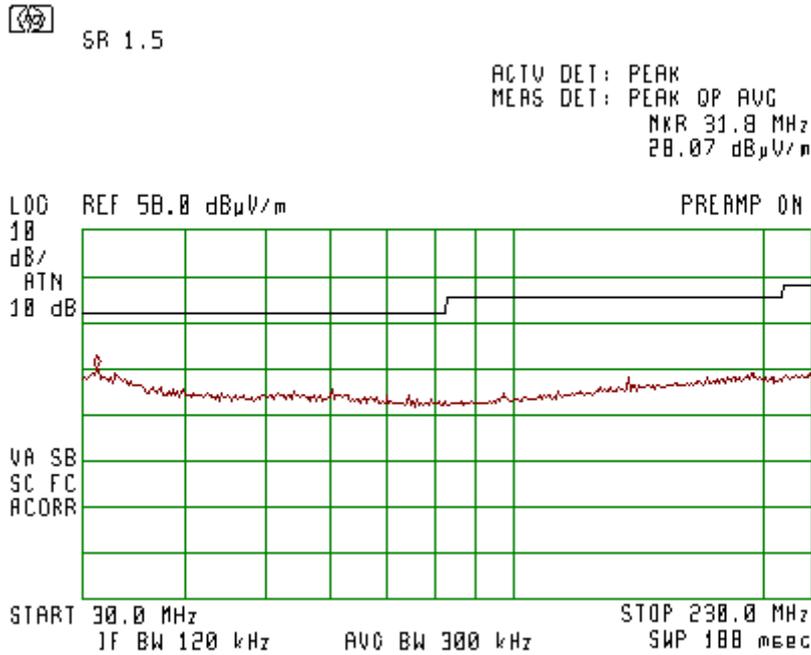


Vertical Polarization
Plot 4.6.74

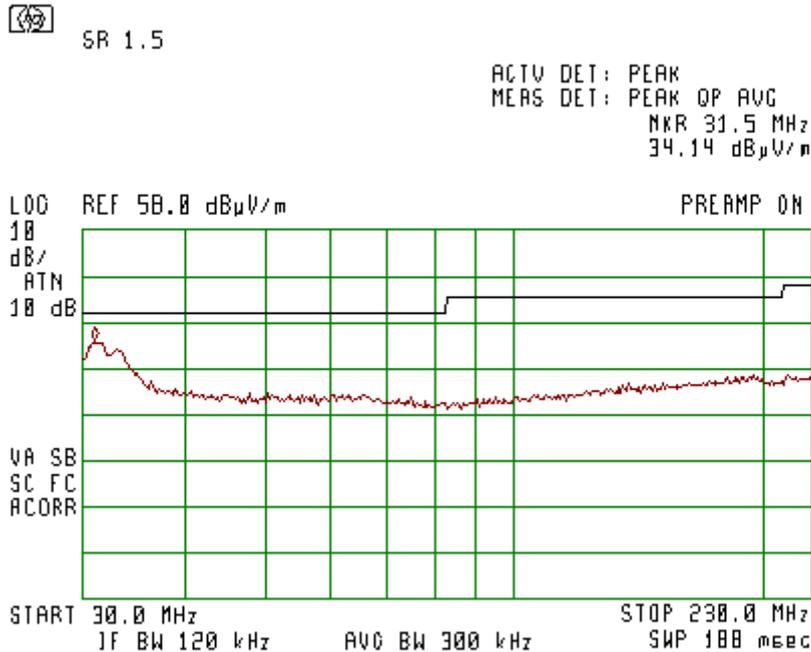

Horizontal Polarization
Plot 4.6.75

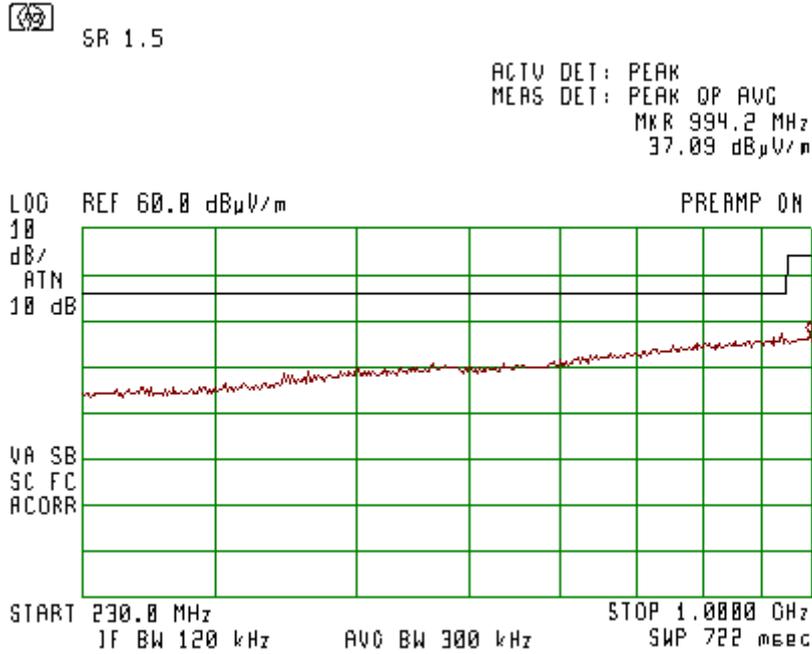

Vertical Polarization
Plot 4.6.76

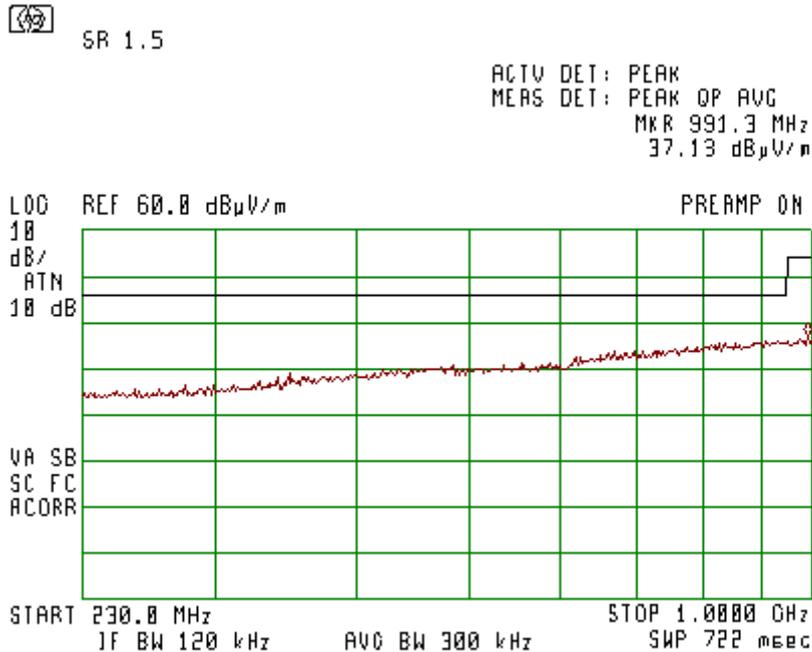

4.7. Frequency Stability

Reference document:	47 CFR §15.407(g)		
Test Requirements:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.		
Test setup:	See sec 2.1	Pass	
Method of testing:	Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 100kHz, VBW: 300kHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	Data indicates that the fundamental emission is maintained within the band of operation under extreme conditions.	See Plot 4.7.1 to Plot 4.7.24	

Test results:

Voltage Variation

5150-5350 MHz

Frequency [MHz]	Data Rate [Mbps]	Extreme Conditions	Edge of 26 dB Bandwidth [MHz]	Margin [MHz]	Ref Plot
5180	54	Ambient temperature 22 °c, Input Voltage 3.145-4.255 Vdc	5170	20.22	4.7.1
5320	54	Ambient temperature 22 °c, Input Voltage 3.145-4.255 Vdc	5330	20.09	4.7.3

5470-5725 MHz

Frequency [MHz]	Data Rate [Mbps]	Extreme Conditions	Edge of 26 dB Bandwidth [MHz]	Margin [MHz]	Ref Plot
5500	54	Ambient temperature 22 °c, Input Voltage 3.145-4.255 Vdc	5485	14.61	4.7.5
5700	54		5710	14.79	4.7.8

5725-5825 MHz

Frequency [MHz]	Data Rate [Mbps]	Extreme Conditions	Edge of 26 dB Bandwidth [MHz]	Margin [MHz]	Ref Plot
5745	54	Ambient temperature 22 °c, Input Voltage 3.145-4.255 Vdc	5735	10.2	4.7.9
5805	54		5815	10.2	4.7.12

Temperature Variation

5150-5350 MHz

Frequency [MHz]	Data Rate [Mbps]	Extreme Conditions	Edge of 26 dB Bandwidth [MHz]	Margin [MHz]	Ref Plot
5180	54	Ambient temperature -30 to +50°C, Input Voltage 3.7Vdc	5170	20.45	4.7.14
5320	54	Ambient temperature -30 to +50 °c, Input Voltage 3.7Vdc	5330	19.94	4.7.15


5470-5725 MHz

Frequency [MHz]	Data Rate [Mbps]	Extreme Conditions	Edge of 26 dB Bandwidth [MHz]	Margin [MHz]	Ref Plot
5500	54	Ambient temperature -30 to +50°C, Input Voltage 3.7Vdc	5485	15.05	4.7.18
5700	54		5701	15.18	4.7.20


5725-5825 MHz

Frequency [MHz]	Data Rate [Mbps]	Extreme Conditions	Edge of 26 dB Bandwidth [MHz]	Margin [MHz]	Ref Plot
5745	54	Ambient temperature -30 to +50 °c, Input Voltage 3.7Vdc	5735	10.05	4.7.23
5805	54		5815	10.29	4.7.24


Voltage Variation
5150-5350 MHz, Carrier frequency 5180 MHz,
115% of Vnom
Plot 4.7.1

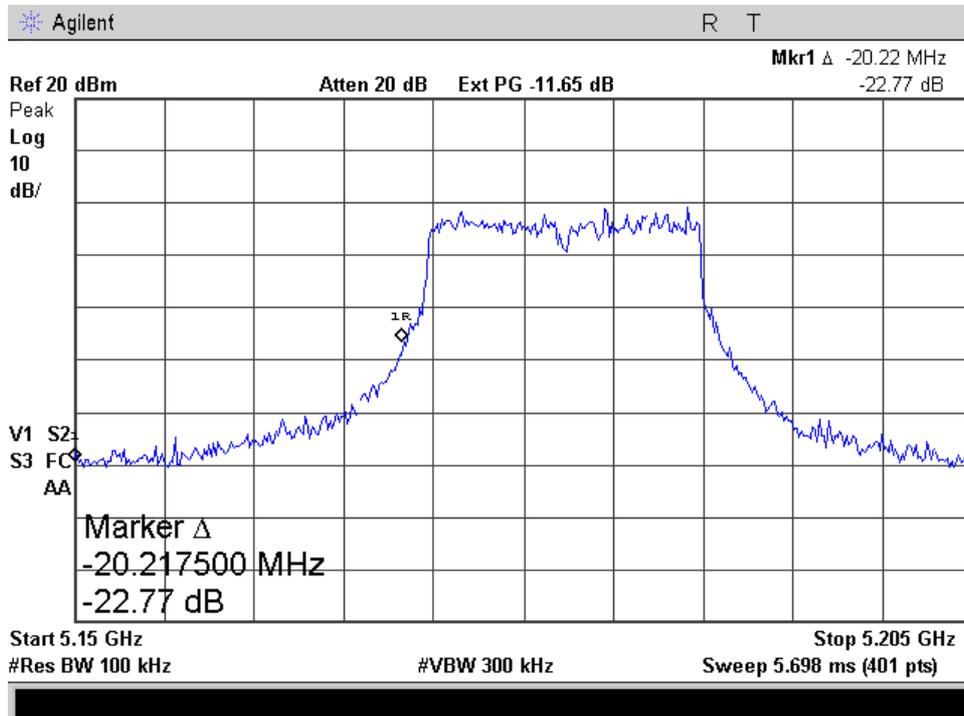


85% of Vnom
Plot 4.7.2

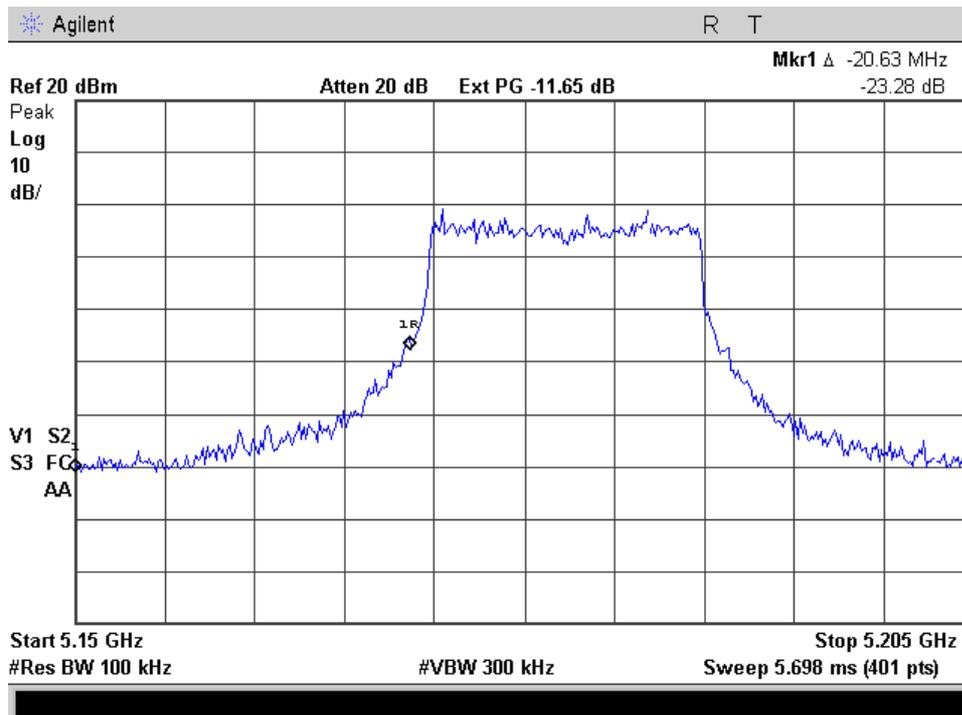


Carrier frequency 5320 MHz
115% of Vnom
Plot 4.7.3

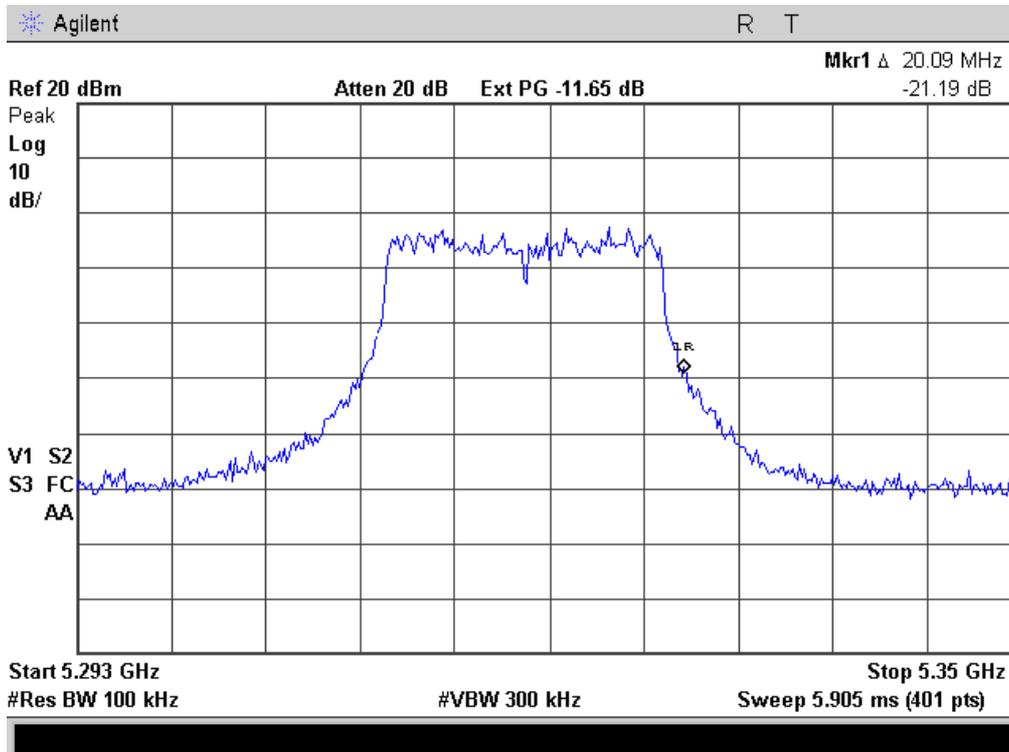


85% of Vnom
Plot 4.7.4

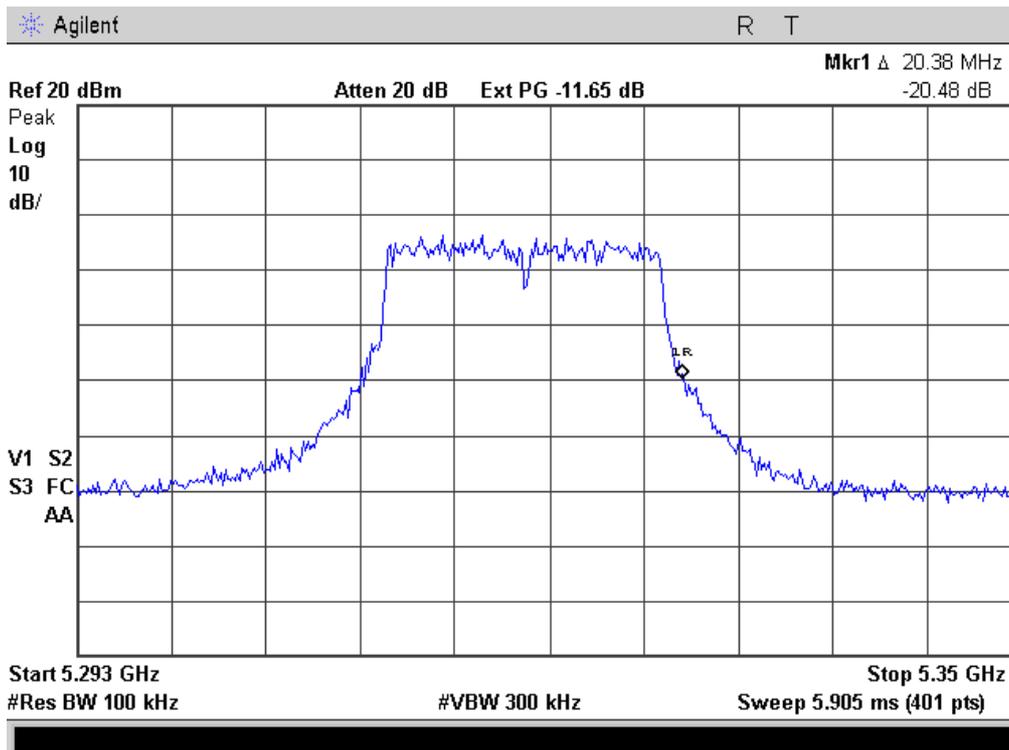


5470-5725 MHz
Carrier frequency 5500 MHz
115% of V mon
Plot 4.7.5

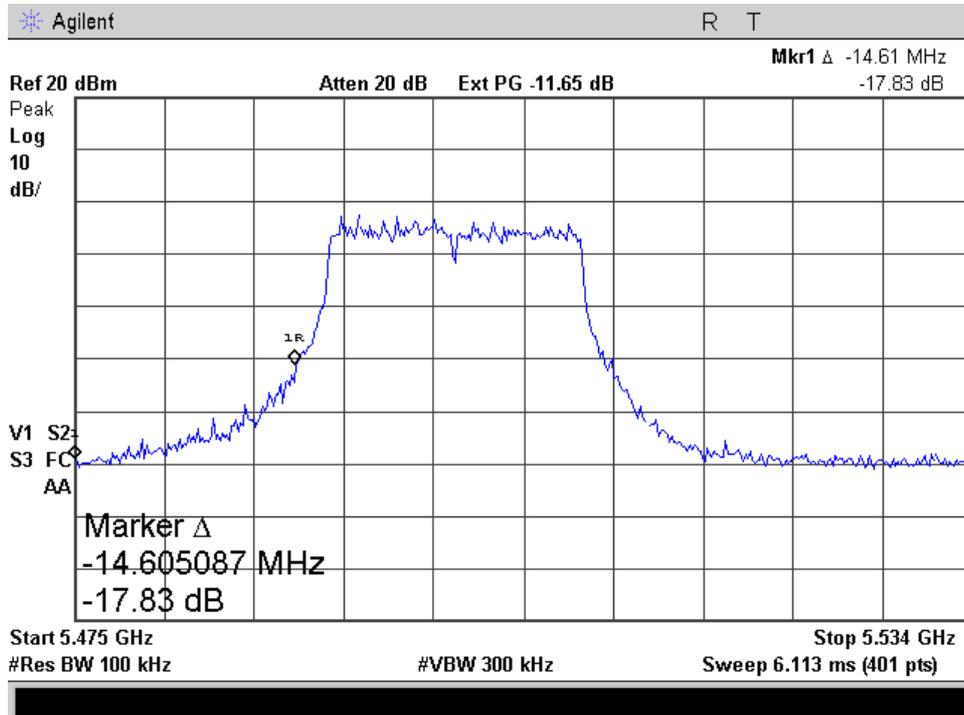


85% of V mon
Plot 4.7.6

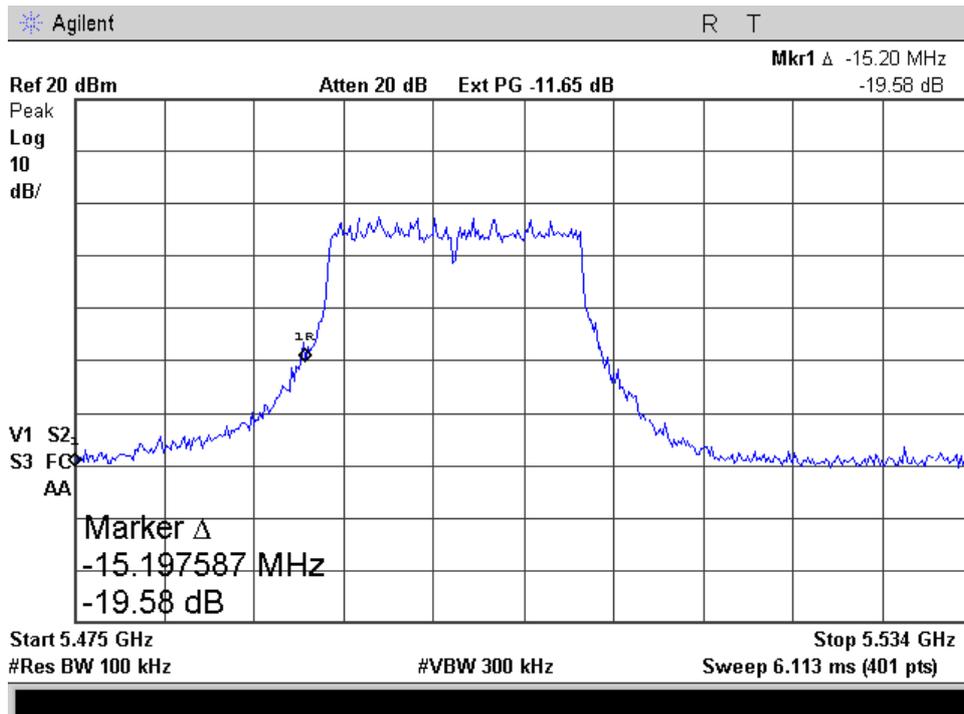


Carrier frequency 5700MHz
115 % of V nom
Plot 4.7.7

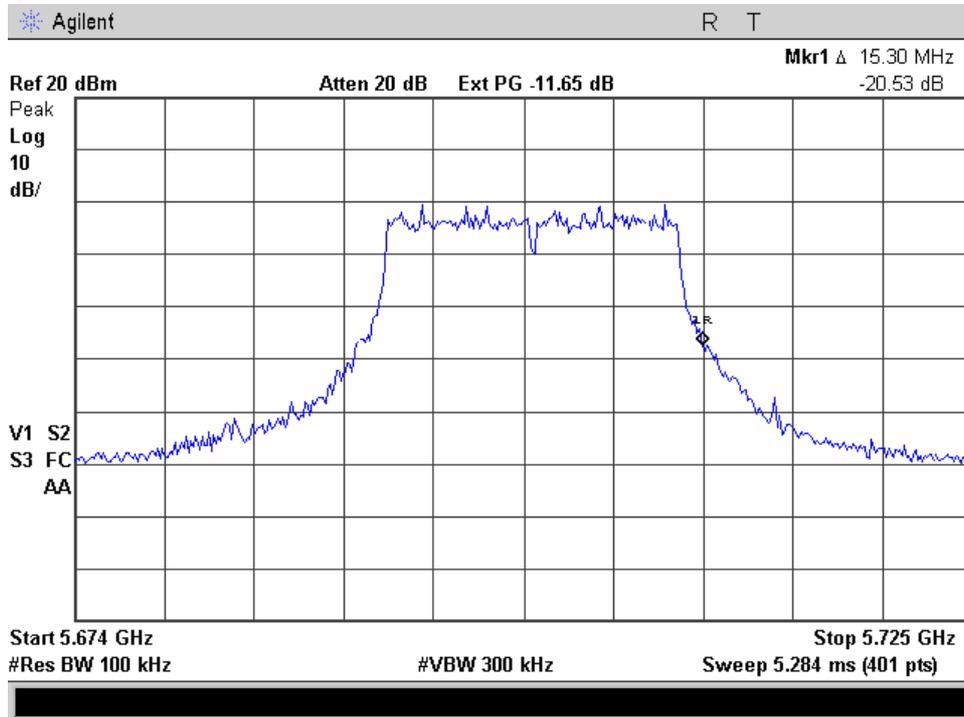


85 % of V nom
Plot 4.7.8

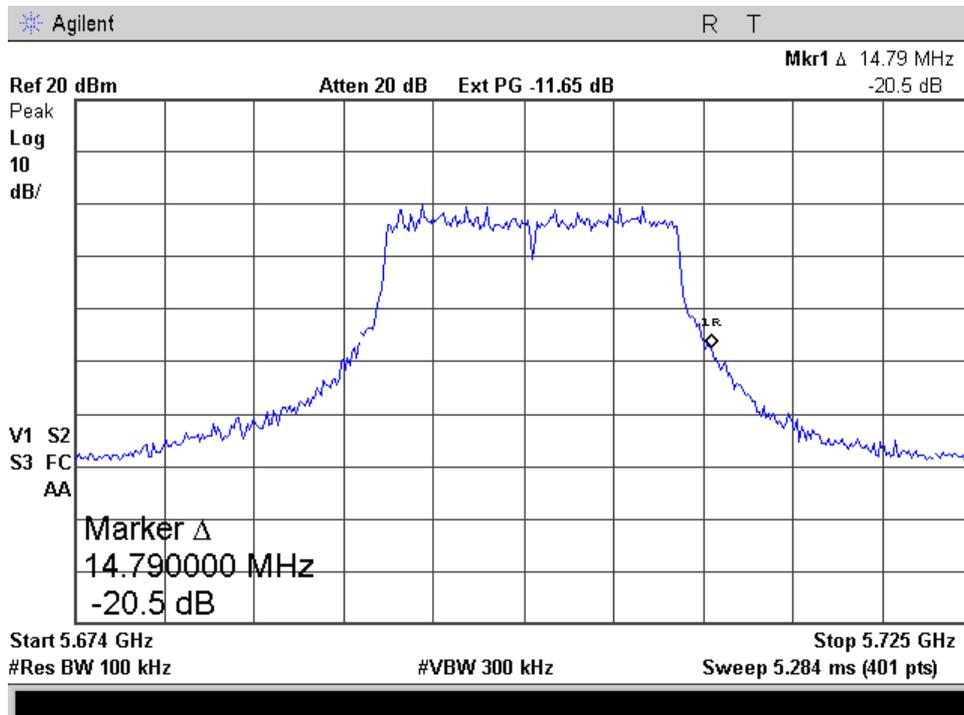


5725-5825 MHz
Carrier frequency 5745 MHz
115% of Vnom
Plot 4.7.9

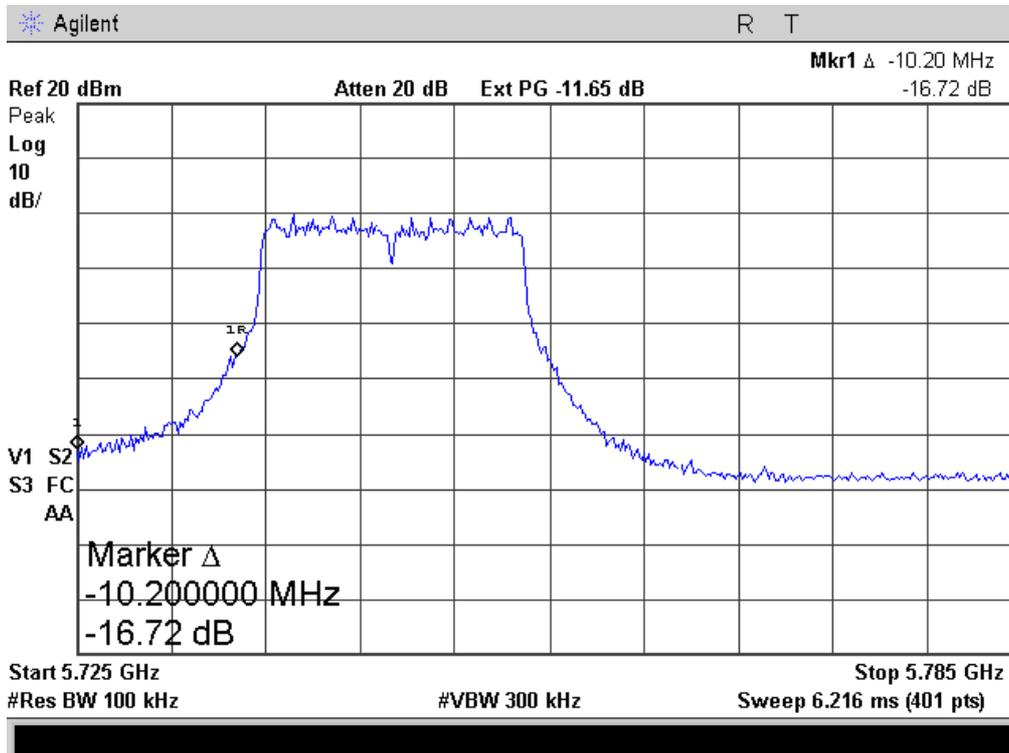


85% of Vnom
Plot 4.7.10

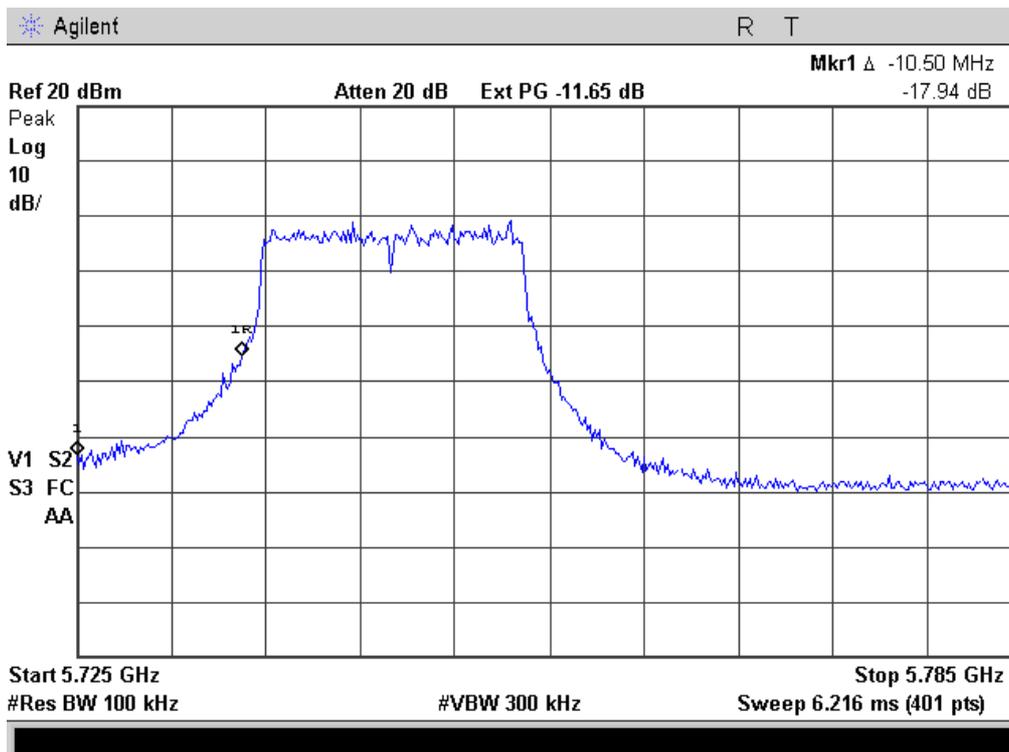


Carrier frequency 5805 MHz
115% of Vnom
Plot 4.7.11

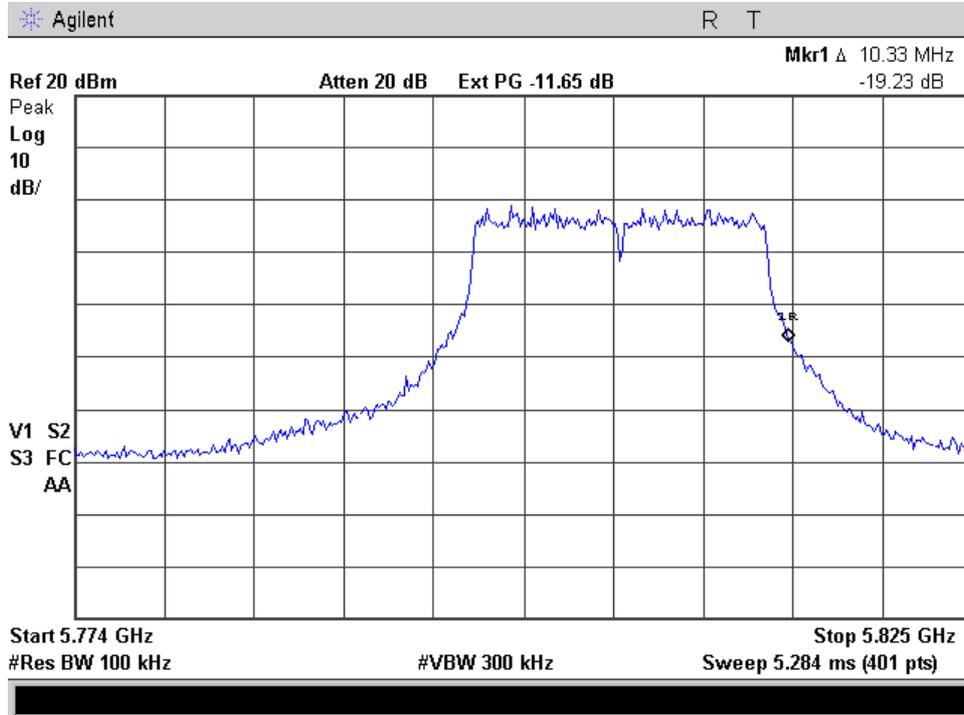


85% of Vnom
Plot 4.7.12

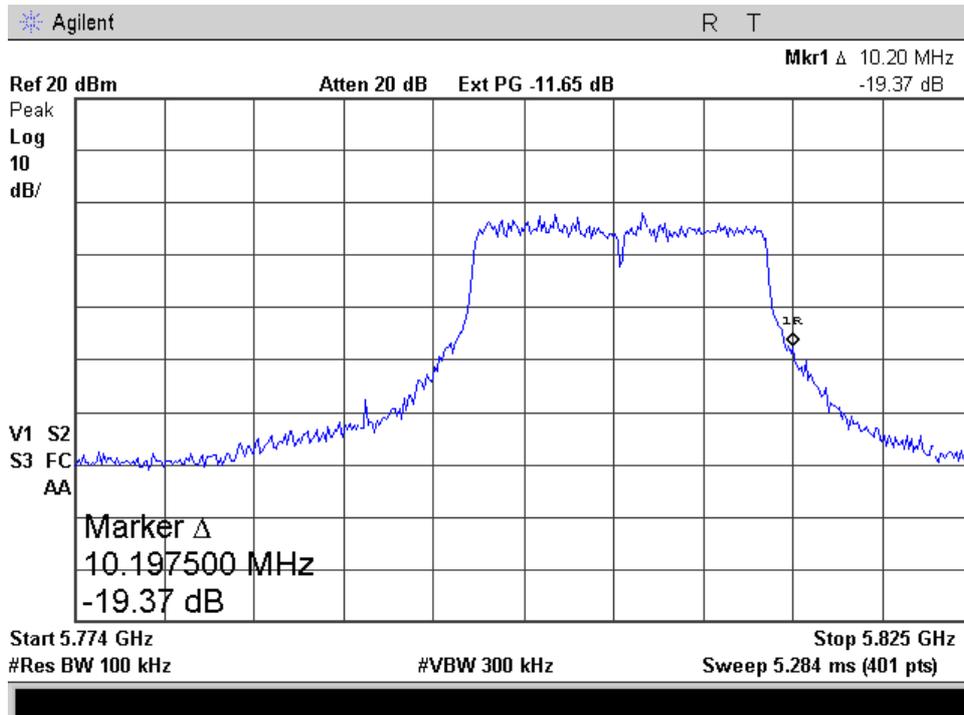


Temperature variation
5150-5350MHz Carrier frequency 5180 MHz
+ 50°C
Plot 4.7.13

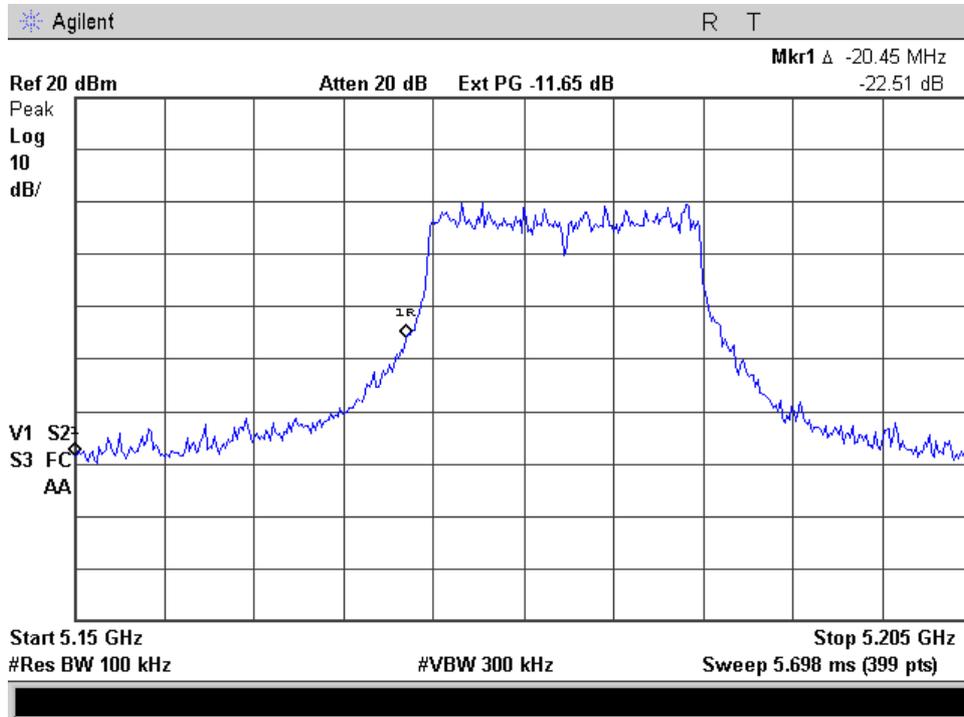


-30°C
Plot 4.7.14

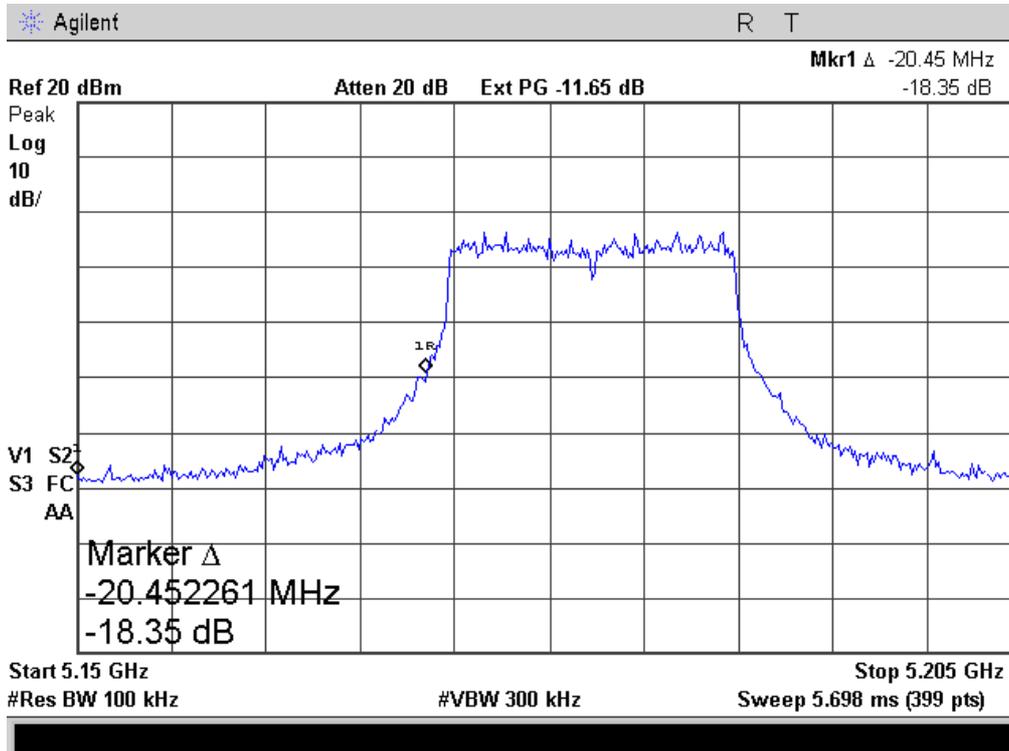


Carrier frequency 5320 MHz
+50°C
Plot 4.7.15

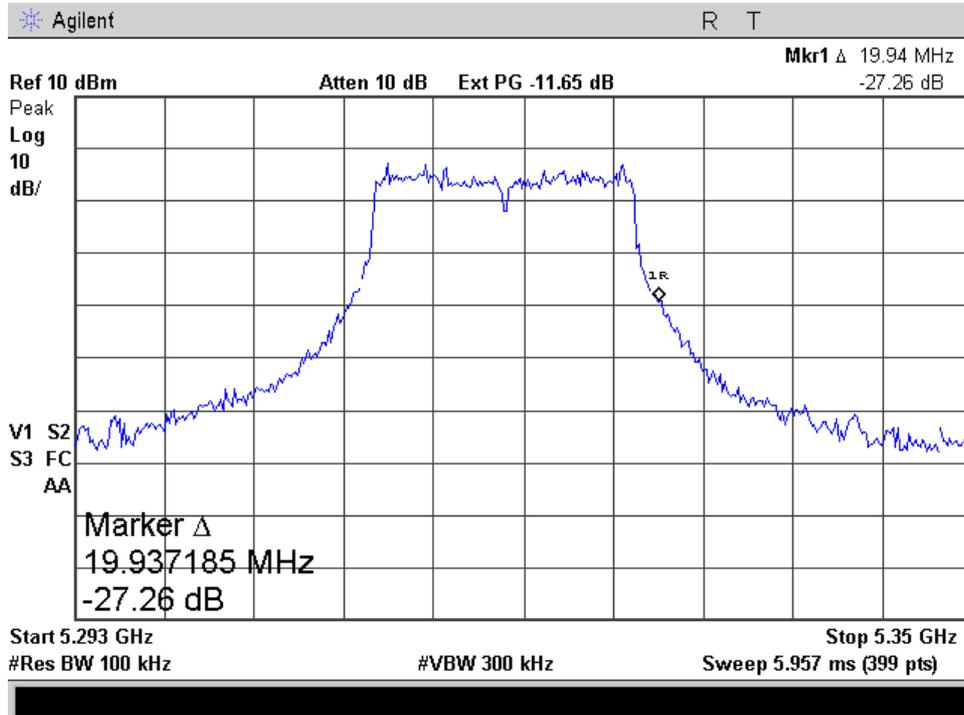


-30 °C
Plot 4.7.16

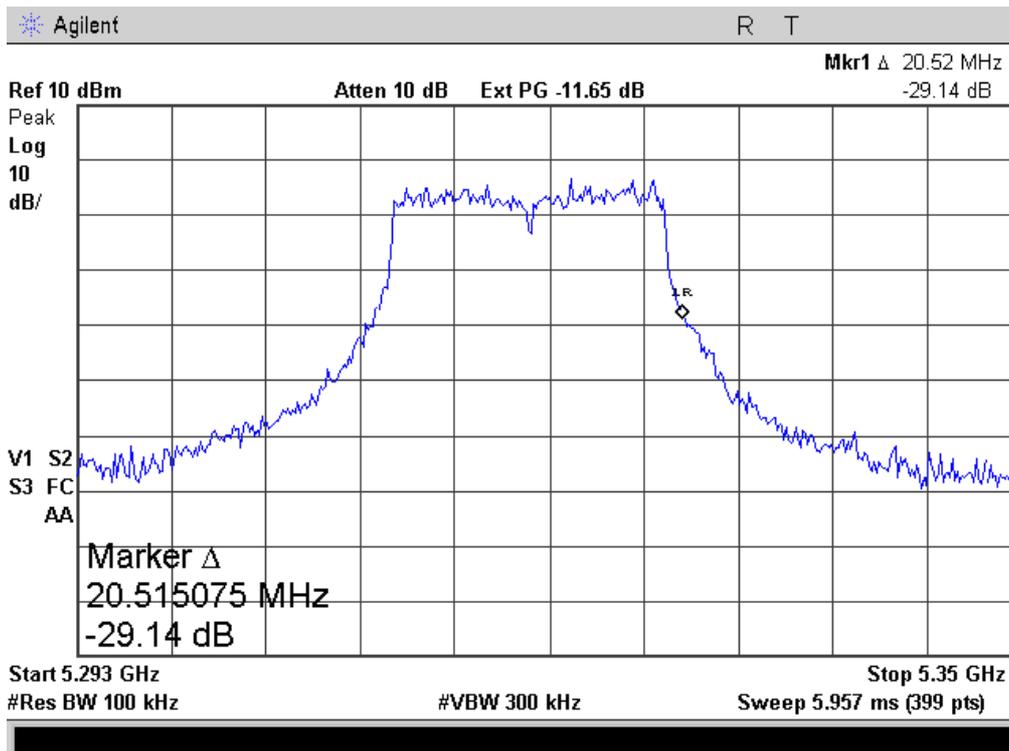


**5470-5725 MHz,
Carrier frequency 5500 MHz
+50°C
Plot 4.7.17**

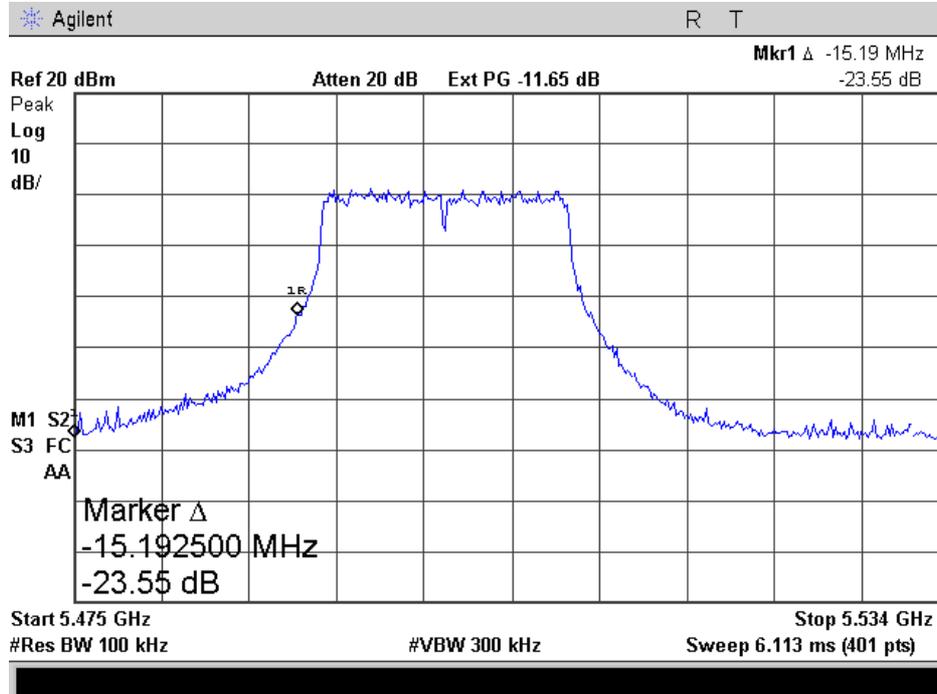


**-30°C
Plot 4.7.18**

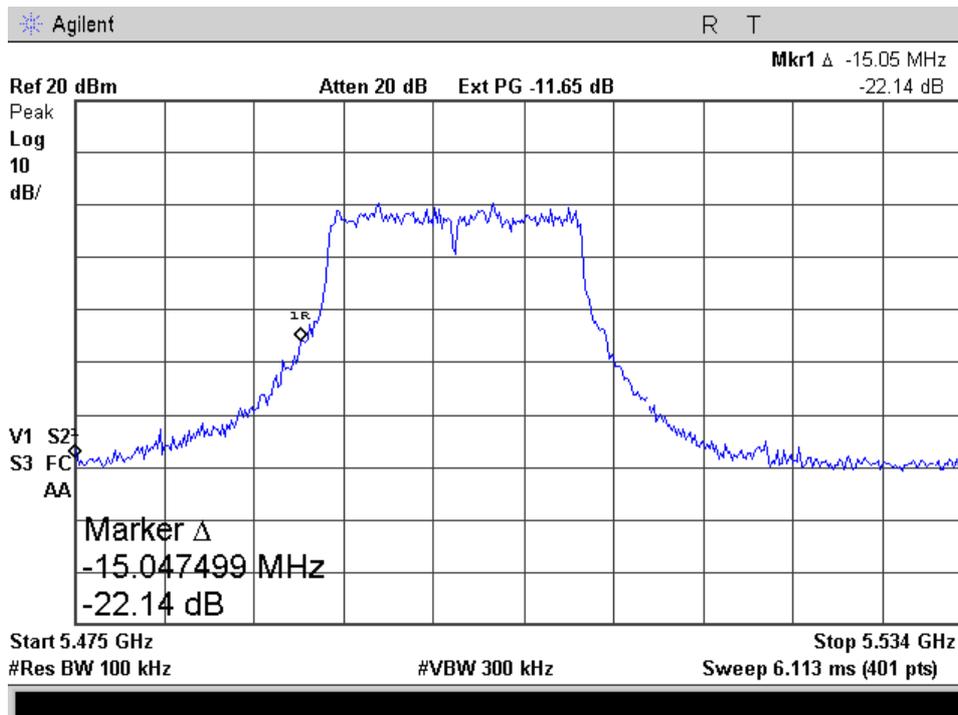


Carrier frequency 5700MHz
+50°C
Plot 4.7.19

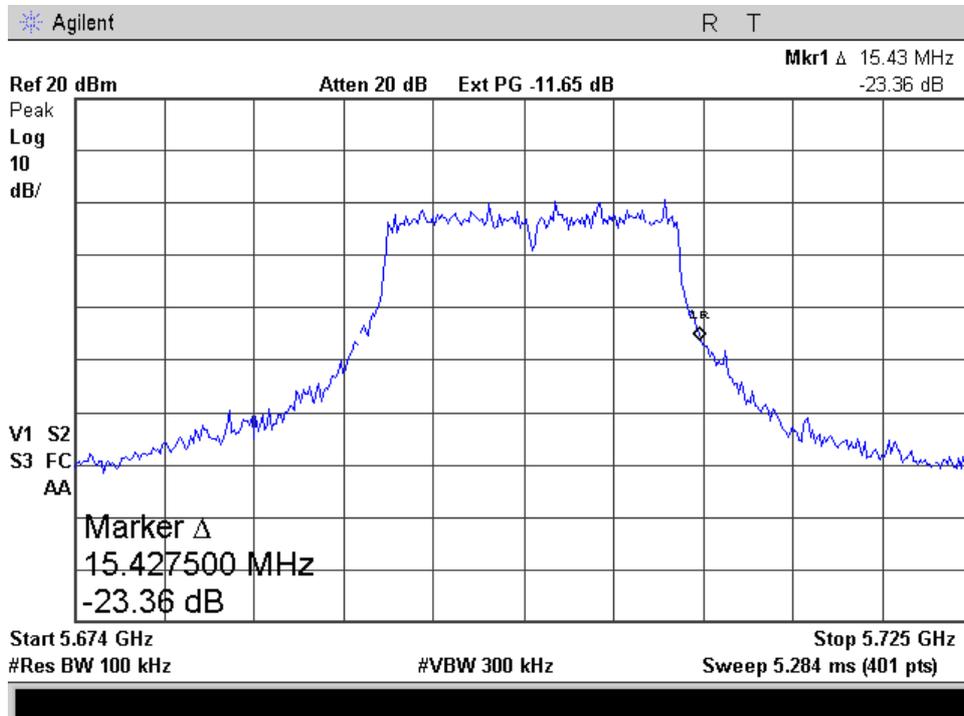


-30°C
Plot 4.7.20

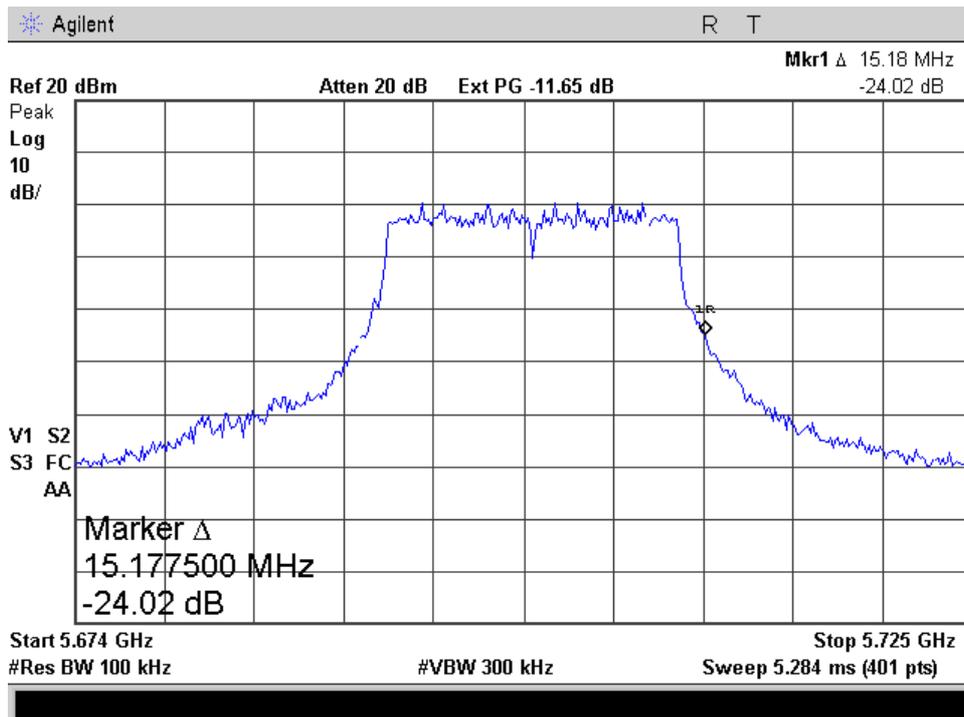


5725-5825 MHz
Carrier frequency 5745 MHz
+50°C
Plot 4.7.21

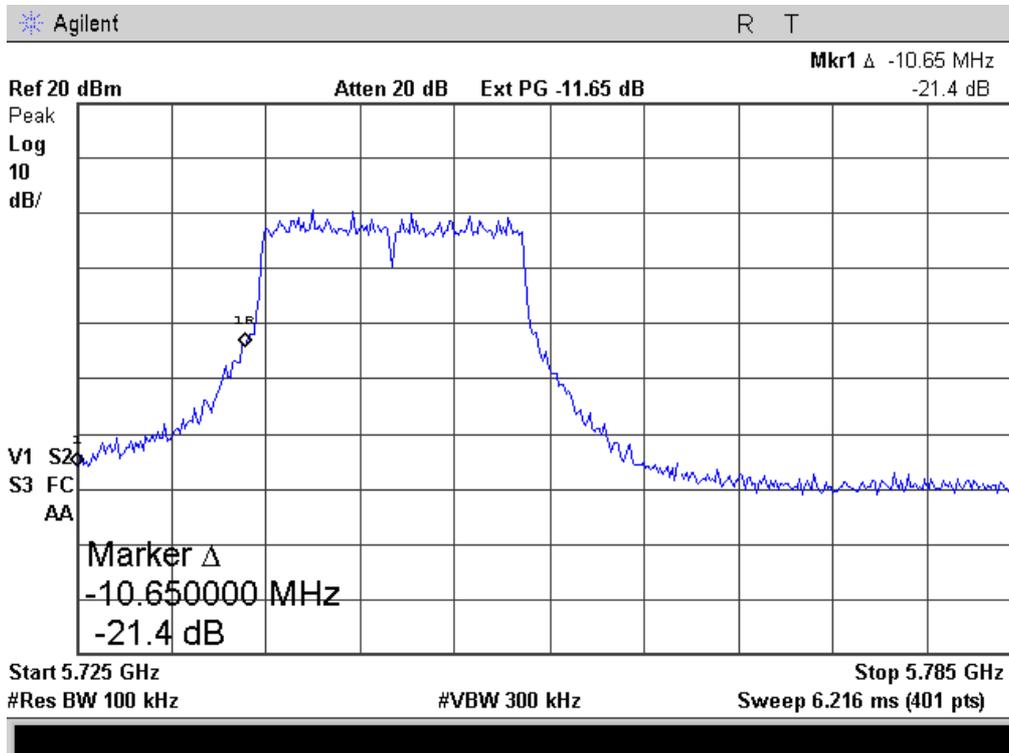


-30°C
Plot 4.7.22

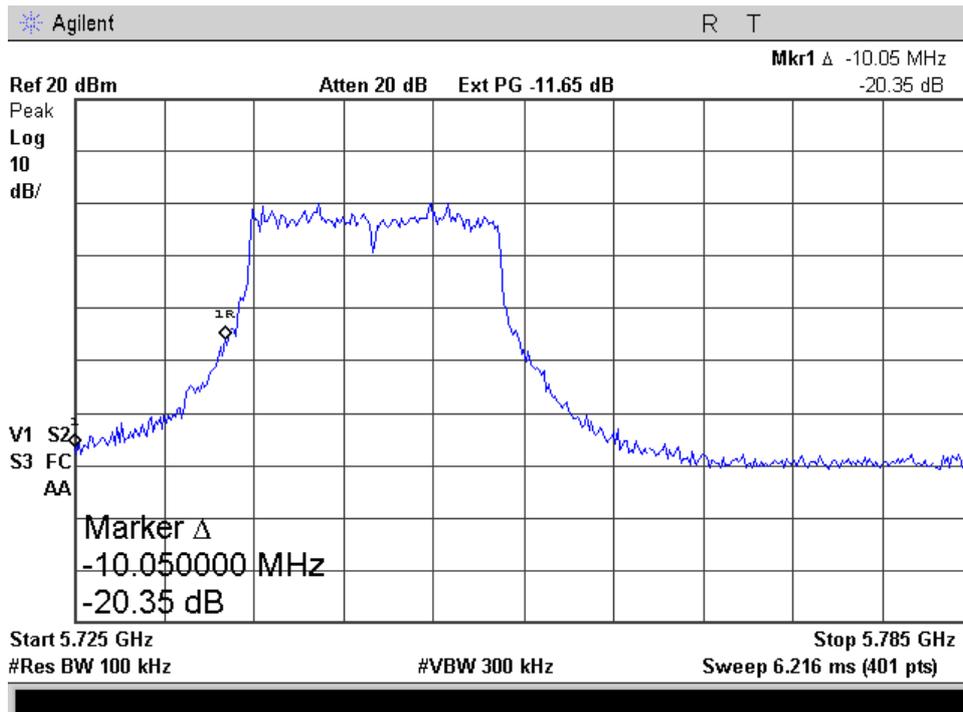

Carrier frequency 5805 MHz
+50°C
Plot 4.7.23

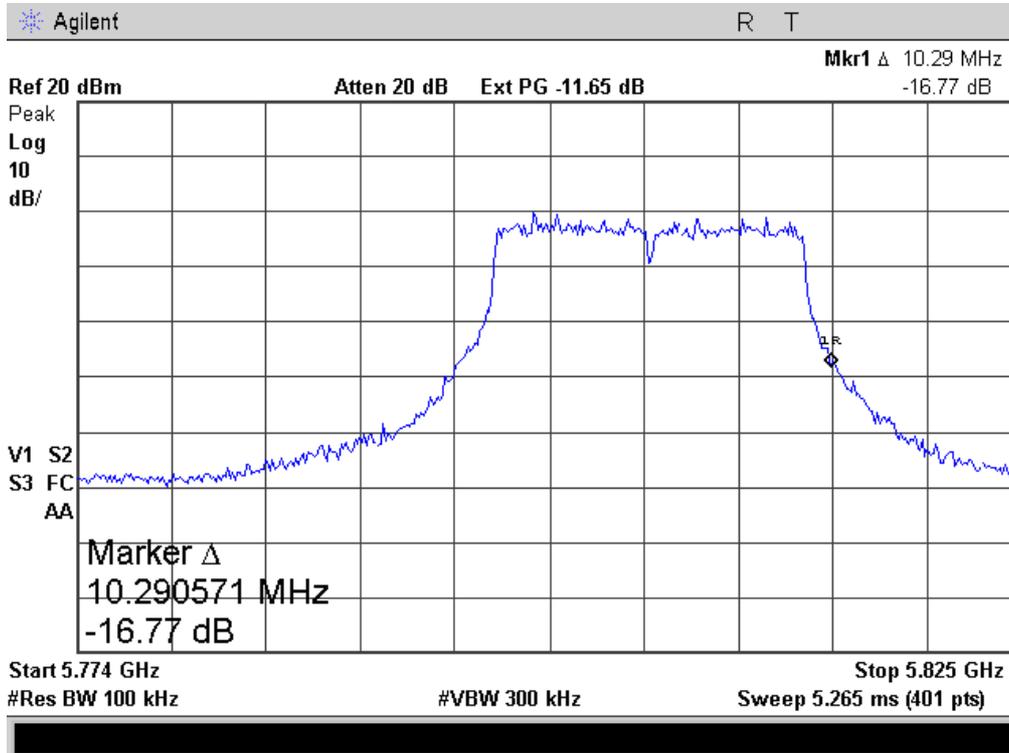

-30°C
Plot 4.7.24

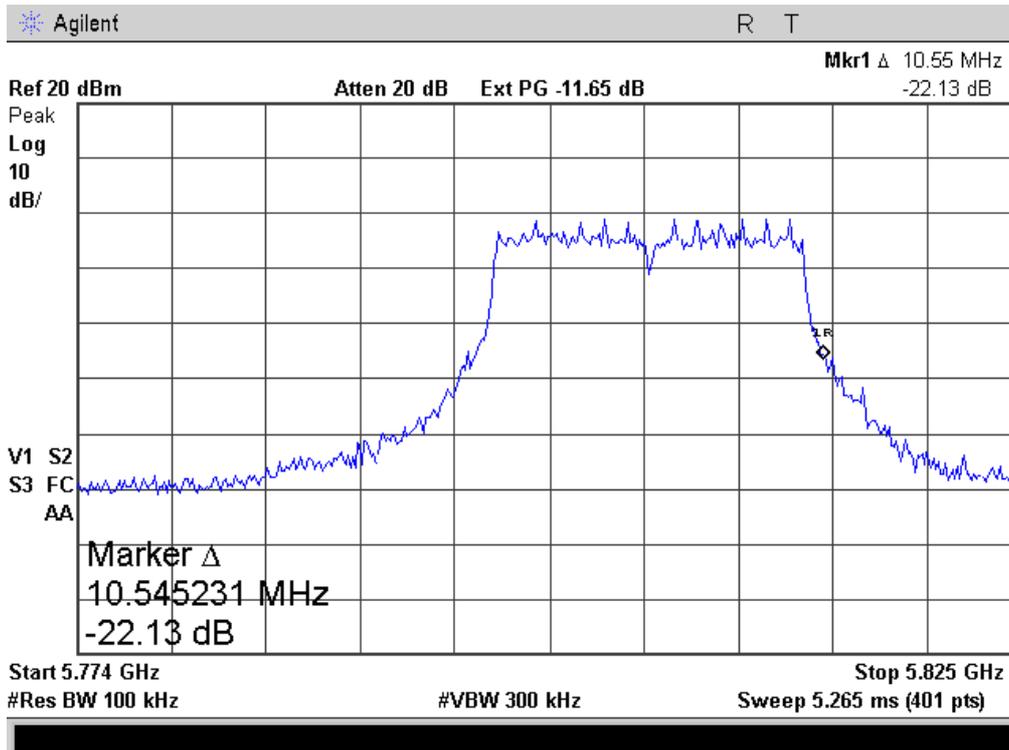

4.8. Antenna Connector Requirements

Reference document:	47 CFR §15.203	
Test Requirements:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with provisions of this section.	
Result:	The EWP3100 Semi Rugged VoWLAN Phone employs for WLAN a/b/g an Integral (on board) PIFA Dual Band.	Comply


4.9. Dynamic Frequency Selection (DFS)

Reference document:	47 CFR §15.407(h)(2)(i)(B) & §15.407(h)(2)(iii) and FCC 06-96		
Test Requirements:	<p>Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating in the 5.25-5.35GHz and 5.47-5.725 GHz bands. Operational Modes. The DFS requirement applies to the following: (B) The requirement for channel move time applies in both the master and slave operational modes. DFS Response Requirements: (iii) Channel Move Time. After the radar's presence is detected, all transmissions shall cease on the operating channel within 10 seconds. Transmissions during this period shall consist of normal traffic for a maximum of 200 ms after detection of the radar signal. In addition, intermittent management and control signals can be sent during the remaining time to facilitate vacating the operating channel.</p>		
Test setup:	See sec 2.5	Pass	
Method of testing:	Radiated		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 3 MHz, VBW:3 MHz, Span 0		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.9.1 to Plot 4.9.6	


Test Results:

Channel Frequency [MHz]	Type of plot	Measured Channel Closing Transmission Time	Limit Channel Closing Transmission Time	Measured Move Time	Limit Move Time	Reference plots	Result
5320	Calibration of Radar Burst Level	-	-	-	-	4.9.1	Comply
5260	Transmission of the EUT on the operating channel at the end of the radar burst during the Channel Move Time	<160ms + aggregated 46ms	200ms + aggregated 60ms	1.2s	10s	4.9.2	
5300						4.9.3	
5280						4.9.4	
5260				30 Minute Non - Occupancy – Associated test	The client device did not transmit on this channel once the channel was cleared.		
5250 - 5725	30 Minute Non - Occupancy – Non - Associated test	The client device did not employ active scanning and did not transmit without being associated with the master device.			4.9.6		


Radar Burst Level
Plot 4.9.1

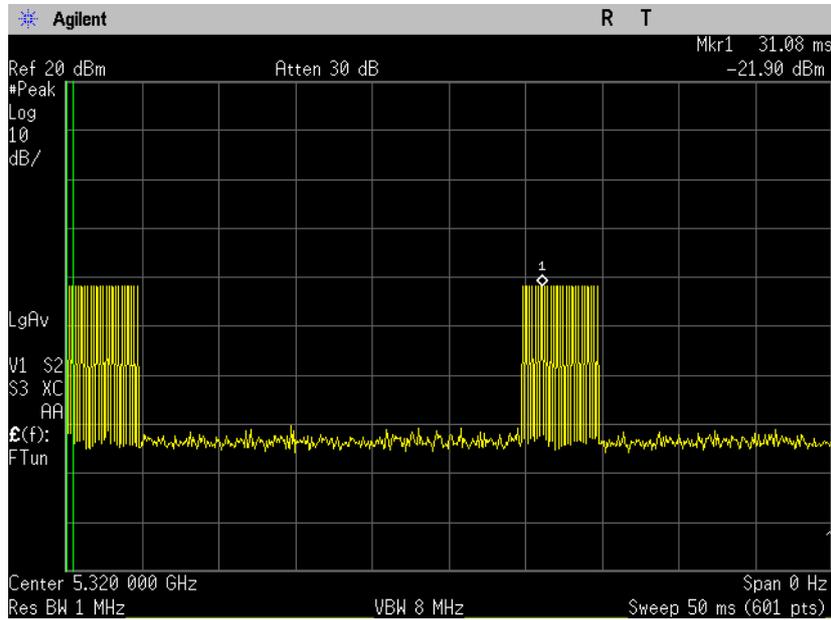


Channel Move Time
Plot 4.9.2

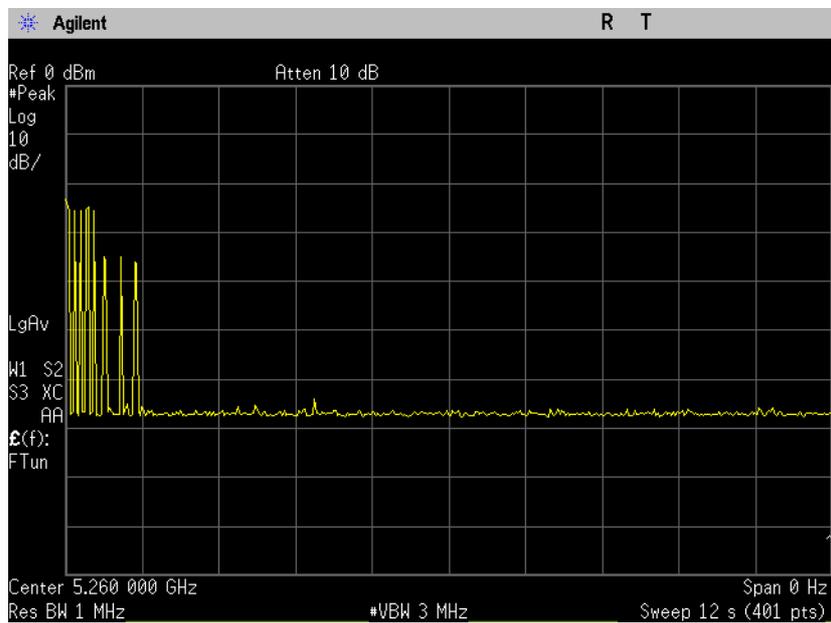


Channel Closing Transmission Time (Sweep 1s)
Plot 4.9.3

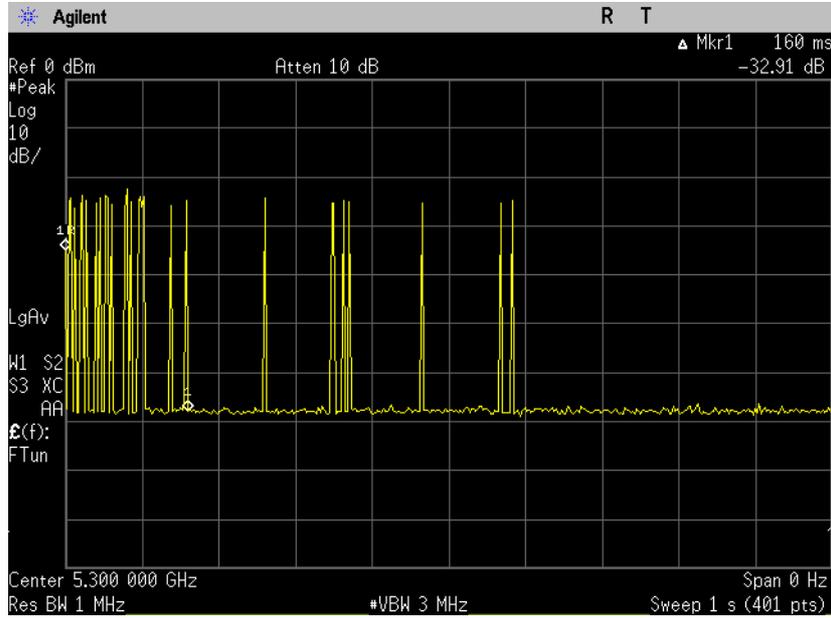


Channel Closing Transmission Time (Sweep 250ms)
Plot 4.9.4

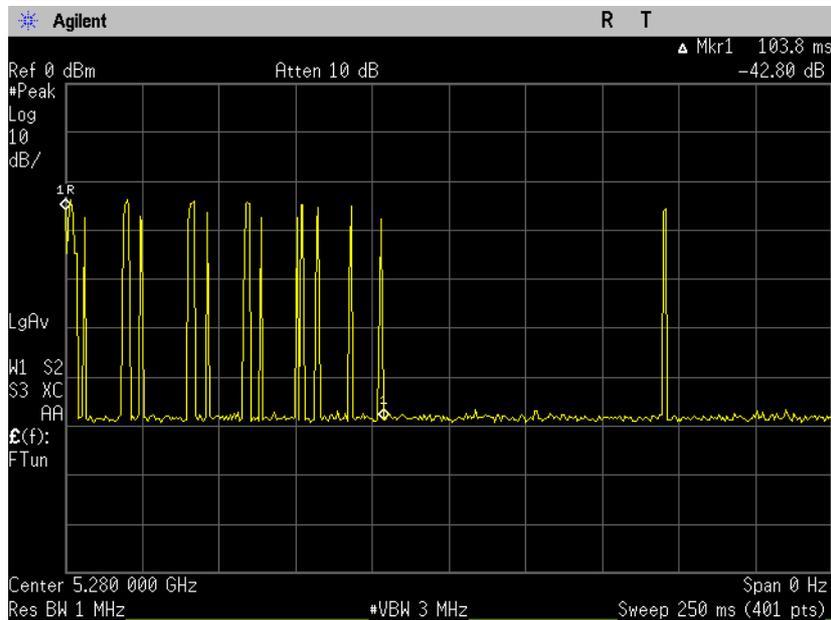

30 Minutes Non-Occupancy, Associated test
Plot 4.9.5

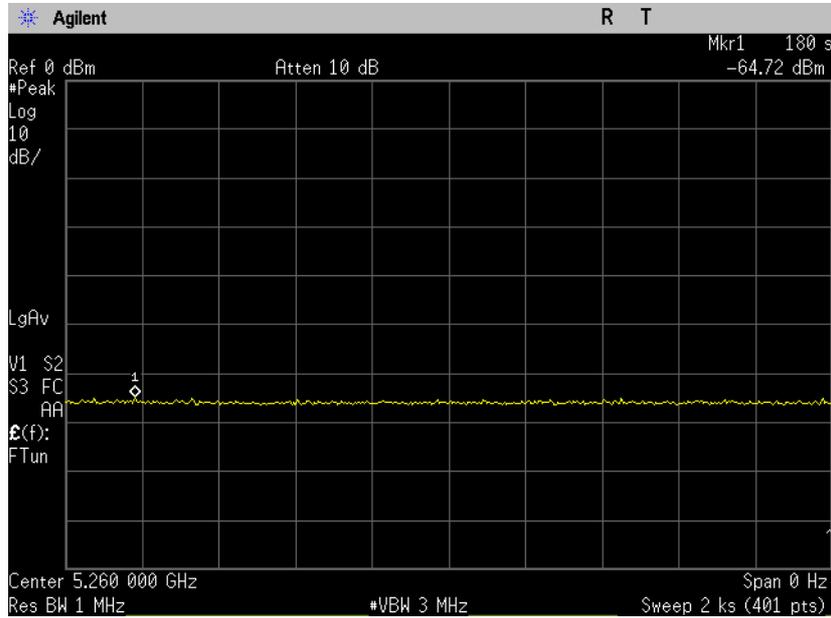

30 Minutes Non-Occupancy, Non-Associated test
Plot 4.9.6

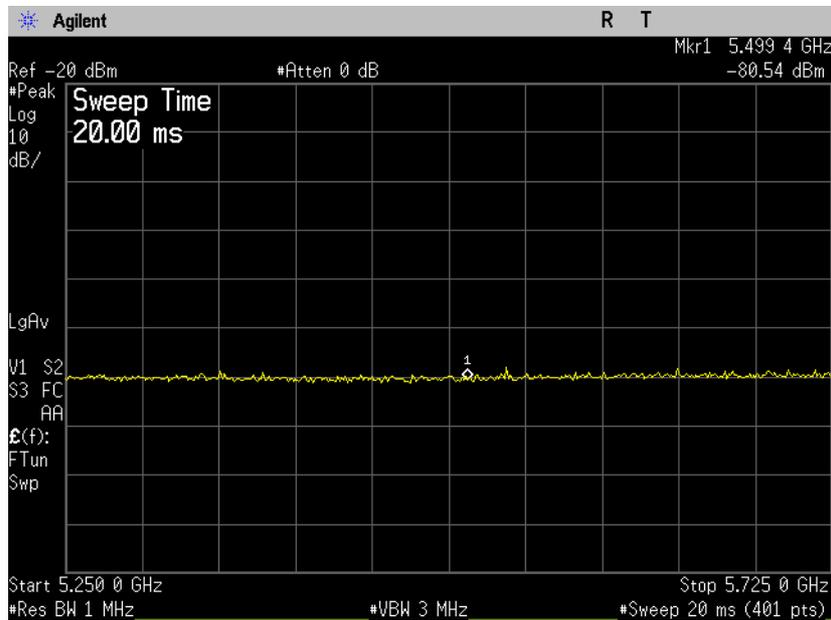

4.10. Power Line Emissions measurements

Reference document:	47 CFR §15.107/207		
Test Requirements:	The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in §15.107. The emissions from an intentional radiator shall not exceed the field strength levels specified in §15.207. Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Sec.15.207.		
Test setup:	See Sec. 2.6	Pass	
Operating conditions:	Under normal test conditions		
Method of testing:	Conducted Emissions		
S.A. Settings:	f <30MHz: RBW: 9kHz, VBW:30kHz		
Radio device:	Idle		
Environment conditions:	Ambient Temperature: 21°C	Relative Humidity: 54%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.10.1 - Plot 4.10.4	

Test Results:

Worst case results of unintentional emissions and emissions while transmitters operating alternately, measured at the charger 110VAC port.

“Phase” Lead

Frequency [MHz]	Measured Result [dBµV]		Class B Limits [dBµV]		Margin [dB]		Pass/Fail
	QP	AVR	QP	AVR	QP	AVR	
0.15	40.3	30.5	66.00	56.00	-25.70	-25.50	Pass
0.220448	35.3	26.6	62.80	52.80	-27.50	-26.20	Pass
0.284895	36.3	24.4	60.67	50.67	-24.37	-26.27	Pass
0.366658	39.9	30.5	58.58	48.58	-18.68	-18.08	Pass
0.584853	37.6	25.9	56.00	46.00	-18.40	-20.10	Pass
1.168865	39.2	23.2	56.00	46.00	-16.80	-22.80	Pass

“Neutral” Lead

Frequency [MHz]	Measured Result [dBµV]		Class B Limits [dBµV]		Margin [dB]		Pass/Fail
	QP	AVR	QP	AVR	QP	AVR	
0.15	40.6	31.2	66.00	56.00	-25.40	-24.80	Pass
0.376575	39.3	29.2	58.35	48.35	-19.05	-19.15	Pass
0.45948	36.1	21.2	56.70	46.70	-20.60	-25.50	Pass
0.600415	35	24	56.00	46.00	-21.00	-22.00	Pass
1.58375	35.5	20.4	56.00	46.00	-20.50	-25.60	Pass
2.119013	31.4	15.3	56.00	46.00	-24.60	-30.70	Pass

Measured at the PC 110VAC port

“Phase” Lead


Frequency [MHz]	Measured Result [dBμV]		Class B Limits [dBμV]		Margin [dB]		Pass/Fail
	QP	AVR	QP	AVR	QP	AVR	
0.17289	44.6	30.8	64.82	54.82	-20.22	-24.02	Pass
0.24235	38.1	26.3	62.02	52.02	-23.92	-25.72	Pass
0.329115	41	36.2	59.47	49.47	-18.47	-13.27	Pass
0.66912	36.2	30.6	56.00	46.00	-19.80	-15.40	Pass
9.168983	36	29.9	60.00	50.00	-24.00	-20.10	Pass
15.425173	37.8	31.8	60.00	50.00	-22.20	-18.20	Pass

“Neutral” Lead


Frequency [MHz]	Measured Result [dBμV]		Class B Limits [dBμV]		Margin [dB]		Pass/Fail
	QP	AVR	QP	AVR	QP	AVR	
0.20593	46.4	29.6	63.37	53.37	-16.97	-23.77	Pass
0.274975	46.3	28.1	60.97	50.97	-14.67	-22.87	Pass
0.331725	46.3	37.6	59.41	49.41	-13.11	-11.81	Pass
0.486295	41	26.6	56.23	46.23	-15.23	-19.63	Pass
0.66001	37.7	29.3	56.00	46.00	-18.30	-16.70	Pass
0.755735	38.6	25.5	56.00	46.00	-17.40	-20.50	Pass

Measured at the charger 110VAC port

Phase Lead
Plot 4.10.1

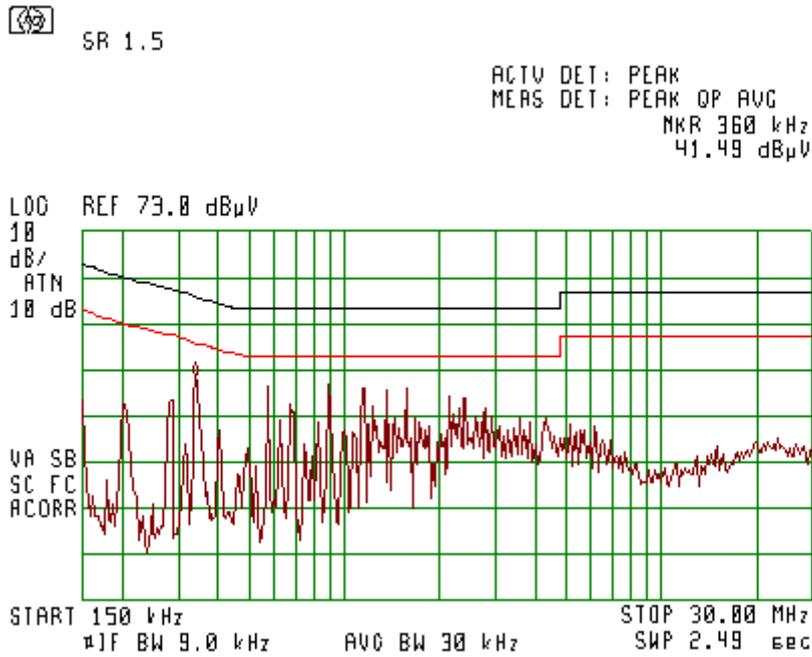


Neutral Lead
Plot 4.10.2

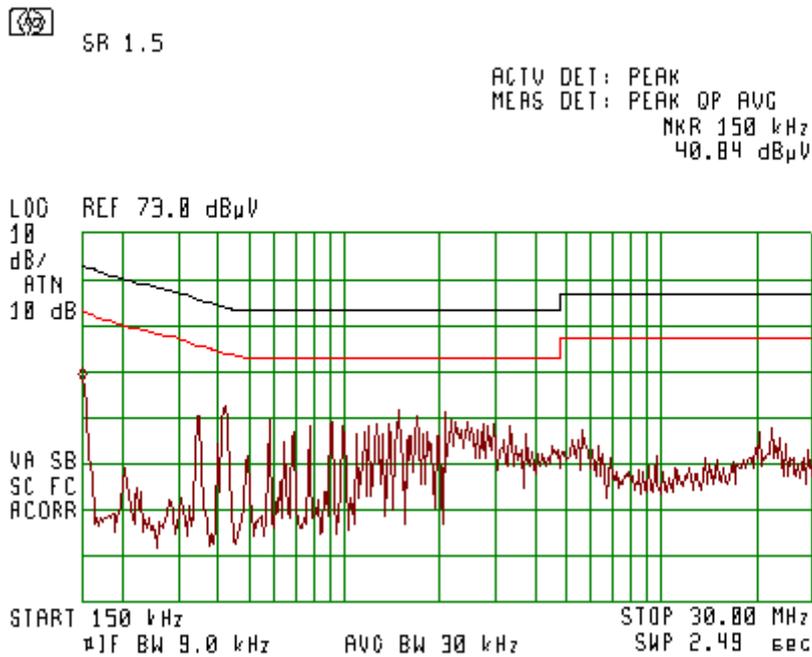


Measured at the PC 110VAC port

**Phase Lead
Plot 4.10.3**

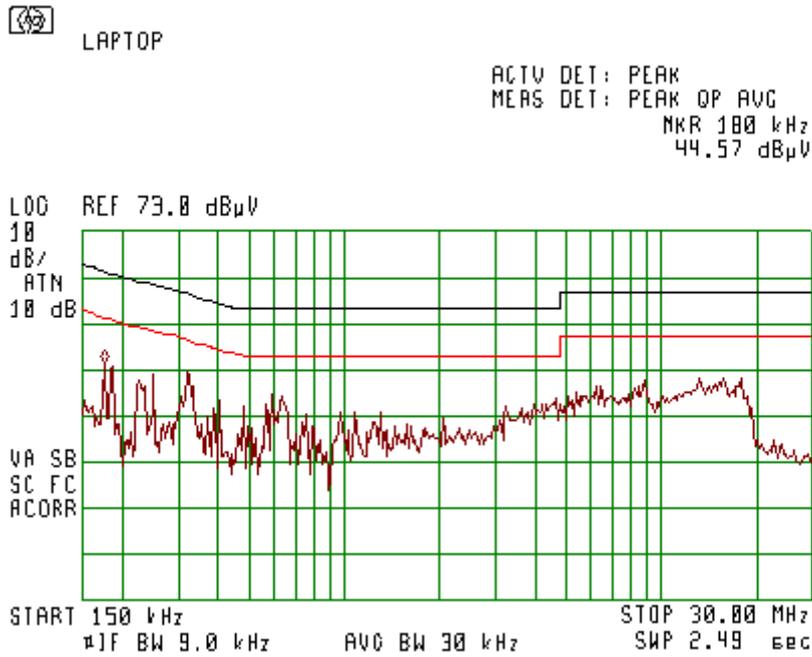

**Neutral Lead
Plot 4.10.4**

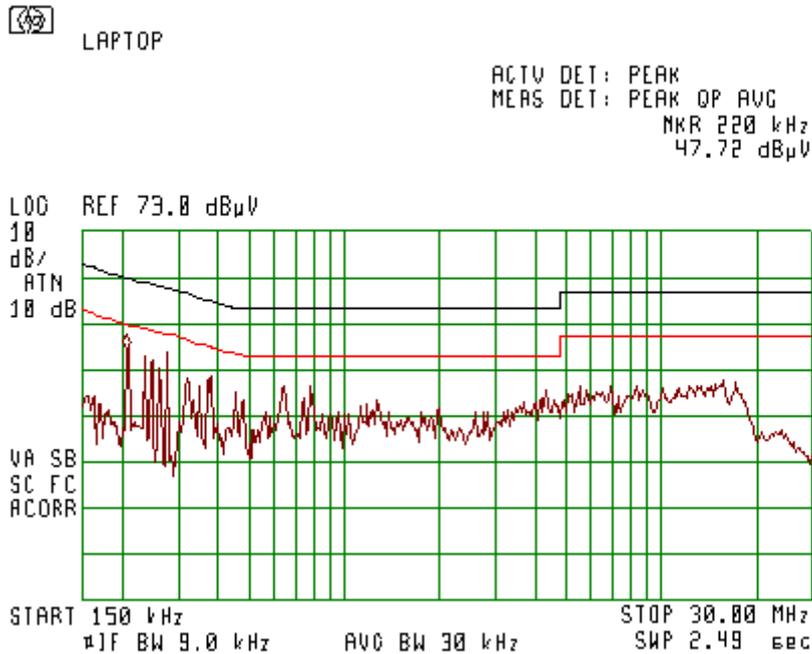

5. Appendix

Appendix A: List of Measuring Equipment used:

Equipment	Manufacturer/ Model	Serial Number	Due date
CISPR16 EMI Receiver	HP8546A	3710A00392	30-06-10
Spectrum Analyzer 9kHz ÷ 22 GHz	HP 8593EM	3536A00131	30-06-10
Spectrum Analyzer 100 Hz ÷ 26.5 GHz	Agilent E7405A	US41160436	30-06-10
LNA Amplifier 1 GHz ÷ 18 GHz	AMP – 5D-010180-30-10P-GW	618653	30-06-10
Power meter	Agilent N1911A	MY45100784	23-02-10
Dual Ridged Guide Ant. 1-18 GHz	EMCO 3115	9602-4677	30-06-10
Antenna 18 GHz ÷ 26.5 GHz	Alpha Industry 861A/599	505	30-06-10
Turn table	HD100	100/693	-
Antenna Mast	HD 100	100/693	-
Biconical 20 –200 MHz	Schwarzbeck VHBB9124	9124/0255	16-05-10
Log-Periodic 200 – 1000 MHz	Schwarzbeck VUSLP9111	VUSLP9111184	16-05-10
Pre-Amplifier	MiTeq, AMF-5F-18002650-30-10P	945372	30-06-10
LISN	Fischer 50/250-25-2	-	30-06-10
Transient Limiter	HP11947A	-	30-06-10
Notch Filter	Micro-Tronics BRM50702-05	0001	30-06-10
Function Generator	HP-33250A	MY40000116	30-06-10
Signal Generator	HP 83732B	US37101834	30-06-10
Dual Ridged Guide Ant. 1-18 GHz	EMCO 3115	6487	30-06-10
Access Point	Cisco AIR-AP1131AG-A-K9	FTX1129T22R	FCC ID: LDK102054E
Radar Signal Generator	E4438C ARB-DFS_TYPE_2	SN-70660	28-02-10

Appendix B: Accreditation Certificate



The American Association for Laboratory Accreditation
World Class Accreditation

Accredited Laboratory
A2LA has accredited
QUALITECH (ECI TELECOM)
Petach-Tikva, Israel
for technical competence in the field of
Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 27th day of May 2009.



Peter Maye
President & CEO
For the Accreditation Council
Certificate Number 1633.01
Valid to September 30, 2010

For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

End of the Test Report