



# Electromagnetic Compatibility Test Report

**Test Report No: MOT 191011-1**  
**Issued on: June 06, 2012 Rev.4**

**Product Name**  
**EWP3200 Semi Rugged VoWLAN Phone**

**Tested According to**  
**FCC 47 CFR, Part 15, Subparts E**  
**IC RSS-210, Issue 8**

**Tests Performed for**  
**Motorola Solutions, Inc.**  
One Motorola Plaza, Holtsville, N.Y 11742, USA

***QualiTech EMC Laboratory, ECI Telecom***

30 Hasivim Street,  
Petah-Tikva, 49517, Israel  
Tel: +972-3-926 8443  
Fax: +972-3-928 7490



ELECTRICAL TESTING  
CERT #1633.01

*The information contained herein is the property of QualiTech, EMC Lab and is supplied without liability for errors or omissions.*

*The copyright for this document vests in QualiTech, EMC Lab.  
All rights reserved.*

*This Test Report may not be reproduced, by any method, without the written permission of the QualiTech, EMC Lab.*

*If and when such permission is granted, the report must be reproduced only in the full format.*


## Test Personnel



**Tests Performed By:** -----

Michael Shtier      Sergey Kapustin

**Report Prepared By:** -----



Bina Talkar

**Report Reviewed By:** -----



**Rami Nataf**  
**Compliance Engineer & Operation Manager**  
**QualiTech EMC Laboratory**

**Report approved By:** -----



**Maurice Dadoun**  
**EMC Lab. Manager**  
**QualiTech EMC Laboratory**

## Test Report details:

Test commencement date: 08.09.2011  
 Test completion date: 03.10.2011  
 Customer's representative: Eli Basri  
 Issued on: 30.05.2012

Version	Date	Details/Reasons	Page no
Rev. 1	19.10.2011	-	-
Rev. 2	08.05.2012	Comment 1: Reference to 5.8 GHz band was removed	7
		Comment 1: Reference to 5.8 GHz band was removed	8
		Comment 1: Reference to 5.8 GHz band was removed	8
		Comment 13: Method of testing was revised	9
		Comment 14: The PSD procedure revised	9
		Comment 11: Test Method of bandedge measurement was corrected	9
		Comment 7: Test procedure of Radiated Emissions Measurements in the restricted bands was corrected	9
		Comment 6: Test procedure of Radiated Emission measurements was corrected	9
		Comment 8: Worst Case Result definition was corrected	10
		Comment 9: Test procedure of Power Line Emission measurements was corrected	11
		Comment 13: Method of testing was revised	14
		Comment 13: Method of testing was revised	25
		Comment 13: Method of testing was revised	27
		Comment 13: Method of testing was revised	38
		Comment 13: Method of testing was revised	49
		Comment 13: Method of testing was revised	79
		Comment 12: the emission level measured was change 20 dB	79
Comment 17: The test result presentation was changed	156		
Comment 17: A note "& on time (inside the makers)" was added to the Header of Plot 4.9.2	157		

Version	Date	Details/Reasons	Page no
Rev. 3	30.05.2012	Comment 2: In Sec.4.5 Band edge locations indicated on the plots 4.5.45 – 4.5.56	73-78
		Comment 3: Retested at 5560 MHz and test results/plots were replaced in sec.4.1 - 4.6	16-120
		Comment 4: Section 2.1 updated	9
		Comment 5: Section 2.1 updated	9
		Comment 6: In Section 4.2 “Measured Peak Power” was replaced with “Measured Average Power”	25/26
		Comment 7: In sec.4.3, a note “ On plots figure 601 pts, span is 50 MHz and resolution band 1MHz, so $2 \times 50 / 1 = 100$ and $601 > 100$ ” was added	29
		Comment 8: Note added to Sec.4.5	49
		Comment 9: Test results Table was resized.	156
		Comment 17: Test results sentence corrected in Sec.4.10	159
Rev .4	10.06.12	Maximum Conducted Output Power for 5470-5725 MHz updated	7
	10.06.12	Comment 2:Retesting was performed in order to clarify the location of bandedge	74-79
	10.06.12	Comment 3: the list of measuring equipment used was revised according to the last calibration data	167
	10.06.12	Comment 4: Retesting for channel move time and closing & additional testing for channel move time for band III	158
	10.06.12	Comment 7 ( former 17) :the statement was removed	11

### Assessment information:

This report contains an assessment of the EUT against Electromagnetic Compatibility based upon tests carried out on the samples submitted. The results contained in this report relate only to the items tested. Manufactured products will not necessarily give identical results due to production and measurement tolerances. QualiTech, EMC Lab does not assume responsibility for any conclusion and generalization drawn from the test results with regards to other specimens or samples of type of the equipment represented by test item.

The EUT was set up and exercised using the configuration, modes of operation and arrangements defined in this report only.

### Modifications:

#### Modifications made to the EUT

None

#### Modifications made to the Test Standard

None

## Summary of Compliance Status

### WLAN 802.11a/n

Test Spec. Clause	Test Case	Remarks
47 CFR §15.403(h)(i) & RSS-210 A9.2(1)	Emission Bandwidth (26dB BW)	Comply
47 CFR §15.407 (a) (1), (2), (3) & RSS-210A9.2(1)	Maximum Conducted Output Power	Comply
47 CFR §15.407 (a) (1), (2), (3), (5) & RSS-210A9.2(1)	Peak Power Spectral Density	Comply
47 CFR §15.407 (a) (6)	Peak Excursion	Comply
47 CFR §15.407 (b) (1),(2),(3),(4) & §15.407 (b)(6) & RSS-210A3.3(1)	Conducted Spurious Emissions	Comply
47 CFR §15.407 (b) (7) & RSS-210A3.3(1)	Spurious Radiated Emissions, Restricted Bands	Comply
47 CFR §15.407(g)	Frequency Stability	Comply
47 CFR §15.203 & RSS - Gen. Section 7.1.4	Antenna Connector Requirements	Comply
47 CFR §15.407(h)(2)(i)(B) & §15.407(h)(2)(iii) and FCC 06-96 & RSS-210 Annex 9.	Dynamic Frequency Selection (DFS)	Comply
47 CFR §15.407(b)(6) & §15.107/207, ICES-003 RSS-GEN section 7.2.3.2	Power line Emission measurements	Comply

## Table of Contents

1.	GENERAL DESCRIPTION.....	7
2.	METHOD OF MEASUREMENTS ACCORDING TO KDB 789033 V01R01 .....	9
2.1.	Conducted RF Measurements: .....	9
2.2.	Radiated Emissions Measurements in the restricted bands: .....	9
2.3.	Radiated Emission measurements:.....	9
2.4.	Worst Case Results: .....	10
2.5.	DFS Response Requirements measurements, Client Device: .....	10
2.6.	Power Line Emission measurements:.....	11
3.	TEST FACILITY & UNCERTAINTY OF MEASUREMENT .....	12
3.1.	Accreditation/ Registration reference: .....	12
3.2.	Test Facility description .....	12
3.3.	Uncertainty of Measurement: .....	13
4.	WLAN 802.11A/N: REPORT OF MEASUREMENTS AND EXAMINATIONS .....	14
4.1.	Emission Bandwidth (26dB BW) .....	14
4.2.	Maximum Conducted Output Power .....	25
4.3.	Peak Power Spectral Density .....	27
4.4.	Peak Excursion .....	38
4.5.	Conducted Spurious Emissions.....	49
4.6.	Spurious Radiated Emissions, Restricted Bands.....	80
4.7.	Frequency Stability .....	138
4.8.	Antenna Connector Requirements .....	156
4.9.	Dynamic Frequency Selection (DFS) .....	157
4.10.	Power Line Emissions measurements .....	163
5.	APPENDIX .....	167

## **1. General Description**

### **Description of the EUT system/test Item:**

**Product name:** EWP3200 Semi Rugged VoWLAN Phone

**Model:** EWP3200

**FCC ID:** AZ489FT7051

**IC ID:** 109U-89FT7051

### **Description:**

The EUT is a Smartphone which provides mobile voice and data communications over wireless network to users inside an enterprise.

It is capable of operating in the unlicensed 2.4 GHz band using 802.11b/g/n protocols or in applicable 5 GHz bands using the 802.11a/n protocol.

The EUT also contains a Bluetooth technology for short range interfaces and EWP3200 has an additional 3.2Mp auto-focus camera.

### **Maximum Conducted Output Power:**

#### **5150-5250 MHz**

36.90mW for WLAN 802.11a

38.82mW for WLAN 802.11n

#### **5250-5350 MHz**

73.28mW for WLAN 802.11a

74.82mW for WLAN 802.11n

#### **5470-5725 MHz**

76.74mW for WLAN 802.11a

77.27mW for WLAN 802.11n

**Frequency range:**

802.11a/n: 5.15-5.350, 5.470-5.725

**Transmit Data rate:**

Protocol	Rate [Mbps]							
802.11a	6	9	12	18	24	36	48	54
802.11n	6.5	13	19.5	26	39	52	58.5	65

**Type of Modulation:**

Protocol	Modulation
802.11a	OFDM (64QAM, 16QAM, QPSK, BPSK)
802.11n	OFDM (64QAM, 16QAM, QPSK, BPSK)

**Antenna Specification:**

Type: WLAN a/b/g/n and BT: Integral (on board) PIFA Dual Band  
 Antenna max gain at 5GHz is 2.4dBi

5180MHz +2.0dBi  
 5320MHz +2.4dBi  
 5540MHz +2.0dBi  
 5660MHz +1.9dBi

## 2. Method of Measurements according to KDB 789033 v01r01

### 2.1. Conducted RF Measurements:

The RF output of the transmitter under test was directly connected to the input of the Spectrum analyzer through a specialized antenna connector provided by the manufacturer, and an attenuator as specified. The external attenuator and cable loss were added to the reading. Worst-case results of the various modulation modes (where applicable) were reported.

For PSD, Set RBW= 1MHz and VBW > 1 MHz. at least 100 traces average. The PPSD is the highest level found across the emission in any 1-MHz band.

For Maximum Conducted Output Power an Average Power Meter was used.

For spurious emissions measurement, the spectrum from 9 KHz to 40GHz was investigated with the transmitter set to the lowest, middle and highest channel frequencies.

For frequency stability, the 26dB Emission Bandwidth measurement was performed under extreme conditions with the DUT tuned to the band-edge channel. Worst case results were compared with the band-edge.

For bandedge measurements allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge, take into account antenna gain for appropriate frequency .

### 2.2. Radiated Emissions Measurements in the restricted bands:

For radiated emissions, which fall in the restricted bands the spectrum from 1MHz to 25GHz was investigated following the guidelines in ANSI C63.4-2003, with the transmitter set to the lowest, middle and highest channel frequencies. Measurements were performed with peak detector and repeated averaged with VBW=10Hz. Only Peak detection plots are presented. Worst-case results of the various modulation modes (where applicable) were reported.

### 2.3. Radiated Emission measurements:

Measurements were performed at a 3-meter measurement distance in the semi-anechoic chamber in order to evaluate the radiated electromagnetic interference characteristics of the EUT. The EUT was placed on a non-metallic table/support, 0.8m above the turntable, was configured, arranged and operated in a manner consistent with typical application and load conditions. The test program of exercising the equipment ensured that various parts of the EUT were exercised to permit detection of all EUT disturbances.

An appropriate antenna depending upon the frequency range, per ANSI C63.4-2003 clause 4.1.5 was used. While the turntable was being rotated, the height of the antenna was varied from 1 to 4m for the frequency range of 30MHz to 1GHz. The highest radiated emission was detected by manipulating the EUT through three axis(x,y,z) and system cables, worst-case results are reported by max hold function .

This process was repeated for both antenna polarizations. The spectrum up to 40GHz was investigated for spurious emissions, using a band-reject filter where appropriate.


The amplitudes of worst-case emission were measured with the detector modes and resolution bandwidths over various frequency ranges according to the requirements of ANSI C63.4-2003 clause 4.2.

#### 2.4. Worst Case Results:

In order to determine the worst case emissions for all modes/data rates/tests, all modes/data rates were investigated for each required test to determine which produces the worst- case data and then full testing was performed in that mode/data rate.

#### 2.5. DFS Response Requirements measurements, Client Device:

**Radar Waveform Calibration:** the following equipment setup was used to generate and calibrate the radiated radar waveform. The Spectrum Analyzer was set to span zero at a selected radar frequency, 3kHz RBW and VBW, and Peak detection.

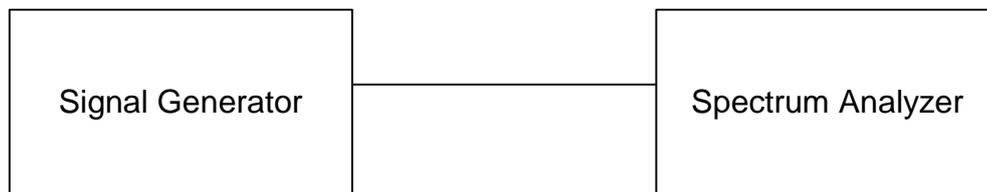


#### Test Procedure:

The IP master device was operated upon start-up and performed a Channel Availability Check and continued normal operation on the selected channel, transmitting MPEG Test File to the client. The selected channel frequency was also set as the RF frequency of the Radar Signal Generation devices. A burst of 25 pulses was generated for a minimum of 30 trials (Radar Type 2) pre-calibrated at appropriate levels above the threshold level to ensure “Radar detection” by the Master device. The Spectrum Analyzer was used as a monitor to verify that the Client EUT has vacated the channel within the Channel Move Time and to verify the Channel Closing Transmission Time do not exceed 200ms starting at the beginning of the Channel Move Time plus any additional intermittent control signals up to an aggregate of 60ms, during the remaining of the 10seconds period.

For “30 Minute Non-Occupancy”, Associated Test: The client was associated with the master and after master detection of radar pulse, the client moved with the master to the next chosen channel, and while streaming the MPEG test file, the vacated channel was monitored to verify that the DUT does not resume any transmission on this channel. The spectrum analyzer was running in max hold on the center of the vacated channel for more than 30 minutes. The 30 minute observation started immediately following the 10 second channel move time.

For “30 Minute Non-Occupancy”, Non - Associated Test: The client device was powered on and the master device was powered off, and a scan was taken across all channels. The spectrum analyzer was running in max hold and sweep time of 20ms. Sweeping was left for a period of more than 30 minutes to verify that the client is not employing active scanning and not transmitting on any channel without being associated with the master device.

**Radiated Setup:** EUT is a client and Radar test Waveform is injected into the Master.

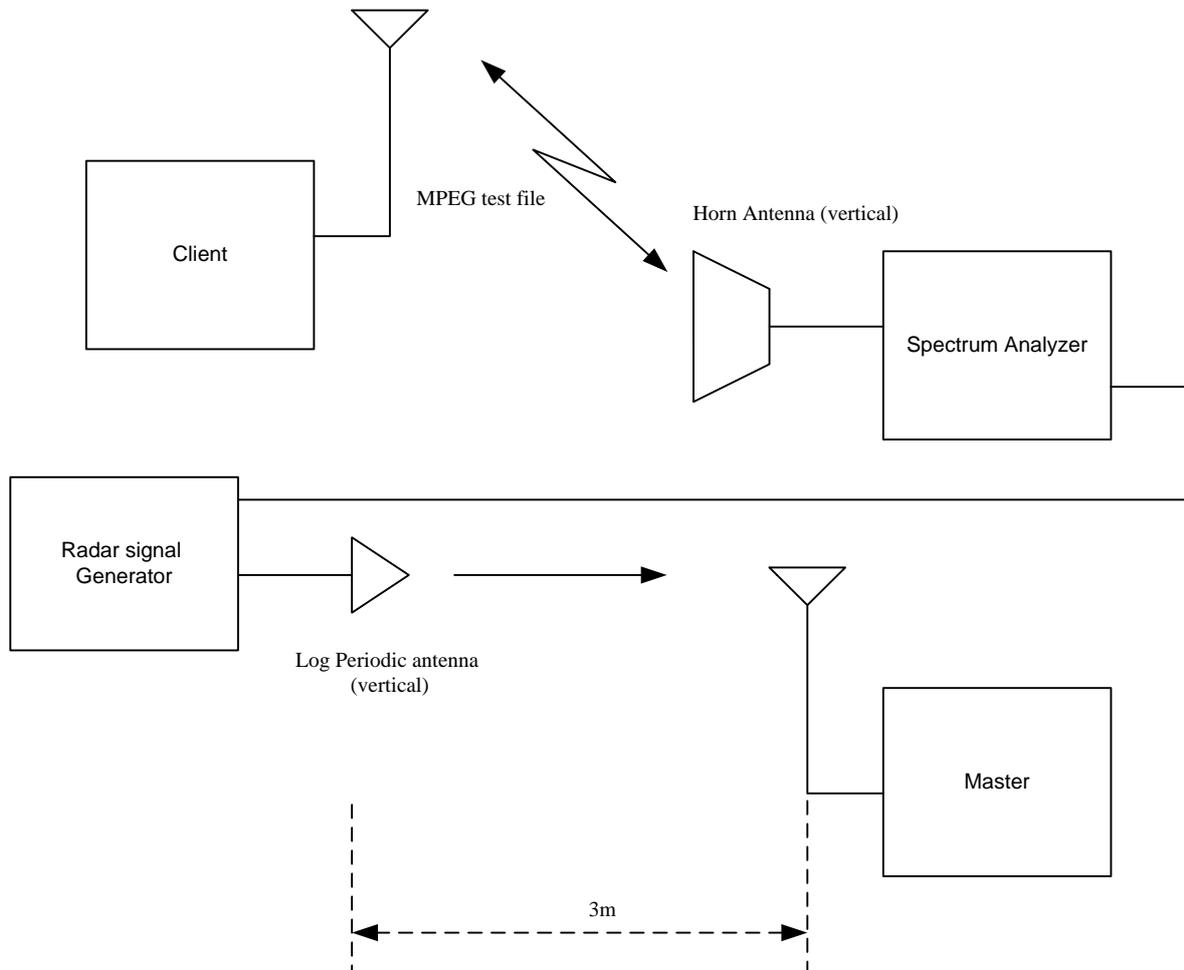

**2.6. Power Line Emission measurements:**

The EUT was placed on a non-conductive table/support 80 cm above the reference ground plane. The EUT was configured in accordance with ANSI C63.4-2003 using a 50µH/50 ohm LISN.

Compliance with the provisions was based on the measurements of the radio frequency voltage between each line and the ground at the power terminal.

### 3. Test Facility & Uncertainty of Measurement

#### 3.1. Accreditation/ Registration reference:

- A2LA Certificate Number: 1633.01

#### 3.2. Test Facility description

The tests were performed at the EMC Laboratory, QualiTech Division, ECI Telecom Group

**Address:** 30, Hasivim St., Petah Tikva, Israel.  
Tel: 972-3-926-8443

#### 3m Anechoic Chamber:

The 3m-screened chamber is used in two configurations: the semi-anechoic configuration for Radiated Emission measurements and the full-anechoic configuration for Radiated Immunity tests.

#### Semi Anechoic Configuration:

Measurement distance	3m
Chamber dimensions	9.5m x 6.5m x 5.2m
Antenna height	1 - 4m
Shielding Effectiveness	Magnetic field $\geq 80$ dB at 15 kHz $\geq 90$ dB at 100 kHz Electric field $> 120$ dB from 1MHz to 1GHz $> 110$ dB from 1GHz to 10GHz
Absorbing material	Ferrite tiles on the walls and ceiling Frankonia hybrid absorbing material in selected positions on the walls
Normalized Site Attenuation measured at 5 positions	$\pm 3.49$ dB, 30MHz to 1GHz
Transmission Loss measured at 5 positions, at 1.5m height	$\pm 3$ dB, 1GHz to 18GHz

#### Full-Anechoic Configuration:

Measurement distance	3m
Chamber dimensions	7m x 4m x 3m
Antenna height	1.55m at Horizontal & Vertical polarizations
Shielding Effectiveness	Magnetic field $\geq 80$ dB at 15 kHz $\geq 90$ dB at 100 kHz Electric field $> 120$ dB from 1MHz to 1GHz $> 110$ dB from 1GHz to 10GHz
Absorbing material	Ferrite tiles on the walls and ceiling Frankonia hybrid absorbing material in selected positions on the walls and floor
Field Uniformity to EN61000-4-3	$\pm 3$ dB 80MHz to 18GHz

**3.3. Uncertainty of Measurement:**

Test Name	Test Method & Range	Uncertainty	
		Combined std. Uc(y) [dB]	Expanded U [dB]
<b>Radiated Emission</b>	30MHz÷230MHz, Horiz. polar.	1.8	3.6
	30MHz÷230MHz, Ver. polar.	2.0	3.9
	230MHz÷1000MHz, Horiz. polar.	1.5	3.0
	230MHz÷1000MHz, Vert. polar.	1.5	3.0
<b>Conducted Emission</b>	9 kHz÷150 kHz	1.4	2.8
	150 kHz÷30MHz	1.1	2.2

#### 4. WLAN 802.11a/n: Report of Measurements and Examinations

##### 4.1. Emission Bandwidth (26dB BW)

Reference document:	<b>47 CFR §15.403 (h) (i)</b>		
Test Requirements:	For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.		
Test setup:	See sec 2.1	<b>Pass</b>	
Method of testing:	KDB 789033 v01r01,sec D, Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 100kHz, VBW: 300kHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.1.1 - Plot 4.1.18	

##### Test results:

##### 5150-5250 MHz

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth [kHz]
<b>802.11a Mode</b>		
5180	54	21039
5200	54	19141
5240	54	19224
<b>802.11n Mode</b>		
5180	65	20356
5200	65	20264
5240	65	20856


##### 5250-5350 MHz

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth [kHz]
<b>802.11a Mode</b>		
5260	54	19596
5300	54	19244
5320	54	19578
<b>802.11n Mode</b>		
5260	65	20761
5300	65	20386
5320	65	20525


**5470-5725 MHz**

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth [kHz]
<b>802.11a Mode</b>		
5500	54	19865
5560	54	19713
5700	54	19394
<b>802.11n Mode</b>		
5500	65	20697
5560	65	20394
5700	65	21268


**5150-5250 MHz 802.11a Mode**  
**Plot 4.1.1**

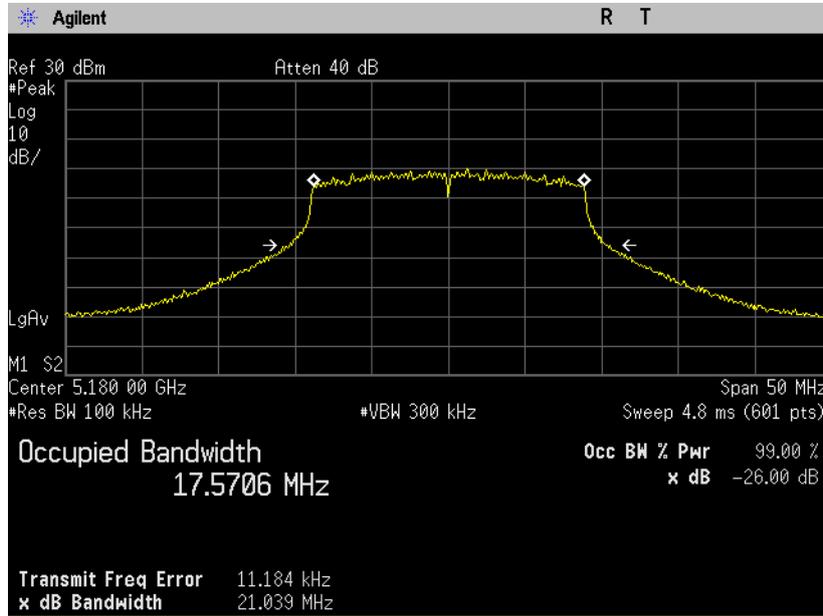


**Plot 4.1.2**

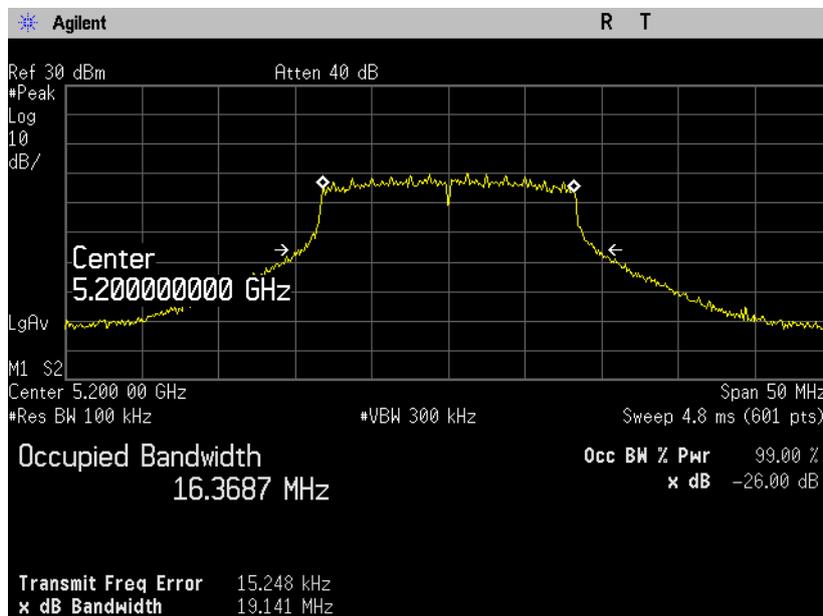


**Plot 4.1.3**

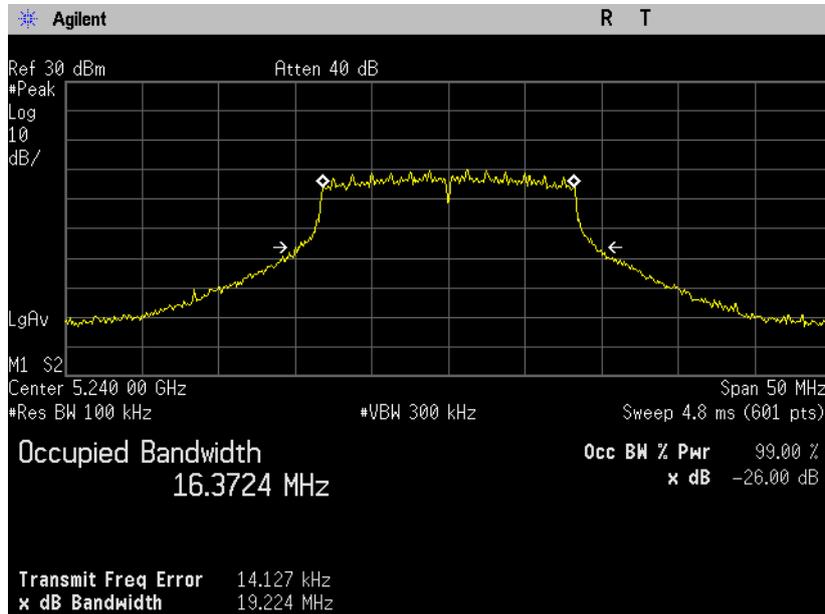


**5150-5250 MHz 802.11n Mode**  
**Plot 4.1.4**

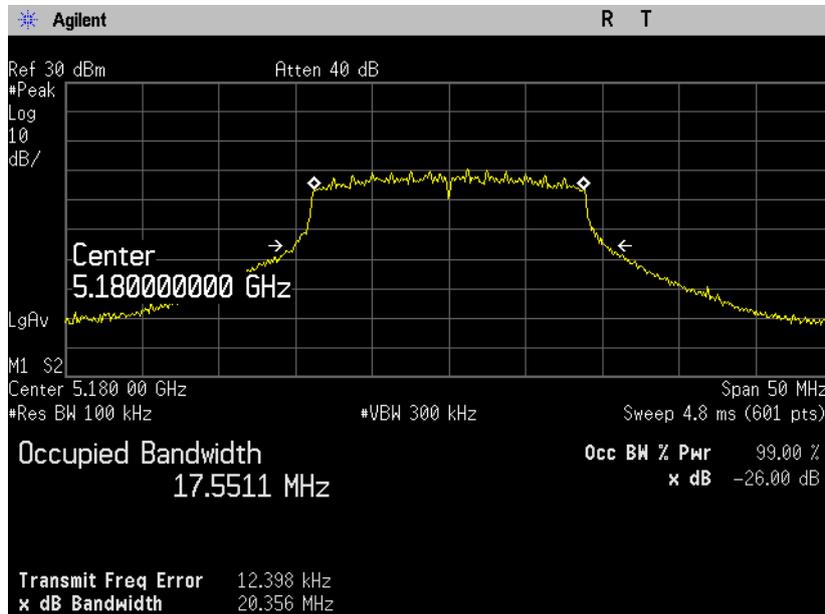


**Plot 4.1.5**

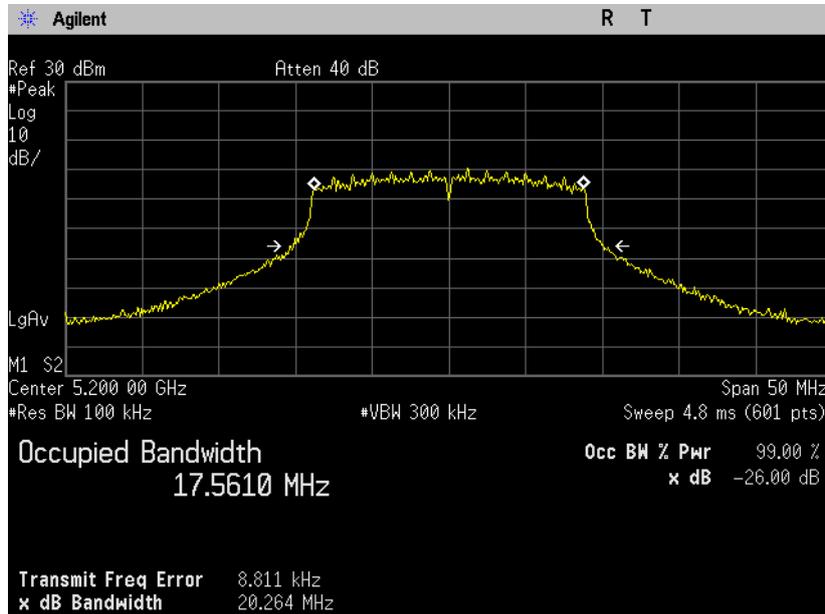


**Plot 4.1.6**

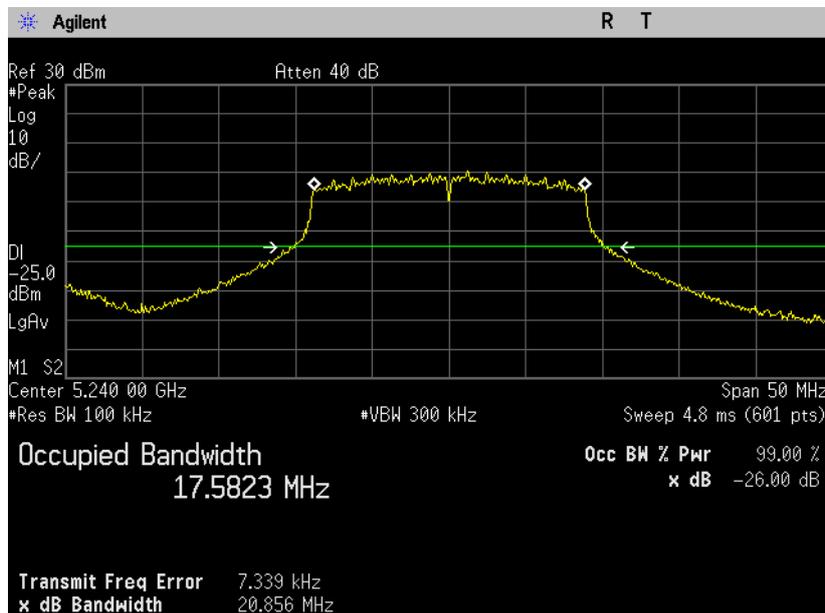


**802.11a Mode 5250-5350 MHz**  
**Plot 4.1.7**

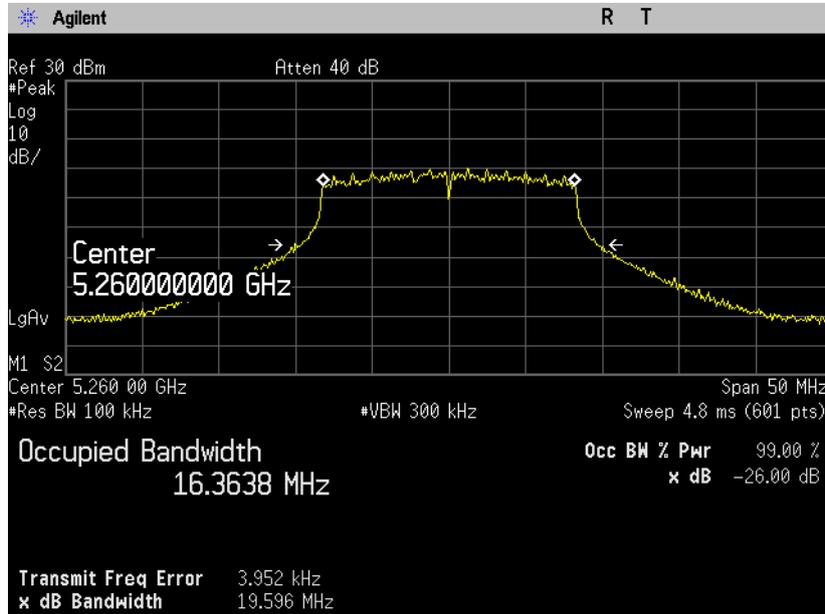


**Plot 4.1.8**

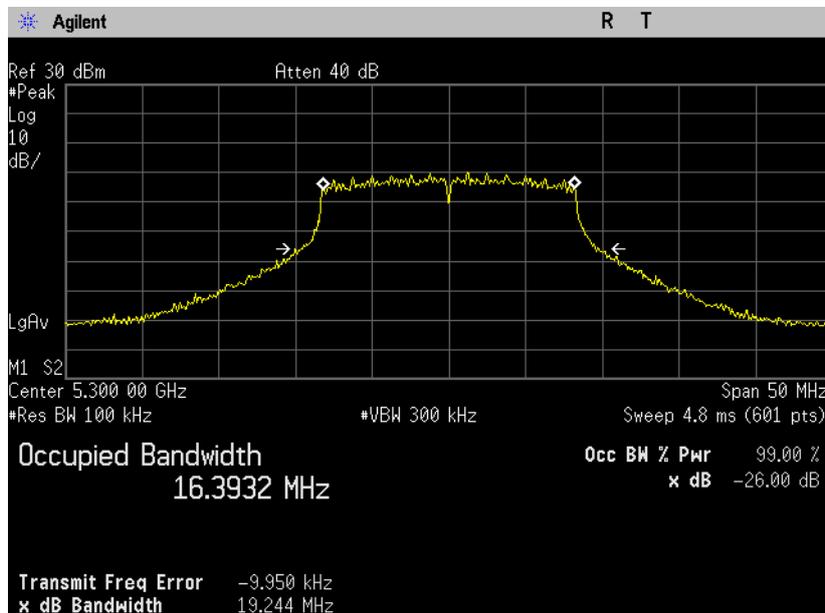


**Plot 4.1.9**

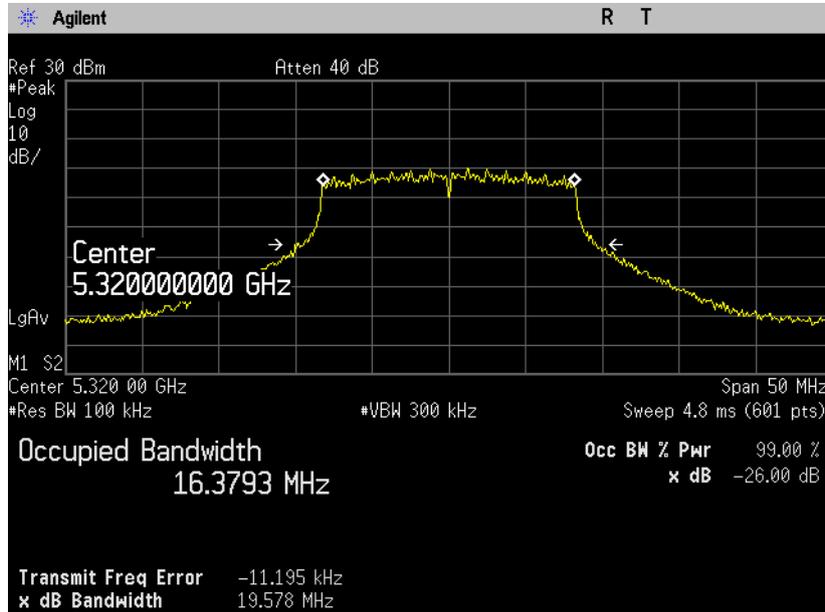


**802.11n Mode 5250-5350 MHz**  
**Plot 4.1.10**

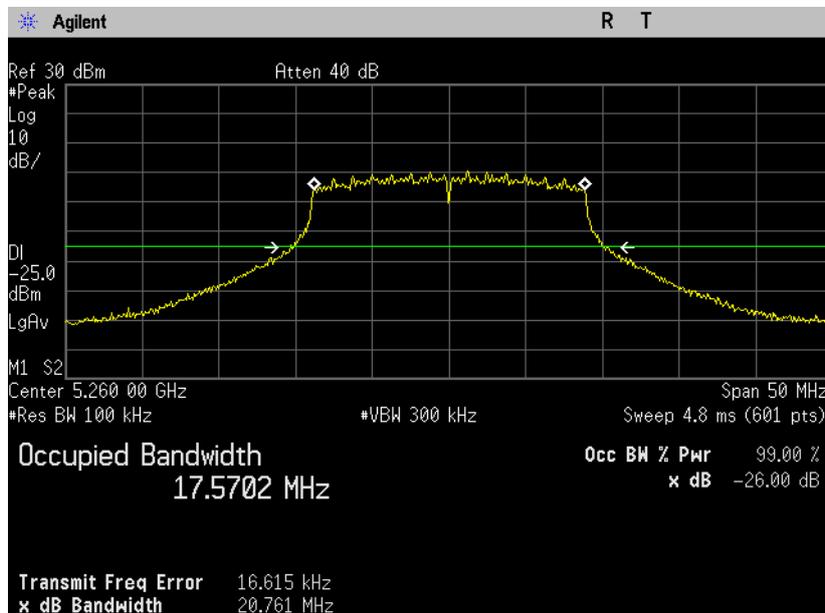


**Plot 4.1.11**

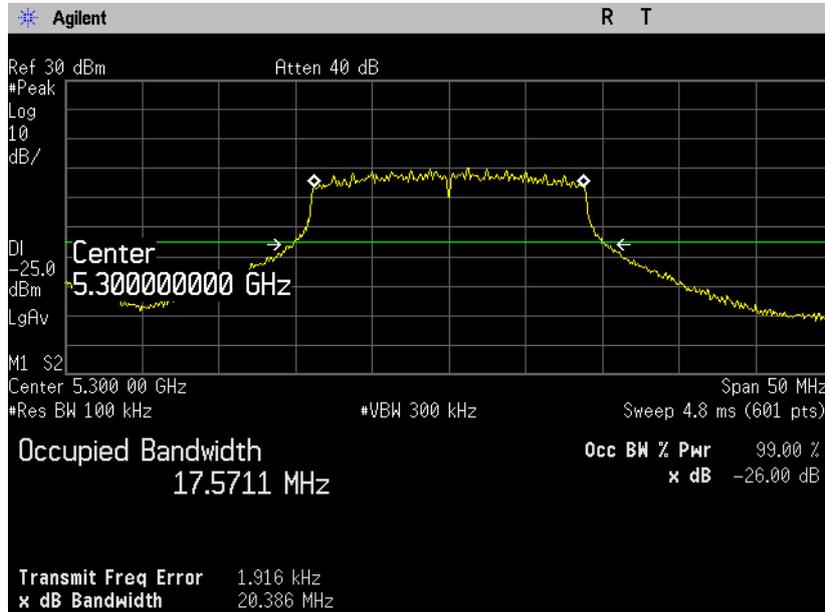


**Plot 4.1.12**

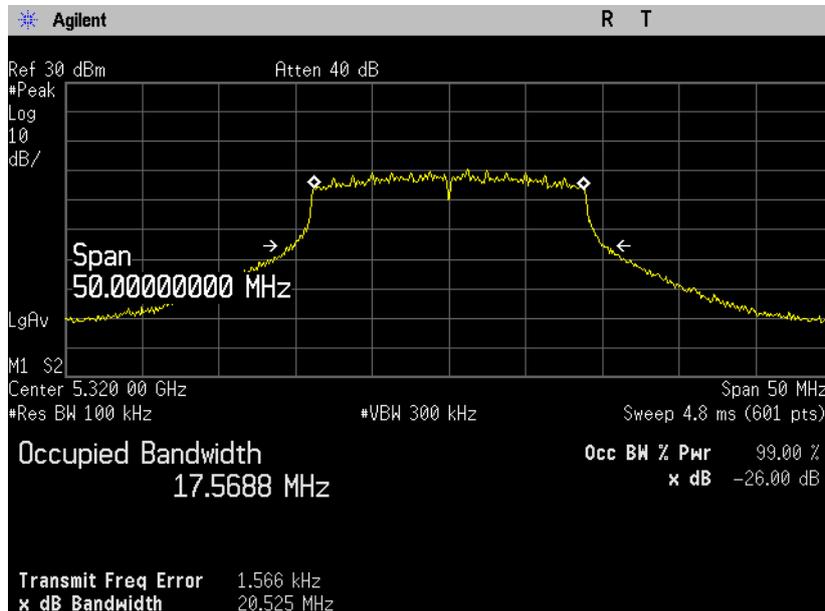


**802.11a Mode 5470-5725 MHz**  
**Plot 4.1.13**

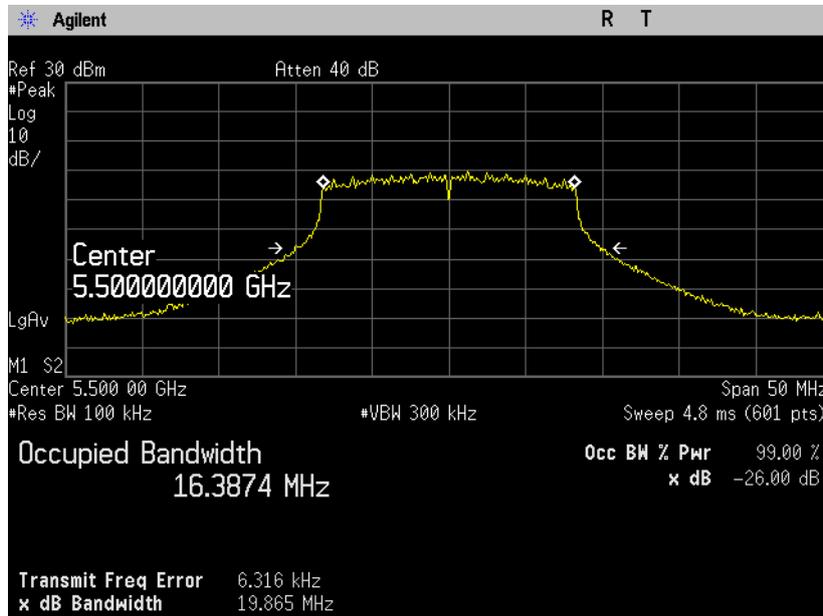


**Plot 4.1.14**

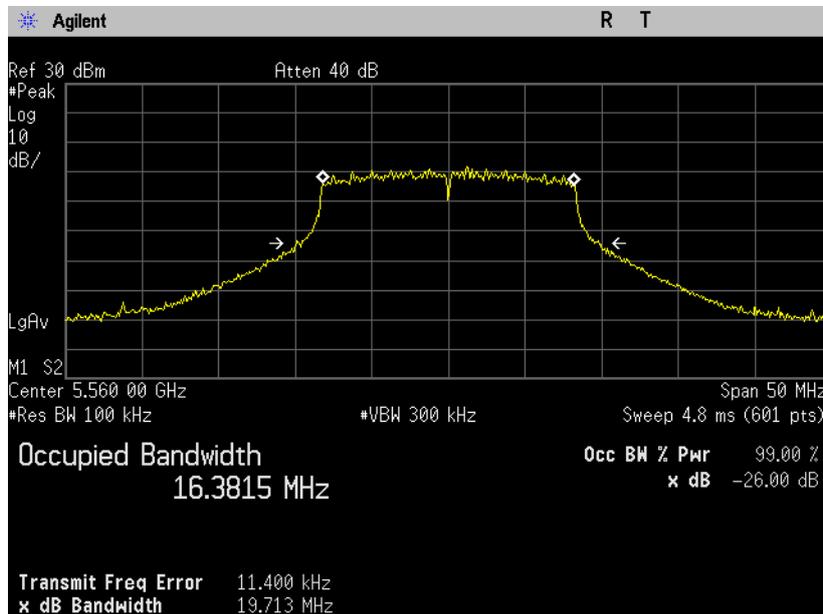


**Plot 4.1.15**

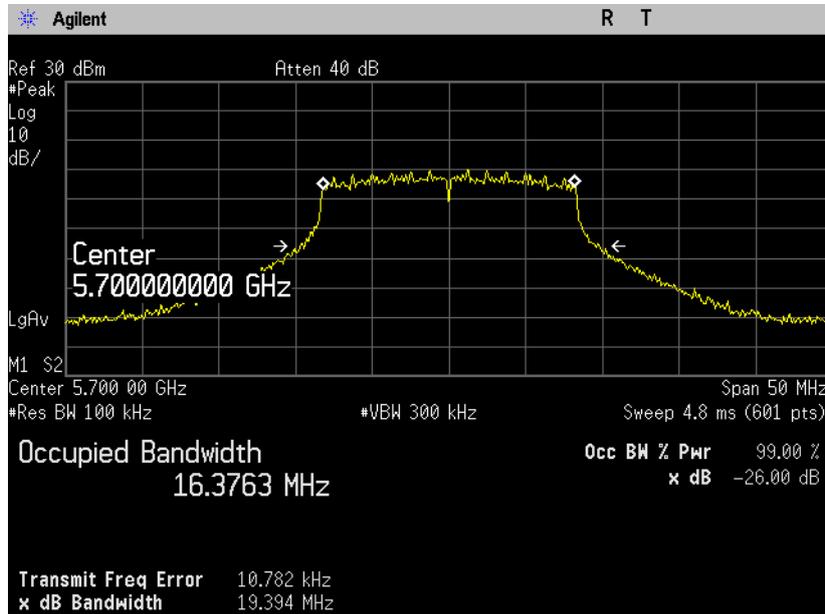


**5470-5725 MHz 802.11n Mode**  
**Plot 4.1.16**

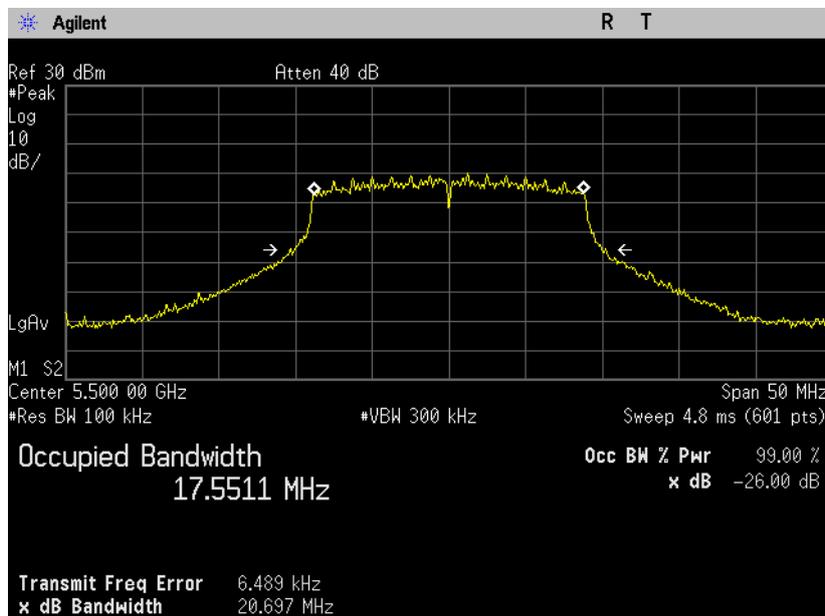

**Plot 4.1.17**

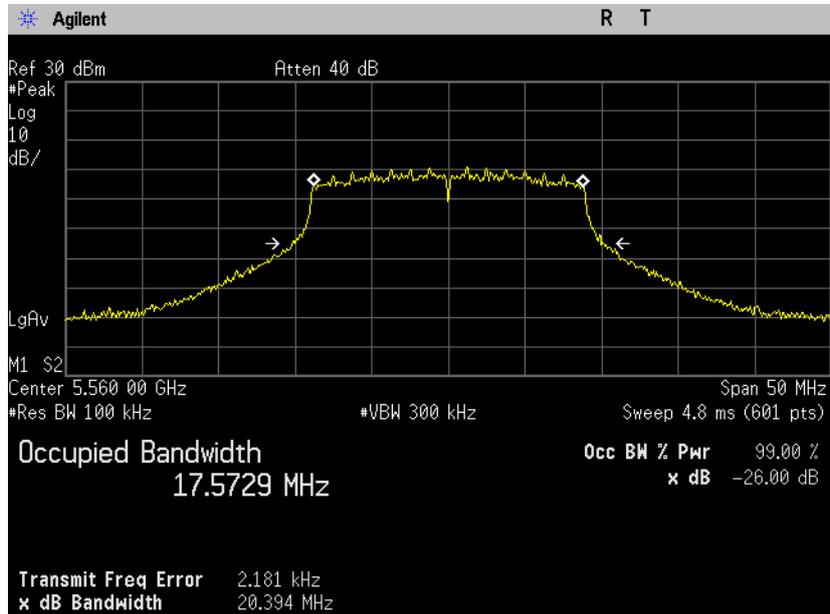

**Plot 4.1.18**

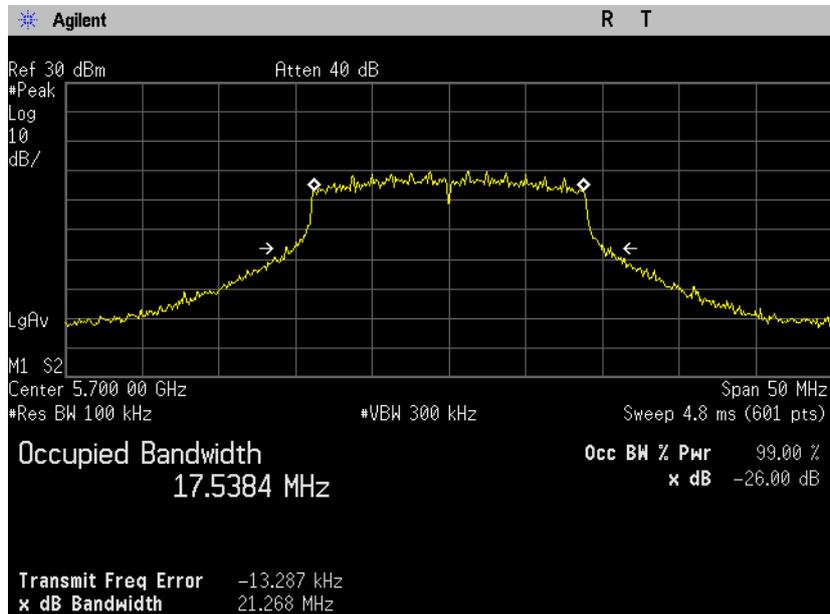

#### 4.2. Maximum Conducted Output Power

Reference document:	47 CFR §15.407 (a) (1), (2), (3)		
Test Requirements:	<p>(1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26-dB,emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used,</p> <p>(2) For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (3).</p> <p>In addition, the peak power spectral density shall not exceed 17 dBm in any 1–MHz band both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>		
Test setup:	See sec 2.1	<b>Pass</b>	
Method of testing:	KDB 789033 v01r01,sec C)4, Conducted		
Operating conditions:	Under normal test conditions		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	-	

#### Test results:

##### 5150-5250MHz Band:

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth (B) [Hz]	4 + 10Log B [dBm]	Measured Average Power [dBm]	Power Limit [dBm]	Margin [dB]
<b>802.11a Mode</b>						
5180	6	21.039	17.23	15.32	17	-1.68
5200	6	19.141	16.82	15.24	16.82	-1.58
5240	6	19.224	16.84	15.67	16.84	-1.17
<b>802.11n Mode</b>						
5180	6.5	20.356	17.09	15.89	17	-1.11
5200	6.5	20.264	17.07	15.46	17	-1.54
5240	6.5	20.856	17.19	15.62	17	-1.38

**5250-5350MHz Band:**

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth (B) [MHz]	11 + 10Log B [dBm]	Measured Average Power [dBm]	Power Limit [dBm]	Margin [dB]
			<b>802.11a Mode</b>			
5260	6	19.596	23.98	18.53	23.98	-5.45
5300	6	19.244	23.99	18.65	23.99	-5.34
5320	6	19.578	23.88	18.47	23.88	-5.41
			<b>802.11n Mode</b>			
5260	6.5	20.761	24.17	18.21	24	-5.79
5300	6.5	20.386	24.09	18.74	24	-5.26
5320	6.5	20.525	24.12	18.41	24	-5.59

**5470-5725 MHz Band:**

Frequency [MHz]	Data Rate [Mbps]	26 dB Bandwidth (B) [MHz]	11 + 10Log B [dBm]	Measured Average Power [dBm]	Power Limit [dBm]	Margin [dB]
			<b>802.11a Mode</b>			
5500	6	19.865	23.98	18.36	23.98	-5.62
5560	6	19.713	23.95	18.85	23.95	-5.09
5700	6	19.394	23.88	18.63	23.88	-5.25
			<b>802.11n Mode</b>			
5500	6.5	20.697	24.16	18.55	24.00	-5.45
5560	6.5	20.394	24.10	18.88	24.00	-5.12
5700	6.5	21.268	24.28	18.47	24.00	-5.53

### 4.3. Peak Power Spectral Density

Reference document:	<b>47 CFR §15.407 (a) (1), (2), (3), (5)</b>		
Test Requirements:	<p>For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, , the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall, maximum conducted output power over the frequency ,If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density ,shall be reduced by the amount in dBthat the directional gain of the antenna exceeds 6 dB</p>		
Test setup:	See sec 2.1	<b>Pass</b>	
Method of testing:	KDB 789033 v01r01,sec E, SA-1, Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 1MHz , VBW: 3MHz , Sweep Time: Auto, Averaging :100 traces		
Environment conditions:	Ambient Temperature: 22°c	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.3.1 - Plot 4.3.18	

### Test Results

#### 5150-5250MHz Band:

Frequency [MHz]	Data Rate [Mbps]	PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	Margin [dB]
<b>802.11a Mode</b>				
5180	6	2.035	4	-1.96
5200	6	2.256	4	-1.74
5240	6	2.143	4	-1.85
<b>802.11n Mode</b>				
5180	6.5	1.951	4	-2.04
5200	6.5	1.817	4	-2.18
5240	6.5	1.928	4	-2.07

**5250-5350MHz Band:**


	Data Rate [Mbps]	PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	Margin [dB]
<b>802.11a Mode</b>				
5260	6	5.132	11	-5.86
5300	6	4.771	11	-6.22
5320	6	4.108	11	-6.89
<b>802.11n Mode</b>				
5260	6.5	4.414	11	-6.58
5300	6.5	4.096	11	-6.90
5320	6.5	4.197	11	-6.80

**5470-5725 MHz Band:**


Frequency [MHz]	Data Rate [Mbps]	PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	Margin [dB]
<b>802.11a Mode</b>				
5500	6	4.269	11	-6.73
5560	6	5.600	11	-5.40
5700	6	4.707	11	-6.29
<b>802.11n Mode</b>				
5500	6.5	4.026	11	-6.97
5560	6.5	5.550	11	-5.45
5700	6.5	4.763	11	-6.23

Note: On plots figure 601 pts, span is 50 MHz and resolution bandwidth 1MHz, so  $2 \times 50 / 1 = 100$  and  $601 > 100$


**5150-5250MHz Band: 802.11a Mode**  
**Plot 4.3.1**

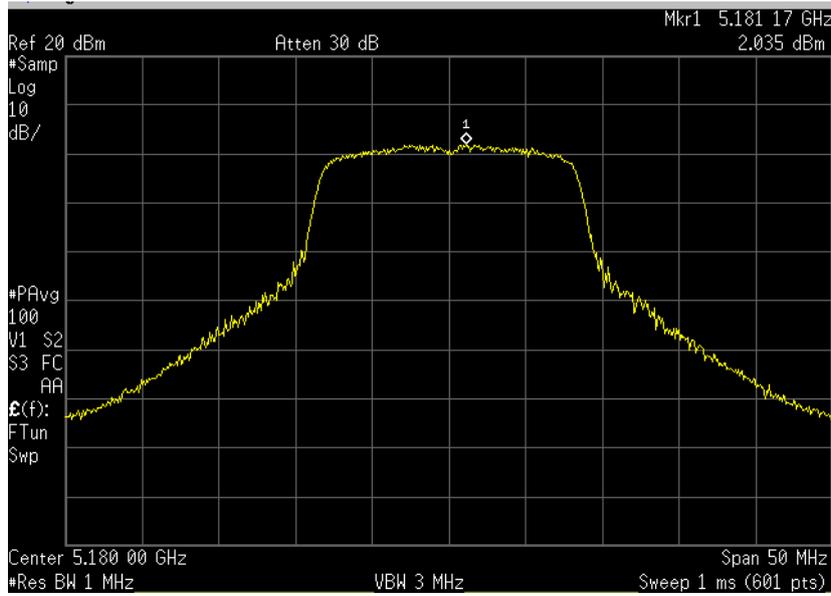


**Plot 4.3.2**

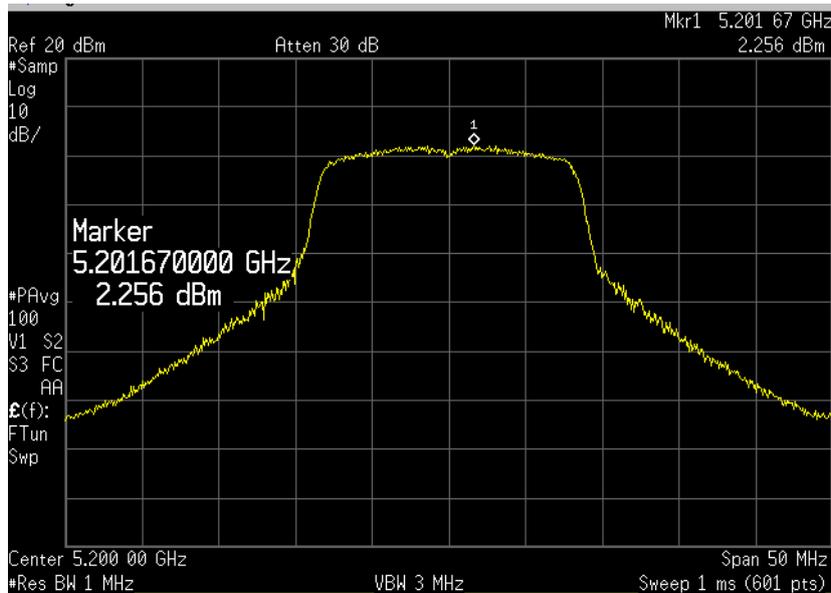


**Plot 4.3.3**

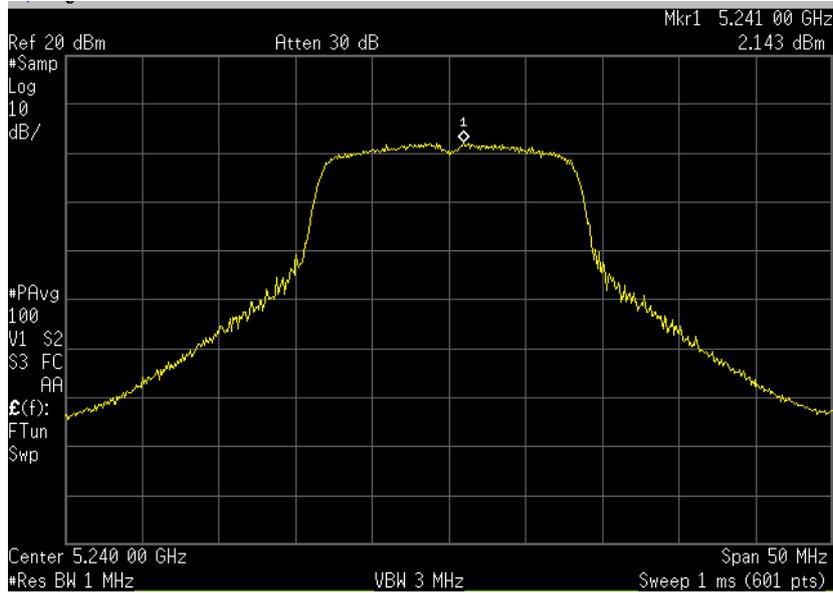


**5150-5250MHz Band: 802.11n Mode**  
**Plot 4.3.4**

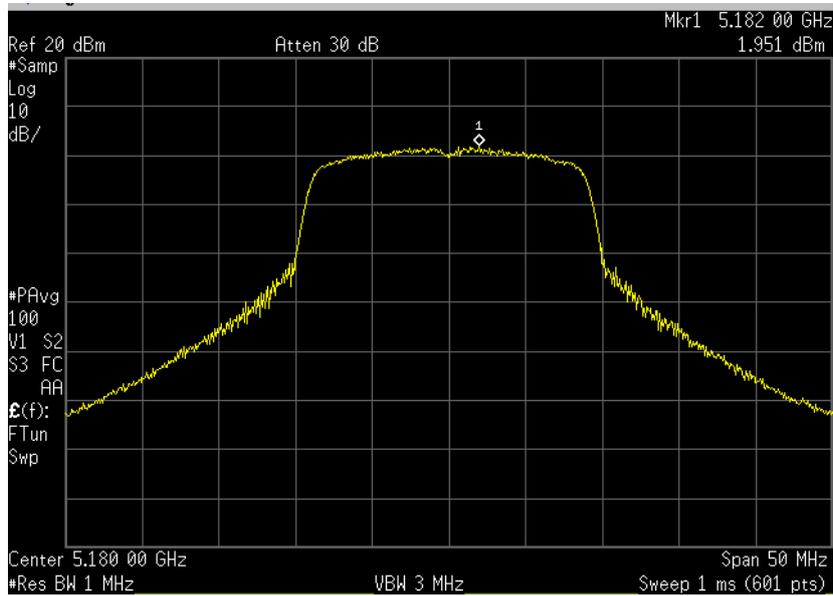


**Plot 4.3.5**

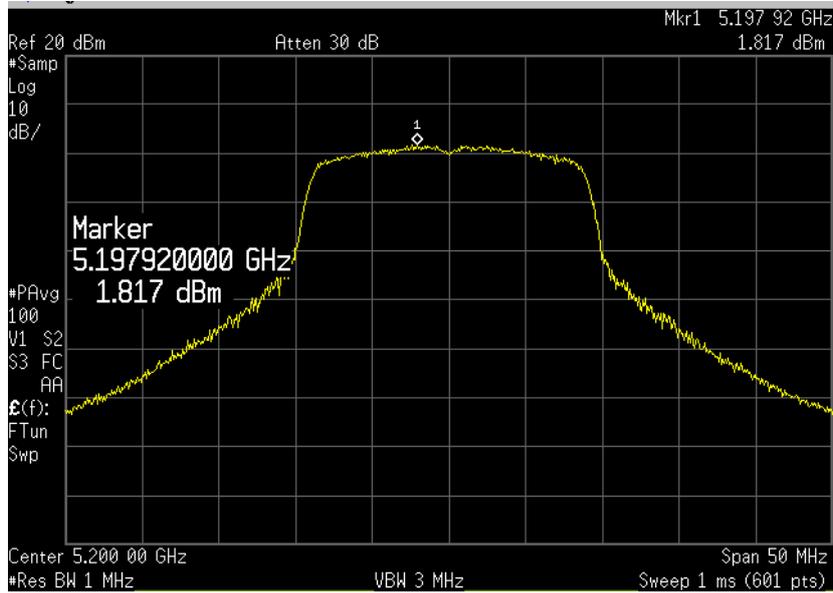


**Plot 4.3.6**

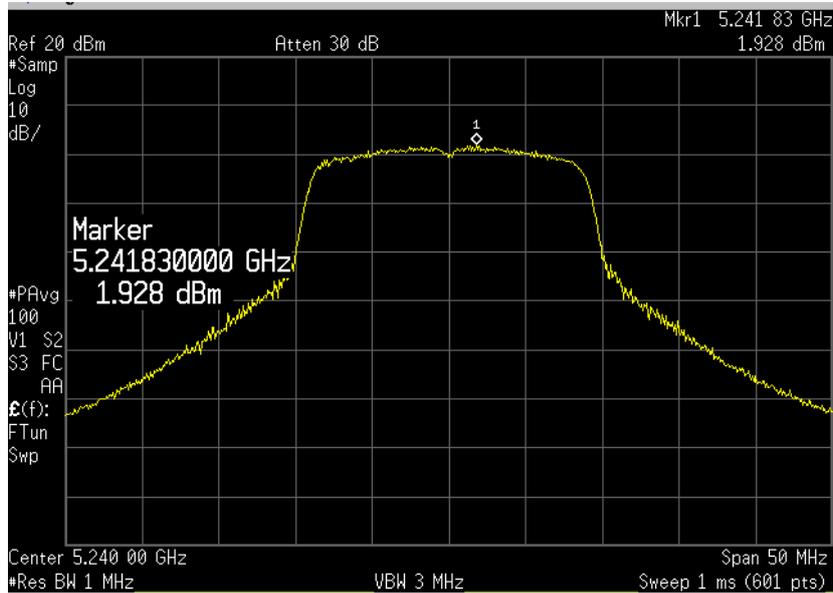


**5250-5350MHz Band: 802.11a Mode**  
**Plot 4.3.7**

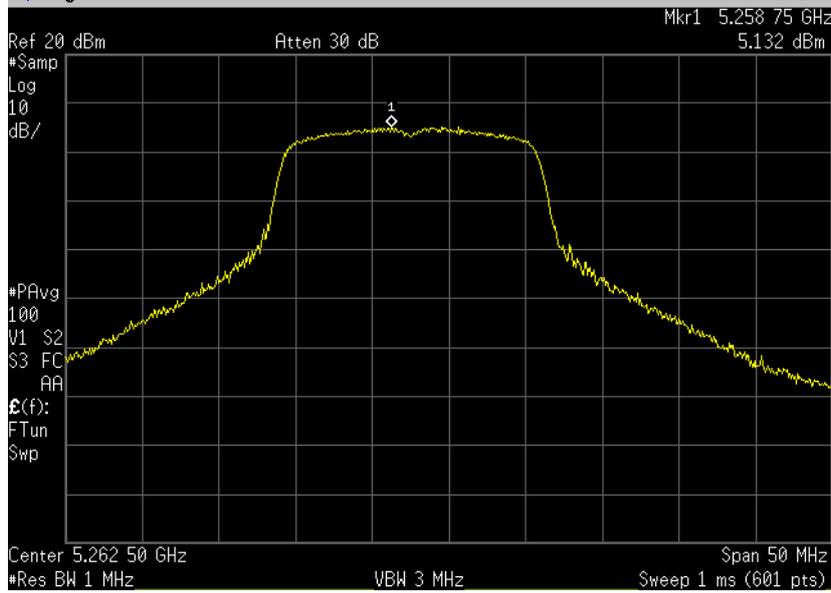


**Plot 4.3.8**

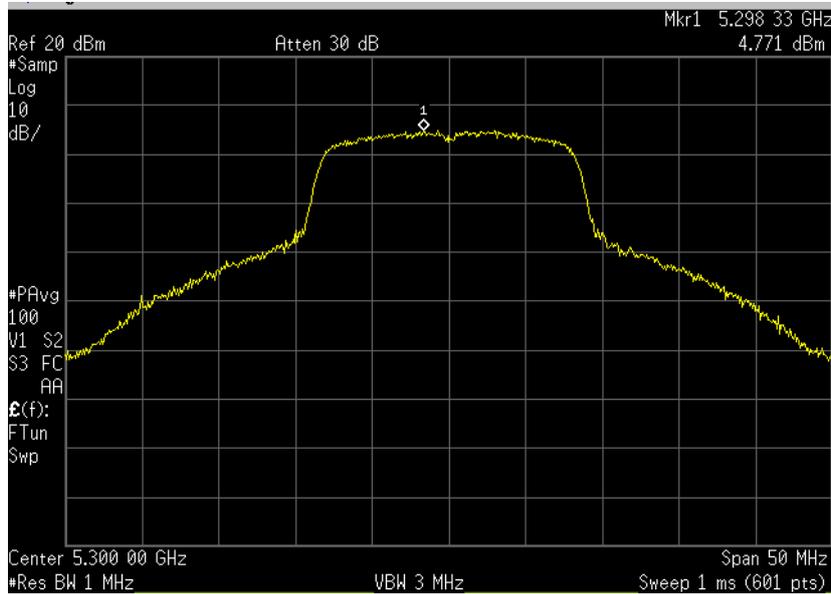


**Plot 4.3.9**

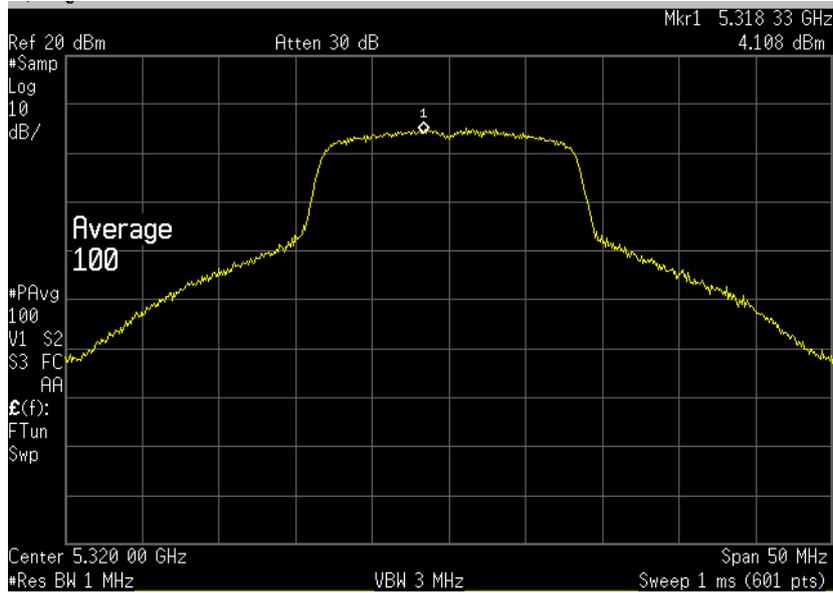


**5250-5350MHz Band: 802.11n Mode**  
**Plot 4.3.10**

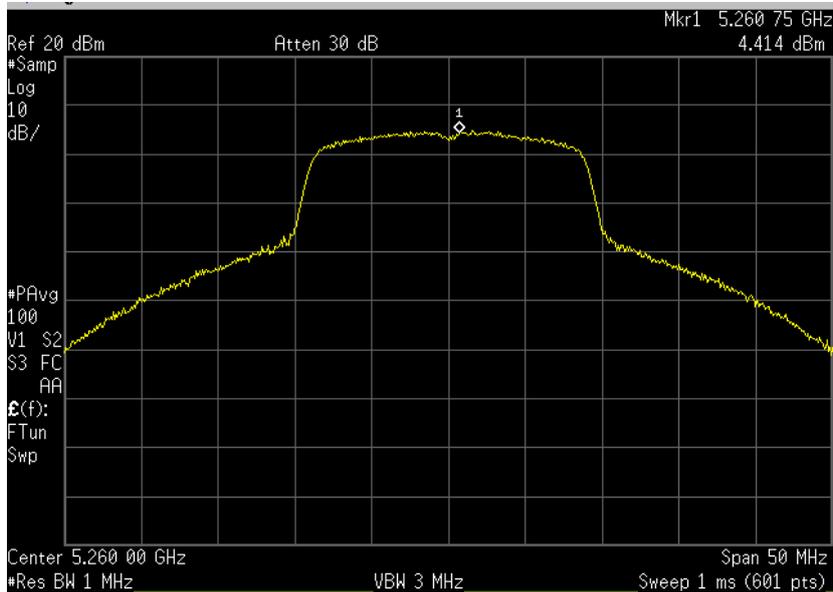


**Plot 4.3.11**

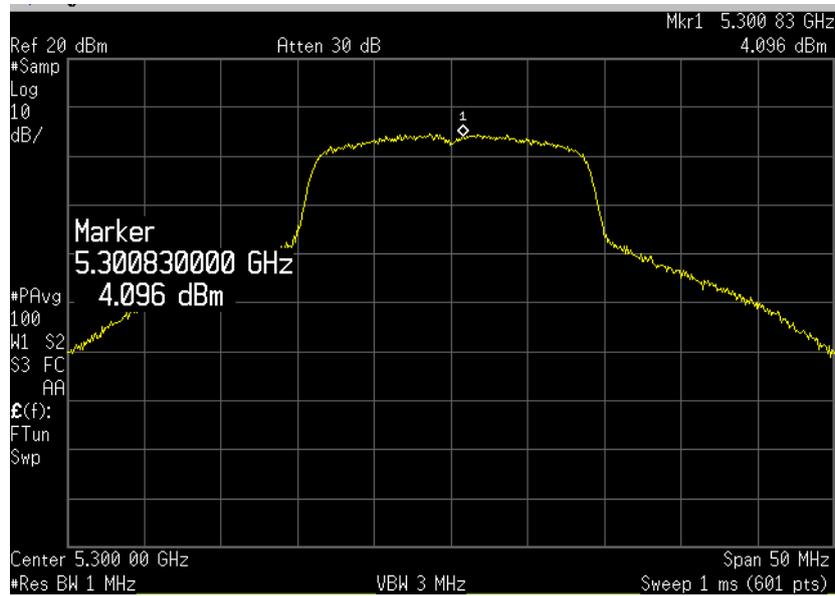


**Plot 4.3.12**

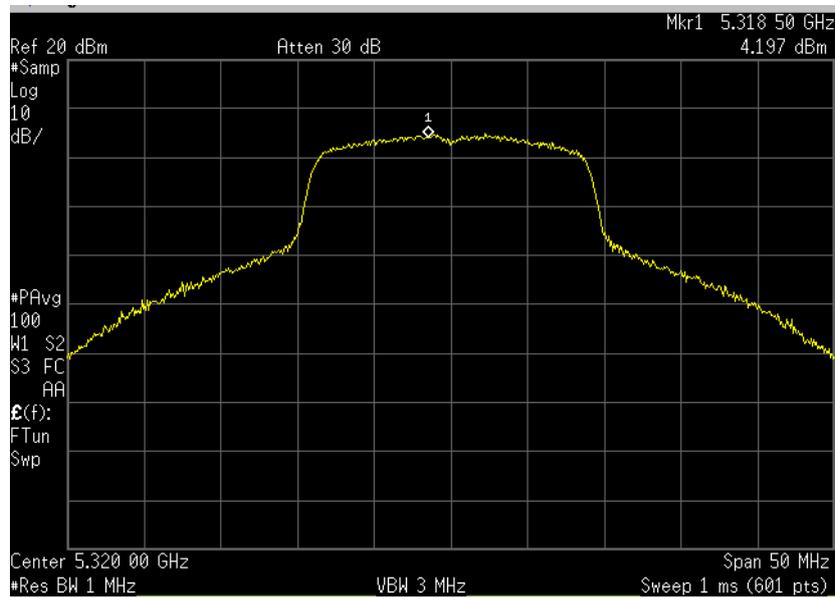


**5470-5725 MHz Band: 802.11n Mode**  
**Plot 4.3.13**

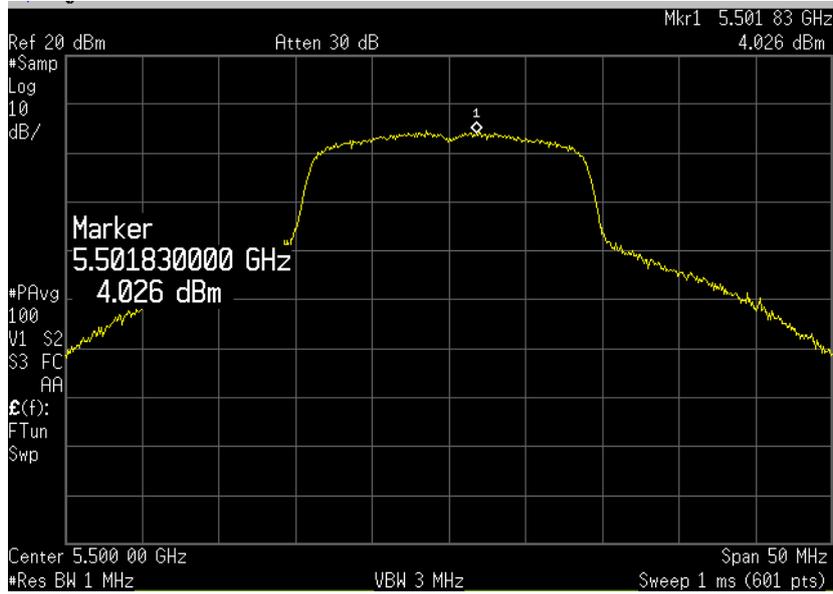


**Plot 4.3.14**

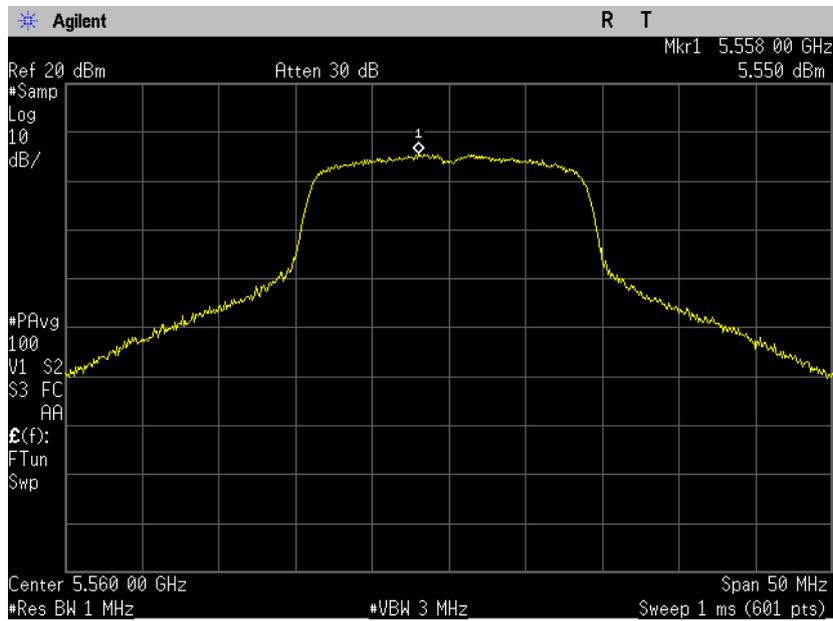


**Plot 4.3.15**

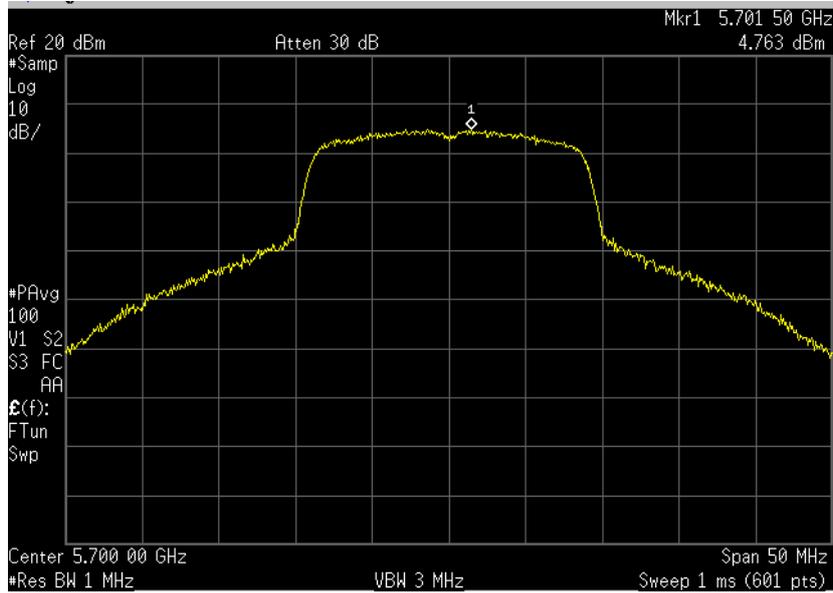


**5470-5725 MHz Band: 802.11a Mode**  
**Plot 4.3.16**

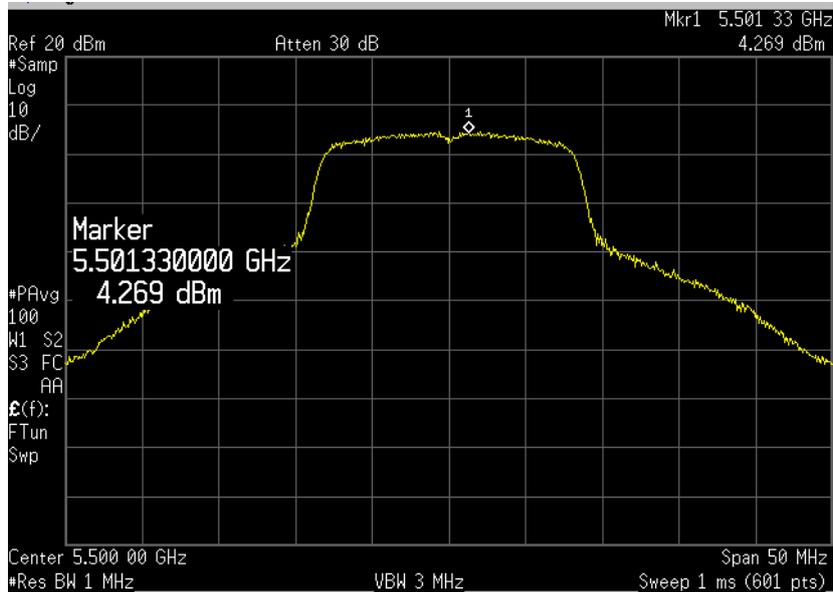

**Plot 4.3.17**

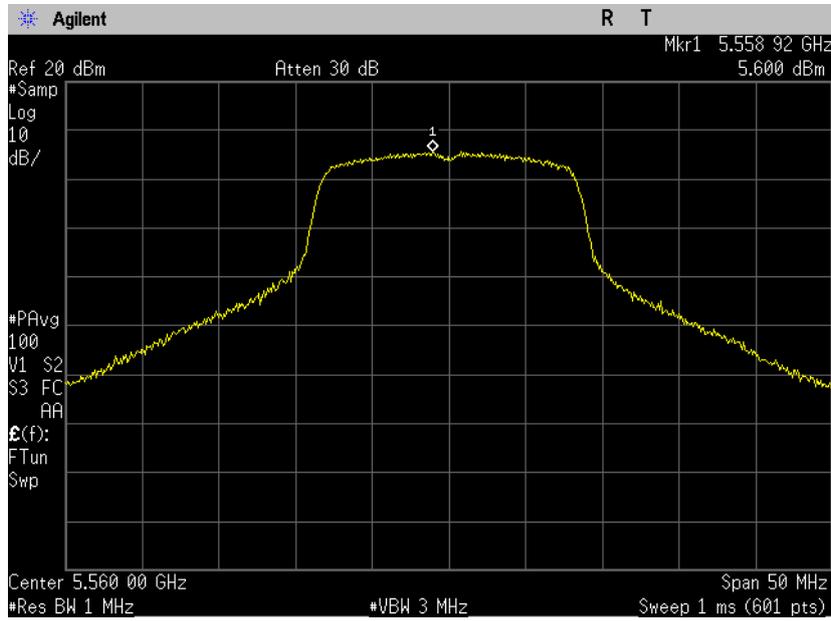

**Plot 4.3.18**

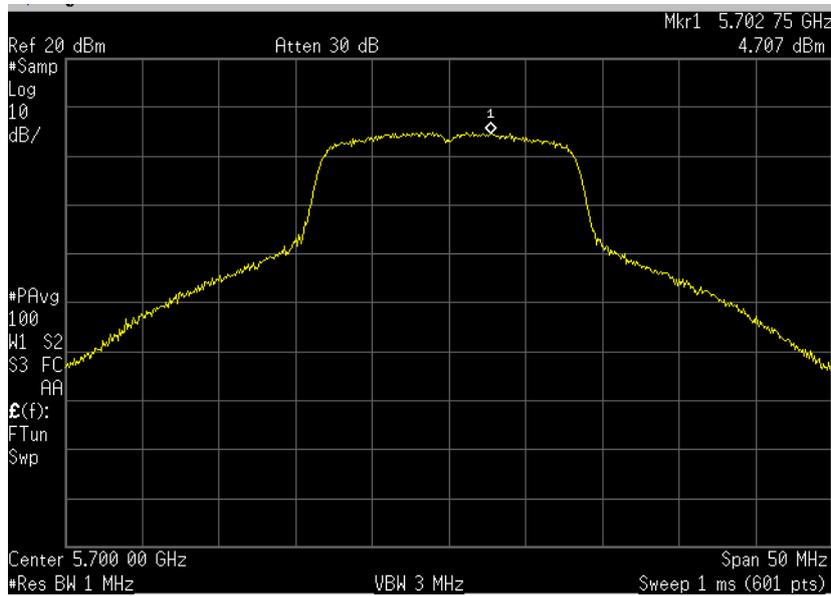

#### 4.4. Peak Excursion

Reference document:	<b>47 CFR §15.407 (a) (6)</b>		
Test Requirements:	The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.		
Test setup:	See sec 2.1	<b>Pass</b>	
Method of testing:	KDB 789033 v01r01,sec F, Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	Trace 1:RBW: 1MHz , VBW: 3MHz , Peak Max Hold, Trace 2: same setting as used for PSD measurements		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.4.1 - 4.4.18	

#### Test Results:

##### 5150-5250 MHz:

Frequency [MHz]	Data Rate [Mbps]	Peak Excursion [dB]	Limit [dB]	Margin [dB]
<b>802.11a Mode</b>				
5180	6	4.126	13	-8.87
5200	6	3.363	13	-9.63
5240	6	3.316	13	-9.68
<b>802.11n Mode</b>				
5180	6.5	4.482	13	-8.51
5200	6.5	4.282	13	-8.71
5240	6.5	3.050	13	-9.95


##### 5250-5350 MHz

Frequency [MHz]	Data Rate [Mbps]	Peak Excursion [dB]	Limit [dB]	Margin [dB]
<b>802.11a Mode</b>				
5260	6	4.987	13	-8.01
5300	6	4.294	13	-8.70
5320	6	4.758	13	-8.24
<b>802.11n Mode</b>				
5260	6.5	4.7	13	-8.3
5300	6.5	4.753	13	-8.24
5320	6.5	5.090	13	-7.91


**5470-5725 MHz**

Frequency [MHz]	Data Rate [Mbps]	Peak Excursion [dB]	Limit [dB]	Margin [dB]
<b>802.11a Mode</b>				
5500	6	3.947	13	-9.053
5560	6	4.923	13	-8.077
5700	6	4.750	13	-8.250
<b>802.11n Mode</b>				
5500	6.5	4.626	13	-8.374
5560	6.5	4.826	13	-8.174
5700	6.5	4.142	13	-8.858


**5150-5250 MHz: 802.11a Mode**  
**Plot 4.4.1**

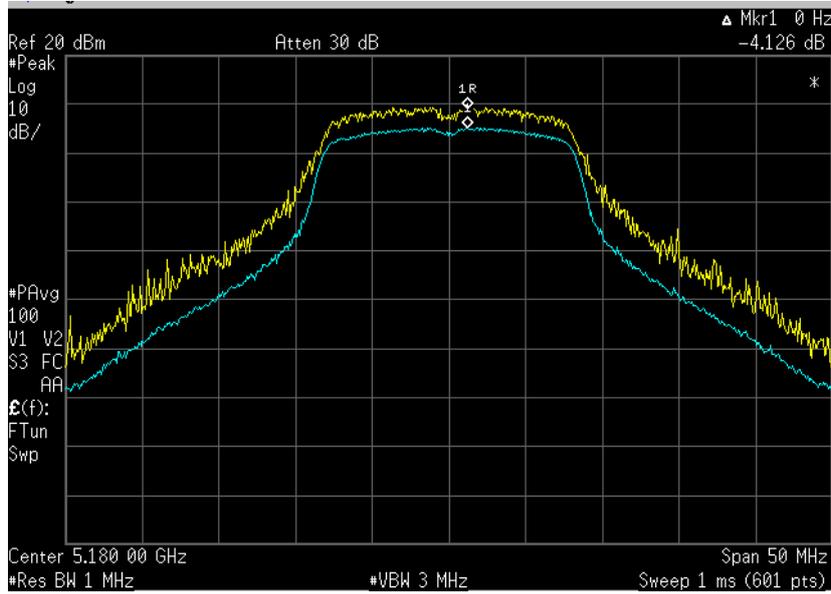


**Plot 4.4.2**

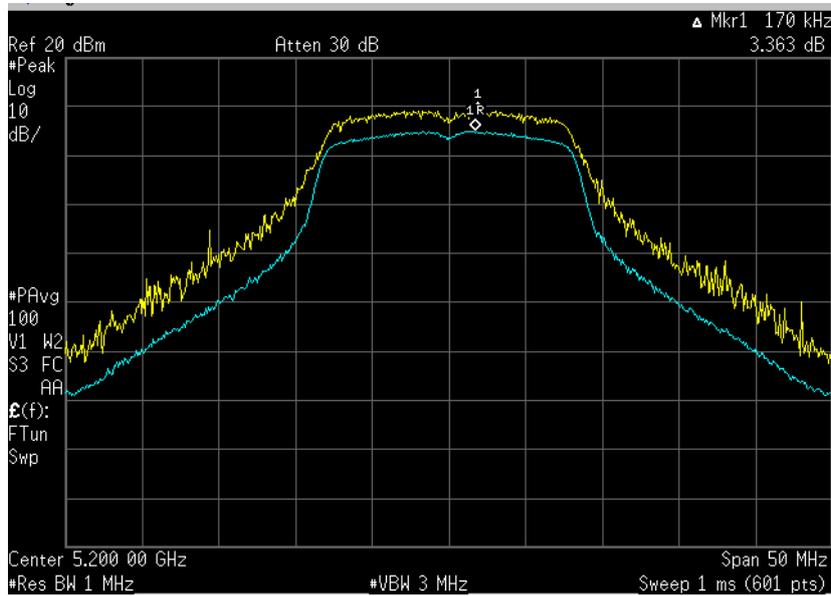


**Plot 4.4.3**

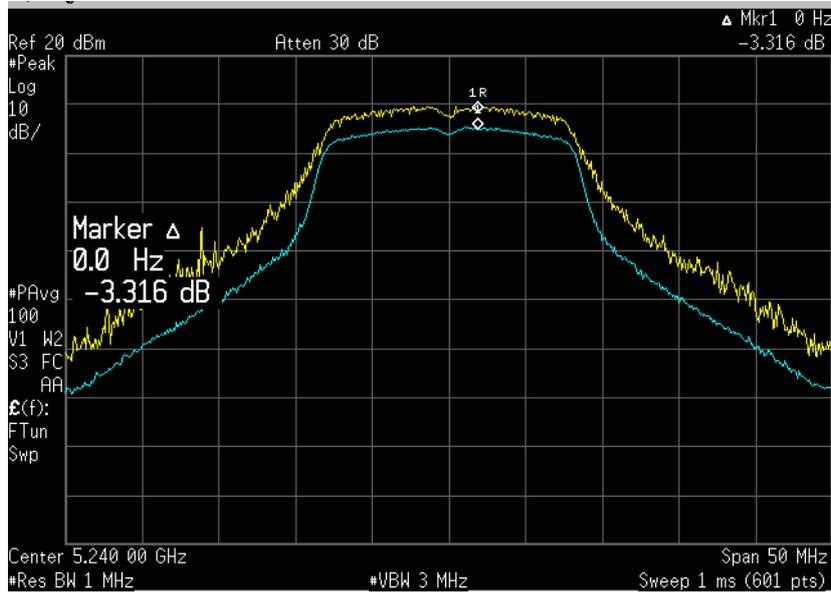


**5150-5250 MHz: 802.11n Mode**  
**Plot 4.4.4**

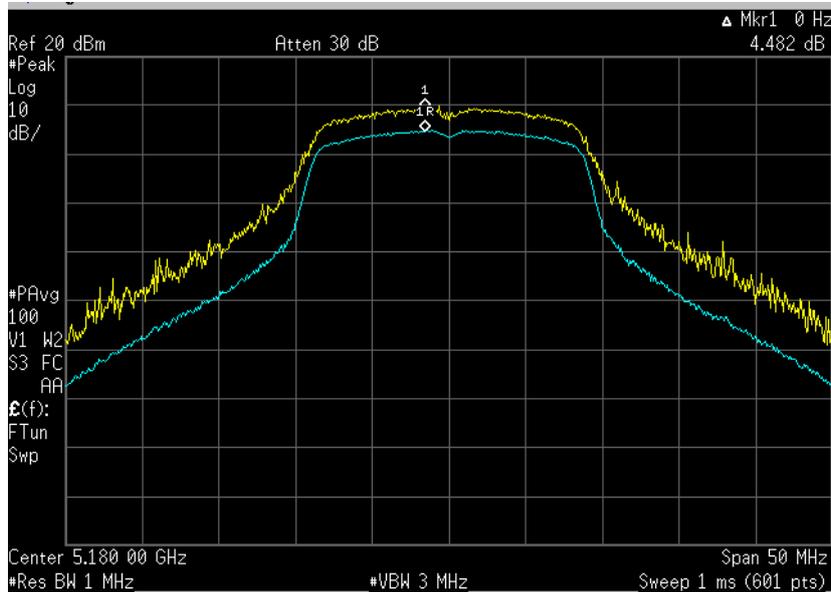


**Plot 4.4.5**

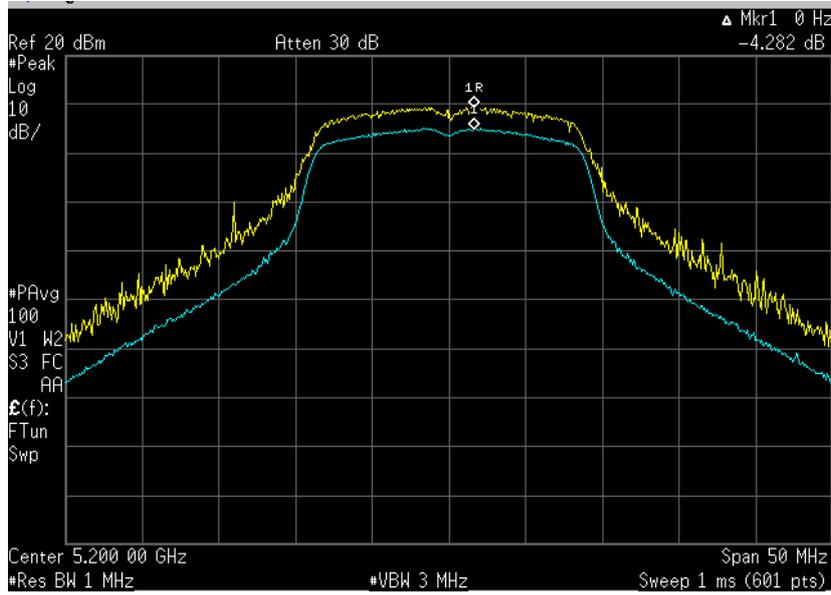


**Plot 4.4.6**

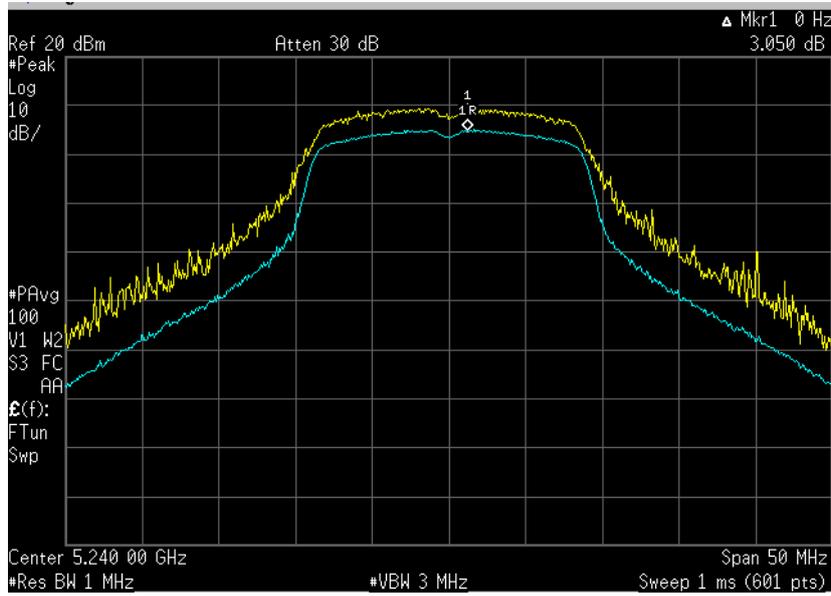


**5250-5350 MHz 802.11n Mode**  
**Plot 4.4.7**

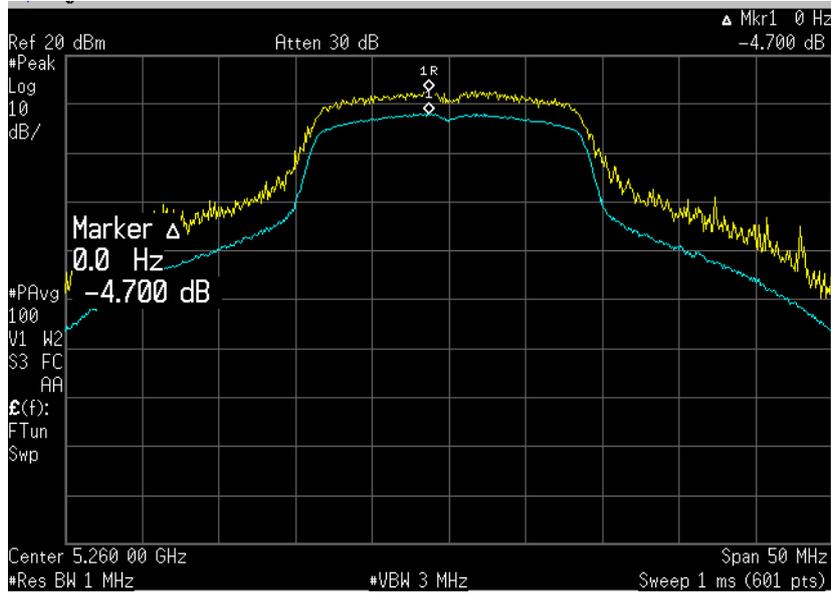


**Plot 4.4.8**

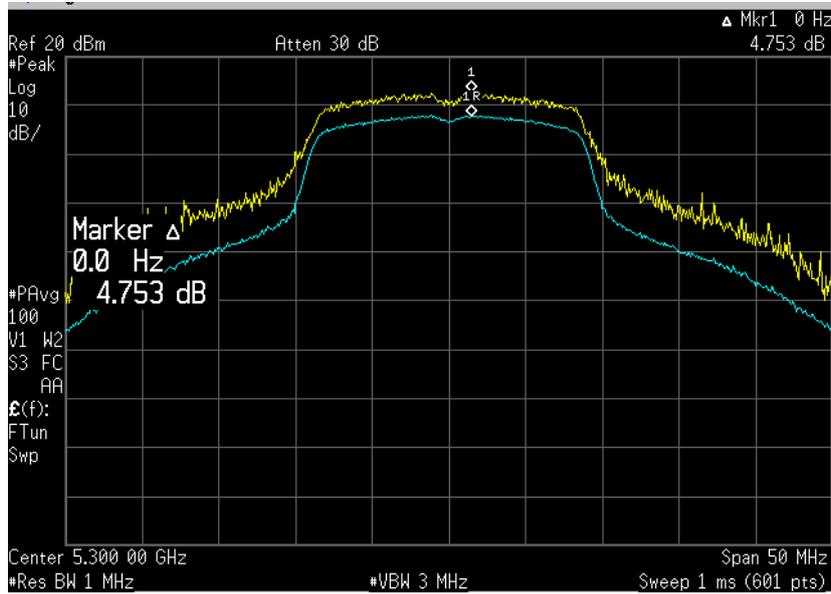


**Plot 4.4.9**

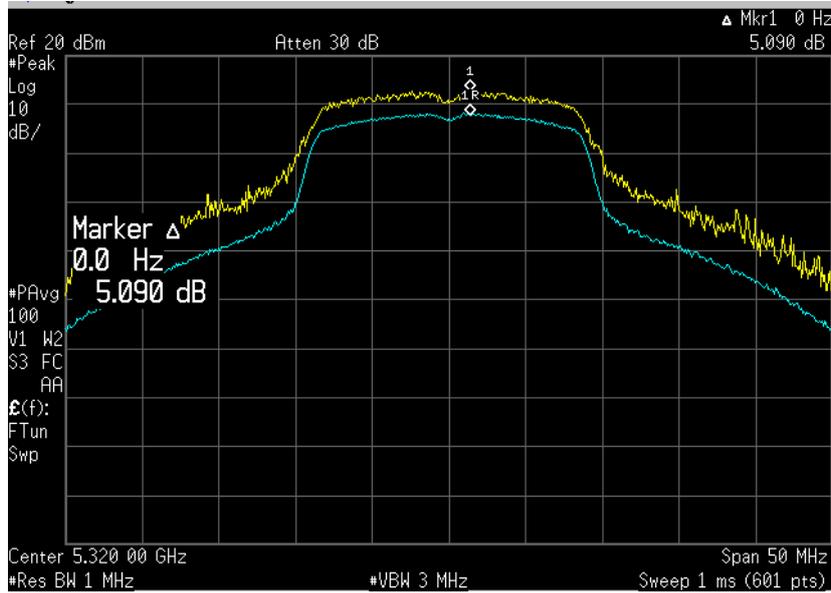


**5250-5350 MHz 802.11a Mode**  
**Plot 4.4.10**

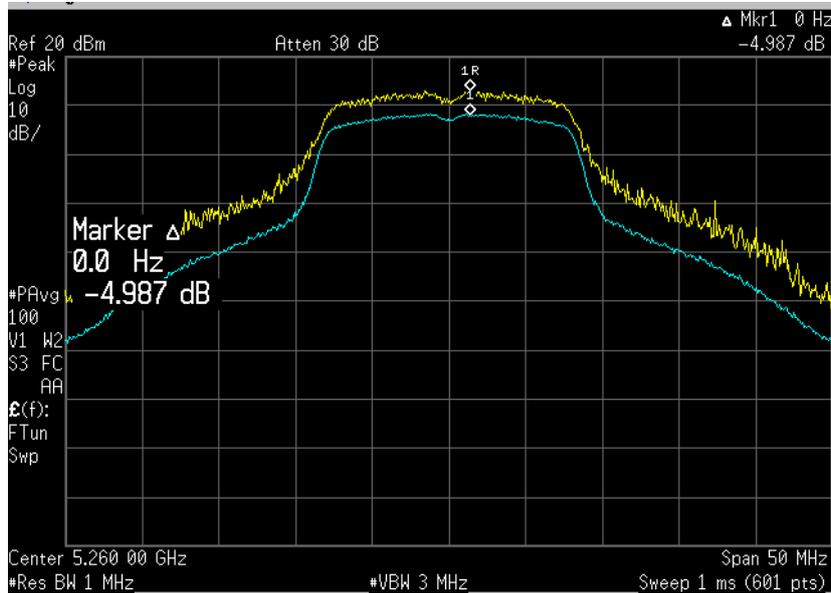


**Plot 4.4.11**

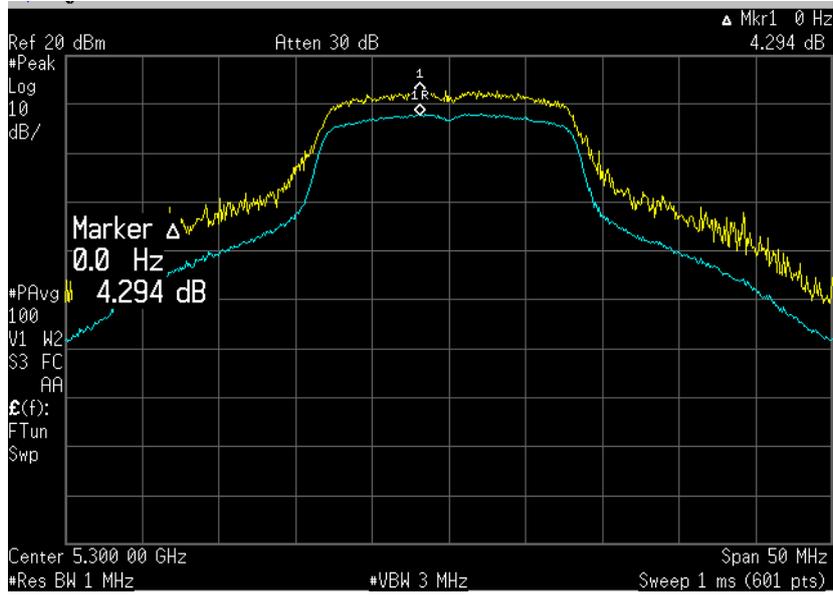


**Plot 4.4.12**

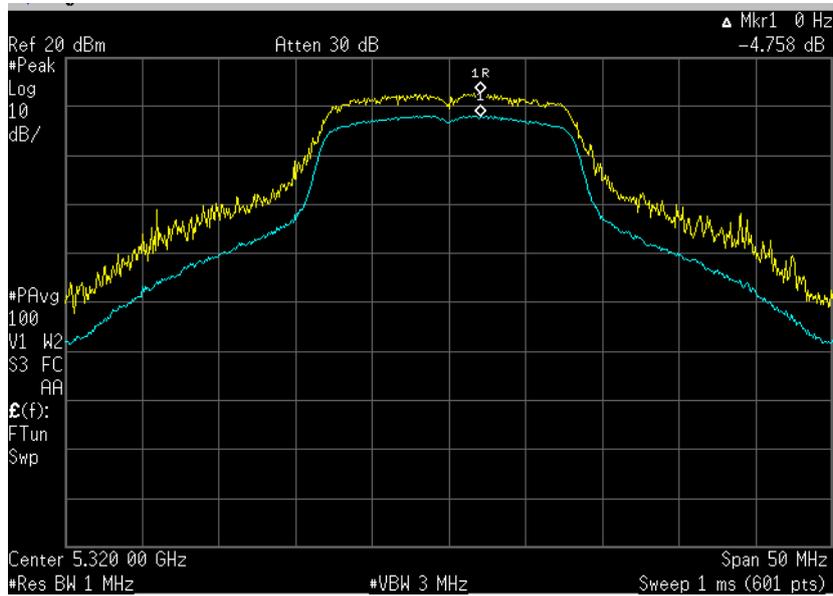


**5470-5725 MHz 802.11a Mode**  
**Plot 4.4.13**

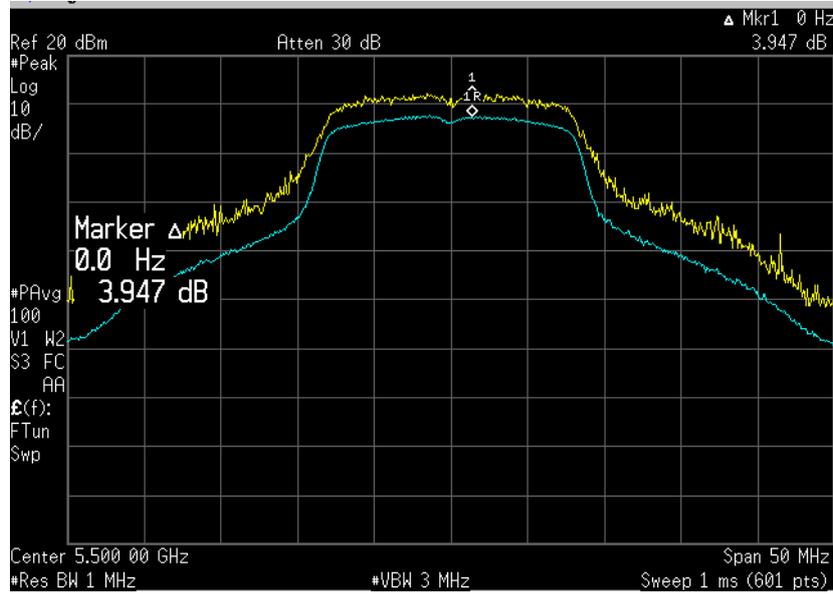


**Plot 4.4.14**

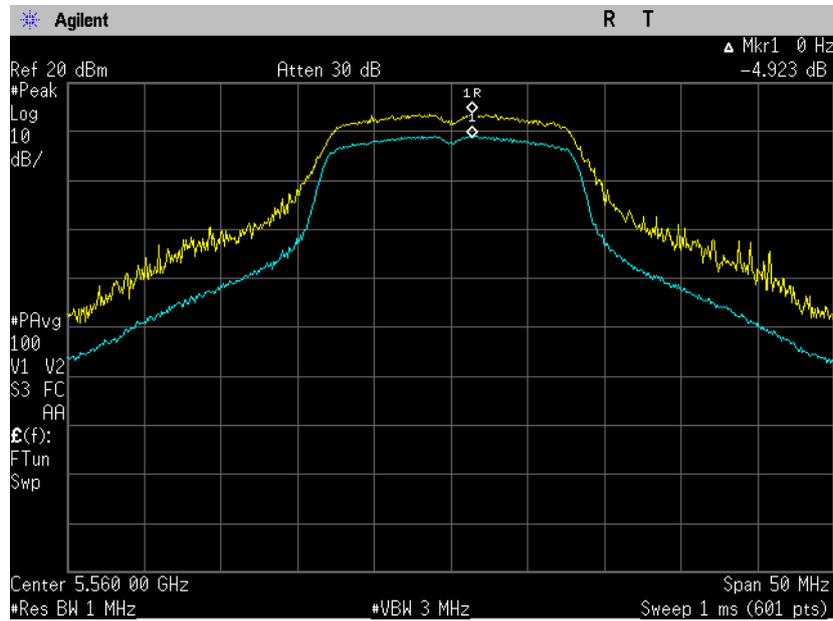


**Plot 4.4.15**

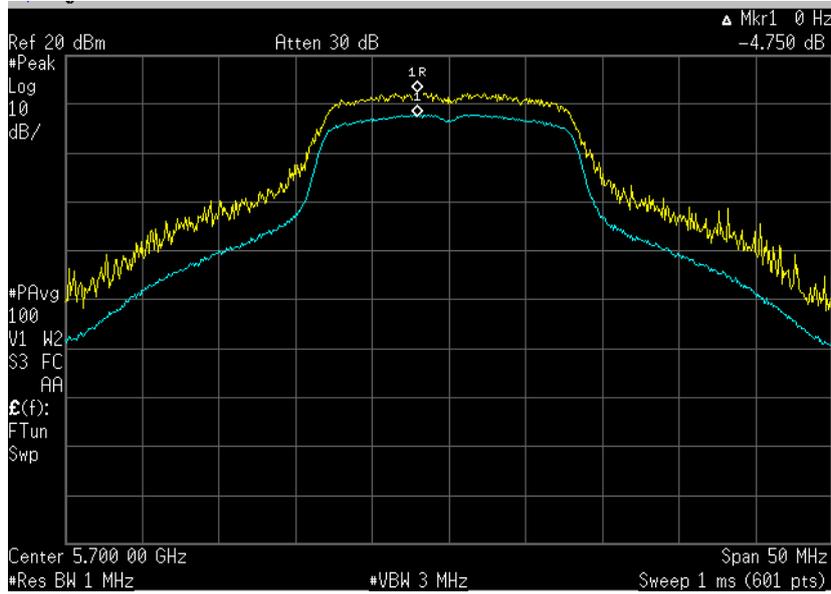


**5470-5725 MHz 802.11n Mode**  
**Plot 4.4.16**

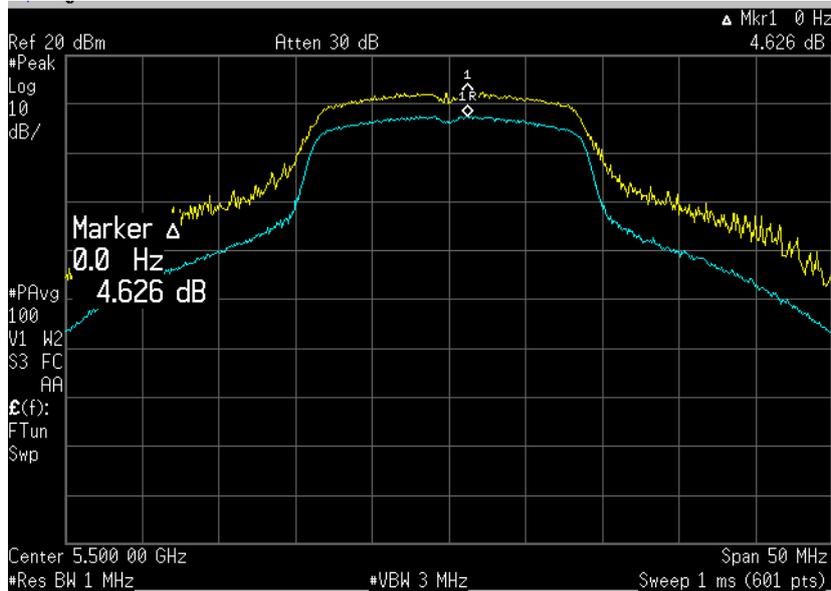

**Plot 4.4.17**

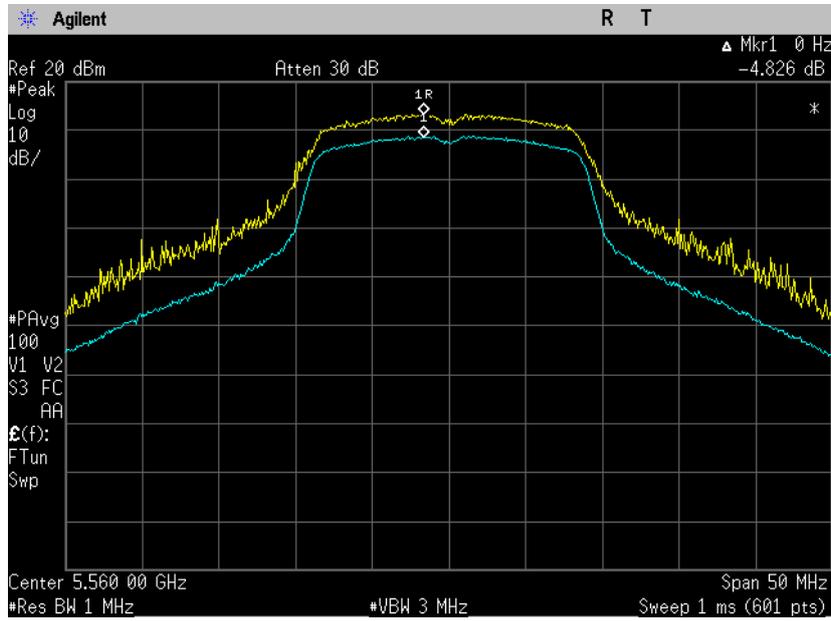

**Plot 4.4.18**

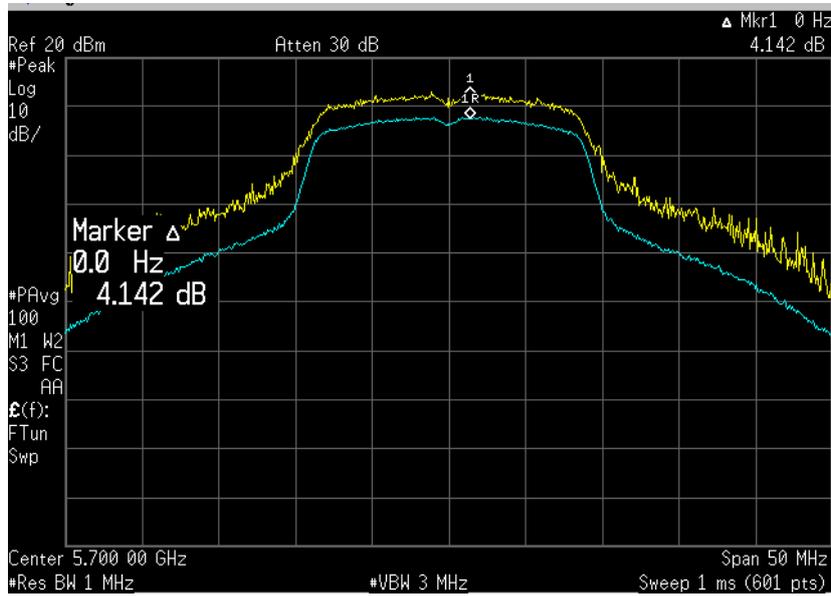

#### 4.5. Conducted Spurious Emissions

Reference document:	<b>47 CFR §15.407 (b) (1),(2),(3),(4) &amp; §15.407 (b)(6)</b>		
Test Requirements:	<p>The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:</p> <p>For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p> <p>For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p> <p>For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p> <p>Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Sec. 15.209.</p>		
Test setup:	See sec 2.1	<b>Pass</b>	
Method of testing:	KDB 789033 v01r01,sec G 3)4), Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 1 MHz, VBW ≥1 MHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.5.1- Plot 4.5.56	

**Note:** The EUT was tested with its internal antenna to radiated emission (see NII EMC section 4.6) and we did not perform rad. Cabinet testing because it was not required in this case. We also performed Conducted emissions although it was not required to demonstrate compliance (refer to KDB 789033 Section G)3b) )

**Test results:**

**5150-5250 MHz: Spurious**

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Margin [dB]	Result
<b>802.11a Mode</b>							
5180	6	2	All emission at least 10 dB below limit		-27	>10	Comply
5220	6						Comply
5240	6						Comply
<b>802.11n Mode</b>							
5180	6.5	2	All emission at least 10 dB below limit		-27	>10	Comply
5220	6.5						Comply
5240	6.5						Comply

**5250-5350 MHz: Spurious**

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Margin [dB]	Result
<b>802.11a Mode</b>							
5260	6	2.4	All emission at least 10 dB below limit		-27	>10	Comply
5300	6						Comply
5320	6						Comply
<b>802.11n Mode</b>							
5260	6.5	2.4	All emission at least 10 dB below limit		-27	>10	Comply
5300	6.5						Comply
5320	6.5						Comply

**5470-5725 MHz: Spurious**

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Margin [dB]	Result
<b>802.11a Mode</b>							
5500	6	2	All emission at least 10 dB below limit		-27	>10	Comply
5560	6	1.9					Comply
5700	6	1.9					Comply
<b>802.11n Mode</b>							
5500	6.5	2	All emission at least 10 dB below limit		-27	>10	Comply
5560	6.5	1.9					Comply
5700	6.5	1.9					Comply

**5150-5250 MHz: Band edge**

	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Margin [dB]	Result
802.11a Mode							
5180	54	2	All emission at least 10 dB below limit		-27	>10	Comply
5240	54	2.4			-27	>10	Comply
802.11n Mode							
5180	65	2	All emission at least 10 dB below limit		-27	>10	Comply
5240	65	2.4			-27	>10	Comply


**5250-5350 MHz: Band edge**

	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Margin [dB]	Result
802.11a Mode							
5260	54	2.4	All emission at least 10 dB below limit		-27	>10	Comply
5320	54	2.4			-27	>10	Comply
802.11n Mode							
5260	65	2.4	All emission at least 10 dB below limit		-27	>10	Comply
5320	65	2.4			-27	>10	Comply


**5470-5725 MHz: Band edge**

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Margin [dB]	Result
802.11a Mode							
5500	54	1.9	All emission at least 10 dB below limit		-27	>10	Comply
5700	54	1.9			-27	>10	Comply
802.11n Mode							
5500	65	1.9	All emission at least 10 dB below limit		-27	>10	Comply
5700	65	1.9			-27	>10	Comply


**802.11a Mode**  
**Frequency 5150-5250 MHz**  
**Frequency 5180**  
**Plot 4.5.1**

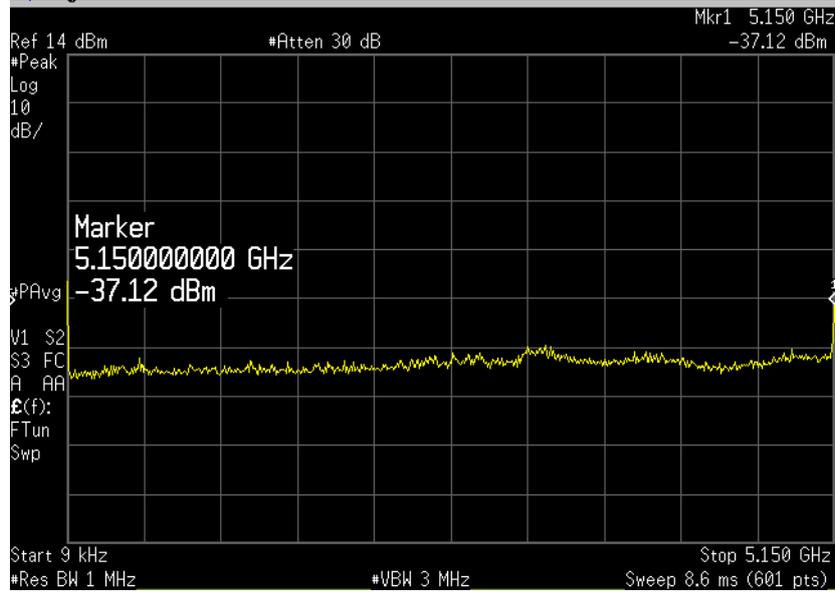


**Plot 4.5.2**

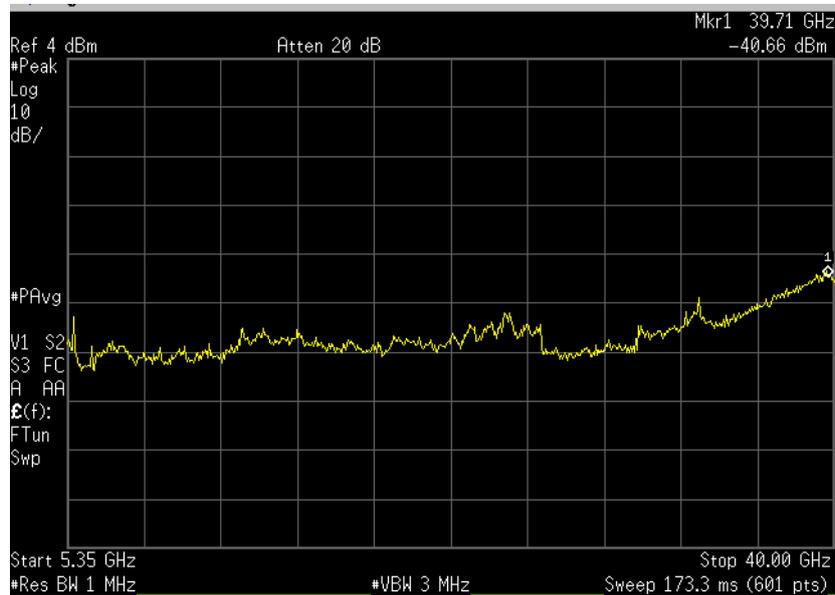


**Frequency 5220**  
**Plot 4.5.3**

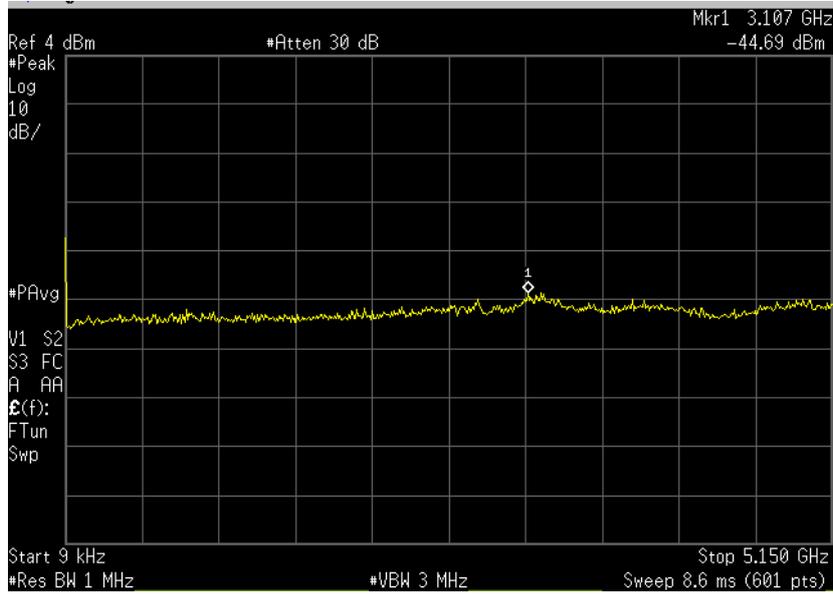


**Plot 4.5.4**

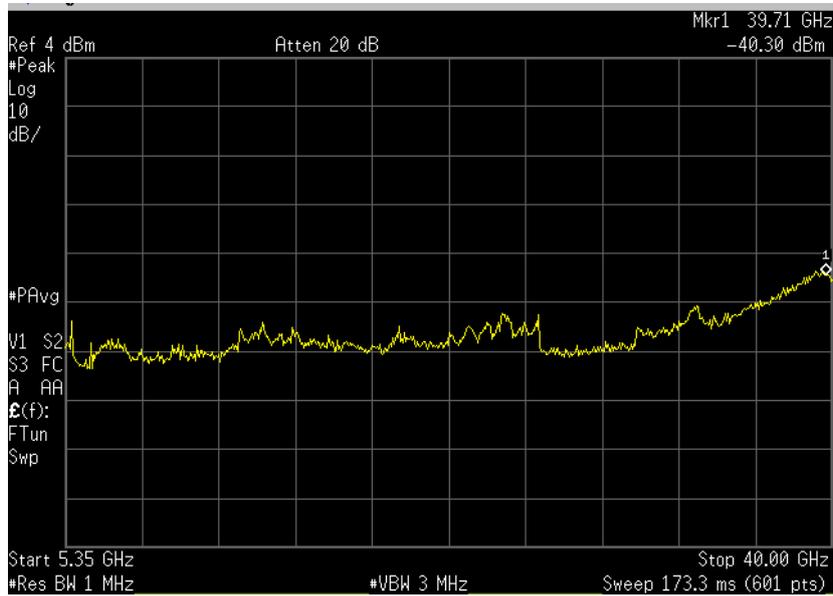


**Frequency 5240**  
**Plot 4.5.5**

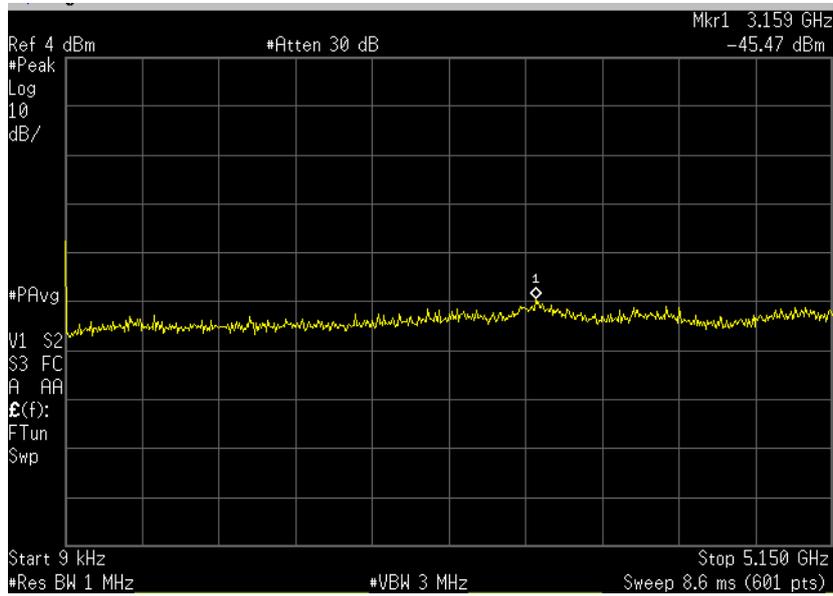


**Plot 4.5.6**

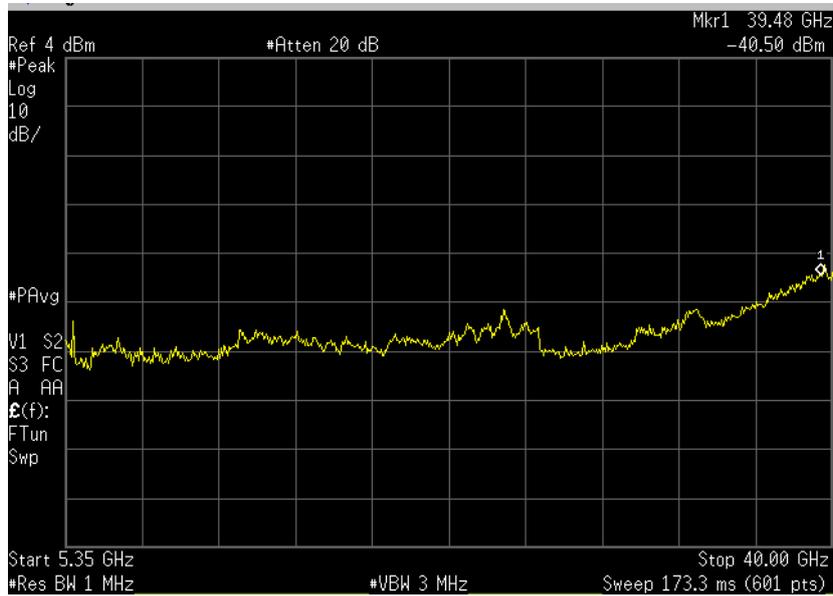


**802.11n Mode**  
**Frequency 5150-5250 MHz**  
**Frequency 5180**  
**Plot 4.5.7**

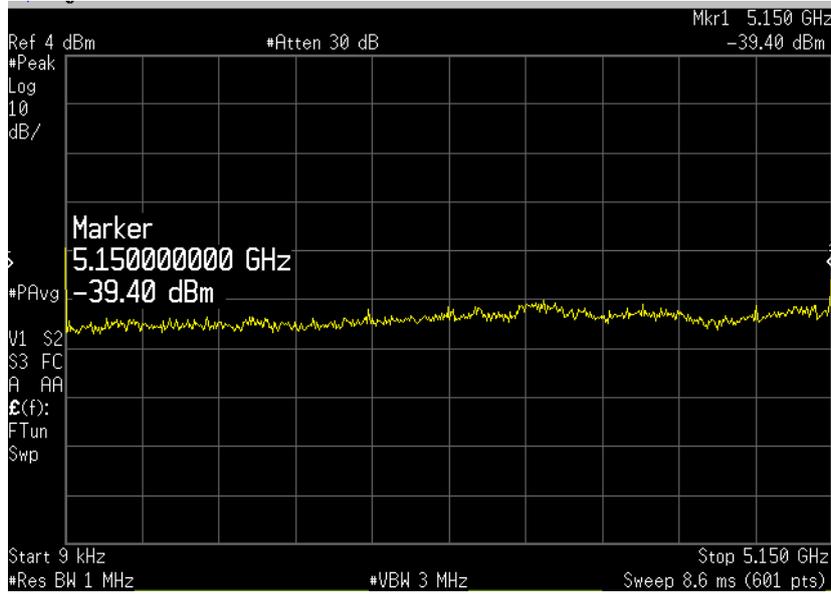


**Plot 4.5.8**

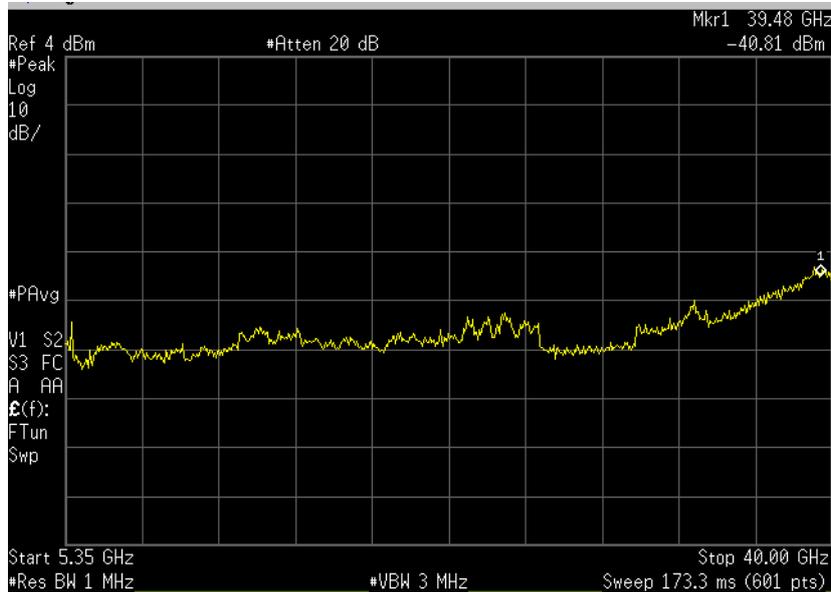


**Frequency 5220**  
**Plot 4.5.9**

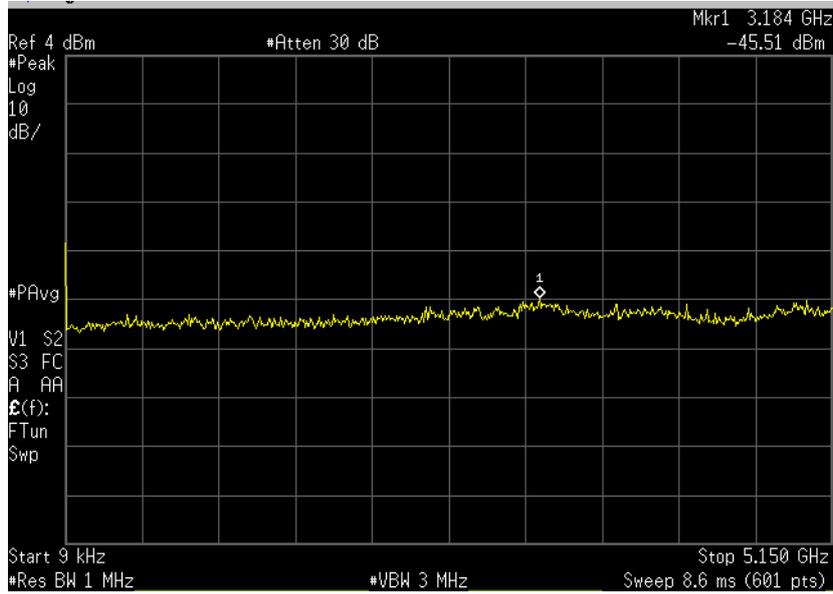


**Plot 4.5.10**

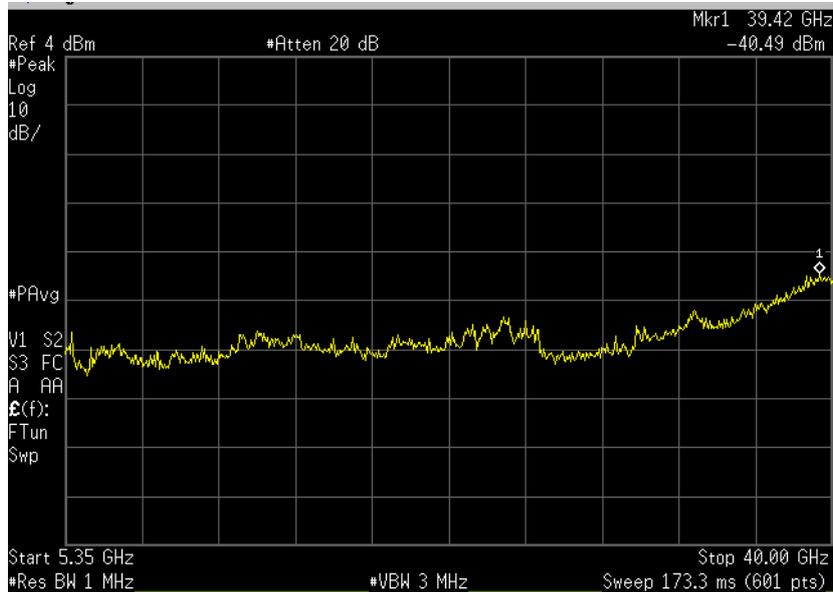


**Frequency 5240**  
**Plot 4.5.11**

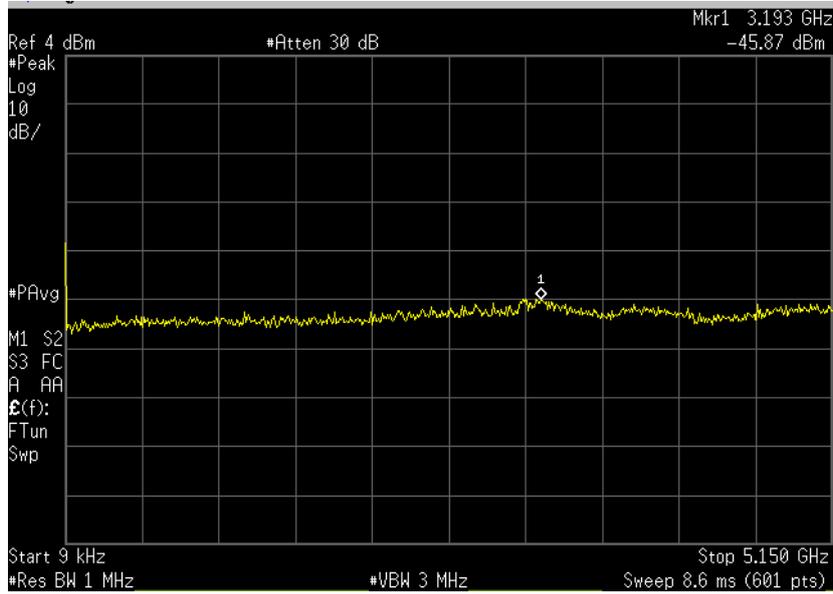


**Plot 4.5.12**

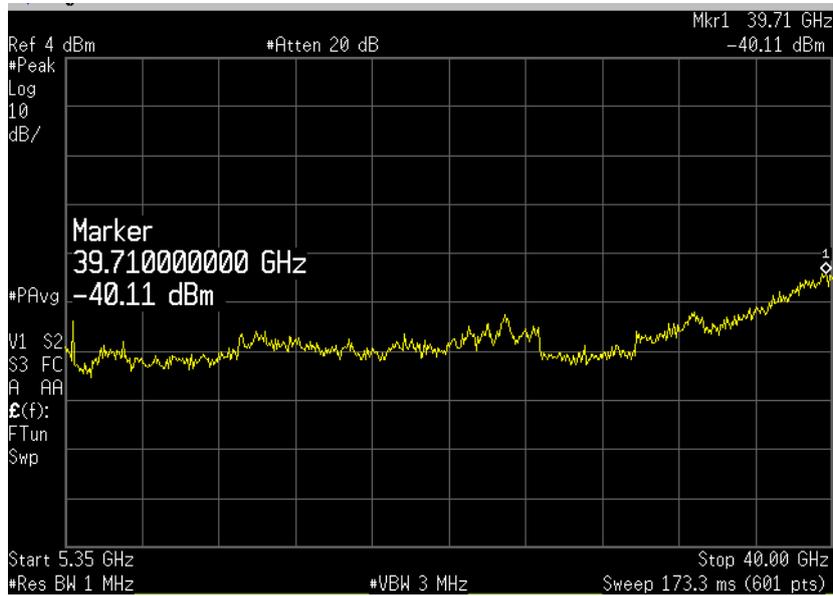


**Spurious 802.11a Mode**  
**Frequency 5250-5350 MHz**  
**Frequency 5260**  
**Plot 4.5.13**

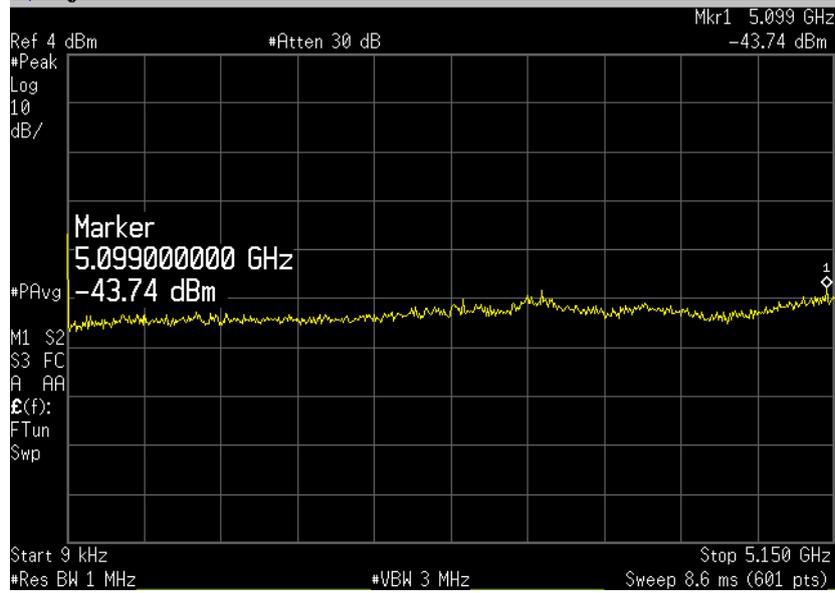


**Plot 4.5.14**

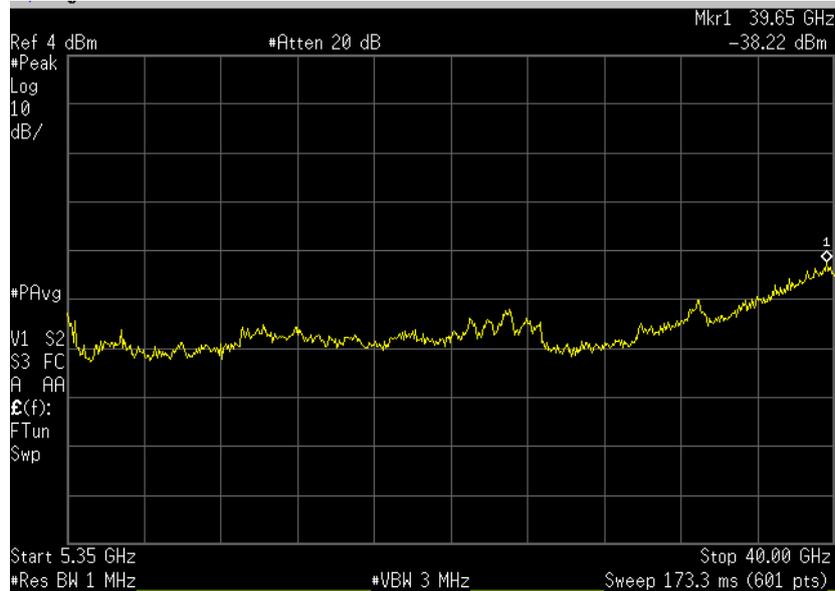


**Frequency 5300**  
**Plot 4.5.15**

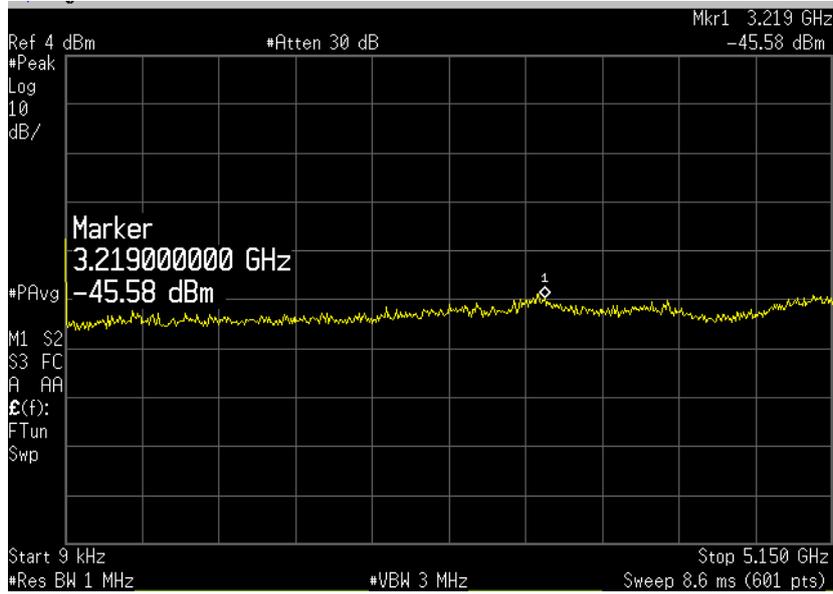


**Plot 4.5.16**

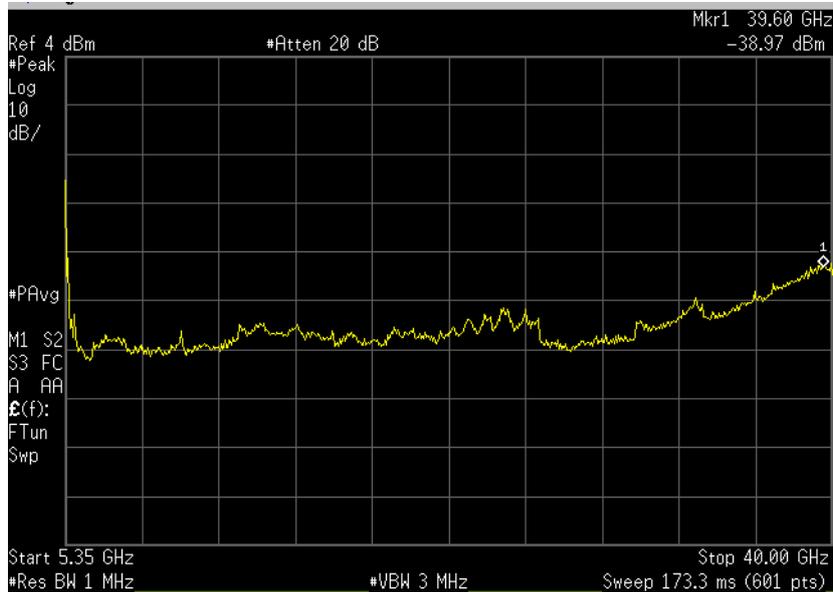


**Frequency 5320**  
**Plot 4.5.17**

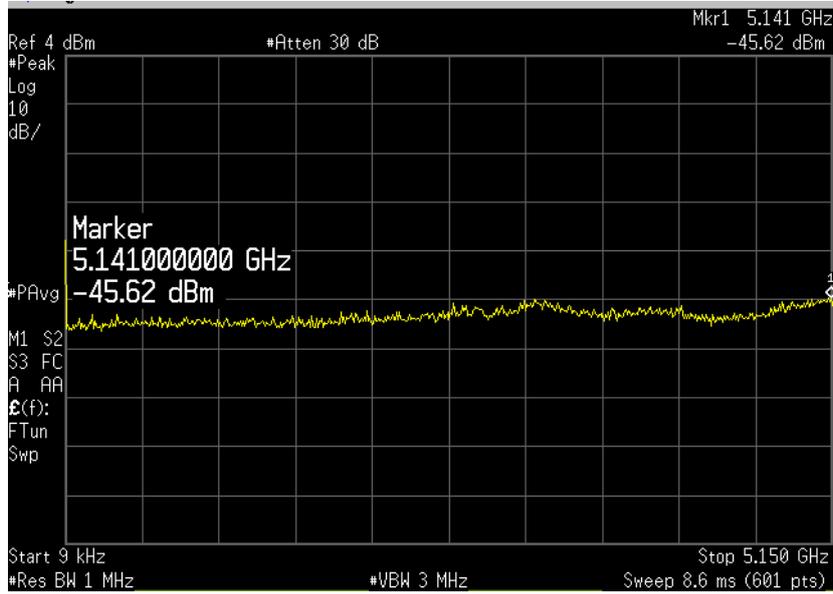


**Plot 4.5.18**

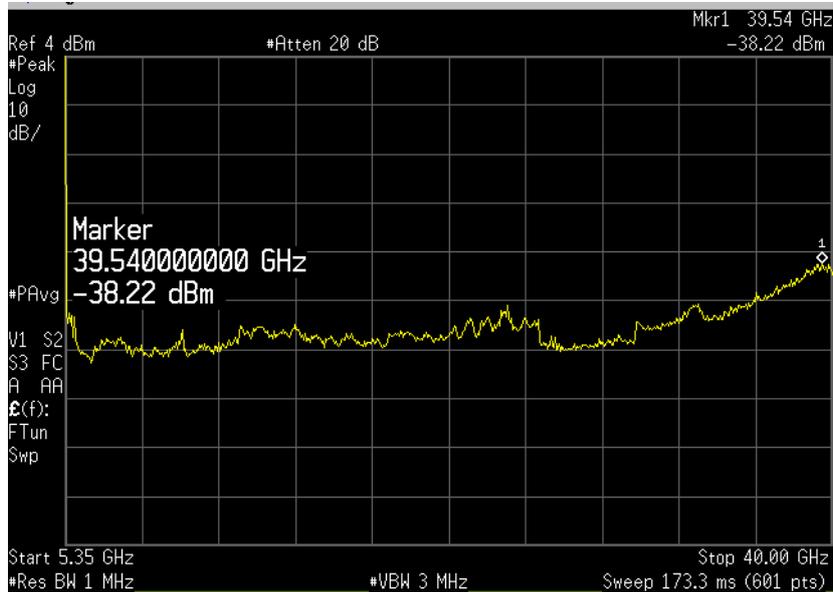


**Spurious 802.11n Mode**  
**Frequency 5250-5350 MHz**  
**Frequency 5260**  
**Plot 4.5.19**

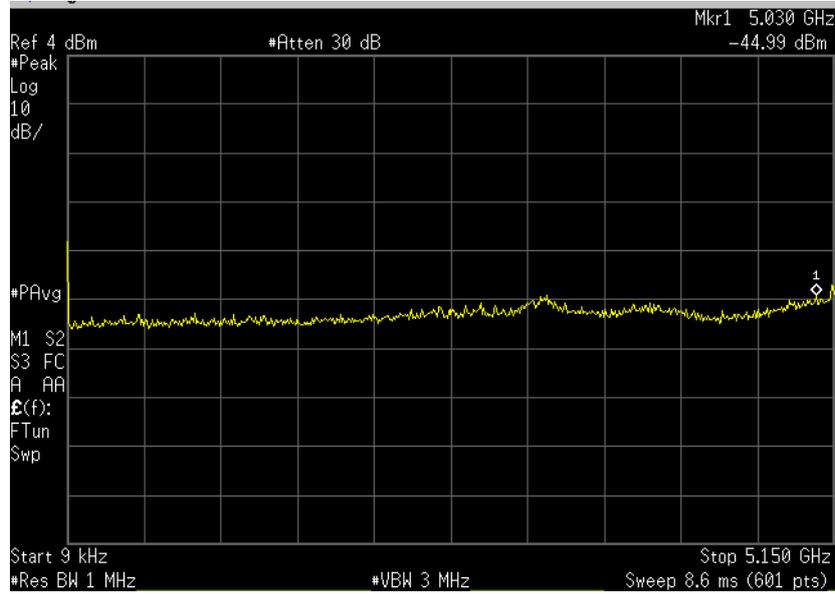


**Plot 4.5.20**

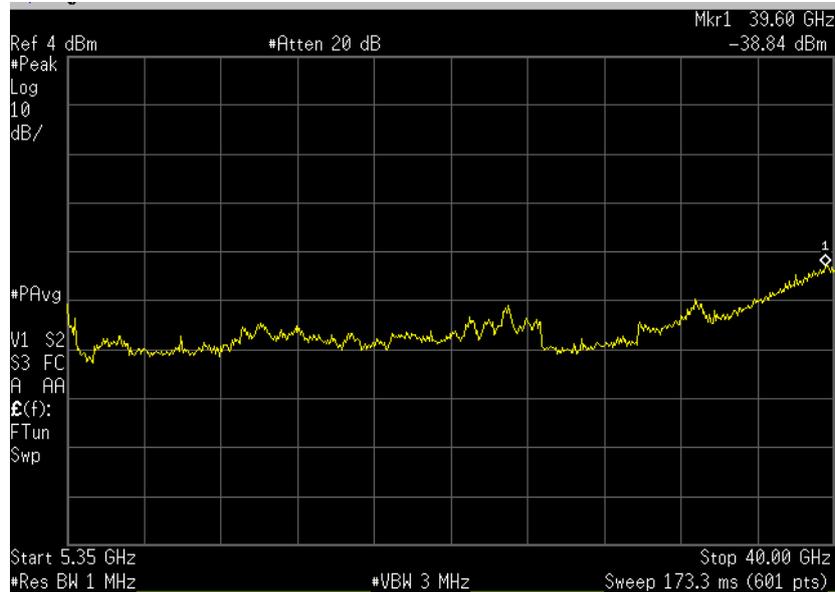


**Frequency 5300**  
**Plot 4.5.21**

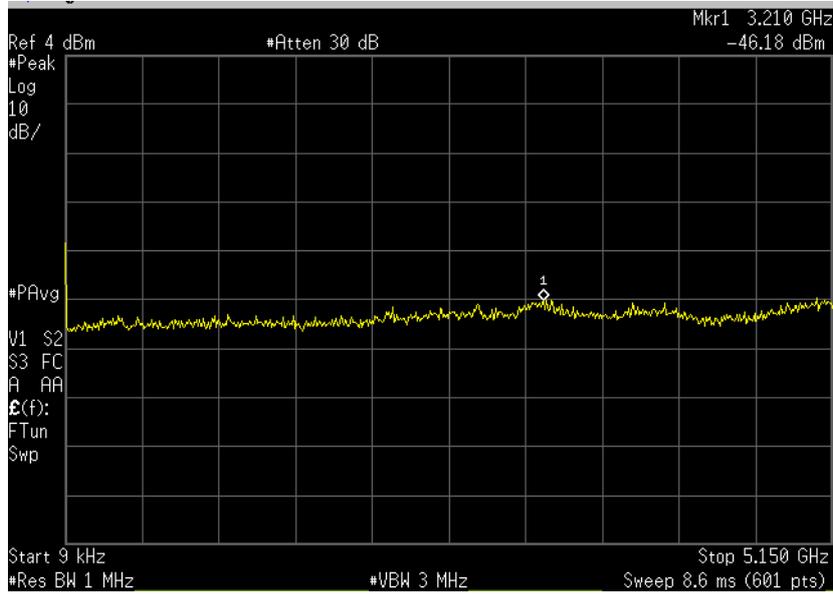


**Plot 4.5.22**

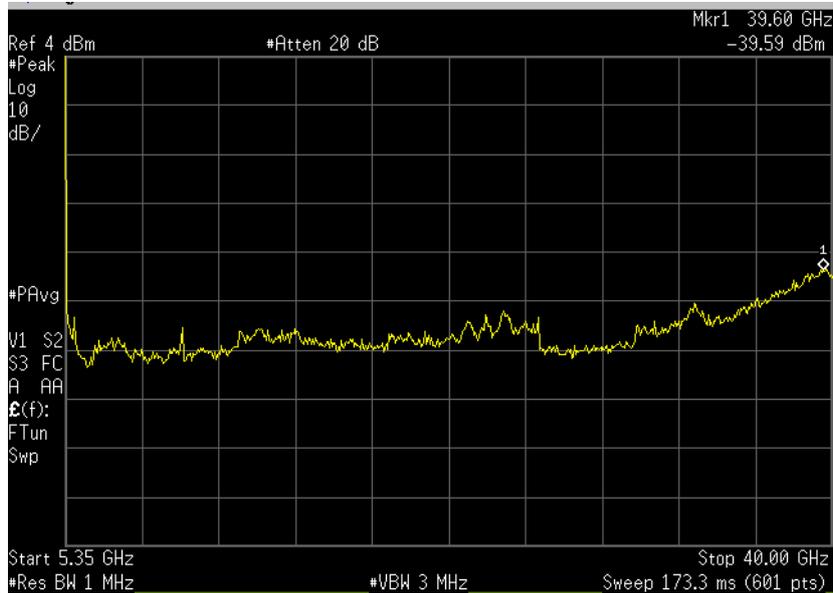


**Frequency 5320**  
**Plot 4.5.23**

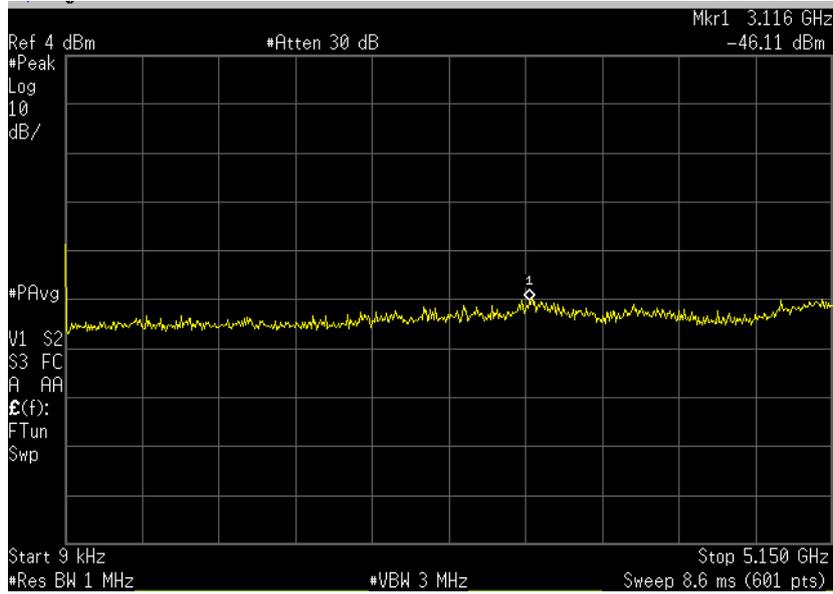


**Plot 4.5.24**

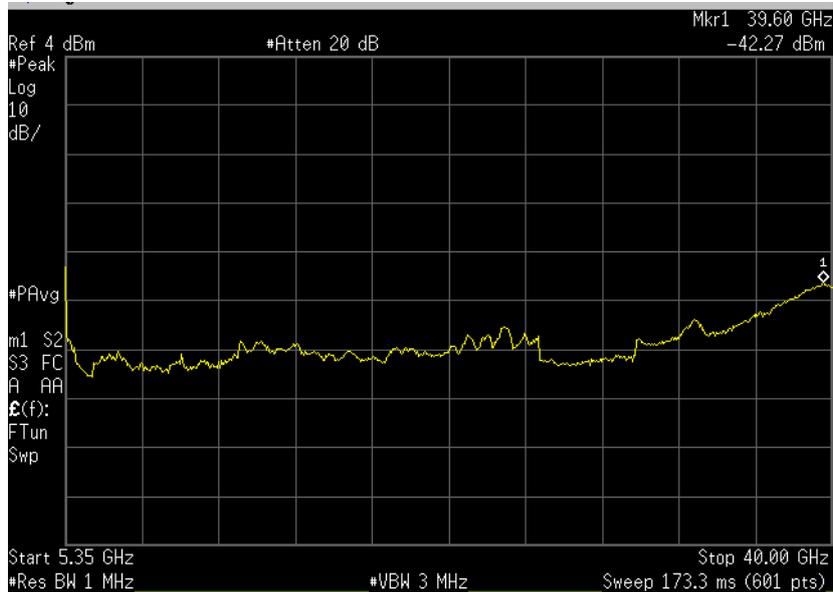


**Spurious 802.11a Mode  
Frequency 5470-5725 MHz  
Frequency 5500  
Plot 4.5.25**

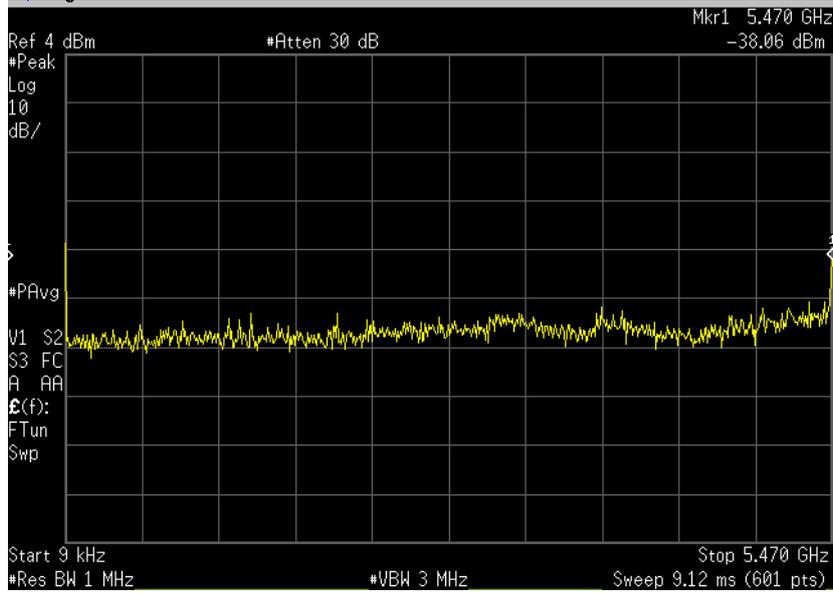


**Plot 4.5.26**

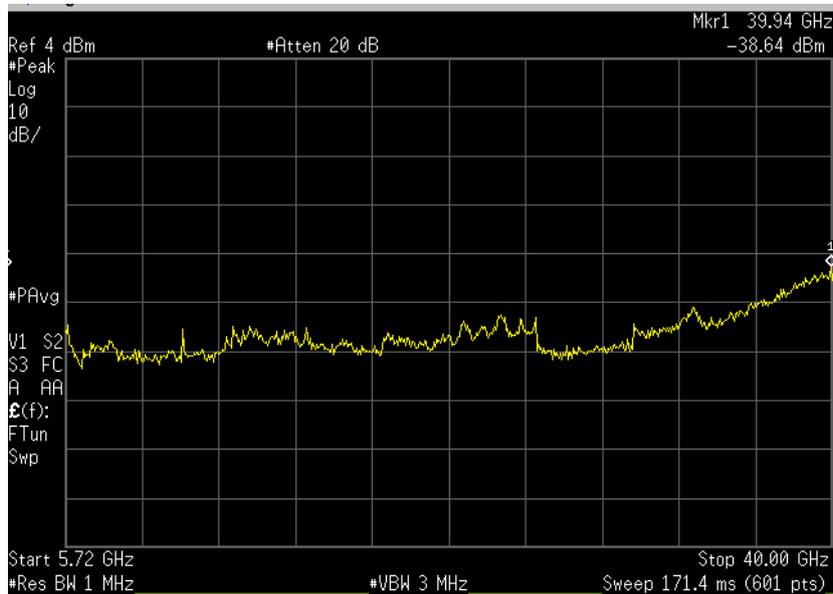


**Frequency 5560**  
**Plot 4.5.27**

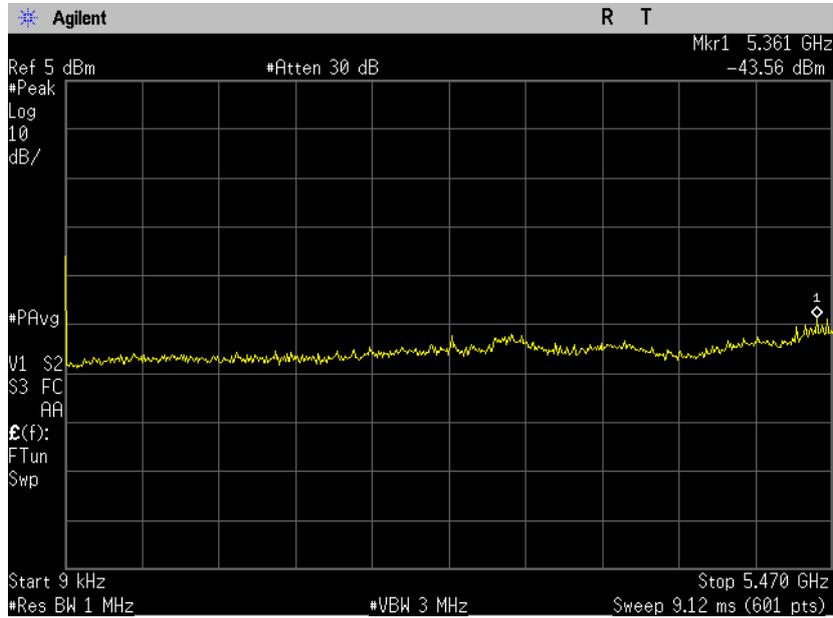


**Plot 4.5.28**

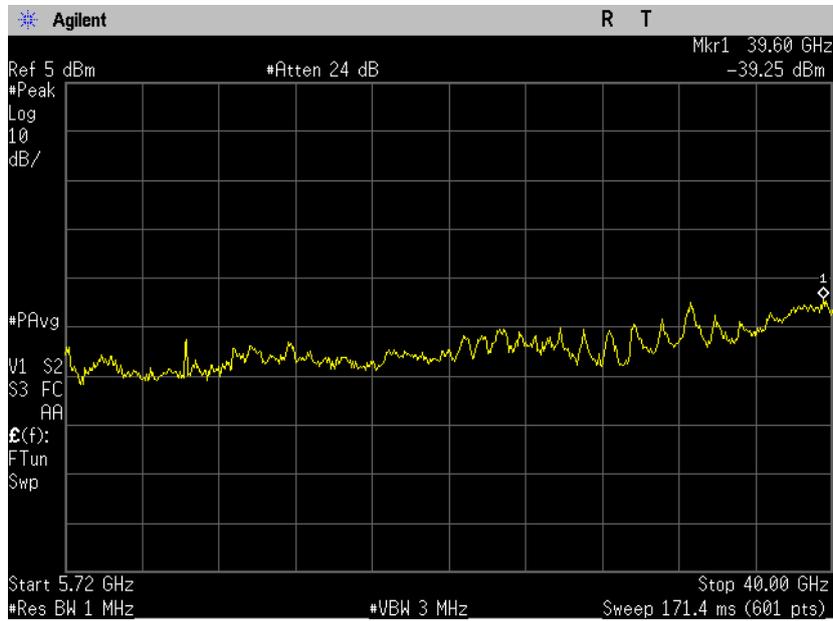


**Frequency 5700**  
**Plot 4.5.29**

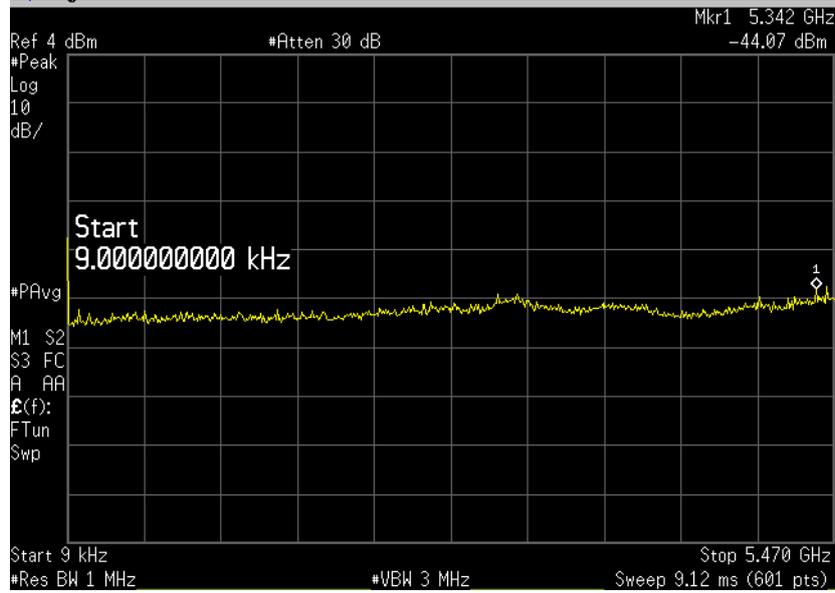


**Plot 4.5.30**

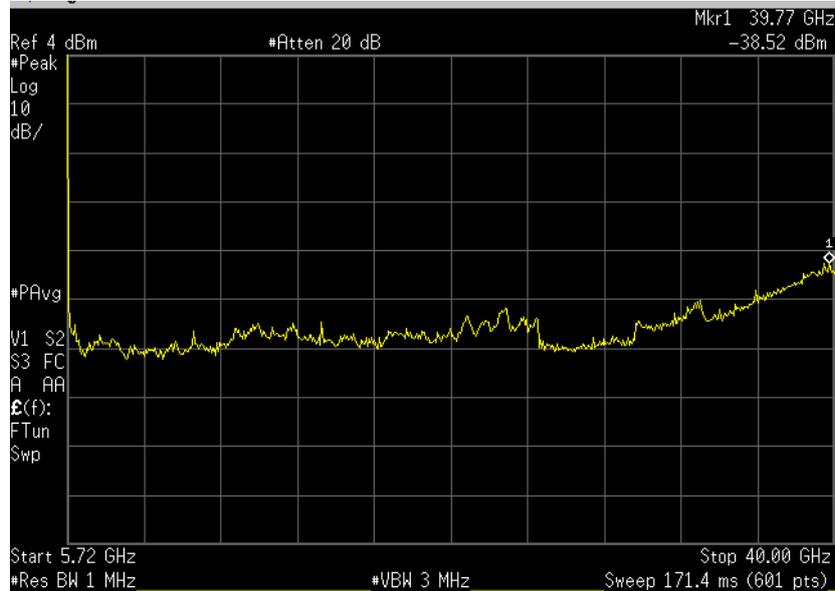


**Spurious 802.11n Mode**  
**Frequency 5470-5725 MHz**  
**Frequency 5500**  
**Plot 4.5.31**

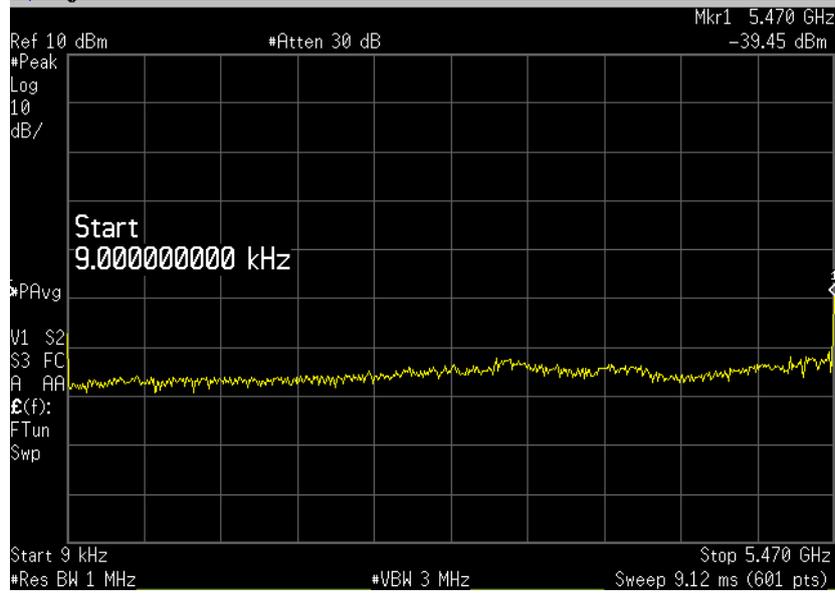


**Plot 4.5.32**

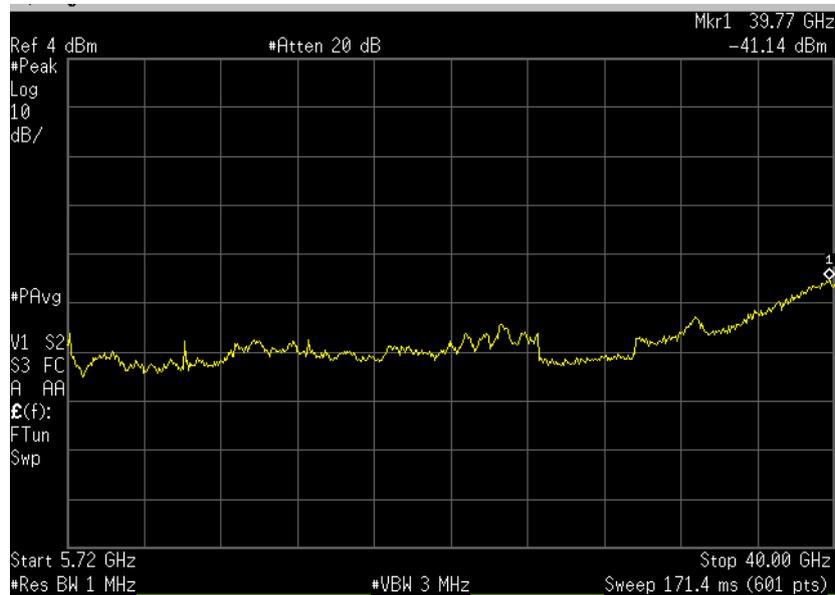


**Frequency 5560**  
**Plot 4.5.33**

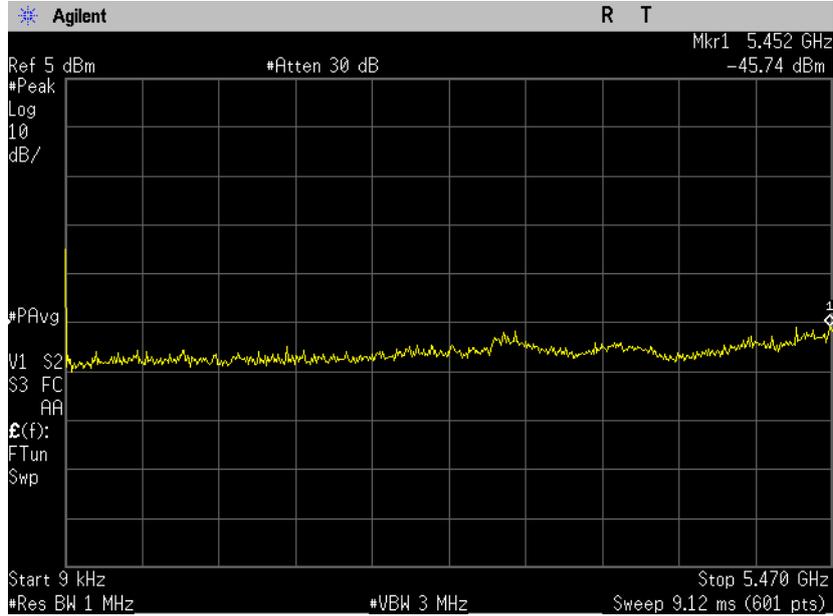


**Plot 4.5.34**

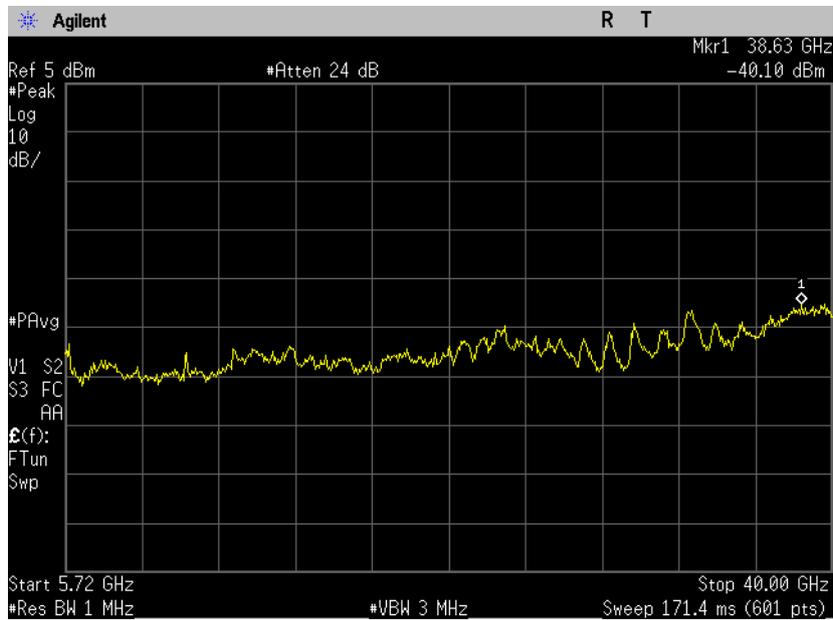


**Frequency 5700**  
**Plot 4.5.35**

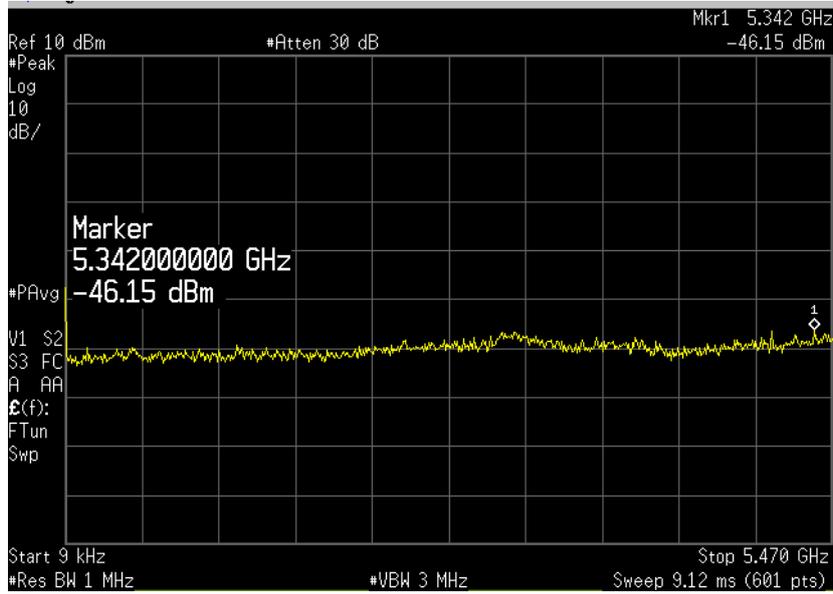


**Plot 4.5.36**

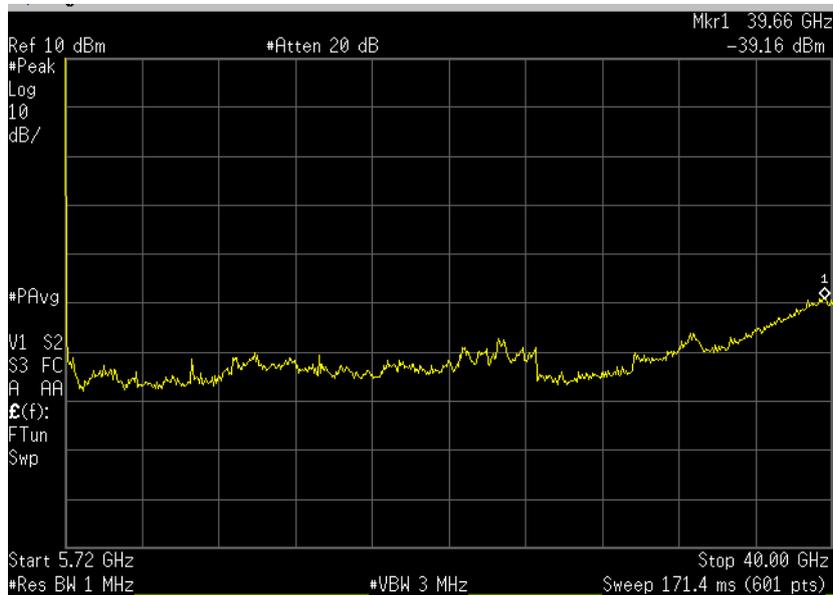


**Frequency 5600**  
**Plot 4.5.37**

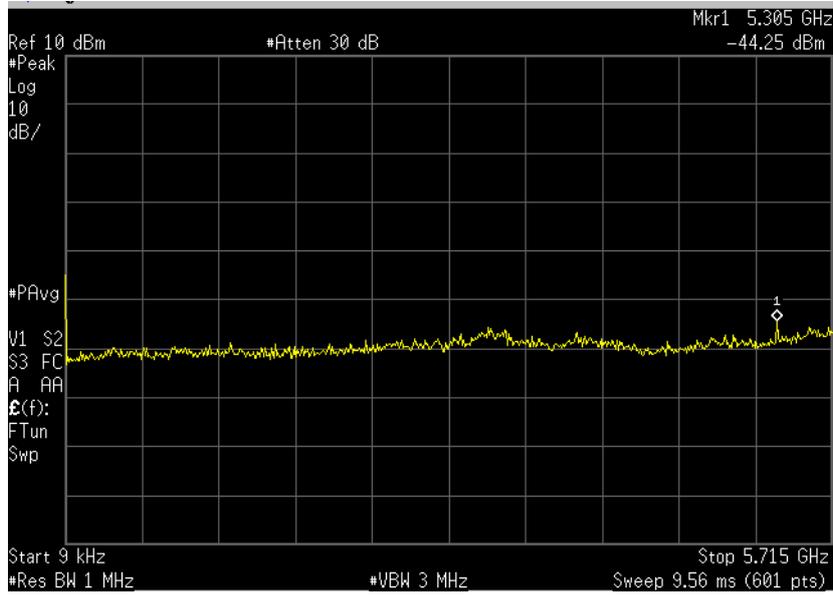


**Plot 4.5.38**

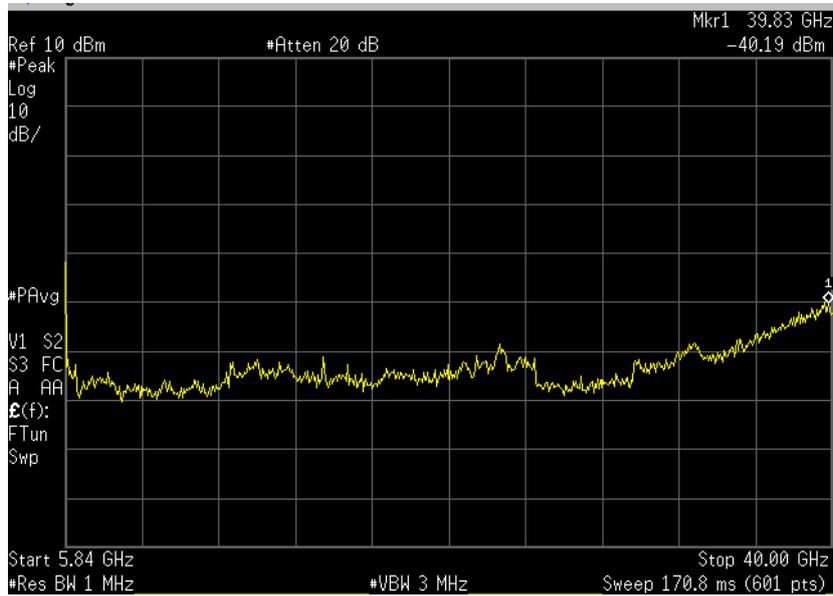


**Frequency 5700**  
**Plot 4.5.39**

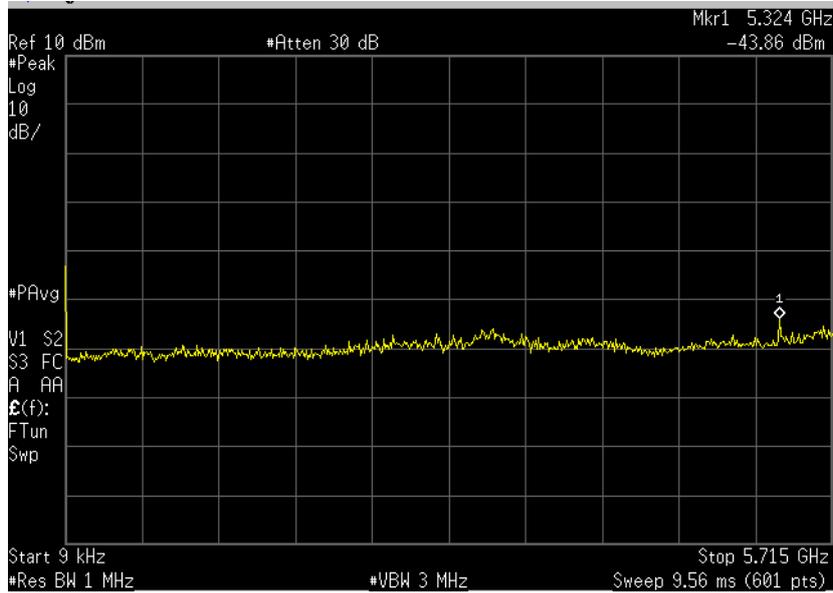


**Plot 4.5.40**

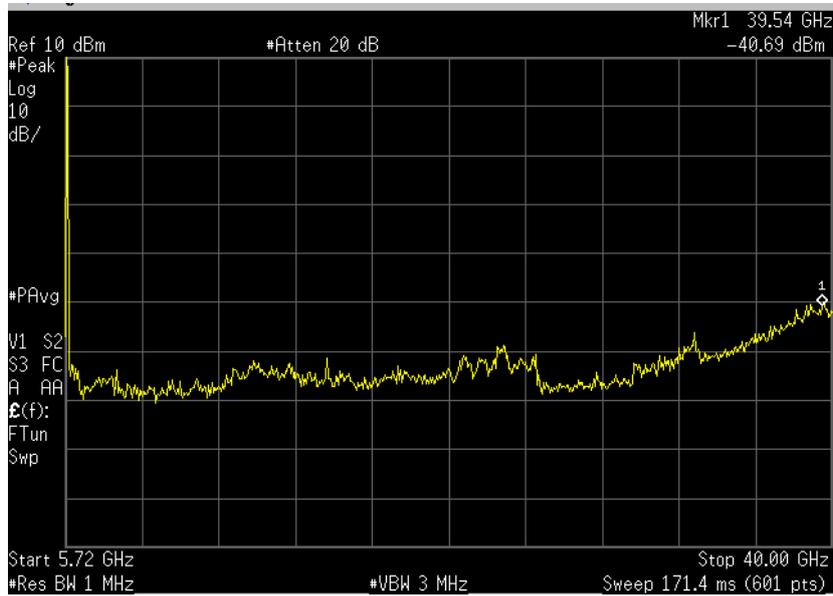


**Frequency 5600**  
**Plot 4.5.41**

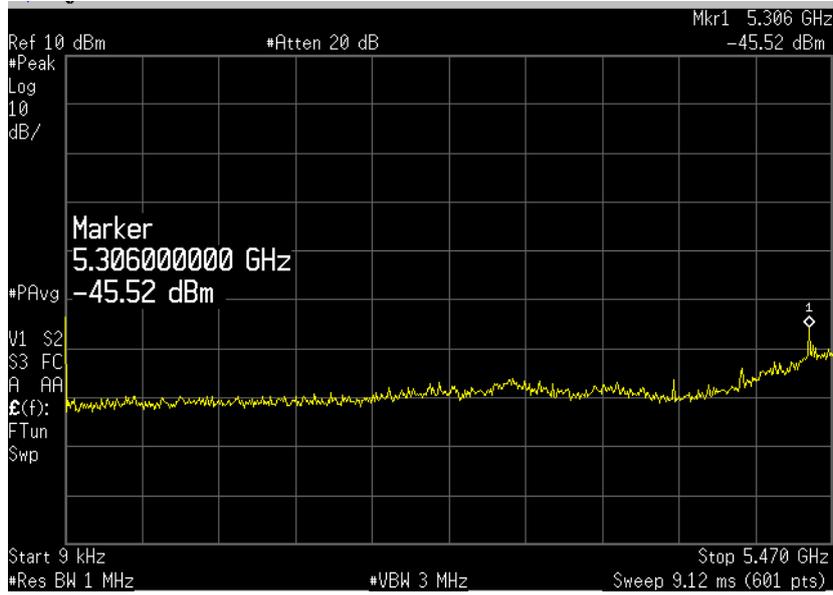


**Plot 4.5.42**

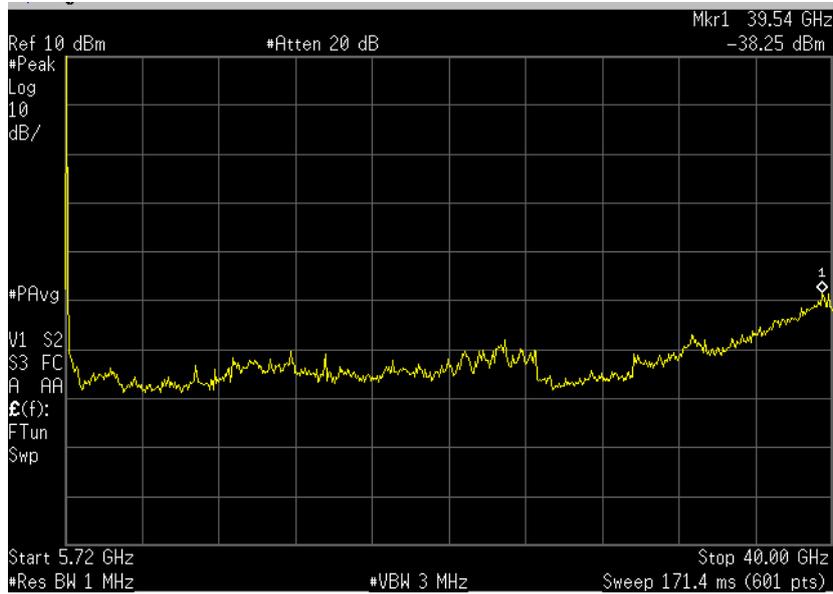


**Frequency 5700**  
**Plot 4.5.43**

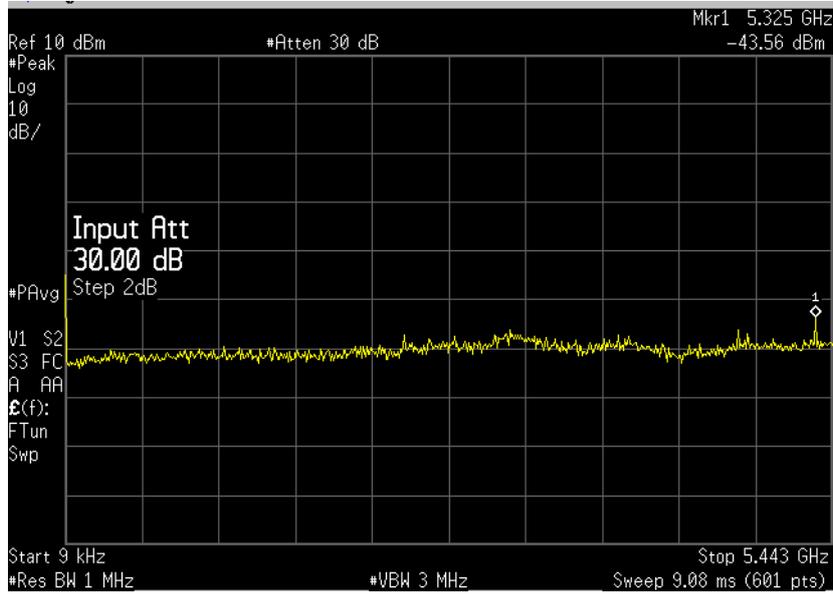


**Plot 4.5.44**

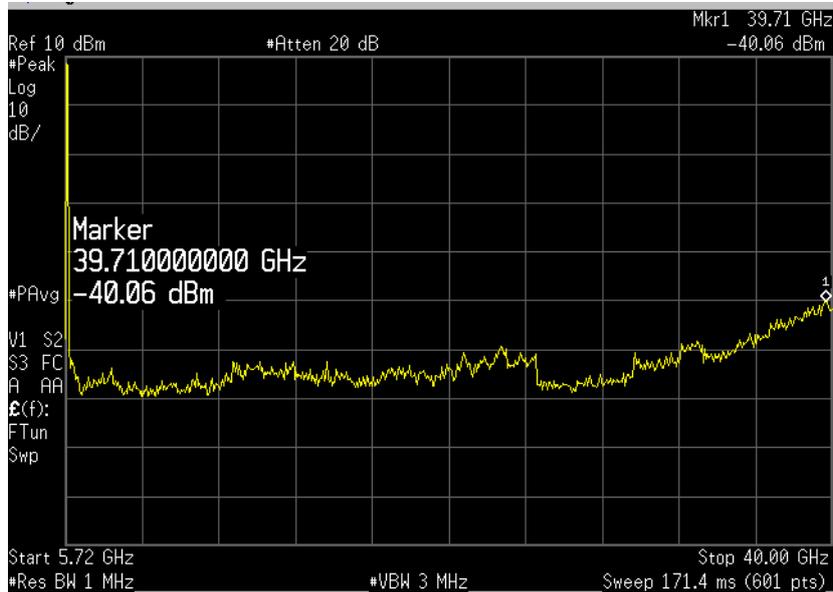


**802.11a Mode Band edge**  
**Band Edge 5150-5250 MHz**  
**Frequency 5180**  
**Plot 4.5.45**

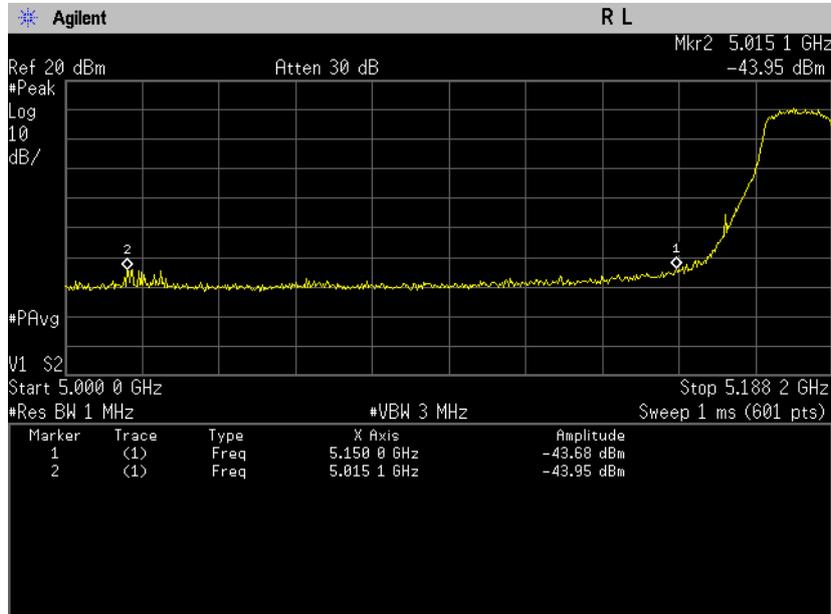


**Frequency 5240**  
**Plot 4.5.46**

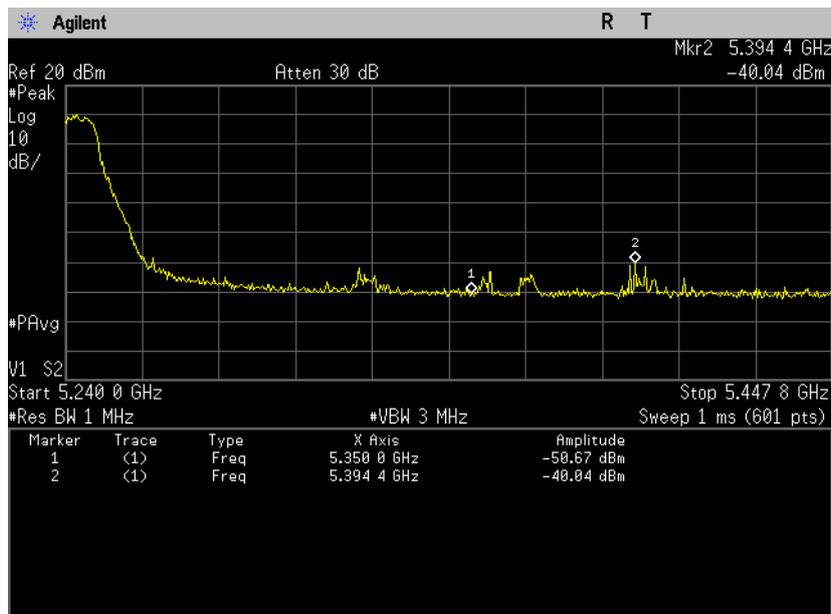


**802.11n Mode Band edge**  
**Band Edge 5150-5250 MHz**  
**Frequency 5180**  
**Plot 4.5.47**

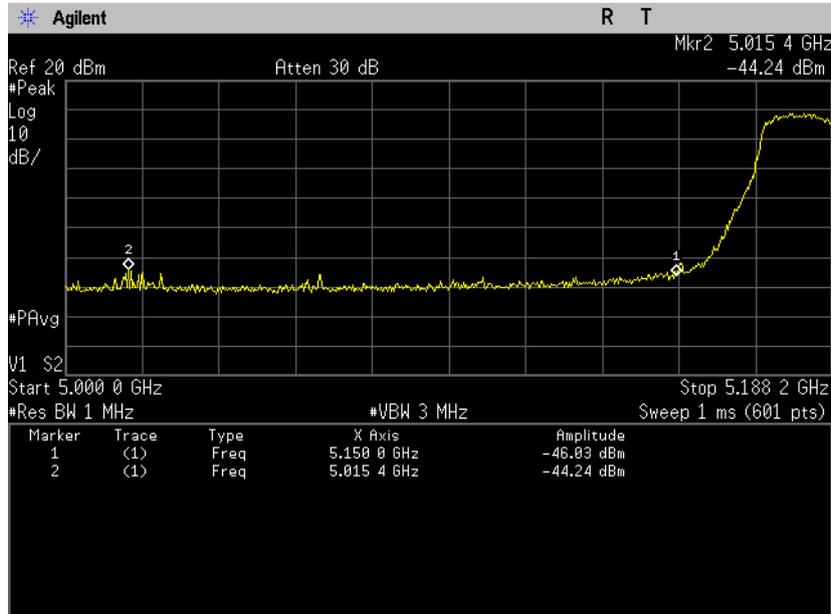


**Frequency 5240**  
**Plot 4.5.48**

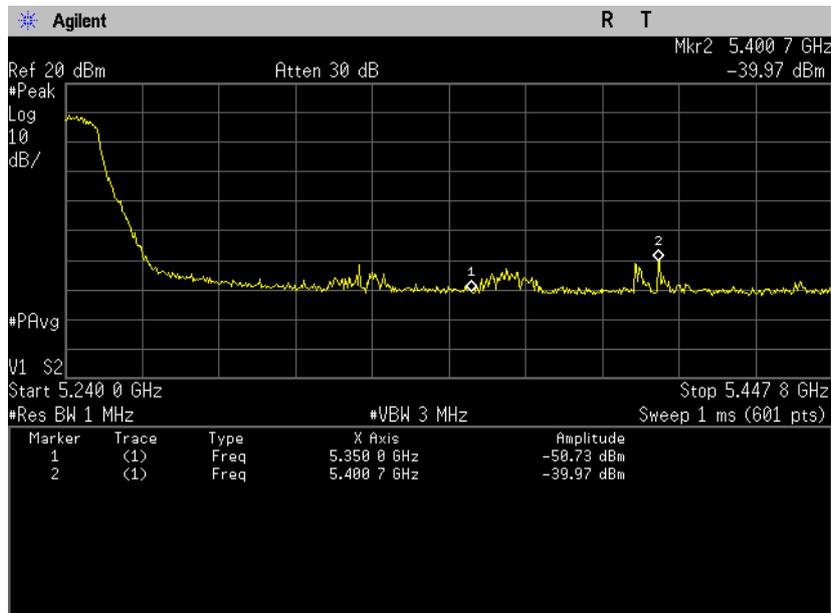


**Band edge 802.11a Mode**  
**Frequency 5250-5350 MHz**  
**Frequency 5260**  
**Plot 4.5.49**

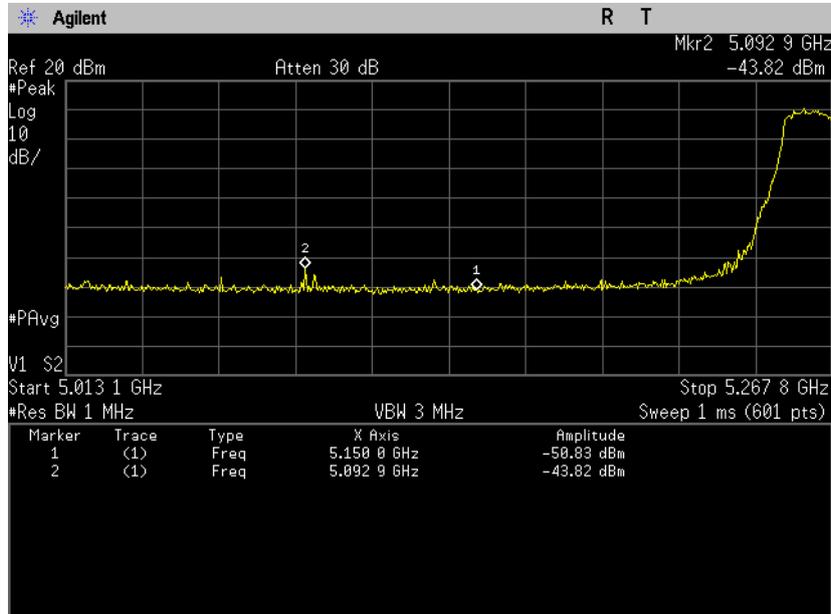


**Frequency 5320**  
**Plot 4.5.50**

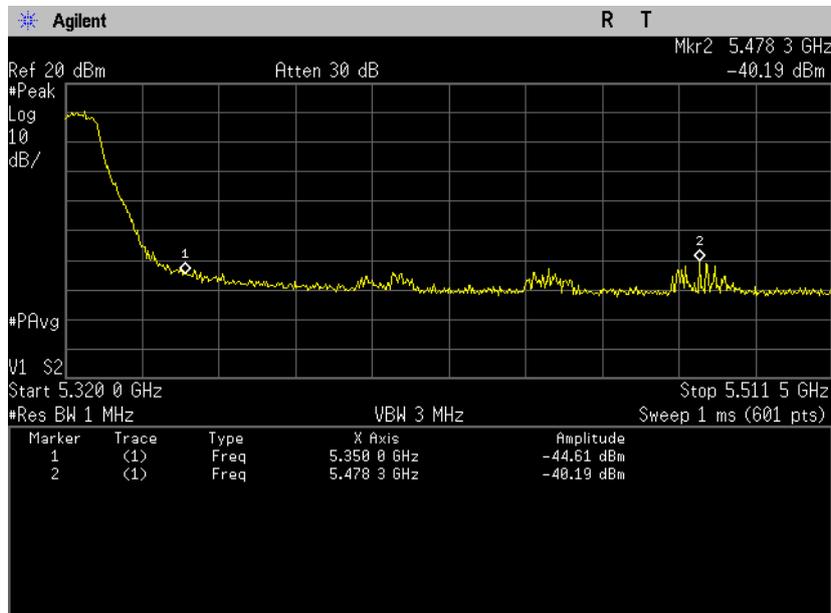


**Band edge, 802.11n mode**  
**Frequency 5250-5350 MHz**  
**Frequency 5260**  
**Plot 4.5.51**

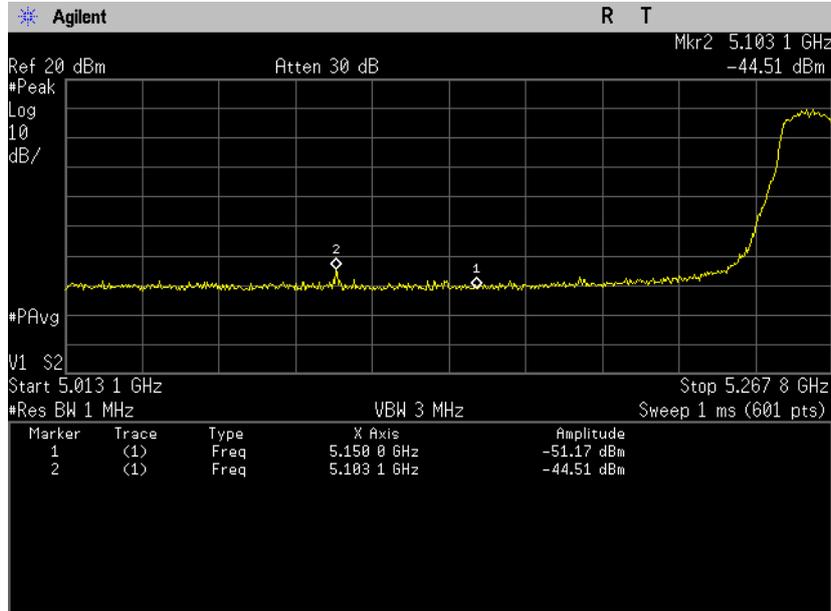


**Frequency 5320**  
**Plot 4.5.52**

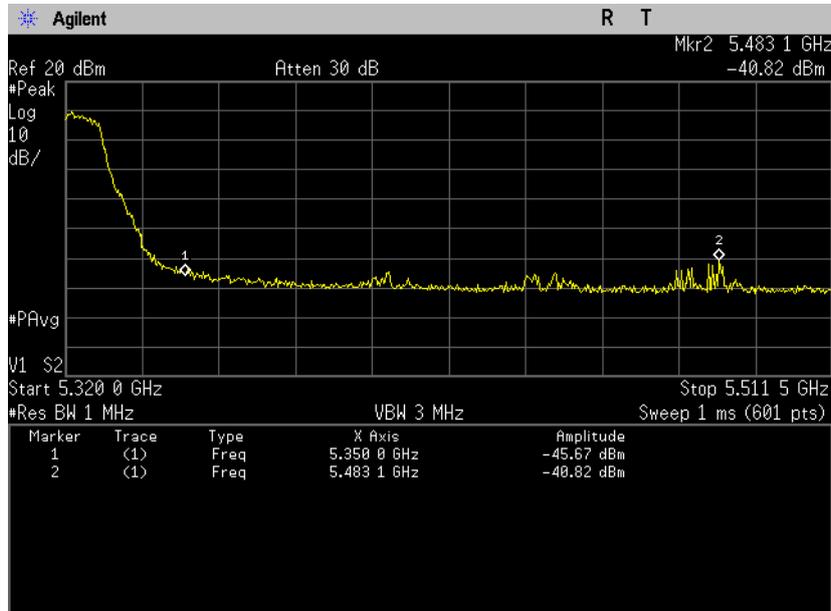


**Band edge, 802.11a Mode**  
**Frequency 5470-5725 MHz**  
**Frequency 5500**  
**Plot 4.5.53**

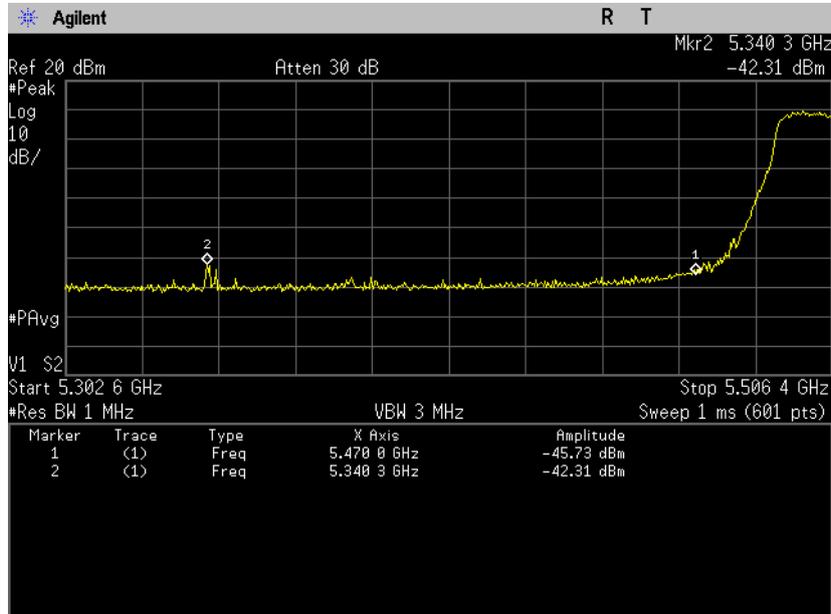


**Frequency 5700**  
**Plot 4.5.54**

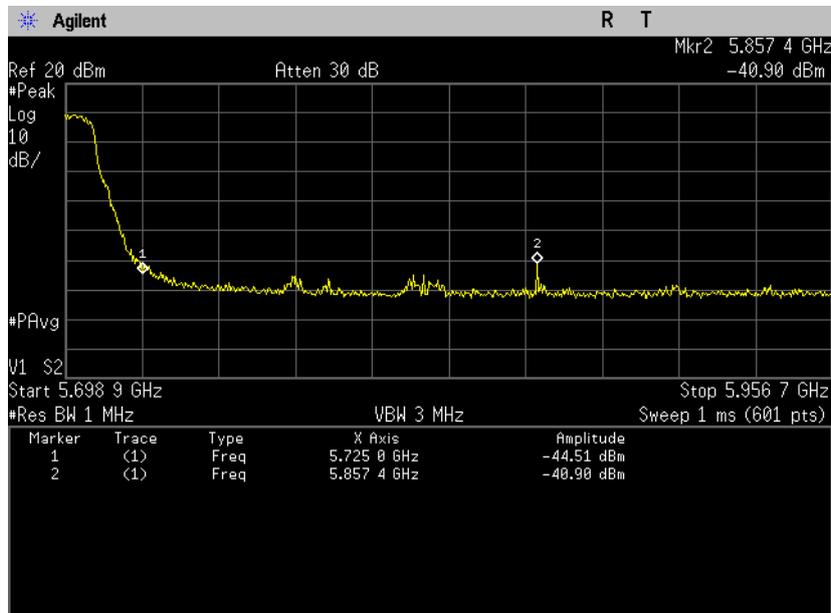

**Band edge, 802.11n Mode**  
**Frequency 5470-5725 MHz**  
**Frequency 5500**  
**Plot 4.5.55**

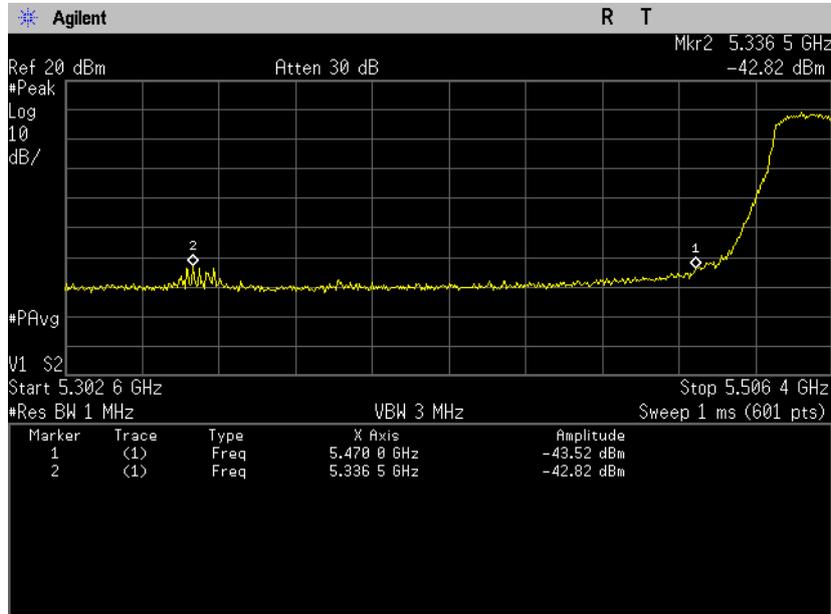

**Frequency 5700**  
**Plot 4.5.56**

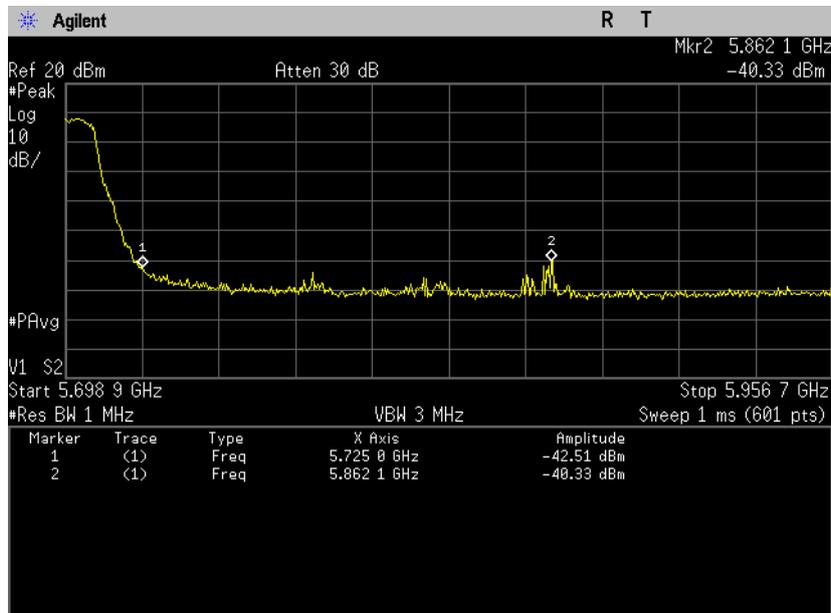

#### 4.6. Spurious Radiated Emissions, Restricted Bands

Reference document:	<b>47 CFR §15.407 (b) (7)</b>		
Test Requirements:	The provisions of Sec. 15.205 apply to intentional radiators operating under this section.		
Test setup:	See sec 2.2, with High Pass Filter	<b>Pass</b>	
Method of testing:	KDB 789033 v01r01,sec G3)4)5)6)d. radiated		
Operating conditions:	Under normal test conditions		
S.A. Settings:	f >1GHz: Peak: RBW= 1MHz, VBW= 3MHz, Average: VBW= 10 Hz f <1GHz: RBW: 120kHz, VBW: 300kHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.6.1- Plot 4.6.88	

**Test results:**

All measurements were performed in horizontal and vertical polarizations; the results show the worst case.

**Test results:**

**5150-5250 MHz: Spurious**

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Margin [dB]	Result
<b>802.11a Mode</b>							
5180	54	2	No emissions were found		-27	>20	Comply
5220	54						Comply
5240	54						Comply
<b>802.11n Mode</b>							
5180	65	2	No emissions were found		-27	>20	Comply
5220	65						Comply
5240	65						Comply

**5250-5350 MHz: Spurious**

Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Margin [dB]	Result
<b>802.11a Mode</b>							
5260	54	2.4	No emissions were found		-27	>20	Comply
5300	54						Comply
5320	54						Comply
<b>802.11n Mode</b>							
5260	65	2.4	No emissions were found		-27	>20	Comply
5300	65						Comply
5320	65						Comply

**5470-5725 MHz: Spurious**


Frequency [MHz]	Data Rate [Mbps]	Antenna Gain [dBi]	Measured Value [dBm/MHz]	Calculated EIRP [dBm/MHz]	EIRP Value Limit [dBm/MHz]	Margin [dB]	Result
<b>802.11a Mode</b>							
5500	54	2	No emissions were found		-27	>20	Comply
5560	54	1.9					Comply
5700	54	1.9					Comply
<b>802.11n Mode</b>							
5500	65	2	No emissions were found		-27	>20	Comply
5560	65	1.9					Comply
5700	65	1.9					Comply

**Test results below 1GHz:**


All measurements were done in horizontal and vertical polarizations; the results show the worst case for all frequencies.

Emission Frequency [MHz]	Detector Type	Polarization H/V	Emission Level [dBμV/m]	Limit [dBμV/m]	Result
No emissions were found					Comply


**802.11a Mode**  
**Frequency 5180 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.1**

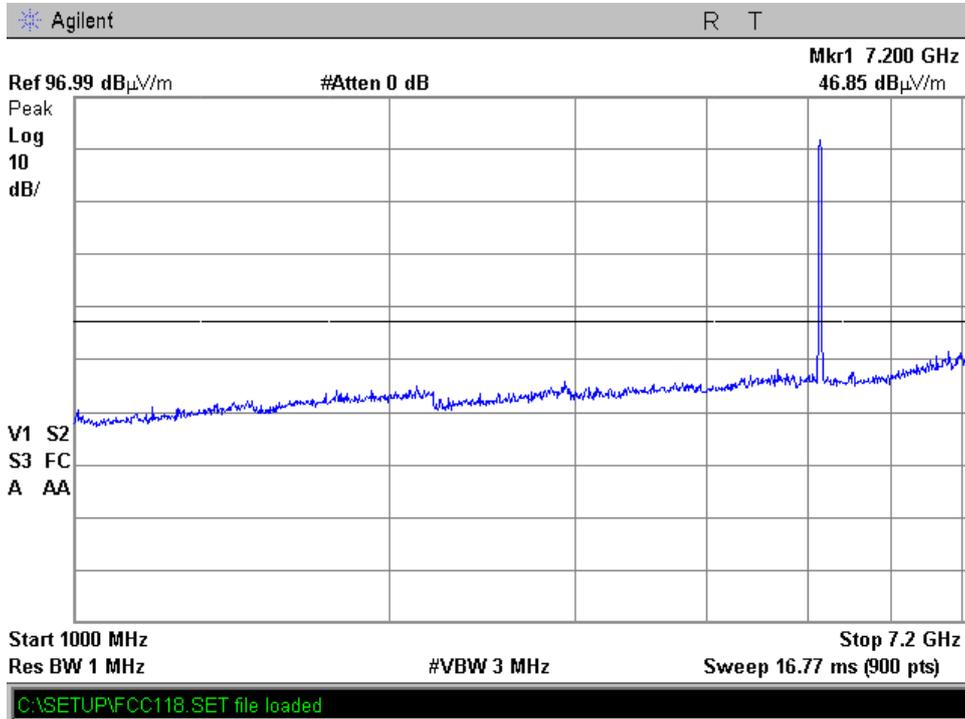


**Plot 4.6.2**

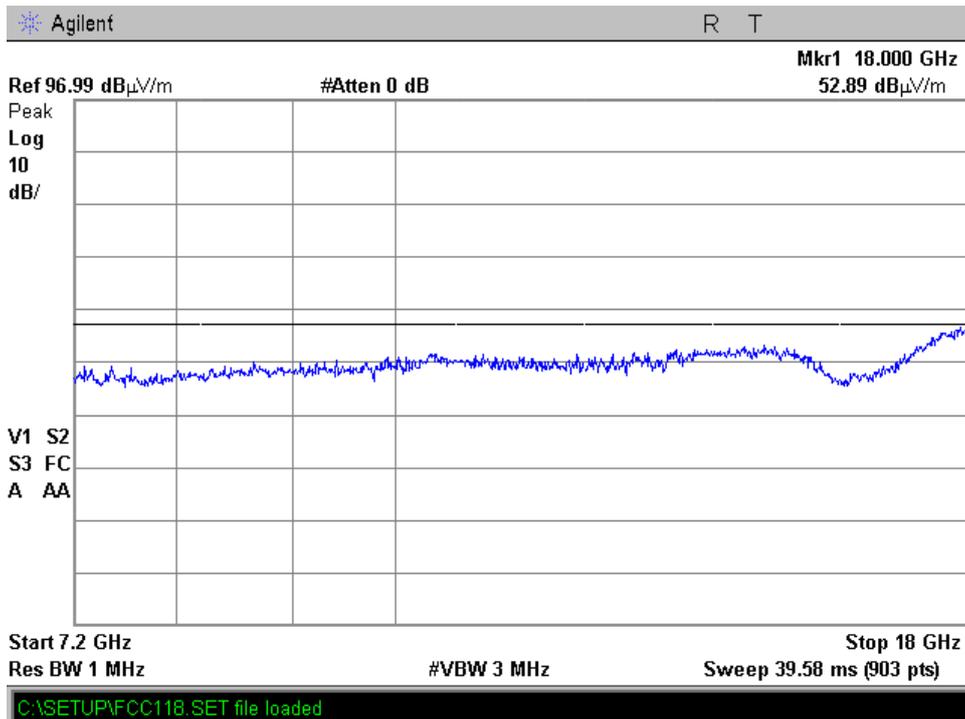


**Plot 4.6.3**

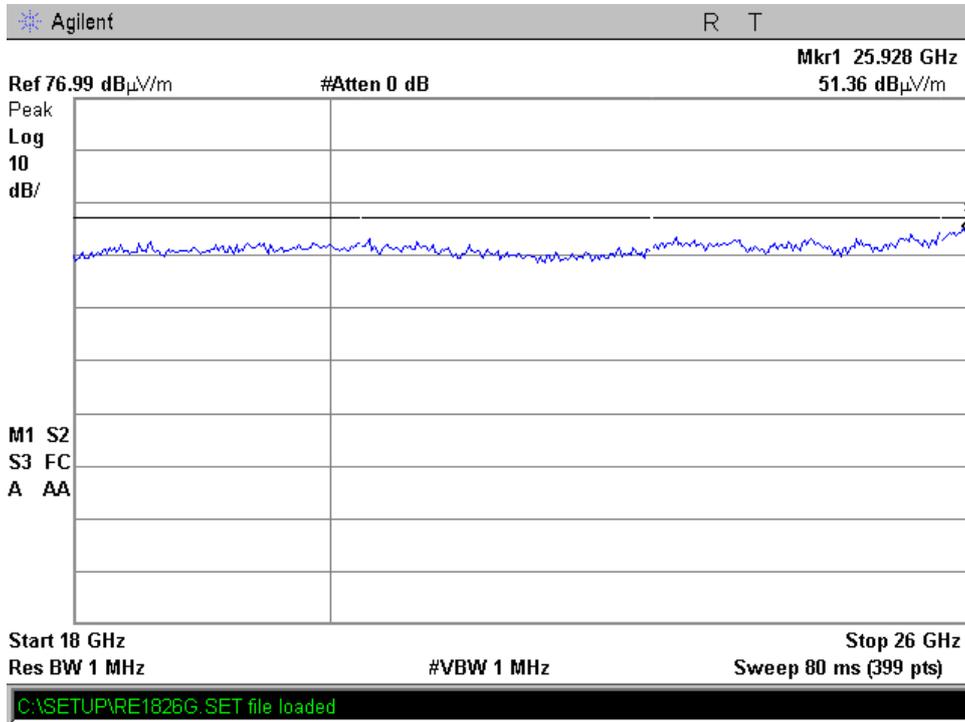


**Frequency 5220 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.4**

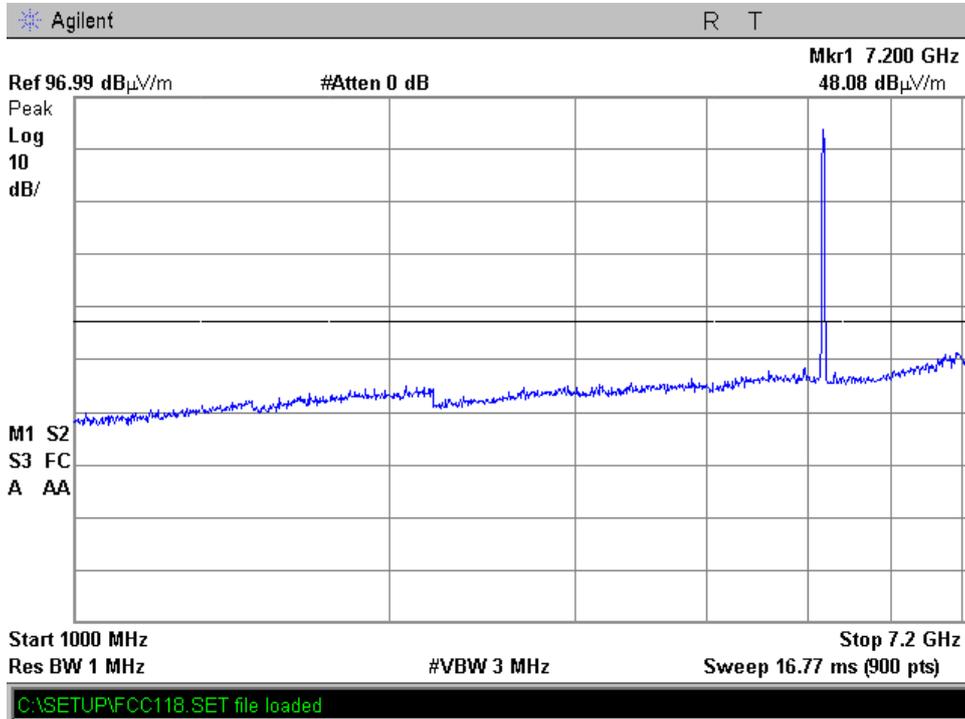


**Plot 4.6.5**

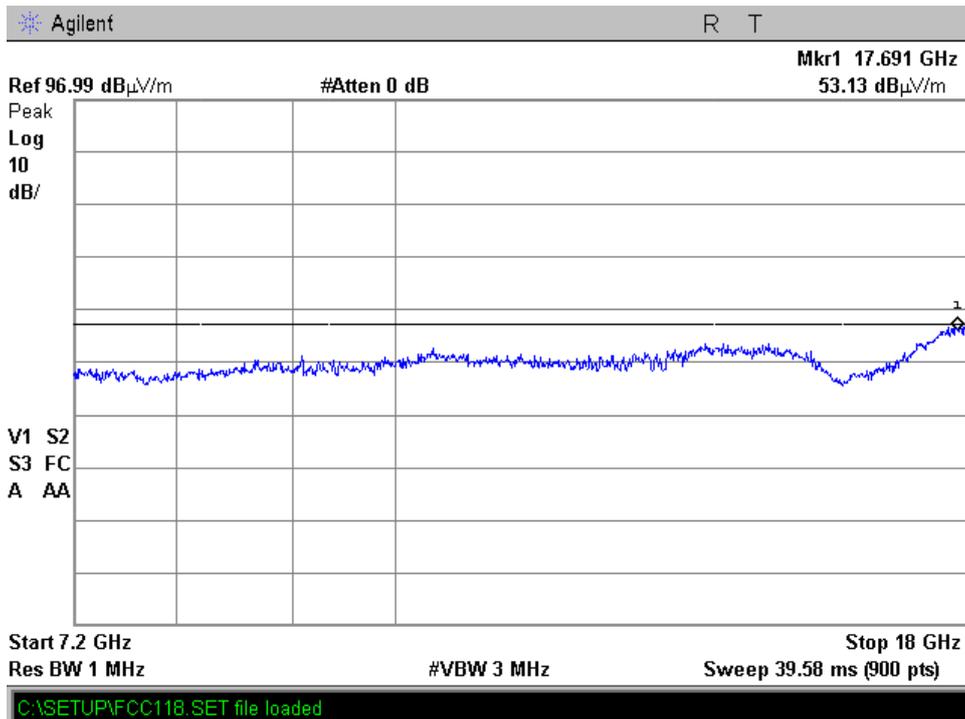


**Plot 4.6.6**

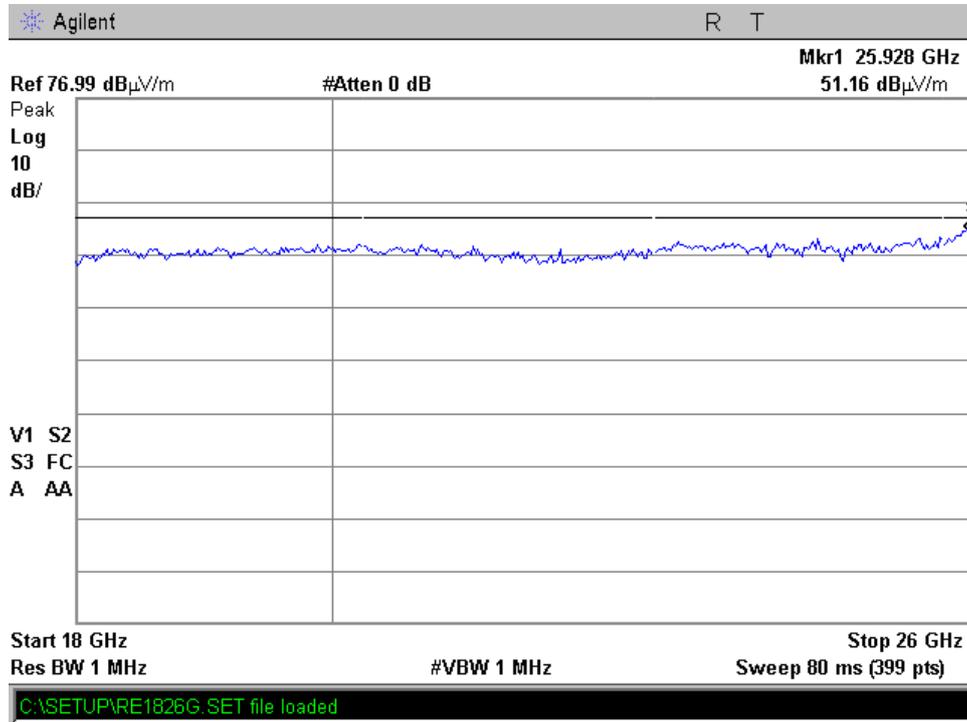


**Frequency 5240 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.7**

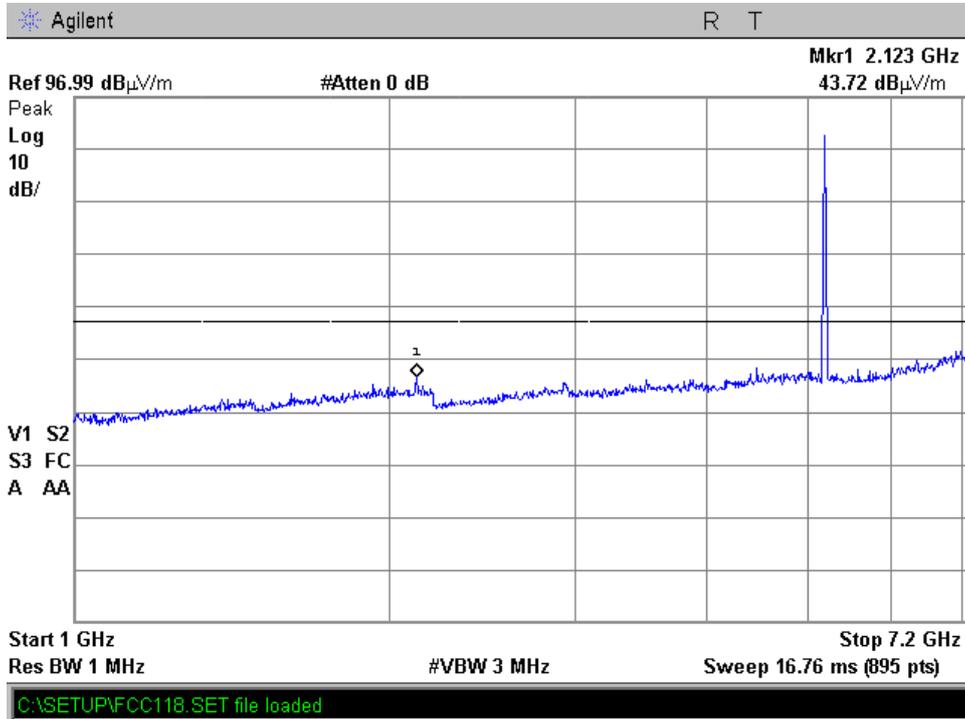


**Plot 4.6.8**

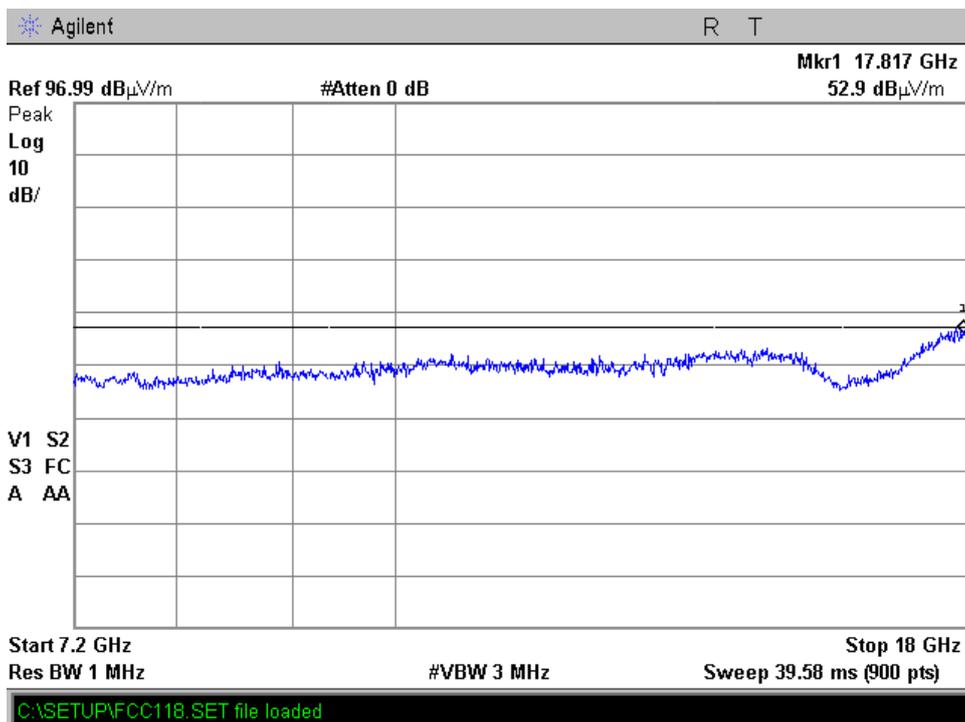


**Plot 4.6.9**

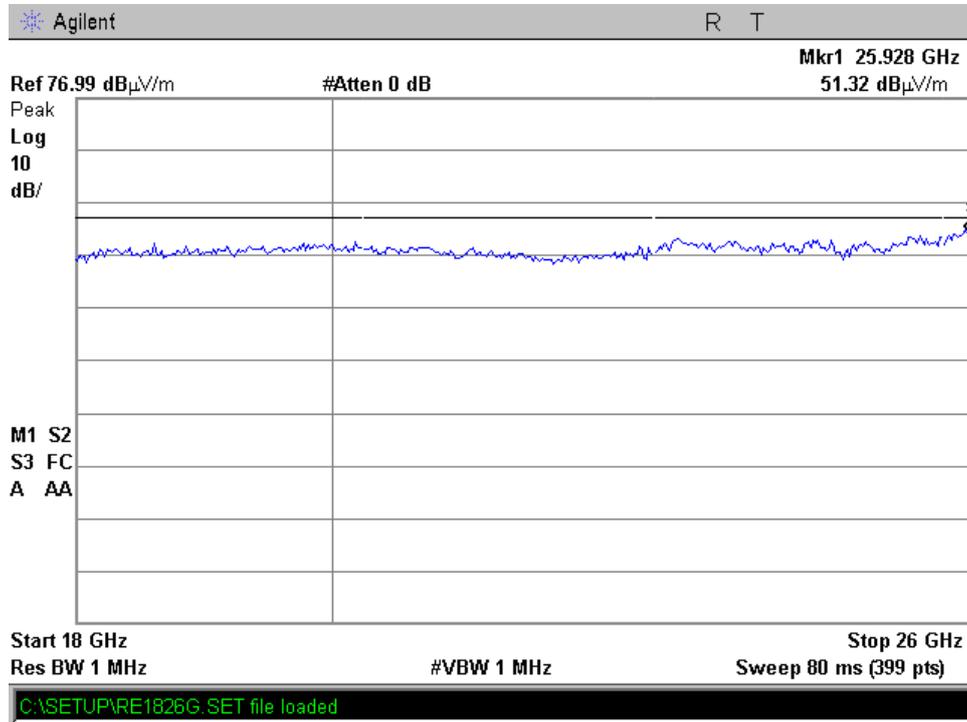


**Frequency 5260 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.10**

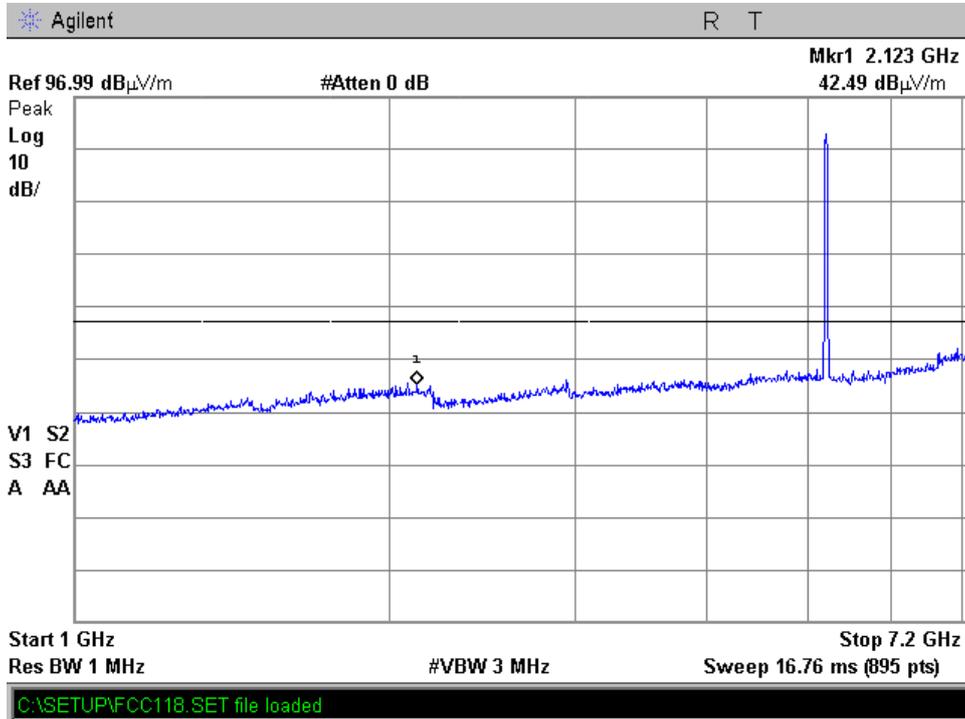


**Plot 4.6.11**

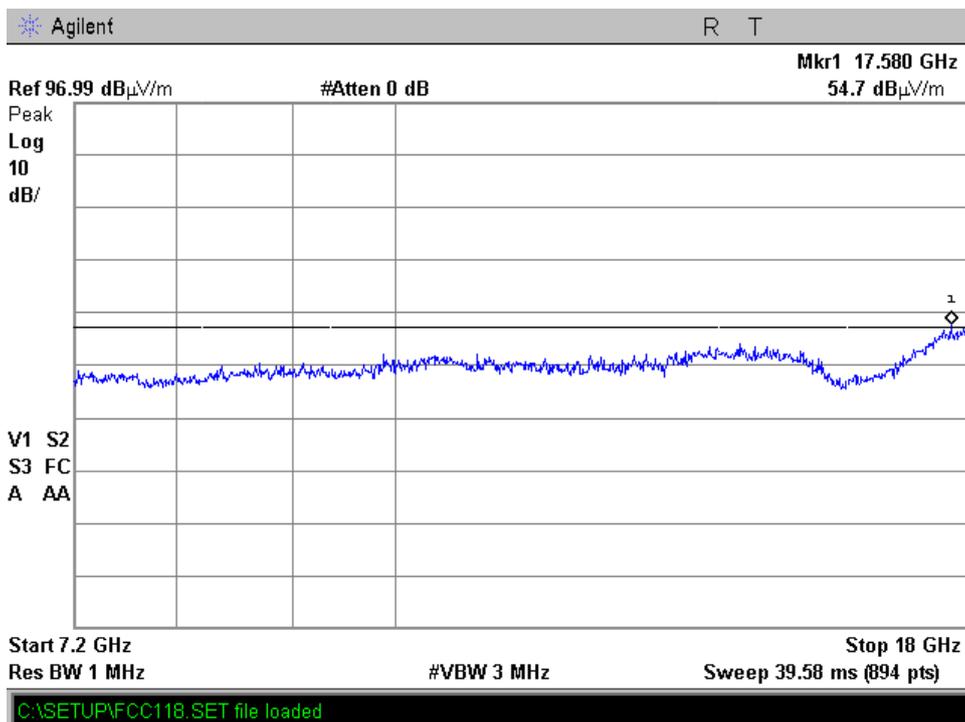


**Plot 4.6.12**

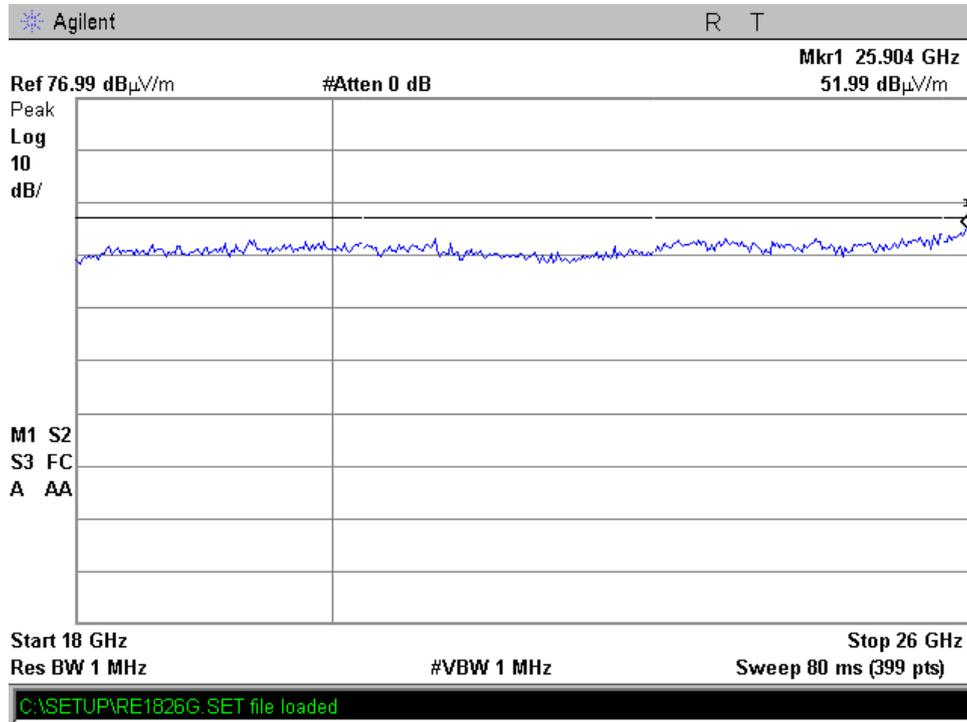


**Frequency 5300 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.13**

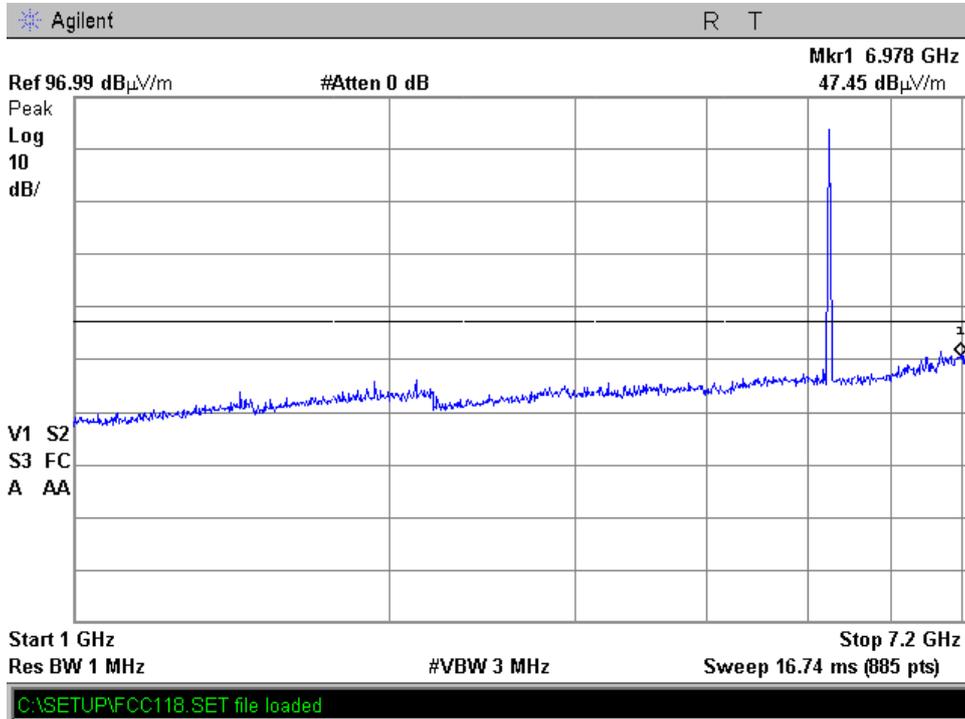


**Plot 4.6.14**

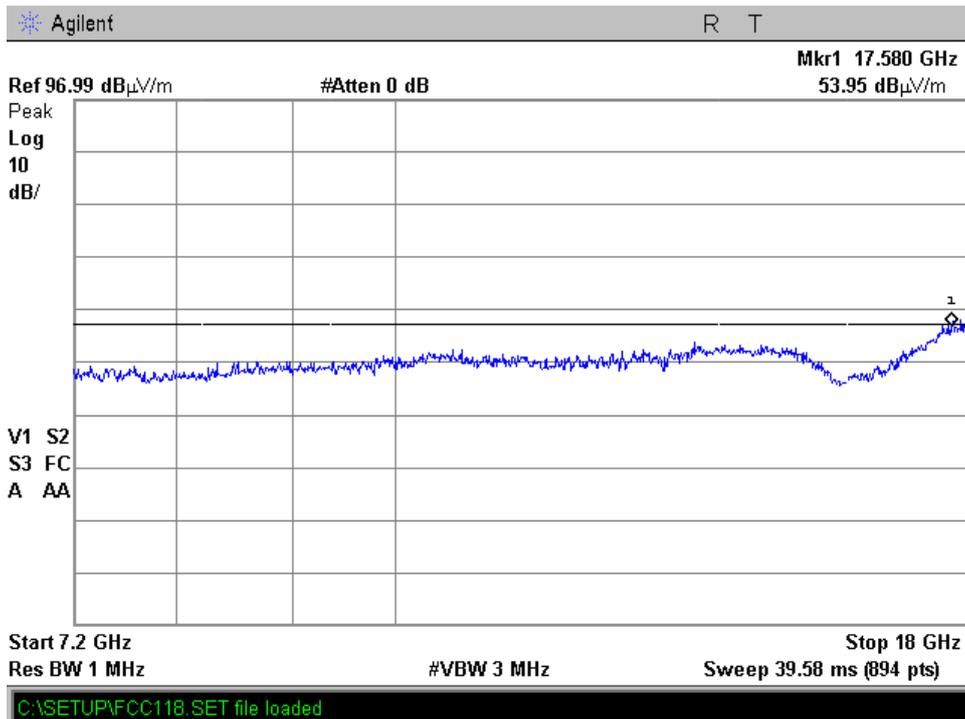


**Plot 4.6.15**

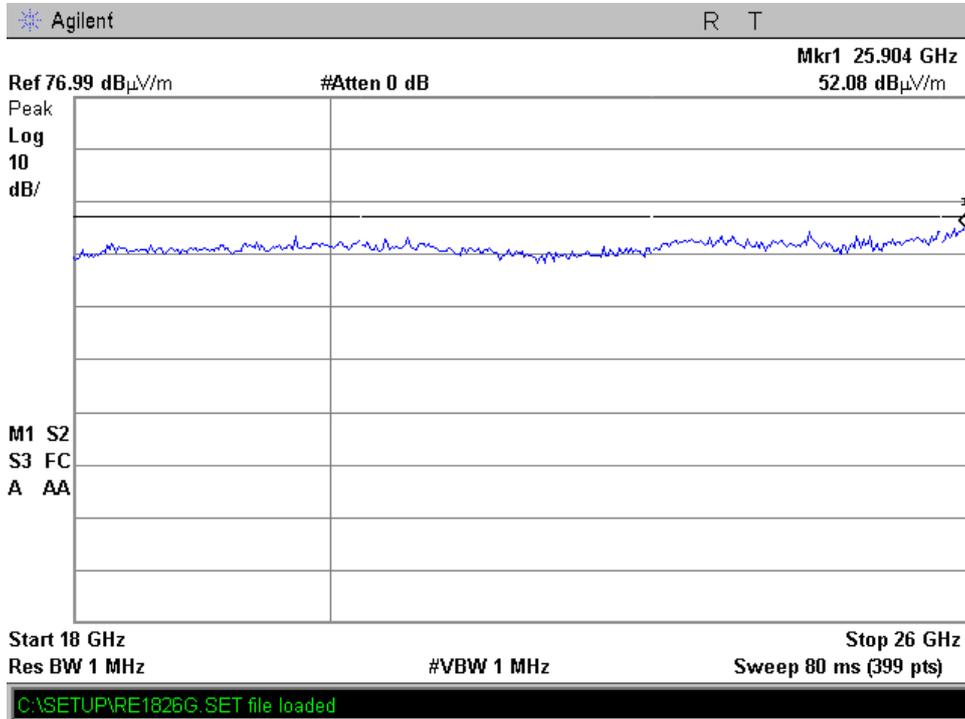


**Frequency 5320 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.16**

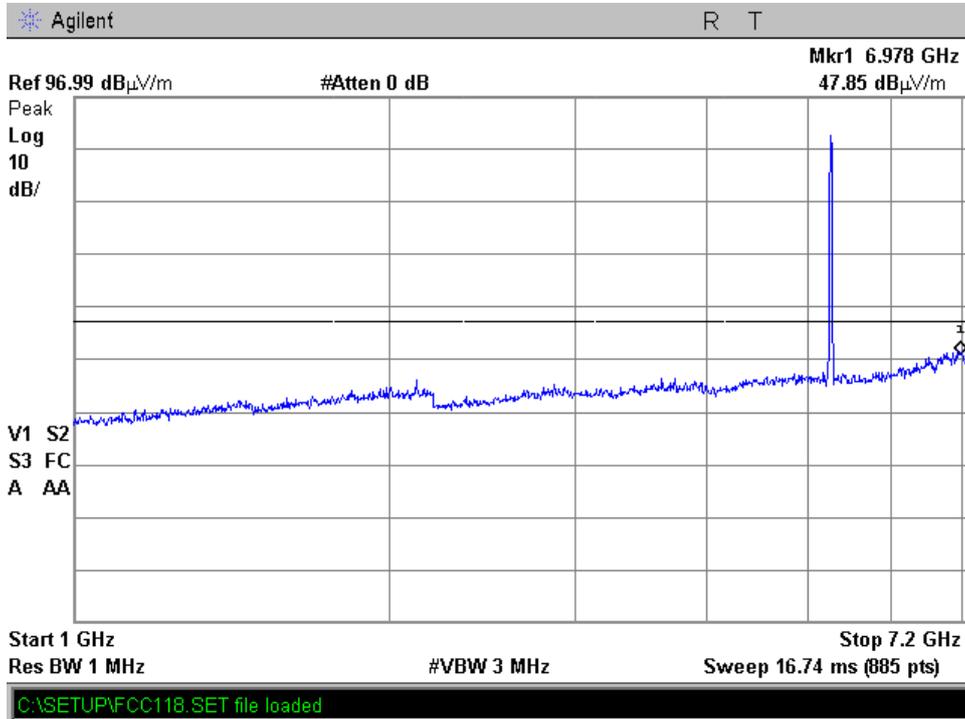


**Plot 4.6.17**

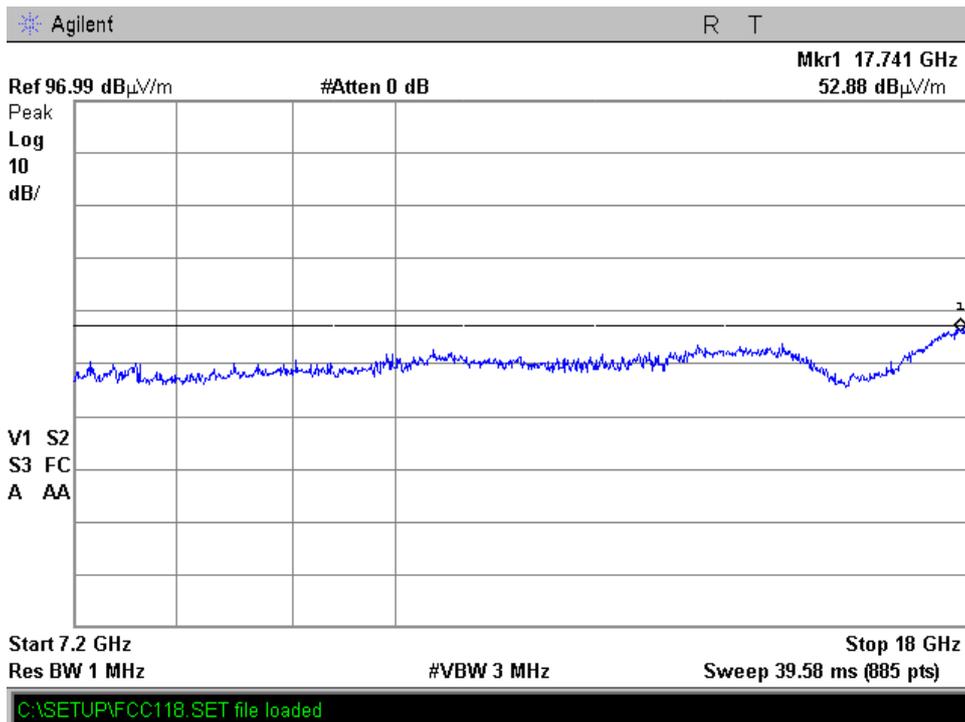


**Plot 4.6.18**

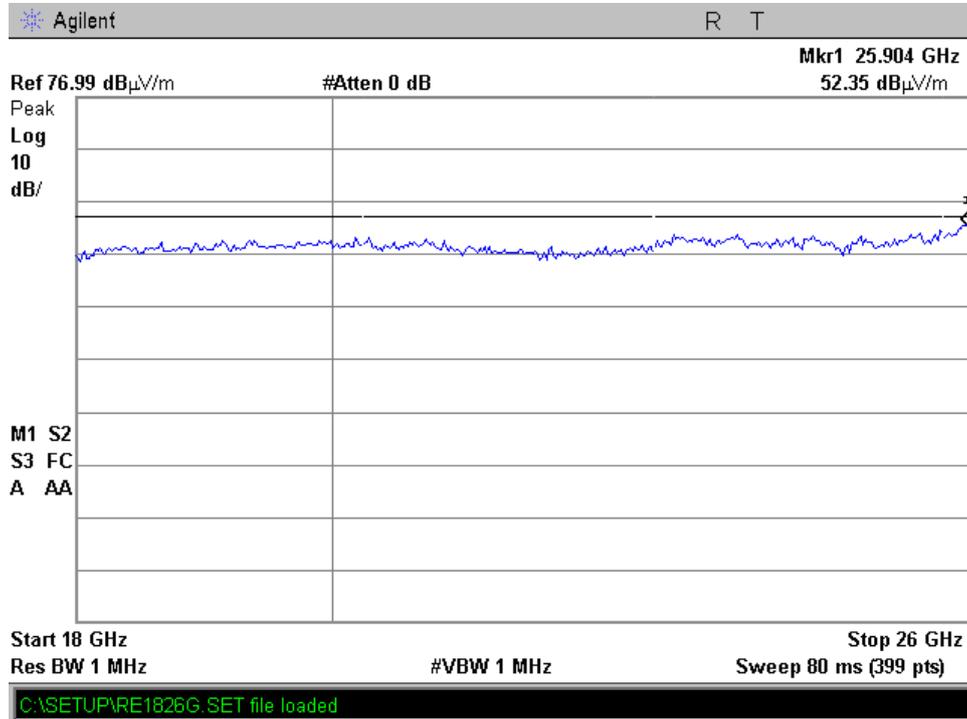


**Frequency 5500 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.19**

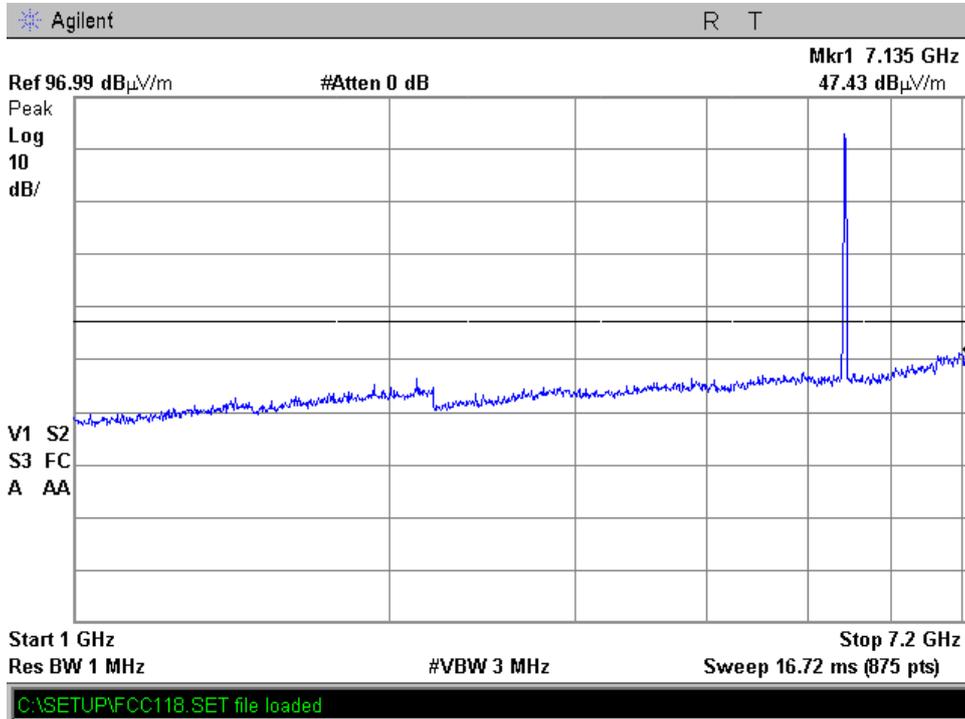


**Plot 4.6.20**

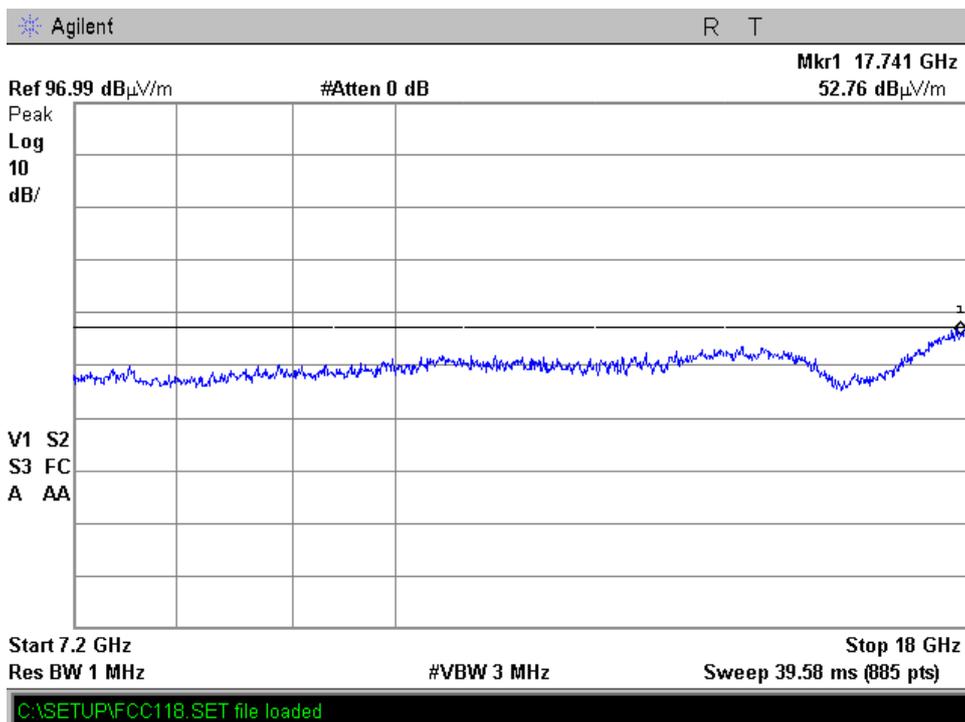


**Plot 4.6.21**

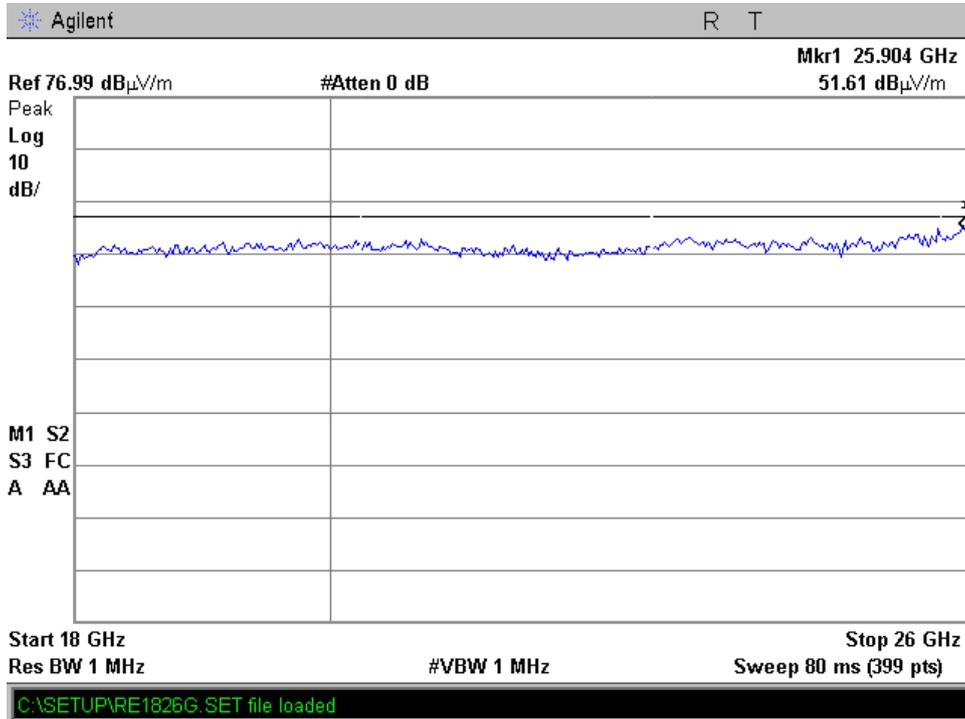


**Frequency 5560 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.22**

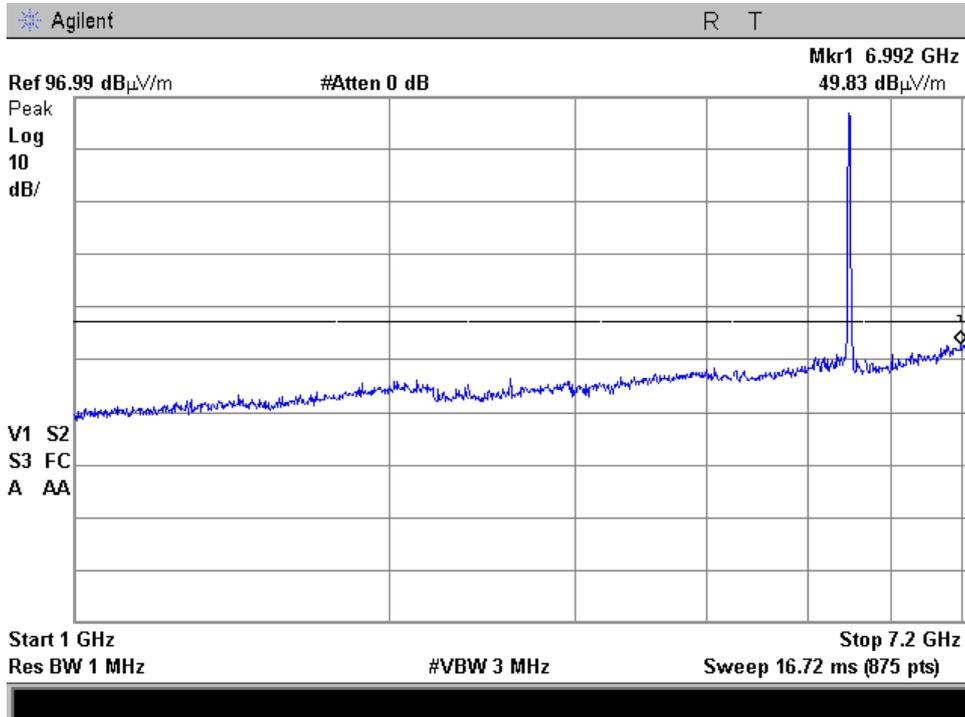


**Plot 4.6.23**

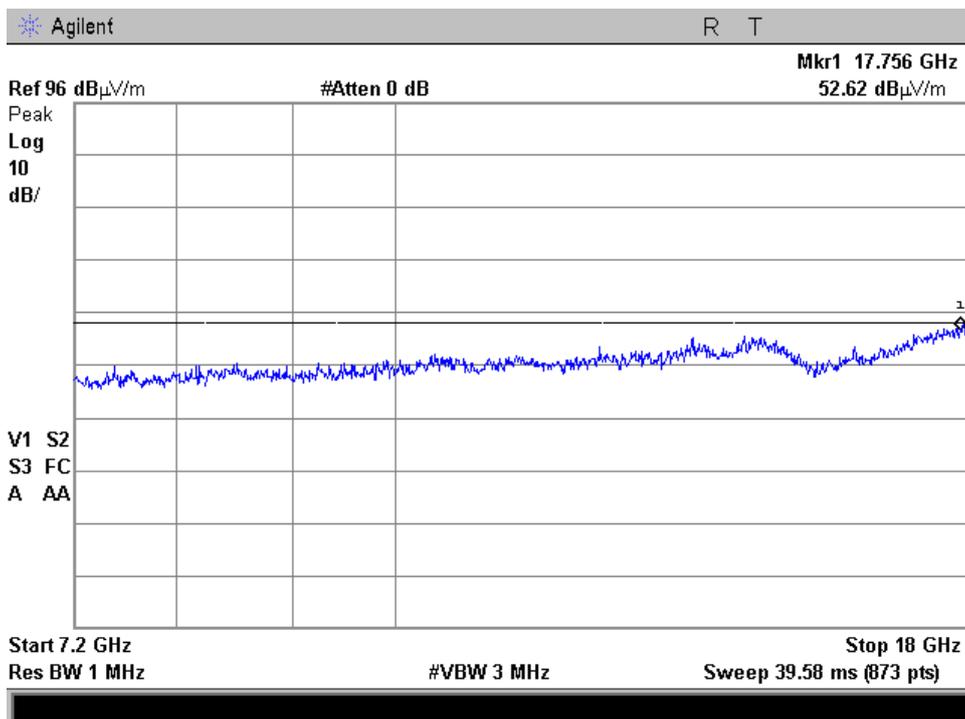


**Plot 4.6.24**

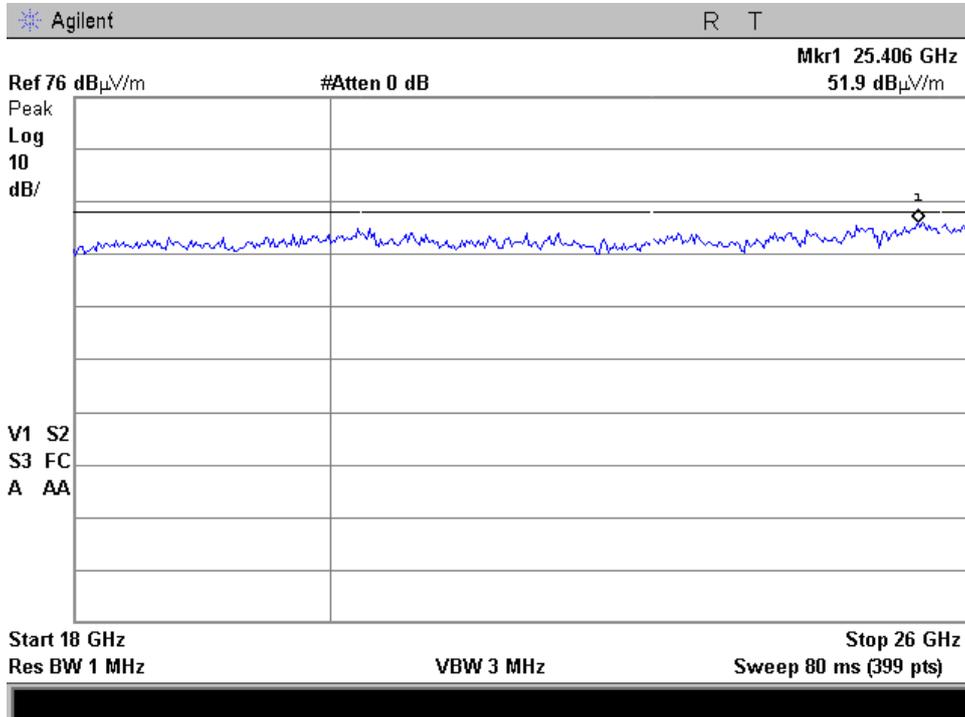


**Frequency 5700 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.25**

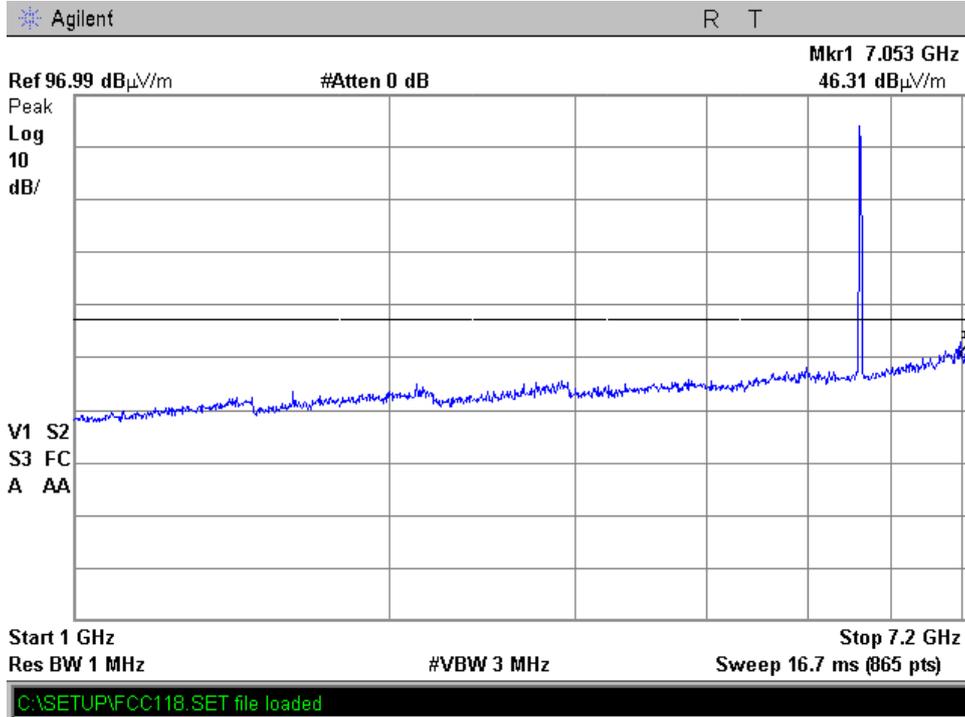


**Plot 4.6.26**

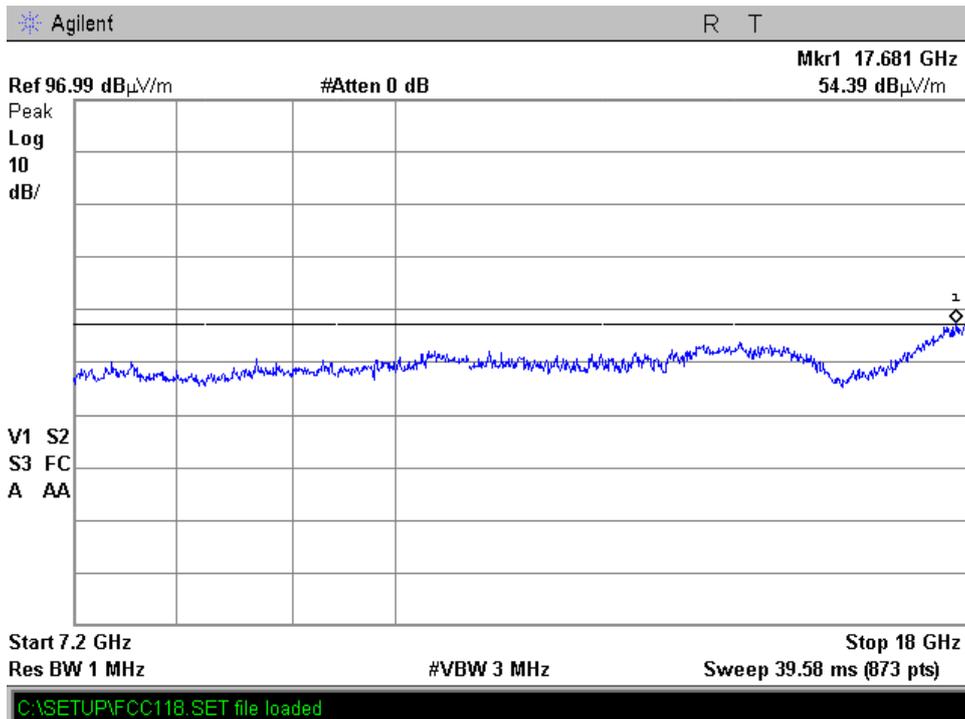


**Plot 4.6.27**

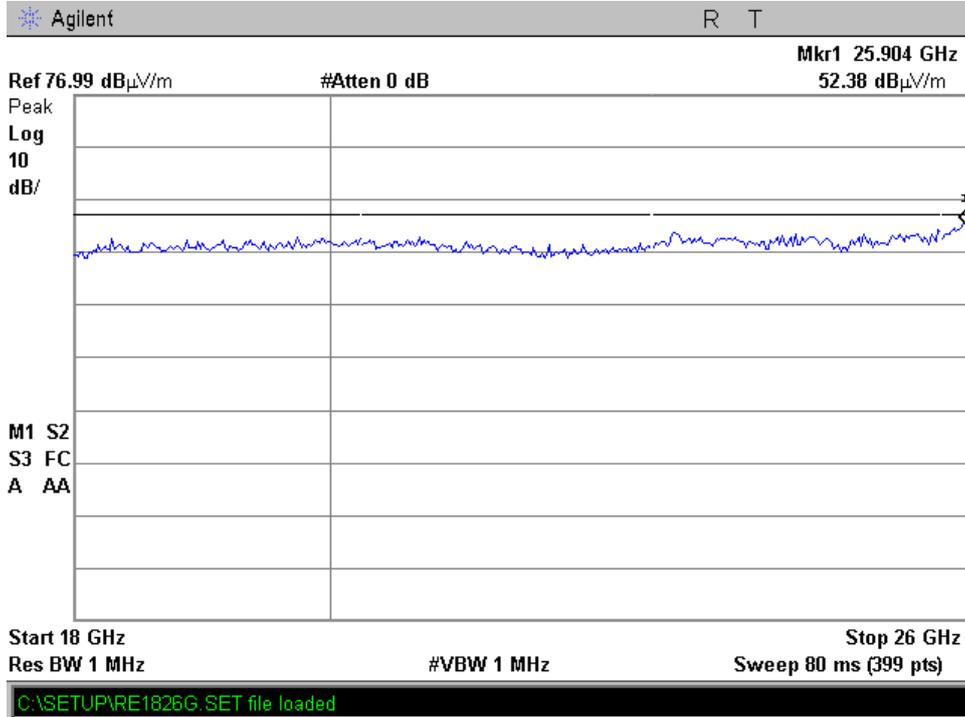


**Frequency 5745 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.28**

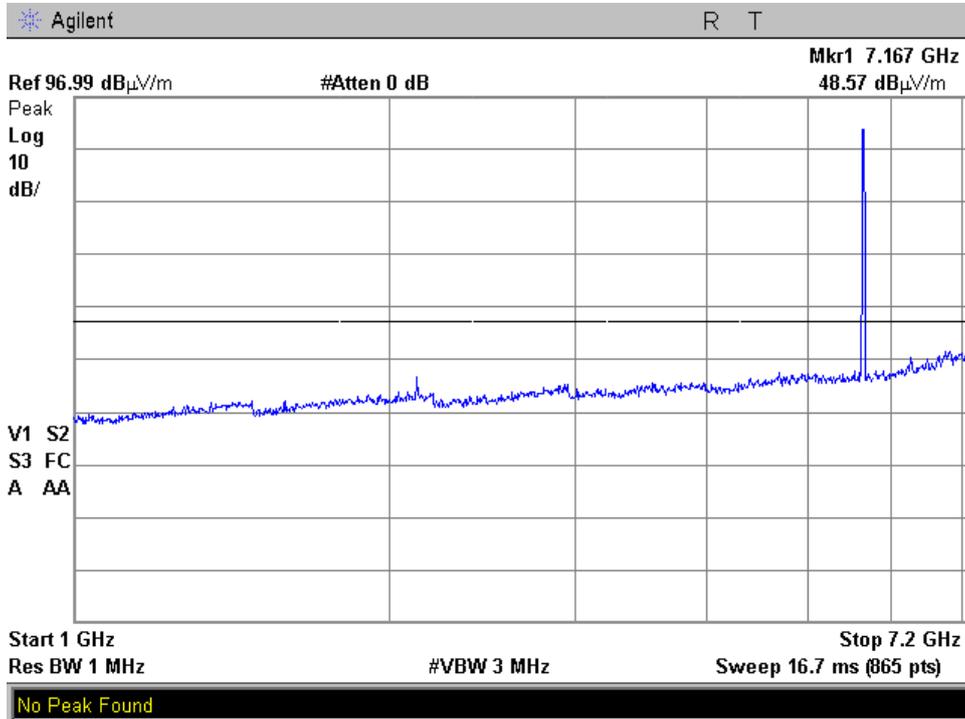


**Plot 4.6.29**

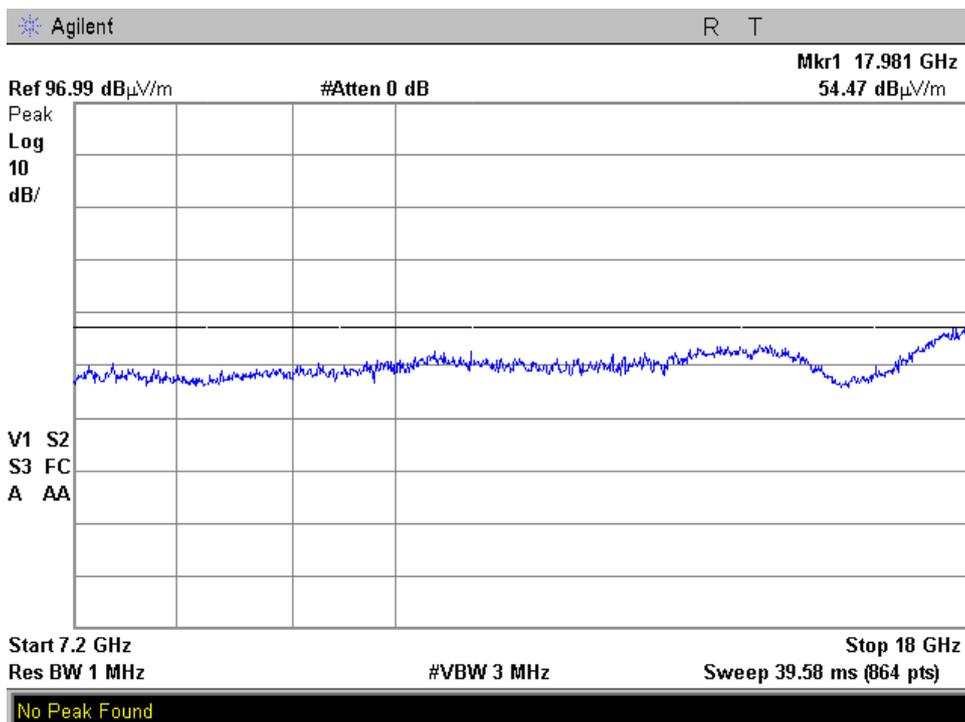


**Plot 4.6.30**

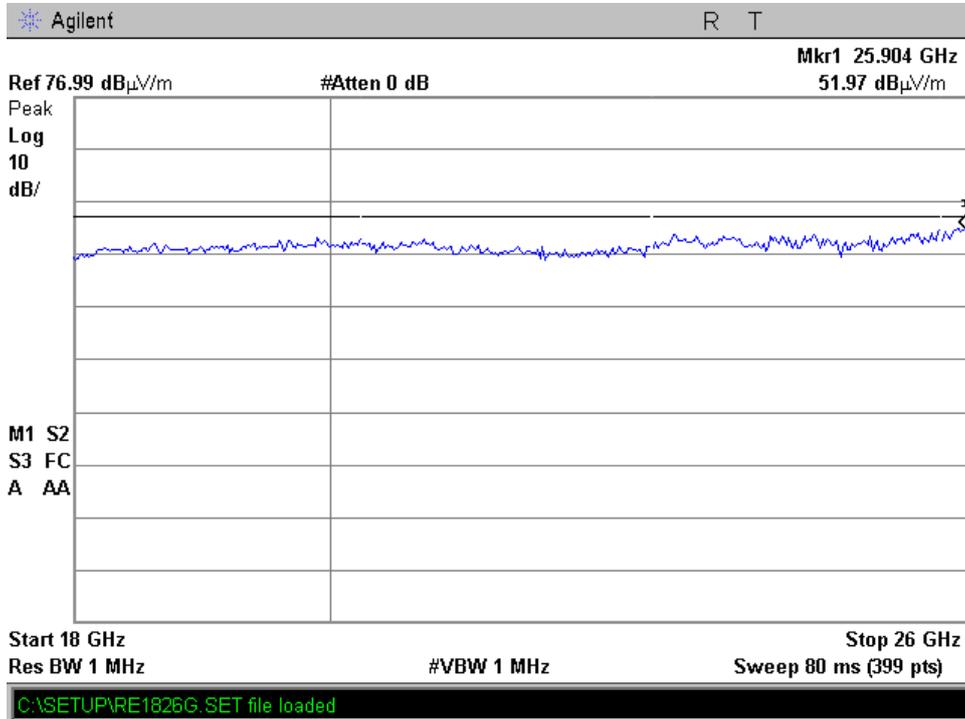


**Frequency 5785 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.31**

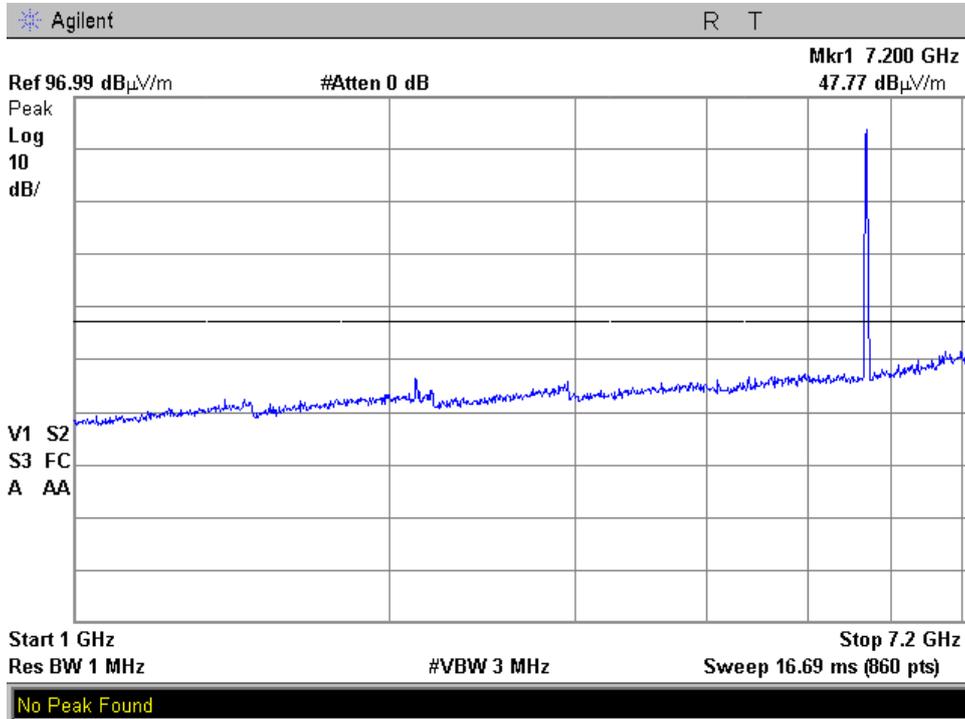


**Plot 4.6.32**

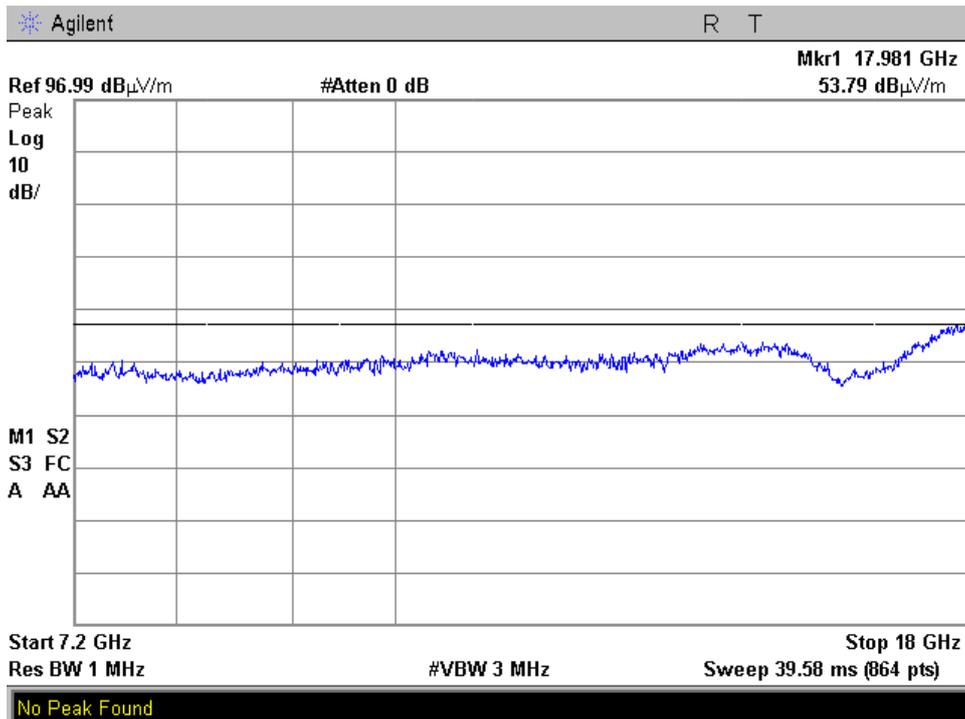


**Plot 4.6.33**

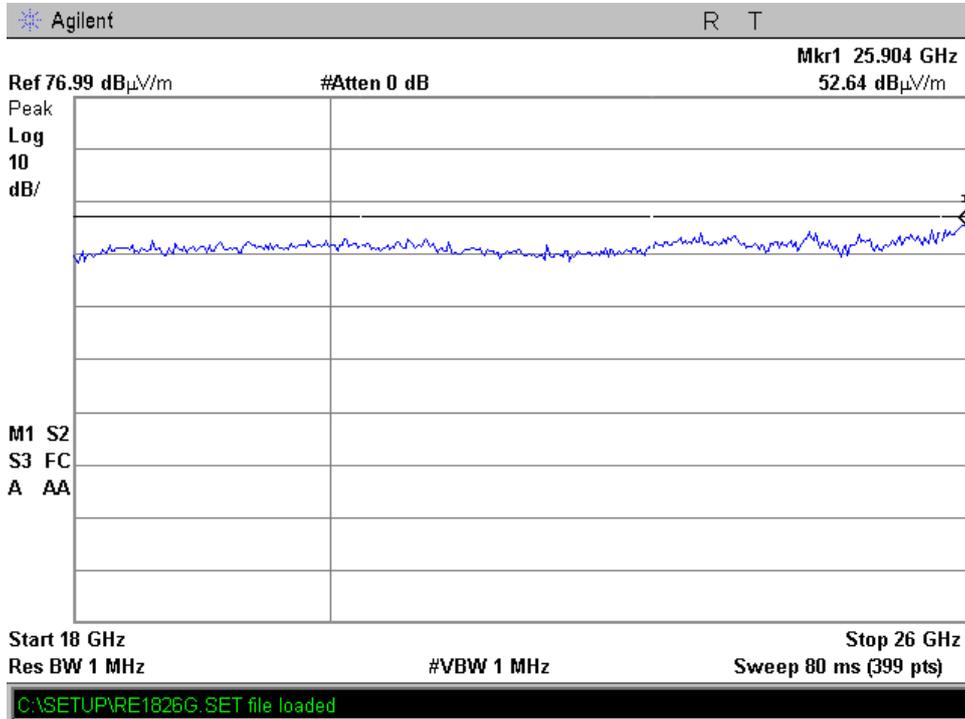


**Frequency 5805 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.34**

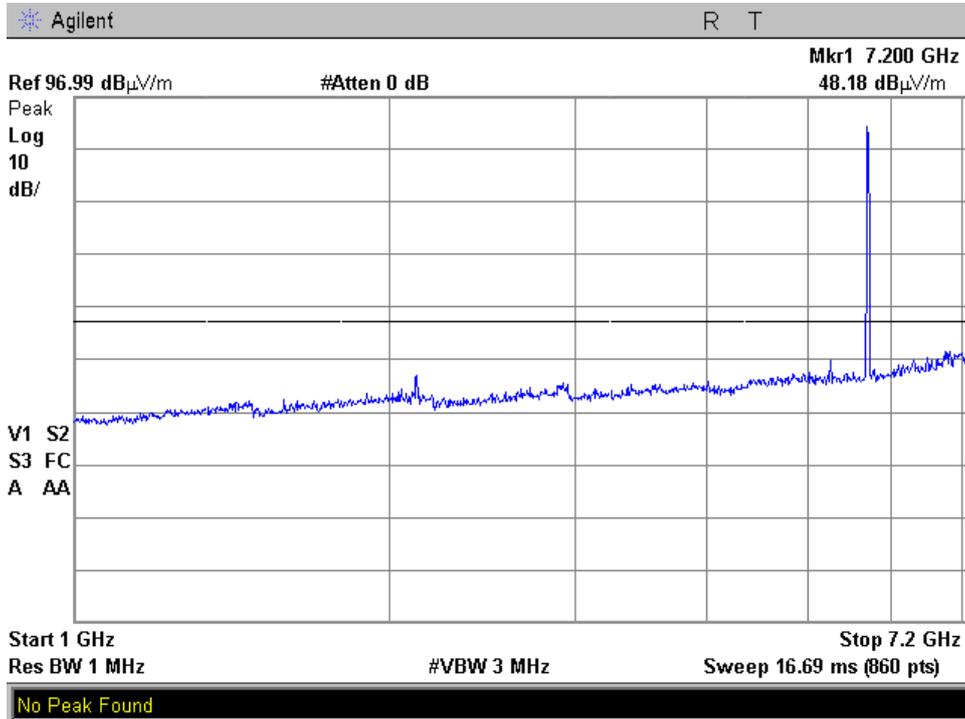


**Plot 4.6.35**

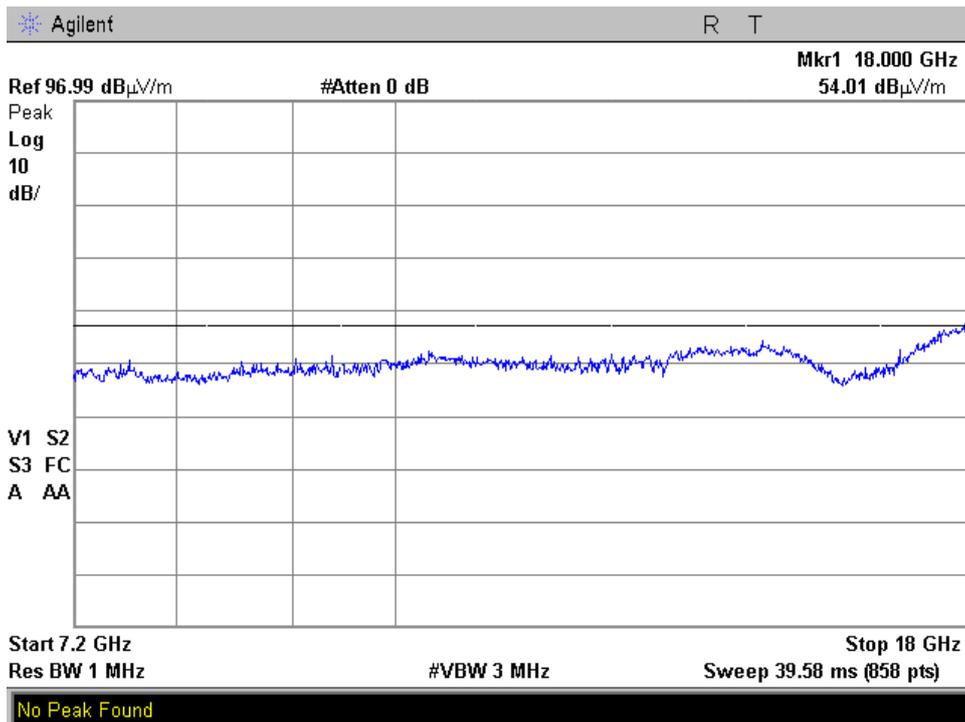


**Plot 4.6.36**

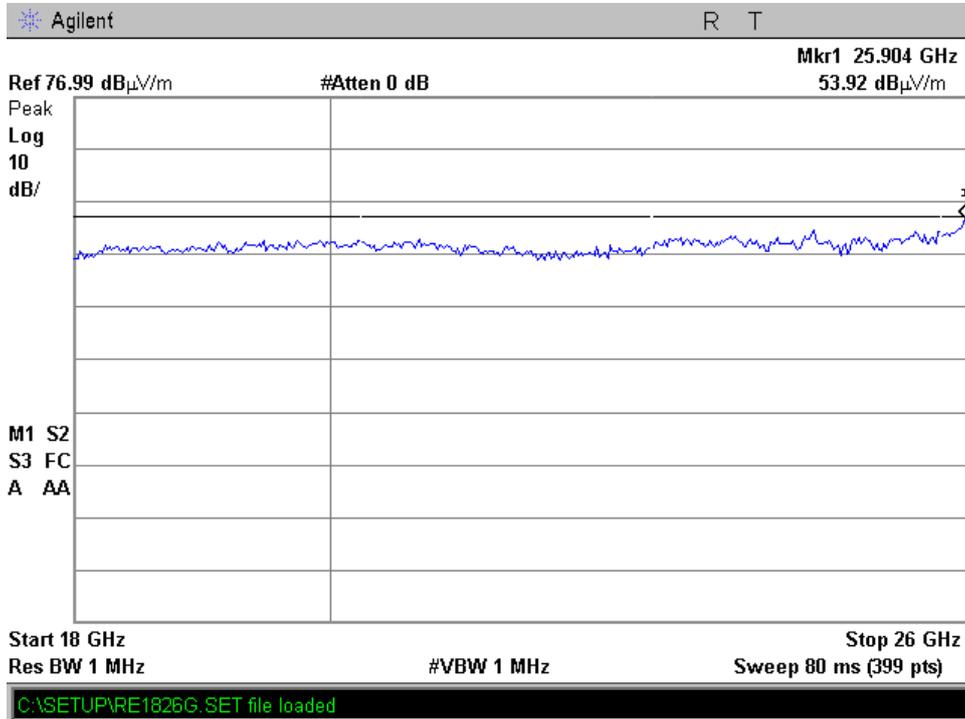


**802.11n Mode**  
**Frequency 5180 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.37**

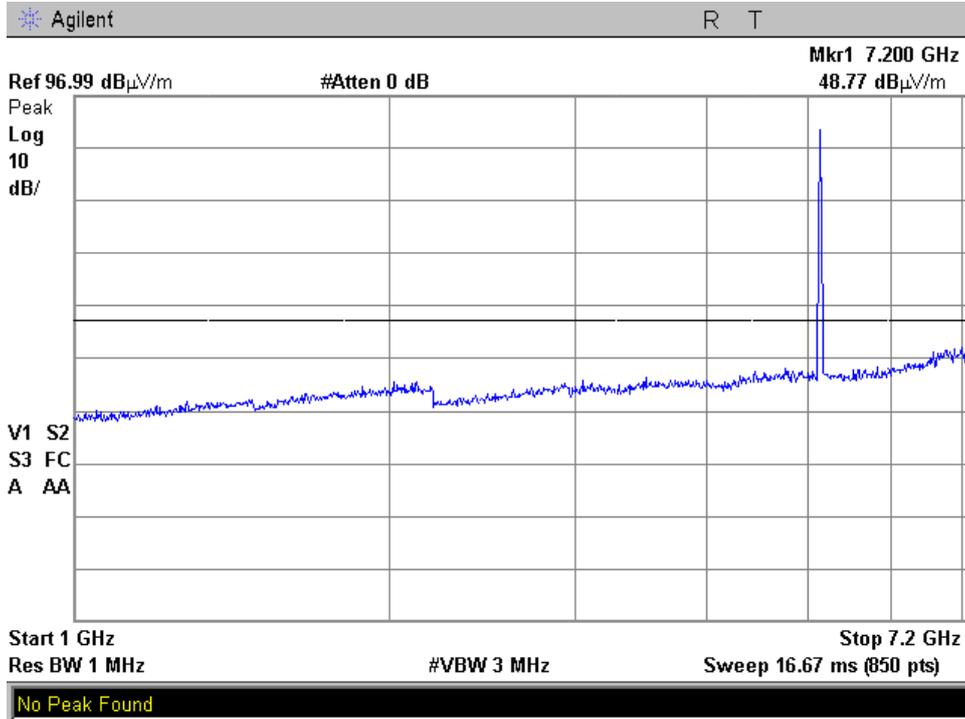


**Plot 4.6.38**

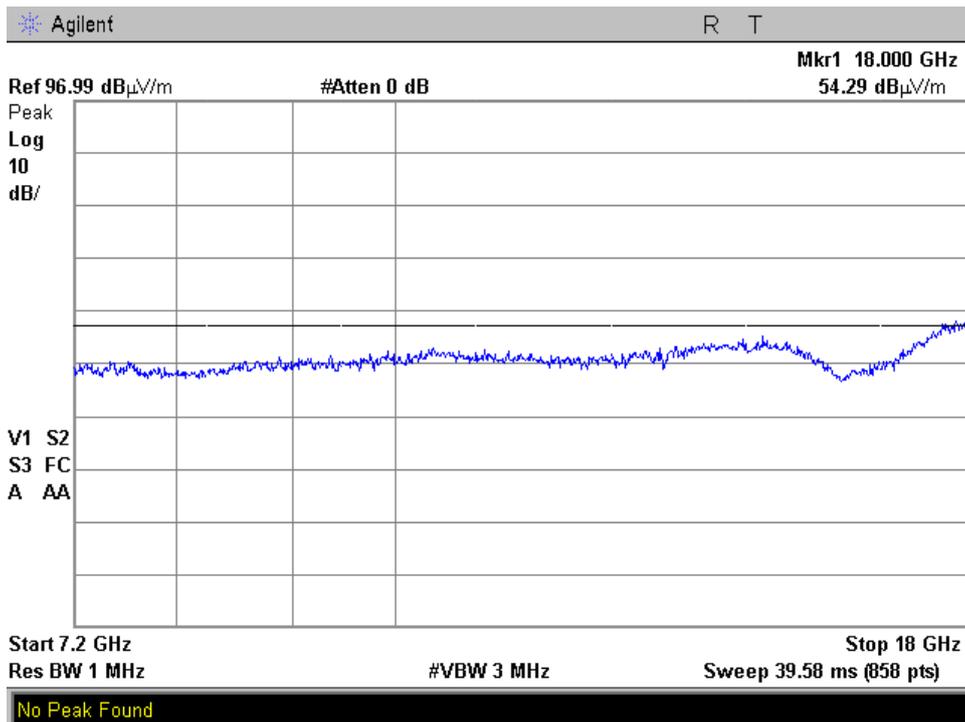


**Plot 4.6.39**

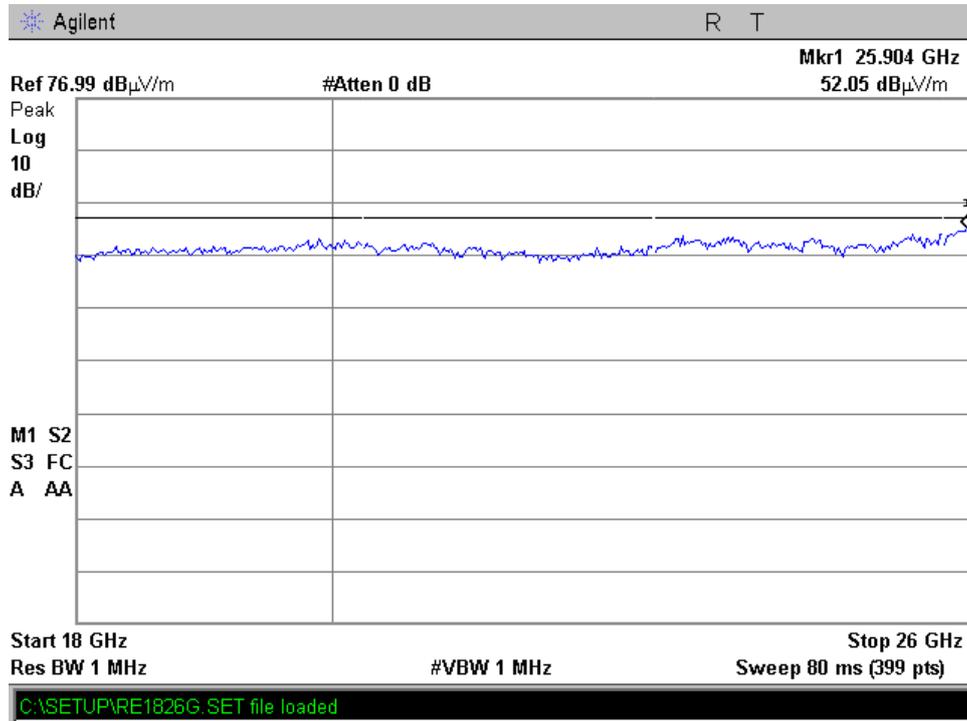


**Frequency 5220 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.40**

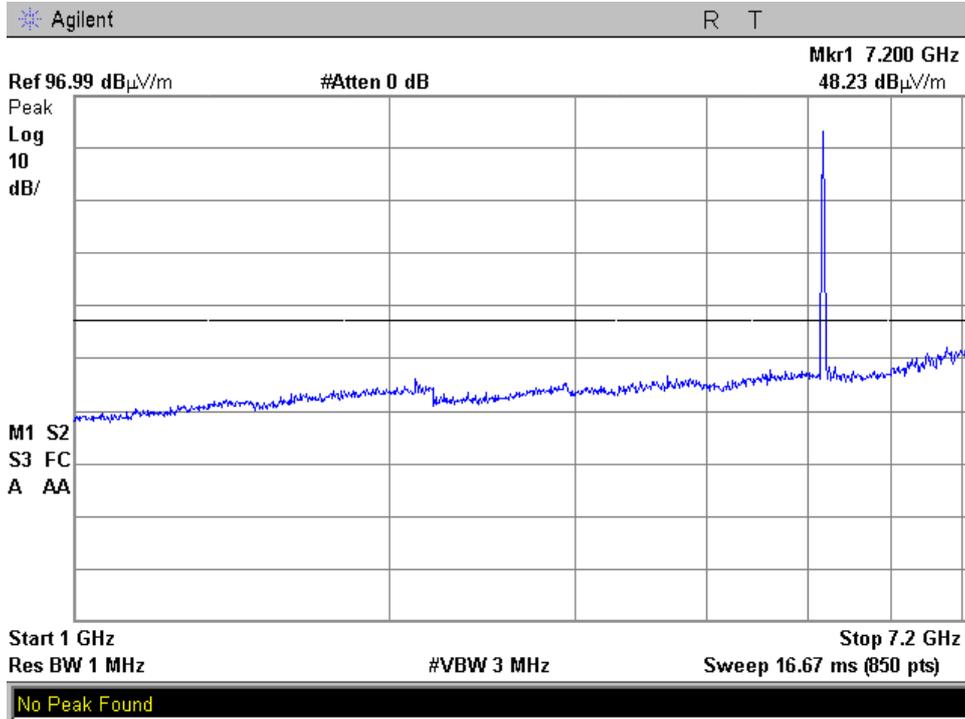


**Plot 4.6.41**

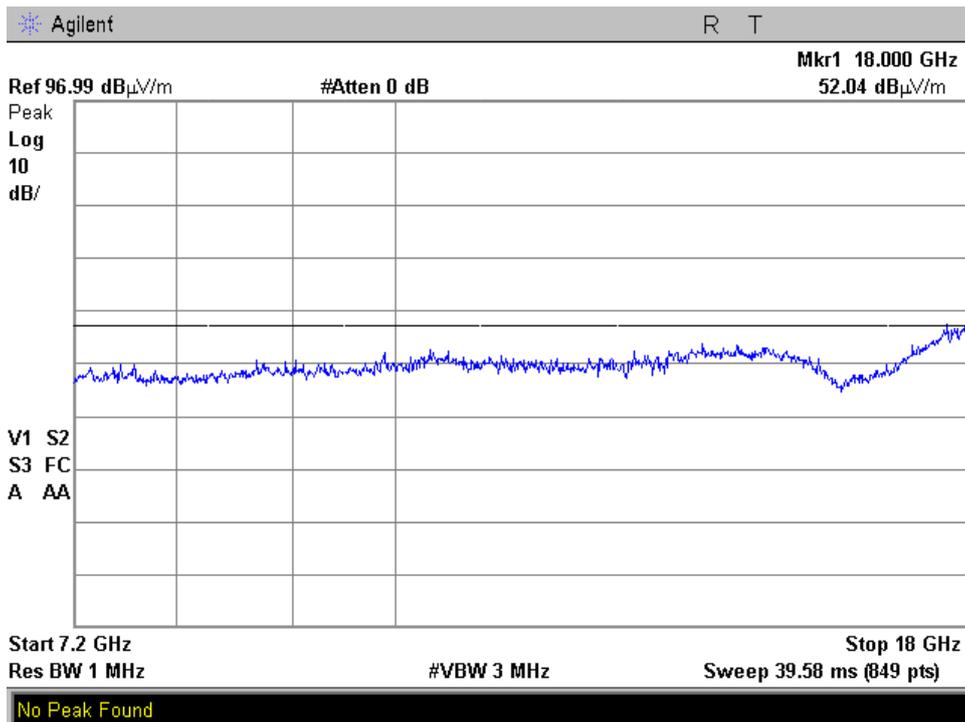


**Plot 4.6.42**

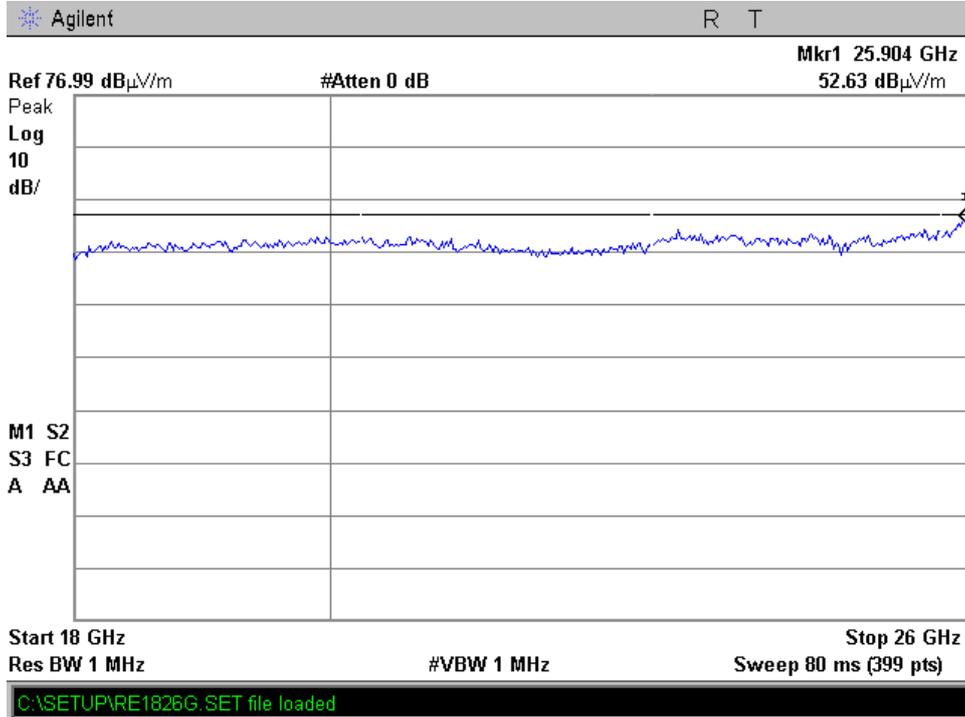


**Frequency 5240 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.43**

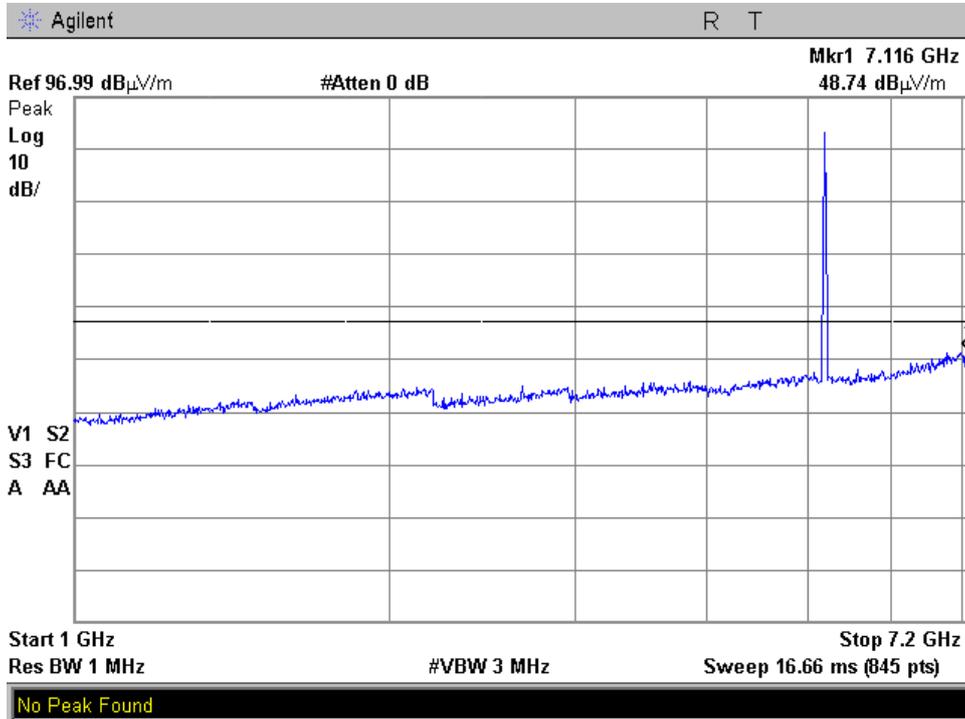


**Plot 4.6.44**

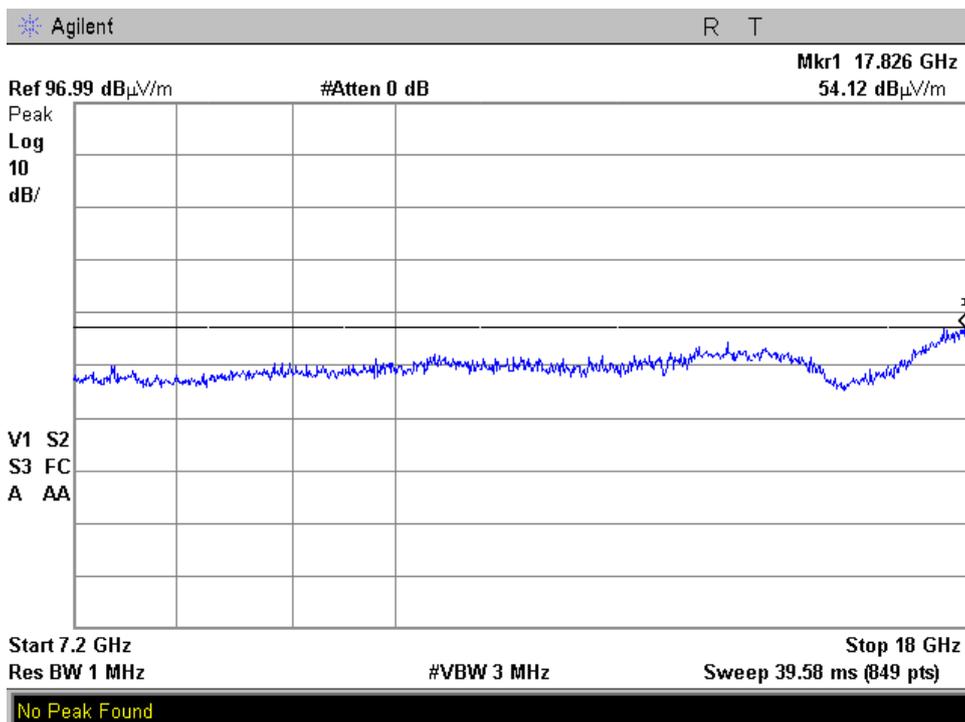


**Plot 4.6.45**

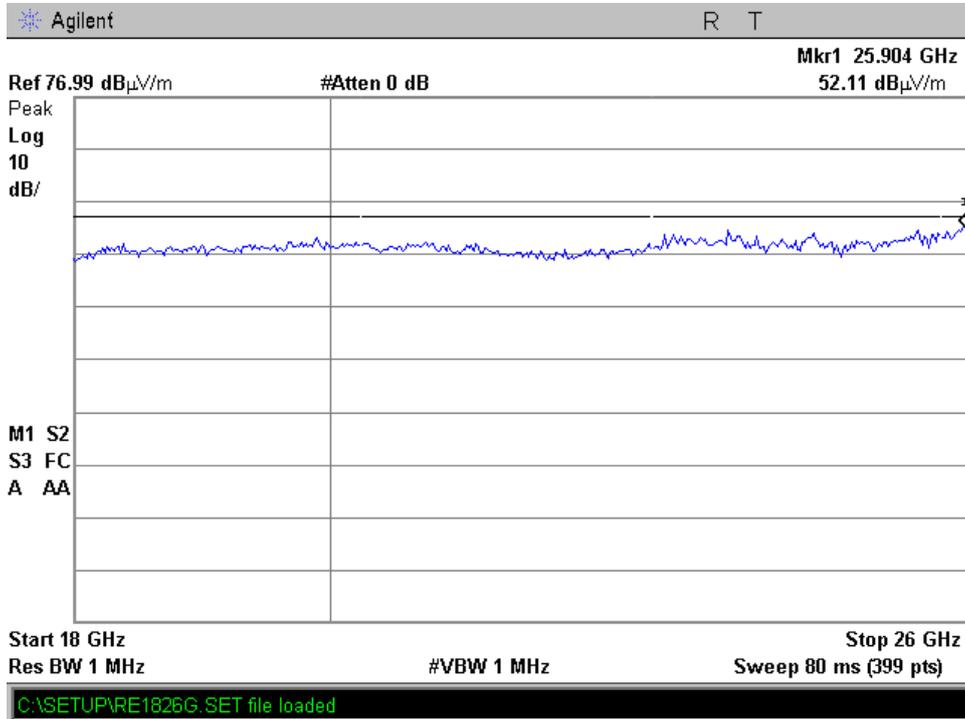


**Frequency 5260 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.46**

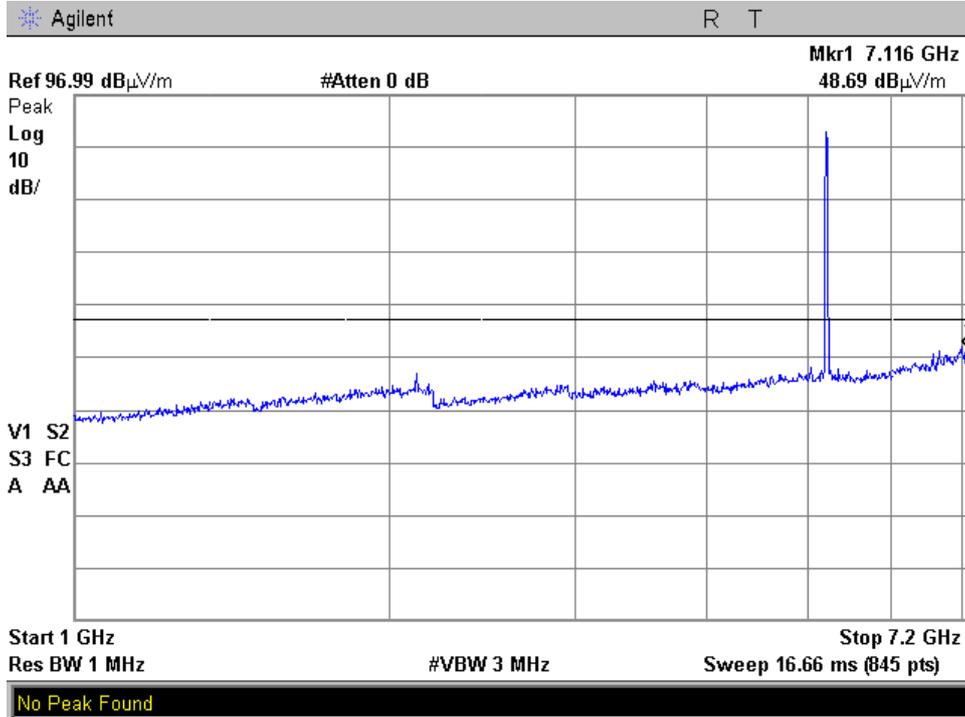


**Plot 4.6.47**

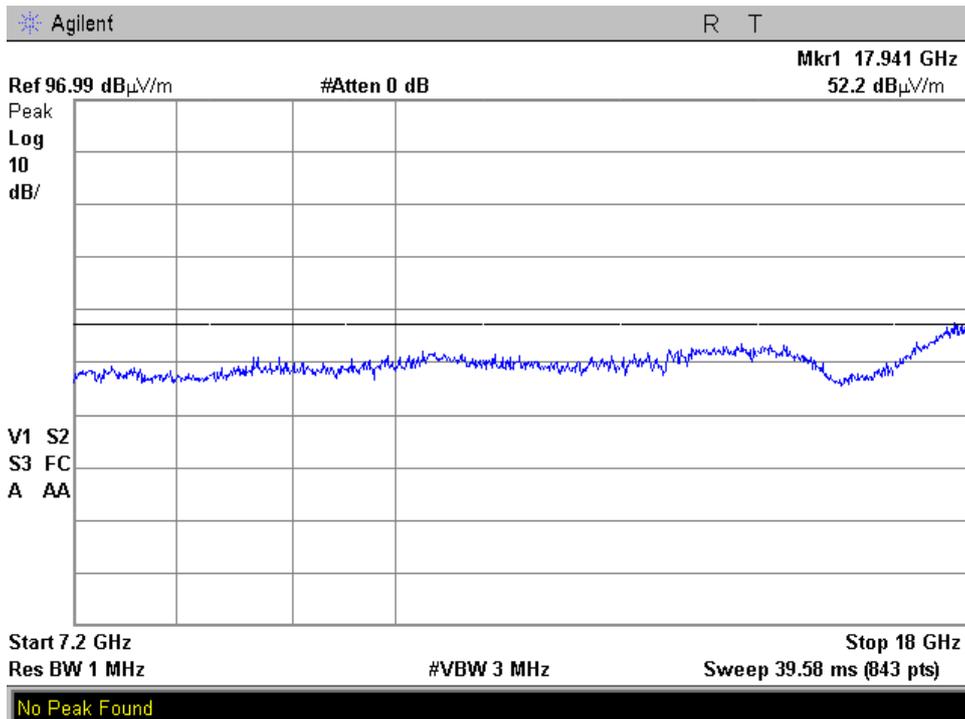


**Plot 4.6.48**

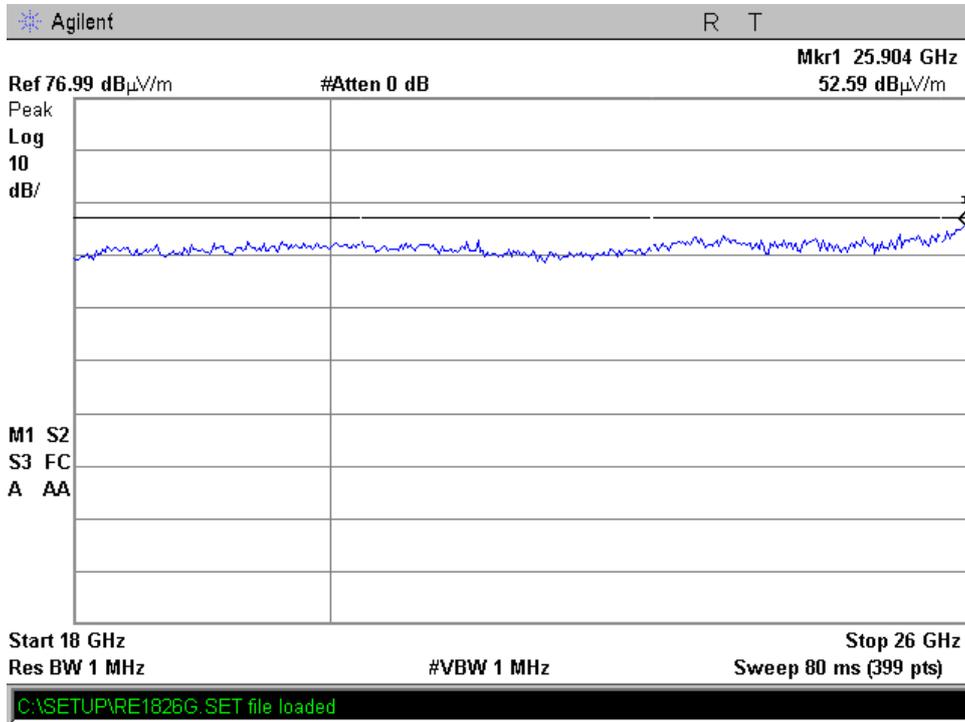


**Frequency 5300 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.49**

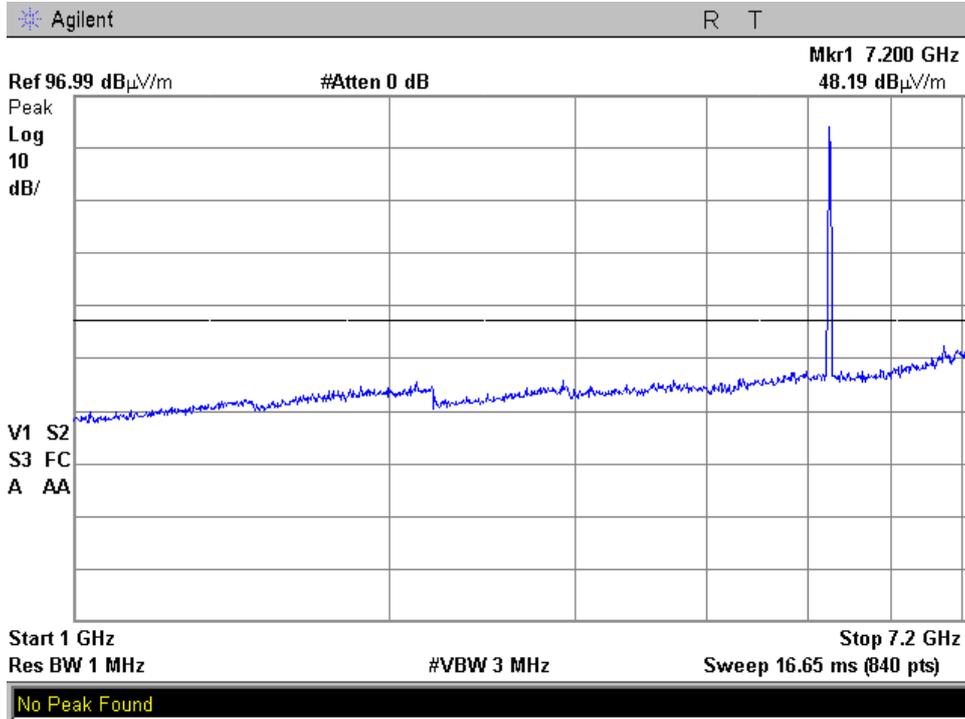


**Plot 4.6.50**

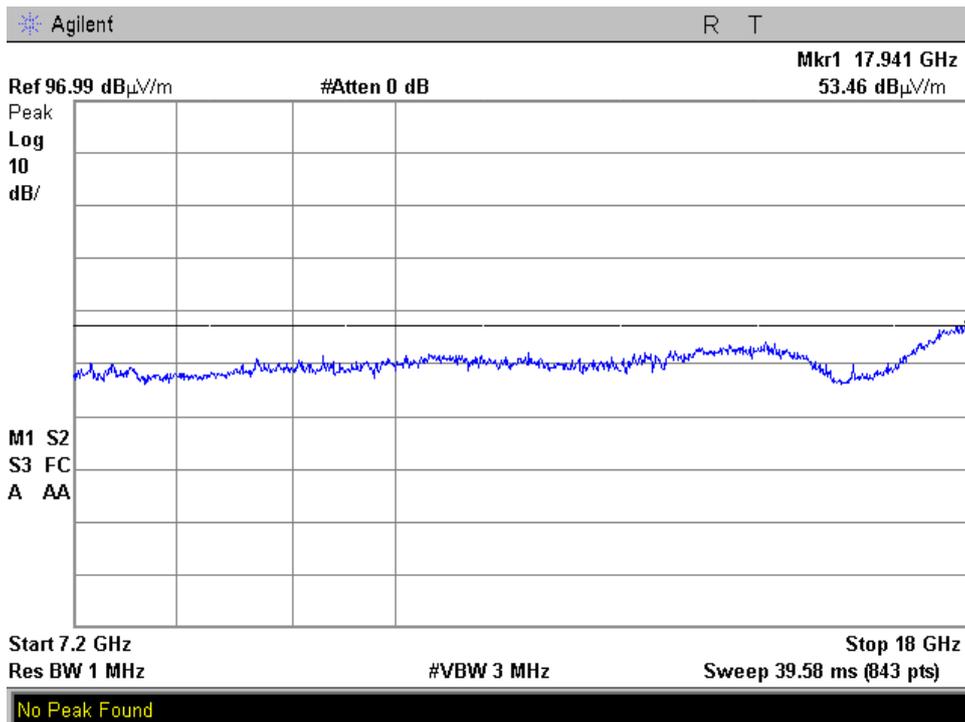


**Plot 4.6.51**

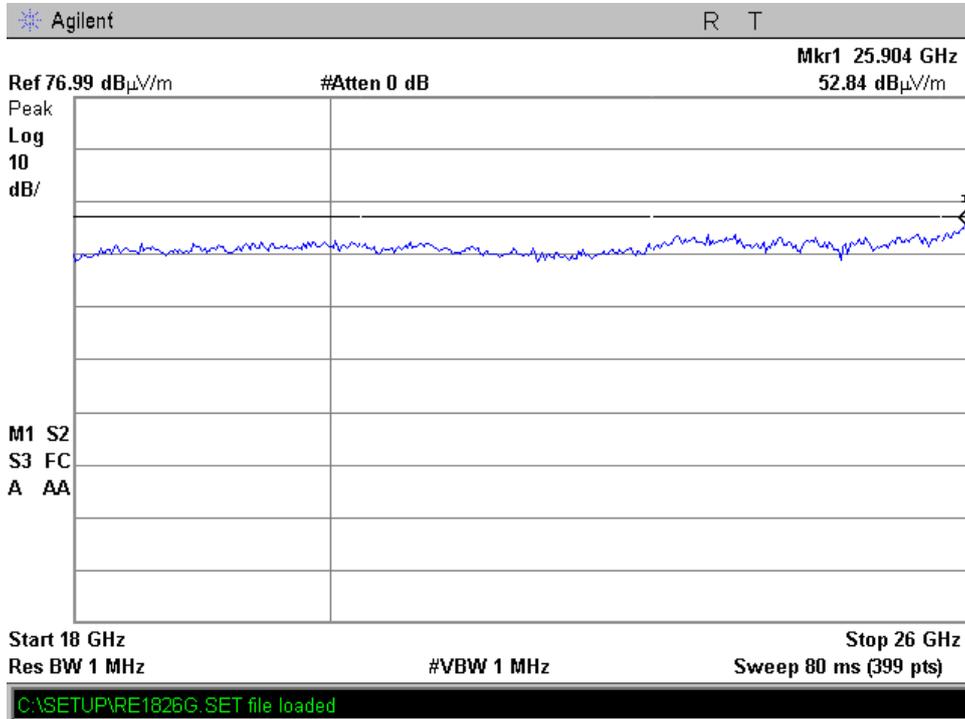


**Frequency 5320 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.52**

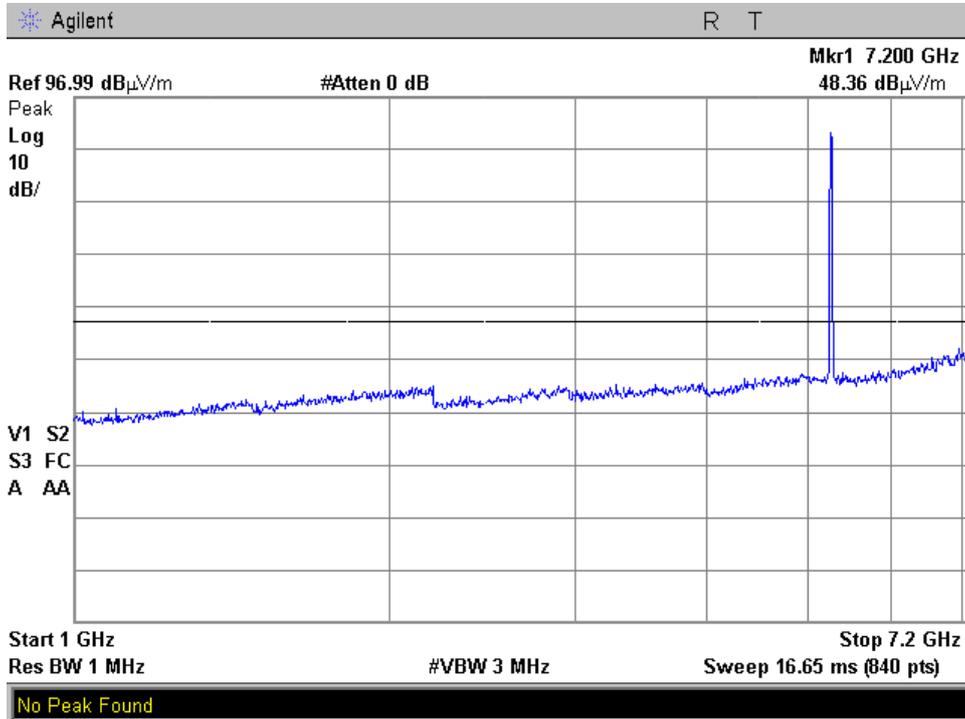


**Plot 4.6.53**

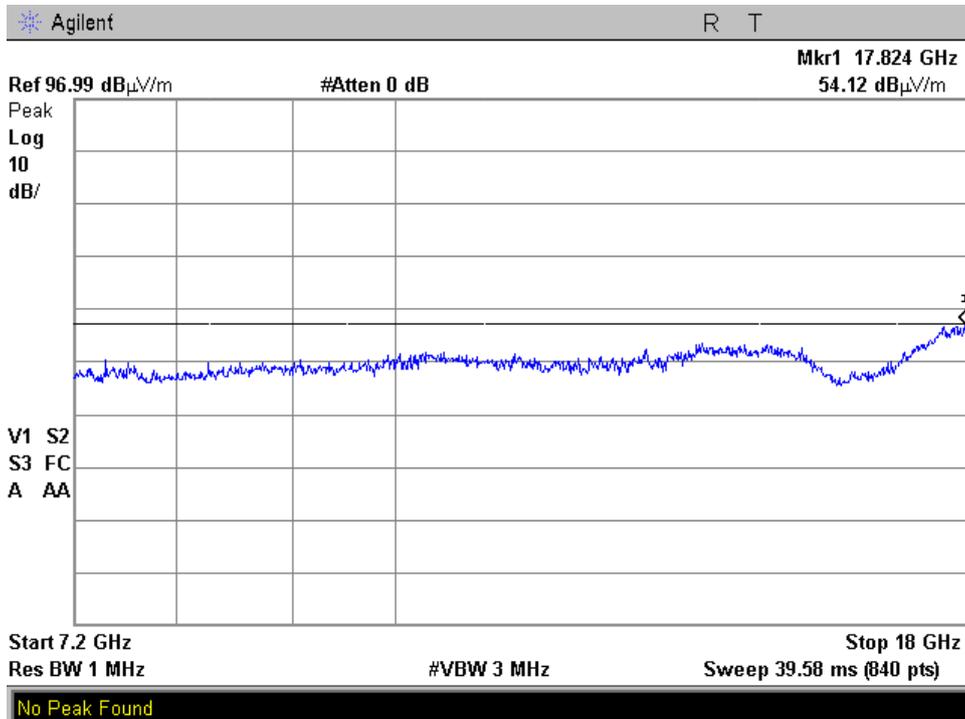


**Plot 4.6.54**

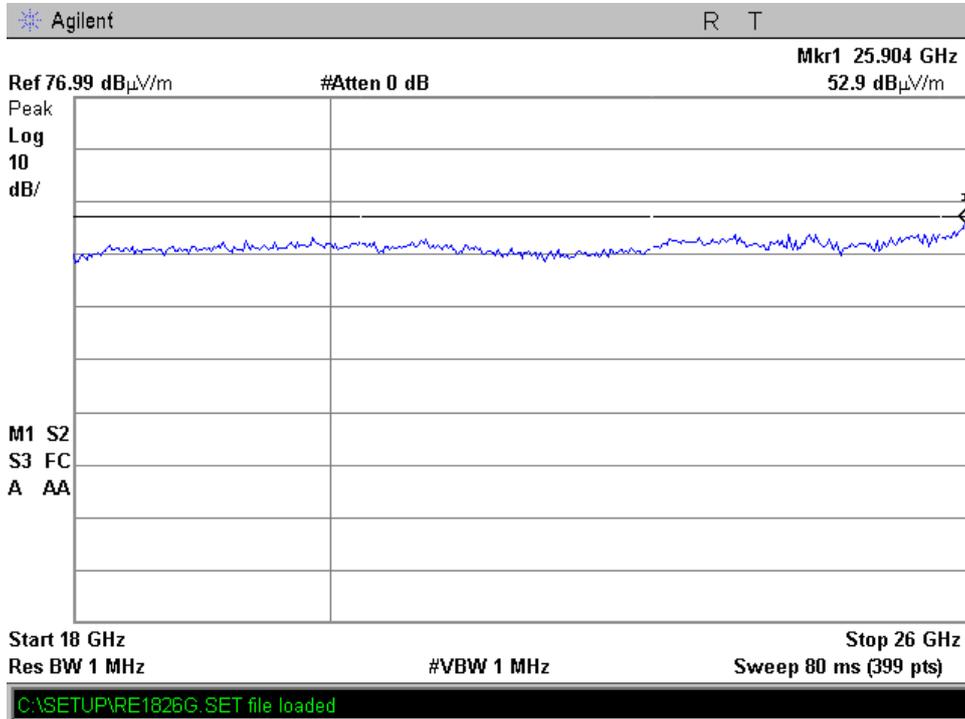


**Frequency 5500 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.55**

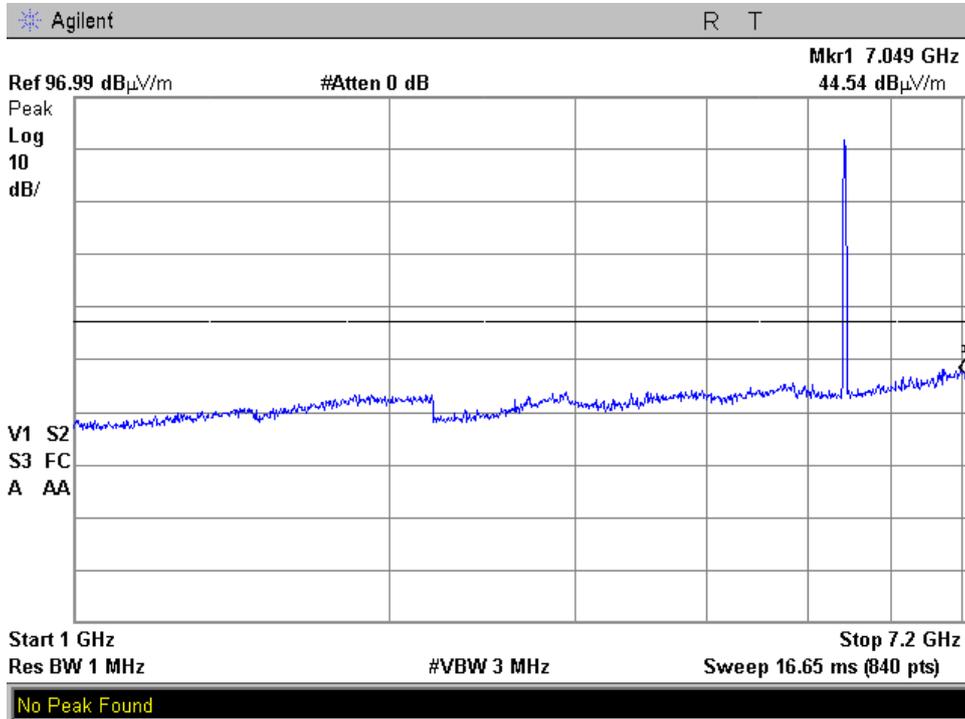


**Plot 4.6.56**

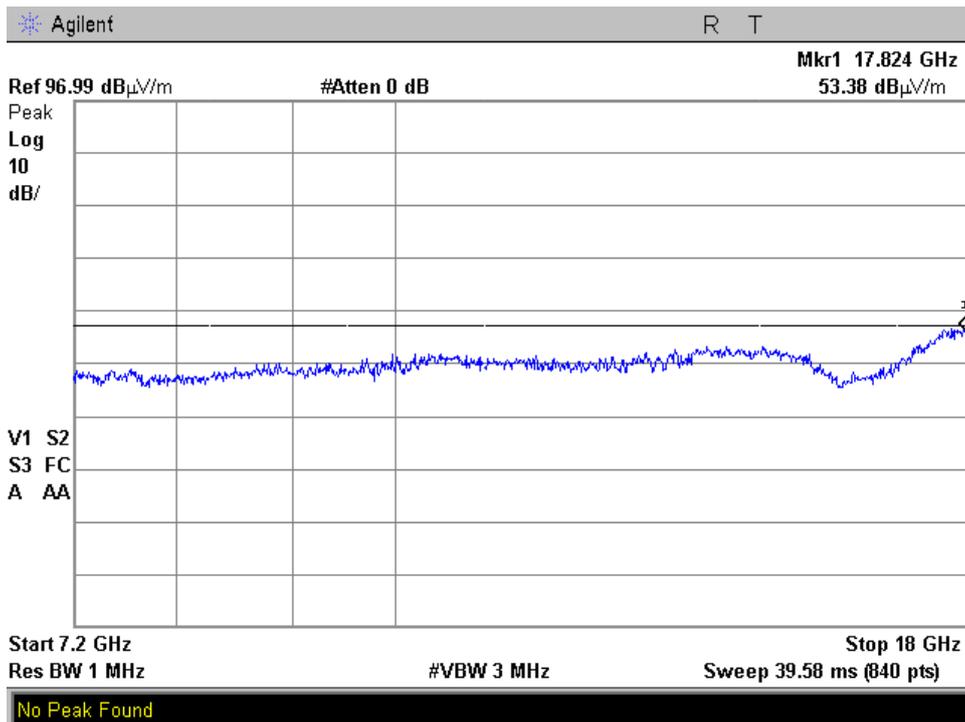


**Plot 4.6.57**

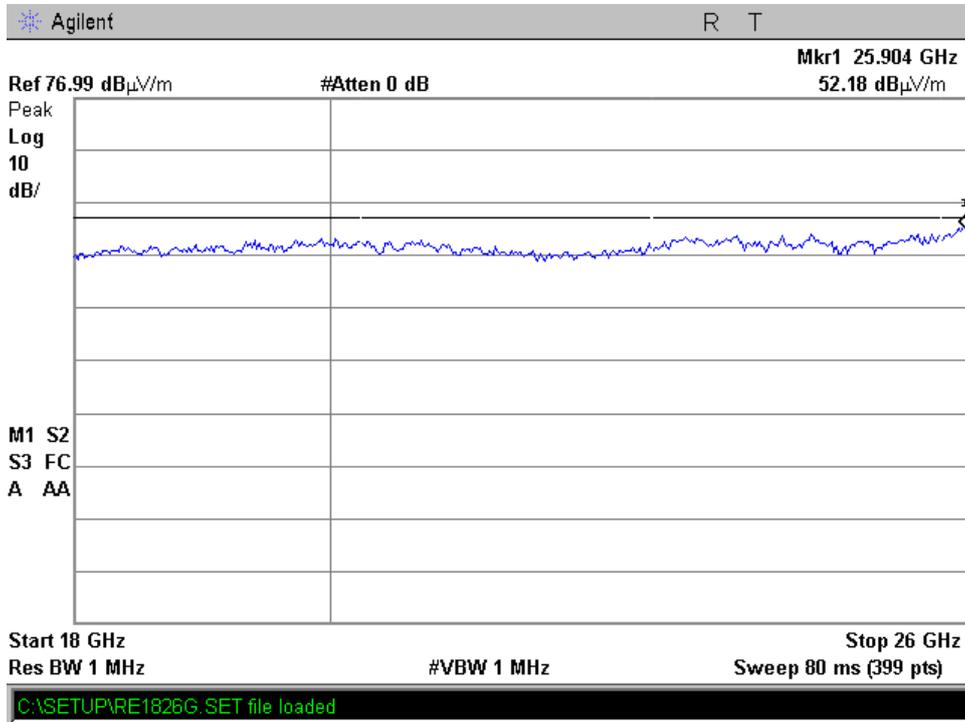


**Frequency 5560 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.58**

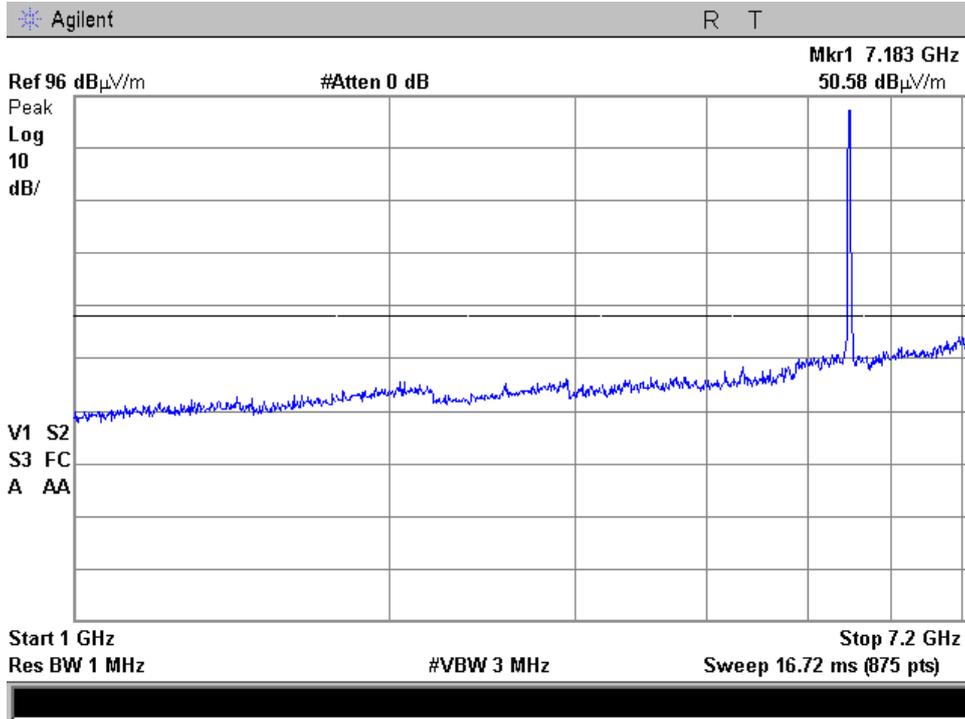


**Plot 4.6.59**

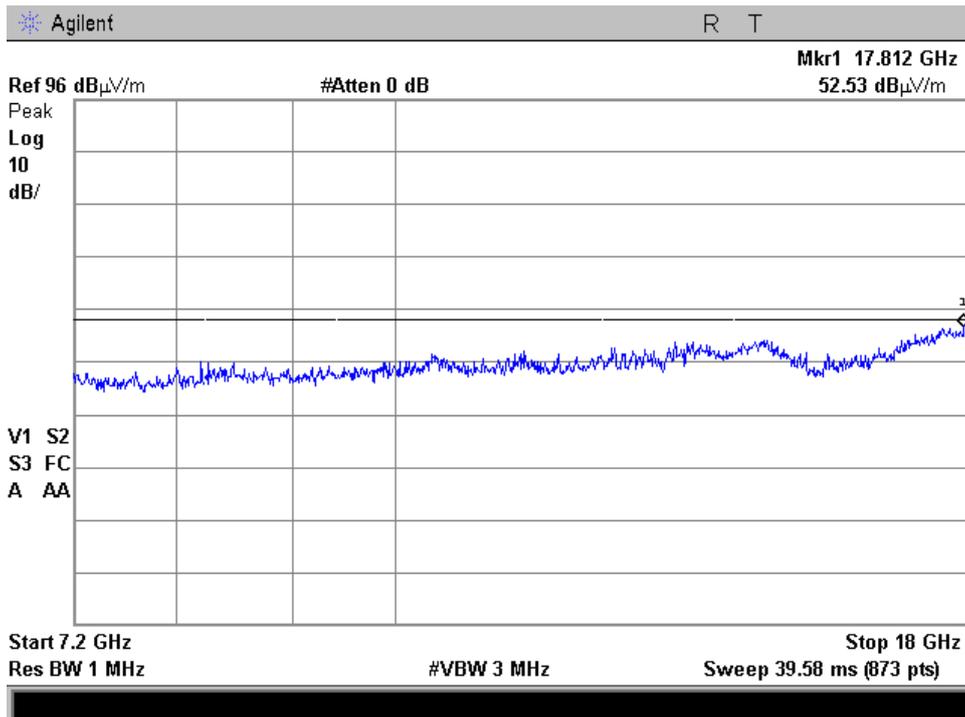


**Plot 4.6.60**

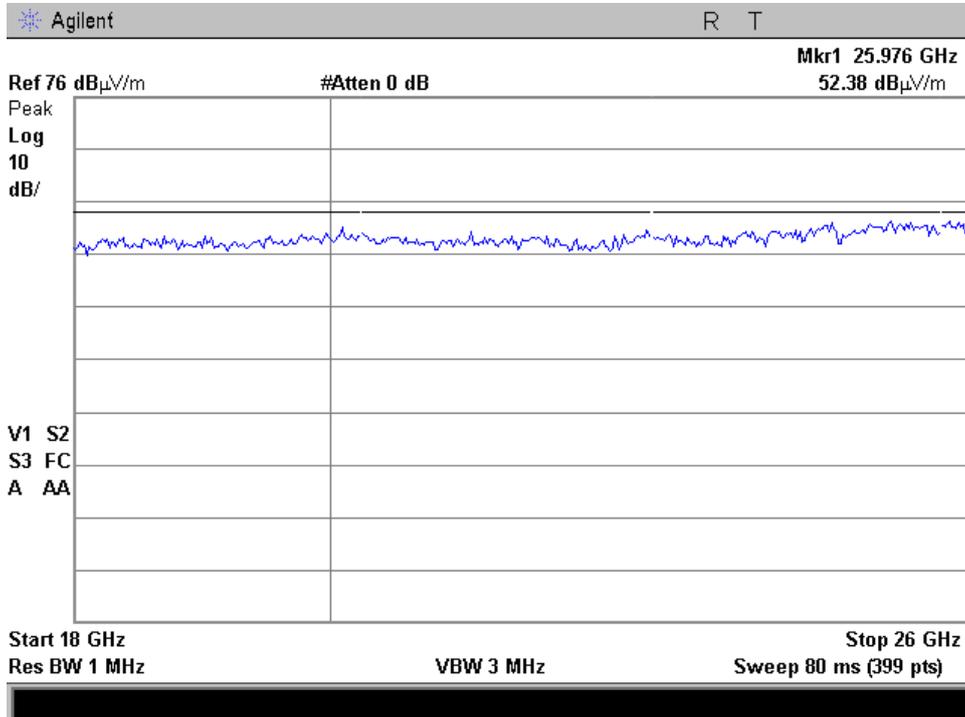


**Frequency 5700 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.61**

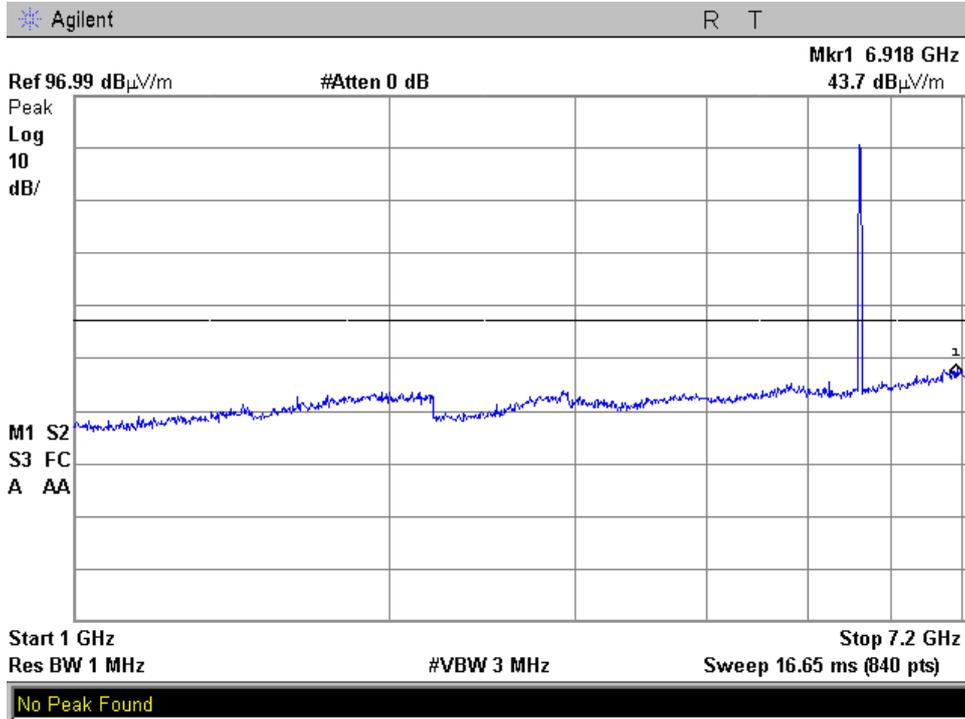

**Plot 4.6.62**

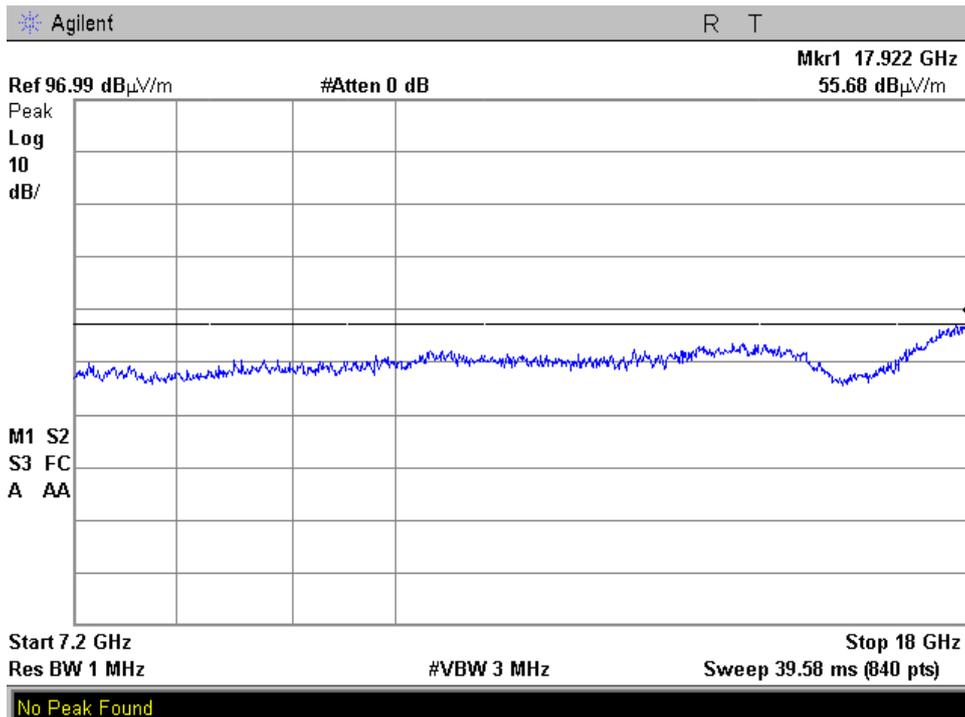


**Plot 4.6.63**

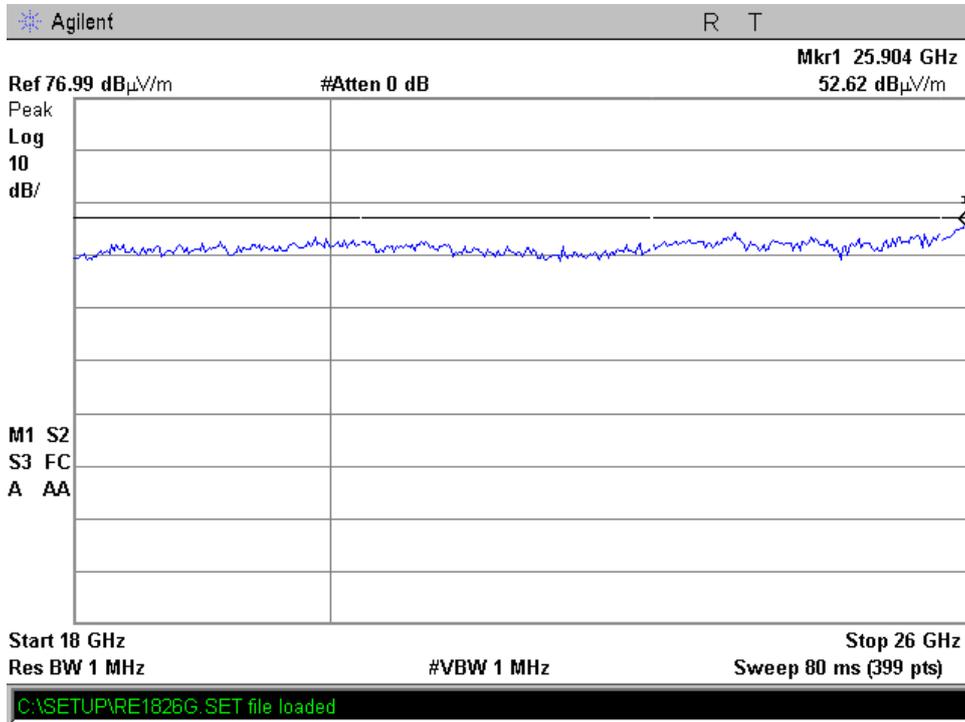


**Frequency 5745 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.64**



**Plot 4.6.65**

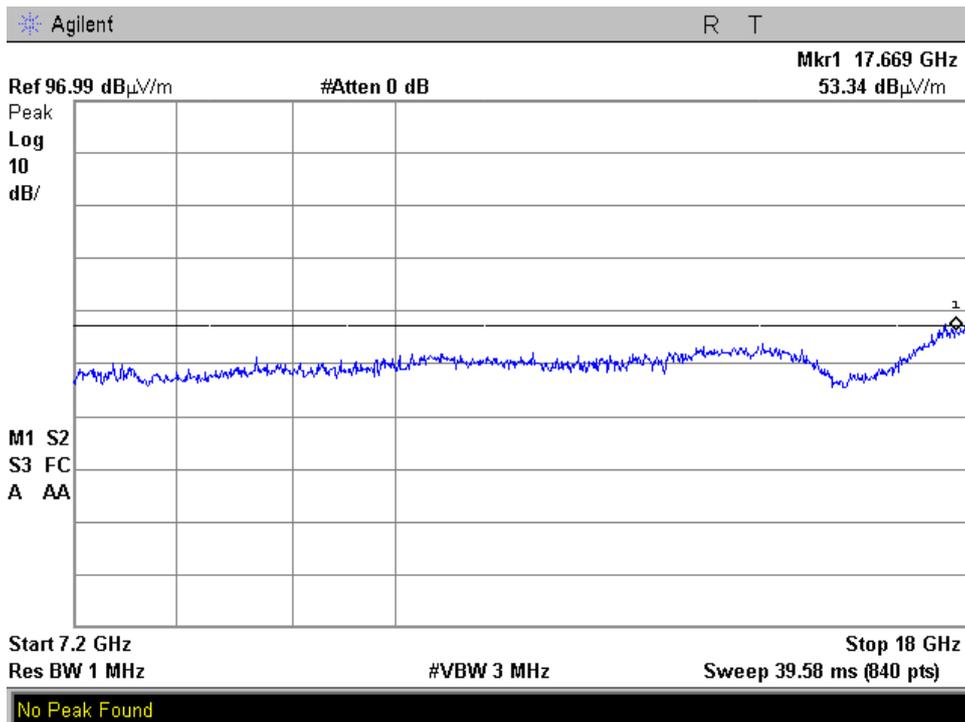


**Plot 4.6.66**

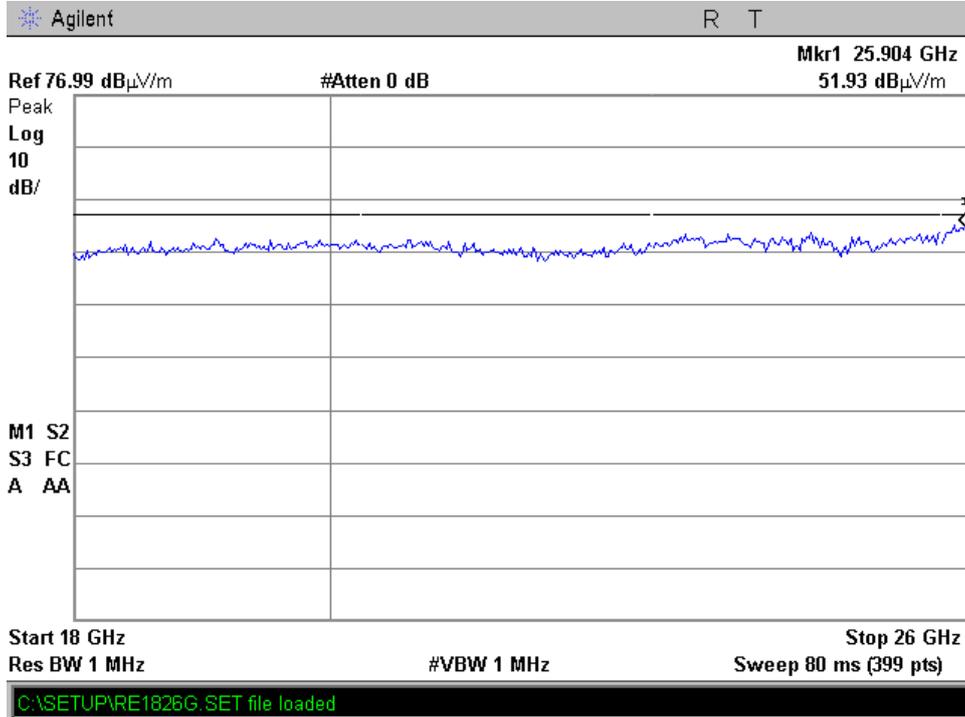





**Plot 4.6.69**

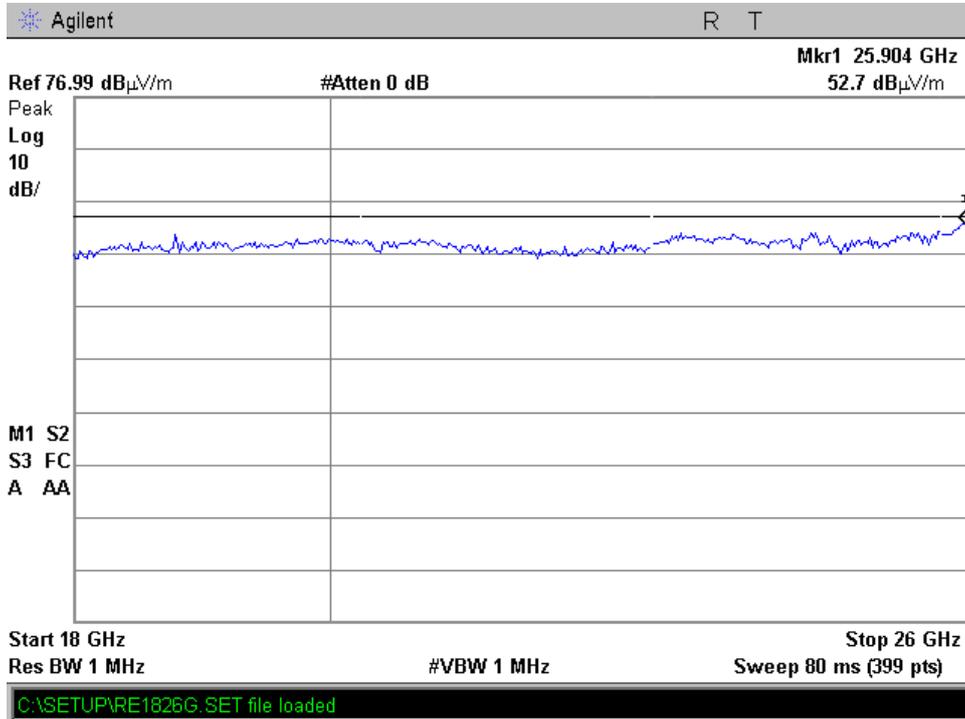


**Frequency 5805 MHz**  
**Horizontal & Vertical Polarization**  
**Plot 4.6.70**

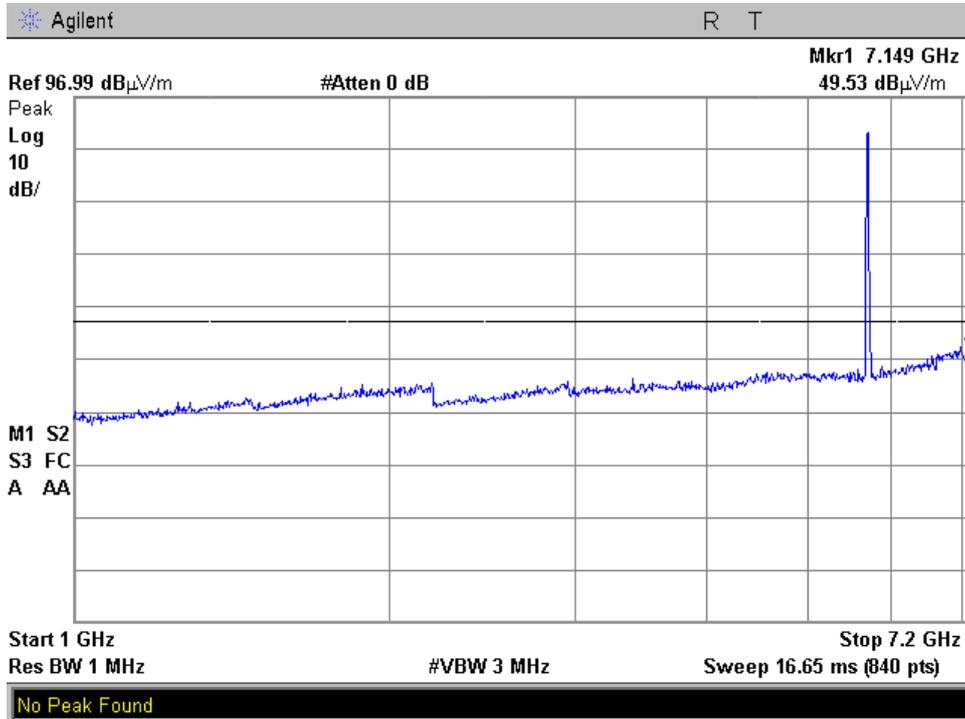

**Plot 4.6.71**

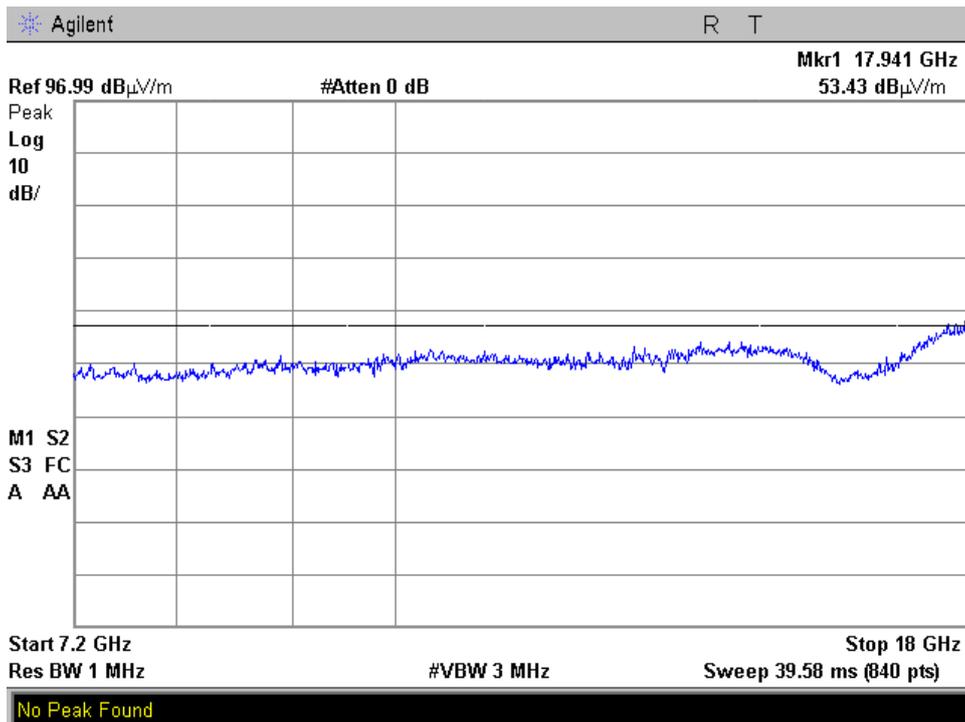


**Plot 4.6.72**

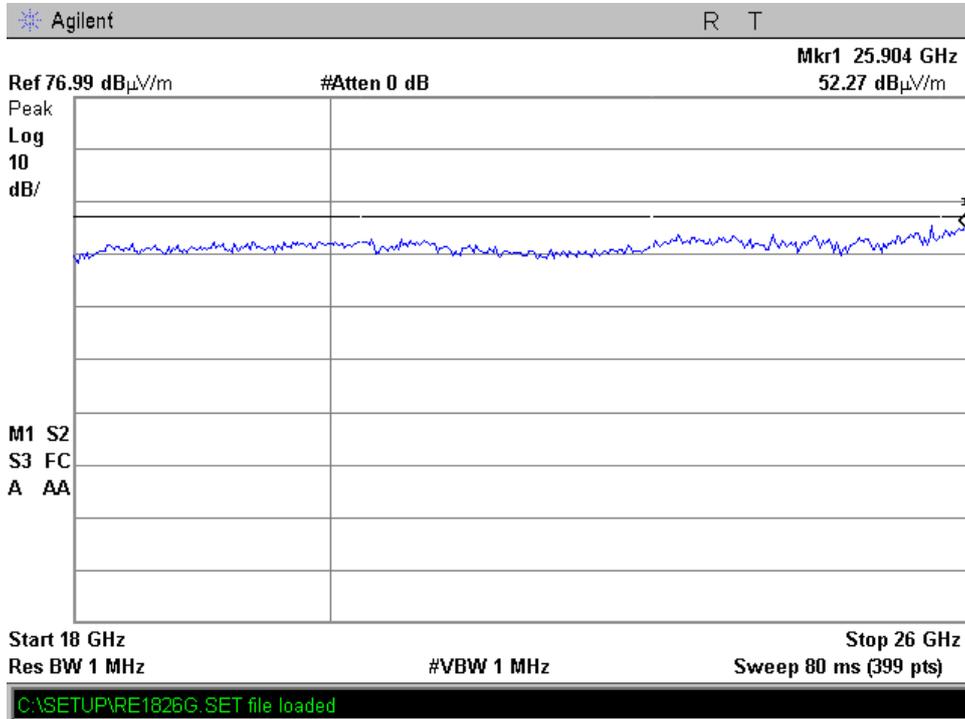

**mode a 5180 MHz**  
**Restricted Band (4.5-5.15 GHz)**  
**Horizontal & Vertical Polarization**  
**Peak**  
**Plot 4.6.73**




ACTV DET: PEAK  
MERS DET: PEAK QP AVG  
MKA 5.1484 GHz  
48.82 dB $\mu$ V/m

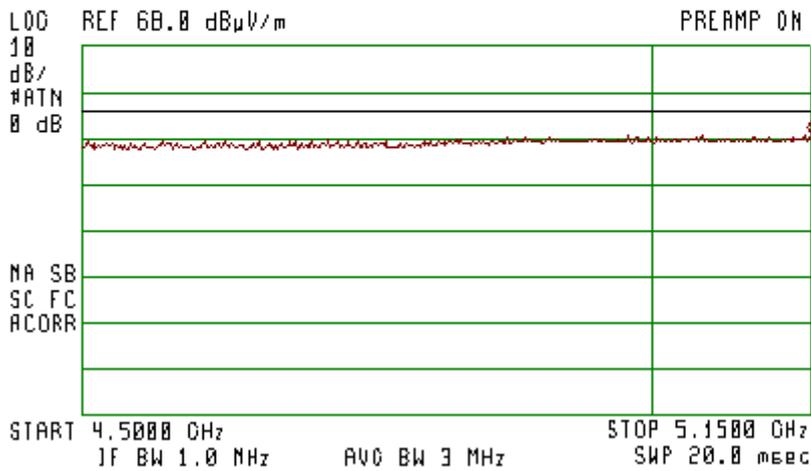

**Horizontal Vertical Polarization**  
**Average**  
**Plot 4.6.74**




ACTV DET: PEAK  
MERS DET: PEAK QP AVG  
MKA 5.1484 GHz  
35.11 dB $\mu$ V/m

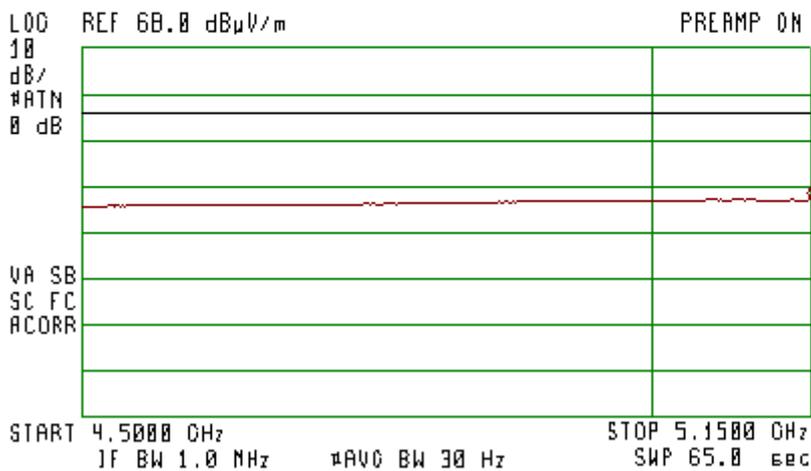

**Restricted Band (5.35-5.46 GHz)**  
**5320 MHz**  
**Horizontal & Vertical Polarization**  
**Peak**  
**Plot 4.6.75**




ACTV DET: PEAK  
MERS DET: PEAK QP AVG  
MKA 5.3660 GHz  
51.63 dB $\mu$ V/m

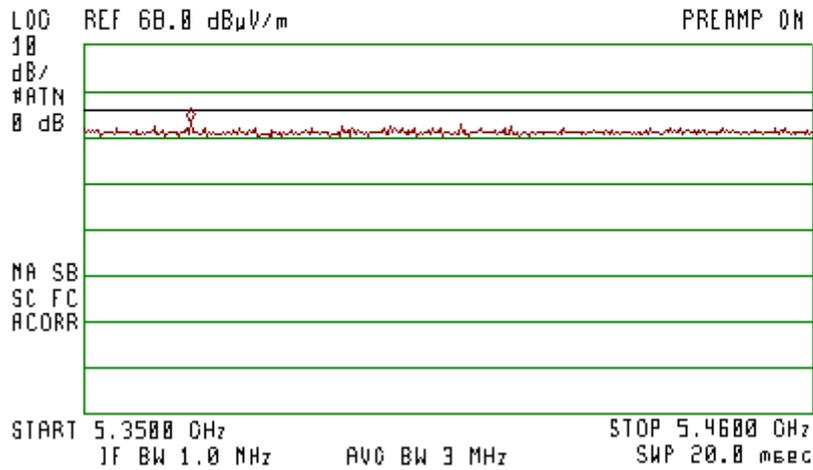

**Horizontal Vertical Polarization**  
**Average**  
**Plot 4.6.76**




ACTV DET: PEAK  
MERS DET: PEAK QP AVG  
MKA 5.4597 GHz  
36.26 dB $\mu$ V/m

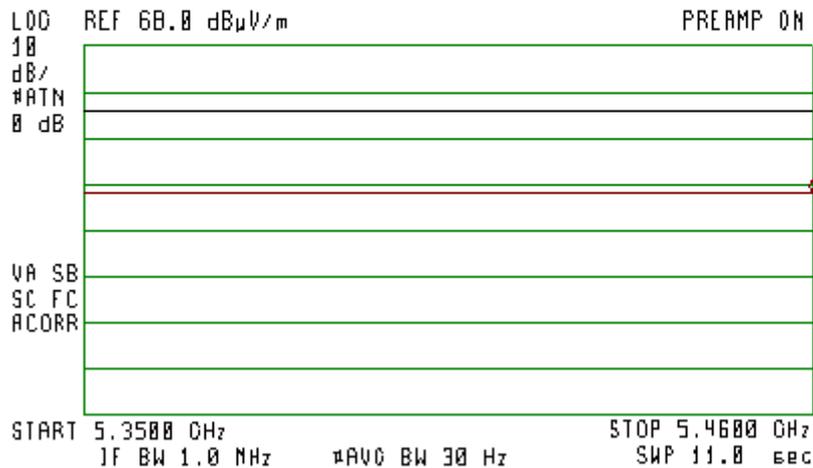


**mode a 5500 MHz**  
**Restricted Band (5.35-5.46 GHz)**  
**Horizontal Polarization**  
**Peak**  
**Plot 4.6.77**

(4)

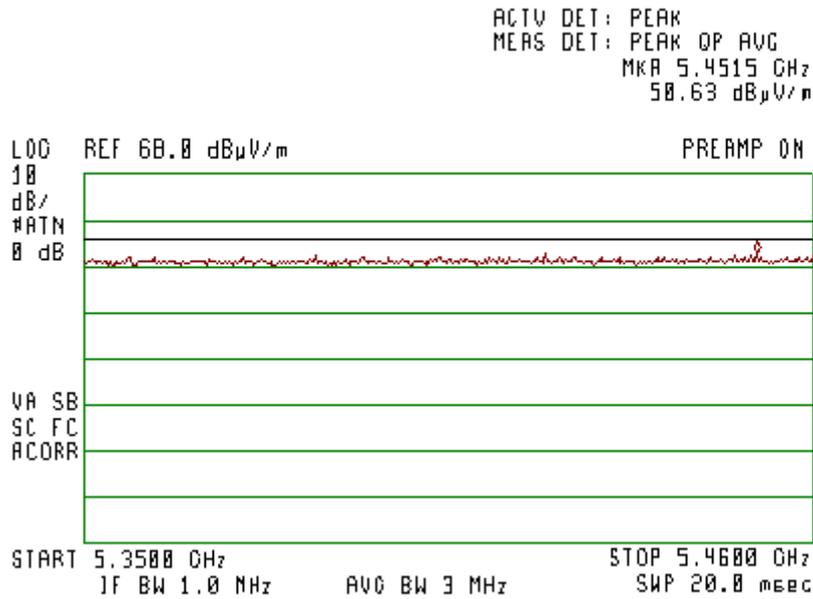

**Horizontal Polarization**  
**Average**  
**Plot 4.6.78**


(4)

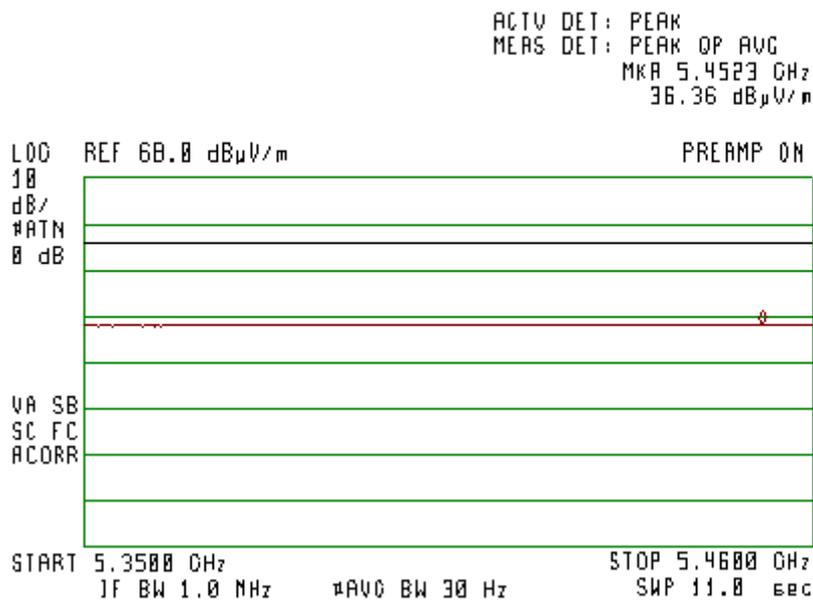

**5180 MHz mode n**  
**Restricted Band (4.5-5.15 GHz)**  
**Horizontal Vertical Polarization**  
**Peak**  
**Plot 4.6.79**




ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKA 5.1419 GHz  
49.06 dB $\mu$ V/m

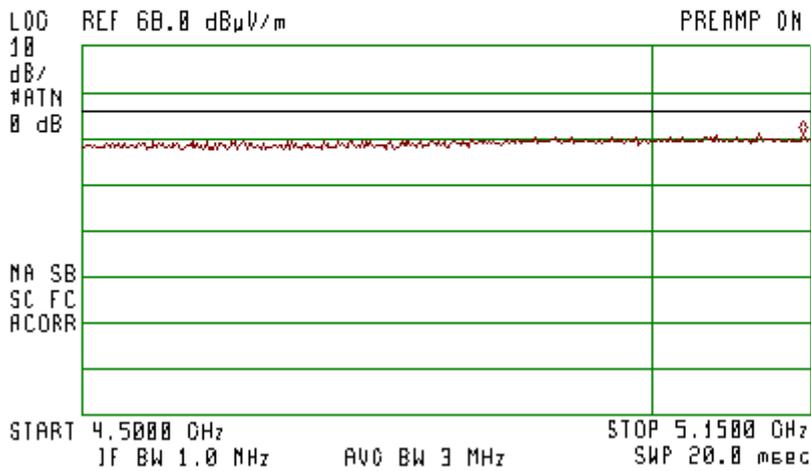


**Horizontal Vertical Polarization Average**  
**Plot 4.6.80**




ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKA 5.0753 GHz  
35.02 dB $\mu$ V/m

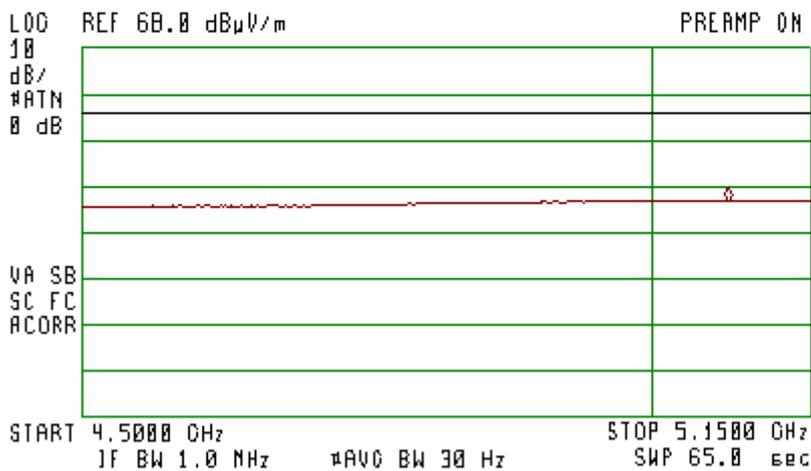

**mode n 5320 MHz**  
**Restricted Band (5.35-5.46 GHz)**  
**Horizontal Polarization**  
**Peak**  
**Plot 4.6.81**

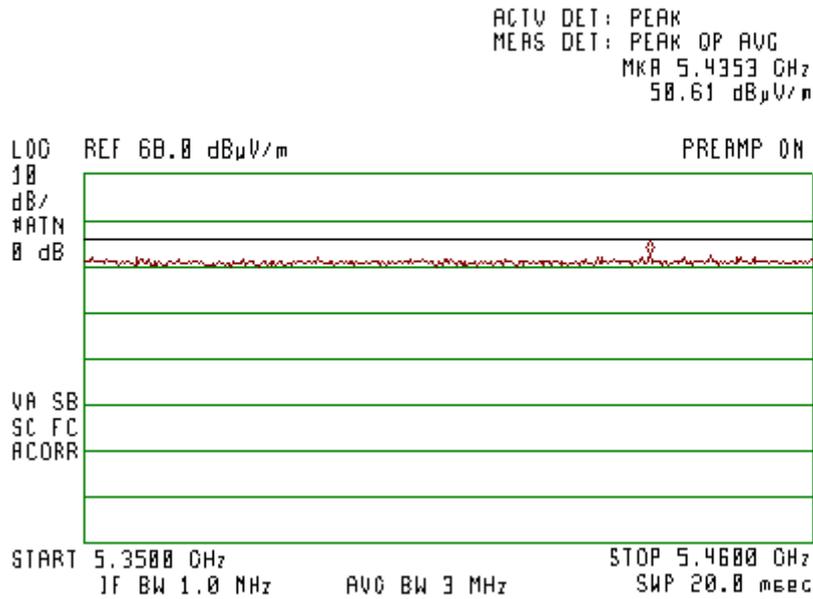


**Horizontal & Vertical Polarization**  
**Average**  
**Plot 4.6.82**

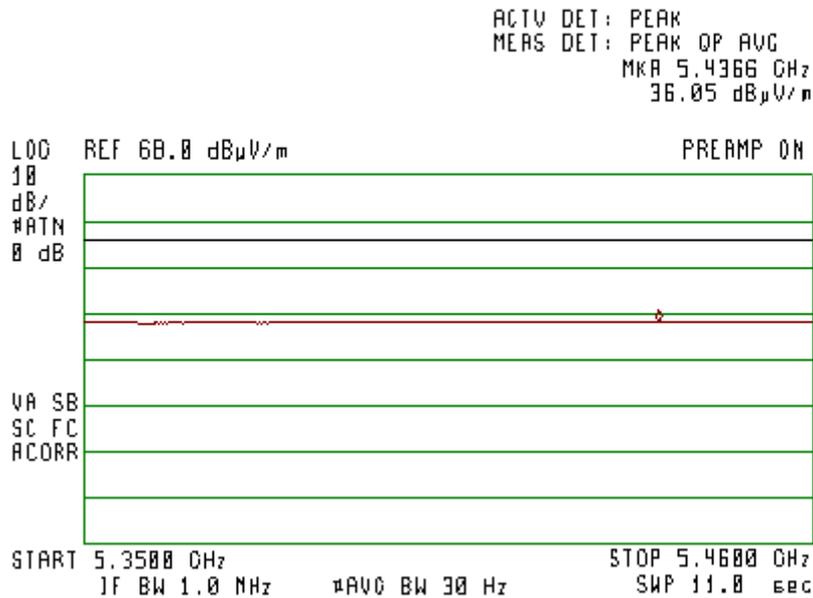

**mode n 5500 MHz**  
**Restricted Band (5.35-5.46 GHz)**  
**Horizontal Polarization**  
**Peak**  
**Plot 4.6.83**




ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKA 5.4386 GHz  
58.07 dB $\mu$ V/m

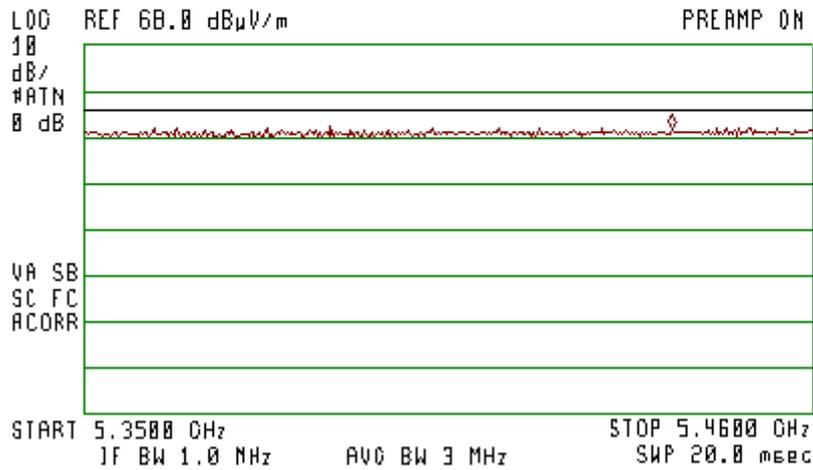


**Horizontal Polarization**  
**Average**  
**Plot 4.6.84**




ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKA 5.4386 GHz  
36.06 dB $\mu$ V/m

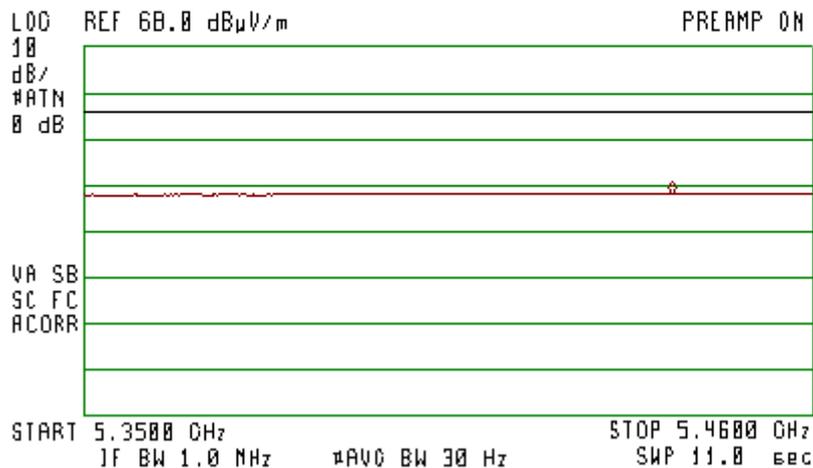


**Radiated Spurious Emissions Below 1 GHz**  
**Worst case for all modes and all frequencies**  
**Horizontal Polarization**  
**Plot 4.6.85**

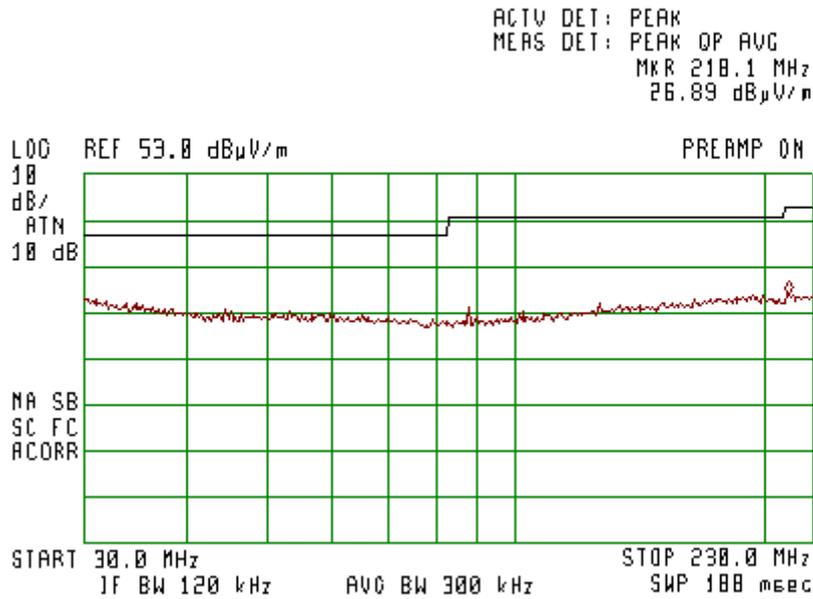


**Vertical Polarization**  
**Plot 4.6.86**

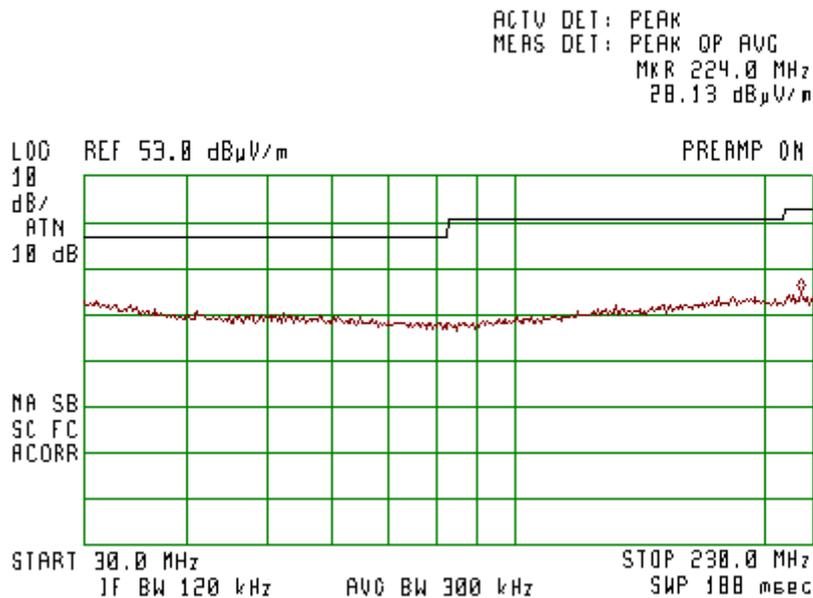

**Horizontal Polarization**  
**Plot 4.6.87**

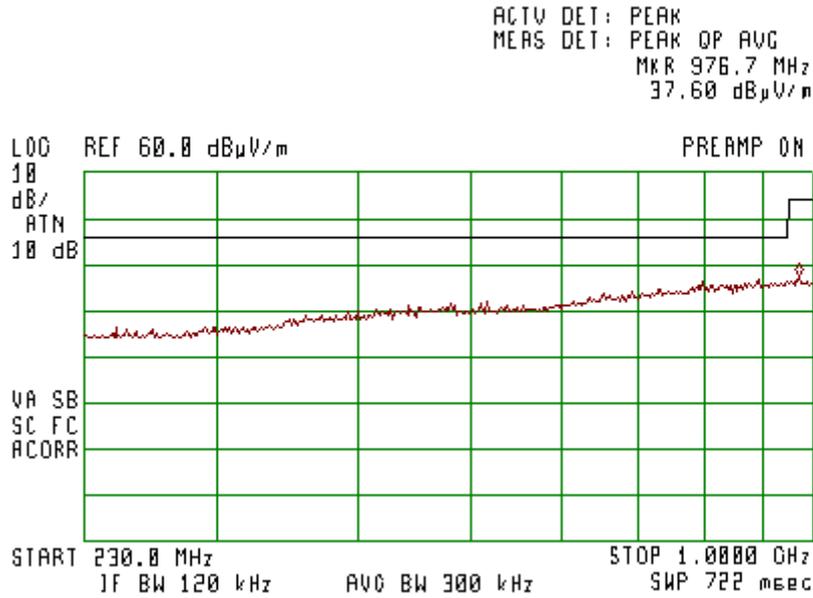

**Vertical Polarization**  
**Plot 4.6.88**

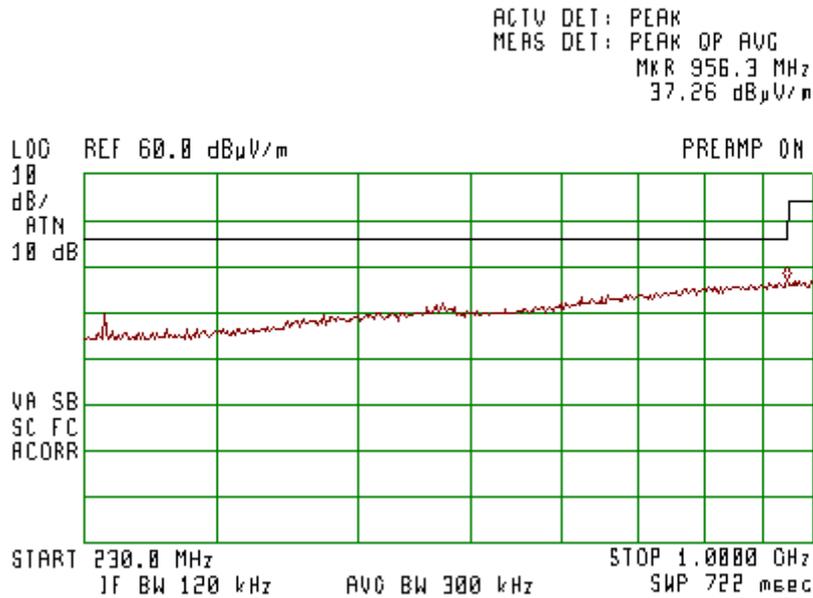

#### 4.7. Frequency Stability

Reference document:	47 CFR §15.407(g)		
Test Requirements:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.		
Test setup:	See sec 2.1	<b>Pass</b>	
Method of testing:	Conducted		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 100kHz, VBW: 300kHz		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	Data indicates that the fundamental emission is maintained within the band of operation under extreme conditions.	See Plot 4.7.1 to Plot 4.7.32	

#### Test results:

#### Voltage Variation

##### 5150-5350 MHz

Frequency [MHz]	Data Rate [Mbps]	Extreme Conditions	Edge of 26 dB Bandwidth [MHz]	Margin [MHz]
<b>802.11a Mode</b>				
5180	54	Ambient temperature 22 °c, Input Voltage 3.145-4.255 Vdc	5170	20.22
5320	54	Ambient temperature 22 °c, Input Voltage 3.145-4.255 Vdc	5330	20.09
<b>802.11n Mode</b>				
5180	65	Ambient temperature 22 °c, Input Voltage 3.145-4.255 Vdc	5170	20.22
5320	65	Ambient temperature 22 °c, Input Voltage 3.145-4.255 Vdc	5330	20.09

##### 5470-5725 MHz

Frequency [MHz]	Data Rate [Mbps]	Extreme Conditions	Edge of 26 dB Bandwidth [MHz]	Margin [MHz]
<b>802.11a Mode</b>				
5500	54	Ambient temperature 22 °c, Input Voltage 3.145-4.255 Vdc	5485	14.61
5700	54		5710	14.79
<b>802.11n Mode</b>				
5500	65	Ambient temperature 22 °c, Input Voltage 3.145-4.255 Vdc	5485	14.61
5700	65		5710	14.79

## Temperature Variation


### 5150-5350 MHz

Frequency [MHz]	Data Rate [Mbps]	Extreme Conditions	Edge of 26 dB Bandwidth [MHz]	Margin [MHz]
<b>802.11a Mode</b>				
5180	54	Ambient temperature -10 to +50°C, Input Voltage 3.7Vdc	5170	20.45
5320	54	Ambient temperature -10 to +50 °c, Input Voltage 3.7Vdc	5330	19.94
<b>802.11n Mode</b>				
5180	65	Ambient temperature -10 to +50°C, Input Voltage 3.7Vdc	5170	20.45
5320	65	Ambient temperature -10 to +50 °c, Input Voltage 3.7Vdc	5330	19.94


### 5470-5725 MHz

Frequency [MHz]	Data Rate [Mbps]	Extreme Conditions	Edge of 26 dB Bandwidth [MHz]	Margin [MHz]
<b>802.11a Mode</b>				
5500	54	Ambient temperature -10 to +50°C, Input Voltage 3.7Vdc	5485	15.05
5700	54		5701	15.18
<b>802.11n Mode</b>				
5500	65	Ambient temperature -10 to +50°C, Input Voltage 3.7Vdc	5485	15.05
5700	65		5701	15.18


**Voltage Variation**  
**Frequency 5150-5350 MHz, Carrier frequency 5180 MHz,**  
**115% of Vnom a mode**  
**Plot 4.7.1**

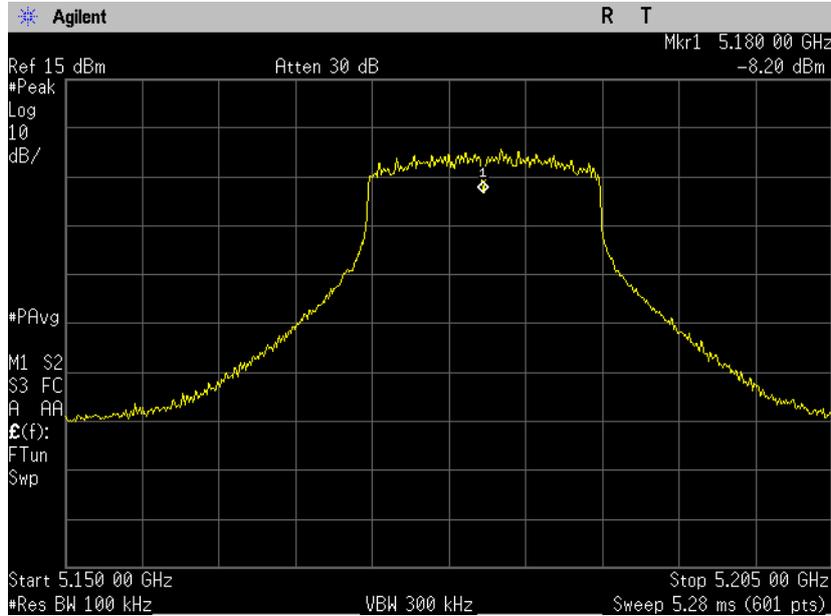


**85% of Vnom**  
**Plot 4.7.2**

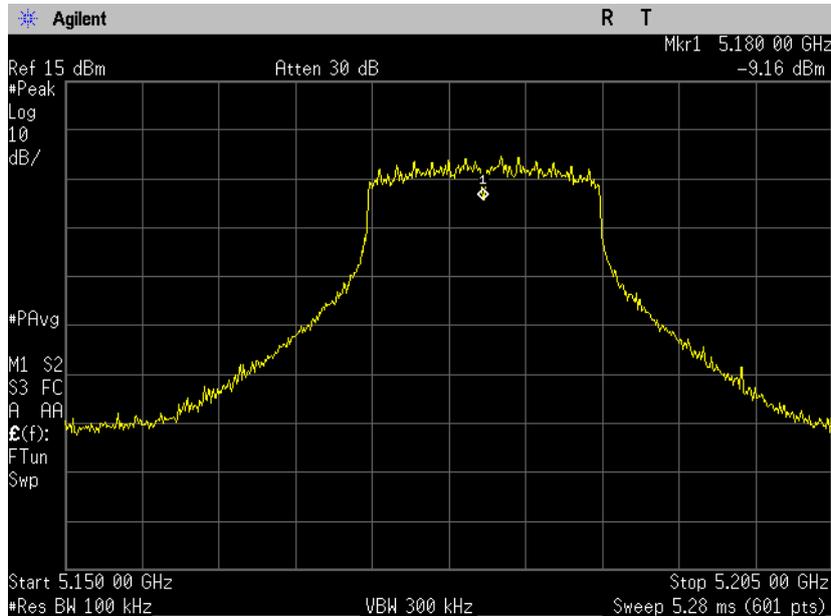


**Voltage Variation**  
**Frequency 5150-5350 MHz, Carrier frequency 5180 MHz, A mode**  
**Ambient temperature -10 °c**  
**Plot 4.7.3**

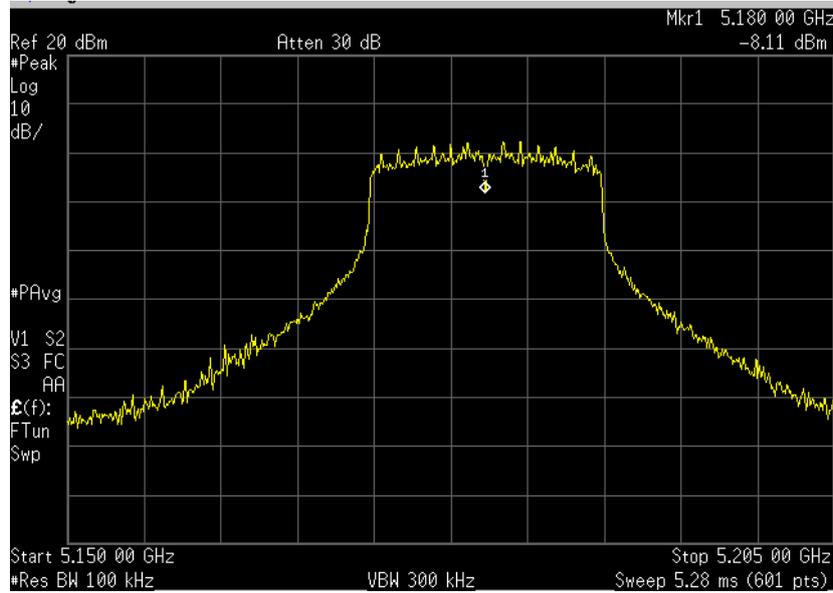


**Ambient temperature +50 °c**  
**Plot 4.7.4**

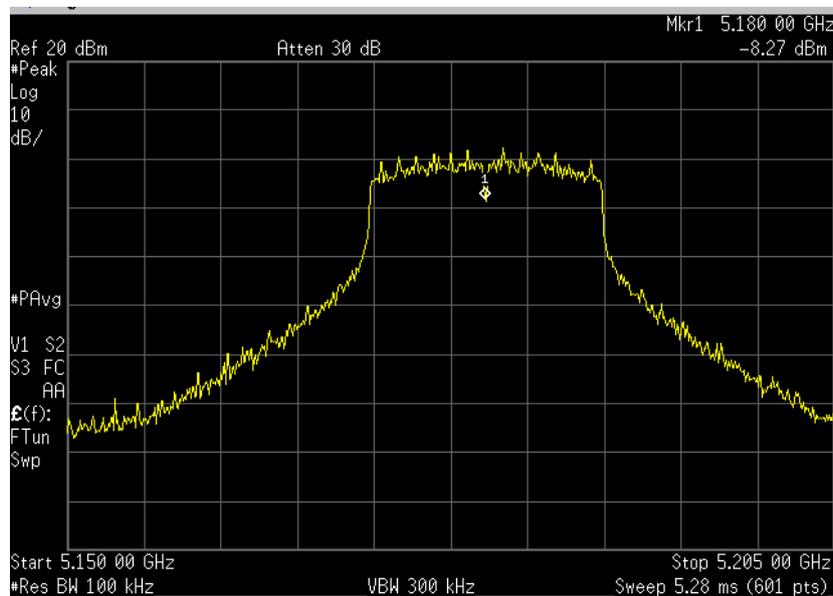


**Frequency 5150-5350 MHz, Carrier frequency 5180 MHz,  
115% of Vnom n mode  
Plot 4.7.5**

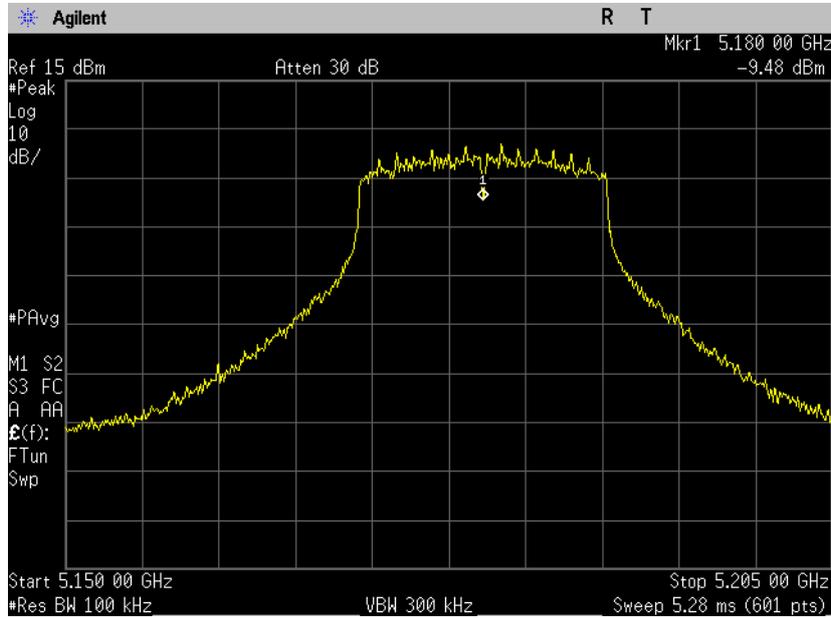


**85% of Vnom  
Plot 4.7.6**

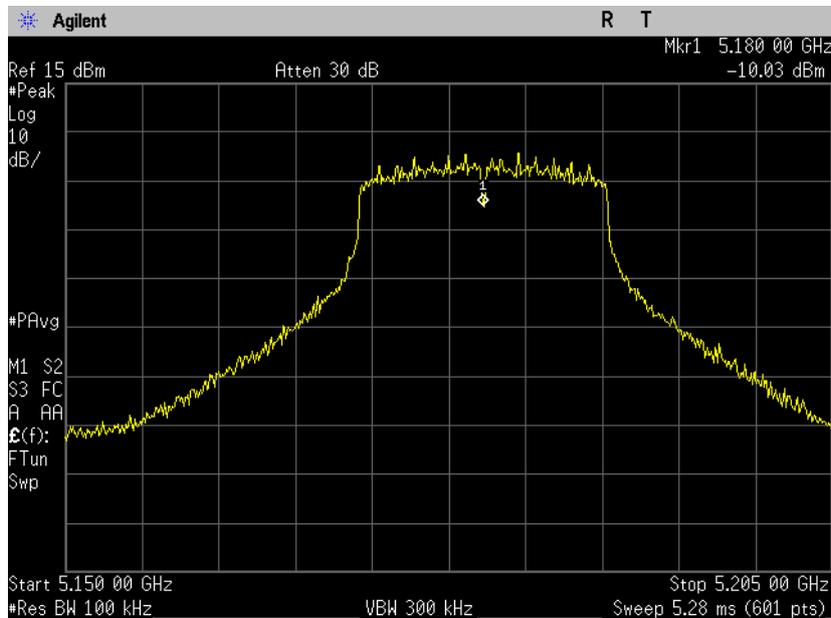


**Frequency 5150-5350 MHz, Carrier frequency 5180 MHz, N mode**  
**Ambient temperature -10 °c**  
**Plot 4.7.7**

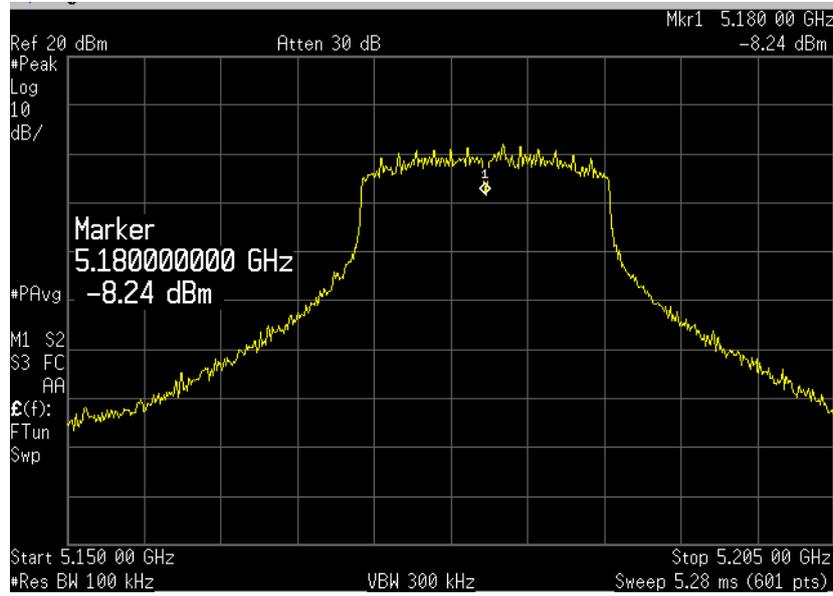


**Ambient temperature +50 °c**  
**Plot 4.7.8**

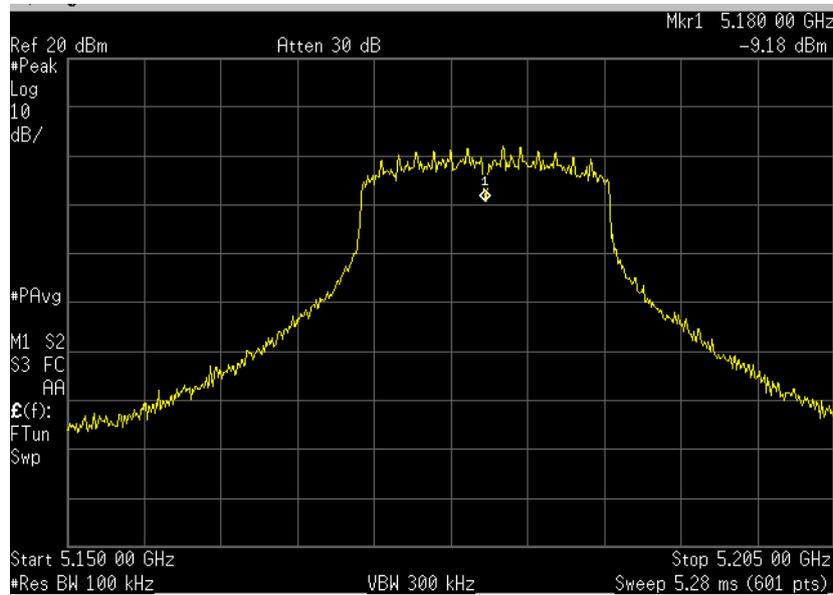


**Carrier frequency 5320 MHz, a mode**  
**115% of Vnom**  
**Plot 4.7.9**

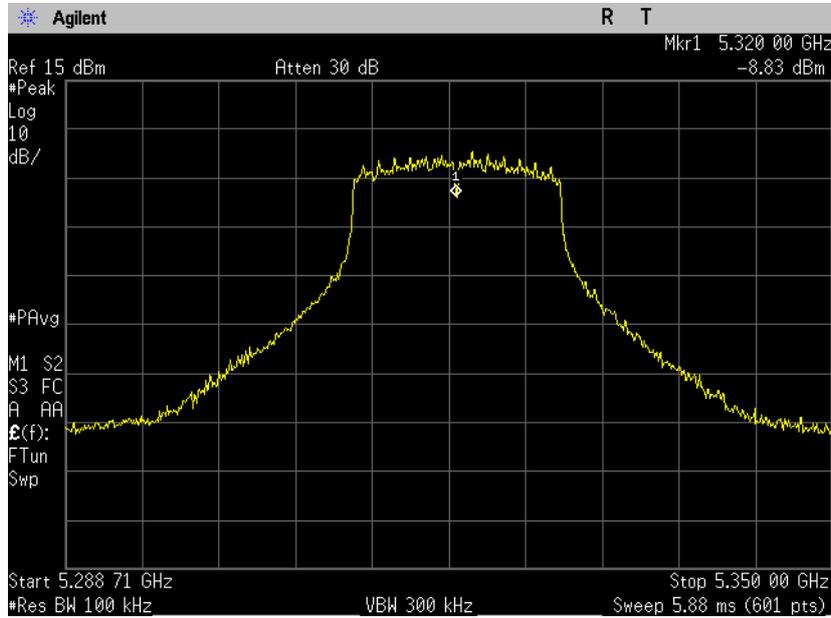


**85% of Vnom**  
**Plot 4.7.10**

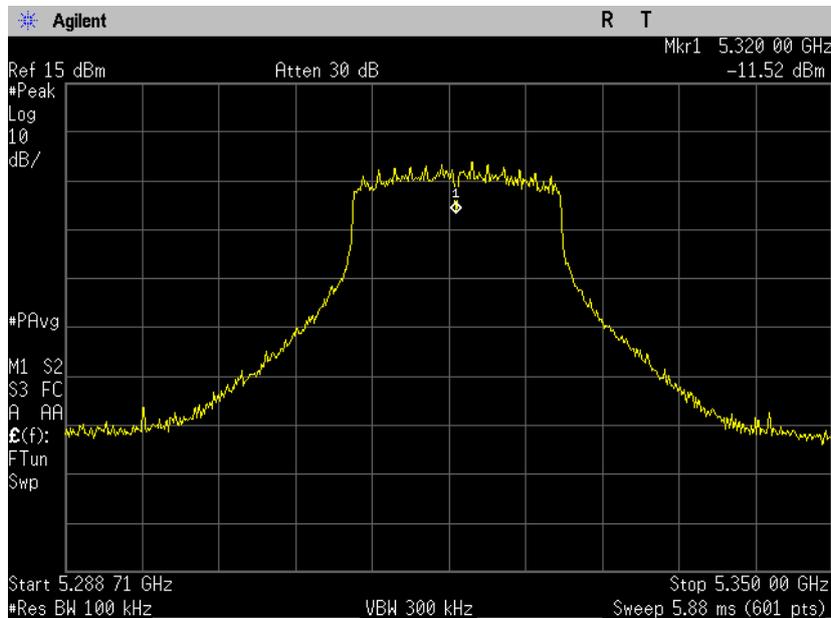


**Carrier frequency 5320 MHz a mode**  
**Ambient temperature -10 °c**  
**Plot 4.7.11**

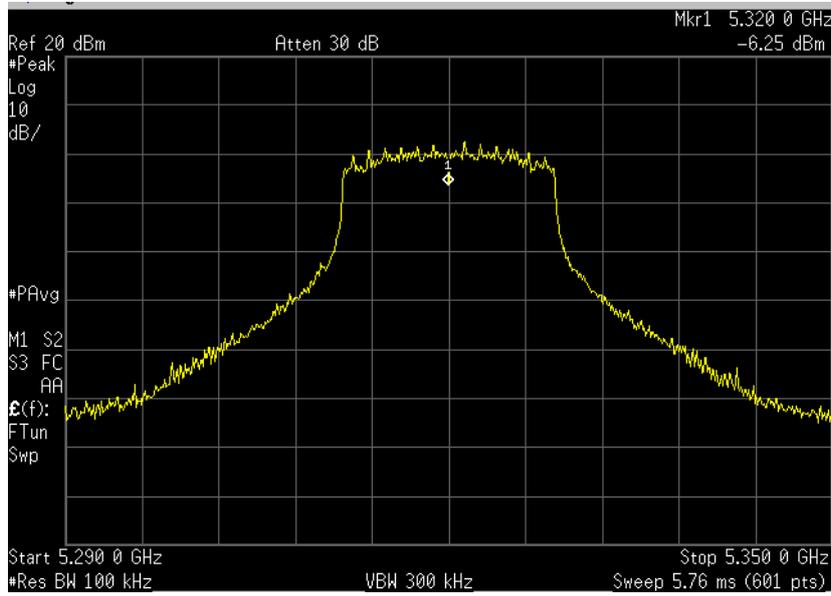


**Ambient temperature +50 °c**  
**Plot 4.7.12**

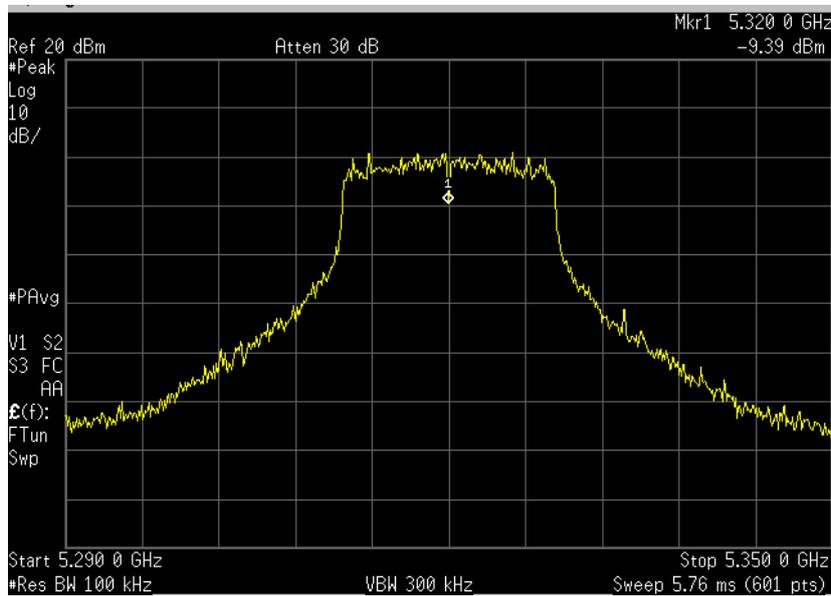


**Carrier frequency 5320 MHz n mode**  
**115% of Vnom**  
**Plot 4.7.13**

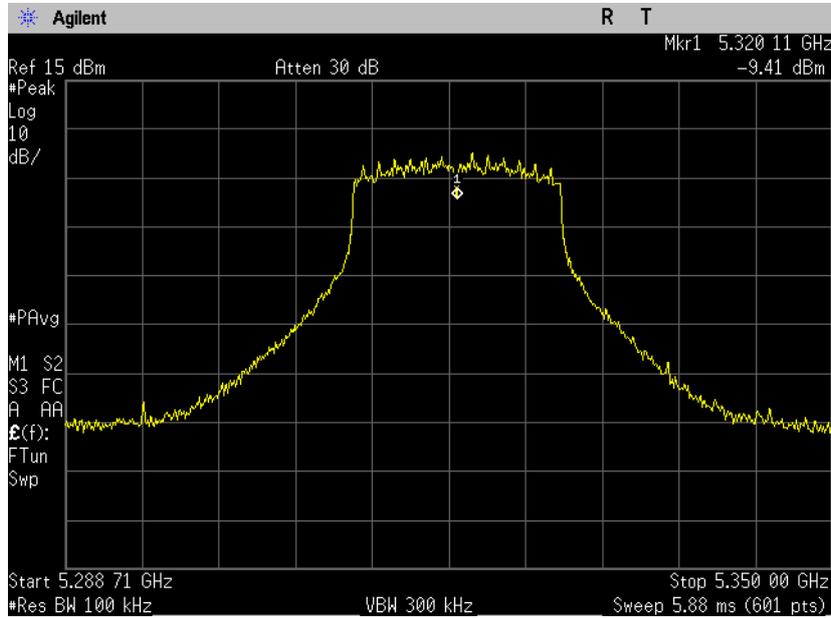


**85% of Vnom N mode**  
**Plot 4.7.14**

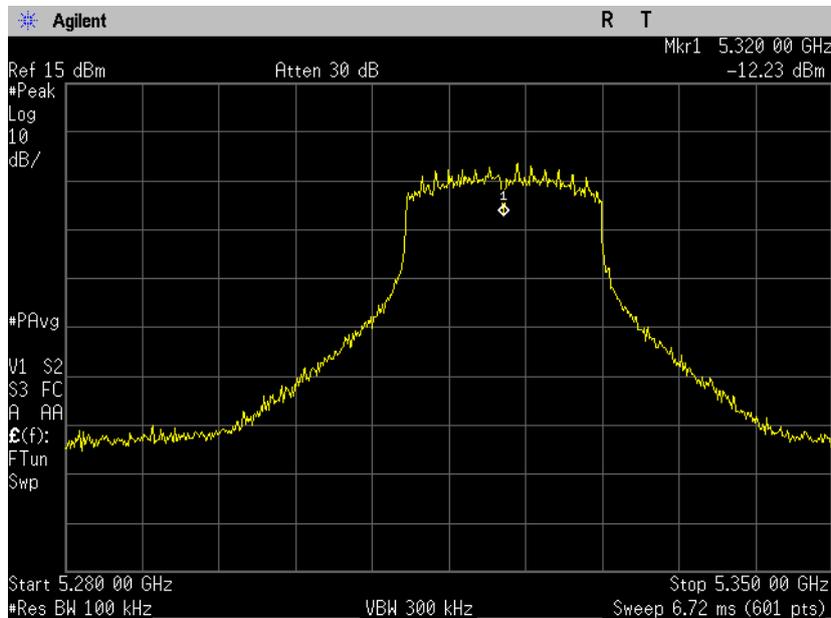


**Carrier frequency 5320 MHz n mode**  
**Ambient temperature -10 °c**  
**Plot 4.7.15**

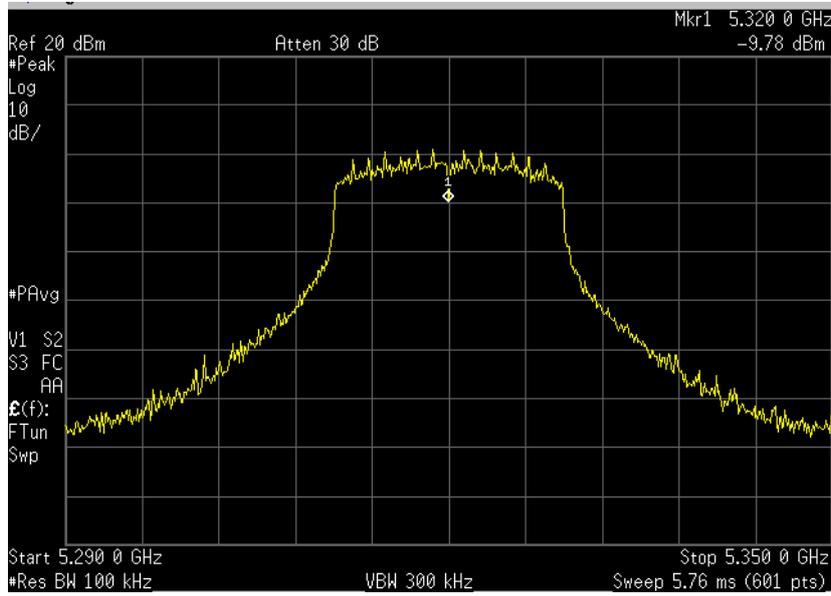


**Ambient temperature +50 °c**  
**Plot 4.7.16**

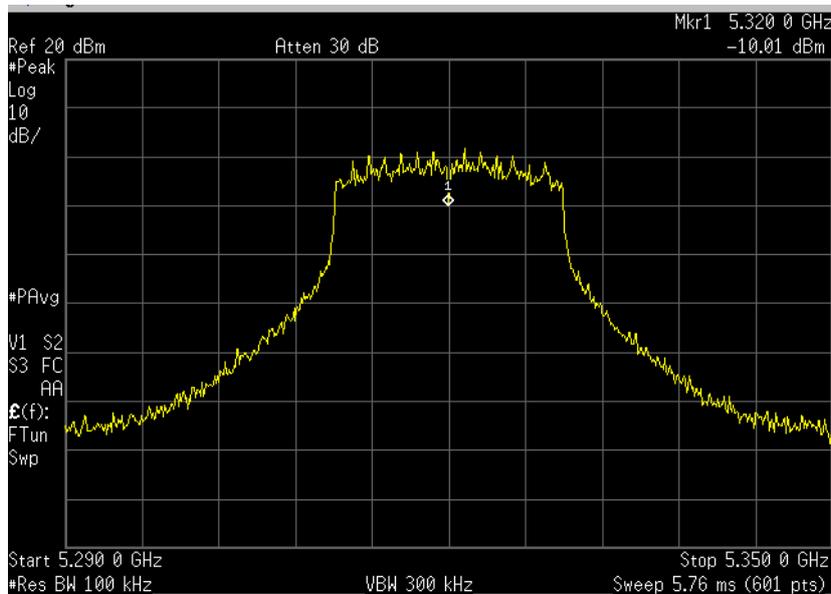


**Frequency 5470-5725 MHz**  
**Carrier frequency 5500 MHz a mode**  
**115% of V mon**  
**Plot 4.7.17**

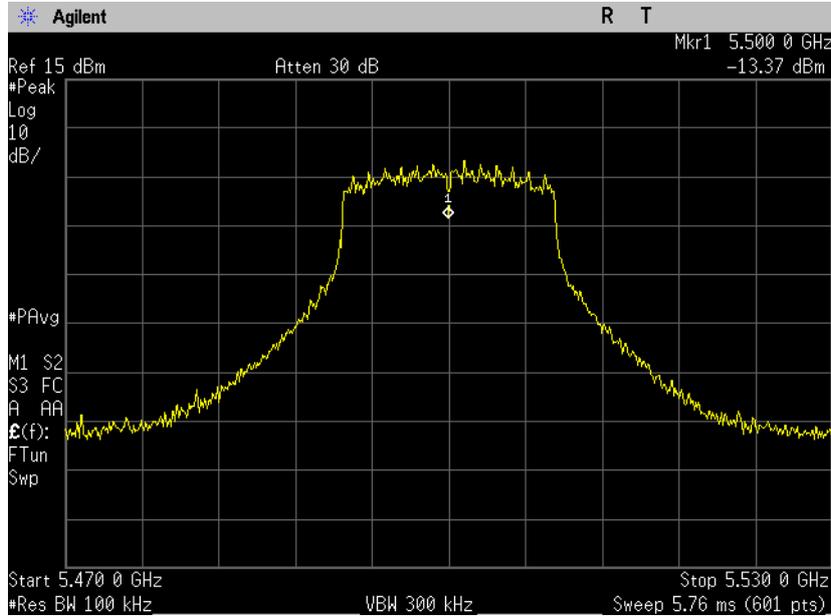


**85% of V mon**  
**Plot 4.7.18**

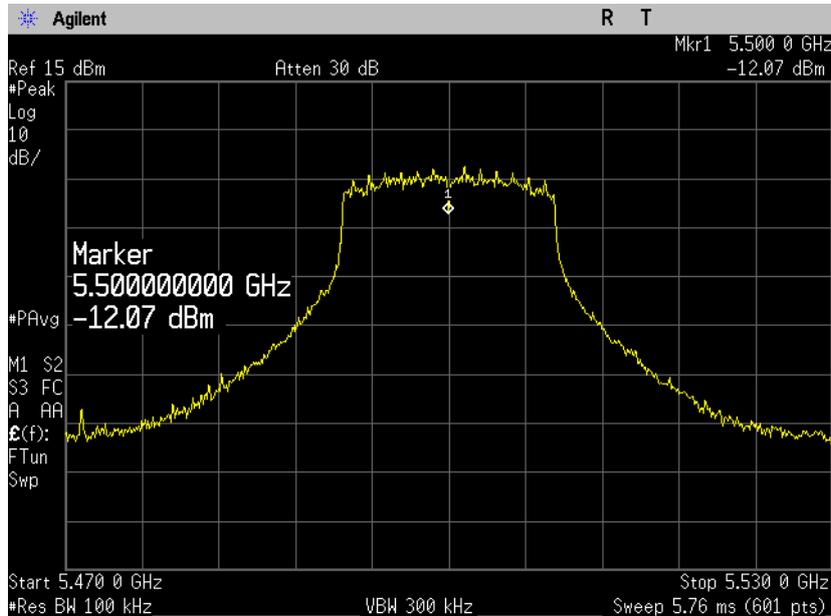


**Frequency 5470-5725 MHz**  
**Carrier frequency 5500 MHz a mode**  
**Ambient temperature -10 °c**  
**Plot 4.7.19**

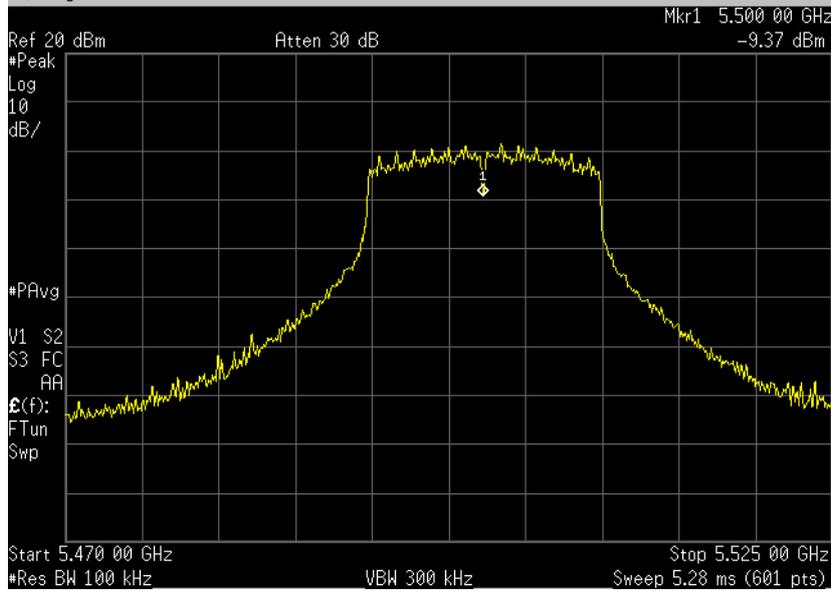


**Ambient temperature +50°c**  
**Plot 4.7.20**

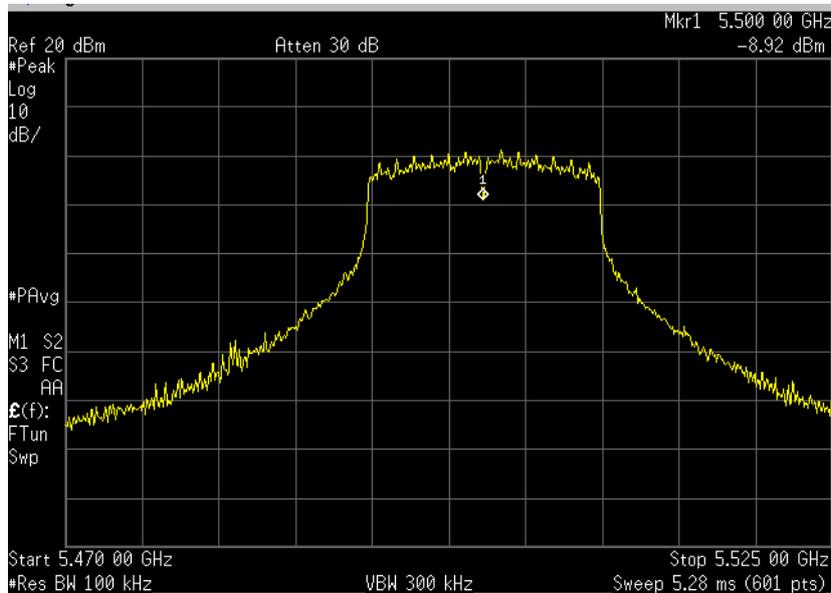


**Frequency 5470-5725 MHz**  
**Carrier frequency 5500 MHz n mode**  
**115% of V mon**  
**Plot 4.7.21**

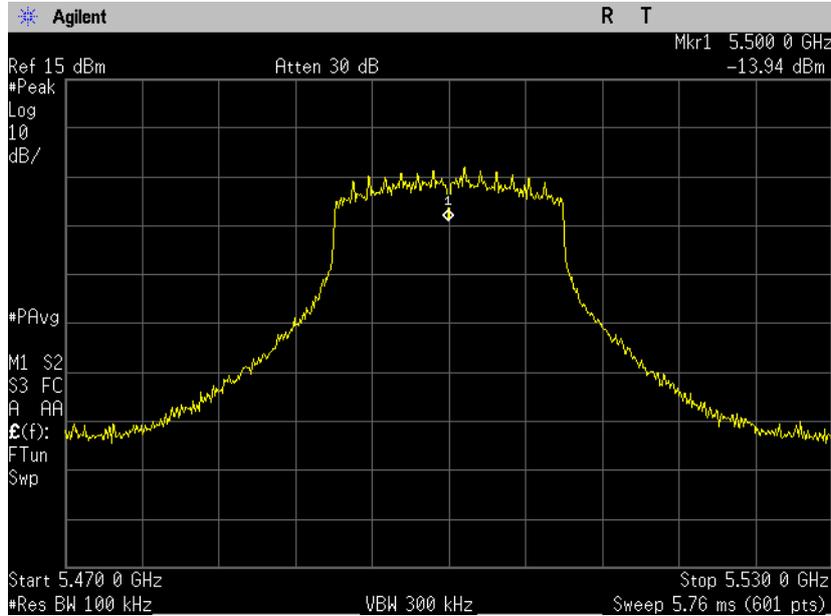


**85% of V mon**  
**Plot 4.7.22**

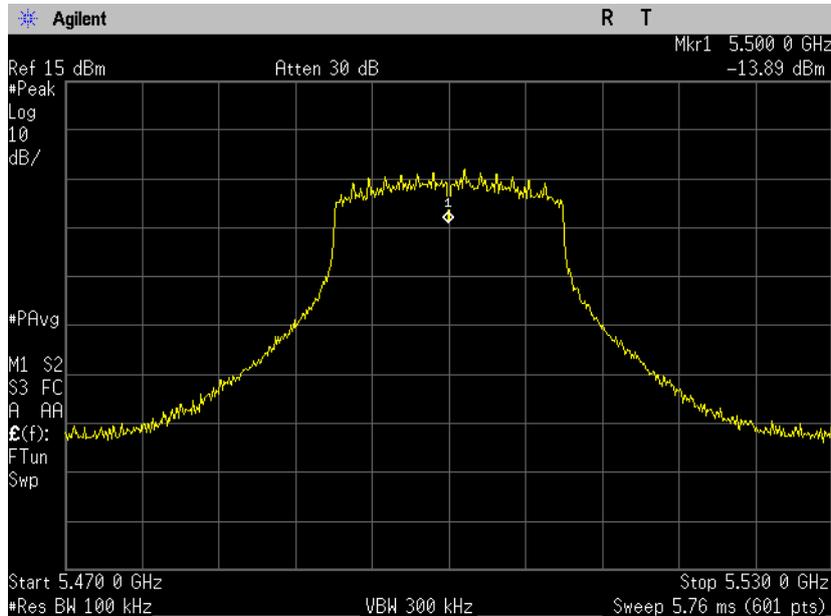


**Frequency 5470-5725 MHz**  
**Carrier frequency 5500 MHz n mode**  
**Ambient temperature -10 °c**  
**Plot 4.7.23**

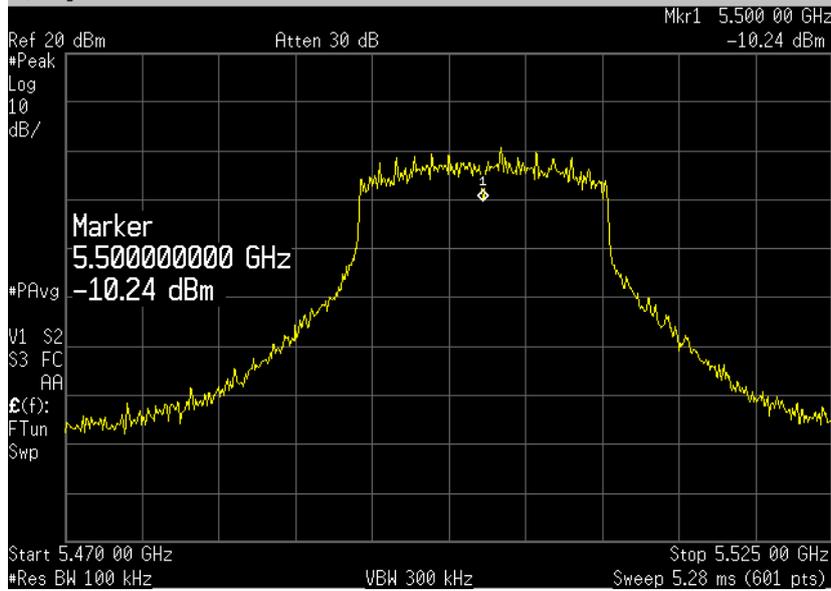


**Ambient temperature +50°c**  
**Plot 4.7.24**

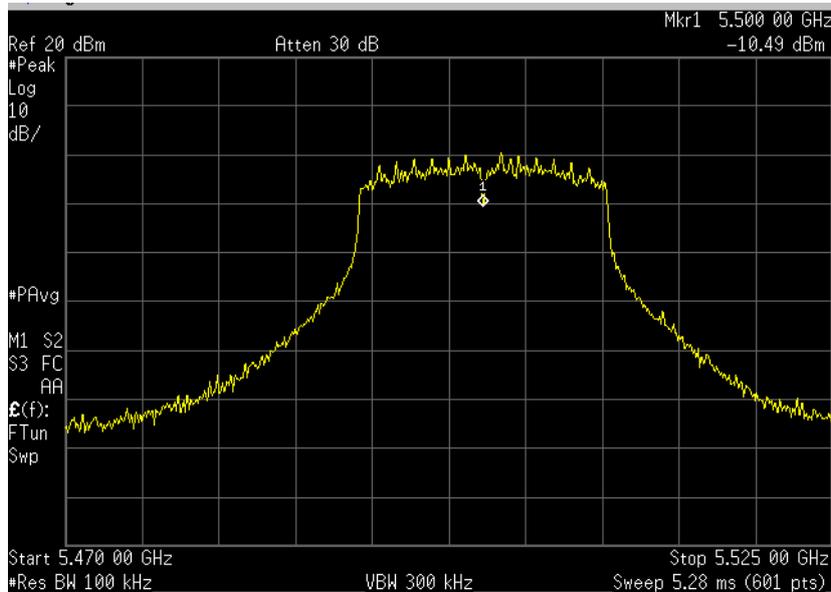


**Frequency 5470-5725 MHz**  
**Carrier frequency 5700 MHz n mode**  
**85% of V mon**  
**Plot 4.7.25**

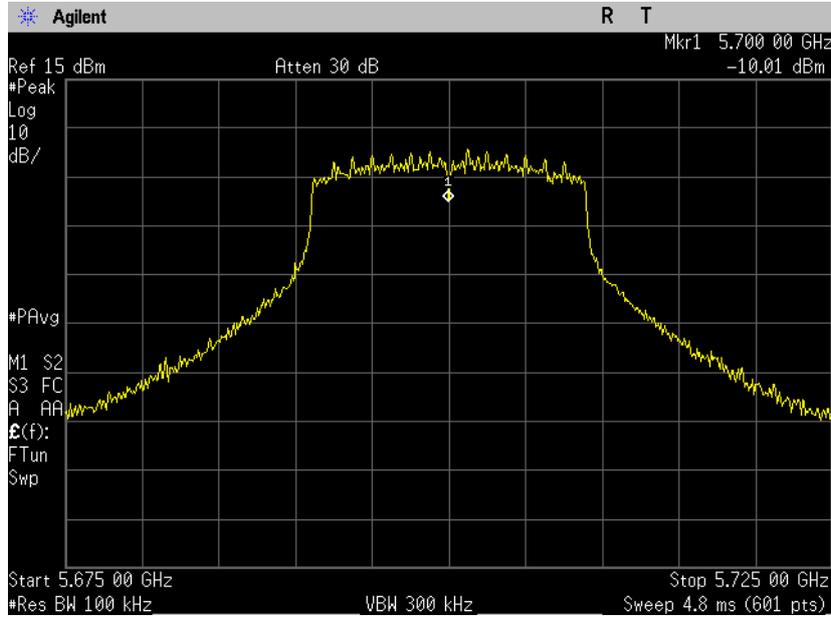


**115% of V mon**  
**Plot 4.7.26**

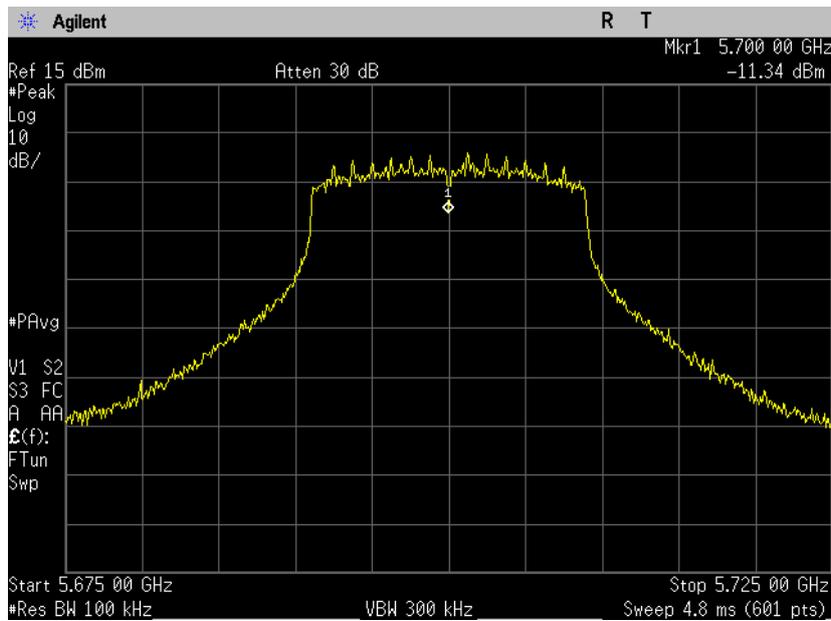


**Frequency 5470-5725 MHz**  
**Carrier frequency 5700 MHz n mode**  
**Ambient temperature -10 °c**  
**Plot 4.7.27**

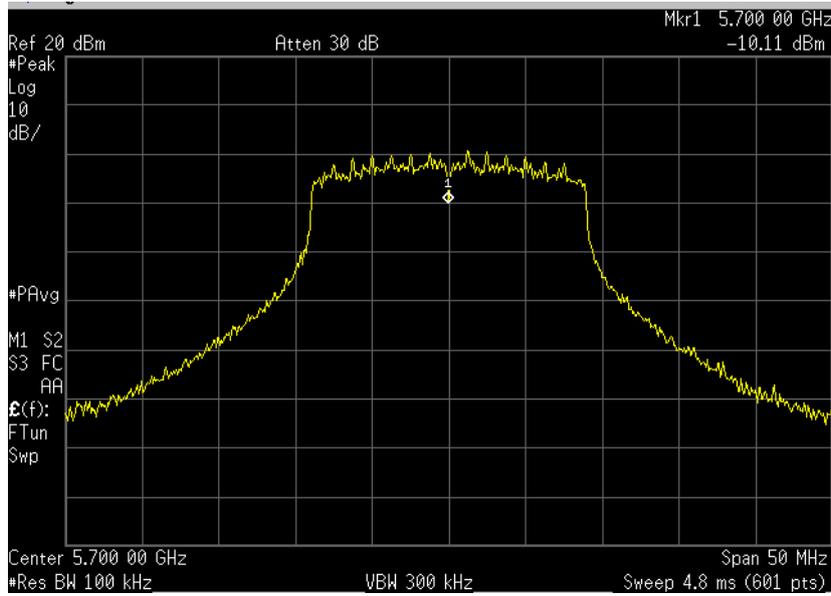


**Ambient temperature +50°c**  
**Plot 4.7.28**

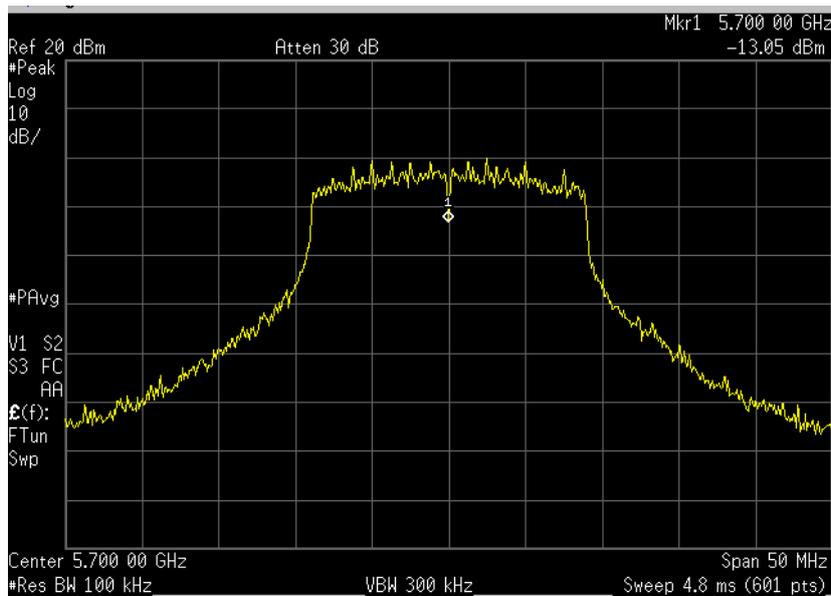


**Frequency 5470-5725 MHz**  
**Carrier frequency 5700 MHz a mode**  
**85% of V mon**  
**Plot 4.7.29**

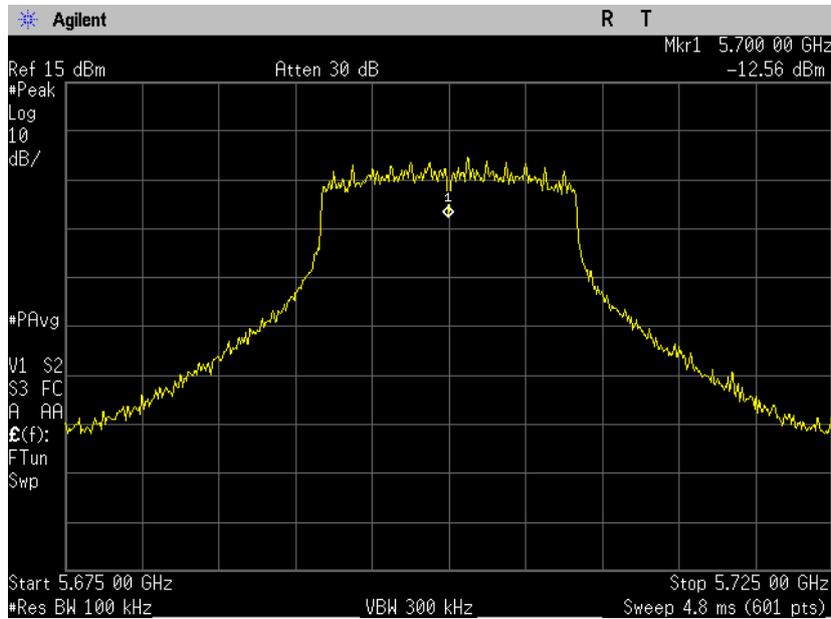


**Carrier frequency 5700MHz**  
**115 % of V nom**  
**Plot 4.7.30**

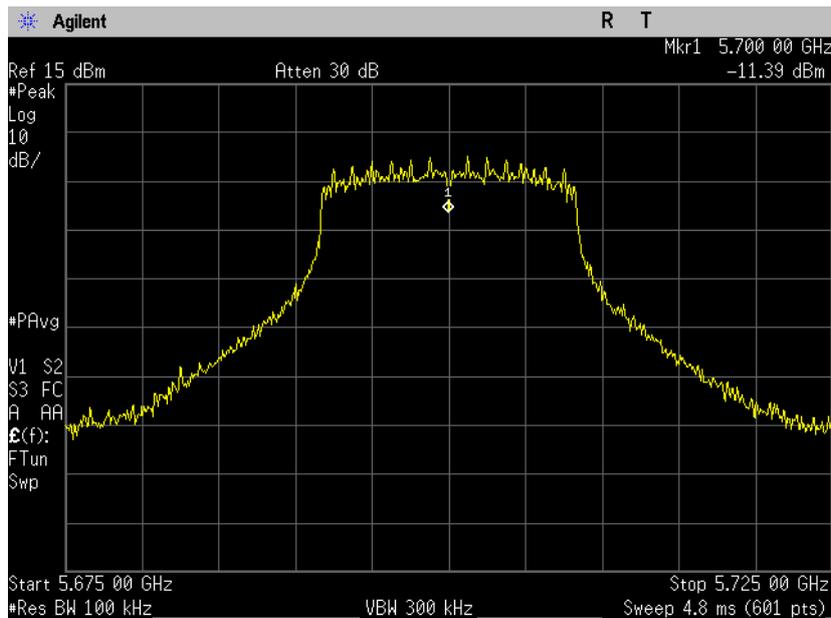

**Frequency 5470-5725 MHz**  
**Carrier frequency 5700 MHz a mode**  
**Ambient temperature -10 °c**  
**Plot 4.7.31**

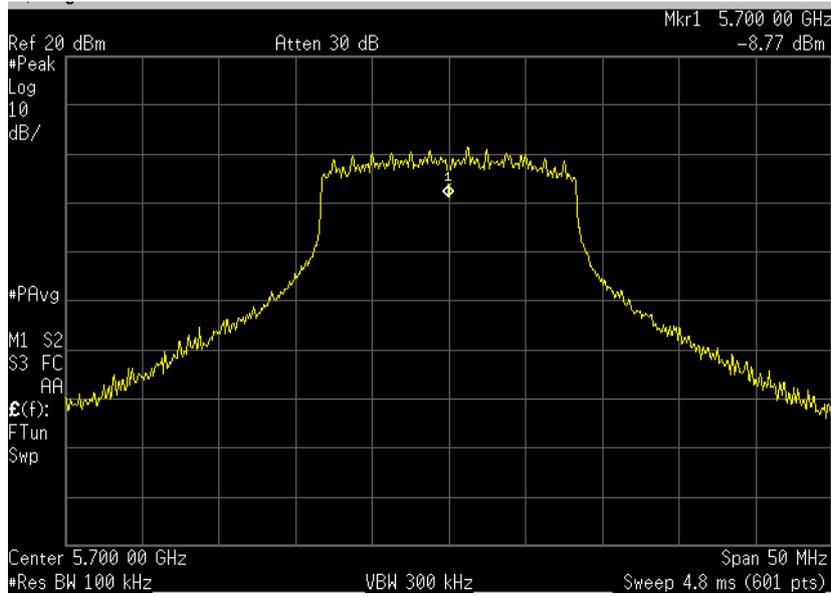

**Ambient temperature +50°c**  
**Plot 4.7.32**

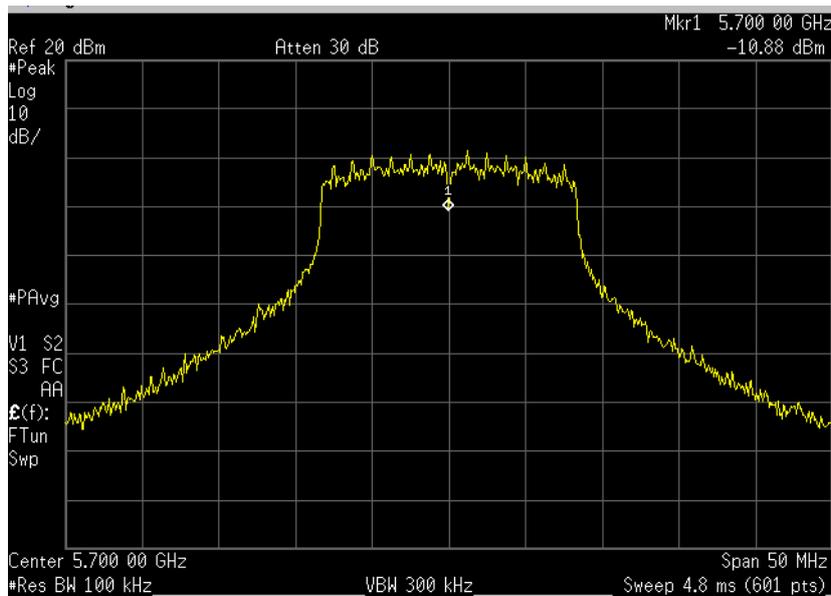

**4.8. Antenna Connector Requirements**

Reference document:	<b>47 CFR §15.203</b>	
Test Requirements:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with provisions of this section.	
Result:	The EWP3200 Semi Rugged VoWLAN Phone employs for WLAN a/b/g an Integral (on board) PIFA Dual Band.	<b>Comply</b>

**4.9. Dynamic Frequency Selection (DFS)**

Reference document:	<b>47 CFR §15.407(h)(2)(i)(B) &amp; §15.407(h)(2)(iii) and FCC 06-96</b>		
Test Requirements:	<p>Radar Detection Function of Dynamic Frequency Selection (DFS).  U-NII devices operating in the 5.25-5.35GHz and 5.47-5.725 GHz bands.  Operational Modes. The DFS requirement applies to the following: (B) The requirement for channel move time applies in both the master and slave operational modes.  DFS Response Requirements: (iii) Channel Move Time. After the radar's presence is detected, all transmissions shall cease on the operating channel within 10 seconds.  Transmissions during this period shall consist of normal traffic for a maximum of 200 ms after detection of the radar signal. In addition, intermittent management and control signals can be sent during the remaining time to facilitate vacating the operating channel.</p>		
Test setup:	See sec 2.5	<b>Pass</b>	
Method of testing:	Radiated		
Operating conditions:	Under normal test conditions		
S.A. Settings:	RBW: 3 MHz, VBW:3 MHz, Span 0		
Environment conditions:	Ambient Temperature: 22°C	Relative Humidity: 48%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.9.1 to Plot 4.9.4	


**The WiFi Firmware doesn't distinguish between NII band III & NII band II.**

**Test Results:**


Channel Frequency [MHz]	Type of plot	Measured OnTime		Measured Channel Closing Transmission Time		Limit Channel Closing Transmission Time	Measured Move Time		Limit Move Time	Result
5280	Transmission of the EUT on the operating channel at the end of the radar burst during the Channel Move Time	<200 msec	Reference Plot - 4.9.2	<200 msec + aggregated 13.5 msec	Reference Plot - 4.9.2	200ms + aggregated 60ms	0.6 s	Reference Plot - 4.9.1	10s	Pass
5280										
5260	30 Minute Non - Occupancy – Associated test			The client device did not transmit on this channel once the channel was cleared.				Reference Plot - 4.9.3		
5250 - 5725	30 Minute Non - Occupancy – Non - Associated test			The client device did not employ active scanning and did not transmit without being associated with the master device.				Reference Plot - 4.9.4		
5680	Transmission of the EUT on the operating channel at the end of the radar burst during the Channel Move Time	<200 msec	Reference Plot - 4.9.5	<200 msec + aggregated 0 msec	Reference Plot -4.9.5	200ms + aggregated 60ms				

**Note:** The WiFi Firmware doesn't distinguish between NII band III & NII band II.


**Channel Move Time**  
**Plot 4.9.1**

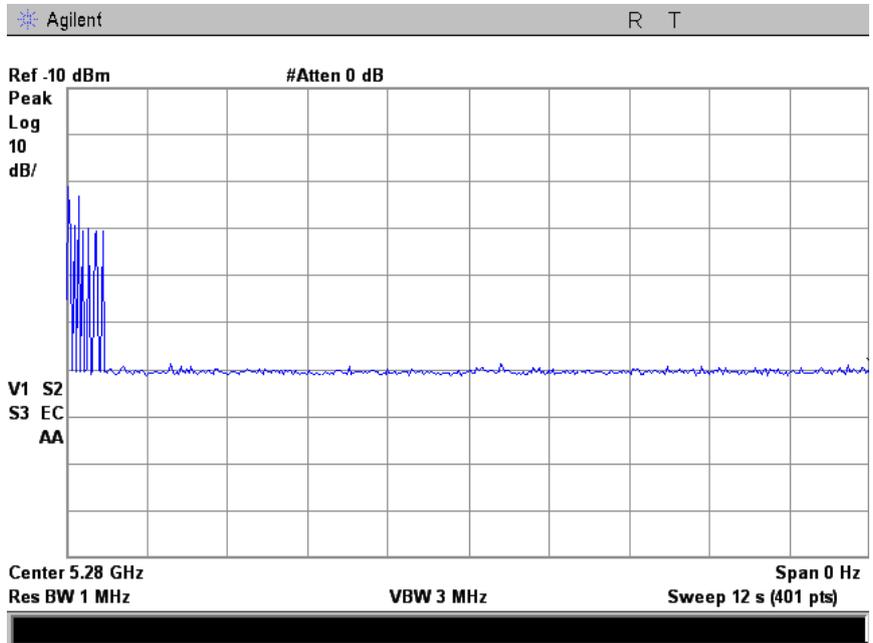


**Retesting for Channel Closing Transmission & on time**  
**Plot 4.9.2**

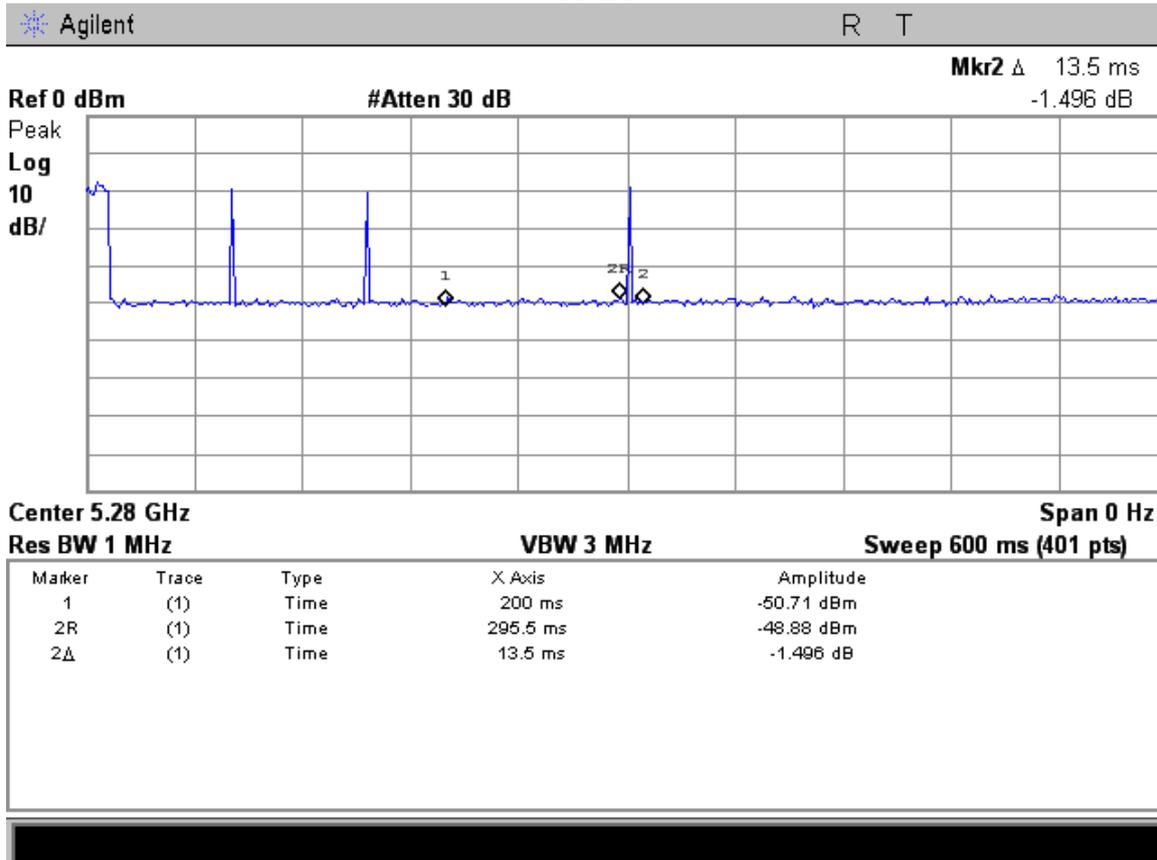


**30 Minutes Non-Occupancy, Associated test**  
**Plot 4.9.3**

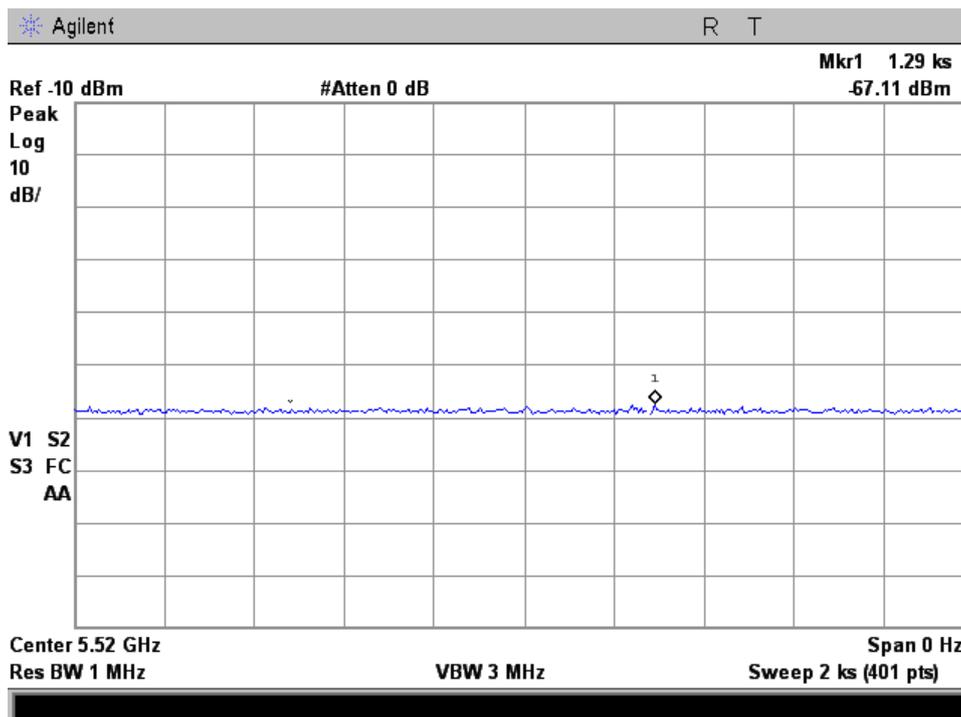

**30 Minutes Non-Occupancy, Non-Associated test**  
**Plot 4.9.4**

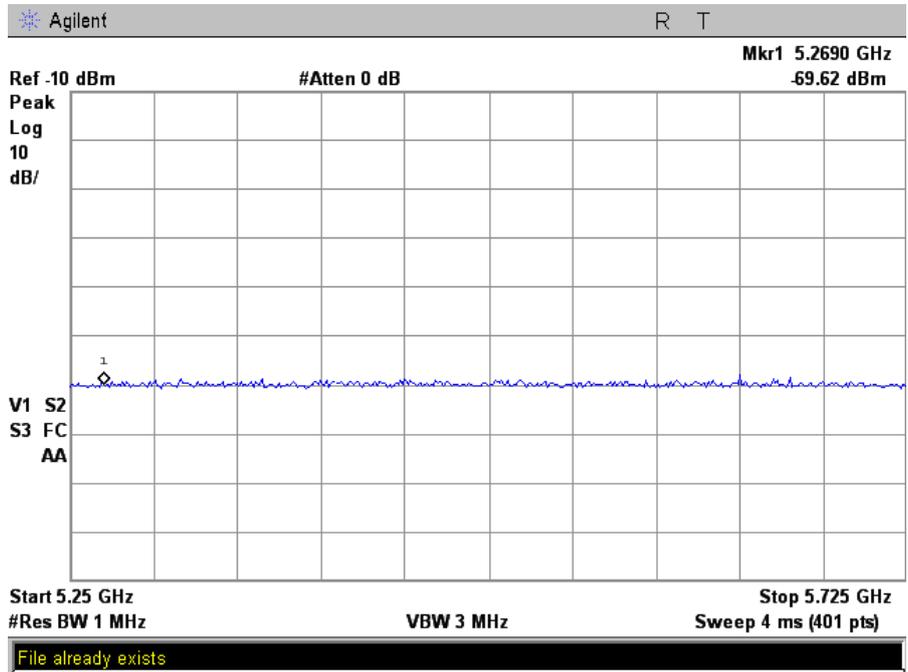

**Additional Testing for Band III**  
**Plot 4.9.5**

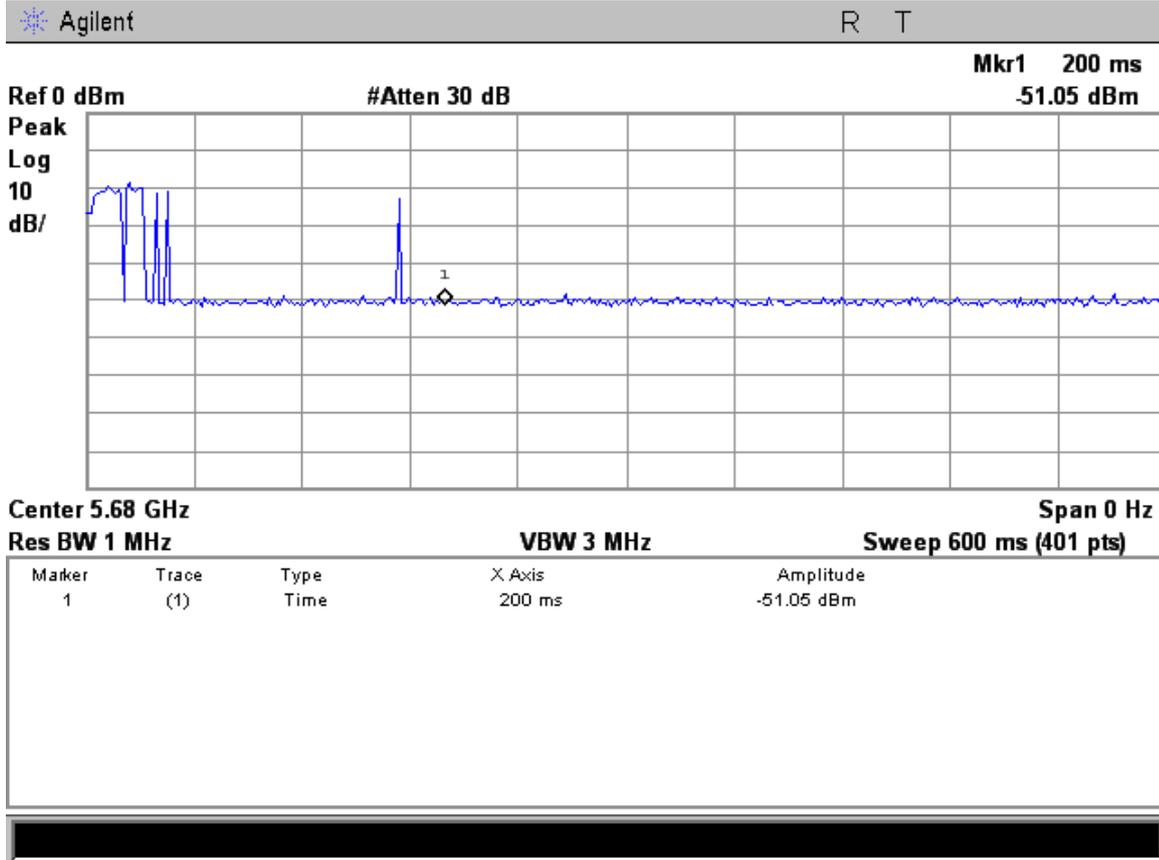

**4.10. Power Line Emissions measurements**

Reference document:	<b>47 CFR §15.107/207</b>		
Test Requirements:	The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in §15.107. The emissions from an intentional radiator shall not exceed the field strength levels specified in §15.207. Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Sec.15.207.		
Test setup:	See Sec. 2.6	<b>Pass</b>	
Operating conditions:	Under normal test conditions		
Method of testing:	Conducted Emissions		
S.A. Settings:	f <30MHz: RBW: 9kHz, VBW:30kHz		
Radio device:	Idle		
Environment conditions:	Ambient Temperature: 21°C	Relative Humidity: 54%	Atmospheric Pressure: 1011.4 hPa
Test Result:	See below	See Plot 4.10.1 - Plot 4.10.4	

**Test Results:**

Worst case results of unintentional emissions and emissions measured at the 110VAC charger port.

**“Phase” Lead**

Frequency [MHz]	Measured Result [dBμV]		Class B Limits [dBμV]		Margin [dB]		Pass/Fail
	QP	AVR	QP	AVR	QP	AVR	
0.767768	38	23.6	56.00	46.00	-18.00	-22.40	Pass
0.508303	38.9	24	56.00	46.00	-17.10	-22.00	Pass
0.320533	39.4	29.4	59.69	49.69	-20.29	-20.29	Pass
1.602735	37	18.8	56.00	46.00	-19.00	-27.20	Pass
1.783115	36.6	22.9	56.00	46.00	-19.40	-23.10	Pass
2.051	34.4	22.4	56.00	46.00	-21.60	-23.60	Pass

**“Neutral” Lead**

Frequency [MHz]	Measured Result [dBμV]		Class B Limits [dBμV]		Margin [dB]		Pass/Fail
	QP	AVR	QP	AVR	QP	AVR	
0.593063	36.3	26.2	56.00	46.00	-19.70	-19.80	Pass
0.191489	36.5	25.8	63.97	53.97	-27.47	-28.17	Pass
0.329369	37.9	30.5	59.47	49.47	-21.57	-18.97	Pass
0.790036	35.8	25.2	56.00	46.00	-20.20	-20.80	Pass
2.43638	33.6	19.2	56.00	46.00	-22.40	-26.80	Pass
1.587	32	15.8	56.00	46.00	-24.00	-30.20	Pass

Measured at the PC 110VAC port

**“Phase” Lead**

Frequency [MHz]	Measured Result [dB $\mu$ V]		Class B Limits [dB $\mu$ V]		Margin [dB]		Pass/Fail
	QP	AVR	QP	AVR	QP	AVR	
0.15	39.4	19	66.00	56.00	-26.60	-37.00	Pass
0.164974	60.9	39.7	65.21	55.21	-4.31	-15.51	Pass
0.19671	51.6	29.1	63.75	53.75	-12.15	-24.65	Pass
0.220327	50.2	28.6	62.81	52.81	-12.61	-24.21	Pass
0.41442	36.9	7.3	57.56	47.56	-20.66	-40.26	Pass
21.96	33.3	27.3	60.00	50.00	-26.70	-22.70	Pass

**“Neutral” Lead**


Frequency [MHz]	Measured Result [dB $\mu$ V]		Class B Limits [dB $\mu$ V]		Margin [dB]		Pass/Fail
	QP	AVR	QP	AVR	QP	AVR	
0.160989	53.7	48.1	65.41	55.41	-11.71	-7.31	Pass
0.150000	36.7	17.5	66.00	56.00	-29.30	-38.50	Pass
0.230453	54.7	27	62.43	52.43	-7.73	-25.43	Pass
0.382123	43.7	10.3	58.23	48.23	-14.53	-37.93	Pass
0.56082	31	10.8	56.00	46.00	-25.00	-35.20	Pass
3.028	28.6	22.4	56.00	46.00	-27.40	-23.60	Pass

**Measured at the charger 110VAC port**

**Phase Lead  
Plot 4.10.1**




ACTV DET: PEAK  
MERS DET: PEAK QP AVG  
NR 510 kHz  
39.38 dBμV

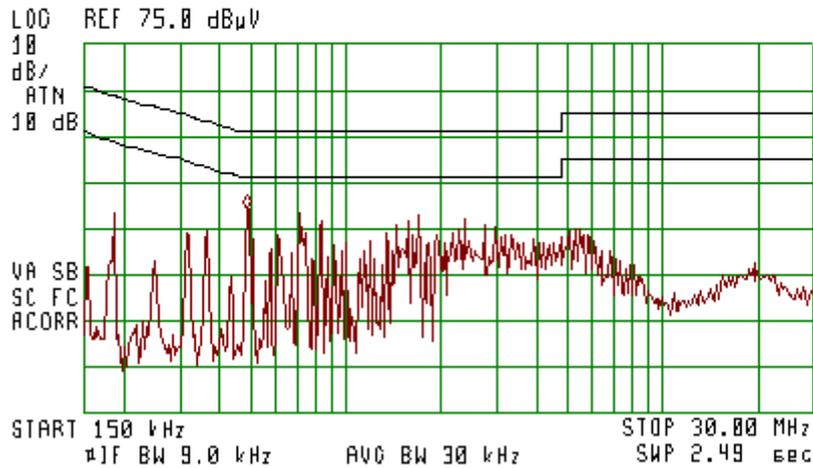

**Neutral Lead  
Plot 4.10.2**



ACTV DET: PEAK  
MERS DET: PEAK QP AVG  
NR 1.71 MHz  
34.85 dBμV

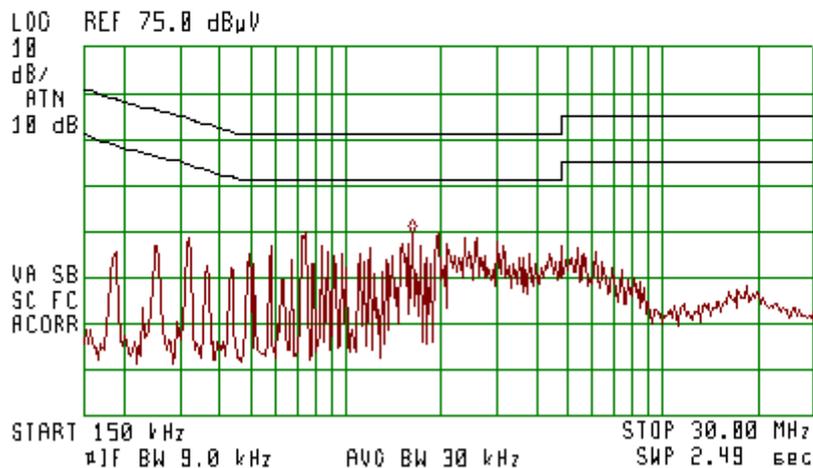


**Measured at the PC 110VAC port**

**Phase Lead  
Plot 4.10.3**




ACTV DET: PEAK  
MERS DET: PEAK OP AVG  
NKR 100 kHz  
55.57 dB $\mu$ V

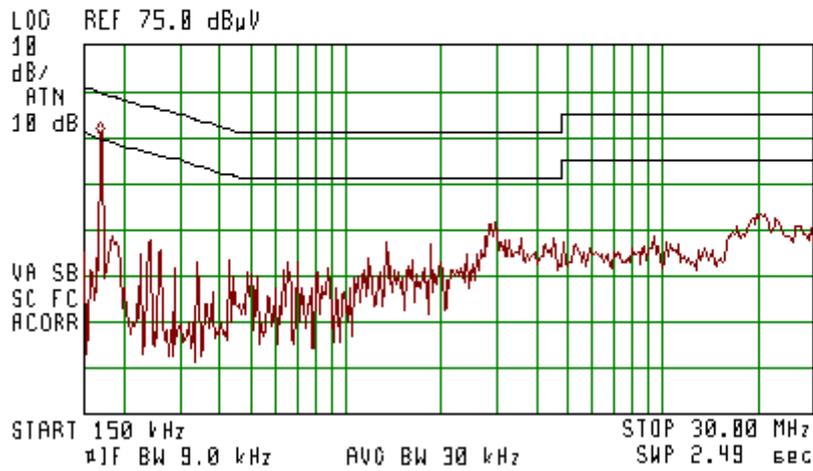

**Neutral Lead  
Plot 4.10.4**



ACTV DET: PEAK  
MERS DET: PEAK OP AVG  
NKR 200 kHz  
57.47 dB $\mu$ V

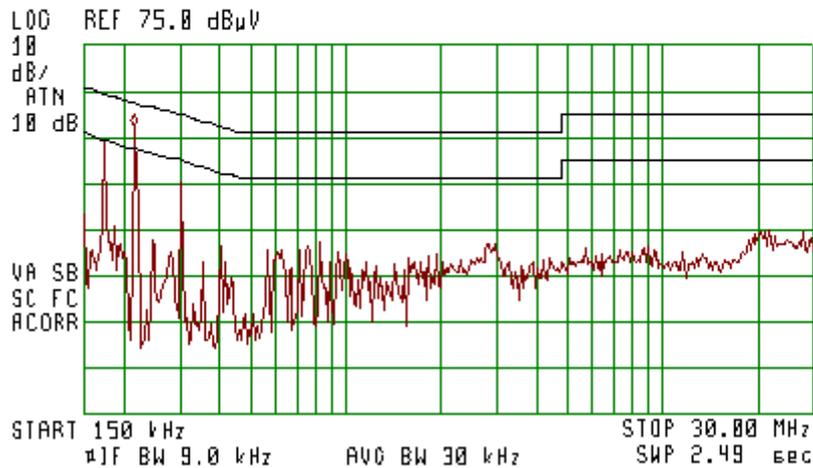

## 5. Appendix

### Appendix A: List of Measuring Equipment used:

Equipment	Manufacturer/ Model	Serial Number	Due date
CISPR16 EMI Receiver	HP8546A	3710A00392	17-11-12
Spectrum Analyzer 100 Hz ÷ 26.5 GHz	Agilent E7405A	US41160436	24-11-12
LNA Amplifier 1 GHz ÷ 18 GHz	AMP – 5D-010180-30-10P-GW	618653	07-03-13
Power meter	Agilent N1911A	MY45100784	12-10-12
Dual Ridged Guide Ant. 1-18 GHz	A.R.A DRG 118/A	17188	23-01-13
Antenna 15 GHz ÷ 40 GHz	Schwarzbeck BBHA 9170	BBHA9170214	03-02-13
Turn table	HD100	100/693	-
Antenna Mast	HD 100	100/693	-
Biconical 20 –200 MHz	Seibersdorf, PBA 320	301	20-01-15
Log-Periodic 200 – 1000 MHz	Schwarzbeck VUSLP9111	VUSLP9111184	20-01-15
Pre-Amplifier	MiTeq, AMF-5F-18002650-30-10P	945372	07-03-13
LISN	Fischer 50/250-25-2	-	05-03-13
Transient Limiter	HP11947A	-	05-03-13
Notch Filter	Micro-Tronics BRM50702-05	0001	04-03-13

**Appendix B: Accreditation Certificate**



*End of the Test Report*